



Epoxidation of cyclooctene and cyclohexene with hydrogen peroxide catalyzed by bis[3,5-bis(trifluoromethyl)-diphenyl] diselenide: Recyclable catalyst-containing phases through the use of glycerol-derived solvents

Héctor García-Marín^a, John C. van der Toorn^{b,1}, José A. Mayoral^{a,c,2}, José I. García^{a,*}, Isabel W.C. E. Arends^{b,**}

^a Dept. Organic Chemistry, Instituto de Ciencia de Materiales de Aragón, Facultad de Ciencias, Univ. de Zaragoza-CSIC, Pedro Cerbuna, 12, E-50009 Zaragoza, Spain

^b Laboratory for Biocatalysis and Organic Chemistry, Delft University of Technology, Julianalaan 13, 2628 BL Delft, Netherlands

^c Instituto Universitario de Catálisis Homogénea, Facultad de Ciencias, Univ. de Zaragoza, Pedro Cerbuna, 12, E-50009 Zaragoza, Spain

ARTICLE INFO

Article history:

Received 31 August 2010

Received in revised form 22 October 2010

Accepted 31 October 2010

Available online 5 November 2010

Keywords:

Hydrogen peroxide epoxidation

Glycerol

Selenium catalyst

Catalyst recycling

Green solvents

ABSTRACT

A green strategy has been explored for olefin epoxidation which combines renewable solvents (derived from glycerol), aqueous hydrogen peroxide, and catalyst recycling (a seleninic acid derivative). The use of fluorinated glycerol derivatives allows good catalytic activity in the epoxidation of cyclooctene and cyclohexene with aqueous hydrogen peroxide, preventing epoxide hydrolysis to a great extent, which is particularly remarkable in the case of cyclohexene. Furthermore, recycling of the catalytically active phase is possible through distillation of the cyclohexene oxide from the reaction mixture, which can be subsequently recharged with fresh oxidant and substrate.

© 2010 Elsevier B.V. All rights reserved.

1. Introduction

Olefin epoxidation is a key transformation in organic synthesis both on a laboratory and on industrial scale, due to the interest of epoxides in the production of chemicals and fine chemicals [1]. The use of hydrogen peroxide for selective epoxidations is highly desirable because it is cheap, the active oxygen content is high, and it is clean, since the only by-product formed is water [2]. Many catalytic systems based on different metals have been reported for the epoxidation of a wide range of alkenes using hydrogen peroxide [3–5].

Peroxy-seleninic acids were first used as stoichiometric oxidants [6], but following the discovery by Umbreit and Sharpless [7] that *tert*-butyl hydroperoxide can be used in conjunction with catalytic amounts of those selenium derivatives, the method gained interest [8]. Further improvements came with the use of hydrogen

peroxide instead of *tert*-butyl hydroperoxide as the oxidant and the heterogenisation [9,10] and functionalisation of the aromatic ring of the selenium catalyst with the electron withdrawing nitro-substituents [11–13].

Applications of selenium reagents in organic chemistry have developed rapidly over the past years, and comprehensive reviews on this area have appeared [14–20]. Moreover diselenides can be easily oxidized *in situ* by hydrogen peroxide to seleninic acid or peroxy-seleninic acid, which are in some cases excellent catalysts in the oxidation of organic compounds [21–24], as, for instance, epoxidation reaction of alkenes [25], Baeyer–Villiger reaction [26], oxidation of carbonyl compounds [27], dehydrogenation of carbonyl compounds [28,29], oxidation of secondary amines [30,31], oxidation of imines [32], or selenenylations or halogenations [33].

But there are other many applications for selenium, for instance organoselenium ligands have been used for metal-catalyzed processes [34], it has been recently included in polyoxometalates to generate a new active catalyst for the epoxidation of olefins [35], or some selenium derivatives have potential as efficient mimetics for selenoenzymes [36].

The efficiency of any catalytic reaction can be further improved by catalyst recycling, which is usually accomplished by using solid heterogeneous catalysts. However, the use of classical heterogeneous catalysts (for instance, those based on titanium) together


* Corresponding author. Tel.: +34 976762271; fax: +34 976762077.

** Corresponding author. Tel.: +31 15 2784423; fax: +31 15 2784700.

E-mail addresses: mayoral@unizar.es (J.A. Mayoral), jig@unizar.es (J.I. García), I.W.C.E.Arends@tudelft.nl (I.W.C.E. Arends).

¹ Tel.: +31 15 2784423; fax: +31 15 2784700.

² Tel.: +34 976762077; fax: +34 976762077.

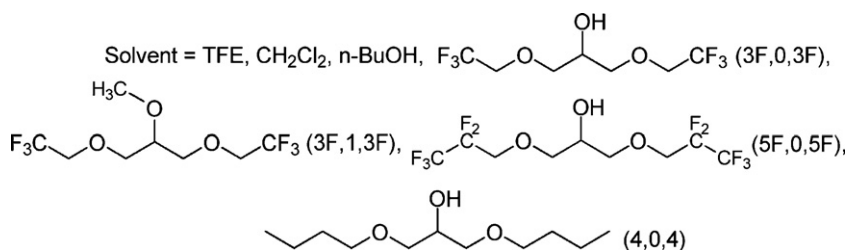

Scheme 1. Glycerol derivatives solvents used to carry out the epoxidation, they have been fully described previously [47].

with aqueous hydrogen peroxide often results in extensive epoxide hydrolysis, and many efforts have been devoted to the synthesis of heterogeneous solid catalysts with hydrophobic properties [37–42]. More recently, the use of polyoxometalates and analogous systems has emerged as an interesting alternative [3,43].

Another alternative would be the use of homogeneous catalysts in a specially designed liquid phase which should be tuned in such a way that easy separation of reagents and products from the catalyst-containing phase should become more straightforward [44]. The catalytically active phase could thus be reused for more reaction cycles. Very often, recovery is accomplished by extraction with an immiscible solvent [45]. Another attractive way is to distill out reagents and products from that liquid phase which contains the catalyst. This strategy has been described for other reactions in the case of ionic liquids [46], but to the best of our knowledge it has not been applied to oxidation reactions yet.

We have recently described the synthesis and characterization of a family of glycerol-derived solvents [47]. These solvents present some new and attractive advantages, as there are made from a renewable source, they are (presumably) low toxic, exhibit a low volatility, and possess tuneable physico-chemical properties. We have previously described the use of some of these glycerol-derived solvents in the homogeneously catalyzed epoxidation reaction of cyclooctene, using aqueous hydrogen peroxide as oxidant and bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide as catalyst precursor [48].

Although classically this catalytic system had been dominated by the use of dichloromethane (DCM) and 2,2,2-trifluoroethanol (TFE) as solvents [25,26], it was found that some of the glycerol-derived solvents are as good as TFE in some cases and often better than DCM. The best glycerol-based solvents in that study were those containing short fluorinated chains (see Scheme 1). The beneficial effect of trifluoroethanol as a solvent – besides being a polar, non-coordinating, non-basic and stable solvent – has been ascribed to its activating properties towards HOOH. Hydrogen peroxide becomes a better nucleophile through exceptional H-bond ability of TFE [49–52]. It can be assumed that this effect can also partially take place for some of our fluorinated glycerol-based solvents.

In this paper we explore the possibility of combining the advantages of using hydrogen peroxide, an homogeneous catalyst (namely an arylseleninic acid) [21,28,53,54], and solvents from renewable sources (glycerol-derived solvents), with tailored properties, to extend the range of applicability of these catalytic systems to the epoxidation of a more challenging substrate, such as cyclohexene, as well as to have a proof-of-principle for recyclable catalytic liquid phases with our innovative solvents (Scheme 2).

2. Experimental

2.1. Materials and equipment

2.1.1. Materials

Cyclohexene (99%, Sigma–Aldrich 29240), cyclooctene, (90%, Fluka 29650), 1,2-dimethoxyethane (99.5%, Sigma–Aldrich 259527),

manganese dioxide (Sigma M3138), sodium sulfate (Scharlau SO0664) and hydrogen peroxide (Scharlab HI0139) are commercially available. Common solvents such as 2,2,2-trifluoroethanol (99%, ABCR AB102852), dichloromethane (99.9% Scharlau CL0348) and *n*-butanol (99.4%, Sigma–Aldrich 360465), are also commercially available.

Glycerol-based solvents were obtained by ring opening of either the appropriate glycidol ether (non-symmetric glycerol based solvents) or epichlorohydrin (symmetric glycerol-based solvents) with corresponding alkoxide in alcoholic media, as previously described [47], and were purified by vacuum distillation.


The catalyst bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide was obtained as described in the literature [55].

2.1.2. Equipment

Reactions were followed by gas chromatography in an Agilent 6890 apparatus equipped with an automatic injector and a FID detector. Two different experimental conditions, shown in Supplementary material, were necessary to use to analyze both olefins. Olefin conversion and olefin oxide yield were determined by area integration of gas chromatography peaks, following calibration equations carried out with ethylene glycol dimethyl ether (glyme) as an internal standard.

2.2. Oxidation reactions

The general procedure to the epoxidation of alkenes was carried out at 25 °C, using the following conditions: 0.8–1.0 mol% of bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide was dissolved in 2 mL of solvent. Next, the hydrogen peroxide (50%) was added. When the solution became colourless, 2 mmol of ethylene glycol dimethyl

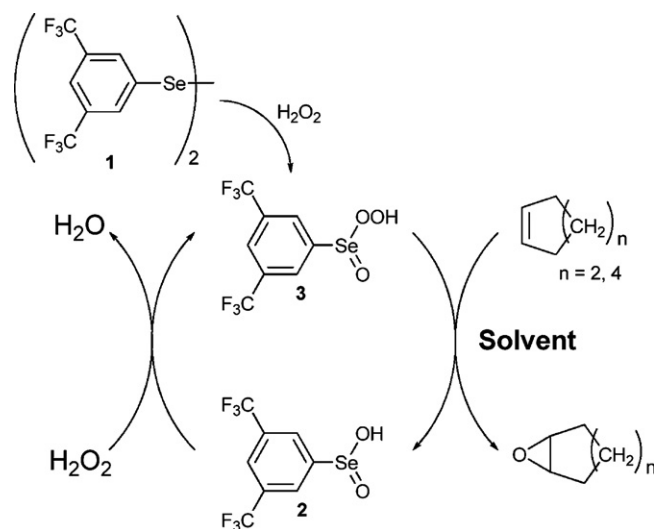

Scheme 2. Catalytic cycle proposed in the literature to explain the epoxidation cyclooctene and cyclohexene with arylseleninic acid–hydrogen peroxide [21,25].

Table 1
Cyclooctene epoxidation results in different solvents.

Solvent	E_T^N	β	TOF ₀ (h ⁻¹) ^a	Conv. (%) ^b (20 min)	Conv. (%) ^b (120 min)	Select. (%) ^c
TFE	0.898	0.000	491	99	100	97
TFE ^d			–	1	26	91
DCM	0.309	0.000	153	54	93	93
<i>n</i> -BuOH	0.586	0.880	100	18	59	93
3F03F	0.701	0.700	155	61	>99	99
3F03F ^d			–	1	4	–
5F05F	0.699	0.700	214	65	>99	93
5F05F ^d			–	1	1	–
3F13F	0.553	0.500	130	48	88	88
3F13F ^d			–	0	3	–
404	0.450	0.600	46	16	52	90
404 ^d			–	0	2	–

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclooctene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 2 h.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b GC-conversion, mmol olefin converted mmol olefin⁻¹.

^c Selectivity, mmol epoxide mmol converted olefin⁻¹.

^d Blank test without catalyst, 2 mmol of cyclooctene, 4 mmol 50% H₂O₂, 2 mL solvent, 57 °C, 2 h [25].

ether was added (internal standard) followed by 4 mmol of each olefin. Reactions were followed by taking samples at regular times. Those samples were dissolved in ethyl acetate; some manganese dioxide was added to quench the excess of hydrogen peroxide in the sample. Samples were dried over sodium sulfate and analyzed by GC.

2.3. Recycling experiments

After certain reaction times (see Tables 1 and 4) the epoxidation product was distilled off during 1–2 h at 50 °C and 10 mbar. Then more hydrogen peroxide was added to the remained distillation mixture (solvent and catalyst). After a few minutes more olefin was added. Reactions were followed by GC as was previously described.

2.4. Safety concerning

The distillation of systems containing H₂O₂ or other peroxo-species can be dangerous since it can form exploding compounds. Moreover, severe safety measures should be taken when the distillation implies high temperatures, large volumes of peroxides or solvents with low flash point.

2.5. Stability of solvents

In no case reaction by-products coming from solvent oxidation in the reaction conditions were found. Furthermore, neither peroxide compounds nor by-products from decomposition were observed when solvents were put under 50 bar O₂ (8%) at 100 °C for 4 h. These results indicate the remarkable stability of the solvents employed under oxidation conditions, even though most of them being secondary alcohols.

3. Results and discussion

In the preliminary studies of the epoxidation of cyclooctene using diselenide **1** as precatalyst and H₂O₂ as oxidant in different reaction media, solvent property effects were investigated through QSPR equations relating solvent polarity and hydrophobicity parameters with catalytic activity [48]. Following the conclusions of this study we have chosen three common organic solvents and three glycerol derivatives as representative sample of solvents among those in which the catalytic reaction takes place. The set of solvents used is the following: from the common organic solvents 2,2,2-trifluoroethanol (TFE), dichloromethane (DCM) and *n*-butanol

(*n*-BuOH), from the glycerol-derived solvents 1,3-di-*n*-butoxy-2-propanol (404), 1,3-bis(2,2,2-trifluoroethoxy)-2-propanol (3F03F), 1,3-bis(2,2,3,3,3-pentafluoro-*n*-propoxy)-2-propanol (5F05F) and 2-methoxy-1,3-bis(2,2,2-trifluoroethoxy)propane (3F13F).

Initial turnover frequencies (TOF₀) and total alkene conversions at different reaction times have been determined for each reaction carried out in the corresponding solvent.

3.1. Epoxidation of cyclooctene

Epoxidation of cyclooctene was carried out using the seven above-mentioned solvents. Good conversions and selectivities were obtained with most solvents tested (Table 1). In no case reaction other by-products than cyclooctan-1,2-diol were observed. It can be seen that there is a direct relation between polarity of the solvent and the reaction kinetics of the epoxidation reaction. Using data in Table 1, the following regression equation can be established:

$$\text{TOF}_0 = 591.6 \cdot E_T^N - 263.3 \cdot \beta - 43.2,$$

$$N = 7; \quad R^2 = 0.970; \quad s = 30.3 \quad (1)$$

In line with our previous QSPR results [48], the hydrogen bond ability of the solvent is the main feature influencing the catalytic activity. Best solvents have to possess good hydrogen bond donor (high E_T^N) and reduced hydrogen bond acceptor (low β) abilities. These results agree with the activation of hydrogen peroxide by multiple hydrogen-bond networks, demonstrated by Berkessel et al. in a series of elegant experimental and computational works [50,51,56].

The two best-performing catalyst-containing phases, namely those with TFE and 3F03F as solvents, were recharged with fresh hydrogen peroxide and cyclooctene, without any further reaction treatment, in order to continue the reaction. The catalyst remained fully active and the reaction could take place for up to eleven recharges without loss of activity (Fig. 1).

Table 2 summarizes the accumulated turnover numbers (TON) after each recharging cycle. As can be seen, the catalytic activity is maintained throughout the recharging steps and the TON increase is almost constant for both solvents. Epoxidation of cyclooctene in 3F03F is somewhat slower than that in TFE (see TOF₀ in Table 1), so whereas almost total cyclooctene conversion is achieved after 2 h of reaction time in TFE, some unreacted cyclooctene remains in the reaction medium after each step (Fig. 1b). In all cases there was full selectivity towards cyclooctene oxide as the sole product. These results point to the stability of the catalytic system in the reaction

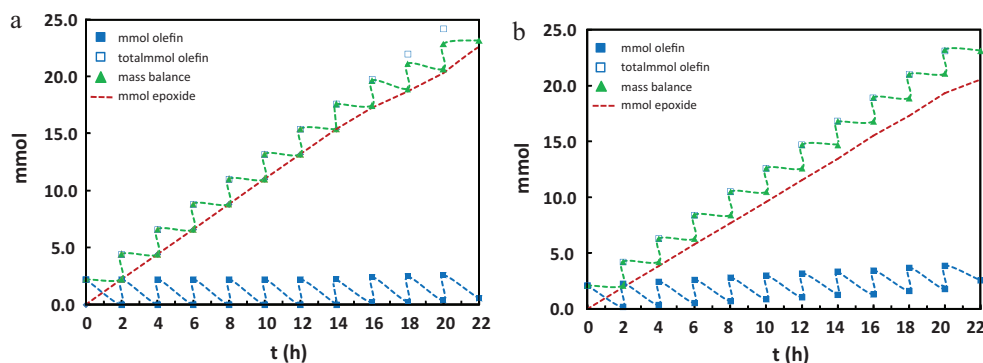


Fig. 1. Recharging fresh reagents in the epoxidation of cyclooctene with hydrogen peroxide using TFE (a) and 3F03F (b) as solvents. Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclooctene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C. After 2 h, when the reaction is completed, 4 mmol 50% H₂O₂ and 2 mmol of cyclooctene were added to run the next step. It was not carried out any distillation between steps.

Table 2

Total turnover number (TON) after each cycle of oxidant (hydrogen peroxide) and olefin (cyclooctene) recharging.

TFE		3F03F	
Step	TON ^a	Step	TON ^a
1	121	1	118
2	242	2	230
3	360	3	352
4	484	4	471
...		...	
11	1494	11	1296

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclooctene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 2 h. After each cycle, 4 mmol 50% H₂O₂ and 2 mmol of cyclooctene were subsequently added.

^a Total turnover number, mmol epoxide mmol catalyst⁻¹.

conditions, which opens the possibility of recovery and recycling of the catalytically active phase.

As the boiling point of TFE (79 °C) is lower than that of cyclooctene oxide (189 °C), the direct distillation of the product from the reaction medium is impossible, which prevents the option of recovery of the catalytic solution. On the other hand, when 3F03F (197 °C) is used as solvent in this reaction the distillation of the cyclooctene oxide from the reaction should in principle be possible.

After the distillation of the epoxide, by high vacuum at low temperature, it turned out that the catalyst was slightly deactivated (Table 3); moreover the total separation of cyclooctene oxide from 3F03F was impossible by fractional distillation, and some solvent (30–40%) was lost after each recovery cycle. This drawback could, in principle, be overcome by using a higher boiling point solvent. However, neither 5F05F (b.p. 204 °C) nor 7F07F (b.p. 206 °C) seem to have differences with regard to 3F03F big enough to justify the use of these much more expensive solvents (due to the scarce avail-

Table 3

Recycling of the catalyst-containing phase by direct distilling of the cyclooctene oxide from the reaction medium, in the case of 3F03F.

Solvent	Cycle	TOF ₀ (h ⁻¹) ^a	Yield (%) ^{b,c}
3F03F	1	160	82
	2	90	85

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclooctene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 2 h. After the first cycle, cyclooctene oxide was removed by high vacuum distillation and 4 mmol 50% H₂O₂ and 2 mmol of cyclooctene were added to run the second cycle.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b CG-yield of epoxide, mmol cyclooctene oxide mmol cyclooctene⁻¹.

^c Pure cyclooctene oxide obtained, but it was contaminated with traces of solvent (3F03F) upon distillation.

ability of the corresponding starting fluorinated alcohols) in the recycling experiments.

Therefore it seemed logical to explore this strategy using a more volatile epoxide which should solve the fractional distillation issue. To test this hypothesis we chose cyclohexene for the recycling experiments. Furthermore cyclohexene is far more sensitive to hydrolysis than cyclooctene, and hence this substrate constitutes a more valuable test regarding catalyst application scope.

3.2. Epoxidation of cyclohexene

Epoxidation of cyclohexene was carried out using six of the seven solvents employed in the cyclooctene epoxidation experiments. Solvent 5F05F was excluded because it has almost the same physico-chemical properties as 3F03F, cyclooctene epoxidation is almost as effective in 3F03F as in 5F05F, and 2,2,3,3,3-pentafluoro-1-propanol is much more expensive than TFE. Although good conversions and selectivities were obtained in relatively short reaction times, after some time the epoxide started to decompose slowly and the selectivity of the reaction decreased (Table 4).

Fig. 2 shows the evolution of epoxide yield with time in each solvent tested, without sodium acetate added, where the cyclohexene oxide is not totally stable and it decomposed by hydrolysis. Water miscibility seemed to be the key point controlling the reaction course. A low miscibility of water with the solvent slows the reaction by reducing the concentration of water in the active phase. Water miscibility depends on both hydrogen bond donor (HBD) ability and lipophilicity of the solvent. In this regard, it is worth

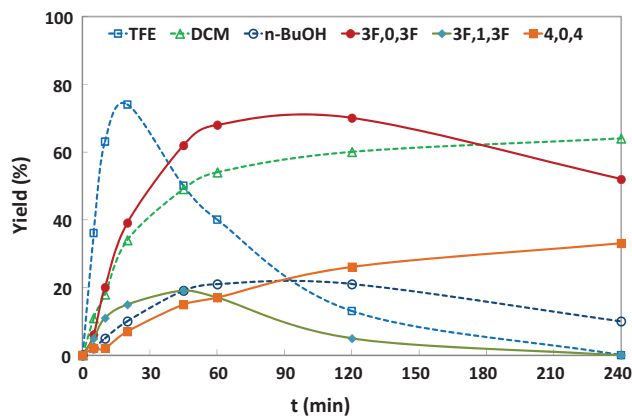


Fig. 2. Decay of cyclohexene oxide yield in time, due to hydrolysis in different solvents. The use of sodium acetate (0.5 mol%) could solve that problem. Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclohexene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 4 h.

Table 4
Cyclohexene epoxidation results in different solvents.

Solvent	E_T^N	β	TOF ₀ (h ⁻¹) ^a	Conv. (%) ^b (20 min)	Select. (%) ^{c,d} (20 min)	Conv. (%) ^b (120 min)	Select. (%) ^{c,d} (120 min)
TFE	0.898	0.000	398	100	89	100	16
DCM	0.309	0.000	133	39	88	80	75
n-BuOH	0.586	0.880	44	11	95	59	35
3F03F	0.701	0.700	183	46	86	96	73
3F13F	0.553	0.500	98	22	70	66	8
404	0.450	0.600	10	11	69	38	70
TFE ^e	0.898	0.000	240	–	–	100	98
3F03F ^e	0.701	0.700	84	–	–	95	97

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclohexene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 2 h.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b GC-conversion of olefine, mmol cyclohexene converted mmol cyclohexene⁻¹.

^c Selectivity, mmol cyclohexene oxide mmol cyclohexene⁻¹.

^d Cyclohexan-1,2-diol was the only by-product.

^e 0.5 mol% of sodium acetate was added.

noting that 3F03F gathers both a high HBD ability and immiscibility with water, which results in high conversions, but also high epoxide stability towards hydrolysis. This unusual combination of physico-chemical properties has also recently been reported for other fluorinated derivatives of glycerol [47], and it allows the development of special applications in catalytic systems, unreachable for common organic solvents. One of these applications has been recently reported by our group [55].

The reaction was also carried out in the presence of traces of sodium acetate (0.5 mol%) to control the pH of the reaction medium and to minimize the hydrolysis suffered by the epoxide [25–27], which can be observed in entries 7 and 8 of Table 4. Although the reaction is initially slower in these conditions (as indicated by the TOF₀ values), in both cases almost total conversion is also reached after 120 min reaction time, and product hydrolysis is totally avoided.

Similar to the case of cyclooctene, it was not possible to distill directly the oxide product from the reaction media when 2,2,2-trifluoroethanol was used, because the boiling point of TFE (79 °C) is lower than that of cyclohexene oxide (129 °C). However, when 3F03F (197 °C) was used as solvent, the fractional distillation of the cyclohexene oxide from the reaction was possible (recovering ca. 80% of the produced epoxide) with no loss of solvent after each distillation. Unfortunately, we found that after every separation the epoxide from the catalytically active phase, by a low temperature distillation, the catalyst was progressively deactivated (Table 5).

We observed during low temperature vacuum distillation that the remaining hydrogen peroxide was deteriorating the catalyst. This deactivation is not merely due to the presence of an excess of hydrogen peroxide, since recharging experiments had already demonstrated catalyst stability under reaction conditions, and independent experiments showed that it is necessary to heat the catalyst solution at 80 °C for three or more hours in the presence of hydrogen peroxide to induce phase deactivation. To avoid the deactivation during recovery processes, the reaction was carried

Table 5
Recycling of the catalyst-containing phase by direct distilling of the cyclohexene oxide from the reaction medium, in the case of 3F03F.

Solvent	Cycle	TOF ₀ (h ⁻¹) ^a	Yield (%) ^b	Isolated (%) ^c
3F03F	1	95	73	78
	2	20	20	80
	3	14	8	85

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 2 mmol of cyclohexene, 4 mmol 50% H₂O₂, 2 mL solvent, 25 °C, 2 h. After the first cycle, 4 mmol 50% H₂O₂ and 2 mmol of cyclooctene were added.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b GC-yield of epoxide, mmol cyclohexene oxide mmol cyclohexene⁻¹.

^c Pure cyclohexene oxide obtained, mmol cyclohexene oxide isolated mmol cyclohexene oxide⁻¹.

Table 6
Cyclohexene epoxidation in 3F03F, using different oxidant/olefin ratios.

Cyclohexene (mmol)	H ₂ O ₂ /olefin ratio	TOF ₀ (h ⁻¹) ^a	Conv. (%) ^b	Yield (%) ^c
4.53	1.9	235	96	45
4.65	1.4	230	92	57
4.45	0.9	200	79	71
4.43	0.5	130	54	90

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, the indicated mmol of cyclohexene, 2 mL solvent, 25 °C, 2 h.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b GC-conversion of olefine, mmol cyclohexene converted mmol cyclohexene⁻¹.

^c GC-yield over the theoretical maximum of cyclohexene oxide, based on the quantity of oxidant, mmol cyclohexene oxide mmol oxidant⁻¹.

out with a sub-stoichiometric amount of oxidant. Although this obviously results in lower and slower olefin conversion (Table 6), the stability of catalyst and product is higher under distillation conditions, which allows catalyst and solvent recovery by direct distillation of the cyclohexene oxide and the unreacted cyclohexene.

By working at low cyclohexene conversions, three catalytic cycles were carried out, see Table 7, complete recovery of the catalytic medium (catalyst and the glycerol-derived solvent, 3F03F) was possible (see Fig. 3) and only in the third catalytic cycle a small amount of cyclohexan-1,2-diol was observed, although cyclohexene oxide could be easily isolated in pure form by distillation.

Table 7
Catalyst reuse in epoxidation of cyclohexene using hydrogen peroxide in water as oxidant and 3F03F as solvent.

Cycle	Time (min)	TOF ₀ (h ⁻¹) ^a	Yield (%) ^b	TON ^c	Diol (%) ^d
1	5		28	14	0
	10	129	48	25	0
	120		>99	54	0
<i>Distillation of the product and recharging of fresh reagents for the second cycle</i>					
2	5		31	84	0
	10	88	52	91	0
	120		>99	110	0
<i>Distillation of the product and recharging of fresh reagents for the second cycle</i>					
3	5		26	135	4
	10	121	44	145	4
	120		76	155	15

Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 4 mmol of cyclohexene, 2 mmol 50% H₂O₂, 2 mL solvent, 25 °C.

^a TOF₀ (h⁻¹), initial rate in mmol product mmol catalyst⁻¹ h⁻¹.

^b GC-yield over the theoretical maximum of cyclohexene oxide, mmol cyclohexene oxide mmol oxidant.

^c Total turnover number mmol epoxide mmol catalyst⁻¹.

^d Cyclohexan-1,2-diol was the only by-product observed.

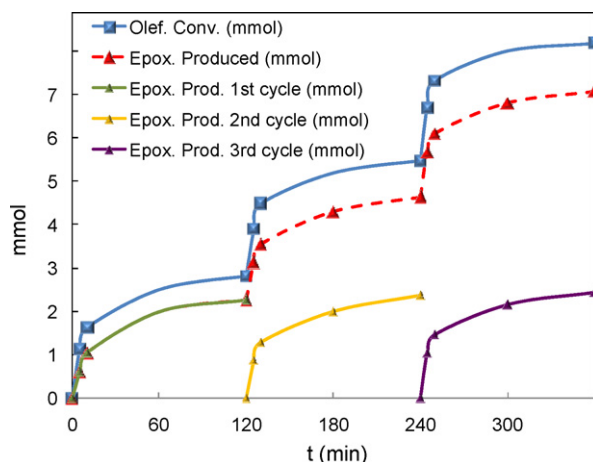


Fig. 3. Recovering of the catalysts by distillation of the product in the epoxidation of cyclohexene with hydrogen peroxide using 3F03F as solvent. Conditions: 0.5 mol% bis[3,5-bis(trifluoro-methyl)diphenyl] diselenide, 4 mmol of cyclohexene, 2 mmol 50% H_2O_2 , 2 mL solvent, 25 °C. After 2 h, when the reaction is completed, cyclohexene oxide was removed by distillation and 2 mmol 50% H_2O_2 and 4 mmol of cyclooctene were added to run the next cycle.

4. Conclusions

An efficient strategy for olefin epoxidation, combining renewable solvents (derived from glycerol), a green oxidant (aqueous hydrogen peroxide), and catalyst recycling (an arylseleninic acid) has been explored. The use of fluorinated glycerol derivatives allows good catalytic activity in the epoxidation of cyclooctene and cyclohexene with aqueous hydrogen peroxide, preventing epoxide hydrolysis, which is particularly remarkable in the case of cyclohexene. Results were in some cases comparable to using standard organic solvents and even better in most cases.

Catalyst stability tests show that the catalytic medium (solvent + seleninic acid derivative) can be repeatedly recharged with reactants without loss of catalytic activity and selectivity. Optimization of the reaction conditions results in the preparation of a recoverable catalyst-containing phase allowing direct distillation of the epoxide product (cyclohexene oxide), with further recycling and reuse of the solvent and the catalyst. This recovery strategy could, in principle, be extrapolated to other catalytic transformations carried out in these kinds of green solvents.

Acknowledgements

Financial support from the European Union (project Solvsafe, NMP2-CT-2005-011774 and the European Social Fund), the Spanish MCIMM (projects CTQ2008-05138 and Consolider Ingenio 2010 CSD 2006-0003) and the Gobierno de Aragón (Grupo de Excelencia E11) is gratefully acknowledged. H. García-Marín thanks the Gobierno de Aragón and Caja de Ahorros de la Inmaculada for grants.

Appendix A. Supplementary data

Supplementary data associated with this article can be found, in the online version, at doi:10.1016/j.molcata.2010.10.027.

References

[1] G. Sielens, R. Rieth, K.T. Rowbottom, Ullmann's Encyclopedia of Organic Chemicals, Wiley-VCH, Weinheim, 1999.

[2] R.A. Sheldon, Topics in Current Chemistry: Homogeneous and Heterogeneous Catalytic Oxidations with Peroxide, Springer-Verlag, Berlin, 1993.
 [3] G. Grigoropoulou, J.H. Clark, J.A. Elings, Green Chem. 5 (2003) 1–7.
 [4] D.E. De Vos, B.F. Sels, P.A. Jacobs, Adv. Synth. Catal. 345 (2003) 457–473.
 [5] D.E. De Vos, B.F. Sels, P.A. Jacobs, Adv. Synth. Catal. 46 (2004) 1–87.
 [6] P.A. Grieco, Y. Yokohama, S. Gilman, M. Nishizawa, J. Org. Chem. 42 (1977) 2034–2036.
 [7] M.A. Umbreit, K.B. Sharpless, J. Am. Chem. Soc. 99 (1977) 5526–5528.
 [8] I. Kuwajima, M. Shimizu, H. Urabe, J. Org. Chem. 47 (1982) 837–842.
 [9] R.T. Taylor, L.A. Flood, J. Org. Chem. 48 (1983) 5160–5164.
 [10] B. Betzemeier, F. Lhermitte, P. Knochel, Synlett (1999) 489.
 [11] T. Hori, K.B. Sharpless, J. Org. Chem. 43 (1978) 1689–1697.
 [12] H.J. Reich, F. Chow, S.L. Peake, Synthesis (1978) 299–301.
 [13] L. Syper, Synthesis (1989) 167–172.
 [14] P.L. Beaulieu, R. Déziel, Organoselenium Chemistry: A Practical Approach, Oxford University Press, New York, 1999.
 [15] T. Wirth, Tetrahedron 55 (1999) 1–28.
 [16] T. Wirth, Top. Curr. Chem. 208 (2000) 143–176.
 [17] T. Wirth, Angew. Chem. Int. Ed. 39 (2000) 3740–3749.
 [18] T. Wirth, Comprehensive Organometallic Chemistry III, Elsevier, Oxford, 2006.
 [19] D.M. Browne, T. Wirth, Curr. Org. Chem. 10 (2006) 1893–1903.
 [20] D.M. Freudendahl, S.A. Shahzad, T. Wirth, Eur. J. Org. Chem. (2009) 1649–1664.
 [21] J. Mlochowski, M. Brza, M. Giurg, J. Palus, H. Wojtowicz, Eur. J. Org. Chem. (2003) 4329–4339.
 [22] J. Mlochowski, M. Brza, M. Chojnacka, M. Giurg, H. Wójtowicz, Arkivoc (2004) 226–248.
 [23] D.H.R. Barton, D.J. Lester, S.V. Ley, J. Chem. Soc. Chem. Commun. (1978) 276–277.
 [24] D. Zhao, M. Johansson, J.E. Bäckvall, Eur. J. Org. Chem. (2007) 4431–4436.
 [25] G.J. ten Brink, B.C.M. Fernandes, M.C.A. Vliet, I.W.C.E. Arends, R.A. Sheldon, J. Chem. Soc. Perkin Trans. 1 (2001) 224–228.
 [26] G.J. ten Brink, J.M. Martijn, J.H. Vis, I.W.C.E. Arends, R.A. Sheldon, J. Org. Chem. 66 (2001) 2429–2433.
 [27] G.J. ten Brink, J.H. Vis, I.W.C.E. Arends, R.A. Sheldon, Tetrahedron 58 (2002) 3977–3983.
 [28] H.J. Reich, J.M. Renga, I.L. Reich, J. Am. Chem. Soc. 97 (1975) 5434–5474.
 [29] D. Crich, G.R. Barba, Org. Lett. 2 (2000) 989–991.
 [30] S.I. Murahashi, T. Shiota, Tetrahedron Lett. 28 (1987) 2383–2386.
 [31] B. Priewisch, K. Rück-Braun, J. Org. Chem. 70 (2005) 2350–2352.
 [32] B.H. Brodsky, J. Du Bois, J. Am. Chem. Soc. 127 (2005) 15391–15393.
 [33] D.M. Freudendahl, S. Santoro, S.A. Shahzad, C. Santi, T. Wirth, Angew. Chem. Int. Ed. 48 (2009) 8409–8411.
 [34] A.L. Braga, D.S. Lüdtkke, F. Vargas, R.C. Braga, Synlett (2006) 1453–1466.
 [35] K. Kamata, R. Ishimoto, T. Hirano, S. Kuzuya, K. Uehara, N. Mizuno, Inorg. Chem. 49 (2010) 2471–2478.
 [36] B.K. Sarma, G. Mughes, Org. Biomol. Chem. 6 (2008) 965–974.
 [37] T. Blasco, M.A. Cambor, A. Corma, P. Esteve, J.M. Guil, A. Martínez, J.A. Perdigon-Melon, S. Valencia, J. Phys. Chem. B 102 (1998) 75–88.
 [38] J.M. Fraile, J.I. García, J.A. Mayoral, E. Vispe, J. Catal. 189 (2000) 40–51.
 [39] J.M. Fraile, J.I. García, J.A. Mayoral, E. Vispe, D.R. Brown, M. Naderi, Chem. Commun. (2001) 1510–1511.
 [40] J.M. Fraile, J.I. García, J.A. Mayoral, E. Vispe, J. Catal. 204 (2001) 146–156.
 [41] J.M. Fraile, J.I. García, J.A. Mayoral, E. Vispe, Appl. Catal. A 276 (2004) 113–122.
 [42] M. Guidotti, C. Pirovano, N. Ravasio, B. Lazaro, J.M. Fraile, J.A. Mayoral, B. Coq, A. Galarneau, Green Chem. 11 (2009) 1421–1427.
 [43] J. Brégeault, M. Vennat, L. Salles, J. Piquemal, Y. Mahha, E. Briot, P.C. Bakala, A. Atlamsani, R. Thouvenot, J. Mol. Catal. A 250 (2006) 177–189.
 [44] J. Muzart, Adv. Synth. Catal. 348 (2006) 275–295.
 [45] See for instance K. Smith, S. Liu, G.A. El-Hiti, Catal. Lett. 98 (2004) 95–101.
 [46] For example J. Dupont, R.F. de Souza, P.A.Z. Suarez, Chem. Rev. 102 (2002) 3667–3692.
 [47] J.I. García, H. García-Marín, J.A. Mayoral, P. Pérez, Green Chem. 12 (2010) 426–434.
 [48] H. García-Marín, J.C. van der Toorn, J.A. Mayoral, J.I. García, I.W.C.E. Arends, Green Chem. 11 (2009) 1605–1609.
 [49] J. Bégué, D. Bonnet-Delpon, B. Crousse, Synlett (2004) 18–29.
 [50] A. Berkessel, J.A. Adrio, D. Hüttenhain, J.M. Neudörfl, J. Am. Chem. Soc. 128 (2006) 8421–8426.
 [51] A. Berkessel, J.A. Adrio, J. Am. Chem. Soc. 128 (2006) 13412–13412.
 [52] S.P. de Visser, J. Kaneti, R. Neumann, S. Shaik, J. Org. Chem. 68 (2003) 2903–2912.
 [53] L. Syper, J. Mlochowski, Synthesis (1984) 747–751.
 [54] L. Syper, J. Mlochowski, Tetrahedron 43 (1987) 207–213.
 [55] L. Aldea, J.M. Fraile, H. García-Marín, J.I. García, C. Herrerías, J.A. Mayoral, I. Pérez, Green Chem. 12 (2010) 435–440.
 [56] A. Berkessel, J.A. Adrio, Adv. Synth. Catal. 346 (2004) 275–280.