



Erratum

Erratum to “Elevated temperature cycling stability and electrochemical impedance of LiMn<sub>2</sub>O<sub>4</sub> cathodes with nanoporous ZrO<sub>2</sub> and TiO<sub>2</sub> coatings” [J. Power Sources 195 (15) (2010) 4943–4951]

Kenneth A. Walz<sup>a,\*</sup>, Christopher S. Johnson<sup>b,1</sup>, Jamie Genthe<sup>a</sup>, Lucas C. Stoiber<sup>a</sup>, Walter A. Zeltner<sup>a</sup>, Marc A. Anderson<sup>a,1</sup>, Michael M. Thackeray<sup>b,1</sup>

<sup>a</sup> Environmental Chemistry and Technology Program, University of Wisconsin-Madison, 660 N Park Street, Madison, WI 53706, United States

<sup>b</sup> Chemical Sciences and Engineering Division, Argonne National Laboratory, 9500 Cass Ave., Argonne, IL 60439, United States

The publisher regrets that in the original printing of the above article Fig. 3 was printed incorrectly. The correct Fig. 3 is as follows.


The publisher would like to apologise for any inconvenience this may have caused to the authors of this article/(and) readers of the journal.

DOI of original article: [10.1016/j.jpowsour.2010.03.007](https://doi.org/10.1016/j.jpowsour.2010.03.007).

\* Corresponding author. Tel.: +1 608 246 6521; fax: +1 608 246 6880.

E-mail address: [kawalz@wisc.edu](mailto:kawalz@wisc.edu) (K.A. Walz).

<sup>1</sup> Electrochemical Society active member.

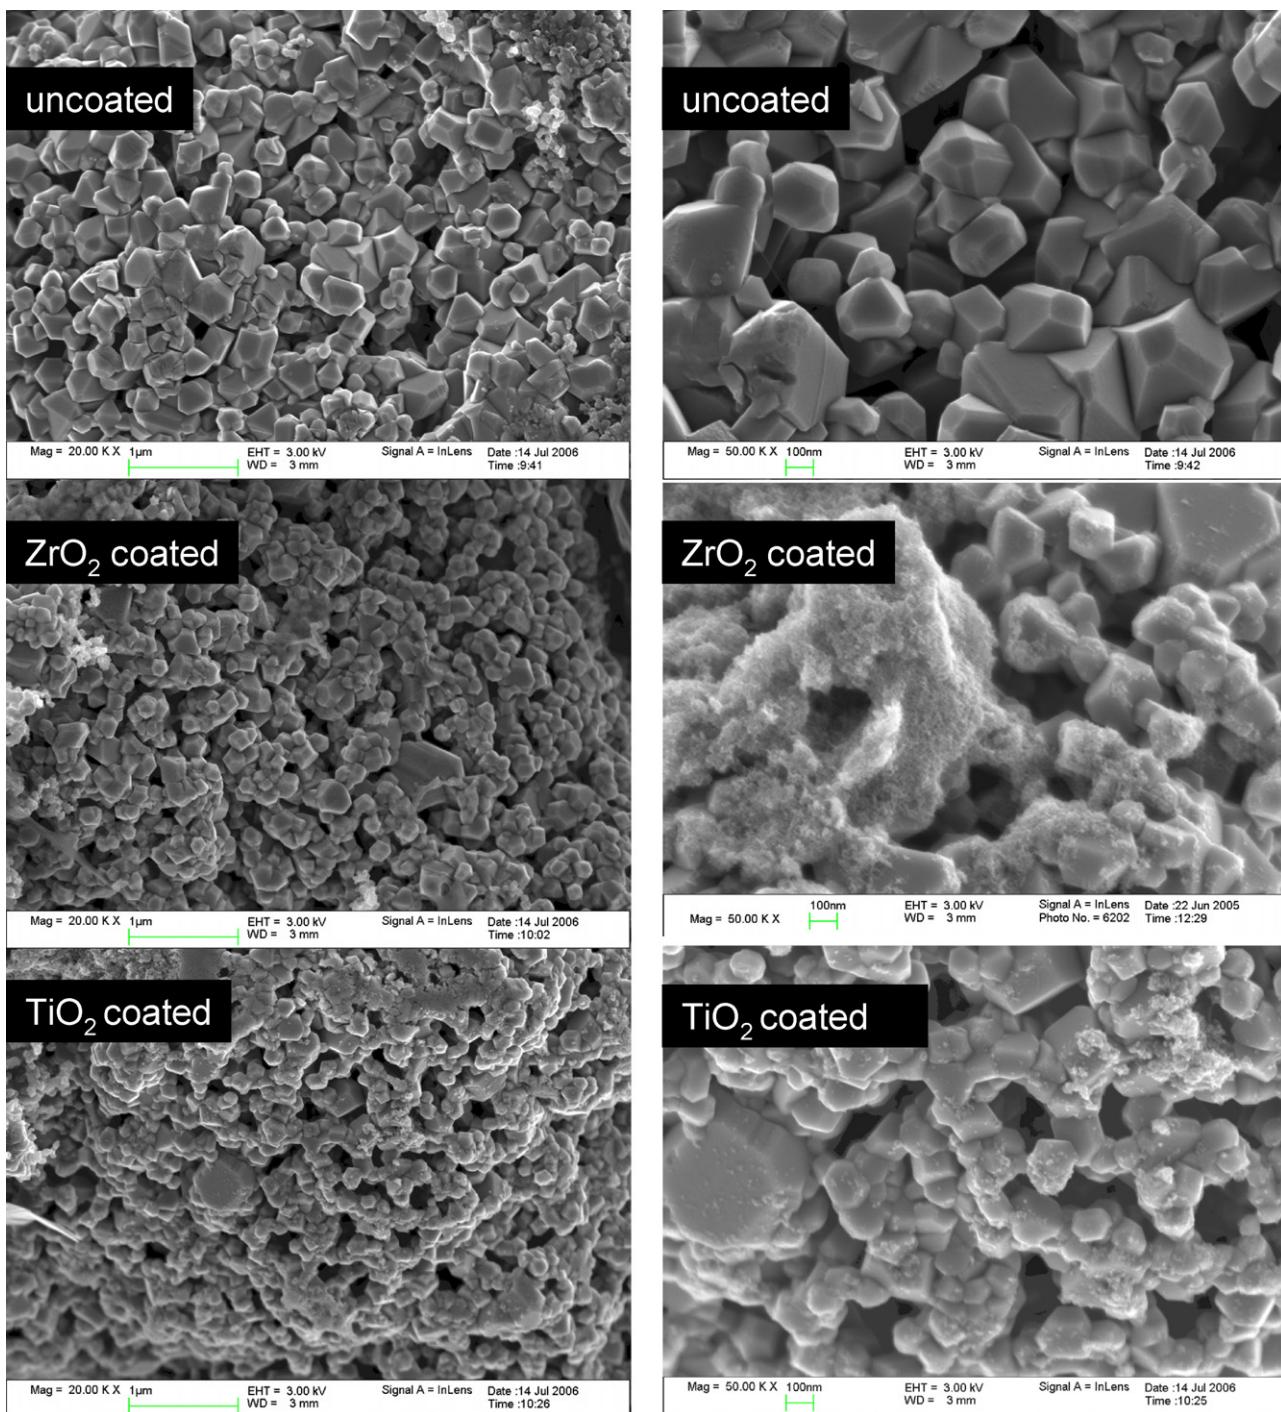

**Fig. 3.** SEM images of uncoated,  $\text{ZrO}_2$ -coated and  $\text{TiO}_2$ -coated electrode laminates at 20,000× (left) and 50,000× (right) magnification.