

chloric acids and the ease of precipitation makes it well suited for this application.

The means for the separation of copper from cadmium in the confirmatory test for cadmium given by Noyes² has been found to be not quite satisfactory for class use due to the fact that many times the student does not obtain a thorough separation of the copper.

The thiocyanate method has been used in the classes in the Qualitative Laboratory of the University of New Hampshire and has been found to give very satisfactory results.

The procedure for this method is as follows. To the part of the ammonium hydroxide solution remaining after the ferrocyanide test has been made for the confirmation of copper add dilute sulfuric acid until acid to litmus, then 5 cc. of a normal solution of potassium thiocyanate. A brown coloration will result due to the formation of cupric thiocyanate. Heat to boiling, add about 0.5 g. of dry sodium sulfite and continue boiling for about one minute until the white precipitate of cuprous thiocyanate has coagulated. Filter off the precipitate and saturate the clear filtrate with hydrogen sulfide. If cadmium is present the characteristic yellow precipitate of cadmium sulfide will form.

This reagent has also been used to advantage to avoid the interference of copper in the test for antimony as given by Noyes,³ which occurs in some instances when sodium polysulfide is used and very often when ammonium polysulfide is employed for the separation of the copper and tin groups. The above procedure may be used after the antimony and tin have been separated from the arsenic by concentrated hydrochloric acid, and the solution has been diluted to the proper acid concentration for the precipitation of the antimony sulfide.

CONTRIBUTION FROM THE
CHEMICAL LABORATORIES OF THE
UNIVERSITY OF NEW HAMPSHIRE
DURHAM, NEW HAMPSHIRE

ALBERT F. DAGGETT

RECEIVED MAY 15, 1929
PUBLISHED SEPTEMBER 5, 1929

An Improved Stopcock for Gas Analysis Burets.—The usual type of buret stopcock used in both technical and exact gas analysis apparatus is of the three-way downward outlet type or a specially bored adaptation¹ of this when a compensator is attached. The objection to this type of stopcock lies not only in the difficulty of stopping the absorbent solutions exactly at the stopcock with its upward pointing outlet, but also in the

² A. A. Noyes, "Qualitative Chemical Analysis," The Macmillan Company, New York, 1928, p. 80.

³ Ref. 2, p. 86.

¹ A. H. White, "Gas and Fuel Analysis," McGraw-Hill Book Company, New York, 1st ed., 1913, pp. 16, 73.

unpreventable draining of these solutions into the gas buret during the absorption process. Even in the hands of an expert an exact gas analysis apparatus becomes badly fouled in the course of a single complete analysis of a gas mixture such as water gas.

This difficulty is eliminated by the use of the special stopcock shown attached to a bulbed exact gas analysis apparatus¹ equipped with a single leg compensator² in Fig. 1. By placing

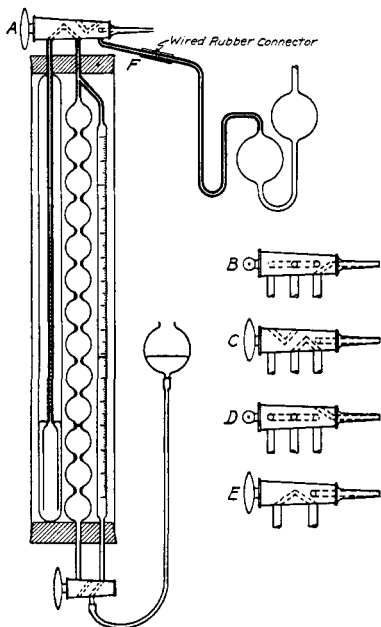


Fig. 1.

the outlet to which the absorption pipet is attached below instead of above the stopcock barrel, it is possible to bring the absorbent solution slowly up to the bore of the cock without any danger of spilling over into the buret. During the absorption of any constituent the solution adhering to the walls of the stopcock outlet then drains down away from the stopcock and buret. Four views of the stopcock are shown at A, B, C and D, each a quarter turn in the clockwise direction from the preceding position as shown in the sketches.

In the case of an uncompensated buret such as is used in technical analyses the simpler stopcock shown at E, suffices.

BUREAU OF CHEMISTRY AND SOILS
FERTILIZER AND FIXED NITROGEN INVESTIGATIONS
DEPARTMENT OF AGRICULTURE

WASHINGTON, D. C.

RECEIVED MAY 16, 1929
PUBLISHED SEPTEMBER 5, 1929

WARD E. KUENTZEL

² F. C. Vilbrandt, *Ind. Eng. Chem.*, **16**, 936 (1924)