

Energy dissipation in body-forced plane shear flow

By C. R. DOERING^{1,2}, B. ECKHARDT³ AND J. SCHUMACHER³

¹Department of Mathematics, University of Michigan, Ann Arbor, MI 48109-1109, USA

²Michigan Center for Theoretical Physics, Ann Arbor, MI 48109-1120, USA

³Fachbereich Physik, Philipps-Universität, D-35032 Marburg, Germany

(Received 14 May 2003 and in revised form 30 July 2003)

We study the problem of body-force-driven shear flows in a plane channel of width ℓ with free-slip boundaries. A mini–max variational problem for upper bounds on the bulk time-averaged energy dissipation rate ϵ is derived from the incompressible Navier–Stokes equations with no secondary assumptions. This produces rigorous limits on the power consumption that are valid for laminar or turbulent solutions. The mini–max problem is solved exactly at high Reynolds numbers $Re = U\ell/\nu$, where U is the r.m.s. velocity and ν is the kinematic viscosity, yielding an explicit bound on the dimensionless asymptotic dissipation factor $\beta = \epsilon\ell/U^3$ that depends only on the ‘shape’ of the shearing body force. For a simple half-cosine force profile, for example, the high Reynolds number bound is $\beta \leq \pi^2/\sqrt{216} = 0.6715\dots$. We also report extensive direct numerical simulations for this particular force shape up to $Re \approx 400$; the observed dissipation rates are about a factor 3 below the rigorous high- Re bound. Interestingly, the high- Re optimal solution of the variational problem bears some qualitative resemblance to the observed mean flow profiles in the simulations. These results extend and refine the recent analysis for body-forced turbulence in Doering & Foias (2002).

1. Introduction

Bounds on the energy dissipation rate for statistically stationary flows belong to the small class of rigorous results for turbulence that can be derived directly from the incompressible Navier–Stokes equations without introducing any supplementary hypotheses or uncontrolled approximations. Quantitative approaches are mostly based on variational formulations, as have been used in a variety of boundary-driven turbulent flows; see, e.g., Howard (1972), Busse (1978), Doering & Constantin (1994), Nicodemus, Grossmann & Holthaus (1998), Kerswell (1998). Childress, Kerswell & Gilbert (2001) and Doering & Foias (2002) extended these analyses to body-forced flows in a fully periodic domain. The aim of such studies is to consider mathematically well-defined and tractable models for (almost) homogeneous and (almost) locally isotropic stationary turbulence when boundaries are far away.

Define the Reynolds number $Re = U\ell/\nu$, where U is the steady-state r.m.s. velocity, ℓ is the longest characteristic length scale in the body-force function and ν is the kinematic viscosity. For the three-dimensional Navier–Stokes equations, Doering & Foias (2002) found that the energy dissipation rate per unit mass ϵ satisfies

$$\epsilon \leq c_1\nu(U^2/\ell^2) + c_2(U^3/\ell) \quad (1.1)$$

where the coefficients c_1 and c_2 depend only on the functional shape of the body force, and not on any other parameters or on any ratios involving the (say, rms) amplitude F of the force or the overall system size L – which could be arbitrarily larger than ℓ . (We give a more precise definition of the ‘shape’ of the forcing function below, or see Doering & Foias 2002.) In terms of the dimensionless dissipation ratio $\beta = \epsilon\ell/U^3$, this result is $\beta \leq c_1/Re + c_2$, an estimate in qualitative accord with theoretical, computational, and experimental results for homogeneous isotropic turbulence (Frisch 1995; Sreenivasan 1984, 1998). The analysis in Childress *et al.* (2001) focuses on dissipation estimates in terms of the true control parameter for such systems, the Grashof number $Gr = F\ell^3/\nu^2$, but those results are less easily interpreted in terms of conventional ideas for homogeneous isotropic turbulence.

In this paper we refine and develop the approach in Doering & Foias (2002) for the particular example of flow between free-slip boundary planes driven by a steady volume forcing density. Homogeneous shear turbulence is of interest in its own right, and by setting a uniform direction of the force we simplify some of the analysis, allowing us to improve the bounds and make quantitative comparison with direct numerical simulations. The analysis produces rigorous limits that are approached within about a factor of three even at the moderate values of Re (up to 400) that we are able to reach computationally (in these runs the usual Taylor microscale Reynolds number $R_\lambda \approx 100$).

2. Preliminaries

The three-dimensional dynamics of the flow is governed by the Navier–Stokes equations for an incompressible Newtonian fluid,

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} + \nabla p = \nu \nabla^2 \mathbf{u} + \mathbf{f}, \quad \nabla \cdot \mathbf{u} = 0, \quad (2.1)$$

where the velocity field is $\mathbf{u}(\mathbf{x}, t) = \mathbf{e}_x u_x + \mathbf{e}_y u_y + \mathbf{e}_z u_z$, and the pressure field is $p(\mathbf{x}, t)$. The flow is in the slab $[0, L_x] \times [0, \ell] \times [0, L_z]$ with periodic boundary conditions in the x (streamwise) and z (spanwise) directions. On the bottom and top surfaces at $y = 0$ and $y = \ell$, we take the free-slip boundary conditions $u_y = 0$ and $\partial_y u_x = 0 = \partial_y u_z$.

The steady body force shearing the fluid is taken to be of the form

$$\mathbf{f}(\mathbf{x}) = F\phi(y/\ell)\mathbf{e}_x. \quad (2.2)$$

The length scale ℓ is the longest length scale in the forcing function. The dimensionless *shape* function $\phi : [0, 1] \rightarrow \mathcal{R}$ satisfies homogeneous Neumann boundary conditions with zero mean:

$$\phi'(0) = 0 = \phi'(1), \quad \int_0^1 \phi(\eta) d\eta = 0. \quad (2.3)$$

Technically we require that ϕ is a square integrable function, i.e. $\phi \in L^2[0, 1]$, but in practice we are interested in even smoother functions whose Fourier transforms are effectively supported on low wavenumbers. The amplitude F is specified uniquely for a given \mathbf{f} when we fix the normalization of the shape function by

$$1 = \int_0^1 \phi(\eta)^2 d\eta. \quad (2.4)$$

We also introduce the dimensionless ‘potential’ for the body-force shape function via

$$\mathbf{f}(\mathbf{x}) = \nabla \times [-F\Phi(y/\ell)\mathbf{e}_z]. \quad (2.5)$$

Then $\Phi \in H^1[0, 1]$, the space of functions with square-integrable first derivatives, so $\phi = -\Phi'$ and, without loss of generality because ϕ has zero mean, it satisfies homogeneous Dirichlet boundary conditions, $\Phi(0) = 0 = \Phi(1)$.

At sufficiently high forcing amplitude, a finite perturbation causes transition to turbulence and the imposed driving sustains the turbulent state ensuring statistical stationarity of the turbulent flow. In the following $\langle \cdot \rangle$ denotes the space–time average. Using the root mean square value $U = \sqrt{\langle \mathbf{u}^2 \rangle}$ of the total velocity field – including both a possible mean flow and turbulent fluctuations – and the length scale ℓ in the force, the Reynolds number is

$$Re = U\ell/\nu. \quad (2.6)$$

The energy dissipation per unit mass is $\epsilon = \nu \langle |\nabla \mathbf{u}|^2 \rangle$ and we define the dimensionless dissipation factor β via

$$\epsilon = \beta U^3/\ell. \quad (2.7)$$

Our aim is to derive bounds on β as a function of Re and as a functional of the shape ϕ of the driving force.

3. Bounds for the energy dissipation

The calculation of upper bounds on β proceeds in two steps. First is the derivation of a variational expression and second is the determination of rigorous estimates for it.

3.1. The variational problem

From the averaged power balance in the Navier–Stokes equations, the energy dissipation rate per unit mass ϵ is†

$$\epsilon = \nu \langle |\nabla \mathbf{u}|^2 \rangle = F \langle \phi u_x \rangle. \quad (3.1)$$

Another expression for the forcing amplitude F can be obtained by projecting onto the momentum equation. Specifically, we project the streamwise component of the Navier–Stokes equations onto a mean zero multiplier function $\psi \in H^2[0, 1]$ (a function whose second derivative is square integrable) satisfying homogeneous Neumann boundary conditions $\psi'(0) = 0 = \psi'(1)$. The multiplier function ψ must not be orthogonal to the shape function ϕ ; we consider only $\langle \phi \psi \rangle \neq 0$. It is also convenient to introduce the derivative of the multiplier function, $\Psi = \psi' \in H^1[0, 1]$, satisfying homogeneous Dirichlet boundary conditions $\Psi(0) = 0 = \Psi(1)$. The inner product of ϕ and ψ is the inner product of Φ and Ψ , i.e. $\langle \Phi \Psi \rangle = \langle \phi \psi \rangle \neq 0$.

Take the inner product of the Navier–Stokes equation (2.1) with $\psi(y/\ell)e_x$, integrate over the volume utilizing appropriate integrations by parts, and take the long-time average to obtain the relation

$$-\left\langle \frac{1}{\ell} \psi' u_x u_y \right\rangle = \left\langle \frac{\nu}{\ell^2} \psi'' u_x \right\rangle + F \langle \phi \psi \rangle. \quad (3.2)$$

† Strictly speaking we are also assuming that the long-time averages exist and that this relation is an equality for the solutions, rather than just an inequality. That is, for weak solutions of the Navier–Stokes equations it is only known that $\epsilon \leq F \langle \phi u_x \rangle$. These mathematical technicalities do not alter the ultimate bounds that we will derive in this paper.

This may be solved for the strength of the applied force F which when inserted into (3.1) yields

$$\epsilon = - \frac{\langle \phi u_x \rangle \left\langle \frac{1}{\ell} \psi' u_x u_y + \frac{\nu}{\ell^2} \psi'' u_x \right\rangle}{\langle \phi \psi \rangle}. \tag{3.3}$$

While the force amplitude F is no longer explicitly displayed in (3.3), it is implicitly present through the constraint that the root mean square value of the velocity field is U . Dividing by U^3/ℓ , we produce an expression for the dimensionless dissipation factor β ,

$$\beta = \frac{\epsilon \ell}{U^3} = - \frac{\left\langle \phi \left(\frac{u_x}{U} \right) \right\rangle \left\langle \psi' \left(\frac{u_x}{U} \right) \left(\frac{u_y}{U} \right) + Re^{-1} \psi'' \left(\frac{u_x}{U} \right) \right\rangle}{\langle \phi \psi \rangle}. \tag{3.4}$$

Changing now to normalized velocities $u\mathbf{e}_x + v\mathbf{e}_y + w\mathbf{e}_z = U^{-1}(u_x\mathbf{e}_x + u_y\mathbf{e}_y + u_z\mathbf{e}_z)$, so that $\langle u^2 + v^2 + w^2 \rangle = 1$, and dimensionless spatial coordinates $\ell^{-1}(x\mathbf{e}_x + y\mathbf{e}_y + z\mathbf{e}_z)$, and using the potential Φ and derivative multiplier Ψ we have the identity

$$\beta = \frac{\langle \Phi' u \rangle \langle \Psi uv + Re^{-1} \Psi' u \rangle}{\langle \Phi \Psi \rangle}. \tag{3.5}$$

The upper bound β_b on the dissipation factor is obtained by first maximizing the right-hand side of (3.5) over all normalized, divergence-free vector fields satisfying the boundary conditions, and then minimizing over all multiplier functions $\Psi \in H^1[0, 1]$ satisfying homogeneous Dirichlet boundary conditions. Thus for any solution of the Navier–Stokes equations, $\beta \leq \beta_b$ where the variational bound β_b is the solution of the mini–max problem

$$\beta_b(Re) = \min_{\Psi} \max_u \frac{\langle \Phi' u \rangle \langle \Psi uv + Re^{-1} \Psi' u \rangle}{\langle \Phi \Psi \rangle}. \tag{3.6}$$

Note that while we explicitly display the Reynolds number dependence of β_b , it also depends the shape of the applied force – but not independently on the forcing amplitude F ; the ratios in (3.4), (3.5) and (3.6) are homogeneous in both ϕ and Φ .

3.2. Evaluating bounds

From (3.6) it follows immediately that $\beta_b(Re)$ is bounded by a function of the form $c_1 + c_2/Re$ for all Reynolds numbers, the analogue of the result in Doering & Foias (2002). To see this, choose any convenient smooth multiplier function Ψ (e.g. Φ) and observe that elementary Cauchy–Schwarz and Hölder estimates (recalling the unit normalization of \mathbf{u}) give

$$\langle \Phi' u \rangle \leq \langle \phi^2 \rangle^{1/2}, \quad \langle \Psi uv \rangle \leq \frac{1}{2} \sup_{y \in [0,1]} |\Psi(y)|, \quad \langle \Psi' u \rangle \leq \langle \Psi'^2 \rangle^{1/2} \tag{3.7}$$

so that

$$\beta_b(Re) = \frac{\langle \phi^2 \rangle^{1/2} \sup_{y \in [0,1]} |\Psi(y)|}{2 \langle \Phi \Psi \rangle} + \frac{\langle \phi^2 \rangle^{1/2} \langle \Psi'^2 \rangle^{1/2}}{\langle \Phi \Psi \rangle} Re^{-1}. \tag{3.8}$$

This simple analysis produces explicit expressions for the coefficients c_1 and c_2 in a bound of the form $\beta \leq c_1/Re + c_2$, displaying their functional dependence on the shape of the driving force. In the following we will quantitatively and qualitatively

improve this upper bound, computing the exact solution of the infinite- Re limit of the mini-max problem.

To further estimate and evaluate $\beta_b(Re)$, note first that the boundary conditions together with incompressibility imply that the y -component satisfies $\bar{v}(y) \equiv 0$ where the overbar means horizontal and time average. We decompose the x -component into a horizontal mean flow $\bar{u}(y)$ and a fluctuating remainder $\tilde{u} = u - \bar{u}$. Then the terms in the numerator of the ratio for β_b reduce:

$$\langle \phi u \rangle = \langle \phi \bar{u} \rangle, \quad \langle \Psi uv \rangle = \langle \Psi \tilde{u} v \rangle, \quad \langle \Psi' u \rangle = \langle \Psi' \bar{u} \rangle. \quad (3.9)$$

Let $\xi^2 = \langle \bar{u}^2 \rangle$. The normalization for the velocity field is

$$1 = \langle \bar{u}^2 + \tilde{u}^2 + v^2 + w^2 \rangle \geq \xi^2 + \langle \tilde{u}^2 + v^2 \rangle, \quad (3.10)$$

so the terms in (3.9) may be estimated:

$$|\langle \phi u \rangle| \leq \langle \phi^2 \rangle^{1/2} \xi, \quad |\langle \Psi uv \rangle| \leq \frac{1}{2} \sup_{y \in [0,1]} |\Psi(y)| (1 - \xi^2), \quad |\langle \Psi' u \rangle| \leq \langle \Psi'^2 \rangle^{1/2} \xi. \quad (3.11)$$

Hence for any choice of Ψ ,

$$\begin{aligned} \max_u \frac{\langle \Phi' u \rangle \langle \Psi uv + Re^{-1} \Psi' u \rangle}{\langle \Phi \Psi \rangle} \\ \leq \max_{0 \leq \xi \leq 1} \frac{\langle \phi^2 \rangle^{1/2}}{\langle \Phi \Psi \rangle} \xi \left[\frac{1}{2} \sup_{y \in [0,1]} |\Psi(y)| (1 - \xi^2) + Re^{-1} \langle \Psi'^2 \rangle^{1/2} \xi \right]. \end{aligned} \quad (3.12)$$

It is easy to find ξ_m , the maximizing value of ξ . It is the solution of a quadratic equation in the interval $[0, 1]$ for sufficiently high values of Re , or else it is $\xi_m = 1$ if

$$Re \leq 2 \frac{\langle \Psi'^2 \rangle^{1/2}}{\sup_{y \in [0,1]} |\Psi(y)|}. \quad (3.13)$$

When $\xi_m = 1$, the maximizing velocity field is a steady plane parallel flow, namely the Stokes flow for the given applied force. The right-hand side of (3.13) is ≥ 4 , providing, by a somewhat roundabout derivation, a lower bound for the smallest possible critical Reynolds number of absolute stability of the steady plane parallel flow that is uniform in the shape of the applied shearing force. For the purposes of the discussion here, however, we use the estimates above to bound β_b as

$$\begin{aligned} \beta_b &\leq \min_{\Psi} \frac{\langle \phi^2 \rangle^{1/2}}{\langle \Phi \Psi \rangle} \left[\max_{0 \leq \xi \leq 1} \xi (1 - \xi^2) \frac{1}{2} \sup_{y \in [0,1]} |\Psi(y)| + \max_{0 \leq \xi \leq 1} \xi^2 Re^{-1} \langle \Psi'^2 \rangle^{1/2} \right] \\ &= \min_{\Psi} \frac{\langle \phi^2 \rangle^{1/2}}{\langle \Phi \Psi \rangle} \left[\frac{1}{\sqrt{27}} \sup_{y \in [0,1]} |\Psi(y)| + Re^{-1} \langle \Psi'^2 \rangle^{1/2} \right]. \end{aligned} \quad (3.14)$$

This leads to improved estimates, in terms of variational problems for an optimal multiplier Ψ and for c_2 in a bound of the form $\beta_b \leq c_1/Re + c_2$. As we will now show, the variational expression above for c_2 is sharp at high Reynolds numbers. That is, the $Re \rightarrow \infty$ limit of the extremization problem for the optimal Ψ and β_b can be solved exactly.

Define

$$\beta_b(\infty) = \min_{\Psi} \max_u \frac{\langle \Phi' u \rangle \langle \Psi uv \rangle}{\langle \Phi \Psi \rangle}. \quad (3.15)$$

First we will evaluate $\beta_b(\infty)$, and then we will prove that

$$\limsup_{Re \rightarrow \infty} \beta_b(Re) \leq \beta_b(\infty). \tag{3.16}$$

We accomplish this through a series of two lemmas and a theorem.

LEMMA 1. *If $\phi = -\Phi' \in L^2[0, 1]$ and $\Psi \in H^1[0, 1]$ satisfies $\Psi(0) = 0 = \Psi(1)$, then*

$$\max_u \langle \Phi' u \rangle \langle \Psi uv \rangle = \frac{1}{\sqrt{27}} \langle \phi^2 \rangle^{1/2} \sup_{y \in [0, 1]} |\Psi(y)| \tag{3.17}$$

where the velocity fields u are divergence-free and unit-normalized in the L^2 , periodic in the downstream (x) and spanwise (z) directions and free-slip in the normal (y) direction.

Proof. We may take $\Psi \neq 0$. The calculation for (3.14) has already established that the proposed answer is an upper bound to this variational problem, so all we need do is display a sequence of acceptable test fields u that approach the bound. Note that any non-vanishing $\Psi \in H^1[0, 1]$ satisfying the homogeneous Dirichlet conditions is uniformly continuous and its extremum is realized at a (not necessarily unique) point y_m in the open interval $(0, 1)$. Consider the unit-normalized divergence-free vector field u_k with components

$$u_k = g_k(y)\sqrt{2} \sin kz + \frac{1}{\sqrt{3}} \frac{\phi(y)}{\sqrt{\langle \phi^2 \rangle}}, \quad v_k = \pm g_k(y)\sqrt{2} \sin kz, \quad w_k = \frac{1}{k} g'_k(y)\sqrt{2} \cos kz, \tag{3.18}$$

where $g_k(y)^2$ is a smooth approximation of a δ -function with compact support centred on y_m and normalized according to

$$\frac{1}{3} = \langle g_k^2 + g_k^2/2k^2 \rangle. \tag{3.19}$$

The wavenumber $k \neq 0$ is adjustable, and for each value of k we have $\langle \phi u_k \rangle = \langle \phi^2 \rangle^{1/2}/\sqrt{3}$. Now $\langle \Psi u_k v_k \rangle = \langle \Psi \overline{u_k v_k} \rangle$ and we may concentrate $\overline{u_k v_k}(y) = \pm g_k(y)^2$ as tightly as desired around y_m by taking k large, in which case $\langle \Psi u_k v_k \rangle \rightarrow |\Psi(y_m)| \langle g_k^2 \rangle$. Moreover, $\langle g_k^2 \rangle \rightarrow 1/3$ as $k \rightarrow \infty$. Hence there exists a sequence of test fields u_k for which $\langle \phi u_k \rangle \langle \Psi u_k v_k \rangle$ approaches the upper bound. \square

LEMMA 2. *If $\Phi \in H^1[0, 1]$ and $\text{sign}[\Phi(y)]$ has a finite number of discontinuities, then*

$$\min_{\Psi \in H^1[0, 1]} \frac{\sup_{y \in [0, 1]} |\Psi(y)|}{\langle \Phi \Psi \rangle} = \frac{1}{\langle |\Phi| \rangle}. \tag{3.20}$$

The minimizing function is $\Psi_m(y) = \text{sign}[\Phi(y)]$ which is not in $H^1[0, 1]$, but it is the pointwise limit of a sequence of functions in H^1 .

Proof. Note that

$$\langle \Phi \Psi \rangle \leq \sup_{y \in [0, 1]} |\Psi(y)| \langle |\Phi| \rangle \tag{3.21}$$

so the proposed answer is a lower bound to the minimum, and the function $\Psi_m(y) = \text{sign}[\Phi(y)]$ saturates this bound. Then it is straightforward to mollify the finite number of discontinuities in Ψ_m to produce a sequence of H^1 functions converging pointwise to Ψ_m . Let the number of discontinuities of $\Psi_m(y)$ be N , located in order at y_n . We may smooth Ψ_m by introducing a finite slope near each y_n to produce the regulated function $\Psi_\delta(y)$ sketched in figure 1. The mollified $\Psi_\delta(y)$ is linear with slope $\pm\delta^{-1}$

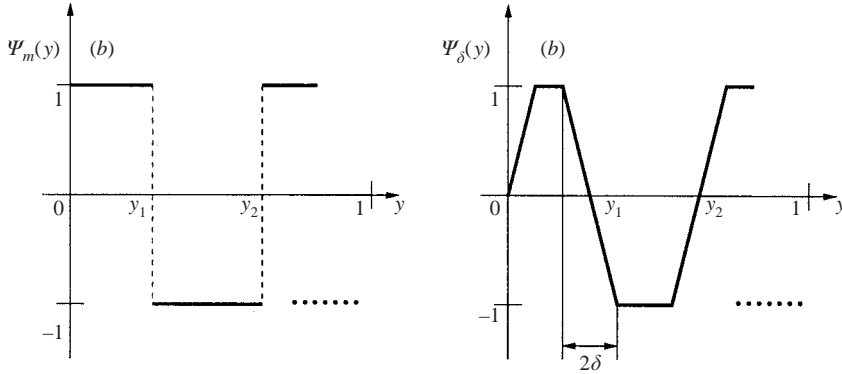


FIGURE 1. Boundary layer regularization for the optimal multiplier Ψ_m . (a) Sketch of $\Psi_m(y)$ with a finite number of jumps in $[0,1]$ at $y = 0, y_1, y_2, \dots, 1$. (b) Sketch of the mollified $\Psi_\delta(y)$ that converges pointwise to $\Psi_m(y)$ for $\delta \rightarrow 0$.

inside all the intervals 2δ around each y_n and within δ of the ends of the interval at $y = 0$ and 1 . Because $\Phi \in H^1[0, 1]$, $\Phi = O(\sqrt{|y - y_n|})$ near the isolated zeros y_n where Ψ_m jumps. Thus $\langle \Phi \Psi_\delta \rangle = \langle |\Phi| \rangle [1 - O(\delta^{3/2})]$. Although $\langle (\Psi'_\delta)^2 \rangle = O(\delta^{-1})$, for each $y \in [0, 1]$, $\Psi_\delta(y) \rightarrow \Psi_m(y)$ as $\delta \rightarrow 0$. \square

THEOREM. *If $\Phi \in H^1[0, 1]$ such that $\text{sign}[\Phi(y)]$ has a finite number of jump discontinuities, then*

$$\beta_b(\infty) = \frac{1}{\sqrt{27}} \frac{\sqrt{\langle \phi^2 \rangle}}{\langle |\Phi| \rangle} \tag{3.22}$$

and

$$\beta_b(Re) \leq \beta_b(\infty) + O(Re^{-3/4}) \tag{3.23}$$

as $Re \rightarrow \infty$.

Proof. Lemmas 1 and 2 establish the value of $\beta_b(\infty)$ in (3.22). To establish (3.23), recall from the proof of Lemma 2 that $\langle \Phi \Psi_\delta \rangle = \langle |\Phi| \rangle [1 - O(\delta^{3/2})]$ and $\langle (\Psi'_\delta)^2 \rangle = O(\delta^{-1})$. Using these facts together with Lemma 1,

$$\begin{aligned} \beta_b(Re) &= \min_{\Psi} \max_u \frac{\langle \Phi' u \rangle \langle \Psi uv + Re^{-1} \Psi' u \rangle}{\langle \Phi \Psi \rangle} \\ &\leq \min_{\delta} \max_u \frac{\langle \Phi' u \rangle \langle \Psi_\delta uv + Re^{-1} \Psi'_\delta u \rangle}{\langle \Phi \Psi_\delta \rangle} \\ &\leq \min_{\delta} \max_u \frac{\langle \Phi' u \rangle (\langle \Psi_\delta uv \rangle + Re^{-1} O(\delta^{-1/2}))}{\langle \Phi \Psi_\delta \rangle} \\ &\leq \min_{\delta} \left(\frac{1}{\sqrt{27}} \frac{\langle \phi^2 \rangle^{1/2}}{\langle |\Phi| \rangle} [1 + O(\delta^{3/2})] [1 + Re^{-1} O(\delta^{-1/2})] \right). \end{aligned} \tag{3.24}$$

Choosing $\delta = O(Re^{-1/2})$ establishes the result. \square

We make three short technical remarks here:

(i) Although we only showed that $\limsup_{Re \rightarrow \infty} \beta_b(Re) \leq \beta_b(\infty)$, it is natural to conjecture that at finite Re the optimal multiplier Ψ does look like the mollified multipliers Ψ_δ and that $\lim_{Re \rightarrow \infty} \beta_b(Re) = \beta_b(\infty)$. But this remains to be proven.

(ii) The $O(Re^{-3/4})$ rate of approach to the $Re \rightarrow \infty$ limit in the theorem is not optimal for smoother shape functions. This is easy to see by repeating the proof of the theorem assuming, say, that $\phi \in H^1$ so that Φ has a bounded derivative and behaves linearly (rather than as a square root) near its zeros. That generic linear behaviour leads to a faster $O(Re^{-4/5})$ rate.

(iii) The hypothesis of a finite number of zeros in Φ is probably not really necessary given $\Phi \in H^1$; we invoke it here for simplicity of the proofs only. In any case, for the applications we have in mind, ϕ and Φ will actually be extremely smooth (composed, for example, of a finite number of Fourier components) so the theorem as stated and proved here serves our purposes.

4. Comparison with numerical results and discussion

Direct numerical simulations (DNS) in this geometry with these kinds of forces are possible in Fourier space thanks to the free-slip boundary conditions. For computations we used the pseudospectral code developed in Schumacher & Eckhardt (2000, 2001) with numerical resolution of $256 \times 65 \times 256$ grid points. The steady volume forcing density, $\mathbf{f}(\mathbf{x})$, was chosen such that a laminar (and linearly stable) shear flow profile $\mathbf{u}_0(\mathbf{x}) = -U_0 \cos(\pi y/\ell) \mathbf{e}_x$ could be sustained. From the Navier–Stokes equations (2.1) it follows for this plane-parallel shear flow that

$$\mathbf{f}(\mathbf{x}) = -(\nu U_0 \pi^2 / \ell^2) \cos(\pi y / \ell) \mathbf{e}_x = F \phi(y / \ell) \mathbf{e}_x \quad (4.1)$$

with shape $\phi(\eta) = \sqrt{2} \cos \pi \eta$ and amplitude $F = -\nu U_0 \pi^2 / \sqrt{2} \ell^2$. The flow can be considered a Kolmogorov flow (see Borue & Orszag 1996 and Childress *et al.* 2001) with additional symmetry constraints in the normal (y) direction. The aspect ratio and scales for the calculations were $L_x / \ell = L_z / \ell = 2\pi$. The Grashof number for absolute (energy) stability of the steady plane-parallel flow with this force shape is $Gr_c = 68$ where the Reynolds number is less than 7; the simulations were carried out well above this value, for Gr varying between 4900 and 59 200.

Mathematical results for the shape function $\phi(y) = -\sqrt{2} \cos \pi y$ (equivalently $\Phi(y) = \pi^{-1} \sqrt{2} \sin \pi y$) are shown in figure 2 along with the DNS results. In contrast to shear flows driven by rigid walls where the friction (dissipation) factor tends to decrease with increasing Reynolds number, here we observe a slight increase. The numerical values for β are about a factor 3 below the upper bound. This is a significantly better comparison of the data and the bounds than for turbulent Couette flow where the discrepancy is a factor 10 at $Re \approx 10^6$.

The mean profiles of the streamwise velocity component for two different Reynolds numbers are shown in the inset in figure 2. It is interesting to note that even though the force shape is nonlinear across the layer, the mean profile is relatively linear with mean shear nearly constant outside boundary layers near the no-slip walls. The high Reynolds number limit of the optimal multiplier $\psi_m(y)$ is piecewise linear with constant magnitude of its slope function; $|\psi'_m(y)| = |\Psi_m(y)| = 1$ away from the corners. We point out the similarity here with the observed mean profiles for the single example we have at hand.

It is interesting to study the bounds $\beta_b(Re)$ as well as the optimal multiplier functions at finite Reynolds numbers for a variety of force shape functions ϕ . This is because while the behaviour of the bound on β is similar in structure to the observed

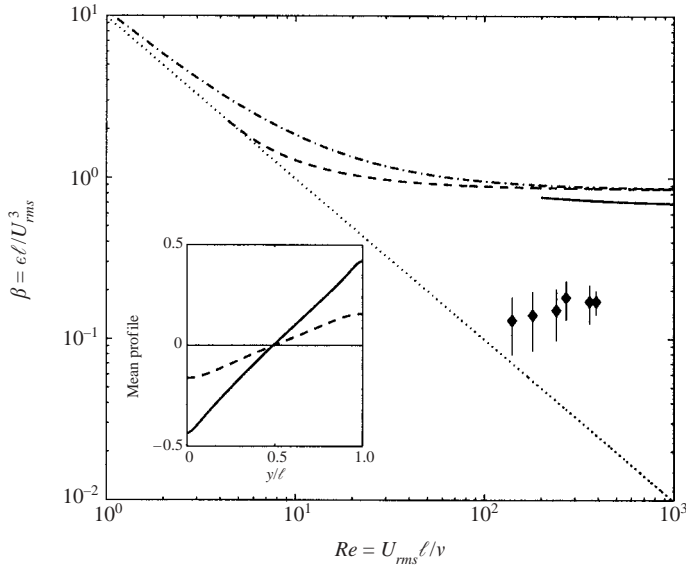


FIGURE 2. The dissipation factor β as a function of the Reynolds number Re for the force shape function $\phi(y/\ell) = -\sqrt{2} \cos \pi y/\ell$. The results of the DNS are indicated by diamonds with error bars due to standard deviation $\pm\sigma_\beta$ where $\sigma_\beta = \beta(\sigma_\epsilon/\epsilon + 3\sigma_{U_{rms}}/U_{rms})$. The dotted line is the dissipation in the steady laminar flow which is a lower limit to the dissipation factor for any (statistically) stationary flow with this force. The three upper bounds are the estimate in (3.14) with the choice $\Psi = \Phi$ (dash-dot line), the estimate in (3.12) with the exact maximization over ξ followed by the choice $\Psi = \Phi$ (dashed line), and the optimal value $\beta_b(\infty) = \pi^2/\sqrt{216}$ from the theorem with the rigorous $O(Re^{-4/5})$ approach added on (solid line). The optimal bound for the infinite- Re limit is a 22% improvement below the infinite- Re limit of the bound with $\Psi = \Phi$. The mean flow profiles $\bar{u}_x(y)$ for the simulations with the smallest (dashed) and largest (solid) Re are shown in the inset.

experimental and computational values (Sreenivasan 1984, 1998), it remains an open question how the high- Re value of β depends on the details of the driving. There are some features that we can anticipate right away, though. Assuming that the structure of $\Psi_m(y)$ persists for large but finite Reynolds numbers, the high- Re optimal multiplier is a simple but interesting nonlinear functional of the shape function of the driving force. While the plane-parallel Stokes flow profile $U_{Stokes}(y)$ is a linear functional of the shape function,

$$U_{Stokes}(y) \sim \int_0^y dy' \left[\int_0^{y'} dy'' \phi(y'') \right] + C, \quad (4.2)$$

the (infinite Re) optimal multiplier comes from a curiously similar – but highly nonlinear – formula

$$\psi_m(y) \sim \int_0^y dy' \text{sign} \left[\int_0^{y'} dy'' \phi(y'') \right] + C. \quad (4.3)$$

This expression for ψ_m displays bifurcations as a functional of the shape function ϕ . That is, for some shape functions, variations in ϕ may result in no change at all in the associated high- Re optimal multiplier, while at other configurations small changes in ϕ can produce large changes in ψ_m (such as the number of ‘kinks’ in the multiplier profile). Whether or not this kind of effect reflects any features of high Reynolds number mean profiles for shear turbulence driven by differently shaped forces remains to be seen.

To summarize, in this paper we have derived and analysed a variational mini-max problem for upper bounds on the energy dissipation rate valid for both low and high Reynolds number (including turbulent) body-forced shear flows. We find that the maximizing flow fields are characterized by streamwise vortices concentrated near the maximal shear in an auxiliary ‘multiplier’ profile, analogous to the ‘background’ profile utilized in Doering & Constantin (1994), Nicodemus *et al.* (1998), Kerswell (1998) and Childress *et al.* (2001). We solved the optimal high- Re mini-max problem exactly and compared the results with data from DNS for a specific choice of forcing. We observed that the high- Re bound is only about a factor 3 above the data, and also that the high- Re optimal multiplier shares some qualitative features with the measured mean flow profiles. Future work in this area will include investigations for other force shapes, as well as the improvement of rigorous bounds by exact numerical evaluation and/or by the inclusion of a balance parameter (see Nicodemus, Grossmann & Holthaus 1997) in the variational problem. Finally, we remark that although we have carried out the bounding analysis with a steady driving for the flow, there is no obstruction to the inclusion of time-dependent forcing in the model.

The numerical simulations were done on a Cray SV1ex at the John von Neumann-Institut für Computing at the Forschungszentrum Jülich; we are grateful for that support. This research was supported by the Deutsche Forschungsgemeinschaft and the US-NSF. Some of this work was completed while C.R.D. was resident at the Geophysical Fluid Dynamics Program at Woods Hole Oceanographic Institution during the summer of 2002, and helpful and stimulating discussions with N. Balmforth, P. Constantin, J. Keller and R. Kerswell are gratefully acknowledged.

REFERENCES

- BORUE, V. & ORSZAG, S. A. 1996 Numerical study of three-dimensional Kolmogorov flow at high Reynolds numbers. *J. Fluid Mech.* **306**, 293–323.
- BUSSE, F. H. 1978 The optimum theory of turbulence. *Adv. Appl. Mech.* **18**, 77–121.
- CHILDRESS, S., KERSWELL, R. R. & GILBERT, A. D. 2001 Bounds on dissipation for Navier–Stokes flow with Kolmogorov forcing. *Physica D* **158**, 105–128.
- DOERING, C. R. & CONSTANTIN, P. 1994 Variational bounds on energy dissipation in incompressible flows: Shear flow. *Phys. Rev. E* **49**, 4087–4099.
- DOERING, C. R. & FOIAS, C. 2002 Energy dissipation in body-forced turbulence. *J. Fluid Mech.* **467**, 289–306.
- FRISCH, U. 1995 *Turbulence: the Legacy of A. N. Kolmogorov*. Cambridge University Press.
- HOWARD, L. N. 1972 Bounds on flow quantities. *Annu. Rev. Fluid Mech.* **4**, 473–494.
- KERSWELL, R. R. 1998 Unification of variational methods for turbulent shear flows: the background method of Doering–Constantin and the mean-fluctuation method of Howard–Busse. *Physica D* **121**, 175–192.
- NICODEMUS, R., GROSSMANN, S. & HOLTHAUS, M. 1997 Improved variational principle for bounds on energy dissipation in turbulent shear flow. *Physica D* **101**, 178–190.
- NICODEMUS, R., GROSSMANN, S. & HOLTHAUS, M. 1998 The background flow method. Part 1. Constructive approach to bounds on energy dissipation. *J. Fluid Mech.* **363**, 281–300.
- SCHUMACHER, J. & ECKHARDT, B. 2000 On statistically stationary homogeneous shear turbulence. *Europhys. Lett.* **52**, 627–632.
- SCHUMACHER, J. & ECKHARDT, B. 2001 Evolution of turbulent spots in a parallel shear flow. *Phys. Rev. E* **63**, 046307.
- SREENIVASAN, K. R. 1984 On the scaling of the turbulent energy dissipation rate. *Phys. Fluids* **27**, 1048–1051.
- SREENIVASAN, K. R. 1998 An update on the energy dissipation rate in isotropic turbulence. *Phys. Fluids* **10**, 528–529.