



ABE production from corn: a recent economic evaluation

N Qureshi and HP Blaschek

Biotechnology and Bioengineering Group, Department of Food Science and Human Nutrition, University of Illinois, 1207 West Gregory Drive, Urbana, IL 61801 USA

This article details an economic assessment of butanol production from corn using the newly developed hyper-butanol-producing strain of *Clostridium beijerinckii* BA101. Butanol is produced in batch reactors and recovered by distillation. For a plant with 153,000 metric tons of acetone, butanol, and ethanol (ABE) production capacity, the production equipment cost and total working capital cost is US\$33.47 $\times 10^6$ and US\$110.46 $\times 10^6$, respectively. Based on a corn price (C_p) of US\$79.23 ton^{-1} (US\$2.01 bushel $^{-1}$), an ABE yield of 0.42 (g ABE/g glucose) butanol price is projected to be US\$0.34 kg^{-1} . An improved yield of 0.50 will reduce this price to US\$0.29 kg^{-1} . Assumptions, such as by-product credit for gases and complete conversion of corn steep liquor (CSL) to fermentation by-products, have been taken into consideration. An increased price of corn to US\$197.10 ton^{-1} would result in a butanol price of US\$0.47 kg^{-1} . A grass-rooted plant would result in a butanol price of US\$0.73 kg^{-1} (C_p US\$79.23 ton^{-1}). In a worst case scenario, the price of butanol would increase to US\$1.07 kg^{-1} (C_p 197.10 ton^{-1} for a grass-rooted plant and assuming no credit for gases). This is based on the assumption that corn price would not increase to more than US\$197.10 ton^{-1} . *Journal of Industrial Microbiology & Biotechnology* (2001) 27, 292–297.

Keywords: corn; *Clostridium beijerinckii* BA101; acetone–butanol–ethanol (ABE); yield; capital cost; plant; corn steep liquor (CSL); fermentation

Introduction

Butanol is an important industrial chemical which is currently produced by either the oxo process starting from propylene (with H_2 and CO over a rhodium catalyst) or the aldol process starting from acetaldehyde [24]. Acetone, a co-product of butanol fermentation, is produced chemically either by the cumene hydroperoxide process or the catalytic dehydrogenation of isopropanol [12]. In either case, these synthetic routes have proven to be economically advantageous in comparison to the fermentation-based processes. For this reason, all butanol/acetone fermentation facilities around the world have ceased. This happened after World War II when rapid development of the petrochemical industry took place.

In 1996, the worldwide annual production of butanol and acetone was 2.49 $\times 10^9$ and 2.10 $\times 10^9$ kg, respectively. The total production of acetone and butanol was achieved by chemical process using petroleum-based raw materials. Since 1990, production of butanol has been constant in the United States at 1.17 $\times 10^9$ kg, while worldwide butanol production has fluctuated slightly. Acetone and butanol production by regions of the world is shown in Table 1 [4].

Butanol has several applications in the chemical industry and as a fuel (Table 2). Butanol contributes to clean air by reducing emissions and unburned hydrocarbons in the tail pipe exhaust. Butanol has research and motor octane numbers of 113 and 94 compared to 111 and 92 for ethanol [6]. Some of the advantages of butanol as a fuel have been reported in the literature [6] including a vapor pressure for pure butanol of 0.63 psi as compared to 2.25 psi for ethanol, and a heat of vaporization of 141.3 kcal kg^{-1} for butanol

compared to 204.1 kcal kg^{-1} for ethanol. Additionally, the high boiling point (118°C) and lower vapor pressure for butanol may affect cold starting. It is more miscible with gasoline and diesel fuel, has a lower vapor pressure, and is less miscible with water. It is currently used as a feedstock chemical in the plastic industry and as a food grade extractant in the food and flavor industry (Table 2). Because of the potential for carcinogen carryover, the use of the petroleum-derived butanol is not desirable for food applications [3].

A recent decision of Oil and Petroleum Exporting Countries (OPEC) to reduce oil output has resulted in dramatic fluctuations in oil prices, which have soared to over US\$30 a barrel. Occasional price hikes (since 1973) and instability in the oil supply region have threatened its supply. As a result of a 1973 price increase, research has been focused on developing technology to produce fuels and chemicals from renewable resources. Since then, new microbial cultures, which can produce fuels more efficiently, have been developed. Additionally, various problems associated with the production of fuels and chemicals from natural resources have been solved. New methods of production and separation have been developed. We have reached a time when fermentation-derived chemicals can compete economically with petroleum-based and chemically manufactured fuels and chemicals.

Butanol can be produced from various commercial raw materials including molasses, whey permeate, and corn [5]. *Clostridium acetobutylicum* or *C. beijerinckii* can be used in this fermentation. In a typical butanol fermentation, acetone and ethanol are also produced along with butanol. The typical ratio of acetone, butanol, and ethanol (ABE) is 3:6:1 with maximum concentration of total solvents being 20 g l^{-1} when using traditional strain/s and traditional batch fermentation processes. *C. beijerinckii* BA101, a hyper-butanol-producing strain which is able to produce up to 33 g l^{-1} total solvents, was developed [2]. This culture is unique relative to other cultures in that it can produce and tolerate higher concentration of butanol and its use results in higher ABE yields. Additionally, *C. beijerinckii* BA101 starts producing butanol during

Correspondence: N Qureshi, Department of Food Science and Human Nutrition, Biotechnology and Bioengineering Group, University of Illinois, 1207 W Gregory Drive, Urbana, IL 61801, USA

Received 12 September 2000; accepted 12 January 2001

Table 1 World production of acetone and butanol by region (1996 data)

Region	Butanol (kg)	Acetone (kg)
North America (Total)	1.17×10^9	1.21×10^9
North America (USA only)	1.17×10^9	1.20×10^9
South America	5.12×10^7	8.52×10^7
Asia	4.30×10^8	4.76×10^8
Europe	8.43×10^8	3.31×10^8
Total	2.49×10^9	2.10×10^9

the active growth phase, which results in improved productivity. *C. beijerinckii* BA101 has been studied extensively for its fermentation characteristics and has been used in pilot plant reactors [13].

The raw materials mentioned above may require upstream processing depending upon the process being used for fermentation [22]. Molasses require dilution and removal of sediments in order to remove minerals, whey permeate requires concentration possibly by reverse osmosis, while corn requires de-branning, de-germing/de-oiling, milling, sieving, centrifugation, and saccharification [26]. Our culture, *C. beijerinckii* BA101, is hyper-amylolytic and can hydrolyze starch efficiently to release glucose for fermentation to ABE. Corn contains 13–14% moisture, 4.5% oil, and 75% starch in addition to fiber, protein and ash [10] (Eckhoff and Ping Yang, personal communication).

The objective of the present paper was to report on the cost estimation of butanol production from corn using traditional technology and the hyper-butanol-producing *C. beijerinckii* BA101. Unless stated, the fermentation facility would be annexed to an existing corn milling plant.

Materials and methods

Fermentation, substrate, plant size, and product recovery

Batch fermentation was considered for the present studies. The medium and process used for fermentation have been reported previously [13,14]. The medium contained corn steep liquor (CSL), which is an inexpensive nutrient source. In order to prepare fermentation medium, 1 vol of CSL containing 100 g l^{-1} solids was added to 5 vol of starch solution. The culture, *C. beijerinckii* BA101, and CSL have been tested in our pilot plant reactors. For the purpose of this model, ABE would be recovered by distillation and four distillation columns would be required. It is assumed that recovered water will be recycled to the fermentation plant for medium preparation. After fermentation is complete, cells will be

removed from the broth by centrifugation, refrigerated, and sold as cattle feed. It is assumed that fermentation gases will be compressed and sold. Cost for gas compression and storage has not been included. Similarly, cost for the storage of by-products has not been included in this exercise. Figure 1 shows a schematic diagram of butanol fermentation and recovery by distillation. The substrate (corn) would be purchased at $\text{US\$}79.23 \text{ ton}^{-1}$ ($\text{US\$}2.01 \text{ bushel}^{-1}$) and processed in the milling section of the plant. A plant size of 153,000 metric tons of total ABE is being considered here of which butanol represents 121,596 metric tons. Unless stated otherwise, an ABE yield ($Y_{p/s}$) of 0.42 (based on glucose) has been considered for this exercise.

Financial investment and assumptions

Standard chemical engineering texts were used for design purposes [15,27]. The equipment list has been adapted from a previous publication [16] and cost has been updated to July 2000 per the Chemical Engineering Index. It is assumed that capital is borrowed at an interest rate of 9%, Federal taxes are paid at 35% on profit, and the rate of return on investment is 20%. The fermentors and alkali tank (for pH adjustment) are constructed of stainless steel while the remainder of the plant is composed of carbon steel. The working life of the plant is 15 years with a straight line depreciation. A lang factor (a factor which is multiplied to the equipment cost to get total capital investment) of 3, which is an appropriate factor for an annexed plant, has been used unless stated. ABE productivity on the order of $0.38\text{--}0.39 \text{ g l}^{-1} \text{ h}^{-1}$ has been assumed for this exercise. Our typical batch reactors result in reactor productivities of $0.35\text{--}0.50 \text{ g l}^{-1} \text{ h}^{-1}$. The number of working days is considered to be 350 days year⁻¹. Fermentation gases (CO_2 and H_2) will be sold for by-product credit. CSL has been assumed to be a no-cost nutrient source. This plant, being an extension of the existing corn milling plant, would not require site development. All the prices are factory gate prices and do not include transportation costs. It has been assumed that CSL would be utilized completely by the culture. Suspended solids would be removed by centrifugation while dissolved solids would be separated by membrane. The recovered solids would be sold as cattle feed.

Results and discussion

The total equipment cost for batch fermentation and distillative recovery was estimated to be $\text{US\$}33.47 \times 10^6$ (Table 3). A base case price for butanol has been calculated to be $\text{US\$}0.34 \text{ kg}^{-1}$ (Table 4). The current reported price for petrochemically derived butanol is $\text{US\$}1.21 \text{ kg}^{-1}$ [1]. For the present plant, the total annual butanol production was calculated to be 121,596,230 kg for a total

Table 2 Applications of acetone and butanol

Acetone

Manufacture of: methyl isobutyl ketone, methacrylates, methyl butanol, bisphenyl A, methyl isobutylcarbinol, isophorone, and diacetone alcohol
Solvent for: paints, lacquers, resins, nitrocellulose, varnishes, various processing, and cellulose acetate

Butanol

Manufacture of: dibutyl phthalate (as a precursor), butyl acetate (as a precursor), butyl acrylate (as a latex), glycol ethers, and amine resins

Other uses: is an excellent fuel (it is miscible with gasoline and diesel fuel, has high calorific value, has a lower vapor pressure, and is less miscible with water); used in plastic industry as a feedstock chemical; food grade extractant; a solvent in the manufacture of oil, pharmaceuticals, perfumes [25]; and as a solvency enhancer in the formation of nitrocellulose lacquers

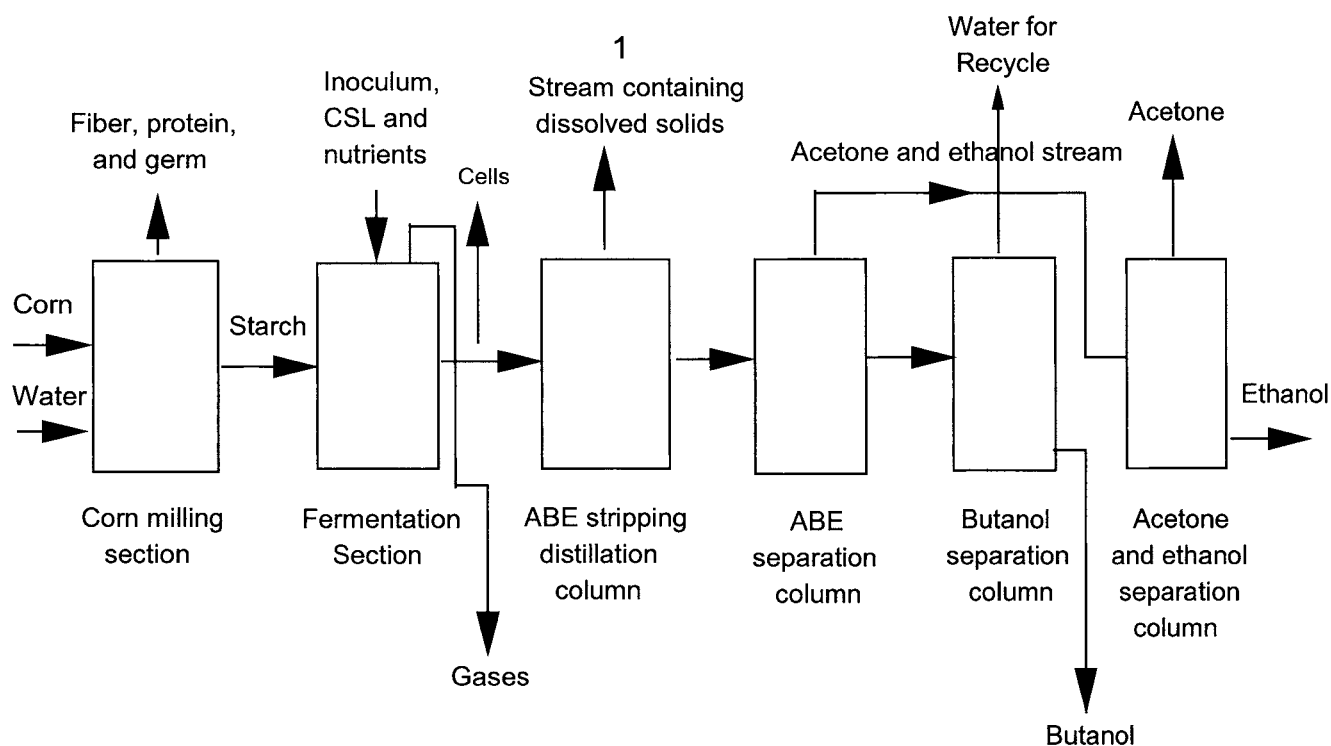


Figure 1 A schematic diagram of butanol production by fermentation of corn (corn starch) and recovery by distillation. Stream (1) containing dissolved solids is directed to membrane section to recover solids and recycle water to the plant.

production cost of $\text{US}\$106.1 \times 10^6$. For the plant, total fixed capital investment was calculated to be $\text{US}\$100.42 \times 10^6$, while the total capital investment would be $\text{US}\$110.46 \times 10^6$. Total direct and indirect expenses were calculated to be $\text{US}\$59.35 \times 10^6$ and $\text{US}\$23.00 \times 10^6$, respectively. The general expenses were calculated to be $\text{US}\$23.74 \times 10^6$ which included administration, profit, and federal taxes. At a corn price (C_p) of $\text{US}\$79.23 \text{ ton}^{-1}$, credit for

by-products was calculated to be $\text{US}\$64.55 \times 10^6$. After by-product credit, net yearly production expenses were $\text{US}\$41.54 \times 10^6$.

Table 5 shows material input and output for the butanol fermentation plant. For the plant, $5.14 \times 10^8 \text{ kg}$ corn containing 14% moisture would be bought at $\text{US}\$79.23 \text{ ton}^{-1}$, unless otherwise stated. This amount of corn would result in the production of $3.65 \times 10^8 \text{ kg}$ of glucose following hydrolysis. During processing and fermentation, $5.75 \times 10^8 \text{ kg}$ of feed material (including CSL solids) would be fed to the system. The total amount of product (butanol $121,596,230 \text{ kg}$) and by-products ($446,707,210 \text{ kg}$) would amount to $5.68 \times 10^8 \text{ kg}$. Approximately $7 \times 10^6 \text{ kg}$ of raw material would be lost during processing, which is 1.22% of the total feed material. It should be noted that a significant amount of by-products credit ($\text{US}\$64.55 \times 10^6$) would be received. The amount of by-products is approximately four times that of the product (butanol).

In order to calculate by-products credit, acetone and ethanol prices were obtained from Chemical Marketing Reporter [1]. These prices were $\text{US}\$0.38$ and $\text{US}\$0.28 \text{ kg}^{-1}$, respectively. Prices for cell mass, fiber/protein, and recovered polysaccharide were assumed to be $\text{US}\$0.18 \text{ kg}^{-1}$ (Ping Yang, personal communication). The credit that would be obtained from the plant is shown in Table 6. The above price of butanol is based on the assumption that $\text{US}\$1 \times 10^6$ would be required for wastewater treatment (W_{wt}) and water recycle [16]. However, if this assumption is increased to $\text{US}\$3 \times 10^6$, butanol price would increase to $\text{US}\$0.36 \text{ kg}^{-1}$. If gases are not recovered, then the butanol price would increase to $\text{US}\$0.53 \text{ kg}^{-1}$ (W_{wt} $\text{US}\$1 \times 10^6$).

It has been our prior experience that the cost of substrate has the greatest effect on fuel/butanol price [8,20–22]. Prices of agricultural commodities often fluctuate and it would not be a surprise if the corn price increased in the future. An increased corn price of $\text{US}\$197.10 \text{ ton}^{-1}$ ($\text{US}\$5 \text{ bushel}^{-1}$) has also been

Table 3 Major equipment for ABE fermentation and recovery

	US\$
<i>Corn wet milling</i>	
Corn storage	216,762
Steeping tank	352,868
Grinding mill	248,923
Sieving (to remove fiber)	10,082
Centrifuge (to separate gluten)	1,133,513
Starch tank	250,536
Pumps (three)	65,734
<i>ABE fermentation</i>	
Seed vessels (three)	354,280
Medium preparation tank	449,655
Fermentors	2,359,175
Cell centrifuge	1,624,403
Pumps (five)	96,283
<i>ABE recovery</i>	
Reboiler (four)	11,165,755
Heat exchanger (four)	6,212,394
Distillation column (four)	8,116,068
Storage tank (three)	648,975
Pump (12)	166,655
Total	33,472,061

Table 4 Total manufacturing expenses and capital investment for a butanol plant (121.6×10^6 kg year⁻¹)

Capital investment	US\$
Total purchased equipment cost	33,472,061
Fixed capital	100,416,184
Working capital	10,041,618
Total capital investment	110,457,803
Manufacturing expenses	
<i>Direct expenses</i>	
Raw materials	40,724,220
Operating labor	1,500,000
Supervisory and clerical labor	225,000
Utilities	
Steam	6,232,000
Electricity	4,655,000
Water	172,500
Waste water treatment	1,000,000
Maintenance and repair	4,016,647
Operating supplies	602,497
Laboratory charges	225,000
Total direct expenses	59,352,864
<i>Indirect expenses</i>	
Local taxes	1,004,162
Insurance	5,020,809
Depreciation	7,029,133
Interest	9,941,202
Total indirect expenses	22,995,306
<i>General expenses</i>	
Administration	140,000
Research and development	500,000
Annual profit after tax	15,048,517
Federal tax	8,054,279
Total general expenses	23,741,796
Total manufacturing expenses	106,089,966
By-products credit	64,550,206
Net manufacturing expenses	41,539,761
Total butanol production (kg)	121,596,230
Butanol production cost (US\$ kg ⁻¹)	0.34

considered. It has been assumed that the prices of by-products such as fiber and protein, germ/oil, polysaccharide, and cell mass will increase in the same proportion as the price of corn. This approach appears to be more realistic than using the increased price of corn alone. With an increased corn price of US\$197.10 ton⁻¹, by-products credit would be US\$109.71 $\times 10^6$ resulting in butanol price of US\$0.47 kg⁻¹ (W_{wt} US\$1 $\times 10^6$).

ABE yield and ratio of ABE are the important characteristics of the mutant strain *C. beijerinckii* BA101. We have consistently achieved ABE yields ranging from 0.40 to 0.50 [3], which is much higher than that reported for *C. acetobutylicum* [9]. At this stage, we do not know where the alterations have occurred in the metabolic pathways of *C. beijerinckii* BA101. However, it is interesting to note that amounts and ratios of fermentation product and by-products, such as acetone, ethanol, and gases, are different than for other clostridial strains. Assuming a yield of 0.50 together with the typical solvent ratios we observed for this strain, the amount of ABE this culture would produce would be on the order of 182,240 tons year⁻¹ (Table 7). In addition to 144,610 tons of butanol per year, 28,470 tons of acetone per year and 9,160 tons of ethanol per year would be produced. The amount of butanol *C. beijerinckii* BA101 produces is much higher than the amount produced by *C. acetobutylicum*. *C. acetobutylicum* produces more

gases and less solvents. The amounts of the product and by-products (and by-product credit) which these two cultures would produce are shown in Table 7. It is interesting to note that butanol produced by *C. beijerinckii* BA101 is projected to cost US\$0.29 kg⁻¹, while butanol produced by *C. acetobutylicum* is projected to cost US\$0.50 kg⁻¹ (C_p US\$79.23 ton⁻¹, $Y_{p/s}$ 0.42, and W_{wt} US\$1 $\times 10^6$).

A grass-rooted plant would be more expensive to start because of expenses involved with development of site, offsite facilities, and auxiliary buildings. For such a plant, the total capital investment would be five times that of the total equipment cost. This would increase the price of butanol dramatically from US\$0.34 kg⁻¹ to US\$0.73 kg⁻¹ (C_p US\$79.23 ton⁻¹, W_{wt} US\$1 $\times 10^6$). A combination of grass-rooted plant and US\$197.10 ton⁻¹ corn would result in a butanol price of US\$0.88 kg⁻¹ (W_{wt} US\$3 $\times 10^6$). In a worst case scenario, if no credit for gases is taken, then this price would increase to US\$1.07 kg⁻¹.

The by-product prices are given in Table 6. Cell mass and corn fiber would be sold as a cattle feed at US\$0.18 kg⁻¹. It should be noted that if CO₂ and H₂ are separated economically and sold as pure gases, then the price of butanol would be reduced significantly. A price of US\$0.50 lb⁻¹ for pure H₂ has been reported in the literature [6]. Moreira [11] discussed the chemical conversion of fermentation offgases to methanol and stated that a discounted cash flow rate of return of 25–30% is likely to be achieved for realistic operating conditions of a methanol synthesis plant co-located next to an acetone–butanol fermentation facility capable of producing 1.00×10^8 kg solvents year⁻¹. The capacity of the plant described herein is 25% larger than suggested by this author.

Another important factor in the ABE fermentation is the economical recovery of solvents. Among several techniques investigated [7], pervaporation is more attractive because it separates ABE selectively from the broth and does not harm the culture. Pervaporation can be used with batch, fed-batch, as well as continuous culture operations. We have studied pervaporation extensively in our reactors in order to separate ABE [17–19]. The impact of using pervaporative recovery on butanol price for a similar capacity plant will be examined in future studies.

Carbon source (substrate) is converted into butanol and a number of by-products such as acetone, ethanol, cell mass, polysaccharide, and gases. For the material balance calculations, it has been assumed (unless otherwise stated) that 42% ($Y_{p/s}$ 0.42) of the carbon is

Table 5 Material balance for the butanol fermentation plant (121.6×10^6 kg year⁻¹)

Material balance	
<i>Feed</i>	
Corn	5.14×10^8 kg ^a (moisture 14%) (this amount of corn will result in 3.32×10^8 kg starch or 3.65×10^8 kg glucose)
FeSO ₄ ·7H ₂ O	569 kg
NaOH	92,865 kg
Water	5×10^9 l (total fermentation broth volume is 6×10^9 l) (most of the water is recycled water)
<i>Products</i>	
Butanol	121,596,230 kg
By-products ^a	446,707,210 kg

^aSee Table 6

296 **Table 6** Annual by-product credit for a butanol production plant from corn using *C. beijerinckii* BA101

By-products	By-product amount (kg)	Corn price US\$79.23 ton ⁻¹		Corn price US\$197.10 ton ⁻¹	
		By-product price (US\$ kg ⁻¹)	Credit (US\$)	By-product price (US\$ kg ⁻¹)	Credit (US\$)
Acetone	23,938,054	0.38	9,096,461	0.38	9,096,461
Ethanol	7,464,200	0.28	2,089,976	0.28	2,089,976
Gases	232,581,500	0.10	23,258,150	0.10	23,258,150
Fiber and protein	88,408,000	0.18	15,913,440	0.45	39,783,600
Germ/oil	19,891,800	0.40	7,956,720	1.00	19,891,800
Cell mass	42,130,000	0.18	7,583,400	0.45	18,958,500
Polysaccharide	32,293,660	0.18	5,812,859	0.45	14,532,147
Total	446,707,210		64,550,206		109,708,634

converted into ABE, 50% to gases, 5% to cell mass, 1% to maintenance energy, and 2% to other products such as acids and polysaccharides. These assumptions are based on previous findings that the cells require maintenance energy for metabolic activities [23]. It is also well known that the ABE fermentation process is a complicated process and several by-products appear in the fermentation broth which require some carbon for their production.

Production of butanol is a biological process. It should be noted that in a biological process, the concentration of products may vary from batch to batch. This may occur under identical fermentation conditions. The calculations for the present plant are based on a batch fermentation which produced more acetone and ethanol than previously reported [16]; hence, solvents produced in this process are more by 3,000 tons year⁻¹. It should be noted that 1 × 10⁹ l of CSL containing 10% (100 g l⁻¹) dry weight solids would be used. The total amount of solids added to the fermentation medium would be 1 × 10⁸ kg, which is a significant amount as compared to corn (5.14 × 10⁸ kg). It has been assumed that all of the CSL solids would be converted into cell mass and by-products (50 × 10⁶ kg gases, 25 × 10⁶ kg cell mass, and 25 × 10⁶ kg polysaccharide). This is in addition to the conversion of corn starch to various products mentioned above. Since CSL contains only limited amounts of sugar, their conversion into ABE has not been considered.

Conclusion

Butanol can be produced at US\$0.34 kg⁻¹ from corn at US\$79.23 ton⁻¹. This price is based on a yield of 0.42 and an assumption that

Table 7 A comparison of amounts of fermentation products derived by *C. beijerinckii* BA101 versus *C. acetobutylicum*

<i>C. beijerinckii</i> BA101, ABE yield 0.50			
Butanol (kg)	144,610,000		
Acetone (kg)	28,470,000	by-product credit	
		US\$63,805,619	
Ethanol (kg)	9,160,000	butanol price US\$0.29 kg ⁻¹	
Gases (kg)	203,166,000		
	(50 × 10 ⁶ kg from CSL)		
<i>C. acetobutylicum</i> , ABE yield 0.30			
Butanol (kg)	65,640,000		
Acetone (kg)	32,820,000	by-product credit	
		US\$73,254,565	
Ethanol (kg)	10,940,000	butanol price US\$0.50 kg ⁻¹	
Gases (kg)	276,103,460		
	(50 × 10 ⁶ kg from CSL)		

gases will be captured, compressed, and sold for by-product credit. For a butanol plant of 121,596,230 kg year⁻¹ capacity, by-product credit would be US\$64.55 × 10⁶. The total capital investment for this plant would be US\$110.46 × 10⁶. If gases are not captured, then the butanol price would increase to US\$0.53 kg⁻¹. Increasing the corn price to US\$197.10 ton⁻¹ would increase the butanol price to US\$0.47 kg⁻¹. A grass-rooted plant would result in a price of US\$0.73 kg⁻¹. For this exercise, a rate of return and federal taxes have been assumed to be 20% and 35%, respectively. In a worst case scenario, the butanol price would increase to US\$1.07 kg⁻¹. In such a case, gases would not be captured, corn would be purchased at US\$197.10 ton⁻¹, and the plant would be grass-rooted. Throughout this exercise, it has been assumed that the CSL would be fully utilized and would be converted to cell mass, gases, and other by-products.

Acknowledgements

This work was supported by Illinois Corn Marketing Board grant ICMB 99-0124-02 Blaschek and ICMB Blaschek ANTC.

References

- 1 Chemical Marketing Reporter. 2000. 258(16) (October 16).
- 2 Chen CK and HP Blaschek. 1999. Acetate enhances solvent production and prevents degeneration in *Clostridium beijerinckii* BA101. *Appl Microbiol Biotechnol* 52: 170–173.
- 3 Formanek J, R Mackie and HP Blaschek. 1997. Enhanced butanol production by *Clostridium beijerinckii* BA101 grown in semidefined P2 medium containing 6 percent maltodextrin or glucose. *Appl Environ Microbiol* 63: 2306–2310.
- 4 Industrial Commodity Statistics. 1998. United Nations, New York, pp. 416, 423.
- 5 Jones DT and DR Woods. 1986. Acetone–butanol fermentation revisited. *Microbiol Rev* 50: 484–524.
- 6 Ladisch MR. 1991. Fermentation-derived butanol and scenarios for its uses in energy-related applications. *Enzyme Microb Technol* 13: 280–283.
- 7 Maddox IS. 1989. The acetone–butanol–ethanol fermentation: recent progress in technology. *Biotechnol Genet Eng Rev* 7: 189–220.
- 8 Manderson GJ, K Spencer, AHJ Paterson, N Qureshi and DE Janssen. 1989. Price sensitivity of bioethanol produced in New Zealand from *Pinus radiata* wood. *Energy Sources* 11: 135–150.
- 9 Marlatt JA and R Datta. 1986. Acetone–butanol fermentation process development and economic evaluation. *Biotechnol Prog* 2: 23–28.
- 10 Mistry A. 1991. Alkali debranning for corn wet and dry milling and characterization of the end products. PhD Thesis, University of Illinois, Urbana, IL, USA.
- 11 Moreira AR. 1983. Acetone–butanol fermentation. In: Wise DL (Ed.),

- Organic Chemicals from Biomass. The Benjamin/Cummings Publishing, Menlo Park, CA, pp. 385–406.
- 12 Nelson DL and BP Webb. 1979. Kirk–Othmer Encyclopedia of Chemical Technology, 3rd ed., Vol. I. John Wiley, New York, pp. 179–190.
 - 13 Parekh M, J Formanek and HP Blaschek. 1999. Pilot scale production of butanol by *Clostridium beijerinckii* BA101 using a low-cost fermentation medium based on corn steep water. *Appl Microbiol Biotechnol* 51: 152–157.
 - 14 Parekh M, J Formanek and HP Blaschek. 1998. Development of a cost-effective glucose–corn steep medium for production of butanol by *Clostridium beijerinckii* BA101. *J Ind Microbiol Biotechnol* 21: 187–191.
 - 15 Peters MS and KD Timmerhaus. 1991. Plant Design and Economics for Chemical Engineers, 4th ed. McGraw-Hill, New York.
 - 16 Qureshi N and HP Blaschek. 2000. Economics of butanol fermentation using hyperbutanol producing *Clostridium beijerinckii* BA101. *Trans Inst Chem Eng* 78 (Part C): 139–144.
 - 17 Qureshi N and HP Blaschek. 2000. Butanol production using *Clostridium beijerinckii* BA101 hyper-butanol producing mutant strain and recovery by pervaporation. *Appl Biochem Biotechnol* 84: 5–15.
 - 18 Qureshi N and HP Blaschek. 1999. Production of acetone butanol ethanol (ABE) by a hyper-producing mutant strain of *Clostridium beijerinckii* BA101 and recovery by pervaporation. *Biotechnol Prog* 15: 594–602.
 - 19 Qureshi N and HP Blaschek. 1999. Fouling studies of a pervaporation membrane with commercial fermentation media and fermentation broth of hyper-producing *Clostridium beijerinckii* BA101. *Sep Sci Technol* 34: 2803–2815.
 - 20 Qureshi N and IS Maddox. 1992. Application of novel technology to the ABE fermentation process: an economic analysis. *Appl Biochem Biotechnol* 34: 441–448.
 - 21 Qureshi N and IS Maddox. 1991. An economic assessment of the acetone–butanol–ethanol (ABE) fermentation process. *Aust J Biotechnol* 5: 56–59.
 - 22 Qureshi N and GJ Manderson. 1995. Bioconversion of renewable resources into ethanol: an economic evaluation of selected hydrolysis, fermentation, and membrane technologies. *Energy Sources* 17: 241–265.
 - 23 Qureshi N, AHJ Paterson and IS Maddox. 1988. Model for continuous production of solvents from whey permeate in a packed bed reactor using cells of *Clostridium acetobutylicum* immobilized by adsorption onto bonechar. *Appl Microbiol Biotechnol* 29: 323–328.
 - 24 Sherman PD. 1979. Kirk–Othmer Encyclopedia of Chemical Technology, 3rd ed., Vol. IV. John Wiley, New York, pp. 338–345.
 - 25 Sherman PD. 1978. In: Mark HF, DF Othmer, CG Overberg and GT Seaberr (Eds.), Encyclopedia of Chemical Technology, Vol. IV. John Wiley, New York, p. 383.
 - 26 Singh V and SR Eckhoff. 1996. Effect of soak time, soak temperature, and lactic acid on germ recovery parameters. *Cereal Chem* 73: 716–720.
 - 27 Ulrich GD. 1984. A Guide to Chemical Engineering Process Design and Economics. John Wiley, New York.