



Apparent mass of the human body in the vertical direction: Effect of a footrest and a steering wheel

M.G.R. Toward, M.J. Griffin*

Human Factors Research Unit, Institute of Sound and Vibration Research, University of Southampton, Southampton, SO17 1BJ, England

ARTICLE INFO

Article history:

Received 13 August 2009

Received in revised form

12 November 2009

Accepted 12 November 2009

Handling Editor: H. Ouyang

Available online 16 December 2009

ABSTRACT

The apparent mass of the seated human body influences the vibration transmitted through a car seat. The apparent mass of the body is known to be influenced by sitting posture but the influence of the position of the hands and the feet is not well understood. This study was designed to quantify the influence of steering wheel location and the position of a footrest on the vertical apparent mass of the human body. The influences of the forces applied by the hands to a steering wheel and by the feet to a footrest were also investigated. Twelve subjects were exposed to whole-body vertical random vibration (1.0 m s^{-2} rms over the frequency range 0.13–40.0 Hz) while supported by a rigid seat with a backrest reclined to 15° . The apparent mass of the body was measured with five horizontal positions and three vertical positions of a steering wheel and also with hands in the lap, and with five horizontal positions of a footrest. The influence of five forward forces (0, 50, 100, 150, 200 N) applied separately to the 'steering wheel' and the footrest were also investigated as well as a 'no backrest' condition. With their hands in their laps, subjects exhibited a resonance around 6.7 Hz, compared to 4.8 Hz when sitting upright with no backrest. In the same posture holding a steering wheel, the mass supported on the seat surface decreased and there was an additional resonance at 4 Hz. Moving the steering wheel away from the body reduced the apparent mass at the primary resonance frequency and increased the apparent mass around the 4 Hz resonance. As the feet moved forward, the mass supported on the seat surface decreased, indicating that the backrest and footrest supported a greater proportion of the subject weight. Applying force to either the steering wheel or the footrest reduced the apparent mass at resonance and decreased the mass supported on the seat surface. It is concluded that the positions and contact conditions of the hands and the feet affect the biodynamic response of the body in a car driving posture. As the biodynamic response influences the vibration transmitted through seats, these factors should be considered in dynamic models of vehicle seating.

© 2009 Elsevier Ltd. All rights reserved.

1. Introduction

Vehicle seats amplify vibration at some frequencies while attenuating vibration at other frequencies. The seat and the human body form a coupled system so that vibration transmitted through a seat is dependent not only on the dynamic properties of the seat [1] but also on the dynamic response of the body [2]. Understanding of the dynamic response of the human body has been used to develop mechanical models (i.e., anthropodynamic dummies) to replace human subjects in seat testing and also to develop mathematical models that predict seat transmissibility. The dynamic models of the body

* Corresponding author. Tel.: +44 023 80592277; fax: +44 023 80592927.

E-mail address: M.J.Griffin@soton.ac.uk (M.J. Griffin).

have been based on experimental data obtained with subjects sitting with their lower legs vertical and their hands in their laps with no backrest, or supported by a rigid flat vertical backrest. In vehicles, drivers and passengers are supported by reclined compliant backrests, seat pans are inclined, and the legs may be extended forward. The operation of steering wheels and pedals results in drivers having different postures from passengers. The influence of such variations in the position of the hands and the feet on the apparent mass of the body has received little attention.

Changes in the apparent mass of the body due to changes in posture may be expected due to variations in either the geometry of the body or the tension in muscles that support the body. Decreases in the frequency and magnitude of the principal vertical resonance around 5 Hz have been reported when subjects adopt slouched as opposed to erect postures (e.g. [2–4]). Increases in the frequency of the principal resonance have been reported when subjects tense muscles in the upper-body during vibration [2]. The apparent mass of the body is nonlinear with vibration magnitude, with the resonance frequency decreasing with increasing magnitude [5]. Matsumoto and Griffin [6] showed that this nonlinearity depended on muscle tension in the abdomen and, particularly, the buttocks, with nonlinear characteristics less clear in tensed postures.

Factors influencing the apparent mass of a seated person include seat height [7], foot position [8] and, to a lesser extent, seat pan inclination [9,10]. A seat backrest can alter body posture and the distribution of the forces supporting the body mass over seat surfaces. Supporting the back by an upright backrest decreases the apparent mass at resonance and the proportion of the body mass supported on the seat surface, but increases the resonance frequency [11]. Inclining a rigid backrest decreases the apparent mass at resonance and also the static mass supported on the seat surface, but increases the resonance frequency, although inclining a compliant backrest reduces the resonance frequency of the apparent mass [11]. Raising the height of a seat pan relative to the feet increases the apparent mass at resonance, due to more mass being supported on the seat surface [9,12]. A slight increase in the apparent mass at resonance has been observed if the feet are moved forward, possibly as a result of more mass being supported on the seat surface, however, only a small range of foot movement (150 mm) has been investigated [8].

Rakheja et al. found apparent mass resonances between 6.5 and 8.6 Hz for subjects in car driving postures [8], compared to 4.5–5.0 Hz in previous studies with subjects sitting upright with no backrest support [2]. When subjects moved their hands from their laps to a steering wheel, both the apparent mass at resonance and the resonance frequency decreased and a second resonance became more pronounced in some subjects. Similarly, the resonance frequency and the apparent mass measured in a direction normal to a reclined backrest reduced when subjects exposed to vertical vibration held a steering wheel [13].

In studies of the transmission of vibration from a rigid seat to points on the body, the fore-and-aft position of the seat relative to controls, and therefore the arm and leg angles, affected the movement of the upper-arm, lower-arm, shin and thigh [14]. The transmissibility at resonance to the upper-arm increased as the elbow angle increased from 90° to 180°, while the resonance frequency in the transmissibility to the thigh increased as either arm or leg angles increased. If arm and leg position affect the transmission of vibration to the body, they will also affect the apparent mass of the body. However, there are no known studies of the effect of the position of a steering wheel or a wide range of positions of the feet on the apparent mass of the body.

The objective of this study was to determine the effects of steering wheel location and foot position on the vertical apparent mass measured at the seat surface. It was hypothesized that holding a steering wheel would restrain the motions of the upper body, increasing the damping and therefore decreasing the magnitude of the primary resonance in the apparent mass. Increasing the distance of the feet from the leading edge of a seat was expected to increase the mass supported on the seat surface and consequently increase the apparent mass at resonance.

2. Methods and procedures

2.1. Apparatus

The study was conducted using a 1 m stroke vertical electro-hydraulic vibrator in the laboratory of the Human Factors Research Unit. A flat rigid seat with a rigid flat vertical backrest was attached to the vibrator platform. An adjustable footrest and an adjustable ‘steering wheel’ were also fixed to the platform (Fig. 1). The horizontal position and angle of inclination of the footrest, and the horizontal and vertical positions of the steering wheel, were adjustable. The force applied by the subjects to the footrest was measured by a set of digital scales (CPW-35 load cell scales; Adam Equipment, Danbury, USA) having a maximum rated load of 35 kg and ± 0.02 kg linearity) attached to the footrest. The force applied to the steering wheel was measured indirectly using the same digital scales attached to the backrest.

Measurements of the dynamic vertical force at the seat surface were made using a force plate (model 9281 B, Kistler, Hook, UK). The signal from the force plate was amplified using a charge amplifier (Kistler 5007). Vibration on the platform was monitored using a piezo-resistive accelerometer (EGCSY-240D-10; Entran, Potterspur, UK) attached to the underside of the force platform.

2.2. Postures

The apparent mass on the seat surface was measured with subjects sitting in 21 different postures (Fig. 1, Table 1). These postures allowed the study of five horizontal positions of the steering wheel, three vertical position of the steering

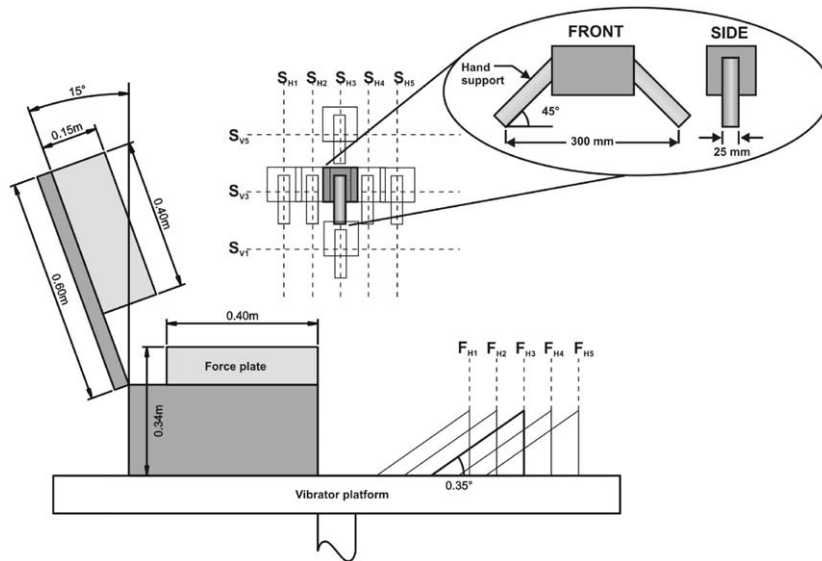


Fig. 1. Experimental apparatus.

Table 1

Position of the hands and feet, force applied to the steering wheel and backrest, and backrest support in each of the 21 postures.

Posture	Horizontal hand position	Vertical hand position	Foot position	Force applied to steering wheel	Force applied to footrest	Backrest
1	Lap	Lap	F_{H4}	0	0	No backrest
2	Lap	Lap	F_{H4}	0	0	15°
2 ^a	Lap	Lap	F_{H4}	0	0	15°
3	S_{H3}	S_{V3}	F_{H4}	0	0	15°
4	S_{H1} (min)	S_{V3}	F_{H4}	0	0	15°
5	S_{H2}	S_{V3}	F_{H4}	0	0	15°
3 ^a	S_{H3}	S_{V3}	F_{H4}	0	0	15°
6	S_{H4}	S_{V3}	F_{H4}	0	0	15°
7	S_{H5} (max)	S_{V3}	F_{H4}	0	0	15°
8	S_{H3}	S_{V1} (min)	F_{H4}	0	0	15°
3 ^a	S_{H3}	S_{V3} (mid)	F_{H4}	0	0	15°
9	S_{H3}	S_{V5} (max)	F_{H4}	0	0	15°
10	Lap	Lap	F_{H1} (min)	0	0	15°
11	Lap	Lap	F_{H2}	0	0	15°
12	Lap	Lap	F_{H3} (mid)	0	0	15°
2 ^a	Lap	Lap	F_{H4}	0	0	15°
13	Lap	Lap	F_{H5} (max)	0	0	15°
3 ^a	S_{H3}	S_{V3}	F_{H4}	0 N	0	15°
14	S_{H3}	S_{V3}	F_{H4}	50 N	0	15°
15	S_{H3}	S_{V3}	F_{H4}	100 N	0	15°
16	S_{H3}	S_{V3}	F_{H4}	150 N	0	15°
17	S_{H3}	S_{V3}	F_{H4}	200 N	0	15°
2 ^a	Lap	Lap	F_{H4}	0	0 N	15°
18	Lap	Lap	F_{H4}	0	50 N	15°
19	Lap	Lap	F_{H4}	0	100 N	15°
20	Lap	Lap	F_{H4}	0	150 N	15°
21	Lap	Lap	F_{H4}	0	200 N	15°

The groups of comparable conditions are highlighted.

^a The same as previous posture with this number.

wheel, five horizontal distances of the footrest from the leading edge of the seat, five forces on the steering wheel, five forces on the footrest, and a 'no backrest' condition.

At the closest footrest position (F_{H1}), the angle between the femur and fibular was 90°. In the furthest position of the footrest (F_{H5}), the legs were outstretched and the femur and fibular were at 180°. The other three positions (F_{H2} , F_{H3} , and

F_{H4}) were equally spaced between the maximum and minimum positions appropriate for each subject. At each position, the angle of the footrest was adjusted so that the sole of the foot was at 90° to the fibular. During these measurements the hands were in the lap and the backrest was reclined to 15° . Subjects were supported by the backrest and asked to maintain a relaxed upright posture and place their feet on the footrest without exerting additional force.

The mid position for both the vertical and the horizontal adjustments of the steering wheel (S_{H3} , S_{V3}) was set so that the forearm (radius) and upper arm (humerus) were at 45° and the hands were vertically in line with the mid-point of the sternum. Subjects were supported by the footrest in position (F_{H4}) and by the reclined backrest. Subjects were asked not to exert additional unnecessary force to the steering wheel, backrest, or footrest.

At the closest steering wheel position (S_{H1}), the forearm (radius) and upper arm (humerus) were at 90° . In the furthest position (S_{H5}) the arms were outstretched. The other three horizontal positions (S_{H2} , S_{H3} and S_{H4}) were set equidistance between the closest and furthest positions. The lowest (S_{V1}) and the highest positions (S_{V5}) of the steering wheel were set the same distance from the mid position (S_{V3}) as the extreme horizontal positions (S_{H1} and S_{H5}). Subjects were asked to maintain full contact with the backrest with all steering wheel positions.

When investigating the effect of force at the footrest, subjects were asked to exert 0, 50, 100, 150 or 200 N while sitting with their hands in their laps and their legs almost outstretched (at position F_{H4}) and the backrest reclined to 15° . Subjects monitored the force using a digital display connected to the scales.

When investigating the effect of force at the hands, subjects were asked to apply 0, 50, 100, 150, or 200 N to the steering wheel in the mid-position (S_{H3} , S_{V3}). The subjects were supported by the backrest and the footrest in position F_{H4} . The force applied to the steering wheel was measured using the digital scales attached to the backrest. The scales were zeroed with a subject supported by the backrest and holding the steering wheel before being asked to exert force on the steering wheel.

In the 'no backrest' condition subjects were asked to sit in a relaxed upright posture without making contact with the reclined backrest. The footrest was adjusted to position F_{H4} and subjects placed their hands in their laps.

2.3. Vibration

The vibrator platform was excited using 60 s periods of 1.0 m s^{-2} rms. (band-limited from 0.13 to 40 Hz using 8-pole Butterworth filters). The approximately flat constant bandwidth acceleration spectra were generated and analysed using an *HVLab* data acquisition and analysis system (version 3.81; University of Southampton, UK). Different random input signals were generated for each subject. The measured force and acceleration were acquired at 500 samples per second via 167 Hz anti-aliasing filters.

2.4. Subjects

Twelve healthy male subjects aged 22–48 years (mean 30.7 years) participated in the experiment. The subjects ranged in stature from 1.69 to 1.89 m (mean 1.80 m) and ranged in weight between 64.5 and 100.7 kg (mean 77.1 kg). All subjects were exposed to all conditions in a single session lasting approximately 90 min. Subjects wore a loose fitting lap belt and had access to an emergency stop button. Subjects gave informed consent to participate in the experiment that was approved by the Human Experimentation, Safety and Ethics Committee of the Institute of Sound and Vibration Research at the University of Southampton.

2.5. Analysis

Transfer functions were calculated between the vertical seat acceleration and the vertical force at the seat surface, to give the apparent masses of the subjects. Apparent mass was calculated using the cross-spectral density (CSD) technique with a resolution of 0.195 Hz. The apparent mass, $H_{io}(f)$, was calculated from the ratio of the CSD of acceleration at the seat, $G_{io}(f)$, to the power spectral density (PSD) of the acceleration at the seat, $G_{ii}(f)$:

$$H_{io}(f) = \frac{G_{io}(f)}{G_{ii}(f)}.$$

Prior to the calculation of the apparent mass, mass cancellation of the mass of the force platform top-plate (33.0 kg) was performed in the time domain to remove its influence from the measured force: the acceleration time-history on the seat surface was multiplied by the mass of the force platform, which was then subtracted from the measured force.

The medians of the primary resonance frequencies and the apparent masses at resonance for the 12 subjects were calculated for each condition. The apparent mass at the primary resonance frequency was assumed to be the greatest apparent mass over the measurement range. The primary resonance frequency was defined as the frequency at which the apparent mass was greatest.

Statistical analysis was performed using SPSS (version 14). Non-parametric tests (the Friedman test for k -related samples and the Wilcoxon matched-pairs signed ranks test for two-related samples) were employed. Non-parametric statistics were used to avoid assuming a normal distribution in the data.

3. Results

3.1. Effect of backrest and steering wheel contact

The effects of contact with the backrest and holding the steering wheel on the median modulus and phase of the apparent masses of the 12 subjects are shown in Fig. 2. The median resonance frequency increased from 4.8 Hz with ‘no backrest contact’ to 6.7 Hz when the back was supported by the backrest reclined to 15° (Table 2; $p < 0.01$, Wilcoxon matched-pairs signed ranks). At the lowest frequencies, the mass supported on the seat surface was reduced by 8.5 kg when supported by the backrest. The apparent mass at resonance was also significantly reduced with the backrest ($p < 0.01$).

The median resonance frequency was similar, irrespective of whether subjects supported by the backrest had their hands in their laps or held the steering wheel (6.7 Hz compared to 6.8 Hz; $p = 0.27$). Although holding the steering wheel did not affect the resonance frequency, it tended to decrease the apparent mass at resonance and the apparent mass at 0.4 Hz ($p < 0.01$). The decrease in the response at 0.4 Hz is consistent with the steering wheel supporting some of the mass of the arms. When subjects held the steering wheel, the response between 8 and 14 Hz tended to increase ($p < 0.01$ at 12.0 Hz) and, in some subjects, there was evidence of a further resonance occurring at around 4 Hz.

3.2. Effect of steering wheel position

Changing the horizontal position of the steering wheel had no effect on the proportion of the subject weight supported on the seat surface ($p > 0.63$ at 0.4 Hz, Friedman). The apparent mass at frequencies > 10 Hz was also little affected by the horizontal position of the steering wheel. However, as the steering wheel moved from the closest position (S_{H1}) to the furthest position (S_{H5}), the median apparent mass decreased at the primary resonance from 84.6 to 75.0 kg (Table 2, Fig. 3) and increased at the secondary resonance around 4 Hz.

The vertical position of the steering wheel had little effect of the apparent mass at any frequency (Fig. 4, Table 2): there were no significant changes in the response at 0.4 Hz ($p = 0.56$), at resonance ($p = 0.56$), or at 12.0 Hz ($p = 0.56$). However, the resonance frequency increased slightly as the steering wheel was raised ($p = 0.02$).

3.3. Effect of horizontal footrest position

Increasing the distance of the footrest from the leading edge of the seat tended to increase the apparent mass at resonance (Fig. 5, Table 2; $p < 0.01$, Friedman) and at low frequencies (at 0.4 Hz, $p < 0.01$, Friedman). There was a tendency for the principal peak in the apparent mass to narrow as the feet were positioned further forward, but the frequency of the primary resonance was not significantly changed ($p = 0.16$, Friedman).

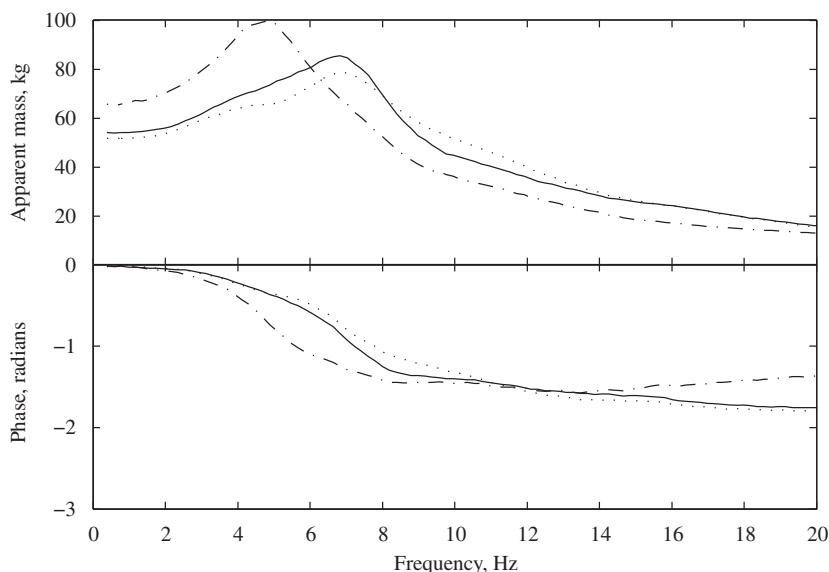


Fig. 2. Effect of backrest and steering wheel contact on apparent mass (medians of 12 subjects with the footrest at position F_{H4}): - - - -, no backrest contact (hands in lap); —, backrest at 15° (hands in lap); ·····, hands on steering wheel (backrest at 15°).

Table 2

Effect of posture on the primary resonance frequencies and apparent masses at resonance, at 0.4 Hz and at 12.0 Hz (medians of 12 subjects); as well as interquartile values (25%, 75%).

	Resonance frequency (Hz)	Apparent mass at resonance (kg)	Apparent mass at 0.4 Hz (kg)	Apparent mass at 12.0 Hz (kg)
<i>Backrest and steering wheel contact</i>				
No backrest (hands in lap, feet F _{H4})	4.8 (4.3, 5.1)	99.6 (98.3, 112.2)	61.8 (59.1, 66.9)	30.8 (28.6, 31.9)
Hand in lap (backrest at 15°, feet F _{H4})	6.7 (6.4, 7.0)	87.2 (78.7, 101.7)	53.3 (49.9, 56.0)	36.8 (34.0, 39.6)
Hands on steering wheel (backrest at 15°, feet F _{H4})	6.8 (6.3, 7.2)	84.5 (72.0, 92.7)	51.5 (48.3, 53.2)	41.2 (40.1, 44.5)
<i>Horizontal steering wheel position (hands S_{V3}, feet F_{H4})</i>				
S _{H1} (minimum)	6.9 (6.5, 7.5)	84.6 (73.0, 95.3)	51.1 (47.7, 52.2)	39.6 (37.8, 41.9)
S _{H2}	6.9 (6.4, 7.1)	85.5 (74.1, 95.3)	50.8 (48.0, 53.4)	39.2 (37.7, 41.9)
S _{H3}	6.8 (6.3, 7.2)	84.5 (72.0, 92.7)	51.5 (48.3, 53.2)	41.2 (40.1, 44.5)
S _{H4}	6.8 (6.3, 7.4)	80.8 (68.9, 87.1)	51.1 (47.3, 53.2)	43.2 (40.1, 45.6)
S _{H5} (maximum)	6.6 (5.9, 7.4)	75.0 (68.7, 80.8)	50.1 (47.3, 52.9)	43.2 (40.3, 46.7)
<i>Vertical steering wheel position (hands S_{H3}, feet F_{H4})</i>				
S _{V1} (minimum)	6.8 (6.2, 7.0)	84.5 (70.9, 89.1)	50.8 (48.4, 53.3)	39.6 (37.0, 41.6)
S _{V3} (mid)	6.8 (5.9, 7.2)	84.5 (67.6, 92.7)	51.1 (48.3, 53.2)	42.0 (40.2, 45.9)
S _{V5} (maximum)	6.9 (6.5, 7.4)	82.8 (73.3, 93.0)	50.8 (47.0, 54.4)	41.2 (39.7, 44.7)
<i>Footrest position (hands in lap)</i>				
F _{H1} (minimum)	6.4 (5.7, 7.1)	75.2 (67.0, 80.0)	49.7 (47.0, 52.7)	38.9 (36.2, 44.0)
F _{H2}	6.6 (5.8, 7.1)	76.6 (68.6, 83.9)	52.3 (46.8, 54.4)	38.9 (35.6, 46.8)
F _{H3} (mid)	6.8 (5.5, 7.1)	80.0 (68.0, 93.3)	53.0 (48.2, 55.6)	39.2 (36.1, 46.0)
F _{H4}	6.7 (6.4, 7.0)	87.2 (78.7, 101.7)	53.3 (49.9, 56.0)	36.8 (34.0, 39.6)
F _{H5} (maximum)	6.1 (5.7, 6.3)	92.0 (83.0, 102.2)	54.3 (50.9, 61.1)	35.4 (33.8, 39.0)
<i>Force applied to steering wheel (hands S_{H3}, feet F_{H4})</i>				
0 N	6.8 (6.3, 7.0)	85.0 (77.7, 93.9)	52.4 (49.3, 53.8)	42.0 (40.2, 44.8)
50 N	6.8 (6.8, 7.4)	79.2 (70.3, 89.8)	50.8 (48.8, 56.0)	44.1 (42.2, 47.9)
100 N	7.2 (6.8, 7.6)	80.5 (72.8, 88.2)	49.7 (46.2, 52.0)	45.6 (42.9, 47.3)
150 N	7.6 (7.1, 7.7)	75.5 (69.0, 86.8)	49.6 (44.4, 55.3)	43.8 (42.3, 48.0)
200 N	6.8 (6.1, 7.7)	76.6 (67.6, 83.3)	48.2 (41.0, 53.4)	43.7 (39.3, 47.8)
<i>Force applied to footrest (hands in lap, feet F_{H4})</i>				
0 N	6.6 (6.3, 7.0)	89.4 (80.3, 105.5)	53.9 (52.0, 56.1)	37.0 (33.7, 39.7)
50 N	7.0 (6.4, 7.4)	90.4 (80.5, 111.3)	51.6 (47.9, 52.9)	39.0 (34.4, 39.7)
100 N	7.0 (5.9, 7.3)	89.5 (78.7, 106.0)	49.3 (45.8, 58.4)	36.1 (34.8, 37.6)
150 N	7.0 (6.4, 7.2)	86.1 (81.1, 102.0)	45.6 (44.7, 52.2)	35.4 (33.1, 37.5)
200 N	6.8 (5.5, 7.0)	80.7 (77.0, 101.8)	44.9 (37.9, 52.9)	32.2 (30.1, 36.5)

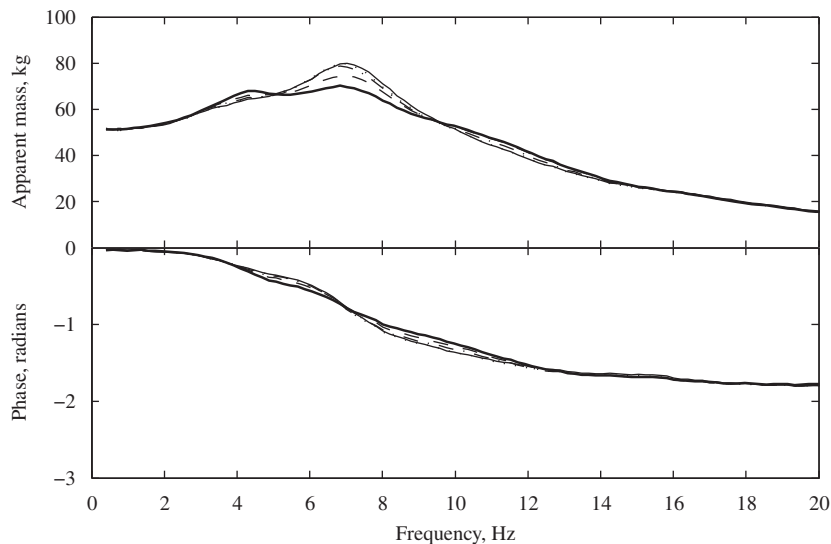


Fig. 3. Effect of horizontal position of the steering wheel on apparent mass (medians of 12 subjects with steering wheel at vertical position S_{V3} and footrest at F_{H4}): S_{H1} (—), S_{H2} (⋯⋯⋯), S_{H3} (- · - · -), S_{H4} (- - -) and S_{H5} (— — —).

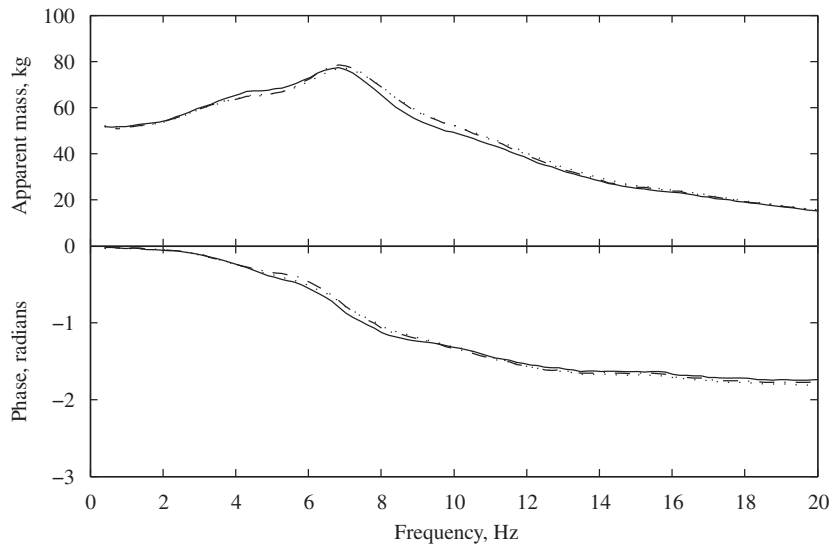


Fig. 4. Effect of vertical position of the steering wheel on apparent mass (medians of 12 subjects with the steering wheel at horizontal position S_{H3} and footrest at F_{H4}): S_{V1} (—), S_{V3} (·····) and S_{V5} (-·-·-) at 1.0 m s^{-2} rms.

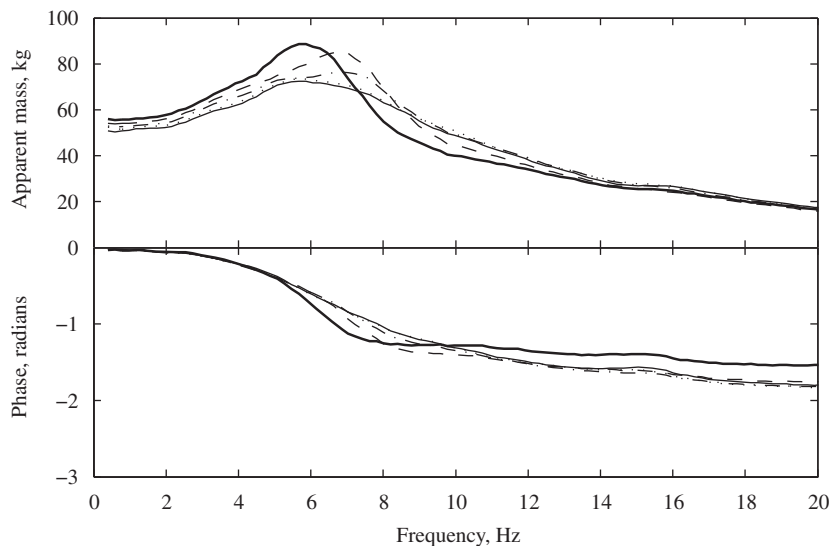


Fig. 5. Effect of horizontal position of the footrest on apparent mass (medians of 12 subjects with hands in lap): F_{H1} (—), F_{H2} (·····), F_{H3} (-·-·-), F_{H4} (-·-·-) and F_{H5} (— — —).

3.4. Effect of force applied to the footrest and the steering wheel

Increasing the force applied to the steering wheel reduced the apparent mass at the principal resonance (Fig. 6 and Table 2; Friedman $p < 0.01$). To a lesser extent, the apparent mass at 0.4 Hz also decreased as the force on the steering wheel increased (Friedman $p < 0.01$). The median resonance frequency increased from 6.8 to 7.6 Hz as the force increased from 0 to 150 N ($p = 0.07$) but decreased to 6.8 Hz as the force was increased further to 200 N ($p = 0.05$).

Increasing the force applied to the footrest reduced the apparent mass at the principal resonance (Fig. 7 and Table 2; Friedman, $p = 0.02$), similar to the effect of force on the steering wheel, but less marked. As the force on the footrest increased, the apparent mass reduced at 0.4 Hz (Friedman, $p < 0.02$) and at 12.0 Hz (Friedman, $p = 0.01$). The resonance frequency was unaffected by footrest force (Friedman, $p = 0.43$).

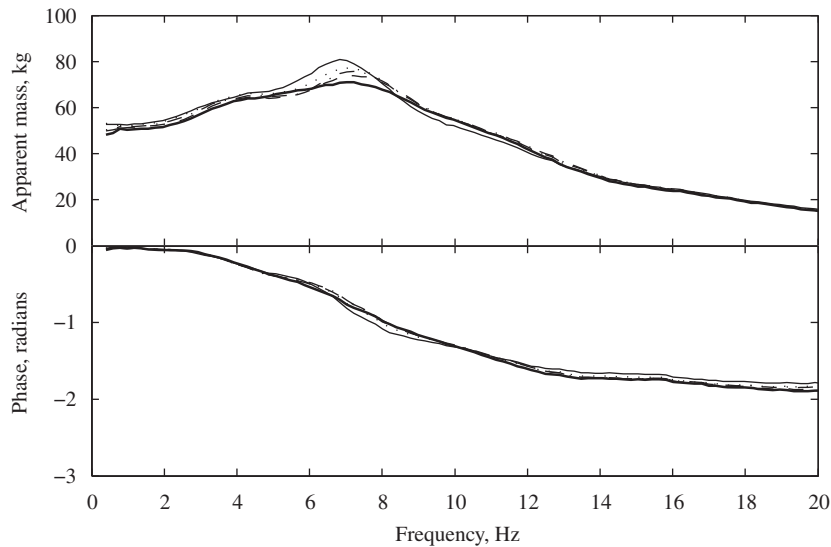


Fig. 6. Effect of force applied to the steering wheel on apparent mass (medians of 12 subjects with the hands at S_{H3} and the feet at F_{H4}): 0 N (—), 50 N (.....) 100 N (---), 150 N (---) and 200 N (—) at 1.0 m s^{-2} rms.

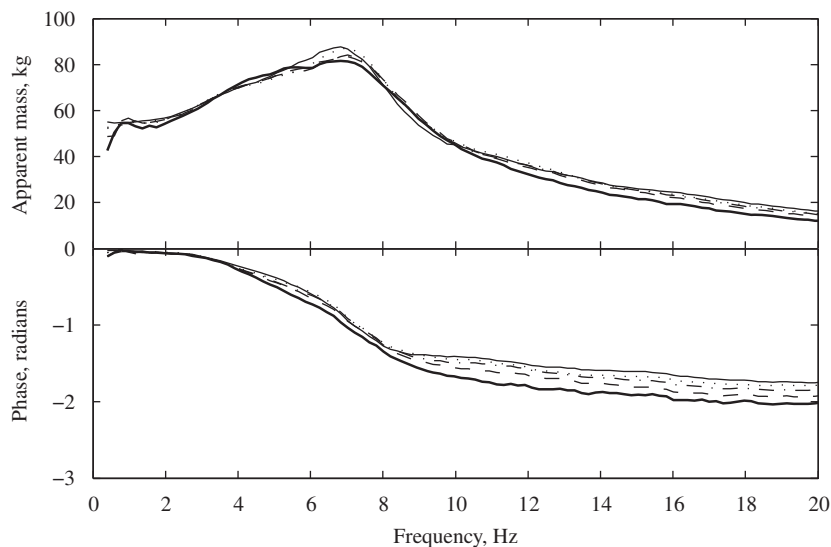


Fig. 7. Effect of force applied to the footrest on apparent mass (medians of 12 subjects with the hands in lap and footrest at F_{H4}): 0 N (—), 50 N (.....) 100 N (---), 150 N (---) and 200 N (—).

4. Discussion

4.1. Effect of backrest and steering wheel contact

The increase in the apparent mass resonance frequency caused by contact with the rigid backrest is consistent with previous studies [8,11,13]. This has previously been explained by the backrest providing an additional constraint to the motions of the body. Contact with a reclined backrest has increased the resonance frequency compared to contact with an upright backrest (e.g., [11]), possibly due to a greater proportion of the body mass being supported on the backrest and increased backrest contact further constraining the motions of the body.

In the present study, both the mass supported on the seat surface and the apparent mass at resonance decreased when the back was supported by a reclined backrest compared to the 'no backrest' condition. Rakheja et al. [8] concluded that both the mass supported on the seat surface and the apparent mass at resonance were increased by a back support, but the 'no backrest' data they used were drawn from previous measurements (ISO 5982 [15]) and may not have been directly comparable data (e.g., from subjects of similar weight).

The mass supported on the seat at low frequencies reduced slightly when the hands were placed on the steering wheel, consistent with the steering wheel supporting some of the subject mass. There was also a lower apparent mass around the primary resonance when subjects held the steering wheel; however, the ratio between the peak apparent mass and the apparent mass at 0.4 Hz (called ‘peak ratio’) was unaffected by hand position (≈ 1.6 in both cases). Rakheja et al. [8] found that this ratio was lower when subjects held a steering wheel (≈ 1.4) compared to the hands in lap posture (≈ 1.7). The reason for this difference between the studies is not clear but the postures may have differed: their subjects adopted an uncontrolled ‘comfortable’ foot position, whereas subjects in the present study had a fixed angle of 157.5° (F_{H4}) between the femur and fibular. When Rakheja et al. [8] asked their subjects to position their feet 7.5 cm further from their bodies, the effect of steering wheel contact on the ‘peak ratio’ was less marked. However, foot position had little effect on the apparent mass when the hands were in the lap, implying an interaction between the effect of foot position and steering wheel contact. In the present study, the steering wheel was adjusted for each subject so that the arm angle was 45° , whereas Rakheja et al. used a fixed steering wheel position. In the present study, the apparent mass at resonance decreased as the steering wheel was moved away from the body. The reduced apparent mass at resonance found by Rakheja et al. [8] when subjects held a steering wheel is consistent with the steering wheel being further from the body and the arms straighter. In the present study, and in a study by Wang et al. [9], the resonance frequency was largely unaffected by steering wheel contact, whereas Rakheja et al. [8] found that the resonance frequency decreased with steering wheel contact, possibly due to the postural differences described above.

4.2. Effect of the steering wheel position

As the steering wheel moved away from the body, the proportion of body weight supported on the seat surface (e.g., the apparent mass at 0.4 Hz) was unchanged but the apparent mass around 4 Hz increased and the apparent mass around the principal resonance decreased. Consequently, at the furthest steering wheel position there were two distinct peaks in the median apparent mass: at 4.4 and 6.6 Hz. The apparent mass varied between subjects, as shown for the five horizontal positions of the steering wheel in Fig. 8; the inter-subject variability was similar in the other postures. All subjects exhibited evidence of a peak in their apparent mass at a frequency less than their primary resonance, with both peaks affected by the horizontal position of the steering wheel (Fig. 8). The systematic change in apparent mass around 4 Hz may have been caused by a resonance of the arms and shoulders at this frequency.

The reduction in the apparent mass at the primary resonance when subjects made contact with the steering wheel suggests the response of the arms interacted with the body movements associated with the primary resonance. As the arms were straightened, the apparent mass at 4.0 Hz increased while the apparent mass around the primary resonance decreased. This might be explained by increased influence of the arm-shoulder response as the arms were extended. Nishiyama et al. [14] measured the vibration transmitted to the arms from the seat surface of subjects sitting in a car

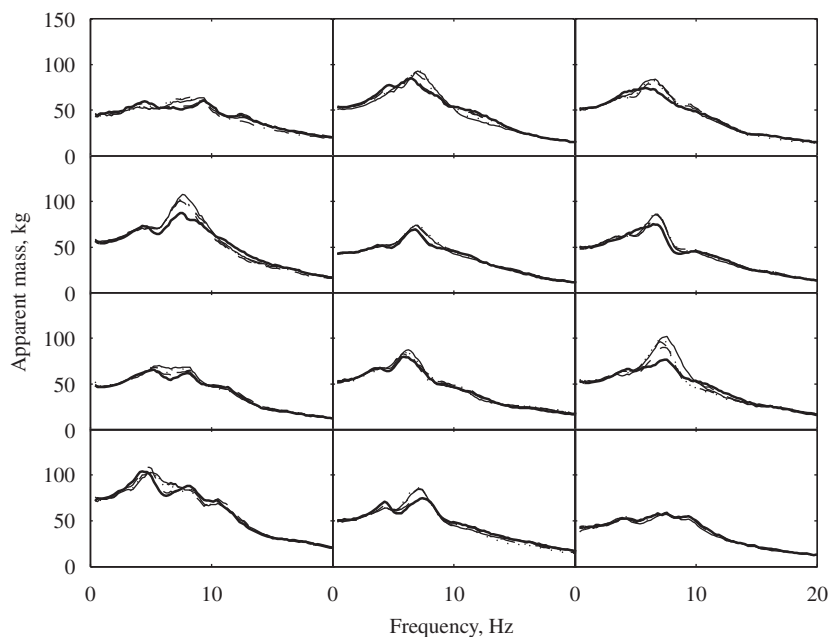


Fig. 8. Individual apparent masses for 12 subjects with the steering wheel at five different horizontal positions (steering wheel at vertical position S_{V3} and footrest at F_{H4}): S_{H1} (—), S_{H2} (·····), S_{H3} (- · - ·), S_{H4} (- - -) and S_{H5} (—) at 1.0 m s^{-2} rms.

driving posture holding a steering wheel. They found that the transmissibility was dependent on the arm angle, with more vibration being transmitted to the arms as they were straightened. The transmissibility between the seat surface and the mid-point of the biceps increased from 3.7 to 4.5 as the arms straightened from 90° to 180°, while the transmissibility to the centre of the chest reduced from 1.7 to 1.6. Previous studies have found the principal resonance is associated with the motions of the upper-body [16,17], so the decrease in transmission of vibration to the chest as the arms are extended is consistent with the decrease in the apparent mass at resonance in the present study. The transmission of vertical seat vibration to an unsupported hand held in front of the body has peaks at approximately 2 and 5 Hz, with the magnitude of the 2 Hz peak higher and the magnitude of the 5 Hz peak lower when the hand is further from the body [18]. These lower resonance frequencies than in the present study (i.e., 2 and 5 Hz compared with approximately 4 and 7 Hz) may be attributed to the use of an upright posture and the absence of a backrest.

Changes in the position of the arms can lead to other postural changes in the body thereby altering muscle tension and mass distribution. Changes in muscle tension can affect the primary resonance frequency (e.g. [2]) while changes in mass distribution can affect the mass supported on the seat surface (e.g. [12]). Neither the frequency of the primary resonance nor the mass supported on the seat surface were significantly affected by arm position, so while an influence of muscle tension and mass distribution cannot be entirely discounted there is no clear evidence of them affecting the results.

Although the horizontal and vertical adjustments of the steering wheel were of the same size, vertical adjustment had less influence on the apparent mass. This may have arisen because the full range of vertical positions of the steering wheel resulted in less change to the angle between forearm and upper arm than the full range of horizontal positions of the steering wheel.

In this study the handles of the 'steering wheel' were aligned vertically (0°, Fig. 1), whereas in a car the steering wheel is usually aligned at an angle between 0° and 25°. Changing the angle of the steering wheel may affect the angle between the forearm and hand but have less effect on the angle between the forearm and the upper arm. Changes in the vertical position of the steering wheel altered the angle between the forearm and hand but had only a minor influence on the apparent mass, so it is expected that the angle of the steering wheel will also have had only a small influence on the apparent mass measured at the seat.

4.3. Effect of footrest position

When the feet are lowered relative to a seat surface, the mass supported on the seat surface and the apparent mass at resonance both increase [12]. In the present study, similar changes were found when the feet moved forward: the mass supported on the seat surface decreased, indicating that the backrest and footrest supported a greater proportion of the subject weight. If the primary resonance of the body is represented as a single degree-of-freedom mass-spring-damper system, a reduction in moving mass with no change in stiffness would increase the resonance frequency. Nawayseh and Griffin [12] found the resonance frequency was independent of foot height and so they hypothesised that either the primary resonance frequency depends on the motions of the upper-body regardless of the motion of the legs or that there was a corresponding decrease in the stiffness of the thighs as the mass supported on the seat surface reduced. In the present study, the resonance frequency tended to increase as the legs were straightened from position F_{H1} (minimum) to position F_{H3} (mid) and then decrease as the legs straightened from position F_{H3} to F_{H5} (maximum): significantly different between F_{H1} and F_{H3} , and between F_{H3} and F_{H5} . The results are consistent with two counteracting influences of foot position on the resonance frequency: as the feet move forward the reduced mass on the seat surface tends to increase the resonance frequency while the reduced thigh contact tends to reduce their stiffness and the resonance frequency.

4.4. Effect of footrest and steering wheel force

As a backrest is reclined, more mass is supported on the backrest, the apparent mass at resonance decreases, and the resonance frequency of the apparent mass increases [11]. In the current study, as the force on the backrest increased due to greater forces applied to either the footrest or the steering wheel, the apparent mass at resonance decreased but the resonance frequency was unchanged. This suggests the increase in the resonance frequency when reclining a backrest may be associated with the angle of the upper-body as opposed to the force applied to the backrest. The absence of a change in the resonance frequency with increased force applied to the steering wheel or the footrest suggests these forces did not tense the body in the same way as in previous studies where the resonance frequency was greater in 'tensed' than 'un-tensed' postures e.g., [2,3,5,6].

5. Conclusions

The median principal resonance frequency in the apparent mass of the body sitting in the posture of a car passenger (hands in lap, backrest at 15°) was 6.7 Hz compared to 4.8 Hz when sitting upright with no backrest. Both the mass supported on the seat surface, and the apparent mass at resonance, were less in the car passenger posture than when sitting upright with no backrest.

When subjects supported by a backrest held a steering wheel, an additional resonance was evident around 4 Hz. Moving the steering wheel away from the body did not change the proportion of the subject mass supported on the seat surface, but the apparent mass at the primary resonance reduced, and the apparent mass at the 4 Hz resonance increased, suggesting the 4 Hz resonance is associated with the arms and shoulders. Raising the steering wheel had a similar, but smaller, effect to moving the steering wheel forward.

As the feet moved forward, the mass supported on the horizontal seat surface decreased, indicating that the backrest and footrest supported a greater proportion of the subject weight.

Applying force to either the steering wheel or the footrest did not affect the resonance frequency but reduced the apparent mass at resonance and decreased the mass supported on the seat surface.

The results show that the apparent mass of the human body sitting in the posture of a car driver or car passenger differs from that when sitting upright with no backrest contact. Systematic variations in the apparent mass have been found when changing the positions of the feet and the hands. As the transmission of vibration through a seat is influenced by the apparent mass of the seat occupant, contact with the backrest and hand and foot position can be expected to affect seat transmissibility and should be taken into account when constructing physical or mathematical models of the dynamic response of the body.

References

- [1] C. Corbridge, M.J. Griffin, P. Harborough, Seat dynamics and passenger comfort, *Institute of Mechanical Engineers, Part F: Journal of Rail and Rapid Transit* 203 (1989) 57–64.
- [2] T.E. Fairley, M.J. Griffin, The apparent mass of the seated human body: vertical vibration, *Journal of Biomechanics* 22 (1989) 81–94.
- [3] T. Miwa, Mechanical impedance of the human body in various postures, *Industrial Health* 13 (1973) 1–22.
- [4] S. Kitazaki, M.J. Griffin, Resonance behaviour of the seated human body and effects of posture, *Journal of Biomechanics* 31 (1998) 143–149.
- [5] N.J. Mansfield, M.J. Griffin, Effects of posture and vibration magnitude on apparent mass and pelvis rotation during exposure to whole-body vertical vibration, *Journal of Sound and Vibration* 253 (1) (2002) 93–107.
- [6] Y. Matsumoto, M.J. Griffin, Effect of muscle tension on non-linearities in the apparent masses of seated subjects exposed to vertical whole-body vibration, *Journal of Sound and Vibration* 253 (2002) 77–92.
- [7] N. Nawayseh, M.J. Griffin, Tri-axial forces at the seat and backrest during whole-body vertical vibration, *Journal of Sound and Vibration* 277 (2004) 309–326.
- [8] S. Rakheja, I. Stiharu, P.É. Boileau, Seated occupant apparent mass characteristics under automotive posture and vertical vibration, *Journal of Sound and Vibration* 253 (1) (2002) 57–75.
- [9] W. Wang, S. Rakheja, P.É. Boileau, Effects of sitting postures on biodynamic response of seated occupant under vertical vibration, *International Journal of Industrial Ergonomics* 34 (2004) 289–306.
- [10] N. Nawayseh, M.J. Griffin, Effect of seat surface angle on forces at the seat surface during whole-body vertical vibration, *Journal of Sound and Vibration* 284 (2005) 613–634.
- [11] M.G.R. Toward, M.J. Griffin, Apparent mass of the human body in the vertical direction: Effect of seat backrest, *Journal of Sound and Vibration* 327 (2009) 657–669.
- [12] N. Nawayseh, M.J. Griffin, Non-linear dual-axis biodynamic response to vertical whole-body vibration, *Journal of Sound and Vibration* 268 (2003) 503–523.
- [13] S. Rakheja, I. Stiharu, P.É. Boileau, Seated occupant interactions with seat backrest and pan, and biodynamic response under vertical vibration, *Journal of Sound and Vibration* 298 (1) (2006) 651–671.
- [14] S. Nishiyama, N. Uesugi, T. Takeshima, Y. Kano, H. Togii, Research on vibration characteristics between human body and seat, steering wheel, and pedals (effects of seat position on ride comfort), *Journal of Sound and Vibration* 236 (2000) 1–21.
- [15] International Organization for Standardisation ISO 5982, Mechanical vibration and shock—range of idealized values to characterize seated-body biodynamic response under vertical vibration, International Standard, 2001.
- [16] F.W. Hagen, C.J. Wirth, J. Piehler, W. Plitz, G.O. Hofmann, Th. Swingers, In vivo experiments on the response of the human spine to sinusoidal Gz-vibration, *AGARD Conference Proceedings* 378 (1985) 1–12.
- [17] Y. Matsumoto, M.J. Griffin, Movement of the upper-body of seated subjects exposed to vertical whole-body vibration at the principle resonance frequency, *Journal of Sound and Vibration* 215 (1998) 743–762.
- [18] M.J. Griffin, *Handbook of Human Vibration*, Academic Press, London, 1990.