Evaluation of a Kernel Associated with Laminar Flow Tubular Catalytic Reactors

By Chul-Hee Kim and R. E. Gilbert

Introduction. Katz [2] has proposed a method of analysis of tubular catalytic reactors which, in principle, will allow the determination of the actual kinetics of the surface reaction even in the presence of a moderately slow rate of diffusion to and from the surface. The catalyst is deposited on the tube wall and the reacting fluid allowed to flow past under conditions of known hydrodynamics. The reader is referred to the original paper for further details.

A case of particular importance is that for which flow is laminar. For this case, the analysis yields an integral equation involving a kernel

(1)
$$M(\theta) = (\partial H/\partial \theta)|_{y=1}$$

where $H(y, \theta)$ is defined by

(2)

$$\frac{\partial}{\partial y} \left(y \frac{\partial H}{\partial y} \right) = 4y(1 - y^2) \frac{\partial H}{\partial \theta},$$

$$y = 0, \quad H \text{ bounded },$$

$$y = 1, \quad \partial H/\partial y = 1.$$

$$\theta = 0, \quad H = 0,$$

The precise evaluation of $M(\theta)$ in a form suitable for computation is the subject of this paper. The variable θ must assume all positive real values.

Exact Solution. To obtain an exact solution to (2) let

(3)
$$H(y,\theta) = \theta + W(y) + G(y,\theta).$$

Then the differential equation for H can be resolved into the following two problems:

(4)
$$\frac{d}{dy}\left(y\frac{dW}{dy}\right) = 4y(1-y^2),$$
$$y = 0, \qquad W \text{ bounded },$$
$$y = 1, \qquad dW/dy = 1,$$

and

(5)

$$\frac{\partial}{\partial y} \left(y \frac{\partial G}{\partial y} \right) = 4y(1 - y^2) \frac{\partial G}{\partial \theta},$$

$$y = 0, \quad G \text{ bounded },$$

$$y = 1, \quad \partial G/\partial y = 0,$$

$$\theta = 0, \quad G = -W(y).$$

Received December 27, 1967.

These two problems, (4) and (5), along with Eq. (3), are consistent with Eq. (2).

The solution to (4) is

(6)
$$W(y) = B_0 + y^2 - y^4/4,$$

where B_0 is an integration constant which need not be determined for our purpose.

The solution to (5) may now be obtained by separation of variables as

(7)
$$G(y,\theta) = A_0 + \sum_{n=1}^{\infty} A_n \phi_n(y) e^{-\lambda_n \theta},$$

where the constants A_n are given by the following ratio of two integrals:

(8)
$$A_n = \frac{\int_0^1 4y(1-y^2)(y^4/4-y^2)\phi_n(y)dy}{\int_0^1 4y(1-y^2)\phi_n^2(y)dy}, \quad n = 1, 2, \cdots.$$

The functions $\phi_n(y)$ are eigensolutions to the Sturm-Liouville system

(9)
$$\frac{d}{dy}\left(y\frac{d\phi_n}{dy}\right) + 4y(1-y^2)\lambda_n\phi_n = 0,$$
$$y = 0, \quad \phi_n' = 0,$$
$$y = 1, \quad \phi_n' = 0.$$

The first 20 eigenvalues, λ_n , for (9) have been tabulated by Dranoff [1] along with the functions $\phi_n(y)$ and the denominator integral of (8). The normalizing condition $\phi_n(0) = 1$ was chosen for convenience in computation. Using the approach of Sellars et al. [4], Dranoff also derived some important approximate formulas for λ_n and ϕ_n valid for large n.

By manipulation of (9) it can be shown [3] that the numerator in (8) is equal to $-\phi_n(1)/\lambda_n$. Hence we may write

(10)
$$A_n = -\phi_n(1)/\lambda_n N_n$$

where N_n is the normalizing integral appearing in the denominator of (8). Putting (6), (7), and (8) into (3), we obtain

(11)
$$H(y,\theta) = \theta + B_0 + y^2 - \frac{y^4}{4} + A_0 - \sum_{n=1}^{\infty} \frac{\phi_n(1)}{\lambda_n N_n} \phi_n(y) e^{-\lambda_n \theta}$$

and applying (1) to Eq. (11) yields the desired kernel

(12)
$$M(\theta) = 1 + \sum_{n=1}^{\infty} \frac{\phi_n^2(1)}{N_n} e^{-\lambda_n \theta} .$$

Notice that neither A_0 nor B_0 appears in (12). This equation is simpler than the expression originally derived by Katz [2] in that it contains only one integral, N_n .

Numerical Evaluation of the Kernel. Equation (12) requires more and more terms as θ approaches zero. Using Dranoff's results [1], we were able to get satisfactory convergence of (12) down to about $\theta = 0.015$. An asymptotic solution for small θ is developed in the Appendix. It takes the form

(13)
$$M(\theta) \sim (.256 \cdots) \theta^{-2/3} \text{ as } \theta \to 0$$
.

518

Unfortunately, Eq. (12) using 20 terms does not give satisfactory agreement with Eq. (13) for the range of Θ near 0.015. Hence it was necessary to extend the work of Dranoff.

Since Dranoff has supplied approximations to the eigenvalues and eigensolutions for large n, the first effort was to use these for values of n above 20. Dranoff's equations yield

(14)
$$\lambda_n \sim 4(n+\frac{1}{3})^2,$$

and

(15)
$$\phi_n(1) \sim \frac{(-1)^{n_3^{1/6}}}{2^{1/3} \Gamma(2/3) (3n+1)^{1/3}} = \frac{(-1)^n \times .7039 \cdots}{(3n+1)^{1/3}}$$

In addition, following Sellars et al. [4], it is easily shown that

(16)
$$N_n = -\phi \frac{\partial^2 \phi}{\partial \lambda \partial y} \bigg|_{y=1; \lambda=\lambda_n} \sim \frac{.75}{3n+1}.$$

These three approximations are all that are required in (12).

Comparing results from (14), (15), and (16) with actual values at n = 20 reveals that (16) gives values accurate to about .02%, (14) is valid to within 0.1%, but (15) is good only to within about 1.7%. The total error in the quantity $\phi_n^2(1)/N_n$ at n = 20 is 3.5% when calculated from (15) and (16). In view of the fact that many terms are required in (12) for small θ , this error was deemed excessive. Hence Dranoff's eigenvalues were extended by direct integration of (9).

Using the Runge-Kutta-Gill integration scheme with double-precision arithmetic on the IBM 360, the eigenvalues of (9) from n = 1 to n = 41 were computed. The overall method for extracting these eigenvalues was that described by Dranoff. The calculations at each n were stopped when $\phi_n'(1)$ was found to be less than 10^{-13} . These calculations are summarized in Table 1. The interval of integration for the Runge-Kutta-Gill algorithm is shown in the second column. All results from n = 1to n = 20 agree very closely with those of Dranoff. As a further check on the integration procedure, the last two columns present the numerator integral of Eq. (7) as calculated by direct integration and from its mathematical equivalent, $-\phi_n(1)/\lambda_n$. Agreement between the two columns is very good.

Using all 41 eigenvalues in Eq. (12), satisfactory convergence was obtained down to about $\theta = .001$. Figure 1 is a plot of $M(\theta)$ on logarithmic coordinates. The asymptote approached for $\theta > .3$ is Eq. (12), using only the first term of the series. The dashed line at the left edge is Eq. (13). It can be seen that $M(\theta)$ is approaching this line asymptotically, although exact agreement is still lacking even at $\theta = .001$.

With these values of the kernel it now becomes possible to test the efficacy of Katz' method for analyzing laminar flow catalytic reactors. The first part of such a program, using computer simulation of a reactor, is now nearing completion.

It has been found that, provided $M(\theta)$ is known accurately down to about .002, only its integral need be known over $0 < \theta < .002$ in order to carry out the convolution. The importance of Eq. (13) is then readily seen, as without it there would be no means for estimating such an integral. Furthermore, over this small range of

Numerator of (8) by direct integration $(\times 10^3)$	76.717135	-18.864785	7.9435094	-4.2362020	2.5834723	-1.7183203	1.2144811	89786079	.68717490	- . 54058922	.43489059	- .35640818	.29668913	25029769	.21361110	- .18414732	.16016164	- .14040057	.12394569	11011114
$- rac{\phi_n(1)/\lambda_n}{(imes 10^3)}$	76.717173	-18.864821	7.9435091	-4.2362030	2.5834751	-1.7183215	1.2144814	- .89786085	.68717524	54058947	.43489086	- .35640842	. 29668925	- .25029781	.21361125	— .18414746	.16016181	14040073	.12394587	11011116
N_n	. 19013708	.10773104	.075228554	.057806621	.046941265	.039516148	.034119353	.030020331	.026800846	.024205195	.022068054	.020277780	.018756011	.017446901	.016308651	.015309859	.014426375	.013639319	.012933721	.012297028
$\phi_n(1)$	49251658	.39550852	34587389	.31404711	-29125289	.27380972	-25985336	.24833251	23859123	.23020046	22286478	.21637299	21056781	.20533429	-20058018	.19623385	19223803	.18854622	18512026	.18192465
λ_n	6.4199	20.9654	43.5417	74.1341	112.7369	159.3472	213.9624	276.5824	347.2058	425.8323	•		709.7251	820.3599	938.9963	1065.6343	1200.2738	1342.9148	1493.5573	1652.1909
Δy	.005	.005	.005	.005	.005	.005	.0025	.0025	.0025	.0025	.0025	.0025	.002	.002	.002	.002	.002	.002	.002	.001
u	I	0	ი	4	5	9	7	×	6	10	11	12	13	14	15	16	17	18	19	20

TABLE 1 Calculated Results

520

CHUL-HEE KIM AND R. E. GILBERT

Numerator of (8) by direct integration (×10³)	- 098381814 088358595	.079732469	- .065749840	- .060045652	.055022783	- .050579135	.046630802	- .043108354	.0399539555	037119148	.034563087	 — .032251172 	.030153944	- .028246169	.026506212	- .024915375	.023457456	022118378	.020885845
$- rac{\phi_n(1)/\lambda_n}{(imes 10^3)}$	098381830 08381830 088358610	.079732485	.065749860	.060045670	.055022799	.050579153	.046630822	.043108371	.039953974	.037119167	.034563106	.032251191	.030153955	.028246191	.026506235	.024915397	.023457479	.022118401	.020885869
	I		I	Ι		I		Ι		1		1		I		1		Ι	
N_n	.011720476 .011195572	.010755990	.0008695670	.0094947223	.0091473118	.0088244301	.0085235677	.0082425463	.0079794657	.0077326608	.0075006662	.0072821874	.0070760763	.0068813112	.0066969800	.0065222656	.0063564339	.0061988237	.0060488378
$\phi_n(1)$	1789401317614077	17350744	16867531	.16644992	16433670	.16232616	16040989	.15858042	15683113	.15515607	15354990	.15200783	15052550	.14909899	14772471	.14639940	14512008	.14388403	14268873
λn	1818.8331 1993.4760	2176.1198 9266 7649	2565.4094	2772.0553	2986.7019	3209.3491	3439.9970	3678.6456	3925.2948	4179.9448	4442.5954	4713.2469	4991.8990	5278.5520	5573.2059	5875.8606			6831.8309
Δy	.00 100	100.	100.	.001	100.	100.	100.	100.	100.	.001	.001	.001	.001	.001	.001	.001	.001	.001	.001
u	$\begin{array}{c} 21\\ 22\end{array}$	23 24	25	26	27	58 78	50	30	31	32	33	34	35	36	37	38	39	40	41

TABLE 1—Continued

 θ the integral need not be known accurately and so the deviation from the asymptote at the left end of Fig. 1 is not serious.

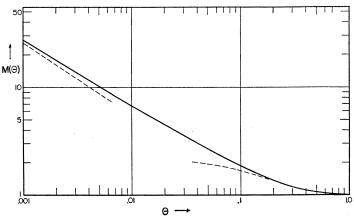


FIGURE 1. The Kernel $M(\theta)$

Appendix

Derivation of the Asymptotic Approximation to $M(\theta)$. We seek a solution to (2) valid for small θ . It is evident from the boundary conditions that the departure of H from its initial condition, H(y, 0) = 0, will first take place at y = 1. The disturbance here will then gradually "penetrate" toward y = 0. This suggests that for small θ we may substitute z = 1 - y into (2) and find a solution valid for small z. This substitution followed by elimination of higher-order terms in z, yields the approximate equation

(A1)
$$\partial^2 H/\partial z^2 = 8z \left(\partial H/\partial \theta\right)$$
.

The Laplace transform of (A1) with respect to θ is then

 $d^2\overline{H}/dz^2 - 8sz\overline{H} = 0,$

which has as a general solution

(A2)
$$\overline{H}(z, s) = z^{1/2} \left[C_1 I_{1/3} \left(\frac{2(8s)^{1/2}}{3} z^{3/2} \right) + C_2 I_{-1/3} \left(\frac{2(8s)^{1/2}}{3} z^{3/2} \right) \right].$$

For large argument, both Bessel functions in (A2) increase exponentially. To keep $\overline{H}(z, s)$ bounded, it is necessary to set $C_2 = -C_1$. The condition

$$z=0$$
, $d\overline{H}/dz=-1/s$

then yields, after some manipulation of the Bessel functions,

(A3)
$$C_2 = -C_1 = \frac{\Gamma(1/3)}{3^{2/3} 2^{1/2} s^{7/6}}.$$

From the definition of $M(\theta)$, it is seen that

(A4)
$$\overline{M}(s) = s\overline{H} \mid_{y=1} = s\overline{H} \mid_{z=0}$$

Evaluating $\overline{H}|_{z=0}$ from (A2) and (A3), inserting the result into (A4), and simplifying, vields

$$\overline{M}(s) = \frac{0.5\Gamma(1/3)}{3^{1/3}\Gamma(2/3)s^{1/3}},$$

which, upon inversion and re-arrangement, gives the function

(A5)
$$M(\theta) = \frac{1}{3^{4/3} \Gamma(5/3) \theta^{2/3}}.$$

This is Eq. (13) of the text. Note that although $M(\theta)$ is infinite at $\theta = 0$, the area under the curve is finite.

Department of Chemical Engineering University of Nebraska Lincoln, Nebraska 68508

J. S. DRANOFF, "An eigenvalue problem arising in mass and heat transfer studies," Math. Comp., v. 15, 1961, pp. 403-409. MR 24 #A280.
 S. KATZ, "Chemical reactions catalysed on a tube wall," Chem. Engr. Sci., v. 10, 1959, 2020

p. 202.

3. C-H. KIM, A Computer Study of Heterogeneous Laminar Flow Tubular Reactors, M.S. Thesis, Univ. of Nebraska, Lincoln, Nebraska, 1968.
4. J. B. SELLARS, M. TRIBUS & J. S. KLEIN, "Heat transfer to laminar flow in a round tube or conduit—the Graetz problem extended," Trans. ASME, v. 78, 1956, p. 441.