

Light-induced deformation and instability of a liquid interface. I. Statics

Régis Wunenburger,^{*} Alexis Casner,[†] and Jean-Pierre Delville[‡]
Centre de Physique Moléculaire Optique et Hertzienne, Université Bordeaux I,
351 cours de la Libération, 33405 Talence Cedex, France
 (Received 15 June 2005; published 27 March 2006)

We study in detail the deformations of a liquid-liquid interface induced by the electromagnetic radiation pressure of a focused cw laser beam. Using a simple linear model of static equilibrium of the interface under the effect of radiation pressure, buoyancy, and Laplace pressure, we explain the observed hump height variations for any value of the optical Bond number $Bo = (\omega_0/\ell_c)^2$ (ℓ_c is the capillary length and ω_0 is the waist of the beam) in the regime of weak deformations and show that the deformations are independent of the direction of propagation of the laser. By increasing the beam power, we observe an instability of the interface leading to the formation of a long jet when the laser propagates from the more refringent phase to the less refringent one. We propose that the total internal reflection of the incident light on the highly deformed interface could be at the origin of this instability. Using a nonlinear model of static equilibrium of the interface taking account of the angular dependance of radiation pressure, we explain the measured beam power threshold of the instability P_\uparrow , as well as the shape of the interface deformations observed at large waists just below the instability onset. According to this model, the instability should occur when the interface slope reaches the angle of total reflection, θ_{TR} . We find experimentally that, just below the instability threshold, the maximum incidence angle along the interface, θ_{max} , is significantly smaller than θ_{TR} and that our nonlinear model does not present any instability up to $\theta_{max} = \theta_{TR}$. Thus, although the proposed instability model correctly predicts the instability threshold P_\uparrow , it fails to describe the actual instability mechanism. We finally discuss possible additional effects that could explain the instability.

DOI: [10.1103/PhysRevE.73.036314](https://doi.org/10.1103/PhysRevE.73.036314)

PACS number(s): 47.20.Ma, 42.50.Vk, 42.25.Gy, 68.05.-n

I. INTRODUCTION

Since Maxwell's calculation of the sunlight radiation pressure on a mirror [1], the force exerted by light on surfaces has been a topic of intense discussions [2–4]. Maxwell predicted that a light beam of intensity I impinging normally upon a surface of reflectivity R exerts a pressure Π_r , analogous to that of a beam of material particles. In 1861, he derived the following formula: $\Pi_r = (1+R)I/c$. The first attempt at an experimental proof of the existence of the radiation pressure Π_r on a mirror in vacuum was performed by Lebedev [5] in 1901. The experiment was further improved by Nichols and Hull [6] in 1903. Both calculated and observed surface forces were proved to act inwards to the reflecting mirror. In 1905, Poynting [7] extended the treatment of the radiation pressure to the case of light refraction. By considering light incident from vacuum on the surface of a transparent dielectric, he predicted an outward force, normal to the surface, irrespective of the angle of incidence. This was in agreement with previous calculations by Thomson [8]. An outward normal force has indeed been experimentally demonstrated by Ashkin and Dziedzic [9] when a laser beam crosses the water free surface. However, these observations revealed, in fact, a still continuing controversy for

the expression of the photon momentum in dielectric media; depending on the expression of the momentum density of the electromagnetic field inside a dielectric, either the Abraham or the Minkowski form, the surface force is predicted to act inwards or outwards. We refer the reader interested in this conflict in radiation pressure theory to nice reviews and articles such as those written by Brevik [10], Loudon [11], Obukhov and Hehl [12], or Mansuripur [3]. Despite Ashkin and Dziedzic's observations, it was concluded that the direction of the fluid interface deformation could not be considered as sufficient proof to definitely answer the controversy, because laser waves also give birth to radial forces due to their Gaussian intensity profile [11,13].

Contrary to the theoretical point of view, experiments converge towards a unified picture. Indeed, since the seminal work of Ashkin and Dziedzic [9], all the investigations performed with lasers on fluid interfaces have invariably retrieved the behavior predicted by Poynting—i.e., the emergence of an outward surface force [14–17]. The generalization to interfaces between two dielectrics leads to surface forces directed towards the medium of the lowest index of refraction [18,19].

As illustrated in the following, the optical surface force is proportional to the refractive index contrast between the media on both sides of the interface. Consequently, the amplitude of the expected optical forcing is intrinsically weak in any case. Since the radiation pressure has to compete with the surface tension (Laplace pressure) and buoyancy (hydrostatic pressure), the resulting interface deformation is also very weak in general. Consequently, the induced surface force is often investigated indirectly from the lensing associated with the interface deformation [9,16,17] or by interfero-

^{*}Electronic address: r.wunenburger@cpmoh.u-bordeaux1.fr

[†]Present address: CEA/DAM Ile-de-France, BP 12, F-91680 Bruyères-le-Châtel, France.

Electronic address: alexis.casner@cea.fr

[‡]Electronic address: jp.delville@cpmoh.u-bordeaux1.fr

metric holography [14]. This weakness also suggests why radiation pressure effects received much less attention than optical trapping and tweezing [20]. However, the emergence of soft materials in the 1980's brought a sort of second birth to optical surface forces. Indeed, as surfactants and membranes are often characterized by low surface tension, it became possible to directly deform soft interfaces at reasonably low irradiance without the help of a beam-trapped bead [21,22]. This property allows for quantitative measurements of ultralow surface tension in a contactless manner [19]. Moreover, since optical dynamometry is generally limited to large vesicles, radiation pressure was also used to quantitatively determine the elasticity of small vesicles [23] and cells [24,25]. As the bending of these soft interfaces was still weak, all these experiments, and others [18], essentially investigated the linear regime of deformation.

If now this linear regime starts to be well documented, our understanding of the nonlinear behaviors in deformations appearing at much larger laser illuminations, when reachable, is still at a very early stage. Impressive pictures of water droplets shape distortions driven by laser pulses were already presented more than 15 years ago by Zhang and Chang [15]. In their experiments, large deformations at the front and rear of a water droplet intercepted by the beam were observed with eventual free-surface disruption on the exit face under even higher illumination. Even if significant success has been achieved in the theoretical description of the weakly nonlinear regime of deformation [26,27], such a scheme, based on linear wave theory, cannot explain giant deformations and the subsequent droplet disruption.

Using very soft transparent liquid interfaces, the present research aims to give a general description of these optical radiation pressure effects. We experimentally investigate the shape and amplitude of stationary laser-induced interface deformations from the linear to the highly nonlinear regime until the onset of interface instability. Results are compared to predictions from existing models. Moreover, by investigating the curvature of interface deformations very close to the instability onset, we discuss the validity of the instability mechanism previously suggested [28]. To explore the underlying physics, we used near-critical liquid-liquid interfaces. As surface tension vanishes close to a critical point, this near-criticality offers invaluable conditions to investigate the full range in interface deformation at steady state under continuous-wave laser excitation—i.e., in conditions that are particularly favorable for quantitative investigations. By varying the interface softness with a temperature scanning and changing the size of the exciting beam, it becomes indeed possible to give a sort of universal point of view on laser-induced interface deformation. The related dynamics and the corresponding time scales close to and far from instability onset are discussed in detail in a companion article [29].

We first present in Sec. II the characteristic features of the electromagnetic radiation pressure and of the experimental setup. Section III is devoted to the theoretical and experimental results concerning static interface deformations of small amplitude (so-called “linear regime”) induced by the radiation pressure. In particular, we show that the height and shape of small-amplitude deformations do not depend on the

direction of propagation of the beam (“up-down” invariance). At large enough beam power, this up-down invariance breaks apart and the interface shapes vary with the direction of propagation of the laser beam. In Sec. IV, we study the interface instability which occurs when the incident laser beam exceeds a given power, leading to the formation of a long jet. We propose a simple mechanism of instability that accurately predicts the values of the beam power at which the instability develops. This model is based on the hypothesis that instability occurs when the maximum of the angle of incidence along the deformed interface reaches the angle of total reflection. This leads to a focusing of the incident electromagnetic energy towards the tip of the deformation and consequently to a huge increase of the radiation pressure acting on it. In order to check the validity of this instability mechanism, we measure the angle of incidence along the deformed interface at the instability threshold. We show that its maximum is noticeably smaller than the angle of total reflection, implying that only a small amount of incident electromagnetic energy is reflected towards the deformation tip at the instability threshold. In Sec. V, we finally show that a simple nonlinear numerical model of the interface deformation describes satisfactorily the observed deformations just below the instability threshold, although it does not present any numerical instability. Using this numerical computation, we explain why the model of total internal reflection, although crude, accurately predicts the beam power threshold at which the instability occurs. Finally, we conclude in Sec. VI.

II. PRINCIPLES OF THE EXPERIMENT

In this section, we first present the main characteristic features of the electromagnetic radiation pressure at the interface between two dielectric fluids. The fact that the radiation pressure is usually very weak justifies our choice of a very soft liquid interface, whose properties are presented. We end by describing the experimental setup used for deforming and visualizing deformed liquid interfaces.

A. Electromagnetic radiation pressure at an interface between two dielectric media

To figure out a simple and intuitive picture of the electromagnetic radiation pressure, let us consider the flat interface between two dielectric, nonmagnetic media labeled 1 and 2, of uniform refractive index n_1 and n_2 ($n_1 < n_2$). We assume this interface to be irradiated at normal incidence by a monochromatic light beam (frequency ν , direction of propagation along the unit vector \mathbf{u}). Since the momentum \mathbf{p} of a photon is proportional to the refractive index of the medium through which it propagates, $\mathbf{p}_i = n_i(h\nu/c)\mathbf{u}$, it varies when the photon is refracted at the interface between the two media. From Newton's second law, this variation of momentum is induced by a force exerted on the photon by the interface. Considering first the configuration of a downward beam incident from the upper, more refringent medium 2 to the lower, less refringent medium 1 [cf. Fig. 1(a)], the decrease of the photon momentum $\mathbf{p}_1 - \mathbf{p}_2 = (n_1 - n_2)(h\nu/c)\mathbf{u}$ when crossing the inter-

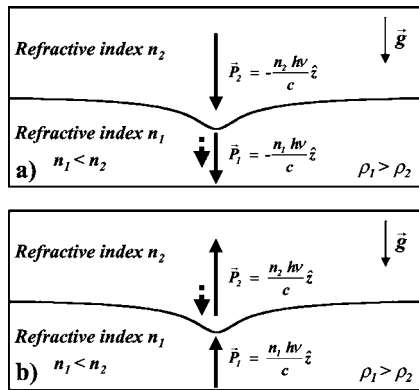


FIG. 1. Variation of photon momentum (solid arrows) at the interface between two dielectric, nonmagnetic liquids. (a) Downward propagating photon. (b) Upward propagating photon. Dotted arrows represent the momentum transferred from the photon to the interface. ρ_1 and ρ_2 are the densities of the two fluids and \vec{g} is the acceleration of gravity.

face is due to an upward force. From Newton's third law, the force exerted by the photon on the interface is its opposite—i.e., directed downward from the more to the less refringent medium. Considering now the reversed situation of an upward beam [cf. Fig. 1(b)], it is straightforward to show that the force exerted by the photon on the interface is the same, as it gains momentum when crossing the interface. This simplified corpuscular point of view shows that the direction of the force exerted on the interface by a refracted photon is independent of the direction of propagation of the electromagnetic wave.

To determine the actual radiation force exerted by the photons incident on the interface with an angle of incidence θ_i , which is equal to the opposite of the variation per unit time of their momentum, one has to take into account the proportion of refracted and reflected photons at the interface, given by the classical reflection and transmission coefficients in electromagnetic energy R and $T=1-R$ [30]. Since $n_1 \approx n_2$ in our two-fluid sample, R and T do not quantitatively depend on the polarization state of the incident wave [31]. Considering here the case of a downward beam incident from medium 2 to medium 1 with an angle of incidence, θ_i , as indicated in Fig. 2, it is shown in Appendix A that the radiation force \mathbf{f} acting on a portion of an interface of unit area is

$$\mathbf{f} = n_2 \cos^2 \theta_i \left(1 + R - \frac{\tan \theta_i T}{\tan \theta_t} \right) \frac{I}{c} \mathbf{n}_{2 \rightarrow 1}, \quad (1)$$

where I is the laser beam intensity, θ_t the angle of refraction ($n_2 \sin \theta_i = n_1 \sin \theta_t$), and $\mathbf{n}_{2 \rightarrow 1}$ is the unit vector normal to the interface and directed from medium 2 to medium 1. Since this force is always normal to the interface whatever the angle of incidence, its intensity is called the radiation pressure (hereafter noted Π). At normal incidence, \mathbf{f} simplifies to

$$\mathbf{f}(\theta_i = 0) = 2n_2 \left(\frac{n_1 - n_2}{n_1 + n_2} \right) \frac{I}{c} \mathbf{n}_{2 \rightarrow 1}. \quad (2)$$

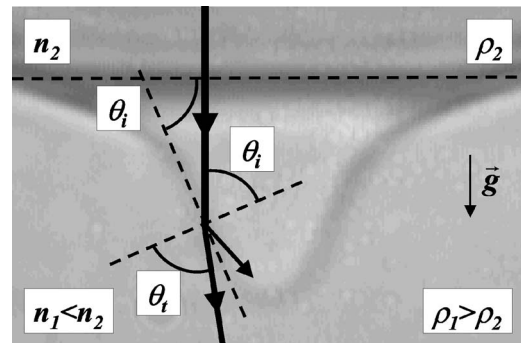


FIG. 2. Picture of the steady interface just below the instability threshold in order to illustrate the notations. The interface is deformed by a laser beam of power $P=480$ mW and waist $\omega_0 = 3.47 \mu\text{m}$, propagating downward. The sample temperature T is $41 \text{ }^\circ\text{C}$ —i.e., 6 K above the critical temperature T_c . Incidence, reflection, and transmission are illustrated by the corresponding arrows. θ_i and θ_t are, respectively, the incident and refracted angles.

Considering now the case of an upward beam incident from medium 1 to medium 2, we obtain the expression of the radiation force per unit area just by inverting indices 1 and 2 in Eq. (1). Applying this transformation to the expression for \mathbf{f} at normal incidence, Eq. (2) evidences the fact that the direction of the radiation force is independent of the beam direction (“up-down” invariance). It has to be noted that this property of the radiation pressure remains valid for any value of the angle of incidence.

Equation (2) also allows us to calculate an order of magnitude of the radiation pressure. For typical conditions—i.e., excitation by a continuous-wave laser beam of power $P = 1$ W focused on a $10\text{-}\mu\text{m}^2$ surface at an interface of index contrast 0.1—one finds 10 Pa. This intrinsically small value shows that we need to use very soft fluid interfaces in order to be able to noticeably deform them. It also illustrates why the deformation of classical interfaces (liquid free surface, for instance) is so small [9,16].

B. Fluid interface used

In order to achieve a very soft liquid interface, we consider the near-critical two-phase equilibrium state of a micellar phase of a microemulsion. The microemulsion is composed of water, oil (toluene), surfactant [sodium-dodecylsulfate (SDS)], and cosurfactant (*n*-butanol-1). For low concentrations of both water and surfactant, such a mixture organizes at thermodynamic equilibrium as a suspension of surfactant-coated water nanodroplets, the micelles, dispersed in an oil continuum. The micellar phase behaves as a binary mixture of micelles and oil. There exists a critical line of consolute points with associated reverted coexistence curves [32]. For the chosen composition (mass fractions: water, 9%, toluene, 79%, SDS, 4%, butanol, 17%), the micelle radius is $\xi_0 = 40 \text{ \AA}$ [33]. This value is small enough to let the mixture be transparent in the visible spectrum. This micellar phase of microemulsion belongs to the $d=3, n=1$ universality class of the Ising model [34]. Its critical temperature is $T_c \approx 35 \text{ }^\circ\text{C}$. Above T_c , this mixture separates in two micellar phases, la-

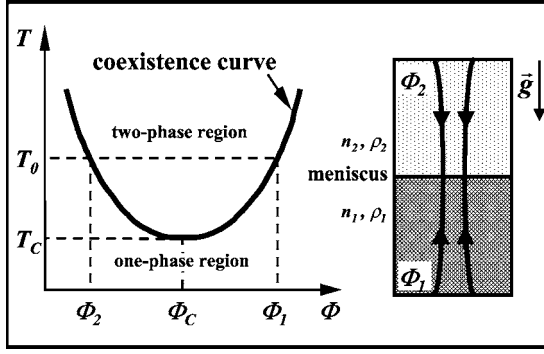


FIG. 3. Left: schematic phase diagram of the micellar phase of microemulsion for the composition described in text. ϕ is the micelle volume fraction; T is temperature. Right: corresponding representation of the phase distribution within the sample in a two-phase state ($T > T_c$).

beled 1 and 2, characterized by different concentrations of micelles ϕ_1 and ϕ_2 , as indicated by the phase diagram schematically shown in Fig. 3. In the vicinity of its consolute point, some properties of this critical two-phase mixture present scaling-law behaviors that are characteristic of the critical phenomena associated with second-order phase transitions (with $\phi_1 - \phi_2$ as the order parameter). These quantities are the volume fraction contrast

$$\phi_1 - \phi_2 = \Delta\phi_0 \left(\frac{T - T_c}{T_c} \right)^\beta, \quad (3)$$

with $\Delta\phi_0 = 1.458$ and $\beta = 0.325$; the density contrast

$$\rho_1 - \rho_2 = \Delta\rho_0 \left(\frac{T - T_c}{T_c} \right)^\beta, \quad (4)$$

with $\Delta\rho_0 = 284 \text{ kg m}^{-3}$; the refractive index contrast

$$n_1 - n_2 = \Delta n_0 \left(\frac{T - T_c}{T_c} \right)^\beta, \quad (5)$$

with $\Delta n_0 \approx (\partial n / \partial \rho)_T \Delta\rho_0$ and $(\partial n / \partial \rho)_T = -1.22 \times 10^{-4} \text{ m}^3 \text{ kg}^{-1}$; the surface tension

$$\sigma = \sigma_0 \left(\frac{T - T_c}{T_c} \right)^{2\nu}, \quad (6)$$

with $\nu = 0.63$ and $\sigma_0 = 10^{-4} \text{ J m}^{-2}$; and the capillary length

$$\ell_c = \sqrt{\frac{\sigma}{(\rho_1 - \rho_2)g}} = \ell_{c0} \left(\frac{T - T_c}{T_c} \right)^{\nu - \beta/2}, \quad (7)$$

with $\ell_{c0} = \sqrt{\sigma_0 / \Delta\rho_0 g} = 190 \text{ } \mu\text{m}$, g being the acceleration of gravity. Our motivations to use such a medium are clearly illustrated by the following reasons. At $T - T_c \sim 1 \text{ K}$, we find $\sigma \sim 10^{-7} \text{ J m}^{-2}$, an extremely low value compared to that of the water free surface, which makes the interface very soft and deformable. Another obvious advantage of such a fluid interface is the possibility to tune continuously the above-presented properties just by changing the sample temperature T .

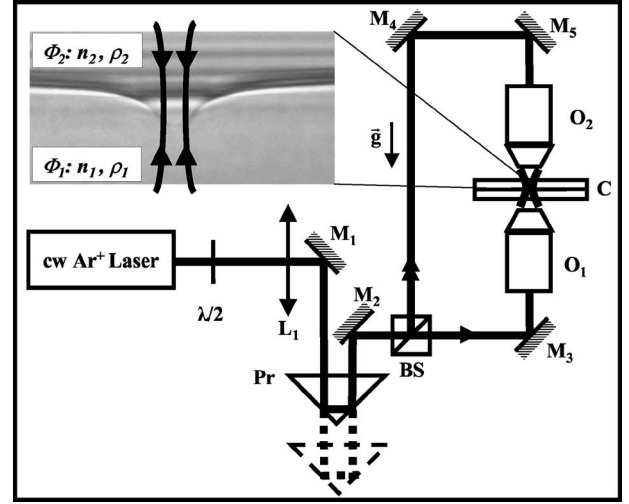


FIG. 4. Experimental setup.

C. Experimental setup

1. Laser beam tuning

Since the laser beam intensity depends on both the beam power and waist, the experimental setup, schematized in Fig. 4, is conceived so as to focus a vertical laser beam on the horizontal fluid interface in the sample cell C and to tune the beam waist ω_0 . The beam is provided by a continuous-wave Ar^+ laser (wavelength in vacuum $\lambda_0 = 514 \text{ nm}$) in the TEM_{00} mode. The lens L_1 forms a first intermediate waist. Selection of the upward or downward direction of the laser beam is achieved by turning the polarization of the laser light with a half-wave plate $\lambda/2$ and directing it using the beam splitter (BS). Beam waist tuning in C is performed by moving the prism (Pr) to vary the optical path between L_1 and the long-working-distance microscope objectives ($10\times$), either O_1 (upward beam) or O_2 (downward beam). The accessible range of the beam waists is $\omega_0 = 4.8\text{--}32.1 \text{ } \mu\text{m}$ ($\omega_0 = 3.47\text{--}11.3 \text{ } \mu\text{m}$) for an upward (downward) beam. The associated confocal parameter $Z = n\pi\omega_0^2/\lambda_0$ is always larger than $100 \text{ } \mu\text{m}$. Consequently, close to the interface, the intensity distribution $I(r, z)$ associated with the incident beam can be assumed as cylindrical along the beam axis (Oz), so $I(r, z) \approx I(r) = (2P/\pi\omega_0^2)\exp(-2r^2/\omega_0^2)$ [(r, z) are the cylindrical coordinates and P is the beam power]. As the beam waist altitude varies with the optical path between L_1 and either O_1 or O_2 , C is mounted on translation stages to precisely locate the beam waist on the interface.

2. Sample observation

The two-phase micellar microemulsion sample is contained in a hermetic transparent glass cell, whose temperature is regulated with a stability of $\pm 0.05 \text{ K}$. The phase distribution within the sample cell is shown schematically in Fig. 3 and is illustrated by the picture in Fig. 4. Interface deformations are illuminated by a white light source and are observed using a charge-coupled device (CCD) video camera. The beam path through the sample can be either observed, since some fraction of the beam intensity is scattered

by the micelles, or completely hidden by placing a colored glass filter on front of the camera.

III. LINEAR REGIME OF STATIC DEFORMATION

In order to understand why a liquid interface can be destabilized by the optical radiation pressure at a well-defined beam power onset, it is necessary to get a clear view of the physics underlying the weak-amplitude interface deformation obtained at much lower beam powers. This section is dedicated to this purpose.

Under the effect of the radiation pressure associated with the focused laser beam and after a short transient, the liquid interface presents a steady, axisymmetric bell-shaped deformation. Two examples are given in Figs. 2 and 4. The shape of the deformation results from the equilibrium between the radiation pressure, hydrostatic pressure difference, and Laplace pressure at the interface.

A. Scaling approach

As the typical length scale of optical excitation is the beam waist ω_0 , we define an optical Bond number $\text{Bo} = (\omega_0/\ell_c)^2$. Bo can be experimentally varied over a wide range, from 0.01 to 5, by independently changing the sample temperature T and the beam waist ω_0 .

On the one hand, interfacial effects overcome buoyancy effects in the $\text{Bo} \ll 1$ regime. Assuming that the hump of height h has a typical curvature radius of ω_0 , we can get an order of magnitude of h by equating the radiation pressure $P(n_2 - n_1)/c\omega_0^2$ [using Eq. (2), $I \sim P/\omega_0^2$ and $n_1 \approx n_2$] and the Laplace pressure $\sigma h/\omega_0^2$. We find $h \sim P(n_2 - n_1)/\sigma c$.

On the other hand, gravitational effects dominate interfacial effects in the $\text{Bo} \gg 1$ regime. By equating the hydrostatic pressure step at the interface $(\rho_1 - \rho_2)gh$ and the radiation pressure, we get

$$h \sim \left(\frac{\partial n}{\partial \rho} \right)_T \frac{P}{\omega_0^2 g c}.$$

Note that in the $\text{Bo} \ll 1$ regime h scales as P , whereas h scales as I in the $\text{Bo} \gg 1$ regime.

B. Linear model

The axisymmetric interface deformations are naturally described in cylindrical coordinates (r, φ, z) centered along the beam axis (Oz) by the height $h(r)$ of the deformed interface shifted from its flat position at rest or, equivalently, by the angle $\theta_i(r) = \arctan[h'(r)]$ between the deformed interface and the horizontal (see Fig. 2). Assuming that the equilibrium shape of the interface is only determined by the balance between the electromagnetic radiation pressure, the hydrostatic pressure difference, and the Laplace pressure at the interface—i.e., neglecting electrostriction [10] and thermocapillary effects [35]—the steady interface profile should be accurately described by the following equation:

$$(\rho_1 - \rho_2)gh(r) - \sigma\kappa(r) = \Pi(r, z, \theta_i), \quad (8)$$

where

$$\kappa(r) = \frac{1}{r} \frac{d}{dr} [r \sin \theta_i(r)] = \frac{1}{r} \frac{d}{dr} \left(\frac{rh'(r)}{\sqrt{1+h'^2(r)}} \right)$$

is the curvature of the interface and $\Pi(r, z, \theta_i)$ the radiation pressure given by Eq. (1).

Small-amplitude deformations are defined as those for which $|h'(r)| = |\tan \theta_i(r)| \approx |\theta_i(r)| \ll 1$. This condition has three consequences. (i) $\kappa(r) \approx (1/r)(d/dr)[rh'(r)]$. (ii) The laser beam can be considered as impinging on the interface at normal incidence. (iii) Although the beam is focused by the lens effect of the deformed interface [36], the resulting focusing is not perceptible at the deformation tip, so these beam perturbations do not modify the interface shape in turn (no propagation-deformation feedback). This means that the radiation pressure is only due to the incident, parallel laser beam: $\Pi = \Pi(r, \theta_i = 0)$. Thus, steady deformations of small amplitude should be described by the linearized expression of Eq. (8). This linear approximation leads to

$$\begin{aligned} (\rho_1 - \rho_2)gh(r) - \sigma \frac{1}{r} \frac{d}{dr} [rh'(r)] \\ = - \frac{n_i n_2 - n_1}{c} \frac{4P}{n_1 + n_2 \pi \omega_0^2} \exp\left(-\frac{2r^2}{\omega_0^2}\right), \end{aligned} \quad (9)$$

where $i=1$ ($i=2$) corresponds to an upward (downward) beam crossing the interface from medium 1 to medium 2 (from medium 2 to medium 1).

In the $\text{Bo} \gg 1$ regime, the solution of Eq. (9) is simply

$$h(r)_{\text{Bo} \gg 1} = - \left(\frac{\partial n}{\partial \rho} \right)_T \frac{n_i}{n_1 + n_2} \frac{4P}{\pi g c \omega_0^2} \exp\left(-\frac{2r^2}{\omega_0^2}\right). \quad (10)$$

Since $n_1 \approx n_2$ near criticality, the height of the hump is

$$h(r=0)_{\text{Bo} \gg 1} \approx \left(\frac{\partial n}{\partial \rho} \right)_T \frac{2P}{\pi g c \omega_0^2}, \quad (11)$$

as expected from the scaling approach. Moreover, Eq. (10) shows that the curvature radius of the hump scales as ω_0 , as assumed in the scaling approach.

In the $\text{Bo} \ll 1$ regime, the solution of Eq. (9) reads

$$\begin{aligned} h(r)_{\text{Bo} \ll 1} = - \frac{n_i n_2 - n_1}{c} \frac{P}{n_2 + n_1} \frac{1}{2\pi\sigma} \left[E_1\left(\frac{8}{\Gamma\text{Bo}}\right) - E_1\left(\frac{2r^2}{\omega_0^2}\right) \right. \\ \left. - \ln\left(\frac{\Gamma\text{Bo}}{4} \frac{r^2}{\omega_0^2}\right) \right], \end{aligned} \quad (12)$$

where E_1 is the one-argument exponential function [$E_1(x) = \int_x^{+\infty} (e^{-u}/u) du$] and $\Gamma = 1.781$ is the Euler constant. Indeed, by integrating Eq. (9) for $g=0$ ($\text{Bo}=0$), we find

$$\begin{aligned} h(r)_{\text{Bo}=0} = - \frac{n_i n_2 - n_1}{c} \frac{P}{n_2 + n_1} \frac{1}{2\pi\sigma} \left[E_1\left(\frac{\omega_{bc}^2}{\omega_0^2}\right) - E_1\left(\frac{2r^2}{\omega_0^2}\right) \right. \\ \left. - \ln\left(\frac{2r^2}{\omega_0^2}\right) \right], \end{aligned} \quad (13)$$

where ω_{bc} is a radius, large compared to ω_0 , which is defined by the boundary condition $h(r=\omega_{bc})_{\text{Bo} \ll 1} = 0$. For integration we also assumed $(\partial h_{\text{Bo} \ll 1} / \partial r)(r=0) = 0$. To determine ω_{bc} , we

solve Eq. (9) in its general form using the Fourier-Bessel transform $h(r) = \int_0^\infty \tilde{h}(k) J_0(kr) k dk$, where J_0 is the zeroth-order Bessel J function. The general expression of $h(r)$, valid for any Bo number, is

$$h(r) = -\frac{n_i n_2 - n_1 P}{c n_2 + n_1 \pi} \int_0^\infty \frac{\exp\left(-\frac{k^2 \omega_0^2}{8}\right)}{(\rho_1 - \rho_2)g + \sigma k^2} J_0(kr) k dk. \quad (14)$$

The nice aspect of Eq. (14) is that we can obtain an analytical expression of $h(r=0)$. We find

$$h(r=0) = h(r=0)_{\text{Bo} \gg 1} F(\text{Bo}), \quad (15)$$

where $F(\text{Bo})$ is given by

$$F(\text{Bo}) = \frac{\text{Bo}}{8} \exp\left(\frac{\text{Bo}}{8}\right) E_1\left(\frac{\text{Bo}}{8}\right). \quad (16)$$

We now compute the $\text{Bo} \ll 1$ limit of Eq. (15). As $E_1(x \ll 1) \approx -\ln(\Gamma x) + x$, we find

$$h(r=0)_{\text{Bo} \ll 1} \approx -\frac{n_i n_2 - n_1 P}{c n_2 + n_1 2\pi\sigma} \ln\left(\frac{8}{\Gamma \text{Bo}}\right). \quad (17)$$

Comparing the expression of $h(r=0)$ given by Eq. (13) to Eq. (17), we deduce

$$\omega_{bc} = 2\sqrt{2} \ell_c J \Gamma \quad (18)$$

and thus the expression of $h(r)$ given by Eq. (12). This exact calculation reveals the logarithmic correction to the $\text{Bo} \ll 1$ scaling law for h obtained by the scaling approach. On the other hand, as $E_1(x)_{x \rightarrow \infty} \rightarrow 0$ and $\omega_{bc}^2 / \omega_0^2 = 8 / \Gamma \text{Bo} \gg 1$, the solution of Eq. (12) close to the beam axis is written

$$h(r \ll \omega_0)_{\text{Bo} \ll 1} \approx -\frac{n_i n_2 - n_1 P}{c n_1 + n_2 2\pi\sigma} \left[\ln\left(\frac{8}{\Gamma \text{Bo}}\right) - \frac{2r^2}{\omega_0^2} \right]. \quad (19)$$

Consequently, the curvature radius of the hump scales as ω_0 .

Finally, Eqs. (11) and (15) lead to the prediction that, given any value of Bo and according to Eq. (2), the interface deformation at normal incidence; i.e., their direction, shape, and height should not depend on the direction of the beam because $n_1 \approx n_2$ (up-down invariance).

C. Comparison with experiments

We analyzed the hump height $h(r=0)$ of small-amplitude deformations, obtained using both an upward and a downward propagating beam, for several beam waists and power values, and we compared our measurements to the above-presented theoretical predictions.

Experimental validation of the scaling laws (11) and (17) in the asymptotic regimes $\text{Bo} \gg 1$ and $\text{Bo} \ll 1$ can be found in Ref. [18]. Moreover, Eqs. (15) and (16) show that the hump height $h(r=0)$ can be expressed in a synthetic fashion as a function of both $h(r=0)_{\text{Bo} \gg 1}$ and Bo. In particular, $h(r=0) \propto \text{Bo} h(r=0)_{\text{Bo} \gg 1}$ for $\text{Bo} \ll 1$. We plot in Fig. 5 the variations

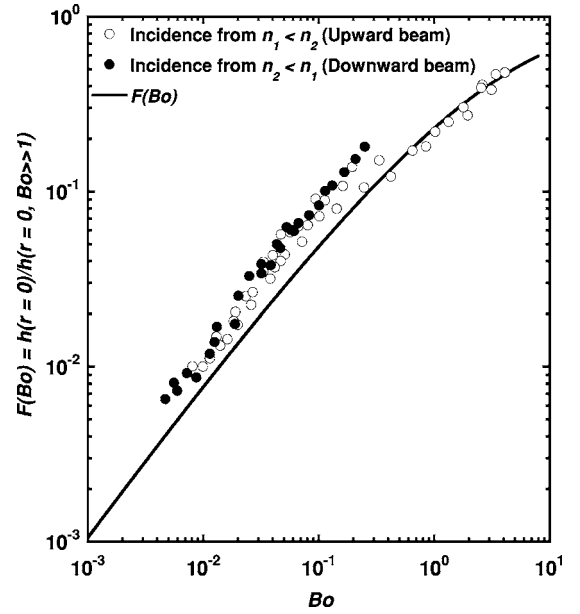


FIG. 5. Variations of the normalized hump height $h(r=0)/h(r=0)_{\text{Bo} \gg 1}$ versus the Bo number measured for both upward (\circ) and downward (\bullet) laser beams. The solid line corresponds to the function $F(\text{Bo})$ given by Eq. (16).

of the normalized hump height $\tilde{h}(\text{Bo}) = h(r=0)/h(r=0)_{\text{Bo} \gg 1}$ versus Bo, measured for both upward and downward directions of propagation of the laser beam and for all the experimentally investigated values of Bo. Both data sets collapse onto the solid line representing the behavior of $F(\text{Bo})$ predicted by Eq. (16). This agreement confirms the validity of Eqs. (15) and (16) as well as the predicted invariance of the deformation with respect to the beam direction at small deformation amplitude.

D. Beyond the linear regime: Up-down invariance breakdown

We end this section dedicated to the linear regime of deformation by characterizing the limits of this regime and, more precisely, the up-down invariance breakdown in the $\text{Bo} \ll 1$ regime. Indeed, at moderate beam power, the interface shape starts to noticeably depend on the direction of propagation of the laser beam.

Let us first consider a laser beam propagating upward. In the $\text{Bo} \ll 1$ regime and for values of the beam power of the order of $6\sigma c \omega_0 / (n_2 - n_1)$, the interface exhibits a tetherlike shape, as shown by the right-hand picture of Fig. 6, whereas the height $h(r=0)$ deviates from the linear relationship $h(r=0) \propto P(n_2 - n_1) / \sigma c$. Such shapes, which may be attributed either to the coupling between the deformation of the interface and the resulting refraction of the laser beam or to optical nonlinearity induced by electro-osmosis, shall deserve further investigation.

The situation is totally different for a laser propagating downward. By increasing progressively the beam power P , $h(r=0)$ increases first linearly with P , as described in Sec. III B. Then, $h(r=0)$ presents a sharp increase as P approaches a well-defined threshold value called P_\dagger , but re-

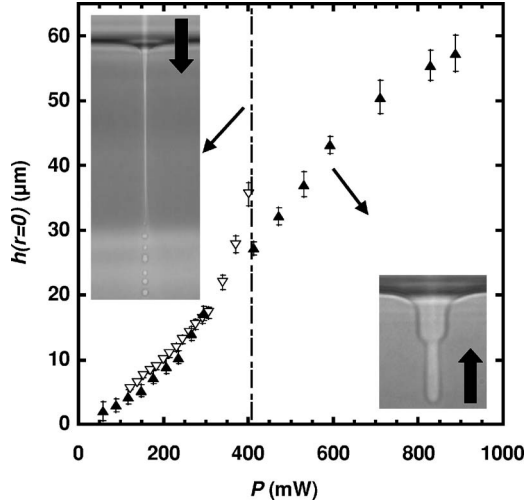


FIG. 6. Variation of the hump height $h(r=0)$ versus the beam power P when light propagates upward (\blacktriangle) and downward (∇) for $\omega_0=5.3 \mu\text{m}$ and $T-T_c=3 \text{ K}$. Right-hand picture: tetherlike shape of the interface deformation appearing for increasing P when light propagates upward. Left-hand picture: long jet observed above a beam power threshold P_\uparrow , illustrated by the dash-dotted line, when light propagates downward.

mains finite and stationary, as shown in Fig. 6. P_\uparrow is defined as the threshold value of the beam power above which the interface is no longer stable. Instability leads to the formation of a very long cylindrical jet, as shown in the left-hand picture of Fig. 6. Its diameter is of the order of ω_0 whereas its length is typically a few hundreds of micrometers. This instability threshold as well as its possible origin is the purpose of the next two sections. The physics of the jet will be the subject of a future article.

IV. INTERFACE INSTABILITY

We studied this interface instability mainly in the $\text{Bo} \ll 1$ regime, where surface effects overcome gravity effects.

A. Beam power behavior just below the instability threshold

We measured the dependance of P_\uparrow with respect to the beam waist ω_0 and temperature difference $T-T_c$ in the range $\omega_0=3.5-11 \mu\text{m}$ and $T-T_c=1.5-15 \text{ K}$, corresponding to $\text{Bo}=0.006-0.54$. P_\uparrow was determined with an accuracy of $\pm 10 \text{ mW}$. The corresponding variations of P_\uparrow versus ω_0 plotted in Fig. 7(a). For each value of $T-T_c$, P_\uparrow is found to vary linearly with ω_0 . The variation of P_\uparrow versus $T-T_c$ for $\omega_0=3.5 \mu\text{m}$ is plotted in Fig. 7(b) in log-log scales. It is found to be compatible with a power-law behavior $(T-T_c)^{1.01 \pm 0.05}$.

B. Dimensional analysis and empirical scaling law

In the $\text{Bo} \ll 1$ regime, dimensional analysis shows that $P_\uparrow/\sigma c \omega_0$ is a function of (n_2-n_1) only. Given the power-law behavior in $P_\uparrow \propto (T-T_c)^{1.01 \pm 0.05}$ shown in Fig. 7(b) and considering Eqs. (6) and (4), we can confidently assume this function to behave as a power law of n_2-n_1 : $P_\uparrow \propto \sigma c \omega_0 (n_2$

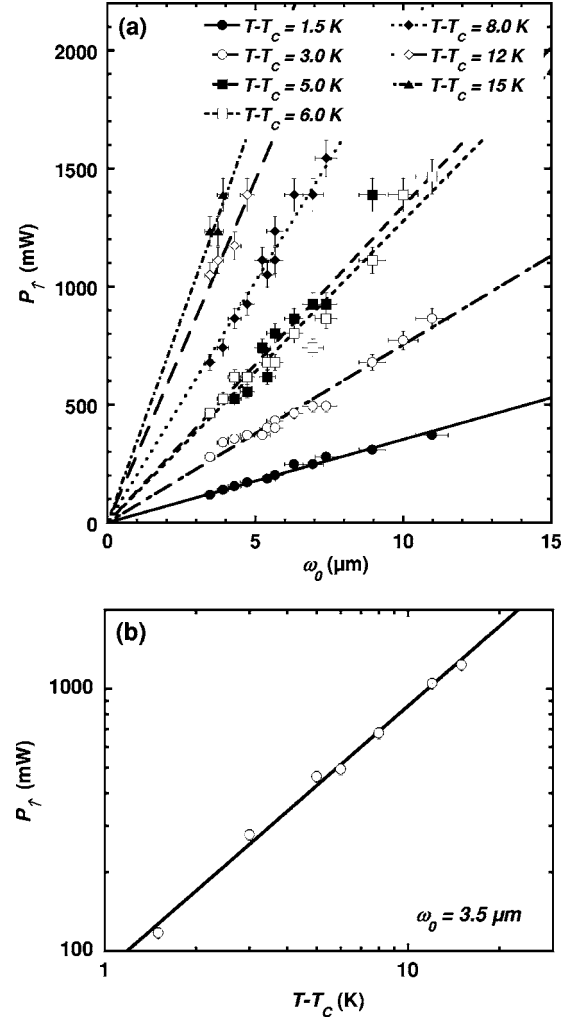


FIG. 7. (a) Variation of the beam power threshold P_\uparrow versus the beam waist ω_0 for several values of $T-T_c$. Lines represent linear fits. (b) Variation of P_\uparrow versus $T-T_c$ for $\omega_0=3.5 \mu\text{m}$ in log-log scales. The solid line is a power-law fit $P_\uparrow \sim (T-T_c)^{1.01 \pm 0.05}$.

$-n_1)^x$ and find $x=(-0.77 \pm 0.15) \approx -1$. The validity of this empirical scaling law is confirmed by the variations of the quantity $P_\uparrow(n_2-n_1)/\sigma c$ versus ω_0 shown in Fig. 8. The best linear fit of this master curve gives

$$P_\uparrow = \beta \frac{\sigma c \omega_0}{n_2 - n_1} \quad \text{with } \beta = 6.3 \pm 0.3. \quad (20)$$

C. Possible optohydrodynamic mechanism for the interface instability

As recently proposed in [28], a possible cause for the up-down invariance breakdown in the regime of large deformation could be the fact that light rays propagating downward in the phase of the largest refractive index can encounter total reflection when the laser impinges a highly deformed interface; note that no such behavior occurs when light propagates upward in the phase of the smallest optical index. Increasing P progressively, total reflection would occur first along the circle formed by the inflection points of

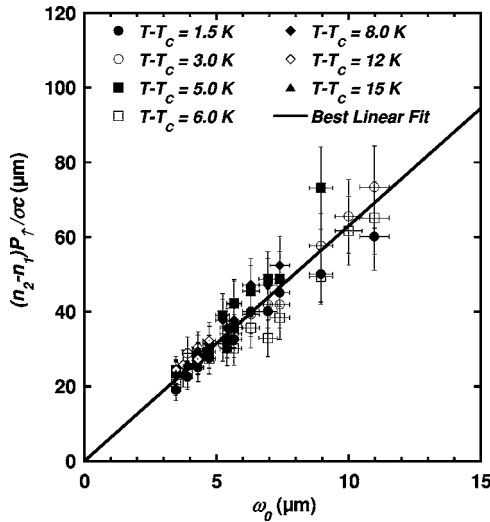


FIG. 8. Rescaling of the data set presented in Fig. 7(a) according to the scaling law given by Eq. (20). The solid line is the best linear fit.

the interface shape, where θ_i is maximum. This initially small amount of reflected light would be refocused towards the beam axis, resulting in an increase of the radiation pressure at the tip of the deformation. This pressure variation would in turn stretch the interface deformation and consequently increase the area of the part of the interface which totally reflects light. This positive feedback could thus be a realistic mechanism for this optohydrodynamic instability. As illustrated in Fig. 9, the plausibility of this mechanism is supported by the observation of light focusing within the deformation during the instability growth and the following jet formation.

This mechanism is based on the assumption that the maximum of θ_i , $\theta_{i \max}$, equals the angle of total reflection $\theta_{TR} = \arcsin(n_1/n_2)$ at the instability onset. We test the validity of

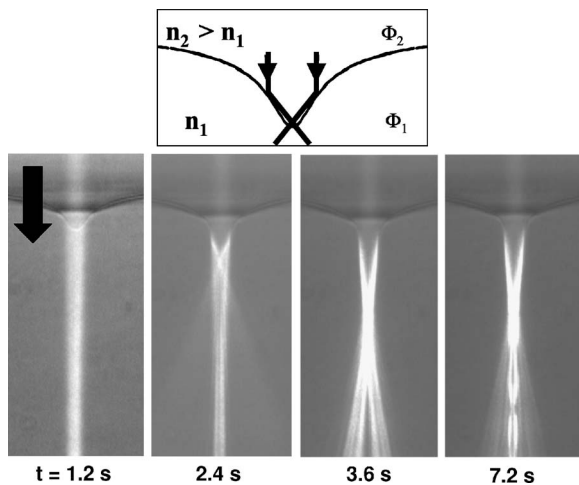


FIG. 9. Proposed mechanism at the origin of the interface instability and the jet formation at P_{\uparrow} showing optical lensing ($t = 1.2$ s) followed by total reflection of light at the edge of the deformation ($t = 2.4$ s) and the resulting optical guiding by the induced jet ($t = 3.6$ and 7.2 s). The experiment is performed at $T - T_c = 5$ K, $\omega_0 = 3.5$ μm , and $P = P_{\uparrow} = 460$ mW.

this hypothesis by measuring precisely the shape of the interface just below the instability threshold in order to determine the maximum of the incidence angle along the interface. Note that, given Eq. (5), one has

$$\theta_{TR} = \arcsin \frac{n_0 - \frac{\Delta n_0}{2} \left(\frac{T - T_c}{T_c} \right)^{0.325}}{n_0 + \frac{\Delta n_0}{2} \left(\frac{T - T_c}{T_c} \right)^{0.325}}, \quad (21)$$

where $n_0 = 1.464$. θ_{TR} is expected to vary between 85° and 82° in the investigated temperature range $T - T_c = 2 - 10$ K. These very large values arise from the small index contrast in our near-critical two-phase system.

D. Maximum angle of incidence just below the instability threshold

1. Interface shape digitization

We captured and digitized the interface profile just below the instability threshold ($|P - P_{\uparrow}| \leq 10$ mW) in the range of beam waists $\omega_0 = 3.47 - 6.95$ μm and for temperatures $T - T_c = 2 - 10$ K. In terms of Bo number, the investigated range is $\text{Bo} = 0.008 - 0.14$. Since we were interested in the slope of the interface shape, particularly around its inflection points along its sides, and since the determination of a slope is very sensitive to digitization noise, we used a special process for digitizing the interface shape. We computed the radial gradient of the raw picture (i.e., along the r axis), and then we detected the intensity maximum along each pixel line. Thus, the left and right sides of the interface deformation are defined in an unusual manner as $r_l(h)$ and $r_r(h)$, as illustrated in Fig. 10. For precision, the tip of the interface deformation is more classically obtained by computing the vertical gradient of the raw picture (i.e., along the z axis) and detecting the intensity maximum of each pixel column. It is thus defined as $h(r)$.

2. Determination of the angle of incidence around the inflection points of the interface shape

In order to precisely determine the slope of the digitized interface shape around its inflection point, we fitted each of its sides $r_l(h)$ and $r_r(h)$ using two different polynomial functions of third degree, $Q_l(h)$ and $Q_r(h)$, which exhibit a single inflection point. The angle $\theta_i(r)$ between the interface and horizontal is obtained on the left and right sides of the deformation using, respectively, $\theta_l(r)(\text{deg}) = -90 - \arctan\{(dQ_l/dh)[h(r)]\}$ and $\theta_r(r)(\text{deg}) = 90 - \arctan\{(dQ_r/dh)[h(r)]\}$ (see Fig. 10). Although we could not estimate precisely the accuracy of this method for the determination of the angle of incidence, we checked that fits using polynomial functions of higher degrees gave close values for the maximum of the angle of incidence, and we concluded that its accuracy was of the order of $\pm 2^\circ$.

3. Maximum angle of incidence just below the instability threshold

Calling $\theta_{il \max} < 0$ ($\theta_{ir \max} > 0$) the minimum (maximum) of the angle of incidence along the left (right) side of the

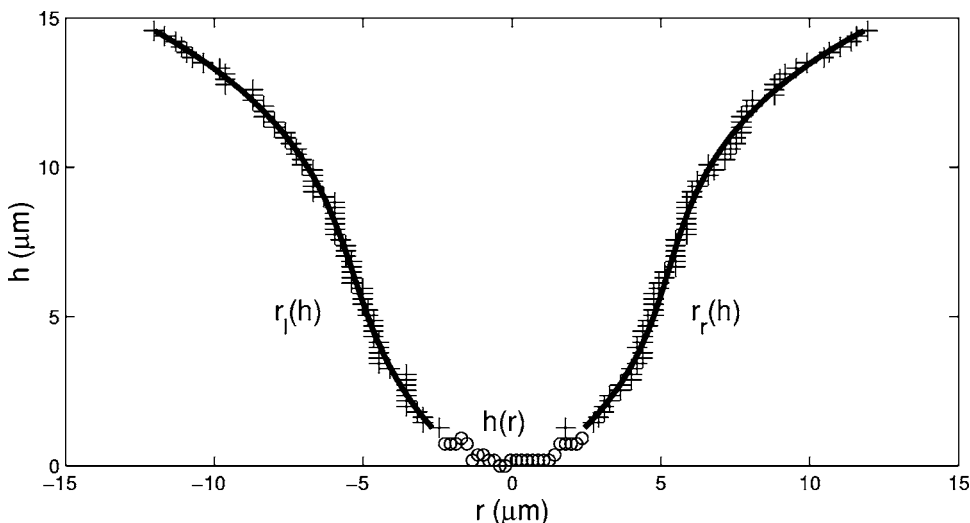


FIG. 10. Digitization of the interface shape shown in Fig. 2. (+) Digitized left and right sides of the interface shape $r_l(h)$ and $r_r(h)$. (o) Tip digitization. Solid lines are fits of $r_l(h)$ and $r_r(h)$ by polynomial functions of third degree, $Q_l(h)$ and $Q_r(h)$.

interface shape, we define the maximum angle of incidence as $\theta_{i \max} = (\theta_{ir \max} - \theta_{il \max})/2$. The variations of $\theta_{i \max}$ measured just below the instability threshold are plotted in Fig. 11 versus $T - T_c$ for several values of ω_0 , together with the variation with $T - T_c$ of the angle θ_{TR} predicted for total reflection. While $\theta_{i \max}$ is found to fluctuate around 72° with no noticeable dependence with respect to $T - T_c$, it is significantly smaller than θ_{TR} by $10^\circ - 15^\circ$.

In Fig. 12, the variations of the same measurements of $\theta_{i \max}$ are plotted as a function of ω_0 for several values of $T - T_c$. $\theta_{i \max}$ is also found to exhibit no noticeable dependence with respect to ω_0 .

E. Discussion

The $10^\circ - 15^\circ$ gap between $\theta_{i \max}$ and θ_{TR} has a dramatic incidence on the validity of the proposed mechanism which assumes that instability is triggered by total reflection of light

within the deformed interface. As a matter of fact, since $n_1 \approx n_2$, the Fresnel reflection coefficient of energy R is very small at any angle of incidence, except very close to θ_{TR} , whatever the polarization of the incident wave [31]. This is illustrated in Fig. 13(a) for the particular case of a transverse electric (TE) polarized wave. In particular, R is of the order of 10^{-3} for $\theta_i \approx 72^\circ$. As a consequence, instability occurs whereas only a very small amount of the incident energy is reflected towards the tip of the deformation. Although this instability mechanism has not to be definitely rejected, the measurements of $\theta_{i \max}$ presented in Figs. 11 and 12 indicate that the scenario leading to the interface instability is more complex.

To determine more precisely the actual influence of the reflected light on the interface shape at the instability threshold, we computed the additional contribution of the light partially reflected at the interface to the radiation pressure within the frame of geometrical optics. This computation,

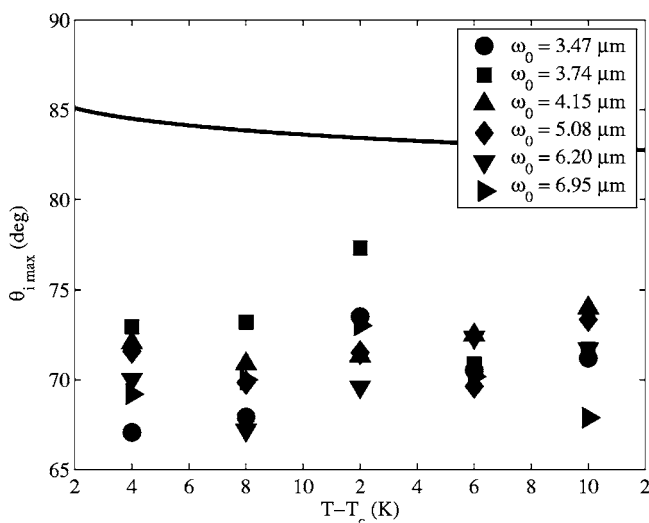


FIG. 11. Variation of the maximum angle of incidence, $\theta_{i \max}$, along the interface measured just below the instability onset versus $T - T_c$. Solid line: variation of the angle of total reflection θ_{TR} predicted by Eq. (21).

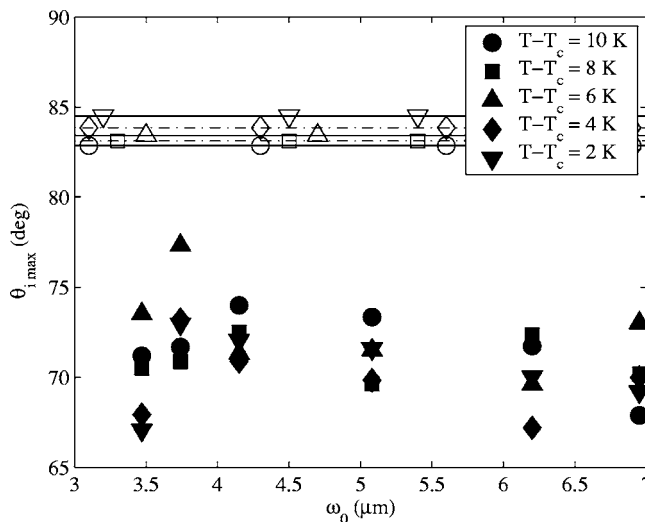


FIG. 12. Variation of the maximum angle of incidence, $\theta_{i \max}$, along the interface measured just below the instability onset versus ω_0 . The lines decorated with open symbols represent the corresponding values of the angle of total reflection θ_{TR} predicted by Eq. (21).

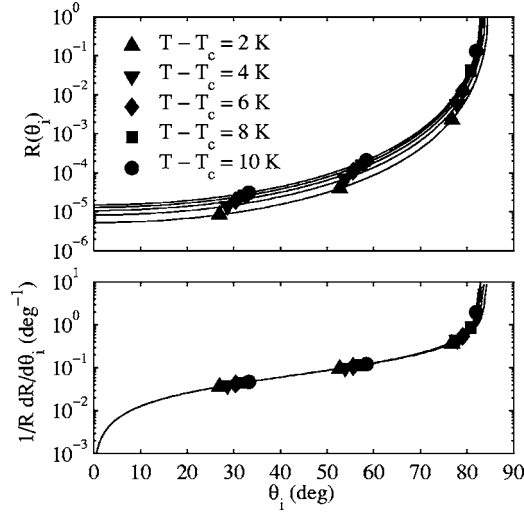


FIG. 13. (a) Energy reflection coefficient R of a TE wave at the interface as a function of its angle of incidence θ_i , for several values of $T - T_c$. Symbols are a guide for the eye. (b) Energy reflection coefficient growth rate $(1/R)dR/d\theta_i$ as a function of the angle of incidence θ_i . Symbols are the same as (a).

presented in Appendix B, shows that the additional radiation pressure contribution of the partially reflected light is indeed small compared to the radiation pressure of the incident light everywhere along the interface except very close to the beam axis, where focusing of the reflected light is probably overestimated. Consequently, the interface shape should be accurately described by considering the radiation pressure of the incident light only.

One way for retaining the idea of reflection-induced instability is inspired by Rayleigh-Bénard convection in pure fluids near the liquid-vapor critical point [37]. In such supercritical fluids, the onset of convection can be reached without increasing either the temperature difference between the top and bottom of the fluid layer or its height, but by increasing only the thermomechanical susceptibility of the fluid, its coefficient of thermal expansion at constant pressure α_p . This can be done by reducing $\langle T \rangle - T_c$ ($\langle T \rangle$ is the average sample temperature, T_c is the critical temperature). In the present experiment, the susceptibility to be considered would be the rate of variation of the Fresnel reflection coefficient in energy R with respect to θ_i , $(1/R)dR/d\theta_i$, whose behavior is plotted in Fig. 13(b). This quantity, which can be considered as the relative variation of the reflected energy when θ_i fluctuates about its steady-state value, corresponds to the susceptibility of the interface shape to angle fluctuations. As illustrated in Fig. 13(b), it increases strongly when θ_i approaches θ_{TR} and takes values comparable to unity when θ_i approaches 72° . At such values of θ_i , small fluctuations of the angle of incidence could be amplified due to the shape changes of the interface induced by the large fluctuations of reflected energy towards the tip of the deformation.

Note finally that $(1/R)dR/d\theta_i$ is actually independent of temperature (except close to θ_{RT}), in particular around $\theta_i = 72^\circ$. This can be related to the fact that $\theta_{i \max}$ at the instability threshold does not depend on temperature (see Fig. 11).

F. Summary

We proposed that interface instability could be triggered by a radiation pressure increase due to the total reflection of light towards the tip. We showed that at the instability onset, only a small amount of incident electromagnetic energy is reflected towards the tip, because the maximum angle of incidence along the deformed interface is smaller than the angle of total reflection, in contradiction with the proposed model. Consequently, if the instability mechanism still involves the light reflected towards the tip, it is more complex than previously expected. Nevertheless, assuming that the instability mechanism should be intimately linked to the interface shape close to the instability threshold, we need to know whether such a simple model as Eq. (8) describes well the interface shape close to the instability threshold and whether it can predict the onset of instability. This is the purpose of the next section.

V. STATIONARY INTERFACE DEFORMATIONS BELOW THE INSTABILITY THRESHOLD

A. Simple model valid in the $Bo \ll 1$ regime

Let us assume deformations of arbitrary amplitude caused by a downward-propagating beam. We have to take into account both the nonlinearity of the differential equation describing the interface shape and the fact that light impinges on the interface at a finite angle of incidence. Then, considering Eq. (1), Eq. (8) simplifies in the $Bo \ll 1$ regime to

$$\sigma \frac{1}{r} \frac{d}{dr} [r \sin \theta_i(r)] = -n_2 \cos^2 \theta_i \left(1 + R - \frac{\tan \theta_i T}{\tan \theta_i} \right) \times \frac{2P}{\pi \omega_0^2 c} \exp\left(-\frac{2r^2}{\omega_0^2}\right), \quad (22)$$

for incidence angles θ_i smaller than the angle of total reflection, $\theta_{RT} = \arcsin(n_2/n_1)$. Following [38], we use the dimensionless coordinates $\tilde{r} = \sqrt{2}r/\omega_0$ and $\tilde{h} = \sqrt{2}h/\omega_0$. Since

$$n_2 \cos^2 \theta_i \left(1 + R - \frac{\tan \theta_i T}{\tan \theta_i} \right) \approx 4(n_2 - n_1) \left(\frac{\cos \theta_i}{\cos \theta_i + \cos \theta_i} \right)^2$$

for $n_2 \approx n_1$, we rewrite Eq. (22) as

$$\frac{d \sin \theta_i}{d\tilde{r}} = -\frac{\sin \theta_i}{\tilde{r}} - K \left(\frac{\cos \theta_i}{\cos \theta_i + \cos \theta_i} \right)^2 e^{-\tilde{r}^2}, \quad (23)$$

where $K = 4\sqrt{2}(n_2 - n_1)P/\pi\sigma c\omega_0$. This first-order nonlinear differential equation is solved numerically with $\theta_i(r=0) = 0$ as the initial condition. The corresponding dimensionless interface profile $\tilde{h}(\tilde{r})$ is obtained by numerical integration of

$$\frac{d\tilde{h}}{d\tilde{r}} = \frac{\sin \theta_i}{\sqrt{1 - \sin^2 \theta_i}}, \quad (24)$$

with $\tilde{h}(r=0) = 0$ as the initial condition. As gravity effects are not taken into account here, Eq. (24) cannot predict accurately the absolute height of the interface deformation, but only its shape near the beam axis, where curvature effects overcome gravitational effects.

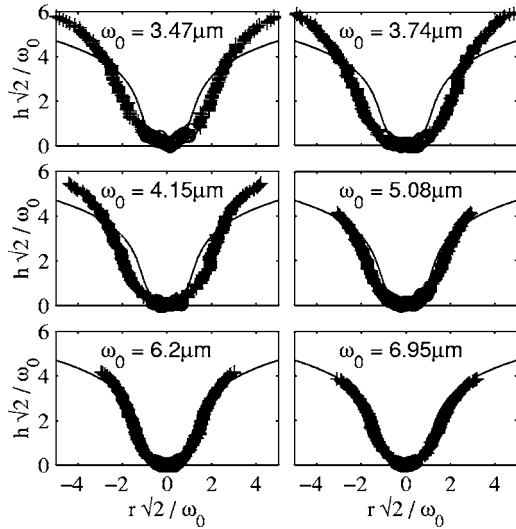


FIG. 14. Experimental interface profiles at $T - T_c = 8$ K just below the instability onset (see Fig. 10 for symbols) represented in reduced coordinates, for several values of the beam waist. Solid lines: numerical interface profiles computed from Eq. (24) so that $\theta_{i \max} = 72^\circ$.

B. Comparison with experiments just below the instability threshold

1. Comparison between expected and measured interface shapes

To reproduce numerically the measured steady interface profiles just below the instability threshold using Eq. (23), we did not use the experimental values of P_\uparrow , since they are slightly noisy (see Fig. 8). We rather choose to fix P so that the computed value of $\theta_{i \max}$ is equal to 72° , which corresponds to the average value of the maximum angle of incidence, $\theta_{i \max}$, measured just below the instability threshold (see Figs. 11 and 12).

The comparison between computed and experimental interface profiles obtained at $T - T_c = 8$ K is presented in Fig. 14. This confrontation is made in reduced coordinates and for several values of beam waists. The experimental interface shapes are found to be systematically wider than the predicted ones. However, satisfactory coincidence is met at the largest values of ω_0 , whereas disagreement is more pronounced at the smallest values of ω_0 . This trend is found for each investigated temperature. This nonlinear model of steady interface deformation can thus be confidently used to simulate the interface shapes at the instability threshold for large values of ω_0 with the aim of determining the instability mechanism. We now discuss five possible causes for the mismatch between predicted and experimental deformation shapes observed at small ω_0 .

(i) Gravity effects should appear at large values of Bo —i.e., for large values of ω_0 —and thus are to be rejected.

(ii) Thermocapillary effects, which are expected to scale as P [35]—i.e., as $P_\uparrow \propto \omega_0$ at the instability threshold [Eq. (20)]—should decrease with decreasing ω_0 and thus are to be rejected too.

(iii) Optical nonlinearity of the micellar phase of microemulsion can also be suspected to modify the index contrast

at the interface and consequently the radiation pressure field. As a matter of fact, the refractive index of a near-critical microemulsion may exhibit large nonlinearities [39], due to both divergent electrostrictive and thermodiffusive (Soret effect) variations of concentration close to the critical point [34]. The thermodiffusive contribution scales as P —i.e., increases with ω_0 at $P = P_\uparrow \propto \omega_0$ —and thus cannot explain the mismatch between the predicted and experimental deformation shapes. On the contrary, the electrostrictive contribution originates from migration of the polarizable micelles (of lower refractive index than the one of the continuous oil phase) out of the laser beam due to a force proportional to the intensity gradient. Thus, electrostriction scales as $I \propto P/\omega_0^2$ —i.e., increases as ω_0 decreases for $P = P_\uparrow \propto \omega_0$. More precisely, the corresponding variation of the concentration in micelles $\delta\phi_i$ in phase i , $i=1,2$, reads $\delta\phi_i(r) = \kappa_i \phi_i^2 (\partial n / \partial \phi)_T 2I(r) / c$, where κ_i is the osmotic compressibility at constant temperature of phase i [40]. The refractive index n_i of phase i can be expanded to leading order in $\delta\phi_i$ as $n_i(r) = n_i^L + (\partial n / \partial \phi)_T \delta\phi_i(r)$, where n_i^L is the refractive index at low intensity of phase i . Thus, $n_i = n_i^L + n_i^{NL} I(r)$, where $n_i^{NL} = \kappa_i \phi_i^2 (\partial n / \partial \phi)_T^2 2I(r) / c$. If we assume that the osmotic compressibility of each phase reduces to its critical contribution written as $\kappa_i = \kappa_{i,0} [(T - T_c) / T_c]^{-\gamma}$, where $\kappa_{i,0} = \nu_m / \phi_i k_B T$ is taken as the osmotic compressibility of an ideal mixture (ν_m is the volume of a micelle, k_B the Boltzmann constant, and $\gamma = 1.24$), then $n_1 - n_2 = n_1^L - n_2^L + (n_1^{NL} - n_2^{NL}) I(r)$ with $n_1^L - n_2^L = (\partial n / \partial \phi)_T (\phi_1 - \phi_2)$ and $n_1^{NL} - n_2^{NL} = 2\nu_m / k_B T c [(T - T_c) / T_c]^{-\gamma} (\partial n / \partial \phi)_T^2 (\phi_1 - \phi_2)$. Given $(\partial n / \partial \phi)_T < 0$, we deduce that $n_1^L - n_2^L$ and $n_1^{NL} - n_2^{NL}$ are of opposite signs. Consequently, the electrostrictive contribution to the optical nonlinearity should lead to a reduction of the index contrast; i.e., the actual deformation height should be smaller than the one predicted using Eq. (23)—i.e., without any optical nonlinearity. Figure 14 shows that it is never the case. Thus, optical nonlinearities are probably not responsible for the mismatch between predicted and experimental deformation shapes.

(iv) The interface tip could be deformed by the additional radiation pressure contribution of the light partially reflected at the interface. Dimensional analysis shows that, in the $\text{Bo} \ll 1$ regime, the resulting perturbation of the angle of incidence should be a function of P/P_\uparrow and $(n_2 - n_1)$ only—i.e., of $(n_2 - n_1)$ only at the instability threshold ($P = P_\uparrow$). However, the interface shape mismatch between experiment and numerical simulation was not found to depend on temperature. Moreover, it is shown in Appendix B that the amount of reflected energy at the instability threshold is very small and results in a very weak additional contribution to the radiation pressure. Consequently, this assumption also has to be rejected.

(v) Finally, the migration of the micelles out of the beam due to electrostriction may change the interfacial tension at the tip (Marangoni effect). Writing the micelles concentration contrast as $\phi_1 - \phi_2 = \phi_1^L - \phi_2^L + \delta\phi_1 - \delta\phi_2$, where $\phi_1^L - \phi_2^L$ is defined by Eq. (3), and using the same assumption for the osmotic compressibility as above,

$$\delta\phi_1 - \delta\phi_2 = \frac{\nu_m}{k_B T} \left(\frac{T - T_c}{T_c} \right)^{-\gamma} (\phi_1^L - \phi_2^L) \frac{2I(r)}{c},$$

i.e., has the same sign as $\phi_1^L - \phi_2^L$. Consequently, electrostriction is likely to increase the micelle concentration contrast. The two-phase system should be moved away from the critical line, the interfacial tension should increase at the tip, and the resulting deformation should be lowered. This is in contradiction with Fig. 14. Thus, the Marangoni effect should not be able to explain the mismatch between the predicted and experimental deformation shapes.

Having confronted the experimental and computed interface shapes just below the instability threshold, we now compare the experimental and computed beam power thresholds P_\uparrow required to trigger the instability.

2. Comparison between experimental and computed threshold values of the beam power just below the instability threshold

Since the maximum angle of incidence just below instability threshold is smaller than the angle of total reflection, one would expect that the simple model of total internal reflection induced instability presented in Sec. IV C, which assumes that onset corresponds to $\theta_{i \max} = \theta_{TR}$, would predict too large threshold values for the beam power P_\uparrow at the onset. This is not the case.

Indeed, we first note that Eq. (23) is numerically stable for $\theta_{i \max} > 72^\circ$, in fact up to $\theta_{i \max} = \theta_{TR}$, whereas interface shapes are experimentally found to be unstable for $\theta_{i \max} \approx 72^\circ$. Consequently, Eq. (23) does not contain the mechanism of optohydrodynamic instability of the interface explaining an instability onset at $\theta_{i \max} \approx 72^\circ$.

Let us compute the threshold value P_{TR} of the beam power P at which the maximum of the function $\theta_i(r)$, the solution of Eq. (22), reaches θ_{TR} . The analytic solution of a linearization of Eq. (22) gives $P_{TR} = 6.9\sigma c \omega_0 / (n_2 - n_1)$ [28], whereas the numerical solution of Eq. (23) gives $P_{TR} = 6.5\sigma c \omega_0 / (n_2 - n_1)$. Both theoretical prefactors of these theoretical scaling laws are very close to the experimental prefactor given in Eq. (20) (relative differences less than 10% and 3%, respectively).

Let us now compute the value P_{72° of the beam power P at which the maximum of the function $\theta_i(r)$ solution of Eq. (23), $\theta_{i \max}$, reaches 72° . We find that the relative difference between P_{TR} and P_{72° decreases from 3.4% at $T - T_c = 2$ K to 2.4% at $T - T_c = 10$ K. The difference between P_{TR} and P_{72° is in fact smaller than the experimental uncertainty in the P_\uparrow measurements. Consequently, whereas the maximum angle of incidence along the interface $\theta_{i \max}$ is experimentally found to be distinctly closer to 72° than to θ_{TR} at the instability onset, the measured beam power threshold P_\uparrow , which actually coincides with P_{72° , can be confounded with the power threshold P_{TR} predicted by the model of total internal reflection induced instability. This explains why a quantitative agreement was found between the measured beam power thresholds P_\uparrow and the model of total internal reflection induced instability presented in Sec. IV C, which basically overestimates P_\uparrow .

VI. CONCLUSION

Using a soft interface between the coexisting phases of a near-critical fluid mixture, we studied the interface deformations induced by the electromagnetic radiation pressure of a focused cw laser beam. By varying the sample temperature, the power, and the waist of the beam and making use of the universal power-law behaviors of the physical properties of the mixture, we showed in Sec. III B that the shapes of the deformations result principally from the equilibrium between the radiation pressure, the hydrostatic pressure difference, and the Laplace pressure at the interface. Using a simple linear model of static equilibrium of the interface [Eq. (9)], we were able to explain the observed hump height variations for any value of the Bond number Bo in the linear regime of deformation. Furthermore, we showed that the deformations were independent of the direction of propagation of the laser. The linear regime of deformation seems to be thus well understood.

When the laser propagates from the more to the less refringent phase and at moderate beam power, we observed an instability of the interface leading to the formation of a long jet acting as a waveguide for the laser beam. We proposed in Sec. IV C that the total internal reflection of the incident light on the highly deformed interface could be at the origin of this instability. Using a simple nonlinear model of static equilibrium of the interface taking into account the radiation pressure of the incident light only [Eq. (23)], we could explain the observed beam power threshold of the instability as well as the deformation tip shapes for the larger waists observed just below the instability onset. According to this model, the instability should occur when the interface slope reaches the angle of total reflection, θ_{TR} . We measured the maximum incidence angle along the interface, $\theta_{i \max}$, just below the instability threshold and found that it was significantly smaller than θ_{TR} . Furthermore, Eq. (23) does not present any unstable behavior up to $\theta_{i \max} = \theta_{TR}$. Thus, we are in a paradoxical situation; i.e., we can satisfactorily model the interface shape just below the instability threshold, whereas the theoretical model [Eq. (23)] we use does not contain any instability mechanism. To definitely determine the relevance of this model of reflection-induced instability, a numerical study of the stability of the deformed interface should be developed by including the additional radiation pressure contribution of the light partially reflected at the interface. It should couple a fully nonlinear and unsteady two-phase hydrodynamic model of the interface dynamics and the computation of the propagation of electromagnetic waves through the interface between both dielectric liquids.

ACKNOWLEDGMENTS

The authors thank W. Zhang for fruitful discussions. They also thank M. Winckert and J. Plantard for technical assistance. This work was partly supported by Centre National de la Recherche Scientifique and Conseil Régional d'Aquitaine.

APPENDIX A: SIMPLE DETERMINATION OF THE RADIATION FORCE AT ANY ANGLE OF INCIDENCE

The aim of this appendix is to compute the radiation force acting on an interface under any angle of incidence. We con-

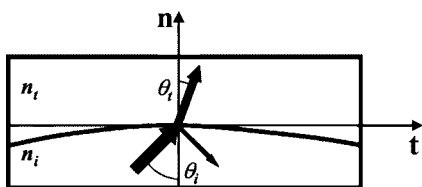


FIG. 15. Schematics used for the calculation of the radiation force exerted by a laser beam on an interface separating two dielectric fluids characterized by the refractive indices n_i and n_t . θ_i and θ_t are, respectively, the incidence and refracted angles. \mathbf{t} and \mathbf{n} are the tangent and normal directions at the location where the beam impinges the interface.

consider two dielectric media, separated by an interface of arbitrary shape, with different refractive indices n . The indices i and t refer to incidence and transmission, and θ_i and θ_t are, respectively, the incident and transmission angles. The momentum carried by the incident light is not necessarily conserved when the beam crosses the interface separating these two dielectrics. The resulting discontinuity in momentum gives birth to the radiation pressure applied to the interface. Let us call \mathbf{t} and \mathbf{n} the tangent and normal directions to the interface at the location where the light impinges the interface (see Fig. 15). We deduce the following properties: (i) an incident photon gives the momentum $(n_i h\nu/c)(\sin \theta_i \mathbf{t} + \cos \theta_i \mathbf{n})$ to the interface, (ii) a reflected photon picks the momentum $(n_i h\nu/c)(\sin \theta_i \mathbf{t} - \cos \theta_i \mathbf{n})$ to the interface, and (iii) a transmitted photon picks the momentum $(n_t h\nu/c) \times (\sin \theta_t \mathbf{t} + \cos \theta_t \mathbf{n})$ to the interface. To calculate the radiation pressure associated with a light beam, we denote N as the number of photons impinging the interface per unit time and unit surface area and $R(\theta_i, \theta_t)$ and $T(\theta_i, \theta_t) = 1 - R(\theta_i, \theta_t)$ the classical Fresnel coefficients of reflection and transmission of electromagnetic energy. Consequently, the momentum variation $d\mathbf{Q}$ of the photons incident on an interface element of area dS during the time dt is $d\mathbf{Q} = d\mathbf{Q}_t + d\mathbf{Q}_n$, where t and n denote, respectively, its components in the \mathbf{t} and \mathbf{n} directions:

$$\begin{aligned} d\mathbf{Q} &= d\mathbf{Q}_t + d\mathbf{Q}_n \\ &= [n_i \sin \theta_i - (R n_i \sin \theta_i + T n_t \sin \theta_t)] \frac{Nh\nu}{c} dS dt \mathbf{t} \\ &\quad + [n_i \cos \theta_i - (-R n_i \cos \theta_i + T n_t \cos \theta_t)] \frac{Nh\nu}{c} dS dt \mathbf{n}. \end{aligned} \quad (\text{A1})$$

Accordingly, $d\mathbf{Q}_t$ reads

$$d\mathbf{Q}_t = [n_i \sin \theta_i (1 - R) - n_t \sin \theta_t T] \frac{Nh\nu}{c} dS dt \mathbf{t}. \quad (\text{A2})$$

As $n_i \sin \theta_i = n_t \sin \theta_t$, $d\mathbf{Q}_t = \mathbf{0}$. There is no momentum transfer parallel to the interface. Consequently, one has

$$d\mathbf{Q} = d\mathbf{Q}_n = n_i \cos \theta_i \left(1 + R - \frac{\tan \theta_i T}{\tan \theta_t} \right) \frac{Nh\nu}{c} dS dt \mathbf{n}. \quad (\text{A3})$$

Classically, the laser intensity I is defined as $I = N_0 h\nu$, where N_0 is the flux of photons through the beam section. As the incident wave is tilted by an angle θ_i at the interface, one gets $N = N_0 \cos \theta_i$. We deduce that the radiation force \mathbf{f} acting on a portion of interface of unit area is given by

$$\mathbf{f} = n_i \cos^2 \theta_i \left(1 + R - \frac{\tan \theta_i T}{\tan \theta_t} \right) \frac{I}{c} \mathbf{n}. \quad (\text{A4})$$

Consequently, \mathbf{f} is always normal to the interface. Moreover, by considering the expressions of the reflection and transmission coefficients R and T [30], it can be easily shown that the optical radiation force is directed towards the dielectric medium of the lowest refractive index.

APPENDIX B: COMPUTATION OF THE ADDITIONAL CONTRIBUTION TO THE RADIATION PRESSURE OF THE LIGHT PARTIALLY REFLECTED AT THE INTERFACE WITHIN THE FRAME OF RAY OPTICS

The aim of this appendix is to compute the additional radiation pressure acting on the interface due the light partially reflected at the interface just below the instability threshold. The exact computation of the electromagnetic field along the interface resulting from diffraction and one or several partial reflections requires a heavy numerical effort. Instead, we propose to evaluate at each point A_1 along the interface, the contributions to the radiation pressure (i) of the light directly incident (called hereafter the direct ray) and (ii) of the light having previously been reflected once at another point A_2 along the interface (called hereafter the reflected rays). Making use of the laws of ray optics, this approximate evaluation should give at least some physical insights into the contribution of partial reflection to radiation pressure.

The procedure is the following. We consider an interface deformation just below the instability threshold. Taking account of the conclusions of Sec. IV E, we suppose that the additional contribution to the radiation pressure of the light partially reflected at the interface is small compared to the radiation pressure due to the incident beam. So, following the conclusions of Sec. V B, we use Eq. (24) as a realistic model of interface shape just below the instability threshold, although Eq. (24) does obviously not contain the mechanism of instability. We determine the direct and reflected rays reaching each point of this interface. We finally compute the associated radiation pressure. This procedure is valid as long as the additional radiation pressure due to the reflected light is small compared to the radiation pressure due to the incident beam (perturbation method).

1. Selection of rays using ray optics

Let us consider the point A_1 of the deformed interface, defined by the radius r_1 and the height $h_1 = h(r_1)$. A ray incident on point A_2 of the interface [of radius r_2 , height h_2

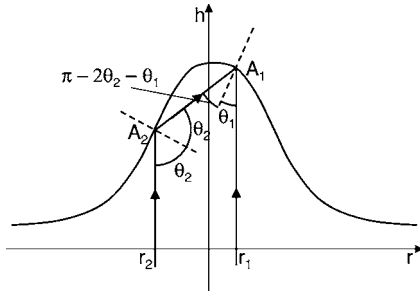


FIG. 16. Geometry of the radiation pressure contribution of light partially reflected at the interface. A_1 is reached by a direct incident ray and a ray having been previously reflected in A_2 .

$=h(r_2)$ is partially reflected towards A_1 if (i) the following geometrical condition is satisfied [41]:

$$\frac{h_1 - h_2}{r_1 - r_2} = \tan\left(2\theta_2 - \frac{\pi}{2}\right), \quad (\text{B1})$$

where $\theta_2 = \theta_i(r_2)$ is the angle of incidence of the incident ray in A_2 , $2\theta_2 - \pi/2$ being the angle between the reflected ray and horizontal, and (ii) the ray joining A_2 to A_1 propagates in the phase of refractive index n_2 (see Fig. 16).

Knowing the interface shape $h(r)$, we solve numerically these two conditions at each point A_1 of the interface. The reflected rays incident on the left side ($r < 0$) of a particular interface profile are plotted in Fig. 17(a). An enlarged view of the tip of the deformation is presented in Fig. 17(b). For $r < -3 \mu\text{m}$ [area 1 in Fig. 17(a)], each point A_1 of the left-hand half-interface is reached by both a direct ray (not represented) and a reflected ray coming from a point A_2 of the facing, right-hand half-interface ($r > 0$). For $-3 \mu\text{m} < r < -0.3 \mu\text{m}$ [area 2 in Fig. 17(b)], each point A_1 of the left-hand half-interface is reached by a second reflected ray coming from a point A_2 of the facing half-interface that is very close to the interface tip. For $-0.3 \mu\text{m} < r < 0$ [area 3 in Fig. 17(b)], each point A_1 of the interface is also reached by two additional reflected rays coming from two points A_2 of the left-hand half-interface (i.e., such that $r_2 < 0$). This segmentation of the interface in different areas as a function of the number of reflected rays reaching them evidences the complexity of computing the additional radiation pressure due to reflected light.

2. Computation of the additional radiation pressure due to reflected light

After determination of the reflected rays involved in the additional radiation pressure, we are able to compute the radiation pressure associated with these rays. A ray partially reflected at point A_2 impinges the interface at point A_1 with an angle of incidence equal to $\pi - 2|\theta_2| - |\theta_1|$, where $\theta_1 = \theta_i(r_1)$ is the angle between the horizontal and interface in A_1 . The intensity $I'(r_1)$ of this ray incident at point A_1 after partial reflection at point A_2 is

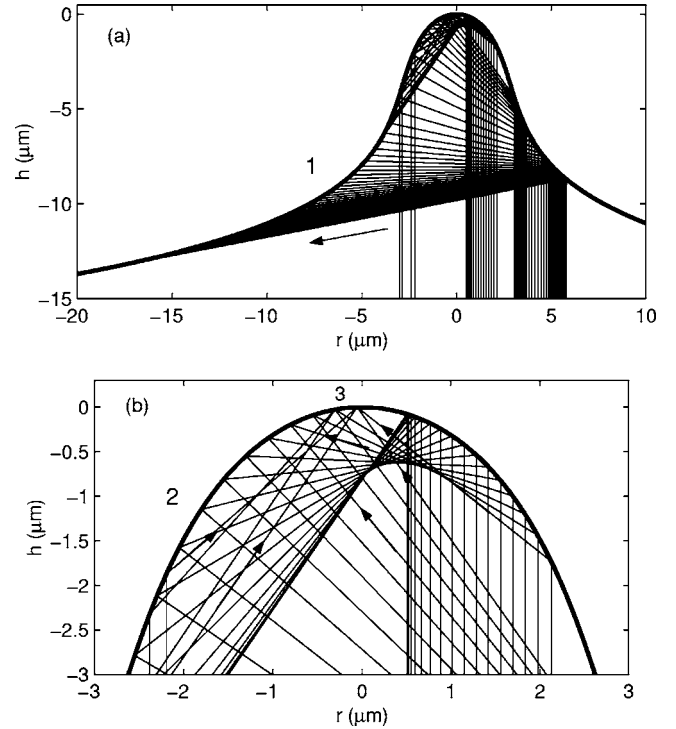


FIG. 17. Shape of an interface at $T - T_c = 10$ K deformed by a $\omega_0 = 3.47 \mu\text{m}$, $P = 822$ mW laser beam, computed using Eq. (23). The light rays reaching regularly spaced points of the left-hand half interface after one reflection are represented. (a) Wide view of the interface. 1 labels the family of points of the interface reached by only one reflected ray. (b) Enlarged view of the interface tip. 2 (3) labels the family of points of the interface reached by two reflected rays (four).

$$I'(r_1) = \frac{r_2}{r_1} I(r_2) R(\theta_2), \quad (\text{B2})$$

where $I(r_2)$ is the intensity of the direct ray incident at point A_2 and $R(\theta_2)$ is the energy reflection coefficient of the ray incident at point A_2 . Since $R(\theta_2) \ll 1$ and $I(r)$ rapidly decreases with r , $I'(r_1)$ can be large compared to the intensity $I(r_1)$ of the direct ray only if (i) r_2/r_1 is large—i.e., at points A_1 close to the beam axis (the divergence at $r_1 = 0$ is an artifact of geometrical optics that should be smeared out by diffraction)—or if (ii) $r_2 \ll r_1$ —i.e., at high irradiance $I(r_2)$.

Finally, the additional radiation pressure due to reflected light of intensity $I'(r)$ is computed using Eq. (1). In Fig. 18 both the radiation pressure Π due to the incident beam of intensity $I(r)$ and the additional radiation pressure Π' due to the reflected light of intensity $I'(r)$ are plotted versus r for the left-hand half-interface used in Fig. 17. Several remarks can be made.

The most important one is that Π' is found to be much smaller than Π for $|r| < 10 \mu\text{m}$, as assumed by this perturbation method, except very close to the beam axis, where the divergence of Π' is due to an abusive use of ray optics. This explains why Eq. (24) accurately reproduces the experimental interface shapes (at least for small beam waists), although it does not take into account the additional radiation pressure

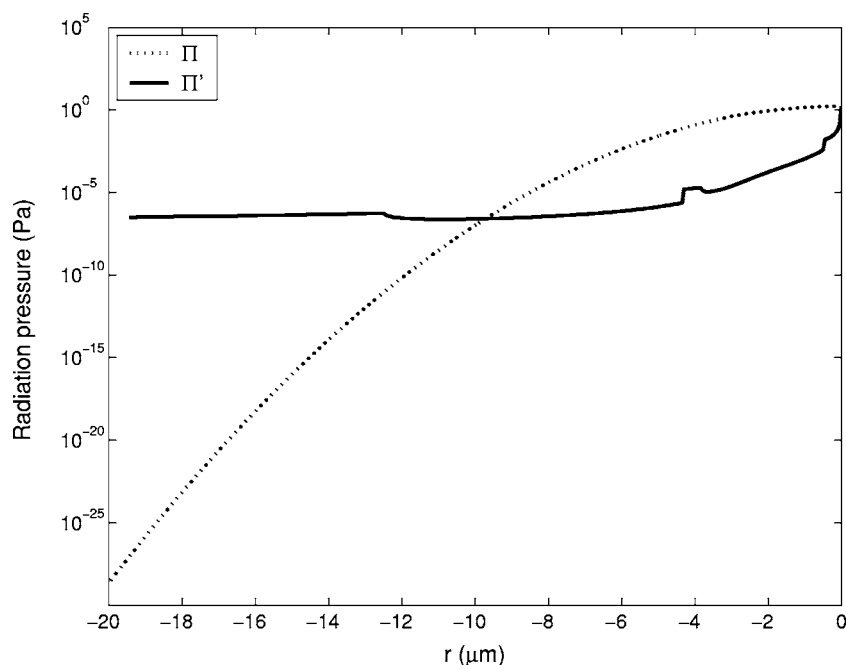


FIG. 18. Radiation pressure contributions acting on the interface shown in Fig. 17. Π is the contribution of the direct incident light, whereas Π' is the contribution of the light having been previously reflected one time at the interface.

due to reflected light. Moreover, Π' is found to be much larger than Π for $|r| > 10 \mu\text{m}$ because $|r_2| \ll |r_1|$ —i.e., $I(r_2) \gg I(r_1)$. However, for $|r| > 10 \mu\text{m}$ the total radiation pressure is very small (less than 10^{-5} Pa).

Second, the steep variations of $\Pi'(r)$ are due either to the total reflection at point A_1 of the reflected ray or to the contribution of an additional reflected ray as $|r|$ decreases, corresponding to the transition from area 1 (2) to area 2 (3), as described in subsection 1.

The next step of this procedure would be to compute the interface shape resulting from the radiation pressure of both direct and reflected rays and to iterate the computation of the

radiation pressure field (procedure of the Hartree-Fock type) in order to investigate whether it leads to instability. The nonrealistic divergence of the light intensity at the hump tip nonetheless makes this iteration irrelevant.

To summarize this appendix, we showed using ray optics that, close to the beam axis, the additional radiation pressure due to the light partially reflected on the interface is small compared to the radiation pressure due to the incident laser beam. Thus, if the jetting instability is actually due to the light focusing at the tip, a model taking into account diffraction is necessary to evaluate it.

[1] J. C. Maxwell, *A Treatise on Electricity and Magnetism* (Dover, New York, 1954).
 [2] R. Loudon, *Fortschr. Phys.* **52**, 1134 (2004).
 [3] M. Mansuripur, *Opt. Express* **12**, 5375 (2004).
 [4] A. Feigel, *Phys. Rev. Lett.* **92**, 020404 (2004); R. Schützhold and G. Plunien, *ibid.* **93**, 268901 (2004); A. Feigel, *ibid.* **93**, 268902 (2004); B. A. van Tiggelen and G. L. J. A. Rikken, *ibid.* **93**, 268903 (2004); A. Feigel, *ibid.* **93**, 268904 (2004).
 [5] P. Lebedev, *Ann. Phys.* **6**, 433 (1901).
 [6] E. F. Nichols and G. F. Hull, *Phys. Rev.* **17**, 26 (1903).
 [7] J. H. Poynting, *Philos. Mag.* **9**, 393 (1905); *The Pressure of Light* (Society for the Propagation of Christian Knowledge, London, 1910).
 [8] J. J. Thomson, *Electricity and Magnetism* (Constable, London, 1904).
 [9] A. Ashkin and J. M. Dziedzic, *Phys. Rev. Lett.* **30**, 139 (1973).
 [10] I. Brevik, *Phys. Rep.* **52**, 133 (1979).
 [11] R. Loudon, *J. Mod. Opt.* **49**, 821 (2002).
 [12] Y. N. Obukhov and F. W. Hehl, *Phys. Lett. A* **311**, 277 (2003).
 [13] J. P. Gordon, *Phys. Rev. A* **8**, 14 (1973).
 [14] G. V. Ostrovskaya, I. I. Komissarova, and E. N. Shedova, *Opt. Commun.* **66**, 15 (1987).
 [15] J. Z. Zhang and R. K. Chang, *Opt. Lett.* **13**, 916 (1988).
 [16] K. Sakai, D. Mizuno, and K. Takagi, *Phys. Rev. E* **63**, 046302 (2001).
 [17] K. Sakai, K. Tachibana, S. Mitani, and K. Takagi, *J. Colloid Interface Sci.* **264**, 446 (2003).
 [18] A. Casner and J. P. Delville, *Phys. Rev. Lett.* **87**, 054503 (2001).
 [19] S. Mitani and K. Sakai, *Phys. Rev. E* **66**, 031604 (2002).
 [20] A. Ashkin, *Proc. Natl. Acad. Sci. U.S.A.* **94**, 4853 (1997).
 [21] M. I. Angelova, B. Pouligny, G. Martinot-Lagarde, G. Gréhan, and G. Gouesbet, *Prog. Colloid Polym. Sci.* **97**, 293 (1994).
 [22] A. Richert, S. Hénon, G. Le Normand, and F. Gallet, *Biophys. J.* **76**, 1145 (1999).
 [23] C. L. Guo, C. H. Lee, and J. Wang, *Opt. Lett.* **23**, 307 (1998).
 [24] J. Guck, R. Ananthakrishnan, T. J. Moon, C. C. Cunningham, and J. Käs, *Phys. Rev. Lett.* **84**, 5451 (2000); *Biophys. J.* **81**, 767 (2001).
 [25] C. H. Lee, W. C. Lin, and J. Wang, *Phys. Rev. E* **64**,

- 020901(R) (2001).
- [26] H. M. Lai, P. T. Leung, K. L. Poon, and K. Young, *J. Opt. Soc. Am. B* **6**, 2430 (1989).
- [27] I. Brevik and R. Kluge, *J. Opt. Soc. Am. B* **16**, 976 (1999).
- [28] A. Casner and J. P. Delville, *Phys. Rev. Lett.* **90**, 144503 (2003).
- [29] R. Wunenburger, A. Casner, and J. P. Delville, following paper, *Phys. Rev. E* **73**, 036315 (2006).
- [30] M. Born and E. Wolf, *Principles of Optics*, 6th ed. (Pergamon, Oxford, 1980).
- [31] A. Casner, J. P. Delville, and I. Brevik, *J. Opt. Soc. Am. B* **20**, 2355 (2003).
- [32] J. Meunier, A. M. Cazabat, D. Langevin, and A. Pouchelon, *J. Phys. (France) Lett.* **43**, L-89 (1982).
- [33] E. Freysz, Ph.D. thesis, no. 976, Bordeaux I University, 1990.
- [34] B. Jean-Jean, E. Freysz, A. Ducasse, and B. Pouligny, *Europhys. Lett.* **7**, 219 (1988).
- [35] J. P. Longtin, K. Hijikata, and K. Ogawa, *Int. J. Heat Mass Transfer* **42**, 85 (1999).
- [36] A. Casner and J. P. Delville, *Opt. Lett.* **26**, 1418 (2001).
- [37] X. Chavanne, Ph.D. thesis, Joseph Fourier University, 1997; A. B. Kogan, D. Murphy, and H. Meyer, *Phys. Rev. Lett.* **82**, 4635 (1999).
- [38] H. M. Lai, *Phys. Rev. Lett.* **92**, 049401 (2004).
- [39] E. Freysz, M. Afifi, A. Ducasse, B. Pouligny, and J. R. Lalanne, *J. Phys. (France) Lett.* **46**, L-181 (1985).
- [40] S. Buil, E. Hugonnot, and J. P. Delville, *Phys. Rev. E* **63**, 041504 (2001).
- [41] M. D. Betterton, *Phys. Rev. E* **63**, 056129 (2001).