ELSEVIER

### Contents lists available at ScienceDirect

## Talanta

journal homepage: www.elsevier.com/locate/talanta



## Corrigendum

# Corrigendum to "Vanadium doped tin dioxide as a novel sulfur dioxide sensor" [Talanta 75 (2008) 385–389]

S. Das<sup>a</sup>, S. Chakraborty<sup>a</sup>, O. Parkash<sup>b</sup>, D. Kumar<sup>b</sup>, S. Bandyopadhyay<sup>c</sup>, S.K. Samudrala<sup>c</sup>, A. Sen<sup>a,\*</sup>, H.S. Maiti<sup>a</sup>

- <sup>a</sup> Sensor and Actuator Division, Central Glass and Ceramic Research Institute, Kolkata 700032, India
- <sup>b</sup> Department of Ceramic Engineering, Institute of Technology, Banaras Hindu University, Varanasi 221005, India
- <sup>c</sup> School of Materials Science and Engineering, University of New South Wales, Sydney, Australia

### ARTICLE INFO

Article history: Available online 17 July 2009

The authors regret that Fig. 1a and b were incorrect in the published manuscript. Please find below the corrected Fig. 1.

The authors also regret that in the Experimental section, in the first line of the second paragraph, "The particle morphology of the powders was observed using a scanning electron microscope (Leo, 30i) after ultrasonically dispersing the powder in acetone" should read as "The particle morphology of the powders was observed using a transmission electron microscope (FEI Tecnai 30 STG<sup>2</sup>) after ultrasonically dispersing the powder in acetone".

The authors would like to apologise for any inconvenience this may have caused to the readers of the journal.

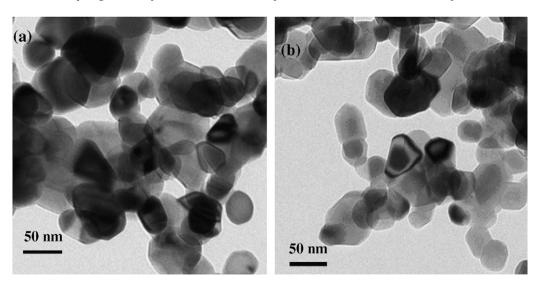


Fig. 1.

DOI of original article: 10.1016/j.talanta.2007.11.010.

<sup>\*</sup> Corresponding author. Tel.: +91 033 2473 3469; fax: +91 033 2473 0957. E-mail address: asen@cgcri.res.in (A. Sen).