

The optimal velocity traffic flow models with open boundaries

H. Ez-Zahraouy^a, Z. Benrihane, and A. Benyoussef

Laboratoire de Magnétisme et de Physique des Hautes Énergies, Département de Physique, Faculté des Sciences, BP 1014, Rabat, Morocco

Received 23 July 2003

Published online 8 December 2003 – © EDP Sciences, Società Italiana di Fisica, Springer-Verlag 2003

Abstract. The effects of the open boundaries on the dynamical behavior of the optimal velocity traffic flow models with a delay time τ allowing the car to reach its optimal velocity is studied using numerical simulations. The particles could enter the chain with a given injecting rate probability α , and could leave the system with a given extracting rate probability β . In the absence of the variation of the delay time $\Delta\tau$, it is found that the transition from unstable to metastable and from metastable to stable state occur under the effect of the probabilities rates α and β . However, for a fixed value of α , there exist a critical value of the extraction rate β_{c_1} above which the wave density disappears and the metastable state appears and a critical value β_{c_2} above which the metastable state disappears while the stable state appears. β_{c_1} and β_{c_2} depend on the values of α and the variation of the delay time $\Delta\tau$. Indeed β_{c_1} and β_{c_2} increase when increasing α and/or decreasing $\Delta\tau$. The flow of vehicles is calculated as a function of α , β and $\Delta\tau$ for a fixed value of τ . Phase diagrams in the (α, β) plane exhibits four different phases namely, unstable, metastable, stable. The transition line between stable phase and the unstable one is curved and it is of first order type. While the transition between stable (unstable) phase and the metastable phase are of second order type. The region of the metastable phase shrinks with increasing the variation of the delay time $\Delta\tau$ and disappears completely above a critical value $\Delta\tau_c$.

PACS. 05.50.+q Lattice theory and statistics (Ising, Potts, etc.) – 64.60.Cn Order-disorder transformations; statistical mechanics of model systems – 75.30.Kz Magnetic phase boundaries (including magnetic transitions, metamagnetism, etc.) – 82.20.Wt Computational modeling; simulation

1 Introduction

Recently, traffic problems have attracted considerable attention [1–3], due to the fact that traffic behavior is important in our lives. When car density increases, traffic jams appear. A variety of approaches have been applied to describe the collective properties of traffic flow: car-following models [4–9], cellular automaton models [10–14], gas kinetic models [15–17], and hydrodynamic models [18, 19].

The traffic flow models are classified into the deterministic and stochastic models. Nagel and Schreckenberg [10] have introduced a stochastic cellular automaton model. It has been shown that the start-stop waves (traffic jams) appear in the congested traffic region as observed in real freeway traffic. Bando et al. [6] have proposed the deterministic optimal velocity model in which a car accelerates or decelerates according to the dynamic equation of car motion with the optimal velocity function. Traffic flow is a kind of many-body systems of strongly interaction cars. Recent studies reveal physical phenomena such as the non-equilibrium phase transitions and nonlinear waves [7–19] the jamming transitions between the freely moving traffic

and jammed traffic are very similar to the conventional phase transitions and critical phenomena: the freely moving and jammed traffic correspond to the gas and liquid phases, respectively. The traffic behavior has been studied by microscopic and macroscopic models [4, 5].

In many works, the jamming transitions and the density waves have been investigated for the system of vehicles with the same characteristic. The car following models with the optimal velocity function are a favorable one of the microscopic traffic models and have been studied in great detail by the use of the numerical and analytical methods [7–20]. In these models, the optimal velocity function is the same for all the vehicles and the equations of motion of all the vehicles are given by the same differential equations. Generally, a vehicle has the characteristic different from the other. The degree of the acceleration or deceleration of a vehicle is different from each other. It will be expected that the difference among the characteristics of vehicles has an important effect on the traffic flow. Thus, it will be necessary to include the different characteristics of vehicles into the car following models.

In modern traffic theory, it is well known that traffic jams occur in the high density region and propagate as kink-antikink density waves [6–9]. In the past, traffic

^a e-mail: ezahamid@fsr.ac.ma

jams have been treated as the soliton density wave [4,5] or triangular shock wave [26]. The nonlinear waves depend strongly on the traffic models [26]. Until now, it has been unclear as to whether or not the triangular shock wave occurs in modern traffic models. The car-following models with optimal velocity function are favorable among microscopic traffic models and have been studied in great detail using of the numerical and analytical methods [20–25]. Recently, Nagatani has studied the effect of the velocity fluctuations of the leader vehicle [22], the velocity-dependent sensitivity [18], the next-nearest-neighbor interaction [23] and the effects of the variation of the delay time $\Delta\tau$ to reach the optimal velocity in the periodic boundaries using numerical simulations [24]. In the latter case and depending on the value of $\Delta\tau$, Nagatani showed the existence of two regime namely, kink jam and uniform velocity free traffic.

Our main contribution in this paper is to study the effects of open boundaries (injecting and extracting rates) on the traffic flow behavior, average velocity and phase diagram of such a model [24] using numerical simulations. However, it is found that phase diagrams in the (α, β) plane exhibits three different phases namely, unstable, metastable, stable. The transition line between stable phase and unstable one is curved and it is of first order type. While the transitions between stable (unstable) phase and metastable phase are of second order one. Furthermore the region of the metastable phase, in the (α, β) plane shrinks with the increase of the variation of the delay time and disappears completely above a critical value $\Delta\tau_c$, which is independent of the value of $\Delta\tau$. Such results are not obtained in the periodic boundaries [24].

The paper is organized as follows: the model is defined in Section 2. Results and discussions are presented in Section 3. While Section 4 is reserved for conclusions.

2 Model

We consider a one-dimensional road of length L with open boundary conditions the particles are injected with a given rate probability α at one end of the road and are extracted with a given rate probability β at the opposite end. We present the car-following models with the optimal velocity function [5–12]. Newell [4] and Whitham [5] have analyzed the traffic model described by the following equation of motion of car j :

$$\frac{dx_j(t+\tau)}{dt} = V(\Delta x_j(t)), \quad (1)$$

where $x_j(t)$ is the position of the vehicle j at time t , $\Delta x_j(t) = x_{j+1}(t) - x_j(t)$ is the headway of vehicle j at time t , and τ is the delay time (how is allows for the time lag that it takes the car velocity to reach the optimal velocity $V(\Delta x_j(t))$ when the traffic flow is varying. $V(\Delta x_j(t))$ is the optimal velocity of vehicle j and is given by

$$V(\Delta x_j(t)) = \frac{v_{max}}{2} \{ \tanh(\Delta x_j(t) - h_c) + \tanh(h_c) \}, \quad (2)$$

where h_c is the safety distance and v_{max} is the maximal velocity of vehicle j when other vehicles do not exist. In the original car following models, the optimal velocity is the same for all the vehicles. Thus, the optimal velocity function of each vehicle is different from each other. Generally, it is necessary that the optimal velocity function has an upper bound (maximal velocity). Also, it is important that the optimal velocity function has the turning point. Otherwise, one cannot have the rebus density wave representing the traffic jams.

The idea of the above car following model is that a driver adjusts the vehicle velocity $\frac{dx_j(t)}{dt}$ according to the observed headway $\Delta x_j(t)$. The delay time τ allows for the time lag that it takes the velocity $\frac{dx_j(t)}{dt}$ of each vehicle to reach the optimal velocity $V(\Delta x_j(t))$ of each vehicle when the traffic flow is varying.

By Taylor-expanding, equation (1), one obtains the differential equation model [6]

$$\frac{d^2 x_j(t)}{dt^2} = a \left[V(\Delta x_j(t)) - \frac{dx_j(t)}{dt} \right], \quad (3)$$

where $a = 1/\tau$ is the sensitivity of a driver.

Furthermore, by transforming the time derivative to the difference in equation (1), one can obtain the difference equation model

$$x_j(t+2\tau) = x_j(t+\tau) + \tau V(\Delta x_j(t)). \quad (4)$$

We consider such a case that the dimensionless delay time of vehicle j is uncorrected with other vehicles and is given by

$$\tau_j = \langle \tau \rangle + \Delta\tau [2\text{rnd}(j) - 1.0], \quad (5)$$

where $\text{rnd}(j)$ is the random number between zero and unity, $\langle \tau \rangle$ is the average value of the dimensionless delay time, and $\Delta\tau$ is the strength of the variation of the dimensionless delay time.

3 Results and discussions

In our simulation the rule described above is updated in parallel dynamics, i.e. during one updating procedure the new particle positions do not influence the rest and only previous positions have to be taken into account. The initial conditions are chosen as follows: $\Delta x_j(0) = \Delta x_0$ for all j , $\Delta x_j(1) = \Delta x_0$ for $j \neq 50, 51$, $\Delta x_j(1) = \Delta x_0 - 0.1$ for $j = 50$ and $\Delta x_j(1) = \Delta x_0 + 0.1$ for $j = 51$, where the initial number of particles is $N = 100$ and $h_c = 5$. Cars are numbered as $1, 2, 3, \dots, N$, the injecting and extracting rate can be do as follows:

if the position of the first particle in the system is superior to the safety distance h_c and the rate injecting probability is superior to an random number between zero and unity, to this moment a new particle is added to the system and it is going to occupy the first position in the chain. In the same time step, if the position of the leading car in the system is superior to the difference between the

size of the chain and the safety distance h_c ($L - h_c$) and the rate extracting probability is superior than a random number between zero and unity, however the leading car removed the system.

In order to study the effects of the open boundaries, in the absence of the variation of the dimensionless delay time $\Delta\tau$, on the traffic flow behavior, Figures 1a–c show the velocity profiles obtained at $t = 30\,000$, $\tau = 0.5$, for fixed values of α and β . However, Figure 1a shows the kink density waves representing the traffic jams in the conventional car following model. It is clear that the vehicle velocities oscillate discontinuously between two different values, high and low velocities. Hence, the higher value correspond to the optimal velocity. The traffic flow appears to be irregular in the velocity profile and the density waves propagate upstream. However, there exist a critical value β_{c_1} above which the kink jams become weaker, and the number of the peaks decrease and then the traffic flow becomes to be regular (Fig. 1b), this situation is called metastable phase. Hence, in this case, we have a congested traffic with a single and/or a few density waves which propagates backward. When the value of β becomes larger than a critical value β_{c_2} ($\beta_{c_2} > \beta_{c_1}$), the kink jams disappear and the velocity profile becomes uniform over all vehicles in the road, and then the traffic flow exhibits the uniform-velocity phase (Fig. 1c). Figures 1d–e shows the combination effects of both open boundaries and finite value of $\Delta\tau = 0.25$ on the velocity profiles at $t = 30\,000$, $\tau = 0.75$. and for a fixed value of α and β . However, Figure 1d shows the oscillatory congested traffic with the kink-antikink form [22]. In the same way when increasing the value of β , the kink-antikink form disappears and we show the oscillatory free traffic where vehicles oscillate around the optimal velocity [24] (Fig. 1e). Even in absence of dimensionless delay time, however, it is found that the effects of open boundaries permits to produce the same features in the traffic flow obtained by Nagatani [24] in the periodic conditions and in presence of dimensionless delay time.

In order to examine the behavior of the flow density regime in the open boundaries, we study the space-time evolution for various values of extracting rate probability β . As a result, three types of traffic flow behavior are distinguished: (1) a coexisting phase in which the kink-antikink density wave appears (unstable state), (2) weaker density wave (metastable state), and (3) a freely moving phase (stable state). To illustrate these features, Figures 2a–c shows the typical traffic patterns that is represented the different behavior (unstable, metastable, stable) for the traffic behavior induced by a fixed value of injecting and extracting rate probability α and β . The pattern in Figure 2a exhibits the space-time evolution for the coexisting phase (the alternative high velocity and low velocity) after a sufficiently large time. It is clear that the density wave appears as the traffic jam. Figure 2b exhibits the space-time evolution for the uniformly congested phase, where the density wave becomes weaker and propagate backward. The pattern in Figure 2c exhibits the space-time evolution for the freely moving phase where all

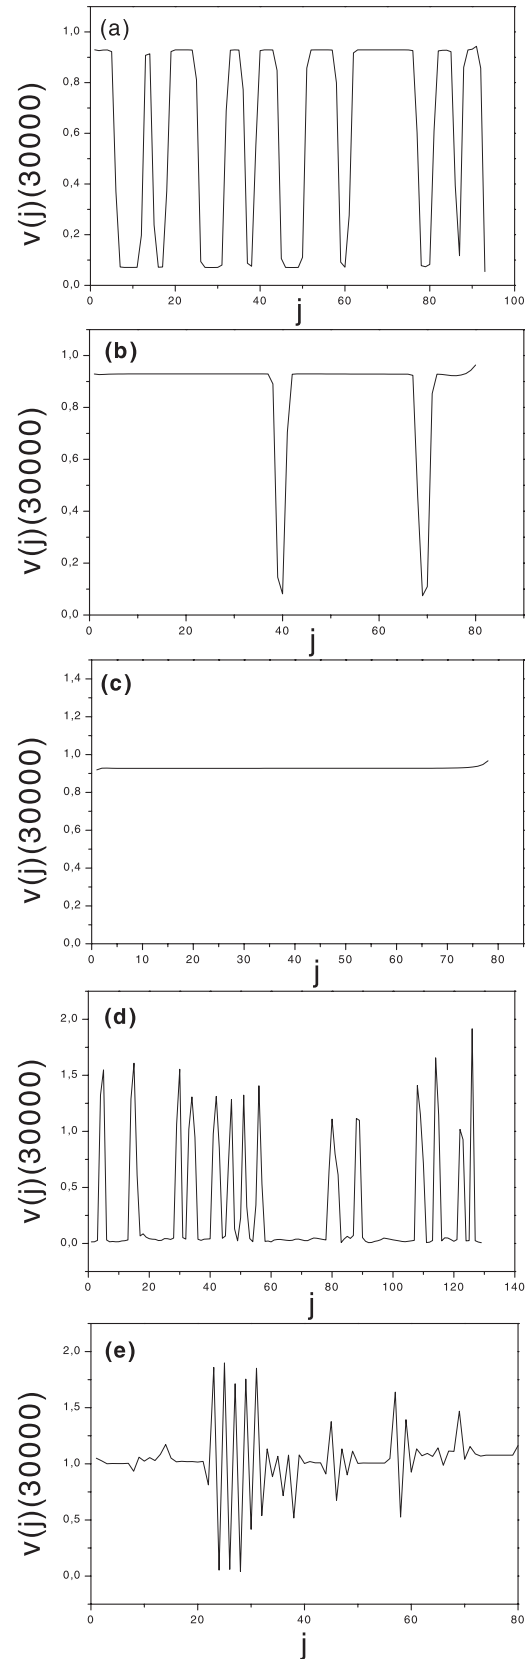


Fig. 1. Velocity profile obtained (a) $\beta = 0.2$, (b) $\beta = 0.4$, (c) $\beta = 1$, and $\langle\tau\rangle = 0.5$, $\Delta\tau = 0.0$ While (d) $\beta = 0.2$, (e) $\beta = 0.4$ and $\langle\tau\rangle = 0.75$, $\Delta\tau = 0.5$ at $t = 30\,000$, $h_c = 5.0$, $\alpha = 1$, and $L = 500$.

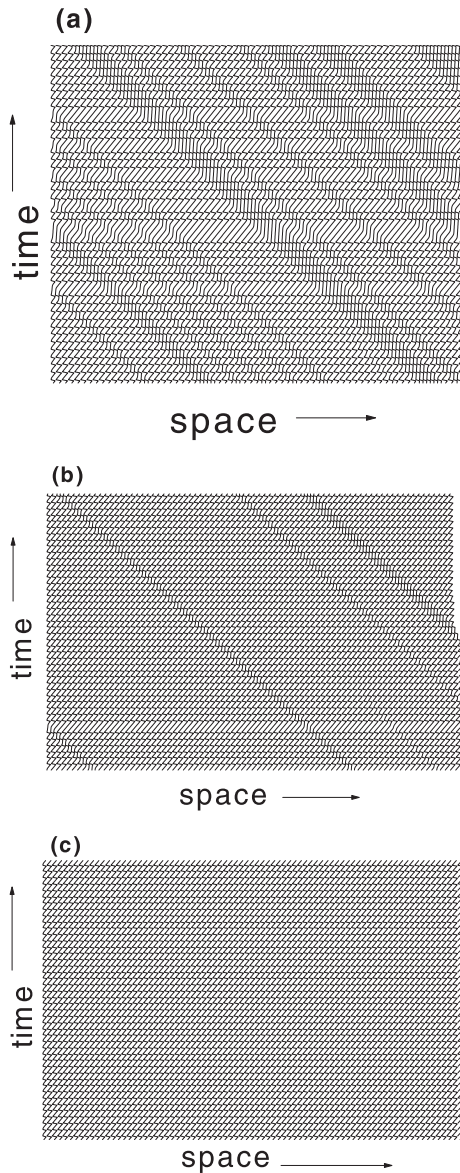


Fig. 2. Space-time plot for $\langle\tau\rangle = 0.5$, $h_c = 5.0$, $\Delta\tau = 0.0$, $\alpha = 1$, and $L = 500$. (a) $\beta = 0.2$, (b) $\beta = 0.4$, (c) $\beta = 1$.

vehicles move with the same velocity. Each velocity profile in the Figures 1a–c corresponds to patterns in Figures 2a–c respectively.

In the case $h_c = 5.0$ and $\tau = 0.5$ and for several values of $\Delta\tau$, phase diagram in the (α, β) plane shows that the system exhibits three phases, unstable, metastable and stable phases (Fig. 3). It is clear that the transition from unstable to metastable and from metastable to stable state occur under the effect of the probabilities rates α and β . However, for a fixed value of α , there exist a critical value of the extraction rate β_{c_1} above which the wave density disappears and the metastable state appears and a critical value β_{c_2} ($\beta_{c_1} < \beta_{c_2}$) above which the metastable state disappears while the stable state appears. β_{c_1} and β_{c_2} depend on the values of α and the variation

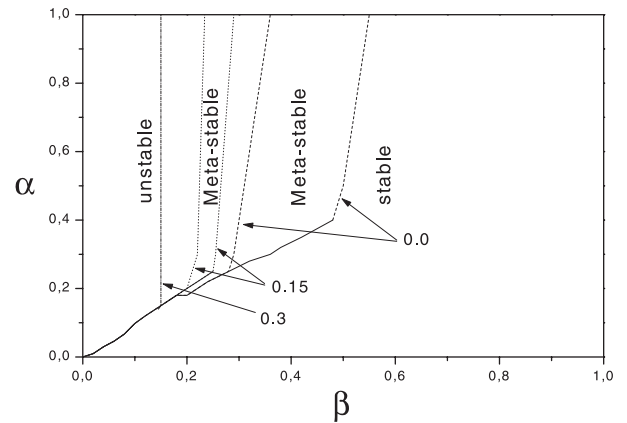


Fig. 3. Phase diagram in the (α, β) plane for $\tau = 0.5$. Dashed lines correspond to second order transition, while solid lines correspond to first order transition. The number accompanying each curve denotes the value of $\Delta\tau$.

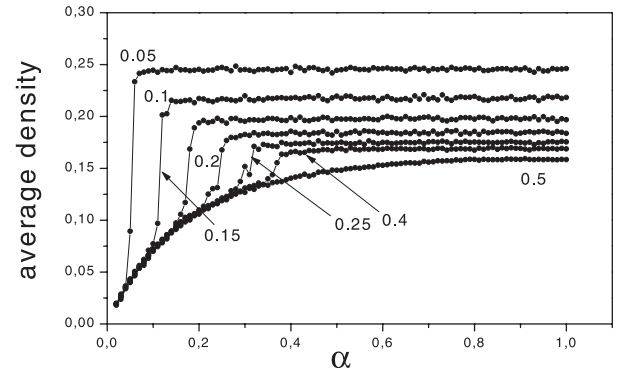


Fig. 4. The variation of the average density versus the injecting rate probability α for $\langle\tau\rangle = 0.5$, $h_c = 5.0$, $\Delta\tau = 0.0$, and $L = 500$. The number accompanying each curve denotes the value of β .

of the delay time $\Delta\tau$. Indeed β_{c_1} and β_{c_2} increase when increasing α and/or decreasing $\Delta\tau$. Furthermore the region of the metastable phase, in the (α, β) plane shrinks with the increase of the variation of the delay time and disappears above a critical value $\Delta\tau_c$, which is independent of the value of the delay time τ . Such results are not obtained in the case of periodic boundaries [24]. The behavior of density as a function of the injecting (or extracting) rate for a fixed value of extracting (or injecting) rate (Fig. 4) shows that the transitions between unstable state (stable state (for $\beta > \beta_c$) and the metastable one are of second order type. While the transitions between metastable (unstable) and stable state (for $\beta < \beta_c$) are of first order type. Indeed, at the first order transition, the density undergoes a discontinuity, while the density behaves continuously at the second order transition [11,27]. The critical value β_c depends on the value of the variation of the delay time $\Delta\tau$. Indeed β_c decreases when increasing $\Delta\tau$. Indeed for $\Delta\tau = 0$, $\beta_c = 0.5$; for $\Delta\tau = 0.15$, $\beta_c = 0.25$, while for $\Delta\tau = 0.3$, $\beta_c = 0.15$. In the latter case, the metastable phase disappears and then, there is

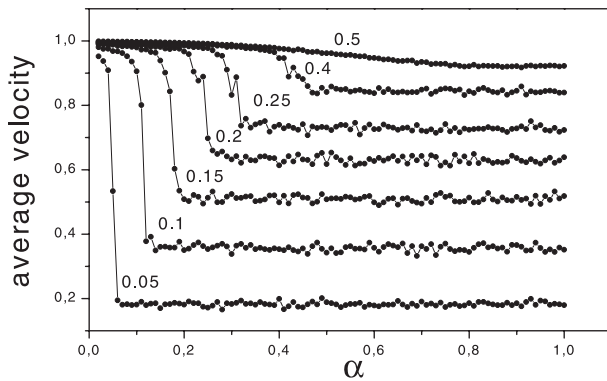


Fig. 5. The variation of the global mean velocity versus the injecting rate probability α for several values of β , with $\langle\tau\rangle = 0.5$, $h_c = 5.0$, $\Delta\tau = 0.0$, and $L = 500$.

only the transition between unstable and stable phases. The corresponding velocity behavior as a function of the injecting rates is given in (Fig. 5). It is found that the average velocity undergoes a jump from high to low values at the first order transition such jumps is obtained, in our previous work, in the case of two dimensional cellular automaton traffic flow models [27].

4 Conclusion

Using numerical simulation method, we have studied the effects of open boundaries conditions on the dynamical behavior of the optimal velocity traffic flow models with a delay time τ . We have shown in the absence of the variation of the delay time $\Delta\tau$, that the transition from unstable to metastable and from metastable to stable state occur under the effect of the probabilities rates α and β . However, for a fixed value of α , there exist a critical value of the extracting rate β_{c_1} above which the wave density phase disappears and the metastable state appears and a critical value β_{c_2} above which the metastable state disappears while the stable state appears. β_{c_1} and β_{c_2} depend on the values of α and the variation of the delay time $\Delta\tau$. Indeed β_{c_1} and β_{c_2} increase when increasing α and/or decreasing $\Delta\tau$. The flow of vehicles is calculated as a function of α , β and $\Delta\tau$ for a fixed value of τ .

We have shown that the (α, β) phase diagram exhibits three different phases namely, unstable, metastable and stable for $\Delta\tau > \Delta\tau_c$, while for $\Delta\tau < \Delta\tau_c$ only stable and unstable phases appears.

References

1. *Traffic and Granular Flow*, edited by D.E. Wolf, M. Schreckenberg, A. Bachem (World Scientific, Singapore, 1996)
2. D. Helbing, *Rev. Mod. Phys.* **73**, 1067 (2001)
3. *Traffic and Granular Flow*, Vol. 97, edited by M. Schreckenberg, D.E. Wolf (Springer, Singapore, 1998)
4. G.F. Newell, *Oper. Res.* **9**, 209 (1961)
5. G.B. Whitham, *Proc. R. Soc. London. Ser. A* **428**, 49 (1990)
6. M. Bando, K. Hasibe, A. Nakayama, A. Shibata, Y. Sagiyama, *Phys. Rev. E* **51**, 1035 (1995)
7. T. Komatsu, S. Sasa, *Phys. Rev. E* **52**, 5574 (1995)
8. T. Nagatani, K. Nakanishi, *Phys. Rev. E* **57**, 6415 (1998)
9. T. Nagatani, K. Nakanishi, H. Emmerich, *J. Phys. A* **31**, 5431 (1998)
10. K. Nagel, M. Schreckenberg, *J. Phys. I France* **2**, 2221 (1992)
11. A. Benyoussef, H. Chakib, H. Ez-Zahraouy, *Eur. Phys. J. B* **8**, 275 (1999)
12. A. Benyoussef, N. Boccara, H. Chakib, H. Ez-Zahraouy, *Chinese J. Phys.* **39**, 428 (2001)
13. T. Nagatani, *Phys. Rev. E* **48**, 3290 (1993)
14. D. Helbing, M. Schreckenberg, *Phys. Rev. E* **59**, R2505 (1999)
15. D. Helbing, *Phys. Rev. E* **53**, 2366 (1996)
16. M. Treiber, A. Hennecke, D. Helbing, *Phys. Rev. E* **59**, 239 (1999)
17. T. Nagatani, *Physica A* **237**, 67 (1997)
18. T. Nagatani, *Physica A* **261**, 599 (1998)
19. H.Y. Lee, H.W. Lee, D. Kim, *Phys. Rev. E* **59**, 5101 (1999)
20. N. Mitarai, H. Nakanishi, *J. Phys. Soc. Jpn* **68** 4857 (1999)
21. T. Nagatani, *Phys. Rev. E* **61**, 3564 (2000)
22. T. Nagatani, *Phys. Rev. E* **61**, 3534 (2000)
23. T. Nagatani, *Phys. Rev. E* **60**, 6395 (1999)
24. T. Nagatani, *Physica A* **284**, 405 (2000)
25. T. Nagatani, *Physica A* **253**, 353 (1998)
26. K. Nagel, *Phys. Rev. E* **53**, 4655 (1996)
27. A. Benyoussef, H. Chakib, H. Ez-Zahraouy, *Phys. Rev. E* **68**, 026129 (2003)