



RELOADERS' GUIDE



- NEW Steel™ and Reloder® 25 Recipes. • Technical Assistance: 800-276-9337.
- Interactive Reloaders' Guide on Web @ www.alliantpowder.com • Email: alliant_reloading@atk.com

CONSISTENT PERFORMANCE BEGINS WITH CONSISTENT QUALITY.

Every container of Alliant smokeless powder is backed by a century of manufacturing experience, and the most exacting quality control procedures in the industry. We check and control chemical composition, the shape and size of powder grains, even the propellants' density and porosity. We send samples of every batch to our ballistics lab, testing, among other things, for burning speed.

Then, after blending batches together for exactly the right ballistic characteristics, we use our advanced computerized equipment to test again.

The result: a line of products known and respected for consistent quality and performance— not only in the lab, but especially on the firing line. One of the reasons you're a reloader, after all, is so you'll know exactly what to expect every time you pull the trigger. With Alliant powders you will. Not only shell after shell, but also year after year.



TABLE OF CONTENTS

	PAGE
Alliant Message	IFC
Table of Contents	3
Contact Information / Conditions & Disclaimers	4-5
"Steel" Non-Toxic Hunting Load	6-7
Shotshell Reloading Data	8
10-Gauge Loads.....	8
12-Gauge Loads.....	9
3-1/2" Shells.....	9
Federal 2-3/4" and 3" Shells.....	10-16
Remington-Peters 2-3/4" and 3" Shells	17-21
Additional 7/8-Ounce Target Loads	21
Winchester-Western 2-3/4" and 3" Shells	22-25
Activ 2-3/4" and 3" Shells	26-27
Fiocchi 2-3/4" and 3" Shells.....	28-29
Additional 2-3/4" 1-Ounce Target Loads	30
28-Gram International Target Loads	31
16-Gauge Loads.....	32-33
20-Gauge Loads.....	33-38
28-Gauge Loads.....	38-39
410 Bore Loads	39
Buckshot and Rifled Slug Loads.....	40-41
International Target Loads	42
24-Gram International Target Loads	42
Pistol Reloading Data	43-45
Pistol and Revolver Loads	43-45
Silhouette Loads	46
Cowboy Action Loads	47
Cowboy Action Loads.....	47
Centerfire Reloading Data	48-55
Centerfire Rifle Loads	48-55
Pistol and Revolver Cartridges – Special Reloading Precautions.....	56
Physical Effect of Gun Recoil.....	56
Reference Data	56
Handloading Precautions	56
Technical Data	57
Smokeless Powders for Reloading	57
Packaging.....	57
Powder Information	57
Dram Equivalent	57
Important Safety and Health Precautions.....	58
Reference Tables	59-60
Ballistic Data	59
Special Notes Regarding Components	59
Black Powder	59
Powder Bushing Charts	60
Properties and Storage of Smokeless Powder.....	61-62
Some Publications on Reloading	IBC

CAUTION

Millions of men and women reload ammunition as a hobby, or because the cost savings allow them to enjoy shooting more often. You should always reload so that the safest and most accurate loads on the shooting line will be yours, and always remember that to become or to continue to be a safe reloader, ***you must be careful at all times.*** As a reloader, you are dealing with and manufacturing explosive materials; handling powders and primers that can, if misused, explode or burn, causing property damage, serious personal injury--even death! Later, when you shoot the ammunition you've produced and checked, you will be the person closest to the gun, the one most likely to be injured if improperly loaded ammunition causes your gun to malfunction.

Protect yourself by studying books that describe safe reloading techniques in detail. When using smokeless powders, use only the exact type and quantity described herein. Always store and use your smokeless powders in accordance with the guidelines listed in this booklet.

POWDER WARNINGS

- ***NEVER*** substitute smokeless powder for black powder, or for Pyrodex, or for any other smokeless powder.
 - ***NEVER*** mix together any two powders, regardless of type, brand, style, or source.
 - ***NEVER*** use the data in this Reloaders' Guide for any other powders, even if advertised "similar to Bullseye" or "burns the same as Red Dot," etc.
- Violation of any of the above could result in severe personal injury (including death) or gun damage.***

DISCLAIMER

Alliant disclaims any warranties with respect to this product, the safety or suitability thereof, or the results obtained, whether express or implied, including, without limitation, any implied warranty of merchantability or fitness for a particular purpose and/or any other warranty. Buyers and users assume all risk, responsibility, and liability whatsoever for any and all injuries (including death), losses, or damages to persons or property arising from the use of this product, whether or not occasioned by seller's negligence or based on strict product liability or principles of indemnity or contribution. Alliant neither assumes nor authorizes any person to assume for it any liability in connection with the use of this product.

WARNING — BE SURE TO:

- The shotgun shell loading data in this booklet are primarily for lead shot applications. Also, do not use buffers or fillers of any kind.
- Scale all powder charges for precise adherence to the recipe.
- **Steel shot components should only be used with STEEL® Powder Reference data.**
- Do Not deviate from the specifications without exception.
- Weigh shot charge precisely.
- For ALL steel shotshell reloading, seal both primer and crimp with commercially available sealant.

Note – This information is provided for unlimited public use per ITAR Part 125.4 (b) (6)

BALLISTICS

The ballistic data shown in this booklet were obtained in the laboratory under strictly controlled conditions. ***You must load only the exact combinations that are listed.*** Even then, different reloading techniques, plus industrial tolerances of each component, likely will cause your ammunition, or ammunition loaded by other competent laboratories, to yield slightly different ballistic data. Therefore, ***charge recommendations in this booklet*** must never be exceeded. Safe shooters and hunters know that accuracy, not maximum power, is their key to success.

FOR TECHNICAL ASSISTANCE

For Technical Assistance or for any information not included in this Reloaders' Guide, please call 1-800-276-9337.

For our interactive Reloaders' Guide on the Web, click onto www.alliantpowder.com.

Our e-mail address is: alliant_reloading@atk.com





STEEL RELOADING DATA

STEEL SHOTSHELL ONLY

WARNING: Reloading steel shotshells requires strict adherence to Alliant published reloading specifications. The reloading specifications provided in this publication were derived through the use of controlled laboratory conditions. While reloading steel shotshells, the reloader must adhere precisely to all the components, without exception, set forth in the load data and specifications. Alliant recommends that both powder charge and shot charge be individually weighed to insure compliance to the load data. Steel shotshells should only be used in well maintained firearms that are designed to shoot steel shot loads. Alliant recommends that commercially available shotshell sealant be applied to both the primer and crimp areas to prevent moisture penetration.

10 Gauge, 3½-inch Shells

Shell Type	Wad	Primer	Shot Weight (ounces)	Velocity (fps)	STEEL Grains	Approx. Pressure
Remington (yellow plastic base wad)**	Ballistic Products mm10312	Federal 209A	1¾	1310	37.0	10,100
Remington (yellow plastic base wad)+	Precision Reloading TUFW105	Federal 209A	1¼	1590	50.0	9,800
Remington Plastic SP***	Precision Reloading TUFW105	Federal 209A	1¾	1475	43.5	10,000
Remington Plastic SP**	Reloading Specialties“SAM 1”	Federal 209A	1¾	1555	48.0	10,300
Remington Plastic SP***	Ballistic Products mm10312	Federal 209A	1¾	1535	46.0	10,100
Remington Plastic SP**	Ballistic Products mm10312	Federal 209A	1½	1385	39.0	10,100
Remington Plastic SP*	Reloading Specialties“SAM 1”	Federal 209A	1½	1470	45.0	10,100
Remington Plastic SP**	Precision Reloading TUFW105	Federal 209A	1½	1345	37.5	10,300

STEEL SHOT ONLY

12 Gauge, 3½-inch Shells

Shell Type	Wad	Primer	Shot Weight (ounces)	Velocity (fps)	STEEL Grains	Approx. Pressure
Remington Plastic SP***	Ballistic Products mm12312	Federal 209A	1¼	1615	45.0	13,300
Remington Plastic SP***	Reloading Specialties“SAM 1”	Federal 209A	1¼	1595	45.0	13,100
Federal Integral Base Wad****	Ballistic Products mm12312	Federal 209A	1¼	1560	45.0	10,900
Federal Integral Base Wad***	Reloading Specialties“SAM 1”	Federal 209A	1¼	1510	45.0	10,400
Federal Integral Base Wad****	Precision Reloading TUFW1235	Federal 209A	1¼	1565	45.0	10,700
Remington Plastic SP**	Ballistic Products mm12312	Federal 209A	1¾	1430	37.0	12,800
Remington Plastic SP***	Reloading Specialties“SAM 1”	Federal 209A	1¾	1430	38.5	12,800
Federal Integral Base Wad***	Ballistic Products mm12312	Federal 209A	1¾	1485	41.5	12,600
Federal Integral Base Wad****	Precision Reloading TUFW1235	Federal 209A	1¾	1470	40.0	12,500
Remington Plastic SP**	Reloading Specialties“SAM 1”	Federal 209A	1½	1330	35.0	13,000
Remington Plastic SP**	Ballistic Products mm12312	Federal 209A	1½	1305	33.0	13,000
Federal Integral Base Wad**	Reloading Specialties“SAM 1”	Federal 209A	1½	1390	39.0	13,300
Federal Integral Base Wad**	Ballistic Products mm12312	Federal 209A	1½	1385	37.0	12,800
Federal Integral Base Wad***	Precision Reloading TUFW1235	Federal 209A	1½	1360	36.0	12,600

NOTES: *For each asterisk (*), add one 12-gauge, ¼ inch felt spacer to the inside bottom of the shot cup.
+ For each cross (+), add one 12-gauge, ½ inch fiber wad to the inside bottom of the shot cup.

STEEL SHOT ONLY

12 Gauge, 3-inch Shells

Shell Type	Wad	Primer	Shot Weight (ounces)	Velocity (fps)	STEEL Grains	Approx. Pressure
Federal 0.090 Integral Base Wad***	Reloading Specialties "SAM 1"	Federal 209A	1	1720	47.0	8,900
Federal 0.090 Integral Base Wad***	Ballistic Products mm12300	Federal 209A	1	1690	45.0	10,500
Federal 0.090 Integral Base Wad**	Precision Reloading TUFW123	Federal 209A	1	1660	44.0	9,400
Federal Hi-Power 7/16 Base Wad**	Reloading Specialties "SAM 1"	Federal 209A	1	1700	48.0	8,200
Federal Hi- Power 7/16 Base Wad**	Ballistic Products mm12300	Federal 209A	1	1665	45.0	8,900
Federal 0.090 Integral Base Wad**	Ballistic Products mm12300	Federal 209A	1 1/8	1510	37.0	10,400
Federal 0.090 Integral Base Wad*	Reloading Specialties "SAM 1"	Federal 209A	1 1/8	1580	40.5	10,700
Federal 0.090 Integral Base Wad**	Precision Reloading TUFW123	Federal 209A	1 1/8	1515	38.0	10,900
Federal Hi- Power 7/16 Base Wad*	Reloading Specialties "SAM 1"	Federal 209A	1 1/8	1560	40.5	10,500
Federal Hi-Power 7/16 Base Wad**	Ballistic Products mm12300	Federal 209A	1 1/8	1550	39.5	10,600
Federal 0.090 Integral Base Wad*	Ballistic Products mm12300	Federal 209A	1 1/4	1370	33.0	10,500
Federal 0.090 Integral Base Wad*	Reloading Specialties "SAM 1"	Federal 209A	1 1/4	1455	37.0	10,800
Federal 0.090 Integral Base Wad*	Precision Reloading TUFW123	Federal 209A	1 1/4	1355	33.0	10,500
Federal Hi-Power 7/16 Base Wad	Reloading Specialties "SAM 1"	Federal 209A	1 1/4	1430	36.0	10,500
Federal Hi- Power 7/16 Base Wad**	Ballistic Products mm12300	Federal 209A	1 1/4	1390	33.0	10,900
Federal 0.090 Integral Base Wad	Reloading Specialties "SAM 1"	Federal 209A	1 1/2	1205	29.0	10,300
Federal 0.090 Integral Base Wad	Ballistic Products mm12300	Federal 209A	1 1/2	1155	26.5	10,500
Federal 0.090 Integral Base Wad	Precision Reloading TUFW123	Federal 209A	1 1/2	1150	27.0	10,500
Federal Hi-Power 7/16 Base Wad	Reloading Specialties "SAM 1"	Federal 209A	1 1/2	1185	29.0	10,000
Federal Hi-Power 7/16 Base Wad	Ballistic Products mm12300	Federal 209A	1 1/2	1170	27.0	10,700

STEEL SHOT ONLY

12 Gauge, 2 3/4-inch Shells

Shell Type	Wad	Primer	Shot Weight (ounces)	Velocity (fps)	STEEL Grains	Approx. Pressure
Federal Gold Medal**	Reloading Specialties "SAM 1"	Federal 209A	7/8	1700	42.0	7,800
Federal Gold Medal*	Ballistic Products mm12234	Federal 209A	7/8	1765	45.0	9,000
Federal Gold Medal	Reloading Specialties "SAM 1"	Federal 209A	1	1520	36.0	9,200
Federal Gold Medal*	Ballistic Products mm12234	Federal 209A	1	1480	33.0	9,500
Federal Gold Medal*	Precision Reloading TUFW12	Federal 209A	1	1500	37.0	8,000
Federal Gold Medal	Reloading Specialties "SAM 1"	Federal 209A	1 1/8	1380	32.0	9,000
Federal Gold Medal	Precision Reloading TUFW12	Federal 209A	1 1/8	1425	32.0	9,600

NOTES: *For each asterisk (*), add one 12-gauge, 1/8 inch felt spacer to the inside bottom of the shot cup.



FINALLY A POWDER THAT GIVES STEEL HEAVYWEIGHT PUNCH.

Introducing the first powder for waterfowl shotshell reloaders to address the critical technical demands of reloading with steel shot. STEEL™ delivers high velocity within safe pressure limits for 10, 12, and 20 gauge loads.

SHOTSHELL RELOADING



10-Gauge, 3½-in. Federal Plastic with Paper Wad Base

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1¼	1,265	CCI 209M Win. 209	Rem. SP10 (see Note 6) Rem. SP10 (see Note 6)			29.5 29.0	8,300 8,800						
4¼	1⅝	1,285	CCI 209M Win. 209	Rem. SP10 (see Note 4) Rem. SP10 (see Note 4)							36.0 10,300		45.0 8,000	45.5 8,300
4½	1⅞	1,270	CCI 209M Win. 209	Rem. SP10 (see Note 3) Rem. SP10 (see Note 3)									45.5 9,900	45.5 10,200
4¼	2	1,210	CCI 209M Win. 209	Rem. SP10 (see Note 2) Rem. SP10 (see Note 2)									43.5 9,200	44.0 9,400
4¼	2¼	1,165	CCI 209M Win. 209	Rem. SP10 (see Note 1) Rem. SP10 (see Note 1)									42.0 9,800	42.5 10,200

10-Gauge, 3½-in. Remington SP Shell

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1¼	1,265	CCI 209M Win. 209	Rem. SP10 (see Note 6) Rem. SP10 (see Note 6)			28.5 29.0	8,800 8,800	31.0 31.0	7,500 7,600				
4¼	1⅝	1,285	CCI 209M Win. 209	Rem. SP10 (see Note 4) Rem. SP10 (see Note 4)									43.5 8,500	44.0 8,500
4½	1⅞	1,270	CCI 209M Win. 209	Rem. SP10 (see Note 3) Rem. SP10 (see Note 3)									44.0 9,800	44.5 9,100
4¼	2	1,210	CCI 209M Win. 209	Rem. SP10 (see Note 2) Rem. SP10 (see Note 2)									42.0 10,400	42.5 10,100
4¼	2¼	1,165	CCI 209M Win. 209	Rem. SP10 Rem. SP10									40.5 10,400	41.0 10,500

10-Gauge, 3½-in. Winchester Polyformed with Plastic Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1¼	1,265	Win. 209 CCI 209M	Rem. SP10 (see Note 5) Rem. SP10 (see Note 5)			28.5 28.0	8,600 8,500						
4¼	1⅝	1,285	Win. 209 CCI 209M	Rem. SP10 (see Note 3) Rem. SP10 (see Note 3)							35.5 10,400		45.0 8,800	44.5 8,700
4½	1⅞	1,270	Win. 209 CCI 209M	Rem. SP10 (see Note 2) Rem. SP10 (see Note 2)									45.5 10,200	45.0 9,800
4¼	2	1,210	Win. 209 CCI 209M	Rem. SP10 (see Note 1) Rem. SP10 (see Note 1)									43.5 9,500	43.0 9,400
4¼	2¼	1,165	Win. 209 CCI 209M	Rem. SP10 Rem. SP10									42.0 10,500	41.5 10,500

- NOTES:**
1. Add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.
 2. Add two 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.
 3. Add three 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.
 4. Add four 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.
 5. Add five 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.
 6. Add six 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.

DATA

12-Gauge, 3½-in. Federal Unibody Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1⅞	1,200	CCI 209M	Fed. 12SO (see Note 1)									41.0	9,100
				Win. WAA12SL (see Note 1)								41.0	8,900	
				Rem. R12L (see Note 2)								40.5	9,600	
			Win. 209	Fed. 12SO (see Note 1)									40.0	9,000
4¼	1⅞	1,255	CCI 209M	Fed. 12SO									43.0	9,800
				Win. WAA12SL								43.0	9,500	
				Rem. R12L (see Note 1)								42.5	10,100	
			Win. 209	Fed. 12SO									42.5	10,100
4¼	2	1,220	CCI 209M	Fed. 12SO									42.5	10,000
				Win. WAA12SL								42.5	9,800	
				Rem. R12L								42.0	10,000	
			Win. 209	Fed. 12SO									41.0	9,900
4¼	2¼	1,150	CCI 209M	Fed. 12S4									38.5	11,100
				Win. WAA12F114								38.5	11,100	
				Rem. SP12								39.5	11,200	
			Win. 209	Fed. 12S4									38.0	10,900

12-Gauge, 3½-in. Remington Plastic SP

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1⅞	1,200	CCI 209M	Rem. R12L (see Note 1)									38.0	10,300
				Fed. 12SO (see Note 1)								38.0	10,100	
				Win. WAA12SL (see Note 1)								38.0	10,000	
			Win. 209	Rem. R12L (see Note 1)									37.5	10,500
4¼	1⅞	1,255	CCI 209M	Rem. R12L (see Note 1)									39.0	10,900
				Fed. 12SO (see Note 1)								39.0	10,600	
				Win. WAA12SL (see Note 1)								39.0	10,400	
			Win. 209	Rem. R12L (see Note 1)									38.5	11,000
4¼	2	1,220	CCI 209M	Rem. R12L									39.5	11,100
				Fed. 12SO								39.5	10,800	
				Win. WAA12SL								39.0	10,700	
			Win. 209	Rem. R12L									39.0	11,200
4¼	2¼	1,150	CCI 209M	Rem. SP12									38.0	11,100
				Fed. 12S4								37.0	11,100	
				Rem. SP12								38.0	11,500	

12-Gauge, 3½-in. Winchester Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
4	1⅞	1,200	Win 209	Win. WAA12SL									38.5	10,000
				Fed. 12SO								38.5	10,600	
				Rem. R12L (see Note 1)								38.5	10,300	
			CCI 209M	Win. WAA12SL									38.0	10,100
4¼	1⅞	1,255	Win. 209	Win. WAA12SL									40.0	10,800
				Fed. 12SO								40.5	10,700	
				Rem. R12L (see Note 1)								40.0	10,700	
			CCI 209M	Win. WAA12SL									39.5	10,500
4¼	2	1,220	Win. 209	Win. WAA12SL									40.0	11,200
				Fed. 12SO								40.5	11,000	
				Rem. R12L								39.0	10,600	
			CCI 209M	Win. WAA12SL									39.0	11,200
4¼	2¼	1,150	Win. 209	Rem. SP12									37.0	11,200

NOTES: 1. Add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.
2. Add two 20-gauge, 0.135-in. thick card wads to the inside bottom of the shot cup.

SHOTSHELL RELOADING



12-Gauge, 2¾-in. Federal Paper Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¼	1	1,290	Fed. 209A	Rem. R12L	20.0	9,300			21.5	8,800						
				Fed. 12S3	20.5	9,000			23.5	9,400						
				Fed. 12SO	20.5	10,400			22.5	9,200						
				CCI 209M Fed. 12S3	21.0	8,700			23.0	7,800						
2¾	1½	1,145	Fed. 209A	Fed. 12C1	18.0	8,500			19.0	8,200						
				Fed. 12S3	18.0	8,700	19.0	8,200	19.5	7,400						
				Rem. R12L	18.5	9,300			19.0	8,000						
				Rem. RXP12	18.0	8,900			18.5	8,100						
				Win. WAA12 (White)	18.0	8,600	19.0	8,400	18.5	8,000						
				Fiocchi FTW1	18.5	9,000			20.0	7,900						
				Red PC	18.0	8,300			20.0	7,600						
				Lage Uniwad	18.0	8,500			19.0	8,400						
				Hornady Versalite	18.0	8,800	19.0	7,900	19.5	6,900						
				Windjammer	18.5	8,200	19.5	7,100	20.5	6,600						
				Rem. Fig. 8			19.0	7,600								
				Win. WT12 (Orange)			19.0	8,100								
				Claybuster 3118-12			19.0	7,600								
				Rem. 209P Fed. 12C1	18.5	8,300			20.0	7,000						
				Fed. 12S3			19.0	8,500								
				Win. 209 Fed. 12C1	18.5	8,600			19.5	7,500						
Fed. 12S3			19.0	8,900												
CCI 109 Fed. 12C1	18.5	8,500			19.0	7,800										
CCI 209M Fed. 12C1	18.5	7,900			20.0	7,400										
CCI 209SC Fed. 12S3			19.0	8,600												
3	1½	1,200	Fed. 209A	Fed. 12C1	19.0	9,300			20.0	8,600	22.0	8,200				
				Fed. 12S3	19.0	9,800	20.5	10,400	21.0	7,800	22.0	7,200				
				Rem. R12L	19.5	9,500			20.0	8,600	22.0	7,800				
				Rem. R12H	19.0	9,200			19.5	8,800						
				Rem. RXP12	19.0	9,900			20.0	8,600	21.0	8,000				
				Win. WAA12 (White)	19.0	10,500	20.5	10,400	19.5	9,000	21.0	8,600				
				Fiocchi FTW1	19.5	9,500			21.0	8,200						
				Red PC	19.0	10,300			21.0	8,800	22.5	8,400				
				Lage Uniwad	18.5	9,400			20.0	8,800	22.0	8,000				
				Hornady Versalite	19.0	8,900	20.0	10,100	21.0	8,300	22.0	7,900				
				Windjammer	19.0	8,700	20.0	9,100	22.0	7,700	23.5	7,600				
				Rem. Fig. 8			20.0	9,800								
				Win. WT12 (Orange)			20.5	10,200								
				Claybuster 3118-12			20.5	9,300								
				Rem. 209P Fed. 12C1	20.0	9,200			22.0	7,800	24.0	7,000				
				Fed. 12S3			21.0	9,700								
Win. 209 Fed. 12C1	19.5	9,800			21.0	8,100	23.0	7,600								
Fed. 12S3			20.5	9,700												
CCI 109 Fed. 12C1	19.0	9,200			20.5	8,200	22.0	7,500								
CCI 209M Fed. 12C1	20.0	8,700			21.5	7,700	24.0	7,200								
CCI 209SC Fed. 12S3			20.5	9,800												
3¼	1½	1,255	Fed. 209A	Fed. 12C1	21.0	10,200			21.5	7,900	22.5	8,900				
				Fed. 12S3	21.0	9,400			23.0	9,100	23.0	8,300				
				Rem. R12H					21.5	9,900	22.5	9,000				
				Rem. RXP12	21.0	10,000			21.5	9,300	22.0	8,500				
				Win. WAA12 (White)					21.5	10,500	22.0	9,500				
				Red PC	20.5	10,700			22.5	9,600	24.5	8,500				
				Hornady Versalite	20.5	9,900			22.5	8,500	23.0	8,700				
				Rem. 209P Fed. 12C1	21.5	10,700			23.5	7,500	26.0	7,500				
Win. 209 Fed. 12C1	21.0	10,300			22.5	9,000	24.5	8,300								
CCI 209M Fed. 12C1	21.0	10,500			22.5	8,500	24.5	8,400								
3½	1½	1,310	Fed. 209A	Fed. 12C1					24.5	9,900	26.5	9,000				
				Fed. 12S3							26.5	9,700				
				Rem. RXP12					24.5	9,800	26.5	8,600				
				Win. WAA12 (White)					24.5	9,700	26.5	9,100				
				Rem. 209P Fed. 12C1					25.5	9,300	27.5	8,300				
Win. 209 Fed. 12C1							26.5	9,200								
CCI 209M Fed. 12C1							26.5	9,400								

continued on next page

DATA

12-Gauge, 2¾-in. Federal Paper Target Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3¼	1¼	1,220	Fed. 209A	Fed. 12C1					21.0	10,600	22.5	9,500						
				Fed. 12S4					23.0	10,500	24.0	9,800						
				Rem. SP12						21.0	9,600	22.0	9,600					
				Win. WAA12 (White)						21.0	10,500	22.0	10,000					
				Win. WAA12F114						23.0	9,900	23.5	9,500					
				Hornady Versalite						23.0	9,600	23.0	8,800					
				Rem. 209P	Fed. 12S4						23.0	9,900	25.5	9,100				
Win. 209	Fed. 12S4								24.5	10,600								
CCI 209M	Fed. 12S4							23.0	10,500	25.5	9,700							
3¼	1¼	1,330	Fed. 209A	Fed. 12S4											37.0	10,300		
				Rem. RP12									29.0	9,400				
				Rem. SP12									29.5	9,300				
				Win. WAA12F114									29.5	9,200				
Win. 209	Fed. 12S4												37.5	10,300				
CCI 209M	Fed. 12S4								28.0	10,700	29.5	9,900	37.0	9,000				
3½	1¾	1,240	Fed. 209A	Rem. SP12											34.0	9,900		
				Win. WAA12F114												33.0	10,200	
				Rem. 209P	Rem. SP12												36.0	8,300
				Win. 209	Rem. SP12												34.5	9,500
CCI 209M	Rem. SP12												34.5	9,500				
3¾	1¾	1,295	Fed. 209A	Rem. SP12											35.5	10,300		
				Win. WAA12F114												36.5	10,600	
				Rem. 209P	Rem. SP12												38.0	8,600
				Win. 209	Rem. SP12												36.5	10,200
CCI 209M	Rem. SP12												37.0	10,600				
4	1¾	1,350	Fed. 209A	Rem. RP12											37.5	10,700		
3¼	1½	1,150	Fed. 209A	Rem. SP12									25.0	10,200				
				Activ T42												31.5	9,100	
				Rem. RP12												32.5	8,800	
				Win. 209	Activ T42												31.5	9,400
				Rem. 209P	Activ T42												32.5	9,100
				CCI 209M	Activ T42												33.0	9,400
Fio. 616	Activ T42												32.0	9,500				
3½	1½	1,205	Fed. 209A	Rem. RP12											34.0	9,300		
				Rem. 209P	Rem. RP12											34.5	10,300	
				Win. 209	Rem. RP12											35.0	9,600	
				CCI 209M	Rem. RP12											35.0	9,400	


PC: Pattern Control

ALLIANT POWDERS.
FIRST A CLEANER BURN,
NOW A CLEANER LOOK.

Cleaner Look



Cleaner Burn

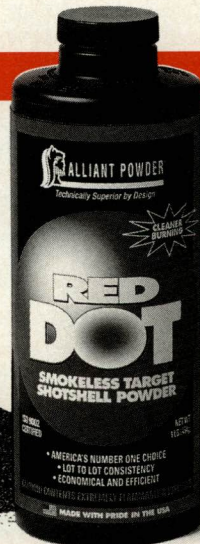

First we made our powders 50% cleaner-burning than ever before. Now we're putting every Alliant formula into bold new containers. Just one thing hasn't changed. The same consistent performance you've trusted for over a century.

SHOTSHELL



RELOADING

12-Gauge, 2¾-in. Federal Gold Medal Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Hercó		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
—	7/8	1,200	Fed. 209A	Fed. 12SO	17.5	7,600													
				Rem. TGT 12	17.5*	7,100													
				Win. WAA12SL	17.0*	7,300													
				Purple PC	17.0*	6,400													
—	7/8	1,250	Fed. 209A	Fed. 12SO	19.0	7,900													
				Rem. TGT 12	18.5*	7,800													
				Win. WAA12SL	18.0*	8,000													
				Purple PC	18.5*	7,300													
—	7/8	1,300	Fed. 209A	Fed. 12SO	19.5	8,400	21.0	7,300	22.0	7,500									
				Rem. TGT 12	19.5*	8,500	21.0	7,400	22.0*	7,200									
				Win. WAA12SL	19.0*	8,400			21.5*	7,600									
				Purple PC	19.5*	7,900	21.5	6,900	22.5*	7,000									
				Claybuster 1100-12			21.5	6,900											
2¾	1	1,200	Fed. 209A	Fed. 12SO	18.0	8,300	19.5	7,100	20.5	7,600									
				Rem. TGT 12	18.0	7,900	19.5	7,500	20.0	7,000									
				Win. WAA12SL	18.0	8,700	19.5	7,200	20.0	7,800									
				Purple PC	18.0*	7,400			20.5*	7,300									
3	1	1,255	Fed. 209A	Fed. 12SO	19.5	9,300	21.0	7,700											
				Rem. TGT 12	19.0	8,700	20.5	8,100	21.5	7,900									
				Win. WAA12SL	18.5	9,100	21.0	8,400	21.5	8,500									
				Purple PC	19.5*	8,700			21.5*	8,000									
				Claybuster 1100-12			21.0	7,600											
3¼	1	1,290	Fed. 209A	Fed. 12SO	20.5	10,300	22.0	8,500											
				Rem. TGT 12	20.0	9,100	21.5	8,800	22.5	8,500									
				Win. WAA12SL	20.0	10,300	21.5	8,800	22.5	9,000									
				Purple PC	20.5	9,300			22.5	8,300									
				Claybuster 1100-12			21.5	8,000											
2½ Extra Lite	1⅛	1,090	Fed. 209A	Fed. 12S3	17.0	8,400	17.5	7,100	18.5	7,800									
				Rem. Fig. 8	17.0	7,700	17.5*	8,000	18.0	7,000									
				Win. WAA12SL	17.0	8,100			18.0	7,600									
				Win. WAA12 (White)	16.5*	8,500	17.5*	7,400	18.0*	7,700									
				Win. WT12 (Orange)			18.0*	7,700											
				Fiocchi FTW1	16.5*	8,500			18.0*	7,800									
				Hornady Versalite	17.0*	8,600	17.0*	8,100	18.0	7,200									
				Windjammer	17.5	7,600			18.5	6,600									
				Claybuster 3118-12			17.5	7,100											
				Win. 209	Fed. 12S3	17.0	8,400												
2¾	1⅛	1,145	Fed. 209A	Fed. 12S3	18.0	8,800	19.0	7,600	19.5	8,100									
				Rem. Fig. 8	18.0	8,800	19.0	9,000	19.0	7,700									
				Rem. RXP12	18.0	9,400			19.0	8,000									
				Win. WAA12SL	18.0	9,200			19.0	8,200									
				Win. WAA12 (White)	17.5*	9,400	19.0	9,600	19.0*	8,200									
				Win. WT12 (Orange)	18.5*	9,300	19.0	9,300	20.0*	8,400									
				Fiocchi FTW1	18.0*	9,600			19.5	8,600									
				Hornady Versalite	18.0*	9,400	18.5	9,600	19.0	8,000									
				Windjammer	18.5	8,200	19.0	8,700	19.5	7,700									
				Claybuster 3118-12			19.0	8,200											
				Rem. 209P	Fed. 12S3	18.5	8,200	19.5	7,800	20.5	6,800								
				Win. 209	Fed. 12S3	17.5	9,600	19.5	8,100	19.5	8,000								
				CCI 209	Fed. 12S3	18.0	8,200			19.0	7,800								
				CCI 209M	Fed. 12S3	18.0	8,600			19.5	7,500								
				CCI 209SC	Fed. 12S3	19.0	9,800	18.5	8,500	20.5	8,600								
	Win. WAA12 (White)	18.5	10,200			20.5	9,000												
	Rem. Fig. 8	19.5	9,500			21.0	8,300												

continued on next page

PC: Pattern Control

NOTES: *For each asterisk (*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

Auto-loading shotguns **may not** function with loads having pressures less than 7,000 psi. It is important to have tight crimps to prevent load efficiencies (pressures) from dropping. The efficiency may also drop when these loads are fired at low temperatures.


Nitro cards may be obtained from: Ballistic Products, Inc., 20015 75th Avenue North, Corcoran, MN 55340. Phone: (612) 494-9237.

DATA

12-Gauge, 2¾-in. Federal Gold Medal Plastic Target Shells (continued)

Dram Equiv.	Shot (ounces)	Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot							
						Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi						
3	1⅛	1,200	Fed. 209A	Fed. 12S3	19.5	10,000	20.5	9,200	20.0	9,000	22.5	7,300											
				Rem. Fig. 8	19.0	9,500	20.0	10,300	20.0	8,600	22.5	7,300											
				Rem. RXP12	19.0	9,900			20.0	8,800	22.5	7,800											
				Win. WAA12SL	19.0	10,000			20.0	8,800													
				Win. WAA12 (White)	19.0*	10,400	20.5	9,400	20.0	9,200	22.5	8,100											
				Fiocchi FTW1	19.0	10,500			20.5	9,300	22.5	8,100											
				Hornady Versalite	19.0	10,100	20.0	10,900	20.5	9,400	22.0	8,000											
				Windjammer	19.5	9,600	20.5	9,800	21.0	8,200	22.5	6,900											
				Win. WT12 (Orange)	20.0*	10,400	20.5	10,400	21.5*	8,800	23.5*	8,300											
				Claybuster 3118-12			20.5	9,600															
				Rem. 209P	Fed. 12S3	19.5	9,300	21.5	9,000	21.5	7,900	24.0	6,900										
				Win. 209	Fed. 12S3	19.0	10,500	20.5	9,900	20.5	9,000	23.0	8,600										
				CCI 209	Fed. 12S3	20.0	9,800			22.0	9,200	24.0	8,300										
				CCI 209M	Fed. 12S3	19.0	8,900			21.0	8,600	23.5	8,000										
CCI 209SC	Fed. 12S3	20.5	10,700	20.5	10,000	22.5	8,900																
	Win. WAA12 (White)	20.0	10,500			22.0	10,200																
	Rem. Fig. 8	21.0	9,800			23.0	9,200																
Heavy 1⅞	1,250	1,250	Fed. 209A	Fed. 12S3			22.0	10,100	21.5	9,500	23.5	8,100	26.0	8,000									
				Rem. Fig. 8	20.0	9,500			22.0	9,200	23.5	7,800	26.0	7,700									
				Rem. RXP12	20.0	10,100			21.5	9,700	23.5	8,400	26.0	8,000									
				Win. WAA12 (White)					21.5	9,400	23.0	8,400	26.0	8,300									
				Hornady Versalite	20.0	10,700	21.0	10,900	21.5	9,000	24.0	8,300	26.0	8,200									
				Windjammer	20.5	9,500	21.5	10,700	22.5	8,400	24.0	7,700	26.0	7,400									
				Claybuster 3118-12			22.0	10,600															
				Rem. 209P	Fed. 12S3					23.0	8,800	25.0	7,600										
				Win. 209	Fed. 12S3					22.5	10,500	24.0	9,800										
				CCI 209M	Fed. 12S3					22.5	9,800	24.0	9,100										
3½	1⅛	1,310	Fed. 209A	Rem. RXP12					24.0	10,400	26.0	10,300											
				Win. WAA12 (White)					23.0	10,400	25.0	9,200											
				Hornady Versalite							25.0	10,000											
				Windjammer					24.0	8,800	25.0	9,700											
3¼	1¼	1,220	Fed. 209A	Fed. 12S4							24.0	10,500	25.0	10,200									
				Rem. SP12							24.0	10,400	26.0	9,700									
				Win. WAA12F114							24.0	10,600	25.0	10,100									
				Rem. 209P	Fed. 12S4						25.0	9,800	25.5	8,100									
				Win. 209	Fed. 12S4						24.0	9,500	25.5	9,400									
CCI 209M	Fed. 12S4						24.5	9,500	25.5	8,700													
3½	1¼	1,275	Fed. 209A	Fed. 12S4									27.0	10,100	34.0	8,900							
				Rem. SP12									27.0	10,500									
				Win. WAA12F114									27.5	9,200									
				Rem. 209P	Fed. 12S4																		
Win. 209	Fed. 12S4													35.0	8,700								
CCI 209M	Fed. 12S4													35.0	9,100								
3¾	1¼	1,330	Fed. 209A	Rem. SP12													35.0	10,500					
				Win. 209	Rem. SP12														37.0	9,000			
				CCI 209M	Rem. SP12														37.5	8,300			
3½	1⅜	1,240	Fed. 209A	Rem. RP12														34.0	9,900				
				Win. WAA12F114																33.0	10,100		
				Win. 209	Rem. RP12																34.5	8,600	
				CCI 209M	Rem. RP12																35.0	8,600	
Rem. 209P	Rem. RP12																	36.0	7,800				
3¾	1⅜	1,295	Fed. 209A	Rem. RP12															35.5	10,700			
				Rem. 209P	Rem. RP12																39.0	8,600	
				Win. 209	Rem. RP12																36.0	9,200	
				CCI 209M	Rem. RP12																36.5	9,000	
3¼	1½	1,150	Fed. 209A	Rem. RP12									25.5	10,100					33.5	8,300			
				Win. 209	Activ T42																32.5	9,200	
				Rem. 209P	Activ T42																	32.5	9,300
				CCI 209M	Activ T42																	32.5	9,400
				Fio. 616	Activ T42																	32.0	9,700
3½	1½	1,205	Fed. 209A	Rem. RP12																34.0	9,700		
				Rem. 209P	Rem. RP12																	35.5	8,100
				CCI 209M	Rem. RP12																	34.0	9,400
				Win. 209	Rem. RP12																	34.5	9,900

SHOTSHELL RELOADING



12-Gauge, 2¾-in. Federal Hi Power Plastic Shells with Rolled Paper Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
3¼	1	1,290	Fed. 209A	Fed. 12S3	21.0	9,400	23.0	7,500							
				Rem. R12L	20.5	8,500	22.5	7,400							
2¾	1½	1,145	Fed. 209A	Fed. 12S3	18.5	7,300	20.0	7,200							
				Rem. RXP12	18.5	8,700	19.0	8,700							
				Win. WAA12 (White)	18.5	9,600	18.5	9,100							
				Hornady Versalite	18.5	8,300	19.5	7,100							
				Rem. 209P	Fed. 12S3	18.5	8,400	21.0	6,700						
				Win. 209	Fed. 12S3	18.5	9,100	20.0	8,200						
3	1½	1,200	Fed. 209A	Fed. 12S3	18.5	8,600	20.0	7,600							
				Fed. 12C1			20.5	9,400							
				Fed. 12S3	19.0	9,300	21.0	8,000	23.0	7,700					
				Rem. RXP12	19.5	9,300	20.5	9,100	22.0	8,100					
				Win. WAA12 (White)	19.0	9,800	20.0	9,300	21.0	7,700					
				Hornady Versalite	19.5	9,000	20.0	8,800	22.5	8,000					
3¼	1½	1,255	Fed. 209A	Fed. 12S3	20.0	9,200	22.0	7,600							
				Fed. 12C1	19.0	10,200	22.0	10,100	23.0	9,000					
				Fed. 12S3	21.5	10,100	22.0	9,000	24.0	8,100					
				Rem. RXP12	21.0	9,800	22.5	10,000	23.0	8,100					
				Win. WAA12 (White)			22.0	10,300	23.0	8,600					
				Hornady Versalite	20.5	9,700	23.5	8,600	23.5	8,200					
3¼	1¼	1,220	Fed. 209A	Fed. 12S3	22.0	10,300	23.0	8,500							
				Fed. 12C1	21.5	10,700	23.0	9,400	25.0	9,100					
				Fed. 12S3	21.5	10,700	23.0	9,400	25.0	9,100					
				Fed. 12S3	21.5	10,100	22.0	9,600	25.5	8,400					
				Fed. 12C1			23.0	9,800	23.0	9,500					
				Fed. 12S4			22.0	10,500							
3¾	1¼	1,330	Fed. 209A	Rem. R12H			22.0	10,500							
				Rem. RXP12			22.0	9,600	23.0	8,300					
				Win. WAA12 (White)			21.5	9,500	23.0	9,600					
				Win. WAA12F114			23.0	9,900	23.0	9,400					
				Hornady Versalite			23.0	9,700	23.5	8,800					
				Rem. 209P	Fed. 12S4			25.5	9,000						
3¾	1¼	1,330	Fed. 209A	Fed. 12S4			25.0	9,500							
				Fed. 12S4			25.0	10,000							
				Fed. 12C1			25.5	10,200	28.5	9,800					
				Fed. 12S4					29.0	10,200					
				Rem. SP12			25.5	10,200	28.5	9,900					
				Win. WAA12 (White)					29.0	10,500					
3¾	1¾	1,295	Fed. 209A	Win. WAA12F114					29.5	9,400					
				Win. 209	Fed. 12S4			30.0	10,200	38.0	8,600				
				CCI 209M	Fed. 12S4			30.0	9,500	38.0	9,800				
				Rem. RP12								38.5	8,600		
				Rem. SP12								38.0	9,000		
				Win. WAA12 (White)								37.5	8,500		
4	1¾	1,350	Fed. 209A	Win. WAA12F114					37.5	9,100					
				Rem. 209P	Rem. RP12					39.0	8,400				
				Win. 209	Rem. RP12					39.0	9,400				
				CCI 209M	Rem. RP12					39.0	8,500				
				Rem. RP12								39.5	9,700		
				Win. 209	Rem. RP12							40.0	9,600		
3¼	1½	1,150	Fed. 209A	CCI 209M	Rem. RP12								39.5	9,600	
				Rem. SP12											
				Activ T42											
				Rem. RP12											
				Win. 209	Activ T42										
				Rem. 209P	Activ T42										
3½	1½	1,205	Fed. 209A	CCI 209M	Activ T42										
				Win. 209	Activ T42										
				CCI 209M	Activ T42										
				Fio. 616	Activ T42										
				Rem. RP12											
				Win. 209	Rem. RP12										
3¾	1½	1,260	Fed. 209A	Rem. RP12											
				Rem. SP12											
				Win. 209	Rem. RP12										
				CCI 209M	Rem. RP12										
				Rem. RP12											
				Win. 209	Rem. RP12										

DATA

12-Gauge, 2¾-in. Federal One-Piece Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¼	1¼	1,220	Fed. 209A	Fed. 12S4		25.0	9,100	26.0	8,400			
				Rem. SP12		25.5	8,700	26.5	7,800			
				Win. WAA12F114		25.0	8,700	26.0	8,000			
			Rem. 209	Fed. 12S4	25.5	8,800	26.5	9,100				
				Fed. 12S4	25.0	9,200	26.0	8,500				
				Fed. 12S4	25.5	9,200	26.0	8,900				
3½	1¼	1,275	Fed. 209A	Fed. 12S4				28.0	9,500			
				Rem. SP12				27.5	8,200			
				Win. WAA12F114				27.5	8,700			
			Rem. 209	Fed. 12S4			28.5	9,400				
				Fed. 12S4			27.5	9,000				
				Fed. 12S4			27.5	9,500				
3¾	1¼	1,330	Fed. 209A	Fed. 12S4							38.5	8,500
				Win. WAA12F114						39.0	7,700	
			Win. 209	Fed. 12S4						39.0	8,400	
				Fed. 12S4						37.5	9,000	
3½	1¾	1,240	Fed. 209A	Rem. SP12							37.0	8,100
				Win. WAA12F114						38.0	7,900	
			Win. 209	Rem. SP12						37.5	7,700	
				Rem. SP12						37.5	8,300	
3¾	1¾	1,295	Fed. 209A	Rem. RP12							38.5	8,700
				Rem. RP12						38.5	9,500	
			Win. 209	Rem. RP12						38.5	9,300	
				Rem. RP12						38.0	9,200	
3¼	1½	1,150	Fed. 209A	Fed. 12S4				27.0	9,200			
				Rem. SP12				27.0	8,600			
				Win. WAA12F114				26.5	8,700			
			Win. 209	Activ T35				26.5	8,500			
				Fed. 12S4				26.5	10,100			
				Fed. 12S4				26.5	9,900			
			Rem. 209P	Fed. 12S4				26.5	10,000			
				Fed. 12S4				26.0	10,100			
3½	1½	1,205	Fed. 209A	Rem. RP12							36.0	8,800
				Rem. RP12						36.0	8,100	
			Win. 209	Rem. RP12						37.0	8,500	
				Rem. RP12						36.0	8,500	
			Fed. 209A	Rem. RP12						38.0	9,900	
3¾	1½	1,260	Rem. 209	Rem. RP12							38.0	8,700
				Rem. RP12						38.0	9,100	
			CCI 209M	Rem. RP12						38.0	10,000	
3¼	1⅝	1,115	Fed. 209A	Rem. SP12				26.5	10,000			
				Rem. SP12				26.5	9,800			
			Rem. 209P	Rem. SP12				26.5	9,500			
				Rem. SP12				26.5	10,000			
			Fio. 616	Rem. SP12				26.0	10,300			



**TO GET
THERE,
START
HERE.**



If you're serious about breaking targets, start with Alliant Powder. It's value priced and performs consistently, batch after batch. Reload with Alliant, you can't lose.

SHOTSHELL RELOADING

12-Gauge, 3-in. Federal Hi Power Plastic Shells with Rolled Paper Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi
3¾	1⅜	1,295	Fed. 209A	Fed. 12S3	30.5	10,000		
				Rem. RXP12	30.5	9,300	38.0	9,000
				Win. WAA12 (White)	30.5	9,700	38.0	8,800
4	1⅜	1,350	Fed. 209A	Fed. 12S4			40.0	9,400
				Rem. SP12			40.0	8,900
				Win. WAA12F114			40.0	9,800
4	1½	1,315	Fed. 209A	Fed. 12S3			38.0	9,700
				Rem. RXP12			38.5	9,600
				Win. WAA12 (White)			37.5	9,800
				Activ TG30			38.0	9,400
4	1⅝	1,280	Fed. 209A	Rem. SP12			39.0	10,400
4	1¾	1,245	Fed. 209A	Rem. RP12			39.0	10,500
3¾	1⅞	1,155	Fed. 209A	Rem. SP12			36.0	10,300
				Rem. RP12			34.0	10,500
				Activ T35			34.5	10,100

12-Gauge, 3-in. Federal One-Piece Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¾	1⅜	1,295	Fed. 209A	Fed. 12S3					31.0	10,500	40.5	7,900
				Rem. RXP12					32.0	10,100		
				Win. WAA12 (White)							38.0	9,800
4	1⅜	1,350	Fed. 209A	Rem. RXP12						42.0	8,000	
				Win. WAA12 (White)						44.0	9,900	
4	1½	1,315	Fed. 209A	Fed. 12S4						40.0	9,700	
				Rem. SP12						40.0	9,000	
				Win. WAA12F114						42.0	9,800	
4	1⅝	1,280	Fed. 209A	Fed. 12S4						40.0	10,100	
				Rem. SP12						40.0	9,400	
				Win. WAA12F114						40.0	10,000	
4	1¾	1,245	Fed. 209A	Rem. RP12						39.0	10,500	
3¾	1⅞	1,155	Fed. 209A	Rem. SP12						36.5	9,900	
				Activ T35						35.5	9,300	

12-Gauge, 2¾-in. Remington Premier, STS Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
—	⅞	1,200	Rem. 209P	Rem. TGT 12	17.0*	6,800										
				Fed. 12SO	17.0	7,200										
				Win. WAA12SL	17.0*	7,000										
				Purple PC	17.5*	6,800										
—	⅞	1,250	Rem. 209P	Rem. TGT 12	18.5*	7,100										
				Fed. 12SO	18.0	7,800										
				Win. WAA12SL	18.5*	7,800										
				Purple PC	18.5*	6,900										
—	⅞	1,300	Rem. 209P	Rem. TGT 12	20.5	8,200	20.5	7,000	22.0	7,100						
				Fed. 12SO	20.0	8,100	20.5	7,700	22.0	8,000						
				Win. WAA12SL	20.5	8,000	20.5	7,900	21.5	7,900						
				Purple PC	20.0	7,500										
				Claybuster 1100-12			20.5	6,900								

NOTE: *For each asterisk(*), add one 20-gauge, 0.135 in. thick card wad to the inside bottom of the shot cup.

continued on next page

DATA

12-Gauge, 2³/₄-in. Remington Premier Plastic Target Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot					
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi				
2 ³ / ₄	1	1,200	Rem. 209P	Rem. TGT 12	18.0	8,700	19.0	7,000	20.0	8,200										
				Fed. 12SO	18.0	9,000	19.5	7,900	19.5	8,600										
				Win. WAA12SL	18.0	9,600	19.0	7,600	19.5	8,600										
				Purple PC	18.5	8,300	20.0	7,500	20.5	7,000										
				Claybuster 1100-12			19.5	7,500												
				Green Duster	17.5	10,000	19.0	7,700	19.5	7,500										
3	1	1,255	Rem. 209P	Rem. TGT 12	19.0	9,500	20.5	8,000	21.0	8,500										
				Fed. 12SO	19.5	10,600	20.5	8,600	21.5	9,300										
				Win. WAA12SL	19.5	10,100	20.5	8,700	21.5	8,900										
				Purple PC	19.5	8,900	20.5	8,500	21.5	8,500										
				Claybuster 1100-12			20.5	8,000												
				Green Duster	18.5	10,900	20.0	8,400	21.0	8,300										
3 ¹ / ₄	1	1,290	Rem. 209P	Rem. Fig. 8	21.5	9,100			22.0	8,100										
				Rem. TGT 12	21.0	10,700	22.5	8,700	22.5	8,400										
				Rem. R12L	20.5	9,900														
				Win. WAA12F1	20.5	9,100			23.0	7,200										
				Win. WAA12SL	20.5	10,400	21.5	9,200	22.5	9,000										
				Fed. 12SO	20.0	10,500	21.5	9,900	22.0	8,700										
				Purple PC	20.5	9,100	21.5	8,900	22.5	8,200										
				Claybuster 1100-12			22.5	8,500												
				Green Duster	20.5	10,500			22.0	8,800										
				Fed. 209	Rem. R12L	20.5	10,500			22.5	9,200									
				Win. 209	Rem. R12L	20.0	10,100			22.0	8,700									
				CCI 209M	Rem. R12L	20.0	10,300			22.0	9,100									
				2 ¹ / ₂ Extra Lite	1 ¹ / ₈	1,090	Rem. 209P	Rem. Fig. 8	16.5	8,300	17.5	7,100	18.5	8,500						
								Rem. RXP12	16.0	8,700	17.0	7,500	18.0	8,700						
Fed. 12S3	16.0	10,300	17.5					8,200												
Win. WAA12 (White)	16.0	9,400							18.0	8,500										
Win. WT12 (Orange)			17.0					7,300												
Fiocchi FTW1	16.5	8,500																		
Windjammer	16.5	7,900	18.0					6,900												
Red PC	16.5	8,700	17.5					7,000												
Claybuster 3118-12			17.5					6,900												
Blue Duster	16.0	9,700	17.0					8,000	17.5	8,200										
Fed. 209	Rem. Fig. 8	16.0	9,800																	
Win. 209	Rem. Fig. 8	16.5	8,900																	
CCI 209M	Rem. Fig. 8	16.5	9,100							18.0	8,400									
	Rem. RXP12	16.0	9,300							17.5	8,600									
	Fed. 12S3	16.0	10,100							17.5	8,500									
	Win. WAA12 (White)	16.0	9,800							17.0	8,700									
	Fiocchi FTW1	16.5	9,700							17.5	8,500									
	Windjammer	16.5	8,300							18.0	7,600									
	Red PC	16.5	9,200			18.0	7,400													
	Fig. 616	Rem. Fig. 8	16.5	9,000																
2 ³ / ₄	1 ¹ / ₈	1,145	Rem. 209P	Rem. Fig. 8	18.0	9,200	19.0	7,600	19.0	7,300										
				Fed. 12S3	18.0	10,100	18.5	9,100	19.0	8,800										
				Rem. RXP12	17.5	8,900	18.5	8,300	19.0	7,700										
				Win. WAA12 (White)	17.0	10,100			19.0	6,700										
				Win. WT12 (Orange)	18.5*	8,800	18.5	8,900	19.5*	7,900										
				Fiocchi FTW1	17.5	9,700			19.5	8,800										
				Windjammer	17.5	8,900	19.0	7,900	19.5	7,800										
				Red PC	17.5	9,000	19.0	8,200	19.0	7,600										
				Lage Uniwad	17.5	9,900			19.0	8,000										
				Hornady Versalite	17.5	9,000			19.0	8,000										
				Claybuster 3118-12			19.0	8,400												
				Blue Duster	17.0	9,800	18.0	8,900	18.5	9,000										

NOTE: *For each asterisk(*), add one 20-gauge, 0.135 in. thick card wad to the inside bottom of the shot cup.

continued on next page

SHOTSHELL RELOADING

12-Gauge, 2¾-in. Remington Premier, STS Plastic Target Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Hercó		Blue Dot																						
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi																					
2¾	1⅛	1,145	Fed. 209A	Rem. Fig. 8	16.5	10,300	18.5	9,200	19.5	10,100																											
				Rem. RXP12	16.0	10,600												19.5	10,500																		
				Fed. S3	16.5	10,100												19.0	9,900																		
				Red PC	17.0	10,700												19.5	10,000																		
				Windjammer	17.5	10,500												20.0	9,600																		
			Win. 209	Rem. Fig. 8	18.0	9,500	18.5	9,000	19.0	8,100																											
				CCI 209M	Rem. Fig. 8	17.5														9,300	19.0	8,800															
			CCI 209M	Rem. RXP12	17.0	9,600																															
																				Fed. 12S3	17.5	10,600	19.0	8,900													
																					Win. WAA12 (White)	16.5	10,200	19.0	9,400												
																				Fiocchi FTW1	17.0	9,900	19.5	9,300													
																					Windjammer	17.0	9,000	19.5	7,900												
																				Red PC	17.0	9,400	19.0	7,700													
																					Hornady Versalite	17.0	9,100	19.0	8,000												
																				CCI 209	Rem. Fig. 8	17.5	8,600	19.5	7,100												
																				CCI 209SC	Rem. Fig. 8	18.0	10,400	18.5	8,900											20.5	9,900
																					Fed. 12S3	18.5	10,400													19.5	9,500
			Win. WAA12 (White)	Windjammer	18.5	9,800	20.0	10,600	20.0	10,600																											
				Windjammer	18.5	9,800	20.0	10,600	20.0	10,600																											
			Fió. 616	Rem. Fig. 8	17.5	8,900			19.0	7,800																											
			3	1⅛	1,200	Rem. 209P	Rem. Fig. 8	19.0	10,100	20.5	9,100	21.0	8,800	22.5	8,200																						
							Rem. RXP12	19.0	10,000												20.5	10,200	20.5	8,700	22.5											8,300	
						Fed. 12S3	19.0	10,400																													
																							Win. WAA12 (White)	20.0	10,600											20.0	10,600
						Win. WT12 (Orange)	19.5*	10,700	20.0	10,600	21.5*	8,700	21.0	8,900	22.0	8,900	22.0	8,900																			
							Fiocchi FTW1	18.5															10,700	20.5	9,900	23.5*	8,300										
						Windjammer	18.5	9,400	20.5	9,100	20.5	8,200	20.5	8,200	23.5	7,000																					
							Red PC	19.5															10,100	20.5	9,700	21.0	8,500	22.5	7,800								
Hornady Versalite	19.0	10,400																																			
																				Claybuster 3118-12	20.0	9,500	20.0	8,700	22.0	7,900											
Blue Duster	18.5	10,300																																			
																				Fed. 209A	Rem. Fig. 8	17.0	10,400	20.0	10,700	20.5	10,500	23.0	9,200								
Rem. RXP12	17.0	10,100																																			
																				Win. 209	Rem. Fig. 8	19.0	10,400	20.0	10,200	20.0	8,600	22.5	8,400								
CCI 209M	Rem. Fig. 8	18.5				10,400																															
																				Rem. RXP12	18.5	10,500	20.0	9,300	22.5	9,500											
	Fed. 12S3	20.5				9,200																															
																					Win. WAA12 (White)	20.5	10,200	20.5	9,200	22.5	9,500										
	Win. WAA12 (White)	21.0				9,600																															
																					Fiocchi FTW1	18.5	10,600	20.5	9,700	22.0	9,300										
	Windjammer	18.5				9,700																															
																					Red PC	19.0	10,400	20.5	8,700	23.5	8,200										
	Hornady Versalite	19.0				10,400																															
																					Claybuster 3118-12	19.0	10,400	20.0	9,200	22.0	8,800										
	CCI 209	Rem. Fig. 8				19.5	9,900			21.0	8,700	22.5	8,500																								
	CCI 209SC	Rem. Fig. 8						20.0	10,300	21.0	10,600	21.0	10,600																								
		Fed. 12S3								20.0	10,600	22.0	10,400																								
	Windjammer	22.0				10,400																															
Fió. 616			Rem. Fig. 8	19.5	10,600															20.0	8,700	23.0	8,500														
Heavy 1⅛	1,250		Fed. 209	Rem. RXP12					22.0	10,500	24.0	10,100																									
				Win. 209	Rem. RXP12																			22.0	9,400	24.5	8,800										
			CCI 209M	Rem. RXP12	22.0	9,600																															
																										Fed. 12S3	21.5	10,600	23.5	10,200	24.5	9,900					
				Win. WAA12 (White)	22.5	10,700																															
														Windjammer	22.0	9,400	24.0	10,300	24.5								10,400										
				Red PC	22.0	9,400																															
																					Hornady Versalite	22.0	9,600	24.0	9,300	25.0	9,400										
				Fió. 616	21.5	10,200																															
																					Rem. RXP12	21.5	10,200	23.5	9,900	24.5	9,900										
				Rem. 209P	22.0	9,100																															
																					Rem. RXP12	21.0	10,500	23.5	9,100	25.0	9,500										
				Rem. Fig. 8	21.5	9,900																															
																					Claybuster 3118-12	21.5	10,600	24.5	9,900	25.0	9,500										
				Blue Duster	21.5	10,300																															
																					Rem. RXP12	21.5	10,300	24.5	9,900	25.0	9,500										

NOTE: *For each asterisk(*), add one 20-gauge, 0.135 in. thick card wad to the inside bottom of the shot cup.

continued on next page


DATA

12-Gauge, 2¾-in. Remington Premier, STS Plastic Target Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
3½	1⅛	1,310	Rem. 209P	Rem. RXP12							24.5	9,700	27.5	8,400					
				Win. WAA12 (White)								25.0	10,500	27.0	8,800				
				Windjammer									26.5	8,600	28.5	8,600			
				Hornady Versalite									25.5	9,900	27.0	8,800			
				Activ T32									25.0	9,900	27.0	9,600			
				Fed. 209	Rem. RXP12										27.0	9,200			
				Win. 209	Rem. RXP12										27.0	9,500			
				CCI 209M	Rem. RXP12										26.5	9,700			
Fio. 616	Rem. RXP12										26.0	9,900	27.5	9,300					
3¼	1¼	1,220	Rem. 209P	Rem. SP12							23.5	9,300	25.0	9,600					
				Fed. 12S4								23.0	10,700	25.0	10,400				
				Win. WAA12F114									24.0	10,100	24.5	9,300			
				Hornady Versalite									23.5	9,400	25.0	8,400			
				Activ T32									23.5	9,400	25.0	8,800			
				Fed. 209	Rem. SP12									23.0	9,900	25.0	9,800		
				Win. 209	Rem. SP12									23.5	10,000	24.5	9,600		
				CCI 209M	Rem. SP12									23.5	10,300	24.5	10,000		
Fio. 616	Rem. SP12									23.0	9,600	24.5	9,300						
3½	1¼	1,275	Rem. 209P	Rem. SP12											34.5	8,600			
				Fed. 12S4												34.0	10,100		
				Win. WAA12F114												26.5	10,500		
				Activ T35												27.0	9,900		
				Fed. 209	Rem. SP12												35.0	8,500	
				Win. 209	Rem. SP12												35.0	9,100	
				CCI 209M	Rem. SP12											26.0	10,600		
				Fio. 616	Rem. SP12												34.5	9,800	
3¾	1¼	1,330	Rem. 209P	Rem. SP12												37.5	9,700		
				Fed. 209	Rem. SP12												36.5	9,700	
				Win. 209	Rem. SP12												36.5	9,900	
				CCI 209M	Rem. SP12												35.5	10,300	
				Fio. 616	Rem. SP12												35.5	9,900	
3½	1⅝	1,240	Rem. 209P	Rem. SP12												35.0	9,300		
				Activ T35													34.0	9,300	
				Fed. 209	Rem. SP12												35.0	9,100	
				Win. 209	Rem. SP12												35.0	9,100	
				CCI 209M	Rem. SP12												34.0	9,400	
Fio. 616	Rem. SP12												34.0	9,100					
3¾	1⅝	1,295	Rem. 209P	Rem. SP12												37.5	10,300		
				Rem. RP12													36.5	9,900	
				Fed. 209	Rem. RP12												35.5	10,500	
				Win. 209	Rem. RP12												35.5	10,500	
				CCI 209M	Rem. RP12												35.5	10,400	
Fio. 616	Rem. RP12												35.5	10,000					
3¼	1½	1,150	Rem. 209P	Rem. RP12												31.0	9,900		
				Activ T42													30.5	10,400	
				Fed. 209	Rem. RP12												31.0	9,900	
				Win. 209	Rem. RP12												31.5	10,100	
				CCI 209M	Rem. RP12												31.0	9,900	
Fio. 616	Rem. RP12												31.0	9,800					
3½	1½	1,205	Rem. 209P	Rem. RP12												33.0	10,200		
				Activ T42													31.5	10,600	
				Fed. 209	Rem. RP12												33.0	10,300	
				Win. 209	Rem. RP12												33.0	10,200	
				CCI 209M	Rem. RP12												33.0	10,100	
Fio. 616	Rem. RP12												33.0	10,100					

PC: Pattern Control

SHOTSHELL RELOADING



12-Gauge, 2¾-in. Remington-Peters Unibody SP Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
3¼	1	1,290	Rem. 209	Rem. R12L			22.0	9,200							
				Rem. RXP12			21.5	9,900							
				Win. WAA12F1			21.0	9,900							
			CCI 209	Rem. R12L	21.0	9,700	23.5	8,100							
			CCI 209M	Rem. R12L	20.0	10,600	22.5	8,100							
			Fed. 209	Rem. R12L	19.5	10,400	22.0	9,600							
	Win. 209	Rem. R12L	20.0	10,700	21.5	8,800									
2¾	1½	1,145	Rem. 209	Rem. RXP12			19.0	8,800							
				Rem. R12H	17.5	9,300	19.0	8,500							
				Fed. 12S3	17.0	10,100	19.0	9,200							
				Win. WAA12 (White)	17.0	10,200	17.5	10,000							
				Hornady Versalite	17.0	8,800	18.0	8,500							
			CCI 209	Rem. RXP12	18.0	10,100	18.5	9,200							
			CCI 209M	Rem. RXP12	17.0	10,200	18.5	9,100							
			Fed. 209	Rem. RXP12	17.5	10,500	18.0	9,200							
			Win. 209	Rem. RXP12	17.0	10,500	18.5	8,800							
3	1½	1,200	Rem. 209	Rem. RXP12	18.0	10,500	20.0	9,800	22.0	9,100					
				Rem. R12H	18.0	10,000	19.5	9,400	21.5	8,300					
				Fed. 12S3					21.5	8,800					
				Win. WAA12 (White)			19.5	10,000	21.5	8,400					
				Hornady Versalite	18.0	10,000	19.0	9,900	21.0	8,200					
			Windjammer	18.5	9,600	20.5	8,300	22.0	7,700						
			Fed. 209	Rem. RXP12	18.0	10,100	20.0	9,200	22.0	8,100					
			CCI 209	Rem. RXP12			21.0	8,800	23.0	8,300					
			CCI 209M	Rem. RXP12			20.0	10,000	22.0	8,800					
			Win. 209	Rem. RXP12			20.5	9,800	22.0	8,900					
3¼	1½	1,255	Rem. 209	Rem. RXP12			20.5	10,300	22.5	9,200					
				Rem. R12H			21.0	10,400	22.5	8,300					
				Fed. 12S3					22.5	9,800					
				Win. WAA12 (White)					22.5	9,200					
				Rem. 97★	Rem. RXP12			21.0	10,600						
			Rem. R12H			21.0	10,100								
			Fed. 209	Rem. RXP12			20.5	10,200	23.0	10,000					
			CCI 209	Rem. RXP12			22.5	10,500	23.0	8,800					
			CCI 209M	Rem. RXP12			21.0	10,100	23.0	9,700					
			Win. 209	Rem. RXP12			21.5	10,700	23.5	9,800					
3½	1½	1,310	Rem. 209	Rem. RXP12					24.0	10,000	25.5	10,200			
				Rem. R12H					24.5	10,100	25.5	10,100			
				Win. WAA12 (White)					24.0	10,300	24.5	10,200			
				Fed. 209	Rem. R12H					25.5	10,700	25.5	10,700		
			CCI 209	Rem. R12H					25.5	9,600	27.0	9,300			
			CCI 209M	Rem. R12H					25.0	10,700	26.5	10,300			
			Win. 209	Rem. R12H					25.0	10,700	26.5	10,700			
3¼	1¼	1,220	Rem. 209	Rem. SP12					22.5	9,700	23.5	9,400			
				Win. WAA12F114					23.0	10,100	23.0	10,100	30.0	10,300	
			Fed. 209	Rem. SP12					22.5	10,700	23.5	10,400	31.5	10,000	
			CCI 209	Rem. SP12					24.5	9,600	25.5	9,100			
			CCI 209M	Rem. SP12					23.0	10,100			32.0	8,500	
			Win. 209	Rem. SP12					23.0	10,600	24.5	10,500	33.0	9,000	
3½	1¼	1,275	Rem. 209	Rem. SP12									32.0	10,200	
				Win. WAA12F114									32.0	10,000	
			Fed. 209	Rem. SP12									32.5	10,600	
			CCI 209	Rem. SP12									35.5	8,900	
			CCI 209M	Rem. SP12									33.5	9,800	
Win. 209	Rem. SP12									35.0	10,300				
3¾	1¼	1,330	CCI 209	Rem. RP12									37.5	9,700	
			CCI 209M	Rem. RP12									35.5	10,400	
3½	1⅜	1,240	CCI 209	Rem. RP12									36.0	10,100	
			CCI 209M	Rem. RP12									32.5	10,500	
3¼	1½	1,150	Rem. 209P	Rem. RP12										32.5	8,000
				Activ T42										31.5	9,600
			Fed. 209	Rem. RP12									31.5	9,100	
			Win. 209	Rem. RP12									32.0	8,300	
			CCI 209M	Rem. RP12									32.0	8,400	
Fio. 616	Rem. RP12									31.5	9,200				
3¼	1⅝	1,115	Rem. 209P	Activ T42										29.5	10,500
				Activ T42									29.0	10,400	
			Win. 209	Activ T42									29.5	10,400	
			CCI 209M	Activ T42									29.5	10,300	
			Fio. 616	Activ T42									29.5	10,400	

DATA

12-Gauge, 3-in. Remington-Peters SP Plastic Shells with Separate Plastic Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¾	1⅜	1,295	CCI 209M	Rem. RXP12* Fed. 12S3 Win. WAA12 (White)*							30.0	9,200		
4	1⅜	1,350	CCI 209M	Rem. RXP12 Fed. 12S3 Win. WAA12 (White)									42.5	8,000
4	1½	1,315	CCI 209M	Rem. SP12* Fed. 12S4* Win. WAA12F114*									42.0	8,500
4	1½	1,315	CCI 209M	Rem. SP12* Fed. 12S4* Win. WAA12F114*									40.0	9,400
4	1⅝	1,280	CCI 209M	Rem. SP12 Fed. 12S4 Win. WAA12F114									39.5	9,800
4	1⅝	1,280	CCI 209M	Rem. SP12 Fed. 12S4 Win. WAA12F114									39.0	9,800
4	1¾	1,245	CCI 209M	Rem. RP12 Activ T35									38.5	10,200
4	1¾	1,245	CCI 209M	Rem. RP12 Activ T35									38.5	10,700
3¾	1⅞	1,155	CCI 209M	Rem. RP12 Activ T35									37.5	10,400
3¾	1⅞	1,155	CCI 209M	Rem. RP12 Activ T35									34.0	10,300
3¾	1⅞	1,155	CCI 209M	Rem. RP12 Activ T35									34.0	10,100

NOTE: *For each asterisk(*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

12-Gauge, 3-in. Remington-Peters Unibody SP Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi
3¾	1⅜	1,295	Win. 209	Rem. RXP12 Fed. 12S3 Win. WAA12SL Win. WAA12 (White) Activ TG30			37.5	9,200
3¾	1⅜	1,295	Win. 209	Rem. RXP12 Fed. 12S3 Win. WAA12SL Win. WAA12 (White) Activ TG30			37.0	9,300
3¾	1⅜	1,295	Win. 209	Rem. RXP12 Fed. 12S3 Win. WAA12SL Win. WAA12 (White) Activ TG30			35.5	10,100
3¾	1⅜	1,295	Win. 209	Rem. RXP12 Fed. 12S3 Win. WAA12SL Win. WAA12 (White) Activ TG30			36.5	9,400
3¾	1⅜	1,295	Win. 209	Rem. RXP12 Fed. 12S3 Win. WAA12SL Win. WAA12 (White) Activ TG30			36.5	9,200
4	1⅜	1,350	Win. 209	Rem. RXP12 Fed. 12S4 Win. WAA12F114 Activ T32			38.5	9,900
4	1⅜	1,350	Win. 209	Rem. RXP12 Fed. 12S4 Win. WAA12F114 Activ T32			38.0	10,200
4	1⅜	1,350	Win. 209	Rem. RXP12 Fed. 12S4 Win. WAA12F114 Activ T32			38.0	10,500
4	1⅜	1,350	Win. 209	Rem. RXP12 Fed. 12S4 Win. WAA12F114 Activ T32			38.5	9,800
4	1½	1,315	CCI 209M	Rem. SP12			37.5	10,700

Additional 12-Gauge, 2¾-in., ⅞-oz. Target Loads‡


Shell	Velocity (fps)	Primer	Wad	Bullseye		Red Dot		American Select		Green Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
Federal Paper Target	1,200	Fed. 209	Fed. 12SO	17.5	4,500	17.5	5,700				
			Win. WAA12F1	17.5*	4,600	17.5	4,800				
			Rem. PT12	17.5*	5,100	17.5	5,000				
Federal Gold Medal	1,200	Fed. 209	Fed. 12SO	17.0**	6,300	18.0	6,200				
			Win. WAA12F1	17.0**	5,800	18.0*	5,700				
			Rem. PT12	17.5**	5,500	18.0*	6,400				
Win. Western AA-Type	1,200	Win. 209	Win. WAA12F1	16.5*	6,700	16.5	7,300				
			Fed. 12SO	16.5	7,400	16.0*	8,000				
			Rem. PT12	16.5*	7,100	16.5*	7,300				

NOTES: *For each asterisk (*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

‡Auto-loading shotguns may not function with loads having pressures less than 7,000 psi.

It is important to have tight crimps to prevent load efficiencies (pressures) from dropping. The efficiency may also drop when these loads are fired at low temperatures.

SHOTSHELL RELOADING



12-Gauge, 2¾-in. Winchester Plastic AA Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
—	7/8	1,200	Win. 209	Win. WAA12SL	16.5*	7,300													
				Win. WAAL (Gray)	16.5	7,900													
				Fed. 12SO	16.0*	8,000													
				Rem. TGT 12	16.5*	7,300													
				Purple PC	17.0*	7,500													
—	7/8	1,250	Win. 209	Win. WAA12SL	18.0*	9,300													
				Win. WAAL (Gray)	17.5	8,600	18.5	7,200											
				Fed. 12SO	17.5	9,000													
				Rem. TGT 12	18.0*	8,400													
				Purple PC	18.0*	8,400													
—	7/8	1,300	Win. 209	Win. WAA12SL	19.0	10,300	20.5	8,400	20.5	8,800									
				Win. WAAL (Gray)	18.5	9,300	19.5	8,000	20.0	8,300									
				Fed. 12SO	19.0	9,400	21.0	8,300	21.0	8,900									
				Rem. TGT 12	19.0*	9,300	20.5	7,600	21.0	8,400									
				Purple PC	19.5*	9,000	20.5	7,200	21.5*	7,900									
				Claybuster 1100-12			21.0	7,200											
—	7/8	1,400	Win. 209	Win. WAAL (Gray)			22.0	10,200											
2¾	1	1,200	Win. 209	Win. WAA12SL	18.0	10,200	19.0	8,200	19.5	8,500									
				Win. WT12 (Orange)	17.5	10,600													
				Fed. 12SO	18.0	9,600	19.0	8,700	19.5	8,400									
				Rem. TGT 12	18.0	9,200	19.0	8,000	19.5	7,900									
				Purple PC	18.0	8,900	19.5	7,277	19.5	7,000									
				Claybuster 1100-12			19.0	7,400											
				Green Duster	17.5	9,900	19.0	8,100	19.5	8,300									
3	1	1,255	Win. 209	Win. WAA12SL	19.0	10,500	20.0	9,500	21.0	9,200									
				Rem. TGT 12	19.5	9,800	20.0	9,100	21.0	8,800									
				Purple PC	19.0	9,700	20.5	8,000	21.5	8,700									
				Fed. 12SO			20.0	10,000											
				Claybuster 1100-12			20.5	8,800											
Green Duster	19.0	10,500	20.0	8,900	20.5	9,200													
3¼	1	1,290	Win. 209	Win. WAA12SL			21.5	10,300	21.5	9,500									
				Win. WAA12 (White)	19.0	10,500			20.0	8,700									
				Fed. 12C1	20.0	10,200			21.0	8,800									
				Fed. 12S3	20.0	9,900			22.5	9,700									
				Fed. 12SO			20.5	10,200											
				Rem. RXP12	20.0	10,100			21.0	8,800									
				Rem. TGT 12			21.0	9,500	22.0	9,700									
				Purple PC	20.0	10,400	21.5	8,500	22.0	9,000									
				Claybuster 1100-12			21.5	9,200											
				Green Duster			21.5	9,700	22.0	9,600									
				CCI 209M	Win. WAA12 (White)	18.5	10,400			21.5	9,900								
				Extra Lite	1½	1,090	Win. 209	Win. WAA12SL	16.0	9,300			18.0	8,000					
								Win. WAA12 (White)	16.0	9,500	17.0	9,000	17.5	8,100					
Win. WT12 (Orange)									16.5	9,000									
Rem. Fig. 8	16.0	8,300	17.5					8,100	18.0	7,400									
Rem. RXP12	16.5	9,000	17.0					9,100	17.5	7,600									
Fed. 12S3	17.0	10,400							18.0	9,700									
Hornady Versalite	16.5	9,000							17.5	7,800									
Red PC	16.0	9,100	17.0					7,300	18.0	7,300									
Claybuster 1100-12			17.0					7,600											
Blue Duster	15.5	10,300	17.0					8,300	17.5	8,300									
Fed. 209	Win. WAA12 (White)	16.0	9,900																
Fed. 209A	Win. WAA12 (White)							17.0	8,700										
Rem. 209P	Win. WAA12 (White)	17.0	8,100					17.0	8,000										
CCI 209M	Win. WAA12 (White)	17.0	9,800																
CCI 209SC	Win. WAA12 (White)			17.0	7,900														
Fio. 616	Win. WAA12 (White)	16.0	8,900																

continued on next page

DATA

12-Gauge, 2³/₄-in. Winchester Plastic AA Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot					
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi				
2 ³ / ₄	1 ¹ / ₈	1,145	Win. 209	Win. WAA12SL					19.0	9,400										
				Win. WAA12 (White)	17.0	10,000	18.0	9,400	18.0	8,500										
				Win. WT12 (Orange)	16.5	10,700	18.5	9,600	18.0	9,400										
				Rem. Fig. 8	17.5	9,900	19.0	9,400	19.0	8,600										
				Rem. RXP12	17.0	8,400	19.0	9,400	18.0	8,100										
				Fed. 12C1	17.5	9,400			18.5	8,100										
				Fiocchi FTW1	17.5	10,100			19.5	9,600										
				Hornady Versalite	18.0	9,500			19.5	8,000										
				Windjammer	17.5	9,300	18.5	8,100	18.0	8,400										
				Red PC	17.5	9,500	18.5	8,600	19.0	8,300										
				Claybuster 3118-12			18.5	9,000												
				Blue Duster	16.5	10,600	18.0	9,000	19.0	9,300										
				Fed. 209A	Win. WAA12 (White)	17.0	10,600	18.5	9,800	18.0	9,300									
					Rem. Fig. 8	17.0	9,800			18.5	8,600									
			Hornady Versalite		17.0	10,300			18.5	9,300										
			Windjammer		17.0	9,000			18.5	8,200										
			Red PC		17.0	10,100			18.5	8,700										
			Rem. 209P	Claybuster 3118-12	17.0	9,600			18.5	8,400										
				Win. WAA12 (White)	17.5	8,700	19.0	8,700												
			CCI 109	Win. WAA12 (White)	17.0	9,200			18.0	8,200										
			CCI 209M	Win. WAA12 (White)	17.5	10,400			18.5	10,100										
			CCI 209SC	Win. WAA12 (White)	17.5	10,600	18.5	9,600	19.5	10,300										
Rem. Fig. 8	18.0	10,500				20.5	9,700													
Windjammer		18.0	9,900			20.5	9,500													
	Win. WAA12 (White)	17.0	10,200			18.5	9,400													
3	1 ¹ / ₈	1,200	Win. 209	Win. WAA12SL					20.5	10,700	22.5	9,100								
				Win. WAA12 (White)	18.0	10,400	19.5	10,300	19.5	9,300	21.0	9,100								
				Win. WT12 (Orange)	17.0	10,700	19.5	10,700	20.0	9,200	21.5	9,000								
				Rem. Fig. 8	18.5	10,700	20.0	9,800	20.5	9,500	22.5	8,300								
				Rem. RXP12	18.5	9,800	20.5	10,700	19.5	8,900	22.0	8,700								
				Fed. 12C1	18.5	9,700			19.5	9,000	22.0	8,900								
				Fiocchi FTW1	18.5	10,700			20.0	9,900	22.5	8,800								
				Hornady Versalite	19.0	9,700			21.0	9,000	21.0	8,200								
				Windjammer	18.5	9,900	20.5	9,200	21.0	9,000	22.5	8,200								
				Red PC	18.5	10,500	20.0	10,100	20.5	9,800	23.5	9,500								
				Claybuster 3118-12			19.5	10,200												
				Blue Duster			19.5	10,000	20.0	9,400										
				Fed. 209A	Win. WAA12 (White)			19.5	10,800	19.0	10,200									
					Rem. Fig. 8	18.5	10,200			19.5	9,400									
			Hornady Versalite		18.0	10,700			19.5	10,400										
			Windjammer		18.0	10,000			20.0	9,200										
			Red PC		18.0	10,000			19.5	10,500										
			Rem. 209P	Claybuster 3118-12	18.5	10,500			19.5	9,300										
				Win. WAA12 (White)	19.0	9,500	21.0	9,600	20.0	9,800	23.0	7,500								
			CCI 109	Win. WAA12 (White)	18.0	10,400			19.0	9,300										
			CCI 209M	Win. WAA12 (White)	18.5	10,500			20.0	10,400	21.5	10,300								
			CCI 209SC	Win. WAA12 (White)			19.5	10,100	20.5	10,700										
Rem. Fig. 8	18.5	10,400				22.0	10,400													
Windjammer						22.0	10,200													
	Win. WAA12 (White)	18.0	10,500			20.0	9,500	21.5	9,100											
Heavy	1 ¹ / ₈	1,250	Win. 209	Win. WAA12SL							24.0	9,900								
				Win. WAA12 (White)					21.5	10,500	23.5	9,400	25.0	9,500						
				Win. WT12 (Orange)					21.5	9,800	22.5	9,500	23.5	9,400						
				Rem. Fig. 8					22.0	10,300	24.0	9,000	25.0	9,100						
				Rem. RXP12			21.0	10,800	21.0	9,500	23.0	9,200	25.0	9,200						
				Fed. 12C1					21.0	10,200	23.0	9,500	25.0	9,400						
				Hornady Versalite					22.0	9,900	24.0	9,400	24.5	9,200						
				Red PC			21.5	10,800	22.0	10,300	24.5	10,000	25.0	9,100						
				Claybuster 3118-12			20.5	10,700												
				Blue Duster																
			Win. 209	Activ T32	21.5	9,600			23.0	8,800										
				Fed. 209																
			Rem. 209P	Win. WAA12 (White)									24.0	10,100						
				Win. WAA12 (White)									24.0	9,300						
			Rem. Fig. 8																	
				Win. WAA12 (White)			22.5	9,400												
Fed. 209	Win. WAA12 (White)	22.0	10,500			23.5	10,100													

continued on next page

SHOTSHELL RELOADING

12-Gauge, 2¾-in. Winchester Plastic AA Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		AmericanSelect		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3½	1⅛	1,310	Win. 209	Rem. RXP12 Win. WAA12 (White) Red PC Hornady Versalite					23.0	10,200	24.0	9,800	26.5	9,100				
											25.5	10,000	26.5	9,300				
											25.0	9,100						
											25.0	10,300	26.5	9,900				
											24.5	10,600						
											26.0	9,700	27.0	8,100				
											25.5	9,700						
3¼	1¼	1,220	Win. 209	Fed. 12S4 Rem. RP12 Win. WAA12F114 Hornady Versalite							23.5	10,400	25.0	9,300				
											22.5	9,500						
											23.5	9,900	25.0	8,400				
											24.0	9,800	25.5	8,500				
											22.5	10,700	24.5	10,400				
											23.0	10,000	24.0	10,100				
											24.0	10,000	25.5	8,300				
											23.5	9,900	24.0	9,100				
23.0	10,300	25.0	9,800															
3½	1¼	1,275	Win. 209	Win. WAA12F114 Rem. SP12 Fed. 12S4 Activ T35									26.5	10,700	34.5	9,900		
															35.0	8,200		
															26.0	10,700	34.0	10,500
															26.0	10,700	34.5	9,000
															26.0	10,700	32.0	9,500
															27.0	9,400		
															27.0	10,700	35.0	8,600
3¼	1¼	1,330	Win. 209	Rem. RP12 Rem. SP12 Win. WAA12F114 Activ T35											38.0	10,200		
																	37.0	10,300
																	37.0	10,600
																	36.5	9,700
																	33.5	10,500
																	36.5	9,500
3½	1⅜	1,240	Win. 209	Win. WAA12F114 Rem. SP12 Fed. 12S4											34.0	10,500		
																	33.0	10,600
																	33.0	10,400
																	32.0	10,100
3¼	1½	1,150	Win. 209	Rem. RP12 Activ T42											31.0	9,400		
																	30.0	10,000
																	30.0	10,400
				30.0	10,400													

PC: Pattern Control

NOTES: *For each asterisk(*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

Auto-loading shotguns **may not** function with loads having pressures less than 7,000 psi. It is important to have tight crimps to prevent load efficiencies (pressures) from dropping. The efficiency may also drop when these loads are fired at low temperatures.

**IF YOU CHOOSE
TO WIN, THERE
ARE THREE
WAYS TO DO IT.**



Whatever your reloading preference, Alliant has your powder. It's value priced and performs consistently, batch after batch. Reload with Alliant, you can't lose.

DATA

12-Gauge, 2¾-in. Winchester Polyformed with Plastic Wad


Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¼	1	1,290	Win. 209	Win. WAA12F1	22.0	7,600	23.5	7,000						
				Fed. 12S3	21.0	9,600								
				Rem. Fig. 8	21.5	8,500	23.0	7,800						
				Purple PC	21.5	7,900	24.0	6,800						
				Rem. 209P	21.5	7,800								
				Fed. 209	21.0	8,200								
2½ Extra Lite	1½	1,090	Win. 209	Win. WAA12 (White)	16.5	7,800								
				Fed. 12S3	17.5	7,800								
				Rem. Fig. 8	17.0	6,900	18.5	6,700						
				Hornady Versalite	16.5	7,900	18.5	6,700						
				Red PC	17.0	7,500								
				Rem. 209P	16.5	6,700								
2¾	1½	1,145	Win. 209	Win. WAA12 (White)	18.0	8,500	20.5	7,300						
				Fed. 12S3	18.0	8,900								
				Rem. Fig. 8	18.0	8,000	19.5	7,000						
				Hornady Versalite	18.0	8,600	20.0	7,200						
				Red PC	18.5	7,800	20.5	6,800						
				Fed. 209	18.0	8,700	20.0	7,000						
3	1½	1,200	Win. 209	Win. WAA12 (White)	19.5	8,900	22.0	8,700	23.0	7,600				
				Fed. 12S3	19.0	9,600	21.5	8,300	23.5	8,300				
				Rem. Fig. 8	19.0	8,700	21.5	8,200	23.0	7,400				
				Hornady Versalite	19.0	9,400	21.5	7,700	23.0	7,700				
				Red PC	19.5	8,400	22.0	7,600	23.5	7,600				
				Rem. 209P	19.5	9,000	23.5	7,900						
3¼	1½	1,255	Win. 209	Win. WAA12 (White)	21.0	9,400	23.5	8,800	25.0	8,500				
				Fed. 12S3			23.5	8,600	25.0	8,400				
				Hornady Versalite	21.5	9,700	24.0	8,300	25.0	8,000				
				Red PC	21.0	9,900	23.5	8,000	25.0	7,900				
				Activ T32	21.0	10,100	23.5	8,800	25.0	8,300				
				Rem. 209P	21.5	9,500			25.5	7,700				
3½	1½	1,310	Win. 209	Win. WAA12 (White)			25.5	8,900	26.5	8,600				
				Fed. 12S3			24.5	9,900	26.0	9,400				
				Hornady Versalite	22.5	10,300	25.0	8,900	26.5	9,000				
				Red PC	22.5	10,200	25.5	8,700	26.5	8,600				
				Activ T32			24.5	9,500	26.5	9,000				
				Rem. 209P	22.5	10,200	25.0	8,800	27.0	9,000				
3¾	1¾	1,295	Win. 209	Fed. 12S3			37.5	10,300						
				Rem. RXP12			38.0	9,400						
				Win. WAA12 (White)			37.5	10,000						
				Fed. 12S4			40.0	10,500						
				Rem. SP12			40.5	9,300						
				Win. WAA12F114			39.0	9,900						
4	1½	1,315	Win. 209	Rem. SP12			38.5	10,300						
4¼	1½	1,335	Win. 209	Rem. RP12					50.0	10,000				
4	1¾	1,245	Win. 209	Rem. RP12					45.0	9,900				

PC: Pattern Control

12-Gauge, 3-in. Winchester-Western Plastic AA-Type Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Herco		Blue Dot		2400	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3¾	1¾	1,295	Win. 209	Fed. 12S3			37.5	10,300		
				Rem. RXP12			38.0	9,400		
				Win. WAA12 (White)			37.5	10,000		
4	1¾	1,350	Win. 209	Fed. 12S4			40.0	10,500		
				Rem. SP12			40.5	9,300		
				Win. WAA12F114			39.0	9,900		
4	1½	1,315	Win. 209	Rem. SP12			38.5	10,300		
4¼	1½	1,335	Win. 209	Rem. RP12					50.0	10,000
4	1¾	1,245	Win. 209	Rem. RP12					45.0	9,900

SHOTSHELL RELOADING



12-Gauge, 2³/₄-in. Activ Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
2 ³ / ₄	1 ¹ / ₈	1,145	CCI 209	Fed. 12S3	18.5	7,800													
			CCI 209M	Fed. 12S3	17.5	8,100													
			Fed. 209	Fed. 12S3	18.0	8,700													
			CCI 209SC	Claybuster					19.0	7,000									
				Activ TG30					19.5	8,100									
			Rem. 209P	Claybuster					20.0	6,900									
				Activ TG30					20.0	7,200									
			Win. 209	Fed. 12S3	18.0	8,500													
				Rem. PT12	17.5	8,300													
				Win. WAA12F1	18.5	7,700													
				Purple PC	18.5	7,400													
				Claybuster					19.0	7,300									
	Activ TG30					19.5	8,100												
	Fed. 209A	Claybuster				19.0	8,700												
		Activ TG30				19.5	8,500												
3	1 ¹ / ₈	1,200	CCI 209	Fed. 12S3	20.0	8,200													
			CCI 209M	Fed. 12S3	19.5	10,000			21.5	8,700									
			CCI 209SC	Claybuster					20.5	9,100									
				Activ TG30					21.0	9,200									
			Fed. 209	Fed. 12S3	19.5	9,600					21.5	7,500							
			Fed. 209A	Claybuster					20.5	10,100									
				Activ TG30					20.5	9,600									
			Rem. 209P	Claybuster (Red)					21.0	9,600									
				Activ TG30					21.0	8,600									
			Win. 209	Fed. 12S3	19.5	10,300					21.5	7,400							
				Rem. PT12	19.5	9,400					22.0	8,000							
				Win. WAA12F1	19.5	8,700					22.5	6,500							
	Purple PC	20.0	8,400					23.0	7,000										
	Claybuster					20.5	8,600												
	Activ TG30					21.0	9,200												
Heavy	1 ¹ / ₈	1,250	Rem. 209P	Activ TG30					22.5	8,900									
				Claybuster (Red)					22.5	10,000									
			Win. 209	Activ TG30					22.0	10,100									
				Claybuster					22.0	9,700									
			CCI 209SC	Activ TG30					22.5	10,600									
				Claybuster					22.0	10,500									
Fed. 209A	Activ TG30					21.0	9,000												
	Claybuster					21.5	10,800												
3 ¹ / ₄	1 ¹ / ₈	1,255	CCI 209M	Fed. 12S3					22.0	9,400									
				Win. WAA12 (White)					23.0	8,800									
3 ¹ / ₄	1 ¹ / ₄	1,220	CCI 209	Activ T32					23.0	9,300	25.5	8,100							
				Win. WAA12 (White)					23.5	9,000	25.5	8,400							
			CCI 209M	Activ T32					22.0	9,600	24.5	9,000							
				Win. WAA12 (White)					22.5	10,000	24.5	9,000							
			Fed. 209	Activ T32					22.5	10,000	24.5	9,200							
				Win. WAA12 (White)					22.5	9,800	24.5	9,500							
			Win. 209	Activ T32					23.0	9,700	24.5	9,000							
				Fed. 12C1							24.5	8,900							
	Rem. RXP12					22.0	9,900	24.5	9,200										
	Win. WAA12 (White)					22.0	10,200	24.0	9,200										
3 ³ / ₄	1 ¹ / ₄	1,330	CCI 209	Fed. 12S4									30.5	9,800	39.5	9,300			
			CCI 209M	Activ T32										29.0	10,200				
			Fed. 209	Activ T32										27.5	10,500	29.5	10,300		
				Fed. 12S4													37.0	10,100	
			Win. 209	Activ T32										27.5	10,200	29.0	9,700		
				Fed. 12S4													39.5	9,000	
	Rem. SP12												28.5	9,800	39.0	8,700			
	Win. WAA12F114												28.5	10,300	40.0	8,800			

continued on next page

DATA

12-Gauge, 2³/₄-in. Activ Plastic Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3 ³ / ₄	1 ³ / ₈	1,295	CCI 209	Activ T35 Rem. RP12									30.5	10,300	40.0	8,500		
			CCI 209M	Activ T35 Rem. RP12										29.5	10,500	38.5	8,700	
			Fed. 209	Activ T35 Rem. RP12												38.0	9,400	
			Win. 209	Activ T35 Rem. RP12												38.0	9,700	
4	1 ³ / ₈	1,350	Fed. 209	Activ T35											37.0	10,200		
			Win. 209	Activ T35												39.0	9,100	
3 ¹ / ₄	1 ¹ / ₂	1,150	Fed. 209	Activ T35											38.0	9,500		
			CCI 209M	Activ T42 Rem. RP12												40.0	10,100	
			Fed. 209	Activ T42												39.5	10,100	
			Rem. 209P	Activ T42													34.0	8,200
			Win. 209	Activ T42													33.0	9,200
3 ³ / ₄	1 ¹ / ₂	1,260	Fio. 616	Activ T42											33.5	9,100		
			CCI 209	Activ T42												38.5	9,600	
			CCI 209M	Activ T42 Rem. RP12												36.5	10,200	
			Win. 209	Activ T42 Rem. RP12												35.5	10,000	
3 ¹ / ₄	1 ⁵ / ₈	1,115	Win. 209	Activ T42											36.0	10,400		
			CCI 209M	Activ T42												35.5	9,900	
			Fed. 209	Activ T42												31.5	9,600	
			Win. 209	Activ T42												31.0	9,100	
			Rem. 209P	Activ T42												31.5	9,500	
Fio. 616	Activ T42												31.0	9,400				

12-Gauge, 3-in. Activ Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3 ³ / ₄	1 ³ / ₈	1,295	CCI 209M	Fed. 12S3 Rem. RXP12 Win. WAA12 (White)								31.5	10,400			
												31.5	10,000			
													31.5	10,100		
4	1 ³ / ₈	1,350	CCI 209M	Activ T32 Rem. RXP12 Win. WAA12 (White) Fed. 12S3								33.5	10,700	43.0	8,300	
												33.0	10,400	42.5	7,900	
														40.5	8,700	
														41.5	8,600	
4	1 ¹ / ₂	1,315	CCI 209M	Activ T35 Fed. 12S4 Rem. R12H Win. WAA12F114										41.0	9,600	
														40.5	9,200	
															41.5	8,500
															40.0	9,800
4	1 ⁵ / ₈	1,280	CCI 209M	Activ T35 Fed. 12S4 Rem. SP12 Win. WAA12F114										39.0	10,000	
														39.5	10,600	
															41.5	10,100
															40.0	9,900
4	1 ³ / ₄	1,245	CCI 209M	Activ T35 Rem. SP12										40.0	10,400	
															40.0	10,700
3 ³ / ₄	1 ⁷ / ₈	1,155	CCI 209M	Activ T35 Rem. SP12										36.5	10,000	
															37.0	10,200
3 ³ / ₄	2	1,120	CCI 209M	Rem. RP12										35.0	10,600	

SHOTSHELL RELOADING



12-Gauge, 2¾-in. Fiocchi Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
—	7/8	1,200	Fio. 616	Rem. TGT 12	17.0*	6,900												
				Fed. 12SO	17.5	6,700												
				Win. WAA12SL	17.0*	6,700												
				Purple PC	17.5*	6,400												
—	7/8	1,250	Fio. 616	Rem. TGT 12	18.5	7,000												
				Fed. 12SO	19.0	6,900												
				Win. WAA12SL	18.5	6,800												
				Purple PC	19.0*	6,700												
—	7/8	1,300	Fio. 616	Fed. 12SO	19.5	8,800												
				Rem. TGT 12	20.0	7,900			22.0	7,600								
				Win. WAA12SL	20.0	8,100			22.0	7,900								
				Purple PC	20.0*	8,600			22.5	7,700								
2¾	1	1,200	Fio. 616	Fed. 12SO	18.0	9,100			20.0	8,100								
				Rem. TGT 12	18.0	8,500			20.0	7,400								
				Win. WAA12SL	18.0	8,500			20.0	7,900								
				Purple PC	18.0	8,100			20.0	7,200								
3	1	1,255	Fio. 616	Rem. TGT 12	19.0	9,300			21.0	8,400								
				Win. WAA12SL	19.0	9,500			21.0	8,100								
				Purple PC	19.0	9,500			21.0	8,200								
3¼	1	1,290	Fio. 616	Rem. TGT 12	20.5	10,100			22.5	8,600								
				Win. WAA12SL	20.5	10,300			22.5	9,400								
				Purple PC	21.0	9,800			23.0	8,400								
Extra Lite	1½	1,090	Fio. 616	Fiocchi FTW1	16.5	8,100			18.5	6,800								
				Fiocchi TL1			18.0	7,400										
				Fed. 12S3	16.0	8,400	17.5	7,400	18.5	7,200								
				Fed. 12C1					18.5	6,800								
				Win. WAA12 (White)	17.0	7,600			18.5	7,000								
				Win. WAA12SL	17.0	7,300												
				Rem. Fig. 8	16.0	8,000			18.5	6,500								
				Rem. RXP12	16.5	8,700			18.5	6,700								
				Hornady Versalite	16.5	8,100			18.5	7,100								
				Claybuster (Red)			18.0	7,100										
2¾	1½	1,145	Fio. 616	Fiocchi FTW1	17.5	8,800			20.0	7,300								
				Fiocchi TL1			19.5	8,500										
				Fed. 12S3	18.0	9,200	19.0	8,700	20.0	7,500								
				Fed. 12C1	18.0	8,800			19.5	7,500								
				Rem. Fig. 8	18.0	8,400			20.0	7,100								
				Rem. RXP12	18.0	8,700			20.0	7,200								
				Win. WAA12 (White)	18.0	9,000			20.0	7,600								
				Win. WAA12SL	18.0	8,300												
				Hornady Versalite	17.5	9,000			19.5	7,500								
				Windjammer Claybuster (Red)	18.5	7,400	19.5	8,000	19.5	7,200								
3	1½	1,200	Fio. 616	Fiocchi FTW1	19.0	9,300			21.0	7,800	23.5	7,400						
				Fiocchi TL1			20.5	9,200										
				Fed. 12S3	19.0	9,700	20.5	9,400										
				Fed. 12C1	19.0	9,500			21.0	8,400	23.5	6,900						
				Rem. Fig. 8	19.5	9,600			21.5	8,500	23.5	7,000						
				Rem. RXP12	19.5	9,700			21.5	7,900	22.5	7,200						
				Win. WAA12 (White)	19.5	9,400			21.5	8,100	23.5	6,800						
				Hornady Versalite	18.5	9,500			21.0	8,200	24.0	7,100						
				Windjammer Claybuster (Red)	20.0	8,600	21.0	9,000	21.0	7,700	24.0	6,400						
				Heavy	1½	1,250	Fio. 616	Fiocchi FTW1	21.0	10,500			23.0	9,200	24.5	8,200	26.0	8,300
Fiocchi TL1			22.0					10,200										
Fed. 12S3			22.0					10,300										
Fed. 12C1	20.5	10,700							22.5	9,300	24.5	8,000	26.0	7,500				
Rem. Fig. 8	20.5	10,200							23.0	8,800	24.5	7,600	26.0	7,300				
Rem. RXP12									23.0	9,200	23.5	8,200	26.0	7,500				
Win. WAA12 (White)									23.0	8,900	25.0	7,800	26.0	7,900				
Hornady Versalite									22.5	9,300	25.0	7,800	25.5	7,700				
Windjammer Claybuster (Red)	21.0	9,400							22.5	9,000	25.5	6,900	26.5	7,700				
									22.5	10,700								
3½	1½	1,310	Fio. 616	Fed. 12S3					25.0	9,600	27.0	8,600						
				Fed. 209					24.5	10,300	27.0	9,200						
				CCI 209M	Rem. RXP12					24.0	10,000	26.5	8,400					
				Win. 209	Win. WAA12 (White)					25.0	8,700	26.5	8,300					
3¼	1¼	1,220	Fio. 616	Fed. 12S4					23.0	9,700	25.0	8,800						
				Fed. 209	Fed. 12S4					23.0	10,000	24.5	9,500					
				CCI 209M	Rem. R12H					24.5	8,000							
				Win. 209	Win. WAA12F114					23.0	10,000	25.0	8,700					

continued on next page

DATA

12-Gauge, 2¾-in. Fiocchi Plastic Target Shells (continued)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot		Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
3½	1¼	1,275	Fio. 616	Fed. 12S4							27.0	10,300	28.0	9,500			
			Fed. 209	Fed. 12S4								26.0	10,100	27.5	9,800		
			CCI 209M	Rem. SP12										28.0	8,300		
			Win. 209	Win. WAA12F114									27.0	10,000	28.0	8,400	
3¾	1¼	1,300	Fio. 616	Fed. 12S4									30.0	9,500	40.0	8,300	
				Rem. SP12										30.5	8,600	41.0	7,700
				Win. WAA12F114										30.0	9,200	39.5	7,500
			Fed. 209	Fed. 12S4										30.0	10,300	37.0	8,800
			CCI 209M	Rem. SP12										30.0	9,200	41.0	7,600
Win. 209	Win. WAA12F114										30.0	10,100	38.5	8,300			
3¾	1¾	1,295	Fio. 616	Rem. RP12											38.0	9,100	
			Fed. 209	Rem. RP12											36.0	10,100	
			CCI 209M	Rem. RP12											37.0	9,600	
			Win. 209	Rem. RP12											38.0	9,500	
4	1¾	1,350	Fio. 616	Rem. RP12											41.5	9,400	
			Fed. 209	Rem. RP12											39.0	10,200	
			CCI 209M	Rem. RP12											40.0	10,100	
			Win. 209	Rem. RP12											40.0	9,900	
3¾	1½	1,150	Fio. 616	Activ T42											32.5	9,000	
				Rem. RP12											32.5	8,700	
			Fed. 209	Activ T42											32.5	8,100	
			Rem. 209P	Activ T42											33.5	8,300	
			Win. 209	Activ T42											33.5	8,700	
CCI 209M	Activ T42											34.0	8,500				
3½	1½	1,205	Fio. 616	Rem. RP12											36.5	9,000	
			Fed. 209	Rem. RP12											34.5	8,500	
			CCI 209M	Rem. RP12											33.0	9,500	
			Win. 209	Rem. RP12											35.5	8,600	
3¾	1½	1,260	Fio. 616	Rem. RP12											37.5	9,600	
			CCI 209M	Rem. RP12											36.5	10,600	
			Win. 209	Rem. RP12											36.5	10,300	
3¾	1⅝	1,115	Fio. 616	Activ T42											31.0	9,600	
			Fed. 209	Activ T42											31.0	9,300	
			Win. 209	Activ T42											31.0	9,000	
			Rem. 209P	Activ T42											31.5	8,600	
CCI 209M	Activ T42											31.5	8,900				

PC: Pattern Control


NOTES: *For each asterisk (*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

Auto-loading shotguns **may not** function with loads having pressures less than 7,000 psi. It is important to have tight crimps to prevent load efficiencies (pressures) from dropping. The efficiency may also drop when these loads are fired at low temperatures.

12-Gauge, 3-in. Fiocchi Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3¾	1¾	1,295	Fio. 616	Fed. 12S3					31.5	9,100				
				Rem. RXP12					32.5	8,600				
				Win. WAA12 (White)					31.5	8,900				
				Fiocchi FTW1					31.0	9,200				
			Win. 209	Fed. 12S3					29.5	10,600	37.5	8,800		
4	1¾	1,350	CCI 209M	Fed. 12S3					30.0	10,000	37.0	9,000		
			Fio. 616	Fed. 12S4					32.0	10,700				
				Rem. SP12					32.5	10,100				
				Win. WAA12F114					32.5	10,700				
				Activ T32					32.5	10,300				
4	1½	1,315	Win. 209	Fed. 12S4							38.5	10,100		
			CCI 209M	Fed. 12S4								38.0	10,400	
			Fio. 616	Fed. 12S4								39.0	10,300	
				Rem. SP12								39.0	9,700	
				Win. WAA12F114								39.0	9,400	
4	1⅝	1,280		Activ T35							39.0	9,000		
			Win. 209	Fed. 12S4							39.0	10,600		
			CCI 209M	Fed. 12S4							38.0	10,400		
			Fio. 616	Fed. 12S4							39.0	10,700		
				Rem. SP12							39.5	9,700		
4	1¾	1,245		Win. WAA12F114							38.5	10,500		
				Activ T35							39.0	10,500		
			Fio. 616	Activ T35							37.5	10,300		
			3¾	1⅞	1,155	Fio. 616	Rem. RP12						34.5	10,700
				Activ T35									34.5	10,300

SHOTSHELL RELOADING



Additional 12-Gauge 2¾-in., 1-oz. Target Loads

Shell	Dram Equiv.	Velocity (fps)	Primer	Wad	Bullseye		Red Dot		Green Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
Federal Paper Target	2¾	1,200	Fed. 209A	Fed. 12SO	18.5	7,800	19.0	8,000			
				Fed. 12S3	18.5*	8,500	18.5	7,400			
				Rem. PT12	18.0	6,200	18.0	7,500			
				Rem. R12L	18.5*	7,800	18.5	7,100			
				Rem. RXP12	18.5*	7,600	19.0	7,200			
				Win. WAA12F1	18.0*	7,500	18.5*	8,100			
				Win. WAA12 (White)	18.5*	8,700	18.5	7,800			
				Pacific Versalite	18.5*	8,500	18.0	7,300			
				Lage Uniwad	19.0*	8,600	19.0	7,100			
				Windjammer	19.0*	7,300	19.0*	7,400			
				Purple PC	19.0	6,400	19.0	7,100			
				CCI 209	Fed. 12SO	18.5	7,600	19.0	7,600		
				CCI 209M	Purple PC	18.0	6,900	18.5	6,600		
				Rem. 209	Purple PC	18.5	6,200	18.0	7,800		
Win. 209	Purple PC	19.0	7,100	19.0	7,200						
Federal Gold Medal	2¾	1,200	Fed. 209A	Fed. 12SO	18.0	7,600	18.0	7,900	21.0	7,100	
				Rem. PT12			18.5	7,500	21.0	6,100	
				Rem. RXP12	17.5*	9,000	18.0*	8,700	20.0	7,600	
				Win. WAA12 (White)	17.5**	9,500	18.0*	8,500	20.0*	8,200	
				Win. WAA12F1	18.5*	7,600	18.0*	8,400	21.0	7,200	
				Purple PC	19.0	5,700	18.5	6,900			
				CCI 209	Fed. 12SO	19.0	8,400	19.0	7,600		
				CCI 209M	Purple PC			18.0	6,900		
				Rem. 209	Purple PC	18.5	5,600	18.5	7,200	20.5	6,100
				Win. 209	Purple PC			18.5	6,700		
Rem. Premier Plastic Target	2¾	1,200	Rem. 209P	Rem. Fig. 8	17.0	7,100	18.0	8,400	20.0	6,500	
				Fed. 12SO	17.5	7,800	18.0	8,800	19.5	7,200	
				Win. WAA12F1	17.5	6,900	18.0	7,800	19.0	6,200	
				Purple PC	18.0	6,900	18.5	7,700	20.5	6,200	
				Pacific Versalite	17.0	7,500	17.5	8,600	20.0	6,600	
				CCI 209M	Rem. Fig. 8	17.0	8,300	17.5	8,900	18.5	7,700
				Fed. 209	Rem. Fig. 8	17.5	7,500	18.0	8,400	20.0	7,200
				Win. 209	Rem. Fig. 8	17.5	7,900	18.0	7,100	20.0	7,100
Peters Target (Blue Magic)	2¾	1,200	Rem. 209	Purple PC	17.5	7,200	17.5	8,300	19.0	7,300	
				Rem. 97★	Fed. 12SO	18.0	10,300	18.0	9,400		
				Fed. 12S3	18.5*	8,500	18.0*	8,600	19.5	7,300	
				Rem. R12L	17.5*	8,300	18.0*	8,000	20.0	7,100	
				Rem. RXP12	17.5*	8,800	18.0*	8,400	20.0	7,500	
				Win. WAA12 (White)	17.5*	9,900	18.0*	9,100	19.5	7,500	
				Win. WAA12F1	18.0	8,700	18.0	8,500	21.0	7,500	
				Lage Uniwad	18.0*	9,600	18.0*	8,600	20.5	6,700	
				Windjammer	18.0*	8,700	19.0*	8,300			
			CCI 209M	Rem. R12L	17.5	9,000	18.0	8,800			
				Purple PC	17.0	7,400	17.5	8,000	19.5	7,000	
			Fed. 209	Purple PC	18.0	6,300	18.5	8,400	20.0	6,400	
			Win. 209	Purple PC	18.0	6,800	18.0	7,700			
Winchester-Western AA	2¾	1,200	Win. 209	Fed. 12SO	18.0	9,600	18.0	9,600	19.5	8,400	
				Fed. 12S3	17.5*	8,700	18.0	8,400			
				Rem. R12L	18.0*	8,800	18.0	7,600	20.0	7,100	
				Rem. RXP12	17.5	8,800	18.0	8,300	20.0	7,100	
				Win. WAA12 (White)	17.5*	9,900	18.0	8,800	19.5	7,500	
				Win. WAA12F1	18.0**	9,500	18.0	9,000	20.0	7,600	
				Lage Uniwad	17.5*	8,900	18.0	8,000	20.5	7,400	
				Windjammer	18.0**	9,500	18.0*	9,100	20.0	7,600	
				Purple PC	17.5	7,300	17.5	8,800	19.5	6,900	
				CCI 209	Purple PC	18.0	7,300	18.5	7,800	21.0	6,300
				CCI 209M	Win. WAA12 (White)			17.5	9,900		
					Purple PC	17.5	7,900	17.5	8,500	19.0	6,600
				Fed. 209	Purple PC	17.5	7,600	17.5	8,900	19.0	7,200
				Rem. 209	Purple PC	17.5	7,400	17.5	8,600	19.0	7,700

PC: Pattern Control

NOTE: *For each asterisk (*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

DATA

28-Gram International Target Loads with 12-Gauge, 2³/₄-in. Federal Gold Medal Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3 ¹ / ₂	1,345	Fed. 209A	Fed. 12SO	23.0	9,900	24.5	9,100	27.5	7,400				
			Rem. Fig. 8	22.5	9,500	25.0	8,400						
			Win. WAA12SL	22.5	9,600	24.5	8,400						
			Purple PC	23.0	8,800	25.0	8,200						

PC: Pattern Control

28-Gram International Target Loads with 12-Gauge, 2³/₄-in. Remington Premier Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3 ¹ / ₂	1,345	Rem. 209P	Rem. Fig. 8	21.5	10,600	23.0	9,700	26.0	8,300				
			Fed. 12S3			23.0	10,300						
			Win. WAA12SL			23.0	10,100						
			Purple PC			24.0	9,900						

PC: Pattern Control

28-Gram International Target Loads with 12-Gauge, 2³/₄ Winchester-Western Plastic AA-Type Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot			
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3 ¹ / ₂	1,345	Win. 209	Win. WAA12SL					25.5	10,200						
			Rem. Fig. 8					22.5	10,600					25.0	9,600
			Fed. 12S3					23.0	9,500					25.5	9,500
			Purple PC											26.5	8,700

PC: Pattern Control

28-Gram International Target Loads with 12-Gauge, 2³/₄ Fiochi Plastic Target Shells


Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot			
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
3 ¹ / ₂	1,345	Fio. 616	Fed. 12S3	22.0	9,600	24.0	8,800	26.5	7,500						
			Rem. Fig. 8			24.0	8,800								
			Win. WAA12SL			24.0	8,800							27.0	7,700
			Purple PC			22.5	9,500							24.0	8,800

PC: Pattern Control

**CAN'T FIND THE ANSWER?
VISIT THE ALLIANT WEB SITE.**

www.alliantpowder.com

SHOTSHELL RELOADING



16-Gauge, 2³/₄-in. Federal Plastic Hi Power Shells with Paper Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2 ³ / ₄	1	1,220	Fed. 209A	Win. WAA16 Activ G28			19.0	9,800	21.0	8,400	21.5	8,100		
	3	1,275	Fed. 209A	Win. WAA16 Activ G28					23.0	8,800	23.5	8,700		
									23.0	9,000	23.5	8,500		
2 ³ / ₄	1 ¹ / ₈	1,185	Fed. 209A	Rem. SP16 Win. WAA16			19.0	10,600	21.5	8,900	22.0	9,100		
	3	1 ¹ / ₈	Fed. 209A	Rem. SP16 Win. WAA16			18.5	10,200	21.0	8,700	22.0	9,100		
									22.5	9,600	23.5	10,100		
									22.0	10,200	24.0	10,200		
3 ¹ / ₄	1 ¹ / ₈	1,295	Fed. 209A	Rem. SP16							24.5	10,300	32.0	8,600
3 ¹ / ₄	1 ¹ / ₄	1,260	Fed. 209A	Rem. SP16									30.5	10,200

16-Gauge, 2³/₄-in. Remington-Peters SP Plastic Shells with Plastic Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2 ¹ / ₂	1	1,165	Rem. 209P	Win. WAA16 Activ G28			16.5	10,200	19.0	8,600				
	2 ³ / ₄	1,220	Rem. 209P	Win. WAA16 Activ G28					19.5	8,400				
	3	1,275	Rem. 209P	Win. WAA16 Activ G28					20.0	9,400	21.0	9,700		
									20.5	8,600	21.0	8,900		
									21.0	10,200	22.0	9,600		
									21.0	10,200	22.0	9,800		
2 ³ / ₄	1 ¹ / ₈	1,185	Rem. 209P	Win. WAA16 Activ G28					20.0	10,300	21.0	10,600		
	3	1 ¹ / ₈	Rem. 209P	Rem. SP16					20.5	10,700	21.0	10,500		
													27.0	9,900

16-Gauge, 2³/₄-in. Winchester AA-Type Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2 ¹ / ₂	1	1,165	Win. 209	Win. WAA16 Activ G28					19.0	9,200				
	2 ³ / ₄	1,220	Win. 209	Win. WAA16 Activ G28					19.0	9,100				
	3	1,275	Win. 209	Rem. SP16					19.5	10,500	20.0	10,200		
											20.0	10,100		
2 ³ / ₄	1 ¹ / ₈	1,185	Win. 209	Rem. SP16									29.0	9,300
													27.0	10,000


16-Gauge 2³/₄-in. Fiochi Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2 ¹ / ₂	1	1,165	Fio. 616	Win. WAA16 Activ G28	15.5	10,400	17.5	9,400	19.0	8,100				
	2 ³ / ₄	1,220	Fio. 616	Activ G28 Win. WAA16	17.0	10,000	18.0	8,200	19.5	7,900				
	3	1,275	Fio. 616	Activ G28 Win. WAA16					20.0	9,000	21.0	8,500		
									20.5	8,800	21.0	8,900		
									21.5	9,600	22.0	9,000		
									21.0	9,900	22.0	9,600		
2 ³ / ₄	1 ¹ / ₈	1,185	Fio. 616	Win. WAA16 Rem. SP16					19.5	10,600				
	3	1 ¹ / ₈	Fio. 616	Rem. SP16					20.5	9,900	21.0	10,200		
											23.5	10,700	31.0	8,900
3 ¹ / ₄	1 ¹ / ₈	1,295	Fio. 616	Rem. SP16									32.5	9,200




**A CLOSE-UP
LOOK
AT ALLIANT
POWDERS
FOR
RELOADERS**


ALLIANT SHOTSHELL POWDERS: THIS FAMOUS ALL-TIME FAVORITE PLUS A NEW

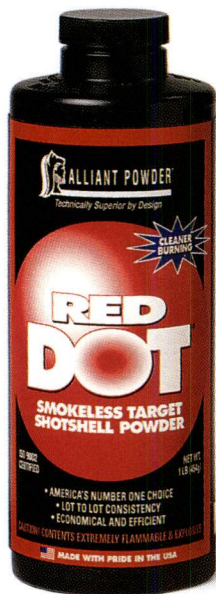

Red Dot®. Now CLEANER BURNING! America's #1 choice, for clay target loads and now, 50% cleaner. Since 1932, more 100 straights than any other powder. Available in 8-lb., 4-lb., and 1-lb. canisters.

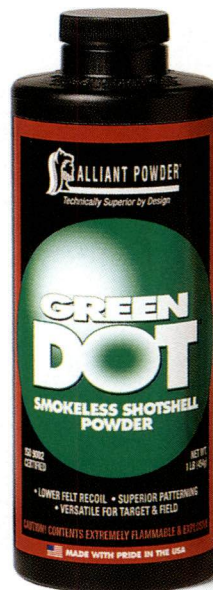

Green Dot®. It delivers precise burn rates for uniformly tight patterns, and you'll appreciate the lower felt recoil. Versatile for target and field. Available in 8-lb., 4-lb., and 1-lb. canisters.

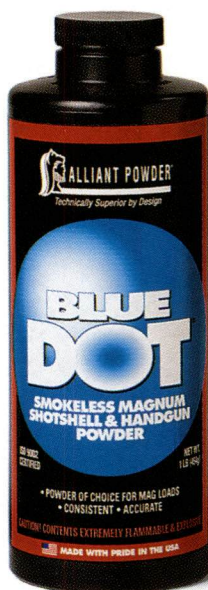


Blue Dot®. The powder of choice for magnum lead shotshell loads. 10, 12, 16, and 20 gauge. Consistent and accurate. Doubles as magnum handgun load. Available in 5-lb., and 1-lb. canisters.




LINE NOW INCLUDES A CLEANER-BURNING NEW POWDER FOR STEEL SHOT.



American Select®.
Our newest "ultra clean" burning premium powder makes a versatile target load and superior 1-oz. load for improved clay target scores. Great for Cowboy Action handgun loading too! *Available in 8-lb., 4-lb., and 1-lb. canisters.*

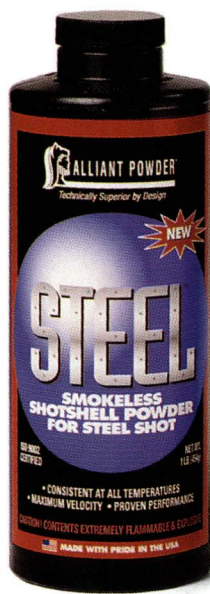

Steel™. ALL NEW!
Special, new powder for waterfowl shotshell gives steel shot high velocity within safe pressure limits for 10 and 12 gauge loads. *Available in 4-lb. and 1-lb. canisters.*

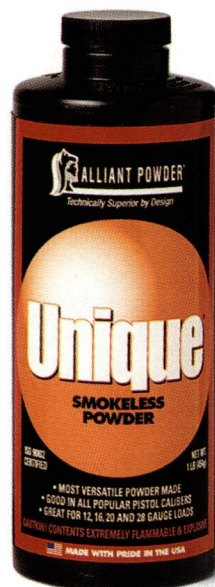

Unique®. Most versatile shotgun/handgun powder made. Great for 12, 16, 20 and 28 gauge loads. Use with most hulls, primers and wads. *Available in 8-lb., 4-lb., and 1-lb. canisters.*

Herco®. Since 1920, proven powder for heavy shotshell loads, including 10, 12, 16, 20 and 28 gauge target loads. The ultimate in 12 gauge, 1-1/4 oz. upland game loads. *Available in 8-lb., 4-lb., and 1-lb. canisters.*

ALLIANT. PROVEN POW

<i>Powder</i>	<i>Relative Quickness</i>	<i>Principal Purpose</i>	<i>Secondary Uses</i>
 BULLSEYE®	100%	Handgun Loads	12 ga. Light Target Loads
 RED DOT®	94.1%	Light & Standard 12 & 16 ga. Target Loads	Handgun Loads
 AMERICAN SELECT®	81.0%	12 ga. Target Loads	Cowboy Action Handgun Loads
 GREEN DOT®	77.9%	Handicap Trap Loads	20 & 28 ga. Target Loads
 UNIQUE®	61.6%	All-around Shotgun Powder, 12, 16 & 20 ga.	Handgun Loads
 POWER PISTOL®	58.6%	High Performance 9mm, .40 S&W & 10mm	Moderate Pistol Cartridges
 HERCO®	56.1%	Heavy Shotgun Loads 10,12, 16, 20 & 28 ga.	Heavy Handgun Loads
 BLUE DOT®	37.8%	Magnum Shotgun Loads, 10, 12, 16, 20 & 28 ga.	Magnum Handgun Loads
 STEEL™	34.0%	Non-Toxic Hunting Shotgun	2 oz. Turkey Loads
 2400®	27.0%	Magnum Handgun Loads	.22 Hornet & 218 Bee
 RELODER® 7	19.4%	Light Rifle	45-70 Gov't
 RELODER® 15	13.7%	Medium Rifle	Silhouette Rifle
 RELODER® 19	11.3%	Standard Rifle	Light Magnum Rifle
 RELODER® 22	11.1%	Magnum Rifle	Heavy Bullet Stand Rifle
 RELODER® 25	10.5%	Heavy Magnum Rifle	Magnum Rifle



POWERS FOR RELOADERS.

Remarks

America's best pistol powder. Unsurpassed for .45 ACP target loads

The Number 1 premium clay target powder, now 50% cleaner burning

Premium Ultra Clean Burning target powder, excellent patterns and less felt recoil

Best long range clay target powder creating tight and uniform patterns

The world's most versatile reloading powder

Best choice for high performance 9mm, .40 S&W, and 10mm

Outstanding 12 ga. heavy hunting and target loads

Powder of choice for magnum hunting loads

NEW! The only powder designed specifically for Steel Shotshell and other non-toxic shot

Legendary for its performance in .44 Mag and other magnum pistol loads

The right choice for use in Varmint calibers using light-weight bullets

Excellent in short action calibers

Superb in 30-06 and .338 Win Mag

Outstanding in 7mm Mag and .300 Win Mag application


NEW! Delivers High Energy for Weatherby Magnums and other large capacity cartridges




T POWDER®

rior by Design


ALLIANT RIFLE & HANDGUN POWDERS: GREAT CHOICES INCLUDING A NEW HEAVY MAGNUM

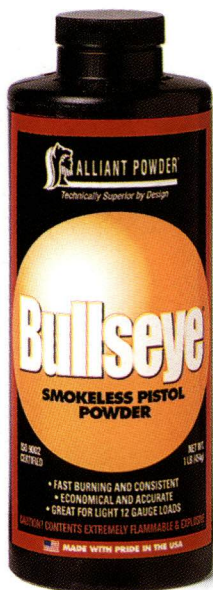

Bullseye®. America's best known pistol powder. Unsurpassed for .45 ACP target loads. *Available in 8-lb., 4-lb., and 1-lb. canisters.*

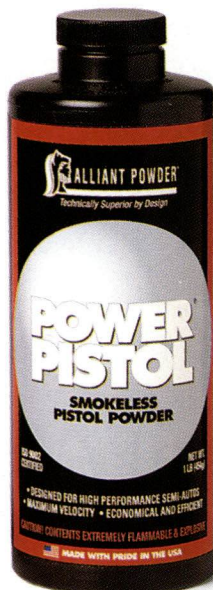

Power Pistol®. Designed for high performance in semi-automatic pistols. In recent years, we've shipped enough to the military to load over 1-billion 9mm rounds. *Available in 4-lb. and 1-lb. canisters.*

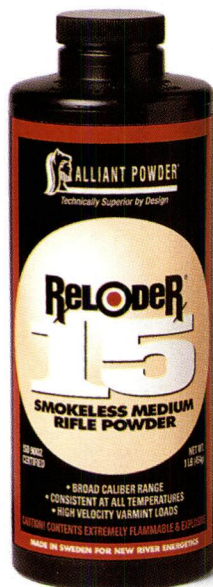


Reloder 15®. The best all-around medium speed rifle powder, it provides excellent .30 cal. performance, and is ideal for high-velocity varmint loads. *Available in 5-lb. and 1-lb. canisters.*




Reloder 19®. Provides superb accuracy in most medium and heavy rifle loads and is the powder of choice for 30-06 and .338 calibers. *Available in 5-lb. and 1-lb. canisters.*

CHOICES FOR TARGET & HUNTING LOADS, MAGNUM POWDER FOR BIG GAME.


Reloder 400®. Legendary for its performance in .44 magnum and other magnum pistol loads. Originally developed for the .22 Hornet, it's also the shooter's choice for .410 bore. *Available in 8-lb., 4-lb., and 1-lb. canisters.*

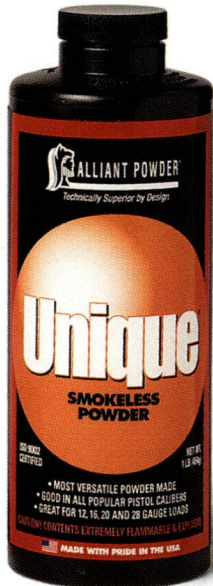


Unique®. Most versatile shotgun/handgun powder made. Great for 12, 16, 20 and 28 gauge loads. Use with most hulls, primers and wads. *Available in 8-lb., 4-lb., and 1-lb. canisters.*

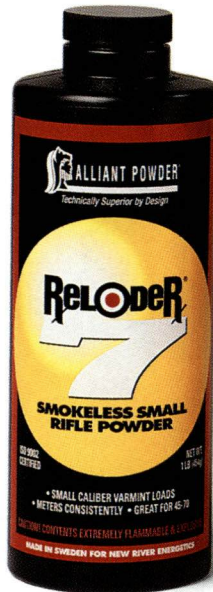

Reloder 7®. Designed for small caliber varmint loads, it meters consistently, and meets the needs of the most demanding bench rest shooter. *Available in 5-lb. and 1-lb. canisters.*

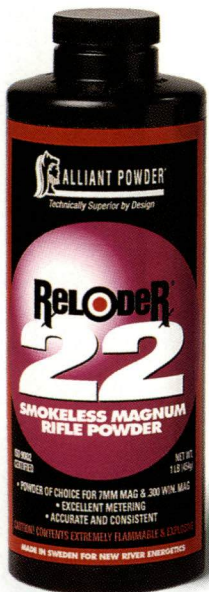

Reloder 22®. This top performing powder for big game loads provides excellent metering, and is the powder of choice for .270, 7mm magnum and .300 Win. magnum. *Available in 5-lb. and 1-lb. canisters.*

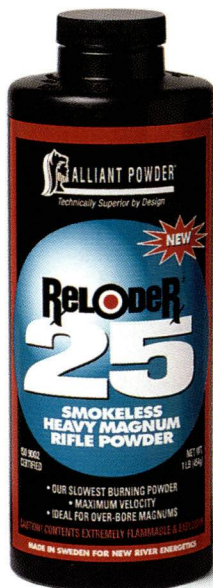

Reloder 25™. This new, advanced powder for big game hunting features improved slower burning, and delivers the high energy that heavy magnum loads need. *Available in 5-lb. and 1-lb. canisters.*



**THE POWDERS BORN IN A 19TH CENTURY BLACK POWDER FACTORY
NOW COME TO YOU FROM THE MOST ADVANCED SMOKELESS
PRODUCTION POWDER MAKING FACILITY IN THE WORLD.**

The long, proud history of Alliant Powder began in 1872 as Laflin & Rand, later to become Hercules Powder Company – the most respected name in the reloading industry.

Now with a new name and a new facility, Alliant Powder operates the most technically advanced powder plant in the world. Our ISO Certification confirms our continued dedication to produce the most technically advanced powders anywhere.

This nearly century-old jar of powder still performs to its original specs. It sits in our lab as a reminder of a long, proud tradition and commitment to consistency. Never forgetting that reloaders must be able to count on consistent performance from their powders, year after year, lot after lot, shot after shot.



Alliant Powder, P.O. Box 6, Radford, Virginia 24141-0096 Phone: 800-276-9337 Web site: www.alliantpowder.com

DATA

16-Gauge 2¾-in. Activ All-Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2½	1	1,165	CCI 209	Activ G28	16.5	10,100	18.0	9,200	20.0	7,900				
2¾	1	1,220	CCI 209	Activ G28 Win. WAA16			19.5	9,800	21.5	8,700	23.0	8,500		
3	1	1,275	CCI 209	Activ G28 Win. WAA16			19.5	9,700	21.5	8,300	22.5	8,000		
2¾	1½	1,185	CCI 209	Win. WAA16 Rem. SP16					23.0	9,100	24.5	8,700		
3	1½	1,240	CCI 209	Win. WAA16 Rem. SP16			19.0	10,600	21.5	9,200	22.0	8,800		
3¼	1½	1,295	CCI 209M	Rem. SP16					22.0	10,000	23.0	10,200		31.0 9,100
3¼	1¼	1,260	CCI 209M	Rem. SP16					22.5	10,200	24.0	9,400		30.0 10,000

20-Gauge, 2¾-in. Federal Paper Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
2¼	¾	1,200	Fed. 209	Fed. 20S1	12.5**	11,400	14.0	9,700	15.5	9,200							
				Rem. RXP20	13.5**	10,500	14.0	10,200	16.0	8,100							
				Win. WAA20	13.0**	10,500	14.0	8,800	15.5	9,200							
			CCI 109	Fed. 20S1	15.0	10,900											
				Rem. RXP20			17.0	8,900									
				Win. WAA20					17.0	6,800							
2¼	⅞	1,155	Fed. 209	Fed. 20S1	14.0	11,400	15.0	9,900	15.5	9,000							
				Rem. RXP20			14.5	10,100	15.5	9,200							
				Win. WAA20			14.5	9,500	15.0	8,800							
			CCI 109	Fed. 20S1	14.0	10,000	14.5	8,900									
				Rem. RXP20			15.0	8,700	15.0	8,000							
				Win. WAA20			14.5	8,400									
			CCI 209M	Fed. 20S1			14.5	9,800	16.0	8,600							
Skeet	⅞	1,200	Fed. 209	Fed. 20S1			15.0	9,600	15.5	9,400							
				Rem. RXP20			15.5	10,900	16.5	9,800							
				Win. WAA20			15.0	9,700	16.0	9,200							
			CCI 109	Fed. 20S1			15.0	9,000	17.0	8,400							
				Rem. RXP20			16.0	9,900	17.0	8,500							
				Win. WAA20			15.5	8,800	17.0	8,500							
			CCI 209M	Fed. 20S1			15.0	10,500	17.0	9,900	17.0	9,600					
2½	1	1,165	Fed. 209	Rem. RXP20							17.0	11,500					
				Rem. SP20									16.5	11,500			
				Win. WAA20										16.0	11,200		
				Win. WAA20F1										16.5	11,300		


NOTE: For each asterisk (*), add one 20-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.



**FOR OVER 100 YEARS
WE'VE ONLY MADE
THEM BETTER.**

We've made our Red Dot® and Green Dot® powders 50% cleaner, but they still deliver the same consistent performance reloaders have trusted for over a century. We know better than to change the best.

SHOTSHELL RELOADING



20-Gauge, 2¾-in. Federal Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
2¼	¾	1,200	Fed. 209	Fed. 20S1	13.0***	10,100	15.0*	9,000	15.0**	9,000					
				Rem. RXP20	13.0***	9,400	15.0*	8,600	16.0**	8,600					
				Win. WAA20	13.0***	10,300	15.0*	8,900	16.0**	8,200					
				Windjammer*	14.0	9,300	15.5	8,700	17.0	7,500					
2¼	⅞	1,155	Fed. 209	Hornady Versalite			15.5	10,000							
				Windjammer			15.0	10,000	16.5	8,600					
				Lage Uniwad			16.0	10,100							
				Win. WAA20			14.5	9,700							
				CCI 109	Fed. 20S1			14.5	8,400						
					Rem. RXP20					16.0	8,600				
					Win. WAA20			14.5	8,000						
					Lage Uniwad			15.5	8,700	17.0	8,300				
CCI 209M	Fed. 20S1			14.5	9,100	16.0	8,700								
Skeet	⅞	1,200	Fed. 209	Windjammer			16.0	10,900	17.0	10,600	18.5	10,200			
				Lage Uniwad			16.5	11,000							
				Fed. 20S1			16.5	10,600							
				Hornady Versalite			16.0	10,500							
				Fed. 209A	PC 20			16.0	11,200	18.0	9,800	18.0	9,200		
				CCI 109	Fed. 20S1			15.5	9,400	17.0	8,500	17.0	9,300		
					Rem. RXP20			16.0	9,600	17.0	9,200	18.0	8,800		
					Win. WAA20			15.5	9,100	17.0	8,500	17.0	9,100		
CCI 209M	Lage Uniwad			16.0	10,000	18.0	8,800								
	Fed. 20S1			16.5	9,300	17.0	9,100	17.5	7,600						
2½	1	1,165	Fed. 209	SP20					16.0	10,800	17.0	9,600			
				Rem. RXP20							17.0	11,300			
				Win. WAA20F1						15.5	11,300	16.5	11,100		
2¾	1	1,220	Fed. 209	Rem. SP20								24.0	10,200		
				Win. WAA20F1									24.0	10,100	
CCI 209M	Fed. 20S1									18.5	9,800				
2¾	1⅛	1,175	Fed. 209	Rem. SP20									23.0	10,900	

NOTE: For each asterisk (*), add one 28-gauge, 0.135-in. thick card wad or one 0.135-in. thick .410 bore card wad to the inside bottom of the shot cup.

20-Gauge 3-in. Federal Plastic Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3	1¼	1,255	Fed. 209	Win. WAA20									26.5	9,400
				Rem. RXP20										27.0
3¼	1¼	1,310	Fed. 209	Rem. RXP20									28.0	10,200
				Win. WAA20									28.5	10,600
				Fed. 20S1									28.0	10,300
3	1⅛	1,230	Fed. 209	Rem. SP20*									26.5	10,300
				Win. WAA20F1									26.0	10,100
3	1¼	1,185	Fed. 209	Rem. SP20*									25.5	10,600
				Win. WAA20F1									25.5	10,400

NOTE: For each asterisk (*), add one 28-gauge, 0.135-in. thick wad to the inside bottom of the shot cup.

**CAN'T FIND THE ANSWER?
VISIT THE ALLIANT WEB SITE.**


www.alliantpowder.com

DATA

20-Gauge, 2¾-in. Remington Premier Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Unique		Herco		Blue Dot					
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi				
2¼	¾	1,200	Rem. 209P	Rem. RXP20**	15.5	8,700								
				Win. WAA20**	15.5	8,900								
				Fed. 20S1**	15.5	8,400								
				Hornady Versalite**	16.0	8,900								
				Windjammer**	15.5	8,900								
				Lage Uniwad**	15.5	8,600								
2¼	⅞	1,155	Rem. 209P	Rem. RXP20	5.5	10,000	16.5	10,000						
				Fed. 20S1	15.5	10,000	16.0	10,000						
				Win. WAA20	5.5	10,200	16.0	9,500						
				Hornady Versalite	15.5	9,700	16.0	9,600						
				Windjammer	15.5	9,900	16.0	9,500						
				Lage Uniwad	15.5	10,000	16.0	9,600						
				Fed. 209	Rem. RXP20	15.5	10,700	16.5	10,500					
				Win. 209	Rem. RXP20	15.5	10,300	16.5	10,200					
				Fio. 616	Rem. RXP20	16.0	10,700	16.5	10,100					
				CCI 209M	Rem. RXP20	15.5	11,000	16.5	10,500					
				CCI 209	Rem. RXP20	16.0	9,500	16.5	8,900					
				Skeet	⅞	1,200	Rem. 209P	Rem. RXP20	16.5	10,700	17.0	10,600		
								Fed. 20S1	16.5	10,800	17.0	10,500		
Win. WAA20	16.5	10,900	17.0					10,700						
Hornady Versalite	16.5	10,200	17.5					10,400						
Windjammer	16.0	10,400	17.0					10,100						
Lage Uniwad	16.5	10,400	17.5					10,300						
PC 20	17.0	10,500	17.5					10,200						
Fed. 209	Rem. RXP20	16.5	11,300					17.0	11,000					
Win. 209	Rem. RXP20	16.5	11,300					17.0	10,600					
Fio. 616	Rem. RXP20	16.5	11,200					17.0	10,700					
CCI 209M	Rem. RXP20	16.0	11,300					17.0	10,800					
CCI 209	Rem. RXP20	16.5	9,900					17.5	9,400					
2½	1	1,155	Rem. 209P					Rem. SP20					21.5	9,000
				Win. WAA20F1			17.5	11,500	21.5	9,000				
				Fed. 209	Rem. SP20					20.5	11,300			
				Win. 209	Rem. SP20					21.5	10,600			
				Fio. 616	Rem. SP20					22.5	9,800			
				CCI 209M	Rem. SP20					21.5	10,500			
2¾	1	1,220	Rem. 209P	Rem. SP20					24.0	11,100				
				Win. WAA20F1					23.5	10,900				
				Win. 209	Rem. SP20					22.0	11,100			
				Fio. 616	Rem. SP20					23.5	11,000			
				CCI 209M	Rem. SP20					22.5	10,900			
				CCI 209	Rem. SP20					23.0	10,300			
2¾	1½	1,175	Rem. 209P	Rem. SP20					22.0	11,300				
				Win. WAA20F1					22.0	11,500				

NOTE: For each asterisk (*), add one 0.135-in. .410-bore card to the inside bottom of the shot cup.

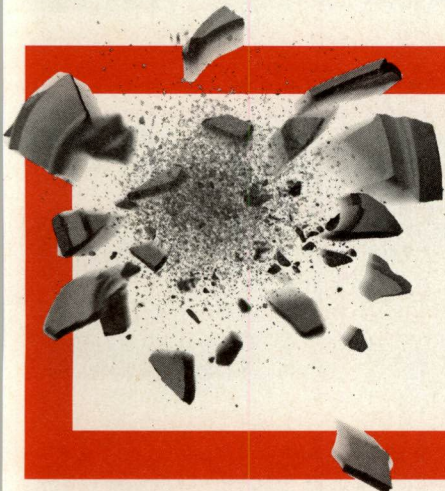


**TO GET
THERE,
START
HERE.**



If you're serious about breaking targets, start with Alliant Powder. It's value priced and performs consistently, batch after batch. Reload with Alliant, you can't lose.

SHOTSHELL RELOADING



20-Gauge, 2¾-in. Remington-Peters RXP Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
2¼	¾	1,200	Rem. 97★	Rem. RXP20	15.5	9,900					
				Fed. 20S1	15.5	9,900					
				Win. WAA20	15.0	9,400					
2¼	⅞	1,155	Rem. 97★	Fed. 20S1							
				Rem. RXP20							
				Win. WAA20							
				Lage Uniwad	15.5	10,800					
				CCI 109							
				Fed. 20S1							
				Rem. RXP20							
				Win. WAA20							
				Lage Uniwad	15.5	9,300					
Skeet	⅞	1,200	Rem. 97★	Fed. 20S1	16.0	10,500					
				Rem. RXP20	16.0	9,700	17.0	10,600			
				Win. WAA20	16.0	10,700	17.0	10,600			
				Lage Uniwad	16.0	10,900					
				CCI 109							
					Fed. 20S1	16.0	10,500	17.0	11,300		
					Rem. RXP20			17.0	9,900		
	Win. WAA20	16.0	10,800	16.5	10,400						
		Lage Uniwad	16.5	10,400							
		CCI 209M									
			Rem. RXP20	16.0	10,500	16.5	10,700				
2½	1	1,165	Rem. 97★	Fed. 20S1	15.5	10,800					
				Rem. RXP20	16.0	10,600					
				Win. WAA20	15.5	11,200					
2¾	1	1,220	Rem. 97★	Rem. RXP20			18.0	11,000			

NOTE: For each asterisk (), add one 28-gauge, 0.135-in. thick card wad to the inside bottom of the shot cup.

20-Gauge, 2¾-in. Remington-Peters Unibody Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Green Dot		Unique		Herco		Blue Dot		2400		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
Skeet	⅞	1,200	Rem. 209	Rem. RXP20			16.5	10,800	16.5	10,200					
				Win. WAA20			16.5	11,200							
				Hornady Versalite					16.5	10,900					
				Fed. 209	Rem. RXP20			16.0	11,500	16.5	10,700				
				CCI 209M	Rem. RXP20			16.5	10,900	17.5	11,300				
			Win. 209	Rem. RXP20					17.5	10,900					
2½	1	1,165	Rem. 209	Rem. SP20							21.0	11,500			
				Win. WAA20F1								21.5	11,100		
				Fed. 209	Rem. SP20							21.5	10,500		
				CCI 209M	Rem. SP20							22.0	10,500		
				Win. 209	Rem. SP20							22.0	11,300		
2¾	1	1,220	Fed. 209	Activ W32									29.5	10,500	

20-Gauge, 2¾-in. Remington SP with Plastic Base Wad

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
Skeet	⅞	1,200	Rem. 209	Rem. RXP20					16.5	9,100				
				Win. WAA20					16.5	9,800				
2½	1	1,165	Rem. 209	Rem. SP20							17.5	11,300		
				Win. WAA20F1							17.5	10,700		
2¾	1	1,220	Rem. 209	Rem. SP20									23.0	10,300
				Win. WAA20F1									24.0	10,100

DATA

20-Gauge, 2¾-in. Winchester-Western Plastic XPert Ranger Shells (Polyformed Shell)

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
2¼	⅞	1,155	Win. 209	Fed. 20S1	14.5	9,700				
				Win. WAA20	14.5	9,800				
Skeet	⅞	1,200	Win. 209	Fed. 20S1	15.5	10,800				
				Rem. RXP20	15.5	9,700				
				Win. WAA20	15.5	10,700				
2½	1	1,165	Win. 209	Rem. RXP20	16.0	11,100				

20-Gauge, 2¾-in. Winchester-Western Plastic AA-Type Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
2¼	¾	1,200	Win. 209	Win. WAA20	15.5*	9,100					
				Fed. 20S1	15.5	9,700					
				Rem. RXP20	15.5*	9,900					
2¼	⅞	1,155	Win. 209	Fed. 20S1	15.0	10,100					
				Rem. RXP20	15.0	8,700					
				Win. WAA20	15.0	9,800					
				Lage Uniwad PC20	15.5	10,500					
				CCI 109	Fed. 20S1	15.5	9,600				
					Rem. RXP20	15.5	7,800				
					Win. WAA20	15.5	9,200				
					Lage Uniwad PC20	16.0	10,100				
CCI 209M	Win. WAA20	15.0	10,200								
Skeet	⅞	1,200	Win. 209	Fed. 20S1	15.5	10,400	16.5	10,700			
				Rem. RXP20	16.0	9,000	16.5	9,000			
				Win. WAA20	16.0	10,500	16.5	9,600			
				PC20	16.0	11,200	16.5	11,300			
				CCI 109	Fed. 20S1	16.0	10,000	16.5	10,200		
					Rem. RXP20	16.0	9,900	16.5	8,800		
					Win. WAA20	16.0	10,700	16.5	10,200		
					Lage Uniwad PC20	16.5	10,800				
CCI 209M	Win. WAA20			17.5	10,000						
2½	1	1,165	Win. 209	Rem. RXP20			16.5	9,600			
				Rem. SP20			16.5	10,000			
				Win. WAA20			16.5	10,400			
2¾	1	1,220	Win. 209	Rem. RXP20					23.0	11,300	
				Rem. SP20					23.5	11,400	
				Win. WAA20F1					23.0	11,500	

20-Gauge, 3-in. Winchester-Western Plastic AA-Type Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Blue Dot		2400	
					Grains	Approx. psi	Grains	Approx. psi
3	1¼	1,255	Win. 209	Rem. SP20	26.0	10,600		
3	1⅝	1,230	Win. 209	Win. WAA20F1	25.5	11,100		
				Rem. SP20	25.5	11,000		
2¾	1¼	1,135	Win. 209	Win. WAA20F1	23.0	10,200		
				Rem. SP20	24.0	10,900		
3	1¼	1,190	Win. 209	Rem. SP20	25.0	11,500		
3¼	1¼	1,240	Win. 209	Rem. SP20			34.5	9,600

SHOTSHELL RELOADING



20-Gauge, 2¾-in. Activ Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot			
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi		
Skeet	¾	1,200	CCI 209M	Fed. 20S1							18.0	9,500				
				Hornady Versalite								18.0	9,800			
				Win. WAA20								18.0	9,500			
				Rem. RXP20								18.5	9,500			
				Win. 209	Hornady Versalite								18.5	9,300		
				Fed. 209	Hornady Versalite								18.0	9,300		
2½	1	1,165	CCI 209M	Activ W28							16.5	10,000				
				Fed. 20S1								17.5	10,300			
				Win. WAA20								18.0	11,300			
				Hornady Versalite								16.5	10,800			
				Rem. RXP20								18.5	10,900			
				Rem. 209	Activ W28								17.0	10,900		
Win. 209	Activ W28								18.0	10,700						

20-Gauge, 2¾-in. Fiocchi Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot					
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi				
2¼	¾	1,155	Fio. 616	Fed. 20S1			15.0	9,100	17.0	9,100								
				Hornady Versalite			15.5	9,700	18.0	8,300								
				Lage Uniwad			15.5	9,500	17.5	8,600								
				Fed. 209	Fed. 20S1			14.5	11,100	15.5	10,000							
				Rem. 209	Fed. 20S1			14.5	10,000	16.0	9,400							
				Win. 209	Fed. 20S1			14.5	10,600	16.5	9,000							
				CCI 209M	Fed. 20S1			14.5	10,500	16.0	9,200							
				Fio. 616	Fed. 20S1			14.5	10,400	16.0	9,500							
Skeet	¾	1,200	Fio. 615	Fed. 20S1			16.0	10,900	18.0	9,700	18.0	9,200						
				Rem. RXP20			16.5	10,300			19.0	8,500						
				Win. WAA20			16.0	10,800	17.5	9,600	18.5	8,700						
				Hornady Versalite			16.0	10,000			19.0	8,300						
				Lage Uniwad			17.5	8,200	19.0	8,000								
				Fio. 616	Fed. 20S1			15.5	10,600	17.5	10,000	18.0	9,200					
				Fed. 209	Fed. 20S1			15.5	11,100	17.0	10,800	17.5	10,200					
				Win. 209	Fed. 20S1			16.0	10,400	16.0	10,100	18.0	9,900					
				Rem. 209	Fed. 20S1			15.5	10,800			16.5	9,900					
				CCI 209M	Fed. 20S1			15.5	10,700	17.0	10,000	17.0	9,900					
				2¾	1	1,220	Fio. 616	Rem. SP20									24.5	10,300
								Fio. 615	Rem. SP20									27.5
Fed. 209	Rem. SP20													23.0	10,300			
Rem. 209	Rem. SP20													22.5	10,600			
CCI 209M	Rem. SP20													24.0	10,700			
3	1	1,275	Fio. 616	Rem. SP20									26.0	10,800				
				Fed. 209	Rem. SP20								25.0	10,300				
				Win. 209	Rem. SP20								26.0	10,600				
2¾	1½	1,175	Fio. 616	Rem. SP20									23.5	10,000				
				Fed. 209	Rem. SP20								23.5	10,700				
				Win. 209	Rem. SP20								23.5	11,400				

28-Gauge, 2¾-in. Federal Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot		
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	
Skeet	¾	1,200	Fed. 209	Fed. 28S1A					13.5	11,600	14.0	11,700	17.5	9,600	
				Rem. SP28						12.5	11,800	13.0	11,200	18.0	9,900
				Win. WAA28								13.5	10,500	14.0	10,900
				CCI 109	Rem. SP28			13.0	10,000	13.5	9,400	14.5	10,000	18.5	9,800
2¼	¾	1,295	Fed. 209	Win. WAA28					14.0	10,400	15.0	10,500			
				Rem. SP28										20.0	10,900

DATA

28-Gauge, 2¾-in. Remington-Peters Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot				
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi			
Skeet	¾	1,200	Rem. 209P	Fed. 28S1A Rem. SP28 Win. WAA28				12.0	10,500	13.5	11,300	14.5	11,200	18.0	9,200		
										13.0	9,100	14.0	8,700	18.0	7,600		
										12.0	10,300	13.0	8,900	14.0	8,800	18.0	7,700
										13.0	11,800	14.0	10,900	14.5	10,700	18.5	10,100
										12.0	10,200	13.0	9,100	14.0	8,900	18.0	7,500
			CCI 109	Fed. 28S1A Rem. SP28 Win. WAA28			12.0	10,400	13.0	9,100	14.0	8,300	18.0	7,300			
2¼	¾	1,295	Rem. 209P	Rem. SP28					15.0	10,600	16.5	10,300	21.0	9,700			

28-Gauge, 2¾-in. Remington Premier Plastic Target Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
Skeet	¾	1,200	Rem. 209	PC Blue					14.0	11,200	14.5	10,800	18.5	9,600

28-Gauge, 2¾-in. Winchester-Western Plastic AA-Type Shells

Dram Equiv.	Shot Wt. (ounces)	Velocity (fps)	Primer	Wad	Red Dot		Green Dot		Unique		Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
Skeet	¾	1,200	Win. 209	Win. WAA28			12.5	11,900	13.0	9,400	14.0	8,400		
			CCI 109	Win. WAA28			13.0	8,400	14.0	7,900				


.410 Bore 2½-in. Plastic Shells

Shell	Shot Weight (ounces)	Velocity (fps)	Primer	Wad	2400	
					Grains	Approx. psi
Federal	½	1,200	Fed. 209	Fed. 410SC	13.5	11,900
				Rem. SP410	13.0	11,500
Rem.-Peters	½	1,200	Rem. 97★	Win. WAA41	13.0	11,300
				Fed. 410	13.5	12,000
				Fed. 410SC	13.0	11,500
				Win. WAA41	13.5	11,400
				Rem. SP410	14.0	11,500
Winchester-Western AA-Type	½	1,200	Win. 209	CCI 209	14.5	10,500
				Fed. 410SC	14.0	10,600
				Win. WAA41	14.5	10,300
				Rem. SP410	13.5	11,000
				CCI 209M	13.5	11,000
Winchester-Western AA-Type	½	1,200	CCI 209	Win. WAA41	13.0	11,700
				Fed. 410SC	13.0	12,100
				Rem. SP410	13.5	12,000

.410 Bore 3-in. Plastic Shells

Shell	Shot Weight (ounces)	Velocity (fps)	Primer	Wad	2400	
					Grains	Approx. psi
Rem.-Peters	11/16	1,135	Rem. 97★	Rem. SP410	14.5	13,000
				Fed. 410SC	14.5	12,600
				Win. WAA41	14.5	12,300
				Fed. 410	14.0	12,700
				CCI 209M	14.5	12,200

SHOTSHELL RELOADING



10-Gauge 3½-in. Buckshot Loads

Primer	Shell	No. and Size Buckshot	Velocity (fps)	Wad	Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi
Fed. 209	Federal Plastic	40-4's	1,275	SP10+.270 in. 20 ga. Card			45.0	10,100
		17-0's	1,300	SP10+.135 in. 20 ga. Card			46.0	10,000
Rem. 57★	Remington Plastic	40-4's	1,275	SP10+.270 in. 20 ga. Card			46.0	10,100
		17-0's	1,300	SP10+.135 in. 20 ga. Card			48.5	9,800
Win. 209	Winchester-Western Plastic	40-4's	1,275	SP10+.270 in. 20 ga. Card			47.5	10,000
		17-0's	1,300	SP10			51.0	9,500

12-Gauge 2¾-in. Buckshot Loads

Primer	Shell	No. and Size Buckshot	Velocity (fps)	Wad	Herco		Blue Dot	
					Grains	Approx. psi	Grains	Approx. psi
Fed. 209	Federal Hi Power Plastic	34-4's	1,250	Card .135+¾ Fiber+Card .135			37.0	10,700
		9-00's	1,325	Card .135+¼+¾+½ Fiber	30.0	9,400		
Win. 209	Winchester-Western AA-Type	34-4's	1,250	Card .135+¾+Card .135			39.0	10,900
		9-00's	1,325	Card .135+¼+¼ Fiber	30.0	10,000		
Rem. 97★	Rem. RXP Plastic	9-00's	1,325	Card .135+¼+¾ Fiber	29.0	10,100		

12-Gauge 3-in. Buckshot Loads

Primer	Shell	No. and Size Buckshot	Velocity (fps)	Wad	Herco		Blue Dot		2400	
					Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
Fed. 209	Fed. Hi Power	33-4's	1,250	Bal. Prod. GS&SC			37.0	10,500	50.0	8,100
		18-1's	1,225	Bal. Prod. GS&SC			36.0	9,700		
		12-0's	1,275	RP12+.200 in. 20 ga. Card	31.5	9,800				
Rem. 97★	Rem. Unibody	33-4's	1,250	Bal. Prod. GS&SC					46.0	9,400
		18-1's	1,225	Bal. Prod. GS&SC			35.5	9,800		
		12-0's	1,275	RP12+.200 in. 20 ga. Card	29.5	10,000				
Win. 209	Winchester-Western AA-Type	33-4's	1,250	Bal. Prod. GS&SC					46.5	9,000
		33-4's	1,300						49.0	9,800
		18-1's	1,225	Bal. Prod. GS&SC			34.5	9,900		
		18-1's	1,300						50.5	9,200
		12-0's	1,275	RP12+.200 in. 20 ga. Card			37.5	9,900		

NOTE: Bal. Prod. = Ballistic Products

**THREE THINGS
DEER FEAR
MORE THAN
HEADLIGHTS...**



When you only get one shot, make it count. Rely on Reloder® 19, Reloder® 22, and Reloder® 25 for proven, predictable performance, time after time.

DATA

12-Gauge, 2¾-in. Rifled Slug Loads—Rolled Crimp

Slug Weight, Type	Primer	Shell	Velocity (fps)	Wad	Unique		Herco	
					Grains	Approx. psi.	Grains	Approx. psi.
7/8 oz., Cast	Fed. 209	Federal Hi Power Plastic	1,570	Card .135+5/16+¼+2 Card .135 Card .135+5/16+2 Card .135	33.0	10,000	35.5	8,000
	Rem. 97★	Rem. RXP Plastic	1,570	Card .135+¼+¼+2 Card .135 Card .135+¼+¼ Fiber+2 Card .135	34.0	10,800	35.0	9,700
	Win. 209	Winchester-Western AA-Type	1,570	Card .135+¼+Fiber+2 Card .135 Card .135+¼ Fiber+2 Card .135	34.5	9,800	29.0	8,600
1 oz., Brenneke	Fed. 209	Federal Hi Power Plastic	1,570	Card .135+¼+¼ Fiber			37.0	10,700
	Win. 209	Winchester-Western AA-Type	1,570	Card .135+5/16 Fiber +3/16			37.0	9,700

12-Gauge, 3-in. Rifled Slug Loads—Rolled Crimp

Slug Weight, Type	Primer	Shell	Velocity (fps)	Wad	Herco		Blue Dot		2400	
					Grains	Approx. psi.	Grains	Approx. psi.	Grains	Approx. psi.
7/8 oz., Cast	Fed. 209	Fed. Hi Power	1,570	.135 Card+½+3/8+.135 Card	40.0	10,500				
	Rem. 97★	Rem. Unibody	1,570	.135 Card+½+3/8+.135 Card	37.5	10,600				
	Win. 209	Winchester-Western AA-Type	1,570	.135 Card+½+.135 Card	37.5	9,700				
1 oz., Brenneke	Fed. 209	Fed. Hi Power	1,525	.135 Cards(2)+3/8 Filler			45.0	10,400		
	Rem. 97★	Rem. Unibody	1,525	.135 Cards(2)+3/8 Filler					56.5	10,000
	Win. 209	Winchester-Western AA-Type	1,525	.135 Cards(2)+3/8 Filler					57.5	9,400

20-Gauge, 2¾-in. Buckshot Loads

Primer	Shell	No. and Size Buckshot	Velocity (fps)	Wad	Herco		Blue Dot	
					Grains	Approx. psi.	Grains	Approx. psi.
Fed. 209	Federal Hi Power Plastic	18-4's	1,275	Rem. SP20	19.0	11,000	25.0	9,300
		24-3's	1,200	Rem. SP20 Petals Removed			24.0	11,200
		12-1's	1,275	Rem. SP20 Petals Removed			25.5	10,100
Win. 209	Winchester-Western AA-Type	18-4's	1,275	Rem. SP20			24.0	9,600
		12-1's	1,275	Rem. SP20 Petals Removed			25.5	10,400

20-Gauge, 3-in. Buckshot Loads

Primer	Shell	No. and Size Buckshot	Velocity (fps)	Wad	Herco		Blue Dot	
					Grains	Approx. psi.	Grains	Approx. psi.
Fed. 209	Federal Hi Power Plastic	18-3's	1,220	Rem. RXP20	19.5	8,400		
		21-3's	1,220	Rem. SP20			26.0	7,800
Rem. 97★	Rem.-Peters Plastic (Old Style)	18-3's	1,220	Win. WAA20F1	19.5	8,300		
		21-3's	1,220	Win. WAA20F1			26.0	8,500
			1,220	Rem. SP20			26.0	8,700
Win. 209	Winchester-Western AA-Type	18-3's	1,220	Win. WAA20F1	19.0	9,500		
		21-3's	1,200	Rem. RP20			25.0	9,400

20-Gauge, 2¾-in. Rifled Slug Loads—Rolled Crimp

Slug Weight, Type	Primer	Shell	Velocity (fps)	Wad	Herco	
					Grains	Approx. psi.
5/8 oz., Cast	Fed. 209	Fed. Hi Power	1,570	.125 Card+½ in. Fiber+2 Card .125 each	25.5	9,800
	Win. 209	Win. WAA-Type	1,570	.125 Card+½ in. Fiber+2 Card .125 each	25.5	10,200

INTERNATIONAL LOADS

24-Gram International Target Loads with 12-Gauge, 2¾-in. Federal Gold Medal Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3½	1,345	Fed. 209A	Fed. 12S0	20.0	8,900	20.5	7,900		
			Purple PC	19.5	8,700				
			Rem. TGT12	20.5	8,900				
			Win. WAA12L (Gray)	20.0	9,000				
			Claybuster 1100-12	20.0	8,700				

24-Gram International Target Loads with 12-Gauge, 2¾-in. Remington Premier, STS Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3½	1,345	Rem. 209P	Rem. TGT12	20.5	9,200	20.5	8,500		
			Fed. 12S0	20.0	9,800				
			Win. WAA12L (Gray)	20.5	9,800				
			Purple PC***	20.5	8,300				
			Claybuster 1100-12	20.5	8,800				

NOTE: For each asterisk (*), add one 0.135-in. .410-bore card to the inside bottom of the shot cup.

24-Gram International Target Loads with 12-Gauge, 2¾-in. Winchester AA Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3½	1,345	Win. 209	Win. WAA12L (Gray)	20.0	10,200	20.5	9,700		
			Rem. TGT12	20.0	9,600				
			Claybuster 1100-12	20.0	9,600				
			Fed. 12S0	20.0	10,100				
			Purple PC***	20.0	9,000				

NOTE: For each asterisk (*), add one 0.135-in. .410-bore card to the inside bottom of the shot cup.

24-Gram International Target Loads with 12-Gauge, 2¾-in. Fiocchi Plastic Target Shells

Dram Equiv.	Velocity (fps)	Primer	Wad	Red Dot		American Select		Green Dot	
				Grains	Approx. psi	Grains	Approx. psi	Grains	Approx. psi
3½	1,345	Fio. 616	Fed. 12S0	20.5	8,700	22.0	7,800		
			Rem. TGT12	20.5	8,200				
			Win. WAA12L (Gray)	21.0	8,500				
			Purple PC	22.5	6,900				

PISTOL AND REVOLVER DATA




Pistol and Revolver Loads

Cartridge/Bullet	Primer	Min. OAL (inches)	Bbl Length	Bullseye Chg Wt fps psi	Red Dot Chg Wt fps psi	American Select Chg Wt fps psi	Green Dot Chg Wt fps psi	Unique Chg Wt fps psi	Power Pistol Chg Wt fps psi	Herco Chg Wt fps psi	Blue Dot Chg Wt fps psi	2400 Chg Wt fps psi
.25 Auto												
50 FMC	Rem. SP 1/2	0.875	2.0	1.3 760 15,000	1.1 740 15,500		1.4 785 15,400	1.7 760 14,800		1.7 735 15,600		
.32 Auto												
71 FMC	Rem. SP 1/2	0.984	4.0	2.2 835 12,500	2.1 805 12,900		2.3 810 11,900	2.5 820 11,200		3.2 880 13,500		
.32 H&R Magnum												
85 JHP	Fed. 100	1.320	5.0	3.4 1,020 18,700	3.4 1,030 19,200		3.5 1,035 19,500	4.1 1,050 18,700		4.6 1,060 18,900	6.6 1,100 19,000	
90 LWC (target)		1.100	5.0	2.2 800 9,500	2.1 800 9,400		2.2 805 9,600	2.5 800 8,400		2.8 805 8,500	3.7 805 7,800	
90 LWC		1.180	5.0	3.3 1,060 19,600	3.1 1,020 20,000		3.3 1,050 20,400	3.7 1,110 20,300		4.0 1,070 20,400	5.1 1,150 20,300	
98 LRN		1.320	5.0	3.4 1,020 19,500	3.1 980 19,700		3.5 1,010 19,600	4.0 1,000 19,000				6.2 1,150 20,400
9x18mm Makarov												
95 JHP	Win. W.S.P.	0.965	4.0	3.6 970 21,200					4.7 1,010 21,600			
100 FJP	1/2-108	0.965	4.0	3.6 960 21,100	3.1 905 21,300		3.5 925 21,300		4.7 995 21,400			
100 LRN		0.965	4.0	3.2 920 21,000	2.7 865 21,300		3.2 910 21,600	4.3 985 20,900	4.2 950 21,600			
9mm Luger												
95 FJM	Win. W.S.P.	1.055	4.0	5.5 1,295 31,400	5.3 1,285 32,100	6.0 1,280 32,200	5.5 1,240 25,500	6.5 1,250 26,400	7.8 1,445 32,900	6.8 1,225 24,400	8.3 1,180 22,000	
115 FJM	1/2-108	1.120	4.0	5.0 1,180 31,000	4.5 1,150 32,600		4.7 1,150 30,000	6.1 1,185 30,100	6.7 1,280 33,500	6.3 1,180 28,700	8.0 1,190 29,200	
115 JHP	[Fed. 100*]	1.140	4.0			5.2 1,135 32,800						
125 L		1.150	4.0	4.9 1,165 32,100	4.5 1,145 32,000		5.2 1,165 32,100	6.0 1,165 29,400		6.2 1,165 28,500	8.2 1,190 29,700	
125 FJM		1.150	4.0	4.9 1,155 32,000	4.6 1,145 33,000	4.7 1,050 33,100	5.2 1,150 32,100	6.2 1,170 31,300	6.6 1,235 34,000	6.5 1,180 32,700	8.2 1,170 29,900	
147 XTP		1.140	4.0	4.2 1,010 32,900	3.4 895 32,400	3.7 890 32,700	3.7 930 32,200	4.4 1,010 32,700	5.7 1,095 34,000	4.9 1,010 30,500	6.2 1,050 30,200	
.357 Magnum												
110 JHP	Fed. 200	1.560	5.6	9.0 1,690 31,700	7.7 1,560 34,000	7.8 1,520 32,700	10.0 1,660 31,300	10.0 1,735 34,100	9.7 1,690 34,000	13.0 1,885 33,300	16.0 2,040 33,800	
125 JSP	[Rem. 5 1/2**]	1.570	5.6	8.4 1,550 32,800	7.0 1,410 34,000	7.4 1,400 33,200	7.3 1,415 33,600	9.6 1,585 33,800	9.2 1,555 33,500	9.8 1,590 33,600	14.5 1,795 34,000	17.6 1,810 31,800
148 LWC (target)		1.330	5.6	2.7 775 12,400		2.9 825 11,300	2.8 780 14,100	3.3 775 10,000				
148 LWC		1.330	5.6	5.7 1,475 34,000	4.6 1,300 33,600		5.1 1,310 34,000	6.4 1,465 33,800		6.7 1,510 33,900	10.0 1,625 33,800	12.2 1,675 33,800
158 LWC		1.580	5.6	6.5 1,320 33,900	5.5 1,215 34,000	6.0 1,210 32,800	6.0 1,240 34,000	6.8 1,295 33,900	8.0 1,305 33,800	7.9 1,365 33,900	10.3 1,490 33,600	15.3 1,620 34,000
170 FJM		1.575	5.6	6.8 1,250 33,100	6.0 1,160 33,400	5.7 1,130 32,900	7.0 1,215 34,000	7.8 1,280 33,200	8.0 1,305 33,800	8.2 1,305 34,000	10.7 1,420 33,300	15.2 1,535 33,100
180 FJM		1.585	5.6	6.2 1,175 33,900	5.4 1,025 33,600	5.2 960 30,700	6.1 1,090 33,700	6.8 1,175 33,500	8.0 1,195 33,300	7.0 1,175 33,500	9.7 1,310 33,800	12.1 1,365 33,600
180 JFP		1.580	5.6	6.3 1,135 34,000	5.3 930 33,200	4.9 850 32,700	6.0 1,010 34,000	7.0 1,125 33,800	7.0 1,145 33,800	7.2 1,110 34,000	9.7 1,260 33,300	12.5 1,300 32,700
200 LRN		1.575	5.6	5.3 1,085 33,900	4.6 990 33,600		5.0 1,015 34,000	6.0 1,105 33,900	6.1 1,105 33,900	6.1 1,105 33,900	8.2 1,225 33,900	10.0 1,245 32,800
.38 Super Auto +P												
115 JHP	Rem. SP 1/2	1.255	5.0	5.5 1,240 33,900	4.7 1,155 33,500		5.7 1,225 33,800	6.6 1,265 33,800	7.3 1,345 34,400	6.8 1,260 34,000	10.2 1,360 33,000	
130 FJM		1.260	5.0	5.1 1,170 33,600	4.5 1,095 33,900		5.2 1,135 33,600	6.2 1,200 34,000	6.8 1,255 34,600	6.3 1,180 33,500	9.1 1,265 32,500	
147 XTP		1.275	5.0	5.0 1,095 34,000	4.5 1,035 34,000		4.7 1,045 33,500	5.8 1,105 34,000	6.2 1,155 34,900	6.4 1,135 33,800	8.6 1,220 33,900	10.9 1,215 33,600
158 L		1.275	5.0	4.6 1,030 33,600	4.0 985 34,000		4.9 1,025 33,900	5.9 1,085 33,800		6.0 1,080 33,100	8.3 1,190 33,900	
.38 Special												
110 JHP	Fed. 100	1.430	5.6	4.5 1,085 14,900	4.0 1,000 15,800	4.4 1,015 15,500	4.6 1,050 16,000	5.6 1,090 15,400		5.6 1,090 15,800	7.8 1,170 15,700	
125 JSP	[Rem. 1 1/2***]	1.440	5.6	4.4 1,000 15,300	3.9 950 15,600	4.3 920 15,900	4.3 985 15,900	5.3 1,015 16,000		5.5 1,040 16,000	7.3 1,035 15,600	
148 LWC (target)		1.180	5.6	2.7 785 14,600	2.3 730 14,800	3.0 805 13,600	2.7 765 14,600	3.2 775 14,100				
148 LWC		1.180	5.6	2.8 815 15,900	2.5 750 15,500		2.9 800 15,900	3.3 815 15,500		3.5 820 16,000	5.3 810 13,600	
158 LWC		1.420	5.6	3.6 910 15,500	3.1 835 15,800		3.5 870 15,800	4.3 920 16,000		4.5 930 15,800	6.1 955 15,600	7.5 990 15,500
160 JSP		1.435	5.6	3.5 805 15,600	3.2 715 15,700		3.4 750 15,800	4.2 800 15,600		4.4 805 16,000	6.2 845 15,800	7.6 850 15,900
200 LRN		1.540	5.6	3.0 760 15,100	2.8 725 15,100		3.1 750 15,500	3.6 780 15,700		3.8 785 15,500	5.3 850 16,000	7.0 870 15,800
.38 Special +P												
90 JHP	Fed. 100	1.410	5.6	5.5 1,340 17,000	4.5 1,245 17,000		5.1 1,260 16,900	6.3 1,300 16,800		6.5 1,310 17,100	9.1 1,345 16,900	
110 JHP		1.430	5.6	5.0 1,175 17,400	4.2 1,040 17,500		4.8 1,100 17,400	5.9 1,160 17,500	6.5 1,200 17,100	5.9 1,150 17,500	8.2 1,205 16,800	
125 JSP		1.445	5.6	4.8 1,090 17,500	4.1 965 17,000		4.6 1,015 17,500	5.6 1,070 17,500	6.3 1,165 17,200	5.8 1,050 16,900	7.5 1,065 16,900	
158 LWC		1.420	5.6	3.8 945 17,200	3.2 855 16,800		3.7 910 17,200	4.5 950 17,100	4.7 965 17,300	4.7 965 17,300	6.3 995 17,000	7.8 1,035 17,400
160 JSP		1.435	5.6	3.7 820 17,100	3.3 750 17,400		3.6 770 17,300	4.4 885 17,100	4.9 880 17,300	4.6 865 17,200	6.3 905 17,400	7.8 910 17,500
200 LRN		1.540	5.6	3.3 795 17,100	2.9 750 17,000		3.2 775 17,100	3.7 800 17,100	4.0 825 17,000	4.0 825 17,000	5.5 885 17,100	7.1 890 17,500

* For 9mm Luger, American Select load data only (in italics) is with Fed. 100 primers.
 ** For .357 Magnum, American Select load data only (in italics) is with Rem. 5 1/2 primers.
 *** For .38 Special, American Select load data only (in italics) is with Rem. 1 1/2 primers.

See Special Reloading Precautions on page 57. See NOTES and KEY on page 45.
 continued on next page

PISTOL AND REVOLVER DATA



Pistol and Revolver Loads

Cartridge/Bullet	Primer	Min. O.A.L. (inches)	Bbl Length	Bullseye Chg Wt	Red Dot Chg Wt	American Select Chg Wt	Green Dot Chg Wt	Unique Chg Wt	Power Pistol Chg Wt	Hercro Chg Wt	Blue Dot Chg Wt	2400 Chg Wt
				fps psi	fps psi	fps psi	fps psi	fps psi	fps psi	fps psi	fps psi	fps psi
.380 Auto												
88 JHP	Win.	0.960	3.7	3.2 980 14,300	3.1 965 14,600	3.7 987 19,700	3.4 940 14,600	4.0 920 13,600		4.1 995 14,900	6.0 1,000 14,700	
90 JHP	1/2-108	0.960	3.7	3.0 940 12,900	3.1 940 14,300		3.2 890 12,800	4.0 940 14,000		4.0 960 14,800	6.0 980 14,800	
90 XTP		0.960	3.7						4.8 1,105 21,500			
95 FMJ		0.975	3.7	3.2 900 14,700	3.1 885 14,900		3.5 890 14,700	4.2 910 14,600		4.4 910 14,600	6.5 910 14,200	
100 FMJ-RN		0.975	3.7	3.3 985 20,100	2.8 920 19,900		3.1 955 20,000	4.3 1,005 19,500				
.38/40 Win.												
150 gr. Sierra JHP	Rem. 2 1/2	1.585	5.6	6.5 960 12,600	6.2 910 12,800		6.8 950 12,700	8.2 990 13,200		9.2 995 13,100	11.8 1,020 13,100	14.1 970 13,100
180 gr. Sierra JHP		1.585	5.6	5.6 820 12,200	5.1 740 12,500		5.6 745 12,700	6.9 815 13,200		7.3 795 13,100	10.3 875 13,200	13.0 875 13,400
200 gr. Hornady FMJ/JFP		1.585	5.6	5.3 750 12,400	4.8 685 12,400		5.5 730 12,500	6.7 765 13,100		7.3 785 13,300	9.9 840 13,500	12.7 830 13,500
.357 Sig.												
90 JHP	Fed. 100	1.090	4.0	9.3 1,660 37,100	7.1 1,495 35,400	8.5 1,506 37,100	7.8 1,545 36,500	9.2 1,615 37,100	11.4 1,715 37,000	10.1 1,625 34,600	12.8 1,690 35,300	
115 JHP		1.150	4.0	8.0 1,435 36,400	6.4 1,285 37,100	7.1 1,288 37,400	6.9 1,305 37,000		10.0 1,505 36,200	8.7 1,400 36,600	11.3 1,495 37,400	
124 TMJ		1.120	4.0	7.0 1,325 37,000	6.0 1,215 37,200	7.0 1,219 37,100	6.5 1,255 36,800		9.5 1,435 37,200	8.3 1,345 37,600	10.6 1,405 36,900	
147 XTP		1.138	4.0	5.8 1,145 36,800		5.2 983 35,900	4.8 1,010 37,100	5.8 1,110 37,200	7.8 1,245 37,000	6.4 1,140 37,600	8.2 1,205 35,800	
.40 S&W Auto												
135 JHP	Win.	1.105	4.0	7.6 1,350 33,600	6.7 1,280 33,200		7.5 1,330 33,100	8.5 1,290 26,600	9.3 1,340 34,000			
150 JHP	1/2-108	1.105	4.0	6.7 1,225 34,000	5.9 1,155 34,000	6.0 1,140 33,000	6.2 1,175 33,800	8.0 1,245 34,000	8.2 1,215 33,300	8.2 1,215 33,900	11.5 1,285 34,000	
170 XTP		1.124	4.0	5.5 1,015 33,500	5.1 985 34,000	5.4 1,020 33,100	5.6 1,045 33,700	6.7 1,075 33,800	7.3 1,105 33,300	7.4 1,125 34,000	9.8 1,170 33,900	12.1 1,110 33,600
180 JHP		1.125	4.0	5.5 1,015 33,900	5.0 980 34,000	4.7 930 32,400	5.3 1,010 33,600	6.4 1,065 33,800	6.9 1,050 33,700	7.0 1,045 34,000	8.8 1,065 34,000	10.9 1,025 33,900
190 JHP		1.130	4.0	5.4 955 34,000	4.9 895 33,600	4.7 895 32,000	5.1 955 33,600	6.1 1,010 34,000	6.9 1,020 33,100	6.7 1,000 33,800	8.7 1,040 33,800	10.6 975 33,600
200 FMJ		1.130	4.0	4.6 945 33,600	4.1 890 33,500	4.2 845 32,600	4.3 890 33,600	5.3 955 33,900	6.3 960 33,700	5.8 955 34,000	7.9 960 33,800	8.5 925 33,600
10mm Auto												
135 JHP	Fed. 150	1.250	5.5						10.6 1,530 35,600			
150 JHP		1.250	5.5						9.7 1,415 35,600			
155 HP		1.250	5.5	6.7 1,190 34,000				7.5 1,200 33,800		8.2 1,230 33,800	11.5 1,340 34,100	13.6 1,270 33,600
155 L		1.250	5.5						9.5 1,320 33,000			
170 HP		1.250	5.5	6.2 1,135 34,000				6.9 1,135 34,100		7.5 1,145 33,600	10.1 1,180 33,500	12.6 1,190 33,800
180 JHP		1.250	5.5	6.4 1,125 35,900				7.0 1,125 35,700		7.5 1,140 35,800	10.4 1,220 35,800	12.9 1,210 36,000
180 L		1.250	5.5						8.7 1,235 34,700			
190 JFP		1.250	5.5	6.3 1,050 35,500				6.7 1,025 35,500		7.2 1,050 35,800	10.0 1,185 36,000	12.5 1,195 35,800
200 FMJ		1.260	5.5	5.3 940 33,600				5.8 940 33,700		6.5 965 33,500	8.9 1,110 33,800	11.2 1,115 34,100
.41 Rem. Magnum												
200 HP	Rem. 2 1/2	1.580	5.8	8.0 1,235 35,700	7.5 1,200 33,400		8.3 1,170 35,000	10.0 1,280 35,700		10.1 1,320 35,900	14.0 1,470 36,000	17.5 1,420 34,700
210 SP		1.575	5.8	8.3 1,245 34,300	8.2 1,225 34,300		8.7 1,165 35,800	10.1 1,265 35,400		10.3 1,320 34,800	13.5 1,425 33,800	17.5 1,425 33,900
220 JHP		1.575	5.8	7.5 1,150 35,800	7.4 1,125 35,900		7.9 1,140 35,800	9.3 1,215 35,300		9.3 1,220 35,800	12.5 1,365 35,800	16.4 1,365 34,300
.44 S&W Special												
180 JHC	Win. 7-111	1.600	5.6	6.5 910 12,000	6.4 885 12,100	5.4 890 13,300	6.7 925 12,400	9.0 985 12,500		9.8 1,000 12,600	13.5 1,020 11,900	16.0 950 11,400
240 LSWC		1.590	5.6			4.7 800 13,100						
246 LRN		1.590	5.6	4.5 765 11,700	4.3 740 11,900		5.0 785 11,900	6.0 800 11,700		7.7 805 12,100	9.2 845 12,300	11.3 805 11,500
.44/40 Win.												
200 JSP	Rem. 2 1/2	1.590	24	6.6 1,070 12,300	5.9 920 12,400		6.6 990 12,200	8.0 1,090 12,400		8.5 1,100 12,500	12.0 1,225 12,500	14.5 1,230 12,500
240 L		1.580	24	5.0 850 12,200	4.7 800 12,300		5.5 850 12,200	6.7 950 12,500		7.1 955 12,400	9.9 1,125 12,500	12.0 1,130 12,500
.44 Rem. Magnum												
180 JHC	Fed. 150	1.585	5.7	11.5 1,520 33,400	10.0 1,410 34,600	11.2 1,435 33,900	11.3 1,470 34,600	13.0 1,550 35,000	14.9 1,663 34,000	13.6 1,560 34,900	19.0 1,725 34,000	23.3 1,760 33,700
200 JHP		1.575	5.7	11.0 1,420 34,000	9.7 1,320 34,800	10.6 1,320 34,100	10.7 1,370 34,500	13.0 1,475 34,400		13.0 1,455 34,500	17.0 1,565 33,400	23.2 1,665 34,300
225 JHP		1.575	5.7	9.5 1,270 34,600	8.2 1,185 34,600	9.1 1,165 33,400	9.2 1,220 34,700	10.7 1,290 34,800		11.0 1,285 34,700	15.2 1,445 34,900	20.5 1,510 34,400
240 L (GC)		1.600	5.7	9.8 1,175 34,400	8.8 1,175 34,900	9.2 1,180 33,800	9.5 1,170 34,800	11.8 1,255 35,000		12.5 1,330 33,800	16.6 1,475 34,700	20.6 1,510 34,700

See Special Reloading Precautions on page 57. See NOTES and KEY on page 45.

Pistol and Revolver Loads (continued)

Cartridge/Bullet	Primer	Min. OAL (inches)	Bbl Length	Bullseye	Red Dot	American Select	Green Dot	Unique	Power Pistol	Hercu	Blue Dot	2400
				Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi	Chg Wt fps psi
.44 Rem. Magnum (cont.)												
240 JSP		1.585	5.7	8.9 1,215 34,700	7.7 1,090 35,000	8.6 1,100 34,200	8.7 1,190 35,000	10.3 1,250 34,900	13.5 1,400 31,900	10.5 1,245 34,700	14.4 1,380 34,800	18.7 1,440 34,800
265 JFP		1.620	5.7	8.3 1,110 34,800	7.1 1,000 34,800	8.3 1,025 34,200	7.8 1,045 35,000	9.3 1,125 34,600	12.7 1,250 34,700	9.5 1,125 34,700	12.7 1,250 34,600	17.0 1,300 34,600
300 HP/XTP		1.600	5.7	7.5 955 34,800	6.7 855 35,000	6.8 850 33,800	6.9 865 35,000	8.3 955 34,800	9.1 1,015 34,500	9.4 1,015 35,000	11.7 1,105 34,200	15.9 1,190 35,000
310 LSWC		1.600	5.7	6.8 975 35,000	5.8 885 34,900		6.2 895 34,600	7.2 965 34,800		8.0 1,005 35,000	10.7 1,110 34,900	13.5 1,150 34,600
240 Swift	Win. WLP	1.615	5.7									21.5 1,473 33,613
280 Swift		1.680	5.7									18.6 1,270 32,100
300 Swift		1.685	5.7									17.3 1,199 33,664
.455 Webley												
220 MK IV L	CCI 300	1.000	6.0	3.6 765 12,500	3.4 745 12,400		3.5 755 12,300	c.u.p. 800 12,600		4.8 790 12,700	c.u.p. 770 12,600	
265 HB RN L		1.245	6.0	3.8 750 12,600	3.4 685 12,300		3.6 690 12,400	c.u.p. 710 12,600		4.9 735 12,700	c.u.p. 6.8 770 12,600	
.45 A.C.P.												
155 Cast Lead	Federal 150	1.270	5.0	6.9 1,175 19,400	5.8 1,155 18,800	6.0 1,125 19,300	6.6 1,165 19,300	7.8 1,190 19,200	8.6 1,025 18,800	8.5 1,185 19,100	9.0 920 13,600	
180 IWC		1.190	5.0	5.4 985 15,800	4.8 900 14,100		5.3 910 14,500	6.0 875 13,400		6.7 950 15,800		
185 IWC		1.190	5.0			5.1 960 19,300						
185 IWP		1.275	5.0	6.7 995 19,400	5.9 940 19,500	5.9 975 19,800	6.8 990 19,300	8.2 1,030 18,900	8.6 1,025 18,800	8.2 990 18,500		
200 LSW (target)		1.190	5.0	4.0 790 9,800	4.0 805 9,400		4.3 805 9,900	5.1 810 9,600				
200 JHP		1.175	5.0	6.0 960 19,400	5.2 890 19,200	5.4 900 19,900	5.9 915 18,900	7.1 975 19,500	7.4 965 19,900	7.7 955 19,300	10.6 1,000 19,500	
230 L (target)		1.190	5.0	4.0 810 13,900	4.0 810 12,800	4.5 825 16,900	4.3 805 13,200	5.0 790 11,800		5.2 815 13,600		
230 JHP		1.230	5.0	5.4 865 19,200	5.0 820 19,500	4.9 780 19,600	5.4 845 19,500	6.4 880 19,400	7.2 895 20,000	7.0 875 19,500	9.8 915 19,300	
230 FMC		1.190	5.0	5.0 905 16,200	5.0 910 16,200		5.4 920 15,800	6.0 895 16,000		6.2 890 16,200	8.5 900 16,200	
240 JHP		1.210	5.0	5.0 810 18,900	4.5 770 19,200	4.7 775 19,500	5.0 790 19,300	5.9 820 19,200		6.5 820 19,200	8.3 865 19,300	
260 JHP		1.210	5.0	4.5 725 19,400				5.4 760 19,400	6.5 835 19,900	5.9 750 18,600	8.3 780 19,000	
240 JHC		1.190	5.0									
.45 ACP +P												
185 JHP	Fed. 150	1.275	5.0	6.0 870 11,800	7.0 915 12,600		8.0 940 12,500	c.u.p. 9.0 895 11,600		9.5 895 11,400	13.0 925 11,800	
200 JHP		1.190	5.0			5.8 810 12,800			9.1 1,075 21,700			
230 FMC		1.190	5.0	5.4 805 11,800	6.0 830 12,000	5.5 795 13,000	6.8 855 12,300	c.u.p. 8.0 850 11,800	8.2 1,030 22,200	c.u.p. 9.0 910 12,600	c.u.p. 11.5 890 12,200	
240 JHC		1.190	5.0	5.0 605 12,400	4.8 550 12,200		5.7 645 12,500	c.u.p. 6.8 690 12,600	7.5 930 22,000	c.u.p. 7.2 670 12,500	c.u.p. 10.0 730 12,300	12.5 735 12,200
.45 Colt												
200 JHP	Win. 7-111	1.550	7.3									
230 LRN		1.550	7.3									
250L		1.550	7.3									
300 HP/XTP		1.580	7.3									
.45 Win. Magnum												
200 JHP	Win. 7-111	1.475	5.0									
230 FMI		1.475	5.0									
260 JHP		1.475	5.0									

NOTES and KEY pertain to Pistol and Revolver tables. See Special Reloading Precautions on page 57

- NOTES:**
- Do not intermix cases of different manufacture, nor bullets, nor primers.
 - Be sure that each case is crackfree and completely empty.
 - Unless specifically recommended, use standard primers. Magnum primers are neither needed nor recommended for most calibers.
 - Do not exceed the powder weight shown, and guard against accidental multiple charges of powder.
 - Start with 10% less powder than shown. Work up gradually, watching for signs of high pressure.
 - Be sure that every completed cartridge is not shorter than the length listed.
 - Watch for signs of case head separation.
- BR** = Bench Rest
FMC = Full Metal Case
FMI = Full Metal Jacket
FN = Flat Nose
FP = Flat Point
FS = Flat Safe
GC = Gas Check
HB = Hollow Base
HC = Hollow Cavity
- HP** = Hollow Point
I = Jacketed
L = Lead
M = Match
psi = Chamber pressure,
PSP = Pointed Soft Point
RN = Round Nose
SB = Solid Base
- SJ** = Semijacketed
SP = Soft Point
Sp. Pt. = Spire Point
WC = Wad Cutter
Wt = weight
Bbl = barrel
in. = inches
gr. = grains
Vel. = velocity
- fps** = feet per second
c.w. = powder charge
c.u.p. = chamber pressure,
min = minimum overall
OAL = length, measured
from base to tip of bullet

SILHOUETTE DATA

Silhouette Loads

Cartridge/Bullet	Primer	Min OAL (inches)	Blue Dot			2400			Reloder 7		
			Charge Weight (grains)	Velocity (fps)	Chamber Pressure (copper units)	Charge Weight (grains)	Velocity (fps)	Chamber Pressure (copper units)	Charge Weight (grains)	Velocity (fps)	Chamber Pressure (copper units)
.222 Remington (Rem. case)											
50 gr. Sierra Spitzer	Fed. 205M	2.090				12.9	2,425	43,800	19.3	2,700	43,800
53 g. Sierra BRHP		2.104				12.4	2,345	43,800	18.2	2,575	43,500
55 gr. Sierra Spitzer		2.125				12.0	2,250	43,100	17.6	2,495	43,400
60 gr. Hornady Spire Pt.		2.125				12.0	2,180	43,800	17.0	2,400	43,800
68.0 gr. Hornady BTHP		2.125				11.3	1,990	43,800	16.5	2,230	43,200
.223 Remington (Rem. case)											
55 gr. Sierra Spitzer	Fed. 205M	2.250				15.9	2,430	48,500	22.1	2,670	48,900
60 gr. Hornady Spire Pt.		2.250				15.4	2,320	48,500	21.4	2,550	49,500
7mm BR Rem. (Rem. case)											
120 gr. Sierra Spitzer	Rem. 7½ BR	2.300				20.2	2,160	47,100	27.8	2,425	47,400
145 gr. Speer Spitzer		2.300				17.7	1,800	47,200	24.8	2,130	47,800
7mm/08 (Rem. case)											
120 gr. Sierra Spitzer	Fed. 210 BR	2.750				27.5	2,310	48,100	37.2	2,560	48,900
145 gr. Speer Spitzer		2.750				23.5	1,970	48,300	33.0	2,250	48,300
.30-.30 Winchester (Fed. case)											
152 gr. Cast Lead	Fed. LR #210	2.500	13.0	1,525	29,000	16.0	1,650	33,300	25.0	1,950	34,900
170 gr. Rem. SPCL		2.500				16.0	1,500	34,700	23.5	1,800	34,900
.35 Remington (Rem. case)											
158 gr. Hornady L	Fed. LR #210	2.400	15.5	1,574	25,200	21.0	1,715	25,300	28.5	1,875	26,600
170 gr. Sierra FMJ		2.400	13.0	1,300	22,400	17.0	1,450	23,400			
200 gr. Rem. SPCL		2.510				22.0	1,650	31,700	30.0	1,825	31,700
.357 Magnum (Win. case)											
158 gr. Rem. SP	Fed. 200	1.580	12.0	1,600	42,900	14.6	1,640	42,300			
170 gr. Sierra FMJ		1.580	10.7	1,445	41,700	13.2	1,450	43,000			
180 gr. Speer FMJ		1.580	9.6	1,265	42,300	11.8	1,320	42,900			
180 gr. Sierra FPJ		1.580	9.2	1,250	42,400	12.1	1,350	41,700			
.357 Maximum (Rem. case)											
125 gr. Speer JHP	Rem. 7½ BR	1.900	15.0	1,860	38,200	20.5	2,045	38,200			
158 gr. Hornady HP		1.975				18.0	1,790	40,400	26.0	1,845	33,600
160 gr. Speer SP		1.975	15.3	1,760	40,700	17.4	1,775	41,200	26.0	1,830	32,700
170 gr. Sierra FMJ		1.975	14.5	1,675	41,300	16.5	1,670	40,500	25.5	1,840	40,100
180 gr. Sierra FPJ		1.975	14.9	1,610	39,400	16.8	1,590	39,000	25.0	1,760	39,700
200 gr. Speer FMJ		1.975	11.6	1,275	41,300	14.1	1,340	41,300	22.3	1,650	41,400
.44 Rem. Magnum (Rem. case)											
180 gr. Sierra HC	Fed. 150	1.590	18.8	1,875	37,900	23.0	1,910	37,800			
240 gr. Speer FMJ		1.590	15.5	1,550	37,600	18.8	1,560	36,800			
250 gr. Sierra FPJ		1.590	15.0	1,525	36,800	19.0	1,600	37,800			
265 gr. Hornady FP		1.590	14.1	1,420	36,300	17.4	1,460	37,400			

Test barrels were 14 inches long, except .357 Maximum, which was 12½ inches.

See NOTES and KEY on page 55.

See Special Reloading Precautions on page 57.

COWBOY ACTION DATA




Cowboy Action Load Data

Caliber	Barrel Length	Bullet	Min. OAL (inches)	Powder	Min. Weight (grs)	Velocity (fps)	Max. Weight (grs)	Velocity (fps)
.38 Spec.	6½	158 RN	1.455	Bullseye	3.2	769	3.8	876
				American Select	3.5	757	4.0	850
				Unique	3.6	661	4.6	865
.357 Mag	6½	158 RN	1.585	Bullseye	4.0	889	5.3	1,071
				American Select	3.3	773	4.9	1,009
				Red Dot	3.3	747		
				Green Dot	3.5	728		
.44 Spec.	5½	200 RN	1.455	American Select	4.5	680	5.3	804
				Unique	5.6	665	6.2	725
				Red Dot	4.5	677	5.2	789
				Green Dot	5.0	689	5.6	752
		240 SWC	1.48	American Select	4.2	650	4.9	739
				Unique	5.1	613	6.0	697
				Red Dot	4.2	616	5.1	737
Green Dot	4.6	632	5.5	747				
.44 Mag	5½	200 RNFP	1.58	Bullseye	4.5	730	6.0	891
				American Select	4.6	699	6.5	898
				Red Dot	4.4	645	6.4	886
				Green Dot	4.8	620	6.8	886
		240 SWC	1.6	American Select	4.5	678	6.5	886
				Green Dot	5.0	661	6.7	849
.45 Colt	5½	200 RNFP	1.585	Bullseye	4.5	630	6.0	835
				Red Dot	4.2	640	5.7	824
				American Select	4.2	640		
				Green Dot	4.2	640	6.6	834
				Unique	5.7	614	7.8	851
		250 SWC	1.58	Bullseye	4.6	661		
				Red Dot	5.0	712		
				American Select	4.6	603	5.3	706
Unique	5.7	579	6.6	714				
Herco	6.3	564	7.0	660				
32-20*	24	118 FP	1.585	Bullseye			3.0	1,009
Red Dot			2.6	923				
30-30*	24	165 FP	2.512	Unique	7.0	1,236		
				Reloder 7	15.8	1,543		
				Green Dot	5.5	1,076		
44/40*	24	200 RNFP	1.59	Bullseye	4.0	825	7.7	1,290
				American Select	4.0	786	6.5	1,130
				Red Dot	4.0	814	6.5	1,153
				Unique	5.0	817	7.8	1,173
45/70*	24	300 FP	2.397	Unique	10.0	1,074	15.0	1,424
				Reloder 7	28.8	1,388		
		405 RNFP	2.669	Unique	9.5	907		

*Test barrel data

CENTERFIRE LOADING DATA



Centerfire Rifle


Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400			Reloder 7			Reloder 12			Reloder 15			Reloder 19			Reloder 22				
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps
.17 Rem. Hornady 25HP	Rem. 7½	2.140	Rem.	24						21.8	3,750	c.u.p. 50,100	22.8	3,915	c.u.p. 50,200									
.22 Hornet Speer 40SP	Win. 6½-116	1.710	Win.	24	7.5	2,250	c.u.p. 41,000	11.0	2,265	c.u.p. 19,800														
Speer 45 Spitz		1.710		24	7.1	2,065	c.u.p. 41,300	10.6	2,170	c.u.p. 20,300														
Hornady 50SPSX		1.710		24	7.0	1,945	c.u.p. 41,700	10.5	2,115	c.u.p. 21,500														
.22/250 Rem. Speer 45 Spitz	Win. 8½-120	2.300	Win.	24						35.5	3,760	59,400												
Hornady 50SPSX		2.350		24						34.3	3,575	58,900												
Hornady 55SPSX		2.350		24						33.3	3,425	59,200	35.3	3,625	59,400									
Hornady 60SP		2.350		24						32.5	3,290	58,500	34.7	3,485	59,400	41.0	3,510	57,800						
.220 Swift Speer 45 Spitz	CCI 200	2.645	Horn.	24						36.6	3,760	c.u.p. 50,100	39.0	4,010	c.u.p. 50,300									
Hornady 50SPSX		2.660		24						36.1	3,675	50,500	38.6	3,850	49,800	44.0	3,650	c.u.p. 50,400						
Hornady 55MJBT		2.630		24									38.0	3,775	c.u.p. 50,500	43.9	3,610	c.u.p. 50,500						
Hornady 60 Sp. Pt.		2.680		24									35.8	3,540	c.u.p. 50,400	43.0	3,575	c.u.p. 50,400	43.0	3,565	c.u.p. 49,900			
.221 Rem. Fireball Speer 40SP	Rem. 7½	1.800	Rem.	10½	15.5	2,700	c.u.p. 46,500																	
Sierra 50 Spitz		1.825		10½	13.8	2,410	43,500																	
Sierra 53BRHP		1.825		10½	13.5	2,320	43,600																	
Nosler 60 Spitz		1.825		10½	13.3	2,200	46,300	18.1	2,250	c.u.p. 34,000														
.222 Rem. Speer 45 Spitz	Rem. 7½ BR	2.090	Rem.	24	19.8	3,225	47,500						25.0	3,290	46,200									
Sierra 50SMP		2.130		24	20.0	3,115	47,400						24.0	3,120	44,300									
Sierra 55FMJBT		2.130		24									24.0	3,190	47,900	24.3	3,120	47,900						
Hornady 60SPPT		2.130		24									22.5	2,915	47,500	22.5	2,915	47,500						
.222 Rem. Mag. Speer 45 Spitz	Rem. 7½	2.280	Rem.	24	23.0	3,400	c.u.p. 46,500																	
Sierra 50 Spitz		2.280		24	22.5	3,250	45,400																	
Sierra 53BRHP		2.280		24	22.0	3,120	44,500																	
Sierra 55 Spitz		2.280		24	22.0	3,100	46,000																	
.223 Rem. Speer 45 Spitz	Fed. 205M	2.210	Fed.	24	14.9	3,030	49,600	21.8	3,375	53,200			28.0	3,470	52,800	28.5	3,635	53,500						
Hornady 50SP		2.250		24	14.5	2,795	48,500	21.5	3,195	53,000			27.0	3,335	52,300									
Sierra 52HPBT		2.250		24	20.9	3,165	53,300	20.9	3,165	53,300			27.5	3,310	52,700	28.3	3,440	53,100						
Hornady 55MJBT		2.215		24									28.0	3,390	53,600	28.0	3,390	53,600						
Hornady 60 Sp. Pt.		2.250		24	14.0	2,685	49,900	20.5	3,080	52,400			25.5	3,070	53,300	26.5	3,240	53,000						
Hornady 68BTHP		2.260		24									24.0	2,935	56,600	25.6	3,030	52,800						
Hornady 75BTHP		2.260	Rem.	24									24.9	2,895	53,400	24.9	2,895	53,400						
Sierra 80HPBT		2.260	Rem.	24									24.0	2,800	53,000	24.0	2,800	53,000						

Cartridge/Bullet/Primer	Min. OAL (inches)	Case	Bbl Length	2400			Reloder 7			Reloder 12			Reloder 15			Reloder 19			Reloder 22			
				Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	
.225 Win.																						
Win. 50FSP	Win. 8½-120	2.450	Win.	24	22.0	3,130	c.u.p. 44,000															
Win. 55FSP		2.450		24	22.0	3,075	c.u.p. 44,500															
.243 Win.																						
Sierra 60HP	Win. 8½-120	2.550	Win.	24	30.2	3,320	54,800	38.5	3,450	56,400												
Speer 75HP		2.610		24	34.0	3,125	57,500	34.0	3,125	57,500												
Speer 80 Spitz		2.685		24	34.0	3,060	57,000															
Sierra 100 Spitz BT		2.700		24																		
6mm Remington																						
Sierra 60HP	Rem. 9½	2.760	Rem.	24	41.8	3,665	62,800	41.8	3,665	62,800	43.6	3,820	62,700									
Speer 75HP		2.790		24	39.0	3,340	62,200	39.0	3,340	62,200	40.6	3,410	62,300									
Speer 80 Spitz		2.790		24	38.0	3,205	62,300	38.0	3,205	62,300	40.5	3,340	63,000	49.5	3,435	61,700	46.0	3,145	62,500	51.5	3,450	60,900
Sierra 100 Spitz BT		2.800		24																		
.25-06 Rem.																						
Sierra 75HP	Fed. 210	3.090	Fed.	24	48.0	3,580	59,900	48.0	3,580	59,900	47.2	3,425	61,000	57.3	3,525	59,800						
Speer 87 Spitz		3.090		24	44.5	3,290	59,500	44.5	3,290	59,500	44.9	3,190	61,000	54.3	3,320	61,000	50.5	3,025	60,400	55.9	3,355	61,100
Speer 100 Spitz		3.200		24																		
Sierra 120HPBT		3.225		24																		
.25/20 Win.																						
Rem. 86SP	CCI 400	1.590	Rem.	24	11.5	1,460	15,000	11.5	1,460	15,000												
.250 Savage																						
Sierra 75HP	Rem. 9½	2.400	Rem.	24	37.8	3,250	43,800	37.8	3,250	43,800	38.3	3,350	43,700									
Speer 87 Spitz		2.450		24																		
Speer 100 Spitz		2.500		24																		
Sierra 120HPBT		2.510		24																		
.257 Roberts																						
Sierra 75HP	Win. 8½-120	2.775	Win.	24	39.0	3,160	42,800	39.0	3,160	42,800	41.8	3,340	42,700									
Speer 87 Spitz		2.775		24	36.5	2,930	43,300	36.5	2,930	43,300	41.0	3,185	43,200	41.0	2,940	42,800	40.0	2,855	43,400	40.0	2,680	43,600
Speer 100 Spitz		2.775		24																		
Sierra 120HPBT		2.775		24																		
.257 Roberts+P																						
Sierra 75HP	Win. 8½-120	2.775	Win.	24	41.0	3,365	48,000	41.0	3,365	48,000	43.4	3,510	48,000									
Speer 87 Spitz		2.775		24	39.5	3,165	48,000	39.5	3,165	48,000	43.5	3,310	48,000	44.7	2,930	43,100	44.0	2,785	43,000	44.0	2,680	43,600
Speer 100 Spitz		2.775		24																		
Sierra 120HPBT		2.775		24																		
.257 Wby. Mag.																						
Sierra 75HP	Fed. 215	3.075	Wby.	26	73.3	3,895	52,900	73.3	3,895	52,900	77.0	3,900	53,000	77.0	3,895	52,900	73.0	3,675	52,700	73.0	3,675	52,700
Speer 87 Spitz		3.150		26	68.4	3,650	53,000	68.4	3,650	53,000	64.5	3,420	52,700	64.5	3,420	52,700	69.0	3,460	52,400	69.0	3,460	52,400
Speer 100 Spitz		3.170		26	61.3	3,175	53,000	61.3	3,175	53,000	59.7	3,100	53,000	59.7	3,100	53,000	64.5	3,200	52,700	64.5	3,200	52,700
Barnes 115 Spitz		3.170		26																		
Nosler 120 SP		3.170		26																		

continued on next page

See NOTES and KEY on page 55.

CENTERFIRE LOADING DATA



Centerfire Rifle (continued)

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400		Reloder 7		Reloder 12		Reloder 15		Reloder 19		Reloder 22	
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi
.260 Remington																
Sierra 85 HP	Rem 9½	2.710														
Sierra 100 HP		2.710														
Hornady 129 SP		2.750														
Sierra 140 SBT		2.750														
6.5x55 Swedish Mauser																
Hornady 129SP	CCI 200	2.935	Norma	24												
Speer 140 Spitz		3.000		24												
Hornady 160RN		2.975		24												
.264 Win. Mag.																
Hornady 129 Sp. Pt.	Win. 8½-120	3.270	Win.	24												
Speer 140 Spitz		3.340		24												
Hornady 160RN		3.315		24												
.270 Win.																
Speer 100 Spitz	Win. 8½-120	3.150	Win.	24												
Speer 130 Spitz		3.250		24												
Sierra 140 SBT		3.280		24												
Sierra 150 Spitz BT		3.320		24												
Nosler 150 Spitz		3.325		24												
.270 Wby. Mag.																
Speer 100 Spitz	Fed. 215	3.160	Wby.	26												
Speer 130 Spitz		3.260		26												
Sierra 140 SBT		3.275		26												
Sierra 150 SBT		3.285		26												
Nosler 150 Spitz		3.285		26												
7-30 Waters																
Hornady 120 Sp. Pt.	Fed. 210	2.640	Fed.	24												
Hornady 139 F.P.		2.650		24												
7mm-08 Rem.																
Hornady 120 Sp. Pt.	Rem. 9½	2.750	Rem.	24												
Hornady 139 Sp. Pt.		2.800		24												
Speer 145 Spitz		2.800		24												
Sierra 150 HPBT		2.800		24												
Sierra 160 Spitz BT		2.800		24												

See NOTES and KEY on page 55.


continued on next page

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400		Reloder 7		Reloder 12		Reloder 15		Reloder 19		Reloder 22				
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi
7x57 Mauser																			
Hornady 120 Sp. Pt. Fed. 210		2.965	Fed.	24			43.0	2,895	48,900	45.0	2,995	48,900	54.0	3,030	48,000				
Hornady 139 Sp. Pt.		3.015		24			40.5	2,660	48,800	41.5	2,700	48,400	51.8	2,835	49,000	53.0	2,790	45,600	
Speer 145 Spitz		3.040		24			37.0	2,520	48,800	38.5	2,550	48,500	47.3	2,680	48,800	48.8	2,720	49,000	
Sierra 160 Spitz BT		3.040		24									49.0	2,665	45,500	50.0	2,690	48,300	
.280 Rem.																			
Hornady 120SP Rem. 9½		3.310	Rem.	24			47.1	2,985	57,900	48.0	3,065	57,200	58.0	3,115	57,600				
Hornady 139 Sp. Pt.		3.320		24			44.0	2,700	57,100	46.5	2,860	57,700	57.0	2,970	58,000	59.5	3,000	57,500	
Speer 145 Spitz		3.320		24			42.5	2,580	57,600	43.0	2,630	57,100	53.0	2,815	57,800	56.0	2,865	58,000	
Sierra 160 Spitz BT		3.325		24									53.4	2,750	58,100	55.7	2,795	58,000	
.284 Win.																			
Hornady 120 SP Win. LR		2.800	Win.	24									60.5	3,265	53,600				
Hornady 139SP 8½-120		2.795		24			51.5	3,235	54,300	48.0	2,975	54,700	57.0	3,075	53,500	58.5	3,030	49,000	
Speer 145 Spitz		2.795		24			46.7	2,855	55,100	47.5	2,780	58,700	61.7	3,090	58,400	64.5	3,150	58,600	
Nosler 150 Part.		2.790		24									55.0	2,940	53,500	55.0	2,900	49,200	
Sierra 160 Spitz BT		2.800		24			54.0	3,110	59,000	47.5	2,780	58,700	62.0	3,020	58,500	65.0	3,075	58,600	
7mm Rem. Mag																			
Hornady 120 Sp. Pt. Rem. 9½		3.275	Fed.	24			57.0	3,035	59,000	55.0	3,200	58,300	69.0	3,465	58,600	73.0	3,490	58,600	
Hornady 139 Sp. Pt.		3.275		24			48.0	2,765	58,900	55.6	3,070	59,000	67.5	3,260	58,100	70.0	3,295	58,000	
Speer 145 Spitz		3.280		24						61.3	3,370	52,500	74.0	3,505	52,100	77.0	3,640	58,400	
Sierra 160 Spitz BT		3.285		24															
Sierra 175 Spitz BT		3.285		24															
7mm Wby. Mag.																			
Hornady 120 Sp. Pt. Fed. 215		3.200	Wby.	26															
Hornady 139 Sp. Pt.		3.280		26															
Speer 145 Spitz		3.240		26															
Nosler 150 Spitz		3.250		26															
Sierra 160 Spitz		3.240		26															
Sierra 175 Spitz		3.245		26															
.30 Carbine																			
Hornady 100SJ CCI 400		1.625	Fed.	20	12.3	1,815													
Cast (GC) 112L		1.625		20	10.3	1,590													
.30-06 Springfield																			
Sierra 110HP Fed. 210		3.100	Fed.	24	30.9	2,715	55,900	45.0	3,145	56,400	58.6	3,465	58,100	65.5	2,995	47,300	63.0	2,815	46,000
Sierra 125 Spitz		3.120		24	30.0	2,575	55,100	42.0	2,915	56,600	56.8	3,275	58,500	63.5	2,895	50,900	62.0	2,845	50,600
Hornady 150 Sp. Pt.		3.210		24	29.4	2,330	56,000	43.8	2,780	57,000	53.6	3,005	58,500	63.0	2,950	56,400	60.0	2,755	51,300
Barnes X 150		3.220		24															
Nosler 165 Part.		3.220		24															
Speer 165 Spitz		3.250		24	29.2	2,295	55,400	40.5	2,610	56,800	49.8	2,815	58,500	62.1	2,890	58,500	62.0	2,824	52,500
Speer 180 Spitz		3.250		24	28.2	2,210	55,400	39.8	2,505	56,900	48.5	2,720	58,200	60.0	2,800	57,000	60.0	2,710	51,000
Nosler 180 Part.		3.250		24															
Win. 180 F.S.		3.200	Win.	24															
Sierra 190 MKing Fed. 210		3.300	Fed.	24	26.0	2,075	55,600	37.4	2,340	57,400	45.3	2,515	56,800	47.0	2,600	56,500	57.2	2,685	55,300
Sierra 200 Spitz BT		3.300		24															

continued on next page

See NOTES and KEY on page 55.

CENTERFIRE LOADING DATA




Centerfire Rifle (continued)

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400			Reloder 7			Reloder 12			Reloder 15			Reloder 19			Reloder 22			
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt
.30-30 Win.																							
Sierra 125FFP	Win. 8½-120	2.470	Win.	24	30.0	2,630	c.u.p. 34,100	37.0	2,555	39,900													
Sierra 150FFP		2.525		24	27.5	2,190	c.u.p. 33,800	33.5	2,320	40,400													
Hornady 170FFP		2.545		24	24.0	1,910	c.u.p. 34,500	32.0	2,160	40,100													
.300 Savage																							
Sierra 125SPT	Rem. 9½	2.600	Rem.	24	46.0	2,920	c.u.p. 44,300																
Sierra 150SPT		2.600		24	43.0	2,635	c.u.p. 41,400																
Sierra 165SPT		2.600		24	41.0	2,485	c.u.p. 40,800																
.300 H&H Mag.																							
Hornady 150 Sp. Pt.	Fed. 210	3.570	Fed.	24	63.8	3,270	c.u.p. 52,500																
Speer 165 Spitz		3.555		24	60.9	3,065	c.u.p. 52,500																
Nosler 180 Part.		3.535		24	58.0	2,910	c.u.p. 52,300																
Speer 180 Spitz		3.575		24	56.7	2,850	c.u.p. 52,400																
Sierra 200 Spitz BT		3.590		24	55.0	2,725	c.u.p. 52,100																
.300 Win. Mag																							
Hornady 150 Sp. Pt.	Win. 8½-120	3.340	Win.	24	59.0	3,105	61,200																
Speer 165 Spitz		3.340		24	62.0	2,935	60,600																
Speer 180 Spitz		3.340		24																			
Win. 180 ES.	Win. W.L.R.	3.340		24																			
Sierra 200 Spitz BT	Win. 8½-120	3.340		24																			
.300 Wby. Mag.																							
Hornady 150 Sp. Pt.	Fed. 215	3.540	Wby.	26	69.5	3,255	52,800																
Speer 165 Spitz		3.510		26	65.0	3,060	52,800																
Speer 180 Spitz		3.515		26																			
Nosler 180 Part.		3.530		26																			
Sierra 200 Spitz		3.550		26																			
.303 British																							
Hornady 123SP	Win. 8½-120	2.860	Win.	24	38.6	2,750	c.u.p. 43,200	48.0	2,915	43,000													
Speer 150 Spitz		2.935		24	31.0	2,400	c.u.p. 41,200	45.0	2,700	42,900													
Speer 180 RN		2.940		24	30.0	2,050	c.u.p. 39,600	40.0	2,340	42,600													

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400		Reloder 7		Reloder 12		Reloder 15		Reloder 19		Reloder 22	
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi
7.62 x 39																
Speer 100 Plinker	CCI 200	1.830	Fed.	20	16.5	2,240	c.u.p. 44,900									
Sierra 110HP		2.055		20	16.0	2,115	c.u.p. 44,800	26.5	2,330	c.u.p. 38,300						
Hornady 123SP		2.155		20	15.3	1,915	c.u.p. 44,900	25.5	2,330	c.u.p. 45,000						
Sierra 150JP		2.000		20	14.8	1,800	c.u.p. 45,000	24.8	2,145	c.u.p. 44,600						
.308 Win.																
Sierra 110JHP	Fed. 210	2.600	Fed.	24			c.u.p.	42.5	3,130	47,200	50.5	3,200	57,400			
Sierra 125 Spitz		2.700		24				40.0	2,920	47,100	49.0	3,040	57,400			
Sierra 150 Spitz		2.600		24	25.0	2,215	c.u.p.	37.0	2,750	46,900	45.0	2,755	57,100	46.3	2,880	57,300
Barnes 150X		2.750		24				45.8	2,750	57,400	45.0	2,815	56,800			
Barnes 165X		2.750		24				43.5	2,590	57,200	43.5	2,675	57,000			
Sierra 165 Spitz		2.700		24				44.0	2,650	57,200	45.5	2,780	57,000			
Sierra 168HPBT	Fed. 210M	2.700	Fed.	24				43.0	2,605	57,200	42.8	2,665	56,600			
Speer 180 Spitz	Fed. 210	2.750	Fed.	24				44.0	2,645	57,500	44.0	2,645	57,500			
Win. 180 F.S.	Win. W.L.R.	2.750	Win.	24				36.0	2,290	55,400	41.5	2,500	57,000			
8mm Mauser																
Hornady 125SP	Win. 8½-120	2.820	Win.	24				45.0	2,720	35,500	46.8	2,760	36,000			
Speer 150 Spitz		2.975		24				43.0	2,455	34,900	44.0	2,560	36,000			
Speer 170 Spitz		3.015		24				40.0	2,280	35,300	41.4	2,400	36,000			
8mm Rem. Mag.																
Speer 170S Spitz	Rem. 9½M	3.500	Rem.	24										82.8	3,315	61,700
Speer 200 Spitz		3.525		24										77.7	3,050	61,600
Hornady 220 Sp. Pt.		3.600		24										75.0	2,885	61,600
.348 Win.																
Rem. 150SP	Rem. 9½	2.790	Rem.	24				48.0	2,750	34,900						
Rem. 200SP		2.790		24				45.0	2,330	35,800						
.338 Win. Mag.																
Hornady 200 Sp. Pt.	Win. 8½-120	3.340	Win.	24							65.0	2,935	51,300	78.0	3,020	52,400
Nosler 210 Spitz		3.330		24										74.0	2,910	52,000
Hornady 225 Sp. Pt.		3.325		24							61.8	2,705	51,600	75.3	2,865	52,100
Barnes 225X		3.335		24							56.5	2,590	51,600	72.0	2,765	50,900
Win. 230 F.S.	Win. W.L.R.	3.335		24							72.0	2,790	60,500	73.0	2,790	46,200
Hornady 250RN	Win. 8½-120	3.330		24							71.8	2,990	53,100	85.0	3,095	53,300
.340 Wby. Mag.																
Hornady 200 Sp. Pt.	Fed. 215	3.660	Wby.	26							70.8	2,930	53,500	84.3	3,075	53,500
Nosler 210 Spitz		3.595		26							83.7	2,995	53,500	88.0	3,035	53,400
Hornady 225 Sp. Pt.		3.645		26							80.7	2,865	53,500	84.7	2,880	53,300
Hornady 250RN		3.665		26												

continued on next page
See NOTES and KEY on page 55.

CENTERFIRE LOADING DATA



Centerfire Rifle (continued)

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400			Reloader 7			Reloader 12			Reloader 15			Reloader 19			Reloader 22				
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps
.35 Rem. Rem. 150SPCL	Win. 8½-120	2.485	Win.	24				32.0	2,290	c.u.p. 30,700														
Cast (GC) 158L		2.485		24				28.0	2,200	c.u.p. 29,800														
Rem. 200SPCL		2.485		24				31.0	2,115	c.u.p. 30,700														
.350 Rem. Mag. Rem. 150SPCL	Rem. 9½M	2.800	Rem.	20				55.0	3,075	c.u.p. 47,500														
Rem. 200SPCL		2.800		20				48.0	2,550	c.u.p. 48,500														
Rem. 250PSP		2.800		20				43.0	2,230	c.u.p. 49,300														
.358 Win. Rem. 200PSP	Win. 8½-120	2.780	Win.	24				38.0	2,420	c.u.p. 46,100	50.0	2,455	c.u.p. 44,100											
Win. 250ST		2.780		24				34.5	2,075	c.u.p. 44,700														
.35 Whelen Hornady 200SP	Rem. 9½M	3.125	Rem.	24				51.5	2,630	c.u.p. 50,300	60.0	2,590	c.u.p. 43,200											
Hornady 250RN		3.225		24				47.6	2,330	c.u.p. 50,400	60.0	2,505	c.u.p. 49,700											
.375 Win. Hornady 220FP	Win. 8½-120	2.555	Win.	24				36.0	2,260	c.u.p. 45,500														
.375 H&H Mag. Hornady 220FP	Rem. 9½M	3.360	Rem.	24							75.0	2,835	c.u.p. 49,500											
Hornady 270SP		3.545		24							73.5	2,540	c.u.p. 49,700											
Hornady 300MC		3.550		24							66.5	2,455	c.u.p. 49,600											
.378 Wby. Mag. Hornady 270SP	Fed. 215	3.620	Wby.	26				23.5	1,900	c.u.p. 44,000														
Barnes 300 Solid		3.625		26																				
.38/55 Win. IWI 255SP	CCI 200	2.530	IVI	24				18.0	1,410	c.u.p. 23,500														
.38/40 Win. 150 Sierra JHP	Rem. 2½	1.585	Rem.	24				14.1	1,425	c.u.p. 13,100														
180 Sierra JHP		1.585		24				13.0	1,305	c.u.p. 13,400														
200 Hornady FM/FP		1.585		24				12.7	1,225	c.u.p. 13,500														
.416 Rem. Mag Barnes 300X	Rem. 9½M	3.600	Rem.	24				90.0	2,790	c.u.p. 52,100	90.5	2,890	c.u.p. 52,400											
Barnes 350X		3.600		24				85.0	2,525	c.u.p. 52,400	85.0	2,610	c.u.p. 52,400											
Hornady 400RN		3.565		24				82.0	2,390	c.u.p. 52,000	82.0	2,445	c.u.p. 51,700											
A Square 400 Solid		3.600		24				81.0	2,410	c.u.p. 52,400	81.0	2,455	c.u.p. 50,900											

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	2400		Reloder 7		Reloder 12		Reloder 15		Reloder 19		Reloder 22		
					Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt	fps	psi	Chg Wt
.416 Rigby																	
Barnes 300X	Fed. 215	3.650	Fed.	24											103.0	2,590	c.u.p. 40,000
Barnes 350X		3.675		24											101.0	2,455	c.u.p. 40,300
Hornady 400RN		3.725		24											96.0	2,355	c.u.p. 39,800
A Square 400 Solid		3.725		24											96.0	2,360	c.u.p. 40,300
.416 Wby. Mag.																	
Barnes 325X	Fed. 215	3.650	Wby.	26											117.0	2,880	c.u.p. 51,000
Barnes 350X		3.650		26											116.9	2,830	c.u.p. 51,000
Hornady 400SP		3.615		26											117.5	2,720	c.u.p. 51,000
A Square 400 Solid		3.680		26											117.0	2,705	c.u.p. 50,500
.44/40 Win.																	
Rem. 200SP	Rem. 2½	1.590	Rem.	24	14.5	1,230	12,500										
Cast 240L		1.580		24	12.0	1,130	12,500	23.5	1,290	12,100							
.444 Marlin																	
Speer 240SP	Rem. 9½	2.500	Rem.	24	25.0	1,730	21,900	51.0	2,400	38,100							
Cast (GC) 240L		2.500		24	22.0	1,725	27,900	42.5	2,080	28,900							
Hornady 265FP		2.500		24	25.0	1,715	22,100	47.0	2,215	35,800							
.45/70 Govt.																	
Hornady 300HP	Rem. 9½	2.475	Rem.	24	30.0	1,650	23,000	50.0	2,075	24,700							
Cast (GC) 385L		2.575		24	25.0	1,340	21,300	45.0	1,810	25,100							
Speer 400FN		2.700		24	25.0	1,260	24,000	40.0	1,580	24,900	54.0	1,710	26,100				
.458 Win. Mag.																	
Hornady 300HP	Win. 8½-120	2.950	24	Win.	35.0	1,590	13,500	70.0	2,555	41,400							
Cast (GC) 385L		3.000		24	30.0	1,290	14,200	65.0	2,285	42,100							
Hornady 500FMJ		3.280		24	35.0	1,415	32,600	64.0	2,000	47,000							

Sample Loads for new Reloder® 25 powder

Cartridge/Bullet	Primer	Min. OAL (inches)	Case	Bbl Length	Chg Wt	fps	psi
7 mm Rem. Mag.							
Nosler 150 Part.	Fed. 215	3.285	Rem.		68.0	3,028	58,000
Sierra 175 SPBT	Fed. 215	3.285	Rem.		68.4	2,934	58,000
300 Win. Mag.							
Nosler 165 Part.	Fed. 215	3.340	Rem.		84.5	3,231	60,700
Sierra 180 SPBT	Fed. 215	3.340	Rem.		82.3	3,112	60,600
Swift 200 SP	Fed. 215	3.308	Rem.		78.0	2,828	58,500
300 Weatherby Mag.							
Barnes 165 X	Fed. 215	3.510	Rem.		87.0	3,176	60,300
Nosler 165 Part.	Fed. 215	3.510	Rem.		90.0	3,245	58,500
Sierra 180 SPBT	Fed. 215	3.560	Rem.		88.5	3,172	60,800

NOTES and KEY pertain to Silhouette and Centerfire rifle tables. See **Special Reloading Precautions** on page 56.

NOTES:

1. Do not intermix cases of different manufacture, nor bullets, nor primers.
2. Be sure that each case is crackfree and completely empty.
3. Unless specifically recommended, use standard primers. Magnum primers are neither needed nor recommended for most calibers.

4. Do not exceed the powder weight shown, and guard against accidental multiple charges of powder.
5. Start with 10% less powder than shown. Work up gradually, watching for signs of high pressure.
6. Be sure that every completed cartridge is not shorter than the length listed.
7. Watch for signs of case head separation.

KEY
 BR = Bench Rest
 FMC = Full Metal Case
 FMJ = Full Metal Jacket
 FN = Flat Nose
 FS = Full Safe
 GC = Gas Check
 HB = Hollow Base
 HC = Hollow Cavity
 HP = Hollow Point
 J = Jacketed
 L = Lead
 M = Match
 psi = Chamber pressure, piezo system
 PSP = Pointed Soft Point
 RN = Round Nose
 SB = Solid Base
 SJ = Semijacketed
 SP = Soft Point
 Sp. Pt. = Spire Point
 WC = Wad Cutter
 Wt = weight

c.u.p. = chamber pressure, in copper units
 Min = minimum overall
 OAL = length, measured from base to tip of bullet
 Bbl = barrel
 in. = inches
 gr. = grains
 Vel. = velocity
 fps = feet per second
 c.w. = powder charge weight

HANDLOADING PRECAUTIONS

Pistol and Revolver Cartridges Special Reloading Precautions

Most pistols and revolvers function best when loaded with a quick-burning powder such as Bullseye. Since peak pressure is reached very quickly, the SEATING DEPTH of the bullet is very important: the deeper the bullet, the higher the pressure. If the bullet is seated too deeply, dangerous pressures will be generated which could burst the gun and cause severe personal injury (including death).

Equally critical is the powder charge. Guard AGAINST multiple charges when reloading. Certain cartridges (notably .38 Special) have been reloaded accidentally with double and even triple charges, with catastrophic results when fired in the gun.

A. Prevent deeply seated bullets.

1. Your assembled cartridges must be as long as, or longer than, the minimum length listed for the combination you are reloading.
2. Set your bullet station accordingly and lock tool securely.
3. Keep bullet station clean of accumulating lead and grease.
4. Inspect all loaded rounds for overall length.
5. Be sure every bullet is held tightly by shell mouth, especially pistol loads (recoil drives magazine against bullet noses of contained cartridges).

B. Prevent multiple charges.

1. **Handloading:** Keep track of every powder charge, then look inside all shells and compare powder levels.
2. **Progressive reloading:** Be sure every shell is truly empty; don't back up the turret; don't jiggle the handle; don't use a shell to clean out the powder train (use paper cup or equivalent).

C. Inspection.

1. Discard cases with split mouths.
2. Discard cases with enlarged primer pockets.
3. Do not use cases that are designed for primer-propelled practice cartridges; such cases may not be designed for full power loads.

Physical Effect of Gun Recoil (Kick)

The rearward motion of every gun, its recoil, increases when heavier shot or heavier bullets are fired, and when higher velocity loads are fired. This motion must be opposed by the shoulder, or the pistol hand, of the shooter. Whenever the recoil is perceptibly annoying to the shooter, accuracy on succeeding firings undoubtedly diminishes.

When the shooting condition demands heavy loads and high velocity, recoil kick can be reduced by using a heavier gun, and by spreading the force over a larger area of the anatomy, such as by using a wider stock, larger grip, plus shoulder pad or softer grip.

Excellent publications available to the reloader, plus his or her own growing sophistication, have generated a wholesome trend away from maximum loads and toward accuracy of loads no more powerful than needed to accomplish the particular shot. Reducing recoil increases accuracy.

Contributing to increased accuracy as well as the pleasantness of shooting is in two main areas:

1. This *Reloaders' Guide* includes many reduced loads.
2. Our research indicates that the burning rate of powders has a modest effect on recoil. For example, whenever two or more powders are listed for the same load, the slower one usually is chosen by the expert shooter as giving milder felt recoil. An intriguing aspect of reloading at home is the freedom to assemble, for example trap loads with Red Dot or Green Dot powder, then to shoot them alternately to decide which seems more comfortable.

Handloading Precautions

1. **Understand what you are doing and why.** Read handbooks and manuals on reloading. Talk to experienced reloaders. Write or call suppliers of components if you have questions or are in doubt.
2. Stay *alert* when reloading. **Do not reload when distracted.**
3. Establish a loading procedure and follow it. **Do not vary your sequence of operations.**
4. **Examine empty cases** (shotshell or metallic) to be sure they are in good condition before reloading. Never force live cartridges into or out of the chamber of a gun.
5. **Do not use cases that are designed for primer-propelled practice cartridges;** such cases may not be designed for full power loads.
6. **Do not ream out or enlarge flash holes of metallic cartridge cases.** This may change the ignition rate and result in dangerous pressures.
7. **Do not punch out live primers.** Fire the empty primed shells in a gun.
8. **Do not mix primers.** Primers differ in brisance of ignition, which affects pressure and velocity. Use only the primer listed.
9. **The shotshell loading data in the *Reloaders' Guide* are for LEAD SHOT only. Use steel shot only as specified in the steel shot data section (pgs. 6-7).**
10. One-piece plastic wads for shotshells vary in compressibility and gas-sealing effectiveness. Use only the wad listed.
11. If you "throw," or measure powder charges by volume, check-weigh the charge frequently. **Do not mix powders.**
12. **Do not use powders near a flame, spark-producing machinery, or heating device.** Do not expose powders to temperatures above 100°F.
13. Keep out of reach of children.
14. **Do not smoke while reloading.**

SMOKELESS & TECHNICAL DATA

Smokeless Powders for Reloading

We currently offer 15 powders for use in reloading. These are listed in the order of decreasing burning rates. Each powder listed is "slower" than those preceding it and "faster" than those following it. Among these Alliant smokeless powders, for example, Red Dot® burns more slowly than Bullseye®, but faster than Green Dot®.

Powder	Principal Use ¹	Can Also be Used In ¹
Bullseye®	Handgun Loads	12-Gauge Light Target Loads
Red Dot®	Light and Standard Shotgun Loads, 12-, 16-, and 20-Gauge	Handgun Loads
American Select®	12-Gauge Target Loads	Handgun Loads
Green Dot®	Standard and Medium Shotgun Loads, 12-, 16-, and 20-Gauge	Handgun Loads
Unique®	All-Around Shotgun Powder, 12-, 16-, 20-, and 28-Gauge	Handgun Loads
Power Pistol®	High performance pistol loads such as the 9mm, .40 S&W, and 10mm	Moderate pressure pistol cartridges like the .38 Special, .380 Auto, and .45 ACP
Herco®	Heavy Shotgun Loads, 10-, 12-, 16-, 20-, and 28-Gauge	Heavy Handgun Loads
Blue Dot®	Magnum Shotgun Loads, 10-, 12-, 16-, 20-, and 28-Gauge	Magnum Handgun Loads
Steel™	Steel Shotgun, 10- and 12-Gauge	Magnum, Shotgun and Turkey Loads
2400®	Magnum Handgun Loads	Some Rifle and Shotgun Loads
Reloder® 7	Light Rifle Loads	Silhouette Loads
Reloder® 15	Medium Rifle Loads	Silhouette Loads
Reloder® 19	Magnum Rifle Loads	Target and hunting rifle loads
Reloder® 22	Magnum Rifle Loads	Maximum hunting loads
Reloder® 25	Magnum Rifle Loads	Maximum hunting loads

¹ Use only in the loads printed in this Guide.

Packaging

Powder	1-lb Canister	4-lb Canister	5-lb Canister	8-lb Keg
Bullseye, Red Dot, American Select, Green Dot, Unique, Herco, 2400	x	x		x
Power Pistol	x	x		
Blue Dot	x		x	
Reloder Series	x		x	
Steel	x	x		

All 15 powders are always in stock at distributors' magazines throughout the U.S.A., and in most countries where reloading is legally permitted and popular. Any reloader unable to purchase any of the 15 powders at retail stores that handle powders should write to the address on the back cover. We cannot ship directly, but we will endeavor to correct supply shortages in your area.

Powder Information

Smokeless sporting propellants are of two basic types – single-base and double-base. Single-base propellants derive their energy from nitrocellulose and double-base from a combination of nitrocellulose and nitroglycerin. Alliant propellants range from the "near" single-base American Select (2% nitroglycerin) to the high nitroglycerin (40%) double-base Bullseye. In addition, our propellants contain stabilizers for long storage life and various other ballistic modifiers which reduce flash, improve combustion efficiency, and promote clean burning.

Some of our propellants also have a chemical coating on the surface to control the burning rate. This creates a progressive burn for achieving higher velocities at lower pressures. All of our propellants have a graphite glaze, which ensures smooth, consistent metering of charges through volumetric reloaders.

Alliant propellants are extruded and cut into circular flakes or cylinders by precision dies and cutting equipment. Granule size tolerances are very tight and uniform to prevent separation of different size granules and to ensure consistent ballistic performance, load after load.

By utilizing a precise combination of chemical formulation, granule size, and chemical coatings, we are able to tailor the burning characteristics of our propellants to achieve the best overall performance in a wide range of loads.

Because each of our propellants is specifically engineered to have different burn rates and performance characteristics, **NEVER BLEND OR MIX DIFFERENT POWDERS, AND USE ONLY THE GRADE AND QUANTITY RECOMMENDED IN THIS RELOADER'S GUIDE.**

All powders burn with great precision and rapidity inside the gun chamber, generating the hot, high-pressure gas that accelerates the bullet (or shot) and drives it toward the target. **It is critically important for safety that the powder used is matched to the bullet (or shot) weight and other factors; otherwise, the gun parts may be deformed or may even burst and cause serious personal injury (including death).** Shot-to-shot accuracy can also be degraded by deviations from recommended loads. Even after 80 years of producing and testing powders, ballisticians are unable to calculate and predict **exact** ballistic results; we must test-fire our powders with each set of components and record the results. Therefore, **the ballistic values and recommended combinations listed in this booklet must be followed without deviation.**

Working up charges. For shotgun loads, use the charge weight shown. However, for all rifle and pistol loads, first load and fire a few cartridges at 10% less charge than is shown, watching for any sign of excessive pressure (difficult extraction, flattened or blown primers, unusual recoil).

Handgun loads. Many pistol and revolver loads require only small amounts of fast-burning powders; therefore: (1) guard against accidental double charges, and even multiple charges, whether loading with handtools or with progressive loading devices; (2) be sure that each bullet is positioned in the case so that the minimum overall length is not violated.

Dram Equivalent

Prior to the commercialization of smokeless powder, shotgun shells were loaded with black powder. The weight measurement system used for black powder was "drams." Compared with black powder, **smokeless powder is more dense and MUCH more energetic, so it cannot safely be measured and used like black powder.** Indeed, a different weight system was selected for smokeless powder: "grains," wherein 7,000 grains equal one pound.

Since many shooters still wanted to be able to compare their smokeless powder loads with the original black powder loads, the term "dram equivalent" evolved. Simply stated, the dram equivalent is an indicator of the velocity of a particular shot load. **But note that the charge and weight of smokeless powder must not be calculated from the dram equivalent.**

Notice

We have inserted information on the properties and storage of smokeless powder for your understanding, so that you can avoid unnecessary risks when using it. This information, on pages 61 and 62, was published initially by the Sporting Arms and Ammunition Manufacturers' Institute, Inc., several years ago in the interest of safety. You must read these pages carefully and comply with the precautions listed. If you have questions, please call or write to us at the address on the back cover.

Important Safety and Health Precautions

To perform in a gun, powders must ignite easily and burn rapidly. These characteristics require use of common sense to avoid accidents. **YOU MUST OBSERVE THESE PRECAUTIONS:**

1. **DO NOT** smoke when reloading.
2. **DO NOT** use spark-producing tools.
3. **DO NOT** mix powders of different kinds.
4. **DO NOT** leave powder where children can get it.
5. **DO NOT** try to load when distracted.
6. Avoid an open fire or working near spark-producing machinery.
7. Pour out only the amount of powder needed for immediate work.
8. Check the powder measure each time it is used. Make sure the settings have not been accidentally changed. Check-weigh "thrown charges" frequently.
9. Clean up any spilled powders. Use a brush and dustpan; do not use a vacuum cleaner. Dispose of spilled powder as described in the SAAMI pages of this Guide.
10. Store powder only in its original container, which was carefully designed for this usage. **DO NOT REPACKAGE.** Do not purchase or accept any Alliant powder not in its original, **FACTORY-SEALED** container.
11. Be sure the powder container is completely empty before discarding. Do not use the container to store other powders or materials, or for any other purpose.
12. Always keep in mind that smokeless powder is an explosive material and highly flammable. It should always be stored and handled in such a way as to avoid impact, friction, heat, sparks, or flame.
13. Wear safety glasses when reloading.
14. This material contains nitroglycerin. Inhalation, skin contact, or ingestion may cause severe headache, nausea, and lowering of blood pressure. **THEREFORE, THE FOLLOWING PRECAUTIONS MUST BE OBSERVED WHEN HANDLING POWDERS:**
 - A. Do not take internally. In case of ingestion, cause vomiting. Call a physician.
 - B. Avoid contamination of food, beverages, or smoking materials.
 - C. Avoid breathing dust. Ensure adequate ventilation during handling.
 - D. Wash thoroughly after handling and before eating, drinking, or smoking.
 - E. Do not carry powder in clothing.

You must also always remember:

1. **Establish a routine for reloading.** It will result in more uniform loads and less chance of error.
2. Some primers are more powerful than others (they produce more gas at a higher temperature). **Use only the primers specified herein.**
3. Shotshell wads differ in their sealing ability. **Use only the load combinations specified herein.**
4. If you use cast bullets, their diameter, hardness, lubrication, and crimp will affect the ballistics.
5. **The shotshell loads in this booklet are for use with LEAD SHOT ONLY!** For steel shot see special steel section, pages 6-7.
6. **Use only the brands of powder and components shown in our tables. Do not substitute other types.**
7. Discharging firearms in poorly ventilated areas, cleaning firearms, or handling ammunition may result in exposure to lead, a substance known to cause birth defects, reproductive harm, and other serious physical injury. **Have adequate ventilation at all times. Wash hands and face thoroughly after handling and before coming in contact with food, chewing materials, and smoking material.**


Reference Tables

Approximate Number of Pellets in Specific Weights of Lead Shot (Sizes 2 Through 9)

Weight, oz	No. 2	No. 4	No. 5	No. 6	No. 7½	No. 8	No. 8½	No. 9
½	45	67	85	112	175	205	242	292
¾	67	101	127	168	262	308	363	439
7/8	79	118	149	197	306	359	425	512
1	90	135	170	225	350	410	485	585
1 ⅛	101	152	191	253	393	461	545	658
1 ¼	112	169	213	281	437	513	605	731
1 ⅜	124	186	234	309	481	564	665	804
1 ½	135	202	255	337	525	615	730	877

Space Occupied by One Ounce of Lead Shot in Various Gauges

(Values are Inches)

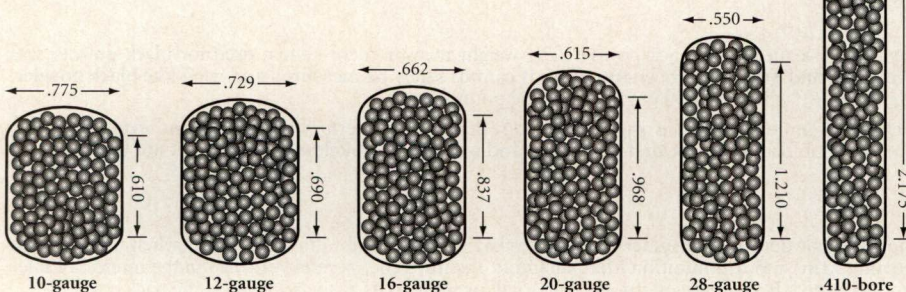

Internal Diameter of the Barrel in Several Shotgun Gauges

10-Gauge—0.775-Inch
 12-Gauge—0.729-Inch
 16-Gauge—0.662-Inch
 20-Gauge—0.615-Inch
 28-Gauge—0.550-Inch
 .410-Bore—0.410-Inch

Reference Tables (continued)

Number of Shells That Can Be Loaded with One Pound of Powder at Various Grains Per Load

(The term grain is a measure of weight; 7,000 grains equal one pound)

Grains/ Load	Loads/ Pound	Grains/ Load	Loads/ Pound	Grains/ Load	Loads/ Pound	Grains/ Load	Loads/ Pound	Grains/ Load	Loads/ Pound	Grains/ Load	Loads/ Pound
12	583	23	304	34	205	45	156	56	125	67	104
13	538	24	291	35	200	46	152	57	123	68	103
14	500	25	280	36	194	47	149	58	121	69	101
15	466	26	269	37	189	48	146	59	119	70	100
16	437	27	259	38	184	49	143	60	117	71	99
17	411	28	250	39	179	50	140	61	115	72	97
18	388	29	241	40	175	51	137	62	113	73	96
19	368	30	233	41	170	52	135	63	111	74	95
20	350	31	225	42	166	53	132	64	109	75	93
21	333	32	218	43	162	54	130	65	108	76	92
22	318	33	212	44	159	55	127	66	106	77	91

Typical Percentage of Pellets in a 30-Inch Circle at 40 Yards (Pattern) for Various Choke Sizes

(Choke is a Constriction at the Muzzle of a Shotgun Barrel)

Full Choke—70%

Improved Cylinder—50%

Improved Modified Choke—65 to 70%

True Cylinder—40%

Modified Choke—55%

Ballistic Data

The velocity and pressure obtained with the specific combinations of shell, wad, primer, bullet or shot weight, powder, and powder weight provided in this booklet were obtained in a laboratory, where considerable effort is made to control the load and test conditions. Velocity was measured with a chronograph (electric stopwatch). Pressure was measured either by compressing copper cylinders, or electronically, by use of a piezoelectric transducer.

Guns are designed to take a considerable amount of internal pressure, but if this is exceeded, they burst violently. Be alert to signs of excess pressure, such as heavy recoil, flattened primers, or blown primers. Don't make changes in the suggested loads.

Tone variations (shaded areas) used in the reloading tables are for ease of reading and do not represent preferred loads.

Each shotshell table lists DRAM EQUIVALENT in the first column. This number is not used in any way during reloading. The quantity of powder to use is listed in GRAINS, which are a measure of weight, under each powder column.

Every reloader needs a good-quality scale for weighing each powder charge, or for checking the weight of powder thrown by volumetric loaders.

Special Notes Regarding Components Other Than Powder

A. Shotgun Shells. Manufacturers may sell ammunition under different brand names that are identical for reloading purposes. Following are popular variations. When in doubt, consult the ammunition producer.

- **Federal Hi Power Plastic** same as **Duck and Pheasant, Field, Game, and Dove and Squirrel** or **Top Gun**.
- **Federal Premium** (Integral Base Wad)
- **Remington-Peters**. Same as Mohawk brand shells.
- **Remington-STC Type**. Same as **Premier, Nitro 27, GunClub, and Game Loads**
- **Winchester AA-Type (Compression-Formed)** same as **AA Target, Upland and Super Double X**.
- **Winchester Polyformed Type (Reifenhauser Tube)** same as **Duck and Pheasant, Dove and Squirrel, and Sears Brand**.

B. Primers

- **CCI 109** and **CCI 209** are ballistically identical and can be interchanged.
- **CCI 209M** (Magnum) is "hotter" and cannot be substituted for CCI 109 or 209. Use 209M only as listed.
- **Rem. 209** is "hotter" and cannot be substituted for Rem. 97★ or Rem. 209P primer.
- **Rem. 209P** is interchangeable with Rem. 97★ primer.
- **Federal 209A** is "hotter" and cannot be substituted for Federal 209.

C. Wads. Card wads and fiber wads are used for certain slug and buckshot loads and a few light shotshell loads. **Do not interchange wads.**


D. Shot. Use only clean lead shot. **DO NOT USE STEEL SHOT IN SHOTSHELL LOADS EXCEPT AS LISTED IN STEEL™ SECTION.**

E. Shot Buffers. Do not add any buffers or fillers of any kind to shotshell loads listed in this Guide.

F. Cards and Fillers. For revolver, pistol, and rifle cartridge reloading, do not add any cards, kapok, or fillers of any kind to loads listed in this Guide.

Black Powder

Black powder is entirely different from smokeless powder. NEVER substitute one for the other. Smokeless powders have much more energy than black powder. NEVER attempt to use smokeless powder in black powder guns or saluting cannon; they may blow up and cause serious personal injury (including death).

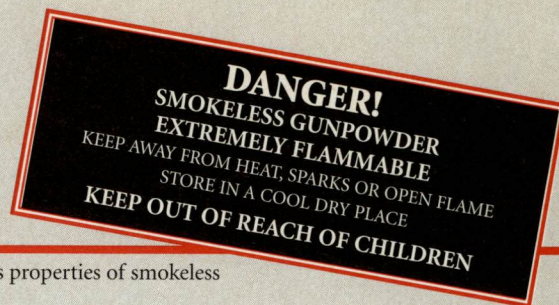

Properties and Storage of Smokeless Powder

Ammunition handloading has become increasingly popular in recent years. This information discusses properties of smokeless powder and offers recommendations for its storage.

This information is intended to increase the knowledge of all concerned individuals and groups regarding smokeless powder. The statements and recommendations made are not intended to supersede local, state, or Federal regulations. Proper authorities should be consulted on regulations for storage and use of smokeless powder in each specific community. A leaflet entitled "Sporting Ammunition Primers: Properties, Handling, & Storage for Hand Loading" supplements this information on smokeless powder.

Properties of Smokeless Powder

Smokeless powders, or propellants, are essentially mixtures of chemicals designed to burn under controlled conditions at the proper rate to propel a projectile from a gun.

Smokeless powders are made in three forms:

1. Thin, circular flakes or wafers
2. Small cylinders
3. Small spheres

Single-base smokeless powders derive their main source of energy from nitrocellulose.

The energy released from double-base smokeless powders is derived from both nitrocellulose and nitroglycerin.

All smokeless powders are extremely flammable; by design, they are intended to burn rapidly and vigorously when ignited.

Oxygen from the air is not necessary for the combustion of smokeless powders since they contain sufficient built-in oxygen to burn completely, even in an enclosed space such as the chamber of a firearm.

In effect, ignition occurs when the powder granules are heated above their ignition temperature. This can occur by exposing powder to:

1. A flame such as a match or primer flash.
2. An electrical spark or the sparks from welding, grinding, etc.
3. Heat from an electric hot plate or a fire directed against or near a closed container even if the powder itself is not exposed to the flame.

When smokeless powder burns, a great deal of gas at high temperature is formed. If the powder is confined, this gas will create pressure in the surrounding structure. The rate of gas generation is such, however, that the pressure can be kept at a low level if sufficient space is available or if the gas can escape.

In this respect smokeless powder differs from blasting agents or high explosives such as dynamite or blasting gelatin, although smokeless powder may contain chemical ingredients common to some of these products.

High explosives such as dynamite are made to detonate, that is, to change from solid state to gaseous state with evolution of intense heat at such a rapid rate that shock waves are propagated through any medium in contact with them. Such shock waves exert pressure on anything they contact, and, as a matter of practical consideration, it is almost impossible to satisfactorily vent away from the effects of a detonation involving any appreciable quantity of dynamite.

Smokeless powder differs considerably in its burning characteristics from common "black powder."

Black powder burns essentially at the same rate out in the open (unconfined) as when in a gun.

When ignited in an unconfined state, smokeless powder burns inefficiently with an orange-colored flame. It produces a considerable amount of light brown noxious smelling smoke. It leaves a residue of ash and partially burned powder. The flame is hot enough to cause severe burns.

The opposite is true when it burns under pressure as in a cartridge fired in a gun. Then it produces very little smoke, a small glow, and leaves very little or no residue. The burning rate of smokeless powder increases with increased pressure.

If burning smokeless powder is confined, gas pressure will rise and eventually can cause the container to burst. Under such circumstances, the bursting of a strong container creates effects similar to an explosion.

For this reason, the Department of Transportation (formerly Interstate Commerce Commission) sets specifications for shipping containers for propellants and requires tests of loaded containers — under actual fire conditions — before approving them for use.

When smokeless powder in D.O.T. approved containers is ignited during such tests, container seams split open or lids pop off — to release gases and powder from confinement at low pressure.

How to Check Smokeless Powder for Deterioration

Although modern smokeless powders are basically free from deterioration under proper storage conditions, safe practices require a recognition of the signs of deterioration and its possible effects.

Powder deterioration can be checked by opening the cap on the container and smelling the contents. Powder undergoing deterioration has an irritating acidic odor. (Don't confuse this with common solvent odors such as alcohol, ether and acetone.)

Check to make certain that powder is not exposed to extreme heat as this may cause deterioration. Such exposure produces an acidity which accelerates further reaction and has been known, because of the heat generated by the reaction, to cause spontaneous combustion.

Never salvage powder from old cartridges and do not attempt to blend salvaged powder with new powder. Don't accumulate old powder stocks.

The best way to dispose of deteriorated smokeless powder is to burn it out in the open at an isolated location in small shallow piles (not over 1" deep). The quantity burned in any one pile should never exceed one pound. Use an ignition train of slow burning combustible material so that the person may retreat to a safe distance before powder is ignited.

Considerations for Storage of Smokeless Powder

Smokeless powder is intended to function by burning, so it must be protected against accidental exposure to flame, sparks or high temperatures.

For these reasons, it is desirable that storage enclosures be made of insulating materials to protect the powder from external heat sources.

Once smokeless powder begins to burn, it will normally continue to burn (and generate gas pressure) until it is consumed.

D.O.T. approved containers are constructed to open up at low internal pressures to avoid the effects normally produced by the rupture or bursting of a strong container.

Storage enclosures for smokeless powder should be constructed in a similar manner:

1. Of fire-resistant and heat-insulating materials to protect contents from external heat.
2. Sufficiently large to satisfactorily vent the gaseous products of combustion, which would result if the quantity of smokeless powder within the enclosure accidentally ignited.

If a small, tightly enclosed storage enclosure is loaded to capacity with containers of smokeless powder, the walls of the enclosure will expand or move outwards to release the gas pressure — if the powder in storage is accidentally ignited.

Under such conditions, the effects of the release of gas pressure are similar or identical to the effects produced by an explosion.

Hence only the smallest practical quantities of smokeless powder should be kept in storage, and then in strict compliance with all applicable regulations and recommendations of the National Fire Protection Association (reprinted at end of leaflet).

Recommendations for Storage of Smokeless Powder

STORE IN A COOL, DRY PLACE. Be sure the storage area selected is free from any possible sources of excess heat and is isolated from open flame, furnaces, hot water heaters, etc. Do not store smokeless powder where it will be exposed to the sun's rays. Avoid storage in areas where mechanical or electrical equipment is in operation. Restrict from the storage areas heat or sparks which may result from improper, defective or overloaded electrical circuits.

DO NOT STORE SMOKELESS POWDER IN THE SAME AREA WITH SOLVENTS, FLAMMABLE GASES, OR HIGHLY COMBUSTIBLE MATERIALS.

STORE ONLY IN DEPARTMENT OF TRANSPORTATION APPROVED CONTAINERS.

Do not transfer the powder from an approved container into one which is not approved.

DO NOT SMOKE IN AREAS WHERE POWDER IS STORED OR USED. PLACE APPROPRIATE "NO SMOKING" SIGNS IN THESE AREAS.

DO NOT SUBJECT THE STORAGE CABINETS TO CLOSE CONFINEMENT.

STORAGE CABINETS SHOULD BE CONSTRUCTED OF INSULATING MATERIALS AND WITH A WEAK WALL, SEAMS OR JOINTS TO PROVIDE AN EASY MEANS OF SELF-VENTING.

DO NOT KEEP OLD OR SALVAGED POWDERS. Check old powders for deterioration regularly. Destroy deteriorated powders immediately.

OBEY ALL REGULATIONS REGARDING QUANTITY AND METHODS OF STORING. Do not store all your powders in one place. If you can, maintain separate storage locations. Many small containers are safer than one or more large containers.

KEEP YOUR STORAGE AND USE AREA CLEAN. Clean up spilled powder promptly. Make sure the surrounding area is free of trash or other readily combustible materials.

10-3 Smokeless Propellants.

10-3.1 Quantities of smokeless propellants not exceeding 25 lb (11.3 kg) in shipping containers approved by the U.S. Department of Transportation, may be transported in a private vehicle.

10-3.2 Quantities of smokeless propellants exceeding 25 lb (11.3 kg) but not exceeding 50 lb (22.7 kg), transported in a private vehicle, shall be transported in a portable magazine having wood walls of at least 1-in. (25.4-mm) nominal thickness.

10-3.3 Transportation of more than 50 lb (22.7 kg) of smokeless propellants in a private vehicle is prohibited.

10-3.4 Commercial shipments of smokeless propellants in quantities not exceeding 100 lb (45.4 kg) are classified for transportation purposes as flammable solids when packaged according to U.S. Department of Transportation Hazardous Materials Regulations (Title 49, Code of Federal Regulations, Part 173.197a), and shall be transported accordingly.

10-3.5 Commercial shipments of smokeless propellants exceeding 100 lb (45.4 kg) or not packaged in accordance with the regulations cited in 10-3.4 shall be transported according to U.S. Department of Transportation regulations for Class B propellant explosives.

10-3.6 Smokeless propellants shall be stored in shipping containers specified by U.S. Department of Transportation Hazardous Materials Regulations.

10-3.7 Smokeless propellants intended for personal use in quantities not exceeding 20 lb (9.1 kg) may be stored in original containers in residences. Quantities exceeding 20 lb (9.1 kg), but not exceeding 50 lb (22.7 kg), may be stored in residences if kept in a wooden box or cabinet having walls of at least 1-in. (25.4-mm) nominal thickness.

10-3.8 Not more than 20 lb (9.1 kg) of smokeless propellants, in containers of 1-lb (0.45-kg) maximum capacity, shall be displayed in commercial establishments.

10-3.9 Commercial stocks of smokeless propellants shall be stored as follows:

- (a) Quantities exceeding 20 lb (9.1 kg), but not exceeding 100 lb (45.4 kg), shall be stored in portable wooden boxes having walls of at least 1-in. (25.4 mm) thickness.
- (b) Quantities exceeding 100 lb (45.4 kg), but not exceeding 800 lb (363 kg), shall be stored in nonportable storage cabinets having walls of at least 1-in. (25.4-mm) thickness. Not more than 400 lb (181 kg) may be stored in any one cabinet and cabinets shall be separated by a distance of at least 25 ft. (7.63 m) or by a fire partition having a fire resistance of at least 1 hour.
- (c) Quantities exceeding 800 lb (363 kg), but not exceeding 5,000 lb (2268 kg), may be stored in a building if the following requirements are met:
 1. The warehouse or storage room shall not be accessible to unauthorized personnel.
 2. Smokeless propellant shall be stored in nonportable storage cabinets having wood walls at least 1 in. (25.4-mm) thick and having shelves with no more than 3 ft (0.92 m) separation between shelves.
 3. No more than 400 lb (181 kg) shall be stored in any one cabinet.
 4. Cabinets shall be located against walls of the storage room or warehouse with at least 40 ft (12.2 m) between cabinets.
 5. Separation between cabinets may be reduced to 20 ft. (6.1 m) if barricades twice the height of the cabinets are attached to the wall, midway between each cabinet. The barricades shall extend at least 10 ft (3 m) outward, shall be firmly attached to the wall, and shall be constructed of ¼-in. (6.4-mm) boiler plate, 2-in. (51-mm) thick wood, brick, or concrete block.
 6. Smokeless propellant shall be separated from materials classified by the U.S. Department of Transportation as flammable liquids, flammable solids, and oxidizing materials by a distance of 25 ft (7.63 m) or by a fire partition having a fire resistance of at least 1 hour.
 7. The building shall be protected by an automatic sprinkler system installed according to NFPA 13, Standard for the Installation of Sprinkler Systems.
- (d) Smokeless propellants not stored according to (a), (b) and (c) above shall be stored in a Type 4 magazine constructed and located according to Chapter 6.

Reprinted with permission from NFPA495-85, Standard for the Manufacture, Transportation, Storage and Use of Explosive Materials, © 1985, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the NFPA on the referenced subject, which is represented by the Standard in its entirety.

Some Publications on Reloading

These and other good literature pertinent to reloading usually are stocked at local gun and ammunition retail stores.

Title	Publisher
<i>Basic Rules for Reloading Safety</i>	National Reloading Manufacturers Association 4905 S.W. Griffith Drive Beaverton, OR 97005
<i>NRA Guide to Reloading</i>	NRA Bookservice 11250 Waples Mill Road Fairfax, VA 22030
<i>Speer Reloading Manual</i>	Blount Industries Box 856 Lewiston, ID 83501
<i>RCBS Reloading Guide</i>	RCBS Box 1919 Oroville, CA 95965
<i>Hornady Handbook of Cartridge Reloading</i> <i>Hornady Reloading Tools and Accessories</i>	Hornady Mfg. Co. Box 1848 Grand Island, NE 68801
<i>Sierra Bullets Reloading Manual</i>	Sierra 10532 Painter Avenue Santa Fe Springs, CA 90670
<i>Lyman Cast Bullet Handbook</i> <i>Lyman Shotgun Handbook</i> <i>Lyman Pistol and Revolver Handbook</i>	Lyman Products Middlefield, CT 06455
<i>Nosler Reloading Manual</i>	Nosler Bullets, Inc. P.O. Box 671 Bend, OR 97709
<i>How to Reload Shotshells and Why</i>	MEC 715 South Street Mayville, WI 53050
<i>Ponsness-Warren Catalog</i>	Ponsness-Warren Box 8 Rathdrum, ID 83858
<i>Handloaders' Digest</i> <i>ABC's of Reloading</i>	DBI Books 540 Frontage Road Northfield, IL 60093
<i>The Handbook of Shotgun Reloading</i>	SKR Industries, Inc. P.O. Box 1382 San Angelo, TX 76092



Alliant Powder
New River Energetics
Route 114, P.O. Box 6
Radford, VA 24141-0096

Visit our web site @ www.alliantpowder.com