

LUBRICATION

ORDER

L05-4930-230-12

20 MARCH 1975

TANK AND PUMP UNIT, LIQUID DISPENSING; FOR TRUCK MOUNTING (ADVANCE INDUSTRIES, INC. MODEL 1100 - LESS ENGINE)

NSN 4930-00-426 9960

Reference: FEDERAL SUPPLY CATALOG C9100-IL, L05-2805-257-12

Intervals and the related man-hour times are based on normal hours of operation. Adjust to compensate for abnormal operation and severe operating conditions or contaminated lubricants. The interval may be extended during periods of low level activity, commensurate with adequate preservation precautions.

Clean fittings before lubricating.

Relubricate after washing.

Clean parts with SOLVENT, dry-cleaning, Type II, (SD-2). Lubricate points indicated by dotted arrow shaft on both sides of equipment.

*The time specified is the time required to perform all services at the particular interval.


* TOTAL MAN-HR	
INTERVAL	MAN-HR
500	0.2

FOLD

FOLD

LUBRICANT ● INTERVAL

Swing Joint Assembly GAA 500
(2 places) (sparingly)

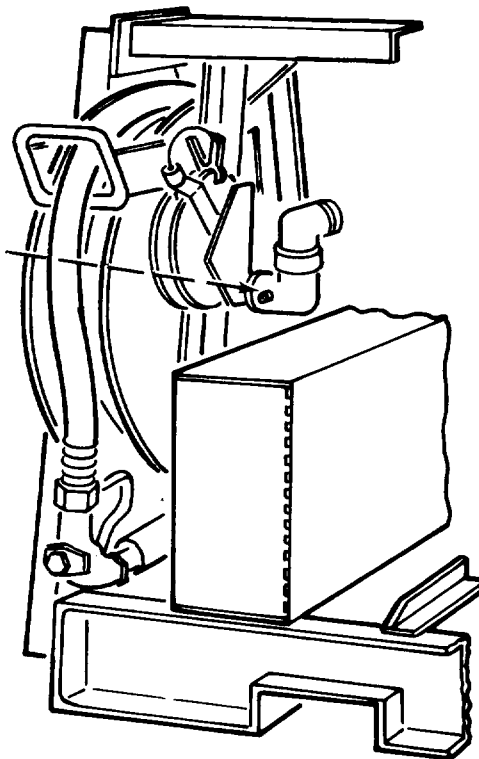

-KEY-

LUBRICANTS	CAPACITY	EXPECTED TEMPERATURES			INTERVALS
		Above + 32° F Above 0° C	+ 40° F to -10° F + 5° C to -23° C	0° F to -65° F -18° C to -50° C	
GAA-GREASE, Automotive and Artillery		ALL TEMPERATURES			Intervals given are in hours of normal operation

NOTES:

1. LUBRICANTS. The following is a list of lubricants with the Military Symbols and applicable specification numbers.

GAA MIL-G-10924

Copy of this Lubrication Order will remain with the equipment at all times; instructions contained herein are mandatory.

BY ORDER OF THE SECRETARY OF THE ARMY:
FRED C. WEYAND
 General, United States Army
 Chief of Staff

OFFICIAL:

VERNE L. BOWERS
 Major General, United States Army
 The Adjutant General

FOLD

FOLD