

NORMAL

MWO Effective Date is January 1993 and Completion Date is January 1997.

MWO 11-5821-260-30-1

MODIFICATION WORK ORDER

MODIFICATION OF RADIO SET AN/ARC-115A(V)1 FOR ANVIS
LIGHTING PROGRAM
(NSN 5821-01-057-4037) (EIC: JCL)

Headquarters, Department of the Army, Washington, DC
15 September 1993

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this MWO. If you find any mistakes, or if you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5007. A reply will be provided to you.

1. Purpose of Modification.

The purpose of this modification is to replace the existing front panel on the VHF AM Radio Set AN/ARC-115A with a new panel designed in accordance with the requirements of the ANVIS Lighting Program. The existing panel is not ANVIS compatible and has created a potential safety of flight concern. All changes to the equipment are a result of the following Engineering Change Proposals (ECP): ANVIS Lighting Program in compliance with MIL-L-85762 or as otherwise described in SLPSOW3-Revision 4.

2. Priority.

This modification is classified NORMAL.

3. End Item To Be Modified.

<u>Nomenclature</u>	<u>NSN</u>	<u>CAGE</u>	<u>Serial No.</u>
Radio Set AN/ARC-115A	5821-01-057-4037	80058	All

4. Assembly To Be Modified.

Not applicable.

5. Parts To Be Modified.

Not applicable.

6. Application.

a. Time Compliance Schedule. The effective date of this MWO is January 1993 and its completion date is January 1997.

b. Level of Maintenance. Aviation Intermediate Maintenance (AVIM) level is authorized to apply this MWO.

c. Applied By. Avionics Communications Equipment Repairer (MOS 68L) or equivalent.

d. Time Required. Time required for completion of modification application to one end item:

<u>Work force/skills</u>	<u>Man-hours</u>
1 Avionics Communications Equipment Repairer (MOS 68L) or equivalent to perform the mechanical/electrical modification.	0.5
1 Avionics Communications Equipment Repairer (MOS 68L) or equivalent to perform an operational functional test of the modified end item.	0.5
Total time required for a single application of this MWO is	1.0

7. Technical Publications Affected/Changed.

The following publications are affected by the application of this MWO:

a. TM 11-5821-260-12

b. TM 11-5821-260-30-2

c. TM 11-5821-260-24P

8. MWO Kits/Parts/and Disposition.

a. Kits/Parts/Required to Accomplish MWO. The kit required to accomplish this MWO is:

(1) NSN: 1680-01-342-6486

(2) CAGE: 80063

- (3) Weight: 0.75 lbs.
- (4) Dimensions: 6" x 7" x 1 ½"
- (5) Cube: 63 cubic inches
- (6) Security Classification: Unclassified

b. Contents of MWO Kit.

Item name	Part No./NSN	CAGE	Qty
1. Panel assembly	A3154371	80063	1
2. Identification plate	A3154374	80063	1

c. Bulk and Expendable Material. Obtain the following materials from local stock or requisition through normal supply channels, as required:

Nomenclature	NSN	CAGE	Qty
1. Lint-free cloth			As required
2. Lubricant, Silicone			1 pt.
3. Solder, Type SN60-WRAP-2 (Fed Spec QQ-S-571) AWG 26, QQ-W-00343 Type 2			As required
4. Cleaning solvent			As required

d. Parts Disposition. The following parts are to be removed from the end item to be modified and returned to the Depot for disposition:

Panel assembly, P/N SM-B-882580, CAGE 80063

9. Tools, Special Tools, Jigs, and Fixtures Required.

a. Hand Tools. The following common hand tools are required for this modification:

- (1) Allen head wrenches, 5/64 inch and 0.05 inch
- (2) Phillips screwdriver
- (3) Soldering iron, 30 watt with 1/8-inch diameter tip

b. Test Equipment. The following test equipment is required to test the end item after the modification:

- (1) Signal Generator AN/USM-44A
- (2) Electronic Voltmeter ME-30A/U
- (3) Test Facilities Kit MK-994/AR
- (4) Headset-Microphone H-101A/U
- (5) Digital Readout Electronic Counter AN/USM-207A
- (6) 50-ohm adapter (p/o AN/URM-145)
- (7) Wattmeter AN/URM-120
- (8) Signal Generator AN/URM-127
- (9) Multimeter ME-26B/U
- (10) Transmitter/regulator radio set assembly A2

c. Special Tools, Jigs, and Fixtures. Special tools, jigs, and fixtures are not required for this modification.

10. Modification Procedure.

Before starting, familiarize yourself with the entire procedure in this paragraph. To minimize equipment off-line time, inventory the kit, identify parts, obtain required tools, and observe the location of parts to be installed.

a. Procedure

- (1) Loosen two setscrews in each of the following control knobs. Remove knobs from their respective control shafts (see figure 1).

NOTE

If the radio set is equipped with a sealing kit, be sure to remove the seals from the front panel control shafts and the dust boot from the RCVR TEST pushbutton. Inspect all seals and the dust boot for damage. Replace damaged or defective seals or dust boot. Clean dirty seals with a clean, lint-free cloth and relubricate with a silicone-type lubricant if required. Set the seals and the dust boot aside for reuse during reassembly of the end item.

- (a) The left MEGAHERTZ control knob (item 1)
- (b) The right MEGAHERTZ control knob (item 2)

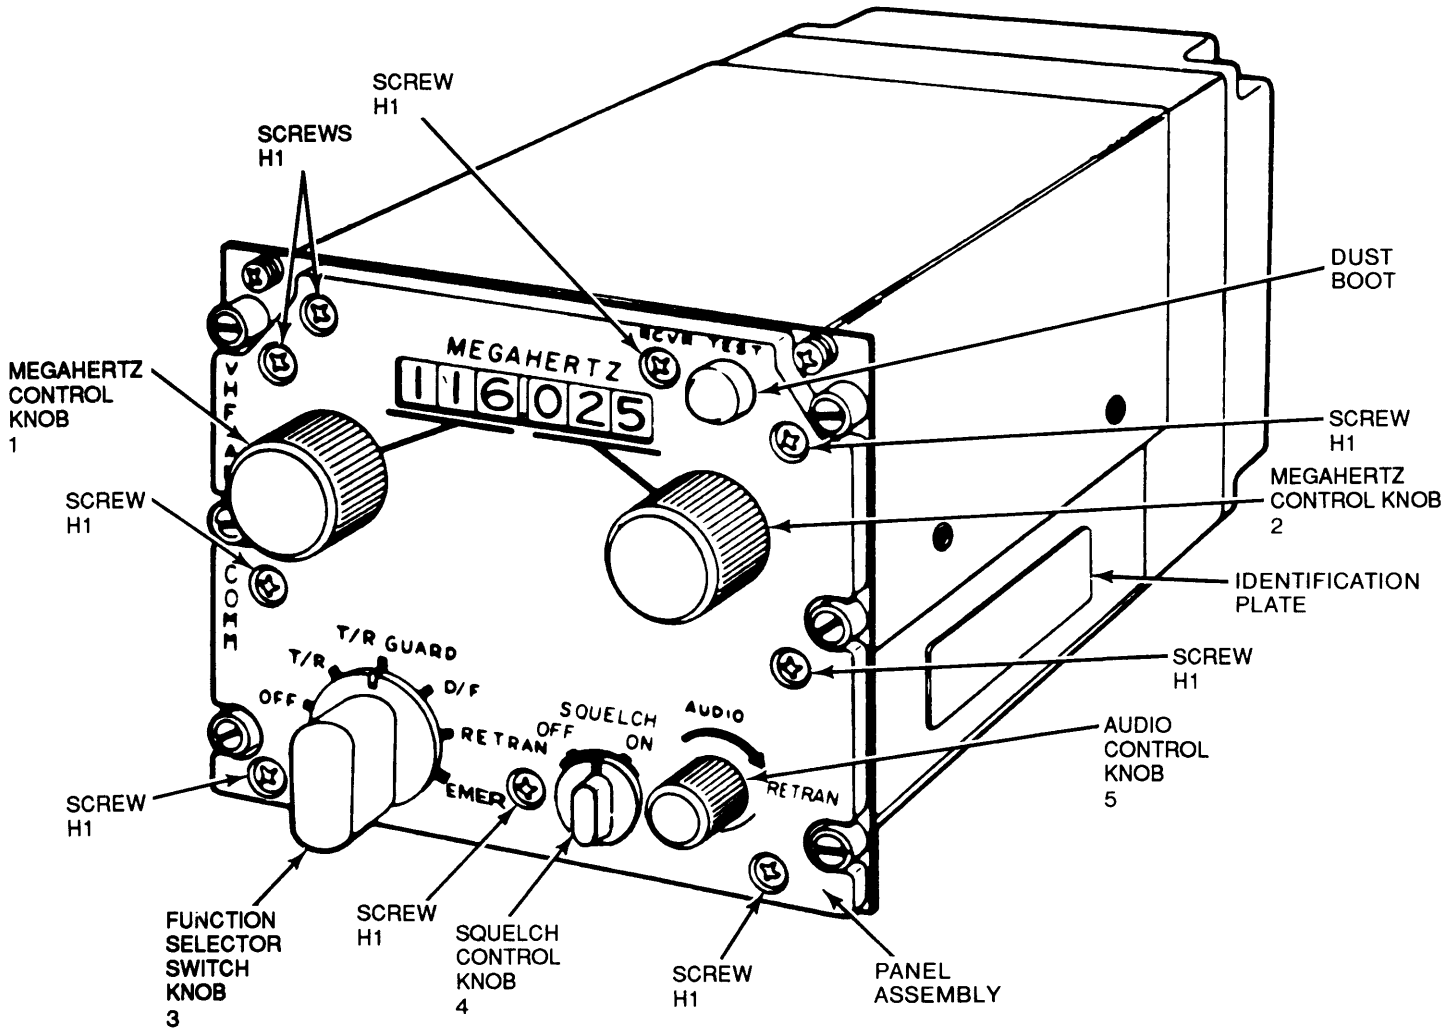


Figure 1. Location of Front Panel Controls and Attaching Hardware

- (c) The function selector switch knob (item 3)
- (d) SQUELCH control knob (item 4)
- (e) AUDIO control knob (item 5)
- (2) Remove nine screws and lockwashers (H1, figure 1) from the panel assembly. Set screws and lockwashers aside for reuse during reassembly of the end item.
- (3) Carefully remove indicating panel from radio set chassis to expose wiring.
- (4) Unsolder the green wire from the terminal stud on the rear surface of the panel assembly.
- (5) Unsolder the white wire from the terminal stud on the rear surface of the panel assembly.
- (6) Remove the panel assembly from the radio set.
- (7) Remove the RCVR TEST dust boot from the panel and set aside for reuse during assembly of the end item.
- (8) Set the panel assembly aside for return to the Depot for disposition.
- (9) Install RCVR TEST dust boot through the opening in the new ANVIS panel assembly. Ensure dust boot is properly seated at the rear of the panel.
- (10) Place new ANVIS panel assembly in close proximity to front of radio set to allow resoldering of the wires.

NOTE

Terminal stud E3 is not used.

- (11) Solder one of the wires (green or white) to terminal stud E2 on rear surface of the ANVIS panel assembly.
- (12) Solder the other wire to terminal stud E1 on the rear surface of the ANVIS panel assembly.
- (13) Carefully place or push both wires into the chassis recess as the ANVIS panel assembly is placed on the front chassis of the radio set.
- (14) Install the new ANVIS panel assembly to the radio set using nine screws and lockwashers (H1, figure 1). Replace any missing or damaged screws or lockwashers.

NOTE

Position knobs as close to the panel surface as possible, but not to touch the panel surface nor interfere with knob movement. Ensure all setscrews are tight.

- (15) Install knobs onto the following controls using two setscrews for each knob. Refer to figure 1.

NOTE

If the radio set was equipped with a sealing kit, be sure to install seals on each control shaft and a dust boot on the RCVR TEST push button.

- (a) AUDIO control knob (item 5)
- (b) SQUELCH control knob (item 4)
- (c) The function selector switch knob (item 3)
- (d) The right MEGAHERTZ control knob (item 2)
- (e) The left MEGAHERTZ control knob (item 1)

- (16) Install new ANVIS identification plate to radio set aft of old identification plate. Do not remove old identification plate.

b. Operational Functional Tests. After the radio set has been modified, perform an operational functional test of the end item.

- (1) Mate the transmitter/regulator radio set subassembly A2 to the radio set.
- (2) Connect the test equipment as shown in figure 2.
- (3) Adjust the dc power input to J28 on the test facilities kit to 28 Vdc \pm 0.5.
- (4) Perform the test procedures given in table 1.

11. Calibration Requirements.

Not applicable.

12. Weight and Balance Data.

Weight and balance are not significantly affected.

13. Quality Assurance Requirements.

The MWO must satisfy the quality assurance requirements of the following:

TM 750-245-4 Direct Support, General Support: Quality Control
Inspector's Inspection Criteria

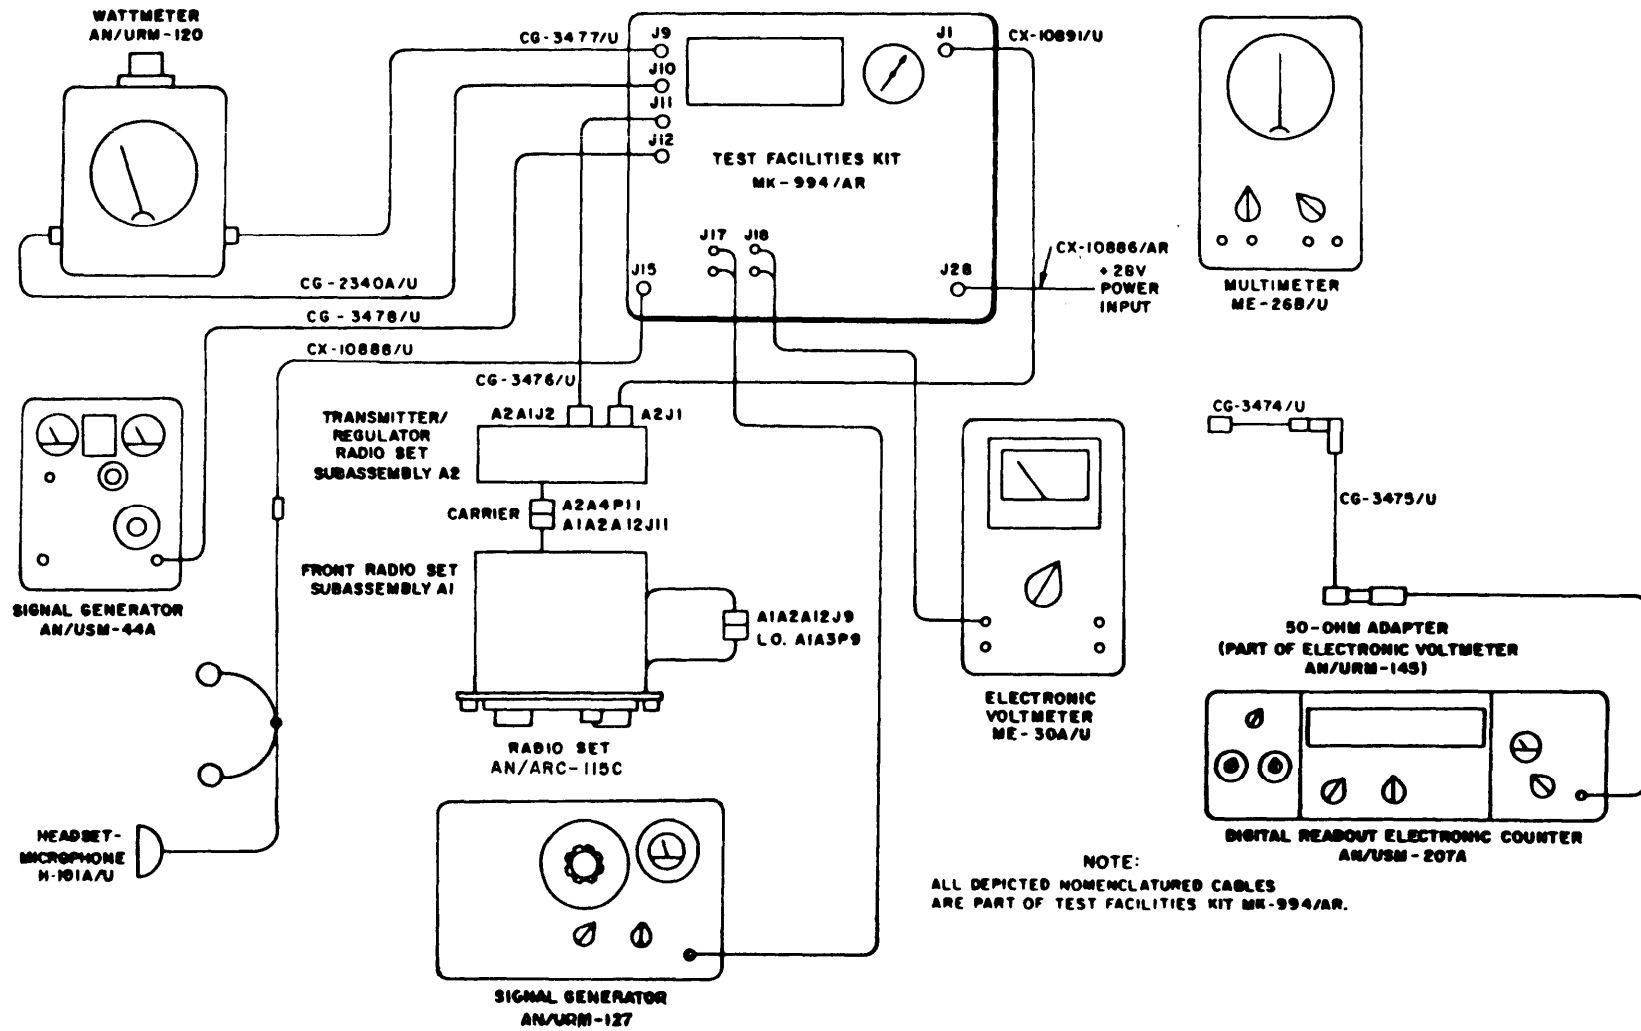


Figure 2. Radio Set Test Setup Diagram

Table 1. Radio Set Electrical Test

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
1	Set the maintenance kit switches as follows: ANTENNA FUNCTION switch: XCVR RADIO TEST switch: 6 COMMCNT NO. 1 selector switch: 1 COMM CONT NO. 1 monitor switch 3: ON COMM CONT VOL control: set to a comfortable level DC POWER circuit breaker: ON	Tune the radio set to 116.000 MHz, and set the radio set function switch to T/R. Audio Control: CW Squelch: ON	A. Listen to the headset while depressing the RCVR TEST push button and tune the radio set from 116.000 MHz to 149.975 MHz.	A tone is heard in headset throughout the radio set tuning range. NOTE In some cases, the test facility kit does not apply a full 28 Vdc to the panel lighting circuits. Because of this it may not be possible to see the panel light up ANVIS green under normal shop lighting conditions. It may be necessary to cover or shroud the equipment to verify the panel lighting circuit. Front panel lights up ANVIS green.

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
			<p style="text-align: center;"><u>CAUTION</u></p> <p>The maintenance kit HEADSETS 1 toggle switch keys the transmitter on. Do not tune the radio set while the transmitter is keyed on. Release the HEADSETS 1 toggle switch while tuning the radio set.</p> <p>B. While holding maintenance kit HEADSETS 1 switch in TRANSMIT, speak into the microphone and listen to the headset earphone and observe the wattmeter.</p> <p>c. Tune the radio set to 140.000 MHz and repeat B above.</p> <p>D. Set radio function switch to EMER and repeat B above.</p>	<p>B. A speaking sound is heard in the headset and the wattmeter indicates 9 watts (min).</p> <p>C. Same as B above.</p> <p>D. Same as B above.</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
2	Same as step 1.	Same as step 1.	<p>E. Adjust the am. generator for the following signal applied to maintenance kit connector J12, and listen to the headset: Frequency: 121.500 MHz Amplitude: 72 Vrms Modulation: 1 kHz, 90%</p> <p>F. Set radio function switch to T/R GUARD, and repeat E above.</p> <p>Measure the dc power supply voltages at the following test points with the Vtm:</p> <p>A. A1A2A12A2TP7 B. A1A2A12A2TP8 C. A1A2A12A2TP5 D. A1A2A12A2TP9</p>	<p>E. The 1-kHz modulating tone is heard in the headset.</p> <p>F. Same as E above.</p> <p>A. +5.0 Vdc \pm0.3 V. B +9.0 Vdc \pm0.5 V. C. +15.00 Vdc\pm0.1 V D. +18.0 Vdc\pm1.0 V</p>

Tble 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
3	Same as step 1.	Same as step 1.	<p style="text-align: center;"><u>CAUTION</u></p> <p>The maintenance kit HEADSETS 1 toggle switch keys the transmitter on. Do not tune the radio set while the transmitter is keyed on. Release the HEADSETS 1 toggle switch while tuning the radio set.</p> <p>Set and hold the maintenance kit HEADSETS 1 switch in TRANSMIT and measure the dc power supply voltage at the following test points with the V_{tm}:</p> <p>A. A1A2A12A2TP6</p> <p>B. A1A2A12A2TP2</p>	<p>None.</p> <p>A. +9.0 Vdc ±0.5 V.</p> <p>B. +18.0 Vdc ±1.0 V.</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
4	Same as step 1.	Same as step 1.	<p data-bbox="1146 337 1440 695">A. Set the maintenance kit RADIO TEST switch to position 2 and set the radio set function switch to RETRAN. Adjust the am. generator for the following output to maintenance kit connector J12:</p> <p data-bbox="1192 703 1388 764">Frequency: 116.000 MHz</p> <p data-bbox="1192 773 1325 834">Amplitude: 100 Vrms</p> <p data-bbox="1192 842 1346 904">Modulation: 1 kHz, 90%</p> <p data-bbox="1146 938 1440 1141">B. Adjust the AUDIO control until the radio audio output at maintenance kit connector J18 is 2.75 Vrms.</p> <p data-bbox="1146 1182 1398 1320">C. Observe the maintenance kit CONTROL SIGNAL lamp.</p> <p data-bbox="1146 1360 1440 1463">D. Remove cable from maintenance kit connector J12.</p>	<p data-bbox="1503 329 1623 354">A. None.</p> <p data-bbox="1503 938 1923 971">B. Radio audio output is 2.75 Vrms.</p> <p data-bbox="1503 1190 1923 1255">C. The CONTROL SIGNAL lamp lights.</p> <p data-bbox="1503 1369 1923 1433">D. The CONTROL SIGNAL lamp is out.</p>

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
5	Same as step 1.	Same as step 1	<p>A. Adjust the audio generator for the following signal applied to maintenance kit connector J17: Frequency: 1 kHz Amplitude: 2.75 Vrms</p> <p>B. Set the maintenance kit switches as follows and listen to the headset: COMM CONT NO. 1 selector switch: ICS Receiver monitor switch 3: ON RADIO TEST switch: 4</p> <p>C. Set maintenance kit radio test switch to 6 after test.</p>	<p>A. None.</p> <p>B. A tone is heard in the headset.</p> <p>C. None.</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
6	Same as step 1.	Same as step 1.	<p>Measure the main receiver local oscillator frequency at radio set connector A1A2A12J9 with the counter, when the radio set is tuned to the following frequencies:</p> <p>A. 116.025 MHz</p> <p>B. 120.425 MHz</p> <p>C. 132.675 MHz</p> <p>D. 145.950 MHz</p>	<p>A. 135.925 MHz \pm3 kHz.</p> <p>B. 140.325 MHz \pm3 kHz.</p> <p>C. 152.575 MHz \pm3 kHz.</p> <p>D. 165.850 MHz \pm3 kHz.</p>

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
7	Same as step 1.	Same as step 1.	<p style="text-align: center;"><u>CAUTION</u></p> <p>The maintenance kit HEADSETS 1 toggle switch keys the transmitter on. Do not tune the radio set while the transmitter is keyed on. Release the HEADSETS 1 toggle switch while tuning the radio set.</p> <p>A. Hold the maintenance kit HEADSETS 1 switch in TRANSMIT, and measure the carrier frequency at A1A2A12J11.</p> <p>B. Release the maintenance kit HEADSETS 1 switch.</p>	<p>A. 116.00 MHz \pm3.0 kHz.</p> <p>B. None.</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
8	Same as step 1.	Same as step 1.	Set the radio set function switch to D/F and set the maintenance kit RADIO TEST switch to position 8. Set the maintenance kit DC POWER circuit breaker to OFF. Measure the homing enable line continuity horn maintenance kit connector J18 to ground with the multimeter.	5 ohms (max).

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
9	Same as step 1.	Same as step 1.	<p>A. Adjust the am. generator for the following output applied to maintenance kit connector J12: Frequency: 116.000 MHz Amplitude: 100 Vrms Modulation: 1 kHz, 90%</p> <p>B. Adjust the AUDIO control until the amplitude of the main receiver output signal at maintenance kit connector J18 is 2.75 Vrms.</p> <p>c. Remove the 1 kHz of modulation (am. generator to cw mode).</p>	<p>A. None.</p> <p>B. 2.75 Vrms.</p> <p>c. 10 dB down (min). (Difference between modulated and unmodulated modes.)</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
10	Same as step 1.	Same as step 1.	<p>A. Set the radio set function switch to T/R GUARD and adjust the am. generator for the following output applied to maintenance kit connector J12:</p> <p>Frequency: 121.500 MHz</p> <p>Amplitude: 72 Vrms</p> <p>Modulation: 1 kHz, 90%</p> <p>B. Adjust the AUDIO control until the amplitude of the guard receiver output signal at maintenance kit connector J18 is 2.75 Vrms.</p> <p>C. Remove the 1 kHz of modulation (am. generator to cw mode).</p>	<p>A. None.</p> <p>B. 2.75 Vrms.</p> <p>C. 10 dB down (min). (Difference between modulated and unmodulated modes.)</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
11	Same as step 1.	Same as step 1.	<p>A. Set the radio set function switch to D/F and squelch switch to ON. Adjust am. generator for the following output signal applied to maintenance kit connector J12:</p> <p>Frequency: 116.000 MHz</p> <p>Amplitude: 100 Vrms</p> <p>Modulation: 1 kHz, 90%</p> <p>B. Observe the homing on-off indicator in the lower left-hand corner of maintenance kit HOMING/ADF/GYRO indicator.</p>	<p>A. None.</p> <p>B. The homing on-off indicator indicates all black.</p>

Table 1. Radio Set Electrical Test — Continued

Step No.	Test equipment control settings	Equipment under test control settings	Test procedure	Performance standard
11 (Cont)			<p>C. Reduce the am. generator amplitude to 12.0 Vrms. Increase the amplitude from 12.0 Vrms to 36 Vrms and observe the station passage meter in the left-hand portion of maintenance kit HOMING/ADF/GYRO meter.</p> <p>D. Remove cable from maintenance kit connector J12.</p>	<p>C. The station passage pointer moved downward as the am. generator amplitude is increased.</p> <p>D. Homing indicator indicates all orange.</p>

14. Recording and Reporting of the Modification.

a. DA Form 2408-5, DA Form 2408-17, or DA Form 2409. Record the modification on DA Form 2408-5, Equipment Modification Record, when multiple form assembled Equipment Logbook is applicable, or DA Form 2409, Equipment Maintenance Log (Consolidated), or DA Form 2408-17, Aircraft Inventory Record, as indicated in DA Pam 738-750.

b. Completion of DA Form 2407, Maintenance Request.

- (1) The serial number to be reported in block 2 must be in the serial range stated in paragraph 3 above.
- (2) The NSN for the end items to be reported in block 6 and block 20h must be the same as the NSN shown in paragraph 3 above.
- (3) The Unit Identification Code (UIC) to be reported in block 1c must be the six character code that is put on the Unit/Organization shown in Block 1a. (Normally, this will be the code that is put on the Unit/Organization Morning Report.)
- (4) List by NSN the number of kits used to accomplish this MWO using block 20 and/or block 35. If more space is needed, use DA Form 2407-1 Continuation Sheet.
- (5) After completing the form, mail the NMP copy (Copy 2) to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-PP. Fort Monmouth, New Jersey 07703-5007 (MWO Coordinator). Mail the Control Copy (Copy 3) to: Commander, US Army Depot System Command, ATTN: DRSDS-PM. Chambersburg. PA 17201, for PAC 98 (Non-AIF Field Activities. Forward the Organizational Copy (Copy 4) as directed by the local commander.

c. DA Form 2408 and 2408-9. When the application of this MWO results in the change of NSN to an end item designated in paragraph 3 of this MWO, Loss and Gain Form 2408-9 will be initiated. After completing the forms, mail the NMP copy (Copy 1) to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-PP, Fort Monmouth, New Jersey 07703-5007 (MWO Coordinator). Mail the Control Copy (Copy 2) to: Commander, US Army Maintenance Management Center, ATTN: DRXMD-MD, Lexington, KY 40511. The Logbook Copy (Copy 3) will be placed in the logbook per DA Pam 738-750.

d. Identification Data. The NSN of this equipment becomes NSN 5821-01-327-5288. The nomenclature of this equipment becomes Radio Set AN/ARC-115C.

15. Product Improvement Proposal Number (PIP).

This MWO is authorized by PIP number (N/A).


16. Modification Identification.

Not applicable.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:


MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army
05055

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36-E, block 9523,
requirements for MWO 11-5821-260-30-1.

