DEPARTMENT OF THE ARMY TECHNICAL MANUAL

ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR CHARGER, BATTERY PP-2926D/U (NSN 6130-01-099-5975)

Headquarters, Department of the Army, Washington, DC 19 November 1980

Current as of 23 September 1980

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) direct to Commander, U S Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL ME-MQ. Fort Monmouth, NJ 07703. In either case, a reply will be furnished direct to you.

Table of Contents

			Page	Figure
SECTION	I.	Introduction	1	_
	II.	Repair Par List	5	
GROUP	00	Charger, Battery PP-2926D/U	5	1
	01	Printed Circuit Board (A1) (No part authorized)		
SECTION	III.	Special Tools List (Not applicable)		
	IV.	National Stock Number and Part Number Index	6	

SECTION I

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational maintenance of the PP-2926D/U. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

- a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.
 - b. Section III. Special Tools List Not applicable.
- c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all parts numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

- a. Illustration. This column is divided as follows:
- (1) *Figure number*. Indicates the figure number of the illustration on which the item is shown.
- (2) Item number. The number used to identify item called out in the illustration.
- b. Source, Maintenance, and Recoverability (SMR) Code.
- (1) Source code. Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code Definition

PA - Item procured and stocked for anticipated or known usage.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

- (2) Maintenance code. Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items.
- The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:
- (a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

 Code

 Application/Explanation

O - Support item is removed, replaced, used at the organizational level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code Application/Explanation

Z - Nonreparable. No repair is authorized.

(3) Recoverability code. Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability codes Definition

- Z Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
- c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.
- d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 70842 which is used to identify the manufacturer, distributor, or Government agency, etc.

- f Description Indicates the Federal item name and, if required, a minimum description to identify the item.
- g. Unit of Measure(UIM). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.
- h Quantity Incorporated in Unit Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, of an assembly.

4. Special Information

- a. The following publication pertains to the PP-2926D/U and its components: TM 11-6130-412-14, Charger, Battery PP-2926D/U
- b. The illustrations in this manual are identical to those published in TM 11-6130412-40P. Only those parts assigned the third position SMR maintenance code "C" or "O" are listed in the tabular listing, therefore, there may be a break in the item number sequence. Only illustrations containing organizational authorized items appear in this manual.
- c. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to Commander, US Army Communications and Electronics Materiel Readiness Command, AMTN: DRSEL-MM, Fort Monmouth, NJ 07703 for the part required to support your equipment.

5. How to Locate Repair Parts

- a. When National stock number or part number is unknown.
- (1) First. Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.
- (2) *Second.* Find the illustration covering the functional group to which the item belongs.
- (3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.
- (4) Fourth Using the Repair Parts Listing, find the figure and item number noted on the illustration.
- b. When National stock number or part number is known.
- (1) First. Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.
- (2) Second After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations Not applicable.

(Next printed page is 4)

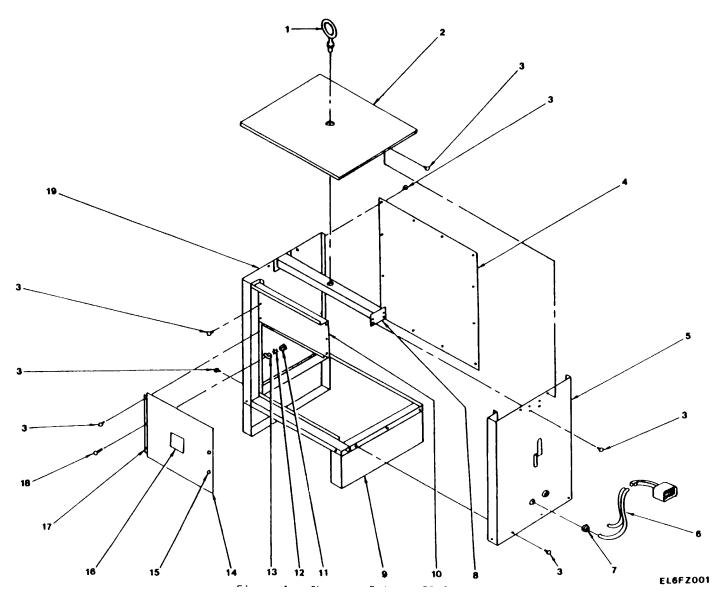


Figure 1. Charger, Battery PP-2926D/U.

SECTION II TM 11-6130-412-20P

ILLUS	(1) TRATION	(2)	(3)	(4)	(5)	(6) DESCRIPTION		(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
NO.	6 6	PAOZZ	NUMBER	100664-1		GROUP 00 CHARGER,BATTERY PP-2926D/U CABLE ASSEMBLY SPE		UNIT

PART NO.	FSCM	FIG NO.	ITEM NO.
100664-1	52512	1	6

6

E. C. MEYER

General, United States Army

Chief of Staff

Official:

J. C. PENNINGTON
Major General, United States Army
The Adjutant General

Distribution:

Active Army:

HISA (Ft Monmouth) (21) USAES (2) USAINSCOM (2) USAICS (3) COE (1) MAAG (1) TSG (1) USARMIS (1) USAARENBD (1) USAERDAA (1) DACOM (1) **USAERDAW (1)** TRADOC (2) Ft Gordon (10) OS Maj Cmd (4) Ft Cason (5) TECOM (2) Army Dep (1) except USACC (4) SAAD (30) **TOAD (14)** MDW (1) Armies (2) SHAD (2) Ft Gillem (10) Corps (2) Svc Colleges (1) USA Dep (1) USASIGS (5) Sig Sec USA Dep (1) USAADS (2) Ft Richardson (CERCOM Ofc) (2) USAFAS (2) Units org under fol TOE USAARMS (2) 29-207 (2) 29-10 (2) USAIS (2)

NG: State AG (3) USAR: None

For explanation of abbreviations used, see AR 310-50.

*U.S. GOVERNMENT PRINTING OFFICE: 1193 - 342-421/61906

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS SOMETHING WRONG WITH THIS PUBLICATION? FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS) THEN. . JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL! DATE SENT PUBLICATION NUMBER PUBLICATION DATE PUBLICATION TITLE BE EXACT. . . PIN-POINT WHERE IT IS IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT: PARA-GRAPH FIGURE NO TABLE NO. TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA , FORM 2028-2

PREVIOUS EDITIONS • ARE OBSOLETE. P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

THE METRIC SYSTEM AND EQUIVALENTS

'NEAR MEASURE

Centimeter = 10 Millimeters = 0.01 Meters = 0.3937 Inches

1 Meter = 100 Centimeters = 1000 Millimeters = 39.37 Inches

1 Kilometer = 1000 Meters = 0.621 Miles

YEIGHTS

Gram = 0.001 Kilograms = 1000 Milligrams = 0.035 Ounces

1 Kilogram = 1000 Grams = 2.2 lb.

1 Metric Ton = 1000 Kilograms = 1 Megagram = 1.1 Short Tons

LIQUID MEASURE

1 Milliliter = 0.001 Liters = 0.0338 Fluid Ounces

1 Liter = 1000 Milliliters = 33.82 Fluid Ounces

SQUARE MEASURE

1 Sq. Centimeter = 100 Sq. Millimeters = 0.155 Sq. Inches

1 Sq. Meter = 10,000 Sq. Centimeters = 10.76 Sq. Feet

1 Sq. Kilometer = 1,000,000 Sq. Meters = 0.386 Sq. Miles

CUBIC MEASURE

1 Cu. Centimeter = 1000 Cu. Millimeters = 0.06 Cu. Inches 1 Cu. Meter = 1,000,000 Cu. Centimeters = 35.31 Cu. Feet

TEMPERATURE

 $5/9(^{\circ}F - 32) = ^{\circ}C$

212° Fahrenheit is evuivalent to 100° Celsius

90° Fahrenheit is equivalent to 32.2° Celsius


32° Fahrenheit is equivalent to 0° Celsius

 $9/5C^{\circ} + 32 = {\circ}F$

APPROXIMATE CONVERSION FACTORS

TO CHANGE	TO	MULTIPLY BY
Inches	Centimeters	2.540
Feet	Meters	0.305
Yards	Meters	
Miles	Kilometers	1.609
Square Inches	Square Centimeters	6.451
Square Feet	Square Meters	
Square Yards	Square Meters	0.836
Square Miles	Square Kilometers	2.590
Acres	Square Hectometers	
Cubic Feet	Cubic Meters	
Cubic Yards	Cubic Meters	
Fluid Ounces	Milliliters	
nts	Liters	
arts	Liters	0.946
allons	Liters	3.785
Ounces	Grams	28.349
Pounds	Kilograms	0.454
Short Tons	Metric Tons	
Pound-Feet	Newton-Meters	
Pounds per Square Inch	Kilopascals	
Miles per Gallon	Kilometers per Liter	
Miles per Hour	Kilometers per Hour	
•		

TO CHANGE	то	MULTIPLY BY
Centimeters	Inches	0.394
Meters	Feet	3.280
Meters	Yards	
Kilometers	Miles	
Square Centimeters	Square Inches	
Square Meters	Square Feet	
Square Meters	Square Yards	1 196
Square Kilometers	Square Miles	0.386
Square Hectometers	Acres	
Cubic Meters	Cubic Feet	
Cubic Meters	Cubic Yards	
Milliliters	Fluid Ounces	
Liters	Pints	
Liters	Quarts	
'ers	Gallons	
.ms	Ounces	
.ograms	Pounds	
Metric Tons.	Short Tons	
Newton-Meters	Pounds-Feet	
Kilopascals	Pounds per Square Inch .	
ometers per Liter	Miles per Square Inch .	9 254
meters per Hour	Miles per Gallon	
miecers per mour	Miles per Hour	U.OZI

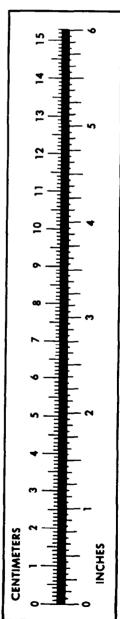

PIN: 047480-000