LUBRICATION ORDER

L05-6675-325-12

13 SEPTEMBER 1983

TOPOGRAPHIC SUPPORT SYSTEM

SYNTHESIS SECTION MODEL ADC-TSS-14

Reference TM 5-6675-325-14 and C9100-IL


NSN: 6675-01-105-5763

Intervals and the related manhour times are based on normal operation, The manhour time specified is the time you need to do all the services prescribed for a particular interval. Decrease the interval and lubricate more frequently if your lubricants have been contaminated or you are operating under adverse conditions, including longer-than-usual operating hours. The intervals between lubrications may be extended during periods of low activity, but only if adequate preser-

vation precautions have been taken. The lowest level of maintenance authorized to lubricate a point is indicated by one of the following symbols: Operator/Crew (C) and Organizational Maintenance (O). Clean all fittings, plugs, and caps before removal and/or lubrication. Remove all excess oil or grease after lubrication. If possible, exercise moving parts to distribute lubricant evenly. Lubricate all oil can points after washing or fording.

LUBRICANT • INTERVAL


INTERVAL ● LUBRICANT

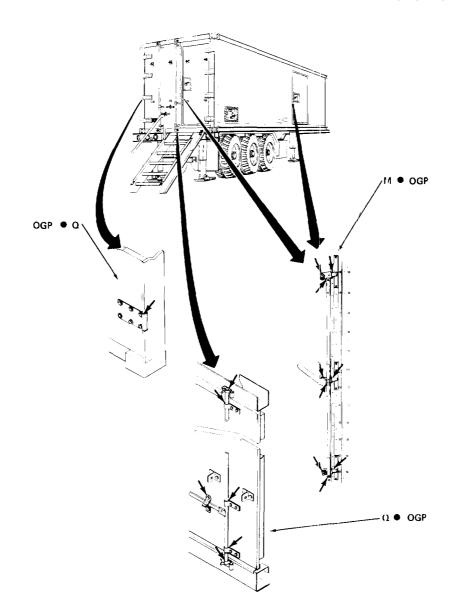

Personnel Door Latches (C) Oil Can Point (See notes 1,2and4)

Cargo Door Latch (C) Oil Can Point (See notes

Personnel
Door And
Cargo Door
Hinges (C)
Oil Can Point
(See notes 1, 2,
and 4)

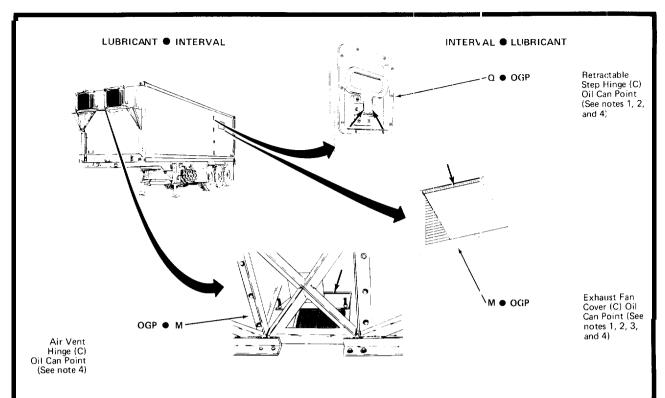

TOTAL MAN - HR		TOTAL MAN HR		
INTERVAL	M A N - H R	INTERVAL	MAN-HR	
М	0.3	Q	0.6	

KEY

LUBRICANTS		ANTS	EXPECTED TEMPERATURES		INTERVALS	
OGP (MIL-L-7870)	GENE	ICATING OIL, RAL PURPOSE, TEMPERATURE		M Q	MONTHLY QUARTERLY	
		PERSONNEL DOOR AND CARGO DOOR HINGES				
		PERSONNEL DOOR LATCHES	All Temperatures			
		CARGO DOOR LATCHES				
		RETRACTABLE STEP HINGE				
		EXHAUST FAN COVER				
		AIR VENT HINGE				

NOTES

- 1. Before lubricating wipe all points free of dirt, grease or dust.
- 2. Wipe all surplus oil from surfaces after lubrication.
- 3. When lubricating hinges, be sure oil covers entire length of hinge.
- 4. OIL CAN POINTS. In accordance with the intervals listed in this Lubrication Order, lubricate the Door Hinges and Latches, Step Hinges, Air Vent Hinge and Exhaust Fan Cover Hinge with OGP.

Copy of this Lubrication Order will remian with the equipment at all times; instruction contained herein are mandatory.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR. General, United States Army Chief Of Staff

Official:

ROBERT M. JOYCE

Major General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-25A, Operator maintenance requirements for Mapping,