

(No Model.)

W. E. HARRIS.

LOOP FOR HANGING GARMENTS.

No. 306,248.

Patented Oct. 7, 1884.

Fig. 1.

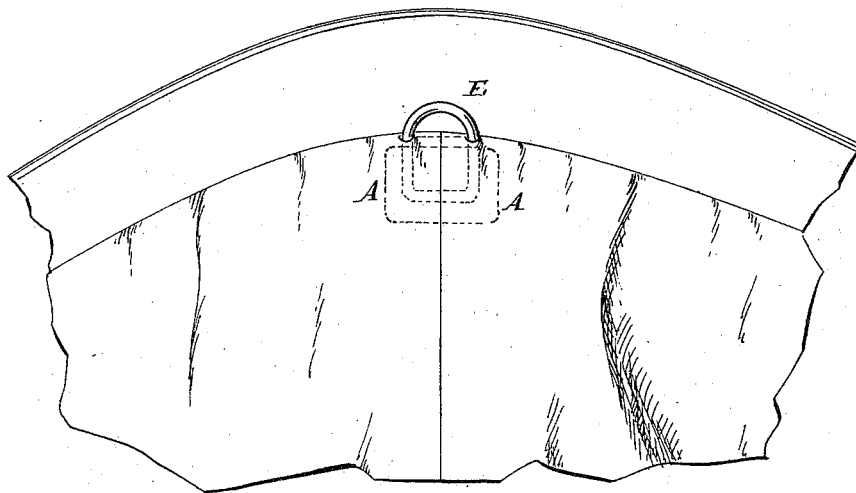


Fig. 2.

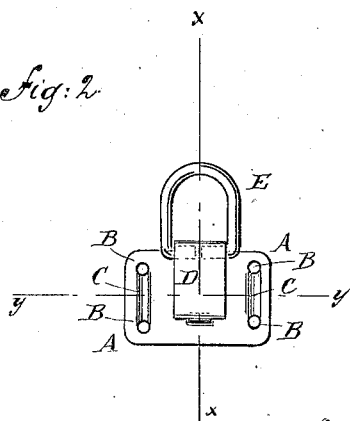


Fig. 3.


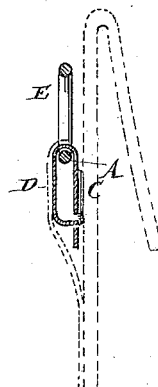


Fig. 4.



WITNESSES:

Chas. Nida
L. Sedgwick

INVENTOR:

W. E. Harris
BY *Munn & Co.*

ATTORNEYS.

UNITED STATES PATENT OFFICE.

WILLIAM EDWARD HARRIS, OF NEW YORK, N. Y.

LOOP FOR HANGING GARMENTS.

SPECIFICATION forming part of Letters Patent No. 306,248, dated October 7, 1884.

Application filed February 19, 1884. (No model.)

To all whom it may concern:

Be it known that I, WILLIAM EDWARD HARRIS, of the city, county, and State of New York, have invented a new and useful Improvement in Loops for Hanging Garments, of which the following is a full, clear, and exact description.

Reference is to be had to the accompanying drawings, forming a part of this specification, in which similar letters of reference indicate corresponding parts in all the figures.

Figure 1 is a front elevation of my improvement shown as applied to a garment. Fig. 2 is a front elevation of the improvement. Fig. 3 is a sectional side elevation of the same, taken through the line *xx*, Fig. 2. Fig. 4 is a sectional plan view of the same, taken through the line *yy*, Fig. 2.

The object of this invention is to facilitate the hanging up of coats and other garments, and promote strength and durability in the hanging-loops.

The invention consists in the peculiar construction and arrangement of parts, all as hereinafter fully described, and pointed out in the claims.

A represents a plate of light sheet metal, made of suitable length and breadth, reference being had to the size and weight of the garment to which it is to be applied.

In each end part of the plate A are formed two perforations, B, for the passage of the thread by means of which the said plate is secured to the garment, and the said plate between the end perforations has a groove or recess, C, formed in it to receive the fastening-

thread as it passes from one to the other of the said perforations B.

Upon the upper edge of the plate A is formed, or to it is attached, the end of a narrow plate or tongue, D, which is bent down over the plate A, and is secured at its other end by being passed through, soldered, or otherwise attached to the said plate A, so as to form a keeper to receive the ring E, as shown in Figs. 2 and 3.

The plate A is designed to be placed between the body and lining of the garment, so as to be entirely covered and concealed, as illustrated in Fig. 1, the upper part of the ring E projecting, so that it can be readily drawn out to be passed over the hook or nail from which the garment is to be suspended.

When not required for use, the ring E is pushed down in the keeper D, so that only the upper part of the said ring will project, as shown in Fig. 1.

Having thus described my invention, I claim as new and desire to secure by Letters Patent—

As an improved article of manufacture, a loop for hanging garments, consisting of the plate A, provided with the perforations B, the grooves C, and the central tongue, D, bent down over the plate and secured thereto, as described, to form a keeper, and ring E, secured to the plate by said keeper, in which it is free to slide, as set forth.

WILLIAM EDWARD HARRIS.

Witnesses:

JAMES T. GRAHAM,
C. SEDGWICK.