


(No Model.)

M. YEAGLE.
SHOE.

No. 384,224.

Patented June 5, 1888.

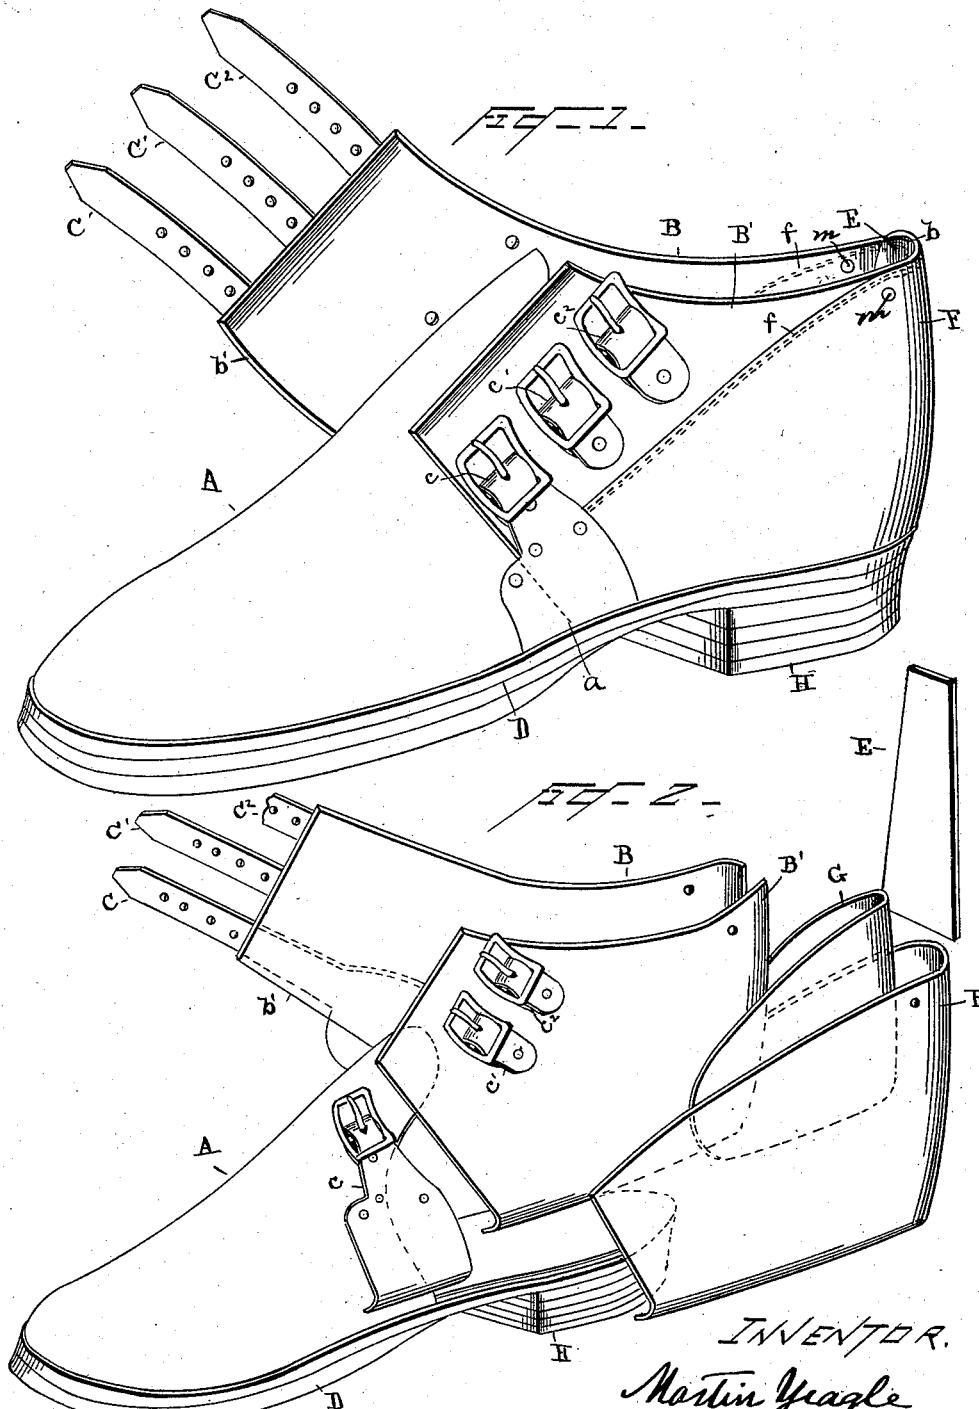

WITNESSES.
Horris A. Clark.
Van Buren Hillyard.

INVENTOR.
Martin Yeagle,
By R. S. & A. P. Lacey,
Attys.

UNITED STATES PATENT OFFICE.

MARTIN YEAGLE, OF WATSONTOWN, PENNSYLVANIA, ASSIGNOR OF ONE-HALF TO ERASTUS D. BARTO, OF SAME PLACE.

SHOE.

SPECIFICATION forming part of Letters Patent No. 384,224, dated June 5, 1888.

Application filed April 12, 1888. Serial No. 270,401. (No model.)

To all whom it may concern:

Be it known that I, MARTIN YEAGLE, a citizen of the United States, residing at Watson-
town, in the county of North and State of Penn-
sylvania, have invented certain new and use-
ful Improvements in Shoes; and I do declare
the following to be a full, clear, and exact
description of the invention, such as will en-
able others skilled in the art to which it apper-
tains to make and use the same, reference be-
ing had to the accompanying drawings, and to
the letters and figures of reference marked
thereon, which form a part of this specifica-
tion.

This invention relates to shoes, and has for
its object the production of a shoe especially
adapted for lumbermen and those exposed to
wet and damp ground, and whose calling nec-
essarily subjects the shoe to hard and rough
usage, that will exclude the dampness, stand
the strain and hard wear, and, withal, be com-
fortable, comparatively light, and neat in ap-
pearance.

The improvement consists in the novel fea-
tures, which hereinafter will be more fully de-
scribed and claimed, and shown in the an-
nexed drawings, in which—

Figure 1 is a perspective view of a shoe of
my invention, and Fig. 2 a perspective view
showing the parts detached and in their rela-
tive positions.

The vamp A and the quarters B and B' are
united by the usual side seams, *a*, and the
quarters are united by the back seam, *b*. The
quarter B is extended to form the flap B', that
overlaps the instep, and is provided with the
straps C C' C'', which are adapted to engage
with buckles fastened to the ends of the cor-
responding straps, *c c' c''*. The straps C and *c*
are widened at their lower ends and overlap
the side seams, *a*, and are lasted to the sole D
with the vamp and quarters. The back seam, *b*,
is protected by the inner stay, E, and the outer,
stay, F, the inner stay, E, widening at the bot-

tom and being lasted to the sole, and the outer
stay extending flush with the top of the quar-
ters in the back and tapering to their front
ends, as shown, where they are secured to the
vamp and quarters by the side seams, *a*. This
outer stay, F, extends from one side seam to
the other, and is secured at its top edge to the
quarters by the seam *f*, and is lasted to the sole
at its bottom edge. The counter G is located
between the quarters and the stay-piece F.
The sole D and the heel H are of ordinary con-
struction, and are lasted to the upper in the
usual manner. The outer stay, F, and the quar-
ters are further connected together by the two
rivets *m*, that are located near the top of the
quarters, one rivet being arranged on one side
of the back seam and the other on the other
side.

Having thus described my invention, what I
claim, and desire to secure by Letters Patent,
is—

The herein shown and described shoe, com-
posed of the vamp and the quarters secured
together by back and side seams, the end of
one quarter being extended to form a flap,
the inner stay, E, the outer stay, F, of one
piece and extending from one side seam to the
other, and secured at its ends by the said side
seams, the upper edge inclining from back to
front, as shown, and secured to the quarters
by a row of stitching, and the lower edge being
lasted in, the straps C C' C'' and the corre-
sponding straps, *c c' c''*, provided with buckles,
the straps C and *c* being widened at their lower
ends to overlap the said side seams and lasted
in, and the sole and the heel, substantially as
specified.

In testimony whereof I affix my signature in
presence of two witnesses.

MARTIN YEAGLE.

Witnesses:

JOSEPH B. KRAMER,
WM. L. BAKER.