

(No Model.)

T. GARIÉPY.

SHUTTLE DRIVING MECHANISM FOR SEWING MACHINES.

No. 456,619.

Patented July 28, 1891.

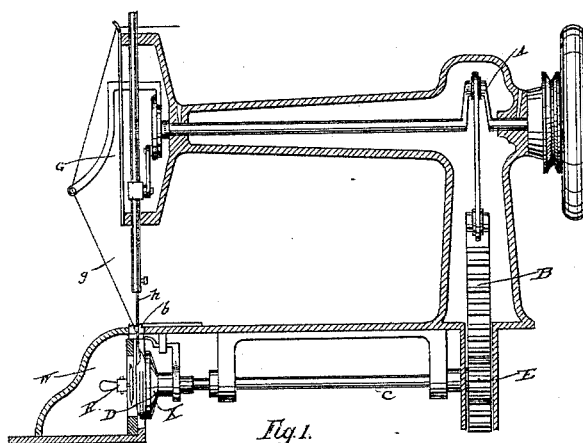


Fig. 1.




Fig. 2

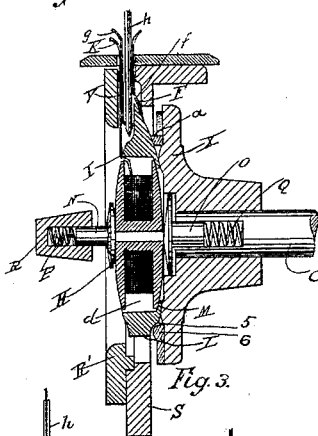


Fig. 3




Fig. 4.




Fig. 5.




Fig. 6.




Fig. 7.


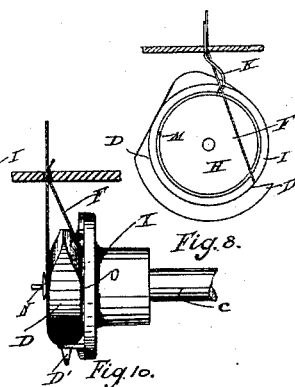


Fig. 8.



D' Fig. 10

Witnesses.

James Laurie
McLadouceur

Inventor:

Vélesphore Gariépy.

per: J. Emile Vanier

Attorney.

UNITED STATES PATENT OFFICE.

TÉLESPHORE GARIÉPY, OF MONTREAL, CANADA.

SHUTTLE-DRIVING MECHANISM FOR SEWING-MACHINES.

SPECIFICATION forming part of Letters Patent No. 456,619, dated July 28, 1891.

Application filed October 30, 1889. Serial No. 328,675. (No model.)

To all whom it may concern:

Be it known that I, TÉLESPHORE GARIÉPY, a citizen of the Dominion of Canada, residing at the city and district of Montreal, and Province of Quebec, Canada, have invented certain new and useful Improvements in Sewing-Machines; and I do hereby declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it appertains to make and use the same.

This invention relates to sewing-machines; and it consists in the novel construction and combination of the parts, hereinafter fully described and claimed.

In the drawings, Figure 1 is a longitudinal section through the sewing-machine, showing the devices for oscillating the shuttle. Fig. 2 is a front view of the hinged plate which encircles the shuttle. Fig. 3 is a cross-section through the shuttle and its co-operating parts. Fig. 4 is a front view of the shuttle, showing also portions of the devices for operating it. Figs. 5, 6, 7, and 8 show the series of positions assumed by the shuttle in making the loop. Fig. 9 is a sectional plan view of the devices for retaining the bobbin in the shuttle. Fig. 10 is a side view of the shuttle and the shuttle-carrier.

The needle *h* is reciprocated in the ordinary manner, and *A* is a crank which imparts a reciprocating motion to the rack *B*.

E is a pinion secured on the shuttle-carrier shaft *c*, and arranged to gear into the said rack.

X is the shuttle-carrier secured on the shaft *c*, and provided with a projection *a* for engaging with the shuttle. The shuttle is oscillated back and forth by the shuttle-carrier and is moved through three-quarters of a revolution at each oscillation.

G is the take-up, and *b* is the feed, both of which are of ordinary construction.

The shuttle *D* consists of a ring provided with a circular projection *I*, which forms the chamber *d* for the bobbin. The projection *I* is cut away at *J* to permit the needle *h* to pass into the chamber *d*.

D' is the hook of the shuttle, which en-

gages with the thread *g* of the needle and forms the loop.

L is a flat place on the shuttle opposite the hook *D'*. A notch or groove *5* is formed in the shuttle behind the flat part *L*, and *6* is a projection on the carrier, which engages with the said notch, and, together with the projection *a*, secures the oscillation of the shuttle. The shuttle has an internal flange *M* at the bottom of the chamber *d*.

H is the bobbin, which is made very large, so that it may hold considerable thread. The bobbin rests in the chamber *d* against the said flange *M*.

O is a sliding friction-piece, which slides in a hole in the end of the shaft *c*, and *Q* is a spring for pressing the sliding piece *O* against the rear side of the bobbin, as shown in Fig. 3.

S is a plate provided with an aperture which encircles the shuttle. This plate is attached to the frame of the machine by hinges *S'*, so that it may be turned around out of the way and permit free access to the shuttle and its carrier.

The bobbin is pressed against the flange *M* of the shuttle, and the shuttle is thereby held against the face of the shuttle-carrier in the following manner:

R is a cross-bar, (shown in Fig. 9,) which is pivoted by the pin *U* to the ring *R'*, which is secured to the plate *S*, as shown in Fig. 3.

T is a retaining-catch for the end of the cross-bar *R* to engage with.

N is a sliding friction-piece carried by the cross-bar *R*, and *P* is a spring for forcing the said sliding piece *N* against the outer side of the bobbin.

The bobbin is inserted in the chamber *d*, and is secured by turning the cross-bar to the position shown in Fig. 9, in which it engages with the catch *T*. The shuttle is moved through the successive positions shown in the Figs. 5, 6, 7, and 8 by means of the oscillating shuttle-carrier, and is then moved back again to its original position. The shuttle engages with the thread *g* during its forward motion, and the thread forms a loop *F*, which is drawn up by the take-up *G*, together with the thread *I* from the bobbin, when the shut-

tle reaches the position shown in Fig. 8 and just before it commences its return movement. The springs Q and P permit the passage of the looped thread between the sliding pieces O and N and the sides of the bobbin.

W is a guard-plate for preserving the parts from injury.

What I claim is—

The combination, with the stationary plate S and the ring R' secured thereto, of the cross-bar R, pivoted to the said ring, the catch T for retaining the cross-bar in position, the oscillating shuttle-carrier, the shuttle provided with the chamber d, the bobbin in said cham-

ber, the spring-actuated sliding piece N, carried by the said cross-bar and adapted to hold the shuttle and the bobbin in position against the said carrier, and the spring-actuated sliding piece O bearing against the rear side of the said bobbin, substantially as and for the purpose set forth.

In testimony whereof I affix my signature in presence of two witnesses.

TÉLESPHORE GARIÉPY.

Witnesses:

JAMES LAWIN,

J. EAUTE VANIER.