


(No Model.)

5 Sheets—Sheet 1.

J. D. DAUGHERTY.
TYPE WRITING MACHINE.

No. 457,258.

Patented Aug. 4, 1891.

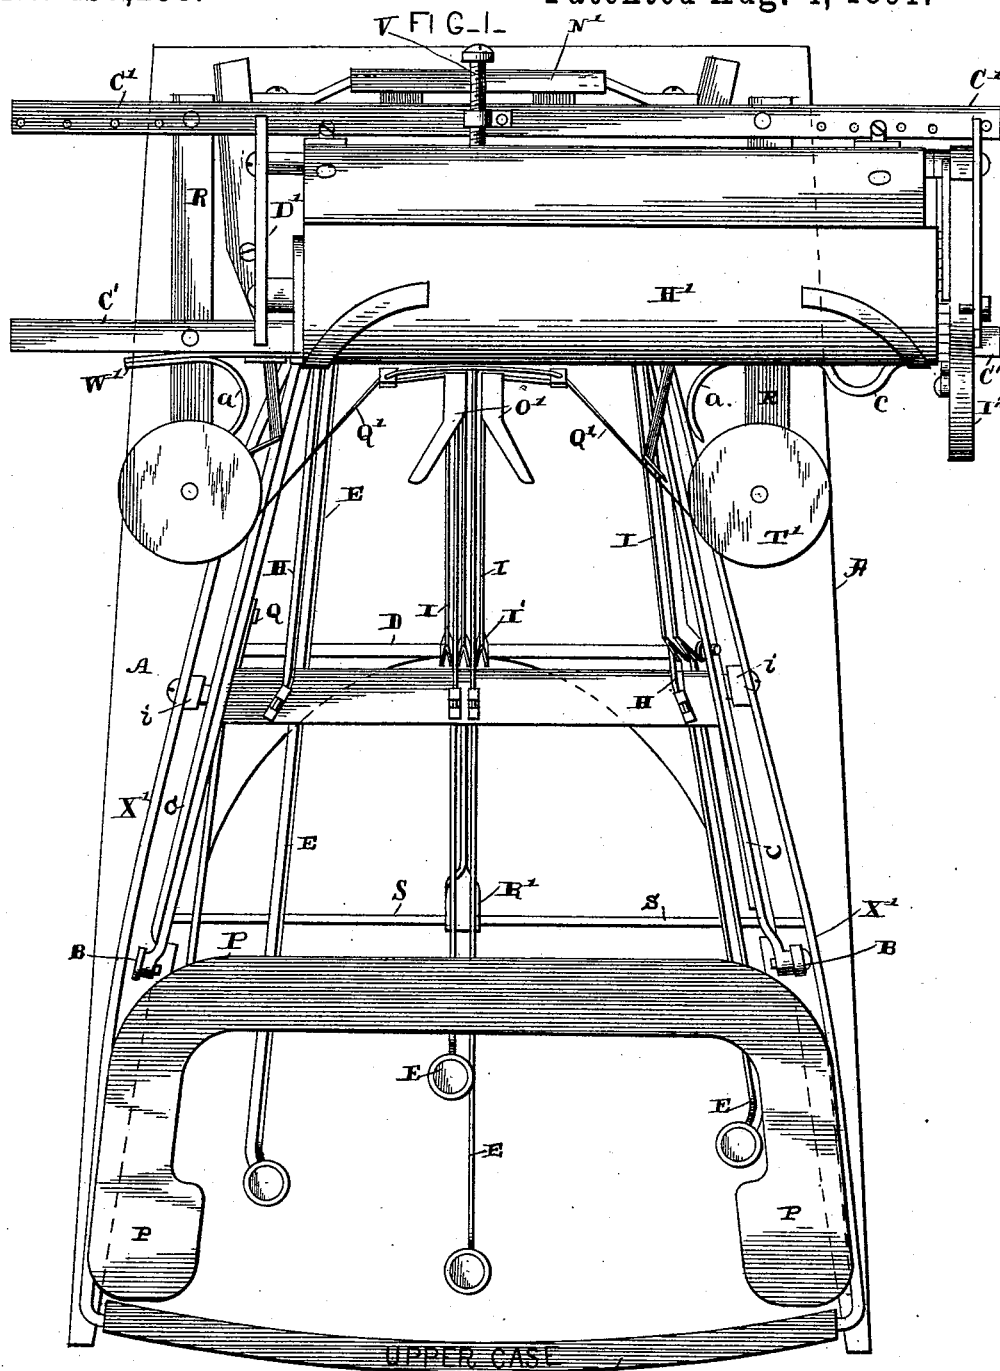

WITNESSES.

Geo. Trich.
 Roland H. Fitzgerald

INVENTOR_

James D. Dougherty
per Lehmann & Patterson
Attys


(No Model.)

5 Sheets—Sheet 2.

J. D. DAUGHERTY.
-TYPE WRITING MACHINE.

No. 457,258.

Patented Aug. 4, 1891.

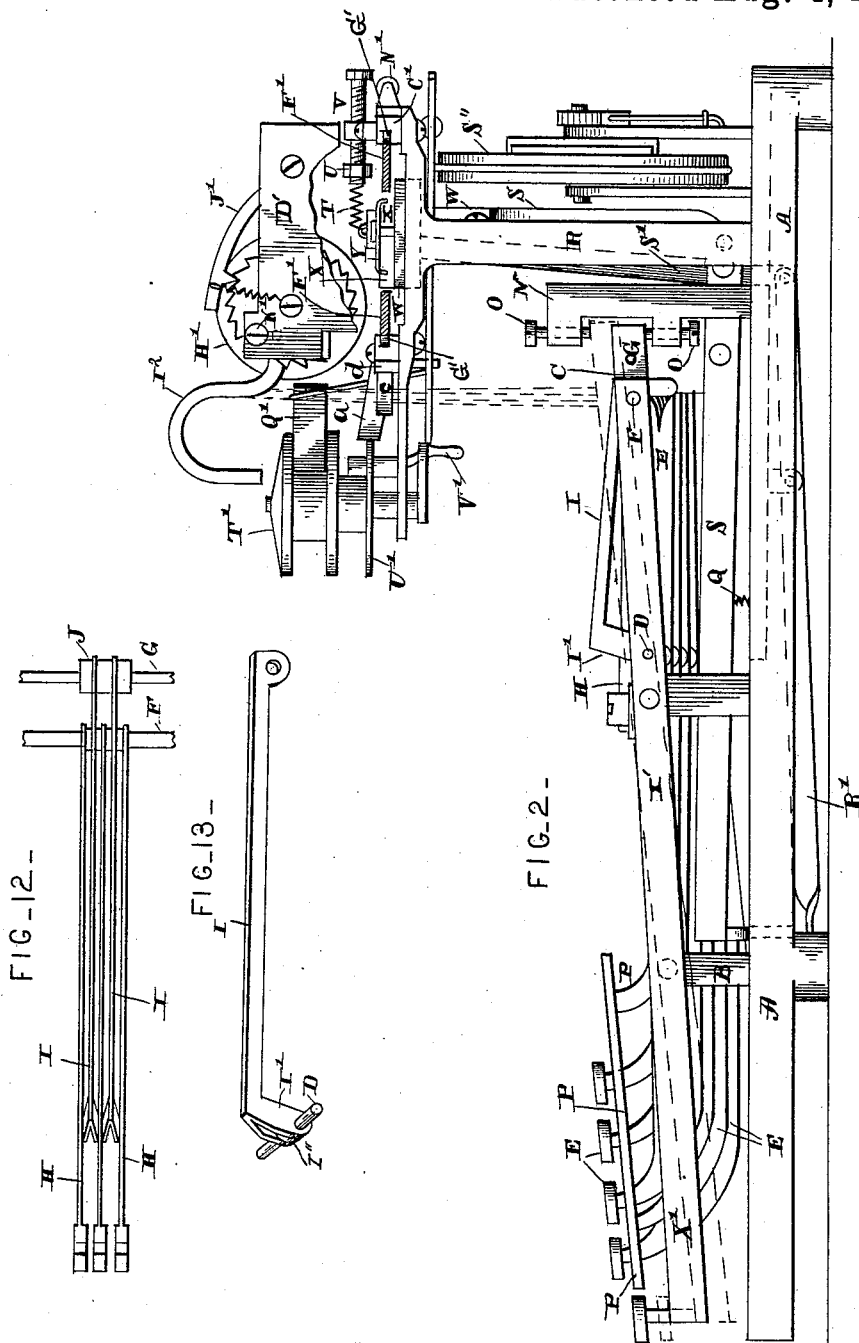

WITNESSES_

Geo. C. Frick.

Roland F. Fitzgerald

INVENTOR_



James D. Dougherty
per Lehmann & Pattison
Attys

J. D. DAUGHERTY.
TYPE WRITING MACHINE.

No. 457,258.

Patented Aug. 4, 1891.

FIG. 3.

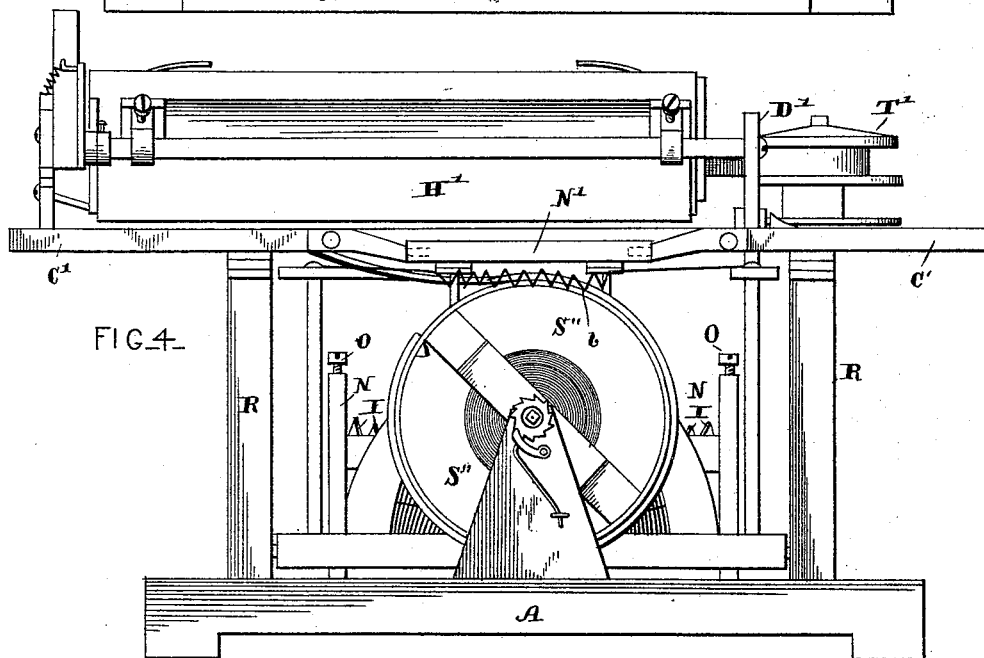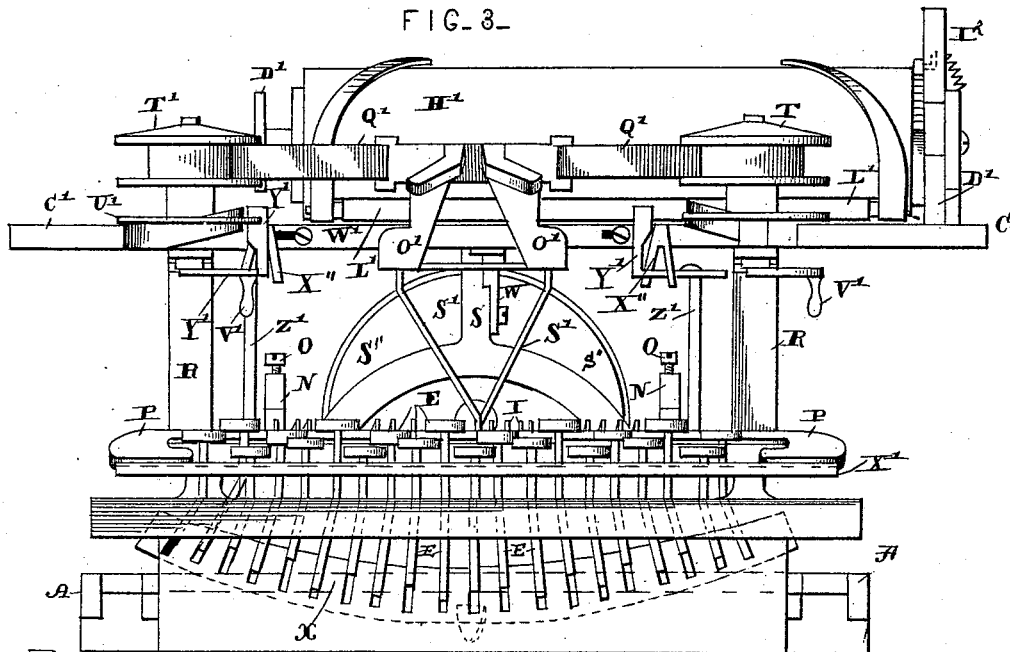

WITNESSES.

Geo. C. French.
Roland Fitzgerald.

INVENTOR.

James D. Daugherty
per Lehmann & Pattison
Attys.






(No Model.)

5 Sheets—Sheet 4.

J. D. DAUGHERTY.
TYPE WRITING MACHINE.

No. 457,258.

Patented Aug. 4, 1891.

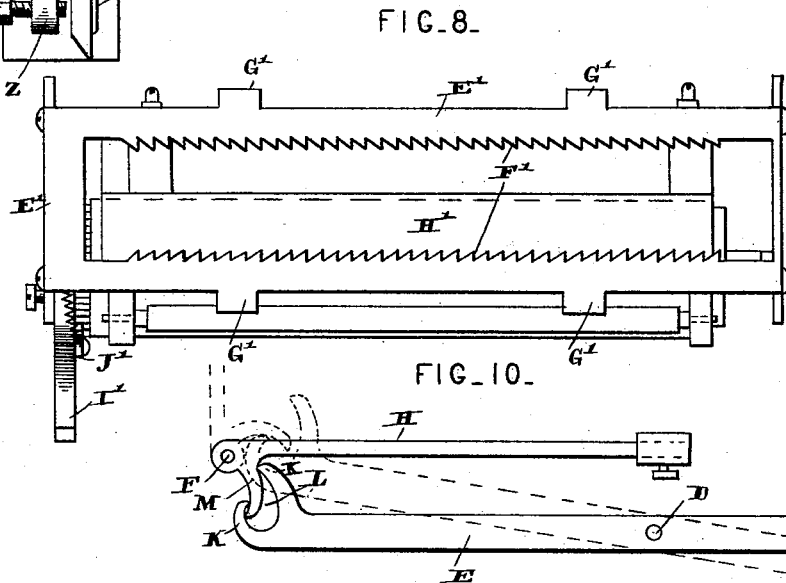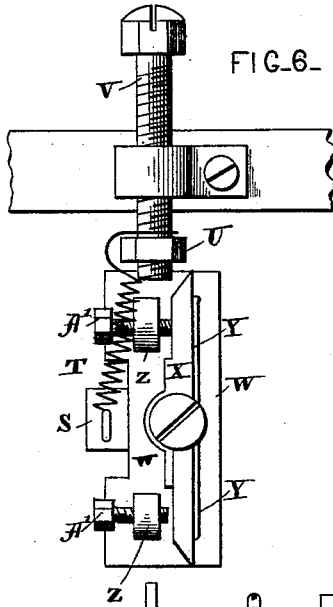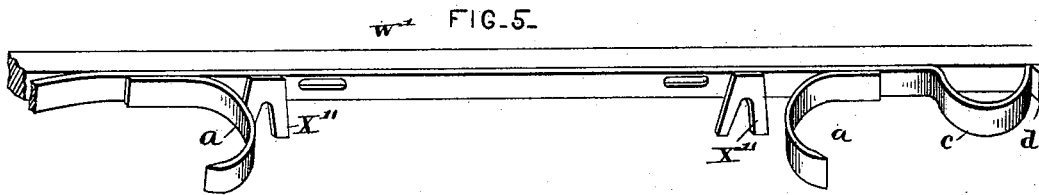

WITNESSES.

Leah French

Roland F. Fitzgerald

INVENTOR.

James D. Daugherty
per Lehmann Pattison
att'y.


(No Model.)

5 Sheets—Sheet 5.

J. D. DAUGHERTY.
TYPE WRITING MACHINE.

No. 457,258.

Patented Aug. 4, 1891.

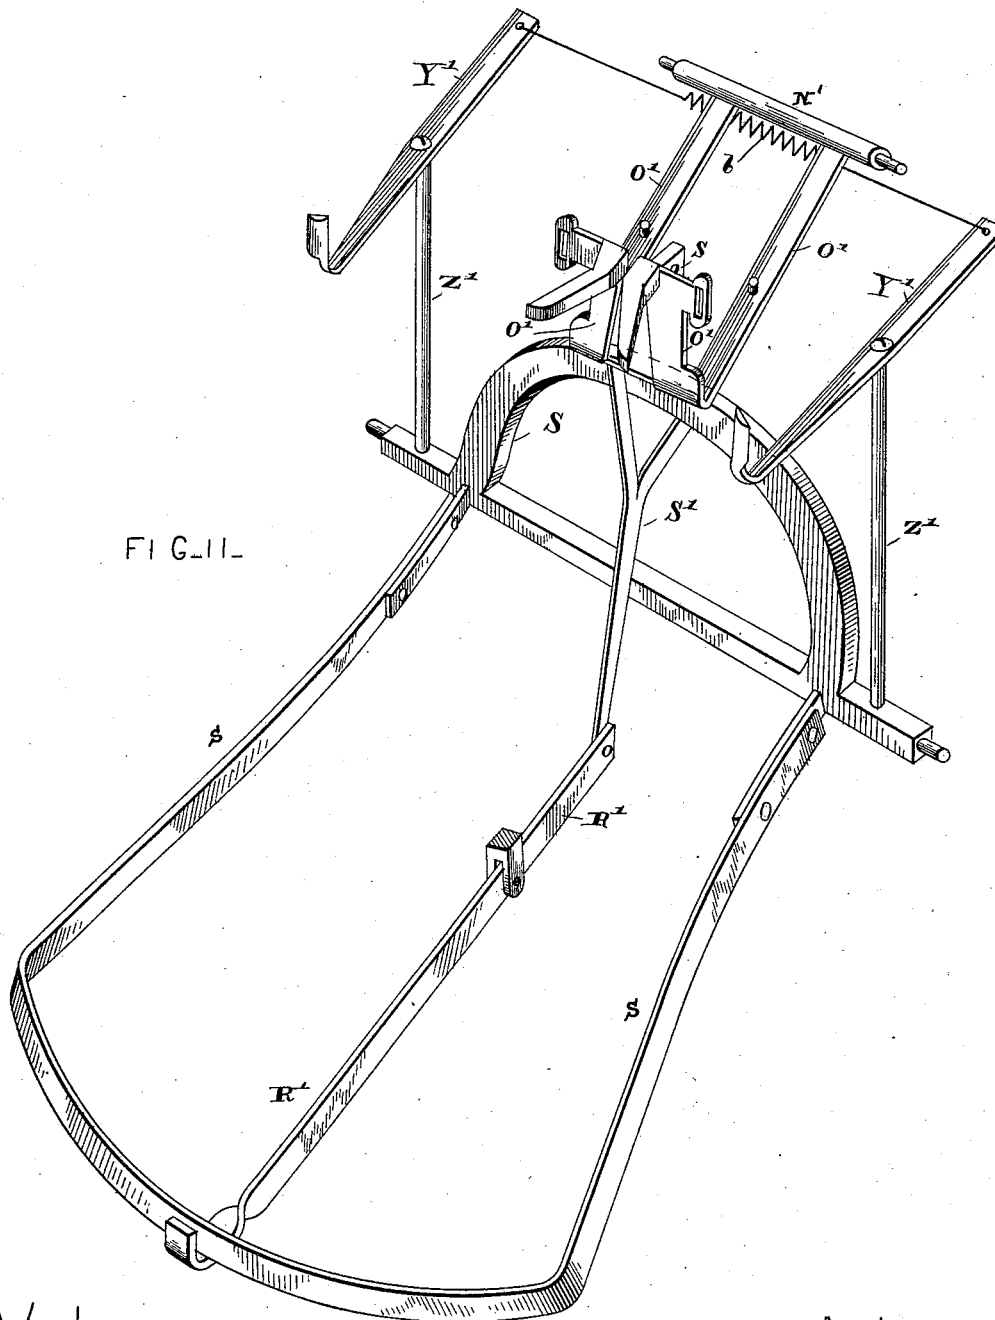

WITNESSES.

Geo. C. Frech.
Roland H. Fitzgerald

INVENTOR.

James D. Daugherty
per Lehmann & Patterson
Attys

UNITED STATES PATENT OFFICE.

JAMES DENNY DAUGHERTY, OF KITTANNING, PENNSYLVANIA.

TYPE-WRITING MACHINE.

SPECIFICATION forming part of Letters Patent No. 457,258, dated August 4, 1891.

Application filed June 9, 1891. Serial No. 395,684. (No model.)

To all whom it may concern:

Be it known that I, JAMES DENNY DAUGHERTY, of Kittanning, in the county of Armstrong and State of Pennsylvania, have invented certain new and useful Improvements in Type-Writing Machines; and I do hereby declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it pertains to make and use it, reference being had to the accompanying drawings, which form part of this specification.

My invention relates to an improvement in type-writing machines; and it consists in the arrangement and combination of parts which will be fully described hereinafter.

The objects of my invention are to connect the key-levers and the type-bars directly at their inner ends without the intervention of any other parts, so as to simplify and cheapen the construction and lessen the friction in the operation of the machine; to separate the type-bars and the key-levers by means of division bars or plates, which prevent the parts from interfering with each other; to provide each type-bar with a type or types having capital and small letters or other characters upon them, and to change from one letter or character to the other by raising the inner end of the frame which carries the type-bars and the key-levers, while the roller or platen carrying the paper remains stationary; to pivot at its rear end the guiding-frame for the type-bars, and which also holds or carries the ribbon, and to give to this guiding-frame a vertical movement at its free front end, so that while it serves as a guide for the type-bars it also raises the ribbon, so that each type-bar prints its character in alignment, and then, as the type-bar drops back in its normal position, the guiding-frame carrying the ribbon also drops, so as to leave each letter or character, as well as the whole line of writing, unobstructedly exposed to the operator without the movement of any other part; to operate the carriage by means of two pivoted spring-actuated dogs, which allow the carriage to move forward one space each time that one of the type-bars is operated, and which permit the carriage to slide freely back to its starting-point.

Figure 1 is a plan view of a type-writer

which embodies my invention. Fig. 2 is a side elevation of the same. Fig. 3 is a front end view of the type-writer to which my invention is applied. Fig. 4 is a rear end view of the same. Figs. 5, 6, 7, 8, 9, 10, 11, 12, and 13 are detail views of different parts of the same.

A represents the base-plate, which will be of any desired shape, size, or construction that may be preferred, and from which at any suitable point rise the two posts or projections B, to the upper ends of which are pivoted the front ends of the frame C, in which are pivoted upon a rod D the key-levers E. Extending across the rear or inner end of this lifting-frame C are the two curved pivotal rods F G, and pivoted upon the rod F are the type-bars H, and secured to the rod G are the rear ends of the division-plates I, and the front ends of the division-plates are secured to the curved pivotal rod D, upon which the key-levers are pivoted. These division-plates I are secured rigidly in position and separated at their rear ends by the washers J, which are slightly thicker than the type-bars. These division plates or bars I serve to separate the type-bars and the key-levers at their rear ends, and also serve to separate and hold the key-levers in position upon the pivotal rod D. These division-plates I are preferably given the shape shown and have a downwardly-extending projection I' at their front ends, which are made to increase from the upper front corner of the bar or plate in thickness down to the top edge of the key-levers, and from this they are all of a uniform thickness. This increased thickness at the lower ends of the extensions I' is made for the purpose of separating the key-levers and holding them rigidly in position upon their pivotal rod D. The upper edges of these division bars or plates I are of one uniform size or thickness, there being sufficient space between them to allow the type-bars to freely operate, and at the same time so confine them as to prevent their interference in operation with each other. The beveled or inclined side of the extensions I' serve to prevent the type-bars from having any lateral play or movement when they are at their lowest point, while the upper edges of the plates allow the type-bars abundance of room for any amount of

movement that may be necessary. These division-plates I may either be formed of solid metal or of sheet metal, as here shown, and which pieces of sheet metal are bent double
 5 and have these doubled portions separated at their lower ends, between which washers I' are placed upon the rod D, Fig. 13.

The inner end of each of the key-levers E, which are pivoted upon the rod D, is provided
 10 with curved arms or projections K, which form an opening or socket L, having curved sides, and each one of the type-bars is provided with a curved arm, lever, or projection M, which catches in the socket L of its corresponding lever E, thus forming an interlocking-joint for connecting these parts, and that
 15 without the intervention of any other piece or part of any kind whatever. When the front end of the key-levers is depressed at its rear end as it moves upward, it exerts a pressure upon the arm or projection M of its corresponding type-bar, and thus causes the type-bar to turn upon its pivot through nearly a
 20 quarter of a circle and imprint one of its characters upon the paper. As soon as the key-lever is released, a spring which is connected to the feed-lever presses the front end of the said feed-lever against the under side of all of the key-levers and the spacing-bars, and
 25 thus causes the type-bars through their corresponding key-levers to instantly return to their normal position. As will be seen, the type-bars are pivoted upon the curved rod, and when in their normal position they form
 30 a segment of a circle. The center bar is made perfectly straight, while those bars upon its sides are slightly curved or bent at their outer ends, the curve increasing in degree the farther the bars recede from the center and at
 35 such an angle to bring the types upon the bars in a vertical position when at the printing-point.

Pivoted between its ends upon the standards i, which project from the frame A, is the shifting or "upper-case" frame X', which has
 45 its inner ends pivotally connected to the inner end of the frame C, and this frame X' extends around in front of the keys, as shown in Fig. 1. A downward pressure upon the outer end
 50 of the frame X' raises its inner ends and with it the inner end of the frame C, in which are the type-bars pivoted upon the rod F.

Rising from the base-plate A, opposite the inner corners of the lifting-frame X', are the
 55 posts N, which have the two inward extensions at their upper ends, and through these extensions are passed the set-screws O, against which the opposite edges of the lifting-frame strike for the purpose of regulating with the
 60 utmost nicety the distance that the lifting-frame shall be raised in changing from one type or character to another, and thus every character and letter are brought into perfect alignment. When the lifting-frame is down
 65 in its normal position, as shown in Fig. 2, only the small letters are brought into operation; but when the inner end of this lifting-

frame, carrying the type-bars and all of their attachments, is raised by depressing the front end of the lifting-frame, then the type-
 70 bars which print only the capital letters are the characters which are then brought into alignment. It will be noticed that the type-bars are given a vertical movement, while the roller or platen carrying the paper to be
 75 printed upon remains stationary, thus reversing the usual method employed in type-bar machines now in the market of changing from one form of letter to another.

Pivoted upon the curved rod D is a spacing bar or lever P, which extends across in
 80 front of the keys and at each side, as shown, so as to be in position to be struck by any finger and from any point, and thus enable it to be operated more rapidly and easily than
 85 can be done where the rod or bar extends along in rear of the keys in the usual manner or where the spacing mechanism is operated from a small key. In order to hold the
 90 spacing-lever up in position and return it instantly to position after being operated, there is attached to each of the inner ends of this lever beyond the pivotal bar D a light spring-wire Q, and this wire has enough elasticity to
 95 hold up the spacing-lever when the feed-lever has been depressed by one of the key-levers.

Pivoted between the two standards R, which rise from the rear corners of the base-plate A, is an L-shaped feed-lever S, which has its front
 100 end to extend across the top of the base-plate underneath the keys and spacing-levers, as shown in Fig. 2, so that each time one of these levers is operated the feed-lever S is operated thereby. To the upper end of this feed-lever
 105 S is fastened one end of the spring T, by means of which the lever is returned to its normal position as soon as it is left free to move after it has been operated by one of the keys or
 110 spacing-levers. The rear end of this spring T is secured to the nut U, placed upon the screw V, which passes through the projection upon the top of one of the curved sliding bars upon which the carriage moves. By means
 115 of the screw and the nut the tension of the spring T can be regulated at will, and thus give to the key and the spacing-lever a harder or softer touch, as may be desired. Mounted upon the upper end of this feed-lever S is the
 120 adjustable head W, upon which the two spring-actuated bars of the dog X are pivoted, and this head W is made adjustable upon the upper end of the lever, so that the dog can be adjusted into position to operate directly with the rack-bars. This head W is
 125 secured to the lever S by means of screws, the upper one of which passes through a slot in the head, and this slot permits the necessary adjustment for the dog. The dog X is made
 130 in two parts, which are jointed at the center of the head, so as to allow each part an independent movement of its own, and both parts of the dog are held in line with each other by means of the spring Y, which is applied there-

to. This spring serves to hold the two parts of the dog X pressed backward against each other where they overlap, and thus form practically a rigid or single dog; but the spring allows the two parts of the dog to freely give as the carriage is returned to its starting-point, and when the bevel side of the dog which is engaged with the rack slips freely over the teeth of the rack so engaged.

Rising from the top of the head are the two projections Z, through which pass the horizontal set-screws A', which have their inner ends to bear against pieces of rawhide, rubber, or other suitable substance, which is placed in the holes through which the screws pass, and which substance serves to prevent the dog from making any unnecessary amount of noise. The set-screws serve to adjust the rawhide forward, and thus regulate the angle or position that the two parts of the dog shall occupy in order to properly engage with their corresponding racks. As the feed-lever is caused to vibrate by the movement of the keys and spacing-lever, the ends of the dog are made to play in and out upon the teeth of the opposite racks, and thus allow the carriage to move forward one space for each movement of one of the levers. While one end of the dog is forced backward by the pressure of the carriage the other end is forced one-half space forward, so as to be ready to engage with its corresponding rack when the feed-lever is moved in that direction, and this end, which was forced forward so as to be ready to engage with its rack, is in turn forced backward after it engages with the rack, and thus the dog is made to partially turn upon its pivot, and at each partial turn the other end is brought into an operative position. As the inner end of the two parts of the dog overlap, the two parts are held rigidly together, so as to always be in a line with each other while the carriage is being fed forward; but either of these parts of the dog give freely before the carriage when the carriage is being moved back to its starting-point.

By means of the construction here shown and described it will be readily seen that the dog consists of only two parts, which are jointed together, a spring for pressing the two parts in a line with each other and the two adjusting-screws, and that a very cheap feed mechanism is produced. The great advantage of this construction consists in having the carriage to move one half-space as the type-bar rises and then move the other half-space as the type-bar descends, and thus cause the carriage to move while the type-bar is in motion, instead of having the carriage move only after the type-bar has returned to its normal position. As a consequence a much more rapid feed is given to the carriage and it is impossible to strike any two of the keys so rapidly that the carriage does not move its full space at each stroke.

Rising from the inner ends of the base-plate A are the two T-shaped standards or supports R, upon which are mounted the two grooved guiding-bars C', upon which the carriage D' moves, and which supports also have the ribbon-spools placed upon them. The carriage D' consists of the plate E', which has its ends turned vertically upward, so as to form bearings or supports for the different parts, and which has its central portion cut away and the two racks F' formed as a part of the plate. Projecting from the opposite outer edges of this plate are the extensions or tongues G', which catch in grooved guiding-bars C', and thus guide the carriage back and forth in its movements.

Journalled between the upturned ends of the plate is a roller H', which is provided with a lever I' and a spring-actuated dog J' for revolving the roller and moving the paper. The lever may either be given the shape here shown or any other that may be preferred, and the distance that the roller is made to turn at each movement of the lever can be regulated by means of a stop-pin K', which can be placed in either one of two holes prepared for it. If placed in the upper hole, the lever will move a long distance and turn the roller a greater distance than it will if the pin is placed in the lower hole. Placed in front of the lower front ends of the large roller is the small roller L', which serves to cause the paper to move when the large roller is moved by the lever. The whole frame of the carriage being formed from a single plate, it can be stamped up and have the racks formed as a part thereof, and the cost of the construction of the machine is greatly simplified and cheapened.

Pivoted by means of the rod N', which is journalled back of the rear grooved guiding-bar C', is the guiding-frame O', which both holds the ribbon in position and guides the type-levers in position, so as to strike the paper in regular spacing. As will be seen, the front end of this frame is divided and the upper part is formed into two horizontal prongs, which are separated from each other at any suitable angle, leaving just sufficient space between their inner ends to allow the types to strike the paper, and that without any lateral play or movement. These two prongs are given the V shape shown, so as to guide the type-bars at the sides into position with the same precision and accuracy as it does those located at or near the center of the machine. This guiding-frame O' has openings through its front end for the passage of the ribbon Q', and is given a vertical movement at its front end for the purpose of raising the ribbon as each type-bar rises, and thus bring it in position to be struck by the type, and then as the type returns to its normal position the ribbon is depressed, so as to leave a free and unobstructed view of the entire line which is being printed. As above stated, this guiding-frame is pivoted at its rear end, and its front

end has a rising and falling movement for the purpose of operating the ribbon directly in front of the eye of the operator, where he can see every letter that is made and the connection of each word with what has preceded or followed it. In order to give the operator as unobstructed a view as possible, there are no parts placed between the eye of the operator and the paper, with the exception of the front end of this frame, which always drops below the line of writing as soon as the letter is struck. For the purpose of giving this frame a vertical play at its front end there is pivoted upon the under side of the base-plate a lever R' , which extends at its front end underneath the feed-bar or front end of the feed-lever S , where it extends across under the keys and spacing-levers, and which lever R' is connected at its rear end to the vertical lever S' , which is forked at its upper end and connected directly to the guiding-frame O' . Each time that one of the keys or spacing-levers is depressed the front end of the feed-lever and the front end of the lever R' is also depressed, and as the rear end of the lever R' is raised the guiding-frame O' is raised before the type-bar can rise to strike the paper. The carriage is drawn forward by the cord or strap that is wound around the wheel S' , which has a flat spring wound around its axle or journal, and which journal is provided with the ratchet or dog, whereby the tension or spring can be increased or decreased at will. The carriage is returned to the starting-point by means of its operating-lever.

The two ribbon-spools T' are mounted upon the extended upper end of the T -frame S' , and each spool is provided with a ratchet U' and a handle V' on the lower end of its shaft or journal. By means of these handles the ribbon can be rapidly wound from one spool to the other as desired. The reversing movement of the ribbon is caused by a sliding bar W' , which is provided with suitable guiding-slots and secured to the front edge of the front grooved guiding-bar C' by means of set-screws. This sliding bar W' has suitable guiding arms or prongs X'' projecting from its lower edge, and these prongs catch upon opposite sides or edges of the dogs Y' , which are pivoted upon the standards Z' , which rise from and move with the feed-lever, which is pivoted between the two standards upon which the carriage is placed. Also secured to this sliding bar W' are the two springs a , which are curved in opposite directions and which alternately engage with the ratchets of the ribbon-spools. These springs, secured to the bar and the dog Y' , moved by the arms projecting from the lower edge of the bar, are moved so that while one dog and one spring are engaging with the ratchet the other dog and other spring are moved away from their ratchet, so as not to engage therewith. At each endwise movement of the bar one dog and one spring are brought into operation with their corresponding ratchet-wheel and the other spring and

dog are thrown out of operation. By moving the bar W' endwise the ribbon is caused to reel upon either spool that may be desired, and thus its movement is reversed in the usual manner.

The two dogs Y' are pivoted upon standards Z' , so as to have a partial turning movement of their own. At the same time they are given a reciprocating movement each time the feed-bar is moved for the purpose of turning the spool upon which the ribbon is being reeled. In order to hold these two dogs in their proper position, their rear ends are connected by a suitable spring b , which allows them a sufficient play at their front ends to engage and disengage from the ratchets in such a manner as to cause the spools to revolve a suitable distance at each movement of the feed-lever. As soon as the dog begins its backward movement, the corresponding spring engages with the ratchet and prevents any backward movement of the spool. It will be seen that the endwise movement of these springs is produced entirely by the rocking movement of the feed-lever, so as to move the ribbon the moment it has been struck by a type, and thus no two type ever strike successively in the same place upon the ribbon. This construction greatly simplifies and cheapens the cost of the machine, and a mechanism is produced for operating the ribbon which is not liable to ever get out of repair while in operation. The sliding bar W' has one of its ends formed into a curved elastic handle c and the outer end of the handle moves back and forth over the projection d , which serves to retain the bar in whatever position it may be adjusted. The only object and use of this endwise-moving bar W' is to reverse the movement of the ribbons, and it is so constructed and arranged that the operator has only to apply one finger to the handle formed upon one end, and thus move it in either direction desired. This construction enables the movement of the ribbon to be reversed by a single movement of the bar W' by one of the fingers.

In order to prevent the free ends of the key-levers and the spacing-bars from having any lateral play or movement, a curved vertical toothed plate is placed below the lower edge of these levers, and the upper ends of the teeth extend up between the levers, so as to allow them only a vertical play. By means of this construction the key-levers are prevented from being bent or from getting out of position at any time.

As shown in Fig. 9, the type-blocks are secured to the ends of their respective type-bars, having a hole or opening made through each one of the blocks to receive the end of the bar, and then the block is fastened into any desired position by means of a set-screw. This construction enables the type-block to be adjusted with the utmost accuracy with very little trouble.

I do not make any claim in this applica-

tion to the pivoted shifting-frame carrying the type-bars, whereby either the upper or lower case of type are brought to the printing-point, as this is made the subject-matter of my pending application filed May 2, 1890, Serial No. 350,286.

Having thus described my invention, I claim—

1. In a type-writer, the combination, with the carriage having two horizontal rack-bars, of type-bars, key-levers, a pivoted feed-lever having one end to oscillate between the rack-bars, and a dog vertically pivoted to horizontally vibrate and alternately engage the two racks as the feed-lever moves back and forth between the racks, substantially as described.

2. In a type-writer, the combination, with the carriage having two horizontal rack-bars, of type-bars, key-levers, a pivoted feed-lever having one end to oscillate between the rack-bars, and a dog composed of two independently vertically-pivoted parts, which horizontally vibrate and alternately engage the two rack-bars as the feed-lever moves back and forth, substantially as described.

3. In a type-writer, the combination, with a carriage having a rack-bar which is provided with teeth of such size that two equal one space, of type-bars, key-levers, a pivoted feed-lever, and a dog upon the feed-lever, composed of two parts, each part having a longitudinal movement in the same direction in relation to the carriage, whereby the carriage moves a half space when the feed-lever is depressed and a half space when it is released, for the purpose substantially as described.

4. A dog composed of two parts, which are placed upon the same pivot and which extend in opposite directions and which are made to overlap at their inner ends, in combination with a spring for holding the two parts in a line with each other, substantially as described.

5. The combination, in a type-writer, of a normally horizontal pivoted type-bar having a downwardly-extending projection adjacent to its pivoted point, and a horizontal key-lever below the type-bar having an upwardly-extending projection which engages the projection of the type-bar, whereby the type-bar and lever normally rest in a line one above the other, substantially as described.

6. In a type-writer, the combination of a separate and disconnected normally horizontal type-bar and key-lever, one having a projection and the other two shoulders in the path traveled by the projection, one shoulder for moving the type-bar in one direction and the other for returning it to position, substantially as shown and described.

7. The combination, in a type-writer, of a normally horizontal pivoted type-bar having a downwardly-extending projection near its pivotal point and a horizontal key-lever below the type-bar, having an upwardly-extending

socket, into which the said type-bar projection rests, for the purpose shown and described.

8. In a type-writer, the combination, with the printing mechanism and horizontal ribbon-spools, of an L-shaped pivoted feed-lever, and horizontal pawls upon each side of the upper-end of the said L-shaped pivoted feed-lever and which engage the said ribbon-spools as the said lever oscillates, substantially as specified.

9. In a type-writer, the combination, with the printing mechanism and ribbon-spools, of an L-shaped pivoted feed-lever, and pawls pivoted between their ends upon the upper end of the said lever, and springs secured to their inner ends for holding them in contact with the said ribbon-spools, substantially as shown.

10. In a type-writer, the combination of the feed-lever, a lever R', having its outer end engaged by the feed-lever, a frame through which the ribbon passes, pivoted at its rear end, and a lever S', connected, respectively, to the inner ends of the ribbon-guiding frame and the lever R', whereby a downward movement of the feed-lever raises the said ribbon-guide frame, combined to operate in the manner substantially as described.

11. The combination, with a type-writer carriage having two parallel racks, of a dog composed of two independently-moving parts which extend in opposite directions, and a spring for holding the two parts normally in a line with each other, combined to operate in the manner substantially as described.

12. In a type-writer, the combination, with the carriage having two parallel racks, of a dog composed of two independently-moving parts which extend in opposite directions, and a set-screw which engages each part for limiting its movement, substantially as shown.

13. In a type-writer, the combination, with the feeding-lever, levers horizontally pivoted upon the upper end of the feed-lever and extending forward for operating the ratchets upon the ribbon-spools, and the endwise-sliding bar W', having notched hangers, which engage the horizontally-pivoted levers, substantially as shown and described.

14. The combination, with a type-writer, of a pivoted frame having its free end provided with a slot or opening for the passage of the type, outwardly-extending diverging guiding-arms, and loops upon opposite sides of the said opening, through which loops the ribbon passes, and a connection between the operating mechanism and the said frame for tilting it, substantially as described.

In testimony whereof I affix my signature in presence of two witnesses.

JAMES DENNY DAUGHERTY.

Witnesses:

J. H. PAINTER,
WM. BUFFINGTON.