
Patented June 25, 1901.


## C. C. CRUMRINE. DETACHABLE SPOUT FOR CANS.

(Application filed Sept. 8, 1900.)

(No Model.)

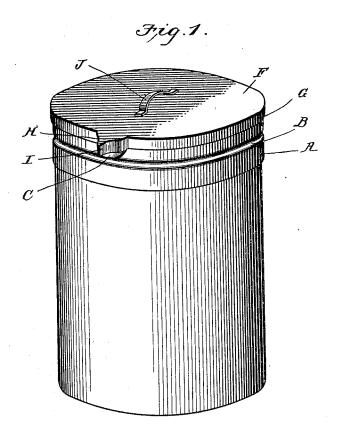

Figh

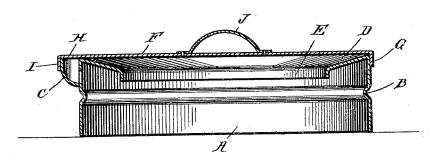

Witnesses

T.P. Portt Claunce Shaw Enventor C.C.Crumrine, By Oliverska Elitorneys

## UNITED STATES PATENT OFFICE.

CHARLES CRITTENDEN CRUMRINE, OF CLEVELAND, OHIO, ASSIGNOR OF ONE-HALF TO ANDREW WINKEL, OF SAME PLACE.

## DETACHABLE SPOUT FOR CANS.

SPECIFICATION forming part of Letters Patent No. 676,937, dated June 25, 1901.

Application filed September 8, 1900. Serial No. 29,415. (No model.)

To all whom it may concern:

Be it known that I, CHARLES CRITTENDEN CRUMRINE, a citizen of the United States, residing at Cleveland, in the county of Cuyahoga and State of Ohio, have invented a new and useful Detachable Spout for Cans, of which the following is a specification.

This invention relates to detachable spouts and covers for vessels; and the object is to produce a spout and cover which may be applied to a vessel for the purpose of preventing splashing of the contents thereof and the falling of foreign substances thereinto and at the same time permit the ready and convenient removal of said contents from the vessel.

With the above object in view the invention consists in the novel features of construction hereinafter fully described, particularly pointed out in the claim, and clearly illustrated in the accompanying drawings, in which—

Figure 1 is a perspective view of my invention applied to a vessel. Fig. 2 is a vertical sectional view.

25 The invention consists of the collar A, adapted to inclose the walls of the vessel at the upper end thereof and formed intermediately of its upper and lower ends with an inwardly-extending bead B, which rests upon the upper edge of the vessel when the attachment is in position thereon. Said collar A is formed with an outlet-opening at a point above said bead and with a spout C on the exterior thereof. The collar is formed at its upper edge with an inwardly-extending annular flange D, which is inclined toward the center of the collar, and upon the inner edge of said flange a downwardly-extending annular flange E is provided.

F designates a removable cover formed 40 about its edge with the depending flange G, adapted to fit over the edge of the collar, and with an offset H of the contour of the spout, also provided with a depending flange I. When the cover is in position upon the collar, this offset constitutes a cover for the spout, the flange I fitting around the walls of the latter.

The flange E serves to prevent splashing of the contents of the vessel, while flange D, be- 50 ing inclined, returns any of the contents of the receptacle which may fall thereon back to the vessel.

The removable cover, which is provided with a handle J, serves to prevent foreign substances from passing into the vessel either through the top or spout thereof.

My attachment is especially useful in connection with cans containing paint for preventing the splashing of the paint while be- 60 ing mixed and permitting same to be readily poured from one can to another.

Having thus fully described my invention, what I claim as new, and desire to secure by Letters Patent, is—

An attachment of the character described, comprising a collar to be applied to the outlet end of a vessel, having at its upper edge an inwardly-extending inclined flange, and a depending flange about the inner edge of the 70 inclined flange, and formed with an outlet beneath said inclined flange and having a spout upon its exterior in line with the outlet, substantially as described.

CHARLES CRITTENDEN CRUMRINE. Witnesses:

James Geering, Henry Goldsmith.