

**F. R. SCHNEIDER.**  
**MANUFACTURE OF AXLES, &c.**

(Application filed June 2, 1900.)

(No Model.)

2 Sheets—Sheet 1.

FIG. 1.

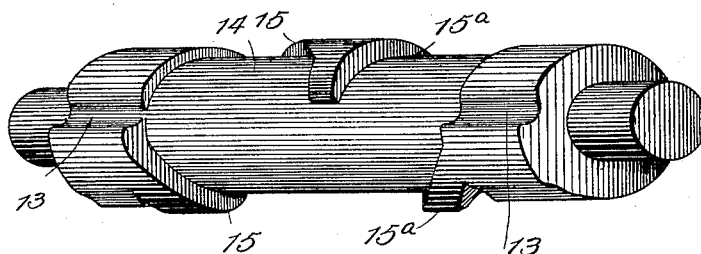


FIG. 2.

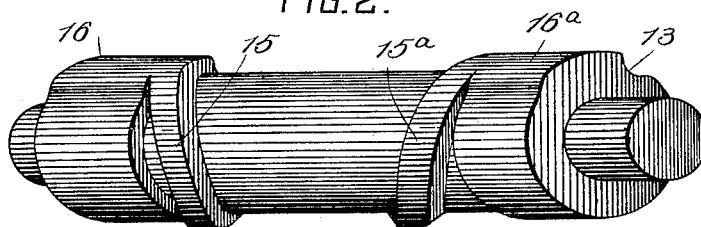


FIG. 3.


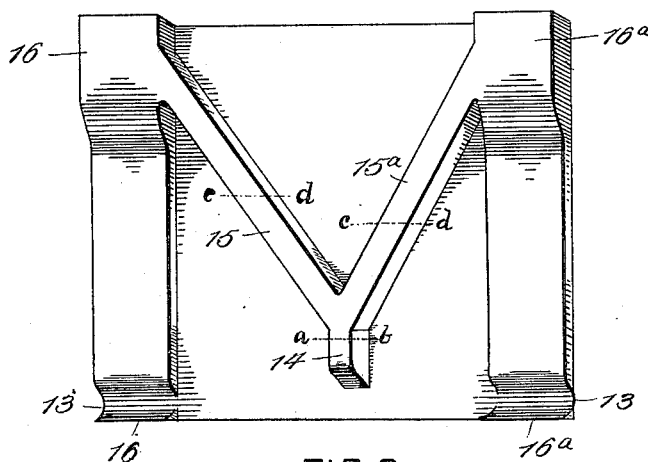


FIG. 8.



WITNESSES:

*G. M. Dafford.*  
*J. H. Bradley.*

INVENTOR

*Francis R. Schneider*  
 by *Darius S. Wolcott* Att'y.

No. 676,997.

Patented June 25, 1901.

F. R. SCHNEIDER.  
MANUFACTURE OF AXLES, &c.

(Application filed June 2, 1900.)

(No Model.)

2 Sheets—Sheet 2.

FIG. 4.

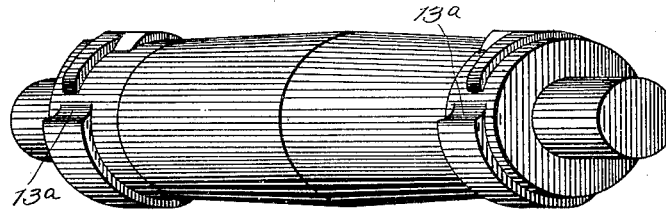


FIG. 5.

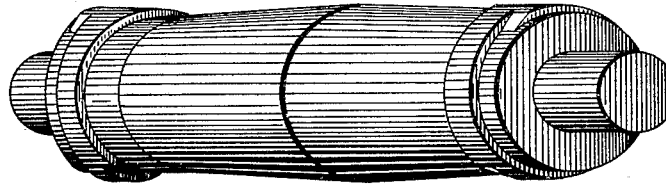


FIG. 6.


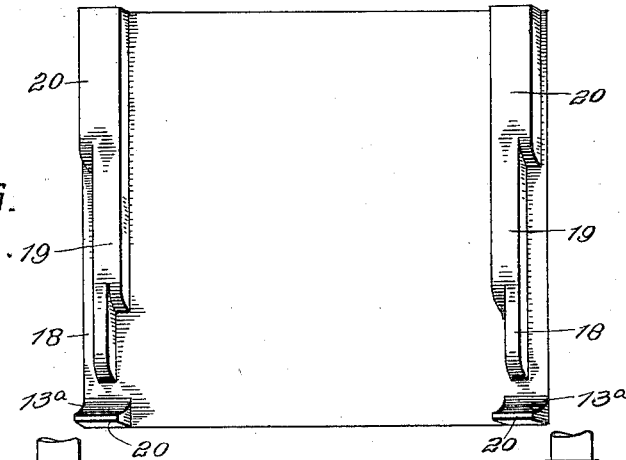


FIG. 7.

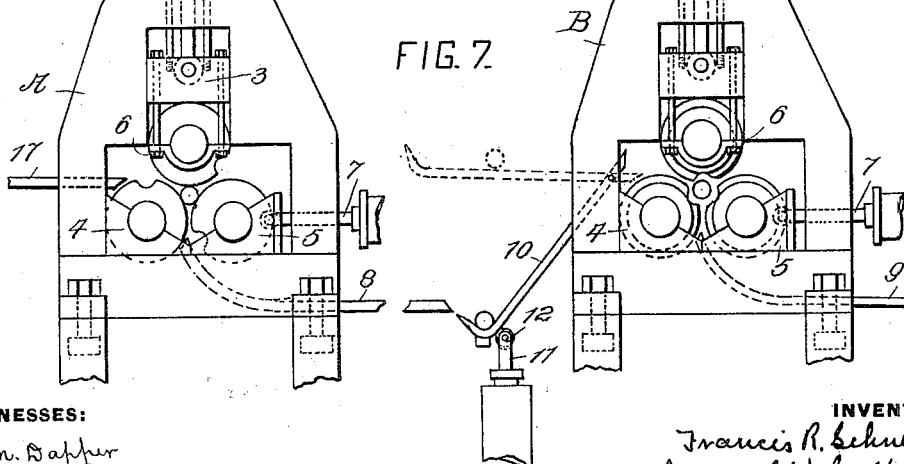

WITNESSES:

*G. M. Saffer*  
*J. H. Bradley*

INVENTOR

*Francis R. Schneider*  
by *Samuel S. Wolcott* Att'y.

# UNITED STATES PATENT OFFICE.

FRANCIS R. SCHNEIDER, OF CRAFTON, PENNSYLVANIA.

## MANUFACTURE OF AXLES, &c.

SPECIFICATION forming part of Letters Patent No. 676,997, dated June 25, 1901.

Application filed June 2, 1900. Serial No. 18,879. (No model.)

*To all whom it may concern:*

Be it known that I, FRANCIS R. SCHNEIDER, a citizen of the United States, residing at Crafton, in the county of Allegheny and State of Pennsylvania, have invented or discovered certain new and useful Improvements in the Manufacture of Axles, &c., of which improvements the following is a specification.

The invention described herein relates to certain improvements in the manufacture of axles for cars and other articles. As is well known, the body portion of the axle—i.e., the portion between the wheel-seats—is made tapering from the seats to the middle of the axle, the wheel-seats are generally made of a diameter slightly less than the largest diameter of the body portion and the journals are made smaller than the wheel-seats. Attempts have been made to form these axles by means of rolls constructed to have a reducing action simultaneously along the entire length of the axle or a great portion thereof; but by reason of the differences in diameter the axle during such reduction is subjected to such torsional strains as to render it unfit for use.

The object of this invention is to provide for the gradual reduction of the bar to finished size, the reducing action being limited or confined at all times to such parts as have equal or approximately equal diameters, thereby avoiding injurious torsional strains. The invention is hereinafter more fully described and claimed.

In the accompanying drawings, forming a part of this specification, Figures 1 and 2 are perspective views of different portions of one of the rolls employed for shaping the middle and wheel-seat portions of the axle. Fig. 3 is a plane projection of the roll-surface. Figs. 4 and 5 are perspective views showing different portions of one of the rolls employed for shaping the journal portions of the axle. Fig. 6 is a plane projection of the roll-surface. Fig. 7 is a view in end elevation of a mill for rolling axles, and Fig. 8 is an elevation of the axle formed in the rolls.

In the practice of my invention I employ two stands of rolls A and B, preferably arranged in tandem, so as to facilitate the feed of the article from one stand to the other. The housings 1 of the stands of rolls are constructed for the reception of the bearing-

blocks 3, 4, and 5 for the journals of the three rolls in each stand. Supporting-blocks 6 are arranged under the journals of the upper rolls and are connected by bolts or other means to the bearing-blocks 3 in order that the upper roll may be raised to permit of the feed of an axle-blank to position between the three rolls. The bearings 4 and 5 for the lower rolls are preferably made triangular, as shown, as such form is better adapted to receive the thrust of said rolls when in operation. The bearing-blocks 3 and 5 are connected to any suitable shifting mechanism, as the piston-rods 7 of fluid-pressure cylinders. By the outward movements of the bearing-blocks 5 the article will be permitted to drop onto rails 8 and 9. The rails 8 conduct the article to a lifting mechanism in front of the stand of rolls B, if both stands are arranged on or approximately on the same level. If the stand B is on a lower level than the stand A, the guide-rails can be arranged to direct the article direct to the second stand of rolls. The lifting mechanism may be constructed in any suitable manner—such, for example, as that shown—consisting of pivotally-mounted arms 10, having their outer ends curved, so as to receive the article from the rails 8. These arms are raised from receiving to delivery position by any suitable means, such as a fluid-pressure cylinder. The rod 11, connected to the piston of the cylinder, is provided with rollers 12, on which the arms 10 rest.

The construction of the rolls in the stand A is clearly shown in Figs. 1, 2, and 3. Each of these rolls is provided with a groove 13, extending longitudinally along the body of the rolls. These grooves in the rolls are so proportioned that when the rolls are brought into operative relation to each other they will hold the blank, but without any material compression thereof. A land or raised portion 14, which is so formed on each of the rolls as to operate on the middle portion of the blank, extends from the groove 13 a distance at least equal to one-third of the circumference of the blank, so that by the conjoint action of all three rolls the entire circumference of the blank at that point will be reduced. From this central reducing land or rib two lands 15 15<sup>a</sup> diverge and connect with

or merge into lands or raised portions 16 16<sup>a</sup>, which extend from the points of junction with the lands or ribs 15 15<sup>a</sup> to the longitudinal groove 13.

5 The three rolls are so geared together that the several portions of the rolls above described will operate simultaneously—*e. g.*, the lands or ribs 14 will operate at the same time, followed in due sequence by the action of the  
10 lands 15 15<sup>a</sup> and 16 16<sup>a</sup>.

When it is desired to form an axle, the rolls are brought to such position that the several grooves 13 in the rolls will form a receptacle for the blank. The upper roll is then raised,  
15 so as to permit a heated blank to roll down the rails 17 into the pocket formed by the grooves 13 in the lower rolls. The upper roll is then lowered and the rolls rotated. On the rotation of the rolls the lands or raised portions 14 of each of the rolls operate on the  
20 middle portion of the blank, reducing it to the desired dimensions. If desired, the operative faces of the land or raised portions 14 may be inclined oppositely from a medium  
25 line to correspond with the taper of the body of the axle. As the rolls continue to rotate the diverging lands or raised portions 15 15<sup>a</sup> come into operation on the blank, progressively reducing the portion thereof between  
30 the wheel-seats *b*. As the height or projection of the lands or raised portions 15 15<sup>a</sup> is lessened gradually from the land or raised portion 14 to their points of junction with lands or raised portions 16 16<sup>a</sup> the portions of the blank operated on by the lands 15 15<sup>a</sup> will be given the  
35 desired taper. The lands or raised portions 16 16<sup>a</sup>, which come into operation after the lands 15 15<sup>a</sup>, have their operative faces in arcs of circles of the same radii. Hence the  
40 end portions of the blank will be cylindrical. It will be understood by those skilled in the art that the area of reduction effected at any one time is limited to the widths of the operative faces of the lands or ribs, measured in a  
45 direction parallel with the axes of the rolls—as, for example, when the lands or ribs 14 are operative on the article the length of the reducing area is equal to the length of the line *a b* and when the ribs or lands 15 are operating the lengths of the reducing areas are equal  
50 to the lengths of the lines *c d*. As the several lands 14 15 15<sup>a</sup> are made comparatively narrow, the portions of the article operated on at any one time will vary little in circumference, thereby avoiding any material torsional strain.

It will be understood by those skilled in the art that the widths of the lands or raised portions will vary with the taper desired in the  
60 article to be produced—*i. e.*, the greater the taper the narrower the lands or raised portions.

65 While the invention is described in connection with the manufacture of railway-axes, it will be understood that it can be employed in the manufacture of other articles of varying diameters. The number of lands or

raised portions can be increased or diminished in accordance with the shape or contour of the article to be produced. 70

If the reduction required is greater than can be effected by one revolution of the rolls, the rolls can be rotated any desired number of times, the rolls being gradually moved in toward each other. 75

As soon as the desired reduction has been effected by the rolls in stand A, the bearing-blocks 5, with their roll, are moved out, thereby permitting the article to drop onto the rails. The upper roll of stand B having been raised 80 and the several rolls adjusted to receiving position, the partially-formed article will be shifted by the transfer mechanism described to the receiving-grooves 13<sup>a</sup> of the lower rolls of stand B. 85

The rolls of stand B are provided at or near their ends with grooves 13<sup>a</sup>, which form when the rolls are adjusted to operative positions receptacles for the portions of the blank to be operated on in these rolls. These grooves 90 are formed in raised portions of the rolls, which increase in the width of their operative faces from one edge of the grooves around to the opposite edge thereof. It is preferred these raised portions should be formed by a 95 series of lands or ribs 18 19 20, &c., of varying widths, the rear land or rib being of a width equal or approximately equal to the desired length of journal. In order to provide an even surface at the bottom of the 100 grooves formed by the lands or ribs 18 19 20, the latter should be made progressively higher, so that each succeeding land should have a slight reducing action on the parts of the article reduced by the preceding lands 105 or ribs. The body of the roll between the raised end portions is constructed to be nearly in contact with the portion or portions of the article reduced in the stand of rolls A, so as to prevent any bending or spring of 110 the axle.

As only such portions as are reduced in the stand of rolls A are in contact with the rolls, there will not be any material chilling of the portions to be reduced by the rolls in stand 115 B. Hence the entire reduction of the article can be effected at one heat.

It will be understood by those skilled in the art that only two oppositely-rotating rolls, having suitable reducing-surfaces, can be 120 used, provided suitable guides for holding the blank in position be employed.

Although I have shown and described with some particularity rolls and mills for the practice of my method, no claim is made 125 herein to such rolls and mills, as the same form the subject-matter of an application, Serial No. 41,937, filed on or about January 3, 1901.

I claim herein as my invention— 130

1. As an improvement in the art of manufacturing articles of varying diameter, the method herein described, which consists in subjecting the articles to reduction by roll-

ing action, such rolling action being successive on different parts of the article, and progressively along the article from point to point, whereby reduction is effected without  
5 torsional strains, substantially as set forth.

2. As an improvement in the art of manufacturing articles of varying diameters, the method herein described, which consists in  
10 subjecting the article to a peripheral rolling action over limited areas and progressively

from point to point along the article, whereby reduction is effected without torsional strains, substantially as set forth.

In testimony whereof I have hereunto set my hand.

FRANCIS R. SCHNEIDER.

Witnesses:

DARWIN S. WOLCOTT,  
F. E. GAITHER.