

United  
States  
of  
America

*To Promote the Progress*

*of Science and Useful Arts*

*The Director*

*of the United States Patent and Trademark Office has received  
an application for a patent for a new and useful invention. The title  
and description of the invention are enclosed. The requirements  
of law have been complied with, and it has been determined that  
a patent on the invention shall be granted under the law.*

*Therefore, this United States*

*Patent*

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.

*Katherine Kelly Vidal*

DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

## Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

## Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.



(12) **United States Patent**  
**Deevers et al.**

(10) **Patent No.:** **US 12,004,660 B2**  
(45) **Date of Patent:** **Jun. 11, 2024**

(54) **COMPLIANT BACKREST**

(71) Applicant: **Steelcase Inc.**, Grand Rapids, MI (US)

(72) Inventors: **Nikolaus William Charles Deevers**, E  
Grand Rapids, MI (US); **Kurt R.**  
**Heidmann**, Grand Rapids, MI (US);  
**Pascal Rolf Hien**, Radebeul (DE);  
**Jeffrey A. Hall**, Grand Rapids, MI  
(US); **John Colasanti**, Jenison, MI  
(US); **Michael Yancharas**, Comstock  
Park, MI (US)

(73) Assignee: **STEELCASE INC.**, Grand Rapids, MI  
(US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/227,612**

(22) Filed: **Jul. 28, 2023**

(65) **Prior Publication Data**

US 2024/0023717 A1 Jan. 25, 2024

**Related U.S. Application Data**

(63) Continuation of application No. 18/096,770, filed on  
Jan. 13, 2023, now Pat. No. 11,819,139, which is a  
(Continued)

(51) **Int. Cl.**  
**A47C 7/44** (2006.01)  
**A47C 7/40** (2006.01)  
**A47C 7/46** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **A47C 7/44** (2013.01); **A47C 7/40**  
(2013.01); **A47C 7/46** (2013.01)

(58) **Field of Classification Search**

CPC ..... **A47C 7/40**; **A47C 7/44**; **A47C 7/46**  
(Continued)

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

87,184 A 2/1869 Mattson  
241,498 A 5/1881 Levalley  
(Continued)

**FOREIGN PATENT DOCUMENTS**

CN 2256246 6/1997  
CN 101049202 10/2007  
(Continued)

**OTHER PUBLICATIONS**

International Search Report and Written Opinion for International  
Application No. PCT/US2017/053409 dated Dec. 20, 2017 (9 pgs).  
(Continued)


*Primary Examiner* — Mark R Wendell

(74) *Attorney, Agent, or Firm* — Crowell & Moring LLP

(57) **ABSTRACT**

A backrest includes a primary frame having a pair of laterally spaced first uprights defining a first opening therebetween, a first front surface and a first rear surface. A secondary frame includes a pair of laterally spaced second uprights defining a second opening therebetween, a second rear surface facing the first front surface of the primary frame and a second front surface, wherein the secondary frame is coupled to the primary frame, and wherein at least portions of the first and second openings are aligned. A flexible shell overlies and is coupled to the second front surface of the secondary frame. The flexible shell includes a third rear surface visible through the aligned portions of the first and second openings.

**20 Claims, 55 Drawing Sheets**

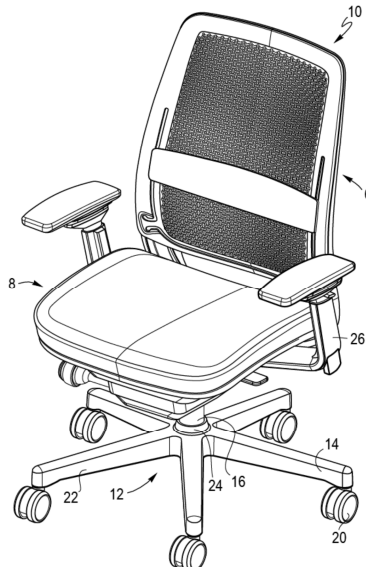

**Related U.S. Application Data**

continuation of application No. 17/683,876, filed on Mar. 1, 2022, now Pat. No. 11,583,092, which is a continuation of application No. 17/035,150, filed on Sep. 28, 2020, now Pat. No. 11,291,305, which is a continuation of application No. 16/208,206, filed on Dec. 3, 2018, now Pat. No. 10,813,463, and a continuation of application No. 29/628,523, filed on Dec. 5, 2017, now Pat. No. Des. 869,872, which is a continuation of application No. 29/628,527, filed on Dec. 5, 2017, now Pat. No. Des. 869,890, and a continuation of application No. 29/628,528, filed on Dec. 5, 2017, now Pat. No. Des. 870,479, and a continuation of application No. 29/628,526, filed on Dec. 5, 2017, now Pat. No. Des. 869,889.

- (60) Provisional application No. 62/594,885, filed on Dec. 5, 2017.

(58) **Field of Classification Search**

USPC ..... 297/301.1  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D149,798 S	6/1948	Crawford	5,154,485 A	10/1992	Fleishman
2,678,685 A	5/1954	Volsk	5,269,631 A	12/1993	Mercer et al.
2,726,713 A	12/1955	Turner	5,282,285 A	2/1994	De Gelis et al.
2,799,323 A	7/1957	Berg et al.	5,288,127 A	2/1994	Berg et al.
D188,843 S	9/1960	Kagan	D346,073 S	4/1994	Hamelink
3,162,487 A	12/1964	Trotman	5,314,240 A	5/1994	Ishi et al.
3,233,885 A	2/1966	Propst	5,320,410 A	6/1994	Faiks et al.
3,559,978 A	2/1971	Molt	5,326,155 A	7/1994	Wild
3,565,482 A	2/1971	Blodee	5,340,197 A	8/1994	Vogtherr
3,652,809 A	3/1972	Dickopp et al.	5,403,067 A	4/1995	Rajaratnam
3,653,233 A	4/1972	Titone	5,518,294 A	5/1996	Ligon, Sr. et al.
3,669,499 A	6/1972	Semplonius et al.	5,664,835 A	9/1997	Desanta
3,709,559 A	1/1973	Rowland	5,711,575 A	1/1998	Hand et al.
3,720,568 A	3/1973	Rowland	5,747,140 A	5/1998	Heerklotz
3,724,402 A	4/1973	Thyberg et al.	5,755,467 A	5/1998	Dilluvio et al.
3,767,261 A	10/1973	Rowland	5,774,911 A	7/1998	Stube et al.
3,774,967 A	11/1973	Rowland	5,791,933 A	8/1998	Saka et al.
3,843,477 A	10/1974	Rowland	5,863,095 A	1/1999	Rivard et al.
3,877,750 A	4/1975	Scholpp	5,871,258 A	2/1999	Batthey et al.
3,948,558 A	4/1976	Obermeier et al.	5,934,758 A	8/1999	Ritch et al.
4,088,367 A	5/1978	Atkinson et al.	5,951,109 A	9/1999	Roslund, Jr. et al.
4,205,880 A	6/1980	Trotman et al.	5,997,094 A	12/1999	Cvek
4,337,931 A	7/1982	Mundell et al.	6,062,649 A	5/2000	Nagel et al.
4,368,917 A	1/1983	Urai	6,079,785 A	6/2000	Peterson et al.
4,418,958 A	12/1983	Watkin	D437,501 S	2/2001	Rehmert et al.
4,502,728 A	3/1985	Sheldon et al.	6,189,972 B1	2/2001	Chu et al.
4,502,731 A	3/1985	Snider	D438,392 S	3/2001	Lucci et al.
D279,244 S	6/1985	Bergquist	6,286,900 B1	9/2001	Roark
4,529,247 A	7/1985	Stumpf et al.	6,299,248 B1	10/2001	Gennaro et al.
4,567,615 A	2/1986	Fanti	D451,293 S	12/2001	Su
4,574,100 A	3/1986	Mercer	6,354,662 B1	3/2002	Su
4,585,272 A	4/1986	Ballarini	6,357,826 B1	3/2002	Gabas et al.
4,634,178 A	1/1987	Carney	6,409,268 B1	6/2002	Cvek
4,647,109 A	3/1987	Christophersen et al.	6,412,869 B1	7/2002	Pearce
4,660,887 A	4/1987	Fleming et al.	6,419,318 B1	7/2002	Albright
4,668,557 A	5/1987	Lakes	6,439,661 B1	8/2002	Bräuning
4,680,215 A	7/1987	Mercer	D462,534 S	9/2002	Grazioli
4,658,807 A	8/1987	Swain	6,471,294 B1	10/2002	Dammermann et al.
4,718,724 A	1/1988	Quinton et al.	6,523,898 B1	2/2003	Ball et al.
4,856,846 A	8/1989	Lohmeyer	D471,042 S	3/2003	Schmitz et al.
4,892,356 A	1/1990	Pittman et al.	6,550,866 B1	4/2003	Su
4,895,091 A	1/1990	Emali et al.	6,568,760 B2	5/2003	Davis et al.
4,913,493 A	4/1990	Heidmann	6,572,190 B2	6/2003	Koepke et al.
4,962,964 A	10/1990	Snodgrass	6,575,530 B1	6/2003	Fischer et al.
5,015,038 A	5/1991	Mrotz, III	6,626,497 B2	9/2003	Nagamitsu et al.
5,022,709 A	6/1991	Marchino	6,644,752 B2	11/2003	Takata
5,024,485 A	6/1991	Berg et al.	6,669,292 B2	12/2003	Koepke
5,102,196 A	4/1992	Kaneda et al.	6,669,301 B1	12/2003	Funk et al.
			6,679,553 B2	1/2004	Batthey et al.
			6,679,557 B2	1/2004	Craft et al.
			6,701,550 B2	3/2004	Baeriswyl
			6,709,060 B1	3/2004	Su
			6,726,285 B2	4/2004	Caruso et al.
			D489,191 S	5/2004	Ma
			6,733,080 B2	5/2004	Stumpf et al.
			6,755,467 B1	6/2004	Chu
			6,767,060 B2	7/2004	Craft et al.
			D494,792 S	8/2004	Schmitz et al.
			6,793,289 B2	9/2004	Kuster et al.
			6,805,405 B2	10/2004	Koo
			6,820,933 B2	11/2004	Fereira Da Silva
			6,874,852 B2	4/2005	Footitt
			6,890,030 B2	5/2005	Wilkerson et al.
			6,910,736 B2	6/2005	White
			6,957,861 B1	10/2005	Chou et al.
			6,981,743 B2	1/2006	Edwards et al.
			6,983,997 B2	1/2006	Wilkerson et al.
			6,986,549 B2	1/2006	Kniese
			7,032,971 B2	4/2006	Williams
			D521,755 S	5/2006	Kinoshita et al.
			7,059,682 B2	6/2006	Caruso et al.
			7,063,384 B2	6/2006	Liu
			D527,557 S	9/2006	Reimers
			7,165,811 B2	1/2007	Bodnar et al.
			7,213,886 B2	5/2007	Schmitz et al.
			7,216,933 B2	5/2007	Schmidt et al.
			7,234,773 B2	6/2007	Raftery et al.
			D546,574 S	7/2007	Kaloustian
			7,237,841 B2	7/2007	Norman et al.

(56)

## References Cited

## U.S. PATENT DOCUMENTS

7,247,265 B2	7/2007	Alderson et al.	8,652,602 B1	2/2014	Dolla
7,252,870 B2	8/2007	Anderson et al.	D701,068 S	3/2014	Usumoto et al.
7,270,378 B2	9/2007	Wilkerson et al.	8,745,783 B2	6/2014	Jansen
7,275,793 B2	10/2007	Fujita	D710,640 S	8/2014	Usumoto et al.
7,303,232 B1	12/2007	Chen	8,820,835 B2	9/2014	Minino et al.
D558,995 S	1/2008	Igarashi	8,919,880 B2	12/2014	Bellingar et al.
7,320,503 B2	1/2008	Eysing	8,926,016 B2	1/2015	Behar et al.
7,344,194 B2	3/2008	Maier et al.	8,939,507 B2	1/2015	Thomaschewski et al.
7,347,495 B2	3/2008	Beyer et al.	8,967,726 B2	3/2015	Schmitz et al.
D571,568 S	6/2008	Overthun et al.	D726,431 S	4/2015	Ye
7,406,733 B2	8/2008	Coffield et al.	8,998,339 B2	4/2015	Peterson et al.
7,419,215 B2	9/2008	Wilkerson et al.	9,010,859 B2	4/2015	Batthey et al.
7,425,037 B2	9/2008	Schmitz et al.	9,022,475 B2	5/2015	Brncick et al.
7,441,758 B2	10/2008	Coffield et al.	9,033,421 B2	5/2015	Wilkinson et al.
7,455,365 B2	11/2008	Caruso et al.	D731,833 S	6/2015	Fifield et al.
7,472,962 B2	1/2009	Caruso et al.	9,114,880 B2	8/2015	Guering
7,484,802 B2	2/2009	Beyer et al.	9,144,311 B2	9/2015	Romero
D591,969 S	5/2009	Overthun et al.	9,155,393 B2	10/2015	Hurford et al.
D594,669 S	6/2009	Asano	9,185,985 B2	11/2015	Bellingar et al.
D595,072 S	6/2009	Su	9,186,290 B2	11/2015	Fowler
7,568,768 B1	8/2009	Tsai	9,192,237 B2	11/2015	Bachar
7,604,298 B2	10/2009	Peterson et al.	9,211,014 B2	12/2015	Schmitz
7,604,299 B2	10/2009	Su	9,237,811 B1	1/2016	Cho et al.
7,647,714 B2	1/2010	Coffield et al.	9,278,634 B2	3/2016	Mathews et al.
7,648,201 B2	1/2010	Eysing	9,301,615 B2	4/2016	Behar et al.
D612,642 S	3/2010	Cassaday	9,326,613 B2	5/2016	Cvek
7,686,395 B2	3/2010	Piretti	9,332,851 B2	5/2016	Machael et al.
7,712,834 B2	5/2010	Knoblock et al.	9,414,681 B2	8/2016	Bellingar et al.
7,726,740 B2	6/2010	Masunaga	9,486,079 B2	11/2016	Romero
7,731,295 B2	6/2010	Lin	9,486,081 B2	11/2016	Sander et al.
7,740,321 B2	6/2010	Brill et al.	D779,251 S	2/2017	Beyer et al.
7,748,783 B2	7/2010	Kinoshita	9,578,968 B2	2/2017	Masunaga et al.
7,794,017 B2	9/2010	Kan et al.	D782,240 S	3/2017	Wada
7,794,022 B2	9/2010	Caruso et al.	9,592,757 B2	3/2017	Machael et al.
7,857,388 B2	12/2010	Bedford et al.	9,596,941 B1	3/2017	Romero
7,874,619 B2	1/2011	Harley	9,603,451 B2	3/2017	Masunaga et al.
7,878,591 B2	2/2011	Walker	9,717,343 B1	8/2017	Pan
7,878,598 B2	2/2011	Oda	9,913,539 B2	3/2018	Potrykus et al.
7,887,131 B2	2/2011	Chadwick et al.	10,064,493 B2	9/2018	Machael et al.
7,896,438 B2	3/2011	Whelan et al.	2001/0008955 A1	7/2001	Garth
7,909,402 B2	3/2011	Chu et al.	2002/0021040 A1	2/2002	Caruso et al.
7,926,879 B2	4/2011	Schmitz et al.	2002/0093233 A1	7/2002	Chu
7,931,257 B2	4/2011	Vanderiet et al.	2002/0190564 A1	12/2002	Coffield
D637,839 S	5/2011	Piretti	2003/0107252 A1	6/2003	Kinoshita et al.
D638,641 S	5/2011	Piretti	2004/0007910 A1	1/2004	Skelly
D642,819 S	8/2011	Piretti	2004/0100139 A1	5/2004	Williams
D643,654 S	8/2011	Piretti	2004/0116031 A1	6/2004	Brennan et al.
D649,804 S	12/2011	Keller et al.	2004/0140701 A1	7/2004	Schmitz et al.
D650,616 S	12/2011	Piretti	2004/0183348 A1	9/2004	Kniese
D652,224 S	1/2012	Ferrier	2004/0195882 A1	10/2004	White
8,113,591 B2	2/2012	Cassaday	2004/0256899 A1	12/2004	Moore et al.
D655,522 S	3/2012	Czumaj-Bront et al.	2005/0001464 A1	1/2005	Caruso et al.
8,157,329 B2	4/2012	Masoud	2005/0025948 A1	2/2005	Johnson et al.
D660,611 S	5/2012	Barile	2005/0062323 A1	3/2005	Dicks
8,172,332 B2	5/2012	Masunaga et al.	2005/0104428 A1	5/2005	Walker et al.
8,186,761 B2	5/2012	Brill et al.	2005/0146193 A1	6/2005	Shieh
8,191,970 B2	6/2012	Igarashi et al.	2006/0022506 A1	2/2006	Chan
8,251,448 B2	8/2012	Machael	2006/0033369 A1	2/2006	Eysing
8,272,691 B2	9/2012	Hsuan-Chin	2006/0103208 A1	5/2006	Schmitz et al.
8,282,169 B2	10/2012	Schmitz et al.	2006/0181126 A1	8/2006	Eysing
8,282,172 B2	10/2012	Schmitz et al.	2006/0255635 A1	11/2006	Iijima
D671,330 S	11/2012	Izawa	2006/0267258 A1	11/2006	Coffield et al.
D673,394 S	1/2013	Hurford	2006/0286359 A1	12/2006	Coffield et al.
D673,395 S	1/2013	Piretti	2007/0031667 A1	2/2007	Hook et al.
8,414,073 B2	4/2013	Schmitz et al.	2007/0057550 A1	3/2007	Beyer et al.
8,436,508 B2	5/2013	Kornbluh et al.	2007/0262634 A1	11/2007	Brill et al.
8,449,037 B2	5/2013	Behar	2008/0011021 A1	1/2008	Starbuck et al.
D686,833 S	7/2013	Chan	2008/0248710 A1	10/2008	Wittner
D688,055 S	8/2013	Baldanzi et al.	2009/0020931 A1	1/2009	Coffield et al.
D688,061 S	8/2013	Giugiaro	2009/0085388 A1	4/2009	Parker et al.
8,528,980 B1	9/2013	Hsiao	2009/0239049 A1	9/2009	Hook et al.
8,534,648 B2	9/2013	Coffield et al.	2010/0001572 A1	1/2010	Masunaga et al.
8,540,315 B2	9/2013	Piretti	2010/0117433 A1	5/2010	Cassaday
D695,537 S	12/2013	Geelen	2011/0046715 A1	2/2011	Ugbolue et al.
8,622,472 B2	1/2014	Rajaratnam	2011/0210593 A1	9/2011	Klaasen et al.
			2011/0282452 A1	11/2011	Koerner et al.
			2012/0025574 A1	2/2012	Wilkinson et al.
			2012/0061988 A1	3/2012	Jaranson et al.
			2012/0119551 A1	5/2012	Brncick et al.

(56)

**References Cited****U.S. PATENT DOCUMENTS**

2012/0129416 A1 5/2012 Anand et al.  
 2013/0147252 A1 6/2013 Schmitz et al.  
 2013/0221724 A1 8/2013 Fowler  
 2013/0257125 A1 10/2013 Bellinger et al.  
 2014/0062154 A1 3/2014 Minino et al.  
 2014/0070587 A1 3/2014 Aldricj et al.  
 2014/0110983 A1 4/2014 Sander et al.  
 2014/0117732 A1 5/2014 Bachar  
 2014/0152064 A1 6/2014 Sander et al.  
 2014/0159450 A1 6/2014 Guering  
 2014/0159455 A1 6/2014 Thomaschewski et al.  
 2014/0183914 A1 7/2014 Cvek  
 2014/0265493 A1 9/2014 Machael et al.  
 2015/0265058 A1 9/2015 Igarashi et al.  
 2015/0296989 A1 10/2015 Machael et al.  
 2015/0320220 A1 11/2015 Eberlein et al.  
 2016/0029801 A1 2/2016 Potrykus et al.  
 2016/0037931 A1 2/2016 Wu  
 2016/0096448 A1 4/2016 Line et al.  
 2016/0100691 A1 4/2016 Masunaga et al.  
 2016/0135603 A1 5/2016 Chan et al.  
 2016/0243967 A1 8/2016 Seibold  
 2019/0014268 A1 5/2019 Liu

**FOREIGN PATENT DOCUMENTS**

CN 202932442 5/2013  
 CN 203524214 4/2014  
 DE 4316057 A1 11/1994  
 DE 102007054257 A1 5/2009  
 DE 102008009509 A1 8/2009  
 EP 1013198 2/2004  
 EP 1491395 12/2004  
 EP 2110052 B1 10/2009  
 FR 2840786 A1 12/2003  
 GB 1224810 3/1971  
 JP 3974636 9/2007  
 JP 2008000364 1/2008  
 JP 2008237332 10/2008  
 JP 2009268780 A 11/2009  
 JP 4462227 5/2010  
 JP 2014054578 3/2014  
 KR 10-1575774 12/2015  
 KR 10-1679795 11/2016  
 WO WO 1988/00523 A1 1/1988  
 WO WO 1991/001210 A1 2/1991  
 WO WO 2000/053830 A1 9/2000  
 WO WO 01/74199 A1 10/2001  
 WO WO 2004/032686 A1 4/2004  
 WO WO 2004/088015 A1 10/2004  
 WO WO 2004/104315 A1 12/2004  
 WO WO 2007/133458 A1 11/2007  
 WO WO 01/98105 A1 12/2007

WO WO 2012/016413 A1 2/2012  
 WO WO 2012/171911 A1 12/2012  
 WO WO 2014/047242 A1 3/2014  
 WO WO 2017/135831 A1 8/2017  
 WO WO 2018/064029 A1 4/2018

**OTHER PUBLICATIONS**

International Search Report and Written Opinion for International Application No. PCT/US2018/63632, dated Apr. 30, 2019.  
 Alderson, Andrew; "A Triumph of Lateral Thought", Chemistry & Industry, May 17, 1999, pp. 384-391.  
 Boulanger, PH and Hayes, M., "Poisson's Ratio for Orthorhombic Materials", Journal of Elasticity, vol. 50, 1998, (3 pgs).  
 Clarke, J.F., Duckett, R.A., Hine, P.J., Hutchinson, I.J., and Ward, I.M., "Negative Poisson's Ratios in Angle-Ply Laminates", Theory and Experiment: Composites, vol. 25, No. 9, 1994, (6 pgs).  
 Dolla, William Jacob S., Fricke, Brian A., and Becker, Bryan R. . . "Structural and Drug Diffusion Models of Conventional and Auxetic Drug-Eluting Stents", Journal of Medical Devices, Mar. 2007, vol. 1, (9 pgs).  
 Dolla, William Jacob Spenner, "Drug Diffusion and Structural Design Criteria for Conventional and Auxetic Drug-Eluting Stents", A Dissertation in Engineering and Chemistry Presented to the Faculty of UMKC, 2006 (149 pgs).  
 Evans, K.E., Donoghue, J.P., and Alderson, K.L., "The Design, Matching and Manufacture of Auxetic Carbon Fibre Laminates", Journal of Composite Materials, vol. 38, No. 2, 2004 (12 pgs).  
 Hine, P.J., Duckett, R.A., and Ward, I.M., "Negative Poisson's Ratio in Angle-ply Laminates", Journal of Materials Science Letters, vol. 16, 1997 (4 pgs).  
 Lakes, Roderic, "Foam Structures with a Negative Poisson's Ratio: American Association for the Advancement of Science", Science, New Series, vol. 235, No. 4792, Feb. 27, 1987, pp. 1038-1040.  
 Lakes, R.S. and Elms, K., "Indentability of Conventional and Negative Poisson's Ratio Foams", Journal of Composite Materials, vol. 27, No. 12., 1993 (10 pgs).  
 Notice of Publication for International Application No. PCT/US2017/053409 dated Apr. 5, 2018 (1 pg).  
 Roguin, Ariel and Beyar, Rafael, "BeStent—The Serpentine Balloon Expandable Stent", Review of Mechanical Properties and Clinical Experience, Artificial Organs, vol. 22, No. 3, 1998, pp. 243-249.  
 Warren, Thomas L., "Negative Poisson's Ratio in a Transversely Isotropic Foam Structure", Journal of Applied Physics, 1990 (5 pgs).  
 Windecker, Stephan, Roffi, Marco and Meier, Bernhard, Sirolimus Eluting Stent, "A New Era in Interventional Cardiology?", Current Pharmaceutical Design, 2003, vol. 9, pp. 1077-1094.  
 Extended European Search Report dated Jul. 22, 2021 for EP Application No. 18886552.1 (8 pgs).  
 Extended European Search Report for EP Application No. 22152762.5 dated Dec. 23, 2022 (14 pages).



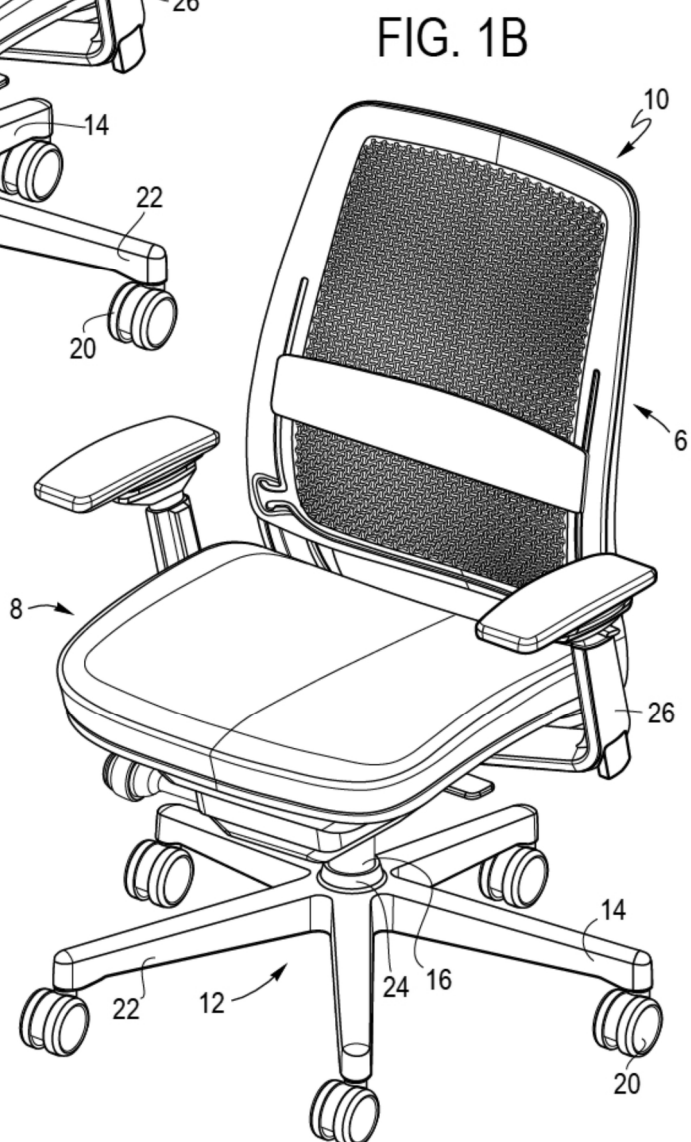
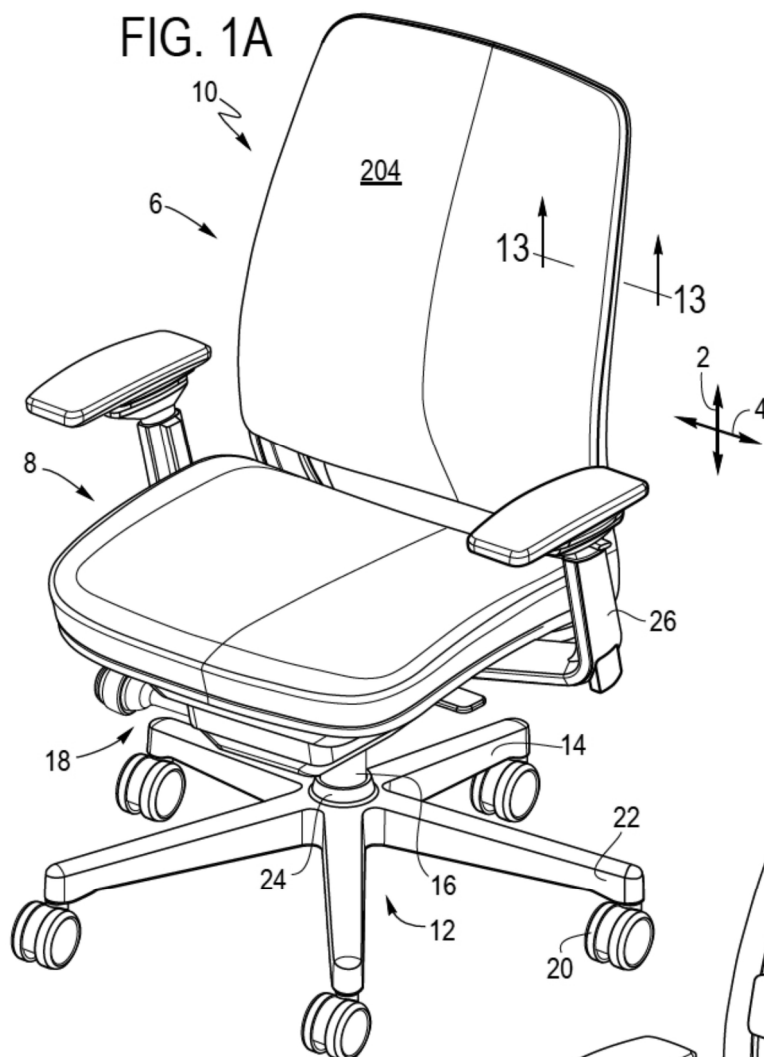


FIG. 1C

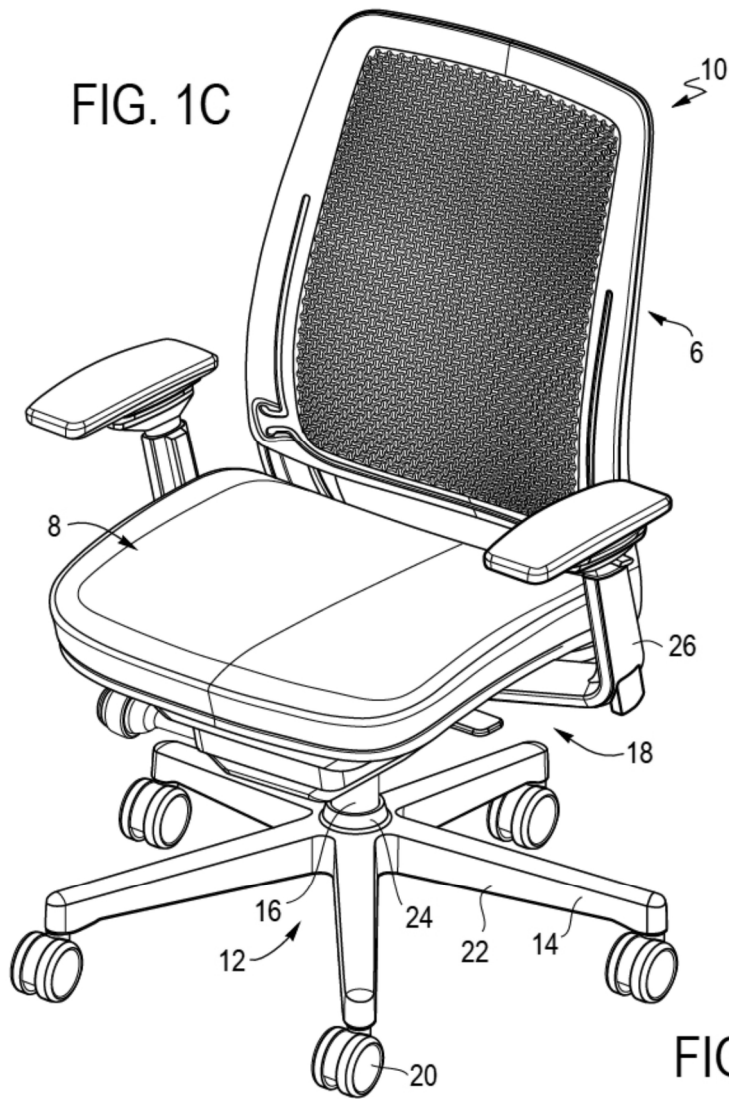


FIG. 2

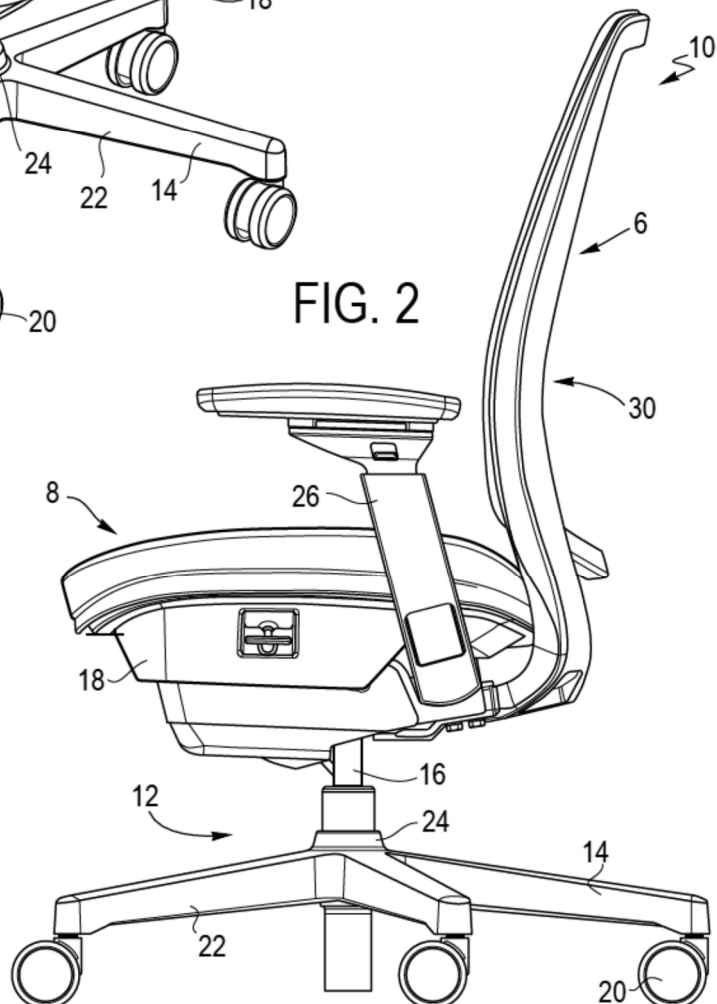




FIG. 3A

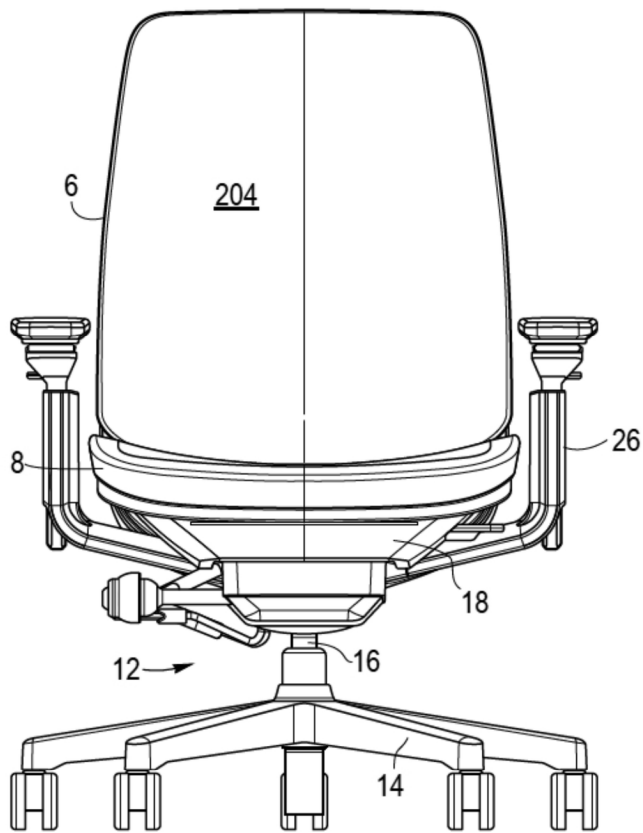


FIG. 3B

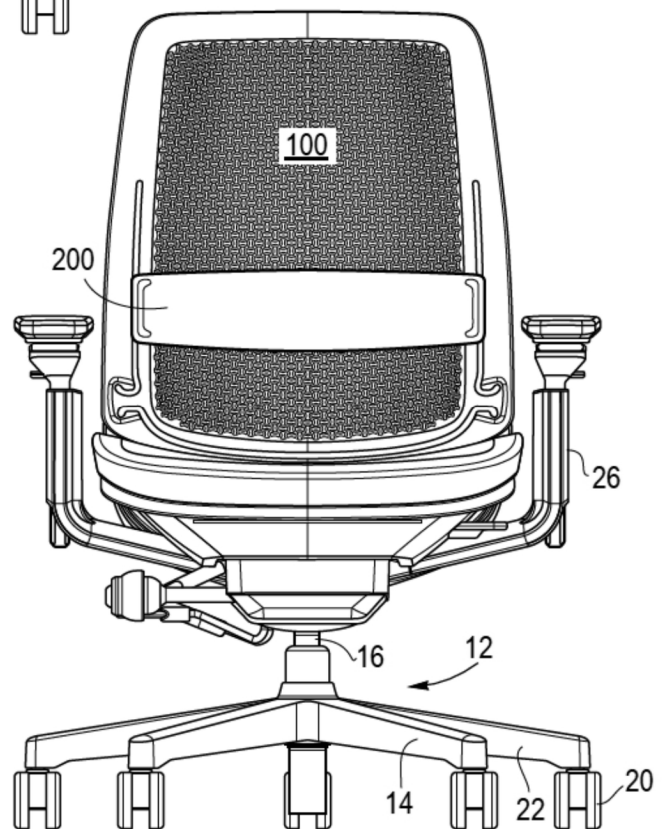


FIG. 3C

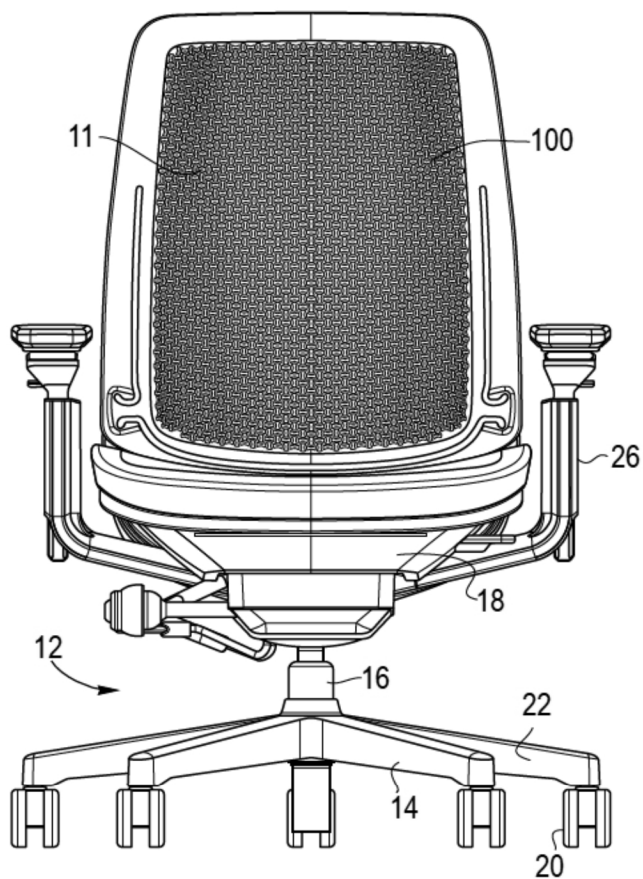


FIG. 4A

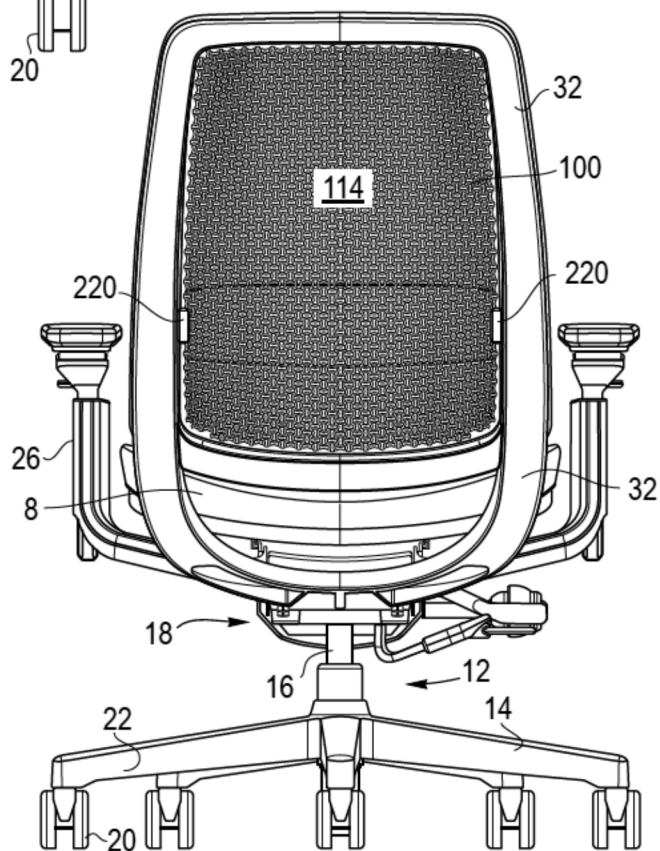


FIG. 4B

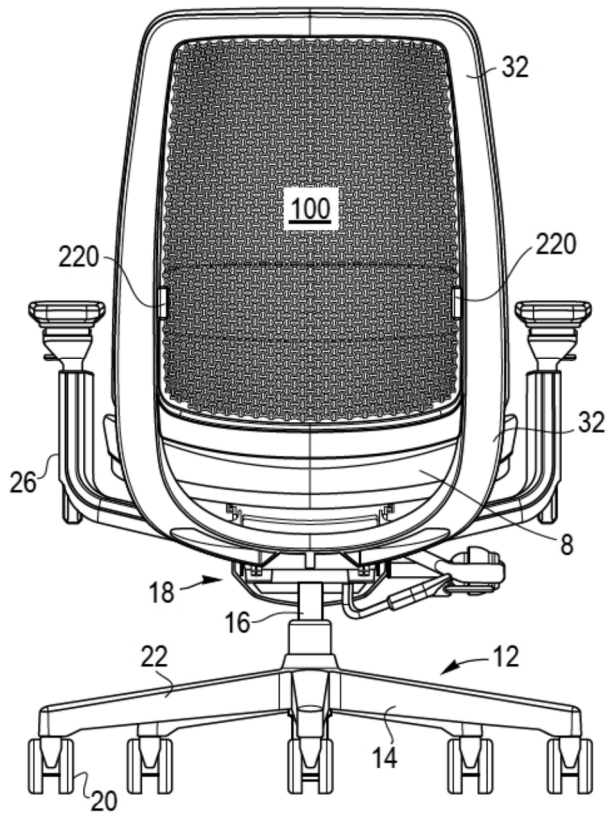


FIG. 4C

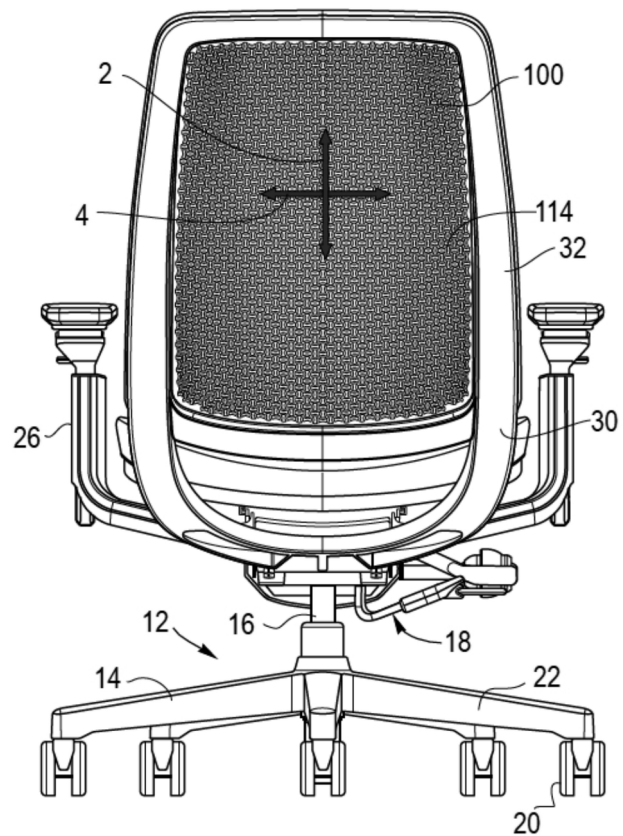


FIG. 5A

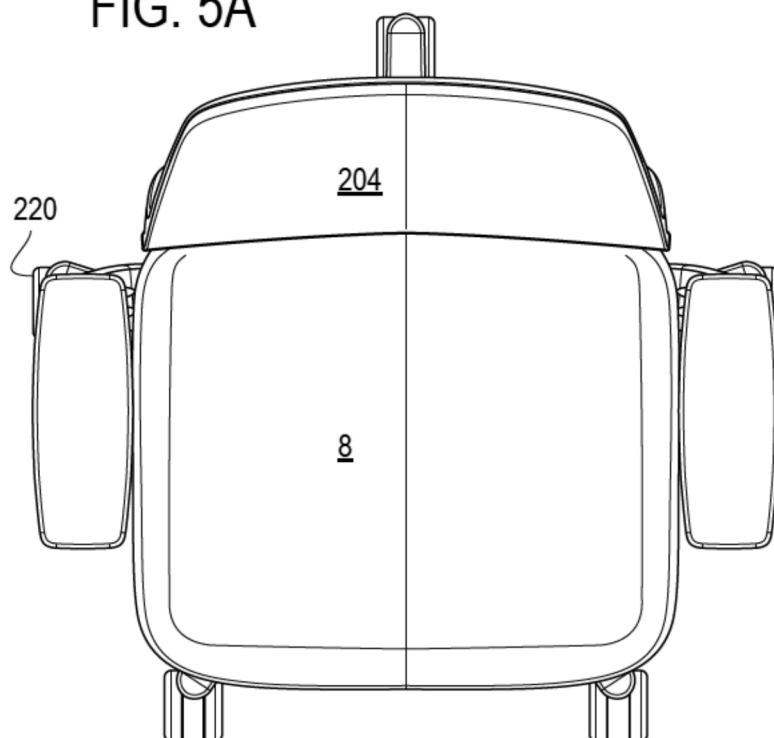


FIG. 5B

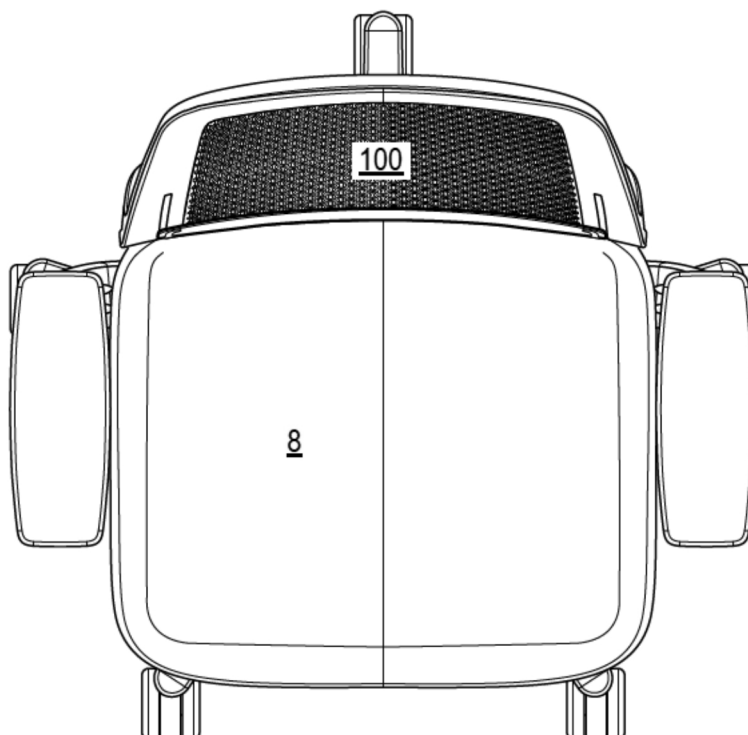


FIG. 6

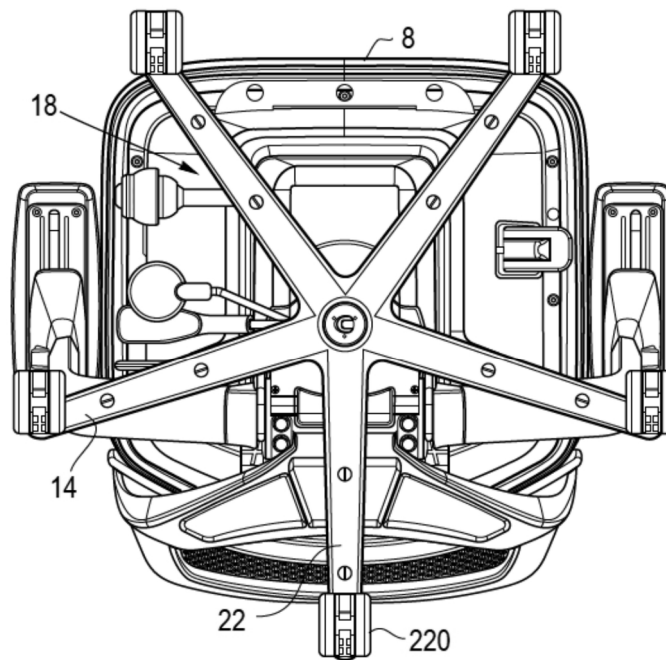


FIG. 7A

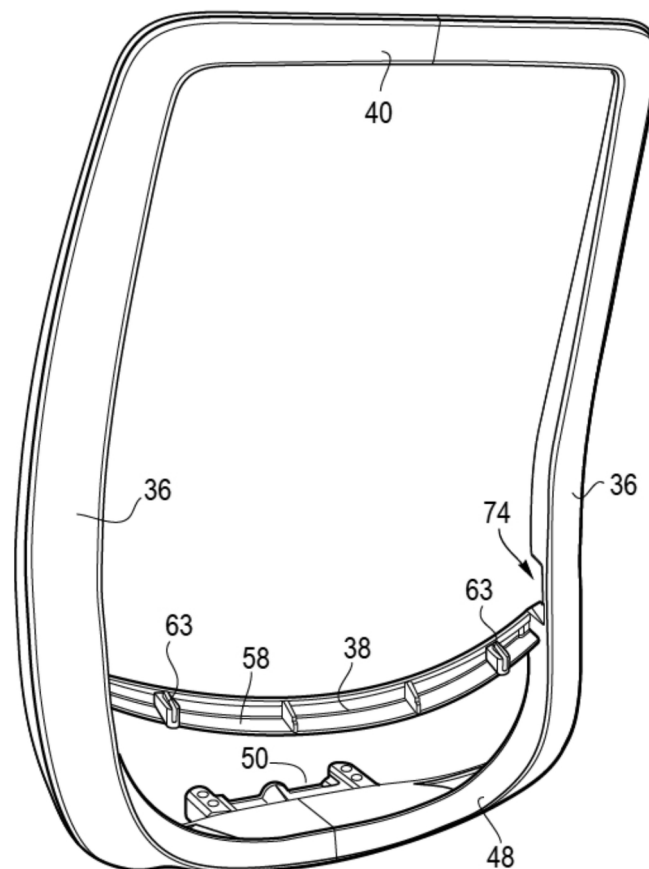


FIG. 7B

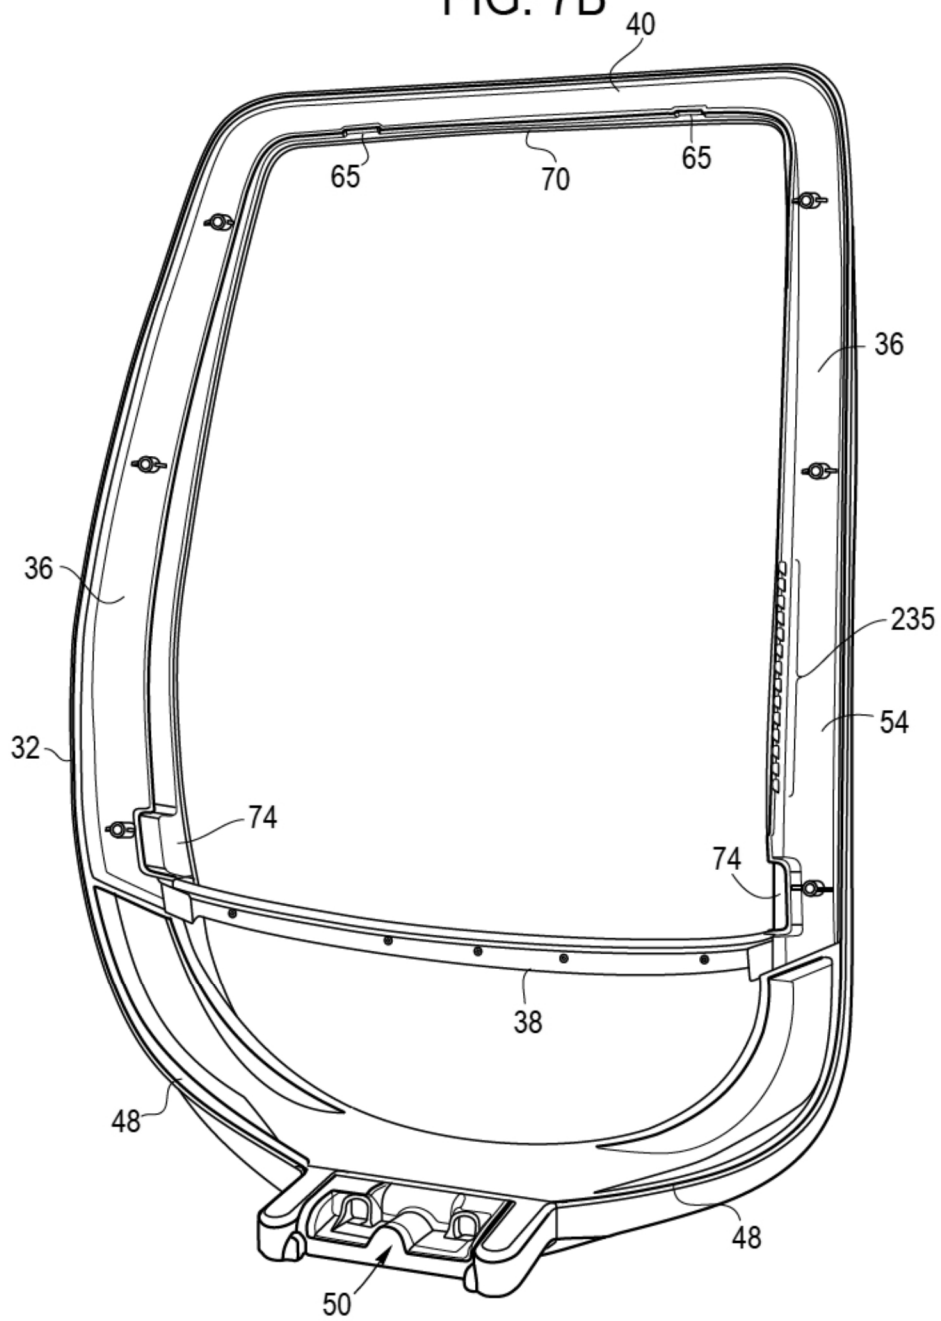




FIG. 8A

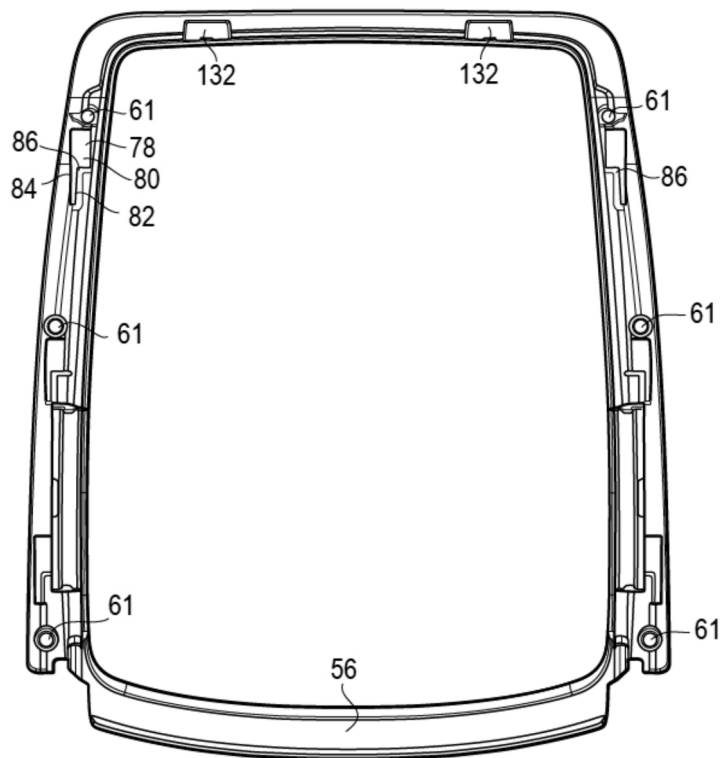


FIG. 8B

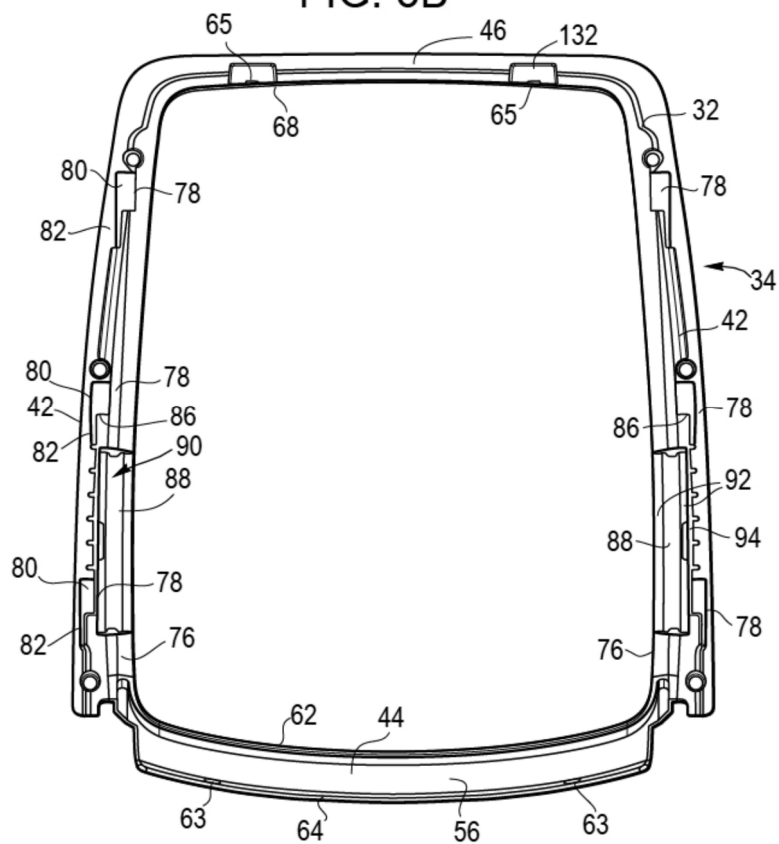


FIG. 9

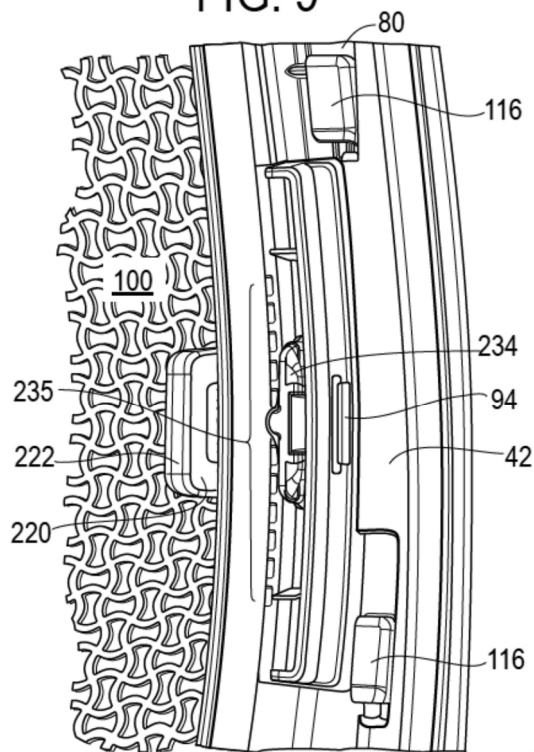


FIG. 10

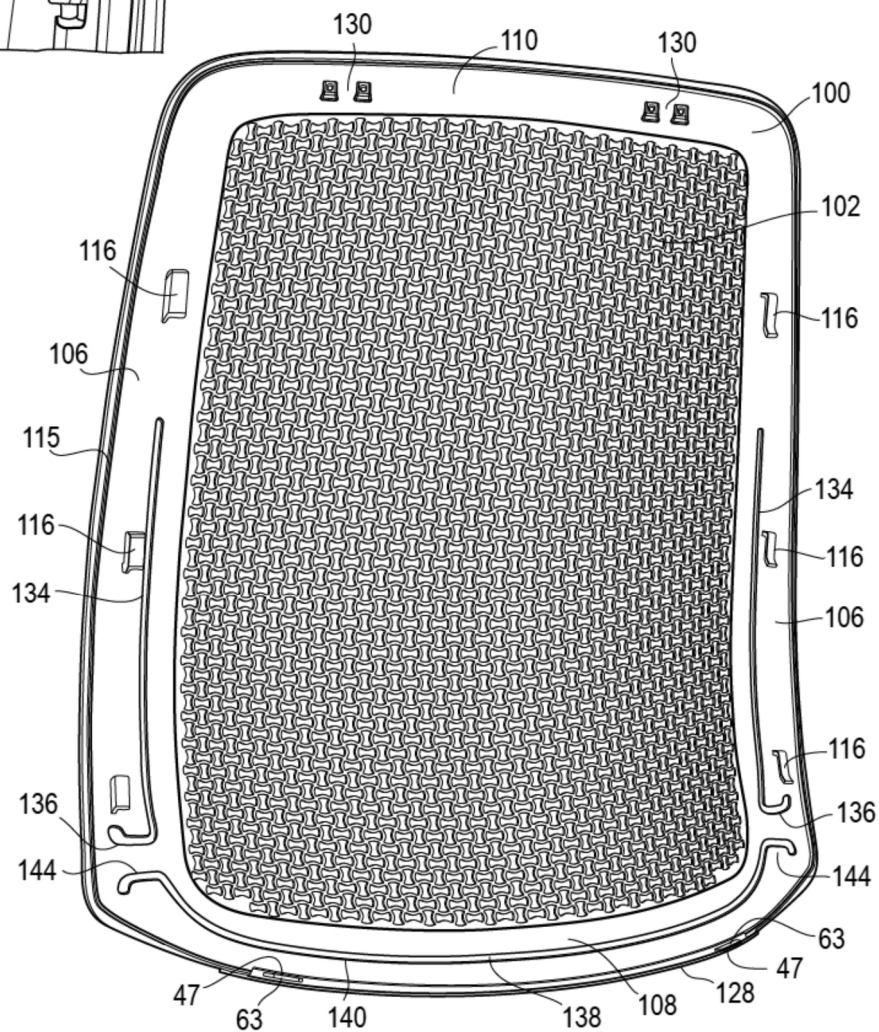


FIG. 11

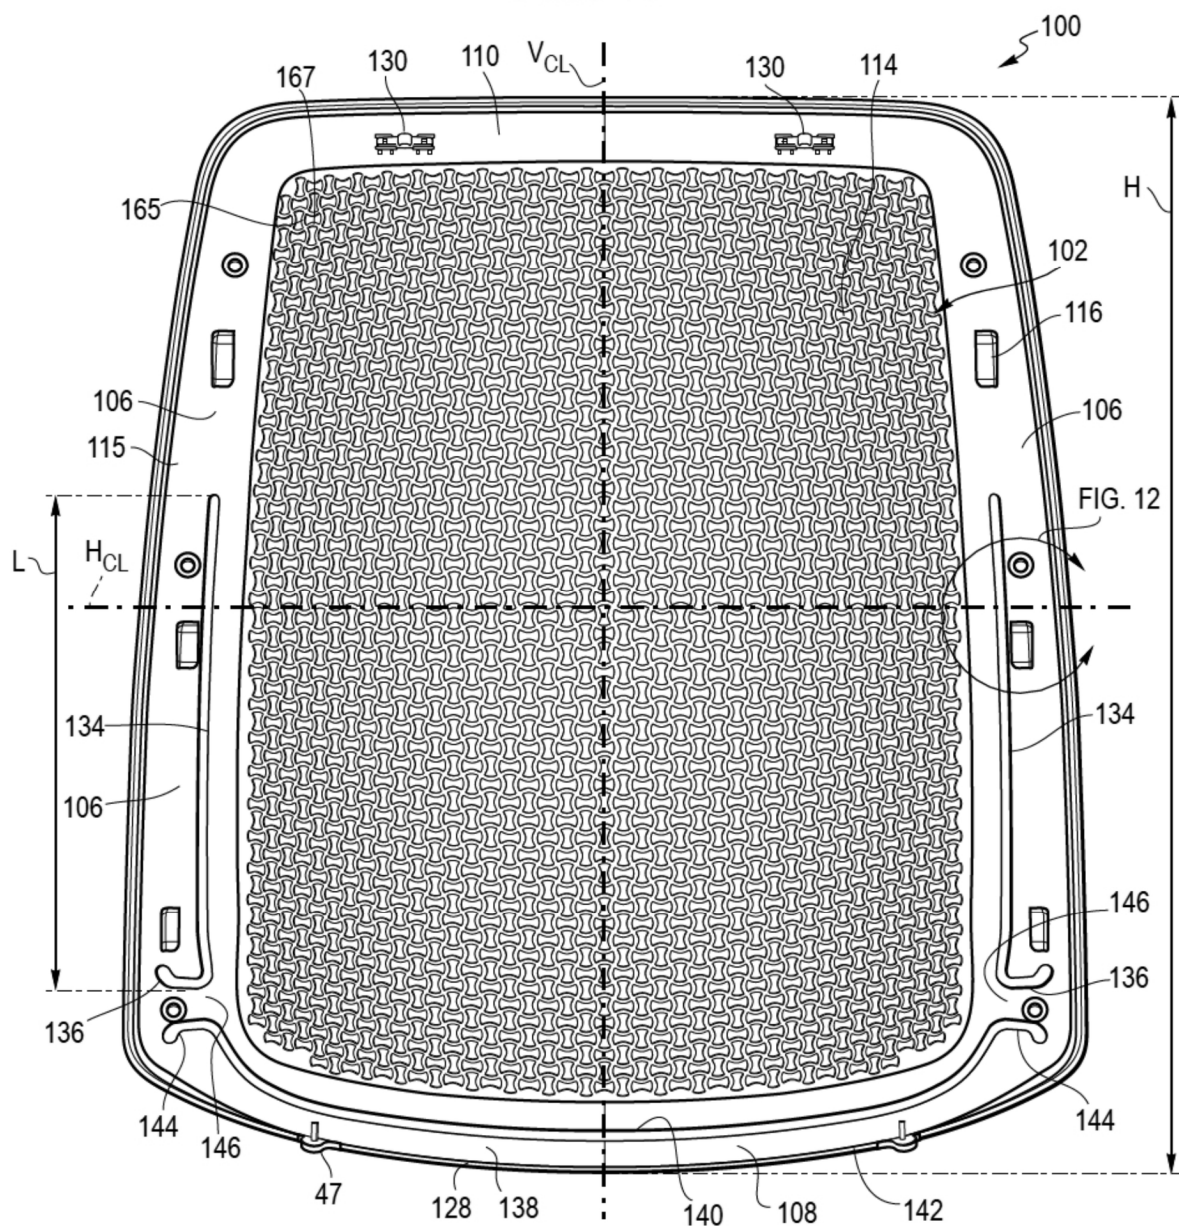




FIG. 12

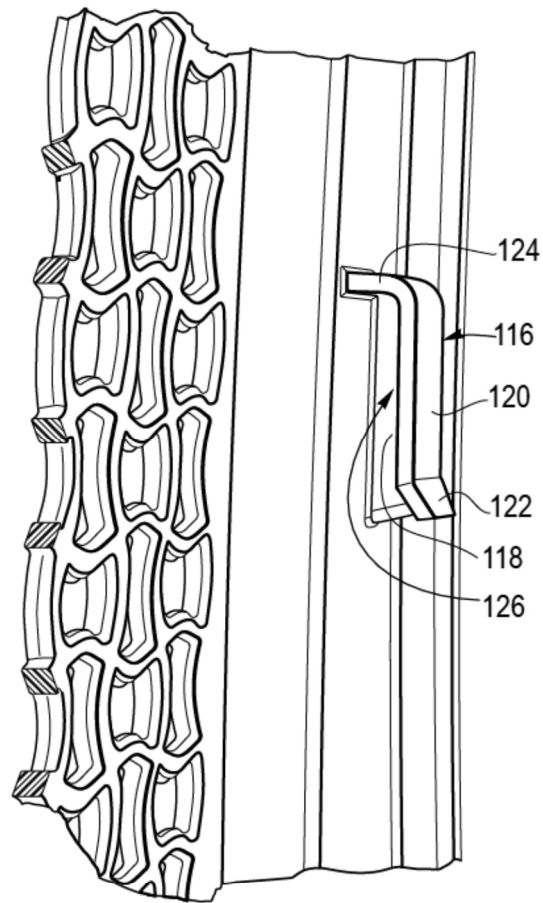


FIG. 13

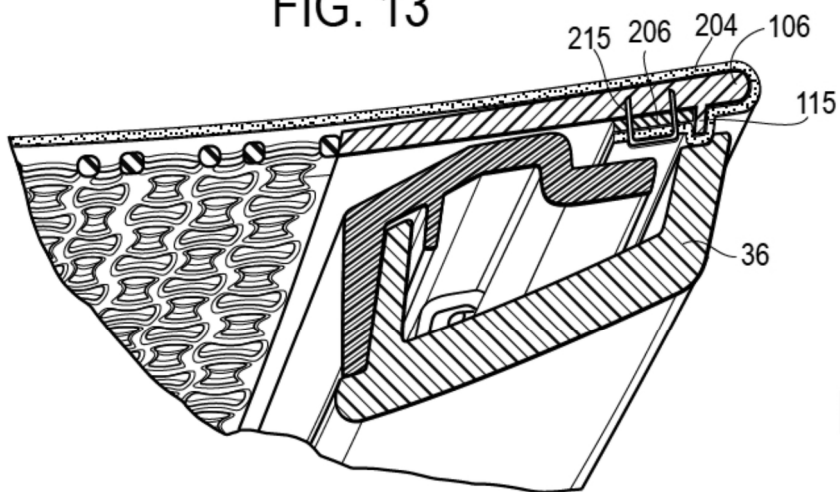


FIG. 14

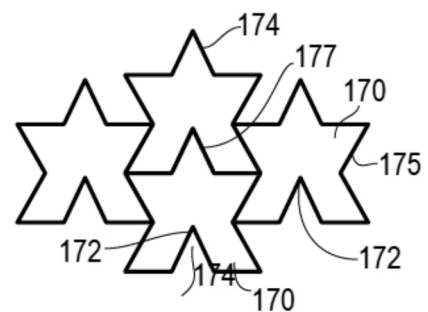


FIG. 15

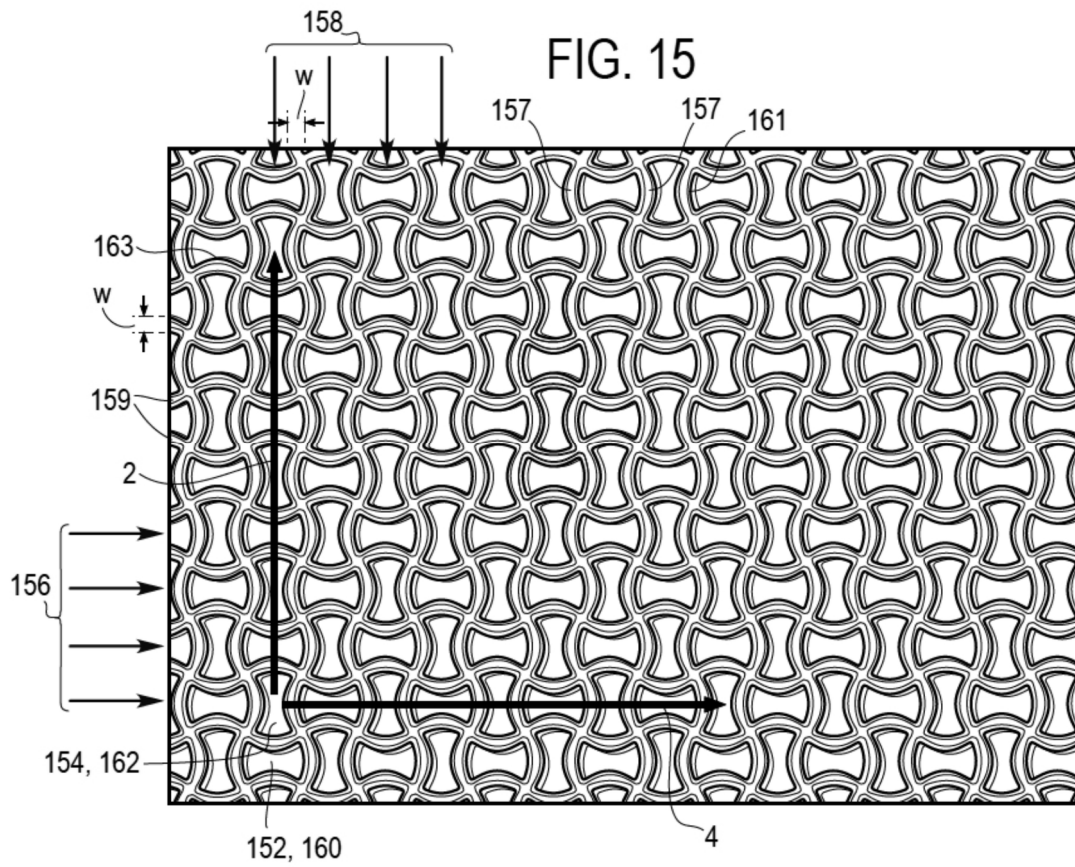


FIG. 16

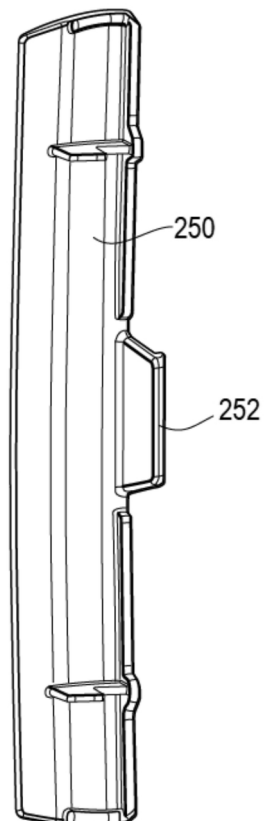


FIG. 17A

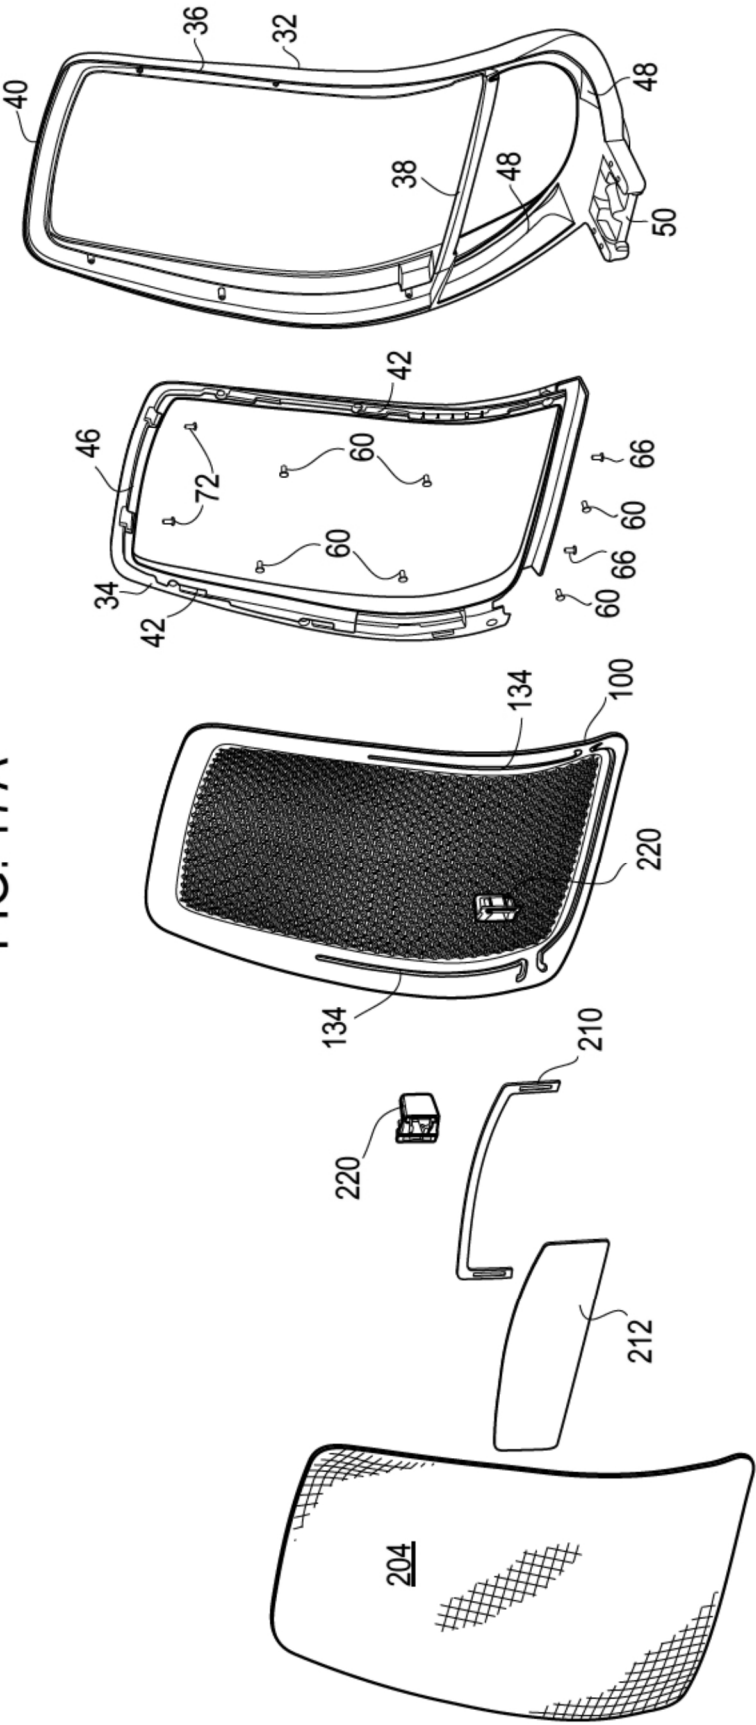




FIG. 17B

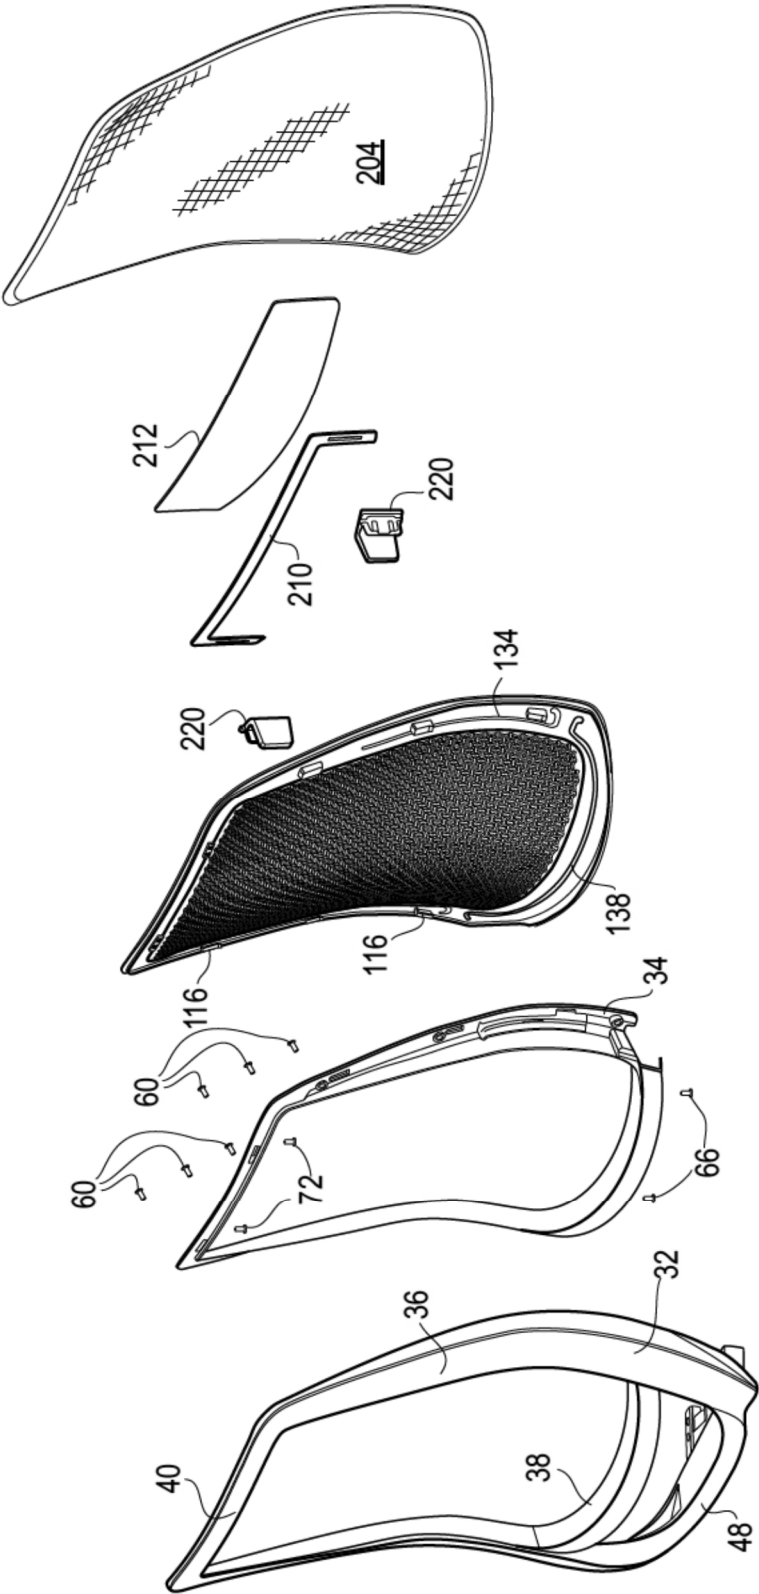


FIG. 18

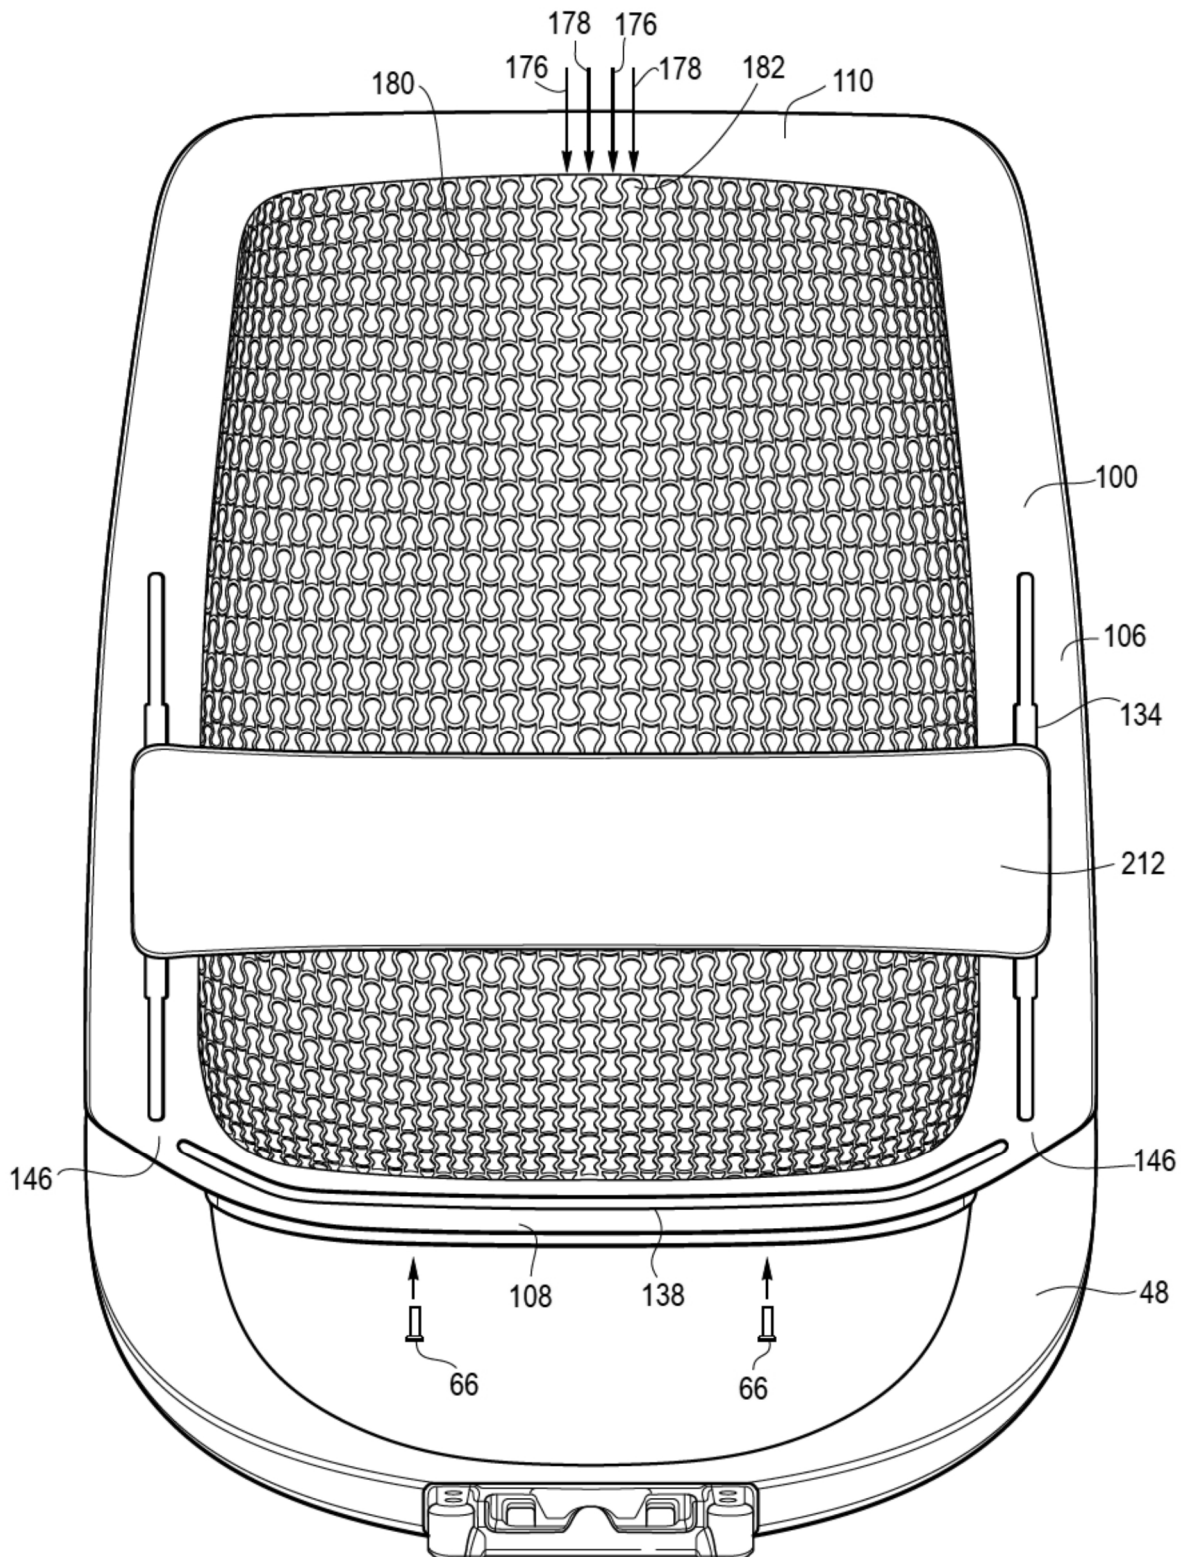


FIG. 19

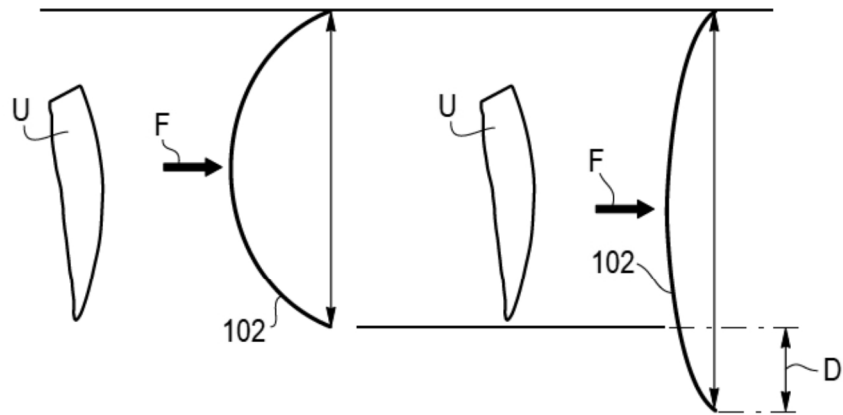


FIG. 21

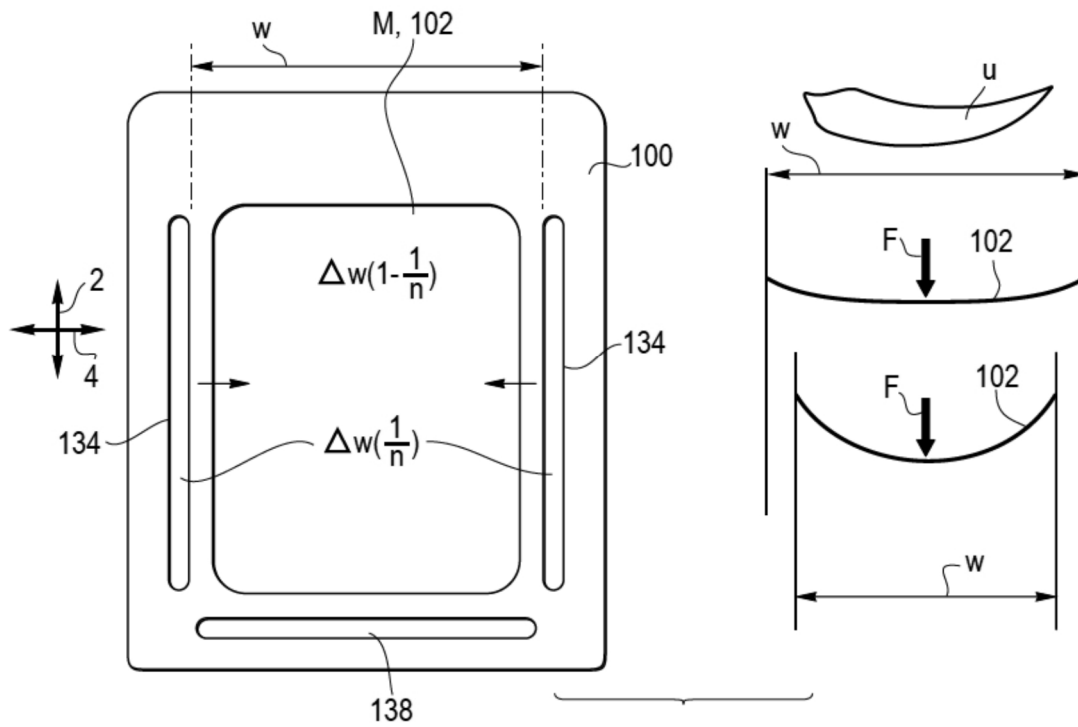


FIG. 20

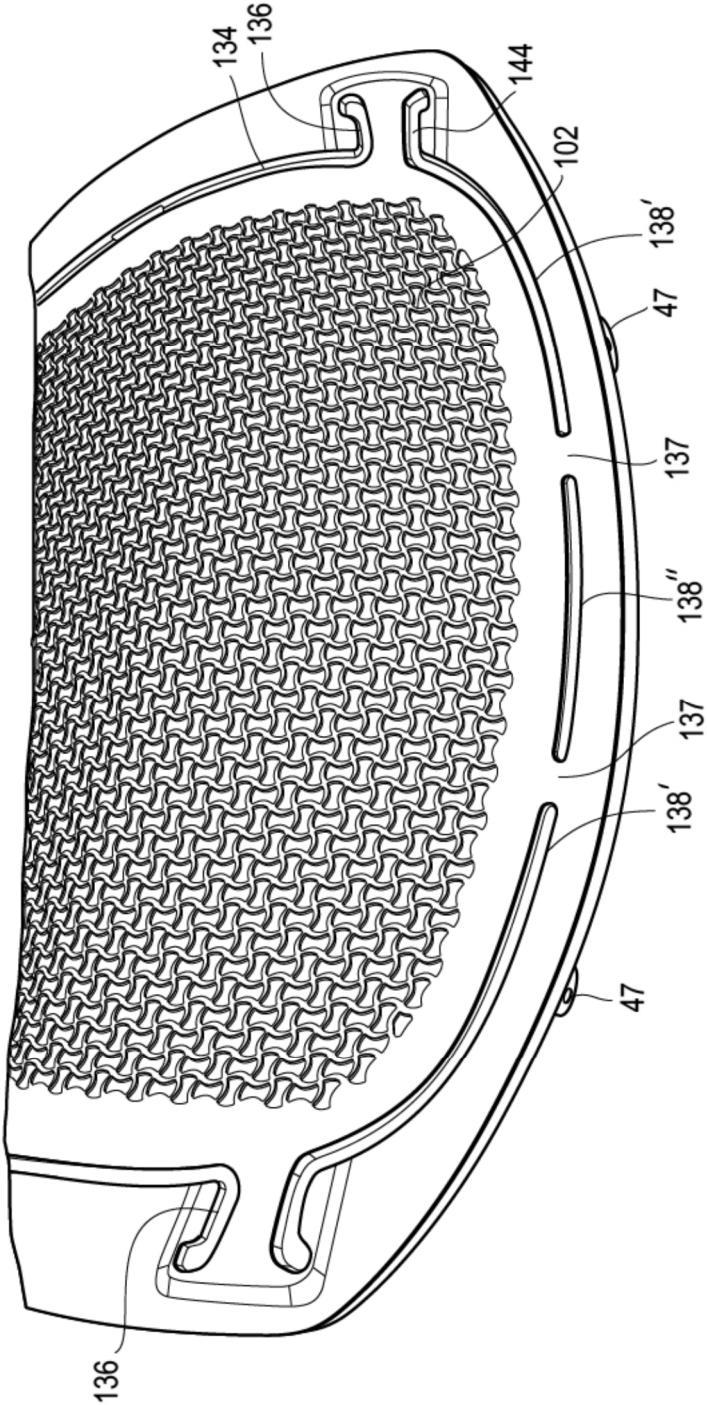


FIG. 22

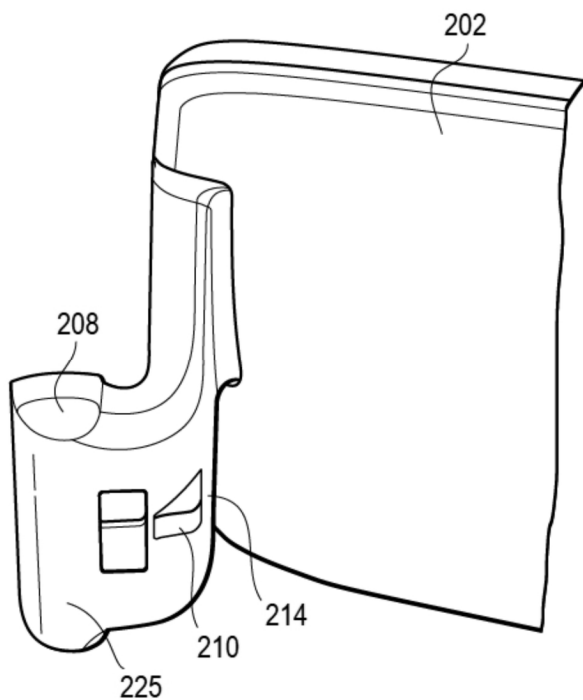


FIG. 23

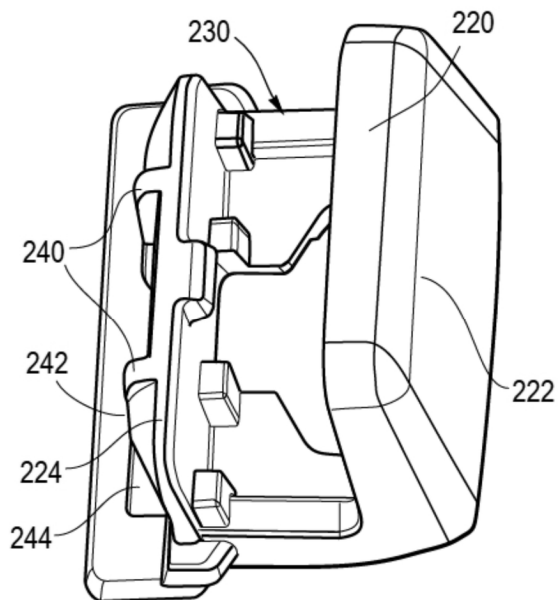


FIG. 24

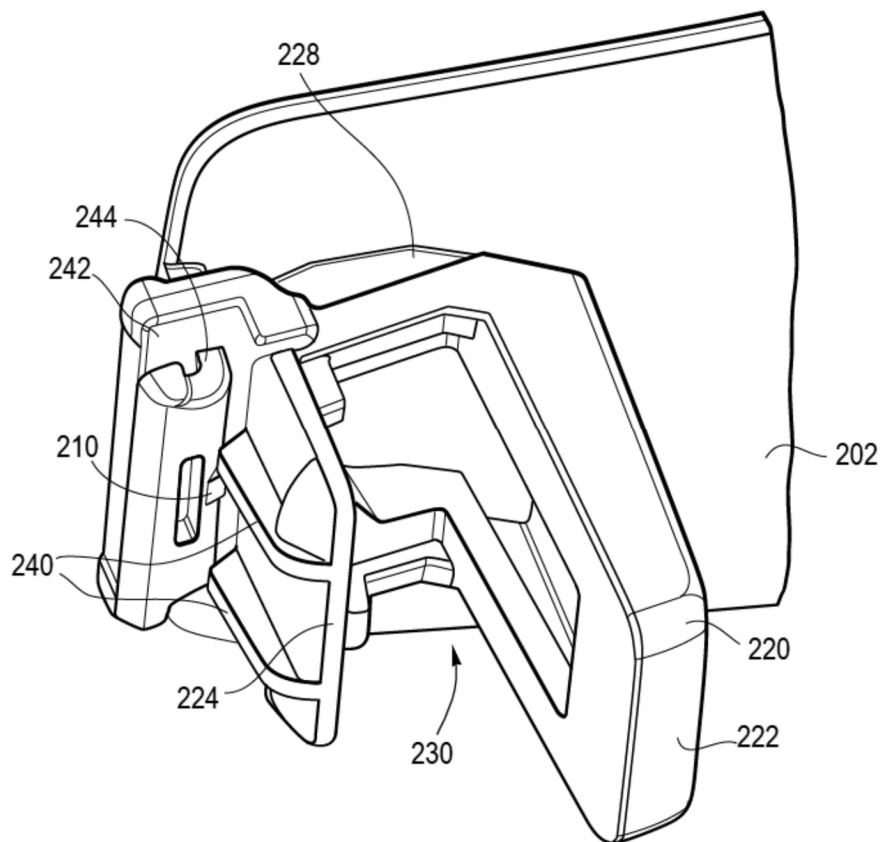




FIG. 25

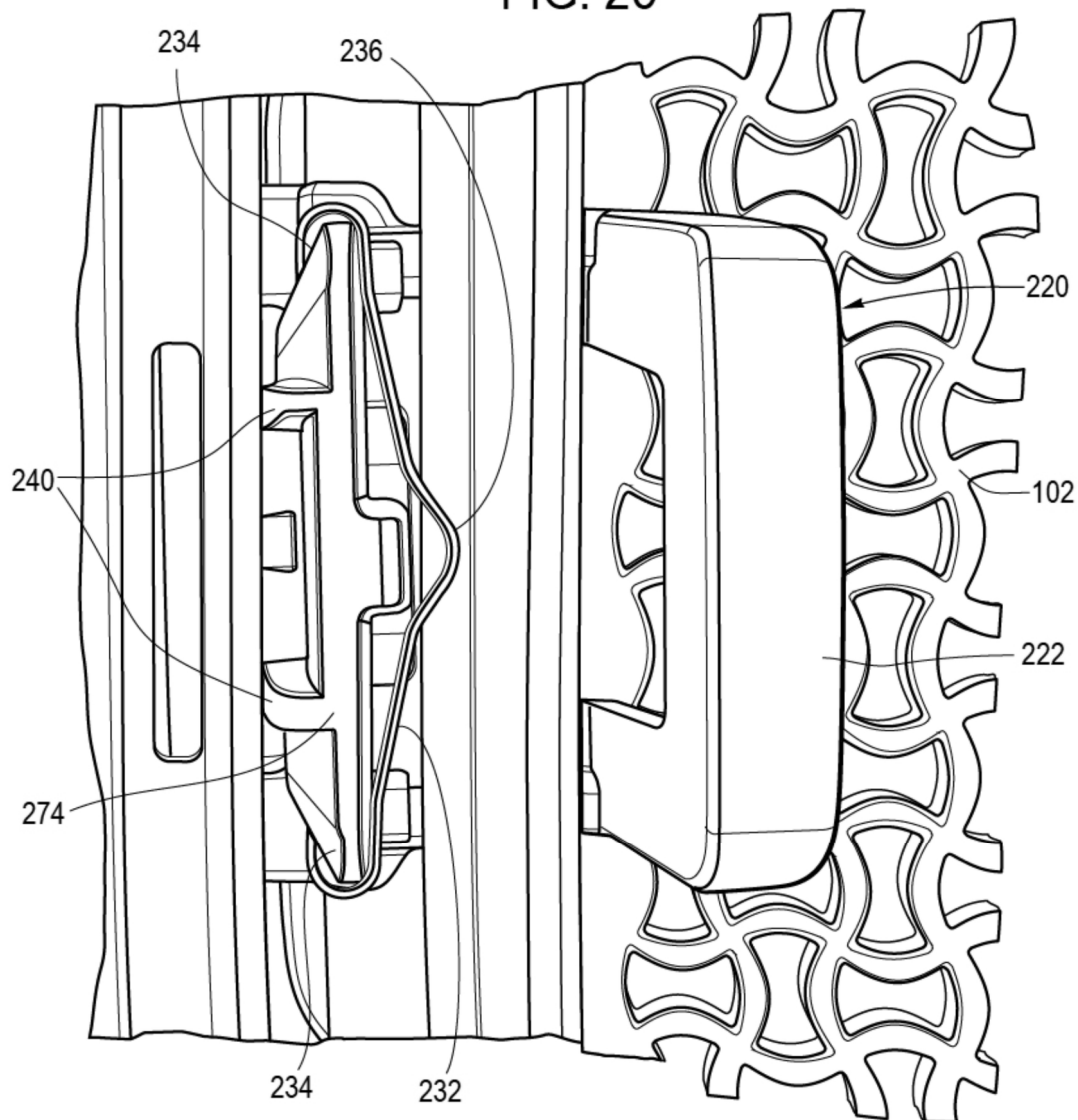


FIG. 26






FIG. 27

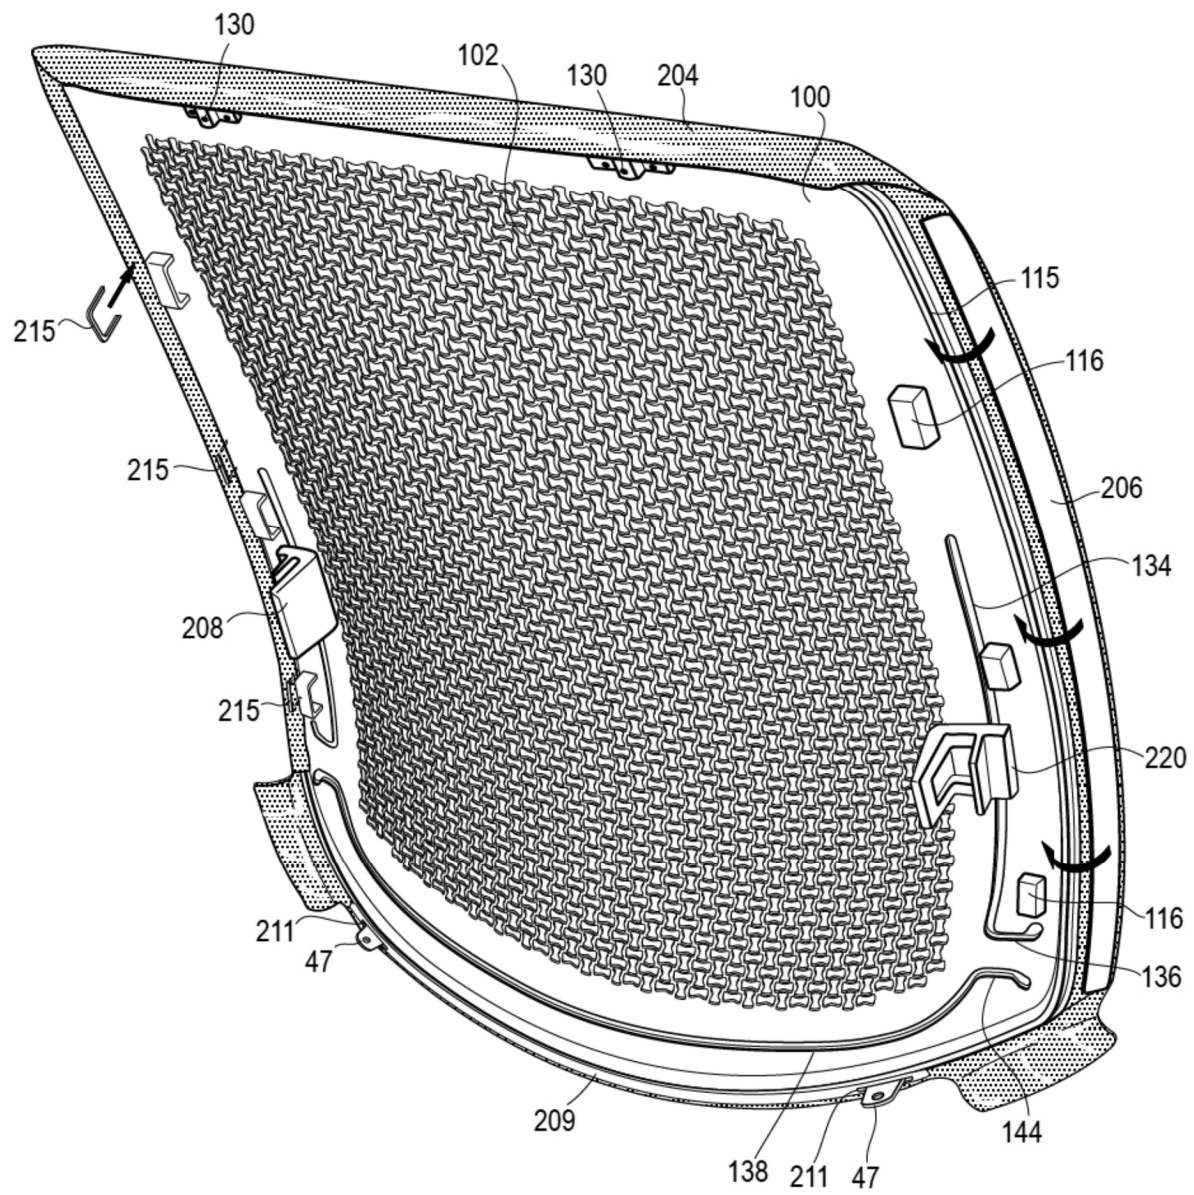


FIG. 28

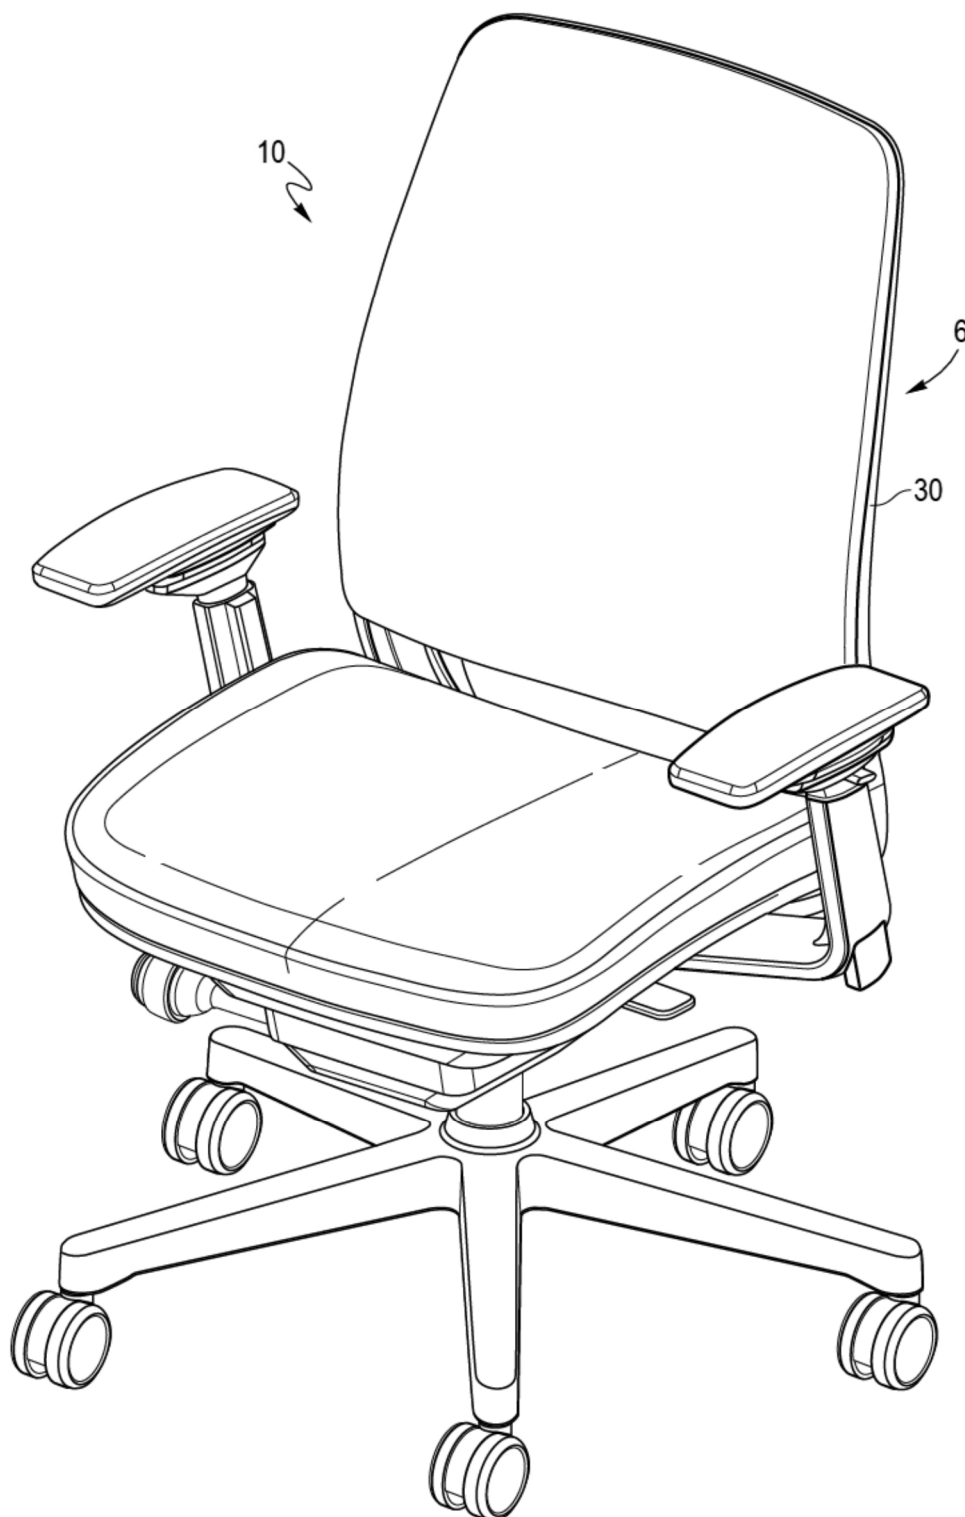


FIG. 29

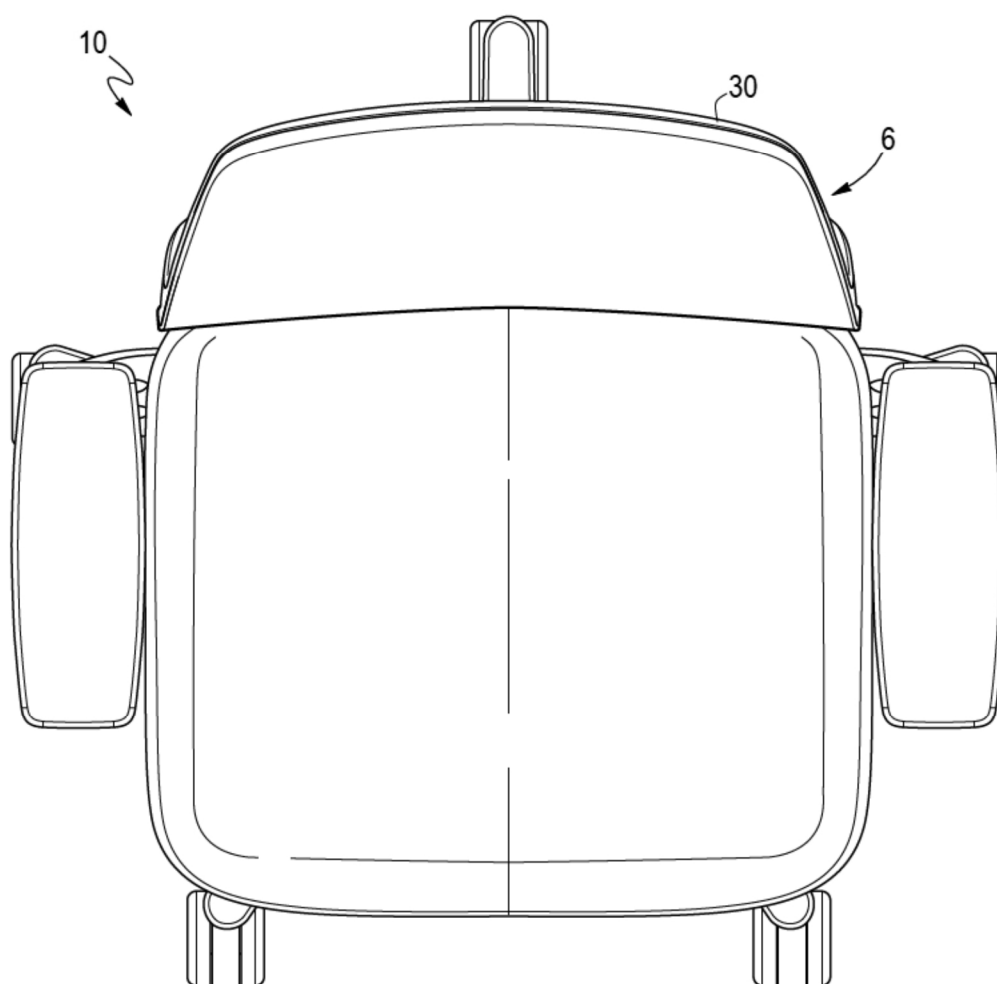


FIG. 30

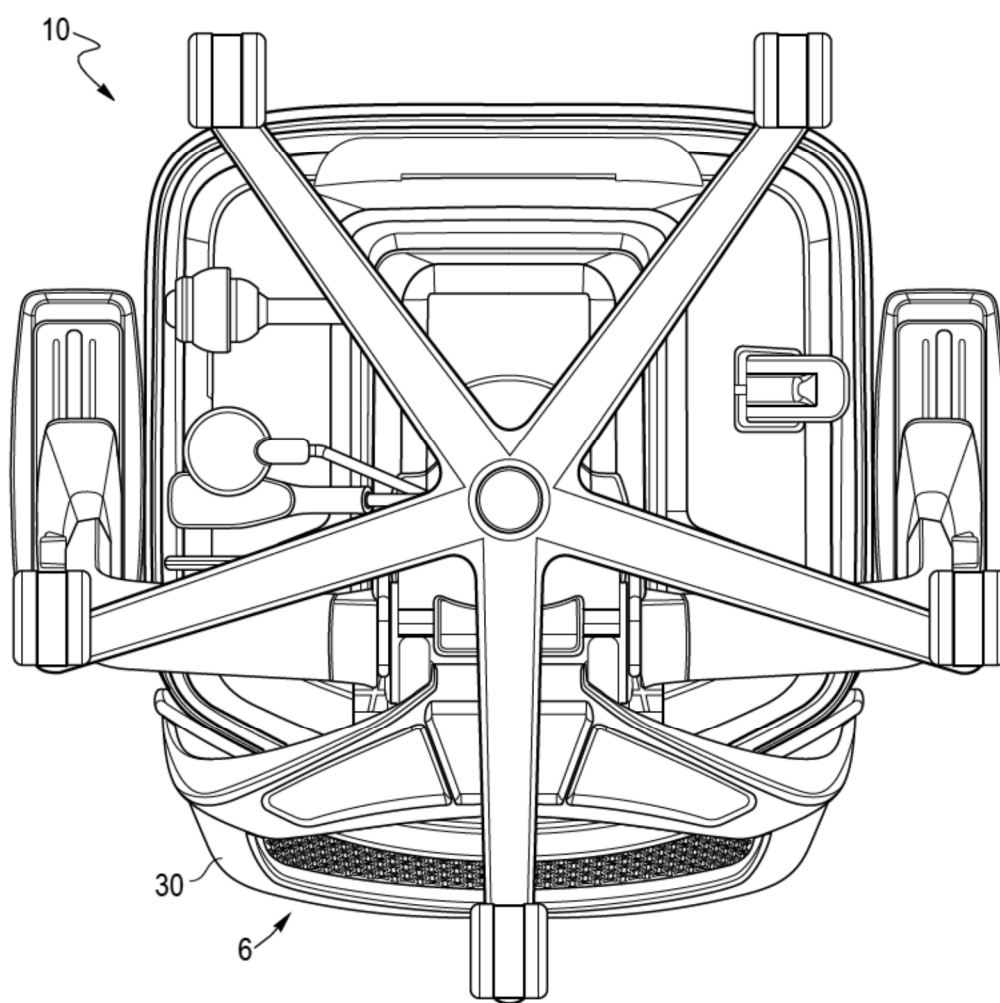


FIG. 31

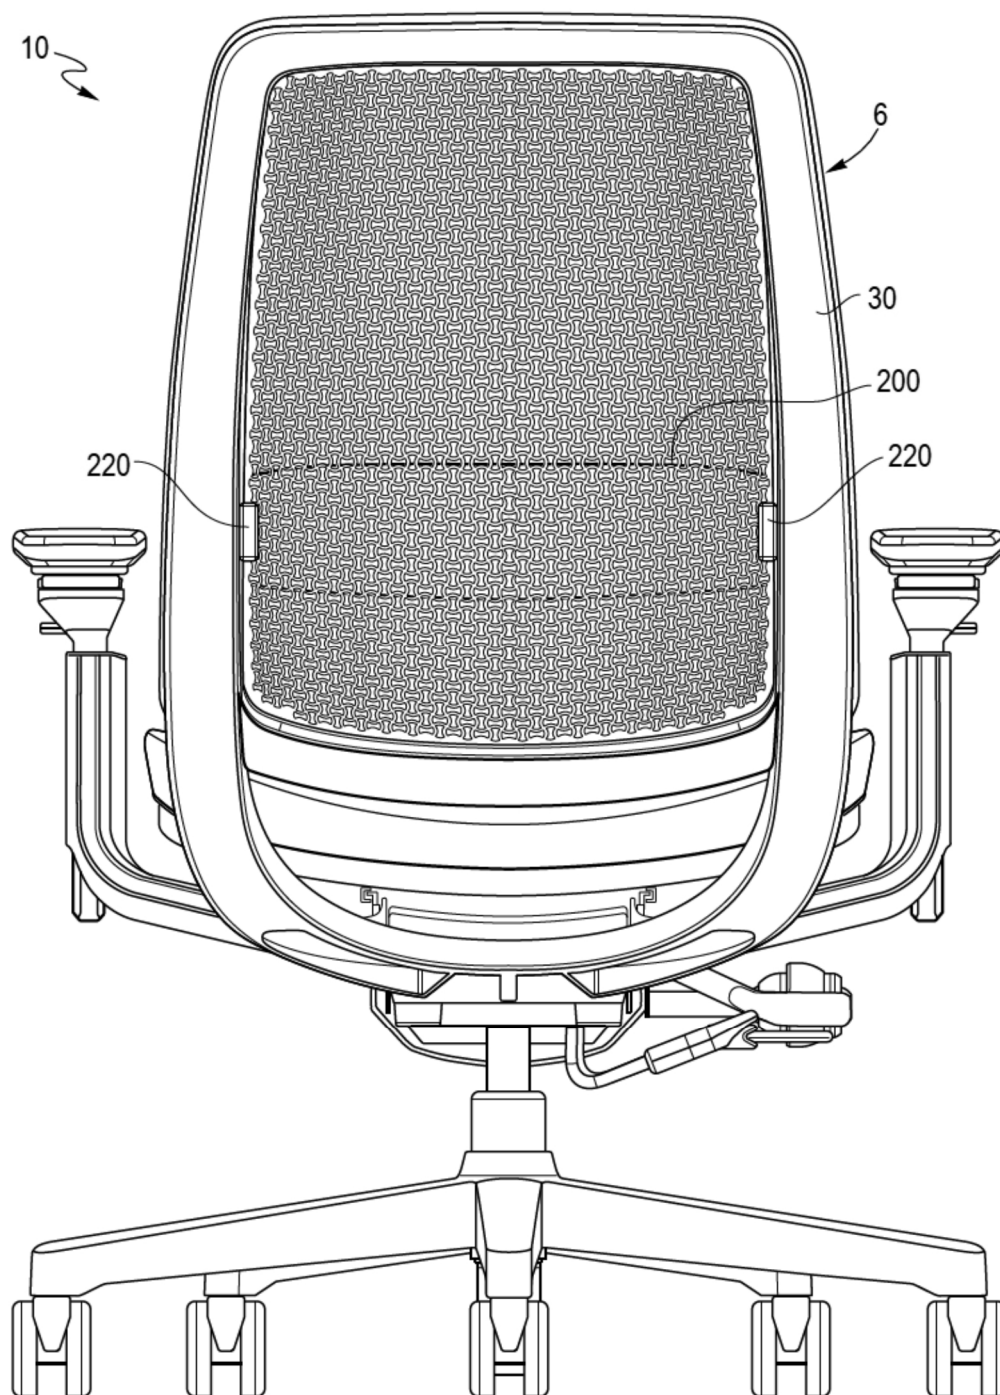




FIG. 32

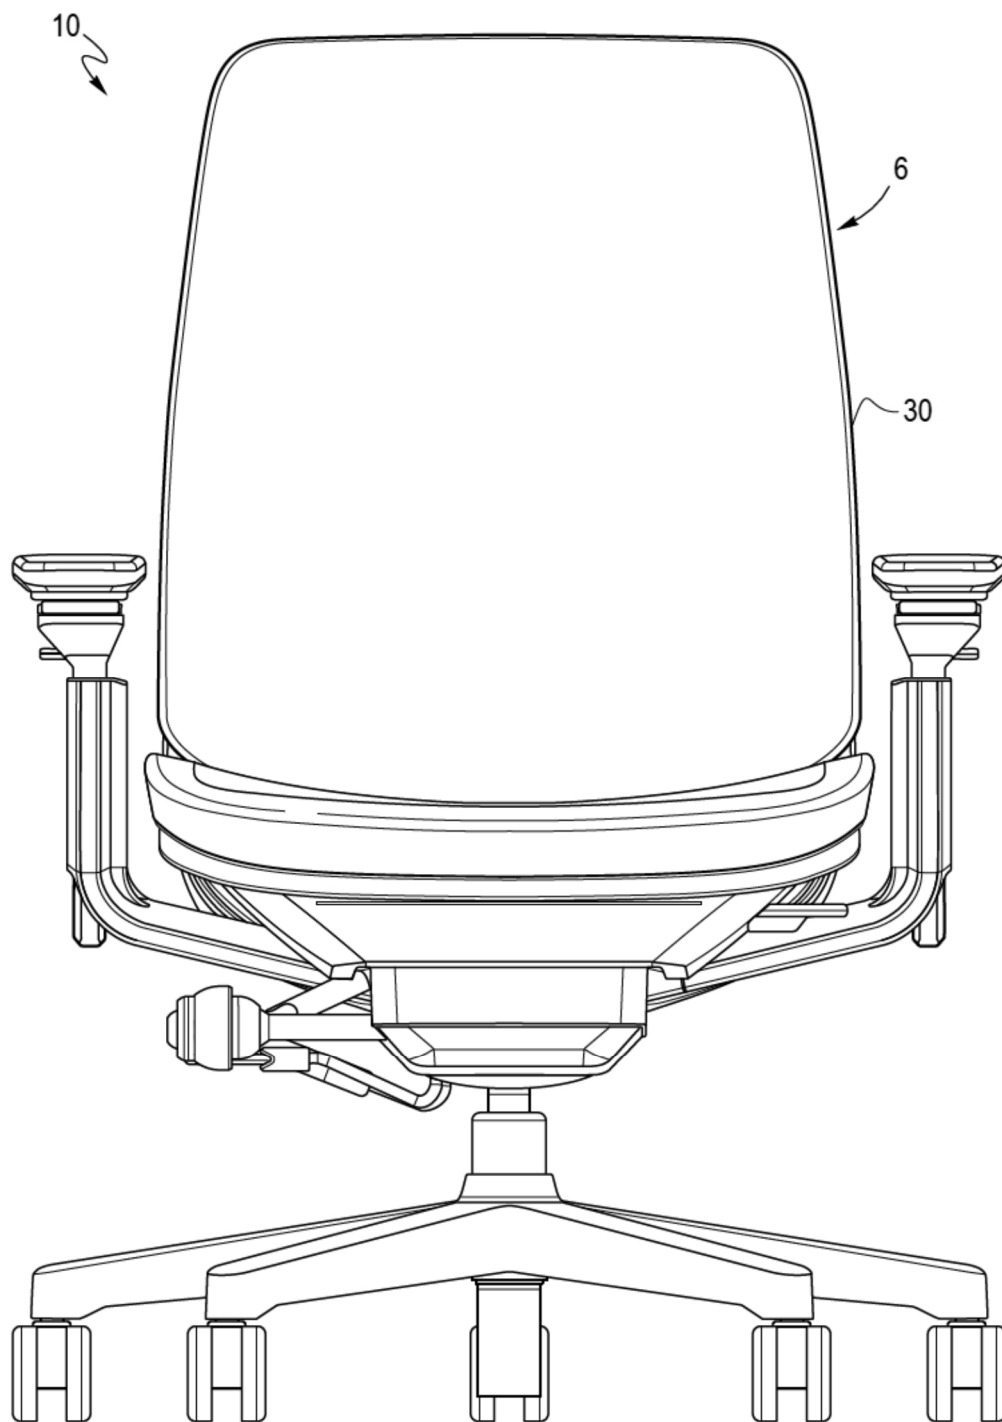


FIG. 33

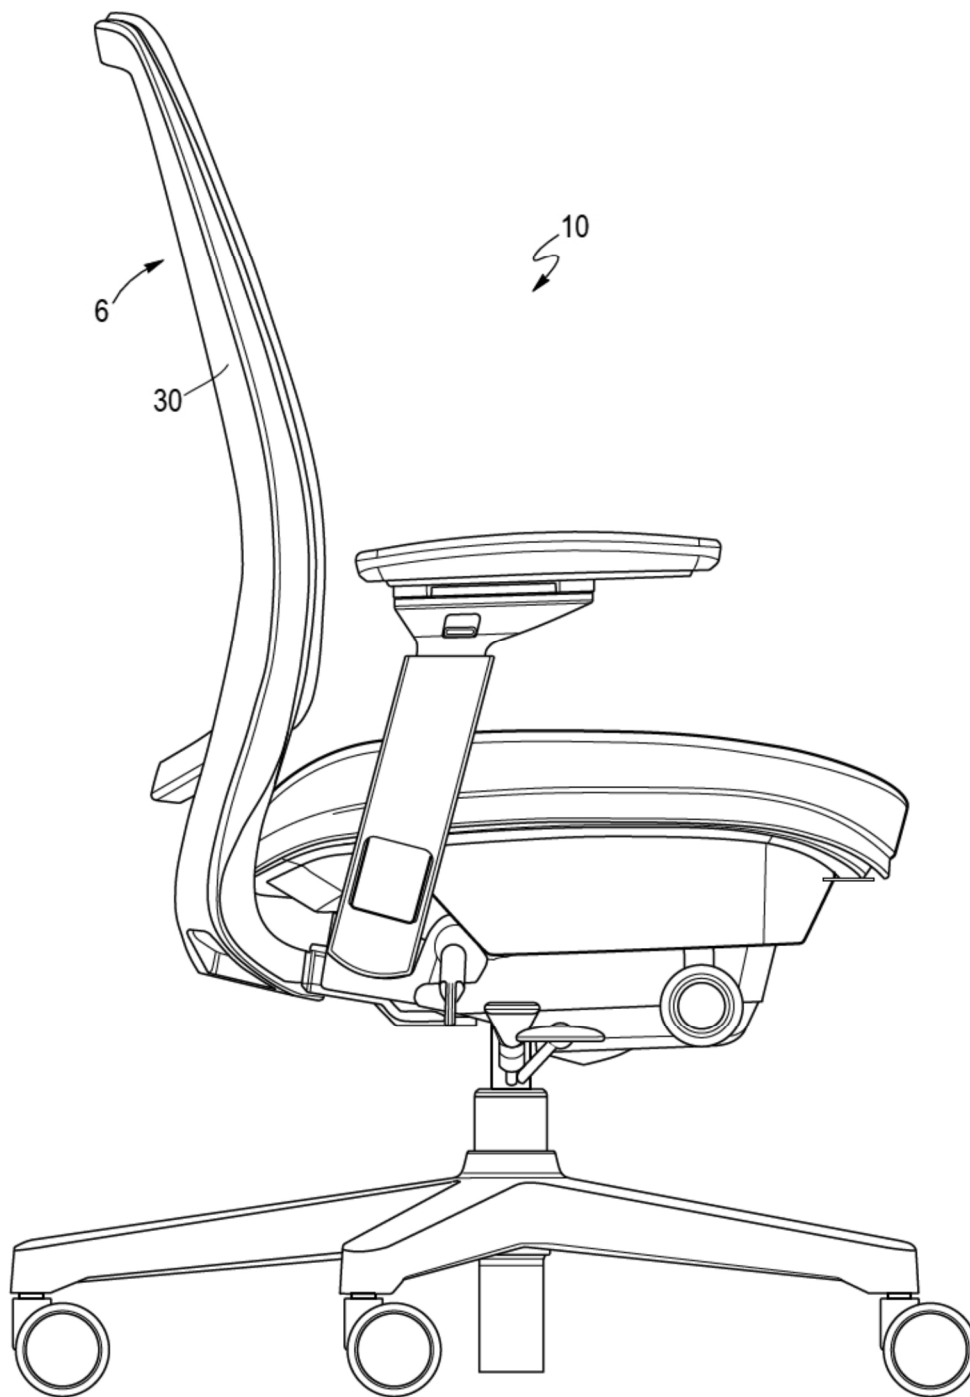


FIG. 34

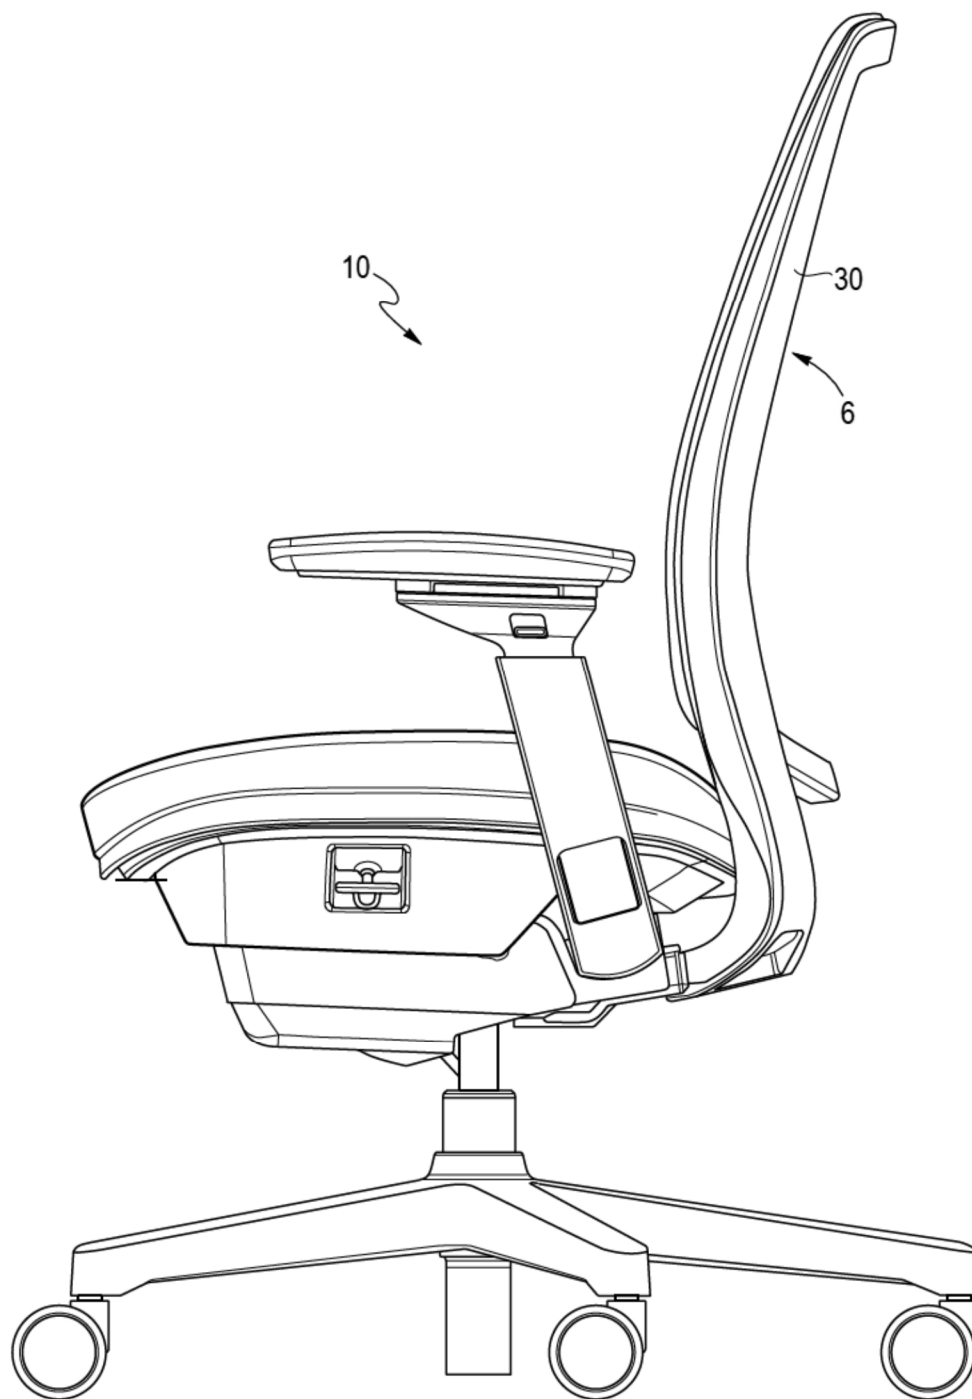


FIG. 35

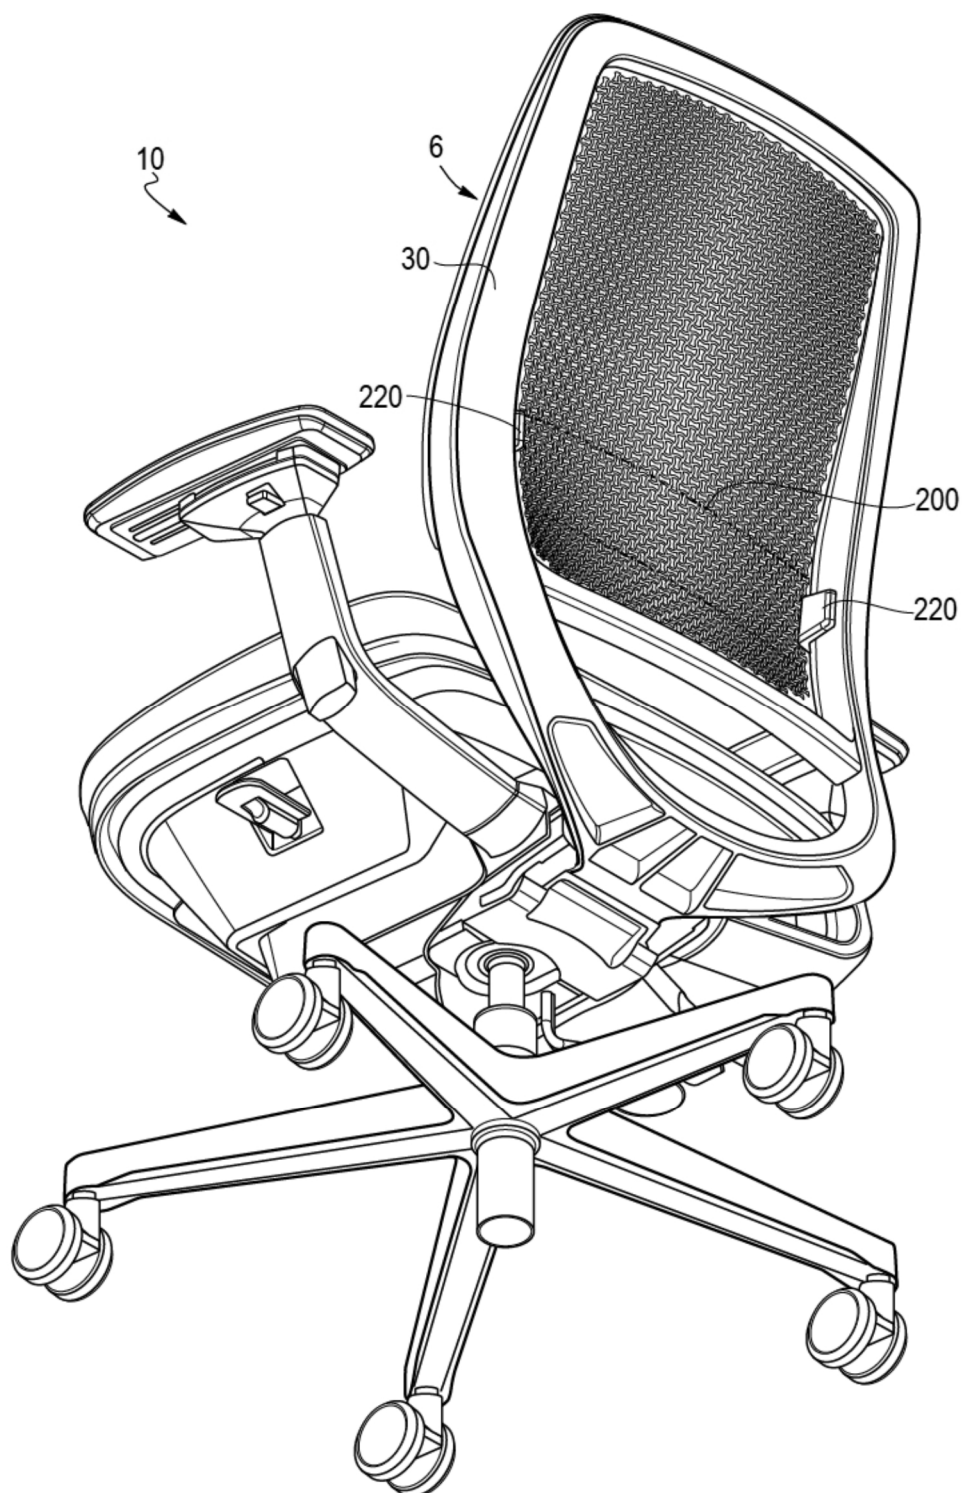


FIG. 36

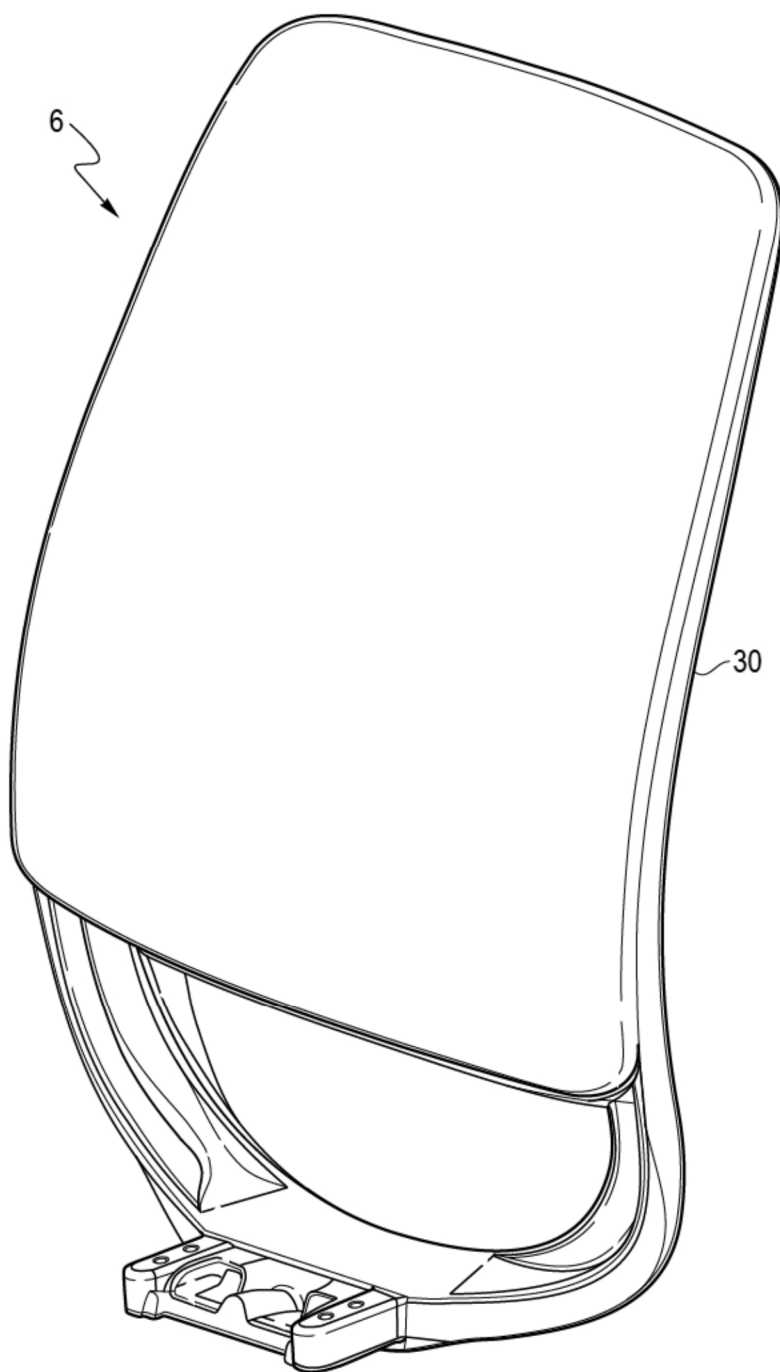




FIG. 37

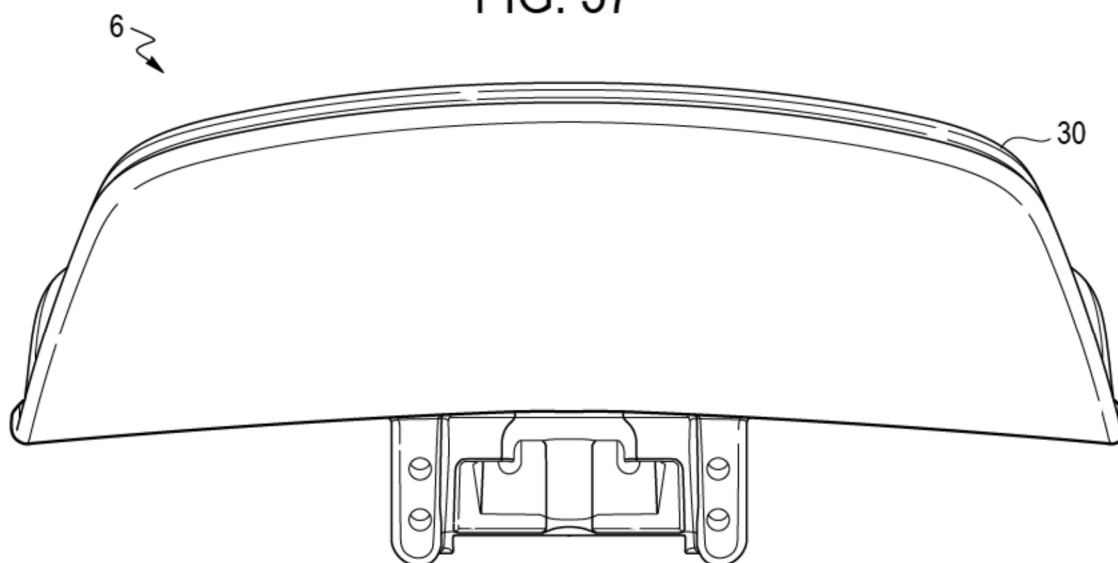


FIG. 38


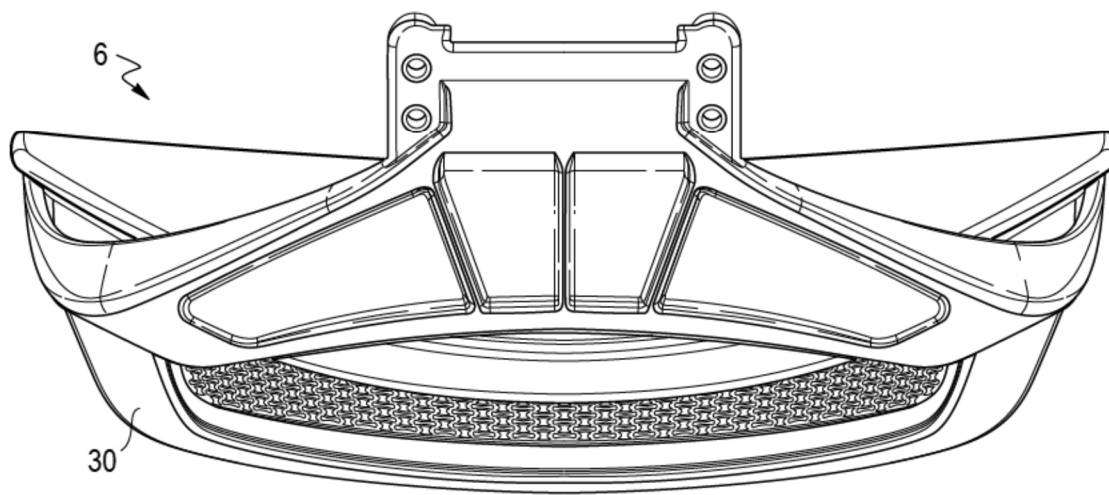


FIG. 39

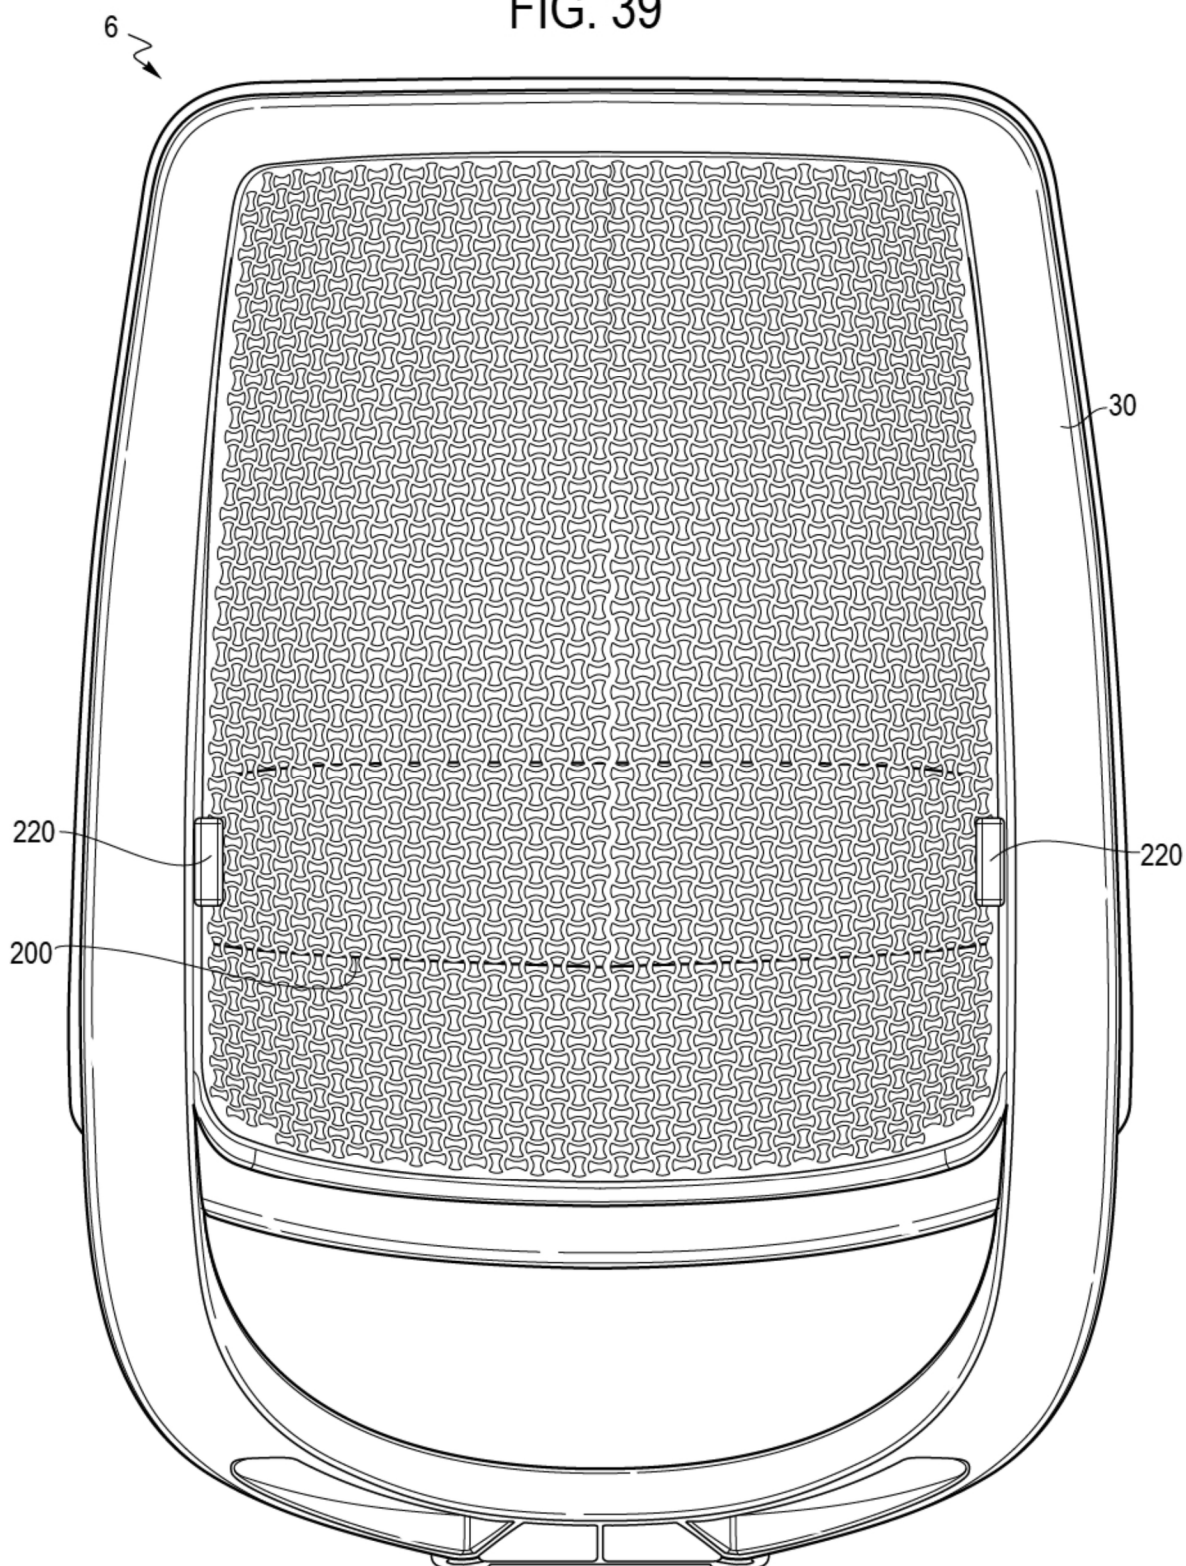

6

FIG. 40

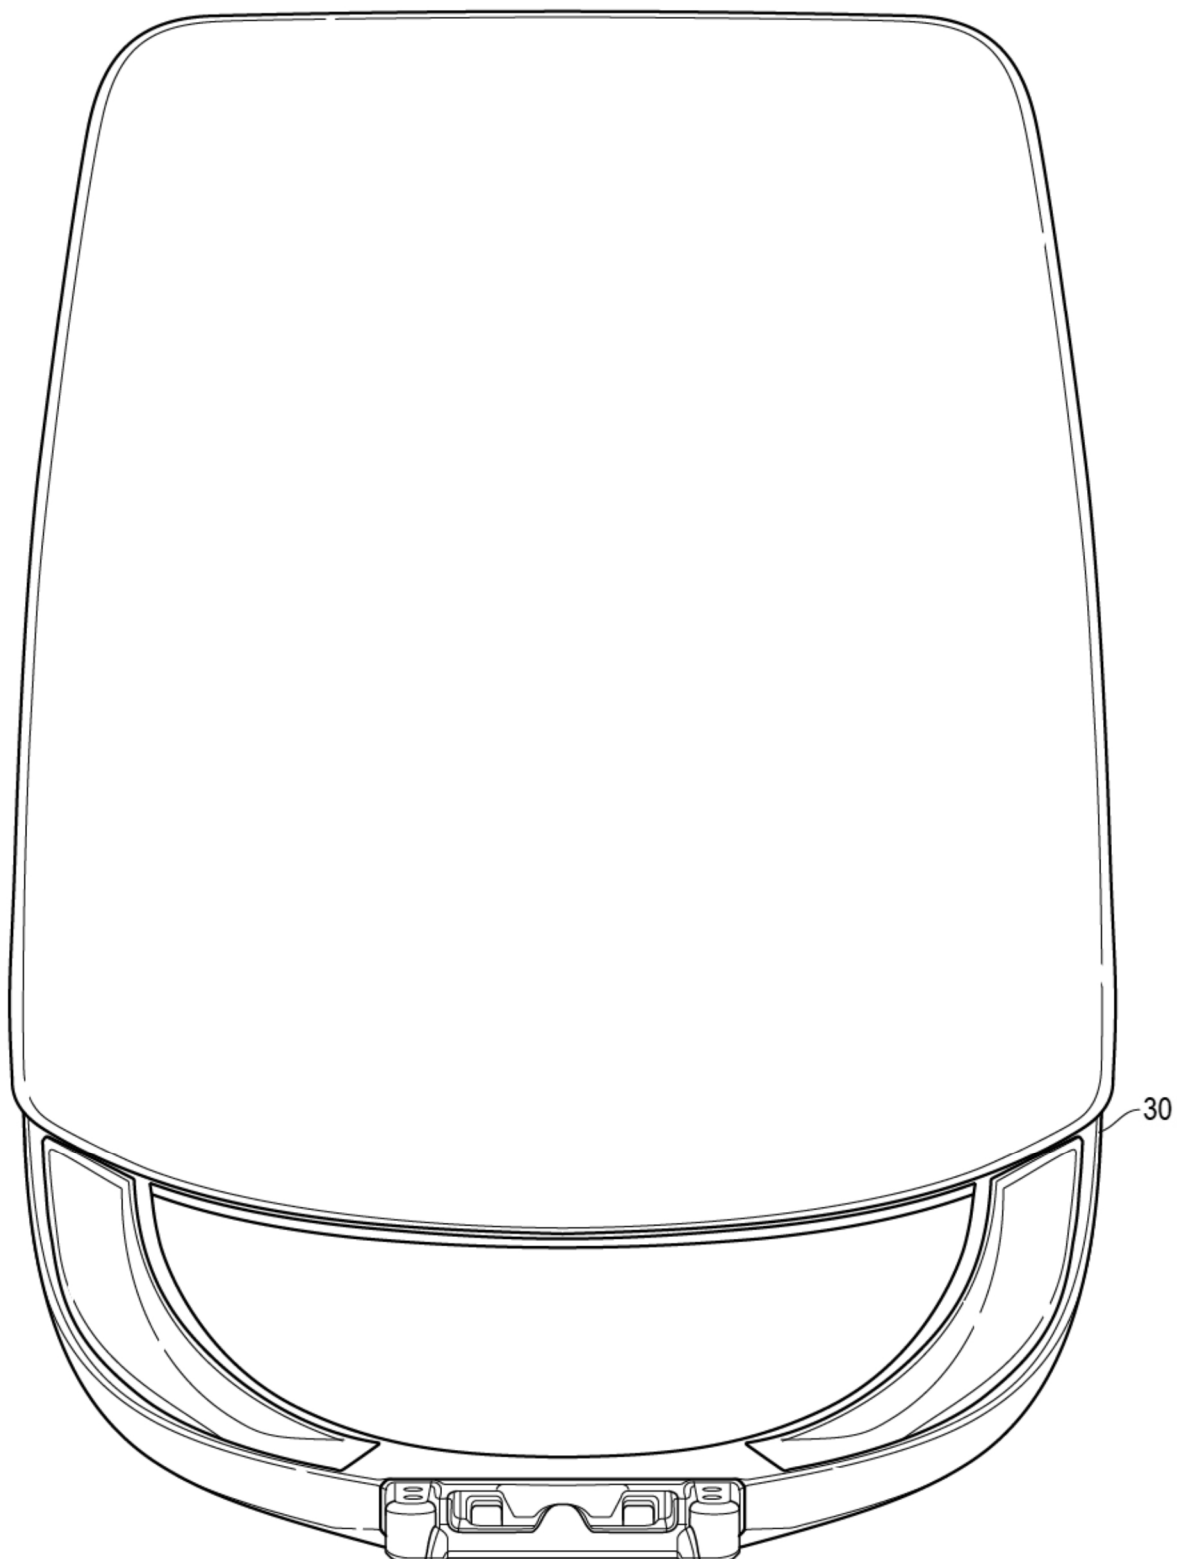


FIG. 41

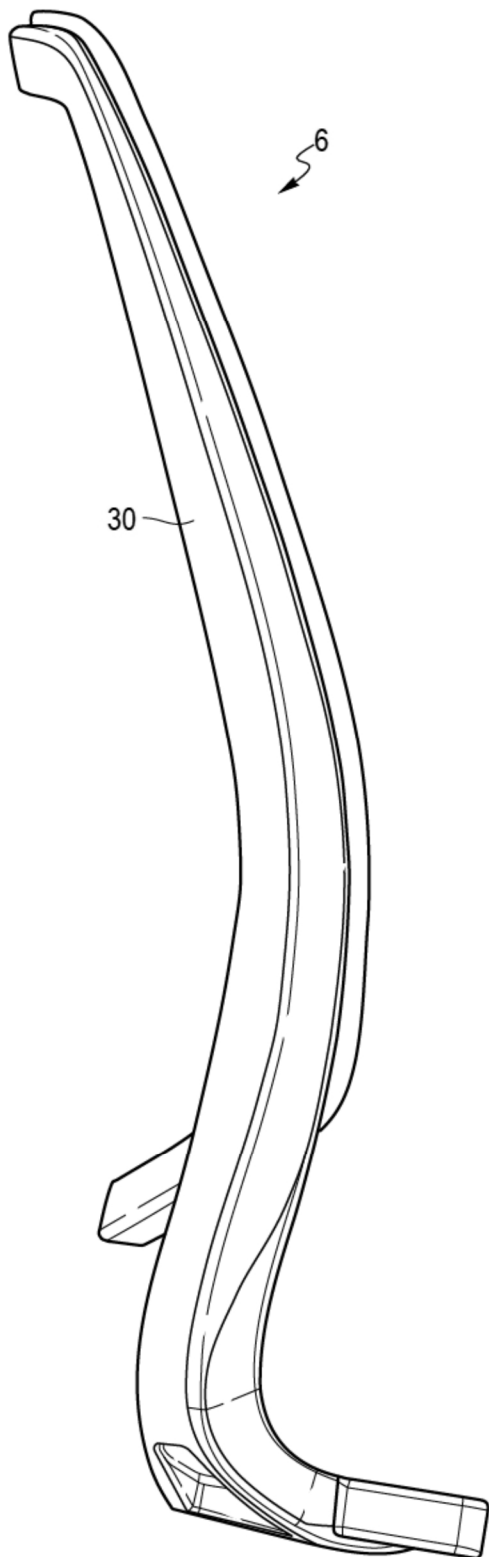


FIG. 42

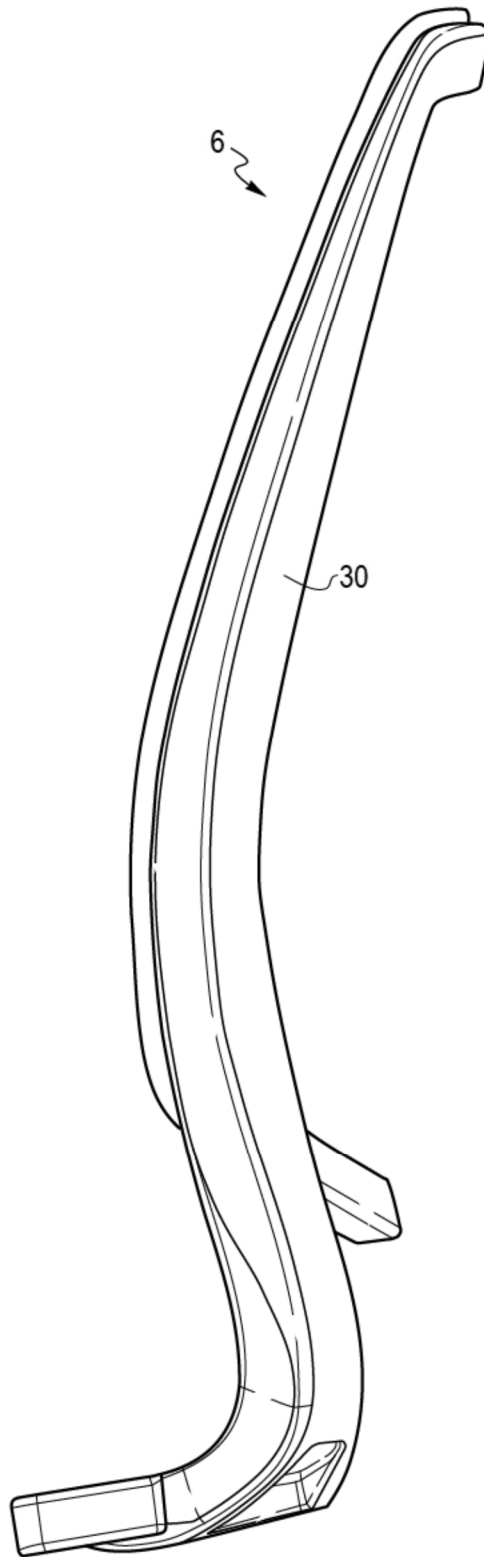




FIG. 43

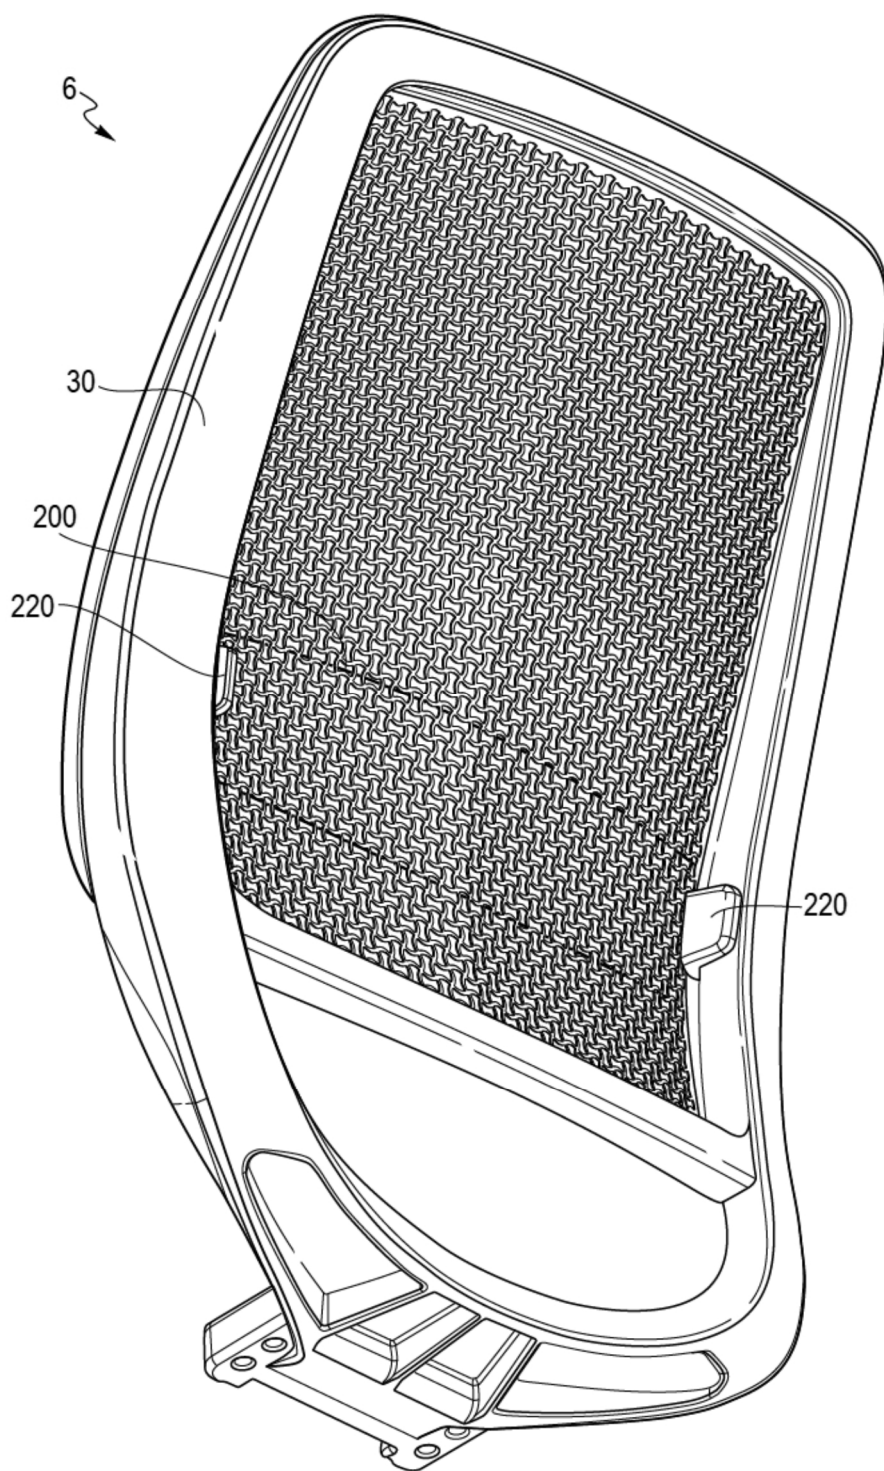




FIG. 44

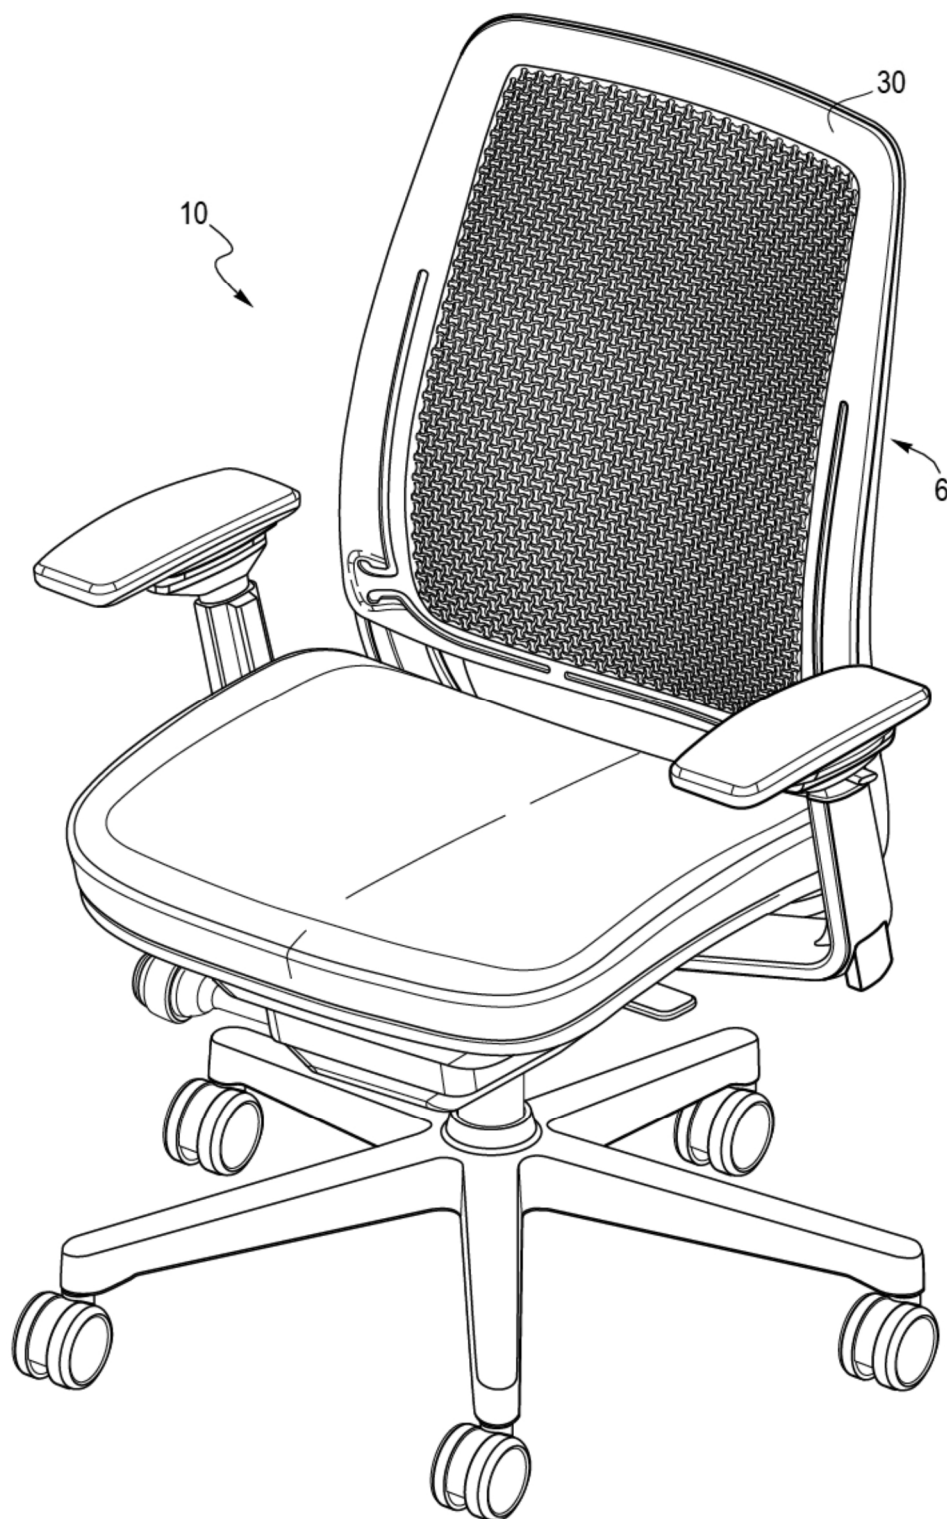


FIG. 45

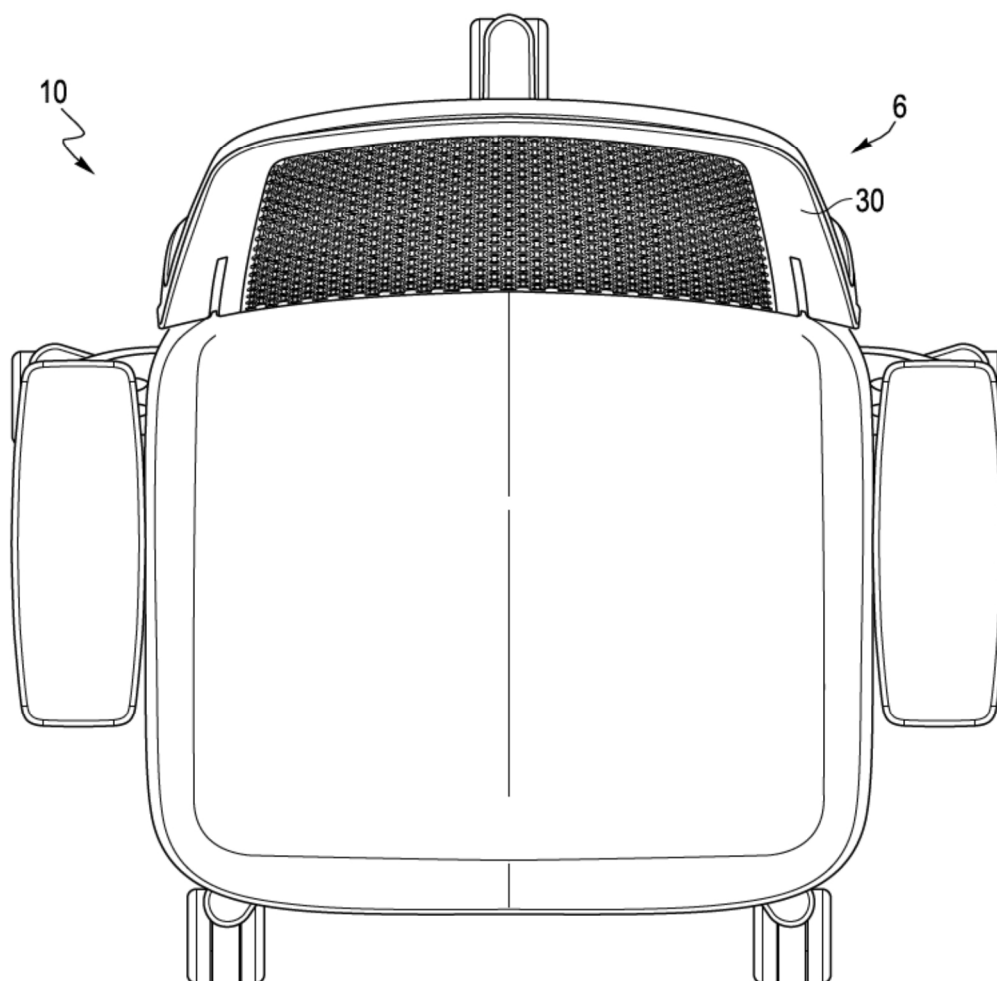


FIG. 46

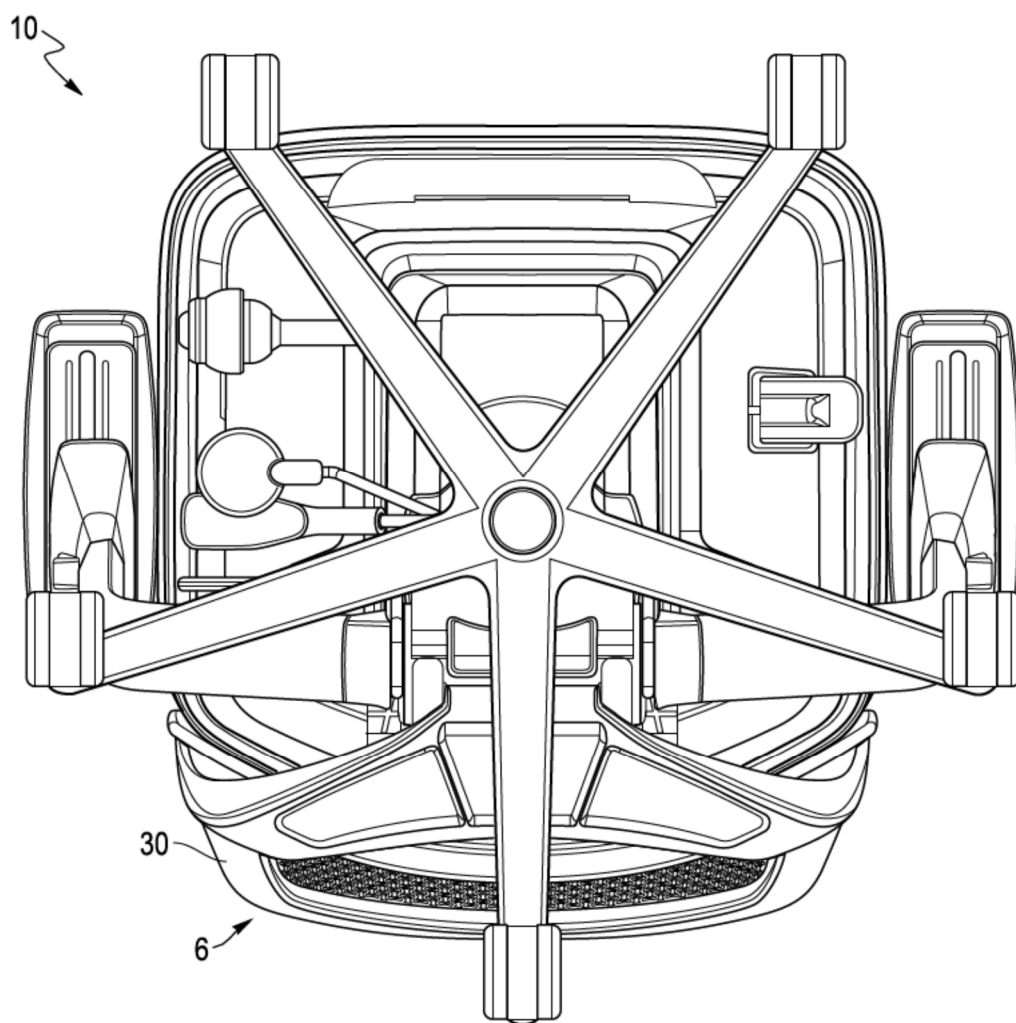


FIG. 47

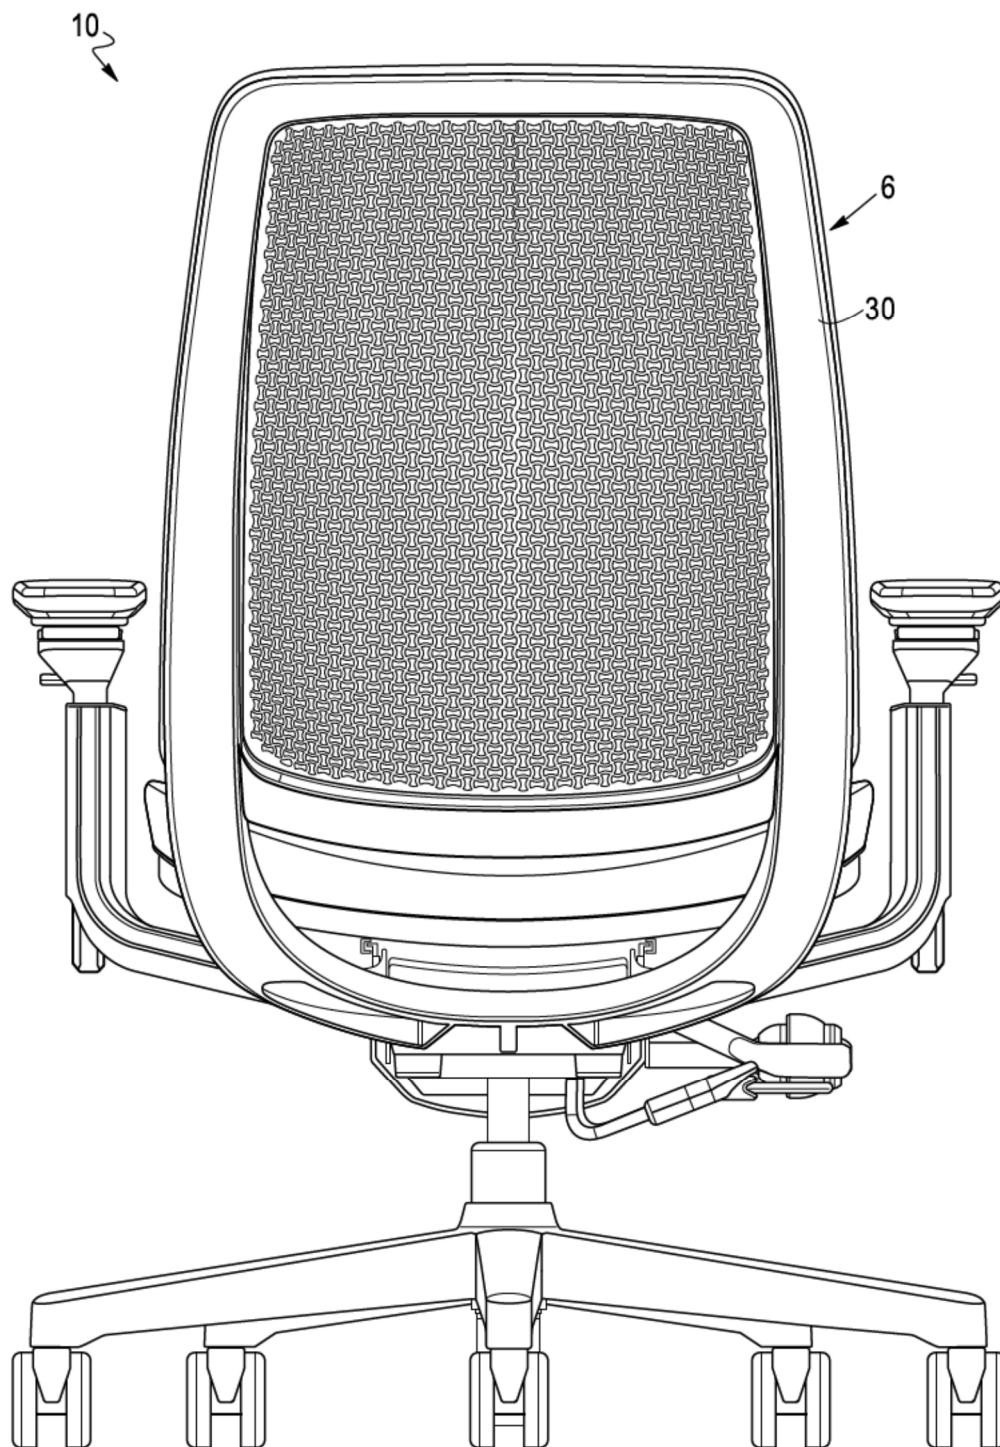




FIG. 48

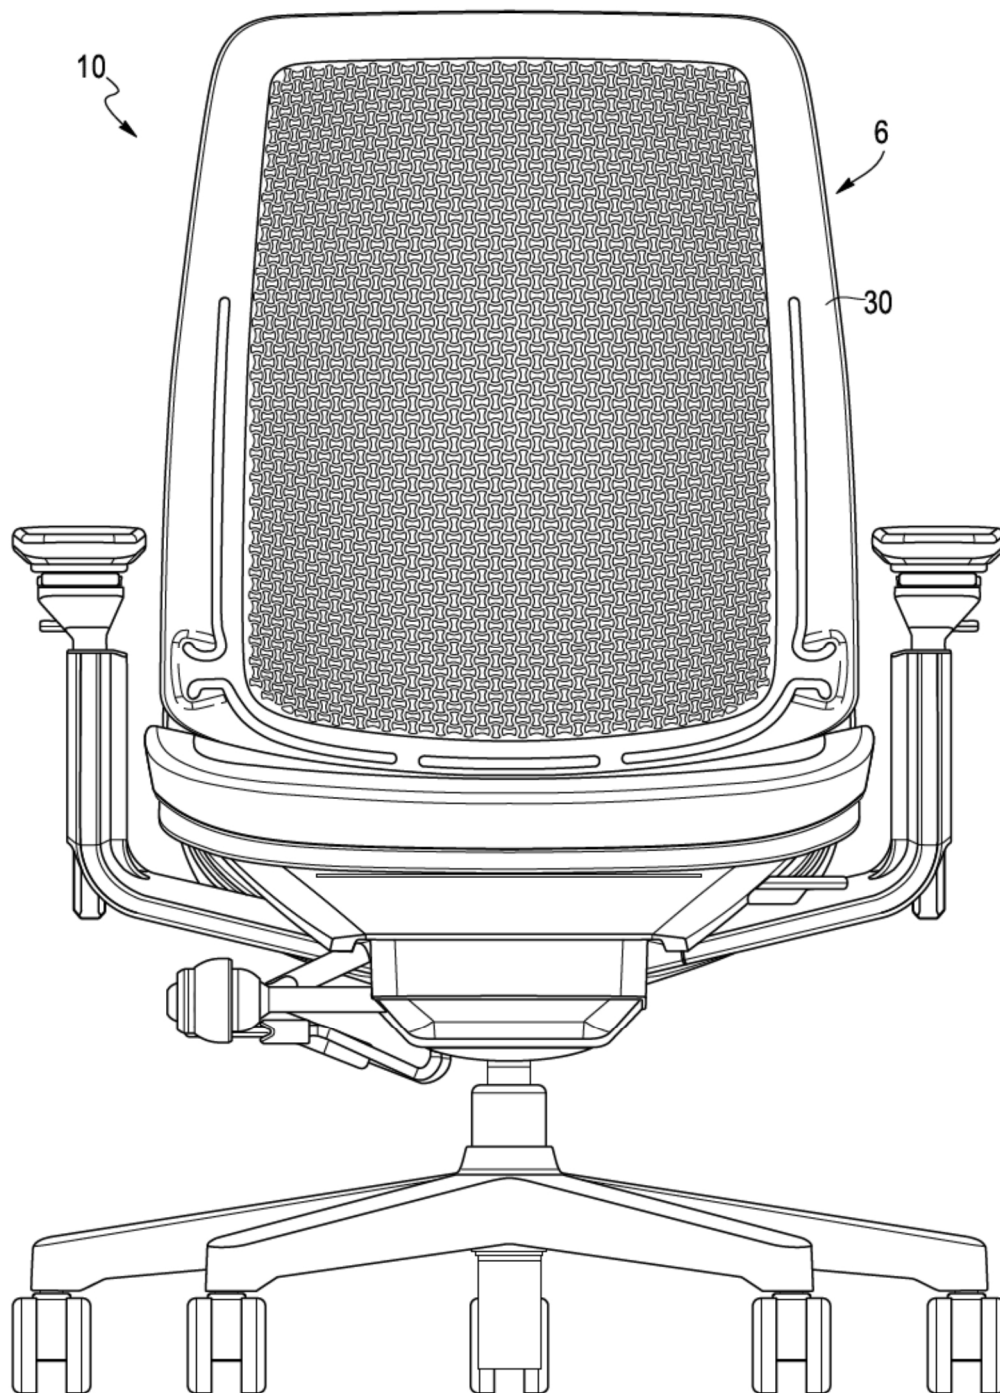




FIG. 49

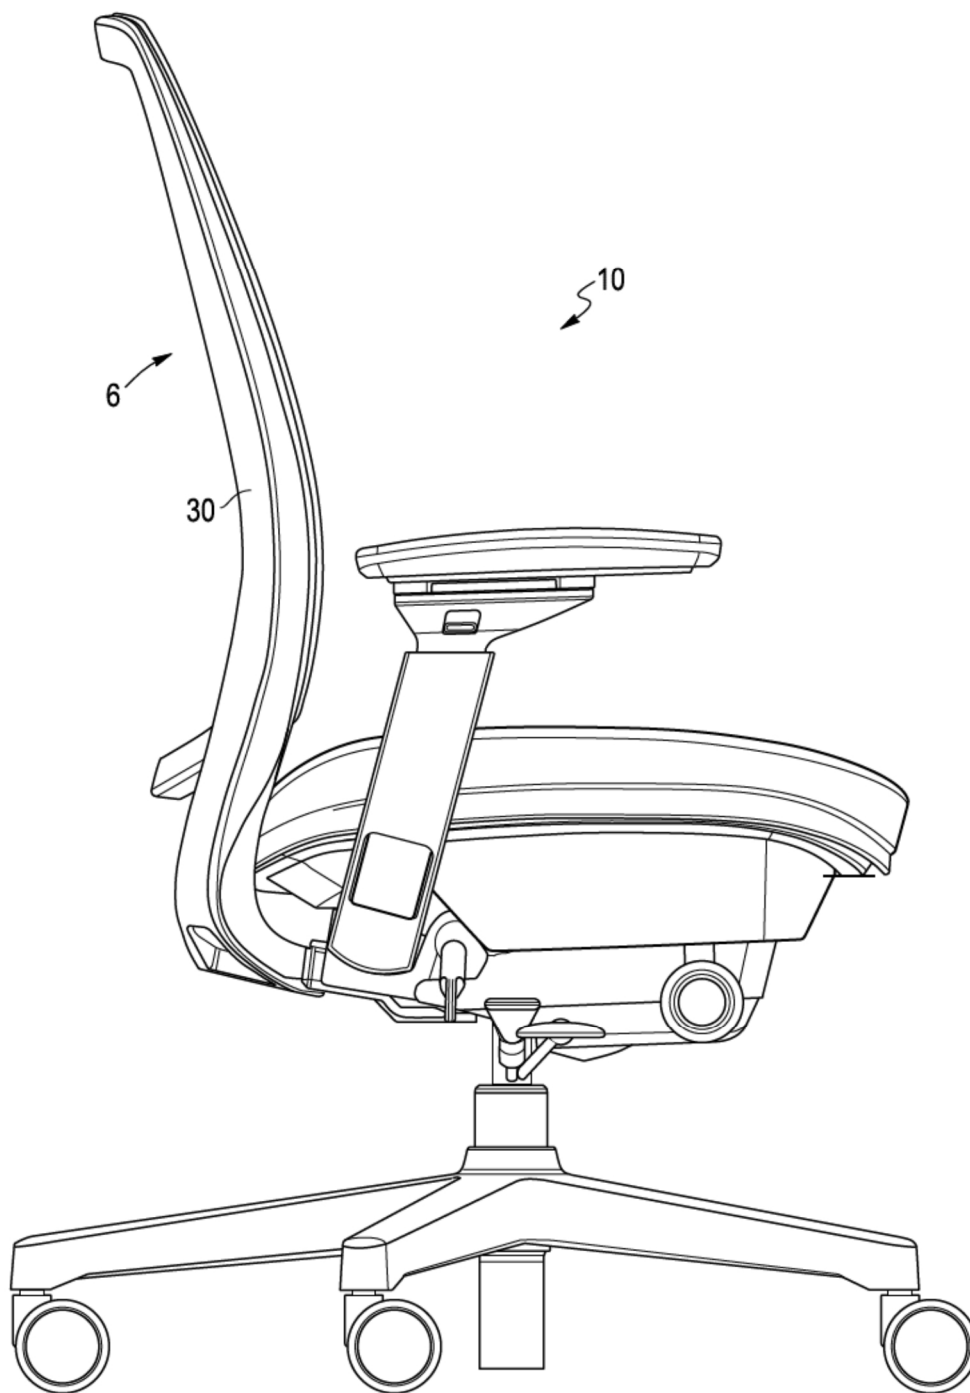


FIG. 50

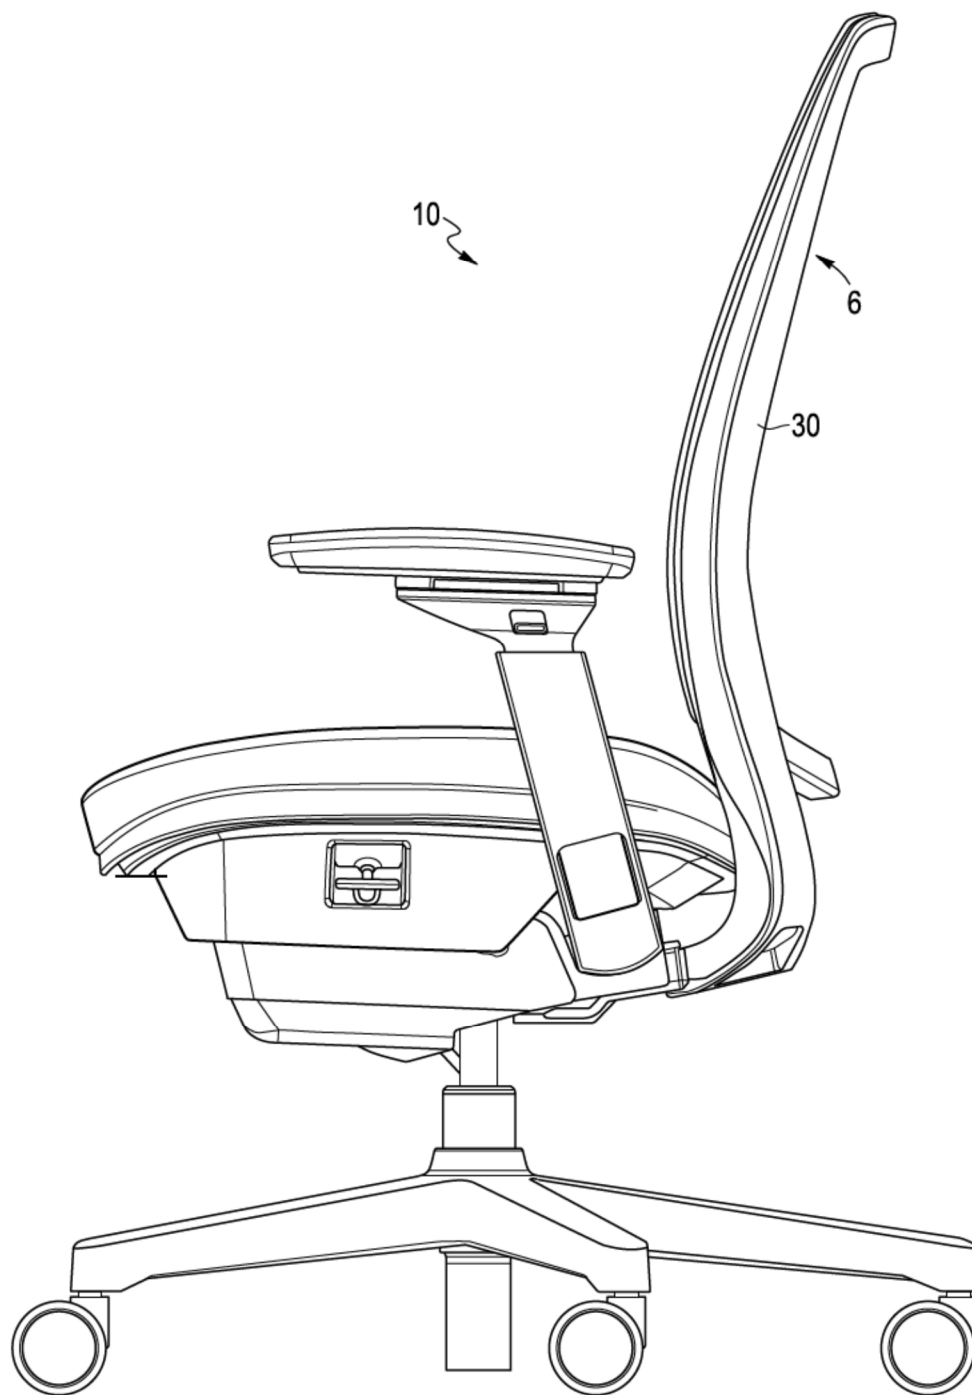


FIG. 51

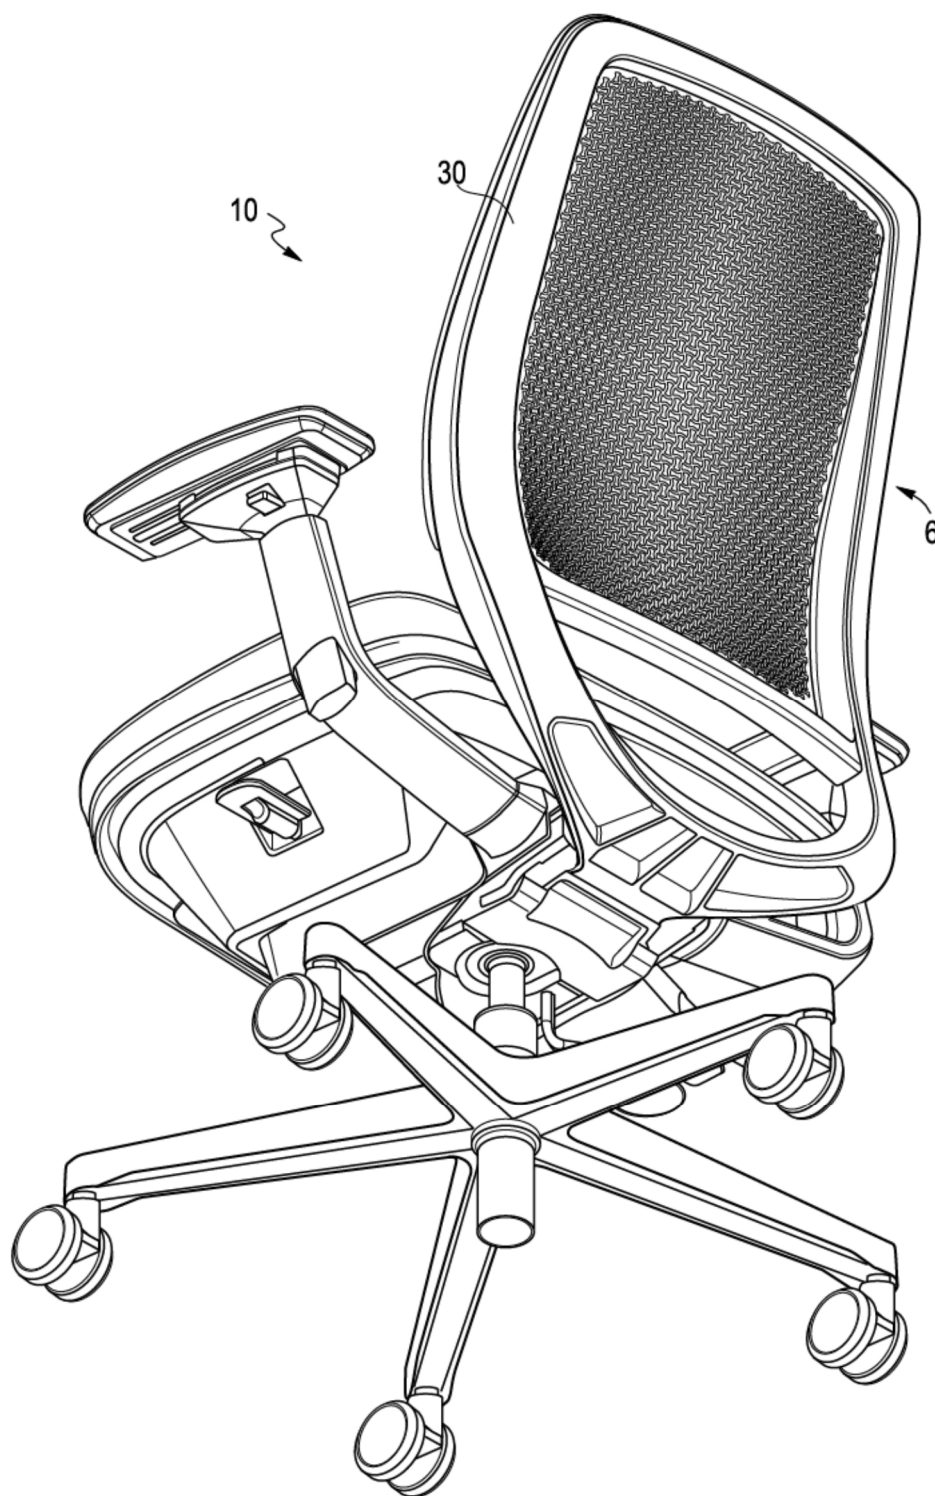


FIG. 52

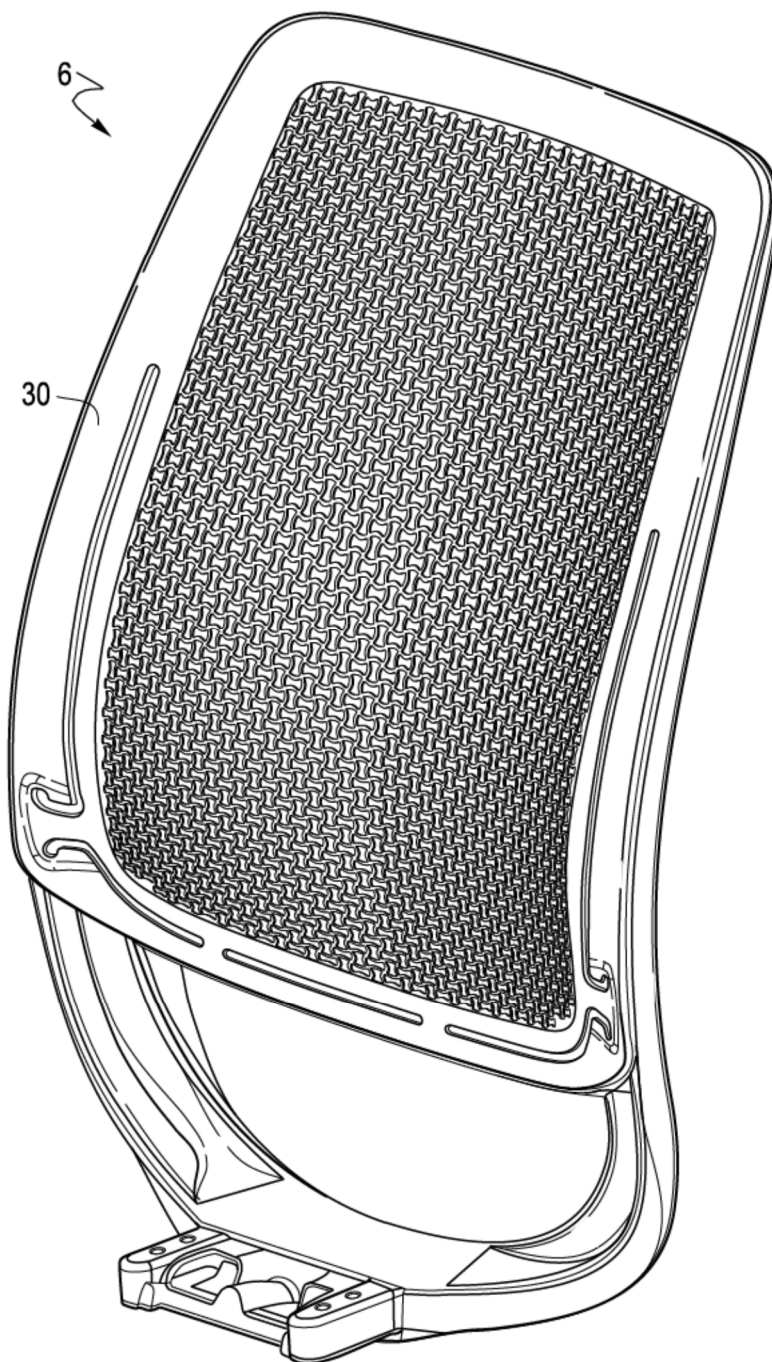




FIG. 53

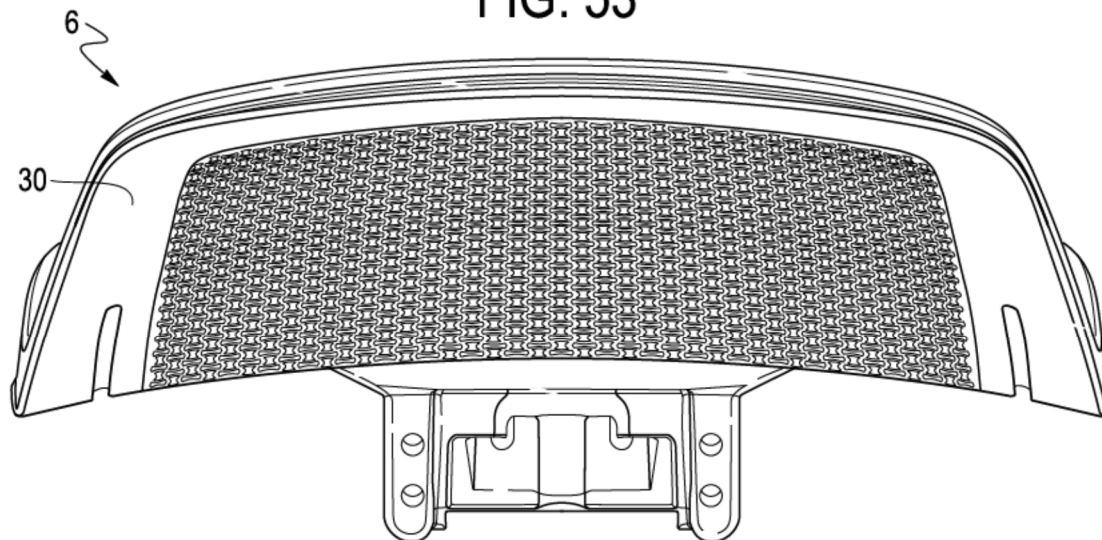


FIG. 54

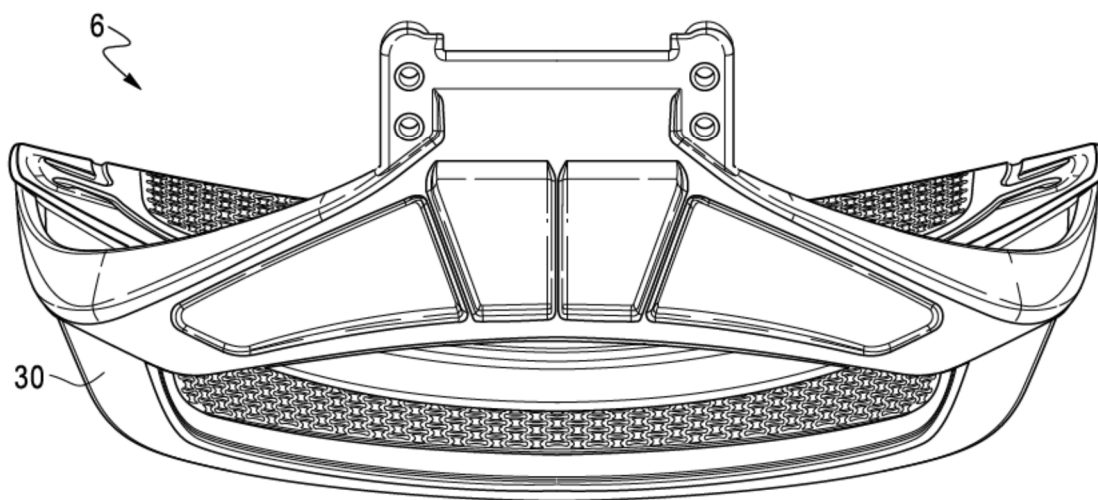




FIG. 55

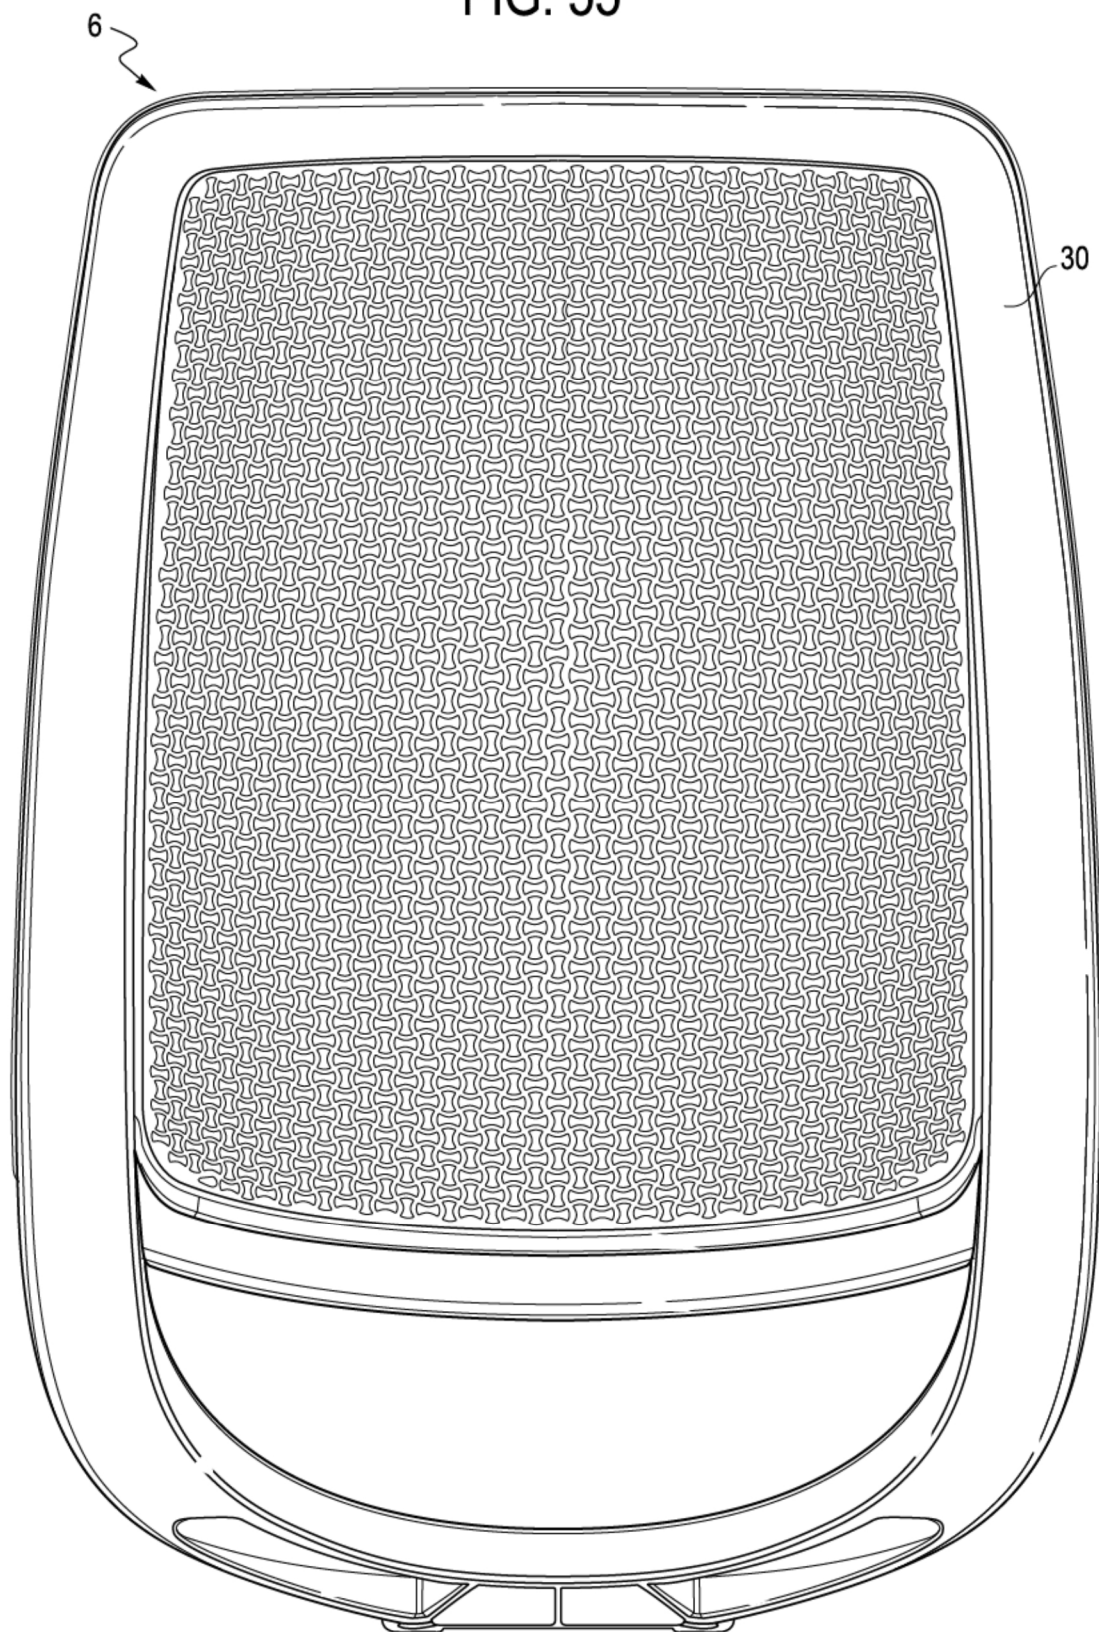


FIG. 56

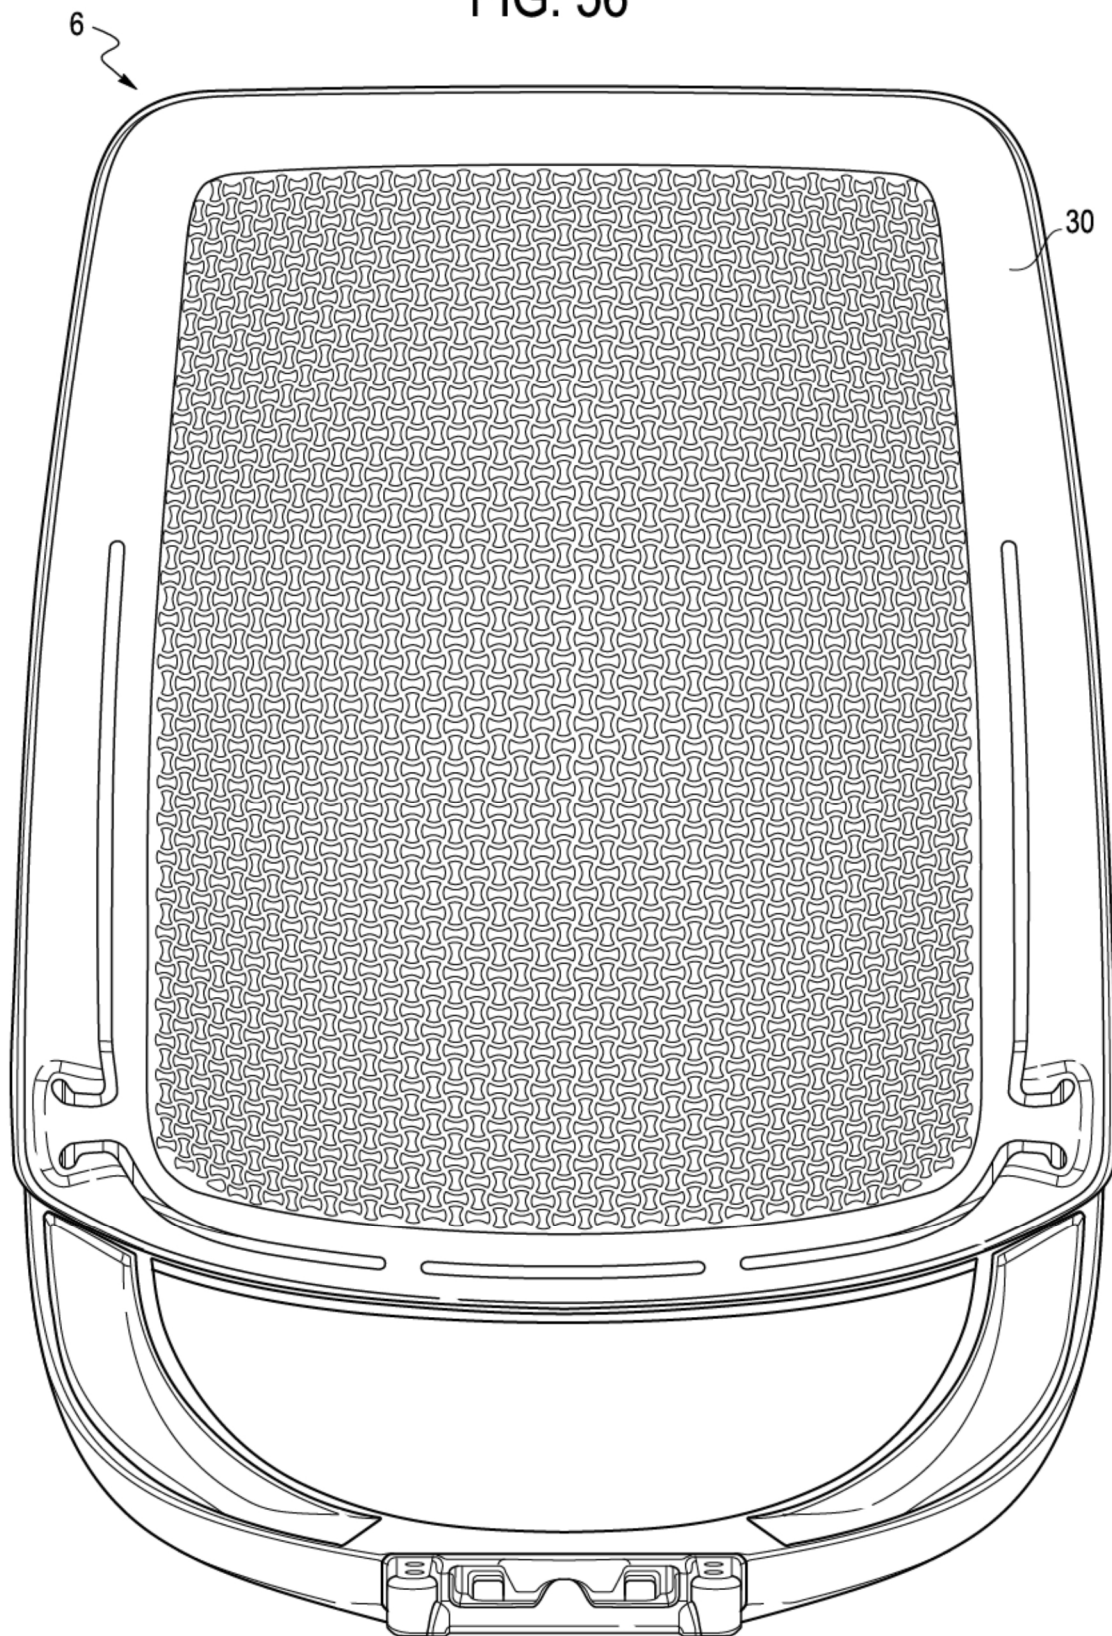




FIG. 57

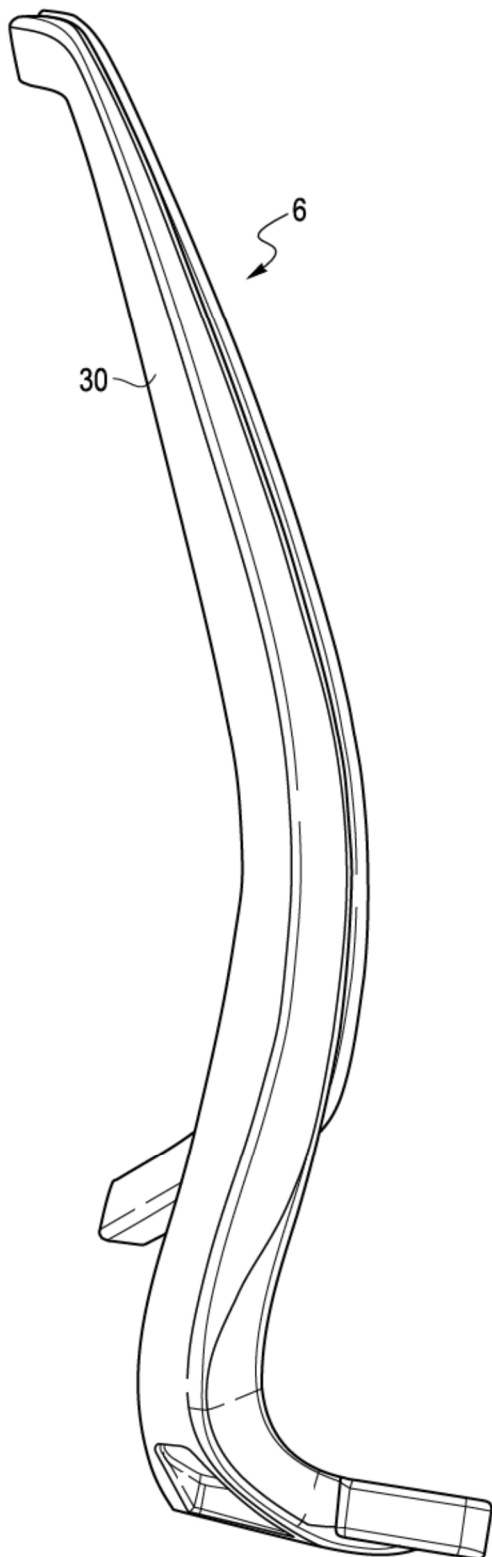


FIG. 58

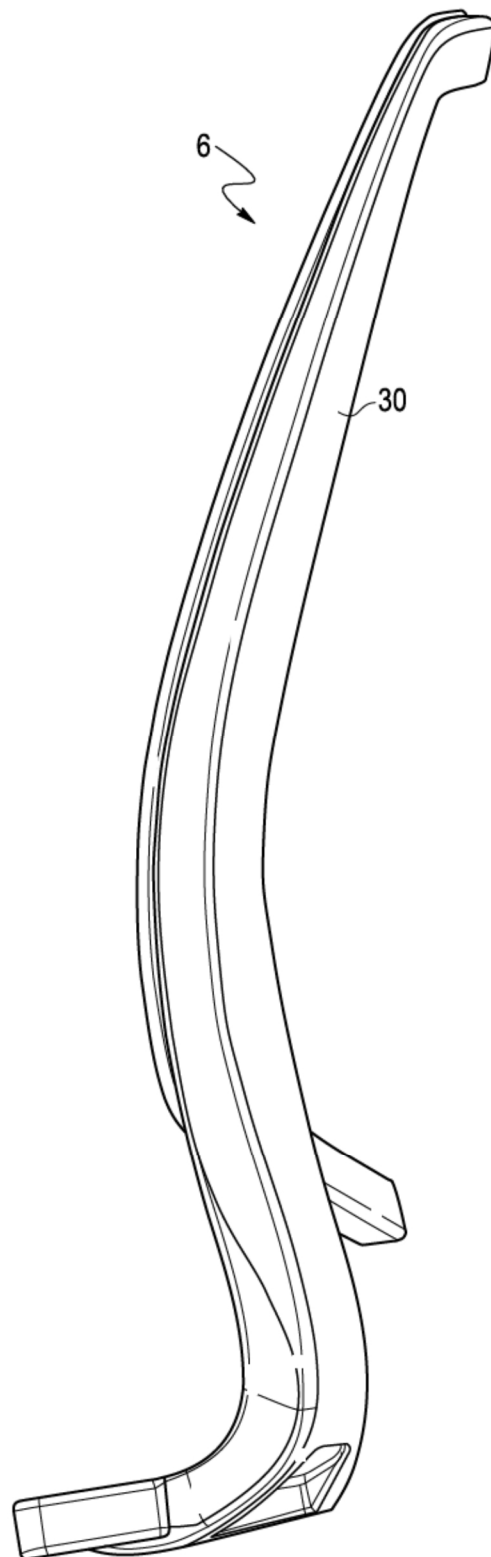


FIG. 59

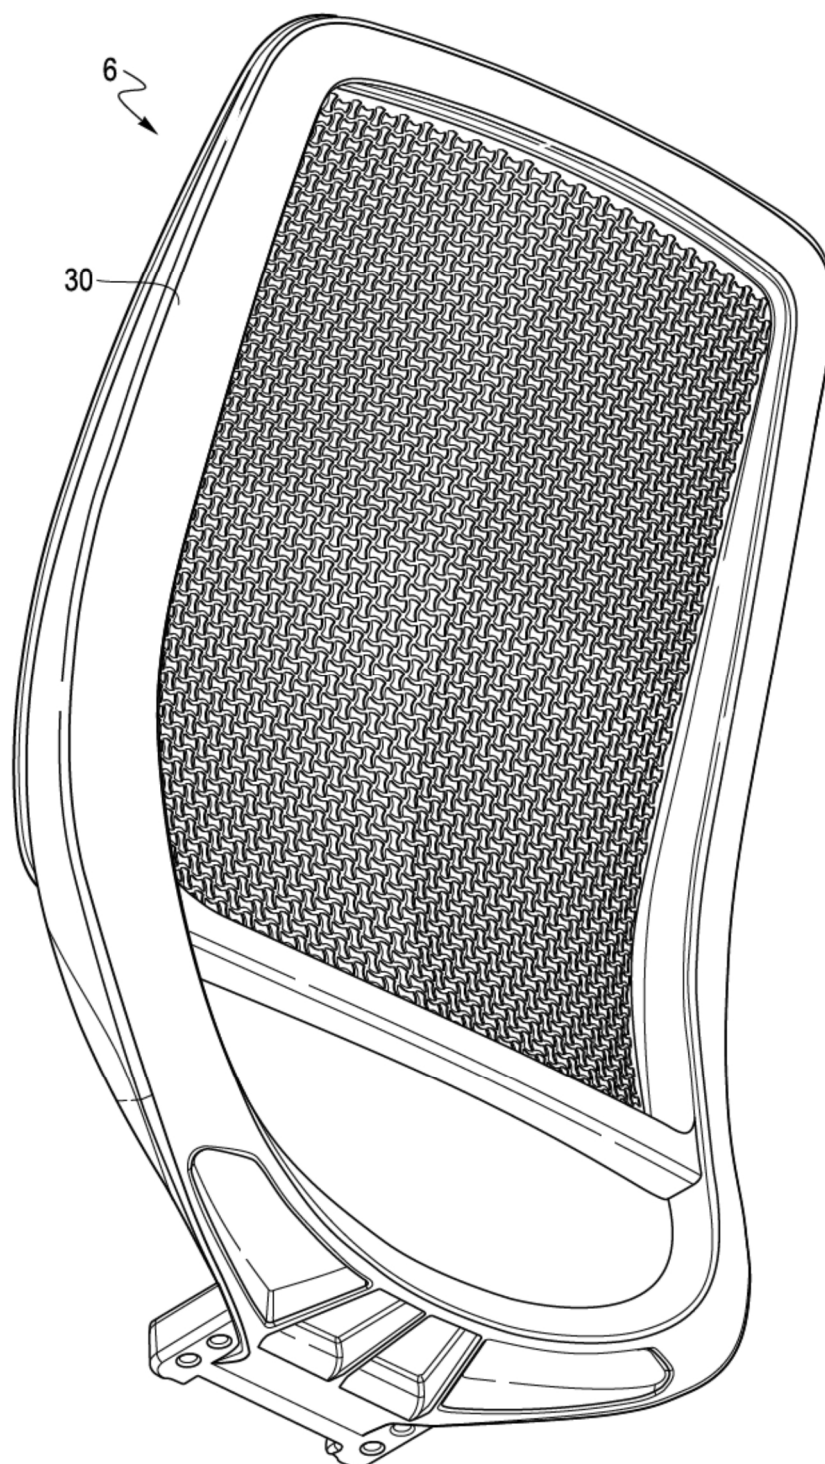


FIG. 60

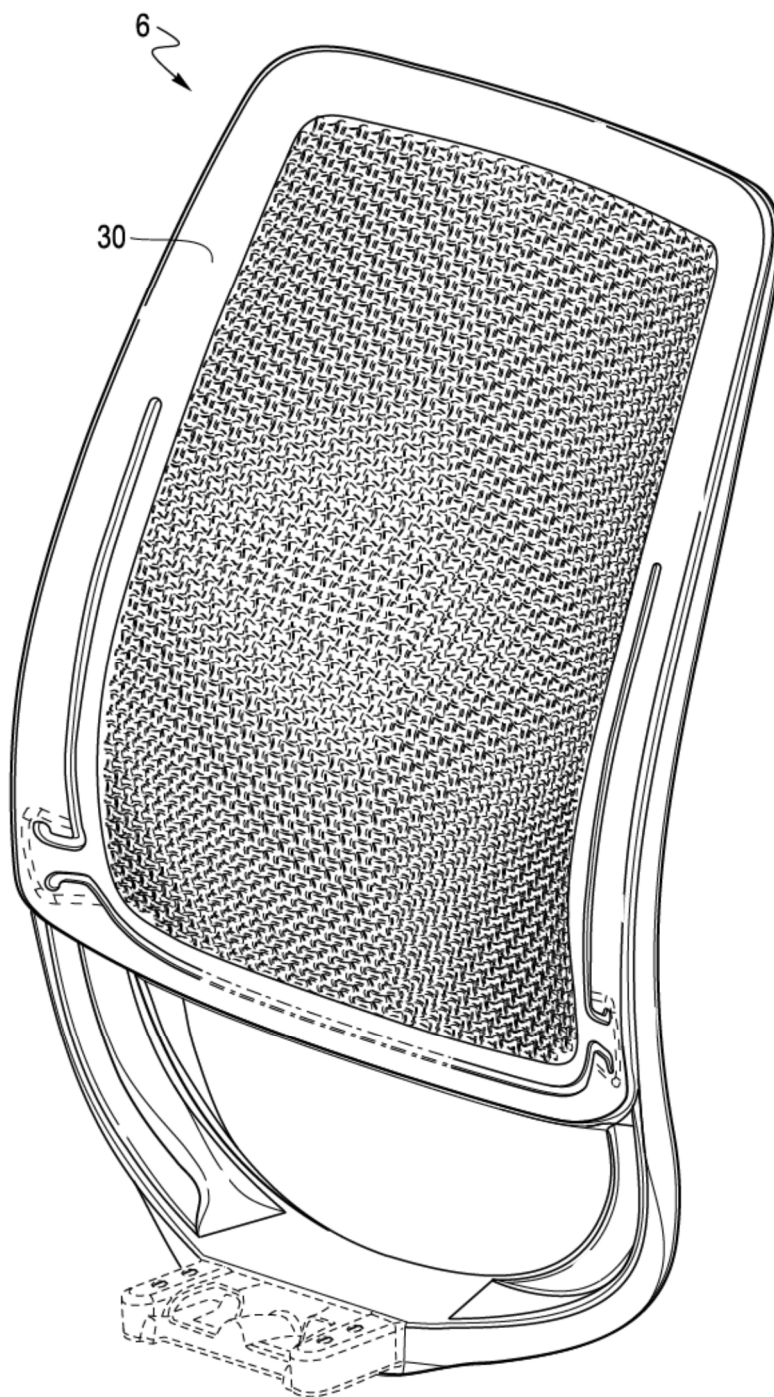




FIG. 61


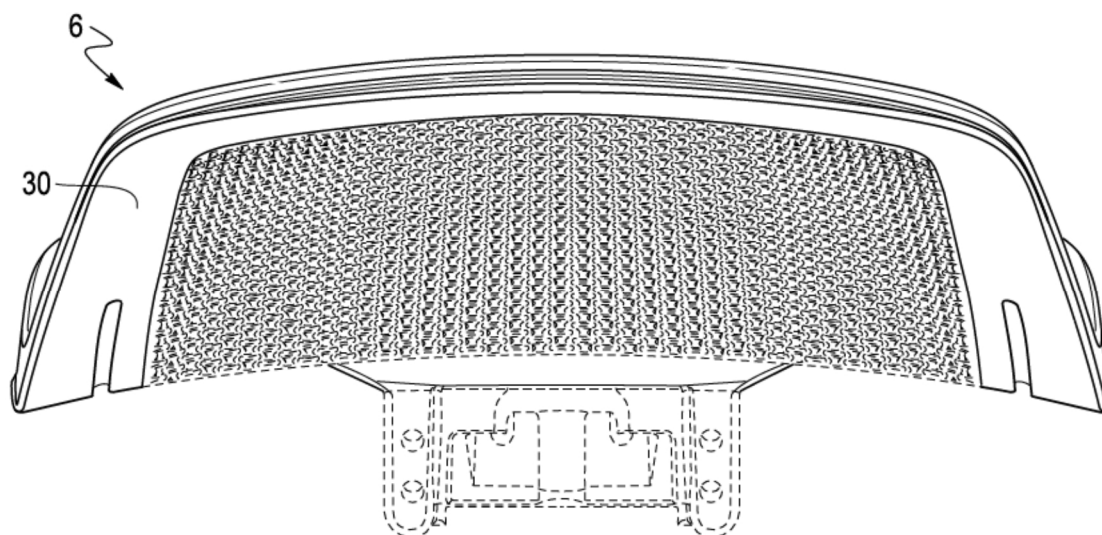


FIG. 62

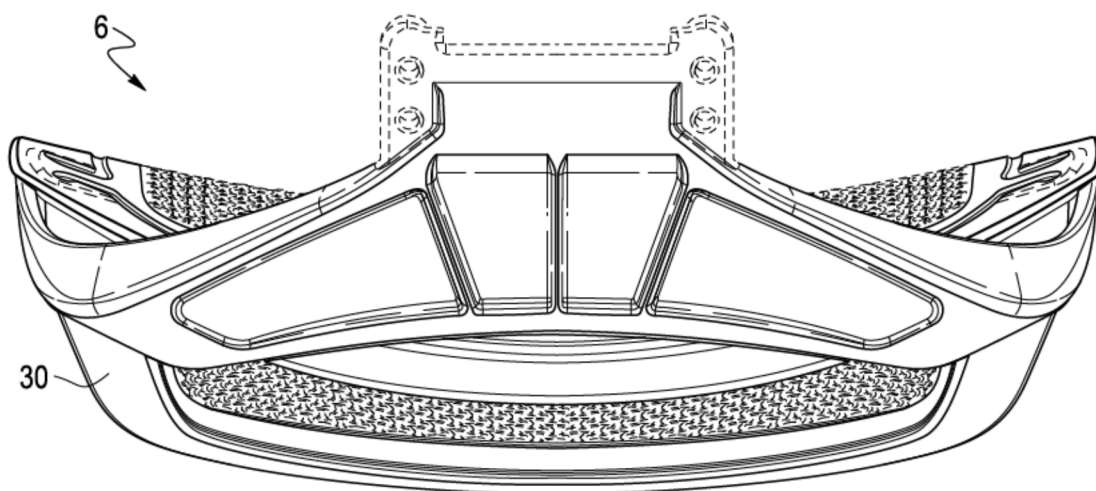

6

FIG. 63





FIG. 64

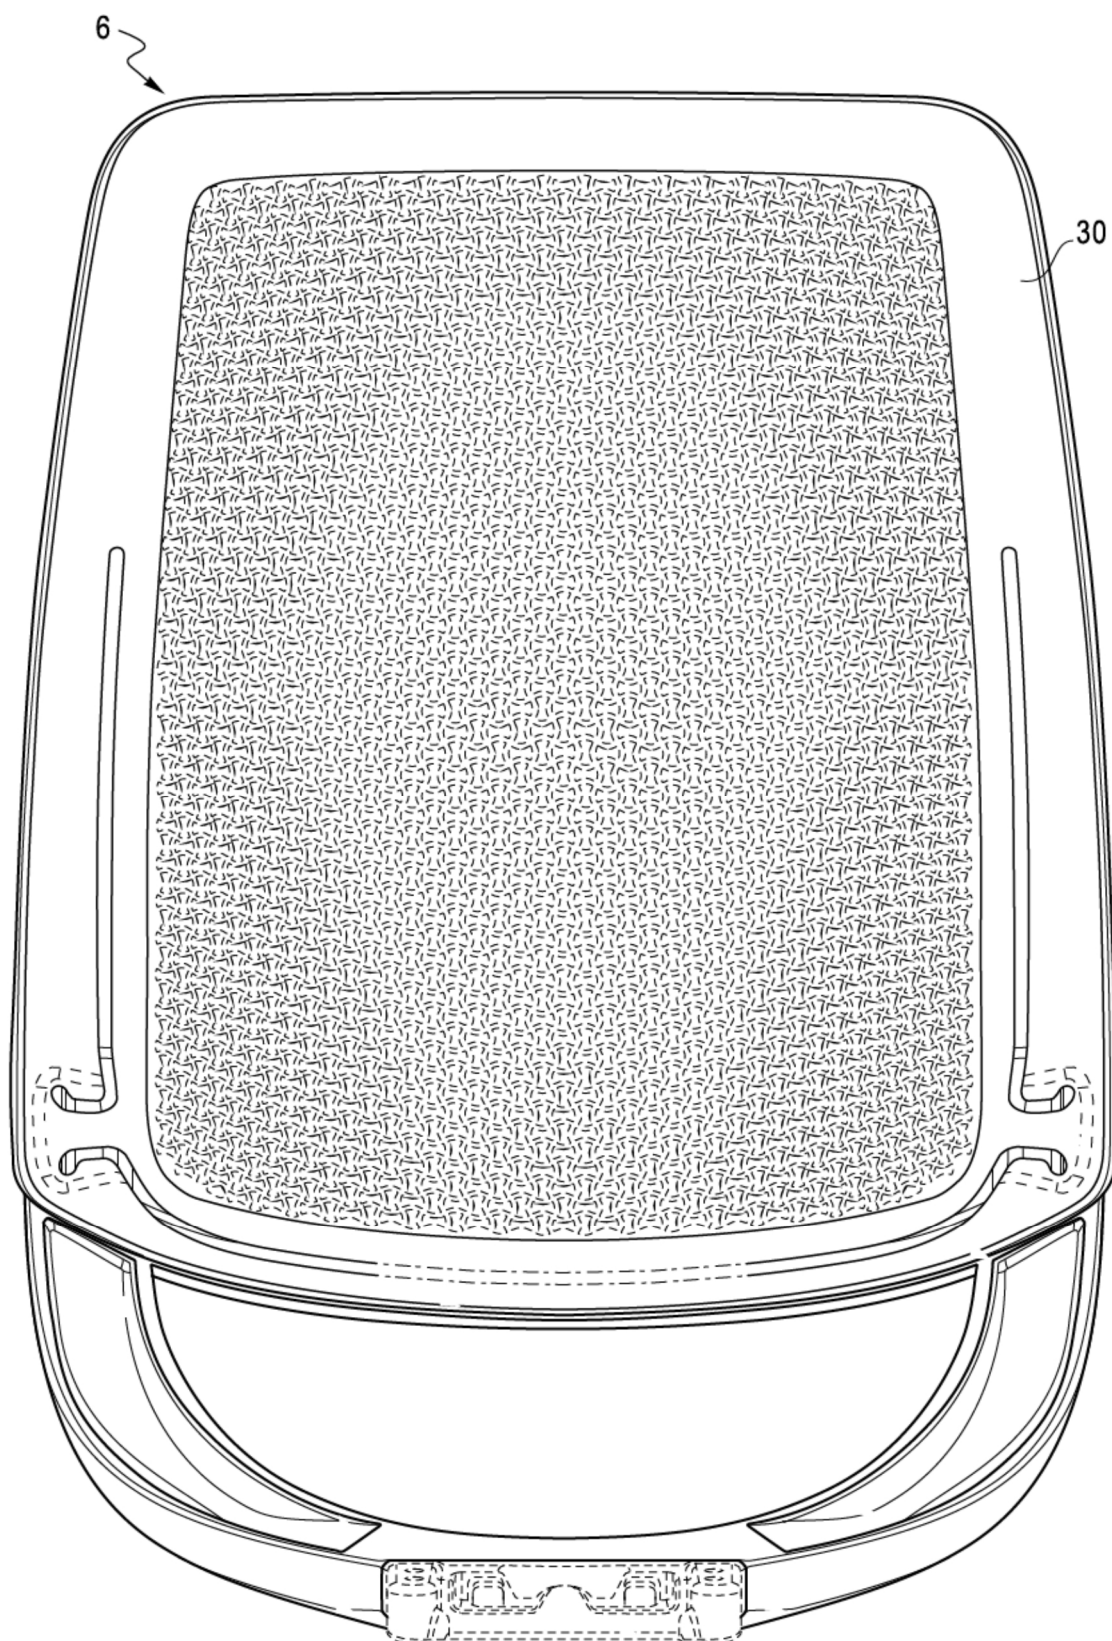


FIG. 65

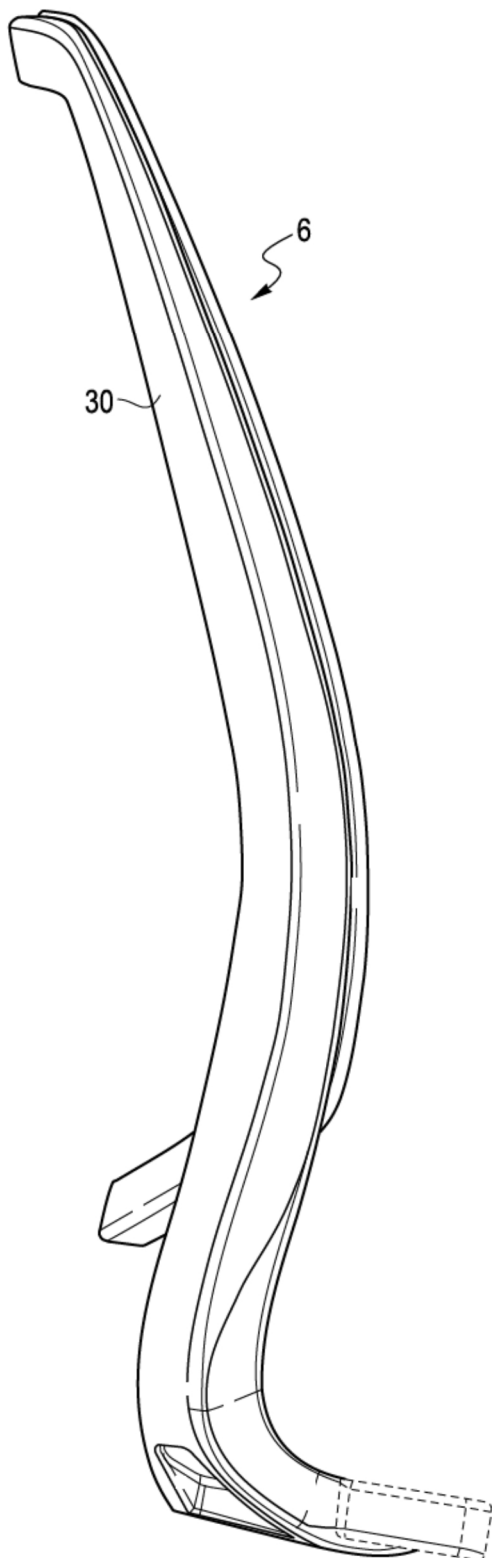


FIG. 66


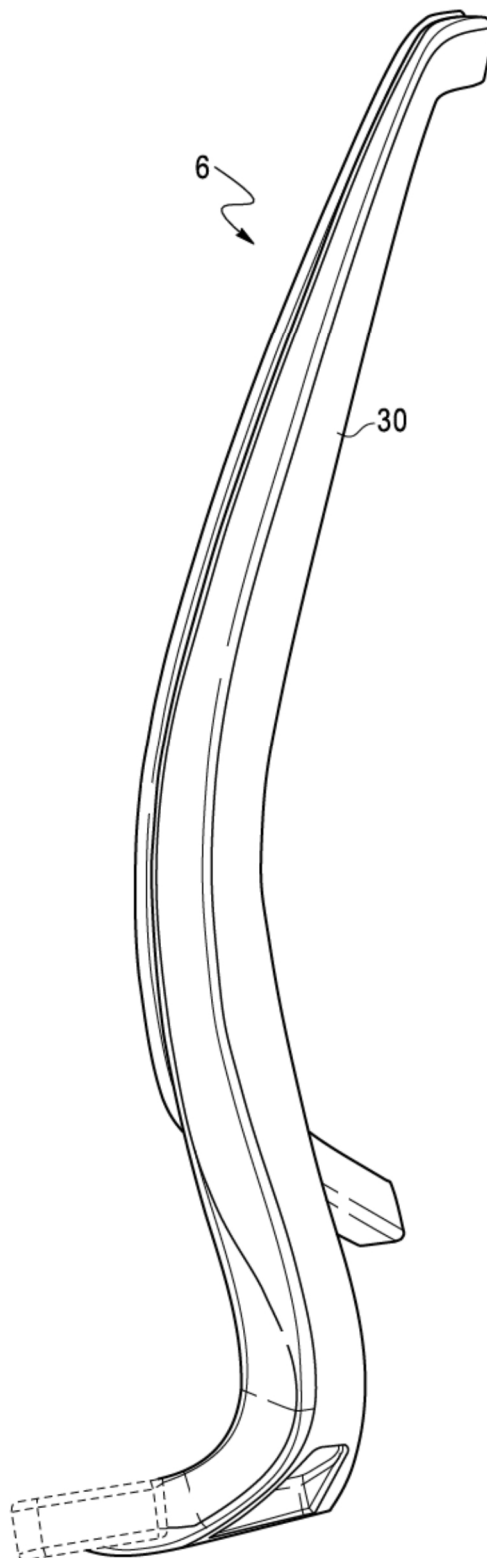


FIG. 67



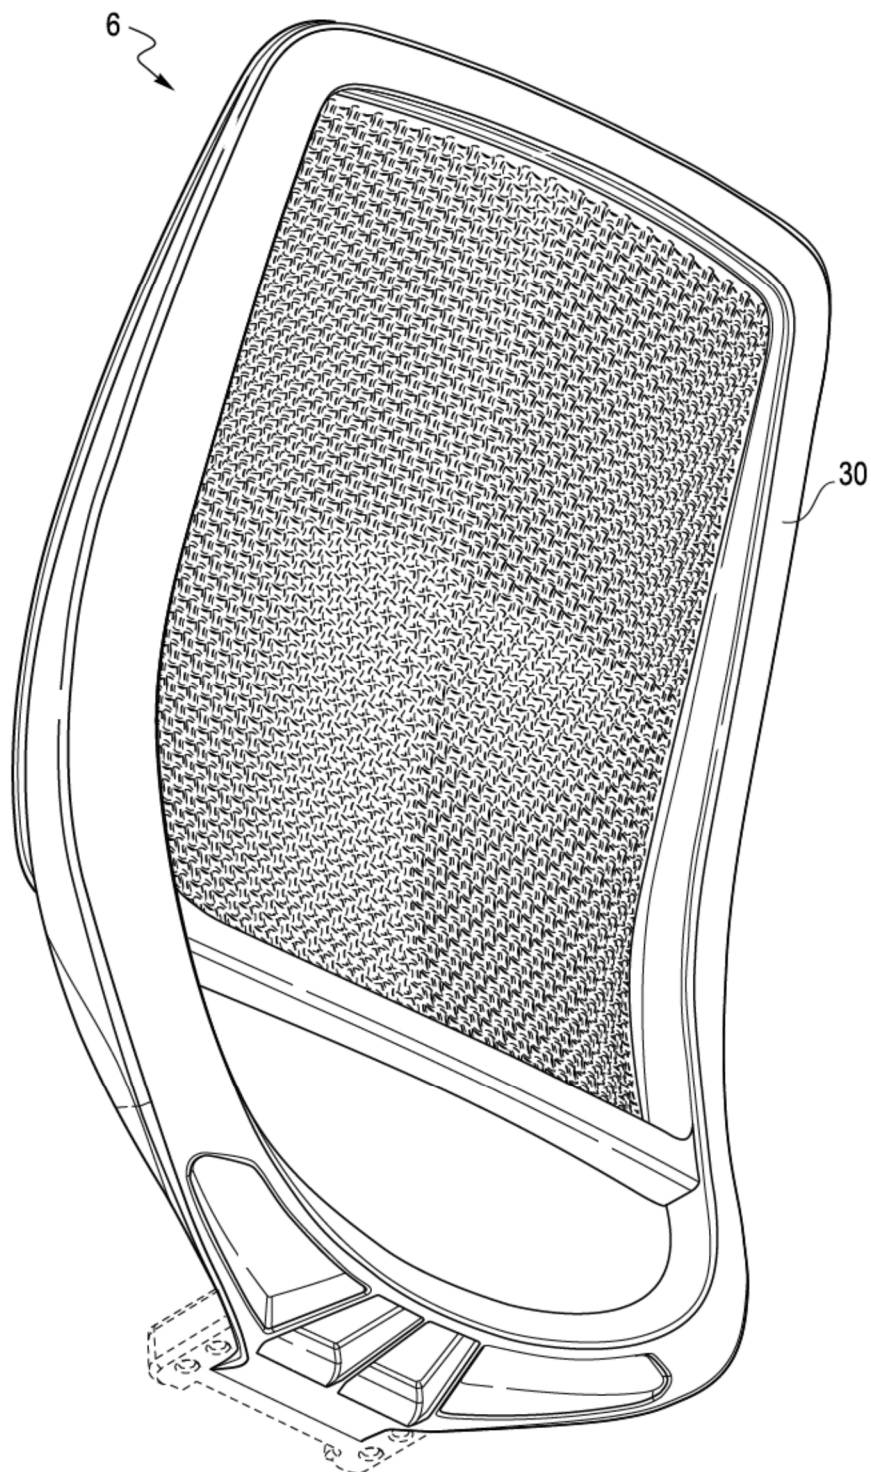

**COMPLIANT BACKREST**

This application is a continuation of U.S. application Ser. No. 18/096,770, filed Jan. 13, 2023, which is a continuation of U.S. application Ser. No. 17/683,876, filed Mar. 1, 2022, which is a continuation of U.S. application Ser. No. 17/035, 150, filed Sep. 28, 2020 and issued as U.S. Pat. No. 11,291,305, which is a continuation of U.S. application Ser. No. 16/208,206, filed Dec. 3, 2018 and issued as U.S. Pat. No. 10,813,463, which application claims the benefit of U.S. Provisional Application No. 62/594,885, filed Dec. 5, 2017 and entitled "Compliant Backrest," and the benefit of U.S. Design Application Nos. 29/628,523; 29/628,526; 29/628, 528; and Ser. No. 29/628,527, each also filed Dec. 5, 2017, including that the entire disclosure of each of the foregoing applications is incorporated herein by reference.

**FIELD OF THE INVENTION**

The present application relates generally to a backrest, and in particular to a compliant backrest, and various office furniture incorporating the backrest, together with methods for the use and assembly thereof.

**BACKGROUND**

Chairs, and in particular office chairs, are typically configured with a backrest having one or more body support surfaces. The support surfaces may be made of various materials, including for example and without limitation foam, elastomeric membranes or plastic shells. Foam materials may limit air circulation and often do not provide localized support. Elastomeric membranes, and other similar materials, typically lie flat when not loaded, must be tensioned and do not provide good shear resistance. Conversely, backrests configured with plastic shells, supported for example by peripheral frames, typically do not provide a comfortable body-conforming support surface.

**SUMMARY**

The present invention is defined by the following claims, and nothing in this section should be considered to be a limitation on those claims.

In one aspect, one embodiment of a backrest includes a peripheral frame defining a central opening. The frame has a pair of laterally spaced upright members connected with longitudinally spaced upper and lower members. A flexible shell has opposite sides coupled to the upright members and upper and lower portions coupled to the upper and lower members. The shell includes first and second slots extending longitudinally along opposite sides of the shell inboard of locations where the shell is connected to the upright members, and one or more third slots extending laterally along the lower portion of the shell above a location where the shell is connected to the lower member. The terminal ends of the one or more third slots are spaced apart from lower terminal ends of the first and second slots, with first and second bridge portions defined between the terminal ends of the third slot and the lower terminal ends of the first and second slots.

In another aspect, one embodiment of a method for supporting the body of a user in a chair includes leaning against a backrest and moving a portion of the shell adjacent the first, second and third slots relative to the frame.

In another aspect, one embodiment of the backrest includes a shell including a molded component having a

three-dimensional shape in a non-loaded configuration. The shell has a forwardly facing convex shape along a vertical centerline and a forwardly facing concave shape along a horizontal centerline in the non-loaded configuration. The shell further includes a plurality of openings arranged in an area overlying the central opening. The shell has flush front and rear surfaces in the area overlying the central opening. The plurality of openings is configured in one embodiment as a matrix of openings providing independent lateral and longitudinal expansion of the shell relative to the frame.

In another aspect, one embodiment of a method for supporting the body of a user in a chair includes leaning against a backrest, laterally expanding the shell across the matrix of openings, and longitudinally expanding the shell across the matrix of openings independent of the laterally expanding the shell.

In another aspect, the shell has various structures and devices for providing different levels of compliance, including means for providing macro compliance and means for providing micro compliance.

The various embodiments of the backrest and methods provide significant advantages over other backrests. For example and without limitation, the openings and slots provide compliance in the backrest, allowing it to move and conform to the user during use, even when bounded by a peripheral frame. At the same time, the openings provide excellent air circulation. The slots also serve to guide, and allow pass through of, an auxiliary body support member, for example and without limitation a lumbar support, which may be moved along a forwardly facing body support surface of the shell, but with a user interface disposed along the rear of the backrest. In addition, the backrest may be configured with a three-dimensional contour in a non-loaded configuration, while maintaining the ability to move and adapt to the user when loaded.

The foregoing paragraphs have been provided by way of general introduction, and are not intended to limit the scope of the claims presented below. The various preferred embodiments, together with further advantages, will be best understood by reference to the following detailed description taken in conjunction with the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIGS. 1A-C are front perspective views respectively of a chair having a backrest with an upholstered front surface, a backrest including an auxiliary body support member without an upholstered front surface and a backrest without a lumbar or upholstered front surface.

FIG. 2 is a side view of the chair shown in FIGS. 1A-1C.

FIGS. 3A-C are front views respectively of a chair having a backrest with an upholstered front surface, a backrest including an auxiliary body support member without an upholstered front surface and a backrest without a lumbar or upholstered front surface.

FIGS. 4A-C are rear views respectively of a chair having a backrest with an upholstered front surface, a backrest including an auxiliary body support member without an upholstered front surface and a backrest without a lumbar or upholstered front surface.

FIGS. 5A and B are top views respectively of a chair having a backrest with and without an upholstered front surface.

FIG. 6 is a bottom view of the chair shown in FIGS. 1A-C.

FIGS. 7A and B are rear and front perspective views of a primary frame.

## 3

FIGS. 8A and B are rear and front perspective views of a secondary frame.

FIG. 9 is an enlarged partial view of an interface between a backrest shell, secondary frame and auxiliary body support member.

FIG. 10 is a perspective view of one embodiment of a flexible shell.

FIG. 11 is a rear view of the shell shown in FIG. 10.

FIG. 12 is an enlarged perspective view taken along line 12 of FIG. 11 and showing a shell connector.

FIG. 13 is a partial cross-sectional view of the shell, secondary frame and upholstery.

FIG. 14 is a schematic drawing of one embodiment of a matrix of openings incorporated into flexible shell.

FIG. 15 is an enlarged partial view of one embodiment of a matrix of openings incorporated into the flexible shell.

FIG. 16 is a partial rear perspective view of the auxiliary body support assembly.

FIGS. 17A and B are exploded front and rear perspective views of one embodiment of a backrest.

FIG. 18 is a front view of an alternative embodiment of a backrest.

FIG. 19 is a schematic side view of the shell deflecting in response to a load (F) being applied to a body support surface thereof.

FIG. 20 is a partial front view of one embodiment of the shell.

FIG. 21 shows schematic rear and cross-sectional views of the shell deflecting in response to a load (F) being applied to a body support surface thereof.

FIG. 22 is a partial, perspective view of an auxiliary body support member.

FIG. 23 is a perspective view of a user interface handle.

FIG. 24 is a partial perspective view of the user interface coupled to the auxiliary body support member.

FIG. 25 is a partial rear view of the auxiliary body support member secured to the frame.

FIG. 26 is a view of an alternative hole pattern incorporated into the central region of the shell.

FIG. 27 is a perspective view showing a cover being applied to a shell having an auxiliary body support assembly coupled thereto.

FIG. 28 is a top upper perspective view of a chair, displaying its ornamental design features.

FIG. 29 is a top plan view thereof.

FIG. 30 is a bottom plan view thereof.

FIG. 31 is a rear elevation view thereof.

FIG. 32 is a front elevation view thereof.

FIG. 33 is a right side elevation view thereof.

FIG. 34 is a left side elevation view thereof.

FIG. 35 is a rear lower perspective view thereof.

FIG. 36 is a top upper perspective view of a backrest, displaying its ornamental design features.

FIG. 37 is a top plan view thereof.

FIG. 38 is a bottom plan view thereof.

FIG. 39 is a rear elevation view thereof.

FIG. 40 is a front elevation view thereof.

FIG. 41 is a right side elevation view thereof.

FIG. 42 is a left side elevation view thereof.

FIG. 43 is a rear lower perspective view thereof.

FIG. 44 is a top upper perspective view of a chair, displaying its ornamental design features.

FIG. 45 is a top plan view thereof.

FIG. 46 is a bottom plan view thereof.

FIG. 47 is a rear elevation view thereof.

FIG. 48 is a front elevation view thereof.

FIG. 49 is a right side elevation view thereof.

## 4

FIG. 50 is a left side elevation view thereof.

FIG. 51 is a rear lower perspective view thereof.

FIG. 52 is a top upper perspective view of another backrest, displaying its ornamental design features.

FIG. 53 is a top plan view thereof.

FIG. 54 is a bottom plan view thereof.

FIG. 55 is a rear elevation view thereof.

FIG. 56 is a front elevation view thereof.

FIG. 57 is a right side elevation view thereof.

FIG. 58 is a left side elevation view thereof.

FIG. 59 is a rear lower perspective view thereof.

FIG. 60 is a top upper perspective view of yet another backrest, displaying its ornamental design features.

FIG. 61 is a top plan view thereof.

FIG. 62 is a bottom plan view thereof.

FIG. 63 is a rear elevation view thereof.

FIG. 64 is a front elevation view thereof.

FIG. 65 is a right side elevation view thereof.

FIG. 66 is a left side elevation view thereof.

FIG. 67 is a rear lower perspective view thereof.

#### DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

It should be understood that the term “plurality,” as used herein, means two or more. The term “longitudinal,” as used herein means of or relating to a length or lengthwise direction 2, for example a direction running from the bottom of a backrest 6 to the top thereof, or vice versa, or from the front of a seat 8 to the rear thereof, or vice versa. The term “lateral,” as used herein, means situated on, directed toward or running in a side-to-side direction 4 of a chair 10, backrest 6 or seat 8. In one embodiment of a backrest disclosed below, a lateral direction corresponds to a horizontal direction and a longitudinal direction corresponds to a vertical direction. The term “coupled” means connected to or engaged with whether directly or indirectly, for example with an intervening member, and does not require the engagement to be fixed or permanent, although it may be fixed or permanent. The terms “first,” “second,” and so on, as used herein are not meant to be assigned to a particular component so designated, but rather are simply referring to such components in the numerical order as addressed, meaning that a component designated as “first” may later be a “second” such component, depending on the order in which it is referred. It should also be understood that designation of “first” and “second” does not necessarily mean that the two components or values so designated are different, meaning for example a first direction may be the same as a second direction, with each simply being applicable to different components. The terms “upper,” “lower,” “rear,” “front,” “fore,” “aft,” “vertical,” “horizontal,” “right,” “left,” and variations or derivatives thereof, refer to the orientations of the exemplary chair 10 as shown in FIGS. 1A-6, with a user seated therein. The term “transverse” means non-parallel.

Chair:

Referring to FIGS. 1A-6, a chair 10 is shown as including a backrest 6, a seat 8 and a base structure 12. In one embodiment, the base structure 12 includes a leg assembly 14, a support column 16 coupled to and extending upwardly from the leg assembly and a tilt control 18 supported by the support column. The leg assembly may alternatively be configured as a fixed structure, for example a four legged base, a sled base or other configuration. In one embodiment, the support column may be height adjustable, including for example and without limitation a telescopic column with a pneumatic, hydraulic or electro-mechanical actuator. The leg

5

assembly 14 includes a plurality of support legs 22 extending radially outwardly from a hub 24 surrounding the support column. Ends of each support leg may be outfitted with a caster, glide or other ground interface member 20. The tilt control 18 includes a mechanism for supporting the seat 8 and backrest 6 and allowing for rearward tilting thereof. A pair of armrests 26 are coupled to the tilt control structure, base and/or backrest support structure. It should be understood that the chair may be configured without any armrests on either side. Various user interface controls are provided to actuate and/or adjust the height of the seat, the amount of biasing force applied by the tilt control mechanism and/or other features of the chair. Various features of the chair, including without limitation the base, seat and tilt control are disclosed in U.S. Pat. Nos. 7,604,298 and 6,991,291, both assigned to Steelcase Inc., the entire disclosures of which are hereby incorporated herein by reference.

#### Backrest Frame Assembly:

The backrest 6 includes a frame assembly 30 including a primary frame 32 and a secondary frame 34. Both of the primary and secondary frames are configured as peripheral frames, each having a pair of laterally spaced upright members 36, 42 connected with longitudinally spaced upper members 40, 46 and lower members 38, 44. As shown in FIGS. 4B and 18, the lower member 38 of the primary frame is configured as a cross-piece connecting the two uprights 36. The uprights 36 extend below the cross-piece member 38 and transition laterally inwardly and longitudinally forwardly, where end portions 48 thereof are joined at a vertex to define a support member 50, which is coupled to the tilt control 18. It should be understood that, in other embodiments, the frame may be configured as a unitary member, and may be configured as a homogenous ring-like frame. It also should be understood that the frame may be connected to a static structure, rather than a tilt control, and may be provided as a component of a chair, sofa, stool, vehicular seat (automobile, train, aircraft, etc.), or other body supporting structure.

Referring to FIGS. 4A-C, 7A-8B, 17A and B, the secondary frame 34 is nested in the primary frame 32 with a rear surface 52 of the upright members 42 and upper member 46 of the secondary frame overlying a front surface 54 of corresponding upright member 36 and upper member 40 of the primary frame. The lower member 44 of the secondary frame has a C-shaped cross section that surrounds the lower member 38 (cross-piece) of the primary frame, with a rear wall 56 of the secondary frame overlying and covering a rear surface 58 of the lower member of the primary frame. The upright members are secured with a plurality of fasteners 60, shown as being positioned at three longitudinally spaced locations 61 along each upright. The fasteners 60 may include for example mechanical fasteners such as screws, snap-fit tabs, Christmas tree fasteners, rivets and other known devices. The lower member 44 of the secondary frame has forwardly extending upper and lower flanges 62, 64. The lower flange 64 is secured to the bottom of the lower member 38 of the primary frame with a plurality of fasteners 66, shown at two laterally spaced locations 63. The fasteners may include for example mechanical fasteners such as screws, snap-fit tabs, Christmas tree fasteners, rivets and other known devices. The upper flange 62 and rear wall 56 have an uninterrupted, smooth surface so as to provide a pleasing and finished aesthetic. Likewise, the uprights 36 and upper member 40 of the primary frame 32 each define channels having forwardly extending flanges coupled to rear walls, all with an uninterrupted, smooth surface so as to provide a pleasing and finished aesthetic. The upper member

6

46 of the secondary frame has a rearwardly extending flange 68 that overlies a forwardly extending flange 70 of the upper member of the primary frame. The overlying flanges 68, 70 are secured with a plurality of fasteners 72, shown at two laterally spaced locations 65. The fasteners may include for example mechanical fasteners such as screws, snap-fit tabs, Christmas tree fasteners, rivets and other known devices. In other embodiments, the frames 32, 34 may be bonded, for example with adhesives, may be secured with a combination of adhesives and mechanical fasteners, may be over molded, or co-molded as a single component. The uprights of the primary frame have a pair of cutouts, or relief spaces 74, formed immediately above the cross-piece, with the secondary frame having opposite boss structures 76, which are received in the cutouts and help locate and stabilize the frame members relative to each other.

The secondary frame 34 has three key-hole slots 78 arranged along each of the uprights. In one embodiment, the key-hole slots are positioned adjacent to, but spaced from, the locations 61 receiving fasteners securing the frames 32, 34. Each key-hole slot is configured with an enlarged opening 80, having a generally rectangular shape, and a finger opening 82 extending downwardly from the enlarged opening. The finger opening is narrower in width than the enlarged opening but shares and defines a common side edge 84. The key-hole slot defines a corner flange 86, which interfaces with a shell connector as explained in more detail below.

Referring to FIG. 8B, the secondary frame 34 has a longitudinally extending through slot 88 formed along a portion of each upright thereof. In one embodiment, the through slots are positioned in a lower half of each upright. A cavity 90 is formed on the front side of the through slots, with a pair of slide surfaces 92 formed on each side of the slot. In addition, a longitudinally extending slot 94 is disposed through an outboard one of the slide surfaces adjacent the slots 88. The slot 94 is shorter in length than the slots 88.

In an alternative embodiment, the frame, including one or both of the primary and secondary frame members, may be configured with only a pair of laterally spaced uprights, for example without an upper or lower member, or with only a lower member, or alternatively with a pair of uprights connected with a laterally extending cross brace that may not define a corresponding member that is secured to a shell as further explained below.

#### Shell:

Referring to FIGS. 3C, 4C, 10-14, a flexible shell 100 is shown as including a molded component having and maintaining a three-dimensional shape in a non-loaded configuration. A "non-loaded" configuration is defined as a configuration where no external loads are being applied to the shell other than gravity. In one embodiment, the three-dimensional shape includes the shell having a forwardly facing convex shape taken along a vertically or longitudinally extending centerline  $V_{cl}$  of the shell, and a forwardly facing concave shape taken along a horizontally or laterally extending centerline  $H_{cl}$ . In one embodiment, the shell is preferably made of polypropylene. In other embodiments, the shell may be made of nylon, ABS, PET or combinations thereof. The shell may have a variable thickness (front to back), for example including and between 1.50 mm and 6.00 mm, or more preferably including and between 2.5 mm and 4.5 mm, which results in various regions of the shell being stiffer than others. In one embodiment, the shell has a thickness of about 4.5 mm along the apex of the lumbar region, and a thickness of about 2.5 mm along the outer edges of a central region. The stiffer a region is the less it

deflects in response to a load being applied thereto, for example with a pusher pad or block (e.g., 1 square inch in surface area) applying a load (e.g., 30 to 40 lbf) against a front surface of the shell.

The shell has a central region **102** configured with a plurality of openings **150** and a ring-like peripheral edge portion **104**, including opposite side portions **106** and lower and upper portions **108**, **110**, surrounding the central region. While the shell has a three-dimensional curved configuration defining the central region, the central region has flush front and rear surfaces **112**, **114**, meaning the region is generally curvi-planar, or defined by a plurality of smooth curves, but is free of any local protuberances and is smooth or uniform across the length or height thereof. Put another way, the shell does not have any discrete or local structures that extend transfer to a tangent taken at any point of the curved surface. The surfaces are also free of any repetitive oscillations or undulations, with a single concave and/or convex curve contained within the width and height of the central region, configured for example as a  $\frac{1}{2}$  cycle sinusoidal wave. It should be understood that the surface may have a compound convex and concave shape, but will not contain more than one of either shape in a preferred embodiment.

Referring to FIGS. **10**, **11** and **15**, the shell, and in particular the central region, is configured with a network of webs or strips **157**, **159** that define the openings there between. For example, as shown in FIG. **15**, the network includes a plurality of longitudinally extending strips **157** that intersect a plurality of laterally extending strips **159** and define the openings **150** there between. In one embodiment, the strips **157**, **159** are each configured as sinusoidal or undulating waves formed within the curvilinear/curved surface of the shell, which is the cross-section of the shell defined by and including all midpoints of the thickness of the shell. In one embodiment, the strips **157**, **159** are arranged such that adjacent longitudinal strips **157** and adjacent lateral strips **159** are offset  $\frac{1}{2}$  wave length, such that the adjacent longitudinal strips, and adjacent lateral strips, undulate toward and away from each other to define the openings **150** as further described below.

In this way, the strips **157** are non-linear between the lower and upper portions **108**, **110**, and the strips **159** are non-linear between the opposite side portions **106**. Under a load, the non-linear strips tend to straighten, allowing for the shell to expand when the load (e.g. normal) is applied to the front surface thereof. In contrast to linear strips, which need to stretch to provide such expansion, the non-linear strips achieve this expansion through a geometric arrangement. It should be understood that the phrase "non-linear" refers to the overall configuration of the strips between the upper and lower portions, or between the side portions. As such, a strip may be non-linear even though it is made up of a one or more linear segments, as shown for example in FIG. **14**.

Front surfaces **161**, **163** and rear surfaces **165**, **167** of the strips define the front and rear surfaces **112**, **114** of the shell. In various embodiments, as noted above, the strips have a thickness including and between 1.50 mm and 6.00 mm, or more preferably including and between 2.5 mm and 4.5 mm defined between the front and rear surfaces **112**, **114**. The strips have a width W (see FIG. **15**) including and between 1.00 mm and 4.00 mm, and in one embodiment a width of 2.5 mm. In one embodiment, the webs or strips each have the same width W. In other embodiments, the webs or strips have different widths. In either case, the webs or strips may have a uniform thickness, or may have variable thicknesses.

The shell **100** is shear resistant, meaning it does not deform locally in response to the application of shear forces

applied over a distance, as would a fabric or elastomeric membrane. In one embodiment, the Young's Modulus of the shell material is  $E \geq 100,000$  PSI.

As shown in FIGS. **9-12**, a plurality of connectors **116**, shown as three, are formed on the rear surface of the side portions **106**. The connectors are configured with a side wall **118**, a longitudinally extending flange **120** having an outwardly turned lip **122** and an end wall or stop member **124** connecting the side wall and flange so as to define a three-sided cavity **126**. The connectors interface with the key-hole slots on the secondary frame to secure the shell to the secondary frame. Specifically, the connectors are inserted through the enlarged opening **80**, with the secondary frame and shell then being moved longitudinally relative to each other such that the lip **122** first engages and rides over the corner flange **86** until the flanges **120**, **86** are overlying and the side wall **118** is disposed in the finger opening **82** and engages an edge of the corner flange **86**. The interface between the connector **116** and corner flange **86** connects the shell and secondary frame in a non-rotationally fixed relationship, meaning the peripheral edges of the shell and secondary frame are prevented from being rotated relative to each other, for example about a longitudinally extending axis. It should be understood that in one embodiment, the shell may only be attached to the uprights of the frame, meaning the upper and lower portions of the shell remain free of any connection to the frame.

In one embodiment, the shell **100** also includes a flange **128** extending rearwardly from the lower portion **108** and a pair of bosses **130** arranged on the upper portion **110**. The flange **128** of the lower portion overlies and is secured to the flange **64** of the lower member secondary frame and the lower member **38** of the primary frame with the fasteners **66** at locations **63**. The flange includes a pair of tabs **47** (see FIGS. **10** and **27**) that overlie the flange **64**. Likewise, the pair of bosses **130** extend through openings **132** in the upper member **46** of the secondary frame and are engaged by the same plurality of fasteners **72** securing the flanges **68**, **70** of the primary and secondary frames as described above. In this way, the upper and lower portions **110**, **108** of the shell are non-rotationally fixed to the upper and lower members **46**, **40**, **44**, **38** of the secondary and primary frames. It should be understood that in an alternative embodiment, the shell may only be attached to the uprights of the frame, meaning the upper and lower portions of the shell remain free of any connection to the frame. The shell also includes a rib **115** that extends rearwardly around the periphery of the rear surface as shown in FIGS. **10**, **13** and **20**. The rib **115** helps mask the gap between an edge of the shell and the frame uprights **36**, for example in an embodiment where a cover is not disposed around the shell (see, e.g., FIG. **13** but without the cover **204**).

As shown in FIGS. **3C**, **11** and **18**, the shell has first and second slots **134** extending longitudinally along opposite sides of the sides **106** of the peripheral edge portions inboard of the locations where the shell is connected to the upright members of the secondary frame, i.e., laterally inboard of the connectors **116**. The first and second slots **134** have a length (L) greater than  $\frac{1}{3}$  of the overall length (e.g., height (H)) of the shell, with at least  $\frac{1}{2}$  of the length of each of the first and second slots being disposed beneath a laterally extending centerline ( $H_{cl}$ ) of the shell. The slots have a width of about 3-20 mm, and preferably 4 mm. In one embodiment, one or more of the slots may be configured as a thin slit, which may appear closed. In one embodiment, lower terminal end portions **136** of the first and second slots extend laterally outwardly from the first and second slots **134**, and



have a curved shape, shown as an upwardly facing concave shape. In other embodiments, shown in FIG. 18, the slots are substantially linear and do not include any laterally extending portion. The slots may have a variable width, as shown for example in FIG. 18, with a wider portion, shown at an intermediate location, accommodating the pass through of a portion of an auxiliary body support member. Upper and lower portions of the slot have a narrower width.

The shell has one or more third slots 138, 138', 138" extending laterally along the lower portion of the shell above a location where the shell is connected to the lower member of the secondary and/or primary frames, or above the rearwardly extending flange 128. In an alternative embodiment, the third slot may be located, and extend laterally along, the upper portion of the shell below the location where the shell is connected to the upper member of the secondary and/or primary frames. In yet another embodiment, the shell may include third and fourth slots in the lower and upper portions respectively. Or, in the embodiment where the shell is attached only to the uprights, the third (and fourth) slots may be omitted.

In one embodiment, shown in FIG. 11, the third slot 138 extends continuously across the width of the lower portion of the shell between the slots 134. Alternatively, as shown in FIG. 20, the third slot includes two outer slots 138' and an intermediate slot 138", separated by bridge portions 137. The bridge portions increase the stiffness of the lower portion. As such, it should be understood that the third slot may be formed from a plurality of discrete slots positioned end-to-end, with landing or bridge portions separating the slots. The lateral outermost discrete slots, making up the third slot, have terminal ends 144.

In the embodiment of FIG. 11, the third slot has an intermediate portion 140 extending across a width of the shell beneath the central region 102 and between opposite side portions 106 of the peripheral edge portion. In one embodiment, the third slot, whether a continuous slot or formed with a plurality of discrete slots, has the same curvature as the bottom edge 142 of the shell, with the third slot having an upwardly oriented concave curvature. The third slot may have other configurations, and may be linear for example. The third slot, whether a continuous slot or a plurality of end-to-end discrete slots, has opposite terminal ends 144 that are spaced apart from, and in one embodiment positioned below, the lower terminal ends 136 of the first and second slots, with the shell having first and second bridge portions 146 defined between the terminal ends of the third slot and the terminal ends of the first and second slots. As shown in FIG. 18, the terminal ends of the third slot 138 are positioned below, but slightly laterally inboard of the first and second slots 134 to define the bridge portions 146. The first and second bridge portions 146 extend between the central region 102 and the portions of the outer peripheral edge portions that are anchored to the frame. The first and second bridge portions 146 function as hinges, permitting the central region 102 to rotate relative to the portion of the peripheral edge portion anchored to the frame.

Referring to FIGS. 9, 10, 11, 14 and 15, the plurality of openings 150 in the central region 102 are arranged between the first and second slots 134 and above the third slot 138. The plurality of openings are arranged in a matrix of openings in one embodiment that permits or provides lateral and longitudinal expansion of the backrest. In one embodiment, and best shown in FIG. 15, the plurality of openings includes a plurality of first openings 152 having a first shape 160 and a plurality of second openings 154 having a second shape 162 different than the first shape, with the openings

152, 154 and shapes 160, 162 defined by the offset strips 157, 159. It should be understood that two openings having the same configuration, but which are rotated relative to each other, or are arranged in different orientations, are considered to have "different" shapes. Conversely, openings of proportionally different sizes, but with the same configuration and orientation are considered to be the "same" shape.

The first and second openings 152, 154 are arranged in an alternating pattern in both a lateral direction (rows 156) and a longitudinal direction (Columns 158). In one embodiment, the first shape 160 is a laterally oriented dog-bone shape and the second shape is a longitudinally oriented dog-bone shape, both defined with enlarged end portions and a constricted mid portion, with the end portions having concave boundaries, or end surfaces, facing one another. In this way, the first openings 152, and interaction between the webs or strips 157, 159, allow for longitudinal expansion of the central region in response to a load (F) being applied, for example by a user (U), while the second openings 154, and interaction between the webs or strips 157, 159, allow for lateral expansion of the central region, as shown in FIGS. 19 and 21, for example moving inwardly. In particular, the strips 157, 159 may straighten slightly to allow for the expansion. The dog-bone configuration of the first and second shapes may be identical, but with different orientations. In one embodiment, the size of the first and second shapes may vary across the width and height, or lateral and longitudinal directions, of the central region. It should be understood that while the overall three-dimensional shape of the shell, and in particular the central region, changes in response to the load applied by the user, the longitudinal and lateral expansion of the central region occurs within the curvi-planar surface defined by the central region.

Referring to FIG. 14, an alternative embodiment of a matrix of openings includes a plurality of nested star shaped openings 170 defined by webs or strips of material. In one embodiment, the opening is a hexagram star shape, with the bottom vertex 172 of each opening being inverted so as to nest with (or define) the top vertex 174 of an underlying opening. The matrix of openings also provides for independent lateral and longitudinal expansion. The longitudinal strips defining the openings 170, including non-linear side portions 175 formed from a pair of linear segments having a concave configuration, may be continuous. Non-linear lateral strips 177, defining the top and bottom of the openings 170, also are formed from linear segments (shown as four) defining the top and bottom vertices 174, 172 and horizontal legs. The lateral strips arranged between the longitudinal strips are vertically offset and may be defined as not continuous, or may share a leg of the longitudinal strips and be defined as continuous. The longitudinal and lateral strips, while non-linear, are made up of linear segments.

Referring to FIG. 18, in yet another embodiment, the matrix is configured with alternating columns 176, 178 of openings having first and second shapes 180, 182 defined by non-linear webs or strips of material, with the first shape 180 being a hybrid hour-glass or dog bone shape having upper and lower upwardly opening concave boundaries, and the second shape 182 being a hybrid hour-glass or dog bone shape with an upper and lower downwardly opening concave boundaries. Expressed another way, the openings have the same configuration, but are rotated 180° relative to each other. The longitudinal strips may be continuous, while lateral strips arranged between the longitudinal strips are vertically offset and not continuous, or defined another way, share portions of the longitudinal strips and are continuous.



## 11

In yet another embodiment, shown in FIG. 26, a plurality of openings **184** have the same shape, shown as an hourglass shape, as opposed to alternating first and second shapes. Various structures configured with such a pattern of openings is further disclosed in U.S. Publication No. 2015/0320220 to Eberlein, assigned to Steelcase Inc., the entire disclosure of which, including the various patterns of openings, is hereby incorporated herein by reference. Again, the longitudinal strips may be continuous, while lateral strips arranged between the longitudinal strips are offset and not continuous, or are continuous while including portions of the longitudinal strips.

Referring to FIGS. 19 and 21, the shell **100** is configured with spaced apart first and second slots **134** defining a structure that provides macro-compliance in a lateral direction **4**, while the shell configured with a third slot **138** (and/or fourth slot) defines a structure for providing macro-compliance in a longitudinal direction **2**. Moreover, the shell is configured with a matrix **M** of first and second openings having different shapes providing for micro-compliance in the longitudinal and lateral directions respectively. The terms macro and micro convey relative amounts of compliance, with the structures providing macro compliance allowing for a greater amount of expansion than the structures providing micro compliance. For example and without limitation, the third slot **138** provides or allows for some amount of longitudinal expansion  $EL1 > \frac{1}{2}D$ , while the matrix of openings provides or allows for some amount of longitudinal expansion  $EL2 < \frac{1}{2}D$ . Likewise, the first and second slots in combination provide or allow for some amount of lateral expansion  $E_{LT1} = \Delta W(1/n)$  where  $n < 2$ , and the matrix of openings **M** provides or allows for some amount of lateral expansion  $E_{LT2} = \Delta W(1-1/n)$ .

Auxiliary Support Member:

Referring to FIGS. 1B, 3B, 4B, 9, 16, 17A and B, an auxiliary support assembly **200** is shown as being moveable along the front, body facing surface **112** of the shell. The assembly includes a laterally extending support member, which may contact the front surface directly, or may have a substrate disposed there between. The auxiliary support member, which may be located in the lumbar region of the backrest and serve as a lumbar member, includes a laterally extending belt **202**, which may be padded.

A cover or upholstery member **204**, such as a fabric cover, extends over and covers the auxiliary support member and front body facing surface of the shell. The cover **204** is secured to the shell **100** over the body support member as shown in FIGS. 13 and 27. In one embodiment, shown in FIG. 27, a plurality of plastic strips **206** are sewn to the edges of the cover (e.g., fabric), for example along the opposite sides and upper and lower portions thereof. The cover is wrapped around the edges of the shell, and the strips **206** are connected to the side portions **106** and upper and lower portions **110**, **108** of the shell, for example with fasteners **215** such as staples, or with adhesive, or combinations thereof. In one embodiment, shown in FIG. 27, a lower strip **209** is configured as a J-strip, or has a J-shaped cross section, which engages a lower edge of the shell flange. The strip has a pair of slits **211** that may be disposed over the tabs **47** to hold the strip **209** in place and help locate the cover **204** relative to the shell. In addition, the strips **206** are disposed on the inside of a ridge, e.g., rib **115**, which also helps locate the cover **204** relative to the shell, prior to securing the strips to the shell with fasteners.

In one embodiment, the auxiliary support member includes a carrier frame **210**, shown in FIGS. 17A and B as a C-shaped frame. A pad **212**, which may be contoured, is

## 12

coupled to a front, body facing surface of the frame, for example with mechanical fasteners, adhesives, or combinations thereof. In another embodiment, shown in FIG. 22, the belt **202** may include a rearwardly extending tab **214**, or insert portion, which in turn has a flange **225** extending laterally from an end of the tab. The flange has ear portions **208** extending from a top and bottom thereof, and a slot formed in middle region. The tabs **214** on opposite sides of the belt are inserted through the slots **134** in the shell.

A handle **220** has a grippable portion, or rearwardly extending block **222** that is disposed and slides along a lateral inboard surface of the secondary frame uprights **42**. The block is visible to the user, and includes a front surface **228** that slides along the rear surface **114** of the shell. The handle includes a second rearwardly extending portion **224**, or leg/flange, laterally spaced from the block and defining a channel **230** there between. Adjacent flanges of the primary and secondary frame upright portions are disposed in the channel **230**, with the flange **224** extending through the slot **88** from front to back. A spring **232**, shown as a leaf spring, has end portions **234** coupled to opposite edges of the flange, with a central portion **236** engaging an inner surface of the primary frame upright portion, which is configured with detents **235**. The flange **224** has a convex shape, with a pair of runners **240** that slide along a surface of the secondary frame. The handle further includes a laterally extending flange **242** with an opening **244**, or slot, formed therein. The tab **214** of the belt extends through the opening **244**, with the flange **225** engaging the flange **242**. In this way, the belt is coupled to the laterally spaced handles. The handle includes one or more detents, or protuberances, which engage indentations in the frame, or vice versa, to help locate the handle and belt at predetermined vertical locations. In one embodiment, the spring **232**, or central portion **236**, interfaces with bumps **235** on the frame.

If the auxiliary body support member is not being used, a cover member **250**, shown in FIG. 16, is disposed in and over the cavity **90** of the secondary frame so as to lie flush with the front surface of the secondary frame. The cover includes a tab **252** that is inserted through the slot **94** in the secondary frame and engages the frame. The cover extends over the cavity and provides an aesthetic appearance when the lumbar is not installed on the backrest.

Operation:

The backrest may be configured with or without an auxiliary body support member. If configured without a body support member, the cover member **250** is disposed over the cavity. If configured with a body support member and assembly, the user may grasp the pair of grippable portions **222** of the handle and move the body support member, or belt **202**, longitudinally, or vertically up and/or down along the front, body-facing support surface of the shell, to a desired position. Stops (e.g., upper and lower portions of the slot in the secondary frame) provide upper and lower limits for the adjustment of the body support member, while longitudinally spaced indentations/detents interface with the detents/spring and identify predetermined longitudinal positions for the auxiliary body support member.

The user may sit in the chair and lean against the backrest **6**. If configured with a tilt control **18**, the user may tilt the backrest rearwardly as they apply a force to the backrest. The backrest may be incorporated into static furniture, including fixed back chairs, sofas, and the like, as well as various vehicular seating applications. As the user applies a force to the backrest, the shell **100** may deform from its unloaded three-dimensional configuration to a loaded con-

13

figuration. In one embodiment, the deformation of the shell includes moving a portion of the shell adjacent and inboard of the first and second slots **134**. The deformation may also include moving a portion of the shell adjacent and above the third slot **138**. For example, as shown in FIG. **19**, the force **F** applied by the user **U** may cause the shell to flatten, with a change **D** in overall height of the center region. The value of **D** may be attributed to the macro compliance associated with the third slot, or the micro compliance associated with the matrix of openings. With respect to the latter, the first openings **152**, due to their shape **160**, or orientation, and the non-linear configuration of the strips, may be enlarged in the longitudinal direction **2**, thereby expanding the shell across the matrix of openings in the longitudinal direction.

At the same time, as shown in FIG. **21**, the backrest may experience a greater concave curvature in response to the load **F** applied by the user across the width of the central region of the backrest. Again, the change in width  $\Delta W$  may be attributed to the macro compliance associated with the first and second slots **134**, or the micro compliance associated with the matrix of openings. With respect to the latter, the second openings **154**, due to their shape **162**, or orientation, and the non-linear configuration of the strips, may be enlarged in the lateral direction **4**, thereby expanding the shell across the matrix of openings in the lateral direction.

It should be understood that, due to the configuration of the matrix of openings in some of the embodiments (FIG. **15**), the micro compliance in the longitudinal and lateral directions are independent, meaning that an expansion in one of the longitudinal and lateral directions **4**, **2** does not necessarily correspond to, or create a proportional expansion (or contraction) in the other of the longitudinal or lateral directions. Rather, the matrix of openings allows the lateral and longitudinal expansion and/or contraction to operate independently in response to the load applied by the user. At the same time, the shell provides excellent shear resistance. The central region may be tuned to provide more or less stiffness in different regions thereof, for example by varying the size of the openings or thickness of the shell.

During this operation, the shell may be firmly and fixedly attached to the frame along the sides, top and bottom, for example in a non-rotational relationship, even while the center region above the third slot and inboard of the first and second slots is able to move and rotate.

FIGS. **28-35** show different views of a chair **10** including a backrest **6** that has an upholstered front face as well as an auxiliary support assembly **200** with handles **220**, where these views highlight aesthetic design features of the chair with this backrest configuration. FIGS. **36-43** show different views of a backrest **6** that includes an upholstered front face and the auxiliary support assembly **200** with handles **220**, where these views highlight aesthetic design features of the chair with this backrest configuration. FIGS. **44-51** show different views of a chair **10** including a backrest **6** that has an exposed web, where these views highlight aesthetic design features of the chair with this backrest configuration. FIGS. **43-59** and **60-67**, respectively, show views of two different configurations of a backrest **6** that includes an exposed web, where these views highlight aesthetic design features of the chair with this backrest configuration. It should be appreciated that the backrest embodiments including each of the different embodiments' respective frame assembly **30**, auxiliary support assembly **200**, and handles **220**, as well as other components of the illustrated chair **10** embodiments may be configured with a number of ornamental appearances that differ from those shown herein while still providing the functions claimed herein.

14

Although the present invention has been described with reference to preferred embodiments, those skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. As such, it is intended that the foregoing detailed description be regarded as illustrative rather than limiting and that it is the appended claims, including all equivalents thereof, which are intended to define the scope of the invention.

What is claimed is:

1. A backrest comprising:

a frame comprising a pair of laterally-spaced side members, an upper member extending laterally between and connecting the side members, and a cross member longitudinally spaced below the upper member, wherein the cross member extends laterally between and connects the side members, wherein the side members, upper member and cross member define a first central opening, and wherein the side members each have a lower portion extending below the cross member, wherein the lower portions are connected to a forwardly extending support member, wherein the lower portions and cross member partially define a second central opening positioned below the first central opening; and

a flexible shell comprising opposite sides coupled to the upright members and upper and lower portions coupled to the upper member and the cross member respectively, wherein the shell covers the first central opening, and wherein at least a portion of the second central opening is not covered by the shell.

2. The backrest of claim **1** wherein the lower portions of the side members extend laterally inwardly and forwardly and comprise end portions joined to define the support member.

3. The backrest of claim **2** wherein the end portions are joined at a central vertex to define the support member.

4. The backrest of claim **1** wherein the second central opening has a concave bottom perimeter.

5. The backrest of claim **1** wherein the cross member is curved and comprises a concave forward surface and a convex rear surface.

6. The backrest of claim **1** wherein the frame comprises a primary frame member, and further comprising a secondary frame member comprising a pair of laterally spaced second side members overlapping the side members of the primary frame member, a second upper member overlapping the upper member of the primary frame member, and a second cross member overlapping the cross member of the primary frame member.

7. The backrest of claim **6** wherein the second cross member covers a rear surface of the cross member of the primary frame member.

8. The backrest of claim **6** wherein the secondary frame member does not extend below the second cross member, wherein the lower portions and support member are defined only by the primary frame member.

9. The backrest of claim **1** wherein the shell further comprises a plurality of openings arranged between the opposite sides, the upper portion and the lower portion.

10. The backrest of claim **9** wherein the plurality of openings comprises a matrix of openings adapted to allow lateral expansion of the shell.

11. The backrest of claim **10** wherein the matrix of openings is adapted to provide longitudinal expansion of the shell.

12. The backrest of claim **9** wherein the shell comprises a ring-like peripheral edge portion surrounding the plurality

## 15

of openings, wherein the edge portion defines the opposite sides, the upper portion and the lower portion.

13. The backrest of claim 1 further comprising an auxiliary body support disposed against and is moveable along a forwardly facing body support surface of the shell.

14. The backrest of claim 13 further comprising a cover disposed over the body support surface of the shell, wherein the auxiliary body support member is disposed between the cover and the shell.

15. The backrest of claim 1 wherein the opposite sides of the shell are non-rotationally fixed to the upright members.

16. The backrest of claim 15 wherein the upper and lower portions of the shell are non-rotationally fixed to the upper and lower members.

17. The backrest of claim 1 wherein the second central opening has a concave bottom perimeter.

18. The backrest of claim 17 wherein the end portions are joined at a central vertex to define the support member.

19. A backrest comprising:

a primary frame member comprising a pair of laterally spaced first side members, a first upper member extending laterally between and connecting the first side members, and a first cross member longitudinally spaced below the first upper member, wherein the first cross member extends laterally between and connects the first side members, wherein the first side members, first upper member and first cross member define a first central opening, and wherein the first side members each have a lower portion extending below the first

## 16

cross member, wherein the lower portions are connected to a forwardly extending support member, wherein the lower portions and first cross member partially define a second central opening positioned below the first central opening;

a secondary frame member coupled to the primary frame member, wherein the second frame member comprises a pair of laterally-spaced second side members overlapping the first side members of the primary frame member, a second upper member overlapping the first upper member of the primary frame member, and a second cross member overlapping the first cross member of the primary frame member, wherein the second side members, second upper member and second cross member define a third central opening aligned with the first central opening, and wherein the second cross member is the lowermost portion of the secondary frame member; and

a flexible shell comprising opposite sides coupled to the second upright members and upper and lower portions coupled to the second upper member and the second cross member respectively, wherein the shell covers the first central opening, and wherein at least a portion of the second central opening is not covered by the shell.

20. The backrest of claim 19 wherein the lower portions of the side members extend laterally inwardly and forwardly and comprise end portions joined to define the support member.

\* \* \* \* \*