

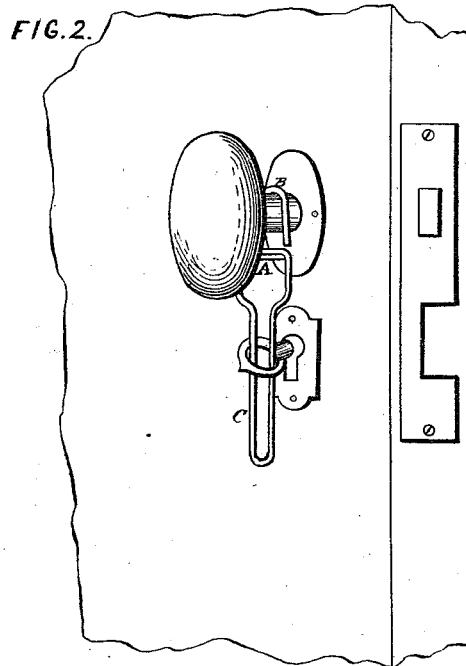


J. THORNTON.
Key-Fastener.

No. 162,259.

Patented April 20, 1875.

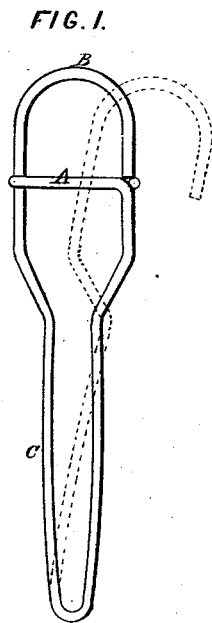

WITNESSES.

J. F. Cornell
J. H. Summons

INVENTOR.

Jesse Thornton
Per. Burridge & Co.
Attorneys

UNITED STATES PATENT OFFICE.

JESSE THORNTON, OF CLEVELAND, OHIO.

IMPROVEMENT IN KEY-FASTENERS.

Specification forming part of Letters Patent No. **162,259**, dated April 20, 1875; application filed February 17, 1875.

To all whom it may concern:

Be it known that I, JESSE THORNTON, of Cleveland, in the county of Cuyahoga and State of Ohio, have invented a certain new and Improved Lock-Key Guard, of which the following is a full, clear, and complete description, reference being had to the accompanying drawings making part of this specification, in which—

Figure 1 is a side view of the key-fastener. Fig. 2 is a view of its application to the key. Fig. 3 is an end view.

Like letters of reference refer to like parts in the several views.

The object of this invention is to secure a key when in the door-lock from being turned from the outside. The construction and manner of applying the fastener to the key are as follows:

A piece of wire of a given length is bent to the shape shown in Fig. 1, wherein it will be seen that one end of said wire is bent into a loop, A, Fig. 3, whereas the opposite end passes through the loop and terminates in a hook, B. The loop also serves as a guide for the movement of the hook. The application of the fastener to the key will be readily understood on examination of Fig. 2, in which it will be seen that the fastener is suspended from the neck of the door-knob by the hook B, while the

lower end or stem C passes through the bow of the key. To apply the fastener the lower end is first inserted in the bow of the key; the hook is then pressed forward, as indicated by the dotted lines in Fig. 1, to allow of its being hooked upon the neck of the door-knob, as shown in the drawing.

It will be obvious that the key cannot be turned in the lock so long as the stem C remains in the bow; hence the lock cannot be picked or unlocked from the outside.

The wire being made of steel, the stem forms a spring for throwing back the hook when pressed forward, as indicated by the dotted lines in Fig. 1.

What I claim as my invention, and desire to secure by Letters Patent, is—

A key-fastener consisting of one piece of wire, bent as described, having a spring-stem, C, formed by the return of the wire, and provided with a guide-loop, A, at one end thereof, and at the opposite end with a spring-hook, B, extending from the said stem C, in combination with a door-key, substantially as herein set forth.

JESSE THORNTON.

Witnesses:

W. H. BURRIDGE,
A. F. CORNELL.