

M. LASSIG.

Cover for the Upper Chords of Bridges.

No. 168,260.

Patented Sept. 28, 1875.

Fig: 1.


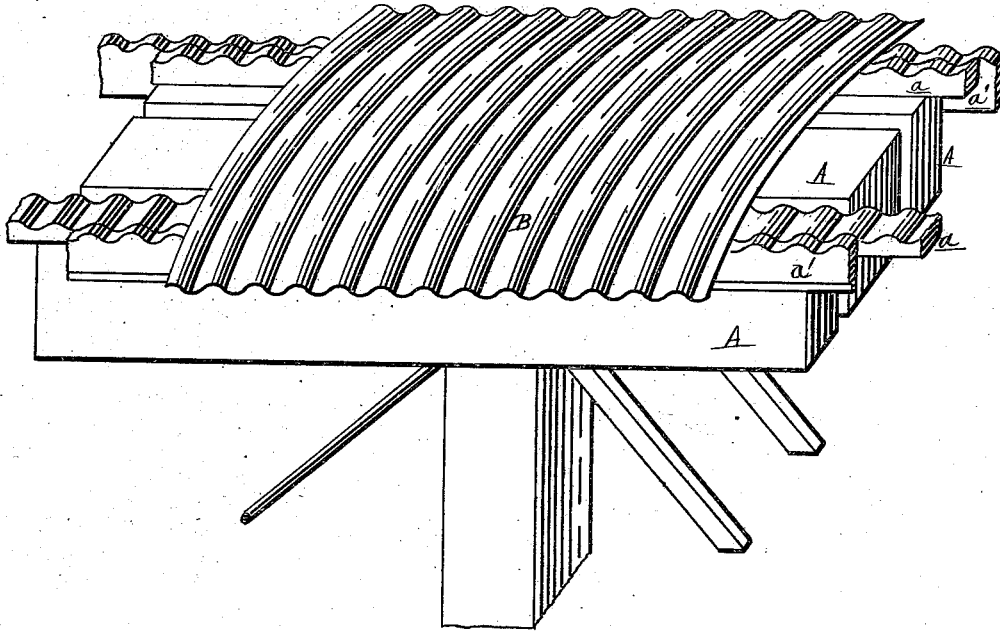


Fig: 2.

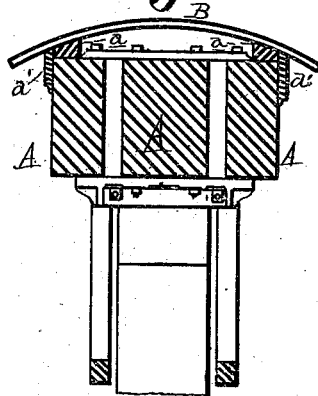

Witnesses:
James Min
Edward Barthel

Inventor:
M. Lassig
By Atty
Geo. S. Sprague

UNITED STATES PATENT OFFICE.

MORITZ LASSIG, OF CHICAGO, ILLINOIS.

IMPROVEMENT IN COVERS FOR THE UPPER CHORDS OF BRIDGES.

Specification forming part of Letters Patent No. **168,260**, dated September 28, 1875; application filed October 19, 1874.

To all whom it may concern:

Be it known that I, MORITZ LASSIG, of Chicago, in the county of Cook and State of Illinois, have invented an Improvement in Roofs or Coverings for the Upper Chords of Bridges, of which the following is a specification:

My invention has for its object to provide the upper chords of wooden and combination bridges with a light and inexpensive roofing or covering, which will exclude the elements, and thus prevent their action upon the wood and metal, the former of which is liable to decay, and the latter to corrosion, if not protected.

The material used for this purpose is corrugated sheet-iron, applied in the manner more fully hereinafter set forth.

Figure 1 is a perspective view of a portion of a top chord partially roofed. Fig. 2 is a cross-section at *xx* in Fig. 1.

In the drawing, *A A A* represent the timbers composing the upper chord of a bridge. *B* is a covering of sheet-iron, arched and transversely corrugated. On the top of each outer timber, at the outer edge thereof, there is nailed a strip, *a*, corrugated on its upper edge to fit the under side of the covering *B*, which is fastened thereto by nails or screws. To the side of the strip *a* and the outer member

of the top chord there is nailed a strip, *a'*, likewise corrugated on its upper edge to fit the under side of the covering, and extending down on the outer timber of the top chord thereby covering the joint of the strip *a* and the upper part of the top chord. Both of these strips, being elevated above the chord, afford a free circulation of air between it and the covering, while they exclude water and snow, which decompose the wood and corrode the metal in the chord.

What I claim as my invention, and desire to secure by Letters Patent, is—

1. In a bridge, the combination, with the top chord *A*, of a corrugated sheet-metal covering, *B*, projecting on each side of said chord, arched and secured at an elevation above the timbers composing said chord, so as to leave a free open space between said covering and chord, substantially as described and shown.

2. In a bridge, the combination, with the top chord *A*, of the corrugated arched covering *B* and the strips *a a'*, all constructed and arranged substantially as described and shown.

MORITZ LASSIG.

Witnesses:

WM. H. LOTZ,

HERMAN A. KROESCHELL.