

## J. W. LATCHER & M. E. DUNHAM.

GAUNTLET-GLOVE.

No. 169,451.

Patented Nov. 2, 1875.

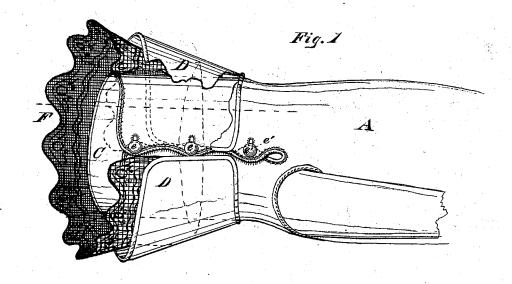



Witnesses;
I Smith

Edwin Baylus

Inventor:

John M. Latcher, Moses E. Dunham, By J.W. Latcher, Atty

## UNITED STATES PATENT OFFICE.

JOHN W. LATCHER AND MOSES E. DUNHAM, OF JOHNSTOWN, NEW YORK; SAID LATCHER ASSIGNOR TO SAID DUNHAM.

## IMPROVEMENT IN GANTLET-GLOVES.

Specification forming part of Letters Patent No. 169,451, dated November 2, 1875; application filed August 11, 1875.

To all whom it may concern:

Be it known that we, John W. LATCHER and Moses E. Dunham, residents of Johnstown, in the county of Fulton and State of New York, have invented a new and useful Glove-Gantlet, of which the following is a specification:

The object of our invention is to prevent the gantlet-cuff from lopping down over the hand of the wearer, by having the wrist of the glove proper extend upward as far as the upper edge or extremity of the cuff or farther, and applying buttons or other fastenings to the said wrist-extension within the outer cuff, in order to keep the wrist of the wearer protected from cold, &c., and to prevent the said outer cuff from lopping down, which has been the result when the fastenings were below the edge of the cuff where the same is united with the wrist of the glove. Another object of our invention is to prevent the inner surface of the gantletcuff from discoloring the dress sleeves and cuffs by interposing a detachable and washable cuff, and attaching the same within the outer or gantlet cuff, above referred to, and the wristextension, and allowing the auxiliary cuff to extend outward somewhat farther than either the wrist-extension or the gantlet-cuff, in order to prevent the gantlet-cuff from coming in contact with the sleeves of the dress. The auxiliary cuff should be made of some suitable textile material, of course, in order that it may be washed, &c., after having become soiled by contact with the cuff of the glove or gantlet, on its outer surface, and the dresssleeve on its inner side.

To enable those skilled in the art to fully understand and construct the same, we will proceed to describe it as follows:

Figure 1 is a perspective view of our invention, and Fig. 2 is a sectional view of the same, exhibiting the arrangement of the several parts with relation to each other.

A represents the body of the glove, &c.; C, the wrist-extension of the same; D, the outer or gantlet cuff, which is attached to the wrist of the glove about the same distance from the finger end of the glove, as heretofore, allowing an extension of the inner wrist C one or more inches upward, or nearly even with the cuff D, as shown in the drawings. One or more buttons or fastenings, e, are affixed to the wrist-extension C, as shown, in order to keep the outer cuff D from lopping down over the hand by reason of the leverage exerted on the button or fastening e', as will be readily understood. The wrist-extension C, when buttoned, also keeps the wrists warmer.

We also apply a detachable or auxiliary cuff, F, to the cuff D, or wrist-extension C, by means of hooks and eyes, or any suitable fastening. Said cuff is made, preferably, of textile material, either embroidered or plain, or it may be ruffled, in order that it may the more shield the wrist of the wearer. Said cuff F is made detachable, in order that it may be washed when it shall have become soiled by contact with the cuff D, or in any other way. The cuff F should be made flexible, in order that it may readily yield to the dress-sleeve, &c.

What we claim as our invention is—
1. In a glove or gautlet, the wrist-extension C and fastenings ee, when arranged with relation to the cuff D, substantially as and for the purposes described.

2. In combination with the cuff D and extension C, as shown and described, the detachable cuff F, as set forth.

J. W. LATCHER. MOSES E. DUNHAM.

Witnesses:

D. McMartin, S. G. Hutchinson.