

L. WORCESTER & J. B. HOWE.

COT-BEDSTEAD.

No. 169,880.

Patented Nov. 9, 1875.

Fig. 1.


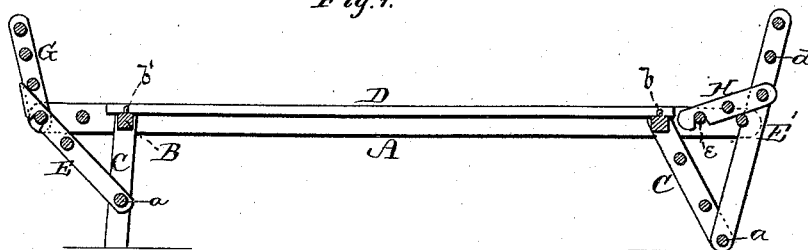


Fig. 2.

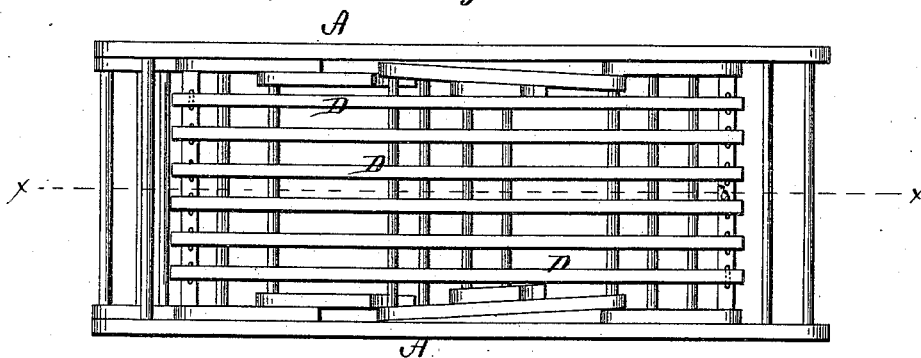

WITNESSES

Henry N. Miller
C. L. Eurb.

INVENTOR

Leonard Worcester
Joshua B. Howe

By Alexander Mator
ATTORNEYS

UNITED STATES PATENT OFFICE.

LEONARD WORCESTER, OF WEST BRATTLEBOROUGH, AND JOSHUA B. HOWE, OF READSBOROUGH, VERMONT.

IMPROVEMENT IN COT-BEDSTEADS.

Specification forming part of Letters Patent No. **169,880**, dated November 9, 1875; application filed March 17, 1875.

To all whom it may concern:

Be it known that we, LEONARD WORCESTER, of West Brattleborough, Windham county, Vermont, and JOSHUA B. HOWE, of Readsborough, in the county of Bennington and in the State of Vermont, have invented certain new and useful Improvements in Cot-Bedsteads; and do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification.

The nature of our invention consists in the construction and arrangement of a cot-bedstead, as will be hereinafter more fully set forth.

In order to enable others skilled in the art to make and use the same, we will now proceed to describe its construction and operation, referring to the annexed drawing, in which—

Figure 1 is a longitudinal vertical section through the line *x x*, Fig. 2. Fig. 2 is a plan view of our invention.

A A represent two parallel side beams connected a suitable distance from the ends by means of cross-bars B B, having legs C pivoted upon their ends immediately inside of the side beams. The legs C C on each cross-bar B are connected by means of rounds *a a*. D D represent the slats supported on the cross-bars B B, and held thereon by means of staples *b b'*, which pass through the slats. On the lower round *a* connecting the two legs C C, at the foot of the bed, are pivoted two arms, E E, which are made to catch on the

rounds of the foot-rest G pivoted between the extreme ends, thus holding the foot-rest in proper position. The head-rest is formed of two vertical arms, E' E', which extend suitably above the slats D. These arms are connected by rounds *d*, and pivoted at their bottoms, at *a*, to the lower ends of the pivoted legs C. At this end of the cot in the main frame are rounds *e*, and pivoted to the arms E' are hooked arms H, which latter catch over the rounds *e*, and hold the head-rest at any inclination desired. It is, of course, understood that we may use either of these devices at either end of the bedstead.

When the bedstead is not in use the legs and ends can be folded close to the body, so as not to take up much room.

Having thus fully described our invention, what we claim as new, and desire to secure by Letters Patent, is—

1. The combination of the frame A B, hinged legs C C, arms E E, and foot-rest G, all substantially as and for the purposes herein set forth.

2. The combination of the frame A B, hinged legs C C, extended arms E' E' provided with rounds *d*, forming the head-rest, and the hooked arms H H, all substantially as and for the purposes herein set forth.

In testimony that we claim the foregoing, we have hereunto set our hands this 15th day of January, 1875.

LEONARD WORCESTER.
JOSHUA B. HOWE.

Witnesses :

WILLARD FROST,
WILLIAM S. NEWTON.