

J. SIMPSON & A. A. POPE.
TACKLE-BLOCK.

No. 180,162.

Patented July 25, 1876.

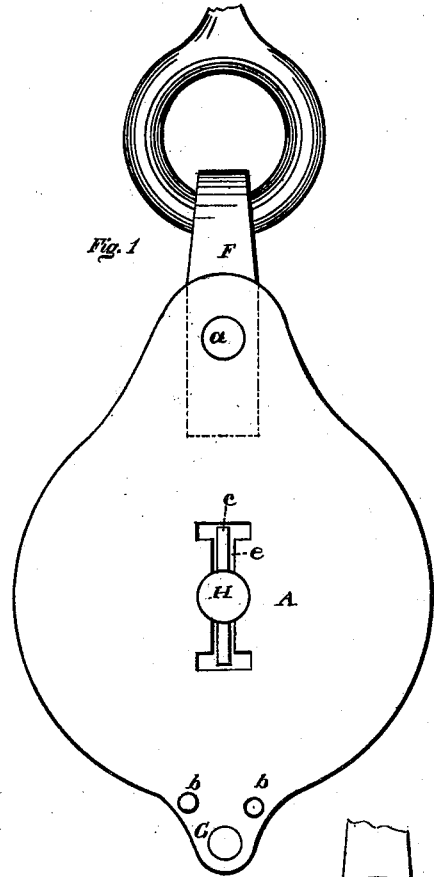


Fig. 1

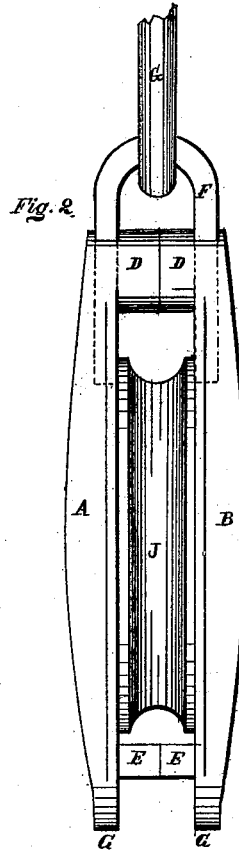


Fig. 2

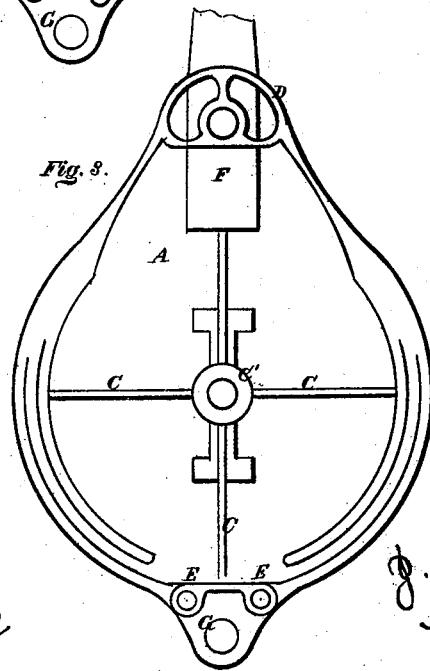


Fig. 3

Witnesses
 E. W. Jones
 M. C. Boston,

Inventor
 J. Simpson & A. A. Pope
 Per Burridge & Co
 Atty

J. SIMPSON & A. A. POPE.
TACKLE-BLOCK.

No. 180,162.

Patented July 25, 1876.

Fig. 4

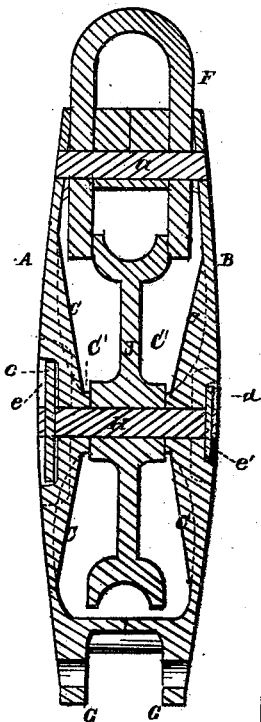


Fig. 5.


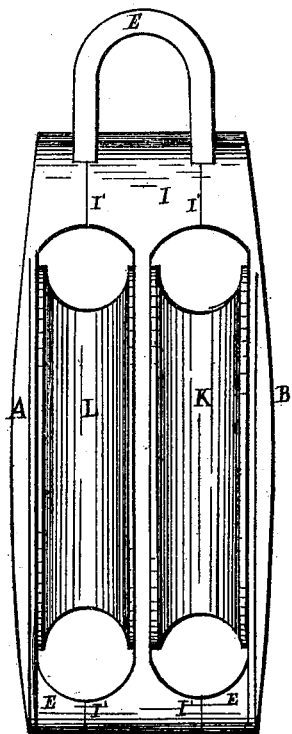


Fig. 6.

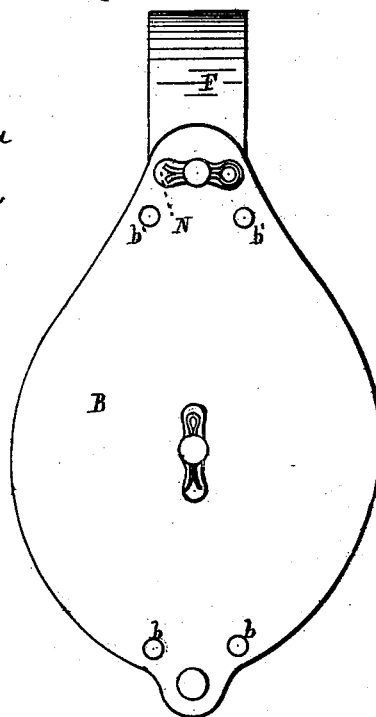

Witnesses
L. J. Roberts
W. C. Easton.

Inventors
J. Simpson & A. A. Pope
Per Burridge & Co.
Attys

UNITED STATES PATENT OFFICE

JOHN SIMPSON AND ALFRED A. POPE, OF CLEVELAND, OHIO.

IMPROVEMENT IN TACKLE-BLOCKS.

Specification forming part of Letters Patent No. **180,162**, dated July 25, 1876; application filed June 23, 1876.

To all whom it may concern:

Be it known that we, JOHN SIMPSON and ALFRED A. POPE, of Cleveland, in the county of Cuyahoga and State of Ohio, have invented a certain new and Improved Tackle-Block; and we do hereby declare that the following is a full, clear, and complete description thereof, reference being had to the accompanying drawings, making part of the same.

Figure 1 is a side view of a one-sheave tackle-block. Fig. 2 is a front view of Fig. 1. Fig. 3 is an inside view of one of the cheek-pieces. Fig. 4 is a vertical transverse section of Fig. 1. Fig. 5 is a front view of a two-sheave tackle-block. Fig. 6 is a side view of Fig. 5.

Like letters of reference refer to like parts in the several views.

The nature of this invention relates to certain improvements in metal tackle-blocks; and which consists in part of so constructing said blocks that the outer surface of the cheeks or shells thereof shall be free from projections, rendering them smooth and uniform in contour, thus avoiding chafing the ropes and rigging while in use. The improvement also consists in so attaching the strap to the block that said strap can be readily removed for certain purposes hereinafter specified; and also in forming, on the inner surfaces of the cheeks, bosses for supporting the hub of the sheaves against lateral thrust. It also relates to the employment of certain peculiar division-plates, by which, in their connection with the cheeks or shell of a single sheave-block, the block is made into a two or more sheave-block, without changing the otherwise essential construction of the block, by which, together with certain other improvements, the tackle-block is rendered strong and durable, substantially in the manner as follows, which is a full and complete description of the alleged improvement.

In the drawings, A and B represent the sides or cheeks of the blocks, which are concave on the inner, and convex on the outer, sides, of which Fig. 3 represents an inside view. Care webs for strengthening the cheeks, and C' is a projecting boss on the inside of the shell, touching the hub of the sheave when in position, taking its side thrust or

wear, thereby relieving the wear and friction at the outer edge of the sheave. This boss may vary in length of projection, to allow of various lengths of hubs or centers of sheaves. It also forms an increased bearing for the pin H. On the inner side of each upper end of the cheeks are formed projecting integral parts D, Fig. 2. These parts may be separate, and connected with the block between the cheeks for the same purpose, which form the parts of contact in putting the blocks together, and by a varied amount of projection form the different widths of space or mortise for various sizes or thickness of sheaves. Similar projections are on the lower end at E of the cheeks, or are substituted by becketts or thimbles, answering the like purpose, the division-plate I, Fig. 5, having corresponding projections for similar purpose. From the top downward in the projectures D D, Fig. 2, is cast a mortise of a size to receive the ends of the strap F, whereby the ring G or hook is attached to the block. The ends of the strap are fitted in the mortises, and extend therein, as will be seen in Fig. 4. The strap is held by a pin or riveted rod, a, Fig. 4, and which also serves to secure the cheeks of the block to each other at that end. The lower end of the cheeks of the blocks are in like manner secured to each other by one or more rivets, b b, Fig. 1, passing through the projectures E E, immediately beneath which, in the ears G, may be secured a becket.

It will be observed, on examination of the drawings, that the cheeks A B, and division-plate I, Fig. 5, serve as the connecting-links between the straps, carrying the hook at one end of the block, and the becket at the other, supporting intermediately the burden on the sheave by the shaft H, entirely dispensing with straps extending along the outer or inner sides of the cheeks for these purposes, as is usually the case. The shaft H is secured in place by pins c d, one on either end, as shown in Fig. 4. Said pins are embedded in the cheeks so far as to be below or even with the surface. To accomplish this end a recess or gain, e, is made in each cheek-piece for the reception of the pins. (See Fig. 4.)

In placing the shaft H in position, the pin d is first inserted in the shaft, then pushed

through, and pin *c* bent and inserted, afterward having its ends set back in the recess, by which it is secured from coming out. The pin *c* may be removed by prying up one end and pushing it out, thus allowing the removal of the shaft, &c. In place of pin *c*, held in position as described, it may be substituted by a split pin-key, which is similarly embedded in recesses to prevent chafing or wear. (See Fig. 6.) It sometimes occurs that, instead of a hook being attached by the strap F, a ring or other device, or in some cases no substitute at all is wanted, as special uses may determine. Therefore, instead of riveting the pin *a*, securing the straps in the cheeks, it is retained therein by split key N, Fig. 6, which is also embedded in the cheek in a recess, so that it shall not be above the surface thereof; hence, to effect the change of a hook for a ring, or for the removal of either, the split key is backed out, and the pin A and strap are taken out to effect the desired change, thus making the strap removable. In such case the upper end of the block is secured or fastened together by rivets *b' b'*. The two sheave-blocks, Figs. 5 and 6, are similar in construction, differing therefrom chiefly by the addition thereto of the division-plate I inserted between the cheeks, creating two spaces for the accommodation of two sheaves, K and L. A three or four sheave block is made by the addition of similar division-plates to the plate I and sheaves, the replacing or placing of mortises for strap for hook being the chief change required. So far as the side plates or cheeks A and B are concerned, and the method of forming mortises for the sheaves, and securing the several parts together, forming the entire block, there is no substantial or material difference between that shown in Figs. 1

and 2 and that represented in Figs. 5 and 6, the latter having in addition the division-plate I, of which there may be one or more, according to the number of sheaves required in the block.

In the construction of the above-described blocks, the special object in view is to produce a metal block, of one or more sheaves, that shall have smooth cheeks or sides, having neither straps, bolts, pins, nor rivets above the surfaces—a block that shall be neat in appearance, strong, and durable, and yet light, so that it may be as readily handled as those made of wood.

What we claim as our invention, and desire to secure by Letters Patent, is—

1. In tackle-blocks, the cheeks or side pieces A and B, having projectures D D cast, or otherwise formed thereon, forming of the projectures and shell one entire piece of metal, substantially as described, the same separately and in combination with the gains or mortises for the strap F, for the purpose set forth.

2. In tackle-blocks, the cheeks or side pieces A and B, having projectures D D and E E cast or otherwise formed thereon, making of the projectures and shell one entire piece of metal, and division-plate I, substantially as and for the purpose specified.

3. The division-plate I, having projectures I' on one or both sides thereof, made or cast of one piece, in combination with the sides A and B, to form division between the sheaves in tackle-block, substantially as herein described.

JOHN SIMPSON.
ALFRED A. POPE.

Witnesses:

J. H. BURRIDGE,
E. W. CROSS.