
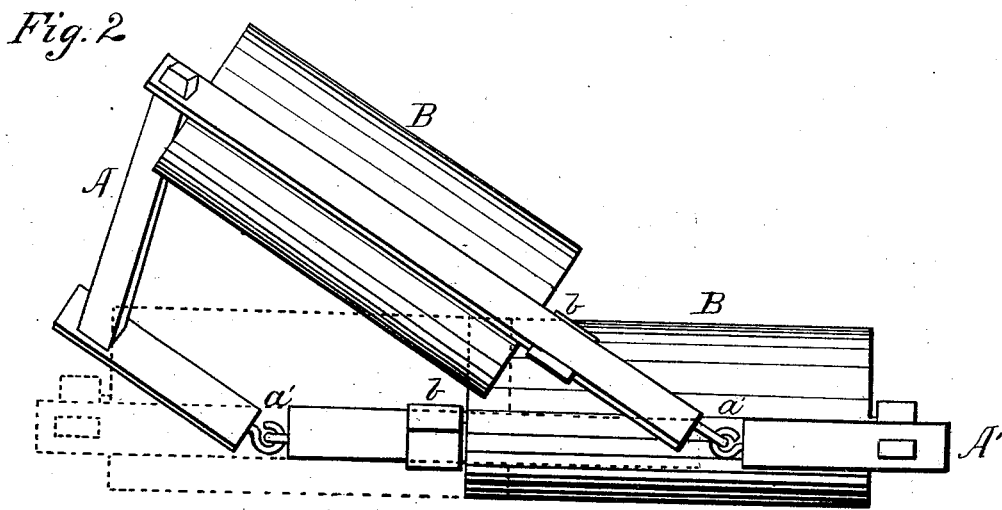


E. SMITH.
LAND ROLLER.

No. 181,734.

Patented Aug. 29, 1876.

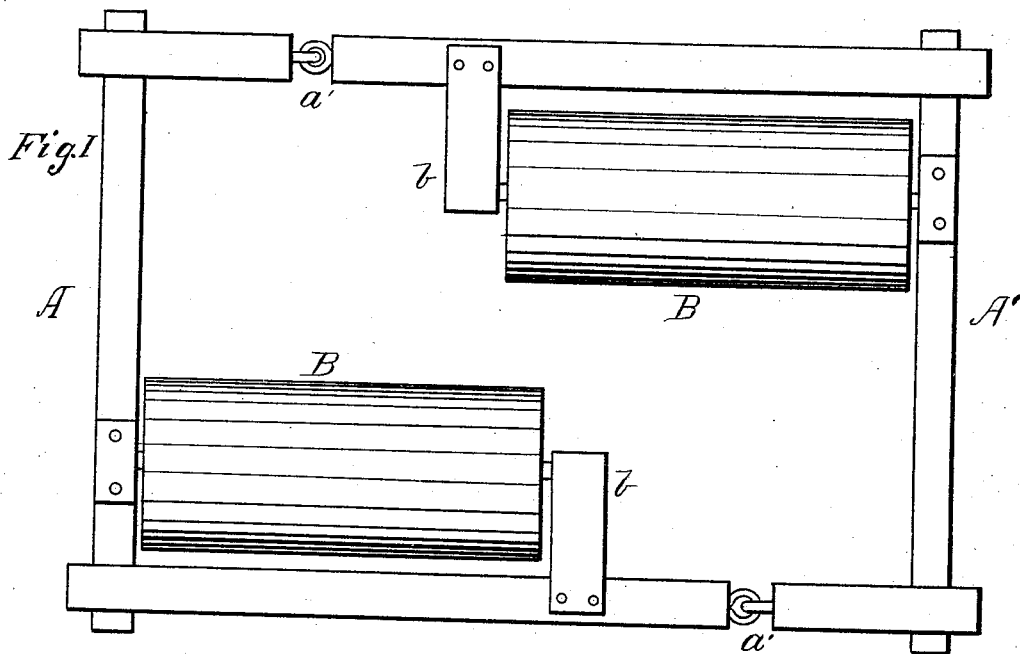

WITNESSES
Thomas Bernard
George C. Updeau.

INVENTOR,
Eliaser Smith.
Gilmore, Smith & Co.
ATTORNEYS.

UNITED STATES PATENT OFFICE.

ELEAZER SMITH, OF GREENE, IOWA.

IMPROVEMENT IN LAND-ROLLERS.

Specification forming part of Letters Patent No. **181,734**, dated August 29, 1876; application filed March 18, 1876.

To all whom it may concern:

Be it known that I, ELEAZER SMITH, of Greene, in the county of Butler and State of Iowa, have invented a new and valuable Improvement in Ground-Roller; and I do hereby declare that the following is a full, clear, and exact description of the construction and operation of the same, reference being had to the annexed drawings, making a part of this specification, and to the letters and figures of reference marked thereon.

Figure 1 of the drawings is a representation of a plan view of my roller, and Fig. 2 is a front elevation of the same.

This invention has relation to ground-rollers; and the nature of my invention consists in a flexible rectangular frame, each section of which is provided with a roller, as will be hereinafter explained.

In the annexed drawings, A A' designate two sections, which are jointed together at *a' a'*, constituting a flexible rectangular frame, to which animals may be hitched in any suitable manner. B B designate rollers, one of which is applied to the front part of the jointed frame, and the other is applied to the rear part of this frame. The shafts or gudgeons of the rollers B B, have their bearings in the flexible frame, and also in brackets *b b*, which are secured to this frame.

The roller-frame is flexible—that is to say, the two sections are jointed in such manner that the rollers B B will accommodate them-

selves to the surface of the ground over which they are drawn.

It will be observed that the joints of the roller-frame are arranged near the front and rear corners of this frame—that is to say, the joints *a' a'* are in a line which is diagonal to the line of draft. This allows the attachment of a draft-tongue to one of the transverse bars of the frame without interfering with the free articulation of this frame.

I am aware that a land-roller has heretofore been constructed in sections, one in advance of the other, and connected by pivoted joints, as shown in Letters Patent granted to A. S. Skiff, dated May 1, 1866, No. 54,425; and I therefore lay no claim to such construction, broadly.

What I claim as new, and desire to secure by Letters Patent, is—

In a ground-roller, the flexible rectangular frame, composed of sections A A', jointed near the front and rear corners of said frame, the line connecting the joints being diagonal to the line of draft, and no central bar being employed, in combination with rollers B B, applied substantially as described.

In testimony that I claim the above I have hereunto subscribed my name in the presence of two witnesses.

ELEAZER SMITH.

Witnesses:

D. D. SMITH,
EDWIN RIGGINS.