## D. M. MOORE.

## SHINGLING BRACKETS.

No. 183,413.

Patented Oct. 17, 1876,


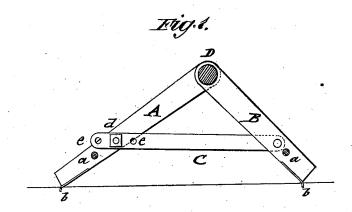


Fig. 2.

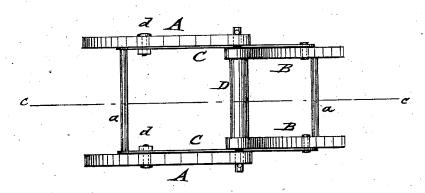

Witnesses: Trances Moshale, John Goethals ATTORNEYS.

## UNITED STATES PATENT OFFICE.

DAVID M. MOORE, OF WINDSOR, VERMONT, ASSIGNOR TO HIMSELF AND JAMES H. COOK, OF SAME PLACE.

## IMPROVEMENT IN SHINGLING-BRACKETS.

Specification forming part of Letters Patent No. 183,413, dated October 17,1876; application filed July 22, 1876.

To all whom it may concern:

Be it known that I, DAVID M. MOORE, of Windsor, Windsor county, Vermont, have invented a new and Improved Bracket, of which the following is a specification:

Figure 1 represents a vertical longitudinal section of my improved bracket on line o c, Fig. 2; and Fig. 2 is a top view of the same. Similar letters of reference indicate corre-

sponding parts.

The invention relates to an adjustable bracket for staging, elevated seats, or other purposes; and consists of pivoted braces with prongs or teeth at the lower ends, and connected by pivot-rods, that may be adjusted to greater or less width of the bracket by suitable bolts.

In the drawing, A and B are braces, that are pivoted at the upper ends to a strong lateral piece, D, and stiffened by lateral rods a near their lower ends. The lower ends of the braces A and B are provided with prongs or teeth b, on which the braces rest securely. Pivot rods or bands C extend from one brace to the other, and are adjusted to produce the

greater or less width of the bracket by bolts d, that pass through the sides of one of the brace-sections, and through perforations e of the connecting-bands C.

By taking off the bolts, and passing them through any of the holes of the connecting-bands, the bracket may be set to the required width, and form a rigid support for the shingling staging, seats, or other purposes to which it is applied.

I am aware that it is not new to make a scaffold-bracket with pivoted legs and adjustable segment held by a thumb-screw; but

What I claim is-

The combination of pivoted braces A B, connecting bands C, lateral piece D, and braces a a, all constructed and arranged as shown and described, for the purpose specified.

DAVID M. MOORE.

Witnesses:

WM. BATCHELDER, A. G. AMSDEN.