

C. BARTLETT & E. C. LEWIS.

ICE-CREEPER.

No. 187,347.

Patented Feb. 13, 1877.

Fig 1




Fig 2

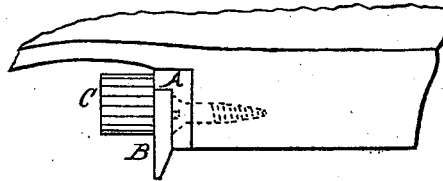


Fig 3




Fig 5




Fig 4

Fig 6

Fig 7



Fig 8

Witnesses

Joseph H. Lewis
Thomas Lowe

Inventors

Charles Bartlett
Errett C. Lewis

UNITED STATES PATENT OFFICE

CHARLES BARTLETT AND EVERETT C. LEWIS, OF PROVIDENCE, RHODE ISLAND, ASSIGNORS TO GEORGE F. LEETE, OF SAME PLACE.

IMPROVEMENT IN ICE-CREEPERS.

Specification forming part of Letters Patent No. **187,347**, dated February 13, 1877; application filed January 19, 1877.

To all whom it may concern:

Be it known that we, CHARLES BARTLETT and EVERETT C. LEWIS, residents of the city of Providence and State of Rhode Island, have invented certain Improvements in Creepers; and we do hereby declare the following to be a true and exact description thereof, reference being had to the accompanying drawings, and to letters of reference marked thereon.

With reference to the drawings, Figure 1 is a front elevation, showing it attached to the heel of a boot or shoe. Fig. 2 is a side elevation of same. Figs. 3 and 4 are views of the movable plate B. Figs. 5 and 6 are views of the stationary plate A. Figs. 7 and 8 are views of the screw C.

To enable others to make and use our invention, we will proceed with a description.

Our invention refers to a simple, easy, and neat mode of fastening creepers to the heels of boots and shoes.

The plate A is made with holes for screws, to allow it to be firmly secured to the heel, and also a hole for screw C to be screwed into. It also has a projection for the support of

plate B, so as to relieve the strain from screw C when it is in use. The plate B has an oblong hole for screw C, so as to allow it to be removed without removing screw C entirely, only loosening it. Plate B also has projections or teeth which project below plate A when fastened to it, so as to prevent the wearer from slipping. The teeth can be of any convenient length or shape.

Screw C is made with a grooved head, to allow it to be screwed in with the fingers without the aid of a screw-driver. Aside from these particulars the creepers may be made of ordinary metals, such as cast, wrought, or malleable metals.

Having thus described our invention, what we claim, and desire to secure by Letters Patent, is as follows:

The combination of the plate A, provided with projections, and plate B and screw C, substantially as described.

CHARLES BARTLETT.
EVERETT C. LEWIS.

Witnesses:

JOSEPH H. LEWIS,
THOMAS LOWE.