


E. JONES.
PUMP.

No. 192,264.

Patented June 19, 1877.

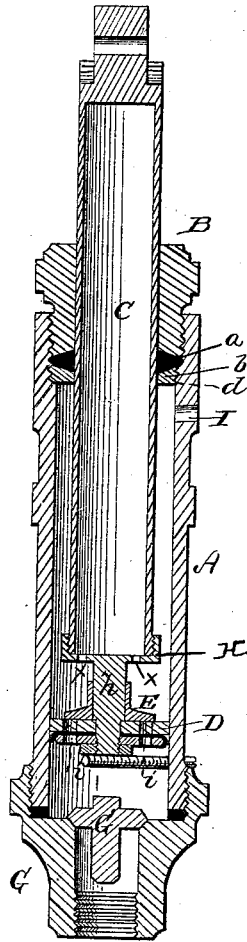

WITNESSES

Frank L. Curran
John Schroeder

INVENTOR

Evan Jones
Alexander Mason
ATTORNEYS

UNITED STATES PATENT OFFICE.

EVAN JONES, OF OTTUMWA, IOWA.

IMPROVEMENT IN PUMPS.

Specification forming part of Letters Patent No. **192,264**, dated June 19, 1877; application filed May 17, 1877.

To all whom it may concern:

Be it known that I, EVAN JONES, of Ottumwa, in the county of Wapello and State of Iowa, have invented certain new and useful Improvements in Pumps; and do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification.

The nature of my invention consists in the construction and arrangement of a pump, as will be hereinafter more fully set forth.

In order to enable others skilled in the art to which my invention appertains to make and use the same, I will now proceed to describe its construction and operation, referring to the annexed drawing, which represents a longitudinal section of my improved pump.

A represents a straight tube of any suitable dimensions, enlarged at the upper end to receive a packing-box, B, through which works a hollow plunger, C.

a is the packing, and *b* the washer, resting on a shoulder, *d*, in the tube A, and against which the box B screws tightly, to pack the hollow plunger C.

The plunger C is of smaller diameter than the inside of the tube A, and is closed at its upper end. The lower end of said plunger is provided with exterior screw-threads, on which is screwed a cup, H, forming the bottom of the plunger, and from which projects a rod, *h*, having a piston, D, secured to its lower extremity. This piston fits tightly in

the tube A, and has openings *i* through it, which are covered by a valve, E, sliding on the rod *h*. In the bottom H of the plunger C are also openings *x*, as shown.

If necessary, the hollow plunger C can be easily detached from the cup and piston, and removed without taking the piston from the tube.

On the lower end of the tube A is fastened a valve-seat, G, with valve G', to connect with the supply in the usual manner.

By the joint action of the hollow plunger C, which forms an air-chamber, and the valve-piston D E, of different areas, connected together and working simultaneously in a straight tube, a continuous stream of water is made to flow from the pump in a steady and regular manner. I is the outlet.

The pump is cheap, compact, durable, and effective in operation.

Having thus fully described my invention, what I claim as new, and desire to secure by Letters Patent, is—

The combination of the tube A with packing-box B and valve G', the hollow removable plunger C, the cup H, with openings *x* and projecting rod *h*, the piston D, with openings *i*, and sliding valve E, substantially as and for the purposes herein set forth.

In testimony that I claim the foregoing I have hereunto set my hand.

EVAN JONES.

Witnesses:

HENRY FULAUP, Jr.,

JOHN W. MILLER.