
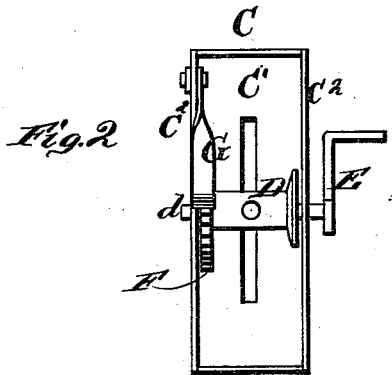


G. DUFFEY.
 FENCE-WIRE TIGHTENER.

No. 192,494.

Patented June 26, 1877

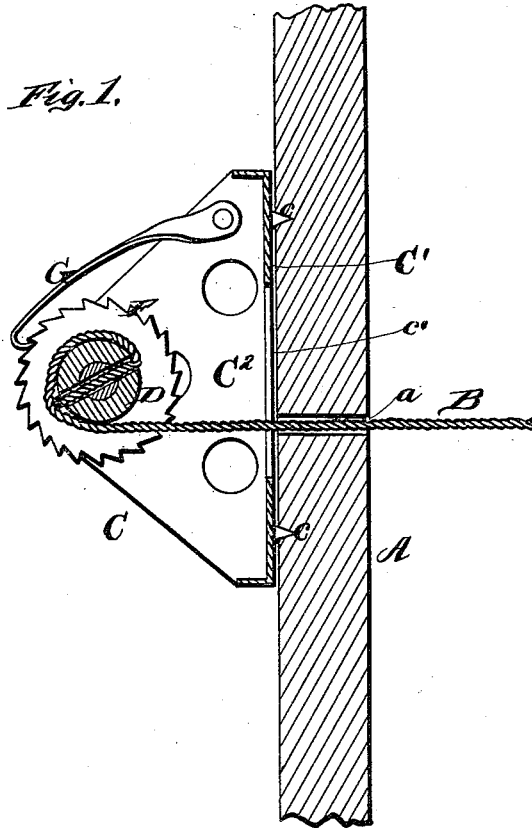

WITNESSES
Robert Emmett
George C. Upham.

INVENTOR
George Duffey.
Carlisle, Smith & Co.
 ATTORNEYS.

UNITED STATES PATENT OFFICE.

GEORGE DUFFEY, OF DE KALB, ILLINOIS, ASSIGNOR OF ONE-HALE HIS
RIGHT TO JOSEPH F. GLIDDEN, OF SAME PLACE.

IMPROVEMENT IN FENCE-WIRE TIGHTENERS.

Specification forming part of Letters Patent No. 192,494, dated June 26, 1877; application filed
March 10, 1877.

To all whom it may concern:

Be it known that I, GEORGE DUFFEY, of De Kalb, in the county of De Kalb and State of Illinois, have invented a new and valuable Improvement in Wire-Fence Tighteners; and I do hereby declare that the following is a full, clear, and exact description of the construction and operation of the same, reference being had to the annexed drawings, making a part of this specification, and to the letters and figures of reference marked thereon.

Figure 1 of the drawings is a representation of a central vertical section of my wire-fence tightener, and Fig. 2 is a front elevation thereof.

This invention relates to devices for tightening the wires of wire fences; and it consists in the combination, with a cable of wire fence of a windlass, ratchet-wheel, and a retaining-pawl attached to a bracket, to be applied to a post of the fence, as will be hereinafter more fully set forth.

In the accompanying drawings, A designates one of the wooden posts of a wire-fence, and B designates one of the wires or cables thereof. C designates a detachable casing or bracket, having an attaching-plate, C¹, and two side pieces, C². Said attaching-plate is provided with points *cc*, which are forced into said post A, so as to fasten casing or bracket C thereto. The end of wire B passes through hole *a*, in post A, and opening *c'* in plate C¹, and is attached to a small horizontal windlass, D, jour-

naled in side pieces C². Said windlass has a shank, *d*, which extends through said casing, and which has a crank-arm, E, attached to one of its ends, whereby said windlass is operated. Said windlass is also provided near its other end, but within said casing C, with a ratchet-wheel, F, which is engaged by a detaining-pawl, G, hung to the upper part of said casing or ratchet. Said pawl and ratchet allow said windlass to be turned, so as to strain said wire B, and draw it taut and horizontal, but will prevent said windlass from turning in the opposite direction, and thereby loosening said wire B. The strain of said wire aids in keeping said casing and windlass secured to said post.

These wire-tighteners are easily and cheaply made, readily detachable, and portable without difficulty.

What I claim as new, and desire to secure by Letters Patent, is—

The improved wire-tightening device, consisting of the case C, having spurs *c* for attachment to the post, the windlass and the ratchet-wheel and pawl, all constructed and combined substantially as described.

In testimony that I claim the above I have hereunto subscribed my name in the presence of two witnesses.

GEORGE DUFFEY.

Witnesses:

GEORGE H. GENDER,
IRA V. RANDALL.