

J. SCHINNELER & L. FITZPATRICK.
MACHINES FOR MAKING CHAIN-LINKS.

No. 194,181.

Patented Aug. 14, 1877.

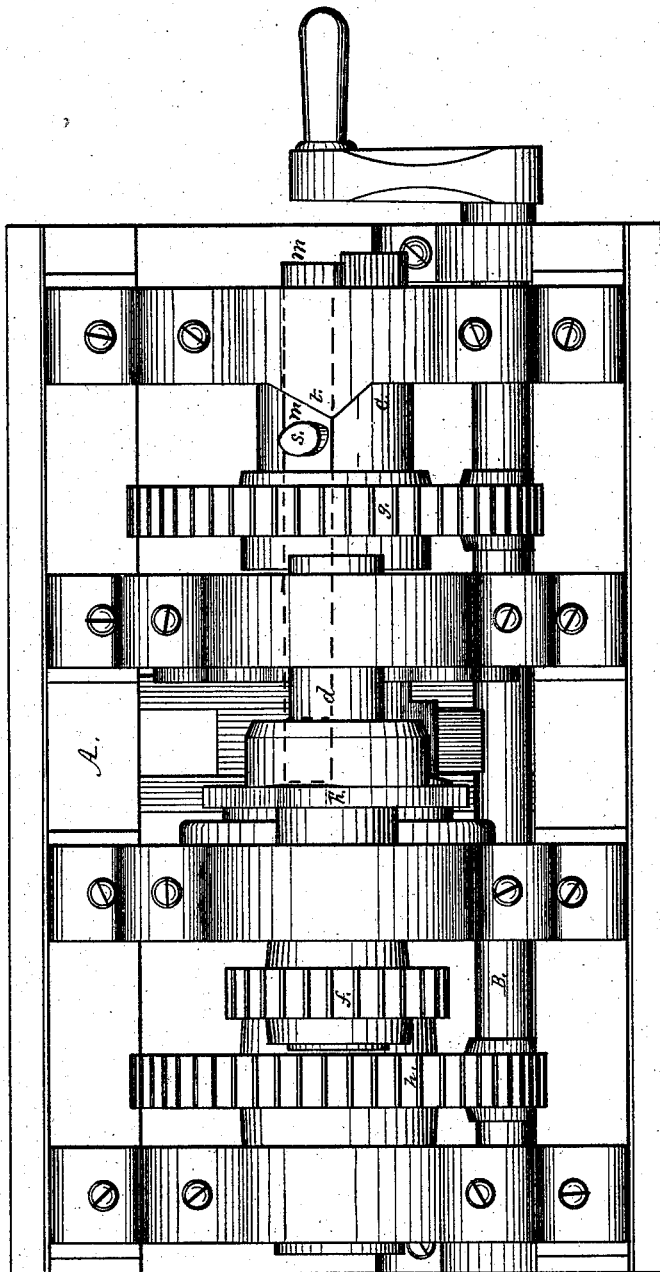


Fig. 1.


Witnesses
James Johnston
Wesley Johnston

Inventor
Jacob Schinneller
Luke Fitzpatrick
By A. E. Johnston atty.

J. SCHINNELER & L. FITZPATRICK.
MACHINES FOR MAKING CHAIN-LINKS.

No. 194,181.

Patented Aug. 14, 1877.

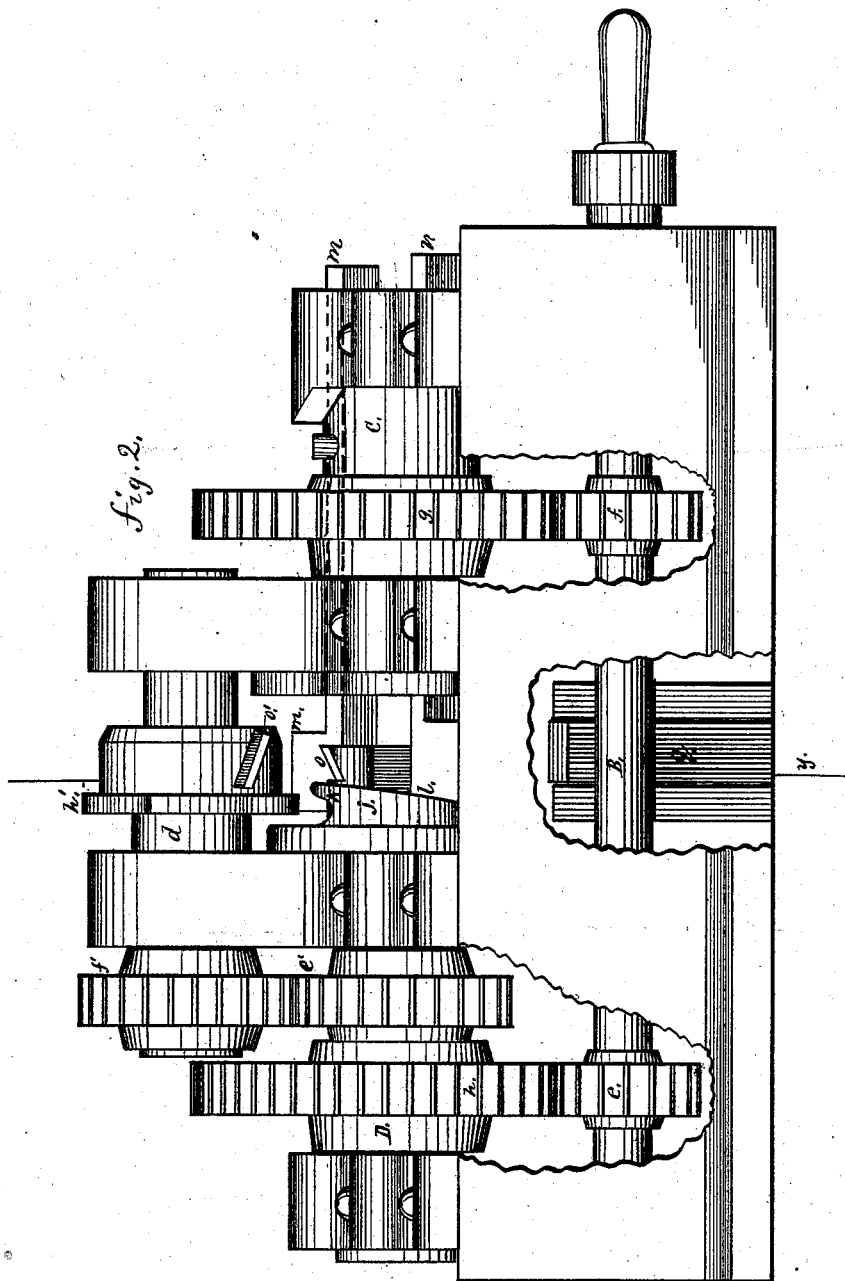

Witnesses

James J. Johnston
Wesley Johnston




Inventor

Jacob Schinneller
Luke Fitzpatrick
By W. K. Johnston
att'y.

3 Sheets—Sheet 3.
J. SCHINNELER & L. FITZPATRICK.
MACHINES FOR MAKING CHAIN-LINKS.

No. 194,181.

Patented Aug. 14, 1877.

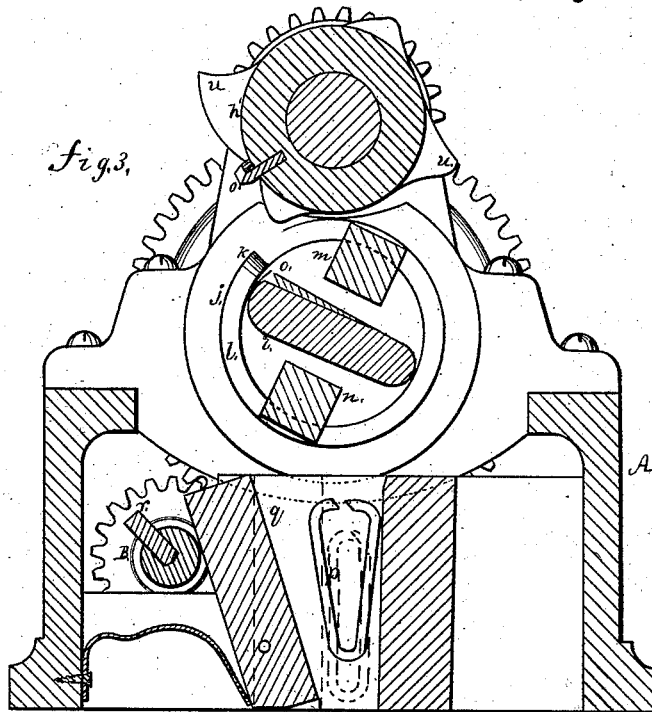

Witnesses
James Johnston
Wesley Johnston

Inventor
Jacob Schinneller
Luke Fitzpatrick
By *A. C. Johnston*
att'y

UNITED STATES PATENT OFFICE.

JACOB SCHINNELLER, OF PITTSBURG, PENNSYLVANIA, AND LUKE FITZPATRICK, OF BENWOOD, WEST VIRGINIA.

IMPROVEMENT IN MACHINES FOR MAKING CHAIN-LINKS.

Specification forming part of Letters Patent No. **194,181**, dated August 14, 1877; application filed June 9, 1877.

To all whom it may concern:

Be it known that we, JACOB SCHINNEL-
LER, of Pittsburg, in the county of Allegheny
and State of Pennsylvania, and LUKE FITZ-
PATRICK, of Benwood, county of Marshall,
State of West Virginia, have invented a new
and useful Improvement in Machines for Mak-
ing Chain-Links; and we do hereby declare
that the following is a full and exact descrip-
tion thereof, reference being had to the accom-
panying drawings, and to the letters of ref-
erence marked thereon.

Our invention relates to an improvement in
machine for making chain-links; and consists
in a rotary mandrel provided with a cutter,
and moving within a guide, the outer face of
which is provided with an incline for discharg-
ing from the mandrel the link as it is formed,
and for moving back holders, in combination
with a revolving die, the axis of which is pro-
vided with a cutter, which operates conjointly
with the cutter on the rotating mandrel,
for the purpose of separating the link and
cutting the desired scarf for welding, which
link subsequently drops from the mandrel
into a conveying-chute, where it is properly
closed in its passage through said chute, the
whole being operated through the medium of
suitable driving-gear and eccentrics.

To enable others skilled in the art to make
and use our invention, we will proceed to de-
scribe its construction and operation.

In the accompanying drawings, which form
part of our specification, Figure 1 is a top view
of our improved machine for making chain-
links. Fig. 2 is a side elevation of the same,
representing the relative position of the sev-
eral parts when in position for receiving the
iron for forming the link. Fig. 3 is a vertical
transverse section at line *y* of Fig. 2. Fig. 4
represents a face view of the mandrel. Fig.
5 is a face view of the roller.

In the drawings, A represents the frame of
the machine, provided with suitable bearings
for the shafts B, C, D, and *d*. On the shaft
B are two driving-wheels, *e f*, which gear into
wheels *g h* on the shafts C D. On the shaft
D is also a wheel, *e'*, which gears into a wheel,
f', for rotating the shaft *d* and die or roller *h'*.
On the inner end of the shaft D is placed the

mandrel *i*, which rotates within a guide, *j*,
having a recess at *k* for the reception of the
iron for forming the links. The outer face of
the guide *j* is provided with an inclined face,
l, for throwing back the holders *m n*, and for
forcing the links off the mandrel. The man-
drel, when viewed endwise, is of oval form,
and is provided with a cutter, *o*. The longi-
tudinal contour of the mandrel gives an oval-
shaped opening to the link, the larger part
being at the scarfed end, as shown in full
lines, Fig. 3, which link, after being discharged
from the mandrel, drops into the chute *p* with
its larger end uppermost, as shown in said
figure, and somewhat open. As it is essential
to close the same before welding—that is to
say, to bring the scarfed ends over each other
by closing or compressing the sides of the link,
as indicated in dotted lines, Fig. 3, where the
closed link is represented as ready to pass
from the chute—the chute will be closed upon
the same by means of the pivoted side *q*, which
is moved forward by the eccentric *r* on the
shaft B, and is thrown back into its original
position by means of a spring at its lower
end. In this operation the link will be forced
from the mandrel by reason of the inclined
guide which surrounds it, the said mandrel
being adjusted, with reference to the chute
and guide, so that the link will be forced off
and fall when it is in a vertical position, or
nearly so, and thus readily drop into the
chute, where its sides are compressed, as
herein described.

The oval form of the mandrel will allow for
the desired lap to the link when closed, so as
to bring the scarfs over or alongside of each
other, thereby giving the same form to each
end of the link, and uniformity throughout its
contour. The link, when discharged from the
chute, is in form for welding. The shaft C is
provided with recesses, in which are placed
holders *m n*, provided with projections *s*, which,
coming in contact with the projection *t*, move
them alternately over the iron on the mandrel
i. The form of the die or roller *h'* is clearly
shown in Figs. 3 and 5, and in outline is of
such form that its points *u* will wipe the iron,
causing it to closely hug the mandrel *i* as it
is being wound around it. The axis or back

support of the die or roller *h'* is provided with a cutter, *o'*, which operates in conjunction with the cutter in the mandrel *i* for separating the links formed around the mandrel. The holders *m n* should have sufficient play at their inner ends to allow them to pass easily over the iron as it is wound around the mandrel *i*.

Having thus described the construction of the several parts of our improvement, and the relation that they bear to each other, we will proceed to describe the operation, which is as follows: The iron is heated to a suitable degree and placed in the recess *k* of the guide *j*, forced in under the holder *m* or *n*, as the case may be, and the revolving of the mandrel *i* winds the iron around it. The roller or die *h'* rotating with the mandrel *i*, the points *u* press the iron close to the walls of the mandrel. The end of the link, coming in contact with the incline face *l* of the guide *j*, forces the formed iron between the cutters *o* and *o'*, which will cut the desired scarf and separate the formed link from the bar or rod being fed, which separated link drops down into the conveying-chute *p*, one side of which is moved forward by the eccentric on the shaft *B*, which closes the link, so as to bring the scarfs over each other, and in position for being finally closed by the welding process. After the link has been thus closed it drops from the machine into a suitable receptacle.

Having thus described the nature, construc-

tion, and operation of our improvement, what we claim is—

1. The mandrel *i*, adapted to form the links of a chain, and adjusted to rotate within the guide *j*, in combination with the irregularly-shaped die or roller *h'*, constructed to rotate and smooth down the metal upon the mandrel as it is being wound thereon, substantially as shown and herein described.

2. In combination with the mandrel, binding-roll, inclined guide, and holders, the cutters *o o'*, situated beyond the point of bite of the roll and mandrel, as and for the purpose set forth.

3. The revolving mandrel *i*, in combination with the die or roller *h'* and holders *m n*, operating with relation to the mandrel *i*, substantially as herein described, and for the purpose set forth.

4. In a machine for making chain-links, the chute *p*, provided with a pivoted side, *q*, adapted by means of a cam or eccentric movement, as set forth, to close upon the link when the same falls into the chute, in combination with the rotating mandrel *i* and guide adapted to force the links therefrom, all substantially as specified.

JACOB SCHINNELLER.
LUKE FITZPATRICK.

Witnesses:

A. C. JOHNSTON,
JAMES E. BARRETT.