

E. HALLETT.  
Fence.

No. 199,642.

Patented Jan. 29, 1878.

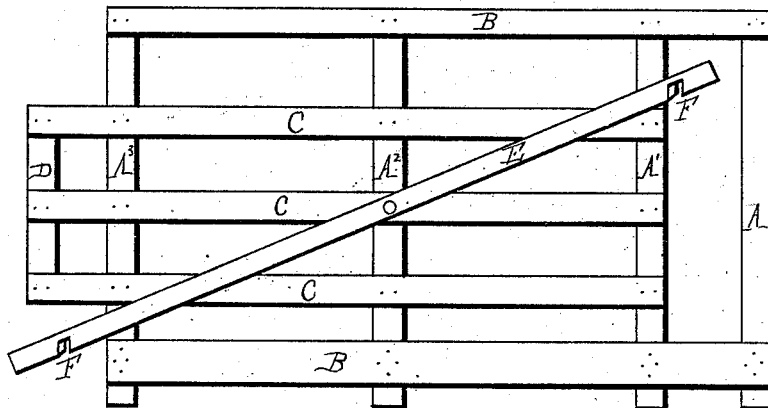
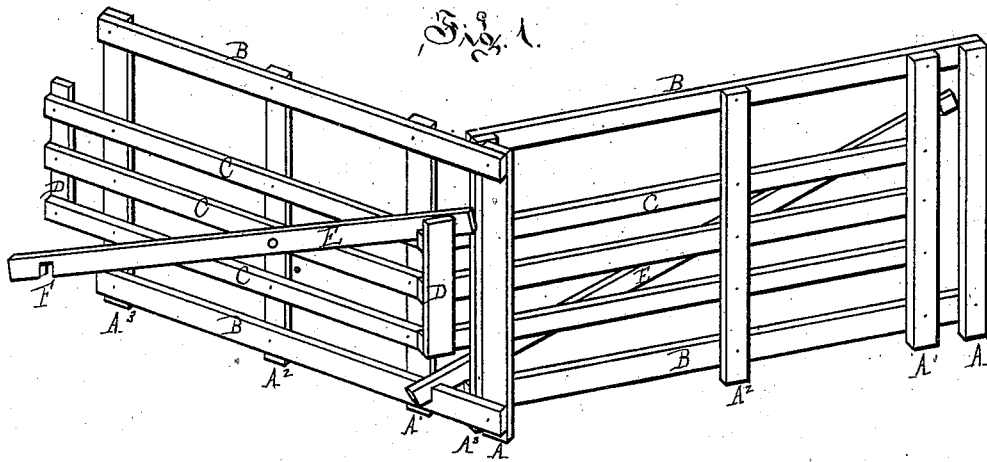


Fig. 2.

Attest:  
H. L. Aulls  
Charles J. Hunt

Inventor:  
E. Hallett  
By Atty  
Thos. S. Sprague

# UNITED STATES PATENT OFFICE.

ENOCH HALLETT, OF HILLSDALE, MICHIGAN.

## IMPROVEMENT IN FENCES.

Specification forming part of Letters Patent No. **199,642**, dated January 29, 1878; application filed October 24, 1877.

### *To all whom it may concern:*

Be it known that I, ENOCH HALLETT, of the town and county of Hillsdale, and State of Michigan, have invented an Improvement in Portable Fences, of which the following is a specification:

The nature of this invention relates to certain new and useful improvements in portable farm-fences, by means of which each length or panel is securely locked to its fellow, at both top and bottom, by a pivoted bar provided with an interlocking notch at each end, and so arranged as not only to lock the panels together, but to form a cross-bar brace to each panel, as more fully hereinafter set forth.

Figure 1 is a perspective view of a section of my improved fence, showing how the panels are locked together when set up; and Fig. 2 is a plan view of a single detached panel.

Like letters indicate like parts in each figure.

In the drawings, A A<sup>1</sup> A<sup>2</sup> A<sup>3</sup> represent the vertical stiles, to which are fastened the top and bottom rails B. Other horizontal rails, C, one or more, as may be desired, are secured at one end to the vertical stile A<sup>1</sup>, and their opposite ends to a short vertical stile, D, thus forming a narrow projecting panel beyond the stile A<sup>2</sup>. To the center rail, and through it and the vertical stile A<sup>2</sup>, is pivoted the double latch-bar E, provided near each end with locking-notches F.

It will be noticed that in Fig. 1, when a section of fence is set up, the latch-bar engages with the top rail of the center panel, which projects through the space between the stiles A and A<sup>1</sup>, and also with the lower rail at the opposite end, and when thus set up the lock-bar also forms a diagonal brace across the face of the whole panel.

This fence may be built upon uneven ground, and the panels are easily unlocked, and as readily removed and set up on another ground, as may be desired.

What I claim as my invention, and desire to secure by Letters Patent, is—

1. In a portable farm-fence, made in sections, the double latch-bar and brace E, pivoted to the central stile of each section, and having notched ends adapted to lock the section to which it is attached with the two adjoining sections, substantially as described and shown.

2. A portable fence the sections of which are composed of vertical stiles and horizontal rails, the central rails C being attached so as to project from one end of the section, in combination with the double latch-bar and brace E, substantially as described and shown.

ENOCH HALLETT.

Witnesses:

H. S. SPRAGUE,  
C. R. HULETT.