


E. LEGER.  
Show-Stand.

No. 203,629.

Patented May 14, 1878.

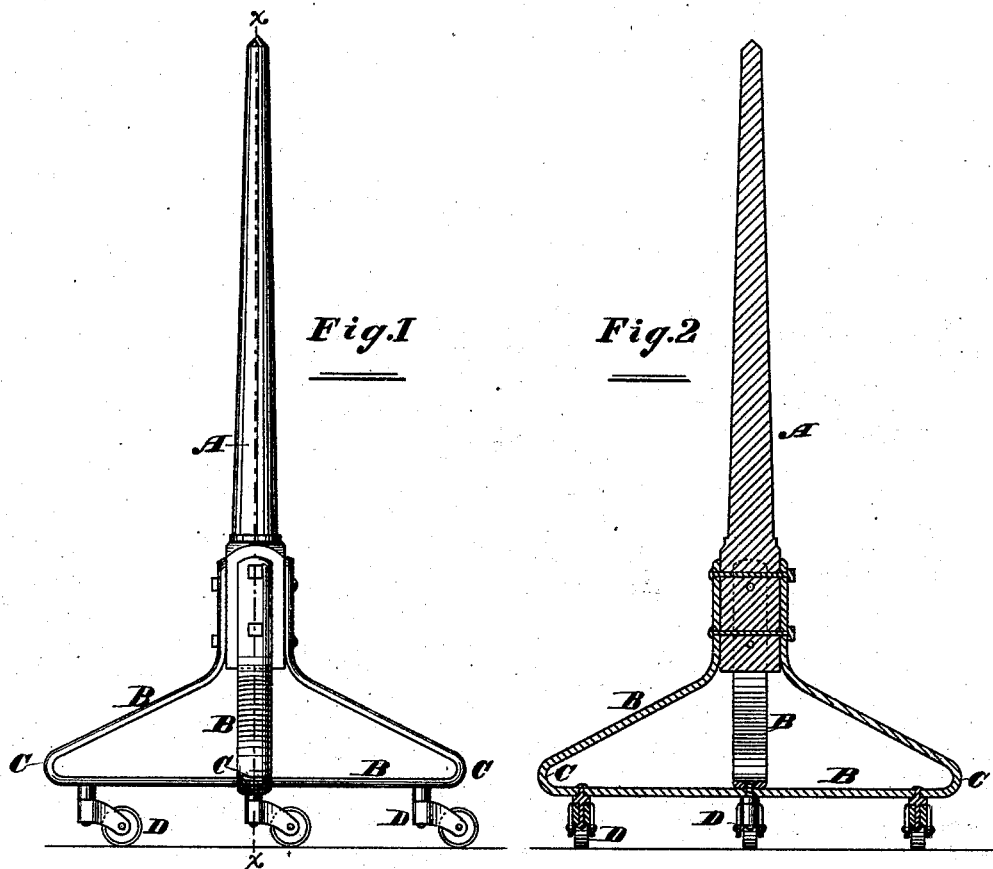

*Attest:*

*W. L. Baker*

*S. L. Mudgett*

*INVENTOR:*

*Edward Leger,*

*By - G. B. Coupland & Co.*

*Attorneys.*

# UNITED STATES PATENT OFFICE.

EDWARD LEGER, OF CHICAGO, ILLINOIS.

## IMPROVEMENT IN SHOW-STANDS.

Specification forming part of Letters Patent No. **203,629**, dated May 14, 1878; application filed March 9, 1878.

*To all whom it may concern:*

Be it known that I, EDWARD LEGER, of the city of Chicago, in the county of Cook and State of Illinois, have made certain new and useful Improvements in Stands for Ladies' Figures; and I hereby declare the following to be a full, clear, and exact description thereof, which will enable others skilled in the art to which my invention appertains to make and use the same, reference being had to the accompanying drawing, and the letters marked thereon.

In the drawing, Figure 1 represents my invention, and Fig. 2 is a vertical section of the same.

The object of my invention is an improvement in the construction of legs or feet of stands used as show-figures in displaying garments and wearing apparel.

The nature of the improvement consists in forming the four feet necessary of two pieces of material, one single piece forming two feet of the stand.

In the drawing, A represents the standard commonly used for this purpose. B repre-

sents the feet, formed of a single piece, being bent to form the rounded corners C C, and then secured to the lower end of the standard A in the usual manner. D represents the casters attached to the feet B.

I am aware of other inventions of this nature for similiar purposes, but they are composed of several parts, requiring the iron to be punched, and then riveted or bolted together, making the cost of construction considerably more, and the feet not being so easily and quickly formed as they are by my plan.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

In a show-stand, the feet B, having the rounded corners C C, and the casters D, located far enough underneath the feet B to be out of the way, in combination with the standard A, substantially as described.

EDWARD LEGER.

Witnesses:

R. O. DUNNING,  
P. RATHKNEDT.