


DESIGN.

A. P. CORSE.  
COOKING RANGE.

No. 9,593.

Patented Oct. 24, 1876.

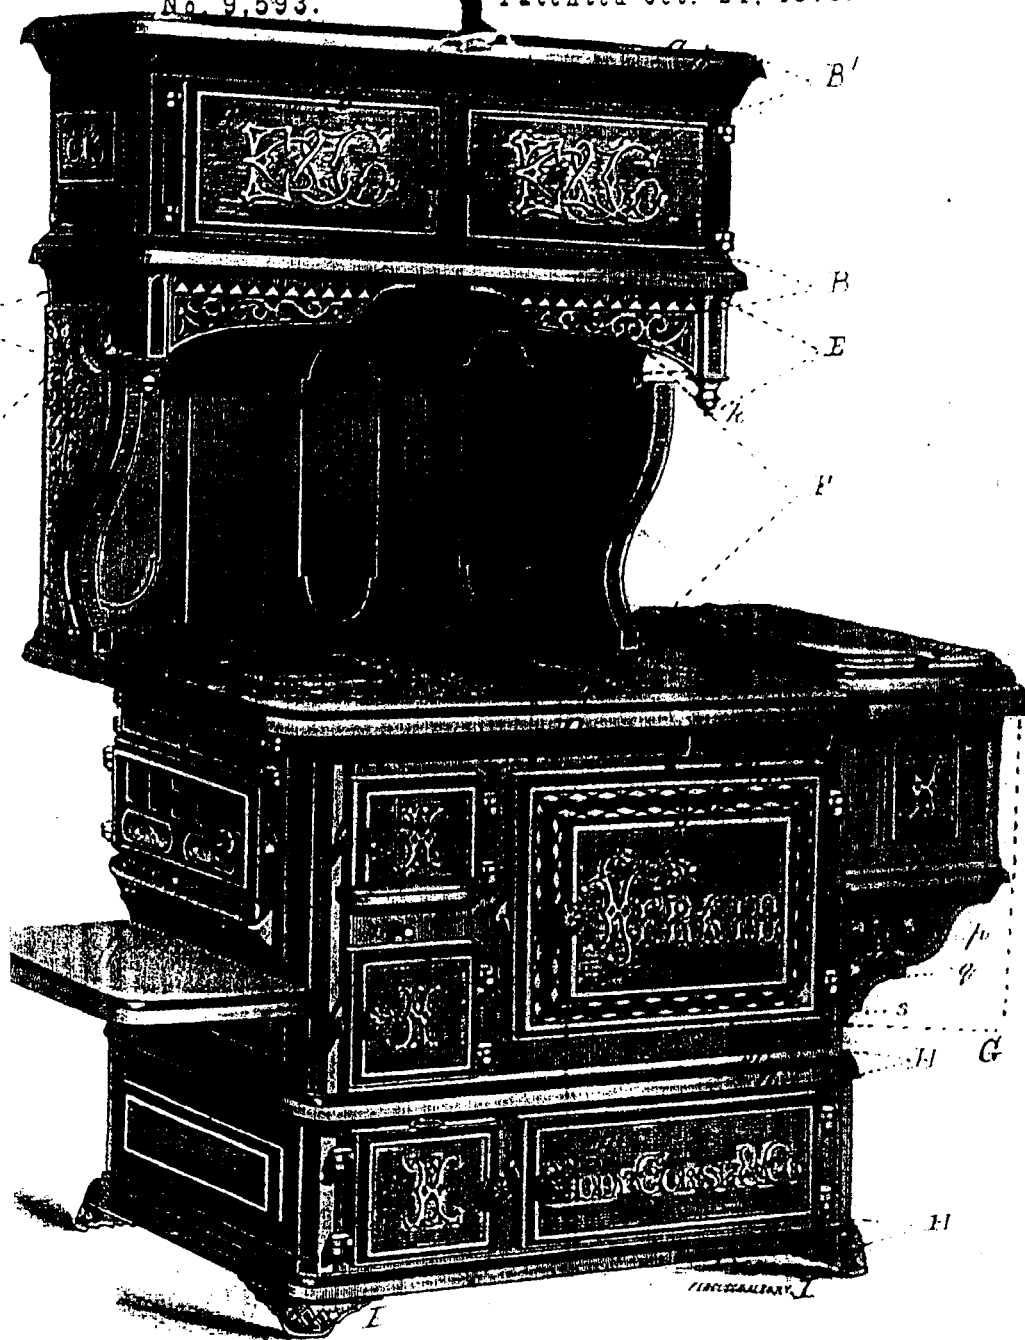

Witnesses  
 J. M. ...  
 J. B. ...  
 Same Oct. 17, 1876.

Inventor  
 Augustus P. Corse  
 W. E. Hazen his  
 Attorney

# UNITED STATES PATENT OFFICE.

AUGUSTUS P. CORSE, OF TROY, NEW YORK, ASSIGNOR TO EDDY, CORSE & CO., OF SAME PLACE.

## DESIGN FOR COOKING-RANGES.

Specification forming part of Design No. 9,593, dated October 21, 1876; application filed September 24, 1876.  
[Term of Patent 7 years.]

### *In all whom it may concern:*

Be it known that I, AUGUSTUS P. CORSE, of the city of Troy, county of Rensselaer, and State of New York, have invented a Design for the Ornamentation of a Cooking-Range, of which the following is a specification:

My invention consists of the ornamentation and ornamental form of the several parts of a cooking-range as entireties; and also in the combination of these parts to form an aggregate of design so applied. As shown and designated in the accompanying illustration, my invention is composed of the following parts, which may be used separately or in connection:

First, in the manner of applying and forming the ornamental cornice placed upon the top of the range, the top of the canopied section, the edge of the boiler-hole top, and upon the bracket which supports the reservoir. This cornice is shown at B B B B B, and consists of the upper molding in cavetto, A, the intermediate beveled band-molding *d*, and the lower oggee-molding C, faced with chevroned ornamentation.

Second, my invention also consists in the manner of ornamenting the doors, as shown at A A A A A A, and in detailed letter reference at *N*. This ornamentation consists of the beveled band molding *d'*, placed parallel to and inside of the straight edge of the door, so as to produce a filleted effect upon the outer edge of the molding so applied. This beveled band-molding projects beyond the panel which it borders upon the door by means of the inner fillet *Q*, and the recessed surface thus inclosed is milled and ornamented by means of a letter in arabesque; or the center may be ornamented by the same style of letter, displaying a name or monogram, as shown upon the other doors. I consider it a special feature of my invention of a design to combine the display of arabesque letter in a milled and molded field, whether an initial letter of this kind is employed as such, or in a name or monogram.

Third, my invention also consists of the ornamentation displayed upon the oven-door of the range, as shown at D, and this is com-

posed of the beveled band-molding *d''* placed inside of and parallel with the straight edge of the door, in filleted effect, having an inner fillet, *Q''*, adjoining, and next inside of the latter, as arranged, in shaded perspective, two rows of ornamental favose squares, as shown at V, upon the inner side of which is placed another beveled band-molding in projection with inner fillet, designated at *b*, inclosing a milled and recessed surface, *h*, upon which is displayed a name in arabesque letter, shown at *y*.

Fourth, my invention also consists in the ornamental form and surface ornamentation of the curtained or canopied section E E. This is composed of the drooping pendent form and surface ornamentation of the curtain *i i*, the attached corner and pendent buttresses *k k*, their form, and their milled and bordered surfaces, the ornamentation of the curtain, consisting of a convoluted vitruvian scroll in each section or loop of the curtain, displayed in a milled and bordered field, as shown at *j j*.

Fifth, my invention further consists in the ornamental form and surface ornamentation of the side brackets beneath the top section, as shown at F F, the ornamental form, consisting of the oggee curve, terminating at the top in approaching circular lines, and given to their front edges, as shown at *l l l l*. The ornamentation consists of their milled and bordered front surfaces, with the raised bordered and milled surfaces displayed upon the sides of the brackets, and ornamented in arabesque, as shown at *m*.

Sixth, another feature of my invention consists of the ornamentation displayed upon the reservoir-section G, and composed of the milled and recessed panel *u'*, inclosed by the rectangular band-molding *w*, the inner milled panel *e*, with an initial letter in arabesque displayed in the milled field of the inner panel, as shown at *y''*, together with the milled and bordered field of the bracket *x*, with its outer oggee curve *p*, notch *q*, and return finish and notch *S*; also the convoluted vine, its pedunculate flowers and buds, as displayed upon its milled area.

**DEPARTMENT OF COMMERCE  
UNITED STATES PATENT AND TRADEMARK OFFICE**

---

MISSING PAGE(S)

PATENT NUMBER D 9593 FOR THE ISSUE DATE 10/24/1878 HAS BEEN  
SCANNED/LOADED, BUT WITH MISSING PAGES(S). UPON RECEIPT OF  
THE MISSING PAGE(S), THE ENTIRE DOCUMENT WILL BE RESCANNED.

THIS NOTICE IS FOR THE MISSING PAGE(S) CONTAINING:

**Text Page 2 to End and Claims**

---