


LA-3703

C3_i

CIC-14 REPORT COLLECTION
**REPRODUCTION
COPY**

LOS ALAMOS SCIENTIFIC LABORATORY
of the
University of California
LOS ALAMOS • NEW MEXICO

**Threading and Assembly of
Soft Delta-Stabilized Plutonium Parts**

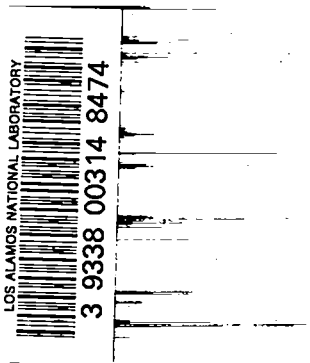

UNITED STATES
ATOMIC ENERGY COMMISSION
CONTRACT W-7405-ENG. 36

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

This report expresses the opinions of the author or authors and does not necessarily reflect the opinions or views of the Los Alamos Scientific Laboratory.

Printed in the United States of America. Available from
Clearinghouse for Federal Scientific and Technical Information
National Bureau of Standards, U. S. Department of Commerce
Springfield, Virginia 22151

Price: Printed Copy \$3.00; Microfiche \$0.65

LA-3703
UC-25, METALS, CERAMICS,
AND MATERIALS
TID-4500

LOS ALAMOS SCIENTIFIC LABORATORY
of the
University of California
LOS ALAMOS • NEW MEXICO

Report written: January 1967


Report distributed: June 16, 1967

Threading and Assembly of
Soft Delta-Stabilized Plutonium Parts

by

R. R. Gilmore
B. N. Robbins
J. W. Anderson





THREADING AND ASSEMBLY OF SOFT DELTA-STABILIZED
PLUTONIUM PARTS

by

R. R. Gilmore, B. N. Robbins, J. W. Anderson

ABSTRACT

Delta-stabilized plutonium, which is a soft gummy material similar to annealed copper, is difficult, if not impossible, to thread using conventional taps and dies or thread-cutting techniques. This report describes a successful "plunge" threading technique and a surface preparation method which permits assembly of threaded delta-stabilized parts without galling.

INTRODUCTION

Plutonium is easily stabilized in the delta phase by the addition of 1 wt % gallium or aluminum.⁽¹⁾ In contrast to unalloyed plutonium which has a hardness of ~275 DPH and machining characteristics similar to cast iron, the delta-stabilized material has a hardness of ~40 DPH and machines like annealed copper. The delta-stabilized material is preferred to unalloyed plutonium for many applications because it is stable at all temperatures below 450°C and can be rolled, drawn, or extruded at ambient temperature. Unalloyed plutonium undergoes a 9 % volume change at 117°C⁽²⁾ at which point it transforms from the alpha to the beta phase, and fabrication operations are generally limited to casting and machining.

As would be expected, difficulties were encountered in attempting to thread the soft delta-stabilized material using conventional thread-cutting tools. This report presents a tool design developed for cutting threads in delta-stabilized plutonium and a procedure for conditioning the threads so that external and internal threaded parts may be mated without galling.

DEVELOPMENT WORK

a. Conventional Cutting

Attempts to cut threads in the soft delta-stabilized plutonium using a standard 60° included-angle tool with the compound slide set at 30° were unsuccessful. In this method the tool was fed using the compound slide, and only one side of the thread was cut. The plutonium turnings, which tore as they were removed, slid across the tool and tended to weld to the other side of the thread. This produced gouges in the threads. These conditions occurred with cuts of from 0.0025 to 0.015 in. on the diameter, with or without lubricants. The tearing effect is illustrated in Fig. 1 by the rough edge on one side of the turnings as the diameter of a delta-stabilized ingot was cut. Threading with taps and dies was equally unsuccessful. The gummy chips loaded the taps and dies and produced severe galling.

b. Plunge Cutting

Threads were successfully cut in delta-stabilized plutonium by using a plunge technique. In this method the compound slide was set at 90° to the rod and the 60° included-angle tool was fed straight into the rod so that



Fig. 1. Delta-stabilized plutonium turnings showing sharp saw-tooth edge.

an equal amount of material was removed from each side of the V-shaped thread. With this type of cut, turning edges curled slightly and the turning moved straight out from the rod as shown in Fig. 2.

Cuts of from 0.0025 to 0.015 in. on the diameter were successfully taken; however, a lubricant such as Mobil Oil Co. Gargoyle DTE-Light was required. The male thread being cut in Fig. 2 is a standard 1 5/8 in. - 16 Class 2.⁽³⁾ Figure 3 shows the mating female thread being cut. Initial cuts of 0.010 to 0.015 in. on the diameter, with a finished cut of 0.0025 in., were taken using a spindle speed of about 60 rpm. The threaded

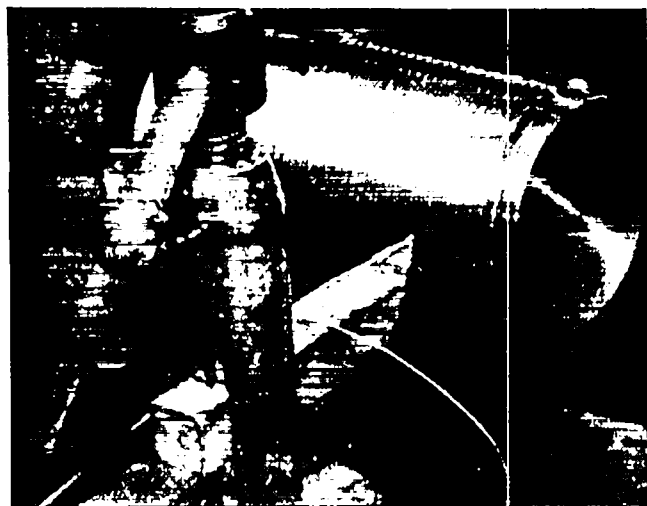


Fig. 2. External threading of delta-stabilized plutonium using plunge feeding.

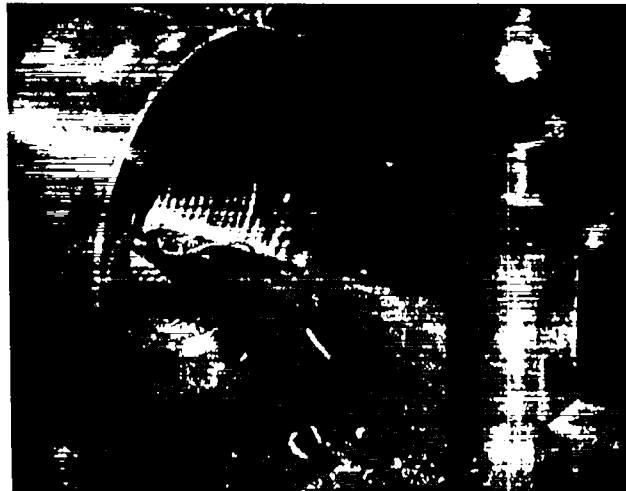


Fig. 3. Internal threading of delta-stabilized plutonium using plunge feeding.

delta-stabilized plutonium parts were inspected using conventional thread gauges and steel standard threaded rings or plugs as shown in Fig. 4.

ASSEMBLY OF THREADED PARTS

Severe galling resulted when threaded delta-stabilized parts were assembled. Liberal use of lubricants during assembly reduced the galling, but was objectionable because organic or water-base residues remaining in the threaded grooves react with plutonium and form hydrides or oxides. Not only are the hydrides and sub-oxides pyrophoric, but the increased volume of the compounds can fracture the threads.



Fig. 4. Inspection of 1 5/8 in. -16 threaded delta-stabilized plutonium rod using steel gauge.

The procedure developed for assembling delta-stabilized threaded parts was as follows: Powdered molybdenum or tungsten disulfide was worked into the soft threads using a pointed phenolic rod as the parts were rotated in a lathe. This gave a case-hardening effect to the threads plus good lubrication which eliminated galling during assembly. Figure 5 shows an assembled 1 5/8 in. -16 Class 2 threaded delta-stabilized plutonium unit which meets standard thread tolerances.

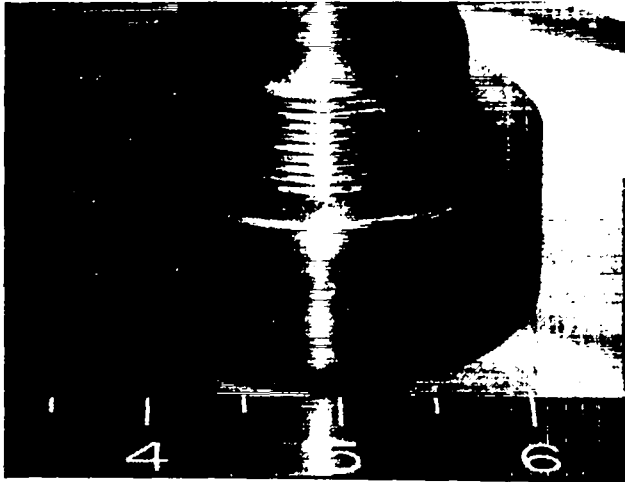


Fig. 5. Partially assembled 1 5/8 in. -16 threaded delta-stabilized plutonium components.

CONCLUSIONS

Soft delta-stabilized plutonium can be threaded by the method described. Treatment of threaded parts with dry molybdenum or tungsten disulfide gives a case-hardening effect plus good lubrication which permits assembly without galling.

Although not tested, an alternate thread cutting method using the plunge feeding technique with a milling cutter ground to the same 60° included angle as the V-shaped tool probably would be satisfactory.

REFERENCES

1. BNWL Report No. 37, "Plutonium Metallurgy Notebook," Comp., M. E. Hasbrouck; Ed., M. P. Burns, 1965, pp. 63 and 119.
2. "Studies on the Equilibrium Temperature for the Plutonium Alpha-Beta Transformation," J. W. Anderson, R. R. Gilmore, W. J. Maraman, Third International Conference on Plutonium, London, 1965.
3. "Machinery's Handbook," 17th Edition, Erik Oberg and F. D. Jones, Industrial Press, New York, 1966, pp. 1103 - 1199.