

LA-UR- 94-3806

Conf-9405265--1

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36.

TITLE: PREDICITON OF MATERIAL STRENGTH AND FRACTURE OF BRITTLE MATERIALS USING THE SPHINX SMOOTH PARTICLE HYDRODYNAMICS CODE

AUTHOR(S): DAVID A. MANDELL, X-3
CHARLES A. WINGATE, X-1
ROBERT F. STELLINGWERF, X-1

SUBMITTED TO: TENTH ASCE ENGINEERING MECHANICS CONFERENCE
MAY 21-24, 1995
BOULDER, CO

By acceptance of this article, the publisher recognizes that the U. S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U. S. Government purposes.

The Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U. S. Department of Energy.

Los Alamos

Los Alamos National Laboratory
Los Alamos, New Mexico 87545

CONFIDENTIAL

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED



**PREDICTION OF MATERIAL STRENGTH AND FRACTURE OF
BRITTLE MATERIALS USING THE SPHINX SMOOTH PARTICLE
HYDRODYNAMICS CODE**

by

David A. Mandell¹, Charles A. Wingate¹, and Robert F. Stellingwerf¹
Los Alamos National Laboratory
PO Box 1663
Los Alamos, NM 87545

Abstract

The design of many devices involves numerical predictions of the material strength and fracture of brittle materials. The materials of interest include ceramics that are used in armor packages; glass that is used in windshields; and rock and concrete that are used in oil wells. As part of a program to develop advanced hydrocode design tools, we have implemented a brittle fracture model for glass into the SPHINX smooth particle hydrodynamics code. We have evaluated this model and the code by predicting data from tungsten rods impacting glass. Since fractured glass properties, which are needed in the model, are not available, we did sensitivity studies of these properties, as well as sensitivity studies to determine the number of particles needed in the calculations. The numerical results are in good agreement with the data.

Introduction

In the current work we use the SPHINX smooth particle hydrodynamics code (Stellingwerf and Wingate, 1993) to predict data from two-dimensional experiments in which a tungsten rod impacted soda lime glass, backed by mild steel (Anderson et al., 1993). A series of experiments was conducted, and the tip and tail positions of the tungsten rod were obtained as a function of time.

¹ Technical Staff Member, Los Alamos National Laboratory, Los Alamos, NM 87545

The fracture model used for predictions of impacts into ceramics is critical (Mandell, 1993). A fracture model that is adequate to predict one-dimensional experiments may give very poor results when predicting multi-dimensional experiments. We use the glass fracture model developed by Cagnoux (Cagnoux, 1985) and extended by Glenn and his co-workers (Glenn et al., 1990). Details of the model, comparisons with one-dimensional impacts into glass, and sensitivity studies are presented in a report (Mandell and Wingate, 1994).

Tungsten Rod Impacting Glass

Figure 1 shows a schematic of the geometry, which consists of a tungsten alloy rod impacting glass, backed by mild steel.

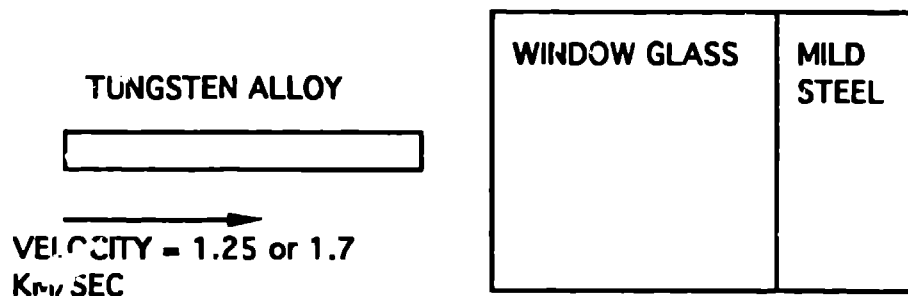


Fig. 1. Geometry for Tungsten Rod Impacting Glass.

The Grueneissen EOS and the elastic plastic strength model were used for the tungsten and mild steel. In these calculations, only the glass was allowed to fracture.

The glass model used in this work requires a knowledge of both the intact and the fractured glass properties - bulk modulus, shear modulus, and yield stress. Intact glass properties are reasonably well known, but the properties of the fractured glass are not available. Therefore we have varied the ratios of the fractured to the intact properties to match the experiments in which the rod velocity was 1.25 km/sec. We then ran the higher velocity experiment, which was at 1.70 km/sec, to determine if the fractured glass properties were valid for conditions other than those for which they were determined.

Figure 2 shows the tungsten rod nose position for the experiments in which the rod was at an initial velocity of 1.25 km/sec. This figure shows the data, a calculation without damage, and a series of calculations with damage in which the ratio of the fractured yield stress to the intact yield stress was varied (YR). For YR = 1.0, only the bulk modulus and shear

modulus are decreased after the glass is fractured.

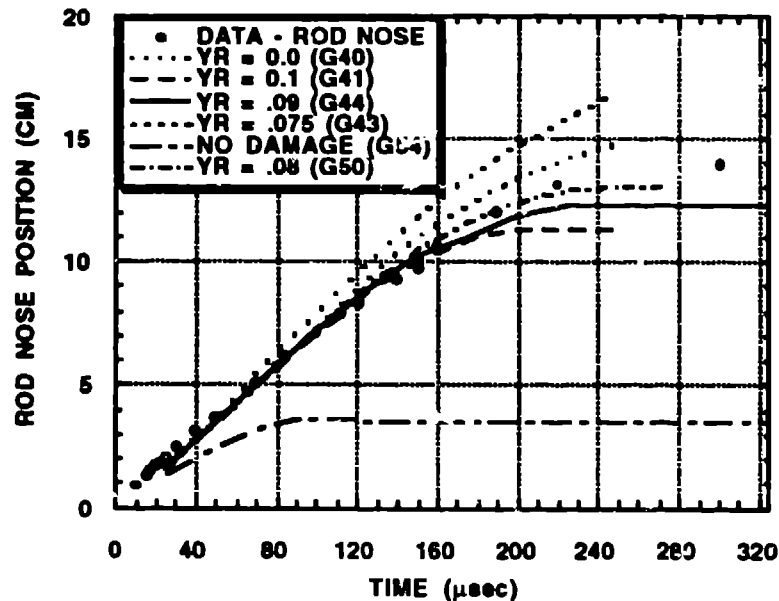


Fig. 2. Predictions of Tungsten Rods Penetrating Glass - Effect of Fractured Glass Yield Stress.

Using the values of the fractured glass properties determined for the experiments in which the rod velocity was 1.25 km/sec, the experiments in which the rod velocity was 1.70 km/sec were predicted. These results are shown in Figure 3. The comparison between the data and the SPHINX predictions is very good.

Conclusions

Two-dimensional experiments in which a tungsten rod impacts soda lime (window) glass were predicted. Fractured glass properties are unknown and had to be estimated. The fractured glass properties estimated for one experiment were used in the predictions of the other experiments, and the data and predictions agree reasonably well.

Several conclusions can be reached from these results. Numerical predictions of glass impacts are greatly in error when no fracture of the glass is allowed. In addition many models let the glass strength go to zero once a cell completely fractures. The model used in this work shows that some glass strength remains after fracture. The results are sensitive to the value of YR, but in all cases the predictions are much better using any nonzero value of YR than assuming that no fracture occurs.

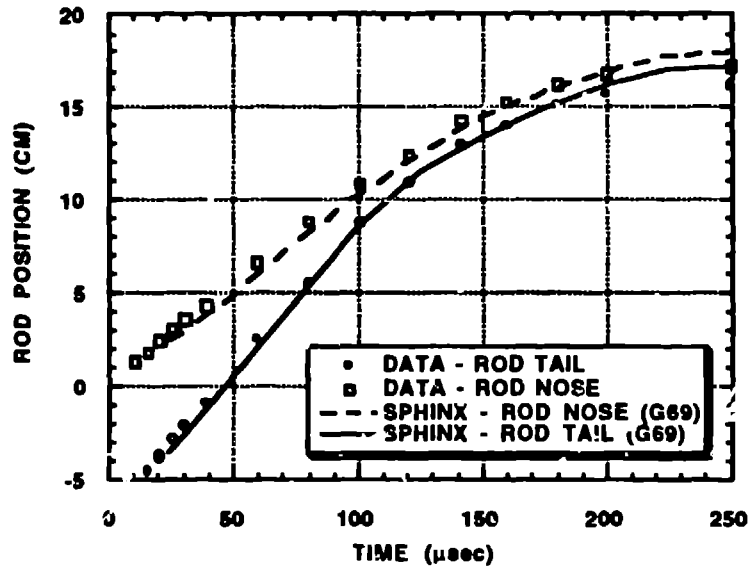


Fig. 3. Predictions of Tungsten Rods Penetrating Glass at 1.7 Km/Sec.

References

Anderson, Charles E. Jr., Hohler, Volker, Walker, James D., and Stilp, Alois J. Penetration of Long Rods into Steel and Glass Targets: Experiments and Computations, Ballistics '93, 14th International Symposium, Quebec, Canada, September 26-29, 1993.

Cagnoux, J., Modele Phenomenologique D'Ecaillage D'Un Pyrex (Phenomenological Model of Spalling of Pyrex Glass), Journal De Physique, Colloque C5, supplement au n°8 Tome 46, 1985.

Glenn, L. A., Moran B., and Kusubov, A., Modeling Jet Penetration In Glass, Conference on the Application of 3-D Hydrocodes to Armor/Anti-Armor Problems, Ballistic Research Laboratory, Aberdeen Proving Grounds, MD, May 1990.

Mandell, David A., Prediction of Alumina Penetration, Los Alamos National Laboratory Report LA-12520, February, 1993.

Mandell, David A., and Wingate, Charles A. Prediction of Material Strength and Fracture of Glass Using the SPHINX Smooth Particles Hydrodynamics Code, Los Alamos National Laboratory Report LA-12830, August, 1994.

Stellingwerf, R. F., and Wingate, C. A., Impact Modeling With Smooth Particle Hydrodynamics, Int. J. Impact Engng, Vol 14, pp 707-718, 1993.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.