

Simulink® Response Optimization™ Release Notes

| | |
|--|-----------|
| Summary by Version | 1 |
| Version 3.1.3 (R2008a) Simulink® Response Optimization™ Software | 3 |
| Version 3.1.2 (R2007b) Simulink® Response Optimization™ Software | 4 |
| Version 3.1.1 (R2007a) Simulink® Response Optimization™ Software | 5 |
| Version 3.1 (R2006b) Simulink® Response Optimization™ Software | 6 |
| Version 3.0 (R2006a) Simulink® Response Optimization™ Software | 8 |
| Version 2.3 (R14SP3) Simulink® Response Optimization™ Software | 10 |
| Version 2.2 (R14SP2) Simulink® Response Optimization™ Software | 11 |
| Version 2.1 (R14SP1) Simulink® Response Optimization™ Software | 12 |
| Version 2.0 (R14) Simulink® Response Optimization™ Software | 13 |
| Compatibility Summary for Simulink® Response Optimization™ Software | 16 |

Summary by Version

This table provides quick access to what's new in each version. For clarification, see “Using Release Notes” on page 1.

| Version (Release) | New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|---------------------------------------|--------------------------|--------------------------------------|-------------------------------|---|
| Latest Version V3.1.3 (R2008a) | Yes Details | No | Bug Reports Includes fixes | Printable Release Notes: PDF Current product documentation |
| V3.1.2 (R2007b) | No | No | No bug fixes | No |
| V3.1.1 (R2007a) | No | No | Bug Reports Includes fixes | No |
| V3.1 (R2006b) | Yes Details | No | Bug Reports Includes fixes | No |
| V3.0 (R2006a) | Yes Details | No | Bug Reports | No |
| V2.3 (R14SP3) | Yes Details | No | Bug Reports Includes fixes | No |
| V2.2 (R14SP2) | Yes Details | No | Bug Reports Includes fixes | No |
| V2.1 (R14SP1) | No | No | Fixed bugs | No |
| V2.0 (R14) | Yes Details | Yes Summary | No bug fixes | No |

Using Release Notes

Use release notes when upgrading to a newer version to learn about:

- New features
- Changes

- Potential impact on your existing files and practices

Review the release notes for other MathWorks™ products required for this product (for example, MATLAB® or Simulink®) for enhancements, bugs, and compatibility considerations that also might impact you.

If you are upgrading from a software version other than the most recent one, review the release notes for all interim versions, not just for the version you are installing. For example, when upgrading from V1.0 to V1.2, review the release notes for V1.1 and V1.2.

What's in the Release Notes

New Features and Changes

- New functionality
- Changes to existing functionality

Version Compatibility Considerations

When a new feature or change introduces a reported incompatibility between versions, the **Compatibility Considerations** subsection explains the impact.

Compatibility issues reported after the product is released appear under Bug Reports at the MathWorks Web site. Bug fixes can sometimes result in incompatibilities, so you should also review the fixed bugs in Bug Reports for any compatibility impact.

Fixed Bugs and Known Problems

The MathWorks offers a user-searchable Bug Reports database so you can view Bug Reports. The development team updates this database at release time and as more information becomes available. This includes provisions for any known workarounds or file replacements. Information is available for bugs existing in or fixed in Release 14SP2 or later. Information is not available for all bugs in earlier releases.

Access Bug Reports using your MathWorks Account.

Version 3.1.3 (R2008a) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 3.1.3 (R2008a):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|--------------------------------------|-------------------------------|---|
| Yes Details below | No | Bug Reports Includes fixes | Printable Release Notes: PDF Current product documentation |

New change introduced in this version:

Updated Error and Warning Message System

The Simulink® Response Optimization™ error and warning IDs and messages have been updated. If you use error and warning IDs in your code, you must update your code to reflect the new IDs.

Version 3.1.2 (R2007b) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 3.1.2 (R2007b):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|---------------------------------|---|--------------------------------------|--|
| No | No | No bug fixes | No |

Version 3.1.1 (R2007a) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 3.1.1 (R2007a):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|---------------------------------|---|--------------------------------------|--|
| No | No | Bug Reports Includes fixes | No |

Demo Updates

This release includes an updated and reorganized demo library. These demos show how you can apply Simulink® Response Optimization™ software in different application areas.

Version 3.1 (R2006b) Simulink® Response Optimization™ Software


This table summarizes what's new in Version 3.1 (R2006b):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|--------------------------------------|-------------------------------|-----------------------------------|
| Yes Details below | No | Bug Reports Includes fixes | No |

New features and changes introduced in this version are described here.

Optimization of Step Response Bounds Supported

When using Simulink® Response Optimization™ software along with Simulink® Control Design™ software, you can now specify rise-time, overshoot, and settling-time requirements on step response plots. To do this, set **Design requirement type** to Step response bounds in the New Design Requirement dialog box.

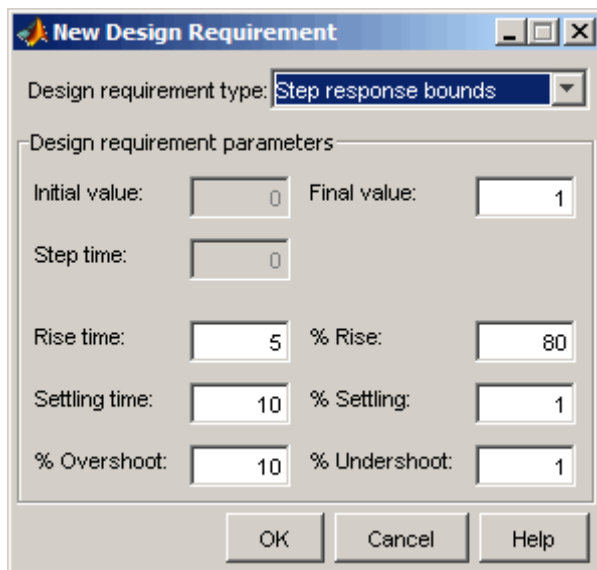

For more information about this dialog box, see “Edit Design Requirement Dialog Box”. For some background information about step response bounds, see “Choosing Step Response Specifications”.

Design Requirements Dialog Box Changed

The New Design Requirement and Edit Design Requirement dialog boxes have a different look. In particular, when a constraint/requirement contains more than one segment, the lower portion of the dialog box contains a grid with one row for each segment. New **Insert** and **Delete** buttons in the dialog box let you add and remove segments. The **Select segment to edit** parameter no longer appears because the grid shows all segments.

Also, numeric fields of these dialog boxes display data the way `format short` would display it in MATLAB® technical computing software. This display feature does not affect the way computations are done and the full precision is still available when you edit the data in the fields of the dialog box.

For more information, see “Edit Design Requirement Dialog Box”.

Version 3.0 (R2006a) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 3.0 (R2006a):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|--------------------------------------|-------------------------------|-----------------------------------|
| Yes Details below | No | Bug Reports | No |

New features and changes introduced in this version are described here.

Optimization of Time- and Frequency-Domain Performance Requirements Is Now Supported

You can now optimize compensator elements directly from the SISO Design Tool using time- and frequency-domain performance requirements. This feature is only available if you have Control System Toolbox™ software installed.

When working in the SISO Design Tool, you perform the optimization using the following steps:

- 1 Specify design requirements. For example, you can add frequency-domain design requirements to plots, such as root-locus, Nichols, and Bode plots in the SISO Design Tool graphical tuning editor. You can also add time-domain design requirements to plots, such as step response or impulse response (when displayed in the LTI Viewer as part of a SISO Design Tool).
- 2 Select the compensator elements and parameters you want to optimize. For example, you can select poles, zeros, and gains.
- 3 Optimize selected compensator elements until responses meet specified time- and frequency-domain performance requirements.

If you have Simulink® Control Design™ software installed and are starting with a Simulink® model, you simply select the Simulink blocks you want to

tune. Then, use Simulink Control Design software to automatically analyze your model, identify the relevant control loops, and open a preconfigured session of the SISO Design Tool where you proceed with the optimization.

For more information, see “Frequency Domain Response Optimization Example” in Simulink® Response Optimization™ Getting Started documentation.

Version 2.3 (R14SP3) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 2.3 (R14SP3):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|--------------------------------------|-------------------------------|-----------------------------------|
| Yes Details below | No | Bug Reports Includes fixes | No |

New features and changes introduced in this version are described here.

Constraint Segment Alignment Enhanced

You can use the **Shift** key to easily and precisely align constraint segments horizontally or vertically. See “Moving Constraints” for more information.

Response Optimization Solutions Search Enhanced

You can automatically search for response optimization solutions that lie further inside the constraint region, rather than stopping after finding the first feasible solution which typically lies at the edge of the region (the default behavior). See “Selecting Optimization Termination Options” for more information.

Version 2.2 (R14SP2) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 2.2 (R14SP2):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|--------------------------------------|-------------------------------|-----------------------------------|
| Yes Details below | No | Bug Reports Includes fixes | No |

New features and changes introduced in this version are described here.

Graphical Representation of Signal Constraints Enhanced

You can manipulate signal constraints more easily due to their enhanced graphical representation.

Response Optimizations Enhanced

You can start response optimizations at nonzero start times.

You can save response optimization projects to the model workspace as well as MAT-files and the MATLAB® workspace.

You can view the number of simulations performed at each step of a response optimization.

Version 2.1 (R14SP1) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 2.1 (R14SP1):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|---------------------------------|---|--------------------------------------|--|
| No | No | Fixed bugs | No |

Version 2.0 (R14) Simulink® Response Optimization™ Software

This table summarizes what's new in Version 2.0 (R14):

| New Features and Changes | Version Compatibility Considerations | Fixed Bugs and Known Problems | Related Documentation at Web Site |
|--------------------------|---|-------------------------------|-----------------------------------|
| Yes Details below | Yes—Details labeled as Compatibility Considerations , below. See also Summary. | No bug fixes | No |

New features and changes introduced in this version are described here.

About Simulink® Response Optimization™ Software

Simulink® Response Optimization™ software provides a graphical user interface (GUI) to assist in design of control systems and physical systems. With this product, you can tune parameters within a nonlinear Simulink® model to meet time-domain performance requirements by graphically placing constraints within a time-domain window or tracking and closely matching a reference signal. You can tune any number of Simulink variables including scalars, vectors, and matrices by entering the variable name into the appropriate dialog box. In addition, you can place uncertainty bounds on other variables in the model for robust design. Simulink Response Optimization software makes attaining performance objectives and optimizing tuned parameters an intuitive and easy process.

To use Simulink Response Optimization software, you need only to include a special block, the Signal Constraint block, in your Simulink diagram. Just connect the block to any signal in the model to signify that you want to place some kind of constraint on the signal. Simulink Response Optimization software automatically converts time-domain constraints into a constrained optimization problem and then solves the problem using optimization routines taken from Optimization Toolbox™ and Genetic Algorithm and Direct Search Toolbox™ software. The constrained optimization problem formulated by

Simulink Response Optimization software iteratively calls for simulations of the Simulink system, compares the results of the simulations with the constraint objectives, and uses gradient methods to adjust tuned parameters to better meet the objectives.

Key Features Introduced

Key features of Simulink Response Optimization software include the ability to

- Optimize signals or design criteria in any Simulink model by tuning selected model parameters
- Constrain signals to lie within time-domain signal bounds
- Closely track a reference, or desired, signal
- Optimize responses for systems that include physical actuation limits and constraints on state/variable values
- Optimize responses for noisy systems by including uncertainty in your parameter values
- Compute the continuous and digital cumulative root mean square values of signals with the CRMS and DRMS blocks. Use these blocks with the Signal Constraint block to optimize the cumulative root mean square of signals in your models.

Major Enhancements

Simulink Response Optimization software features several major enhancements to the Nonlinear Control Design Blockset. These major enhancements include

- Support for discrete and hybrid models
- Support for stopping and restarting an optimization
- Ability to undo or redo optimization of parameter values
- Support for three different optimizers, offering more robust optimization algorithms
- Ability to constrain any signal in the model hierarchy

- Support for vector-valued signals

Product Name Change

In previous releases, Simulink Response Optimization software was called the Nonlinear Control Design Blockset (NCD). Simulink Response Optimization software includes and improves upon the functionality of NCD.

Compatibility Considerations

Models that were created using NCD will not work with Simulink Response Optimization software. To convert your NCD models for use with Simulink Response Optimization software, use the `ncdupdate` function which is described in Simulink Response Optimization Function Reference.

Compatibility Summary for Simulink® Response Optimization™ Software

This table summarizes new features and changes that might cause incompatibilities when you upgrade from an earlier version, or when you use files on multiple versions. Details are provided in the description of the new feature or change.

| Version (Release) | New Features and Changes with Version Compatibility Impact |
|---|--|
| Latest Version V3.1.3 (R2008a) | None |
| V3.1.2 (R2007b) | None |
| V3.1.1 (R2007a) | None |
| V3.1 (R2006b) | None |
| V3.0 (R2006a) | None |
| V2.3 (R14SP3) | None |
| V2.2 (R14SP2) | None |
| V2.1 (R14SP1) | None |
| V2.0 (R14) | <p>See the Compatibility Considerations subheading for this new feature or change:</p> <ul style="list-style-type: none"> • “Product Name Change” on page 15 |