

DO Qualification Kit 1

Model-Based Design Workflow for DO-178B

MATLAB[®]
& SIMULINK[®]

How to Contact MathWorks



www.mathworks.com
[comp.soft-sys.matlab](mailto:comp.soft-sys.matlab@mathworks.com)
www.mathworks.com/contact_TS.html

Web
Newsgroup
Technical Support



suggest@mathworks.com
bugs@mathworks.com
doc@mathworks.com
service@mathworks.com
info@mathworks.com

Product enhancement suggestions
Bug reports
Documentation error reports
Order status, license renewals, passcodes
Sales, pricing, and general information



508-647-7000 (Phone)



508-647-7001 (Fax)



The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

For contact information about worldwide offices, see the MathWorks Web site.

DO Qualification Kit Model-Based Design Workflow for DO-178B

© COPYRIGHT 2010–2011 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

September 2010	Online only	New for Version 1.3 (Release 2010b)
April 2011	Online only	New for Version 1.4 (Release 2011a)

DO-178B Software Life Cycle

1

DO-178B Software Life Cycle Overview	1-2
Model-Based Design Workflow in DO-178B	1-3
Planning Process	1-5
Software Development and Integral Processes Activities are Defined	1-6
Transition Criteria, Inter-Relationships, and Sequencing Among Processes are Defined	1-7
Software Life-Cycle Environment Is Defined	1-8
Additional Considerations are Addressed	1-8
Software Development Standards are Defined	1-8
Software Plans Comply with DO-178B	1-9
Software Plans are Coordinated	1-9
Software Development Process	1-10
High-Level Requirements are Developed	1-10
Derived High-Level Requirements are Developed	1-11
Software Architecture Is Developed	1-11
Low-Level Requirements are Developed	1-11
Derived Low-Level Requirements are Developed	1-12
Source Code Is Developed	1-12
Executable Object Code Is Produced and Integrated in the Target Computer	1-12
Verification of Requirements Process	1-13
Software High-Level Requirements Comply with System Requirements	1-14
High-Level Requirements Are Accurate and Consistent ..	1-15
High-Level Requirements Are Compatible with the Target Computer	1-15
High-Level Requirements Are Verifiable	1-16
High-Level Requirements Conform to Standards	1-17

High-Level Requirements Are Traceable to System Requirements	1-17
Algorithms Are Accurate	1-18
Verification of Design Process	1-19
Low-Level Requirements Comply with High-Level Requirements	1-20
Low-Level Requirements Are Accurate and Consistent ...	1-21
Low-Level Requirements Are Compatible with the Target Computer	1-22
Low-Level Requirements Are Verifiable	1-23
Low-Level Requirements Conform to Standards	1-23
Low-Level Requirements Are Traceable to High-Level Requirements	1-24
Algorithms Are Accurate	1-25
Software Architecture Is Compatible with High-Level Requirements	1-26
Software Architecture Is Consistent	1-26
Software Architecture Is Compatible with the Target Computer	1-27
Software Architecture Is Verifiable	1-27
Software Architecture Conforms to Standards	1-28
Software Partitioning Integrity Is Confirmed	1-28
Verification of Coding and Integration Process	1-29
Source Code Complies with Low-Level Requirements ...	1-30
Source Code Complies with Software Architecture	1-30
Source Code Is Verifiable	1-30
Source Code Conforms to Standards	1-30
Source Code Is Traceable to Low-Level Requirements ...	1-31
Source Code Is Accurate and Consistent	1-31
Output of Software Integration Process Is Complete and Correct	1-31
Testing of Outputs of Integration Process	1-32
Executable Object Code Complies with High-Level Requirements	1-33
Executable Object Code Is Robust with High-Level Requirements	1-34
Executable Object Code Complies with Low-Level Requirements	1-35
Executable Object Code Is Robust with Low-Level Requirements	1-36

Executable Object Code Is Compatible with Target Computer	1-37
Verification of Verification Process Results	1-38
Test Procedures Are Correct	1-39
Test Results Are Correct and Discrepancies Explained ...	1-39
Test Coverage of High-Level Requirements Is Achieved ..	1-39
Test Coverage of Low-Level Requirements Is Achieved ...	1-40
Test Coverage of Software Structure (Modified Condition/Decision) Is Achieved	1-40
Test Coverage of Software Structure (Decision Coverage) Is Achieved	1-40
Test Coverage of Software Structure (Statement Coverage) Is Achieved	1-41
Test Coverage of Software Structure (Data Coupling and Control) Is Achieved	1-41
Software Configuration Management Process	1-42
Configuration Items Are Identified	1-43
Baselines and Traceability Are Established	1-43
Problem Reporting, Change Control, Change Review, and Configuration Status Accounting Are Established	1-43
Archive, Retrieval, and Release Are Established	1-44
Software Load Control Is Established	1-44
Software Life Cycle Environment Control Is Established ..	1-44
Software Quality Assurance Process	1-45
Assurance Is Obtained That Software Development and Integral Processes Comply with Approved Software Plans and Standards	1-45
Assurance Is Obtained That Transition Criteria for the Software Life Cycle Processes are Satisfied	1-46
Software Conformity Review Is Completed	1-46
Certification Liaison Process	1-47
Communication and Understanding Between the Applicant and the Certification Authority Is Established	1-47
The Means of Compliance Is Proposed and Agreement with the Plan for Software Aspects of Certification is Obtained	1-48
Compliance Substantiation Is Provided	1-48

Abbreviations

A

Abbreviations A-2

References

B

Normative References B-2

Index

DO-178B Software Life Cycle

- “DO-178B Software Life Cycle Overview” on page 1-2
- “Model-Based Design Workflow in DO-178B” on page 1-3
- “Planning Process” on page 1-5
- “Software Development Process” on page 1-10
- “Verification of Requirements Process” on page 1-13
- “Verification of Design Process” on page 1-19
- “Verification of Coding and Integration Process” on page 1-29
- “Testing of Outputs of Integration Process” on page 1-32
- “Verification of Verification Process Results” on page 1-38
- “Software Configuration Management Process” on page 1-42
- “Software Quality Assurance Process” on page 1-45
- “Certification Liaison Process” on page 1-47

DO-178B Software Life Cycle Overview


The DO-178B software life cycle consists of the following processes:

- Planning
- Software development
- Verification of requirements
- Verification of design
- Verification of coding and integration
- Testing of outputs of integration
- Verification of verification results
- Software configuration management
- Software quality assurance
- Certification liaison process

There are objectives that must be met for each of the life cycle stages in DO-178B. In Appendix A of DO-178B, these objectives are summarized in tables. This document summarizes those tables and provides recommendations on meeting the objectives using a Model-Based Design process. Available Model-Based Design tools that can be used in achieving the objectives are also included.

Model-Based Design Workflow in DO-178B

The following diagram shows a Model-Based Design workflow that addresses the development and verification activities in a DO-178B software life cycle.

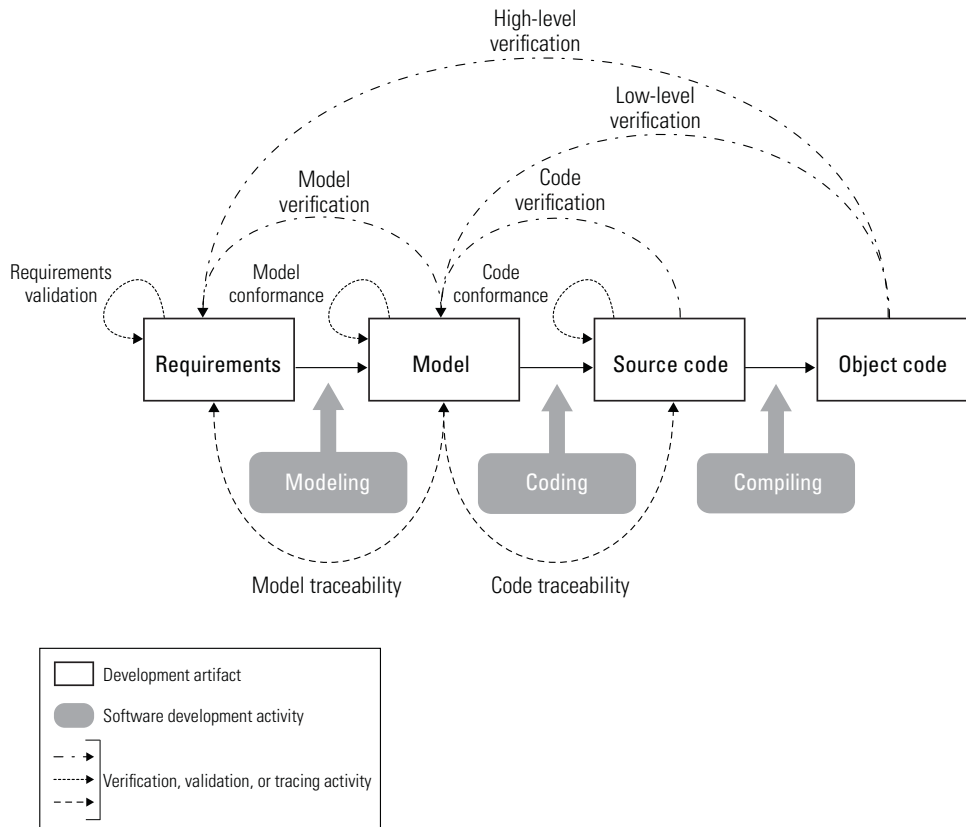

The following table lists the MathWorks® products and capabilities that can be used in each step of the workflow as Model-Based Design tools.

Workflow Step	Available Products and Capabilities for Model-Based Design
Requirements validation	Manual review
Modeling	Simulink®, Stateflow®

Workflow Step	Available Products and Capabilities for Model-Based Design
Model traceability	Simulink® Verification and Validation™ — Requirements Management Interface (RMI), Simulink® Report Generator™ — System Design Description report*
Model conformance	Simulink — Model Advisor checks, Simulink® Coder™ — Model Advisor checks, Simulink Verification and Validation — Model Advisor checks, Simulink Verification and Validation — DO-178B checks*
Model verification	SystemTest™ — Limit Check element*, Simulink® Design Verifier™ — Property Proving, Simulink Verification and Validation — Model Coverage*, Simulink Report Generator — System Design Description report*
Coding	Embedded Coder™
Code traceability	Embedded Coder — Traceability Report
Code conformance	Polyspace® Products for C/C++*
Code verification	Embedded Coder — Code Generation Report
Compiling	Embedded Coder — IDE Link
Low-level verification	SystemTest — Limit Check element*, Simulink Design Verifier — Test Generation, Embedded Coder — IDE Link, Polyspace Products for C/C++*
High-level verification	SystemTest — Limit Check element*, Embedded Coder — IDE Link, Polyspace Products for C/C++*
*The DO Qualification Kit product may be used to support DO-178B tool qualification.	

Planning Process

The following table contains a summary of the planning process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the potential impact to the process when using Model-Based Design.

Table A-1: Planning Process

	Objective	Sections	Software Levels	Model-Based Design Process Impact
1	Software development and integral processes activities are defined.	4.1a, 4.3	A, B, C, D	Must include Model-Based Design as part of the development process.
2	Transition criteria, inter-relationships and sequencing among processes are defined.	4.1b, 4.3	A, B, C	Must include Model-Based Design transition and sequencing relationships.
3	Software life cycle environment is defined.	4.1c	A, B, C	Must include Model-Based Design tools in the life cycle processes.
4	Additional considerations are addressed.	4.1d	A, B, C, D	If applicable to the project and tool qualification, must address any EASA Certification Review Items and FAA Issue Papers. DO Qualification Kit product available for tool qualification.
5	Software development standards are defined.	4.1e	A, B, C	As part of the development standards, must include modeling standards.
6	Software plans comply with DO-178B.	4.1f, 4.6	A, B, C	No impact
7	Software plans are coordinated.	4.1g, 4.6	A, B, C	No impact

The following sections describe in more detail the potential impacts for each planning process objective when using Model-Based Design, if applicable, as compared to traditional development

Software Development and Integral Processes Activities are Defined

Model-Based Design must be defined as one of the activities in the software development process. Models may be defined as high-level or low-level software requirements, or both. Library or model reference components may be developed and defined as low-level software requirements. The models that use these components to provide full functionality may be defined as high-level software requirements. The following scenarios describe three possible software development processes:

- Scenario 1 – Models developed at the system level are used to generate code directly

High-level system requirements allocated to system design are in the form of textual requirements. The models are developed during the system design process and allocated to software. The models become both the high- and low-level software requirements. The models must meet predefined standards and must be adequately detailed so that code can be generated directly from the models. As a part of the development process, a predefined set of library blocks and reusable reference models may be designed for systems engineers. These requirements for the library blocks and reference models may be considered to be derived software requirements, because they do not trace to the higher-level requirements.

Under this scenario, the verification objectives from tables A-3 and A-4 are combined and applied to the single model.

- Scenario 2 – Models developed at the system level are not used directly to generate code

High-level system requirements allocated to system design are in the form of textual requirements. The models are developed during the system design process and allocated to software. These models become the high-level software requirements, but they are not detailed enough to generate code directly. An example of this type of model is a Simulink diagram that uses continuous blocks which are not appropriate for embedded real-time code. The software engineering process takes these

models, modifies them, and adds details as necessary prior to code generation. These modified models then become the low-level software requirements.

Under this scenario, the verification objectives from table A-3 are applied to the high-level model, and the objectives from table A-4 are applied to the low-level model.

- Scenario 3 – System-level textual requirements are allocated to software

The system-level requirements and design allocated to software are in the form of textual high-level software requirements. The models are developed as part of the software engineering process and are detailed enough to generate code. These models are the low-level software requirements.

Under this scenario, the verification objectives from table A-3 are applied to the high-level textual requirements, and the objectives from table A-4 are applied to the model.

Address change control and configuration management of the models during the planning process.

Transition Criteria, Inter-Relationships, and Sequencing Among Processes are Defined

When Model-Based Design begins, it must be defined. This stage is when the higher-level requirements (either system requirements or high-level software requirements) are developed, configured, and approved.

When code is generated, the code must be defined. This stage is when the models have been developed, configured, and approved. The steps to approve the models as complete and correct must be defined and may include model:

- Reviews
- Simulation testing
- Static analysis
- Dynamic analysis

Software Life-Cycle Environment Is Defined

Model-Based Design tools used in the development and verification processes must be defined. The tools may include the MATLAB[®], Simulink, Stateflow, MATLAB[®] Coder[™], Simulink Coder, Embedded Coder, Polyspace products for C/C++, Simulink Verification and Validation, Simulink Design Verifier, SystemTest, and Simulink Report Generator products.

Additional Considerations are Addressed

If any Model-Based Design tools are qualified as development or verification tools, each of the tools to be qualified must be identified and the tool qualification activities must be defined. The DO Qualification Kit product may be used in the qualification of MathWorks verification tools.

When Model-Based Design is used on a program, the Federal Aviation Administration (FAA) provides an Issue Paper (IP), or, for the European Aviation Safety Agency (EASA), a Certification Review Item (CRI). Items in the program-specific IP and CRI must be addressed during planning. There may be requirements to trace the models to higher-level requirements and to trace the code to the models. Verification of the models and executable object code against the higher-level requirements may also be addressed. For software levels A and B, independence of the model and test developers may need to be ensured as part of the verification against the higher-level requirements. If an automated tool verifies the executable object code against the model, then that tool may have to be shown to be independent of the automatic code generator and compiler. The use of an automated tool to verify the executable object code against the model does not eliminate the verification of the executable object code against the higher-level requirements. The automated verification tool may only be used to supplement the higher-level requirements-based tests.

Software Development Standards are Defined

Because the models may be mapped to high-level or low-level requirements, or both (see “Software Development and Integral Processes Activities are Defined” on page 1-6), modeling standards must be in place to satisfy the requirements standards objectives. Compliance to the standards have to be verified through the use of tools and human reviews.

For the Embedded Coder tool, MISRA C^{®1} coding standards can be used, with a few minor exceptions. Some constructs in the generated code, such as naming conventions, can be controlled by users to meet specific customer coding standards. Compliance to the standards must be verified through tools and human reviews.

Software Plans Comply with DO-178B

A Plan for Software Aspects of Certification (PSAC) must be developed, the same as for traditional development programs.

Software Plans are Coordinated

The Plan for Software Aspects of Certification (PSAC) must be configured under change control and approved by the applicable certification authorities as part of the program, as in a traditional development process.

1. The Motor Industry Software Reliability Association. *MISRA-C:2004 Guidelines for the use of the C language in critical systems*. MIRA Limited, 2004.

Software Development Process

The following table contains a summary of the software development process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the available Model-Based Design tools for satisfying the objectives.

Table A-2 Software Development Process

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	High-level requirements are developed.	5.1.1a	A, B, C, D	Simulink, Stateflow
2	Derived high-level requirements are developed.	5.1.1b	A, B, C, D	Simulink, Stateflow
3	Software architecture is developed.	5.2.1a	A, B, C, D	Simulink, Stateflow
4	Low-level requirements are developed.	5.2.1a	A, B, C, D	Simulink, Stateflow
5	Derived low-level requirements are developed.	5.2.1b	A, B, C, D	Simulink, Stateflow
6	Source code is developed.	5.3.1a	A, B, C, D	Simulink Coder, Embedded Coder
7	Executable Object Code is produced and integrated in the target computer.	5.3.1a	A, B, C, D	Embedded Coder — IDE Link

The following sections describe in more detail the potential impacts for each software development process objective when using Model-Based Design, if applicable, as compared to traditional development.

High-Level Requirements are Developed

If models are defined as high-level software requirements, then the Simulink and Stateflow products may be used to develop the high-level software

requirements. The components within these models, such as Simulink blocks or Stateflow objects, would then trace to the appropriate system-level requirements, which are developed in accordance with ARP4754². The models should be developed in accordance with the modeling standards defined during the planning process.

Derived High-Level Requirements are Developed

If models are defined as high-level software requirements, any Simulink or Stateflow components that do not trace to the system requirements would be identified as derived requirements. These derived requirements would be provided to the safety assessment process.

Software Architecture Is Developed

Architecture of individual software modules may be defined by the Simulink and Stateflow models, including sequencing and interfacing of the various elements within the models. If model reference capability is used, then the model dependency viewer may be used to document the architecture of the software modules that are integrated using this capability.

The higher-level architecture of how the Model-Based Design generated code interfaces to other code within the system must be defined separately. This may include an interface to the real-time operating system (RTOS), calling sequence for the code generated from the Model-Based Design, and data interface to other code modules.

Low-Level Requirements are Developed

If models are defined as low-level software requirements, then the Simulink and Stateflow products may be used to develop the low-level software requirements. The components within these models would then trace to the appropriate high-level software requirements. The models should be developed in accordance with the modeling standards defined during the planning process.

2. SAE International. *Certification Considerations for Highly-Integrated Or Complex Aircraft Systems*, 1996.

If the models are defined as high-level software requirements and source code is generated directly from those models, this objective does not apply.

Derived Low-Level Requirements are Developed

If models are defined as low-level software requirements, then any Simulink or Stateflow components that do not trace to the high-level software requirements would be identified as derived requirements. These derived requirements would be provided to the safety assessment process.

If the models are defined as high-level software requirements, library components or reusable model reference functions may be considered to be low-level derived requirements.

Source Code Is Developed

Embedded Coder and Simulink Coder products may be used to generate the source code from the model. The source code can trace to the model components through the use of appropriate commenting options. The source code can be generated in accordance with MISRA C standards, with some exceptions, using appropriate modeling standards.

Executable Object Code Is Produced and Integrated in the Target Computer

The generated source code may be compiled, linked, and the executable object code automatically downloaded to a target processor or DSP using the IDE Link capability of the Embedded Coder product.

Alternatively, the generated source code may be compiled and linked using standard compilers and linkers. The make file that the compiler uses may be generated by the Embedded Coder product or developed manually. The executable object code is then loaded onto the target computer.

Verification of Requirements Process

The following table contains a summary of the verification of requirements process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also provides the available Model-Based Design tools that may be used in satisfying the objectives.

Table A-3 Verification of Requirements Process

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	Software high-level requirements comply with system requirements.	6.3.1a	A, B, C, D	Simulink Verification and Validation, Simulink Design Verifier, SystemTest, Simulink Report Generator, DO Qualification Kit
2	High-level requirements are accurate and consistent.	6.3.1b	A, B, C, D	Simulink Verification and Validation, SystemTest, Simulink Report Generator, DO Qualification Kit
3	High-level requirements are compatible with the target computer.	6.3.1c	A, B	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
4	High-level requirements are verifiable.	6.3.1d	A, B, C	Simulink Verification and Validation, Simulink Design Verifier, SystemTest, Simulink Report Generator, DO Qualification Kit
5	High-level requirements conform to standards.	6.3.1e	A, B, C	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit

Table A-3 Verification of Requirements Process (Continued)

	Objective	Sections	Software Levels	Available Products for Model-Based Design
6	High-level requirements are traceable to system requirements.	6.3.1f	A, B, C, D	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
7	Algorithms are accurate.	6.3.1g	A, B, C	Simulink Verification and Validation, SystemTest, Simulink Report Generator, DO Qualification Kit

The following sections describe in more detail the potential impacts for each of the verification of requirements process objectives when using Model-Based Design, if applicable, as compared to traditional development.

Software High-Level Requirements Comply with System Requirements

If models are defined as high-level software requirements, compliance with system requirements may be accomplished using a combination of model reviews, model analysis, and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the system requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases based on the system requirements, and execute those test cases on the model to assist in verifying that the system requirements are satisfied. The Simulink Design Verifier product may be used to prove properties of the model to assist in verifying certain system requirements are satisfied.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- System Design Description report in the Simulink Report Generator product.

High-Level Requirements Are Accurate and Consistent

If models are defined as high-level software requirements, accuracy and consistency may be verified using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop and execute test cases based on the system requirements to assist in verifying the accuracy and consistency. The Model Advisor may be used to assist in verifying that the diagnostic settings used by the Simulink product are appropriate for simulation and also to verify the proper usage of certain Simulink blocks.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

High-Level Requirements Are Compatible with the Target Computer

If models are defined as high-level software requirements, compatibility with target hardware may be accomplished using a combination of model reviews and Model Advisor checks. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The Model Advisor may be used to assist in verifying that the hardware interface settings used by the Embedded Coder product are appropriate for the target processor.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

High-Level Requirements Are Verifiable

If models are defined as high-level software requirements, verification may be accomplished using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the system requirements and execute those test cases on the model. During execution of these test cases, a Simulink Verification and Validation model coverage report may be generated to assist in verifying that all requirements are fully verified. The coverage report may assist in finding conditions and decisions in the model that cannot be reached, indicating that the requirements may not be fully verifiable. The Simulink Design Verifier product may be used to identify untestable or unreachable model conditions and decisions using test case generation, indicating that the high-level requirements may not be fully verifiable. The Model Advisor may be used to assist in verifying the proper usage of certain Simulink blocks and data types.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- DO-178B checks in the Simulink Verification and Validation product.
- Model coverage in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

High-Level Requirements Conform to Standards

If models are defined as high-level software requirements, conformance to standards may be accomplished using a combination of model reviews and Model Advisor checks. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The Model Advisor may verify predefined model standards, and may be customized using an API to perform checks defined by the user that may be unique to their application.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- Custom checks added by the user, but the user is responsible for defining the Tool Operational Requirements, Test Cases, Procedures, and Expected Results for those custom checks.
- System Design Description report in the Simulink Report Generator product.

High-Level Requirements Are Traceable to System Requirements

If models are defined as high-level software requirements, traceability to system requirements may be accomplished by model reviews that include a report generated by the Requirements Management Interface (RMI), a capability of the Simulink Verification and Validation product. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the system requirements. The Model Advisor may be used to assist in verifying that requirements links are consistent, and can identify model components that do not trace to requirements.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.

- System Design Description report in the Simulink Report Generator product.

Algorithms Are Accurate

If models are defined as high-level software requirements, accuracy of the algorithms may be verified using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the system requirements and execute those test cases on the model, assisting in verifying the accuracy of the algorithms within the model. The Model Advisor may be used to assist in verifying the proper usage of certain Simulink blocks and data types.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

Verification of Design Process

The following table contains a summary of the verification of design process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the available Model-Based Design tools for satisfying the objectives.

Table A-4 Verification of Design Process

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	Low-level requirements comply with high-level requirements.	6.3.2a	A, B, C	Simulink Verification and Validation, Simulink Design Verifier, SystemTest, Simulink Report Generator, DO Qualification Kit
2	Low-level requirements are accurate and consistent.	6.3.2b	A, B, C	Simulink Verification and Validation, SystemTest, Simulink Report Generator, DO Qualification Kit
3	Low-level requirements are compatible with the target computer.	6.3.2c	A, B	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
4	Low-level requirements are verifiable.	6.3.2d	A, B	Simulink Verification and Validation, Simulink Design Verifier, SystemTest, Simulink Report Generator, DO Qualification Kit
5	Low-level requirements conform to standards.	6.3.2e	A, B, C	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
6	Low-level requirements are traceable to high-level requirements.	6.3.2f	A, B, C	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit

Table A-4 Verification of Design Process (Continued)

	Objective	Sections	Software Levels	Available Products for Model-Based Design
7	Algorithms are accurate.	6.3.2g	A, B, C	Simulink Verification and Validation, SystemTest, Simulink Report Generator, DO Qualification Kit
8	Software architecture is compatible with high-level requirements.	6.3.3a	A, B, C	Simulink Report Generator
9	Software architecture is consistent.	6.3.3b	A, B, C	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
10	Software architecture is compatible with the target computer.	6.3.3c	A, B	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
11	Software architecture is verifiable.	6.3.3d	A, B	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
12	Software architecture conforms to standards.	6.3.3e	A, B, C	Simulink Verification and Validation, Simulink Report Generator, DO Qualification Kit
13	Software partitioning integrity is confirmed.	6.3.3f	A, B, C, D	Not applicable

The following sections describe in more detail the potential impacts for each of the verification of design process objectives when using Model-Based Design, if applicable, as compared to traditional development.

Low-Level Requirements Comply with High-Level Requirements

If models are defined as low-level software requirements, compliance with high-level software requirements may be accomplished using a combination

of model reviews, model analysis, and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the system requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the high-level requirements and execute those test cases on the model to assist in verifying that the high-level requirements are satisfied. The Simulink Design Verifier product may be used to prove properties of the model in order to assist in verifying certain high-level requirements are satisfied.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, code may be generated directly from the high-level requirements, and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Low-Level Requirements Are Accurate and Consistent

If models are defined as low-level software requirements, accuracy and consistency may be verified using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the high-level requirements, and execute those test cases on the model to assist in verifying the accuracy and consistency. The Model Advisor may be used to assist in verifying the diagnostic settings used by the Simulink product are appropriate for simulation, and also to verify the proper usage of certain Simulink blocks.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, code may be generated directly from the high-level requirements, and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Low-Level Requirements Are Compatible with the Target Computer

If models are defined as low-level software requirements, compatibility with target hardware may be accomplished using a combination of model reviews and Model Advisor checks. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The Model Advisor may be used to assist in verifying that the hardware interface settings used by the Embedded Coder product are appropriate for the target processor.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, code may be generated directly from the high-level requirements, and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Low-Level Requirements Are Verifiable

If models are defined as low-level software requirements, verifiability may be accomplished using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the high-level requirements, and execute those test cases on the model. During execution of these test cases, a Simulink Verification and Validation model coverage report may be generated to assist in verifying that all requirements are fully verified. The coverage report may assist in finding conditions and decisions in the model that cannot be reached, indicating that the design may not be fully verifiable. The Simulink Design Verifier product may be used to identify untestable or unreachable model conditions and decisions using test case generation, indicating that the low-level requirements may not be fully verifiable. The Model Advisor may be used to assist in verifying the proper usage of certain Simulink blocks and data types.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- DO-178B checks in the Simulink Verification and Validation product.
- Model coverage in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, code may be generated directly from the high-level requirements, and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Low-Level Requirements Conform to Standards

If models are defined as low-level software requirements, conformance to standards may be accomplished using a combination of model reviews and

Model Advisor checks. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The Model Advisor may be used to verify predefined model standards and may also be customized to perform checks defined by the user that are unique for their application.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- Custom checks added by the user, but the user is responsible for defining the Tool Operational Requirements, Test Cases, Procedures, and Expected Results for those custom checks.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, then code may be generated directly from the high-level requirements and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Low-Level Requirements Are Traceable to High-Level Requirements

If models are defined as low-level software requirements, traceability to high-level software requirements may be accomplished using a combination of model reviews and the Requirements Management Interface (RMI). The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the high-level software requirements. The Model Advisor may be used to assist in verifying that requirements links are consistent.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.

- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, then code may be generated directly from the high-level requirements and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Algorithms Are Accurate

If models are defined as low-level software requirements, accuracy of the algorithms may be verified using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report that includes a trace report to the higher-level requirements. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the high-level requirements, and execute those test cases on the model, assisting in verifying the accuracy of the algorithms within the model. The Model Advisor may be used to assist in verifying the proper usage of certain Simulink blocks and data types.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.
- System Design Description report in the Simulink Report Generator product.

If the models are defined as high-level software requirements, code may be generated directly from the high-level requirements, and this objective does not apply. For details, see DO-178B, Section 6.1.b.

Software Architecture Is Compatible with High-Level Requirements

Compatibility of the software architecture within the models may be verified using model reviews. The Simulink Report Generator product may be used to generate a System Design Description report. The Model Dependency Viewer in the Simulink product can show the architecture of reference models and library blocks.

The System Design Description report capability in the Simulink Report Generator product may be qualified as a verification tool using the DO Qualification Kit product.

The higher-level software architecture, which includes the real-time operating system (RTOS) and other code, may be verified using traditional methods.

Software Architecture Is Consistent

Consistency of the software architecture within the models may be verified using model reviews. The Simulink Report Generator product may be used to generate a System Design Description report. The Model Dependency Viewer in the Simulink product can show the architecture of reference models and library blocks. The Model Advisor may be used to assist in verifying the diagnostic settings used by the Simulink product are appropriate for simulation, and also to verify the proper use of certain Simulink blocks.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

The higher-level software architecture, which includes the RTOS and other code, may be verified using traditional methods.

Software Architecture Is Compatible with the Target Computer

Target compatibility of the software architecture within the models may be verified using model reviews. The Simulink Report Generator product may be used to generate a System Design Description report. The Model Advisor may be used to verify that the hardware interface settings used by the Embedded Coder product are appropriate for the target processor.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

The higher-level software architecture, which includes the RTOS and other code, may be verified using traditional methods.

Software Architecture Is Verifiable

Verification of the software architecture may be accomplished using a combination of model reviews and simulation. The Simulink Report Generator product may be used to generate a System Design Description report. The SystemTest and Simulink Verification and Validation products may be used to develop test cases from the high-level requirements, and execute those test cases on the model. During execution of these test cases, a model coverage report may be generated to assist in verifying that all requirements are fully verified. The coverage report may assist in finding conditions and decisions in the model architecture that cannot be reached, indicating that the software architecture may not be fully verifiable.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- When used for pass and fail determination, the Limit Check element in the SystemTest product.

- Model coverage in the Simulink Verification and Validation product.
- System Design Description report in the Simulink Report Generator product.

The higher-level software architecture, which includes the RTOS and other code, may be verified using traditional methods.

Software Architecture Conforms to Standards

Conformance to standards may be accomplished using a combination of model reviews and Model Advisor checks. The Simulink Report Generator product may be used to generate a System Design Description report. The Model Advisor may be used to verify predefined model standards, and may also be customized to perform checks defined by the user that are unique for their application.

The following capabilities may be qualified as a verification tool using the DO Qualification Kit product:

- DO-178B checks in the Simulink Verification and Validation product.
- Custom checks added by the user, but the user is responsible for defining the Tool Operational Requirements, Test Cases, Procedures, and Expected Results for those custom checks.
- System Design Description report in the Simulink Report Generator product.

The higher-level software architecture, which includes the RTOS and other code, may be verified using traditional methods.

Software Partitioning Integrity Is Confirmed

Because partitioning is outside of the scope of Model-Based Design, partitioning may be verified using traditional methods.

Verification of Coding and Integration Process

The following table contains a summary of the verification of coding and integration process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the available Model-Based Design tools for satisfying the objectives.

Table A-5 Verification of Coding and Integration Process

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	Source code complies with low-level requirements.	6.3.4a	A, B, C	Embedded Coder
2	Source code complies with software architecture.	6.3.4b	A, B, C	Embedded Coder, Polyspace, DO Qualification Kit
3	Source code is verifiable.	6.3.4c	A, B	Embedded Coder, Polyspace, DO Qualification Kit
4	Source code conforms to standards.	6.3.4d	A, B, C	Embedded Coder, Polyspace, DO Qualification Kit
5	Source code is traceable to low-level requirements.	6.3.4e	A, B, C	Embedded Coder, Simulink Verification and Validation, DO Qualification Kit
6	Source code is accurate and consistent.	6.3.4f	A, B, C	Embedded Coder, Polyspace, DO Qualification Kit
7	Output of software integration process is complete and correct.	6.3.5	A, B, C	Not applicable

The following sections describe in more detail the potential impacts for each of the verification of coding and integration process objectives when using Model-Based Design, if applicable, as compared to traditional development.

Source Code Complies with Low-Level Requirements

Compliance to low-level requirements may be verified using code reviews. The Embedded Coder product produces a code generation report that may assist in code reviews by providing traceability from the code to the models, including hyperlinks to the objects in the models.

Source Code Complies with Software Architecture

Compliance to software architecture may be verified using code reviews. The Embedded Coder product produces a code generation report that may assist in code reviews by providing traceability from the code to the models, including hyperlinks to the objects in the models. The Polyspace products for C/C++ can assist in the identification of data-flow and control-flow errors.

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Source Code Is Verifiable

Verifiability of the code may be verified using code reviews. The Embedded Coder product produces a code generation report that may assist in code reviews by providing traceability from the code to the models, including hyperlinks to the objects in the models. The Polyspace products for C/C++ can assist in the identification of unreachable, and therefore nonverifiable, code.

The Polyspace products for C/C++ work with the Simulink product, allowing errors identified in the code to be traced to the corresponding model blocks.

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Source Code Conforms to Standards

Standards compliance of source code may be verified using the MISRA C checker in the Polyspace products for C/C++. The MISRA C checker works with the Simulink product.

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Source Code Is Traceable to Low-Level Requirements

Traceability of source code to low-level requirements may be verified using code reviews. The Embedded Coder product produces a code generation report that may assist in code reviews by providing traceability from the code to the models, including hyperlinks to the objects in the models. The Model Advisor may be used to assist in verifying the commenting settings used by the Embedded Coder product are appropriate for tracing the source code to the models.

The DO-178B checks in the Simulink Verification and Validation product may be qualified as a verification tool using the DO Qualification Kit product.

Source Code Is Accurate and Consistent

Accuracy and consistency of source code may be verified using code reviews. The Embedded Coder product produces a code generation report that may assist in code reviews by providing traceability from the code to the models, including hyperlinks to the objects in the models.

The Polyspace products for C/C++ have the capability to identify run-time errors, such as potential underflow, overflow, divide by zero, etc. The Polyspace products for C/C++ also have the capability to detect uninitialized variables and constants.

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Output of Software Integration Process Is Complete and Correct

Because the integration process is outside of the scope of Model-Based Design, the integration process may be verified using traditional methods.

Testing of Outputs of Integration Process

The following table contains a summary of the testing of outputs of integration process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the available Model-Based Design tools for satisfying the objectives.

Table A-6 Testing of Outputs of Integration Process

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	Executable Object Code complies with high-level requirements.	6.4.2.1, 6.4.3	A, B, C, D	SystemTest, Embedded Coder — IDE Link, Polyspace, DO Qualification Kit
2	Executable Object Code is robust with high-level requirements.	6.4.2.2, 6.4.3	A, B, C, D	SystemTest, Embedded Coder — IDE Link, Polyspace, DO Qualification Kit
3	Executable Object Code complies with low-level requirements.	6.4.2.1, 6.4.3	A, B, C	SystemTest, Simulink Design Verifier, Embedded Coder — IDE Link, Polyspace, DO Qualification Kit
4	Executable Object Code is robust with low-level requirements.	6.4.2.2, 6.4.3	A, B, C	SystemTest, Simulink Design Verifier, Embedded Coder — IDE Link, Polyspace, DO Qualification Kit
5	Executable Object Code is compatible with target computer.	6.4.3a	A, B, C, D	Embedded Coder — IDE Link

The following sections describe in more detail the potential impacts for each testing of outputs of integration process objective when using Model-Based Design, if applicable, as compared to traditional development.

Executable Object Code Complies with High-Level Requirements

The executable object code may be verified by reusing the same test cases that are used to verify the models. During execution of the model verification tests, using the SystemTest product, the inputs and outputs of each model under test can be logged and saved for use in verifying the executable object code.

The executable object code may be tested on a target processor or DSP using the IDE Link capability of the Embedded Coder product. The SystemTest product may be used to execute these tests and compare the test results to expected results.

When used for pass and fail determination, the Limit Check element capability within the SystemTest product may be qualified as a verification tool using the DO Qualification Kit product.

The Polyspace products for C/C++ may also be used to satisfy this objective by verifying the source code using abstract interpretation. Some errors detected by the Polyspace products for C/C++ may not be detected during traditional dynamic testing.

The Polyspace products for C/C++ help to exhaustively identify:

- Uninitialized variables
- Parameter passing errors
- Data corruption, especially global data
- Inadequate, end-to-end numerical resolution
- Detection of arithmetic faults
- Detection of violation of array limits

The Polyspace products for C/C++ help to partially identify:

- Incorrect initialization of variables and constants
- Incorrect initialization of variables and constants leading to an underflow or overflow
- Global data corruption of shared variables without protection mechanism

- Incorrect sequencing of events and operations
- Detection of loops leading to run-time error
- Detection of incorrect logic decision leading to irrefutable dead code or run-time errors

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Executable Object Code Is Robust with High-Level Requirements

Robustness tests should be developed against the models and may be done using the SystemTest product. The robustness of the executable object code may be verified by reusing the same test cases that are used to verify robustness of the models. During execution of the model verification tests, using the SystemTest product, the inputs and outputs of each model under test can be logged and saved for use in verifying the executable object code.

The executable object code may be tested on a target processor or DSP using the IDE Link capability of the Embedded Coder product. The SystemTest product may be used to execute these tests and compare the test results to expected results.

When used for pass and fail determination, the Limit Check element capability within the SystemTest product may be qualified as a verification tool using the DO Qualification Kit product.

The Polyspace products for C/C++ may also be used to satisfy this objective by verifying the source code using abstract interpretation. Some of the errors detected by the Polyspace products for C/C++ may not be detected during traditional dynamic testing.

The Polyspace products for C/C++ help to partially identify:

- Incorrect initialization of variables and constants
- Incorrect initialization of variables and constants leading to an underflow or overflow
- Detection of loops leading to run-time error

- Detection of overflows
- Detection of certain run-time errors

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Executable Object Code Complies with Low-Level Requirements

The Simulink Design Verifier product may be used to generate low-level tests from the model. These test cases can be run on the model and the executable object code, and the results compared. The comparison is used to demonstrate that the executable object code complies with the low-level requirements.

The executable object code may be tested on a target processor or DSP using the IDE Link capability of the Embedded Coder product. The SystemTest product may be used to execute these tests and compare the test results to expected results.

When used for pass and fail determination, the Limit Check element capability within the SystemTest product may be qualified as a verification tool using the DO Qualification Kit product.

The Polyspace products for C/C++ may also be used to satisfy this objective by verifying the source code using abstract interpretation. Some of the errors detected by the Polyspace products for C/C++ may not be detected during traditional dynamic testing.

The Polyspace products for C/C++ help to exhaustively identify:

- Uninitialized variables
- Parameter passing errors
- Data corruption, especially global data
- Inadequate, end-to-end numerical resolution
- Detection of arithmetic faults
- Detection of violation of array limits

The Polyspace products for C/C++ help to partially identify:

- Incorrect initialization of variables and constants
- Incorrect initialization of variables and constants leading to an underflow or overflow
- Global data corruption of shared variables without protection mechanism
- Incorrect sequencing of events and operations
- Detection of loops leading to run-time error
- Detection of incorrect logic decision leading to irrefutable dead code or run-time errors

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit product.

Alternatively, verification against the low-level requirements may be eliminated, if requirements based coverage and structural coverage are achieved using the high-level requirements based tests (for example, software integration tests). The following guidance is provided in section 6.4 of DO-178B:

If a test case and its corresponding test procedure are developed and executed for hardware/software integration testing or software integration testing and satisfy the requirements-based coverage and structural coverage, it is not necessary to duplicate the test for low-level testing. Substituting nominally equivalent low-level tests for high-level tests may be less effective due to the reduced amount of overall functionality tested.

Executable Object Code Is Robust with Low-Level Requirements

The Simulink Design Verifier product may be used to generate robustness tests from the model. These test cases can be run on the model and the executable object code, and the results compared. The comparison demonstrates that the executable object code is robust with the low-level requirements. For robustness test cases, Test Condition and Test Objective blocks may be used to assist in the definition of test cases that exercise the object code outside of normal boundary conditions.

The executable object code may be tested on a target processor or DSP using the IDE Link capability of the Embedded Coder product. The SystemTest product may be used to execute these tests and compare the test results to expected results.

When used for pass and fail determination, the Limit Check element capability within the SystemTest product may be qualified as a verification tool using the DO Qualification Kit product.

The Polyspace products for C/C++ may also be used to satisfy this objective by verifying the source code using abstract interpretation. Some of the errors detected by the Polyspace products for C/C++ may not be detected during traditional dynamic testing.

The Polyspace products for C/C++ help to partially identify:

- Incorrect initialization of variables and constants
- Incorrect initialization of variables and constants leading to an underflow or overflow
- Detection of loops leading to run-time error
- Detection of overflows
- Detection of certain run-time errors

The Polyspace products for C/C++ may be qualified as a verification tool using the DO Qualification Kit products.

Executable Object Code Is Compatible with Target Computer

The executable object code may be evaluated for stack usage, memory usage, and execution time on a target processor or DSP using the IDE Link capability of the Embedded Coder product.

Other aspects of hardware compatibility such as interrupt handling, resource contention, hardware interfaces, partitioning, etc., must be verified using traditional methods.

Verification of Verification Process Results

The following table contains a summary of the verification of verification process results objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the available Model-Based Design tools that may be used in satisfying the objectives.

Table A-7 Verification of Verification Process Results

	Objective	Sections	Software Levels	Available Products for Model-Based Design
1	Test procedures are correct.	6.3.6b	A, B, C	Simulink Verification and Validation
2	Test results are correct and discrepancies explained.	6.3.6c	A, B, C	SystemTest
3	Test coverage of high-level requirements is achieved.	6.4.4.1	A, B, C, D	Simulink Verification and Validation
4	Test coverage of low-level requirements is achieved.	6.4.4.1	A, B, C	Simulink Verification and Validation
5	Test coverage of software structure (modified condition/decision) is achieved.	6.4.4.2	A	Not applicable
6	Test coverage of software structure (decision coverage) is achieved.	6.4.4.2a, 6.4.4.2b	A, B	Not applicable
7	Test coverage of software structure (statement coverage) is achieved.	6.4.4.2a, 6.4.4.2b	A, B, C	Not applicable
8	Test coverage of software structure (data coupling and control) is achieved.	6.4.4.2c	A, B, C	Not applicable

The following sections describe in more detail the potential impacts for each of the verification of verification process results objective when using Model-Based Design, if applicable, as compared to traditional development.

Test Procedures Are Correct

Correctness of the test procedures from the higher-level requirements may be verified by reviewing the test procedures. The Simulink Verification and Validation product may assist in test procedure reviews by providing traceability from the test cases to the requirements, including hyperlinks to the requirements in the higher-level requirements document.

Completeness of the test cases generated by the Simulink Design Verifier product may be verified by executing the test cases on the Simulink model while measuring model coverage during simulation. The expected results produced by Simulink may be verified by reviewing the results.

The model coverage capability in the Simulink Verification and Validation product may be qualified as a verification tool using the DO Qualification Kit product.

Test Results Are Correct and Discrepancies Explained

Correctness of the test results may be verified by reviewing the test results. As an alternative, develop a processor-in-the-loop test platform for the executable object code that could be qualified as a verification tool in order to determine pass and fail status of the results.

Test Coverage of High-Level Requirements Is Achieved

Test coverage of high-level software requirements may be verified by reviewing the test cases and traceability to the high-level requirements. The Simulink Verification and Validation product can be used to trace the test cases to the high-level requirements, providing the capability to assist in verifying that each requirement has associated test cases.

Test Coverage of Low-Level Requirements Is Achieved

Test coverage of low-level software requirements may be verified using the Simulink Verification and Validation model coverage report during execution of the low-level requirements based tests. The model coverage report provides data to assist in proving that low-level requirements are fully covered during testing.

The model coverage capability in the Simulink Verification and Validation product may be qualified as a verification tool using the DO Qualification Kit product.

Test Coverage of Software Structure (Modified Condition/Decision) Is Achieved

Modified condition and decision coverage of the software structure may be verified using a commercial, off-the-shelf structural coverage analysis tool. This analysis is accomplished during the execution of the requirements based tests described in “Executable Object Code Complies with High-Level Requirements” on page 1-33.

If requirements-based test cases are developed at the model level and reused for testing of the executable object code, the model coverage capability of the Simulink Verification and Validation product may be used during development of the requirements based test cases. Using the capability helps predict the effectiveness of the test cases in providing structural coverage for the generated code.

Test Coverage of Software Structure (Decision Coverage) Is Achieved

Decision coverage of the software structure may be verified using a commercial, off-the-shelf structural coverage analysis tool. This analysis is accomplished during the execution of the requirements based tests described in “Executable Object Code Complies with High-Level Requirements” on page 1-33.

If requirements-based test cases are developed at the model level and reused for testing of the executable object code, the model coverage capability may be used during development of the requirements based test cases. Using the

tool helps predict the effectiveness of the test cases in providing structural coverage for the generated code.

Test Coverage of Software Structure (Statement Coverage) Is Achieved

Statement coverage of the software structure may be verified using a commercial, off-the-shelf structural coverage analysis tool. This analysis is accomplished during the execution of the requirements based tests described in “Executable Object Code Complies with High-Level Requirements” on page 1-33.

If requirements-based test cases are developed at the model level and reused for testing of the executable object code, then the model coverage capability may be used during development of the requirements based test cases. Using the tool helps predict the effectiveness of the test cases in providing structural coverage for the generated code.

Test Coverage of Software Structure (Data Coupling and Control) Is Achieved

Because the data coupling and control is outside of the scope of code generated using Model-Based Design, data coupling and control may be verified using traditional methods. The test coverage for data coupling and control involves verification of the data interfaces to and from the automatically generated code and the calling sequence of the automatically generated code in relation to other code modules.

Software Configuration Management Process

The following table contains a summary of the configuration management process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the potential impact to the process when using Model-Based Design.

Table A-8 Software Configuration Management Process

	Objective	Sections	Software Levels	Model-Based Design Process Impact
1	Configuration items are identified.	7.2.1	A, B, C, D	No impact
2	Baselines and traceability are established.	7.2.2	A, B, C, D	Use of Requirements Management Interface (RMI) and traditional baseline establishment
3	Problem reporting, change control, change review, and configuration status accounting are established.	7.2.3, 7.2.4, 7.2.5, 7.2.6	A, B, C, D	No impact
4	Archive, retrieval, and release are established.	7.2.7	A, B, C, D	No impact
5	Software load control is established.	7.2.8	A, B, C, D	No impact
6	Software life cycle environment control is established.	7.2.9	A, B, C, D	No impact

The following sections describe in more detail the potential impacts for each configuration management process objective when using Model-Based Design, if applicable, as compared to traditional development.

Configuration Items Are Identified

For projects using Model-Based Design, throughout the project, the following artifacts may have to be configured and identified:

- High-level requirements (level above the models)
- Models
- System Design Description and trace reports
- Model Advisor reports
- Automatically generated code
- Model test harnesses
- Model test scripts
- SystemTest files
- Model test results reports
- Model coverage reports
- Object code structural coverage reports

These artifacts are in addition to, or substitute for, traditional configured items.

Baselines and Traceability Are Established

Establishing baselines and traceability is the same as for traditional projects. Part of the traceability may be covered by the Requirements Management Interface (RMI).

Problem Reporting, Change Control, Change Review, and Configuration Status Accounting Are Established

Establishing problem reporting, change control, change review, and configuration status accounting is the same as for traditional projects.

Archive, Retrieval, and Release Are Established

Establishing archive, retrieval, and release is the same as for traditional projects. The version of the Model-Based Design tools used on the project may have to be archived.

Software Load Control Is Established

Establishing software load control is the same as for traditional projects.

Software Life Cycle Environment Control Is Established

Establishing software life cycle environment control is the same as for traditional projects.

Software Quality Assurance Process

The following table contains a summary of the software quality assurance process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective is applicable to. The table also describes the potential impact to the process when using Model-Based Design.

Table A-9 Software Quality Assurance Process

	Objective	Sections	Software Levels	Model-Based Design Process Impact
1	Assurance is obtained that software development and integral processes comply with approved software plans and standards.	8.1a	A, B, C, D	No impact
2	Assurance is obtained that transition criteria for the software life cycle processes are satisfied.	8.1b	A, B	No impact
3	Software conformity review is completed.	8.1c, 8.3	A, B, C, D	No impact

The following sections describe in more detail the potential impacts for each software quality assurance process objective when using Model-Based Design, if applicable, as compared to traditional development.

Assurance Is Obtained That Software Development and Integral Processes Comply with Approved Software Plans and Standards

Obtaining assurance that software development and integral processes comply with approved software plans and standards is the same as for traditional projects.

Assurance Is Obtained That Transition Criteria for the Software Life Cycle Processes are Satisfied

Obtaining assurance that transition criteria for the software life cycle processes are satisfied is the same as for traditional projects.

Software Conformity Review Is Completed

Completing software conformity review is the same as for traditional projects.

Certification Liaison Process

The following table contains a summary of the certification liaison process objectives from DO-178B, including the objective, applicable DO-178B reference sections, and software levels applicable to the objective. The table also describes the potential impact to the process when using Model-Based Design.

Table A-10 Certification Liaison Process

	Objective	Sections	Software Levels	Model-Based Design Process Impact
1	Communication and understanding between the applicant and the certification authority is established.	9.0	A, B, C, D	No impact
2	The means of compliance is proposed and agreement with the Plan for Software Aspects of Certification is obtained.	9.1	A, B, C, D	No impact
3	Compliance substantiation is provided.	9.2	A, B, C, D	No impact

The following sections describe in more detail the potential impact for each certification liaison process objective when using Model-Based Design, if applicable, as compared to traditional development.

Communication and Understanding Between the Applicant and the Certification Authority Is Established

Establishing communication and understanding between the applicant and the certification authority is the same as for traditional projects.

The Means of Compliance Is Proposed and Agreement with the Plan for Software Aspects of Certification is Obtained

Proposing the means of compliance and obtaining agreement with the Plan for Software Aspects of Certification (PSAC) is the same as for traditional projects.

Compliance Substantiation Is Provided

Providing compliance substantiation is the same as for traditional projects.

Abbreviations

Abbreviations

API	Application Programming Interface
CRI	Certification Review Item
EASA	European Aviation Safety Agency
FAA	Federal Aviation Administration
IP	Issue Paper
PIL	Processor-In-the-Loop
PSAC	Plan for Software Aspects of Certification
RMI	Requirements Management Interface
RTOS	real-time operating system

References

Normative References

The Motor Industry Software Reliability Association. *MISRA-C:2004 Guidelines for the use of the C language in critical systems*. MIRA Limited, 2004.

SAE International. *Certification Considerations for Highly-Integrated Or Complex Aircraft Systems*, 1996.

A

API 1-17 A-2
application programming interface 1-17 A-2
ARP4754 1-10 B-2

C

code conformance 1-3
code generation report 1-3 1-30 to 1-31
code traceability 1-3
code verification 1-3
coding 1-3
coding standards 1-8
compiling 1-3
CRI 1-8 A-2

D

DO Qualification Kit 1-3 1-5 1-8 1-13 to 1-36
1-39 to 1-40
DO-178B 1-2 to 1-3 1-20 to 1-25 1-35
model-based design workflow 1-3
section 6.1.b 1-20 to 1-25
section 6.4 1-35
software life cycle 1-2
DO-178B checks 1-3 1-15 to 1-18 1-21 to 1-24
1-26 to 1-28 1-31

E

EASA 1-5 1-8 A-2
Embedded Coder™ 1-3 1-8 1-10 1-12 1-15 1-22
1-27 1-29 to 1-31

F

FAA 1-5 1-8 A-2

H

high-level verification 1-3

I

IDE Link 1-3 1-10 1-12 1-32 to 1-37
IP 1-8 A-2

L

Limit Check element 1-3 1-14 to 1-16 1-18 1-20
to 1-21 1-23 1-25 1-27 1-33 to 1-36
low-level verification 1-3

M

MISRA C® 1-8 1-12 1-30 B-2
Model Advisor 1-3 1-15 to 1-18 1-21 to 1-28 1-31
Model Advisor reports 1-43
model coverage 1-3 1-16 1-23 1-27 1-39 to 1-41
1-43
model coverage report 1-3 1-16 1-23 1-27 1-40
1-43
model traceability 1-3
model verification 1-3
modeling 1-3
modeling conformance 1-3
modeling standard 1-5 1-8 1-10 to 1-12

P

PIL 1-39 A-2
Polyspace® products for C/C++ 1-3 1-8 1-29 to
1-36
processor-in-the-loop 1-39 A-2
PSAC 1-9 1-47 to 1-48 A-2

R

report
code generation 1-3 1-30 to 1-31
Model Advisor 1-43
model coverage 1-3 1-16 1-23 1-27 1-40 1-43
System Design Description 1-3 1-14 to 1-18
1-20 to 1-28 1-43

requirements validation 1-3
RMI 1-3 1-17 1-24 1-42 to 1-43 A-2
RTOS 1-11 1-26 to 1-28 A-2

S

Simulink® Coder™ 1-3 1-8 1-10 1-12
Simulink® Design Verifier™ 1-3 1-8 1-13 to 1-14
1-16 1-19 to 1-20 1-23 1-32 1-35 to 1-36 1-39
Simulink® Report Generator™ 1-3 1-8 1-13 to
1-28
Simulink® Verification and Validation™ 1-3 1-8
1-13 to 1-29 1-31 1-38 to 1-40

Simulink® 1-3 1-6 1-8 1-10 to 1-13 1-15 to 1-16
1-18 1-21 1-23 1-25 to 1-26 1-30 1-39
Stateflow® 1-3 1-8 1-10 to 1-12
System Design Description report 1-3 1-14 to
1-18 1-20 to 1-28 1-43
SystemTest™ 1-3 1-8 1-13 to 1-16 1-18 to 1-21
1-23 1-25 1-27 1-32 to 1-36 1-38 1-43

T

traditional projects 1-43 to 1-48
traditional verification methods 1-26 to 1-28
1-31 1-37 1-41