


WLAN Toolbox™

Reference

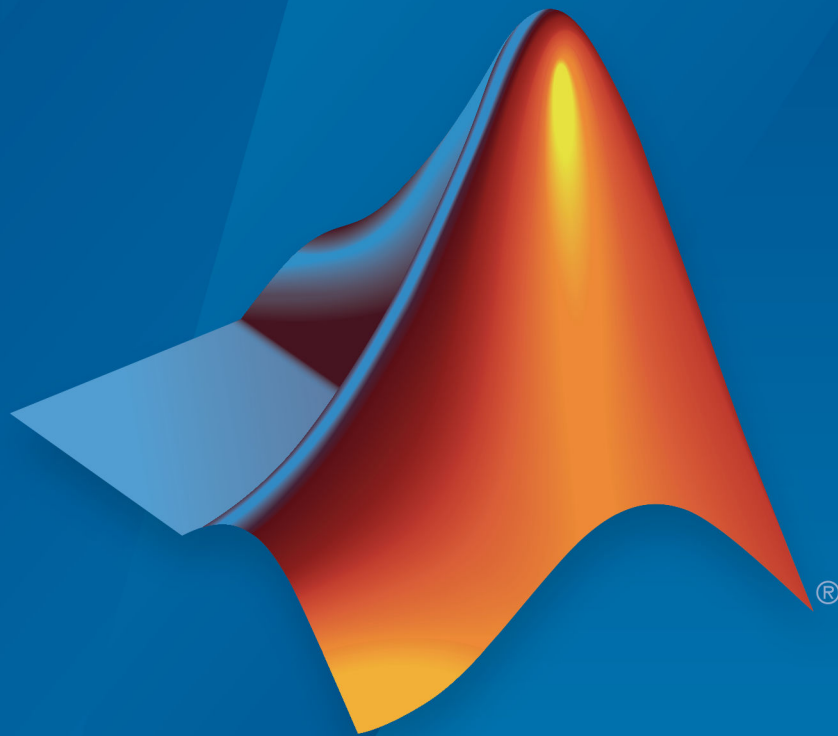

MATLAB®

R2019b



How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us



Phone: 508-647-7000



The MathWorks, Inc.
1 Apple Hill Drive
Natick, MA 01760-2098

WLAN Toolbox™ Reference

© COPYRIGHT 2015–2019 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

October 2015	Online only	New for Version 1.0 (Release 2015b)
March 2016	Online only	Revised for Version 1.1 (Release 2016a)
September 2016	Online only	Revised for Version 1.2 (Release 2016b)
March 2017	Online only	Revised for Version 1.3 (Release 2017a)
September 2017	Online only	Revised for Version 1.4 (Release 2017b)
March 2018	Online only	Revised for Version 1.5 (Release 2018a)
September 2018	Online only	Revised for Version 2.0 (Release 2018b)
March 2019	Online only	Revised for Version 2.1 (Release 2019a)
September 2019	Online only	Revised for Version 2.2 (Release 2019b)

1 | Apps – Alphabetical List

2 | Functions – Alphabetical List

3 | Classes – Alphabetical List

Apps — Alphabetical List

Wireless Waveform Generator

Create, impair, visualize, and export modulated waveforms

Description

The Wireless Waveform Generator app enables you to create, impair, visualize, and export modulated waveforms.

Using this app you can:


- Generate custom OFDM, QAM, and PSK modulated waveforms.
- Generate sine wave test waveforms.
- Generate Bluetooth modulated waveforms. This feature requires the Communications Toolbox™ Library for the Bluetooth® Protocol. To download this library, go to Get Add-Ons (MATLAB).
- Generate WLAN (802.11™) modulated waveforms. This feature requires the “WLAN Toolbox”.
- Generate LTE modulated waveforms. This feature requires the “LTE Toolbox”.
- Distort the waveform by adding RF impairments such as AWGN, phase offset, frequency offset, DC offset, IQ imbalance, and memoryless cubic nonlinearity.
- Visualize the waveform in constellation diagram, spectrum analyzer, OFDM grid, and time scope plots.
- Export the waveform to your workspace as a structure, to a *.mat* or a *.bb* file, or to a runnable MATLAB® script.

Note You can use the MATLAB script to reproduce your waveform outside of the **Wireless Waveform Generator** app.

- Generate a waveform that you can transmit using a connected lab test instrument. The **Wireless Waveform Generator** app can transmit using instruments supported by the `rfsiggen` function. Use of the transmit feature in the **Wireless Waveform Generator** app requires “Instrument Control Toolbox”.

For more information, see “Using Wireless Waveform Generator App” (Communications Toolbox).


Open the Wireless Waveform Generator App

- MATLAB Toolstrip: On the **Apps** tab, under **Signal Processing and Communications**, click the app icon, 
- MATLAB command prompt: Enter `wirelessWaveformGenerator`

Examples


Generate WLAN Non-HT PPDU

Open the **Wireless Waveform Generator** app and configure a non-HT PPDU with one packet and an idle time of zero. Using this feature of the app requires the WLAN Toolbox. In the **Waveform Type** section, select **802.11a/g/j (OFDM)**. Click **Generate** to generate the waveform. The displayed waveform is an 802.11a™ packet with a 20 MHz channel bandwidth.

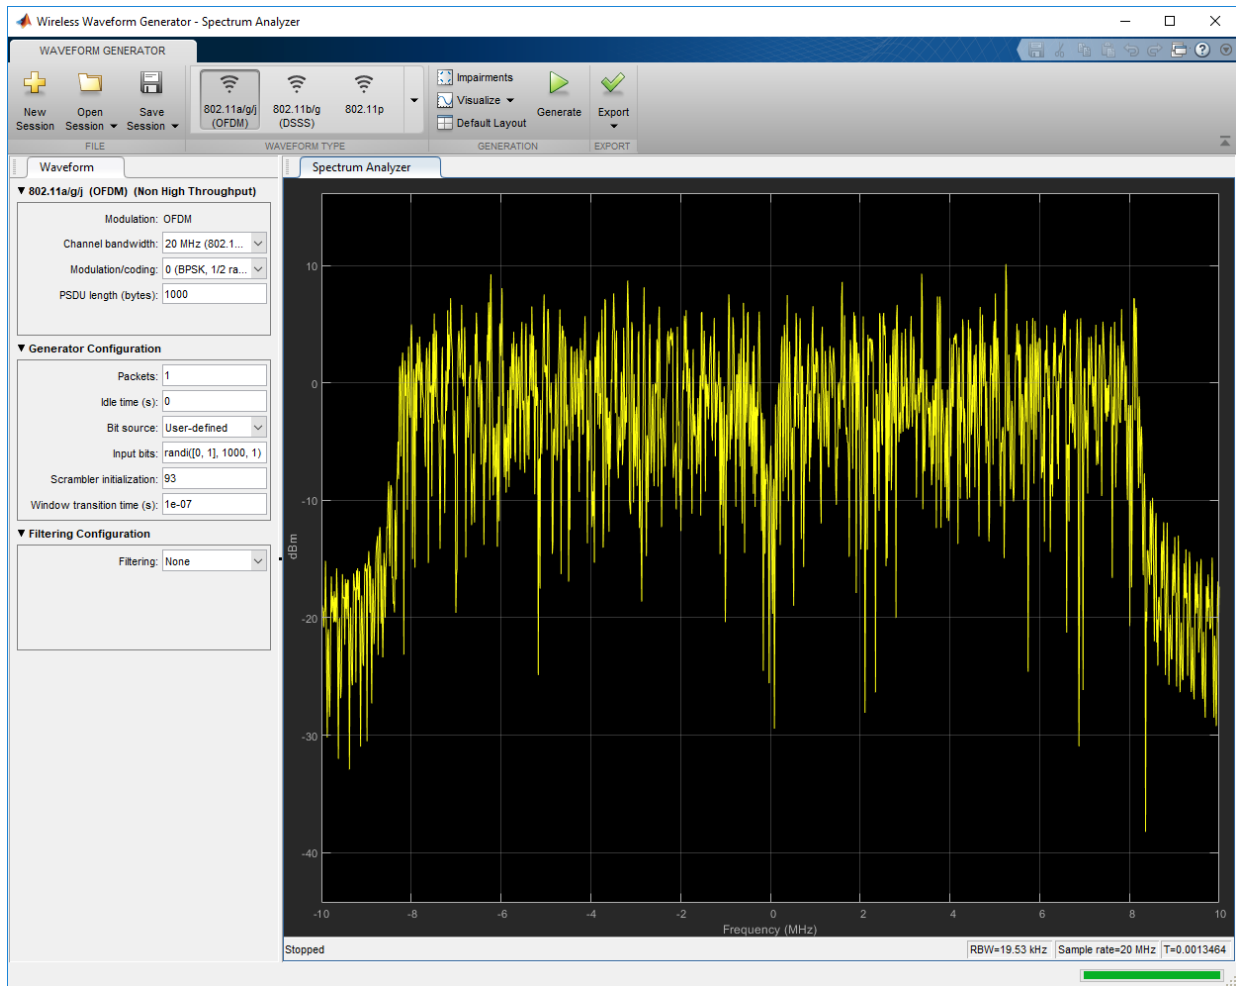

Configure the app to generate a non-HT PPDU with three packets and an idle time of 10 ms between consecutive packets. Click **Visualize** and configure to select **Time Scope** only. Click **Generate** again to generate a waveform using the current configuration. The **Time Scope** plot shows the updated waveform with three packets. An idle time of 10 ms


follows each packet.

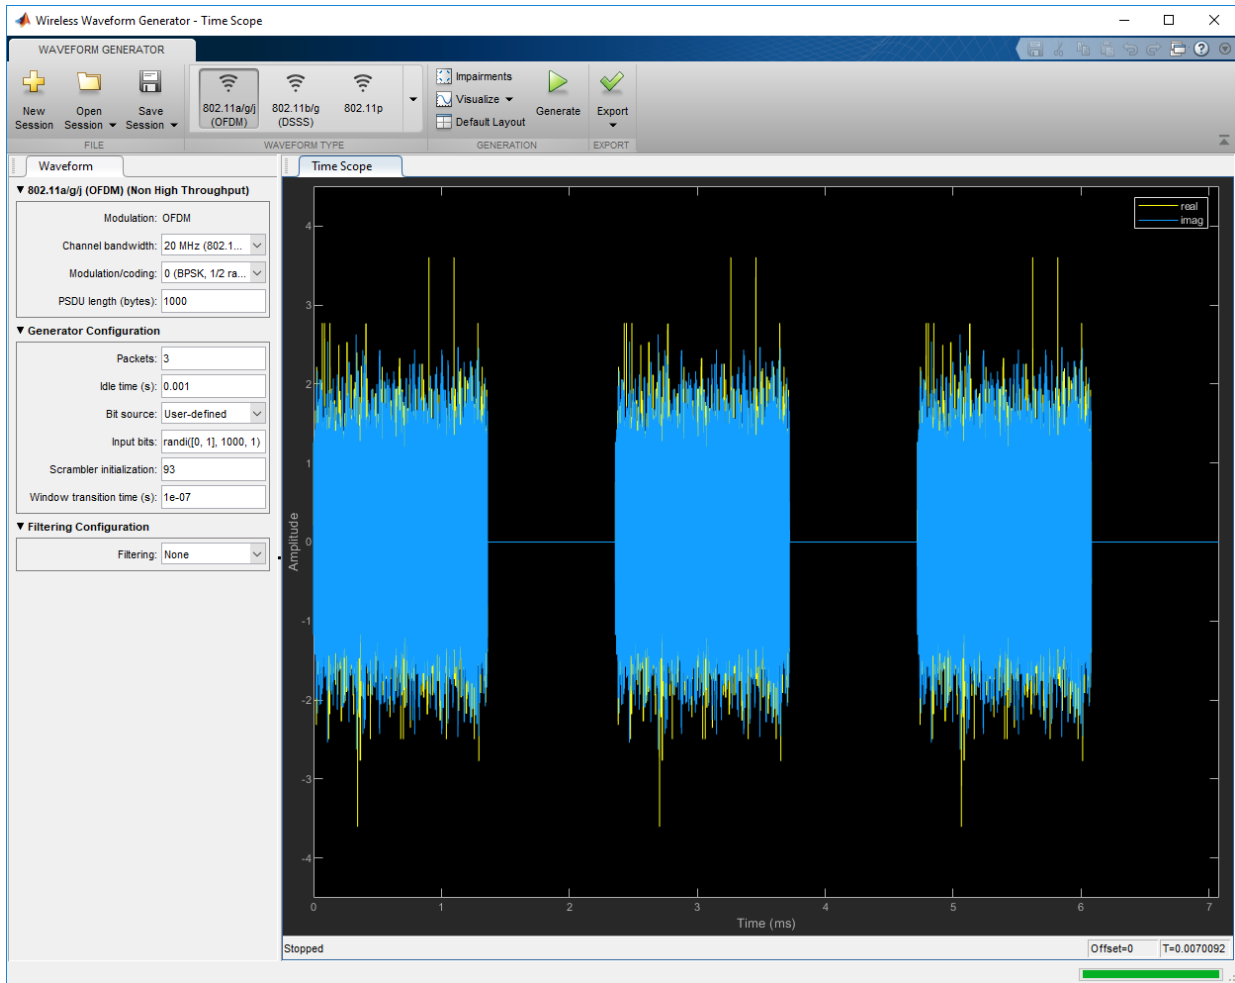

Generate WLAN VHT PPDU


Open **Wireless Waveform Generator** and configure a VHT PPDU with one packet and an idle time of zero. Using this feature of the app requires the WLAN Toolbox. In the **Waveform Type** section, select **802.11ac (OFDM)**. Click **Generate** to generate the

waveform. The displayed waveform is an 802.11ac™ packet with an 80 MHz channel bandwidth.

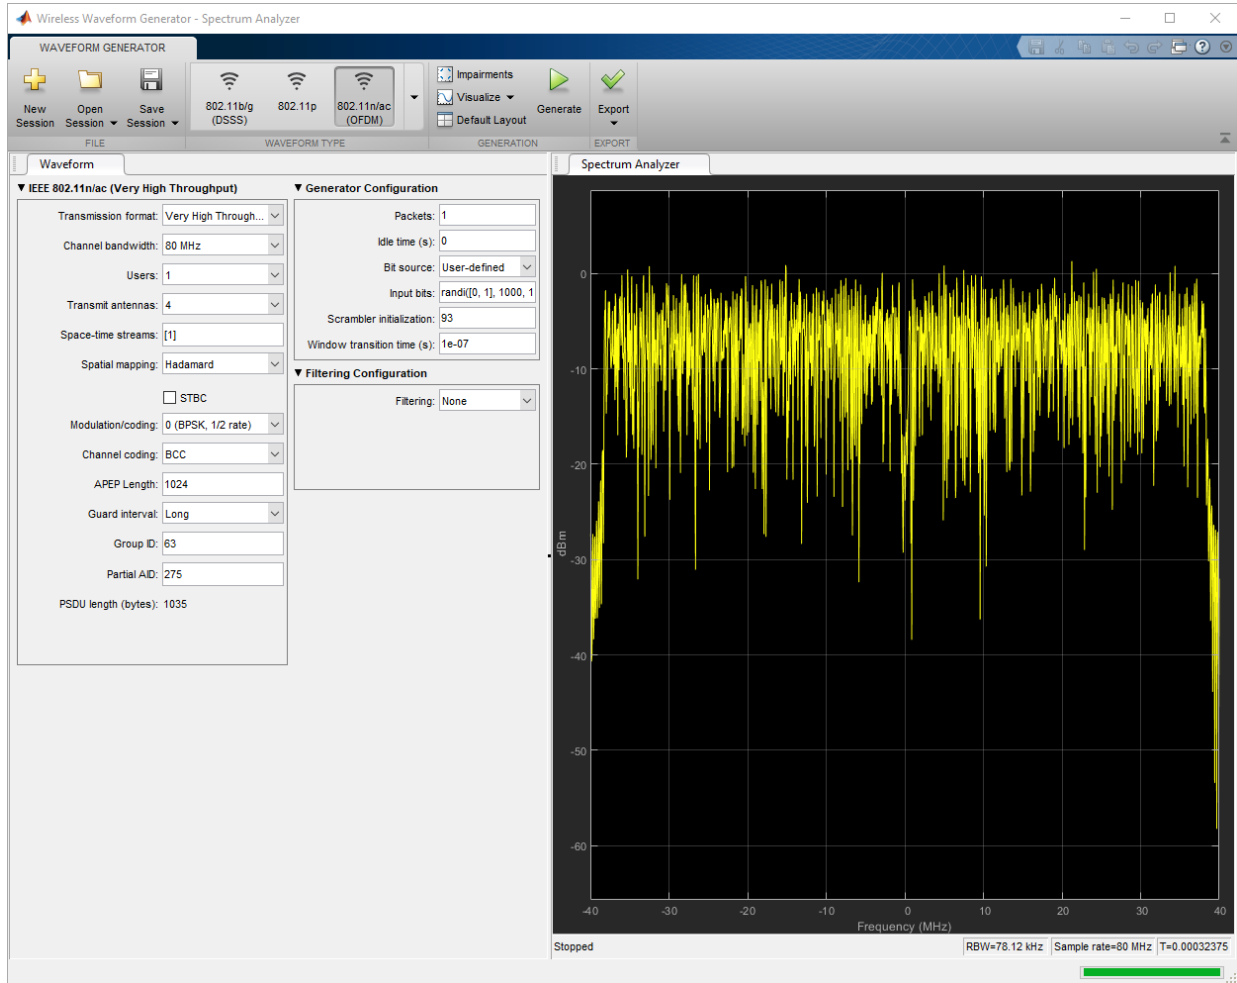

Configure the app to generate a VHT PPDU with two transmit antennas, two users, two packets, and an idle time of 0.5 ms between consecutive packets. Click **Visualize** and configure to select **Time Scope** only. Click **Generate** again to generate a waveform using the current configuration. The **Time Scope** plot shows the updated waveform with two packets. An idle time of 0.5 ms follows each packet.

Note The app only plots the first transmission stream.

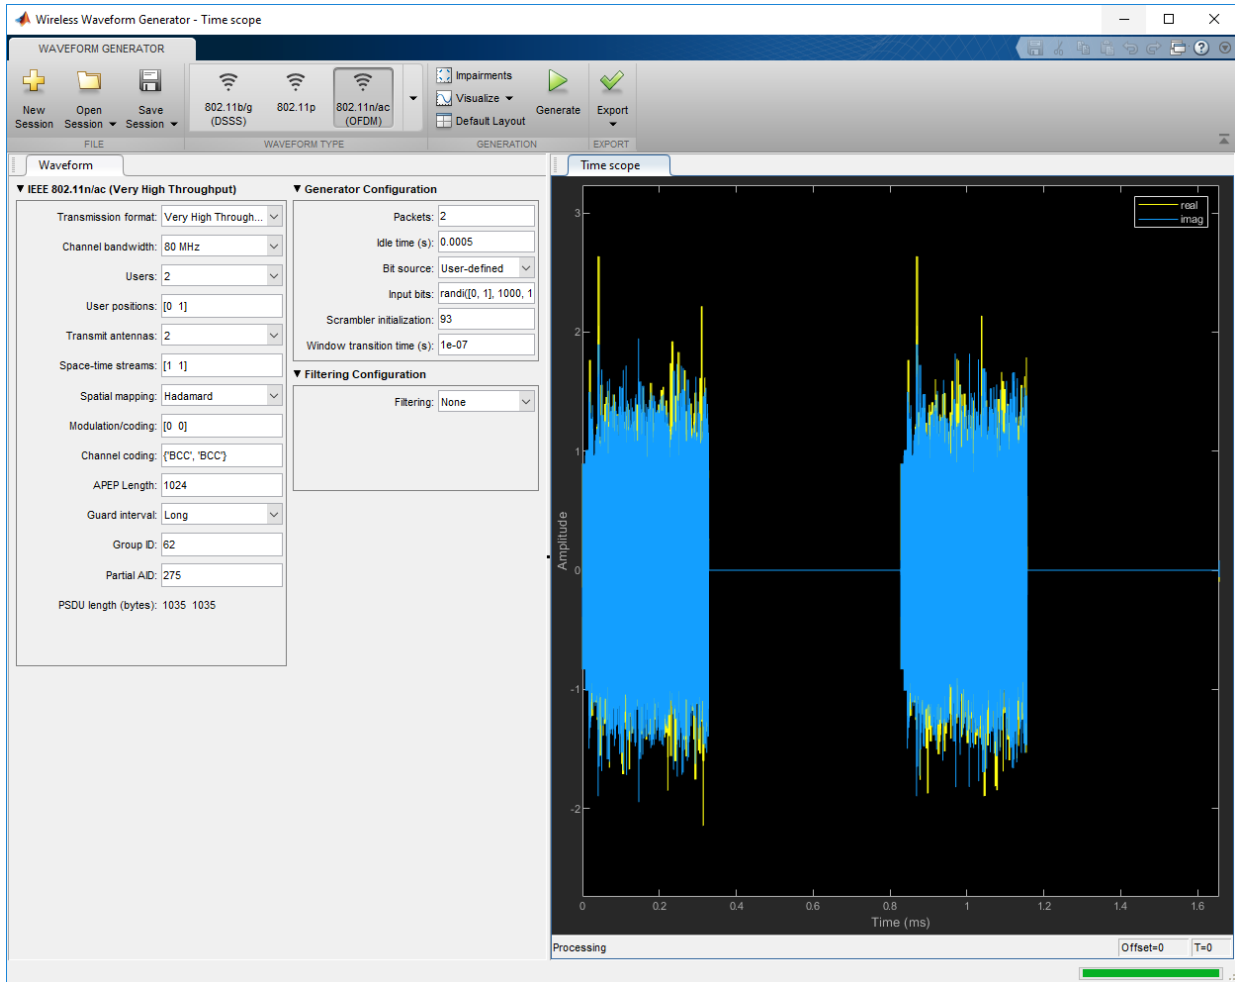

- “Using Wireless Waveform Generator App” (Communications Toolbox)

See Also

Functions

Apps
BER Analyzer

Topics

“Using Wireless Waveform Generator App” (Communications Toolbox)

Introduced in R2018b

Functions — Alphabetical List

addIE

Update MAC management frame configuration object with specified IE

Syntax

```
macmgmtconfig = addIE(macmgmtconfig,id,information)
```

Description

`macmgmtconfig = addIE(macmgmtconfig,id,information)` appends the specified information element (IE) to the `InformationElements` property in `wlanMACManagementConfig`.

Examples

Add Information Element to WLAN MAC Management Frame-Body Configuration Object

Add the DSSS Parameter Set information element to a WLAN MAC management frame-body configuration object by using the `addIE` object function. The element ID for this information element is 3. The information is `'0b'`, representing the current channel (11) in hexadecimal format.

```
config = wlanMACManagementConfig('FrameType','Beacon');  
id = 3;  
information = '0b'  
  
information =  
'0b'  
  
config = addIE(config,id,information);
```

Display the information elements of the frame-body configuration object by using the `displayIEs` object function.

```
displayIEs(config)
```

```
Element ID: 0, Information: 0x646566661756C742053534944
```

```
Element ID: 1, Information: 0x8C98B0
```

```
Element ID: 3, Information: 0x0B
```

Input Arguments

macmgmtconfig — MAC management frame configuration

wlanMACManagementConfig object

MAC management frame configuration, specified as a wlanMACManagementConfig object.

id — IE ID field

nonnegative integer

IE ID field, specified as a nonnegative integer in the interval [0,255]. For more information, refer to Table 9-77 in [1]

Data Types: double

information — Value of information field

character vector | string scalar

Value of information field in hexadecimal format, specified as a character vector or string scalar of hexadecimal octets. Refer to Section 9.4.2 in [1].

Data Types: char | string

Output Arguments

macmgmtconfig — MAC management frame-body configuration with updated IE

wlanMACManagementConfig object

MAC management frame-body configuration with updated IE, returned as a wlanMACManagementConfig object.

References

- [1] IEEE Std 802.11™-2016 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

See Also

wlanMACManagementConfig

Introduced in R2018b

displayIEs

Display the list of information elements (IEs)

Syntax

```
displayIEs(cfg)
```

Description

`displayIEs(cfg)` displays the list of information elements in the WLAN MAC management frame-body configuration `cfg`. Each row consists of the element ID, element extension ID (if present), and the information element (IE). The element ID and element extension ID are integers in the interval [0, 255]. The IEs are displayed in hexadecimal format with the prefix `0x`.

Examples

Display IEs of wlanMACManagementConfig Object

Create a WLAN MAC management frame-body configuration object with default settings. Display the information elements of the object using the `displayIEs` object function.

```
cfg = wlanMACManagementConfig;  
displayIEs(cfg);
```

```
Element ID: 0, Information: 0x64656661756C742053534944  
Element ID: 1, Information: 0x8C98B0
```

Input Arguments

cfg — WLAN MAC management frame-body configuration
wlanMACManagementConfig object

WLAN MAC management frame-body configuration, specified as a `wlanMACManagementConfig` object.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

`wlanMACManagementConfig`

Introduced in R2019a

getPSDULength

Return HE format PSDU length

Syntax

```
psduLength = getPSDULength(cfgHE)
```

Description

`psduLength = getPSDULength(cfgHE)` returns the PSDU length for the HE format configuration object.

Examples

Get PSDU Length for HE Configuration Objects

Get the PSDU length of single user and multiuser HE configuration objects.

Get Single User PSDU Length

Create a single user HE configuration object. Get and display the PSDU length for the configured object.

```
hesu = wlanHESUConfig;  
psduLength = getPSDULength(hesu)
```

```
psduLength = 100
```

Get Multiuser PSDU Lengths

Create a multiuser HE configuration object with the allocation index set to 5, which configures the object with seven users. Get and display the PSDU lengths for the configured object.

```
hemu = wlanHEMUConfig(5);  
psduLength = getPSDULength(hemu)  
  
psduLength = 1×7  
    100    100    202    100    100    100    202
```

Input Arguments

cfgHE — HE format configuration object

wlanHESUConfig object | wlanHEMUConfig object

HE format configuration object, specified as a wlanHEMUConfig or wlanHESUConfig object.

Output Arguments

psduLength — PSDU length

positive integer | row vector

PSDU length for the HE format configuration object in bytes, returned as an integer or 1-by-NumUsers vector. NumUsers is an integer in the range [1,74]. For more information about NumUsers, see ruInfo.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHEMUConfig | wlanHESUConfig

Functions

packetFormat | ruInfo | showAllocation | wlanWaveformGenerator

Introduced in R2018b

getSIGBLength

Return information relevant to HE-SIG-B field length

Syntax

```
info = getSIGBLength(cfg)
```

Description

`info = getSIGBLength(cfg)` returns a structure, `info`, which contains information relevant to the HE-SIG-B field length of the high-efficiency (HE) recovery configuration object `cfg`. The input `cfg` contains the parameters recovered from decoding the signaling fields of an HE-format waveform.

Examples

Return HE-SIG-B Field Length Information

Create a WLAN HE-MU-format configuration object, specifying the allocation index.

```
cfgHEMU = wlanHEMUConfig(0);
```

Generate a WLAN waveform for the specified configuration and return the PPDU field indices.

```
waveform = wlanWaveformGenerator(1, cfgHEMU);  
ind = wlanFieldIndices(cfgHEMU);
```

Decode the L-SIG field and obtain the OFDM information. This information is required to obtain the L-SIG length, which is used in the recovery configuration object.

```
lsig = waveform(ind.LSIG(1):ind.LSIG(2), :);  
lsigDemod = wlanHEDemodulate(lsig, 'L-SIG', cfgHEMU.ChannelBandwidth);  
preHEInfo = wlanHEOFDMInfo('L-SIG', cfgHEMU.ChannelBandwidth);
```

Recover the L-SIG information bits and related information, making sure that the bits pass the parity check. For this example, we assume a noiseless channel. For more realistic results you can pass the waveform through an 802.11ax™ channel model by using the wlanTGaxChannel System object™ and work with the received waveform.

```
csi = ones(52,1);
[lsigBits, failCheck, lsigInfo] = wlanLSIGBitRecover(lsigDemod(preHEInfo.DataIndices, :, :),
```

Decode the HE-SIG-A field and recover the HE-SIG-A information bits, ensuring that the bits pass the cyclic redundancy check (CRC).

```
sigA = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
sigADemod = wlanHEDemodulate(sigA, 'HE-SIG-A', cfgHEMU.ChannelBandwidth);
preHEInfo = wlanHEOFDMInfo('HE-SIG-A', cfgHEMU.ChannelBandwidth);
[bits, failCRC] = wlanHESIGABitRecover(sigADemod(preHEInfo.DataIndices, :, :), 0, csi);
```

Create a WLAN recovery configuration object, specifying an HE-MU-format packet and the length of the L-SIG field.

```
cfg = wlanHERecoveryConfig('PacketFormat', 'HE-MU', 'LSIGLength', lsigInfo.Length);
```

Update the recovery configuration object with the recovered HE-SIG-A bits.

```
cfgUpdated = interpretHESIGABits(cfg, bits);
```

Return and display the HE-SIG-B information.

```
info = getSIGBLength(cfgUpdated);
disp(info);
```

```
    NumSIGBCommonFieldSamples: 80
           NumSIGBSymbols: 10
```

Input Arguments

cfg — HE recovery configuration object

wlanHERecoveryConfig object

HE recovery configuration object, specified as a wlanHERecoveryConfig object.

Output Arguments

info — Information relevant to HE-SIG-B field length

structure

Information relevant to the HE-SIG-B field length, returned as a structure containing these fields.

NumHESIGBCommonFieldSamples — Number of samples in HE-SIG-B common field

nonnegative integer

Number of samples in HE-SIG-B common field, returned as a nonnegative integer.

Data Types: `double`

NumHESIGBSymbols — Total number of symbols in HE-SIG-B field

nonnegative integer

Total number of symbols in HE-SIG-B field, returned as a nonnegative integer.

Data Types: `double`

Data Types: `struct`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanHERecoveryConfig`

Introduced in R2019a

info

Characteristic information about TGn, TGah, TGac, and TGax multipath fading channels

Syntax

```
S = info(chan)
```

Description

`S = info(chan)` returns a structure, `S`, containing characteristic information about the corresponding channel object, `chan`.

Examples

Characteristic Information of a TGah channel

Return the characteristic information of a TGah channel.

Create the TGah channel System Object. Specify a delay profile defined by the model E, path loss, 4 MHz of channel bandwidth and a 2x2 MIMO channel.

```
tgah = wlanTGahChannel;  
tgah.DelayProfile = 'Model-E';  
tgah.LargeScaleFadingEffect = 'Pathloss';  
tgah.ChannelBandwidth = 'CBW4';  
tgah.NumTransmitAntennas = 2;  
tgah.NumReceiveAntennas = 2;
```

Return the delay by the channel filtering, the delay and average gain of each discrete path, and the path loss.

```
S = info(tgah)
```

```
S = struct with fields:  
    ChannelFilterDelay: 7
```

```
ChannelFilterCoefficients: [18x17 double]
      PathDelays: [1x18 double]
      AveragePathGains: [1x18 double]
      Pathloss: 41.2126
```

Input Arguments

chan — Channel

wlanTGnChannel object | wlanTGacChannel object | wlanTGahChannel object | wlanTGaxChannel object

Channel, specified as a wlanTGnChannel, wlanTGacChannel, wlanTGahChannel, or wlanTGaxChannel System object™.

Output Arguments

S — Characteristic information about the channel

structure

Characteristic information about the channel, returned as a structure containing the following fields:

- **ChannelFilterDelay**: Channel filter delay introduced by the implementation, measured in number of samples.
- **ChannelFilterCoefficients**: Channel fractional delay filter coefficients.
- **PathDelays**: Multipath delay of the discrete paths, measured in seconds.
- **AveragePathGains**: Average gains of the discrete paths, measured in decibels (dB).
- **Pathloss**: Path loss between the transmitter and receiver, measured in dB.

See Also

wlanTGacChannel | wlanTGahChannel | wlanTGaxChannel | wlanTGnChannel

Introduced in R2015b

info

Return characteristic information about TGay multipath fading channel

Syntax

```
tgayInfo = info(tgay)
```

Description

`tgayInfo = info(tgay)` returns a structure, `tgayInfo`, containing characteristic information about the IEEE® 802.11ay™ (TGay) multipath fading channel System object `tgay`.

Examples

Return Characteristic Information of WLAN TGay Channel

Create a WLAN TGay channel System object™ and return its characteristic information.

Create a WLAN TGay multipath fading channel System object with default property values.

```
tgay = wlanTGayChannel;
```

Return and display the characteristic information of the TGay channel.

```
tgayInfo = info(tgay);  
disp(tgayInfo);  
  
    NumTxStreams: 1  
    NumRxStreams: 1  
    NumTxElements: 4  
    NumRxElements: 4  
    ChannelFilterDelay: 7  
    NumSamplesProcessed: 0
```

Input Arguments

tgay — TGay multipath fading channel

wlanTGayChannel System object

TGay multipath fading channel, specified as a wlanTGayChannel System object.

Output Arguments

tgayInfo — Characteristic information about TGay channel

structure

Characteristic information about channel, returned as a structure containing these fields:

- NumTxStreams - Number of transmitted data streams
- NumRxStreams - Number of received data streams
- NumTxElements - Number of elements in each transmit antenna array
- NumRxElements - Number of elements in each receive antenna array
- ChannelFilterDelay - Channel filter delay introduced by the implementation, measured in number of samples
- NumSamplesProcessed - Number of samples the channel has processed since it was last reset

Each field of tgayInfo is returned as a nonnegative integer.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanTGayChannel

Introduced in R2019a

interpretHESIGABits

Update recovery configuration object with HE-SIG-A bits

Syntax

```
cfgUpdated = interpretHESIGABits(cfg, bits)
```

Description

`cfgUpdated = interpretHESIGABits(cfg, bits)` updates `wlanHERecoveryConfig` configuration object `cfg` by interpreting recovered HE-SIG-A bits `bits`. The function populates the properties of `cfg` that are relevant to the HE-SIG-A field and returns updated object `cfgUpdated`.

Examples

Recover HE-Data Field for HE-SU-Format Packet

Recover the HE-Data field for an HE-SU-format packet by decoding the HE signaling fields, updating the unknown properties in the recovery configuration object, and passing the updated object into the HE-Data recovery function.

Create an HE-SU-format configuration object, specifying the MCS, and extract the channel bandwidth.

```
cfgHESU = wlanHESUConfig('MCS', 0);  
cbw = cfgHESU.ChannelBandwidth;
```

Generate a waveform for the specified configuration object.

```
bits = randi([0 1], 8*getPSDULength(cfgHESU), 1, 'int8');  
waveform = wlanWaveformGenerator(bits, cfgHESU);
```

Create a WLAN recovery configuration object, specifying the known channel bandwidth and an HE-SU-format packet.

```
cfgRx = wlanHERecoveryConfig('ChannelBandwidth',cbw,'PacketFormat','HE-SU');
```

Recover the HE signaling fields by retrieving the field indices and performing the relevant demodulation operations.

```
ind = wlanFieldIndices(cfgRx);
heLSIGandRLSIG = waveform(ind.LSIG(1):ind.RLSIG(2),:);
symLSIG = wlanHEDemodulate(heLSIGandRLSIG,'L-SIG',cbw);
info = wlanHEOFDMInfo('L-SIG',cbw);
```

Merge the L-SIG and RL-SIG fields for diversity and obtain the data subcarriers.

```
symLSIG = mean(symLSIG,2);
lsig = symLSIG(info.DataIndices,:);
```

Decode the L-SIG field, assuming a noiseless channel, and use the length field to update the recovery object.

```
[~,~,lsigInfo] = wlanLSIGBitRecover(lsig,0);
cfgRx.LSIGLength = lsigInfo.Length;
```

Recover and demodulate the HE-SIG-A field, obtain the data subcarriers and recover the HE-SIG-A bits.

```
heSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);
symSIGA = wlanHEDemodulate(heSIGA,'HE-SIG-A',cbw);
siga = symSIGA(info.DataIndices,:);
[sigaBits,failCRC] = wlanHESIGABitRecover(siga,0);
```

Update the recovery configuration object with the recovered HE-SIG-A bits and obtain the updated field indices.

```
cfgRx = interpretHESIGABits(cfgRx,sigaBits);
ind = wlanFieldIndices(cfgRx);
```

Retrieve and decode the HE-Data field.

```
heData = waveform(ind.HEData(1):ind.HEData(2),:);
symData = wlanHEDemodulate(heData,'HE-Data', ...
    cbw,cfgRx.GuardInterval,[cfgRx.RUSize cfgRx.RUIndex]);
infoData = wlanHEOFDMInfo('HE-Data',cbw,cfgRx.GuardInterval,[cfgRx.RUSize cfgRx.RUIndex]);
data = symData(infoData.DataIndices,:);
dataBits = wlanHEDataBitRecover(data,0,cfgRx);
```

Check that the returned data bits are the same as the transmitted data bits.

```
isequal(bits,dataBits)
```

```
ans = logical  
     1
```

Update HE-MU Recovery Configuration Object

Update a WLAN HE recovery configuration object by interpreting recovered HE-SIG-A information bits.

Create a WLAN HE-MU-format configuration object, setting the allocation index to 0.

```
cfgHEMU = wlanHEMUConfig(0);
```

Generate a WLAN waveform for the specified format configuration and the PPDU field indices.

```
waveform = wlanWaveformGenerator(1, cfgHEMU);  
ind = wlanFieldIndices(cfgHEMU);
```

Decode the L-SIG field and obtain the orthogonal frequency-division multiplexing (OFDM) information. This information is required to obtain the L-SIG length, which is used in the recovery configuration object.

```
lsig = waveform(ind.LSIG(1):ind.LSIG(2),:);  
lsigDemod = wlanHEDemodulate(lsig, 'L-SIG', cfgHEMU.ChannelBandwidth);  
preHEInfo = wlanHEOFDMInfo('L-SIG', cfgHEMU.ChannelBandwidth);
```

Recover the L-SIG bits and related information, making sure that the bits pass the parity check. For this example we assume a noiseless channel. For more realistic results you can pass the waveform through an 802.11ax™ channel model by using the `wlanTGaxChannel System` object™ and work with the received waveform.

```
csi = ones(52,1);  
[lsigBits, failCheck, lsigInfo] = wlanLSIGBitRecover(lsigDemod(preHEInfo.DataIndices, :, :), csi);
```

Decode the HE-SIG-A field and recover the HE-SIG-A bits, ensuring that the bits pass the cyclic redundancy check (CRC).

```
sigA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);  
sigADemod = wlanHEDemodulate(sigA, 'HE-SIG-A', cfgHEMU.ChannelBandwidth);
```



```
preHEInfo = wlanHEOFDMInfo('HE-SIG-A',cfgHEMU.ChannelBandwidth);
[bits, failCRC] = wlanHESIGABitRecover(sigaDemod(preHEInfo.DataIndices, :, :), 0, csi);
```

Create a WLAN recovery configuration object, specifying an HE-MU-format packet and the length of the L-SIG field.

```
cfg = wlanHERecoveryConfig('PacketFormat', 'HE-MU', 'LSIGLength', lsigInfo.Length);
```

Update the recovery configuration object with the recovered HE-SIG-A bits. Display the updated object. A field returned as -1 or 'Unknown' indicates an unknown or undefined property value, which can be updated after decoding the HE-SIG-B field of the HE-MU packet.

```
cfgUpdated = interpretHESIGABits(cfg, bits);
disp(cfgUpdated);
```

wlanHERecoveryConfig with properties:

```

    PacketFormat: 'HE-MU'
    ChannelBandwidth: 'CBW20'
    LSIGLength: 878
    SIGBCompression: 0
    SIGBMCS: 0
    SIGBDCM: 0
    NumSIGBSymbolsSignaled: 10
    STBC: 0
    LDPCExtraSymbol: 1
    PreFECPaddingFactor: 1
    PEDisambiguity: 0
    GuardInterval: 3.2000
    HELTFTType: 4
    NumHELTFSymbols: 1
    UplinkIndication: 0
    BSSColor: 0
    SpatialReuse: 0
    TXOPDuration: 127
    HighDoppler: 0
    AllocationIndex: -1
    NumUsersPerContentChannel: -1
    RUTotalSpaceTimeStreams: -1
    RUSize: -1
    RUIndex: -1
    STAID: -1
    MCS: -1
    DCM: -1

```

```
ChannelCoding: 'Unknown'  
Beamforming: -1  
NumSpaceTimeStreams: -1  
SpaceTimeStreamStartingIndex: -1
```

Input Arguments

cfg — Recovery configuration object before interpretation of HE-SIG-A bits

wlanHERecoveryConfig object

Recovery configuration object before interpretation of HE-SIG-A bits, specified as a wlanHERecoveryConfig object.

bits — Recovered HE-SIG-A bits

52-by-1 binary column vector

Recovered HE-SIG-A bits, specified as a 52-by-1 binary column vector.

Data Types: double

Output Arguments

cfgUpdated — Updated recovery configuration object

wlanHERecoveryConfig object

Updated recovery configuration object, returned as a wlanHERecoveryConfig object. The properties of the updated object are populated in accordance with the recovered HE-SIG-A bits bits. The HE-SIG-A fields are defined in Tables 28-18 and 28-19 of [2].

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax™/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High

Efficiency WLAN.” IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHERecoveryConfig

Functions

wlanHESIGABitRecover

Introduced in R2019a

phyType

Return DMG PHY modulation type

Syntax

```
type = phyType(cfg)
```

Description

`type = phyType(cfg)` returns the DMG physical layer (PHY) modulation type, based on the configuration of the DMG object.

Examples

Create DMG Configuration Object and Return DMG PHY Type

Create DMG configuration objects and change the default property settings by using dot notation. Use the `phyType` object function to access the DMG PHY modulation type.

Create a DMG configuration object and return the DMG PHY modulation type. By default, the configuration object creates properties to model the DMG control PHY.

```
dmg = wlanDMGConfig;  
phyType(dmg)
```

```
ans =  
'Control'
```

Model the SC PHY by modifying the defaults by using the dot notation to specify an MCS of 5.

```
dmg.MCS = 5;  
phyType(dmg)
```

```
ans =  
'SC'
```

Input Arguments

cfg — DMG PDU configuration

wlanDMGConfig object

DMG PDU configuration, specified as a wlanDMGConfig object.

Output Arguments

type — DMG PHY modulation type

'Control' | 'SC' | 'OFDM'

DMG PHY modulation type, specified as 'Control', 'SC', or 'OFDM'.

Data Types: char | string

See Also

Objects

wlanDMGConfig

Introduced in R2017b

ruInfo

Return HE format resource unit allocation information

Syntax

```
info = ruInfo(cfgHE)
```

Description

`info = ruInfo(cfgHE)` returns `info`, resource unit (RU) allocation information for high efficiency (HE) format configuration object `cfgHE`.

Examples

Get RU Allocation Information for HE Configuration Objects

Use the `ruInfo` function to get the resource unit information of single user and multi-user HE configuration objects.

Get Single User RU Allocation Information

Create a single user HE configuration object. Get and display the RU allocation information for the configured object.

```
hesu = wlanHESUConfig;  
ru = ruInfo(hesu)  
  
ru = struct with fields:  
    NumUsers: 1  
    NumRUs: 1  
    RUIndices: 1  
    RUSizes: 242  
    NumUsersPerRU: 1  
    NumSpaceTimeStreamsPerRU: 1  
    PowerBoostFactorPerRU: 1
```

```
RUNumbers: 1
```

Get Multiuser RU Allocation Information

Create a multiuser HE configuration object with the allocation index set to 5, which configures the object with seven users. Get and display the RU allocation information for the configured object.

```
hemu = wlanHEMUConfig(5);
ru = ruInfo(hemu)

ru = struct with fields:
    NumUsers: 7
    NumRUs: 7
    RUIndices: [1 2 2 5 6 7 4]
    RUSizes: [26 26 52 26 26 26 52]
    NumUsersPerRU: [1 1 1 1 1 1 1]
    NumSpaceTimeStreamsPerRU: [1 1 1 1 1 1 1]
    PowerBoostFactorPerRU: [1 1 1 1 1 1 1]
    RUNumbers: [1 2 3 4 5 6 7]
```

Inactivate RU for Second User in Multiuser HE

Create a two user HE configuration object. Make the RU for the second user inactive by setting the station identity to 2046.

Create a multiuser HE configuration object with the allocation index set to 96, which configures an object for two users. The resource information shows that RUs are active for two users.

```
hemu = wlanHEMUConfig(96);
ruInfo(hemu)

ans = struct with fields:
    NumUsers: 2
    NumRUs: 2
    RUIndices: [1 2]
    RUSizes: [106 106]
    NumUsersPerRU: [1 1]
    NumSpaceTimeStreamsPerRU: [1 1]
    PowerBoostFactorPerRU: [1 1]
```

```
RUNumbers: [1 2]
```

Set the station identity to 2046 for the second user. The RU allocation information now shows that RUs are active only for RU index 1.

```
hemu.User{2}.STAID = 2046;
ruInfo(hemu)

ans = struct with fields:
    NumUsers: 2
    NumRUs: 1
    RUIndices: 1
    RUSizes: 106
    NumUsersPerRU: 1
    NumSpaceTimeStreamsPerRU: 1
    PowerBoostFactorPerRU: 1
    RUNumbers: 1
```

Input Arguments

cfgHE — HE configuration object

wlanHESUConfig object | wlanHEMUConfig object

HE configuration object, specified as a wlanHEMUConfig or wlanHESUConfig object.

Output Arguments

info — Information about RU properties of object

structure

Information about the RU properties of the input object, returned as a structure.

NumUsers — Number of users

integer in the range [1, 74]

Number of users, returned as an integer in the range [1, 74].

Data Types: double

NumRUs — Number of RUs

integer in the range [1, 74]

Number of RUs, returned as an integer in the range [1, 74].

Data Types: double

RUIndices — RU indices

integer | vector

RU indices, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8].

Data Types: double

RUSizes — Resource unit sizes

integer | vector

Resource unit sizes, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8].

Data Types: double

NumUsersPerRU — Number of users per RU

integer | vector

Number of users per RU, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8].

Data Types: double

NumSpaceTimeStreamsPerRU — Number of space-time streams per RU

integer | vector

Number of space-time streams per RU, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8].

Data Types: double

PowerBoostFactorPerRU — Power boost factor per RU

integer | vector

Power boost factor per RU, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8].

Data Types: `double`

RUNumbers — RU numbers

`integer` | `vector`

RU numbers, returned as an integer or a 1-by-NumRUs vector with elements that have integer values in the range [1, 8]. `RUNumbers` correspond to the indices for each active RU configured in the `cfgHE.RU` object. An RU is not active when it contains a single station with its station identifier set to 2046.

Data Types: `double`

Data Types: `struct`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

`wlanHEMUConfig` | `wlanHESUConfig`

Functions

`getPSDULength` | `packetFormat` | `showAllocation` | `wlanWaveformGenerator`

Introduced in R2018b

showAllocation

Show resource unit (RU) allocation

Syntax

```
showAllocation(cfgHE)
showAllocation(cfgHE,ax)
```

Description

`showAllocation(cfgHE)` shows the RU allocation in a high-efficiency (HE) WLAN transmission parameterized by HE format configuration `cfgHE`.

`showAllocation(cfgHE,ax)` specifies `ax`, the axes that the function uses to plot the allocation.

Examples


Show RU Allocation in HE MU Transmission

Create a configuration object for an HE MU transmission with a channel bandwidth of 40 MHz.

```
AllocationIndex = [100 98];
cfgHE = wlanHEMUConfig(AllocationIndex);
```

Show the RU allocation in the resultant transmission. This configuration object specifies seven users across four RUs.

```
showAllocation(cfgHE)
```

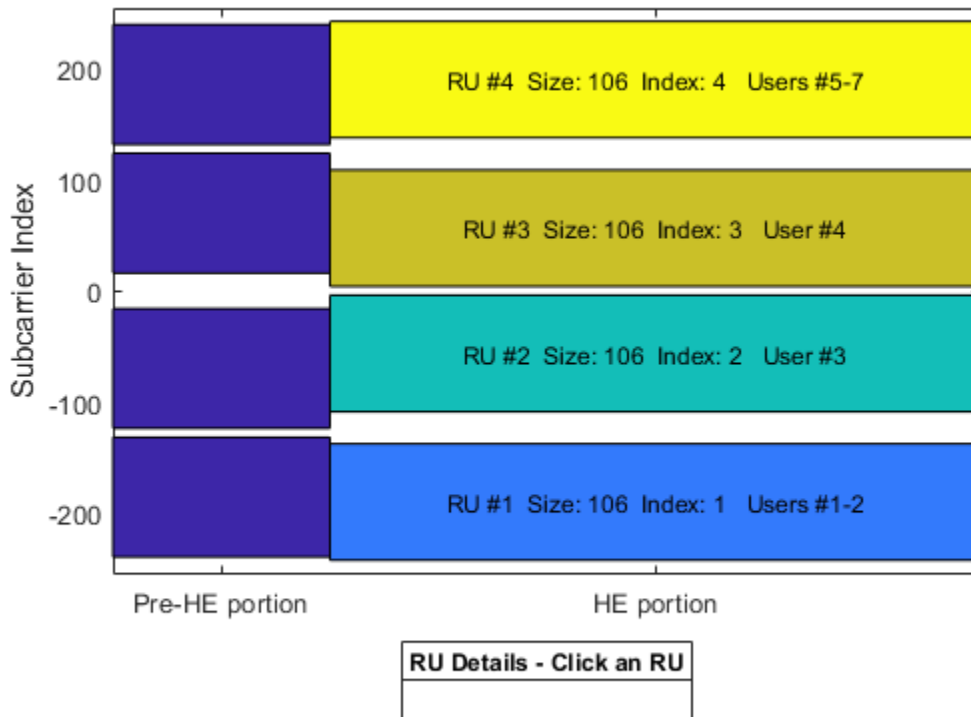

Input Arguments

cfgHE — HE format configuration

wlanHEMUConfig object | wlanHESUConfig object

HE format configuration, specified as a wlanHEMUConfig or wlanHESUConfig object.

- To show the RU allocation for an HE single-user (HE SU) or HE extended-range SU (HE ER SU) transmission, specify this input as a wlanHESUConfig object.
- To show the RU allocation for an HE multiuser (HE MU) transmission, specify this input as a wlanHEMUConfig object.

ax — Plot axes

Axes object

Plot axes, specified as an Axes object. For more information, see Axes Properties. If you do not specify this input, the showAllocation object function shows the RU allocation plotted on the default axes.

See Also

Objects

wlanHEMUConfig | wlanHESUConfig

Functions

getPSDULength | packetFormat | ruInfo

Introduced in R2019b

showEnvironment

Display channel environment with D-Rays from ray tracing

Syntax

```
showEnvironment(tgay)
showEnvironment(tgay,envOnly)
```

Description

`showEnvironment(tgay)` displays a three-dimensional figure for the IEEE 802.11ay (TGay) channel environment determined by the input `wlanTGayChannel` object, `tgay`. The figure shows a schematic depiction of the channel environment, locations of the transmit and receive antenna arrays, and quasi-deterministic strong rays (D-rays) between the arrays determined by ray tracing.

`showEnvironment(tgay,envOnly)` displays the channel environment with the option of turning off ray tracing.

Examples

Filter Dual-Polarized Signal Through 802.11ay Channel

Filter a dual-polarized signal through a WLAN 802.11ay™ channel, specifying a street canyon environment.

Configure a TGay channel System object for a street canyon environment, specifying a user configuration of single-user multiple-input/multiple-output (SU-MIMO) with two transmit antenna arrays and two receive antenna arrays. Specify the transmit antenna arrays as two-element uniform linear arrays (ULAs) and the receive antenna arrays as single isotropic elements. Use a custom beamforming method to specify the transmit and receive beamforming vectors, and specify the source of the random number stream.

```

tgay = wlanTGayChannel('SampleRate',2e9,'Environment','Street canyon hotspot', ...
    'UserConfiguration','SU-MIMO 2x2','ArraySeparation',[0.8 0.8],'ArrayPolarization',
    'TransmitArray',wlanURAConfig('Size',[1 2]),'TransmitArrayOrientation',[10; 10; 10],
    'ReceiveArray',wlanURAConfig('Size',[1 1]),'BeamformingMethod','Custom','Normalized',
    'RandomStream','mt19937ar with seed','Seed',100);


```

Display the environment of the TGay channel.

```

showEnvironment(tgay);
title('Street Canyon Hotspot with Antenna Arrays and D-Rays');

```

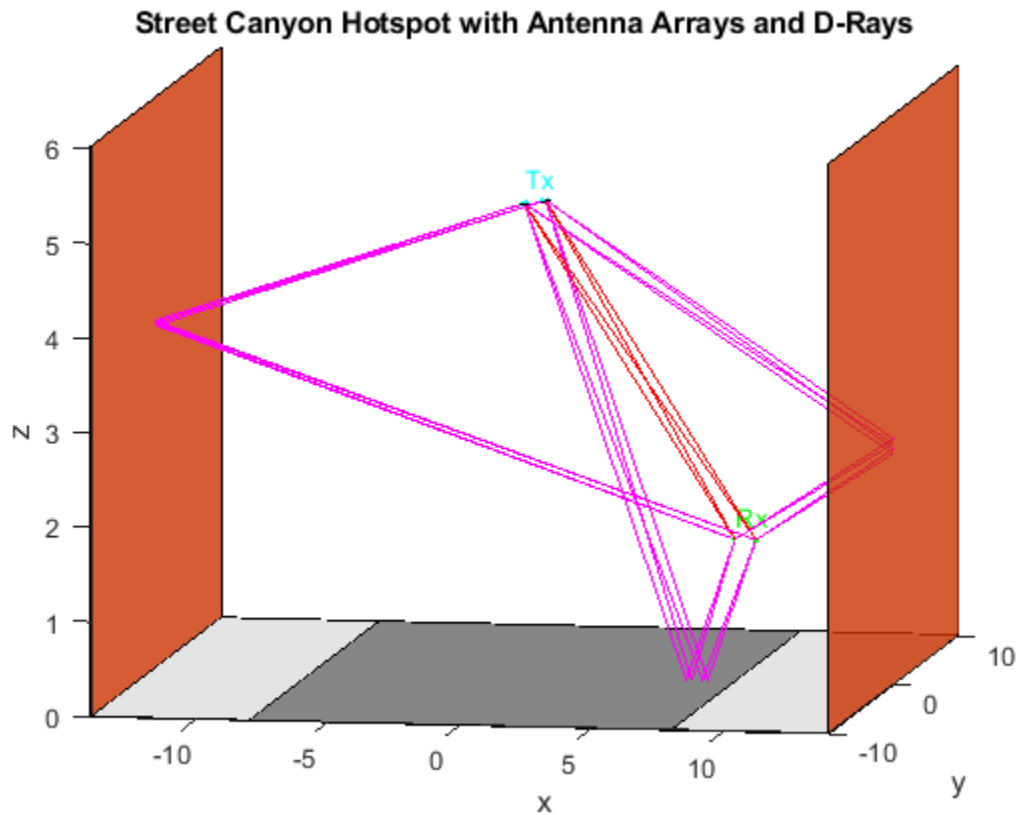

Retrieve channel characteristics by using the `info` object function.

```

tgayInfo = tgay.info;

```

Formulate the beamforming vectors in terms of the number of transmit elements, receive elements, transmit streams, and receive streams obtained from `tgayInfo`.

```
NTE = tgayInfo.NumTxElements;
NTS = tgayInfo.NumTxStreams;
NRE = tgayInfo.NumRxElements;
NRS = tgayInfo.NumRxStreams;
tgay.TransmitBeamformingVectors = ones(NTE,NTS)/sqrt(NTE);
tgay.ReceiveBeamformingVectors = ones(NRE,NRS)/sqrt(NRE);
```

Create a random input signal and filter it through the TGay channel.

```
txSignal = complex(rand(100,NTS),rand(100,NTS));
rxSignal = tgay(txSignal);
```

Display Open Area Hotspot Environment

Display the open area hotspot environment for a WLAN TGay channel model.


Configure a TGay channel System object for an open area hotspot environment, specifying a user configuration of single-user multiple-input/multiple-output (SU-MIMO) with two transmit antenna arrays and two receive antenna arrays. Specify the transmit antenna array as a 2x2 uniform rectangular array (URA) and the receive antenna arrays as single isotropic elements. Use a custom beamforming method to specify the transmit and receive beamforming vectors, and specify the source of the random number stream.

```
tgay = wlanTGayChannel('SampleRate',1e9,'Environment','Open area hotspot', ...
    'UserConfiguration','SU-MIMO 2x2','ArraySeparation',[0.6 0.6],'ArrayPolarization',
    'TransmitArray',wlanURAConfig('Size',[2 2]),'TransmitArrayOrientation',[20; 10; 10; 10],
    'ReceiveArray',wlanURAConfig('Size',[1 1]),'BeamformingMethod','Custom', ...
    'NormalizeImpulseResponses',false,'RandomStream','mt19937ar with seed','Seed',150);
```

Display the environment of the TGay channel.

```
envOnly = false;
showEnvironment(tgay,envOnly);
title('Open Area Hotspot with Antenna Arrays and D-Rays');
```


Open Area Hotspot with Antenna Arrays and D-Rays

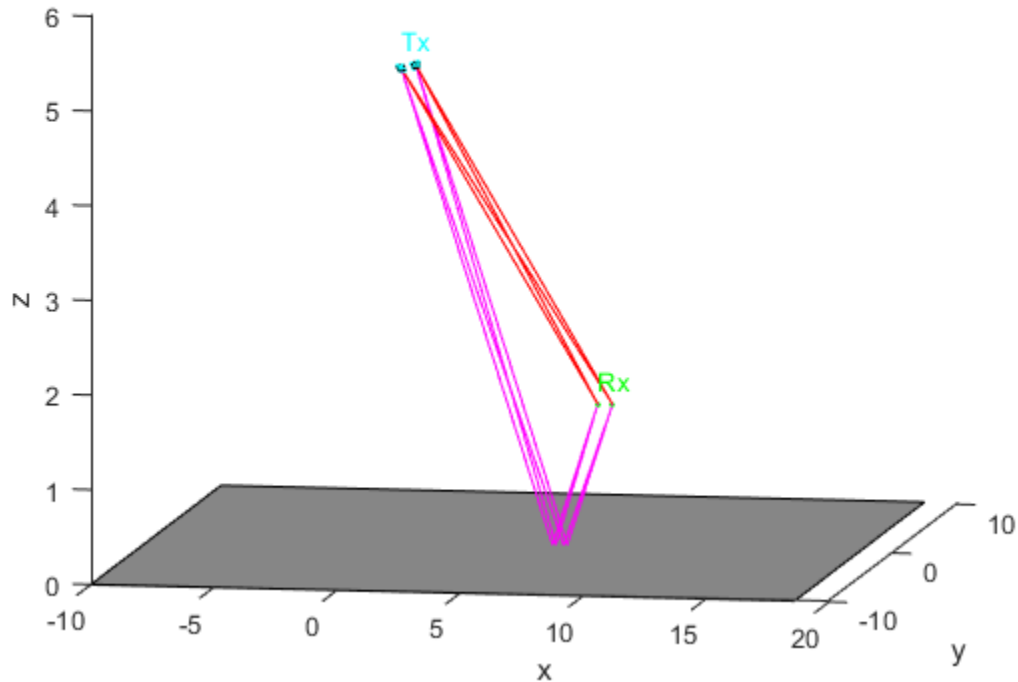

Input Arguments

tgay – TGay multipath fading channel

wlanTGayChannel System object

TGay multipath fading channel, specified as a wlanTGayChannel System object.

envOnly – Display environment without D-Rays

false (default) | true

Display environment without D-Rays, specified as a logical value of true or false. To display a schematic of the channel environment without D-Rays, set this property to

`true`. To display a schematic of the channel environment with D-Rays, set this property to `false`.

Data Types: `logical`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

`wlanTGayChannel`

Introduced in R2019a

wlanAMPDUDeaggregate

Deaggregate A-MPDU and extract MPDUs

Syntax

```
[mpduList,delimiterCRCFail,status] = wlanAMPDUDeaggregate(ampdu,
cfgPHY)
[mpduList,delimiterCRCFail,status] = wlanAMPDUDeaggregate(____
,'DataFormat',format)
```

Description

[mpduList,delimiterCRCFail,status] = wlanAMPDUDeaggregate(ampdu, cfgPHY) returns a list of medium access control (MAC) protocol data units (MPDUs), mpduList, by deaggregating the input aggregated MPDU (A-MPDU), ampdu, for the given physical layer (PHY) format configuration cfgPHY. The function also returns delimiterCRCFail, which indicates any delimiter cyclic redundancy check (CRC) failures for subframes found in ampdu, and status, which indicates the status of A-MPDU deaggregation.

[mpduList,delimiterCRCFail,status] = wlanAMPDUDeaggregate(____, 'DataFormat', format) specifies the data format of the input A-MPDU to be deaggregated.

Examples

Deaggregate VHT-Format A-MPDU

Deaggregate a very-high-throughput-format (VHT-format) A-MPDU specified in bit form.

Create a WLAN MAC frame configuration object, specifying the frame type and format.

```
cfgMAC = wlanMACFrameConfig('FrameType','QoS Data','FrameFormat','VHT');
```

Create a VHT-format configuration object with default settings.

```
cfgPHY = wlanVHTConfig;
```

Create a random payload of eight MSDUs and use it to generate an A-MPDU in octet form.

```
payload = repmat({randi([0 255],1,40)},1,8);  
ampduOctets = wlanMACFrame(payload, cfgMAC, cfgPHY);
```

Convert the A-MPDU to bit form.

```
ampdu = reshape(de2bi(hex2dec(ampduOctets),8)', [], 1);
```

Return the list of MPDUs by deaggregating the A-MPDU.

```
[mpduList, delimiterCRCFail, status] = wlanAMPDUDeaggregate(ampdu, cfgPHY);
```

Deaggregate HT-Format A-MPDU

Deaggregate a high-throughput-format (HT-format) A-MPDU, specified in octet form.

Create a WLAN MAC frame configuration object, specifying the frame type, frame format, and MPDU aggregation.

```
cfgMAC = wlanMACFrameConfig('FrameType', 'QoS Data', 'FrameFormat', 'HT-Mixed', 'MPDUAggregation', 1);
```

Create an HT-format configuration object, specifying MPDU aggregation.

```
cfgPHY = wlanHTConfig('AggregatedMPDU', 1);
```

Create a random payload of eight MSDUs and use it generate an A-MPDU in octet form.

```
payload = repmat({randi([0 255],1,40)},1,8);  
ampdu = wlanMACFrame(payload, cfgMAC, cfgPHY);
```

Return the list of MPDUs by deaggregating the A-MPDU.

```
[mpduList, delimiterCRCFail, status] = wlanAMPDUDeaggregate(ampdu, cfgPHY, 'DataFormat', 'Octet');
```

Decode MPDUs Extracted from A-MPDU

Deaggregate a VHT-format A-MPDU and decode the extracted MPDUs.

Create a WLAN MAC frame configuration object for a VHT-format A-MPDU.

```
txCfgMAC = wlanMACFrameConfig('FrameType','QoS Data','FrameFormat','VHT');
```

Create a VHT-format configuration object with default settings.

```
cfgPHY = wlanVHTConfig;
```

Generate a random payload of eight MSDUs.

```
txPayload = repmat({randi([0 255],1,40)},1,8);
```

Generate the A-MPDU containing eight MPDUs for the specified MAC and PHY configurations.

```
ampdu = wlanMACFrame(txPayload,txCfgMAC,cfgPHY);
```

Return the list of MPDUs by deaggregating the A-MPDU. Display the status of the deaggregation and the delimiter CRC.

```
[mpduList, delimiterCRCFail, status] = ...
    wlanAMPDUDeaggregate(ampdu, cfgPHY, 'DataFormat', 'octets');
disp(status)
```

```
    Success
```

```
disp(delimiterCRCFail)
```

```
    0    0    0    0    0    0    0    0
```

Decode all the MPDUs in the extracted list.

```
if strcmp(status, 'Success')
    for i = 1:numel(mpduList)
        if ~delimiterCRCFail(i)
            [cfgMAC, payload, decodeStatus] = ...
                wlanMPDUDecode(mpduList{i}, cfgPHY, 'DataFormat', 'octets');
        end
    end
end
```

Input Arguments

ampdu — A-MPDU to be deaggregated

binary vector | numeric vector | string scalar | character array

A-MPDU to be deaggregated, specified as one of these values:

- a binary vector representing the A-MPDU in bit format;
- a numeric vector representing octets in decimal format, where each element is an integer in the interval [0, 255];
- a string scalar representing the A-MPDU as octets in hexadecimal format;
- a character vector representing the A-MPDU as octets in hexadecimal format;
- a character array, where each row represents an octet in hexadecimal format.

Data Types: double | char | string

cfgPHY — PHY format configuration

wlanHESUConfig object | wlanVHTConfig object | wlanHTConfig object

PHY format configuration, specified as an object of type `wlanHESUConfig`, `wlanVHTConfig`, or `wlanHTConfig`. This object defines the PHY format configuration and its applicable properties.

format — Format of the input A-MPDU

'bits' (default) | 'octets'

Format of the input A-MPDU, specified as 'bits' or 'octets'.

Data Types: string

Output Arguments

mpduList — List of MPDUs

cell array of character arrays

List of MPDUs, returned as a cell array of character arrays, where each character array corresponds to one MPDU. In these character arrays, each row is the hexadecimal representation of an octet.

If no MPDU delimiter is found in the input A-MPDU, the function returns `mpduList` as an empty cell array.

Data Types: `cell`

delimiterCRCFail — Delimiter CRC failure indicator

row vector of logical values

Delimiter CRC failure indicator, returned as a row vector of logical values. Each element of `delimiterCRCFail` indicates the delimiter CRC failure status for an A-MPDU subframe.

A value of 1 for the k th element of `delimiterCRCFail` indicates that the delimiter CRC failed for the k th A-MPDU subframe. In this case, the k th element of `mpduList` contains an MPDU that might be invalid.

A value of 0 for the k th element of `delimiterCRCFail` indicates that the delimiter CRC passed for the k th subframe. In this case, the k th element of `mpduList` contains a valid MPDU.

Data Types: `logical`

status — Status of A-MPDU deaggregation

nonpositive integer

Status of A-MPDU deaggregation, returned as a nonpositive integer in the interval $[-20, 0]$. Each enumeration value of `status` corresponds to a member of the `wlanMACDecodeStatus` enumeration class, which indicates the status of MAC frame parsing according to this table.

Enumeration value	Member of enumeration class	Decoding Status
0	Success	MAC frame successfully decoded
-1	FCSFailed	Frame check sequence (FCS) failed
-2	InvalidProtocolVersion	Invalid protocol version
-3	UnsupportedFrameType	Unsupported frame type

-4	UnsupportedFrameSubtype	Unsupported frame subtype
-5	NotEnoughData	Insufficient data to decode the frame
-6	UnsupportedBAVariant	Unsupported variant of Block Ack frame
-7	UnknownBitmapSize	Unknown bitmap size
-8	UnknownAddressExtMode	Unknown address extension mode
-9	MalformedAMSDULength	Malformed aggregated MAC service data unit (A-MSDU) with invalid length
-10	MalformedSSID	Malformed service set identifier (SSID) information element (IE)
-11	MalformedSupportedRatesIE	Malformed supported rates IE
-12	MalformedIELength	Malformed IE length field
-13	MissingMandatoryIEs	Mandatory IEs missing
-14	NoMPDUFound	No MPDU found in the A-MPDU
-15	CorruptedAMPDU	All the delimiters in the given A-MPDU failed the cyclic redundancy check (CRC)
-16	InvalidDelimiterLength	Invalid length field in MPDU delimiter
-17	MaxAMSDULengthExceeded	A-MSDU exceeded the maximum length limit
-18	MaxMPDULengthExceeded	MPDU exceeded the maximum length limit
-19	MaxMMPDULengthExceeded	MAC management frame exceeded the maximum length limit

-20	MaxMSDULengthExceeded	MSDU exceeded the maximum length limit
-----	-----------------------	--

An enumeration value other than 0 means that A-MPDU deaggregation stopped because the input A-MPDU is corrupt or malformed.

Data Types: int16

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanMACFrame | wlanMPDUDecode

Objects

wlanMACFrameConfig | wlanMACManagementConfig

Introduced in R2019a

wlanAPEPLength

Calculate APEP length in octets

Syntax

```
APEPLength = wlanAPEPLength(cfgPHY,unit,value)
```

Description

`APEPLength = wlanAPEPLength(cfgPHY,unit,value)` returns `APEPLength`, the aggregate MAC protocol data unit (A-MPDU) pre-EOF padding (APEP) length, in octets from the given `value` and the physical layer configuration, `cfgPHY`. The units of `value` can be in terms of physical layer conformance procedure (PLCP) protocol data unit (PPDU) transmission time or number of data symbols, specified by the `unit` input argument.

Examples

Generate VHT Waveform with Specified Transmission Time

Create a `wlanVHTConfig` object, `'cfgPHY'`, and specify the transmission time, `'txTime'`, in microseconds.

```
cfgPHY = wlanVHTConfig;  
txTime = 200;
```

Calculate the APEP length in octets.

```
aepLength = wlanAPEPLength(cfgPHY,'TxTime',txTime)
```

```
aepLength = 580
```

Set the number of bytes carried in the user payload for the configuration object, `'cfgPHY'`, to this APEP length.

```
cfgPHY.APEPLength = apepLength;
```

Create a wlanMACFrameConfig object, 'cfgMAC'. Use this object to generate a VHT-format QoS data frame.

```
cfgMAC = wlanMACFrameConfig('FrameType', 'QoS Data', ...
    'FrameFormat', 'VHT');
```

Calculate the MAC service data unit (MSDU) lengths required to generate a MAC frame of size 'APEPLength'.

```
msduLengths = wlanMSDULengths(apepLength, cfgMAC, cfgPHY);
```

Create random MSDUs using 'msduLengths'.

```
msduList = cell(1, numel(msduLengths));
for i = 1:numel(msduLengths)
    msduList{i} = randi([0 255], 1, msduLengths(i));
end
```

Generate MAC frame bits using the MSDUs, 'msduList'.

```
macFrameBits = wlanMACFrame(msduList, cfgMAC, cfgPHY, 'OutputFormat', 'bits');
```

Generate a VHT waveform using 'cfgPHY' and the generated MAC frame bits, 'macFrameBits'.

```
waveform = wlanWaveformGenerator(macFrameBits, cfgPHY);
```

Generate HE-SU Waveform with Specified Number of Data Symbols

Create a wlanHESUConfig object, 'cfgPHY'.

```
cfgPHY = wlanHESUConfig;
```

Calculate the APEP length in octets, specifying 200 data symbols.

```
apepLength = wlanAPEPLength(cfgPHY, 'NumDataSymbols', 200)
```

```
apepLength = 2916
```

Set the number of bytes carried in the user payload for the configuration object, 'cfgPHY', to this APEP length. Calculate the PSDU length.

```
cfgPHY.APEPLength = apepLength;  
psduLength = getPSDULength(cfgPHY)*8;
```

Create a random PSDU, 'psdu', using the calculated PSDU length.

```
psdu = randi([0 1],getPSDULength(cfgPHY)*8,1);
```

Generate an HE-SU waveform using 'cfgPHY' and 'psdu'.

```
waveform = wlanWaveformGenerator(psdu, cfgPHY);
```

Input Arguments

cfgPHY — PHY format configuration

wlanHESUConfig object | wlanVHTConfig object

PHY format configuration, specified a wlanHESUConfig or wlanVHTConfig object. This object defines a PHY format configuration and its applicable properties.

unit — Units of argument value

'TxTime' | 'NumDataSymbols'

Units of argument value, specified as one of 'TxTime' or 'NumDataSymbols'. This value indicates the units of value from which the APEP length is calculated.

Data Types: char | string

value — Value from which APEP length is calculated

numeric scalar

Value from which APEP length is calculated, specified as a numeric scalar. Input argument unit specifies the unit of value. This table describes how the function interprets value based on unit.

unit Value	value Description
'TxTime'	Scalar number specifying the time in microseconds
'NumDataSymbols'	Scalar number specifying the number of data symbols

Data Types: double

Output Arguments

APEPLength — Length of APEP
numeric scalar

Length of APEP, in octets, returned as a numeric scalar.

Data Types: double

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanMSDULengths | wlanPSDULength

Introduced in R2019b

wlanBCCDecode

Convolutionally decode input data

Syntax

```
y = wlanBCCDecode(sym, rate)
y = wlanBCCDecode(sym, rate, decType)
y = wlanBCCDecode(sym, rate, tDepth)
y = wlanBCCDecode(sym, rate, decType, tDepth)
```

Description

`y = wlanBCCDecode(sym, rate)` convolutionally decodes the input `sym` using a binary convolutional code (BCC) at the specified `rate`. The BCC is defined in IEEE 802.11-2012 Sections 18.3.5.6 and 20.3.11.6.

`y = wlanBCCDecode(sym, rate, decType)` specifies the decoding type of the Viterbi decoding algorithm.

`y = wlanBCCDecode(sym, rate, tDepth)` specifies the traceback depth of the Viterbi decoding algorithm.

`y = wlanBCCDecode(sym, rate, decType, tDepth)` specifies the decoding type and the traceback depth. `decType` and `tDepth` can be placed in any order after `rate`.

Examples

BCC-Decode Two Encoded Streams

Decode two encoded streams of soft bits by using a BCC of rate 1/2.

Create the sequence of data bits.

```
dataBits = randi([0 1],100,1,'int8');
```

Parse the data bits as defined in IEEE® 802.11™-2012 Section 20.3.11.5 and IEEE® 802.11ac™-2013 Section 22.3.10.5.2. numES is the number of encoded streams.

```
numES = 2;
parsedData = reshape(dataBits,numES,[]).';
```

BCC-encode the parsed sequence.

```
encodedData = wlanBCCEncode(parsedData, '1/2');
```

Convert the encoded bits to soft bits (i.e. LLR demodulation).

```
demodData = double(1-2*encodedData);
```

BCC-decode the demodulated data.

```
decodedData = wlanBCCDecode(demodData, '1/2');
```

Deparse the decoded data.

```
deparsedData = reshape(decodedData.', [], 1);
```

Verify that the decoded data matches the original data.

```
isequal(dataBits,deparsedData)
```

```
ans = logical
      1
```

BCC-Decode Soft Bits

Decode a sequence of soft bits by using a BCC of rate 3/4 and a traceback depth of 60.

Create the sequence of data bits.

```
dataBits = randi([0 1],300,1);
```

BCC-encode the sequence of bits.

```
encodedData = wlanBCCEncode(dataBits,3/4);
```

Convert the encoded bits to soft bits (i.e. LLR demodulation).

```
demodData = 1-2*encodedData;
```

BCC-decode the demodulated bits.

```
tDepth = 60;  
decodedData = wlanBCCDecode(demodData,3/4,tDepth);
```

Verify that the decoded data matches the original data.

```
isequal(dataBits,decodedData)
```

```
ans = logical  
     1
```

BCC-Decode Hard Bits

Decode a sequence of hard bits by using a BCC of rate 3/4 and a traceback depth of 45.

Create the sequence of data bits.

```
dataBits = randi([0 1],300,1,'int8');
```

BCC-encode the sequence of bits.

```
encodedData = wlanBCCEncode(dataBits,'2/3');
```

Perform hard BCC decoding on the encoded bits. Specify a traceback depth 45.

```
tDepth = 45;  
decodedBits = wlanBCCDecode(encodedData,'2/3','hard',tDepth);
```

Verify that the decoded bits match the original bits.

```
isequal(dataBits,decodedBits)
```

```
ans = logical  
     1
```


Input Arguments

sym — Input sequence

matrix

Input sequence of symbols to decode, specified as a numeric matrix of integers. The number of columns must be the number of encoded streams. Each stream is encoded separately. When `decType` is 'soft' or not specified, `sym` must be a real matrix with log-likelihood ratios. Positive values represent a logical 0 and negative values represent a logical 1.

Data Types: double | int8

rate — Code rate

1/2 | 2/3 | 3/4 | 5/6

Code rate of the binary convolutional code (BCC), specified as a scalar, character array, or string scalar. `rate` must be a numeric value equal to 1/2, 2/3, 3/4, or 5/6, or a character vector or string scalar equal to '1/2', '2/3', '3/4', or '5/6'.

Example: '3/4'

Data Types: double | char | string

decType — Decoding type

'soft' (default) | 'hard'

Decoding type of the binary convolutional code (BCC), specified as a character vector or a string scalar. It can be 'hard' for a hard input Viterbi algorithm, or 'soft' for a soft input Viterbi algorithm without any quantization.

Data Types: char | string

tDepth — Traceback depth

positive integer

Traceback depth of the Viterbi decoding algorithm, specified as a positive integer less than or equal to the number of input symbols in `sym`.

Example: `y = wlanBCCDecode(sym, '1/2', 'hard', 50)`

Data Types: double

Output Arguments

y — Binary convolutionally decoded output

matrix

Binary convolutionally decoded output, returned as a binary matrix of integers. The number of rows of **y** is equal to the number of rows of input **sym** multiplied by **rate**, rounded to the next integer. The number of columns of **y** is equal to the number of columns of **sym**.

Data Types: `int8`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`vitdec` | `wlanBCCEncode`

Introduced in R2017b

wlanBCCDeinterleave

Deinterleave binary convolutionally interleaved input

Syntax

```
y = wlanBCCDeinterleave(bits,type,numCBPSSI,cbw)
y = wlanBCCDeinterleave(bits,type,numCBPSSI)
```

Description

`y = wlanBCCDeinterleave(bits,type,numCBPSSI,cbw)` outputs the binary convolutionally deinterleaved input `bits` for a specified interleaver `type`, as defined in IEEE 802.11-2012 Section 18.3.5.7, IEEE 802.11ac-2013 Section 22.3.10.8, and IEEE 802.11ah™ Section 24.3.9.8. `numCBPSSI` specifies the number of coded bits per OFDM symbol per spatial stream per interleaver block and `cbw` specifies the channel bandwidth.

`y = wlanBCCDeinterleave(bits,type,numCBPSSI)` outputs the deinterleaved input `bits` for the non-HT interleaver `type`.

Examples

Interleave and Deinterleave VHT Data Field

Perform BCC interleaving and deinterleaving for the VHT interleaving type.

Define the input parameters. Set the number of coded bits per OFDM symbol per spatial stream per interleaver block to 52, the channel bandwidth to 20Mhz and the number of spatial streams, named as `numSS`, to 4.

```
numCBPSSI = 52;
chanBW = 'CBW20';
numSS = 4;
```

Create a sequence of bits for two OFDM symbols, four spatial streams, and one segment.

```
bits = randi([0 1],(2*numCBPSSI),numSS,1);
```

Perform BCC interleaving on the bits.

```
intBits = wlanBCCInterleave(bits, 'VHT', numCBPSSI, chanBW);
```

Perform BCC deinterleaving on the interleaved bits.

```
out = wlanBCCDeinterleave(intBits, 'VHT', numCBPSSI, chanBW);
```

Verify that the deinterleaved data matches the original data.

```
isequal(bits,out)
```

```
ans = logical  
     1
```

Interleave and Deinterleave Non-HT Data Field

Perform BCC interleaving and deinterleaving for the non-HT interleaving type.

Define the input parameters. Set the number of coded bits per OFDM symbol per spatial stream per interleaver block to 48.

```
numCBPSSI = 48;
```

Create a sequence of random bits for one OFDM symbol, one spatial stream, and one segment.

```
bits = randi([0 1],numCBPSSI,1);
```

Perform BCC interleaving on the bits.

```
intBits = wlanBCCInterleave(bits, 'Non-HT', numCBPSSI);
```

Perform BCC deinterleaving on the interleaved bits.

```
out = wlanBCCDeinterleave(intBits, 'Non-HT', numCBPSSI);
```

Verify that the deinterleaved data matches the original data.

```
isequal(bits,out)
```

ans = logical
1

Input Arguments

bits — Input sequence

matrix | 3-D array

Input sequence containing binary convolutionally interleaved data, specified as an $(N_{\text{CBPSSI}} \times N_{\text{SYM}})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
 - If type= 'Non-HT', then N_{SS} must be 1.
 - If type= 'VHT', then N_{SS} must be from 1 to 8.
- N_{SEG} is the number of segments.

Data Types: double

type — Type of interleaving

'VHT' | 'Non-HT'

The type of interleaving, specified as 'VHT' or 'Non-HT'.

Data Types: char | string

numCBPSSI — Number of coded bits per OFDM symbol per spatial stream per interleaver block

positive integer

Number of coded bits per OFDM symbol per spatial stream per interleaver block specified as a positive integer. As defined in IEEE 802.11ac-2013 Table 22-6, the value of numCBPSSI depends on the interleaving type:

'Non-HT'	$N_{\text{SD}} \times N_{\text{BPSCS}}$
----------	---

'VHT'	$N_{SD} \times N_{BPSCS} / N_{SEG}$
-------	-------------------------------------

where:

- N_{SD} is the number of data subcarriers.
- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream, specified as 1, 2, 4, 6, or 8.
- N_{SEG} is the number of segments.

When `type= 'Non-HT'`, `numCBPSSI` can be 48, 96, 192, 288, and 384, since $N_{CBPSSI} = 48 \times N_{BPSCS}$.

When `type= 'VHT'`, `numCBPSSI` can be 24, 48, 96, 144, and 192, since $N_{CBPSSI} = 24 \times N_{BPSCS}$.

Data Types: double

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW10' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW10', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. When the interleaver type is set to 'Non-HT', then `cbw` is optional.

Data Types: char | string

Output Arguments

y — Deinterleaved output

matrix | 3-D array

Deinterleaved output, returned as an $(N_{CBPSSI} \times N_{SYM})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
- N_{SEG} is the number of segments.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`convdeintrlv` | `wlanBCCInterleave`

Introduced in R2017b

wlanBCCEncode

Convolutionally encode binary data

Syntax

```
y = wlanBCCEncode(bits,rate)
```

Description

`y = wlanBCCEncode(bits,rate)` convolutionally encodes the binary input `bits` using a binary convolutional code (BCC) at the specified `rate`. The BCC is defined in IEEE 802.11-2012 Sections 18.3.5.6 and 20.3.11.6.

Examples

BCC-Encode Bits

Encode a sequence of data bits by using a BCC of rate 3/4.

Create the sequence of data bits.

```
dataBits = randi([0 1],300,1);
```

BCC-encode the data bits.

```
encodedData = wlanBCCEncode(dataBits,'3/4');  
size(encodedData)
```

```
ans = 1×2
```

```
400    1
```


BCC-Encode Two Streams

Encode two streams of data bits by using a BCC of rate 1/2.

Create the sequence of data bits.

```
dataBits = randi([0 1],100,1,'int8');
```

Parse the sequence of bits as defined in IEEE® 802.11™-2012 Section 20.3.11.5 and IEEE® 802.11ac™-2013 Section 22.3.10.5.2. numES is the number of encoded streams.

```
numES = 2;
parsedData = reshape(dataBits,numES,[]).';
```

BCC-encode the parsed sequence.

```
encodedData = wlanBCCEncode(parsedData,1/2);
size(encodedData)
```

```
ans = 1×2
```

```
100    2
```

Input Arguments

bits — Input sequence

matrix

Input sequence with data bits to encode, specified as a binary matrix. The number of columns must equal the number of encoded streams. Each stream is encoded separately.

Data Types: double | int8

rate — Code rate

1/2 | 2/3 | 3/4 | 5/6

Code rate of the binary convolutional code (BCC), specified as a scalar, character array, or string scalar. **rate** must be a numeric value equal to 1/2, 2/3, 3/4, or 5/6, or a character vector or string scalar equal to '1/2', '2/3', '3/4', or '5/6'.

Example: '1/2'

Data Types: `double` | `char` | `string`

Output Arguments

y — Binary convolutionally encoded output
matrix

Binary convolutionally encoded output, returned as a binary matrix of the same type of bits. The number of rows of `y` is the result of dividing the number of rows of input `bits` by `rate`, rounded to the next integer. The number of columns of `y` is equal to the number of columns of `bits`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`convenc` | `wlanBCCDecode`

Introduced in R2017b

wlanBCCInterleave

Interleave binary convolutionally encoded input

Syntax

```
y = wlanBCCInterleave(bits,type,numCBPSSI,cbw)
y = wlanBCCInterleave(bits,type,numCBPSSI)
```

Description

`y = wlanBCCInterleave(bits,type,numCBPSSI,cbw)` outputs the interleaved binary convolutionally encoded (BCC) input `bits` for a specified interleaver `type`, as defined in IEEE 802.11-2012 Section 18.3.5.7, IEEE 802.11ac-2013 Section 22.3.10.8, and IEEE 802.11ah Section 24.3.9.8. `numCBPSSI` specifies the number of coded bits per OFDM symbol per spatial stream per interleaver block and `cbw` specifies the channel bandwidth.

`y = wlanBCCInterleave(bits,type,numCBPSSI)` outputs the interleaved input `bits` for the non-HT interleaver `type`.

Examples

Interleave VHT Data Field

Perform BCC interleaving for the 'VHT' interleaving type.

Define the input parameters. Set the number of coded bits per OFDM symbol per spatial stream per interleaver block to 52, the channel bandwidth to 20Mhz and the number of spatial streams, named as `numSS`, to 4.

```
numCBPSSI = 52;
cbw = 'CBW20';
numSS = 4;
```

Create a sequence of bits for two OFDM symbols, four spatial streams, and one segment.

```
inBits = randi([0 1],(2*numCBPSSI),numSS,1,'int8');
```

Perform BCC interleaving on the bits.

```
out = wlanBCCInterleave(inBits,'VHT',numCBPSSI,cbw);
```

Interleave Non-HT Data Field

Perform BCC interleaving for the non-HT interleaving type.

Define the input parameters. Set the number of coded bits per OFDM symbol per spatial stream per interleaver block to 48.

```
numCBPSSI = 48;
```

Create a sequence of random bits for one OFDM symbol, one spatial stream, and one segment.

```
inBits = randi([0 1],numCBPSSI,1);
```

Perform BCC interleaving on the bits.

```
out = wlanBCCInterleave(inBits,'Non-HT',numCBPSSI);
```

Compare the original sequence with the interleaved one.

```
[inBits out]
```

```
ans = 48×2
```

```
1     1
1     0
0     0
1     1
1     1
0     0
0     0
1     1
1     0
1     1
```

```

:

```

Interleave Sequence

Get the interleaving sequence of a non-HT interleaver type.

Define the input parameters. Set the number of coded bits per OFDM symbol per spatial stream per interleaver block to 192.

```
numCBPSSI = 192;
```

Create a numeric sequence from 1 to numCBPSSI.

```
seq = (1:numCBPSSI).';
```

Perform BCC interleaving on the numeric sequence.

```
intSeq = wlanBCCInterleave(seq, 'Non-HT', numCBPSSI);
intSeq(1:10)
```

```
ans = 10×1
```

```

     1
    17
    33
    49
    65
    81
    97
   113
   129
   145

```

Input Arguments

bits — Input sequence

matrix | 3-D array

Input sequence containing binary convolutionally encoded (BCC) data, specified as an $(N_{\text{CBPSSI}} \times N_{\text{SYM}})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
 - If `type= 'Non-HT'`, then N_{SS} must be 1.
 - If `type= 'VHT'`, then N_{SS} must be from 1 to 8.
- N_{SEG} is the number of segments.

Data Types: `double` | `int8`

type — Type of interleaving

`'VHT'` | `'Non-HT'`

The type of interleaving, specified as `'VHT'` or `'Non-HT'`.

Data Types: `char` | `string`

numCBPSSI — Number of coded bits per OFDM symbol per spatial stream per interleaver block

positive integer

Number of coded bits per OFDM symbol per spatial stream per interleaver block specified as a positive integer. As defined in IEEE 802.11ac-2013 Table 22-6, the value of `numCBPSSI` depends on the interleaving type:

<code>'Non-HT'</code>	$N_{\text{SD}} \times N_{\text{BPSCS}}$
<code>'VHT'</code>	$N_{\text{SD}} \times N_{\text{BPSCS}} / N_{\text{SEG}}$

where:

- N_{SD} is the number of data subcarriers.
- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream, specified as 1, 2, 4, 6, or 8.
- N_{SEG} is the number of segments.

When `type= 'Non-HT'`, `numCBPSSI` can be 48, 96, 192, 288, and 384, since $N_{\text{CBPSSI}} = 48 \times N_{\text{BPSCS}}$.

When `type = 'VHT'`, `numCBPSSI` can be 24, 48, 96, 144, and 192, since $N_{\text{CBPSSI}} = 24 \times N_{\text{BPSCS}}$.

Data Types: `double`

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW10' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW10', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. When the interleaver type is set to 'Non-HT', then `cbw` is optional.

Data Types: `char` | `string`

Output Arguments

y — Interleaved output

`matrix` | 3-D array

Interleaved output, returned as an $(N_{\text{CBPSSI}} \times N_{\text{SYM}})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
- N_{SEG} is the number of segments.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`convintrlv` | `wlanBCCDeinterleave`

Introduced in R2017b

wlanClosestReferenceSymbol

Find closest constellation points

Syntax

```
refSym = wlanClosestReferenceSymbol(sym,mod)
refSym = wlanClosestReferenceSymbol(sym,mod,phase)

refSym = wlanClosestReferenceSymbol(sym,cfg)
refSym = wlanClosestReferenceSymbol(sym,cfg,userNumber)
```

Description

`refSym = wlanClosestReferenceSymbol(sym,mod)` returns the constellation points closest to equalized symbols `sym` for modulation scheme `mod`.

`refSym = wlanClosestReferenceSymbol(sym,mod,phase)` returns the constellation points closest to the equalized symbols with counterclockwise rotation `phase`.

`refSym = wlanClosestReferenceSymbol(sym,cfg)` returns the constellation points closest to the equalized symbols for `cfg`, a configuration object that parameterizes a single-user (SU) transmission or a recovered high-efficiency (HE) transmission.

`refSym = wlanClosestReferenceSymbol(sym,cfg,userNumber)` returns the constellation points closest to the equalized symbols for the user specified by `userNumber` in a multiuser (MU) transmission and MU-format configuration object `cfg`.

Examples

Find Closest Reference Symbols for 64-QAM

Find the closest reference symbols to a received set of noisy symbols for 64-QAM.

Create a high-efficiency single-user-format (HE-SU-format) configuration object, specifying a modulation and coding scheme (MCS) with 64-QAM.

```
cfg = wlanHESUConfig('MCS',6);
```

Obtain the PSDU length.

```
psduLength = getPSDULength(cfg);
```

Generate a waveform for a payload of randomly generated bits and the specified configuration.

```
bits = randi([0 1],8*psduLength,1,'int8');  
waveform = wlanWaveformGenerator(bits, cfg);
```

Generate noise to be added to the signal, specifying the signal-to-noise ratio (SNR).

```
SNR = 10;  
rxWaveform = awgn(waveform, SNR);
```

Get the field indices and extract the HE-Data field.

```
ind = wlanFieldIndices(cfg);  
sym = rxWaveform(ind.HEData(1):ind.HEData(2));
```

Find the closest reference symbols for the specified modulation scheme.

```
mod = '64QAM';  
refSym = wlanClosestReferenceSymbol(sym, mod);
```

Find Nearest Reference Symbols for DMG-Format Configuration

Find the closest reference symbols to a received set of noisy symbols in a DMG-format configuration.

Create a DMG-format configuration object, specifying the MCS.

```
cfg = wlanDMGConfig('MCS',10);
```

Generate a waveform for a payload of randomly generated bits and the specified configuration.

```
bits = randi([0 1],8*cfg.PSDULength,1,'int8');
waveform = wlanWaveformGenerator(bits,cfg);
```

Generate noise to be added to the signal, specifying the SNR.

```
SNR = 10;
rxWaveform = awgn(waveform,SNR);
```

Get the field indices and extract the DMG-Data field.

```
ind = wlanFieldIndices(cfg);
sym = rxWaveform(ind.DMGData(1):ind.DMGData(2));
```

Find the closest reference symbols for the specified configuration.

```
refSym = wlanClosestReferenceSymbol(sym,cfg);
```

Input Arguments

sym — Equalized symbols

complex-valued array

Equalized symbols, specified as a complex-valued array.

Data Types: double

Complex Number Support: Yes

mod — Modulation scheme

'BPSK' | 'pi/2-BPSK' | 'QPSK' | 'pi/2-QPSK' | '16QAM' | 'pi/2-16QAM' | '64QAM'
| 'pi/2-64QAM' | '256QAM' | '1024QAM'

Modulation scheme, specified as one of these values:

- 'BPSK' - Indicates binary phase-shift keying (BPSK)
- 'pi/2-BPSK' - Indicates $\pi/2$ -BPSK
- 'QPSK' - Indicates quadrature phase-shift keying (QPSK)
- 'pi/2-QPSK' - Indicates $\pi/2$ -QPSK
- '16QAM' - Indicates 16-point quadrature amplitude modulation (16-QAM)
- 'pi/2-16QAM' - Indicates $\pi/2$ -16-QAM

- '64QAM' - Indicates 64-QAM
- 'pi/2-64QAM' - Indicates $\pi/2$ -64-QAM
- '256QAM' - Indicates 256-QAM
- '1024QAM' - Indicates 1024-QAM

Data Types: char | string

phase — Counterclockwise rotation

real-valued scalar (default) | real-valued row vector

Counterclockwise rotation, in radians, specified as a real-valued scalar or real-valued row vector. To return reference symbols for different phases, specify phase as a row vector in which each element represents a chosen phase.

Note The rotations you specify in phase apply only to the constellation points returned in refSym, and not to the equalized symbols specified in sym.

Data Types: double

cfg — PHY format configuration

wlanHESUConfig object | wlanHEMUConfig object | wlanHERRecoveryConfig object | wlanDMGConfig object | wlanSIGConfig object | wlanVHTConfig object | wlanHTConfig object | wlanNonHTConfig object

Physical layer (PHY) format configuration, specified as one of these objects: wlanHESUConfig, wlanHEMUConfig, wlanHERRecoveryConfig, wlanDMGConfig, wlanSIGConfig, wlanVHTConfig, wlanHTConfig, or wlanNonHTConfig.

userNumber — Number assigned to user of interest

positive integer

Number assigned to user of interest, specified as a positive integer in the interval $[1, N_u]$, where N_u is the number users in the transmission.

This argument is required when you specify the cfg input as an object of type wlanHEMUConfig, wlanSIGConfig, or wlanVHTConfig.

If cfg is a wlanHEMUConfig object, N_u is equal to the number of elements in the value of its User property. If cfg is a wlanSIGConfig or wlanVHTConfig object, N_u is equal to the value of its NumUsers.

Dependencies

This argument applies only when the `cfg` input is an object of type `wlanHEMUConfig`, `wlanSIGConfig`, or `wlanVHTConfig`.

Data Types: `double`

Output Arguments

refSym — Constellation points closest to input symbols

complex-valued column vector

Constellation points closest to input symbols, returned as a complex-valued column vector. Each entry of `refSym` is the constellation point closest to the corresponding entry of the `sym` input; `refSym` is the same size as `sym`.

Data Types: `double`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanReferenceSymbols`

Objects

`comm.EVM`

Introduced in R2019a

wlanCoarseCFOEstimate

Coarse estimate of carrier frequency offset

Syntax

```
f0ffset = wlanCoarseCFOEstimate(rxSig,cbw)
f0ffset = wlanCoarseCFOEstimate(rxSig,cbw,corr0ffset)
```

Description

`f0ffset = wlanCoarseCFOEstimate(rxSig,cbw)` returns a coarse estimate of the carrier frequency offset (CFO) given received time-domain “L-STF” on page 2-80¹ samples and channel bandwidth.

`f0ffset = wlanCoarseCFOEstimate(rxSig,cbw,corr0ffset)` returns a coarse estimate given correlation offset, `corr0ffset`.

Examples

Coarse Estimate of CFO for Non-HT Waveform

Create a non-HT configuration object.

```
nht = wlanNonHTConfig;
```

Generate a non-HT waveform.

```
txSig = wlanWaveformGenerator([1;0;0;1],nht);
```

Create a phase and frequency offset object and introduce a 2 kHz frequency offset.

1. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
pfOffset = comm.PhaseFrequencyOffset('SampleRate',20e6,'FrequencyOffset',2000);
rxSig = pfOffset(txSig);
```

Extract the L-STF.

```
ind = wlanFieldIndices(nht,'L-STF');
rxLSTF = rxSig(ind(1):ind(2),:);
```

Estimate the frequency offset from the L-STF.

```
freqOffsetEst = wlanCoarseCFOEstimate(rxLSTF,'CBW20')
freqOffsetEst = 2.0000e+03
```

Estimate and Correct CFO for VHT Waveform with Correlation Offset

Estimate the frequency offset for a VHT signal passing through a noisy, TGac channel. Correct for the frequency offset.

Create a VHT configuration object and create the L-STF.

```
vht = wlanVHTConfig;
txstf = wlanLSTF(vht);
```

Set the channel bandwidth and sample rate.

```
cbw = 'CBW80';
fs = 80e6;
```

Create TGac and thermal noise channel objects. Set the delay profile of the TGac channel to 'Model-C'. Set the noise figure of the thermal noise channel to 9 dB.

```
tgacChan = wlanTGacChannel('SampleRate',fs,'ChannelBandwidth',cbw, ...
    'DelayProfile','Model-C','LargeScaleFadingEffect','PathLoss');

noise = comm.ThermalNoise('SampleRate',fs,'NoiseMethod','Noise figure', ...
    'NoiseFigure',9);
```

Pass the L-STF through the noisy TGac channel.

```
rxstfNoNoise = tgacChan(txstf);
rxstf = noise(rxstfNoNoise);
```

Create a phase and frequency offset object and introduce a 750 Hz frequency offset.

```
pfOffset = comm.PhaseFrequencyOffset('SampleRate', fs, ...  
    'FrequencyOffsetSource', 'Input port');  
rxstf = pfOffset(rxstf, 750);
```

For the model-C delay profile, the RMS delay spread is 30 ns, which is 3/8 of the 80 ns short training symbol duration. As such, set the correlation offset to 0.375.

```
corrOffset = 0.375;
```

Estimate the frequency offset. Your results may differ slightly.

```
fOffsetEst = wlanCoarseCFOEstimate(rxstf, cbw, corrOffset)  
fOffsetEst = 746.2700
```

The estimate is very close to the introduced CFO of 750 Hz.

Change the delay profile to 'Model-E', which has an RMS delay spread of 100 ns.

```
release(tgacChan)  
tgacChan.DelayProfile = 'Model-E';
```

Pass the transmitted signal through the modified channel and apply the 750 Hz CFO.

```
rxstfNoNoise = tgacChan(txstf);  
rxstf = noise(rxstfNoNoise);  
rxstf = pfOffset(rxstf, 750);
```

Estimate the frequency offset.

```
fOffsetEst = wlanCoarseCFOEstimate(rxstf, cbw, corrOffset)  
fOffsetEst = 947.7234
```

The estimate is inaccurate because the RMS delay spread is greater than the duration of the training symbol.

Set the correlation offset to the maximum value of 1 and estimate the CFO.

```
corrOffset = 1;  
fOffsetEst = wlanCoarseCFOEstimate(rxstf, cbw, corrOffset)  
fOffsetEst = 745.3640
```


The estimate is accurate because the autocorrelation does not use the first training symbol. The channel delay renders this symbol useless.

Correct for the estimated frequency offset.

```
rxstfCorrected = pf0ffset(rxstf, -f0ffsetEst);
```

Estimate the frequency offset of the corrected signal.

```
f0ffsetEstCorr = wlanCoarseCFOEstimate(rxstfCorrected, cbw, corr0ffset)
```

```
f0ffsetEstCorr = 2.7402e-11
```

The corrected signal has negligible frequency offset.

Two-Step CFO Estimation and Correction

Estimate and correct for a significant carrier frequency offset in two steps. Estimate the frequency offset after all corrections have been made.

Set the channel bandwidth and the corresponding sample rate.

```
cbw = 'CBW40';
fs = 40e6;
```

Coarse Frequency Correction

Generate an HT format configuration object.

```
cfg = wlanHTConfig('ChannelBandwidth', cbw);
```

Generate the transmit waveform.

```
txSig = wlanWaveformGenerator([1;0;0;1], cfg);
```

Create TGn and thermal noise channel objects. Set the noise figure of the receiver to 9 dB.

```
tgnChan = wlanTGnChannel('SampleRate', fs, 'DelayProfile', 'Model-D', ...
    'LargeScaleFadingEffect', 'Pathloss and shadowing');
noise = comm.ThermalNoise('SampleRate', fs, ...
    'NoiseMethod', 'Noise figure', ...
    'NoiseFigure', 9);
```

Pass the waveform through the TGN channel and add noise.

```
rxSigNoNoise = tgnChan(txSig);  
rxSig = noise(rxSigNoNoise);
```

Create a phase and frequency offset object to introduce a carrier frequency offset. Introduce a 2 kHz frequency offset.

```
pfOffset = comm.PhaseFrequencyOffset('SampleRate', fs, 'FrequencyOffsetSource', 'Input port');  
rxSig = pfOffset(rxSig, 2e3);
```

Extract the L-STF signal for coarse frequency offset estimation.

```
istf = wlanFieldIndices(cfg, 'L-STF');  
rxstf = rxSig(istf(1):istf(2), :);
```

Perform a coarse estimate of the frequency offset. Your results may differ.

```
foffset1 = wlanCoarseCF0Estimate(rxstf, cbw)  
foffset1 = 2.0221e+03
```

Correct for the estimated offset.

```
rxSigCorr1 = pfOffset(rxSig, -foffset1);
```

Fine Frequency Correction

Extract the L-LTF signal for fine offset estimation.

```
iltf = wlanFieldIndices(cfg, 'L-LTF');  
rxltf1 = rxSigCorr1(iltf(1):iltf(2), :);
```

Perform a fine estimate of the corrected signal.

```
foffset2 = wlanFineCF0Estimate(rxltf1, cbw)  
foffset2 = -11.0795
```

The corrected signal offset is reduced from 2000 Hz to approximately 7 Hz.

Correct for the remaining offset.

```
rxSigCorr2 = pfOffset(rxSigCorr1, -foffset2);
```

Determine the frequency offset of the twice corrected signal.

```
rxlft2 = rxSigCorr2(iltf(1):iltf(2),:);
deltaFreq = wlanFineCFOEstimate(rxlft2,cbw)
```

```
deltaFreq = -2.0374e-11
```

The CFO is zero.

Input Arguments

rxSig — Received signal

matrix

Received signal containing an L-STF, specified as an N_S -by- N_R matrix. N_S is the number of samples in the L-STF and N_R is the number of receive antennas.

Note If the number of samples in `rxSig` is greater than the number of samples in the L-STF, the trailing samples are not used to estimate the carrier frequency offset.

Data Types: double

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as: 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

corrOffset — Correlation offset

0.75 (default) | real scalar from 0 to 1

Correlation offset as a fraction of a short training symbol, specified as a real scalar from 0 to 1. The duration of the short training symbol varies with bandwidth. For more information, see “L-STF” on page 2-80.

Data Types: double

Output Arguments

foffset — Frequency offset

real scalar


Frequency offset in Hz, returned as a real scalar.

Data Types: double

More About

L-STF

The legacy short training field (L-STF) is the first field of the 802.11 OFDM PLCP legacy preamble. The L-STF is a component of VHT, HT, and non-HT PPDU.

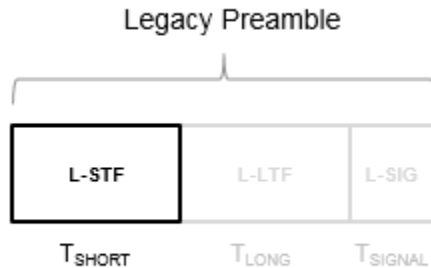

The L-STF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	L-STF Duration ($T_{SHORT} = 10 \times T_{FFT} / 4$)
20, 40, 80, and 160	312.5	3.2 μ s	8 μ s
10	156.25	6.4 μ s	16 μ s

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{\text{FFT}} = 1 / \Delta_F$)	L-STF Duration ($T_{\text{SHORT}} = 10 \times T_{\text{FFT}} / 4$)
5	78.125	12.8 μs	32 μs

Because the sequence has good correlation properties, it is used for start-of-packet detection, for coarse frequency correction, and for setting the AGC. The sequence uses 12 of the 52 subcarriers that are available per 20 MHz channel bandwidth segment. For 5 MHz, 10 MHz, and 20 MHz bandwidths, the number of channel bandwidths segments is 1.

References

- [1] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [2] Li, Jian. “Carrier Frequency Offset Estimation for OFDM-Based WLANs.” *IEEE Signal Processing Letters*. Vol. 8, Issue 3, Mar 2001, pp. 80-82.
- [3] Moose, P. H. “A technique for orthogonal frequency division multiplexing frequency offset correction.” *IEEE Transactions on Communications*. Vol. 42, Issue 10, Oct 1994, pp. 2908-2914.
- [4] Perahia, E. and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac*. 2nd Edition. United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`comm.PhaseFrequencyOffset` | `wlanFineCF0Estimate` | `wlanLSTF`

Introduced in R2015b

wlanConstellationDemap

Constellation demapping

Syntax

```
y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS)
y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,demapType)
y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,phase)
y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,demapType,phase)
```

Description

`y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS)` demaps the received input `sym` using the soft-decision approximate LLR method for the specified number of coded bits per subcarrier per spatial stream `numBPSCS`. The received symbols must be generated with one of these modulations:

- BPSK, QPSK, 16QAM, or 64QAM, as per IEEE 802.11-2012, Section 18.3.5.8
- 256QAM, as per IEEE 802.11ac-2012, Section 22.3.10.9.1
- 1024QAM, as per IEEE 802.11-16/0922r2

`y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,demapType)` specifies the demapping type.

`y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,phase)` derotates the symbols clockwise before demapping by the number of radians specified in `phase`.

`y = wlanConstellationDemap(sym,noiseVarEst,numBPSCS,demapType,phase)` specifies the demapping type and the phase rotation.

Examples

256QAM Demapping

Perform a 256QAM demapping, as defined in IEEE® 802.11ac™-2013, Section 22.3.10.9.1.

Create the sequence of data bits.

```
bits = randi([0 1],416,1,'int8');
```

Perform the constellation mapping on the data bits by using a 256QAM modulation. The size of the output returned equals the size of the input sequence divided by eight.

```
numBPSCS = 8;  
mappedData = wlanConstellationMap(bits,numBPSCS);  
size(mappedData)
```

```
ans = 1×2
```

```
52    1
```

Perform the 256QAM constellation demapping. Because the default demapping type is soft, the output is a vector of soft bits.

```
noiseVar = 0;  
demappedData = wlanConstellationDemap(mappedData,noiseVar,numBPSCS);  
size(demappedData)
```

```
ans = 1×2
```

```
416    1
```

Constellation Demapping with Hard Demodulation

Perform a 256QAM demapping by using hard demodulation. The demapping is defined in IEEE® 802.11™-2012 Section 18.3.5.8

Create the sequence of data bits.

```
bits = randi([0 1],416,1);
```

Perform the constellation mapping on the data bits by using a 256QAM constellation.


```
numBPSCS = 8;
mappedData = wlanConstellationMap(bits,numBPSCS);
```

Perform the hard 256QAM constellation demapping. Because it is a hard demapping, the estimated noise variance is ignored.

```
noiseVar = 0;
demapType = 'hard';
demappedData = wlanConstellationDemap(mappedData,noiseVar,numBPSCS,demapType);
```

Verify that the demapped data matches the original data.

```
isequal(bits,demappedData)
```

```
ans = logical
      1
```

BPSK and QBPSK Demapping for VHT-SIG-A Field

BPSK and QBPSK demapping for different OFDM symbols for the VHT-SIG-A field by using a soft demodulation. The demapping is defined in IEEE® 802.11ac™-2013 Section 22.3.8.3.3

Create the sequence of data bits. Specify the two OFDM symbols in columns.

```
bits = randi([0 1],48,2,'int8');
```

Perform constellation mapping on the data bits. Specify the size of the constellation rotation as the number in columns of the input sequence. The first column is mapped with a BPSK modulation. The second column is modulated with a QBPSK modulation.

```
numBPSCS = 1;
phase = [0 pi/2];
mappedData = wlanConstellationMap(bits,numBPSCS,phase);
```

Perform the constellation demapping with an estimated variance noise equal to zero (no added noise). To derotate the constellation, specify the same phase as in the mapping function. The output is a vector of soft bits ready to be the input of a convolutional decoder.

```
noiseVar = 0;  
demappedData = wlanConstellationDemap(mappedData,noiseVar,numBPSCS,phase);
```

Verify that the demapped data matches the original data. Because no noise is present, you can recover the original data without errors by assigning the negative values to a logical 1 and the positive values to a logical 0. In other words, you can convert the soft bits into hard bits.

```
demappedBits = int8((demappedData<=0));  
isequal(bits,demappedBits)
```

```
ans = logical  
     1
```

Demap 4-D Array

Perform QBPSSK demapping on a four-dimensional array by using hard demodulation.

Create the sequence of data bits as an array of four dimensions, with 416 coded bits per subcarrier per spatial stream per interleaver block, four OFDM symbols, two spatial streams, and two segments.

```
numCBPSSI = 416;  
numSym = 4;  
numSS = 2;  
numSeg = 2;  
bits = randi([0 1],numCBPSSI,numSym,numSS,numSeg);  
size(bits)
```

```
ans = 1×4  
     416     4     2     2
```

Perform QBPSSK constellation mapping on the data bits with a rotation of $\frac{\pi}{2}$ radians.

```
numBPSCS = 1;  
phase = pi/2;  
mappedData = wlanConstellationMap(bits,numBPSCS,phase);  
size(mappedData)
```

```
ans = 1×4
      416      4      2      2
```

Perform hard QPSK constellation demapping. To de-rotate the constellation, specify the same phase as in the mapping function. Because it is a hard demapping, the estimated noise variance is ignored.

```
noiseVar = 0;
demapType = 'hard';
demappedData = wlanConstellationDemap(mappedData, noiseVar, numBPSCS, demapType);
```

Verify that the demapped data matches the original data.

```
isequal(bits, demappedData)

ans = logical
      1
```

Input Arguments

sym — Input sequence

vector | matrix | multidimensional array

Input sequence of received symbols, specified as a numeric vector, matrix, or multidimensional array of integers.

Data Types: double

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar. When the demapping type is set to 'hard', the noise variance estimate is not required and therefore is ignored.

Example: 0.7071

Data Types: double

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8 | 10

Number of coded bits per subcarrier per spatial stream, specified as $\log_2(M)$, where M is the modulation order. Therefore, numBPSCS must equal:

- 1 for a BPSK modulation
- 2 for a QPSK modulation
- 4 for a 16QAM modulation
- 6 for a 64QAM modulation
- 8 for a 256QAM modulation
- 10 for a 1024QAM modulation

Example: 4

Data Types: double

demapType — Demapping type

'soft' (default) | 'hard'

Demapping type, specified as a character vector or a string scalar. It can be 'hard' for hard-decision demapping or 'soft' for the soft-decision approximate LLR method.

Data Types: double

phase — Constellation rotation

scalar | vector | multidimensional array

Constellation rotation in radians, specified as a scalar, vector, or multidimensional array. The size of **phase** must be compatible with the size of the input **sym**. **phase** and **sym** have compatible sizes if, for each corresponding dimension, the dimension sizes are either equal or one of them is 1. When one of the dimensions of **sym** is equal to 1, and the corresponding dimension of **phase** is larger than 1, then the output dimensions have the same size as the dimensions of **phase**.

Example: `pi*(0:size(bits,1)/numBPSCS-1)'/2;`

Data Types: double

Output Arguments

y — Demapped symbols

vector | matrix | multidimensional array

Demapped symbols, returned as a numeric vector, matrix, or multidimensional array of integers. **y** has the same size as **sym** except for the number of rows, which is equal to the number of rows of **sym**, multiplied by **numBPSCS**.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanConstellationMap

Introduced in R2017b

wlanConstellationMap

Constellation mapping

Syntax

```
y = wlanConstellationMap(bits,numBPSCS)
y = wlanConstellationMap(bits,numBPSCS,phase)
```

Description

`y = wlanConstellationMap(bits,numBPSCS)` maps the input sequence `bits` using the number of coded bits per subcarrier per spatial stream, `numBPSCS`, to one of the following modulations:

- BPSK, QPSK, 16QAM, or 64QAM, as per IEEE 802.11-2012, Section 18.3.5.8
- 256QAM, as per IEEE 802.11ac-2012, Section 22.3.10.9.1
- 1024QAM, as per IEEE 802.11-16/0922r2

The constellation mapping is performed column-wise.

`y = wlanConstellationMap(bits,numBPSCS,phase)` rotates the constellation points counterclockwise by the number of radians specified in `phase`.

Examples

256QAM Mapping

Perform a 256QAM mapping, as defined in IEEE® 802.11ac™-2013 Section 22.3.10.9.1.

Create the sequence of data bits.

```
bits = randi([0 1],416,1,'int8');
```

Perform the constellation mapping on the data bits with a 256QAM modulation.

```
numBPSCS = 8;
mappedData = wlanConstellationMap(bits,numBPSCS);
```

The size of the output returned by this modulation equals the size of the input sequence divided by eight.

```
size(mappedData)
```

```
ans = 1×2
```

```
52    1
```

$\pi/2$ -BPSK Mapping

Perform a $\frac{\pi}{2}$ -BPSK mapping on a sequence of data bits as defined in IEEE® 802.11ad™-2012 Section 21.6.3.2.4.

Create the sequence of data bits.

```
bits = randi([0 1],512,1);
```

Perform the BPSK mapping on the data bits with a rotation of $\frac{\pi}{2}$ radians. Note that the size of the constellation rotation `phase` is equal to the size of input sequence.

```
numBPSCS = 1;
phase = pi*(0:size(bits,1)/numBPSCS-1)'/2;
mappedData = wlanConstellationMap(bits,numBPSCS,phase);
```

As we performed a BPSK mapping, the number of symbols per bit is one, therefore the size of the output is equal to the size of the original sequence.


```
size(mappedData)
```

```
ans = 1×2
```

```
512    1
```

Display the modulated signal constellation using the `scatterplot` function.

```
scatterplot(mappedData);
```

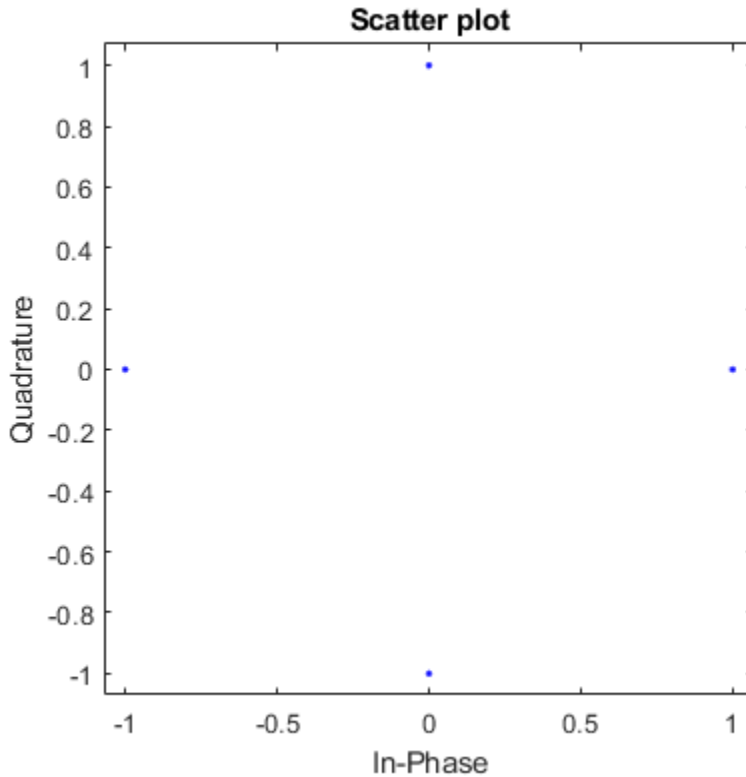

BPSK and QBPSK Mapping for VHT-SIG-A field

Perform BPSK and QBPSK demapping for different OFDM symbols for the VHT-SIG-A field by using a soft demodulation. The mapping is defined in IEEE® 802.11ac™-2013 Section 22.3.8.3.3 for the VHT-SIG-A field.

Create the sequence of data bits. Place the two OFDM symbols in columns.


```
bits = randi([0 1],48,2,'int8');
```


Perform constellation mapping on the data bits. Specify the size of constellation rotation phase as the number of columns in the input sequence. The first column is mapped with a BPSK modulation. The second column is modulated with a QPSK modulation.


```
numBPSCS = 1;  
phase = [0 pi/2];  
mappedData = wlanConstellationMap(bits,numBPSCS,phase);
```

Display the modulated signal constellation by using the `scatterplot` function. The first plot shows the data after the BPSK modulation, and the second plot shows the QPSK-modulated symbols.

```
scatterplot(mappedData(:,1))
```

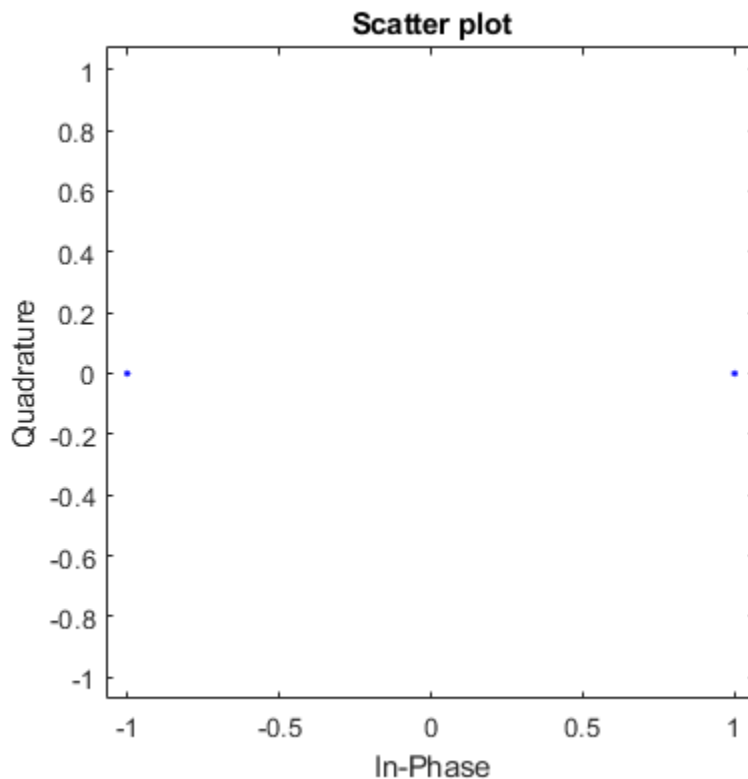

```
scatterplot(mappedData(:,2))
```

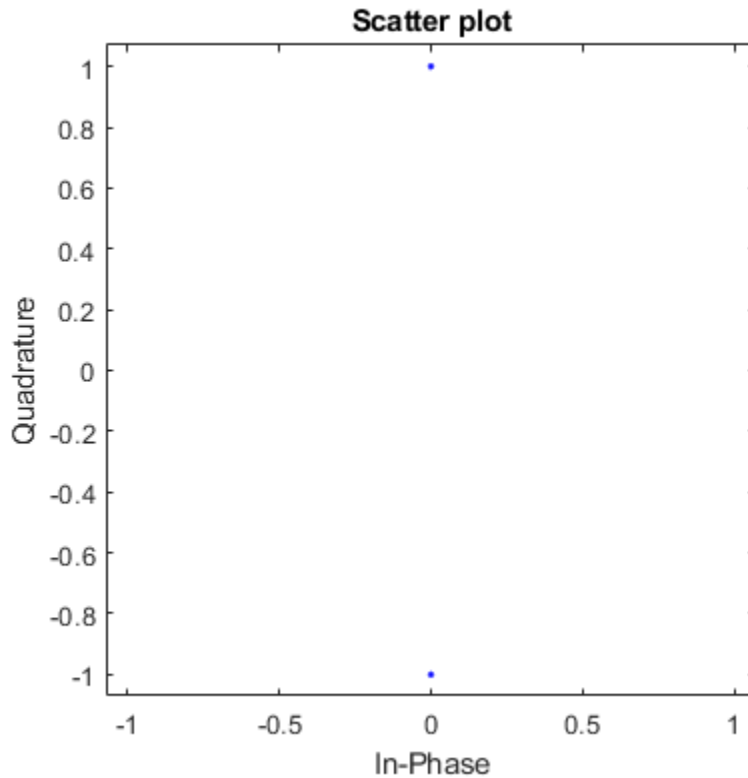

Input Arguments

bits — Input sequence

vector | matrix | multidimensional array

Input sequence of bits to map into symbols, specified as a binary vector, matrix, or multidimensional array.

Data Types: double | int8

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8 | 10

Number of coded bits per subcarrier per spatial stream, specified as $\log_2(M)$, where M is the modulation order. Therefore, numBPSCS must equal:

- 1 for a BPSK modulation
- 2 for a QPSK modulation
- 4 for a 16QAM modulation
- 6 for a 64QAM modulation
- 8 for a 256QAM modulation
- 10 for a 1024QAM modulation

Example: 4

Data Types: double

phase — Constellation rotation

scalar | vector | multidimensional array

Constellation rotation in radians, specified as a scalar, vector, or multidimensional array. The size of phase must be compatible with the size of the input bits. phase and bits have compatible sizes if, for each corresponding dimension, the dimension sizes are either equal or one of them is 1. When one of the dimensions of bits is equal to 1, and the corresponding dimension of phase is larger than 1, then the output dimensions have the same size as the dimensions of phase.

Example: `pi*(0:size(bits,1)/numBPSCS-1)'/2;`

Data Types: double

Output Arguments

y — Mapped symbols

vector | matrix | multidimensional array

Mapped symbols, returned as a complex vector, matrix, or multidimensional array. y has the same size as bits, except for the number of rows, which is equal to the number of rows of bits divided by numBPSCS.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanConstellationDemap`

Introduced in R2017b

wlanDMGDataBitRecover

Recover data bits from DMG data field

Syntax

```
DataBits = wlanDMGDataBitRecover(rxDataSig,noiseVarEst,cfg)
DataBits = wlanDMGDataBitRecover(rxDataSig,noiseVarEst,csi,cfg)
DataBits = wlanDMGDataBitRecover( ____,Name,Value)
```

Description

`DataBits = wlanDMGDataBitRecover(rxDataSig,noiseVarEst,cfg)` recovers the data bits given the data field from a DMG transmission (OFDM, single-carrier, or control PHY), the noise variance estimate, and the DMG configuration object.

`DataBits = wlanDMGDataBitRecover(rxDataSig,noiseVarEst,csi,cfg)` uses the channel state information specified in `csi` to enhance the demapping of OFDM subcarriers.

`DataBits = wlanDMGDataBitRecover(____,Name,Value)` specifies additional options in name-value pair arguments, using the inputs from preceding syntaxes. When a name-value pair is not specified, its default value is used.

Examples

Recover Data Field from DMG SC PHY

Recover data information bits from the DMG data field of single-carrier (SC) PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the SC PHY.

```
cfgDMG = wlanDMGConfig('MCS',10);
```

Create the input sequence of data bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.

```
txBits = randi([0 1],cfgDMG.PSDULength*8,1,'int8');  
tx = wlanWaveformGenerator(txBits, cfgDMG);
```

AWGN Channel

Set an SNR of 10 dB, calculate the noise power (noise variance), and add AWGN to the transmission waveform by using the `awgn` function.

```
SNR = 10;  
nVar = 10^(-SNR/10);  
rx = awgn(tx,SNR);
```

Receiver

Extract the data field by using the `wlanFieldIndices` function to generate the PPDU field indices.

```
ind = wlanFieldIndices(cfgDMG);  
rxData = rx(ind.DMGData(1):ind.DMGData(2));
```

Reshape the received data waveform into blocks. Set the data block size to 512 and the guard interval length to 64. Remove the last guard interval from the received data waveform. The resulting data waveform is a 512-by-`Nblks` matrix, where `Nblks` is the number of DMG data blocks.

```
blkSize = 512;  
Ngi = 64;  
rxData = rxData(1:end-Ngi);  
rxData = reshape(rxData,blkSize,[]);
```

Remove the guard interval from each block. The resulting signal is a 448-by-`Nblks` matrix, as expected for a time-domain DMG data field signal for SC PHY.

```
rxSym = rxData(Ngi+1:end,:);  
size(rxSym)
```

```
ans = 1×2
```

```
448    9
```

Recover the PSDU from the DMG data field.

```
rxBits = wlanDMGDataBitRecover(rxSym,nVar,cfgDMG);
```

Compare it against the original information bits.

```
disp(isequal(txBits,rxBits));
```

1

Recover Data Field from DMG OFDM PHY

Recover data information bits of the DMG data field of the OFDM PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the OFDM PHY.

```
cfgDMG = wlanDMGConfig('MCS',14);
```

Create the input sequence of data bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.

```
txBits = randi([0 1],cfgDMG.PSDULength*8,1,'int8');
tx = wlanWaveformGenerator(txBits,cfgDMG);
```

Channel

Transmit the signal through a channel with no noise (zero noise variance).

```
rx = tx;
nVar = 0;
```

Receiver

Extract the data field, using the `wlanFieldIndices` function to generate the PPDU field indices.

```
ind = wlanFieldIndices(cfgDMG);
rxData = rx(ind.DMGData(1):ind.DMGData(2));
```

Set the FFT length to 512 and the cyclic prefix length to 128 for the OFDM demodulation.

```
Nfft = 512;  
Ncp = 128;
```

Perform the OFDM demodulation. Reshape the received waveform to have the OFDM symbols per column and remove cyclic prefix. Then, scale the sequence by the active tone 352 and extract the *frequency domain* symbols.

```
ofdmSym = reshape(rxData,Nfft+Ncp,[]);  
dftSym = ofdmSym(Ncp+1:end,:);  
dftSym = dftSym/(Nfft/sqrt(352));  
freqSym = fftshift(fft(dftSym,[],1),1);
```

Extract data-carrying subcarriers and discard the pilots. Set the highest subcarrier index to 177.

```
pilotSCIndex = [-150; -130; -110; -90; -70; -50; -30; -10; 10; 30; 50; 70; 90; 110; 130];  
noDataSCIndex = [pilotSCIndex; [-1; 0; 1]];  
Nsr = 177;  
dataSCIndex = setdiff((-Nsr:Nsr).',sort(noDataSCIndex));  
rxSym = freqSym(dataSCIndex+(Nfft/2+1),:);
```

Recover the PSDU from the DMG data field. Assume a CSI estimation of all ones.

```
csi = ones(length(dataSCIndex),1);  
rxBits = wlanDMGDataBitRecover(rxSym,nVar,csi,cfgDMG);
```

Compare it against the original information bits.

```
disp(isequal(txBits,rxBits));
```

1

Recover Data Field from DMG Control PHY

Recover data information bits from the DMG data field of the control PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the control PHY.

```
cfgDMG = wlanDMGConfig('MCS',0);
```

Create the input sequence of data bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.


```
txBits = randi([0 1],cfgDMG.PSDULength*8,1,'int8');
tx = wlanWaveformGenerator(txBits,cfgDMG);
```

Channel

Transmit the signal through a channel with no noise (zero noise variance).

```
rx = tx;
nVar = 0;
```

Receiver

Extract the header and the data field by using the `wlanFieldIndices` function.

```
ind = wlanFieldIndices(cfgDMG);
rxSym = rx(ind.DMGHeader(1):ind.DMGData(2));
```

De-rotate the received signal by $\pi/2$ and despread it with a spreading factor of 32. Use the `wlanGolaySequence` function to generate the Golay sequence.

```
rxSym = rxSym.*exp(-1i*pi/2*(0:size(rxSym,1)-1).');
SF = 32;
Ga = wlanGolaySequence(SF);
rxSymDespread = (reshape(rxSym,SF,length(rxSym)/SF)'*Ga)/SF;
```

Recover the PSDU from the DMG data field.

```
rxBits = wlanDMGDataBitRecover(rxSymDespread,nVar,cfgDMG);
```

Compare it against the original information bits.

```
disp(isequal(txBits,rxBits));
```

1

Input Arguments

rxDataSig — Received DMG data field signal

real or complex matrix

Received DMG data signal, specified as a real or complex matrix. The contents and size of `rxDataSig` depend on the physical layer (PHY):

- Single-carrier PHY — `rxDataSig` is the time-domain DMG data field signal, specified as a 448-by- N_{BLKS} matrix of real or complex values. The value 448 is the number of symbols in a DMG data symbol and N_{BLKS} is the number of DMG data blocks.
- OFDM PHY — `rxDataSig` is the demodulated DMG data field OFDM symbols, specified as a 336-by- N_{SYM} matrix of real or complex values. The value 336 is the number of data subcarriers in the DMG data field and N_{SYM} is the number of OFDM symbols.
- Control PHY — `rxDataSig` is the time-domain signal containing the header and data fields, specified as an N_{B} -by-1 column vector of real or complex values, where N_{B} is the number of despread symbols.

Data Types: double

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cfg — DMG PPDU configuration

`wlanDMGConfig` object

DMG PPDU configuration, specified as a `wlanDMGConfig` object.

csi — Channel State Information

real column vector

Channel state information, specified as a 336-by-1 real column vector. The value 336 specifies the number of data subcarriers in the DMG data field. `csi` is required only for OFDM PHY.

Data Types: double

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name`, `Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside quotes. You can specify several name and value pair arguments in any order as `Name1, Value1, ..., NameN, ValueN`.

Example: 'MaximumLDPCIterationCount', '12', 'EarlyTermination', 'false' specifies a maximum of 12 decoding iterations for the LDPC and disables early termination of LDPC decoding so that it completes the 12 iterations.

MaximumLDPCIterationCount — Maximum number of decoding iterations in LDPC

12 (default) | positive integer

Maximum number of decoding iterations in low-density parity check (LDPC), specified as a positive integer. This argument applies when channel coding is set to LDPC for the user of interest.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: double

EarlyTermination — Enable early termination of LDPC decoding

false or 0 (default) | true or 1

Enable early termination of LDPC decoding, specified as a logical value of 1 (true) or 0 (false). This property applies when channel coding is set to LDPC for the user of interest.

- When set to false, LDPC decoding completes the number of iterations specified by `MaximumLDPCIterationCount`, regardless of parity check status.
- When set to true, LDPC decoding terminates when all parity-checks are satisfied.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: logical

Output Arguments

DataBits — Recovered information bits in the DMG data field

1 | 0 | column vector

Recovered information bits from the DMG data field, returned as a column vector of length $8 \times \text{cfgDMG.PSDULength}$. See `wlanDMGConfig` for `PSDULength` details.


Data Types: int8

More About


DMG Data Field

The DMG format supports three physical layer (PHY) modulation schemes: control, single carrier, and OFDM. The data field is variable in length. It serves the same function for the three PHYs and carries the user data payload.


Control PHY

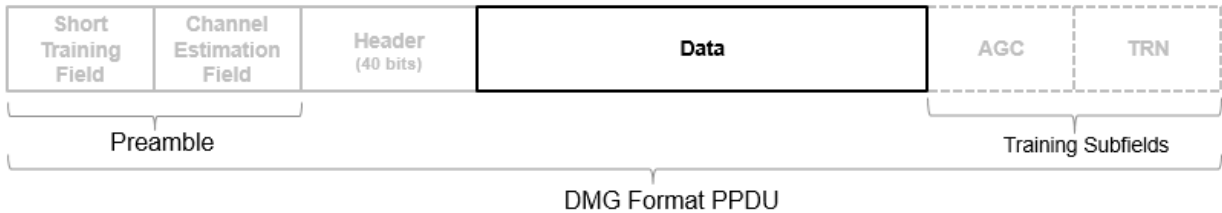

Single Carrier (SC) PHY

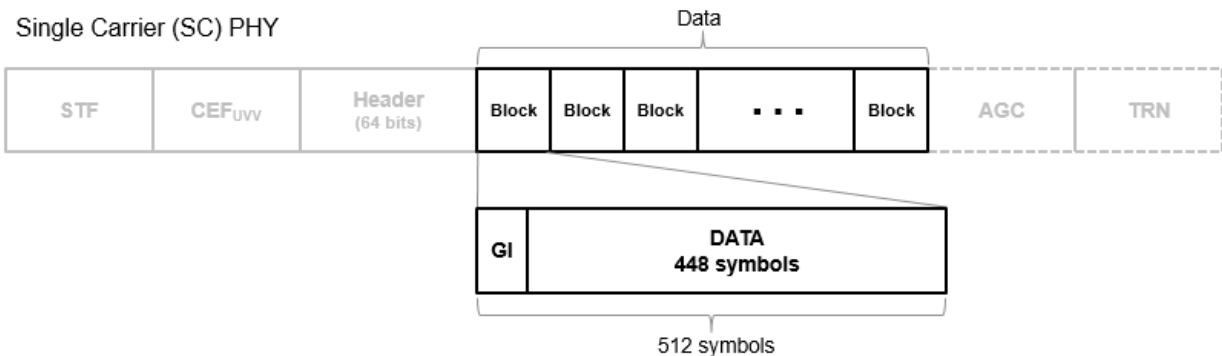

OFDM PHY

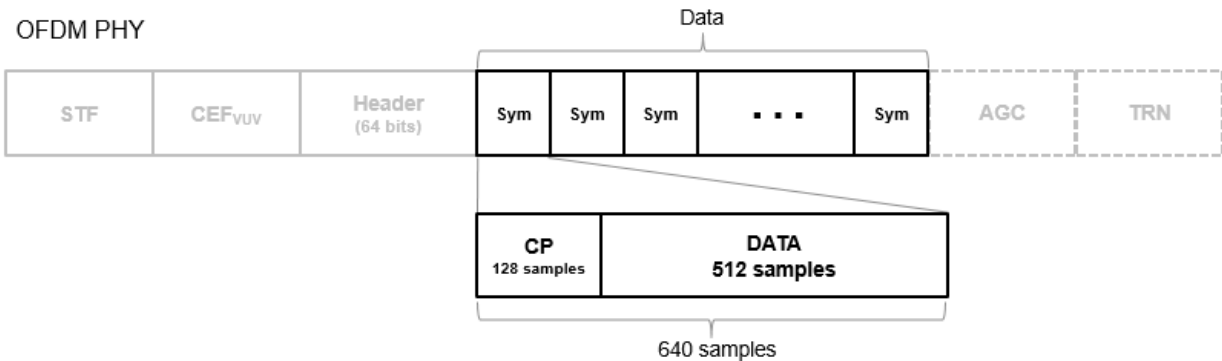

For SC PHY, each block in the data field is 512-symbols long and with a guard interval (GI) of 64 symbols with the Golay Sequence. For OFDM, each OFDM symbol in the data field are 640 samples long and with a cyclic prefix (CP) of 128 samples to prevent intersymbol interference.

IEEE 802.11ad™-2012 specifies the common aspects of the DMG PDU packet structure in Section 21.3. The PHY modulation-specific aspects of the data field structure are specified in these sections:

- The DMG control PHY packet structure is specified in Section 21.4.
- The DMG OFDM PHY packet structure is specified in Section 21.5.
- The DMG SC PHY packet structure is specified in Section 21.6.

References

- [1] IEEE Std 802.11ad™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanDMGConfig` | `wlanDMGHeaderBitRecover`

Introduced in R2017b

wlanDMGHeaderBitRecover

Recover header bits from DMG header field

Syntax

```
[headerBits, failHCS] = wlanDMGHeaderBitRecover(rxHeader, noiseVarEst,
cfg)
headerBits = wlanDMGHeaderBitRecover(rxHeader, noiseVarEst, csi, cfg)
headerBits = wlanDMGHeaderBitRecover( ____, Name, Value)
```

Description

`[headerBits, failHCS] = wlanDMGHeaderBitRecover(rxHeader, noiseVarEst, cfg)` recovers the header information bits and tests the header check sequence (HCS) given the header field from a DMG transmission (OFDM, single-carrier, or control PHY), the noise variance estimate, and the DMG configuration object.

`headerBits = wlanDMGHeaderBitRecover(rxHeader, noiseVarEst, csi, cfg)` uses the channel state information specified in `csi` to enhance the demapping of OFDM subcarriers.

`headerBits = wlanDMGHeaderBitRecover(____, Name, Value)` specifies additional options using name-value pair arguments, using the inputs from preceding syntaxes. When a name-value pair is not specified, its default value is used.

Examples

Recover Header Field from DMG SC PHY

Recover header bits from the DMG header field of the single-carrier (SC) PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the SC PHY.

```
cfgDMG = wlanDMGConfig('MCS',10);
```

Create the input sequence of bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.

```
txBits = randi([0 1],cfgDMG.PSDULength*8,1,'int8');  
tx = wlanWaveformGenerator(txBits, cfgDMG);
```

AWGN Channel

Set an SNR of 10 dB, calculate the noise power (noise variance), and add AWGN to the transmission waveform by using the `awgn` function.

```
SNR = 10;  
nVar = 10^(-SNR/10);  
rx = awgn(tx,SNR);
```

Receiver

Extract the header field by using the `wlanFieldIndices` function.

```
ind = wlanFieldIndices(cfgDMG);  
rxHeader = rx(ind.DMGHeader(1):ind.DMGHeader(2));
```

Reshape the received waveform into blocks. Set the data block size to 512 and the guard interval length to 64. Remove the last guard interval from the received header waveform. The resulting signal is a 448-by-2 matrix.

```
blkSize = 512;  
rxHeader = reshape(rxHeader,blkSize,[]);  
Ngi = 64;  
rxSym = rxHeader(Ngi+1:end,:);  
size(rxSym)
```

```
ans = 1×2
```

```
448    2
```

Recover header bits from DMG header field.


```
[rxBits, failHCS] = wlanDMGHeaderBitRecover(rxSym, nVar, cfgDMG);
```

Display the HCS check on the recovered header bits.

```
disp(failHCS);
```

```
0
```

Recover Header Field from DMG OFDM PHY

Recover header information bits from the DMG header field of the OFDM PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the OFDM PHY.

```
cfgDMG = wlanDMGConfig('MCS', 14);
```

Create the input sequence of data bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.

```
txBits = randi([0 1], cfgDMG.PSDULength*8, 1, 'int8');
tx = wlanWaveformGenerator(txBits, cfgDMG);
```

Channel

Transmit the signal through a channel with no noise (zero noise variance).

```
rx = tx;
nVar = 0;
```

Receiver

Extract data field using the `wlanFieldIndices` function.

```
ind = wlanFieldIndices(cfgDMG);
rxHeader = rx(ind.DMGHeader(1):ind.DMGHeader(2));
```

Set the FFT length to 512 and the cyclic prefix length to 128 for the OFDM demodulation.

```
Nfft = 512;
Ncp = 128;
```

Perform the OFDM demodulation. Remove cyclic prefix, scale the sequence by the active tone 352, and extract the *frequency domain* symbols.

```
dftSym = rxHeader(Ncp+1:end,:);  
dftSym = dftSym/(Nfft/sqrt(352));  
freqSym = fftshift(fft(dftSym,[],1),1);
```

Extract data-carrying subcarriers and discard the pilots. Set the highest subcarrier index to 177.

```
pilotSCIndex = [-150; -130; -110; -90; -70; -50; -30; -10; 10; 30; 50; 70; 90; 110; 130];  
noDataSCIndex = [pilotSCIndex; [-1; 0; 1]];  
Nsr = 177;  
dataSCIndex = setdiff((-Nsr:Nsr).',sort(noDataSCIndex));  
rxSym = freqSym(dataSCIndex+(Nfft/2+1),:);
```

Recover the header bits from the DMG header field. Assume a CSI estimation of all ones.

```
csi = ones(length(dataSCIndex),1);  
[rxBits,failHCS] = wlanDMGHeaderBitRecover(rxSym,nVar,csi,cfgDMG);
```

Display the HCS check on the recovered header bits.

```
disp(failHCS);
```

```
0
```

Recover Header Field from DMG Control PHY

Recover header information bits of the DMG header field from the control PHY.

Transmitter

Create the DMG configuration object with a modulation and coding scheme (MCS) for the control PHY.

```
cfgDMG = wlanDMGConfig('MCS',0);
```

Create the input sequence of data bits, specifying it as a column vector with `cfgDMG.PSDULength*8` elements. Generate the DMG transmission waveform.

```
txBits = randi([0 1],cfgDMG.PSDULength*8,1,'int8');  
tx = wlanWaveformGenerator(txBits,cfgDMG);
```

Channel

Transmit the signal through a channel with no noise (zero noise variance).

```
rx = tx;
nVar = 0;
```

Receiver

Extract the header field by using the `wlanFieldIndices` function.

```
ind = wlanFieldIndices(cfgDMG);
rxHeader = rx(ind.DMGHeader(1):ind.DMGHeader(2));
```

De-rotate the received signal by $\pi/2$ and despread it with a spreading factor of 32. Use the `wlanGolaySequence` function to generate the Golay sequence.

```
rxSym = rxHeader.*exp(-1i*pi/2*(0:size(rxHeader,1)-1).');
SF = 32;
Ga = wlanGolaySequence(SF);
rxDespread = reshape(rxSym,SF,length(rxSym)/SF)'*Ga/SF;
```

Recover the header bits from the DMG header field.

```
[rxBits, failHCS] = wlanDMGHeaderBitRecover(rxDespread,nVar,cfgDMG);
```

Display the HCS check on the recovered header bits.

```
disp(failHCS);
```

0

Input Arguments

rxHeader — Received DMG header field signal

matrix

Received DMG header field signal, specified as a real or complex matrix. The contents and size of `rxHeader` depends on the physical layer (PHY):

- Single-Carrier PHY — `rxHeader` is the time-domain DMG header field signal, specified as a 448-by- N_{BLKS} matrix of real or complex values. The value 448 is the number of symbols in a DMG header symbol and N_{BLKS} is the number of DMG header blocks.

- OFDM PHY — `rxHeader` is the frequency-domain signal, specified as a 336-by-1 column vector of real or complex values. The value 336 is the number of data subcarriers in the DMG header field.
- Control PHY — `rxHeader` is the time-domain signal containing the header field, specified as an N_B -by-1 column vector of real or complex values. N_B is the number of despread symbols.

Data Types: `double`

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: `double`

cfg — DMG PPDU configuration

`wlanDMGConfig` object

DMG PPDU configuration, specified as a `wlanDMGConfig` object.

csi — Channel State Information

real column vector

Channel state information, specified as a 336-by-1 real column vector. The value 336 specifies the number of data subcarriers in the DMG data field. `csi` is required only for OFDM PHY.

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name`, `Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside quotes. You can specify several name and value pair arguments in any order as `Name1, Value1, ..., NameN, ValueN`.

Example: `'MaximumLDPCIterationCount', '12', 'EarlyTermination', 'false'` specifies a maximum of 12 decoding iterations for the LDPC and disables early termination of LDPC decoding so that it completes the 12 iterations.

MaximumLDPCIterationCount — Maximum number of decoding iterations in LDPC

12 (default) | positive integer

Maximum number of decoding iterations in low-density parity check (LDPC), specified as a positive integer. This argument applies when channel coding is set to LDPC for the user of interest.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: double

EarlyTermination — Enable early termination of LDPC decoding

false or 0 (default) | true or 1

Enable early termination of LDPC decoding, specified as a logical value of 1 (true) or 0 (false). This property applies when channel coding is set to LDPC for the user of interest.

- When set to false, LDPC decoding completes the number of iterations specified by **MaximumLDPCIterationCount**, regardless of parity check status.
- When set to true, LDPC decoding terminates when all parity-checks are satisfied.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: logical

Output Arguments

headerBits — Recovered header information bits

1 | 0 | column vector

Recovered header information bits, returned as a column vector of 64 elements for OFDM and single-carrier PHYs and a column vector of 40 elements for control PHYs.

Data Types: int8

failHCS — HCS check

false | true


HCS check, returned as a logical. When headerBits fails the HCS check, failHCS is true.

Data Types: logical

More About

DMG Header Field

In the DMG format, the header field is different in size and content for every supported physical layer (PHY) modulation scheme. This field contains additional important information for the receiver.

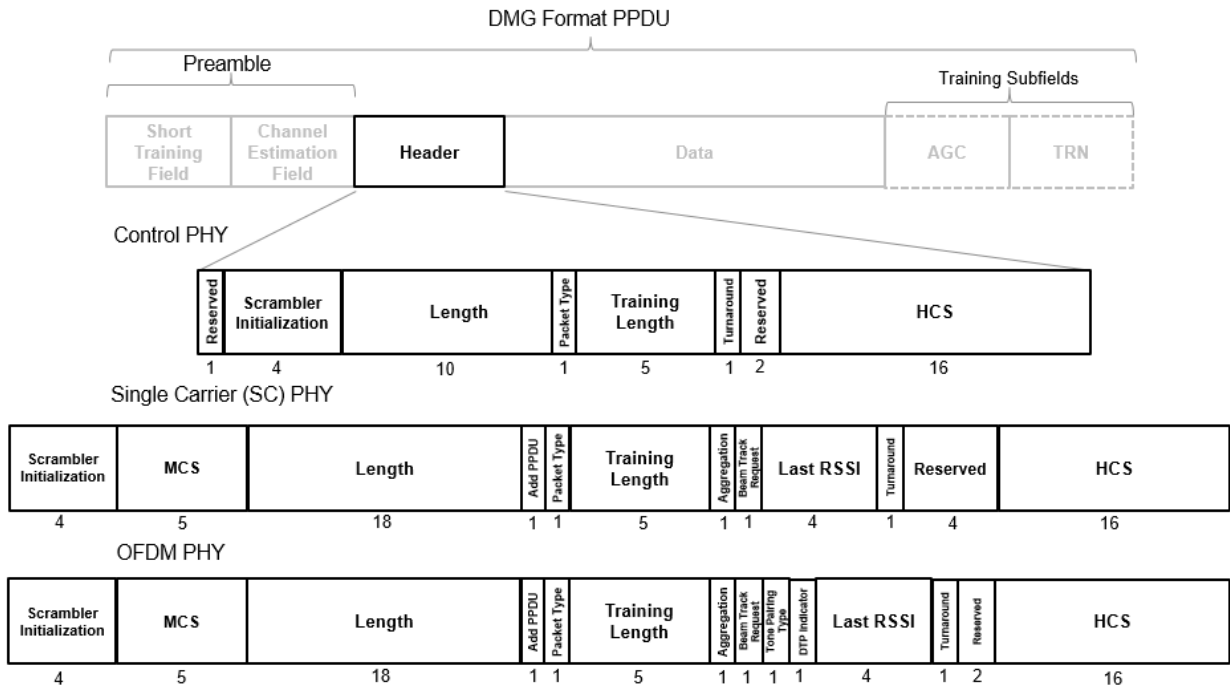

The total size of the header field is 40 bits for control PHYs and 64 bits for SC and OFDM PHYs.

The most important fields common for the three PHY modes are:

- *Scrambler initialization* — Specifies the initial state for the scrambler.
- *MCS* — Specifies the modulation and coding scheme used in the data field. It is not present in control PHY.
- *Length (data)* — Specifies the length of the data field.
- *Packet type* — Specifies whether the beamforming training field is intended for the receiver or the transmitter.
- *Training length* — Specifies whether a beamforming training field is used and if so, its length.
- *HCS* — Provides a checksum per CRC for the header.

IEEE 802.11ad-2012 specifies the detailed aspects of the DMG header field structure. In particular, the PHY modulation-specific aspects of the header field are specified in these sections:

- The DMG control PHY header structure is specified in Section 21.4.3.2.
- The DMG OFDM PHY header structure is specified in Section 21.5.3.1.
- The DMG SC PHY header structure is specified in Section 21.6.3.1.

References

- [1] IEEE Std 802.11ad™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanDMGConfig | wlanDMGDataBitRecover

Introduced in R2017b

wlanDMGOFDMDemodulate

Demodulate fields of DMG waveform

Syntax

```
sym = wlanDMGOFDMDemodulate(rx)
sym = wlanDMGOFDMDemodulate(rx, 'OFDMSymbolOffset', symOffset)
```

Description

`sym = wlanDMGOFDMDemodulate(rx)` returns demodulated frequency-domain signal `sym` by performing orthogonal frequency-division multiplexing (OFDM) demodulation on directional multi-gigabit (DMG) time-domain signal `rx`.

`sym = wlanDMGOFDMDemodulate(rx, 'OFDMSymbolOffset', symOffset)` returns the frequency-domain signal for OFDM symbol sampling offset `symOffset`, specified as a fraction of the cyclic prefix length using name-value pair syntax.

Examples

Demodulate DMG-Data Field and Get OFDM Information

Perform OFDM demodulation on the DMG-Data field, then extract the data and pilot subcarriers.

Generate a WLAN waveform for a DMG transmission, specifying the modulation and coding scheme (MCS).

```
cfg = wlanDMGConfig('MCS', '15');
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the DMG-Data field.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.DMGData(1):ind.DMGData(2),:);
```

Perform OFDM demodulation on the DMG-Data field.

```
sym = wlanDMGOFDMDemodulate(rx);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanDMGOFDMInfo;  
data = sym(info.DataIndices,,:);  
pilots = sym(info.PilotIndices,,:);
```

Demodulate DMG-Data field for OFDM Symbol Offset

Perform OFDM demodulation on the DMG-Data field for an OFDM symbol offset, specified as a fraction of the cyclic prefix length.

Generate a WLAN waveform for a DMG transmission, specifying the modulation and coding scheme (MCS).

```
cfg = wlanDMGConfig('MCS','12');  
bits = [0; 0; 0; 1];  
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the DMG-Data field.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.DMGData(1):ind.DMGData(2),:);
```

Perform OFDM demodulation on the DMG-Data field, specifying an OFDM symbol offset of 0.5.

```
sym = wlanDMGOFDMDemodulate(rx, 'OFDMSymbolOffset', 0.5);
```

Input Arguments

rx — Received time-domain signal

complex-valued matrix

Received time-domain signal, specified as a complex-valued matrix. The size of this input must be N_S -by- N_R , where N_S is the number of time-domain samples and N_R is the number of receive antennas. If N_S is not an integer multiple of the OFDM symbol length, L_S , for the specified field, then the function ignores the remaining $\text{mod}(N_S, L_S)$ symbols.

Data Types: double


Complex Number Support: Yes

symOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset, as a fraction of the cyclic prefix length, specified as a scalar in the interval [0, 1].

The value that you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix.

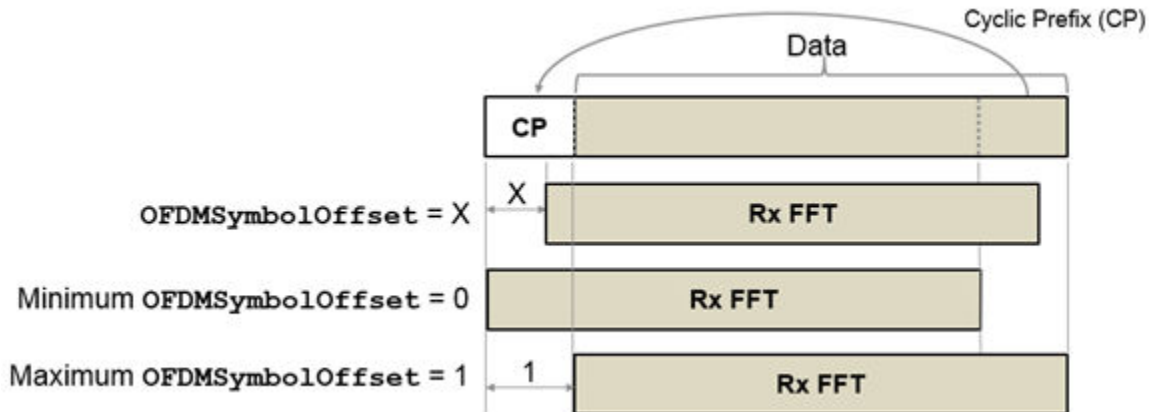

Example: 'OFDMSymbolOffset', 0.45

Data Types: double

Output Arguments

sym — Demodulated frequency-domain signal

complex-valued array

Demodulated frequency-domain signal, returned as a complex-valued array of size `sym` is N_{SC} -by- N_{sym} -by- N_{R} , where:

- N_{SC} is the number of active occupied subcarriers in the demodulated field.
- N_{sym} is the number of OFDM symbols.
- N_{R} is the number of receive antennas.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanDMGOFDMInfo` | `wlanHEDemodulate` | `wlanSIGDemodulate`

Objects

`wlanDMGConfig`

Introduced in R2019a

wlanDMGOFDMInfo

Get OFDM information for DMG transmission

Syntax

```
info = wlanDMGOFDMInfo
```

Description

`info = wlanDMGOFDMInfo` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the DMG-Data or DMG-Header fields in a directional multi-gigabit transmission.

Examples

Get OFDM Information for DMG-Data Field

Get the OFDM information for the DMG-Data field and display the fast Fourier transform (FFT) length.

```
info = wlanDMGOFDMInfo;  
disp(info.FFTLength)
```

```
512
```

Demodulate DMG-Data Field and Get OFDM Information

Perform OFDM demodulation on the DMG-Data field, then extract the data and pilot subcarriers.

Generate a WLAN waveform for a DMG transmission, specifying the modulation and coding scheme (MCS).

```
cfg = wlanDMGConfig('MCS','15');  
bits = [1; 0; 0; 1];  
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the DMG-Data field.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.DMGData(1):ind.DMGData(2),:);
```

Perform OFDM demodulation on the DMG-Data field.

```
sym = wlanDMGOFDMDemodulate(rx);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanDMGOFDMInfo;  
data = sym(info.DataIndices, :, :);  
pilots = sym(info.PilotIndices, :, :);
```

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLength	Positive integer	Cyclic prefix length, in samples	double
NumTones	Nonnegative integer	Number of active subcarriers	double
NumSubchannels	Positive integer	Number of 20-MHz subchannels	double

Name	Values	Description	Data Types
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double
PilotIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanDMGOFDMDemodulate

Objects

wlanDMGConfig

Introduced in R2019a

wlanFineCFOEstimate

Fine estimate of carrier frequency offset

Syntax

```
f0ffset = wlanFineCFOEstimate(rxSig,cbw)
f0ffset = wlanFineCFOEstimate(rxSig,cbw,corr0ffset)
```

Description

`f0ffset = wlanFineCFOEstimate(rxSig,cbw)` returns a fine estimate of the carrier frequency offset (CFO) given received time-domain “L-LTF” on page 2-130² samples `rxSig` and channel bandwidth `cbw`.

`f0ffset = wlanFineCFOEstimate(rxSig,cbw,corr0ffset)` returns the estimated frequency offset given correlation offset `corr0ffset`.

Examples

Fine Estimate of Carrier Frequency Offset

Create non-HT configuration object.

```
nht = wlanNonHTConfig;
```

Generate a non-HT waveform.

```
txSig = wlanWaveformGenerator([1;0;0;1],nht);
```

Create a phase and frequency offset object and introduce a 2 Hz frequency offset.

2. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
pfOffset = comm.PhaseFrequencyOffset('SampleRate',20e6,'FrequencyOffset',2);  
rxSig = pfOffset(txSig);
```

Extract the L-LTF and estimate the frequency offset.

```
ind = wlanFieldIndices(nht,'L-LTF');  
rxlltf = rxSig(ind(1):ind(2),:);  
freqOffsetEst = wlanFineCFOEstimate(rxlltf,'CBW20')  
  
freqOffsetEst = 2.0000
```

Estimate and Correct CFO for VHT Waveform

Estimate the frequency offset for a VHT signal passing through a noisy, TGac channel. Correct for the frequency offset.

Create a VHT configuration object and create the L-LTF.

```
vht = wlanVHTConfig;  
txlftf = wlanLLTF(vht);
```

Set the sample rate to correspond to the default bandwidth of the VHT configuration object.

```
fs = 80e6;
```

Create TGac and thermal noise channel objects. Set the noise figure of the AWGN channel to 10 dB.

```
tgacChan = wlanTGacChannel('SampleRate',fs, ...  
    'ChannelBandwidth',vht.ChannelBandwidth, ...  
    'DelayProfile','Model-C','LargeScaleFadingEffect','Pathloss');  
  
noise = comm.ThermalNoise('SampleRate',fs, ...  
    'NoiseMethod','Noise figure', ...  
    'NoiseFigure',10);
```

Pass the L-LTF through the noisy TGac channel.

```
rxlftfNoNoise = tgacChan(txlftf);  
rxlftf = noise(rxlftfNoNoise);
```

Create a phase and frequency offset object and introduce a 25 Hz frequency offset.

```
pfoffset = comm.PhaseFrequencyOffset('SampleRate', fs, 'FrequencyOffsetSource', 'Input port');
rxlftf = pfoffset(rxlftf, 25);
```

Perform a fine estimate the frequency offset using a correlation offset of 0.6. Your results may differ slightly.

```
f0ffsetEst = wlanFineCFOEstimate(rxlftf, vht.ChannelBandwidth, 0.6)
f0ffsetEst = 28.0773
```

Correct for the estimated frequency offset.

```
rxlftfCorr = pfoffset(rxlftf, -f0ffsetEst);
```

Estimate the frequency offset of the corrected signal.

```
f0ffsetEstCorr = wlanFineCFOEstimate(rxlftfCorr, vht.ChannelBandwidth, 0.6)
f0ffsetEstCorr = 2.5029e-13
```

The corrected signal has negligible frequency offset.

Two-Step CFO Estimation and Correction

Estimate and correct for a significant carrier frequency offset in two steps. Estimate the frequency offset after all corrections have been made.

Set the channel bandwidth and the corresponding sample rate.

```
cbw = 'CBW40';
fs = 40e6;
```

Coarse Frequency Correction

Generate an HT format configuration object.

```
cfg = wlanHTConfig('ChannelBandwidth', cbw);
```

Generate the transmit waveform.

```
txSig = wlanWaveformGenerator([1;0;0;1], cfg);
```

Create TGn and thermal noise channel objects. Set the noise figure of the receiver to 9 dB.

```
tgnChan = wlanTGnChannel('SampleRate',fs,'DelayProfile','Model-D', ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');  
noise = comm.ThermalNoise('SampleRate',fs, ...  
    'NoiseMethod','Noise figure', ...  
    'NoiseFigure',9);
```

Pass the waveform through the TGn channel and add noise.

```
rxSigNoNoise = tgnChan(txSig);  
rxSig = noise(rxSigNoNoise);
```

Create a phase and frequency offset object to introduce a carrier frequency offset. Introduce a 2 kHz frequency offset.

```
pf0ffset = comm.PhaseFrequencyOffset('SampleRate',fs,'FrequencyOffsetSource','Input port 1');  
rxSig = pf0ffset(rxSig,2e3);
```

Extract the L-STF signal for coarse frequency offset estimation.

```
istf = wlanFieldIndices(cfg,'L-STF');  
rxstf = rxSig(istf(1):istf(2),:);
```

Perform a coarse estimate of the frequency offset. Your results may differ.

```
foffset1 = wlanCoarseCF0Estimate(rxstf,cbw)
```

```
foffset1 = 2.0221e+03
```

Correct for the estimated offset.

```
rxSigCorr1 = pf0ffset(rxSig,-foffset1);
```

Fine Frequency Correction

Extract the L-LTF signal for fine offset estimation.

```
iltf = wlanFieldIndices(cfg,'L-LTF');  
rxlftf1 = rxSigCorr1(iltf(1):iltf(2),:);
```

Perform a fine estimate of the corrected signal.

```
foffset2 = wlanFineCF0Estimate(rxlftf1,cbw)
```

```
foffset2 = -11.0795
```

The corrected signal offset is reduced from 2000 Hz to approximately 7 Hz.

Correct for the remaining offset.

```
rxSigCorr2 = pfOffset(rxSigCorr1, -foffset2);
```

Determine the frequency offset of the twice corrected signal.

```
rxlftf2 = rxSigCorr2(iltf(1):iltf(2),:);
deltaFreq = wlanFineCFOEstimate(rxlftf2,cbw)
```

```
deltaFreq = -2.0374e-11
```

The CFO is zero.

Input Arguments

rxSig — Received signal

matrix

Received signal containing an L-LTF, specified as an N_S -by- N_R matrix. N_S is the number of samples in the L-LTF and N_R is the number of receive antennas.

Note If the number of samples in `rxSig` is greater than the number of samples in the L-LTF, the trailing samples are not used to estimate the carrier frequency offset.

Data Types: double

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

corrOffset — Correlation offset

0.75 (default) | real scalar from 0 to 1

Correlation offset as a fraction of the L-LTF cyclic prefix, specified as a real scalar from 0 to 1. The duration of the short training symbol varies with bandwidth. For more information, see “L-LTF” on page 2-130.

Data Types: double

Output Arguments

f0ffset — Frequency offset

real scalar


Frequency offset in Hz, returned as a real scalar.

Data Types: double

More About


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

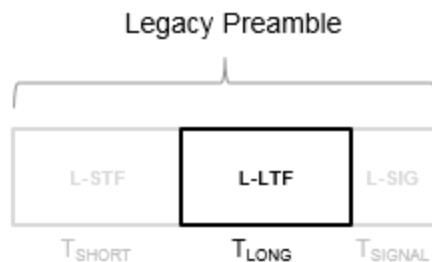

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

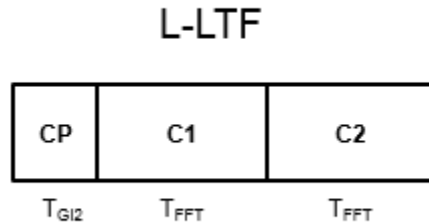

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{GI2} = T_{FFT} / 2$)	L-LTF Duration ($T_{LONG} = T_{GI2} + 2 \times T_{FFT}$)
20, 40, 80, and 160	312.5	3.2 μ s	1.6 μ s	8 μ s
10	156.25	6.4 μ s	3.2 μ s	16 μ s
5	78.125	12.8 μ s	6.4 μ s	32 μ s

References

- [1] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [2] Li, Jian. “Carrier Frequency Offset Estimation for OFDM-Based WLANs.” *IEEE Signal Processing Letters*. Vol. 8, Issue 3, Mar 2001, pp. 80-82.

- [3] Moose, P. H. "A technique for orthogonal frequency division multiplexing frequency offset correction." *IEEE Transactions on Communications*. Vol. 42, Issue 10, Oct 1994, pp. 2908-2914.
- [4] Perahia, E., and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac*. 2nd Edition. United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`comm.PhaseFrequencyOffset` | `wlanCoarseCF0Estimate` | `wlanLLTF`

Introduced in R2015b

wlanLLTFChannelEstimate

Channel estimation using L-LTF

Syntax

```
chEst = wlanLLTFChannelEstimate(demodSig, cfg)
chEst = wlanLLTFChannelEstimate(demodSig, cbw)
chEst = wlanLLTFChannelEstimate( ____, span)
```

Description

`chEst = wlanLLTFChannelEstimate(demodSig, cfg)` returns the channel estimate between the transmitter and all receive antennas using the demodulated “L-LTF” on page 2-143³, `demodSig`, given the parameters specified in configuration object `cfg`.

`chEst = wlanLLTFChannelEstimate(demodSig, cbw)` returns the channel estimate given channel bandwidth `cbw`. The channel bandwidth can be used instead of the configuration object.

`chEst = wlanLLTFChannelEstimate(____, span)` returns the channel estimate and performs frequency smoothing over the specified filter span. For more information, see “Frequency Smoothing” on page 2-144.

This syntax supports input options from prior syntaxes.

Examples

Estimate SISO Channel Using L-LTF

Create VHT format configuration object. Generate a time-domain waveform for an 802.11ac VHT packet.

3. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
vht = wlanVHTConfig;  
txWaveform = wlanWaveformGenerator([1;0;0;1],vht);
```

Multiply the transmitted VHT signal by $-0.1 + 0.5i$ and pass it through an AWGN channel with a 30 dB signal-to-noise ratio.

```
rxWaveform = awgn(txWaveform*(-0.1+0.5i),30);
```


Extract the L-LTF field indices and demodulate the L-LTF. Perform channel estimation without frequency smoothing.

```
idxLLTF = wlanFieldIndices(vht,'L-LTF');  
demodSig = wlanLLTFDemodulate(rxWaveform(idxLLTF(1):idxLLTF(2),:),vht);
```

```
est = wlanLLTFChannelEstimate(demodSig,vht);
```

Plot the channel estimate.

```
scatterplot(est)  
grid
```

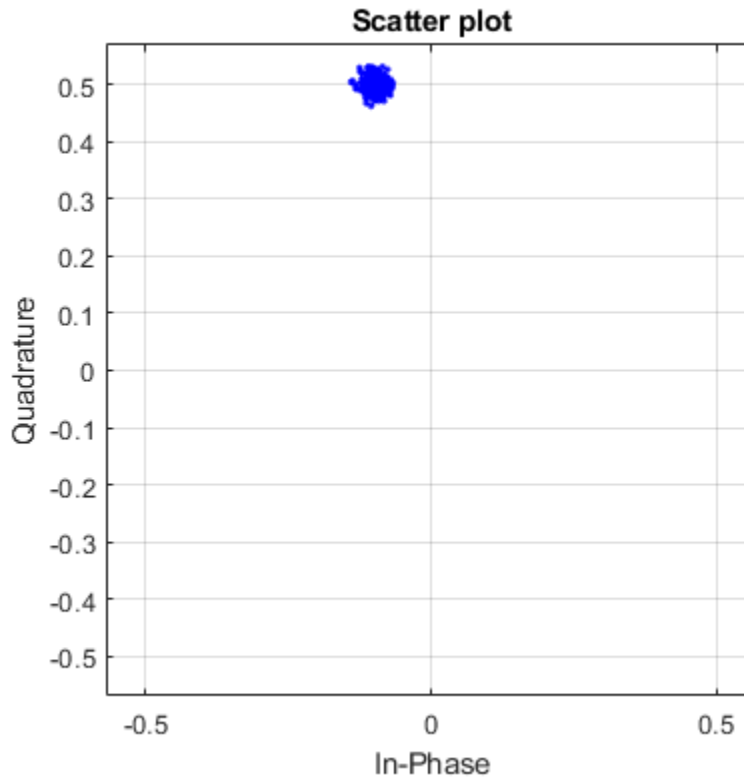

The channel estimate matches the complex channel multiplier.

L-LTF Channel Estimation After TGn Channel

Generate a time domain waveform for an 802.11n HT packet, pass it through a TGn fading channel and perform L-LTF channel estimation. Trailing zeros are added to the waveform to allow for TGn channel delay.

Create the HT packet configuration and transmit waveform.

```
cfgHT = wlanHTConfig;  
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgHT);
```

Configure a TGn channel with 20 MHz bandwidth.

```
tgnChannel = wlanTGnChannel;  
tgnChannel.SampleRate = 20e6;
```

Pass the waveform through the TGn channel, adding trailing zeros to allow for channel delay.

```
rxWaveform = tgnChannel([txWaveform; zeros(15,1)]);
```

Skip the first four samples to synchronize the received waveform for channel delay.

```
rxWaveform = rxWaveform(5:end,:);
```

Extract the L-LTF and perform channel estimation.

```
idnLLTF = wlanFieldIndices(cfgHT, 'L-LTF');  
sym = wlanLLTFDemodulate(rxWaveform(idnLLTF(1):idnLLTF(2),:),cfgHT);  
est = wlanLLTFChannelEstimate(sym,cfgHT);
```

Estimate 80 MHz SISO Channel Using L-LTF

Create a VHT format configuration object. Using these objects, generate a time-domain waveform for an 802.11ac VHT packet.

```
vht = wlanVHTConfig('ChannelBandwidth','CBW80');  
txWaveform = wlanWaveformGenerator([1;0;0;1],vht);
```

Multiply the transmitted VHT signal by $-0.4 + 0.3i$ and pass it through an AWGN channel.


```
rxWaveform = awgn(txWaveform*(-0.4+0.3i),30);
```

Specify the channel bandwidth for demodulation and channel estimation. Extract the L-LTF field indices, demodulate the L-LTF, and perform channel estimation without frequency smoothing.

```
chanBW = 'CBW80';  
idxLLTF = wlanFieldIndices(vht, 'L-LTF');  
demodSig = wlanLLTFDemodulate(rxWaveform(idxLLTF(1):idxLLTF(2),:),chanBW);  
est = wlanLLTFChannelEstimate(demodSig,chanBW);
```

Plot the channel estimate.

```
scatterplot(est)  
grid
```

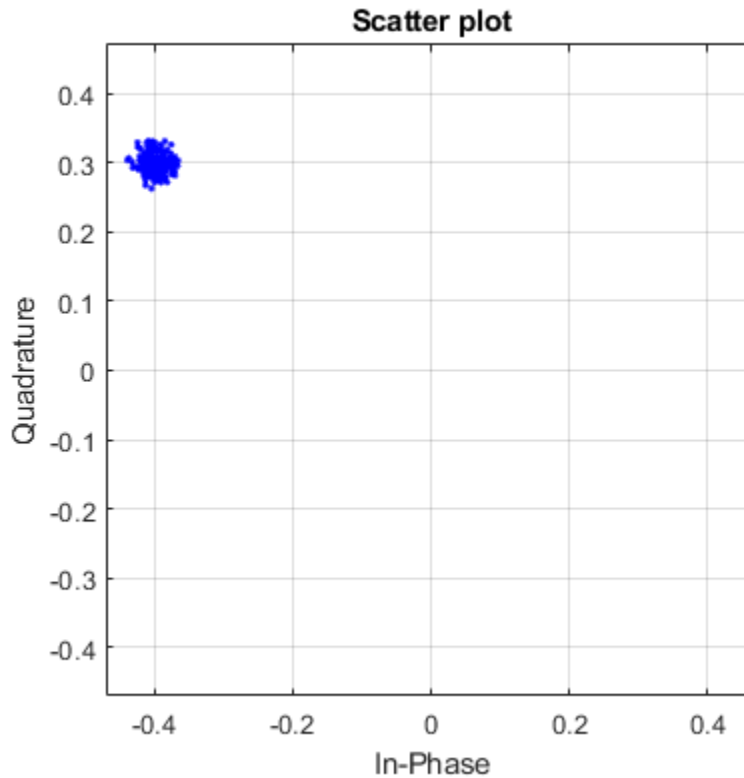

The channel estimate matches the complex channel multiplier.

Estimate SISO Channel Using L-LTF and Smoothing Filter

Create a VHT format configuration object. Generate a time-domain waveform for an 802.11ac VHT packet.

```
vht = wlanVHTConfig;  
txWaveform = wlanWaveformGenerator([1;0;0;1],vht);
```

Multiply the transmitted VHT signal by $0.2 - 0.6i$ and pass it through an AWGN channel having a 10 dB SNR.

```
rxWaveform = awgn(txWaveform*complex(0.2, -0.6), 10);
```

Extract the L-LTF from the received waveform. Demodulate the L-LTF.


```
idxLLTF = wlanFieldIndices(vht, 'L-LTF');  
lltfDemodSig = wlanLLTFDemodulate(rxWaveform(idxLLTF(1):idxLLTF(2), :), vht);
```

Use the demodulated L-LTF signal to generate the channel estimate.

```
est = wlanLLTFChannelEstimate(lltfDemodSig, vht);
```

Plot the channel estimate.


```
scatterplot(est)  
grid
```

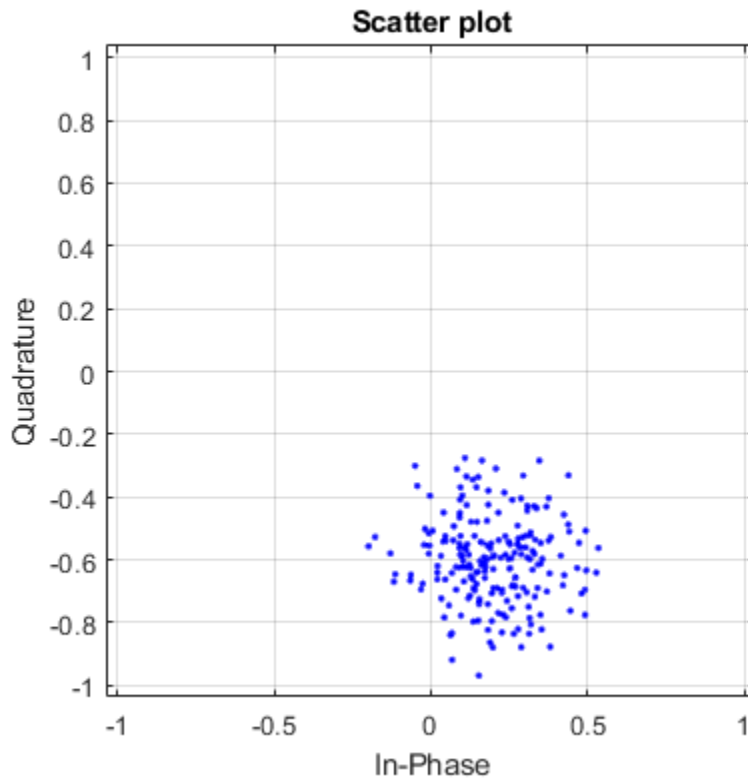

The channel estimate is noisy, which may lead to inaccurate data recovery.

Estimate the channel again with the filter span set to 11.

```
est = wlanLLTFChannelEstimate(lltfDemodSig,vht,11);  
scatterplot(est)  
grid
```

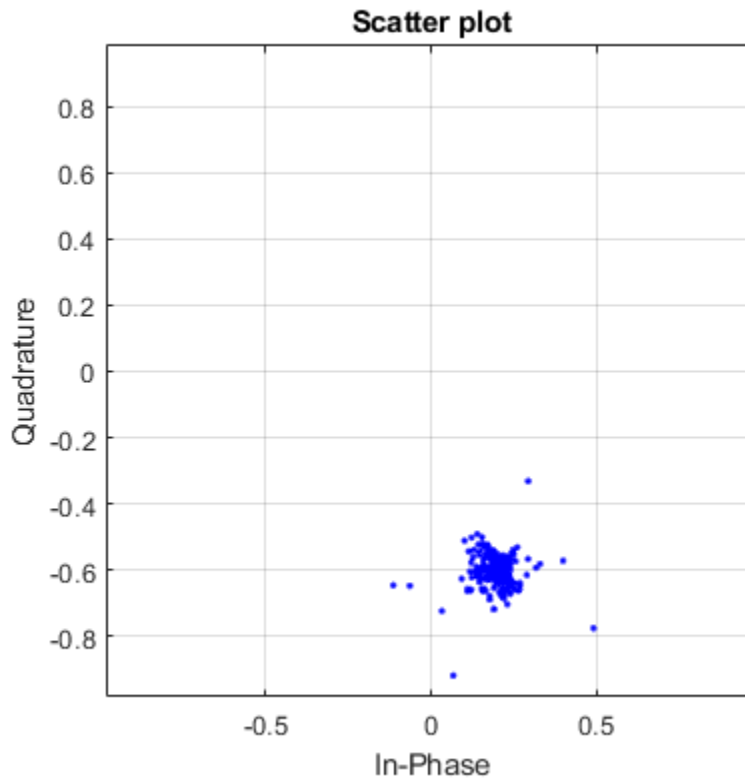

The filtering provides a better channel estimate.

Estimate Channel with L-LTF and Recover VHT-SIG-A

Create a VHT format configuration object. Generate L-LTF and VHT-SIG-A fields.

```
vht = wlanVHTConfig;  
txLLTF = wlanLLTF(vht);  
txSig = wlanVHTSIGA(vht);
```

Create a TGac channel for an 80 MHz bandwidth and a Model-A delay profile. Pass the transmitted L-LTF and VHT-SIG-A signals through the channel.


```
tgacChan = wlanTGacChannel('SampleRate',80e6,'ChannelBandwidth','CBW80', ...
    'DelayProfile','Model-A');
```

```
rxLLTFNoNoise = tgacChan(txLLTF);
rxSigNoNoise = tgacChan(txSig);
```

Create an AWGN noise channel with an SNR = 15 dB. Add the AWGN noise to L-LTF and VHT-SIG-A signals.

```
chNoise = comm.AWGNChannel('NoiseMethod','Signal to noise ratio (SNR)', ...
    'SNR',15);
```

```
rxLLTF = chNoise(rxLLTFNoNoise);
rxSig = chNoise(rxSigNoNoise);
```

Create an AWGN channel having a noise variance corresponding to a 9 dB noise figure receiver. Pass the faded signals through the AWGN channel.

```
nVar = 10^((-228.6 + 10*log10(290) + 10*log10(80e6) + 9)/10);
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);
```

```
rxLLTF = awgnChan(rxLLTF);
rxSig = awgnChan(rxSig);
```

Demodulate the received L-LTF.

```
demodLLTF = wlanLLTFDemodulate(rxLLTF,vht);
```

Estimate the channel using the demodulated L-LTF.

```
chEst = wlanLLTFChannelEstimate(demodLLTF,vht);
```

Recover the VHT-SIG-A signal and verify that there was no CRC failure.

```
[recBits,crcFail] = wlanVHTSIGARecover(rxSig,chEst,nVar,'CBW80');
crcFail
```

```
crcFail = logical
    0
```

Input Arguments

demodSig — Demodulated L-LTF OFDM symbols

3-D array

Demodulated L-LTF OFDM symbols, specified as an N_{ST} -by- N_{SYM} -by- N_R array. N_{ST} is the number of occupied subcarriers. N_{SYM} is the number of demodulated L-LTF symbols (one or two). N_R is the number of receive antennas. Each column of the 3-D array is a demodulated L-LTF OFDM symbol. If you specify two L-LTF symbols, `wlanLLTFChannelEstimate` averages the channel estimate over both symbols.

Data Types: double

Complex Number Support: Yes

cfg — Format configuration

`wlanVHTConfig` object | `wlanHTConfig` object | `wlanNonHTConfig` object

Format configuration, specified as one of these objects:

- `wlanVHTConfig` for VHT format
- `wlanHTConfig` for HT format
- `wlanNonHTConfig` for non-HT format

The `wlanLLTFChannelEstimate` function uses the `ChannelBandwidth` property of `cfg`.

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth of the packet transmission waveform, specified as:

PPDU Transmission Format	Valid Channel Bandwidth
VHT	'CBW20', 'CBW40', 'CBW80' (default), or 'CBW160'
HT	'CBW20' (default) or 'CBW40'
non-HT	'CBW5', 'CBW10', or 'CBW20' (default)

Data Types: char | string

span — Filter span

positive odd integer

Filter span of the frequency smoothing filter, specified as a positive odd integer and expressed as a number of subcarriers. Frequency smoothing is applied only when span is specified and is greater than one. See “Frequency Smoothing” on page 2-144.

Note Frequency smoothing is recommended only when a single transmit antenna is used.

Data Types: double

Output Arguments

chEst — Channel estimate


3-D array

Channel estimate containing data and pilot subcarriers, returned as an N_{ST} -by-1-by- N_R array. N_{ST} is the number of occupied subcarriers. The value of 1 corresponds to the single transmitted stream in the L-LTF. N_R is the number of receive antennas.

More About


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

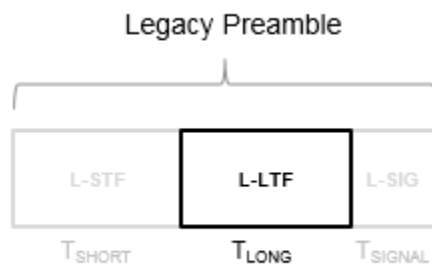

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

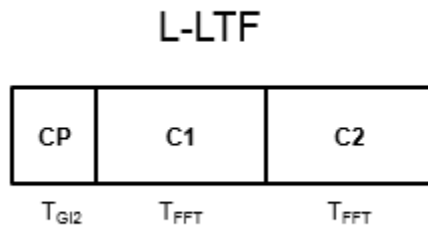

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{GI2} = T_{FFT} / 2$)	L-LTF Duration ($T_{LONG} = T_{GI2} + 2 \times T_{FFT}$)
20, 40, 80, and 160	312.5	3.2 μ s	1.6 μ s	8 μ s
10	156.25	6.4 μ s	3.2 μ s	16 μ s
5	78.125	12.8 μ s	6.4 μ s	32 μ s

Frequency Smoothing

Frequency smoothing can improve channel estimation for highly correlated channels by averaging out white noise.

Frequency smoothing is recommended only for cases in which a single transmit antenna is used. Frequency smoothing consists of applying a moving-average filter that spans

multiple adjacent subcarriers. Channel conditions dictate whether frequency smoothing is beneficial.

- If adjacent subcarriers are highly correlated, frequency smoothing results in significant noise reduction.
- In a highly frequency-selective channel, smoothing can degrade the quality of the channel estimate.

References

- [1] Van de Beek, J.-J., O. Edfors, M. Sandell, S. K. Wilson, and P. O. Borjesson. "On Channel Estimation in OFDM Systems." Vehicular Technology Conference, IEEE 45th, Volume 2, IEEE, 1995.
- [2] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanHTLTFChannelEstimate](#) | [wlanLLTFDemodulate](#) | [wlanNonHTConfig](#) | [wlanVHTConfig](#) | [wlanVHTLTFChannelEstimate](#)

Introduced in R2015b

wlanHEDataBitRecover

Recover data bits from HE-Data field

Syntax

```
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgHE)
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgHE)
```

```
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgHE,userIdx)
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgHE,
userIdx)
```

```
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgRx)
dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgRx)
```

```
recBits = wlanHEDataBitRecover( ____,Name,Value)
```

Description

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgHE)` recovers `dataBits`, the HE-Data bits in a high-efficiency single-user (HE SU) transmission.

The function recovers `dataBits` from `rxDataSym`, the equalized HE-Data OFDM symbols. The `cfgHE` input parameterizes the transmission, which is subject to noise variance estimate `noiseVarEst`.

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgHE)` returns the recovered data bits using the channel state information `csi` to enhance the demapping of OFDM subcarriers.

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgHE,userIdx)` returns the recovered data bits for the specified user of a high-efficiency multiuser (HE MU) transmission, as determined by the user index `userIdx`.

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgHE,userIdx)` returns the recovered data bits for the specified user of an HE MU

transmission, using the channel state information to enhance the demapping of OFDM subcarriers.

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,cfgRx)` returns the data bits recovered from a transmission parameterized by `cfgRx`, an HE recovery configuration object.

`dataBits = wlanHEDataBitRecover(rxDataSym,noiseVarEst,csi,cfgRx)` returns the recovered data bits for the HE recovery configuration object and channel state information.

`recBits = wlanHEDataBitRecover(____,Name,Value)` returns the recovered data bits for additional options specified by one or more name-value pair arguments. When you do not specify a name-value pair, the default value is used.

Examples

Recover Single-User HE Packet Data in AWGN Channel

Recover HE data from a single-user HE packet waveform transmitted through an AWGN channel.

```
cfgHE = wlanHESUConfig('MCS',11);
```

Generate a transmit waveform containing eight data packets.

```
msgLen = getPSDULength(cfgHE)*8;
txBits = randi([0 1],msgLen,1,'int8');
txWaveform = wlanWaveformGenerator(txBits,cfgHE);
```

Add noise to the waveform.

```
snr = 30;
rxWaveform = awgn(txWaveform,snr);
```

Extract the data field.

```
ind = wlanFieldIndices(cfgHE);
rxData = rxWaveform(ind.HEData(1):ind.HEData(2),:);
```

Assuming 20-MHz channel bandwidth and 3.2-microsecond guard interval, OFDM demodulate the received waveform and extract the data-carrying subcarriers.

```
Nfft = 256; % FFT length (20 MHz)
Ncp = 64; % Cyclic prefix length (3.2 us at 20 MHz)
pilotSC = [-116; -90; -48; -22; 22; 48; 90; 116]; % Pilot indices
ruSC = [-122:-2 2:122].'; % Active subcarrier indices
nullIdx = setdiff((-Nfft/2:(Nfft/2-1)).', ruSC)+Nfft/2+1;
pilotIdx = pilotSC+Nfft/2+1;
sf = (1/sqrt(numel(ruSC)))*Nfft; % Scaling factor
rxSym = ofdmmodem(rxData,Nfft,Ncp,Ncp,nullIdx,pilotIdx)/sf;
```

Recover the data bits.

```
csi = ones(length(rxSym),1); % Assume CSI estimate of all ones
nVar = 10^(-snr/10); % Noise variance
rxBits = wlanHEDataBitRecover(rxSym,nVar,csi,cfgHE);
```

Compare the recovered bits to the original information bits.

```
disp(isequal(txBits,rxBits));
```

1

Decode Multiuser HE-Data Field

Decode the HE-Data field for each user in an OFDMA transmission.

Waveform Generation

Create a multiuser HE object and packet configuration.

```
allocationIndex = 96; % Two 106-tone RUs, two users, 20 MHz
cfg = wlanHEMUConfig(allocationIndex);
cfg.User{1}.MCS = 4;
cfg.User{2}.APEPLength = 1e3;
cfg.User{2}.MCS = 7;
```

Generate random data based on the specific PSDU length per user.

```
numUsers = numel(cfg.User);
psduLength = getPSDULength(cfg);
txBits = cell(1,numUsers);
for i = 1:numUsers
    txBits{i} = randi([0 1],psduLength(i)*8,1);
end
```


Generate an OFDMA waveform signal and add AWGN to the signal.

```
txWaveform = wlanWaveformGenerator(txBits,cfg);
snr = 25;
rxWaveform = awgn(txWaveform,snr);
```

Receiver Processing per User

Using the PPDU field indices structure, extract the HE-Data field for each user.

```
ind = wlanFieldIndices(cfg)
```

```
ind = struct with fields:
    LSTF: [1 160]
    LLTF: [161 320]
    LSIG: [321 400]
    RLSIG: [401 480]
    HESIGA: [481 640]
    HESIGB: [641 880]
    HESTF: [881 960]
    HELTF: [961 1280]
    HEData: [1281 6720]
    HEPE: [0x2 double]
```

```
rxData = rxWaveform(ind.HEData(1):ind.HEData(2),:);
```

For each user, OFDM demodulate and extract data-carrying subcarriers assuming 20-MHz channel bandwidth, and 3.2-microsecond guard interval for the appropriate resource unit (RU).

```
for userIdx = 1:numUsers
    Nfft = 256; % FFT length (20 MHz)
    Ncp = 64; % Cyclic prefix length (3.2 us at 20 MHz)
    pilotSC = [-116; -90; -48; -22; 22; 48; 90; 116]; % Pilot indices
    if userIdx==1
        ruSC = (-122:-17).'; % Active subcarrier indices RU #1
    else
        ruSC = (17:122).'; % Active subcarrier indices RU #2
    end
    nullIdx = setdiff((-Nfft/2:(Nfft/2-1)).',ruSC)+Nfft/2+1;
    pilotIdx = pilotSC(ismember(pilotSC,ruSC))+Nfft/2+1;
    sf = (1/sqrt(2* numel(ruSC)))*Nfft; % Scaling factor
    rxSym = ofdm demod(rxData,Nfft,Ncp,Ncp,nullIdx,pilotIdx)/sf;
```

```
% Recover data bits and compare with transmitted
csi = ones(length(rxSym),1); % Assume CSI estimate of all ones
nVar = 10^(-snr/10); % Noise variance
rxBits = wlanHEDataBitRecover(rxSym,nVar,csi,cfg,userIdx);
disp(isequal(rxBits,txBits{userIdx}))
end

1

1
```

Recover HE-Data Field for HE-SU-Format Packet

Recover the HE-Data field for an HE-SU-format packet by decoding the HE signaling fields, updating the unknown properties in the recovery configuration object, and passing the updated object into the HE-Data recovery function.

Create an HE-SU-format configuration object, specifying the MCS, and extract the channel bandwidth.

```
cfgHESU = wlanHESUConfig('MCS',0);
cbw = cfgHESU.ChannelBandwidth;
```

Generate a waveform for the specified configuration object.

```
bits = randi([0 1],8*getPSDULength(cfgHESU),1,'int8');
waveform = wlanWaveformGenerator(bits,cfgHESU);
```

Create a WLAN recovery configuration object, specifying the known channel bandwidth and an HE-SU-format packet.

```
cfgRx = wlanHERecoveryConfig('ChannelBandwidth',cbw,'PacketFormat','HE-SU');
```

Recover the HE signaling fields by retrieving the field indices and performing the relevant demodulation operations.

```
ind = wlanFieldIndices(cfgRx);
heLSIGandRLSIG = waveform(ind.LSIG(1):ind.RLSIG(2),:);
symLSIG = wlanHEDemodulate(heLSIGandRLSIG,'L-SIG',cbw);
info = wlanHEOFDMInfo('L-SIG',cbw);
```

Merge the L-SIG and RL-SIG fields for diversity and obtain the data subcarriers.

```
symLSIG = mean(symLSIG,2);
lsig = symLSIG(info.DataIndices,:);
```

Decode the L-SIG field, assuming a noiseless channel, and use the length field to update the recovery object.

```
[~,~,lsigInfo] = wlanLSIGBitRecover(lsig,0);
cfgRx.LSIGLength = lsigInfo.Length;
```

Recover and demodulate the HE-SIG-A field, obtain the data subcarriers and recover the HE-SIG-A bits.

```
heSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);
symSIGA = wlanHEDemodulate(heSIGA,'HE-SIG-A',cbw);
siga = symSIGA(info.DataIndices,:);
[sigaBits,failCRC] = wlanHESIGABitRecover(siga,0);
```

Update the recovery configuration object with the recovered HE-SIG-A bits and obtain the updated field indices.

```
cfgRx = interpretHESIGABits(cfgRx,sigaBits);
ind = wlanFieldIndices(cfgRx);
```

Retrieve and decode the HE-Data field.

```
heData = waveform(ind.HEData(1):ind.HEData(2),:);
symData = wlanHEDemodulate(heData,'HE-Data', ...
    cbw,cfgRx.GuardInterval,[cfgRx.RUSize cfgRx.RUIndex]);
infoData = wlanHEOFDMInfo('HE-Data',cbw,cfgRx.GuardInterval,[cfgRx.RUSize cfgRx.RUIndex]);
data = symData(infoData.DataIndices,:);
dataBits = wlanHEDataBitRecover(data,0,cfgRx);
```

Check that the returned data bits are the same as the transmitted data bits.

```
isequal(bits,dataBits)
```

```
ans = logical
     1
```

Input Arguments

rxDataSym — Equalized HE-Data field OFDM symbols

complex-valued array

Equalized HE-Data field OFDM symbols for a user, specified as an N_{SD} -by- N_{Sym} -by- N_{SS} complex-valued array. N_{SD} is the number of data subcarriers in the HE-Data field, N_{Sym} is the number of OFDM symbols, and N_{SS} is the number of spatial streams. The contents and size of `rxDataSym` depend on the HE PPDU format configuration.

Data Types: `double`

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: `double`

csi — Channel State Information

real-valued matrix

Channel state information, specified as an N_{ST} -by- N_{SS} real-valued matrix. N_{ST} is the number of subcarriers and N_{SS} is the number of spatial streams.

Data Types: `double`

cfgHE — HE format configuration

`wlanHESUConfig` object | `wlanHEMUConfig` object

HE format configuration, specified as an object of type `wlanHESUConfig` or `wlanHEMUConfig`.

cfgRx — HE recovery configuration

`wlanHERecoveryConfig` object

HE recovery configuration, specified as a `wlanHERecoveryConfig` object.

userIdx — User index

integer in the interval [1, 8]

User index, specified as an integer in the interval [1, 8].

Data Types: double

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name`, `Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside quotes. You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'MaximumLDPCIterationCount','12','EarlyTermination','false'` specifies a maximum of 12 decoding iterations for the low-density parity check (LDPC) and disables early termination of LDPC decoding so that it completes the 12 iterations.

MaximumLDPCIterationCount — Maximum number of decoding iterations in LDPC

12 (default) | positive integer

Maximum number of decoding iterations in low-density parity check (LDPC), specified as a positive integer. This argument applies when channel coding is set to LDPC for the user of interest.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: double

EarlyTermination — Enable early termination of LDPC decoding

false or 0 (default) | true or 1

Enable early termination of LDPC decoding, specified as a logical value of 1 (`true`) or 0 (`false`). This property applies when channel coding is set to LDPC for the user of interest.

- When set to `false`, LDPC decoding completes the number of iterations specified by `MaximumLDPCIterationCount`, regardless of parity check status.
- When set to `true`, LDPC decoding terminates when all parity-checks are satisfied.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: logical

Output Arguments

dataBits — Recovered information bits in the HE-Data field

1 | 0 | column vector


Recovered information bits in the HE-Data field, returned as an 8-by- L_{PSDU} column vector, where L_{PSDU} is the PSDU length. You can determine the PSDU length by using the `getPSDULength` function.

Data Types: `int8`

More About

HE-Data Field

The HE-Data field of the HE PPDU contains data for one or more users.

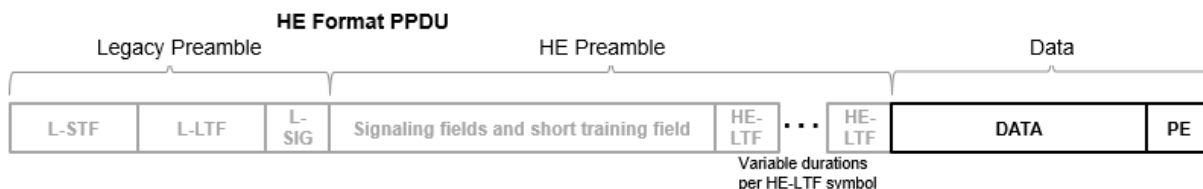

As described in [1], the number of OFDM symbols in the HE-Data field is determined by the length value of the legacy signal (L-SIG) field (see Equation (28-11)), the preamble duration and the settings of the GI+LTF Size, Pre-FEC Padding Factor, and PE Disambiguity fields in the HE-SIG-A field (see 28.3.10.7 (HE-SIG-A)).

- Data symbols in an HE PPDU use a discrete Fourier transform (DFT) period of 12.8 μs and subcarrier spacing of 78.125 kHz.
- Data symbols in an HE PPDU support guard interval durations of 0.8 μs , 1.6 μs , and 3.2 μs .
- HE PPDUs have single stream pilots in the HE-Data field.

When BCC encoding is used, the HE-Data field consists of the SERVICE field, the PSDU, the pre-FEC PHY padding bits, the tail bits, and the post-FEC padding bits. Packet extension is assumed to be zero.

When LDPC encoding is used, the HE-Data field consists of the SERVICE field, the PSDU, the pre-FEC PHY padding bits, the post-FEC padding bits, and the packet extension. No tail bits are present when LDPC encoding is used.

For more information, see “WLAN Packet Structure” and “Build HE PPDU”.

References

- [1] IEEE Std P802.11ax™/D3.1 Draft Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 6: Enhancements for High Efficiency WLAN.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanHEMUConfig | wlanHERecoveryConfig | wlanHESUConfig | wlanRecoveryConfig

Introduced in R2018b

wlanHTLTFChannelEstimate

Channel estimation using HT-LTF

Syntax

```
chEst = wlanHTLTFChannelEstimate(demodSig, cfg)
chEst = wlanHTLTFChannelEstimate(demodSig, cfg, span)
```

Description

`chEst = wlanHTLTFChannelEstimate(demodSig, cfg)` returns the channel estimate using the demodulated “HT-LTF” on page 2-162⁴ signal, `demodSig`, given the parameters specified in configuration object `cfg`.

`chEst = wlanHTLTFChannelEstimate(demodSig, cfg, span)` returns the channel estimate and specifies the span of a moving-average filter used to perform frequency smoothing.

Examples

Estimate SISO Channel Using HT-LTF

Estimate and plot the channel coefficients of an HT-mixed format channel by using the high throughput long training field.

Create an HT format configuration object. Generate the corresponding HT-LTF based on the object.

```
cfg = wlanHTConfig;
txSig = wlanHTLTF(cfg);
```

4. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Multiply the transmitted HT-LTF signal by $0.2 + 0.1i$ and pass it through an AWGN channel. Demodulate the received signal.


```
rxSig = awgn(txSig*(0.2+0.1i),30);  
demodSig = wlanHTLTFDemodulate(rxSig,cfg);
```

Estimate the channel response using the demodulated HT-LTF.

```
est = wlanHTLTFChannelEstimate(demodSig,cfg);
```

Plot the channel estimate.

```
scatterplot(est)  
grid
```

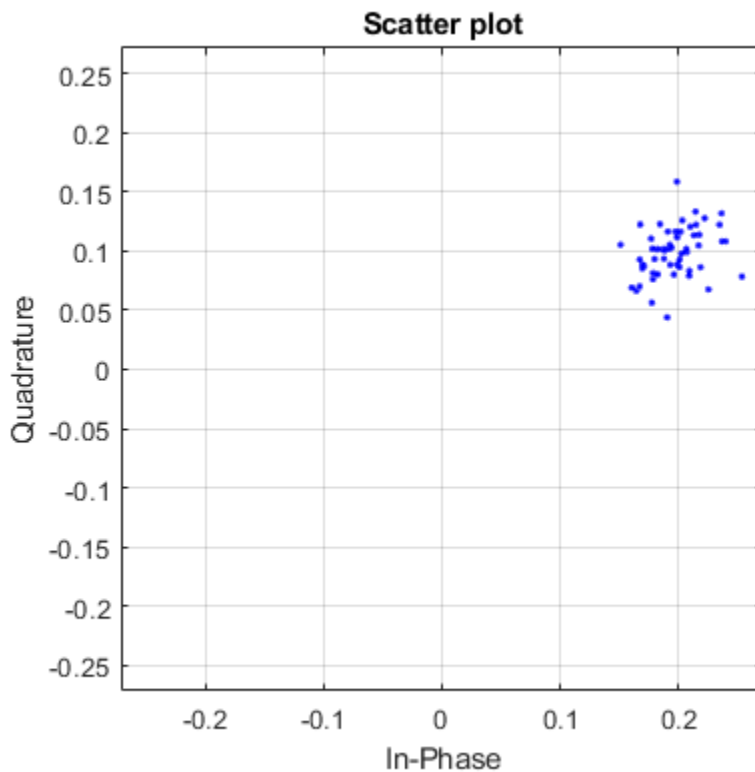

The channel estimate matches the complex channel multiplier.

Estimate MIMO Channel Using HT-LTF

Estimate the channel coefficients of a 2x2 MIMO channel by using the high throughput long training field. Recover the HT-data field and determine the number of bit errors.

Create an HT-mixed format configuration object for a channel having two spatial streams and four transmit antennas. Transmit a complete HT waveform.

```
cfg = wlanHTConfig('NumTransmitAntennas',2, ...  
    'NumSpaceTimeStreams',2,'MCS',11);  
txPSDU = randi([0 1],8*cfg.PSDULength,1);  
txWaveform = wlanWaveformGenerator(txPSDU,cfg);
```

Pass the transmitted waveform through a 2x2 TGn channel.

```
tgnChan = wlanTGnChannel('SampleRate',20e6, ...  
    'NumTransmitAntennas',2, ...  
    'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');  
rxWaveformNoNoise = tgnChan(txWaveform);
```

Create an AWGN channel with noise power, $nVar$, corresponding to a receiver having a 9 dB noise figure. The noise power is equal to $kTBF$, where k is Boltzmann's constant, T is the ambient noise temperature (290K), B is the bandwidth (20 MHz), and F is the noise figure (9 dB).

```
nVar = 10^((-228.6 + 10*log10(290) + 10*log10(20e6) + 9)/10);  
awgnChan = comm.AWGNChannel('NoiseMethod','Variance', ...  
    'Variance',nVar);
```

Pass the signal through the AWGN channel.

```
rxWaveform = awgnChan(rxWaveformNoNoise);
```

Determine the indices for the HT-LTF. Extract the HT-LTF from the received waveform. Demodulate the HT-LTF.

```
indLTF = wlanFieldIndices(cfg,'HT-LTF');  
rxLTF = rxWaveform(indLTF(1):indLTF(2),:);  
ltfDemodSig = wlanHTLTFDemodulate(rxLTF,cfg);
```

Generate the channel estimate by using the demodulated HT-LTF signal. Specify a smoothing filter span of three subcarriers.

```
chEst = wlanHTLTFChannelEstimate(ltfDemodSig,cfg,3);
```

Extract the HT-data field from the received waveform.

```
indData = wlanFieldIndices(cfg,'HT-Data');
rxDataField = rxWaveform(indData(1):indData(2),:);
```

Recover the data and verify that there no bit errors occurred.

```
rxPSDU = wlanHTDataRecover(rxDataField,chEst,nVar,cfg);
```

```
numErrs = biterr(txPSDU,rxPSDU)
```

```
numErrs = 0
```

Input Arguments

demodSig — Demodulated HT-LTF signal

3-D array

Demodulated HT-LTF signal, specified as an N_{ST} -by- N_{SYM} -by- N_R array. N_{ST} is the number of occupied subcarriers, N_{SYM} is the number of HT-LTF OFDM symbols, and N_R is the number of receive antennas.

Data Types: double

cfg — Configuration information

wlanHTConfig

Configuration information, specified as a wlanHTConfig object. The function uses the following wlanHTConfig object properties:

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: double

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3

Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3. When NumExtensionStreams is greater than 0, SpatialMapping must be 'Custom'.

Data Types: double

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 31

Modulation and coding scheme to use for transmitting the current packet, specified as an integer from 0 to 31. The MCS setting identifies which modulation and coding rate combination is used, and the number of spatial streams (N_{SS}).

MCS ^(Note 1)	N_{SS} ^(Note 1)	Modulation	Coding Rate
0, 8, 16, or 24	1, 2, 3, or 4	BPSK	1/2
1, 9, 17, or 25	1, 2, 3, or 4	QPSK	1/2
2, 10, 18, or 26	1, 2, 3, or 4	QPSK	3/4
3, 11, 19, or 27	1, 2, 3, or 4	16QAM	1/2
4, 12, 20, or 28	1, 2, 3, or 4	16QAM	3/4
5, 13, 21, or 29	1, 2, 3, or 4	64QAM	2/3
6, 14, 22, or 30	1, 2, 3, or 4	64QAM	3/4
7, 15, 23, or 31	1, 2, 3, or 4	64QAM	5/6
Note-1 MCS from 0 to 7 have one spatial stream. MCS from 8 to 15 have two spatial streams. MCS from 16 to 23 have three spatial streams. MCS from 24 to 31 have four spatial streams.			

See IEEE 802.11-2012, Section 20.6 for further description of MCS dependent parameters.

When working with the HT-Data field, if the number of space-time streams is equal to the number of spatial streams, no space-time block coding (STBC) is used. See IEEE 802.11-2012, Section 20.3.11.9.2 for further description of STBC mapping.

Example: 22 indicates an MCS with three spatial streams, 64-QAM modulation, and a 3/4 coding rate.

Data Types: double

span — Filter span

positive odd integer

Filter span of the frequency smoothing filter, specified as an odd integer. The span is expressed as a number of subcarriers.

Note If adjacent subcarriers are highly correlated, frequency smoothing will result in significant noise reduction. However, in a highly frequency selective channel, smoothing may degrade the quality of the channel estimate.

Data Types: double

Output Arguments

chEst — Channel estimate

3-D array


Channel estimate between all combinations of space-time streams and receive antennas, returned as an N_{ST} -by- $(N_{STS}+N_{ESS})$ -by- N_R array. N_{ST} is the number of occupied subcarriers, N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_R is the number of receive antennas. Data and pilot subcarriers are included in the channel estimate.

Data Types: double

More About

HT-LTF

The high throughput long training field (HT-LTF) is located between the HT-STF and data field of an HT-mixed packet.

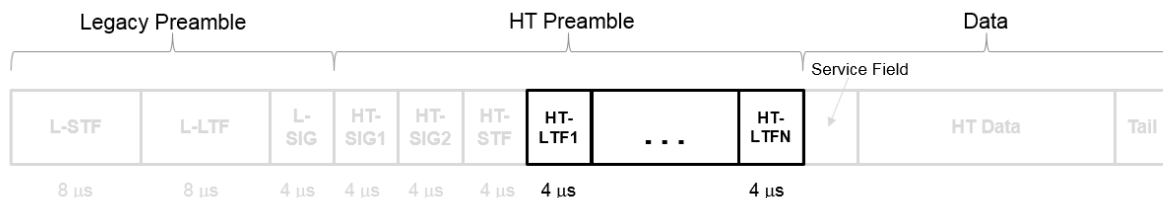

As described in IEEE Std 802.11-2012, Section 20.3.9.4.6, the receiver can use the HT-LTF to estimate the MIMO channel between the set of QAM mapper outputs (or, if STBC is applied, the STBC encoder outputs) and the receive chains. The HT-LTF portion has one or two parts. The first part consists of one, two, or four HT-LTFs that are necessary for demodulation of the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-DLTFs. The optional second part consists of zero, one, two, or four HT-LTFs that can be used to sound extra spatial dimensions of the MIMO channel not utilized by the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-ELTFs. Each HT long training symbol is 4 μs. The number of space-time streams and the number of extension streams determines the number of HT-LTF symbols transmitted.

Tables 20-12, 20-13 and 20-14 from IEEE Std 802.11-2012 are reproduced here.

N_{STS} Determination	N_{HTDLTF} Determination	N_{HTELTF} Determination
Table 20-12 defines the number of space-time streams (N_{STS}) based on the number of spatial streams (N_{SS}) from the MCS and the STBC field.	Table 20-13 defines the number of HT-DLTFs required for the N_{STS} .	Table 20-14 defines the number of HT-ELTFs required for the number of extension spatial streams (N_{ESS}). N_{ESS} is defined in HT-SIG ₂ .

N_{STS} Determination			N_{HTDLTF} Determination		N_{HTELTf} Determination	
N_{SS} from MCS	STBC field	N_{STS}	N_{STS}	N_{HTDLTF}	N_{ESS}	N_{HTELTf}
1	0	1	1	1	0	0
1	1	2	2	2	1	1
2	0	2	3	4	2	2
2	1	3	4	4	3	4
2	2	4				
3	0	3				
3	1	4				
4	0	4				

Additional constraints include:

- $N_{HTLTF} = N_{HTDLTF} + N_{HTELTf} \leq 5$.
- $N_{STS} + N_{ESS} \leq 4$.
 - When $N_{STS} = 3$, N_{ESS} cannot exceed one.
 - If $N_{ESS} = 1$ when $N_{STS} = 3$ then $N_{HTLTF} = 5$.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems, Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.
- [2] Perahia, E., and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac*. 2nd Edition, United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanHTConfig` | `wlanHTLTF` | `wlanHTLTFDemodulate`

Introduced in R2015b

wlanVHTLTFChannelEstimate

Channel estimation using VHT-LTF

Syntax

```
chEst = wlanVHTLTFChannelEstimate(demodSig, cfg)
chEst = wlanVHTLTFChannelEstimate(demodSig, cbw, numSTS)
chEst = wlanVHTLTFChannelEstimate( ____, span)
```

Description

`chEst = wlanVHTLTFChannelEstimate(demodSig, cfg)` returns the channel estimate, using the demodulated “VHT-LTF” on page 2-173⁵ signal, `demodSig`, given the parameters specified in `wlanVHTConfig` object `cfg`.

`chEst = wlanVHTLTFChannelEstimate(demodSig, cbw, numSTS)` returns the channel estimate for the specified channel bandwidth, `cbw`, and the number of space-time streams, `numSTS`.

`chEst = wlanVHTLTFChannelEstimate(____, span)` specifies the span of a moving-average filter used to perform frequency smoothing.

Examples

Estimate SISO Channel Using VHT-LTF

Display the channel estimate of the data and pilot subcarriers for a VHT format channel using its long training field.

Create a VHT format configuration object. Generate a VHT-LTF based on `cfg`.

5. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

```
cfg = wlanVHTConfig;  
txSig = wlanVHTLTF(cfg);
```

Multiply the transmitted VHT-LTF signal by $0.3 - 0.15i$ and pass it through an AWGN channel having a 30 dB signal-to-noise ratio. Demodulate the received signal.


```
rxSig = awgn(txSig*(0.3-0.15i),30);  
demodSig = wlanVHTLTFDemodulate(rxSig,cfg);
```

Estimate the channel response using the demodulated VHT-LTF signal.

```
est = wlanVHTLTFChannelEstimate(demodSig,cfg);
```

Plot the channel estimate.

```
scatterplot(est)  
grid
```

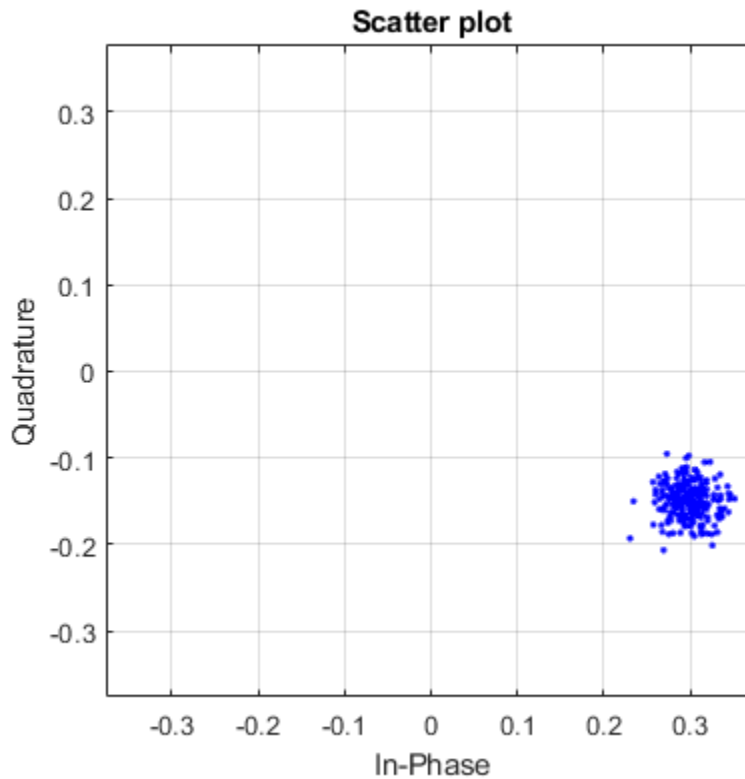

The channel estimate matches the complex channel multiplier.

Estimate MIMO Channel Using VHT-LTF

Estimate and display the channel coefficients of a 4x2 MIMO channel using the VHT-LTF.

Create a VHT format configuration object for a channel having four spatial streams and four transmit antennas. Transmit a complete VHT waveform.

```
cfg = wlanVHTConfig('NumTransmitAntennas',4, ...  
    'NumSpaceTimeStreams',4,'MCS',5);  
txWaveform = wlanWaveformGenerator([1;0;0;1;1;0],cfg);
```

Set the sampling rate, and then pass the transmitted waveform through a 4x2 TGac channel.

```
fs = 80e6;
tgacChan = wlanTGacChannel('SampleRate',fs, ...
    'NumTransmitAntennas',4,'NumReceiveAntennas',2);
rxWaveform = tgacChan(txWaveform);
```

Determine the VHT-LTF field indices and demodulate the VHT-LTF from the received waveform.


```
indVHTLTF = wlanFieldIndices(cfg,'VHT-LTF');
ltfDemodSig = wlanVHTLTFDemodulate(rxWaveform(indVHTLTF(1):indVHTLTF(2),:), cfg);
```

Generate the channel estimate by using the demodulated VHT-LTF signal. Specify a smoothing filter span of five subcarriers.

```
est = wlanVHTLTFChannelEstimate(ltfDemodSig,cfg,5);
```

Plot the magnitude response of the first space-time stream for both receive antennas. Due to the random nature of the fading channel, your results may vary.

```
plot(abs(est(:,1,1)))
hold on
plot(abs(est(:,1,2)))
xlabel('Subcarrier')
ylabel('Magnitude')
legend('Rx Antenna 1','Rx Antenna 2')
```

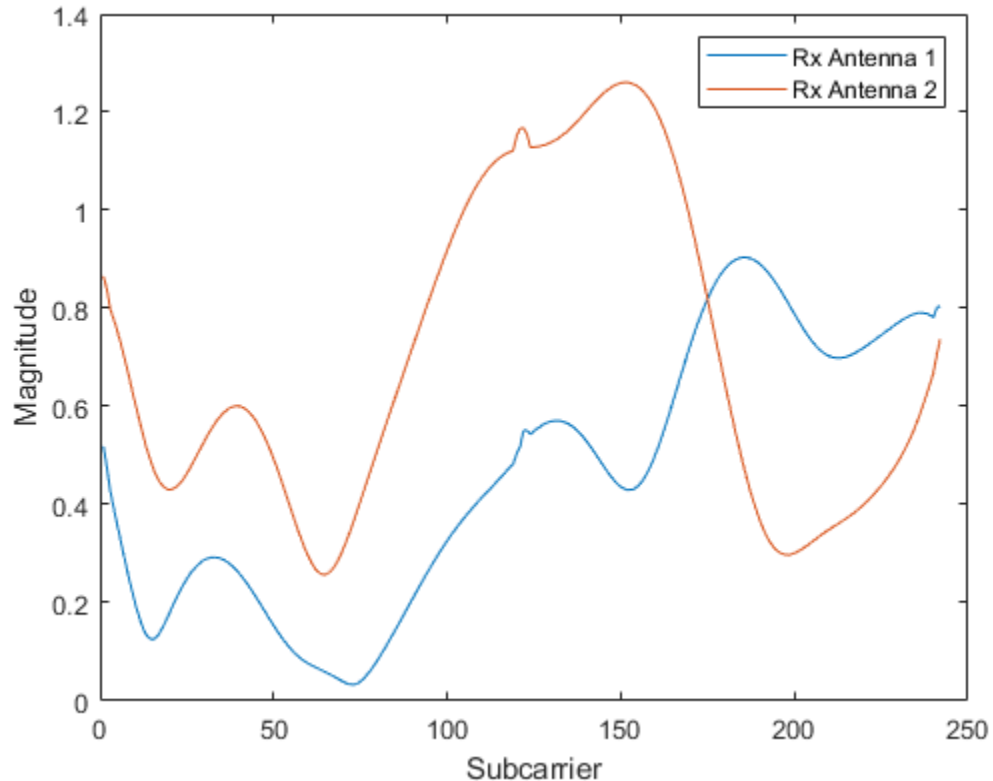

Recover VHT-Data Field in MU-MIMO Channel

Recover VHT-Data field bits for a multiuser transmission using channel estimation on a VHT-LTF field over a quasi-static fading channel.

Create a VHT configuration object having a 160 MHz channel bandwidth, two users, and four transmit antennas. Assign one space-time stream to the first user and three space-time streams to the second user.

```
cbw = 'CBW160';  
numSTS = [1 3];
```

```
vht = wlanVHTConfig('ChannelBandwidth',cbw,'NumUsers',2, ...  
    'NumTransmitAntennas',4,'NumSpaceTimeStreams',numSTS);
```

Because there are two users, the PSDU length is a 1-by-2 row vector.

```
psduLen = vht.PSDULength
```

```
psduLen = 1×2
```

```
    1050    3156
```

Generate multiuser input data. This data must be in the form of a 1-by- N cell array, where N is the number of users.

```
txDataBits{1} = randi([0 1],8*vht.PSDULength(1),1);  
txDataBits{2} = randi([0 1],8*vht.PSDULength(2),1);
```

Generate VHT-LTF and VHT-Data field signals.

```
txVHTLTF = wlanVHTLTF(vht);  
txVHTData = wlanVHTData(txDataBits,vht);
```

Pass the data field for the first user through a 4x1 channel because it consists of a single space-time stream. Pass the second user's data through a 4x3 channel because it consists of three space-time streams. Apply white Gaussian noise to each user signal.

```
snr = 15;  
H1 = 1/sqrt(2)*complex(randn(4,1),randn(4,1));  
H2 = 1/sqrt(2)*complex(randn(4,3),randn(4,3));  
  
rxVHTData1 = awgn(txVHTData*H1,snr,'measured');  
rxVHTData2 = awgn(txVHTData*H2,snr,'measured');
```

Repeat the process for the VHT-LTF fields.

```
rxVHTLTF1 = awgn(txVHTLTF*H1,snr,'measured');  
rxVHTLTF2 = awgn(txVHTLTF*H2,snr,'measured');
```

Calculate the received signal power for both users and use it to estimate the noise variance.

```
powerDB1 = 10*log10(var(rxVHTData1));  
noiseVarEst1 = mean(10.^(0.1*(powerDB1-snr)));
```

```
powerDB2 = 10*log10(var(rxVHTData2));
noiseVarEst2 = mean(10.^(0.1*(powerDB2-snr)));
```

Estimate the channel characteristics using the VHT-LTF fields.

```
demodVHTLTF1 = wlanVHTLTFDemodulate(rxVHTLTF1, cbw, numSTS);
chanEst1 = wlanVHTLTFChannelEstimate(demodVHTLTF1, cbw, numSTS);
```

```
demodVHTLTF2 = wlanVHTLTFDemodulate(rxVHTLTF2, cbw, numSTS);
chanEst2 = wlanVHTLTFChannelEstimate(demodVHTLTF2, cbw, numSTS);
```

Recover VHT-Data field bits for the first user and compare against the original payload bits.

```
rxDataBits1 = wlanVHTDataRecover(rxVHTData1, chanEst1, noiseVarEst1, vht, 1);
[~,ber1] = biterr(txDataBits{1}, rxDataBits1)
```

```
ber1 = 0.4983
```

Determine the number of bit errors for the second user.

```
rxDataBits2 = wlanVHTDataRecover(rxVHTData2, chanEst2, noiseVarEst2, vht, 2);
[~,ber2] = biterr(txDataBits{2}, rxDataBits2)
```

```
ber2 = 0.0972
```

The bit error rates are quite high because there is no precoding to mitigate the interference between streams. This is especially evident for the user 1 receiver because it receives energy from the three streams intended for user 2. The example is intended to show the workflow and proper syntaxes for the LTF demodulate, channel estimation, and data recovery functions.

Input Arguments

demodSig — Demodulated VHT-LTF signal

3-D array

Demodulated VHT-LTF signal, specified as an N_{ST} -by- N_{SYM} -by- N_R array. N_{ST} is the number of occupied subcarriers, N_{SYM} is the number of VHT-LTF OFDM symbols, and N_R is the number of receive antennas.

Data Types: double

cfg — Format configuration

wlanVHTConfig

Format configuration, specified as a wlanVHTConfig object.

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users.

Data Types: char | string

numSTS — Number of space-time streams

1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] indicates that one space-time stream is assigned to user 1, three space-time streams are assigned to user 2, and two space-time streams are assigned to user 3.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

span — Filter span

positive odd integer

Filter span of the frequency smoothing filter, specified as an odd integer. The span is expressed as a number of subcarriers.

Note If adjacent subcarriers are highly correlated, frequency smoothing results in significant noise reduction. However, in a highly frequency-selective channel, smoothing can degrade the quality of the channel estimate.

Data Types: double

Output Arguments

chEst — Channel estimate

3-D array


Channel estimate between all combinations of space-time streams and receive antennas, returned as an N_{ST} -by- $N_{STS,total}$ -by- N_R array. N_{ST} is the number of occupied subcarriers. $N_{STS,total}$ is the total number of space-time streams for all users. For the single-user case, $N_{STS,total} = N_{STS}$. N_R is the number of receive antennas. The channel estimate includes coefficients for both the data and pilot subcarriers.

Data Types: double

More About

VHT-LTF

The very high throughput long training field (VHT-LTF) is located between the VHT-STF and VHT-SIG-B portion of the VHT packet.

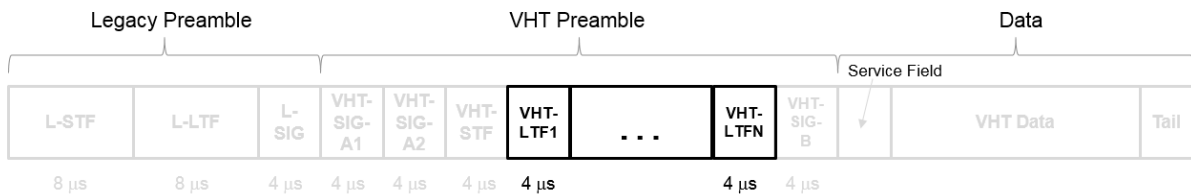

It is used for MIMO channel estimation and pilot subcarrier tracking. The VHT-LTF includes one VHT long training symbol for each spatial stream indicated by the selected MCS. Each symbol is 4 μs long. A maximum of eight symbols are permitted in the VHT-LTF.

The VHT-LTF is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.5.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.
- [3] Perahia, E., and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac*. 2nd Edition, United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanVHTConfig` | `wlanVHTDataRecover` | `wlanVHTLTFDemodulate`

Introduced in R2015b

wlanFieldIndices

Generate PPDU field indices

Syntax

```
ind = wlanFieldIndices(cfg)
ind = wlanFieldIndices(cfg, field)
```

Description

`ind = wlanFieldIndices(cfg)` returns `ind`, a structure containing the start and stop indices of the individual component fields that comprise the baseband physical layer convergence procedure protocol data unit (PPDU) waveform.

Note For non-high-throughput (non-HT) format, this function supports generation of field indices only for OFDM modulation.

`ind = wlanFieldIndices(cfg, field)` returns the start and stop indices for the specified field type in the rows of a matrix `ind`.

Examples

Return Field Indices for HE MU Waveform

Create a WLAN HE-MU-format configuration object and use it to generate an HE MU waveform with packet extension.

```
cfg = wlanHEMUConfig(192);
cfg.User{1}.NominalPacketPadding = 16;
bits = [1;0;0;1];
waveform = wlanWaveformGenerator(bits, cfg);
```

Return and display the PPDU field indices.

```
ind = wlanFieldIndices(cfg);  
disp(ind)
```

```
    LSTF: [1 160]  
    LLTF: [161 320]  
    LSIG: [321 400]  
    RLSIG: [401 480]  
    HESIGA: [481 640]  
    HESIGB: [641 800]  
    HESTF: [801 880]  
    HELTF: [881 1200]  
    HEData: [1201 3760]  
    HEPE: [3761 3840]
```

Recover Information Bits in HE-SIG-A Field

Recover the information bits in the HE-SIG-A field of a WLAN HE single-user (HE-SU) waveform.

Create a WLAN HE-SU-format configuration object with default settings and use it to generate an HE-SU waveform.

```
cfgHE = wlanHESUConfig;  
cbw = cfgHE.ChannelBandwidth;  
waveform = wlanWaveformGenerator(1, cfgHE);
```

Obtain the WLAN field indices, which contain the HE-SIG-A field.

```
ind = wlanFieldIndices(cfgHE);  
rxSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
```

Perform orthogonal frequency-division multiplexing (OFDM) demodulation to extract the HE-SIG-A field.

```
sigADemod = wlanHEDemodulate(rxSIGA, 'HE-SIG-A', cbw);
```

Return the pre-HE OFDM information and extract the demodulated HE-SIG-A symbols.

```
preHEInfo = wlanHEOFDMInfo('HE-SIG-A', cbw);  
sigA = sigADemod(preHEInfo.DataIndices, :);
```

Recover the HE-SIG-A information bits and other information, assuming no channel noise. Display the parity check result.

```

noiseVarEst = 0;
[bits, failCRC] = wlanHESIGABitRecover(siga, noiseVarEst);
disp(failCRC);

0

```

Extract VHT-STF From VHT Waveform

Extract the very-high-throughput short training field (VHT-STF) from a VHT waveform.

Create a VHT-format configuration object for a multiple-input/multiple-output (MIMO) transmission using a 160-MHz channel bandwidth. Generate the corresponding VHT waveform.

```

cfg = wlanVHTConfig('MCS',8,'ChannelBandwidth','CBW160', ...
    'NumTransmitAntennas',2,'NumSpaceTimeStreams',2);
txSig = wlanWaveformGenerator([1;0;0;1],cfg);

```

Determine the component PPDU field indices for the VHT format.

```
ind = wlanFieldIndices(cfg)
```

```

ind = struct with fields:
    LSTF: [1 1280]
    LLTF: [1281 2560]
    LSIG: [2561 3200]
    VHTSIGA: [3201 4480]
    VHTSTF: [4481 5120]
    VHTLTF: [5121 6400]
    VHTSIGB: [6401 7040]
    VHTData: [7041 8320]

```

The VHT PPDU waveform is comprised of eight fields, including seven preamble fields and one data field.

Extract the VHT-STF from the transmitted waveform.

```
stf = txSig(ind.VHTSTF(1):ind.VHTSTF(2),:);
```

Verify that the VHT-STF has dimension 640-by-2, corresponding to the number of samples (80 for each 20-MHz bandwidth segment) and the number of transmit antennas.

```
disp(size(stf))  
    640     2
```

Extract VHT-LTF and Recover VHT Data

Generate a VHT waveform. Extract and demodulate the VHT long training field (VHT-LTF) to estimate the channel coefficients. Recover the data field by using the channel estimate and use this field to determine the number of bit errors.

Configure a VHT-format configuration object with two paths.

```
vht = wlanVHTConfig('NumTransmitAntennas',2,'NumSpaceTimeStreams',2);
```

Generate a random PSDU and create the corresponding VHT waveform.

```
txPSDU = randi([0 1],8*vht.PSDULength,1);  
txSig = wlanWaveformGenerator(txPSDU,vht);
```

Pass the signal through a TGac 2x2 MIMO channel.

```
tgacChan = wlanTGacChannel('NumTransmitAntennas',2,'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');  
rxSigNoNoise = tgacChan(txSig);
```

Add AWGN to the received signal. Set the noise variance for the case in which the receiver has a 9-dB noise figure.

```
nVar = 10^((-228.6+10*log10(290)+10*log10(80e6)+9)/10);  
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);  
rxSig = awgnChan(rxSigNoNoise);
```

Determine the indices for the VHT-LTF and extract the field from the received signal.

```
indVHT = wlanFieldIndices(vht,'VHT-LTF');  
rxLTF = rxSig(indVHT(1):indVHT(2),:);
```

Demodulate the VHT-LTF and estimate the channel coefficients.

```
dLTF = wlanVHTLTFDemodulate(rxLTF,vht);  
chEst = wlanVHTLTFChannelEstimate(dLTF,vht);
```

Extract the VHT-Data field and recover the information bits.

```
indData = wlanFieldIndices(vht, 'VHT-Data');
rxData = rxSig(indData(1):indData(2),:);
rxPSDU = wlanVHTDataRecover(rxData,chEst,nVar,vht);
```

Determine the number of bit errors.

```
numErrs = biterr(txPSDU,rxPSDU)
```

```
numErrs = 0
```

Input Arguments

cfg — Transmission format

wlanHESUConfig object | wlanHEMUConfig object | wlanHERRecoveryConfig object | wlanDMGConfig object | wlanSIGConfig object | wlanVHTConfig object | wlanHTConfig object | wlanNonHTConfig object

Transmission format, specified as one of these configuration objects: wlanHESUConfig, wlanHEMUConfig, wlanHERRecoveryConfig, wlanDMGConfig, wlanSIGConfig, wlanVHTConfig, wlanHTConfig, or wlanNonHTConfig.

Example: `cfg = wlanVHTConfig`

field — PPDU field name

character vector

PPDU field name, specified as a character vector. The valid set of values for this input depends on the transmission format you specify in the `cfg` input.

Transmission Format (cfg)	Valid Field Name Values (field)
wlanHESUConfig, wlanHEMUConfig, or wlanHERRecoveryConfig	'L-STF', 'L-LTF', 'L-SIG', 'RL-SIG', 'HE-SIG-A', 'HE-SIG-B', 'HE-STF', 'HE-LTF', 'HE-Data', or 'HE-PE'
wlanDMGConfig	'DMG-STF', 'DMG-CE', 'DMG-Header', and 'DMG-Data' are common for all directional multi-gigabit (DMG) physical layer (PHY) configurations.

Transmission Format (cfg)	Valid Field Name Values (field)
	When the TrainingLength of the wlanDMGConfig is positive, additional valid fields are 'DMG-AGC', 'DMG-AGCSubfields', 'DMG-TRN', 'DMG-TRNCE', and 'DMG-TRNSubfields'.
wlanSIGConfig	'S1G-STF', 'S1G-LTF1', and 'S1G-Data' are common for all sub-one-gigahertz (S1G) configurations. For a 1-MHz or greater than 2-MHz short preamble configuration, additional valid fields are 'S1G-SIG' and 'S1G-LTF2N'. For a greater than 2-MHz long preamble configuration, additional valid fields are 'S1G-SIG-A', 'S1G-DSTF', 'S1G-DLTF', and 'S1G-SIG-B'.
wlanVHTConfig	'L-STF', 'L-LTF', 'L-SIG', 'VHT-SIG-A', 'VHT-STF', 'VHT-LTF', 'VHT-SIG-B', or 'VHT-Data'
wlanHTConfig	'L-STF', 'L-LTF', 'L-SIG', 'HT-SIG', 'HT-STF', 'HT-LTF', or 'HT-Data'
wlanNonHTConfig	'L-STF', 'L-LTF', 'L-SIG', or 'NonHT-Data'

Data Types: char | string

Output Arguments

ind — Start and stop indices

structure | matrix

Start and stop indices, returned as a structure matrix. The indices correspond to the start and stop indices of fields included in the baseband waveform defined by the `cfg` input.


If you specify the `field` input, the function returns `ind` as an N -by-2 matrix of `uint32` values, consisting of the start and stop indices of the PPDU field. This table outlines the N

dimension of the N -by-2 matrix that is returned based on the specific format and configuration.

Format	Configuration	ind or Specific Field Dimension
non-HT	—	1-by-2 matrix for each field
HT	—	1-by-2 matrix for each field
	Null data packet (NDP) mode, if the PSDULength property of wlanHTConfig object is 0	Empty matrix
VHT and S1G	—	1-by-2 matrix for each field
	NDP mode, if the APEPLength property of the wlanVHTConfig or wlanS1GConfig object is 0	Empty matrix
HE ⁽¹⁾	—	1-by-2 matrix for each field
	NDP mode, if the APEPLength property of the wlanHESUConfig or wlanHESUConfig object is 0	Empty matrix
	When a midamble is added to the HE-Data field to improve channel estimates for high-Doppler scenarios	R -by-2 matrix when you specify the field input as 'HE-Data', where R is the number of data blocks separated by midamble periods
DMG ⁽²⁾	—	1-by-2 matrix for each field
	When the TrainingLength property of wlanDMGConfig object is positive	1-by-2 matrix when you specify the field input as 'DMG-AGC' or 'DMG-TRN' 'DMG-AGCSubfields' is a TrainingLength-by-2 matrix.


Format	Configuration	ind or Specific Field Dimension
		TrainingLength-by-2 matrix when you specify the field input as 'DMG-TRNSubfields'
		(TrainingLength/4)-by-2 matrix when you specify the field input as 'DMG-TRNCE'
	When the TrainingLength property of wlanDMGConfig object is 0	Empty matrix when you specify the field input as 'DMG-AGC', 'DMG-TRN', 'DMG-AGCSubfields', 'DMG-TRNSubfields', or 'DMG-TRNCE'.

- As described in Section 28.3.11.16 of [1], you can add a midamble to the HE-Data field to improve the channel estimates for high-Doppler scenarios.

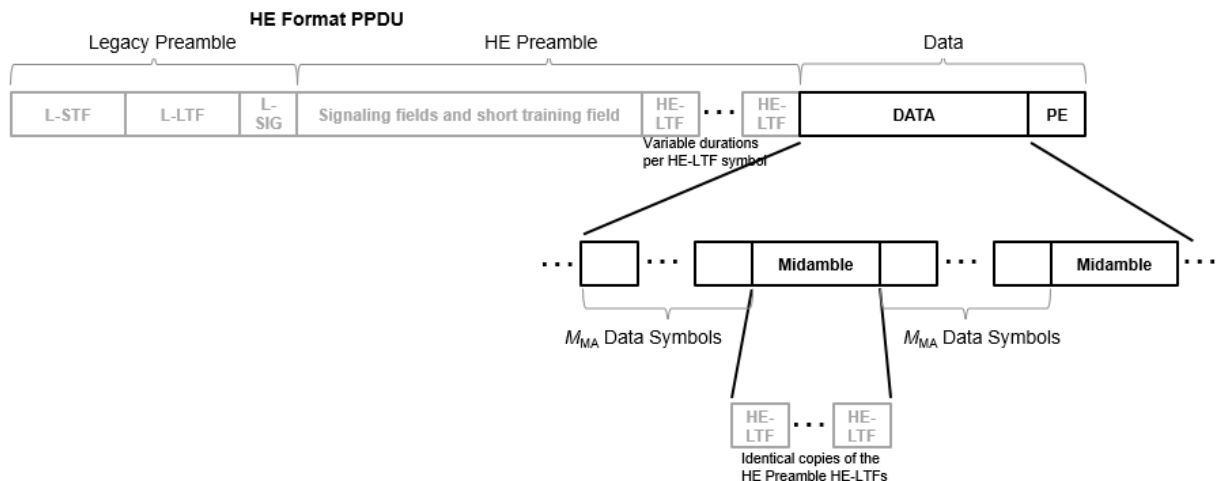

- For DMG, the 'DMG-AGC' field contains $N_{\text{TrainingLength}}$ subfields, where $N_{\text{TrainingLength}}$ is 0-64 subfields. The 'DMG-TRN' field contains $N_{\text{TrainingLength}} + (N_{\text{TrainingLength}}/4)$ subfields. As shown in this figure, the indices for 'DMG-AGC' and 'DMG-TRN' overlap

with the indices of their respective subfields, 'DMG-AGCSubfields' and 'DMG-TRNsubfields'.

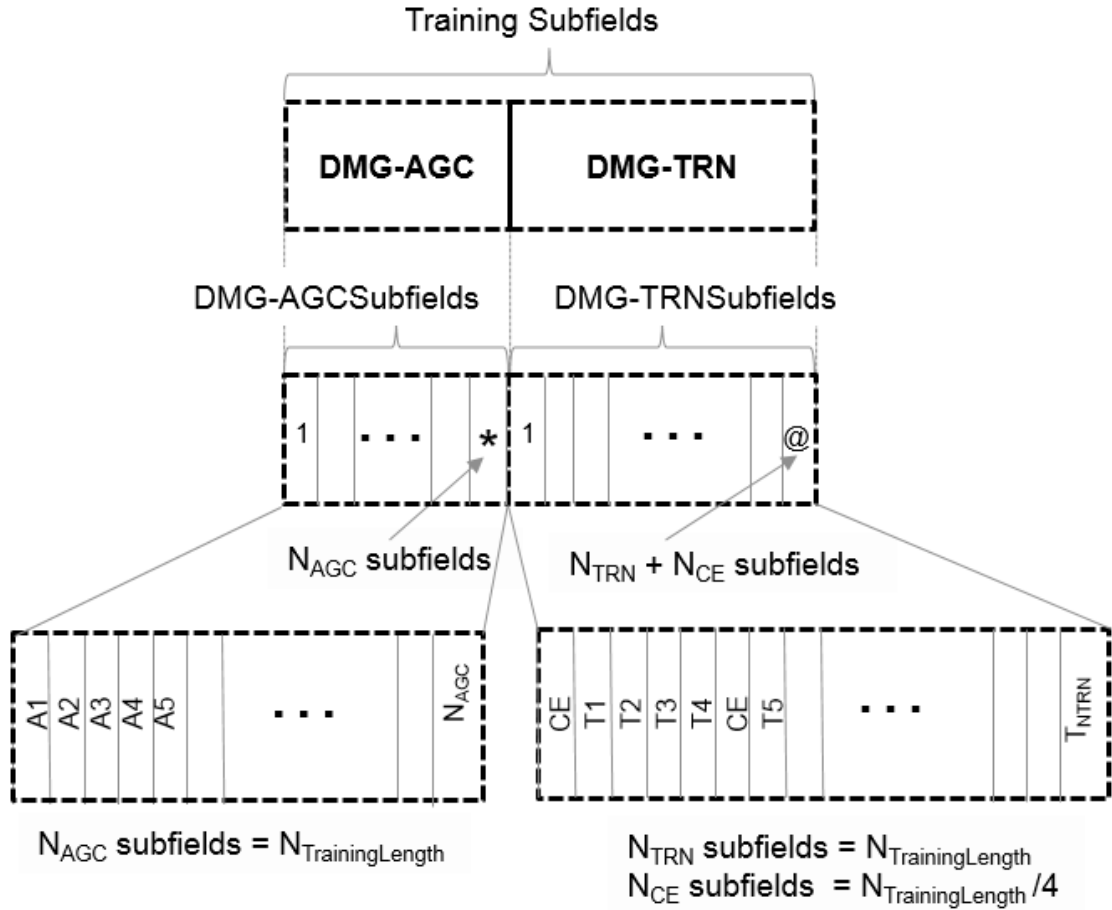

Data Types: uint32 | struct

References

- [1] IEEE P802.11ax/D3.1 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." Draft Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE Std 802.11-2016 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [3] IEEE Std 802.11-2012 Part 11: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [4] IEEE Std 802.11ac-2013 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [5] IEEE Std 802.11ad-2012 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHERecoveryConfig | wlanHESUConfig |
wlanHTConfig | wlanNonHTConfig | wlanSIGConfig | wlanVHTConfig

Introduced in R2015b

wlanFormatDetect

Detect packet format

Syntax

```
format = wlanFormatDetect(rxSig,chEst,noiseVarEst,cbw)
format = wlanFormatDetect(rxSig,chEst,noiseVarEst,cbw,cfgRec)
```

Description

`format = wlanFormatDetect(rxSig,chEst,noiseVarEst,cbw)` detects and returns `format`, the packet format of a received time-domain signal. The function detects the packet format by performing a series of checks on `rxSig`, a portion of the signal whose contents uniquely determine the packet format. For more information, see “Format Detection Processing” on page 2-192. To perform these checks, the function also requires estimated channel characteristics `chEst`, estimated noise variance `noiseVarEst`, and channel bandwidth `cbw`.

`format = wlanFormatDetect(rxSig,chEst,noiseVarEst,cbw,cfgRec)` specifies algorithm options for information bit recovery by using transmission parameters contained in `cfgRec`.

Examples

Detect HE-SU-Format Waveform

Detect the format of a WLAN HE SU waveform

Generate an HE SU waveform and obtain a received signal by adding noise.

```
cbw = 'CBW20'; % Specify channel bandwidth of 20MHz
cfgHESU = wlanHESUConfig('ChannelBandwidth',cbw); % Create configuration object for HE
bits = [1;0;0;1];
tx = wlanWaveformGenerator(bits,cfgHESU); % Generate HE SU waveform
```

```
snr = 10; % Specify signal-to-noise ratio (SNR)
rx = awgn(tx,snr); % Create receive waveform
```

Specify the sample rate and durations of the relevant PPDU fields.

```
sr = 20e6; % Sample rate in samples per second
tLSTF = 8e-6; % Duration of legacy short training field (L-STF)
tLLTF = tLSTF; % Duration of legacy long training field (L-LTF)
```

Determine the field indices and estimate the channel using the L-LTF.

```
ind = tLSTF*sr+(1:tLLTF*sr);
y = wlanLLTFDemodulate(rx(ind,:),cbw);
chEst = wlanLLTFChannelEstimate(y,cbw);
```

Specify the channel noise variance estimate and detect the format of the waveform.

```
noiseVarEst = 10^(-snr/20);
rxSig = rx((tLSTF+tLLTF)*sr+(1:sr*(16e-6)),:); % 16 microseconds corresponding to four
format = wlanFormatDetect(rxSig,chEst,noiseVarEst,cbw);
disp(format)
```

HE-SU

Detect HT-MF Format Waveform

Perform format detection on a WLAN high throughput mixed format (HT-MF) waveform.

Generate an HT-MF waveform and add noise to the transmitted waveform.

```
cbw = 'CBW20';
cfgTx = wlanHTConfig('ChannelBandwidth',cbw);
tx = wlanWaveformGenerator([1;0;0;1],cfgTx);
snr = 10;
rxSig = awgn(tx,snr);
```

Demodulate Received Signal and Perform Channel Estimation

- Determine indices for the L-LTF for the 20 MHz bandwidth waveform. For this calculation, define local variables for the sample rate and duration of the L-STF and L-LTF fields in seconds.

- Demodulate the L-LTF.
- Perform channel estimation using the L-LTF.
- Estimate the noise variance.

```
sr = 20e6;
Tlstf = 8e-6;
Tlltf = 8e-6;

idxlltf = Tlstf*sr+(1:Tlltf*sr);

lltfDemod = wlanLLTFDemodulate(rxSig(idxlltf,:),cbw);
chEst = wlanLLTFChannelEstimate(lltfDemod,cbw);
noiseVarEst = 10^(-snr/20);
```

Detect Signal Format

- Determine indices for the three symbols following the L-LTF. For a 20 MHz bandwidth waveform, the duration for three symbols is 12 μ s.
- Perform format detection.

```
idxDetectionSymbols = (Tlstf+Tlltf)*sr+(1:12e-6*sr);

in = rxSig(idxDetectionSymbols,:);
format = wlanFormatDetect(in,chEst,noiseVarEst,cbw)

format =
'HT-MF'
```

Detect VHT Format Waveform After Adjusting Recovery Algorithm

Perform format detection on a WLAN very high throughput (VHT) waveform. Use the recovery configuration object to adjust the default recovery algorithm settings.

Generate an VHT waveform and add noise to the transmitted waveform.

```
cbw = 'CBW80';
cfgTx = wlanVHTConfig('ChannelBandwidth',cbw);
tx = wlanWaveformGenerator([1;0;0;1],cfgTx);
snr = 10;
rxSig = awgn(tx,snr);
```


Received signal demodulation and channel estimation

- Determine indices for the L-LTF for the 80 MHz bandwidth waveform. For this calculation, define local variables for the sample rate and duration of the L-STF and L-LTF fields in seconds.
- Demodulate the L-LTF.
- Perform channel estimation using the L-LTF.
- Estimate the noise variance.

```
sr = 80e6;
Tlstf = 8e-6;
Tlltf = 8e-6;

idxlltf = Tlstf*sr+(1:Tlltf*sr);

lltfDemod = wlanLLTFDemodulate(rxSig(idxlltf,:),cbw);
chEst = wlanLLTFChannelEstimate(lltfDemod,cbw);
noiseVarEst = 10^(-snr/20);
```

Format detection

- Determine indices for the three symbols following the L-LTF. For an 80 MHz bandwidth waveform, the duration for three symbols is 12 μ s.
- Adjust the default recovery settings.
- Perform format detection using modified recovery settings.

```
TdetectionSymbols = 12e-6;
idxDetectionSymbols = (Tlstf+Tlltf)*sr+(1:TdetectionSymbols*sr);
in = rxSig(idxDetectionSymbols,:);
cfgRec = wlanRecoveryConfig('OFDMSymbolOffset',0.5,...
    'PilotPhaseTracking','None')

cfgRec =
    wlanRecoveryConfig with properties:
        OFDMSymbolOffset: 0.5000
        EqualizationMethod: 'MMSE'
        PilotPhaseTracking: 'None'
        MaximumLDPCIterationCount: 12
        EarlyTermination: 0

format = wlanFormatDetect(in,chEst,noiseVarEst,cbw,cfgRec)
```

format =
'VHT'

Input Arguments

rxSig — Post-LTF portion of received time-domain signal

complex-valued matrix

Post-long-training-field (post-LTF) portion of the received time-domain signal, specified as a complex-valued N_S -by- N_R matrix, where:

- N_S is the number of time-domain samples.
- N_R is the number of receive antennas.

To successfully detect the format of an HE packet, this input must contain all time-domain samples in the four OFDM symbols immediately following the L-LTF: *sym1*, *sym2*, *sym3*, and *sym4*. To successfully detect other packet formats, this signal must contain all time-domain samples in the three OFDM symbols immediately following the relevant LTF: *sym1*, *sym2*, *sym3*. The first entry in each column of this input must be the first time-domain sample of the symbol received by the corresponding antenna. For more information about how the `wlanFormatDetect` function uses this input for format detection, see “Format Detection Processing” on page 2-192.

Note If the number of received OFDM symbols is greater than four, the function ignores additional samples after *sym4*.

Data Types: `double`

Complex Number Support: Yes

chEst — Channel estimate

numeric matrix | 3-D numeric array

Channel estimate for data and pilot subcarriers based on the L-LTF, specified as a numeric matrix or array of size N_{ST} -by-1-by- N_R , where:

- N_{ST} is the number of occupied subcarriers.
- N_R is the number of receive antennas.

The second dimension corresponds to the single transmitted stream in the L-LTF. If the transmission uses multiple antennas, the single transmitted stream includes the combined cyclic shifts.

Data Types: double

Complex Number Support: Yes

noiseVarEst – Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cbw – Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, in MHz, specified as one of these values.

- 'CBW5' - Channel bandwidth of 5 MHz
- 'CBW10' - Channel bandwidth of 10 MHz
- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char

cfgRec – Algorithm parameters

wlanRecoveryConfig object

Algorithm parameters containing properties used during data recovery, specified as a wlanRecoveryConfig object. The configurable properties include the OFDM symbol sampling offset, equalization method, and type of pilot phase tracking. If you do not specify this argument, the wlanFormatDetect function uses the default property values of the wlanRecoveryConfig object.

Output Arguments

format — Packet format

'Non-HT' | 'HT-MF' | 'HT-GF' | 'VHT' | 'HE-SU' | 'HE-EXT-SU' | 'HE-MU' | 'HE-TB'

Packet format, returned as one of these values:

- 'Non-HT' - Non-high-throughput (non-HT) format
- 'HT-MF' - High-throughput mixed format (HT MF)
- 'HT-GF' - High-throughput greenfield format (HT GF)
- 'VHT' - Very-high-throughput (VHT) format
- 'HE-SU' - High-efficiency single-user (HE SU) format
- 'HE-EXT-SU' - HE extended-range single-user (HE ER SU) format
- 'HE-MU' - HE multiuser (HE MU) format
- 'HE-TB' - HE trigger-based (HE TB) format

Algorithms

Format Detection Processing

The format detection processing algorithm determines packet format by checking relevant attributes of the `rxSig` input.


- To successfully detect the format of an HE packet, `rxSig` must contain all time-domain samples in the four OFDM symbols following the L-LTF.
- To successfully detect the format of a non-HT, HT-MF, or VHT packet, `rxSig` must contain all time-domain samples in the three OFDM symbols following the L-LTF.
- To successfully detect the format of an HT-GF packet, `rxSig` must contain all time-domain samples in the three OFDM symbols following the HT-LTF1.


The first entry in each column of `rxSig` must be the first time-domain sample of the first OFDM symbol following the relevant LTF received by the corresponding antenna. The function does not use additional samples after the last sample of the fourth OFDM symbol.

Before demodulating any packet symbols, the `wlanFormatDetect` function checks the number of OFDM symbols in the `rxSig` input. If the function detects four or more symbols, it determines the packet format by following the steps outlined in “HE Format Detection” on page 2-193. If the function detects three symbols, it determines the packet format by following the steps outlined in “Legacy Format Detection” on page 2-195.

HE Format Detection

- 1 Check for the repeated L-SIG (RL-SIG) field. If RL-SIG field is detected, begin detection for HE formats.
 - a Check the validity of the L-SIG field by computing the parity and data rate. If the L-SIG field is valid, follow these steps.
 - i Check the length of the L-SIG field *modulo* 3.
 - A If the length *modulo* 3 is 1, the packet format is either HE ER SU or HE MU. Demodulate the HE-SIG-A field and check the modulation scheme of *sym4*.
 - I If the modulation method of *sym4* is QPSK, the format is HE ER SU.
 - II If the modulation method of *sym4* is BPSK, the format is HE MU.
 - B If the length *modulo* 3 is 2, the packet format is either HE SU or HE TB. Recover the information bits in the HE-SIG-A field by using the `wlanHESIGABitRecover` function.
 - I If the first bit is 0, the format is HE TB.
 - II If the first bit is 1, the format is HE SU.
 - III If the HE-SIG-A field fails the cyclic redundancy check (CRC), detect the format by following the steps in “Legacy Format Detection” on page 2-195.
 - C If the length *modulo* 3 is 0, detect the format by following the steps in “Legacy Format Detection” on page 2-195.
 - b If the L-SIG field is invalid, detect the format by following the steps in “Legacy Format Detection” on page 2-195.
- 2 If RL-SIG field is not detected, detect the format by following the steps outlined in “Legacy Format Detection” on page 2-195.

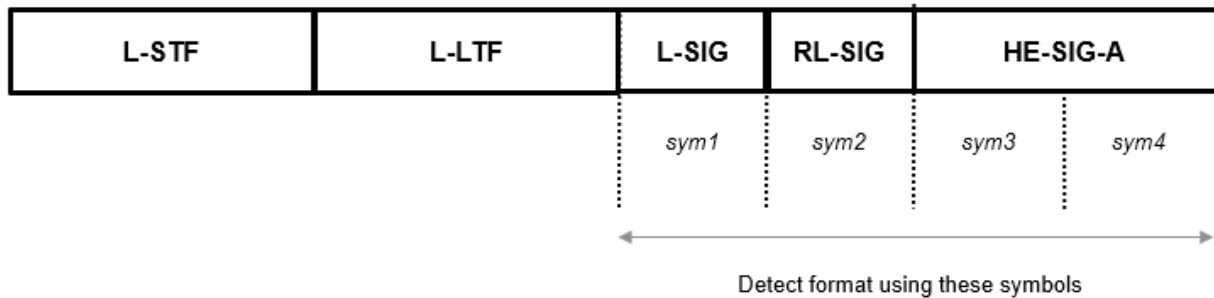


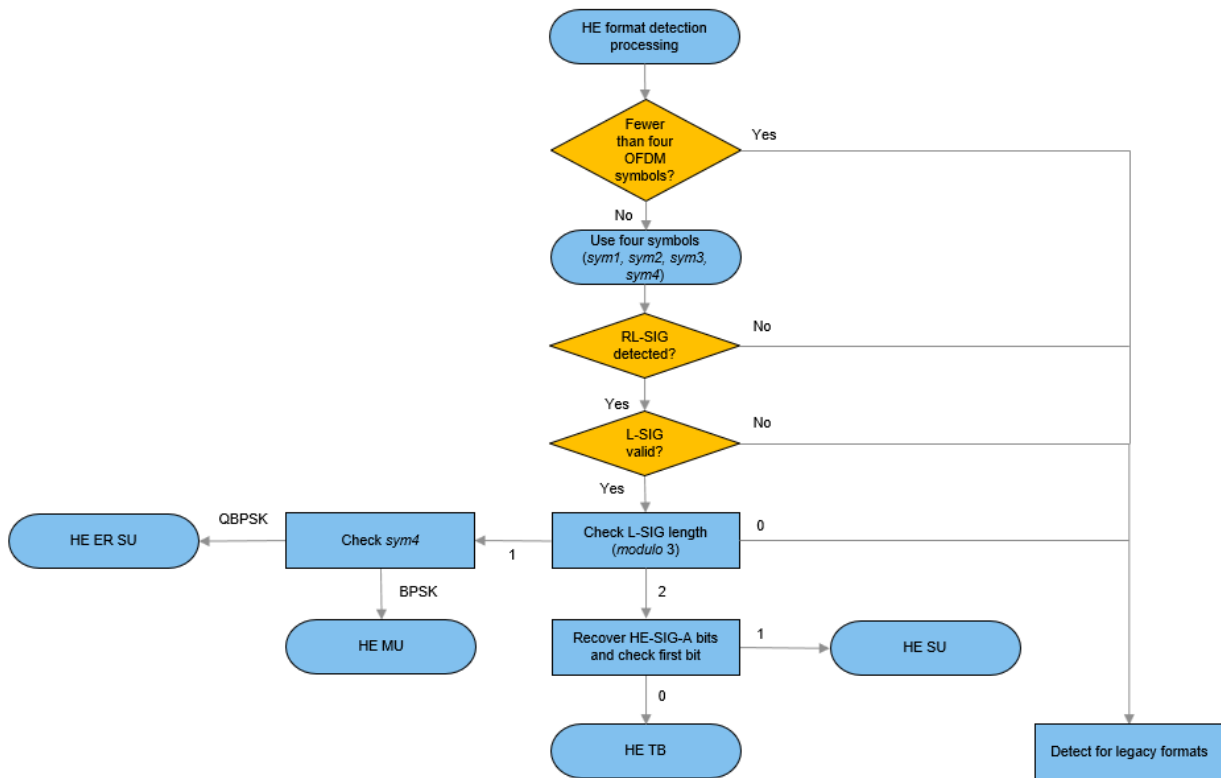


Legacy Format Detection

- 1 If the modulation scheme of *sym1* is QBPSK, the packet format is HT-GF.
- 2 If the modulation scheme of *sym1* is BPSK and the L-SIG parity check fails, the function returns a warning. The format detection processing continues because the L-SIG parity check does not conclusively indicate an error in the modulation and coding scheme (MCS) determination.
 - a If the MCS is not 0, the packet format is non-HT.
 - b If the MCS is 0, check the modulation scheme of *sym2*.
 - i If the modulation scheme of *sym2* is QBPSK, the format is HT MF.
 - ii If the modulation scheme of *sym2* is BPSK, detect the modulation scheme of *sym3*.

- A If the modulation scheme of *sym3* is QBPSK, the format is VHT.
- B If the modulation scheme of *sym3* is BPSK, the format is non-HT.

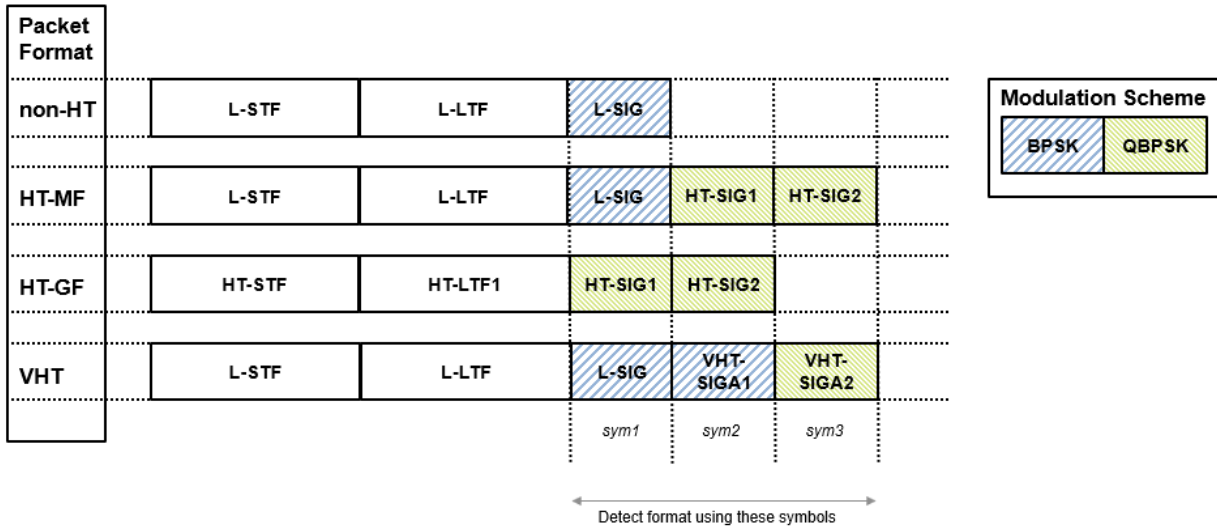

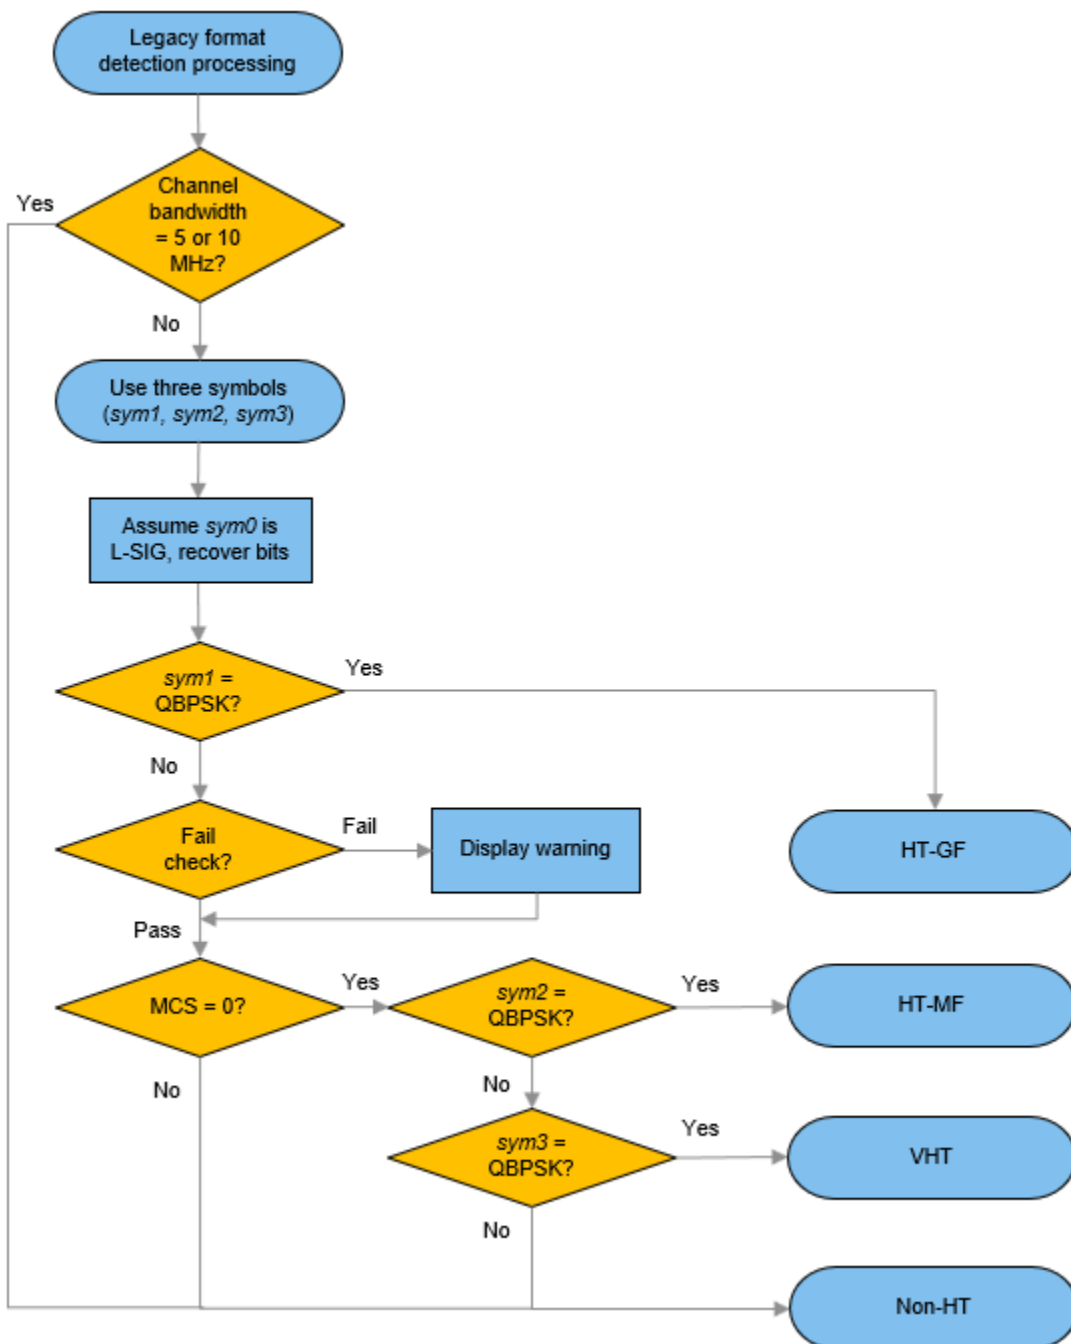

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanHESIGABitRecover | wlanHTSIGRecover | wlanLLTFChannelEstimate |
wlanLSIGRecover

Objects

wlanHERecoveryConfig | wlanRecoveryConfig

Introduced in R2016b

wlanGolaySequence

Generate Golay sequence

Syntax

```
[Ga,Gb] = wlanGolaySequence(len)
```

Description

`[Ga,Gb] = wlanGolaySequence(len)` returns the Golay sequences `Ga` and `Gb` for a specified sequence length. The sequences are defined in IEEE 802.11ad-2012, Section 21.11.

Examples


Generate Golay Sequences

Generate complementary 32-length Golay sequences.

```
[Ga,Gb] = wlanGolaySequence(32);
```

The sum of the autocorrelations is a dirac delta function.

```
figure  
stem(xcorr(Ga)+xcorr(Gb))
```

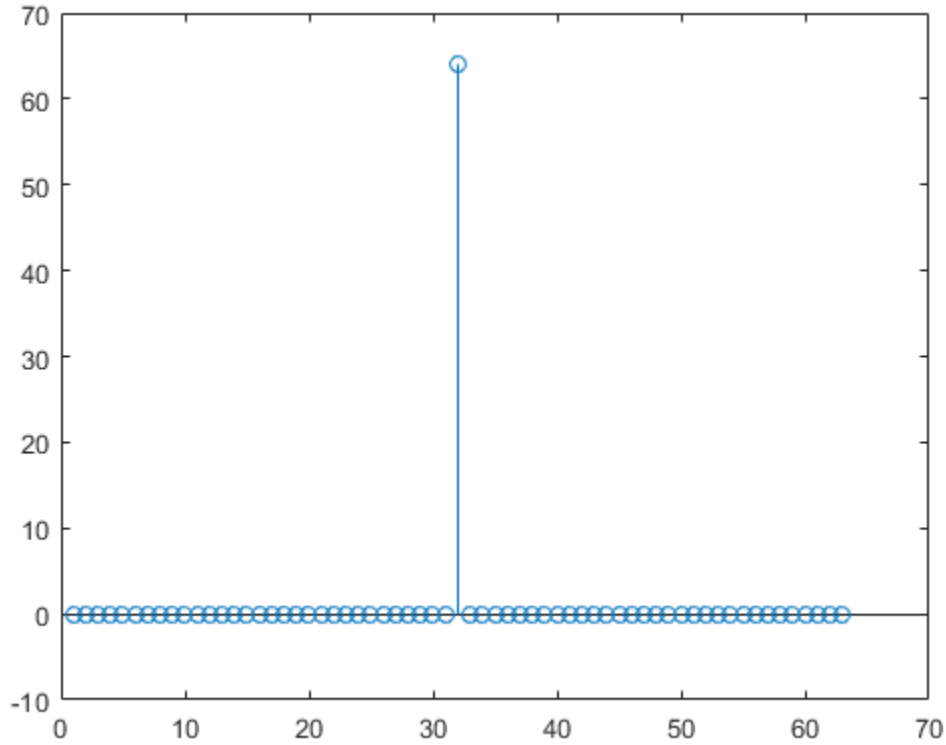

Input Arguments

len — Sequence length

32 | 64 | 128

Sequence length, specified as 32, 64, or 128.

Data Types: double

Output Arguments

Ga — Golay sequence

column vector of integers

Golay sequence, returned as a column vector of integers of length `len`.

Gb — Complementary Golay sequence

column vector of integers

Complementary Golay sequence, returned as a column vector of integers of length `len`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanDMGConfig` | `wlanDMGDataBitRecover`

Introduced in R2017b

wlanHEDemodulate

Demodulate fields of HE waveform

Syntax

```
sym = wlanHEDemodulate(rx, field, cfg)
sym = wlanHEDemodulate(rx, field, cfg, ruNumber)

sym = wlanHEDemodulate(rx, field, cbw, hegi, ru)
sym = wlanHEDemodulate(rx, field, cbw, hegi, ltfType, ru)
sym = wlanHEDemodulate(rx, field, cbw)

sym = wlanHEDemodulate( ____, 'OFDMsymbolOffset', symOffset)
```

Description

`sym = wlanHEDemodulate(rx, field, cfg)` returns demodulated frequency-domain signal `sym` by performing orthogonal frequency-division multiplexing (OFDM) demodulation on received time-domain signal `rx` parameterized by high-efficiency (HE) configuration object `cfg`. The function uses parameters appropriate for `field`, the specified signal field.

`sym = wlanHEDemodulate(rx, field, cfg, ruNumber)` returns the frequency-domain signal for the resource unit of interest, as determined by its number `ruNumber`. Use this syntax when specifying `cfg` as an HE multiuser (HE MU) configuration object to demodulate either the HE-Data field or the HE long training field (HE-LTF).

`sym = wlanHEDemodulate(rx, field, cbw, hegi, ru)` returns the frequency-domain signal for channel bandwidth `cbw`, guard interval `hegi`, and resource unit determined by the size and index specified in `ru`. If `ru` is not specified, the function returns the demodulated signal assuming a full band configuration. To demodulate the HE-Data field when the PHY format is unknown, use this syntax.

`sym = wlanHEDemodulate(rx, field, cbw, hegi, ltfType, ru)` returns the frequency-domain signal for HE-LTF type specified in `ltfType`. If `ru` is not specified,

`wlanHEDemodulate` returns the demodulated signal assuming a full band configuration. To demodulate the HE-LTF when the PHY format is unknown, use this syntax.

`sym = wlanHEDemodulate(rx, field, cbw)` returns the frequency-domain signal for the input field and channel bandwidth. To return OFDM information for any of the L-LTF, L-SIG, RL-SIG, HE-SIG-A, or HE-SIG-B fields when the PHY format configuration is unknown, use this syntax.

`sym = wlanHEDemodulate(____, 'OFDMSymbolOffset', symOffset)` returns the frequency-domain signal for OFDM symbol sampling offset `symOffset`, specified as a fraction of the cyclic prefix length.

Examples

Demodulate HE-SIG-A Field and Get OFDM Information

Perform OFDM demodulation on the HE-SIG-A field and extract the data and pilot subcarriers.

Generate a WLAN waveform for an HE SU transmission.

```
cfg = wlanHESUConfig;
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the HE-SIG-A field.

```
ind = wlanFieldIndices(cfg);
rx = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
```

Perform OFDM demodulation on the HE-SIG-A field.

```
sym = wlanHEDemodulate(rx, 'HE-SIG-A', cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanHEOFDMInfo('HE-SIG-A', cfg);
data = sym(info.DataIndices, :, :);
pilots = sym(info.PilotIndices, :, :);
```

Demodulate HE-LTF for RUs in HE MU Waveform

Demodulate the HE-LTF for each RU in an HE MU waveform.

Create a WLAN HE-MU-format configuration object, specifying the allocation index, HE-LTF type, and guard interval.

```
AllocationIndex = 16;  
cfg = wlanHEMUConfig(16, 'HELTFTYPE', 2, 'GuardInterval', 1.6);
```

Generate a waveform for the specified information bits and format configuration object.

```
bits = [1; 0; 0; 1];  
waveform = wlanWaveformGenerator(bits, cfg);
```

Generate field indices and extract the HE-LTF.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.HELTFTYPE(1):ind.HELTFTYPE(2), :);
```

Demodulate the HE-LTF for each RU and display the size of the array containing the demodulated symbols in each case.

```
info = ruInfo(cfg);  
allRUs = info.NumRUs;  
for ruNumber = 1:allRUs  
    sym = wlanHEDemodulate(rx, 'HE-LTF', cfg, ruNumber);  
    disp(size(sym));  
end
```

```
52      1  
  
52      1  
  
106     1
```

Demodulate L-LTF

Perform OFDM demodulation on the legacy long training field (L-LTF) of a received signal, specifying a channel bandwidth of 80 MHz.

Retrieve the L-LTF from a very-high-throughput (VHT) waveform with a channel bandwidth of 80 MHz.

```
cbw = 'CBW80'; % Specify the channel bandwidth
rx = wlanLLTF(wlanVHTConfig('ChannelBandwidth',cbw));
```

Get the frequency-domain signal by demodulating the L-LTF.

```
sym = wlanHEDemodulate(rx, 'L-LTF', cbw);
```

Input Arguments

rx — Received time-domain signal

complex-valued matrix

Received time-domain signal, specified as a complex-valued matrix. The size of this input must be N_S -by- N_R , where N_S is the number of time-domain samples and N_R is the number of receive antennas. If N_S is not an integer multiple of the OFDM symbol length, L_S , for the specified field, then the function ignores the remaining $\text{mod}(N_S, L_S)$ symbols.

Data Types: double

Complex Number Support: Yes

field — Field to be demodulated

'L-LTF' | 'L-SIG' | 'RL-SIG' | 'HE-SIG-A' | 'HE-SIG-B' | 'HE-LTF' | 'HE-Data'

Field to be demodulated, specified as one of these values:

- 'L-LTF' - Demodulate the legacy long training field (L-LTF).
- 'L-SIG' - Demodulate the legacy signal (L-SIG) field.
- 'RL-SIG' - Demodulate the repeated legacy signal (RL-SIG) field.
- 'HE-SIG-A' - Demodulate the HE signal A (HE-SIG-A) field.
- 'HE-SIG-B' - Demodulate the HE signal B (HE-SIG-B) field.
- 'HE-LTF' - Demodulate the HE long training field (HE-LTF).
- 'HE-Data' - Demodulate the HE-Data field.

Data Types: char | string

cfg — PHY format configuration

wlanHESUConfig object | wlanHEMUConfig object

Physical layer (PHY) format configuration, specified as a wlanHESUConfig object or wlanHEMUConfig object.

ruNumber — Number of RU of interest

positive integer

Number of the RU of interest, specified as a positive integer. The RU number specifies the location of the RU within the channel. For example, consider an 80-MHz transmission with two 242-tone RUs and one 484-tone RU, in order of absolute frequency. For this allocation:

- RU number 1 corresponds to the 242-tone RU in the 20-MHz subchannel at the lowest absolute frequency (size 242, index 1).
- RU number 2 corresponds to the 242-tone RU in the 20-MHz subchannel at the next lowest absolute frequency (size 242, index 2).
- RU number 3 corresponds to the 484-tone RU in the 40-MHz subchannel at the highest absolute frequency (size 484, index 2).

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as one of these values.

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

hegi — Guard interval duration

0.8 | 1.6 | 3.2

Guard interval duration, in microseconds, specified as 0.8, 1.6, or 3.2.

Data Types: double

ltfType — HE-LTF type

1 | 2 | 4

HE-LTF type, specified as 1, 2, or 4.

Data Types: double

ru — RU size and index

1-by-2 vector of positive scalars

RU size and index, specified as a 1-by-2 vector of positive scalars. Specify *ru* in the form [*size*, *index*], where *size* must be 26, 52, 106, 242, 484, 996, or 1992 in accordance with the specified channel bandwidth. For example, an 80-MHz transmission has four possible 242-tone RUs (one for each 20-MHz subchannel). RU number 242-1 (*size* = 242 and *index* = 1) is the lowest absolute frequency within the 80-MHz channel. RU number 242-4 is the highest absolute frequency.


Data Types: double

symOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset, as a fraction of the cyclic prefix length, specified as a scalar in the interval [0, 1].

The value that you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix.

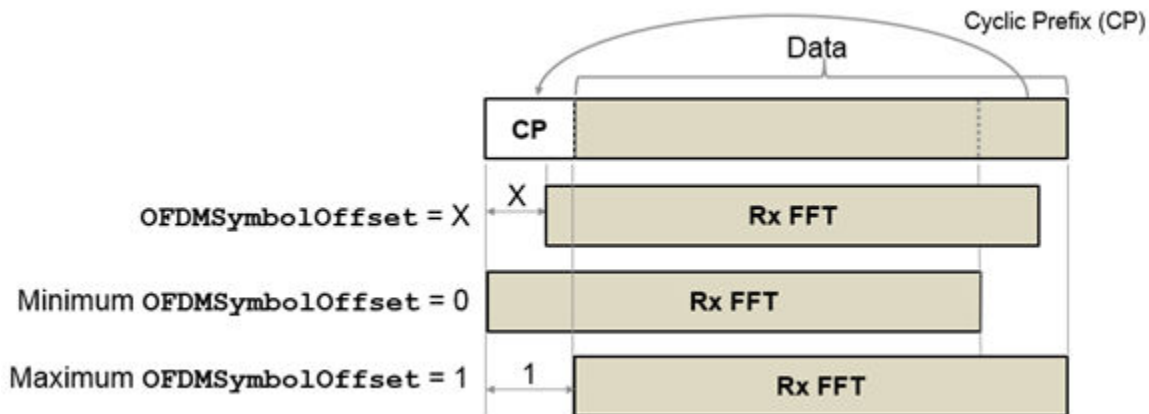

Example: 'OFDMSymbolOffset',0.45

Data Types: double

Output Arguments

sym — Demodulated frequency-domain signal

complex-valued array

Demodulated frequency-domain signal, returned as a complex-valued array of size `sym` is N_{SC} -by- N_{sym} -by- N_R , where:

- N_{SC} is the number of active occupied subcarriers in the demodulated field.
- N_{sym} is the number of OFDM symbols.
- N_R is the number of receive antennas.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanDMGOFDMDemodulate` | `wlanHEOFDMInfo` | `wlanSIGDemodulate`

Objects

`wlanHEMUConfig` | `wlanHESUConfig`

Introduced in R2019a

wlanHEOFDMInfo

Get OFDM information for HE transmission

Syntax

```
info = wlanHEOFDMInfo(field,cfg)
info = wlanHEOFDMInfo(field,cfg,ruNumber)
info = wlanHEOFDMInfo(field,cbw,hegi,ru)
info = wlanHEOFDMInfo(field,cbw)
```

Description

`info = wlanHEOFDMInfo(field,cfg)` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the input `field` in a high-efficiency (HE) transmission parameterized by configuration object `cfg`.

`info = wlanHEOFDMInfo(field,cfg,ruNumber)` returns OFDM information for the resource unit (RU) of interest, as determined by its number `ruNumber`, when you specify `cfg` as an HE multiuser (HE MU) configuration. To return OFDM information for either the HE-Data field or the HE long training field (HE-LTF) in an HE MU transmission, use this syntax.

`info = wlanHEOFDMInfo(field,cbw,hegi,ru)` returns OFDM information for channel bandwidth `cbw`, guard interval `hegi`, and RU of interest determined by its size and index specified in `ru`. If you do not specify `ru`, then `wlanHEOFDMInfo` returns information assuming a full band configuration. To return OFDM information for either the HE-Data field or the HE-LTF when the PHY format configuration is unknown, use this syntax.

`info = wlanHEOFDMInfo(field,cbw)` returns OFDM information for the specified field and channel bandwidth. To return OFDM information for one of the L-LTF, L-SIG, RL-SIG, HE-SIG-A, or HE-SIG-B fields when the PHY format configuration is unknown, use this syntax.

Examples

Demodulate HE-SIG-A Field and Get OFDM Information

Perform OFDM demodulation on the HE-SIG-A field and extract the data and pilot subcarriers.

Generate a WLAN waveform for an HE SU transmission.

```
cfg = wlanHESUConfig;  
bits = [1; 0; 0; 1];  
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the HE-SIG-A field.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
```

Perform OFDM demodulation on the HE-SIG-A field.

```
sym = wlanHEDemodulate(rx, 'HE-SIG-A', cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanHEOFDMInfo('HE-SIG-A', cfg);  
data = sym(info.DataIndices, :, :);  
pilots = sym(info.PilotIndices, :, :);
```

Get OFDM Information for RUs in HE MU Waveform

Get OFDM information for each RU in an HE MU waveform.

Create a WLAN HE-MU-format configuration object with the allocation index set to 16.

```
AllocationIndex = 16;  
cfg = wlanHEMUConfig(AllocationIndex);
```

Get the OFDM information pertaining to the HE-Data field for each RU and extract the number of active subcarriers in each case.

```

NumTones = zeros(numel(cfg.RU),1);
for ruNumber = 1:numel(cfg.RU)
    info = wlanHEOFDMInfo('HE-Data',cfg,ruNumber);
    NumTones(ruNumber) = info.NumTones;
end

```

Display the number of active subcarriers for each RU.

```

disp(NumTones');

    52    52   106

```

Get OFDM Information for L-LTF

Get OFDM information for the legacy long training field (L-LTF) for a specified channel bandwidth.

Specify a channel bandwidth of 40 MHz.

```

cbw = 'CBW40';

```

Get the OFDM information for the L-LTF and display the fast Fourier transform (FFT) length.

```

info = wlanHEOFDMInfo('L-LTF',cbw);
disp(info.FFTLength);

```

```

    128

```

Input Arguments

field — Field for which to return OFDM information

'L-LTF' | 'L-SIG' | 'RL-SIG' | 'HE-SIG-A' | 'HE-SIG-B' | 'HE-LTF' | 'HE-Data'

Field for which to return OFDM information, specified as one of these values.

- 'L-LTF' - Return OFDM information for the legacy long training field (L-LTF).
- 'L-SIG' - Return OFDM information for the legacy signal (L-SIG) field.

- 'RL-SIG' - Return OFDM information for the repeated legacy signal (RL-SIG) field.
- 'HE-SIG-A' - Return OFDM information for the HE signal A (HE-SIG-A) field.
- 'HE-SIG-B' - Return OFDM information for the HE signal B (HE-SIG-B) field.
- 'HE-LTF' - Return OFDM information for the HE long training field (HE-LTF).
- 'HE-Data' - Return OFDM information for the HE-Data field.

Data Types: char | string

cfg — PHY format configuration

wlanHESUConfig object | wlanHEMUConfig object

Physical layer (PHY) format configuration, specified as a wlanHESUConfig object or a wlanHEMUConfig object.

ruNumber — Number of RU of interest

positive integer

Number of the RU of interest, specified as a positive integer. The RU number specifies the location of the RU within the channel. For example, consider an 80-MHz transmission with two 242-tone RUs and one 484-tone RU, in order of absolute frequency. For this allocation:

- RU number 1 corresponds to the 242-tone RU in the 20-MHz subchannel at the lowest absolute frequency (size 242, index 1).
- RU number 2 corresponds to the 242-tone RU in the 20-MHz subchannel at the next lowest absolute frequency (size 242, index 2).
- RU number 3 corresponds to the 484-tone RU in the 40-MHz subchannel at the highest absolute frequency (size 484, index 2).

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as one of these values.

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz

- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

hegi — Guard interval duration

0.8 | 1.6 | 3.2

Guard interval duration, in microseconds, specified as 0.8, 1.6, or 3.2.

Data Types: double

ru — RU size and index

1-by-2 vector of positive scalars

RU size and index, specified as a 1-by-2 vector of positive scalars. Specify *ru* in the form [*size,index*], where *size* must be 26, 52, 106, 242, 484, 996, or 1992 in accordance with the specified channel bandwidth. For example, an 80-MHz transmission has four possible 242-tone RUs (one for each 20-MHz subchannel). RU number 242-1 (*size* = 242 and *index* = 1) is the lowest absolute frequency within the 80-MHz channel. RU number 242-4 is the highest absolute frequency.

Data Types: double

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLength	Positive integer	Cyclic prefix length, in samples	double
NumTones	Nonnegative integer	Number of active subcarriers	double

Name	Values	Description	Data Types
NumSubchannels	Positive integer	Number of 20-MHz subchannels	double
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double
PilotIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanHEDemodulate

Objects

wlanHEMUConfig | wlanHESUConfig

Introduced in R2019a

wlanHESIGABitRecover

Recover information bits in HE-SIG-A field

Syntax

```
[bits, failCRC] = wlanHESIGABitRecover(siga, noiseVarEst)
[bits, failCRC] = wlanHESIGABitRecover(siga, noiseVarEst, csi)
```

Description

`[bits, failCRC] = wlanHESIGABitRecover(siga, noiseVarEst)` recovers `bits`, the information bits contained in `siga`, the HE-SIG-A field of an IEEE 802.11 high-efficiency transmission subject to channel noise with estimated variance `noiseVarEst`. The function also returns `failCRC`, the result of the cyclic redundancy check (CRC) on `bits`.

For more information on 802.11ax signal recovery, see “802.11ax Signal Recovery with Preamble Decoding”.

`[bits, failCRC] = wlanHESIGABitRecover(siga, noiseVarEst, csi)` also enhances the demapping of orthogonal frequency-division multiplexing (OFDM) subcarriers by using channel state information `csi`.

Examples

Recover Information Bits in HE-SIG-A Field

Recover the information bits in the HE-SIG-A field of a WLAN HE single-user (HE-SU) waveform.

Create a WLAN HE-SU-format configuration object with default settings and use it to generate an HE-SU waveform.

```

cfgHE = wlanHESUConfig;
cbw = cfgHE.ChannelBandwidth;
waveform = wlanWaveformGenerator(1, cfgHE);

```

Obtain the WLAN field indices, which contain the HE-SIG-A field.

```

ind = wlanFieldIndices(cfgHE);
rxSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);

```

Perform orthogonal frequency-division multiplexing (OFDM) demodulation to extract the HE-SIG-A field.

```

sigadDemod = wlanHEDemodulate(rxSIGA, 'HE-SIG-A', cbw);

```

Return the pre-HE OFDM information and extract the demodulated HE-SIG-A symbols.

```

preHEInfo = wlanHEOFDMInfo('HE-SIG-A', cbw);
sigas = sigadDemod(preHEInfo.DataIndices,:);

```

Recover the HE-SIG-A information bits and other information, assuming no channel noise. Display the parity check result.

```

noiseVarEst = 0;
[bits, failCRC] = wlanHESIGABitRecover(sigas, noiseVarEst);
disp(failCRC);

```

0

Recover HE-SIG-A Information Bits with Channel State Information

Recover the information bits in the HE-SIG-A field of a WLAN HE multiuser (HE-MU) waveform with specified channel state information.

Create a WLAN HE-MU-format configuration object with default settings and use it to generate an HE-MU waveform.

```

cfgHE = wlanHEMUConfig(0);
cbw = cfgHE.ChannelBandwidth;
waveform = wlanWaveformGenerator(1, cfgHE);

```

Obtain the WLAN field indices, which contain the modulated HE-SIG-A symbols.

```
ind = wlanFieldIndices(cfgHE);  
rxSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);
```

Perform OFDM demodulation to extract the HE-SIG-A field.

```
sigadDemod = wlanHEDemodulate(rxSIGA, 'HE-SIG-A', cbw);
```

Return the pre-HE OFDM information and extract the demodulated HE-SIG-A symbols.

```
preHEInfo = wlanHEOFDMInfo('HE-SIG-A', cbw);  
sigad = sigadDemod(preHEInfo.DataIndices,:);
```

Specify the channel state information and assume no channel noise.

```
csi = ones(52,1);  
noiseVarEst = 0;
```

Recover the HE-SIG-A information bits and other information. Display the CRC result.

```
[bits, failCRC] = wlanHESIGABitRecover(sigad, noiseVarEst, csi);  
disp(failCRC);
```

```
0
```

Input Arguments

sigad — Demodulated HE-SIG-A symbols

complex-valued matrix

Demodulated HE-SIG-A symbols, specified as a complex-valued matrix. The size of **sigad** depends on the packet format.

- For high-efficiency single-user (HE SU) or high-efficiency multiuser (HE MU) packets, specify a 52-by-2 matrix.
- For high-efficiency extended-range single-user (HE ER SU) packets, specify a 52-by-4 matrix.

Data Types: `double`

Complex Number Support: Yes

noiseVarEst — Channel noise variance estimate

nonnegative scalar

Channel noise variance estimate, specified as a nonnegative scalar.

Data Types: `double`

csi – Channel state information

52-by-1 real-valued vector

Channel state information, specified as a 52-by-1 real-valued vector. To use the channel state information for enhanced demapping of the orthogonal frequency-division multiplexing (OFDM) symbols, specify this argument.

Data Types: `double`

Output Arguments

bits – Information bits recovered from HE-SIG-A field

52-by-1 binary column vector

Information bits recovered from HE-SIG-A field, returned as a 52-by-1 binary column vector.

Data Types: `int8`

failCRC – CRC result

1 (true) | 0 (false)

CRC result, returned as a logical value of 1 (`true`) or 0 (`false`). The function returns this argument as 1 (`true`) if the recovered bits fail the CRC. The function returns this argument as 0 (`false`) if the recovered bits pass the CRC.

Data Types: `logical`

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High

Efficiency WLAN." Draft Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanFieldIndices | wlanHEDataBitRecover | wlanHESIGBCommonBitRecover | wlanHESIGBUserBitRecover | wlanLSIGBitRecover

Objects

wlanHERecoveryConfig

Introduced in R2019a

wlanHESIGBCommonBitRecover

Recover common field bits in HE-SIG-B field

Syntax

```
[bits,status,cfgUpdated] = wlanHESIGBCommonBitRecover(sym,  
noiseVarEst,cfg)  
[bits,status,cfgUpdated] = wlanHESIGBCommonBitRecover(sym,  
noiseVarEst,csi,cfg)
```

Description

[bits,status,cfgUpdated] = wlanHESIGBCommonBitRecover(sym, noiseVarEst,cfg) recovers **bits**, the HE-SIG-B common field bits in an IEEE 802.11ax high-efficiency multiuser (HE MU) transmission.

The function recovers **bits** from **sym**, the demodulated and equalized HE-SIG-B common field symbols. The **cfg** input parameterizes the transmission, which is subject to channel noise with estimated variance **noiseVarEst**.

The function also returns **status**, the result of content channel decoding, and **cfgUpdated**, the updated transmission parameters recovered from the decoded HE-SIG-B field.

For more information on 802.11ax signal recovery, see the “802.11ax Signal Recovery with Preamble Decoding” example.

[bits,status,cfgUpdated] = wlanHESIGBCommonBitRecover(sym, noiseVarEst,csi,cfg) also enhances the demapping of orthogonal frequency-division multiplexing (OFDM) subcarriers by using channel state information **csi**.

Examples

Recover Information Bits in HE-SIG-B Common Field

Recover the information bits in the HE-SIG-B common field of a WLAN HE MU waveform.

Generate an HE MU waveform for the specified information bits and HE-MU-format configuration object.

```
AllocationIndex = 192;  
cfgHE = wlanHEMUConfig(AllocationIndex, 'SIGBCompression', false);  
bits = [1;0];  
waveform = wlanWaveformGenerator(bits, cfgHE);
```

Extract the L-SIG and HE-SIG-A portions from the waveform.

```
ind = wlanFieldIndices(cfgHE);  
rxLSIG = waveform(ind.LSIG(1):ind.LSIG(2), :);  
rxSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
```

Create an HE recovery configuration object for an HE-MU-format packet, specifying the channel bandwidth and packet format.

```
cbw = cfgHE.ChannelBandwidth;  
cfgRecovery = wlanHERecoveryConfig('ChannelBandwidth', cbw, 'PacketFormat', 'HE-MU');
```

Perform orthogonal frequency-division multiplexing (OFDM) demodulation to extract the L-SIG and HE-SIG-A fields, assuming no channel noise.

```
noiseVarEst = 0;  
info = wlanHEOFDMInfo('L-SIG', cbw);  
lsigDemod = wlanHEDemodulate(rxLSIG, 'L-SIG', cbw);  
sigDemod = wlanHEDemodulate(rxSIGA, 'HE-SIG-A', cbw);  
[~,~,lsigInfo] = wlanLSIGBitRecover(lsigDemod(info.DataIndices,:), noiseVarEst);  
cfgRecovery.LSIGLength = lsigInfo.Length;  
sigA = wlanHESIGABitRecover(sigDemod(info.DataIndices,:), noiseVarEst);
```

Update the HE recovery configuration object with the HE-SIG-A information bits.

```
cfg = interpretHESIGABits(cfgRecovery, sigA);
```

Extract the HE-SIG-B field.

```
s = getSIGBLength(cfg);  
rxSIGB = waveform(ind.HESIGA(2)+(1:s.NumSIGBCommonFieldSamples), :);
```

Demodulate and decode the HE-SIG-B common field, displaying the result.

```
sigbDemod = wlanHEDemodulate(rxSIGB, 'HE-SIG-B', cbw);
sigb = sigbDemod(info.DataIndices, :, :);
[bits, status, cfgUpdated] = wlanHESIGBCommonBitRecover(sigb, noiseVarEst, cfg);
disp(bits')
```

```
    0    0    0    0    0    0    1    1    0    0    0    0    0    0    0    0    0    0
```

```
disp(status)
```

```
Success
```

Input Arguments

sym — Demodulated and equalized HE-SIG-B symbols

52-by-1 complex-valued vector | 104-by-1 complex-valued vector

Demodulated and equalized HE-SIG-B symbols, specified as a complex-valued column vector. The length of the vector is equal to the number of active subcarriers, which depends on the channel bandwidth of the transmission.

- If the channel bandwidth is 20 MHz, specify this argument as a 52-by-1 vector.
- If the channel bandwidth is 40 MHz, 80 MHz, or 160 MHz, specify this argument as a 104-by-1 vector. This vector must contain the combined 20 MHz subchannel repetitions.

The ChannelBandwidth property of the `cfg` input determines the channel bandwidth.

Data Types: double

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cfg — HE MU transmission parameters

wlanHERecoveryConfig object

HE MU transmission parameters, specified as a wlanHERecoveryConfig object.

csi — Channel state information

real-valued column vector

Channel state information, specified as an N_{SD} -by-1 real-valued vector, where N_{SD} is the number of data subcarriers in the HE-SIG-B field.

Data Types: double

Output Arguments

bits — Recovered HE-SIG-B common field bits

binary column vector | binary matrix

Recovered HE-SIG-B common field bits for each content channel of the HE-SIG-B field, returned as a binary column vector or matrix. The size of this output depends on the channel bandwidth of the transmission according to this table.

Channel Bandwidth/MHz	Size of bits
20	18-by-1
40	18-by-2
80	27-by-2
160	43-by-2

Data Types: int8

status — Result of content channel decoding

character vector

Result of content channel decoding, returned as one of these values.

- 'Success' - All content channels passed the cyclic redundancy check (CRC).
- 'ContentChannel1Fail' - Content channel 1 failed the CRC, and the number of HE-SIG-B symbols signaled in the HE-SIG-A field is less than 16.
- 'ContentChannel2Fail' - Content channel 2 failed the CRC, and the number of HE-SIG-B symbols signaled in the HE-SIG-A field is less than 16.
- 'UnknownNumUsersContentChannel1' - Content channel 1 failed the CRC, and the number of HE-SIG-B symbols signaled in the HE-SIG-B field is 16.

- 'UnknownNumUsersContentChannel2' - Content channel 2 failed the CRC, and the number of HE-SIG-B symbols signaled in the HE-SIG-B field is 16.
- 'AllContentChannelCRCFail' - All content channels failed the CRC.

If the number of HE-SIG-B symbols signaled in the HE-SIG-A field is less than 16 and any content channel fails the CRC, the HE-SIG-A field determines the length of the HE-SIG-B field. If the number of HE-SIG-B symbols signaled in the HE-SIG-A field is 16 and any content channel fails the CRC, the length of the HE-SIG-B field is undetermined.

Data Types: char

cfgUpdated — Updated HE MU transmission parameters

wlanHERecoveryConfig object

Updated HE MU transmission parameters recovered from the decoded HE-SIG-B field, returned as a wlanHERecoveryConfig object.

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." Draft Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanFieldIndices | wlanHEDataBitRecover | wlanHESIGABitRecover |
wlanHESIGBUserBitRecover | wlanLSIGBitRecover

Objects

wlanHERecoveryConfig

Topics

“Multiuser HE Transmission”

Introduced in R2019b

wlanHESIGBUserBitRecover

Recover user field bits in HE-SIG-B field

Syntax

```
[bits, failCRC, cfgUpdated] = wlanHESIGBUserBitRecover(sym,  
noiseVarEst, cfg)  
[bits, failCRC, cfgUpdated] = wlanHESIGBUserBitRecover(sym,  
noiseVarEst, csi, cfg)
```

Description

[bits, failCRC, cfgUpdated] = wlanHESIGBUserBitRecover(sym, noiseVarEst, cfg) recovers bits, the HE-SIG-B user field bits contained in an IEEE 802.11ax high-efficiency multiuser (HE MU) transmission.

The function recovers bits from sym, the demodulated and equalized HE-SIG-B user field symbols. The cfg input parameterizes the transmission, which is subject to channel noise with estimated variance noiseVarEst.

The function also returns failCRC, the result of the cyclic redundancy check (CRC) on bits, and cfgUpdated, the updated transmission parameters recovered from the decoded HE-SIG-B field.

For more information on 802.11ax signal recovery, see the “802.11ax Signal Recovery with Preamble Decoding” example.

[bits, failCRC, cfgUpdated] = wlanHESIGBUserBitRecover(sym, noiseVarEst, csi, cfg) also enhances the demapping of orthogonal frequency-division multiplexing (OFDM) subcarriers by using channel state information csi.

Examples

Recover Information Bits in HE-SIG-B User Field

Recover the information bits in the HE-SIG-B user field of a WLAN HE MU waveform.

Generate an HE MU waveform for the specified information bits and HE-MU-format configuration object.

```
cfgHE = wlanHEMUConfig(192);  
bits = [1;0;1;1];  
waveform = wlanWaveformGenerator(bits, cfgHE);
```

Extract the L-SIG and HE-SIG-A portions of the waveform.

```
ind = wlanFieldIndices(cfgHE);  
rxLSIG = waveform(ind.LSIG(1):ind.LSIG(2), :);  
rxSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2), :);
```

Create an HE recovery configuration object for an HE-MU-format packet, specifying the channel bandwidth and packet format.

```
cbw = cfgHE.ChannelBandwidth;  
cfgRecovery = wlanHERecoveryConfig('ChannelBandwidth', cbw, 'PacketFormat', 'HE-MU');
```

Perform orthogonal frequency-division multiplexing (OFDM) demodulation to extract the L-SIG and HE-SIG-A fields, assuming no channel noise.

```
noiseVarEst = 0;  
info = wlanHEOFDMInfo('L-SIG', cbw);  
lsigDemod = wlanHEDemodulate(rxLSIG, 'L-SIG', cbw);  
sigADemod = wlanHEDemodulate(rxSIGA, 'HE-SIG-A', cbw);  
[~,~,lsigInfo] = wlanLSIGBitRecover(lsigDemod(info.DataIndices, :), noiseVarEst);  
cfgRecovery.LSIGLength = lsigInfo.Length;  
sigA = wlanHESIGABitRecover(sigADemod(info.DataIndices, :), noiseVarEst);
```

Update the HE recovery configuration object with the HE-SIG-A information bits.

```
cfg = interpretHESIGABits(cfgRecovery, sigA);
```

Extract the HE-SIG-B field.

```
rxSIGB = waveform(ind.HESIGB(1):ind.HESIGB(2), :);
```

Demodulate and decode the HE-SIG-B user field, displaying the result.

```
sigbDemod = wlanHEDemodulate(rxSIGB, 'HE-SIG-B', cbw);  
sigb = sigbDemod(info.DataIndices, :, :);
```



```
[bits, failCRC, cfgUpdated] = wlanHESIGBUserBitRecover(sigb, noiseVarEst, cfg);
disp(bits')

Columns 1 through 19
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

Columns 20 through 21
0 1

disp(failCRC)

0
```

Input Arguments

sym — Demodulated and equalized HE-SIG-B symbols

52-by-1 complex-valued vector | 104-by-1 complex-valued vector

Demodulated and equalized HE-SIG-B symbols, specified as a complex-valued vector. The length of the vector is equal to the number of active subcarriers, which depends on the channel bandwidth of the transmission.

- If the channel bandwidth is 20 MHz, specify this argument as a 52-by-1 vector.
- If the channel bandwidth is 40 MHz, 80 MHz, or 160 MHz, specify this argument as a 104-by-1 vector. This vector must contain the combined 20 MHz subchannel repetitions.

Data Types: double

Complex Number Support: Yes

noiseVarEst — Channel noise variance estimate

nonnegative scalar

Channel noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cfg — HE MU transmission parameters

wlanHERecoveryConfig object

HE MU transmission parameters, specified as a `wlanHERecoveryConfig` object.

csi — Channel state information

real-valued column vector

Channel state information, specified as an N_{SD} -by-1 real-valued vector, where N_{SD} is the number of data subcarriers in the HE-SIG-B field.

Data Types: `double`

Output Arguments

bits — Recovered HE-SIG-B user field bits

binary matrix

Recovered HE-SIG-B user field bits, returned as a 21-by- N_{users} binary matrix, where N_{users} is the number of users in the transmission. Each column of this argument contains the recovered user field bits for the corresponding user.

Data Types: `int8`

failCRC — CRC result for each user

logical row vector

CRC result for each user, returned as a 1-by- N_{users} logical vector, where N_{users} is the number of users in the transmission. Each element of this argument represents the result of the CRC for the corresponding user. A value of 1 indicates that the user bits failed the CRC. A value of 0 indicates that the user bits passed the CRC.

Data Types: `logical`

cfgUpdated — Updated HE MU transmission parameters

cell array of `wlanHERecoveryConfig` objects

Updated HE MU transmission parameters recovered from the decoded HE-SIG-B field, returned as a 1-by- N_{users} cell array of `wlanHERecoveryConfig` objects. N_{users} is the number of users in the transmission.

Note The `wlanHESIGBUserBitRecover` function does not return the updated transmission parameters for users whose `FailCRC` result is 1.

Data Types: cell

Limitations

The `wlanHESIGBUserBitRecover` function returns output arguments `bits`, `failCRC`, and `cfgUpdated` only for users in a valid HE-SIG-B content channel. If the function cannot decode an HE-SIG-B content channel, then it does not return any output arguments for users in that content channel. For more information on allocating users across HE-SIG-B content channels in HE MU transmissions, see “Multiuser HE Transmission”.

References

- [1] IEEE Std 802.11- 2016. “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1 “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN.” Draft Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanFieldIndices` | `wlanHEDataBitRecover` | `wlanHESIGABitRecover` | `wlanHESIGBCommonBitRecover` | `wlanLSIGBitRecover`

Objects

wlanHERecoveryConfig

Topics

“Multiuser HE Transmission”

Introduced in R2019b

wlanHTData

Generate HT-Data field waveform

Syntax

```
y = wlanHTData(psdu,cfg)
y = wlanHTData(psdu,cfg,scramInit)
```

Description

`y = wlanHTData(psdu,cfg)` generates the “HT-Data field” on page 2-240⁶ time-domain waveform for the input PLCP service data unit, `psdu`, and specified configuration object, `cfg`. See “HT-Data Field Processing” on page 2-241 for waveform generation details.

`y = wlanHTData(psdu,cfg,scramInit)` uses `scramInit` for the scrambler initialization state.

Examples

Generate HT-Data Waveform

Generate the waveform signal for a 40 MHz HT-mixed data field with multiple transmit antennas. Create an HT format configuration object. Specify 40 MHz channel bandwidth, two transmit antennas, and two space-time streams.

```
cfgHT = wlanHTConfig('ChannelBandwidth','CBW40','NumTransmitAntennas',2,'NumSpaceTimeS
cfgHT =
wlanHTConfig with properties:
```

6. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
ChannelBandwidth: 'CBW40'  
NumTransmitAntennas: 2  
NumSpaceTimeStreams: 2  
    SpatialMapping: 'Direct'  
        MCS: 12  
    GuardInterval: 'Long'  
    ChannelCoding: 'BCC'  
        PSDULength: 1024  
    AggregatedMPDU: 0  
    RecommendSmoothing: 1
```

Assign `PSDULength` bytes of random data to a bit stream and generate the HT data waveform.

```
PSDU = randi([0 1],cfgHT.PSDULength*8,1);  
y = wlanHTData(PSDU,cfgHT);
```

Determine the size of the waveform.

```
size(y)
```

```
ans = 1×2
```

```
    2080         2
```

The function returns a complex two-column time-domain waveform. Each column contains 2080 samples, corresponding to the HT-Data field for each transmit antenna.

Input Arguments

psdu — PLCP Service Data Unit

vector

PLCP Service Data Unit (“PSDU” on page 2-241), specified as an N_b -by-1 vector. N_b is the number of bits and equals `PSDULength × 8`.

Data Types: double

cfg — Format configuration

wlanHTConfig object

Format configuration, specified as a `wlanHTConfig` object. The `wlanHTData` function uses the object properties indicated.

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: `char` | `string`

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as 1, 2, 3, or 4.

Data Types: `double`

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: `double`

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3

Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3. When `NumExtensionStreams` is greater than 0, `SpatialMapping` must be 'Custom'.

Data Types: `double`

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value 'Direct' applies when `NumTransmitAntennas` and `NumSpaceTimeStreams` are equal.

Data Types: `char` | `string`

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to rotate and scale the constellation mapper output vector. This property applies when the

SpatialMapping property is set to 'Custom'. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas.

- When specified as a scalar, NumTransmitAntennas = NumSpaceTimeStreams = 1 and a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be $(N_{STS} + N_{ESS})$ -by- N_T . N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. The spatial mapping matrix applies to all the subcarriers. The first N_{STS} and last N_{ESS} rows apply to the space-time streams and extension spatial streams respectively.
- When specified as a 3-D array, the size must be N_{ST} -by- $(N_{STS} + N_{ESS})$ -by- N_T . N_{ST} is the sum of the data and pilot subcarriers, as determined by ChannelBandwidth. N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. In this case, each data and pilot subcarrier can have its own spatial mapping matrix.

The table shows the ChannelBandwidth setting and the corresponding N_{ST} .

ChannelBandwidth	N_{ST}
'CBW20'	56
'CBW40'	114

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3; 0.4 0.4; 0.5 0.8] represents a spatial mapping matrix having three space-time streams and two transmit antennas.

Data Types: double

Complex Number Support: Yes

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 31

Modulation and coding scheme to use for transmitting the current packet, specified as an integer from 0 to 31. The MCS setting identifies which modulation and coding rate combination is used, and the number of spatial streams (N_{SS}).

MCS ^(Note 1)	N_{SS} ^(Note 1)	Modulation	Coding Rate
0, 8, 16, or 24	1, 2, 3, or 4	BPSK	1/2

MCS (Note 1)	N_{SS} (Note 1)	Modulation	Coding Rate
1, 9, 17, or 25	1, 2, 3, or 4	QPSK	1/2
2, 10, 18, or 26	1, 2, 3, or 4	QPSK	3/4
3, 11, 19, or 27	1, 2, 3, or 4	16QAM	1/2
4, 12, 20, or 28	1, 2, 3, or 4	16QAM	3/4
5, 13, 21, or 29	1, 2, 3, or 4	64QAM	2/3
6, 14, 22, or 30	1, 2, 3, or 4	64QAM	3/4
7, 15, 23, or 31	1, 2, 3, or 4	64QAM	5/6
Note-1 MCS from 0 to 7 have one spatial stream. MCS from 8 to 15 have two spatial streams. MCS from 16 to 23 have three spatial streams. MCS from 24 to 31 have four spatial streams.			

See IEEE 802.11-2012, Section 20.6 for further description of MCS dependent parameters.

When working with the HT-Data field, if the number of space-time streams is equal to the number of spatial streams, no space-time block coding (STBC) is used. See IEEE 802.11-2012, Section 20.3.11.9.2 for further description of STBC mapping.

Example: 22 indicates an MCS with three spatial streams, 64-QAM modulation, and a 3/4 coding rate.

Data Types: double

GuardInterval — Cyclic prefix length for the data field within a packet

'Long' (default) | 'Short'

Cyclic prefix length for the data field within a packet, specified as 'Long' or 'Short'.

- The long guard interval length is 800 ns.
- The short guard interval length is 400 ns.

Data Types: char | string

ChannelCoding — Type of forward error correction coding

'BCC' (default) | 'LDPC'

Type of forward error correction coding for the data field, specified as 'BCC' (default) or 'LDPC'. 'BCC' indicates binary convolutional coding and 'LDPC' indicates low density

parity check coding. Providing a character vector or a single cell character vector defines the channel coding type for a single user or all users in a multiuser transmission. By providing a cell array different channel coding types can be specified per user for a multiuser transmission.

Data Types: `char` | `cell` | `string`

PSDULength — Number of bytes carried in the user payload

1024 (default) | integer from 0 to 65,535

Number of bytes carried in the user payload, specified as an integer from 0 to 65,535. A PSDULength of 0 implies a sounding packet for which there are no data bits to recover.

Example: 512


Data Types: `double`

scramInit — Scrambler initialization state

93 (default) | integer from 1 to 127 | binary vector

Scrambler initialization state for each packet generated, specified as an integer from 1 to 127 or as the corresponding binary vector of length seven. The default value of 93 is the example state given in IEEE Std 802.11-2012, Section L.1.5.2.

The scrambler initialization used on the transmission data follows the process described in IEEE Std 802.11-2012, Section 18.3.5.5 and IEEE Std 802.11ad-2012, Section 21.3.9. The header and data fields that follow the scrambler initialization field (including data padding bits) are scrambled by XORing each bit with a length-127 periodic sequence generated by the polynomial $S(x) = x^7 + x^4 + 1$. The octets of the PSDU (Physical Layer Service Data Unit) are placed into a bit stream, and within each octet, bit 0 (LSB) is first and bit 7 (MSB) is last. The generation of the sequence and the XOR operation are shown in this figure:

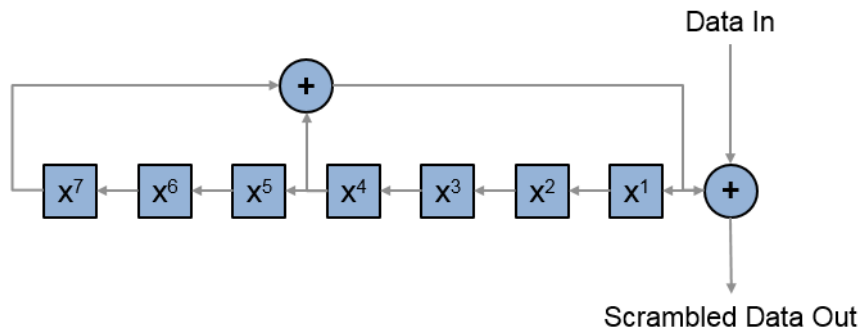

Conversion from integer to bits uses left-MSB orientation. For the initialization of the scrambler with decimal 1, the bits are mapped to the elements shown.

Element	X^7	X^6	X^5	X^4	X^3	X^2	X^1
Bit Value	0	0	0	0	0	0	1

To generate the bit stream equivalent to a decimal, use `de2bi`. For example, for decimal 1:

```
de2bi(1,7,'left-msb')
ans =
```

```
0 0 0 0 0 0 1
```

Example: `[1; 0; 1; 1; 1; 0; 1]` conveys the scrambler initialization state of 93 as a binary vector.

Data Types: `double` | `int8`

Output Arguments

y — HT-Data field time-domain waveform


matrix

“HT-Data field” on page 2-240 time-domain waveform for HT-mixed format, returned as an N_S -by- N_T matrix. N_S is the number of time domain samples, and N_T is the number of transmit antennas.

More About

HT-Data field

The high throughput data field (HT-Data) follows the last HT-LTF of an HT-mixed packet.

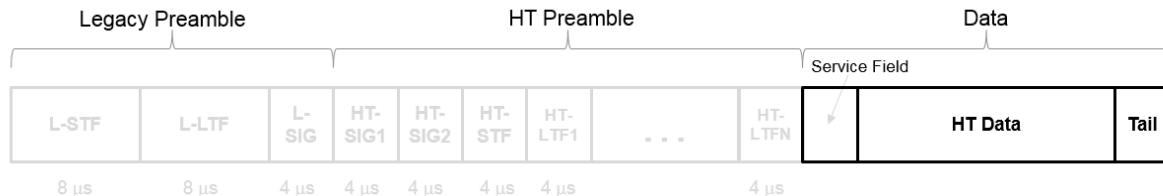

The high throughput data field is used to transmit one or more frames from the MAC layer and consists of four subfields.

HT Data Field

Service 16 bits	PSDU 1-65535 bytes	Tail $6N_{es}$ bits	Pad Bits as needed
---------------------------	------------------------------	----------------------------------	---------------------------------

- **Service field** — Contains 16 zeros to initialize the data scrambler.
- **PSDU** — Variable-length field containing the PLCP service data unit (PSDU). In 802.11, the PSDU can consist of an aggregate of several MAC service data units.

- **Tail** — Tail bits required to terminate a convolutional code. The field uses six zeros for each encoding stream.
- **Pad Bits** — Variable-length field required to ensure that the HT-Data field consists of an integer number of symbols.


PSDU

Physical layer convergence procedure (PLCP) service data unit (PSDU). This field is composed of a variable number of octets. The minimum is 0 (zero) and the maximum is 2500. For more information, see IEEE Std 802.11™-2012, Section 15.3.5.7.

Algorithms


HT-Data Field Processing

The “HT-Data field” on page 2-240 follows the last HT-LTF in the packet structure.

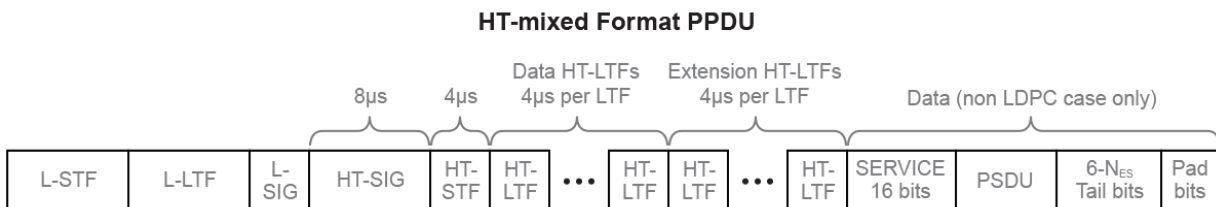

The “HT-Data field” on page 2-240 includes the user payload in the PSDU, plus 16 service bits, $6 \times N_{ES}$ tail bits, and additional padding bits as required to fill out the last OFDM symbol.

For algorithm details, refer to IEEE Std 802.11™-2012 [1], Section 20.3.11. The wlanHTData function performs transmitter processing on the “HT-Data field” on page 2-240 and outputs the time-domain waveform for N_T transmit antennas.

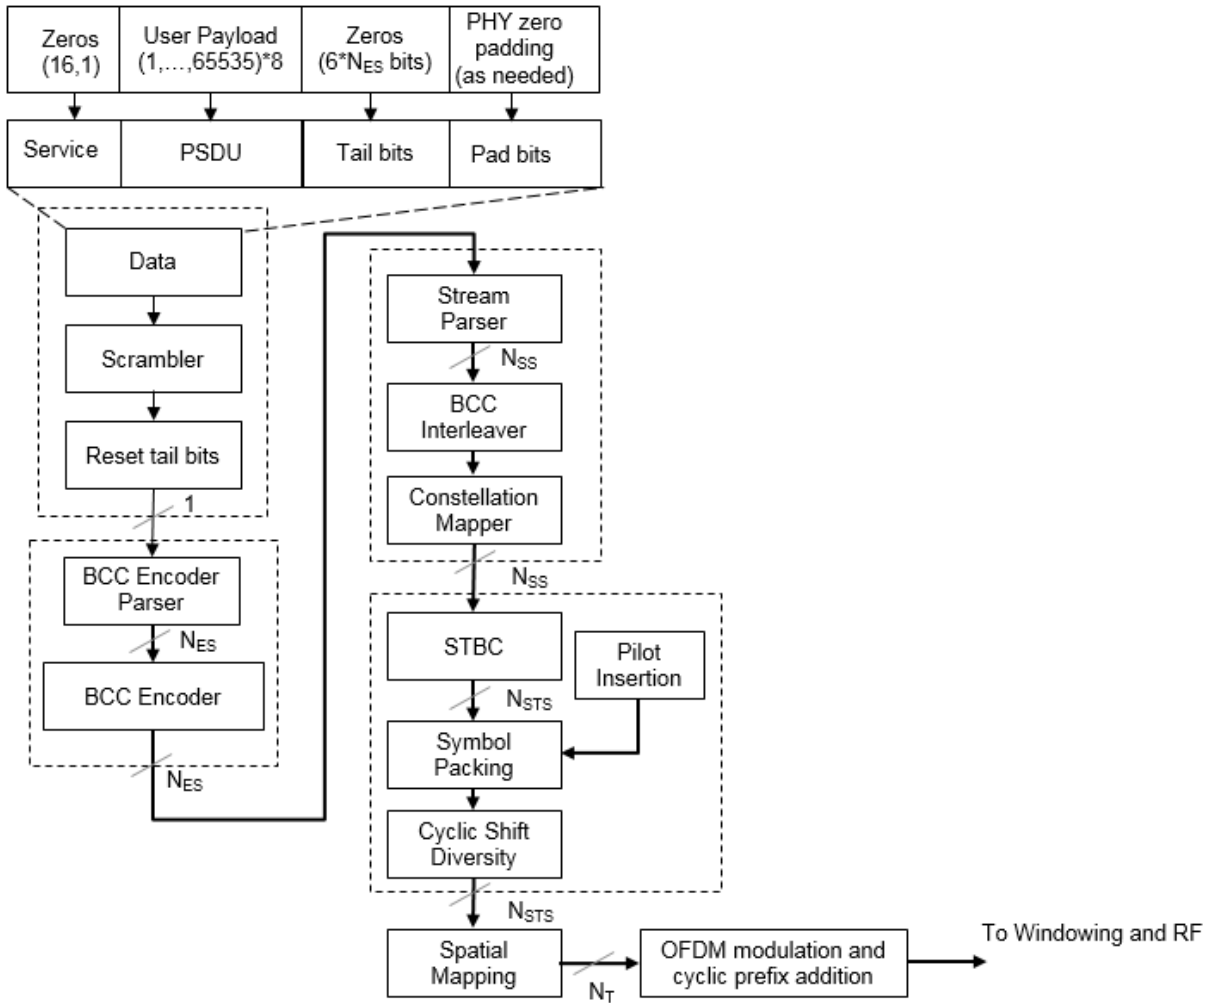

N_{ES} is the number of BCC encoders.
 N_{SS} is the number of spatial streams.
 N_{STS} is the number of space-time streams.
 N_T is the number of transmit antennas.

BCC channel coding is shown. STBC and spatial mapping are optional modes for HT format.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanHTDataRecover](#) | [wlanHTLTF](#) | [wlanWaveformGenerator](#)

Introduced in R2015b

wlanHTDataRecover

Recover HT data

Syntax

```
recData = wlanHTDataRecover(rxSig,chEst,noiseVarEst,cfg)
recData = wlanHTDataRecover(rxSig,chEst,noiseVarEst,cfg,cfgRec)
[recData,eqSym] = wlanHTDataRecover( ___ )
[recData,eqSym,cpe] = wlanHTDataRecover( ___ )
```

Description

`recData = wlanHTDataRecover(rxSig,chEst,noiseVarEst,cfg)` returns the recovered “HT-Data field” on page 2-247⁷, `recData`, for input signal `rxSig`. Specify a channel estimate for the occupied subcarriers, `chEst`, a noise variance estimate, `noiseVarEst`, and an “HT-Mixed” on page 2-248 format configuration object, `cfg`.

`recData = wlanHTDataRecover(rxSig,chEst,noiseVarEst,cfg,cfgRec)` specifies algorithm information using `wlanRecoveryConfig` object `cfgRec`.

`[recData,eqSym] = wlanHTDataRecover(___)` also returns the equalized symbols, `eqSym`, using the arguments from the previous syntaxes.

`[recData,eqSym,cpe] = wlanHTDataRecover(___)` also returns the common phase error, `cpe`.

Examples

7. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Recover HT-Data Bits

Create an HT configuration object having a PSDU length of 1024 bytes. Generate an HTData sequence from a binary sequence whose length is eight times the length of the PSDU.

```
cfgHT = wlanHTConfig('PSDULength',1024);
txBits = randi([0 1],8*cfgHT.PSDULength,1);
txHTSig = wlanHTData(txBits, cfgHT);
```

Pass the signal through an AWGN channel with a signal-to-noise ratio of 10 dB.

```
rxHTSig = awgn(txHTSig,10);
```

Specify a channel estimate. Because fading was not introduced, a vector of ones is a perfect estimate. For a 20 MHz bandwidth, there are 52 data subcarriers and 4 pilot subcarriers in the HT-SIG field.

```
chEst = ones(56,1);
```

Recover the data bits and determine the number of bit errors. Display the number of bit errors and the associated bit error rate.

```
rxBits = wlanHTDataRecover(rxHTSig, chEst, 0.1, cfgHT);
[numerr, ber] = biterr(rxBits, txBits)
```

```
numerr = 0
```

```
ber = 0
```

Recover HT-Data Field Signal Using Zero-Forcing Algorithm

Create an HT configuration object having a 40 MHz channel bandwidth and a 1024-byte PSDU length. Generate the corresponding HT-Data sequence.

```
cfgHT = wlanHTConfig('ChannelBandwidth', 'CBW40', 'PSDULength', 1024);
txBits = randi([0 1], 8*cfgHT.PSDULength, 1);
txHTSig = wlanHTData(txBits, cfgHT);
```

Pass the signal through an AWGN channel with a signal-to-noise ratio of 7 dB.

```
rxHTSig = awgn(txHTSig, 7);
```

Create a data recovery object that specifies the use of the zero-forcing algorithm.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Recover the data and determine the number of bit errors. Because fading was not introduced, the channel estimate is set to a vector of ones whose length is equal to the number of occupied subcarriers.

```
rxBits = wlanHTDataRecover(rxHTSig,ones(114,1),0.2,cfgHT,cfgRec);  
[numerr,ber] = biterr(rxBits,txBits)
```

```
numerr = 0
```

```
ber = 0
```

Input Arguments

rxSig — Received HT-Data signal

vector | matrix

Received HT-Data signal, specified as an N_S -by- N_R vector or matrix. N_S is the number of samples, and N_R is the number of receive antennas.

Data Types: double

chEst — Channel estimate

vector | matrix | 3-D array

Channel estimate, specified as an N_{ST} -by- N_{STS} -by- N_R array. N_{ST} is the number of occupied subcarriers, N_{STS} is the number of space-time streams, and N_R is the number of receive antennas.

Data Types: double

noiseVarEst — Noise variance estimate

scalar

Noise variance estimate, specified as a nonnegative scalar.

Example: 0.7071

Data Types: double

cfg — Format configuration

wlanHTConfig object

Format configuration, specified as a wlanHTConfig object.

cfgRec — Algorithm parameters

wlanRecoveryConfig object

Algorithm parameters, specified as a wlanRecoveryConfig object.

Output Arguments

recData — Recovered binary output data

binary column vector

Recovered binary output data, returned as a column vector of length $8 \times N_{\text{PSDU}}$, where N_{PSDU} is the length of the PSDU in bytes. See wlanHTConfig for PSDULength details.

Data Types: int8

eqSym — Equalized symbols

column vector | matrix | 3-D array

Equalized symbols, returned as an N_{SD} -by- N_{SYM} -by- N_{SS} array. N_{SD} is the number of data subcarriers, N_{SYM} is the number of OFDM symbols in the HT-Data field, and N_{SS} is the number of spatial streams.

Data Types: double

cpe — Common phase error


column vector

Common phase error in radians, returned as a column vector having length N_{SYM} . N_{SYM} is the number of OFDM symbols in the HT-Data field.

More About


HT-Data field

The high throughput data field (HT-Data) follows the last HT-LTF of an HT-mixed packet.

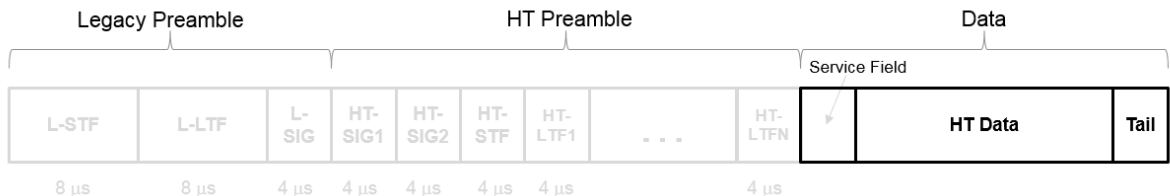

The high throughput data field is used to transmit one or more frames from the MAC layer and consists of four subfields.

HT Data Field



- **Service field** — Contains 16 zeros to initialize the data scrambler.
- **PSDU** — Variable-length field containing the PLCP service data unit (PSDU). In 802.11, the PSDU can consist of an aggregate of several MAC service data units.
- **Tail** — Tail bits required to terminate a convolutional code. The field uses six zeros for each encoding stream.
- **Pad Bits** — Variable-length field required to ensure that the HT-Data field consists of an integer number of symbols.

HT-Mixed

High throughput mixed (HT-mixed) format devices support a mixed mode in which the PLCP header is compatible with HT and Non-HT modes.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanHTConfig | wlanRecoveryConfig

Introduced in R2015b

wlanHTLTF

Generate HT-LTF waveform

Syntax

```
y = wlanHTLTF(cfg)
```

Description

`y = wlanHTLTF(cfg)` generates an “HT-LTF” on page 2-254⁸ time-domain waveform for “HT-mixed” on page 2-256 format transmissions given the parameters specified in `cfg`.

Examples

Generate Single-Stream HT-LTF Waveform

Create a `wlanHTConfig` object having a channel bandwidth of 40 MHz.

```
cfg = wlanHTConfig('ChannelBandwidth','CBW40');
```

Generate the corresponding HT-LTF.

```
hltfOut = wlanHTLTF(cfg);  
size(hltfOut)
```

```
ans = 1×2
```

```
160    1
```

The `cfg` parameters result in a 160-sample waveform having only one column corresponding to a single stream transmission.

8. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Generate HT-LTF with Four Space-Time Streams

Generate an HT-LTF having four transmit antennas and four space-time streams.

Create a `wlanHTConfig` object having an MCS of 31, four transmit antennas, and four space-time streams.

```
cfg = wlanHTConfig('MCS',31,'NumTransmitAntennas',4,'NumSpaceTimeStreams',4)

cfg =
    wlanHTConfig with properties:
        ChannelBandwidth: 'CBW20'
        NumTransmitAntennas: 4
        NumSpaceTimeStreams: 4
        SpatialMapping: 'Direct'
            MCS: 31
        GuardInterval: 'Long'
        ChannelCoding: 'BCC'
        PSDULength: 1024
        AggregatedMPDU: 0
        RecommendSmoothing: 1
```

Generate the corresponding HT-LTF.

```
hltfOut = wlanHTLTF(cfg);
```

Verify that the HT-LTF output consists of four streams (one for each antenna).

```
size(hltfOut)

ans = 1×2
    320    4
```

Because the channel bandwidth is 20 MHz and has four space-time streams, the output waveform has four HT-LTF and 320 time-domain samples.

Input Arguments

cfg — Format configuration

wlanHTConfig object

Format configuration, specified as a wlanHTConfig object. The wlanHTLTF function uses these properties:

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as 1, 2, 3, or 4.

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: double

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3

Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3. When NumExtensionStreams is greater than 0, SpatialMapping must be 'Custom'.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to rotate and scale the constellation mapper output vector. This property applies when the `SpatialMapping` property is set to 'Custom'. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas.

- When specified as a scalar, `NumTransmitAntennas = NumSpaceTimeStreams = 1` and a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be $(N_{STS} + N_{ESS})$ -by- N_T . N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. The spatial mapping matrix applies to all the subcarriers. The first N_{STS} and last N_{ESS} rows apply to the space-time streams and extension spatial streams respectively.
- When specified as a 3-D array, the size must be N_{ST} -by- $(N_{STS} + N_{ESS})$ -by- N_T . N_{ST} is the sum of the data and pilot subcarriers, as determined by `ChannelBandwidth`. N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. In this case, each data and pilot subcarrier can have its own spatial mapping matrix.

The table shows the `ChannelBandwidth` setting and the corresponding N_{ST} .

<code>ChannelBandwidth</code>	N_{ST}
'CBW20'	56
'CBW40'	114

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: `[0.5 0.3; 0.4 0.4; 0.5 0.8]` represents a spatial mapping matrix having three space-time streams and two transmit antennas.

Data Types: double

Complex Number Support: Yes

Output Arguments

y — HT-LTF waveform

matrix

HT-LTF waveform, returned as an $(N_S \times N_{HTLTF})$ -by- N_T matrix. N_S is the number of time domain samples per N_{HTLTF} , where N_{HTLTF} is the number of OFDM symbols in the “HT-LTF” on page 2-254. N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth. Each symbol contains 80 time samples per 20 MHz channel.

ChannelBandwidth	N_S
'CBW20'	80
'CBW40'	160


Determination of the number of N_{HTLTF} is described in “HT-LTF” on page 2-254.

Data Types: double

More About

HT-LTF

The high throughput long training field (HT-LTF) is located between the HT-STF and data field of an HT-mixed packet.

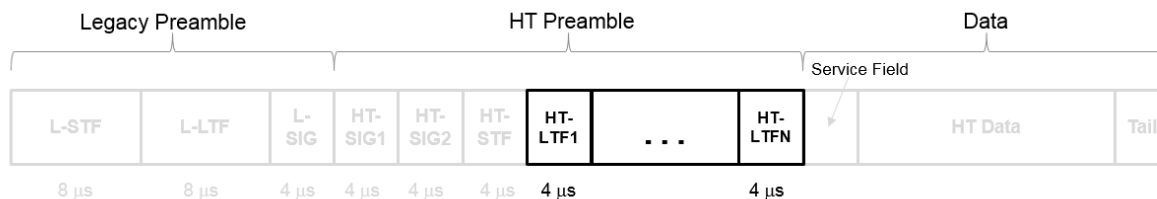

As described in IEEE Std 802.11-2012, Section 20.3.9.4.6, the receiver can use the HT-LTF to estimate the MIMO channel between the set of QAM mapper outputs (or, if STBC

is applied, the STBC encoder outputs) and the receive chains. The HT-LTF portion has one or two parts. The first part consists of one, two, or four HT-LTFs that are necessary for demodulation of the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-DLTFs. The optional second part consists of zero, one, two, or four HT-LTFs that can be used to sound extra spatial dimensions of the MIMO channel not utilized by the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-ELTFs. Each HT long training symbol is 4 μ s. The number of space-time streams and the number of extension streams determines the number of HT-LTF symbols transmitted.

Tables 20-12, 20-13 and 20-14 from IEEE Std 802.11-2012 are reproduced here.

N_{STS} Determination			N_{HTDLTF} Determination		N_{HTELTf} Determination	
Table 20-12 defines the number of space-time streams (N_{STS}) based on the number of spatial streams (N_{SS}) from the MCS and the STBC field.			Table 20-13 defines the number of HT-DLTFs required for the N_{STS} .		Table 20-14 defines the number of HT-ELTFs required for the number of extension spatial streams (N_{ESS}). N_{ESS} is defined in HT-SIG ₂ .	
N_{SS} from MCS	STBC field	N_{STS}	N_{STS}	N_{HTDLTF}	N_{ESS}	N_{HTELTf}
1	0	1	1	1	0	0
1	1	2	2	2	1	1
2	0	2	3	4	2	2
2	1	3	4	4	3	4
2	2	4				
3	0	3				
3	1	4				
4	0	4				

Additional constraints include:

- $N_{HTLTF} = N_{HTDLTF} + N_{HTELTf} \leq 5$.
- $N_{STS} + N_{ESS} \leq 4$.
 - When $N_{STS} = 3$, N_{ESS} cannot exceed one.

- If $N_{ESS} = 1$ when $N_{STS} = 3$ then $N_{HTLTF} = 5$.

HT-mixed

As described in IEEE Std 802.11-2012, Section 20.1.4, high throughput mixed (HT-mixed) format packets contain a preamble compatible with IEEE Std 802.11-2012, Section 18 and Section 19 receivers. Non-HT (Section 18 and Section 19) STAs can decode the non-HT fields (L-STF, L-LTF, and L-SIG). The remaining preamble fields (HT-SIG, HT-STF, and HT-LTF) are for HT transmission, so the Section 18 and Section 19 STAs cannot decode them. The HT portion of the packet is described in IEEE Std 802.11-2012, Section 20.3.9.4. Support for the HT-mixed format is mandatory.

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanHTConfig` | `wlanHTData` | `wlanHTLTFChannelEstimate` | `wlanHTLTFDemodulate` | `wlanLLTF`

Introduced in R2015b

wlanHTLTFDemodulate

Demodulate HT-LTF waveform

Syntax

```
y = wlanHTLTFDemodulate(x,cfg)
y = wlanHTLTFDemodulate(x,cfg,OFDMSymbolOffset)
```

Description

`y = wlanHTLTFDemodulate(x,cfg)` returns the demodulated “HT-LTF” on page 2-262⁹, `y`, given received HT-LTF `x`. The input signal is a component of the “HT-mixed” on page 2-263 format “PPDU” on page 2-264. The function demodulates the signal using the information in the `wlanHTConfig` object, `cfg`.

`y = wlanHTLTFDemodulate(x,cfg,OFDMSymbolOffset)` specifies the OFDM symbol sampling offset.

Examples

Demodulate HT-LTF in AWGN

Create an HT configuration object.

```
cfg = wlanHTConfig;
```

Generate an HT-LTF signal based on the object.

```
x = wlanHTLTF(cfg);
```

Pass the HT-LTF signal through an AWGN channel.

9. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.


```
y = awgn(x,20);
```

Demodulate the received signal.

```
z = wlanHTLTFDemodulate(y,cfg);
```

Display the scatter plot of the demodulated signal.

```
scatterplot(z)
```

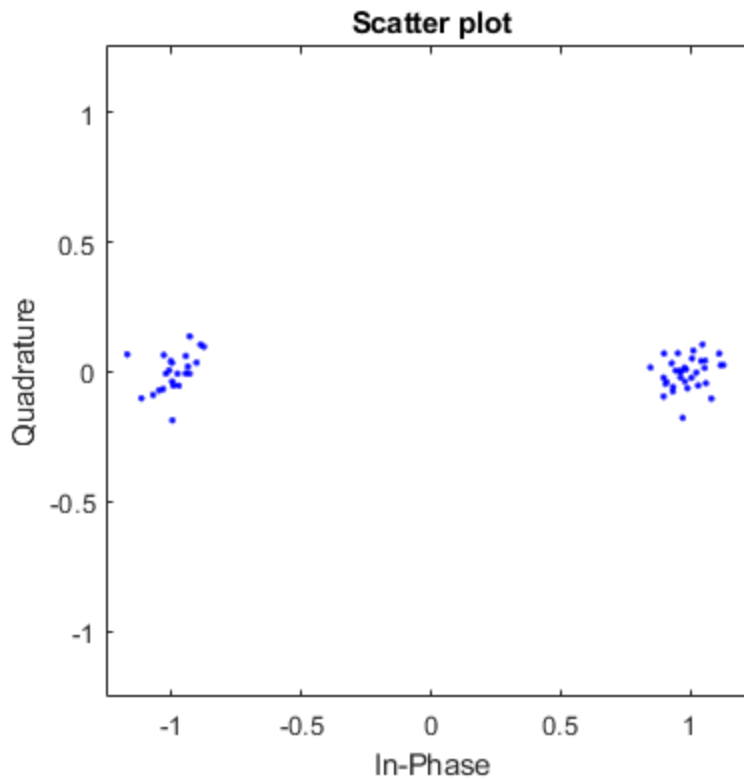

Demodulate 2x2 HT-LTF with OFDM Symbol Offset

Create an HT configuration object having two transmit antennas and two space-time streams.

```
cfg = wlanHTConfig('NumTransmitAntennas',2,'NumSpaceTimeStreams',2, ...  
    'MCS',8);
```

Generate the HT-LTF based on the configuration object.

```
x = wlanHTLTF(cfg);
```

Pass the HT-LTF signal through an AWGN channel.

```
y = awgn(x,10);
```

Demodulate the received signal. Set the OFDM symbol offset to 0.5, which corresponds to 1/2 of the cyclic prefix length.

```
z = wlanHTLTFDemodulate(y, cfg, 0.5);
```

Input Arguments

x — Input signal

matrix

Input signal comprising an “HT-LTF” on page 2-262, specified as an N_S -by- N_R matrix. N_S is the number of samples and N_R is the number of receive antennas. You can generate the signal by using the `wlanHTLTF` function.

Data Types: `double`

cfg — HT format configuration

`wlanHTConfig` object

HT format configuration, specified as a `wlanHTConfig` object. The function uses the following `wlanHTConfig` object properties:

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: double

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3


Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3. When `NumExtensionStreams` is greater than 0, `SpatialMapping` must be 'Custom'.

Data Types: double

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

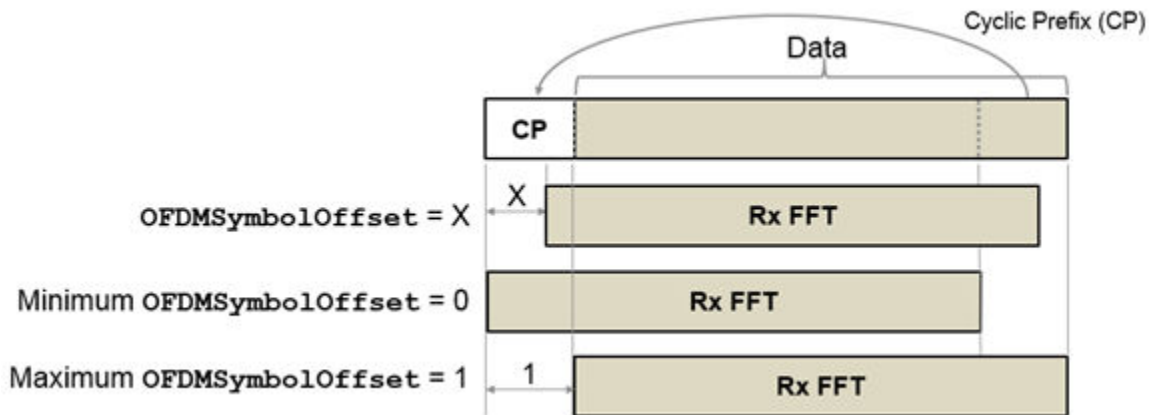

Data Types: double

Output Arguments

y — Demodulated HT-LTF signal

matrix | 3-D array


Demodulated HT-LTF signal for an HT-Mixed PPDU, returned as an N_{ST} -by- N_{SYM} -by- N_R matrix or array. N_{ST} is the number of data and pilot subcarriers. N_{SYM} is the number of OFDM symbols in the HT-LTF. N_R is the number of receive antennas.

Data Types: double

More About

HT-LTF

The high throughput long training field (HT-LTF) is located between the HT-STF and data field of an HT-mixed packet.

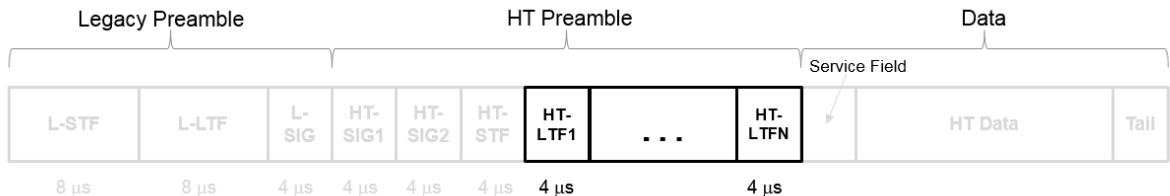

As described in IEEE Std 802.11-2012, Section 20.3.9.4.6, the receiver can use the HT-LTF to estimate the MIMO channel between the set of QAM mapper outputs (or, if STBC is applied, the STBC encoder outputs) and the receive chains. The HT-LTF portion has one or two parts. The first part consists of one, two, or four HT-LTFs that are necessary for demodulation of the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-DLTFs. The optional second part consists of zero, one, two, or four HT-LTFs that can be used to sound extra spatial dimensions of the MIMO channel not utilized by the HT-Data portion of the PPDU. These HT-LTFs are referred to as HT-ELTFs. Each HT long training symbol is 4 μs. The number of space-time streams and the number of extension streams determines the number of HT-LTF symbols transmitted.

Tables 20-12, 20-13 and 20-14 from IEEE Std 802.11-2012 are reproduced here.

N_{STS} Determination			N_{HTDLTF} Determination		N_{HTELTf} Determination	
Table 20-12 defines the number of space-time streams (N_{STS}) based on the number of spatial streams (N_{SS}) from the MCS and the STBC field.			Table 20-13 defines the number of HT-DLTFs required for the N_{STS} .		Table 20-14 defines the number of HT-ELTFs required for the number of extension spatial streams (N_{ESS}). N_{ESS} is defined in HT-SIG ₂ .	
N_{SS} from MCS	STBC field	N_{STS}	N_{STS}	N_{HTDLTF}	N_{ESS}	N_{HTELTf}
1	0	1	1	1	0	0
1	1	2	2	2	1	1
2	0	2	3	3	2	2
2	1	3	4	4	3	4
2	2	4				
3	0	3				
3	1	4				
4	0	4				

Additional constraints include:

- $N_{HTLTF} = N_{HTDLTF} + N_{HTELTf} \leq 5$.
- $N_{STS} + N_{ESS} \leq 4$.
 - When $N_{STS} = 3$, N_{ESS} cannot exceed one.
 - If $N_{ESS} = 1$ when $N_{STS} = 3$ then $N_{HTLTF} = 5$.

HT-mixed

High throughput mixed (HT-mixed) format devices support a mixed mode in which the PLCP header is compatible with HT and non-HT modes.

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanHTConfig` | `wlanHTLTF` | `wlanHTLTFChannelEstimate`

Introduced in R2015b

wlanHTOFDMInfo

Return OFDM information for HT transmission

Syntax

```
info = wlanHTOFDMInfo(field,cfg)
info = wlanHTOFDMInfo(field,cbw,gi)
info = wlanHTOFDMInfo(field,cbw)
```

Description

`info = wlanHTOFDMInfo(field,cfg)` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the input field in a high-throughput (HT) transmission parameterized by configuration object `cfg`.

`info = wlanHTOFDMInfo(field,cbw,gi)` returns OFDM information for channel bandwidth `cbw` and guard interval `gi`. To return OFDM information for the HT-Data field when the format configuration is unknown, use this syntax.

`info = wlanHTOFDMInfo(field,cbw)` returns OFDM information for the specified field and channel bandwidth. To return OFDM information for any field other than HT-Data when the format configuration is unknown, use this syntax.

Examples

Demodulate HT-LTF and Get OFDM Information

Perform OFDM demodulation on the HT-LTF, then extract the data and pilot subcarriers.

Generate a WLAN waveform for an HT transmission.

```
cfg = wlanHTConfig;
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits,cfg);
```

Obtain the field indices and extract the HT-LTF.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.HTLTF(1):ind.HTLTF(2),:);
```

Perform OFDM demodulation on the HT-LTF.

```
sym = wlanHTLTFDemodulate(rx, cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanHTOFDMInfo('HT-LTF', cfg);  
data = sym(info.DataIndices, :, :);  
pilots = sym(info.PilotIndices, :, :);
```

Get OFDM Information for HT-Data Field

Get OFDM information for the HT-Data field.

Specify the channel bandwidth and guard interval duration.

```
cbw = 'CBW40';  
gi = 'Long';
```

Return and display the OFDM information for the HT-Data field.

```
info = wlanHTOFDMInfo('HT-Data', cbw, gi);  
disp(info);  
  
          FFTLength: 128  
          CPLength: 32  
    NumSubchannels: 2  
          NumTones: 114  
ActiveFrequencyIndices: [114x1 double]  
  ActiveFFTIndices: [114x1 double]  
      DataIndices: [108x1 double]  
    PilotIndices: [6x1 double]
```

Get OFDM Information for HT L-LTF

Get OFDM information for the L-LTF in a transmission with specified channel bandwidth.

Specify a channel bandwidth of 40 MHz.

```
cbw = 'CBW40';
```

Return and display the OFDM information for the L-LTF.

```
info = wlanHTOFDMInfo('L-LTF',cbw);
disp(info);
```

```
          FFTLength: 128
          CPLength: [64 0]
    NumSubchannels: 2
          NumTones: 104
ActiveFrequencyIndices: [104x1 double]
  ActiveFFTIndices: [104x1 double]
      DataIndices: [96x1 double]
      PilotIndices: [8x1 double]
```

Input Arguments

field — Field for which to return OFDM information

'L-LTF' | 'L-SIG' | 'HT-SIG' | 'HT-LTF' | 'HT-Data'

Field for which to return OFDM information, specified as one of these values.

- 'L-LTF' - Return OFDM information for the legacy long training field (L-LTF).
- 'L-SIG' - Return OFDM information for the legacy signal (L-SIG) field.
- 'HT-SIG' - Return OFDM information for the HT signal (HT-SIG) field.
- 'HT-LTF' - Return OFDM information for the HT long training field (HT-LTF).
- 'HT-Data' - Return OFDM information for the HT-Data field.

Data Types: char | string

cfg — PHY format configuration

wlanHTConfig object

Physical layer (PHY) format configuration, specified as a wlanHTConfig object.

cbw — Channel bandwidth

'CBW20' | 'CBW40'

Channel bandwidth, specified as one of these values.

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz

Data Types: char | string

gi — Guard interval duration

'Short' | 'Long'

Guard interval duration, specified as 'Short' or 'Long'.

Data Types: double

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLength	Positive integer	Cyclic prefix length, in samples	double
NumTones	Nonnegative integer	Number of active subcarriers	double
NumSubchannels	Positive integer	Number of 20-MHz subchannels	double

Name	Values	Description	Data Types
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double
PilotIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanHTLTFDemodulate | wlanLLTFDemodulate

Objects

wlanHTConfig

Introduced in R2019a

wlanHTSIG

Generate HT-SIG waveform

Syntax

```
y = wlanHTSIG(cfg)
[y,bits] = wlanHTSIG(cfg)
```

Description

`y = wlanHTSIG(cfg)` generates an “HT-SIG” on page 2-276¹⁰ time-domain waveform for “HT-mixed” on page 2-277 format transmissions given the parameters specified in `cfg`.

`[y,bits] = wlanHTSIG(cfg)` returns the information bits, `bits`, that comprise the HT-SIG field.

Examples

Generate HT-SIG Waveform

Generate an HT-SIG waveform for a single transmit antenna.

Create an HT configuration object. Specify a 40 MHz channel bandwidth.

```
cfg = wlanHTConfig;
cfg.ChannelBandwidth = 'CBW40'

cfg =
    wlanHTConfig with properties:
        ChannelBandwidth: 'CBW40'
```

10. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
NumTransmitAntennas: 1
NumSpaceTimeStreams: 1
    SpatialMapping: 'Direct'
        MCS: 0
    GuardInterval: 'Long'
    ChannelCoding: 'BCC'
        PSDULength: 1024
    AggregatedMPDU: 0
    RecommendSmoothing: 1
```

Generate the HT-SIG waveform. Determine the size of the waveform.

```
y = wlanHTSIG(cfg);
size(y)

ans = 1x2
```

```
320    1
```

The function returns a waveform having a complex output of 320 samples corresponding to two 160-sample OFDM symbols.

Display MCS Information from HT-SIG

Generate an HT-SIG waveform and display the MCS information. Change the MCS and display the updated information.

Create a `wlanHTConfig` object having two spatial streams and two transmit antennas. Specify an MCS value of 8, corresponding to BPSK modulation and a coding rate of 1/2.

```
cfg = wlanHTConfig('NumSpaceTimeStreams',2,'NumTransmitAntennas',2,'MCS',8);
```

Generate the information bits from the HT-SIG waveform.

```
[~,sigBits] = wlanHTSIG(cfg);
```

Extract the MCS field from `sigBits` and convert it to its decimal equivalent. The MCS information is contained in bits 1-7.

```
mcsBits = sigBits(1:7);
bi2de(mcsBits')
```

```
ans = int8
      8
```

The MCS matches the specified value.

Change the MCS to 13, which corresponds to 64-QAM modulation with a 2/3 coding rate. Generate the HT-SIG waveform.

```
cfg.MCS = 13;
[~,sigBits] = wlanHTSIG(cfg);
```

Verify that the MCS bits are the binary equivalent of 13.

```
mcsBits = sigBits(1:7);
bi2de(mcsBits')
```

```
ans = int8
      13
```

Input Arguments

cfg — Format configuration

wlanHTConfig object

Format configuration, specified as a wlanHTConfig object. The wlanHTSIG function uses these properties.

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 31

Modulation and coding scheme to use for transmitting the current packet, specified as an integer from 0 to 31. The MCS setting identifies which modulation and coding rate combination is used, and the number of spatial streams (N_{SS}).

MCS ^(Note 1)	N_{SS} ^(Note 1)	Modulation	Coding Rate
0, 8, 16, or 24	1, 2, 3, or 4	BPSK	1/2
1, 9, 17, or 25	1, 2, 3, or 4	QPSK	1/2
2, 10, 18, or 26	1, 2, 3, or 4	QPSK	3/4
3, 11, 19, or 27	1, 2, 3, or 4	16QAM	1/2

MCS ^(Note 1)	N_{SS} ^(Note 1)	Modulation	Coding Rate
4, 12, 20, or 28	1, 2, 3, or 4	16QAM	3/4
5, 13, 21, or 29	1, 2, 3, or 4	64QAM	2/3
6, 14, 22, or 30	1, 2, 3, or 4	64QAM	3/4
7, 15, 23, or 31	1, 2, 3, or 4	64QAM	5/6
<small>Note-1</small> MCS from 0 to 7 have one spatial stream. MCS from 8 to 15 have two spatial streams. MCS from 16 to 23 have three spatial streams. MCS from 24 to 31 have four spatial streams.			

See IEEE 802.11-2012, Section 20.6 for further description of MCS dependent parameters.

When working with the HT-Data field, if the number of space-time streams is equal to the number of spatial streams, no space-time block coding (STBC) is used. See IEEE 802.11-2012, Section 20.3.11.9.2 for further description of STBC mapping.

Example: 22 indicates an MCS with three spatial streams, 64-QAM modulation, and a 3/4 coding rate.

Data Types: double

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

PSDULength — Number of bytes carried in the user payload

1024 (default) | integer from 0 to 65,535

Number of bytes carried in the user payload, specified as an integer from 0 to 65,535. A PSDULength of 0 implies a sounding packet for which there are no data bits to recover.

Example: 512

Data Types: double

RecommendSmoothing — Recommend smoothing for channel estimation

true (default) | false

Recommend smoothing for channel estimation, specified as a logical.

- If the frequency profile is nonvarying across the channel, the receiver sets this property to `true`. In this case, frequency-domain smoothing is recommended as part of channel estimation.
- If the frequency profile varies across the channel, the receiver sets this property to `false`. In this case, frequency-domain smoothing is not recommended as part of channel estimation.

Data Types: `logical`

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: `double`

ChannelCoding — Type of forward error correction coding

'BCC' (default) | 'LDPC'

Type of forward error correction coding for the data field, specified as 'BCC' (default) or 'LDPC'. 'BCC' indicates binary convolutional coding and 'LDPC' indicates low density parity check coding. Providing a character vector or a single cell character vector defines the channel coding type for a single user or all users in a multiuser transmission. By providing a cell array different channel coding types can be specified per user for a multiuser transmission.

Data Types: `char` | `cell` | `string`

GuardInterval — Cyclic prefix length for the data field within a packet

'Long' (default) | 'Short'

Cyclic prefix length for the data field within a packet, specified as 'Long' or 'Short'.

- The long guard interval length is 800 ns.
- The short guard interval length is 400 ns.

Data Types: `char` | `string`

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3

Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3. When `NumExtensionStreams` is greater than 0, `SpatialMapping` must be 'Custom'.

Data Types: double

Output Arguments

y — HT-SIG waveform

matrix

HT-SIG waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

Data Types: double

bits — HT-SIG information bits

vector


HT-SIG information bits, returned as a 48-by-1 vector.

Data Types: int8

More About



HT-SIG

The high throughput signal (HT-SIG) field is located between the L-SIG field and HT-STF and is part of the HT-mixed format preamble. It is composed of two symbols, HT-SIG₁ and HT-SIG₂.

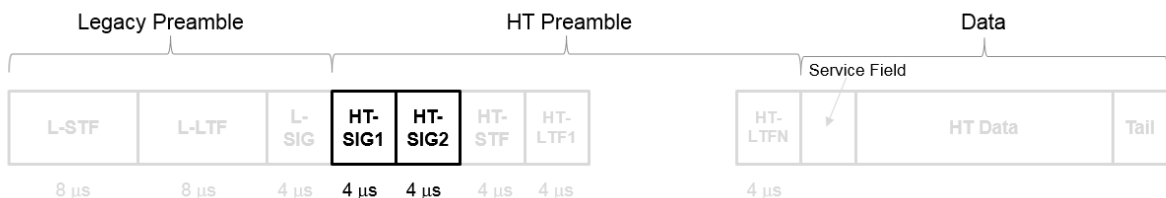

HT-SIG carries information used to decode the HT packet, including the MCS, packet length, FEC coding type, guard interval, number of extension spatial streams, and

whether there is payload aggregation. The HT-SIG symbols are also used for auto-detection between HT-mixed format and legacy OFDM packets.

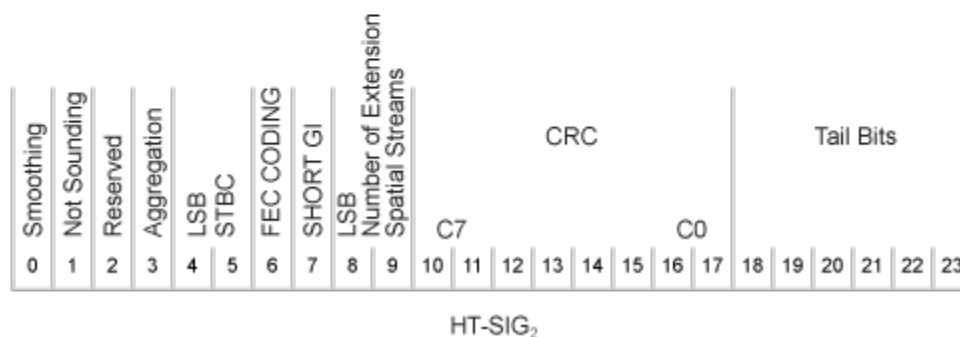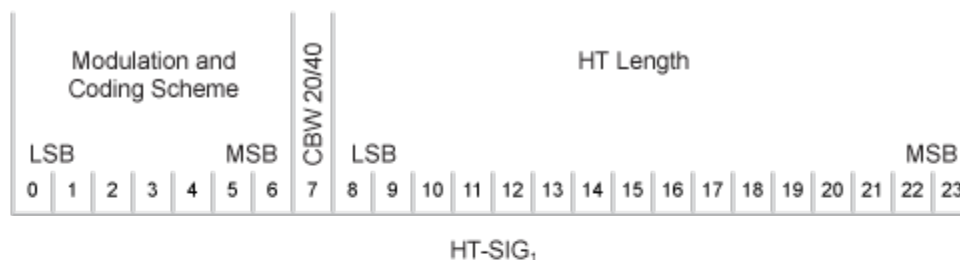

Refer to IEEE Std 802.11-2012, Section 20.3.9.4.3 for a detailed description of the HT-SIG field.

HT-mixed

As described in IEEE Std 802.11-2012, Section 20.1.4, high throughput mixed (HT-mixed) format packets contain a preamble compatible with IEEE Std 802.11-2012, Section 18 and Section 19 receivers. Non-HT (Section 18 and Section 19) STAs can decode the non-HT fields (L-STF, L-LTF, and L-SIG). The remaining preamble fields (HT-SIG, HT-STF, and HT-LTF) are for HT transmission, so the Section 18 and Section 19 STAs cannot decode them. The HT portion of the packet is described in IEEE Std 802.11-2012, Section 20.3.9.4. Support for the HT-mixed format is mandatory.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanHTSIGRecover](#) | [wlanHTSTF](#) | [wlanLSIG](#)

Introduced in R2015b

wlanHTSIGRecover

Recover HT-SIG information bits

Syntax

```
recBits = wlanHTSIGRecover(rxSig,chEst,noiseVarEst,cbw)
recBits = wlanHTSIGRecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)
[recBits,failCRC] = wlanHTSIGRecover( ___ )
[recBits,failCRC,eqSym] = wlanHTSIGRecover( ___ )
[recBits,failCRC,eqSym,cpe] = wlanHTSIGRecover( ___ )
```

Description

`recBits = wlanHTSIGRecover(rxSig,chEst,noiseVarEst,cbw)` returns the recovered information bits from the “HT-SIG” on page 2-287¹¹ field and performs a CRC check. Inputs include the channel estimate data `chEst`, noise variance estimate `noiseVarEst`, and channel bandwidth `cbw`.

`recBits = wlanHTSIGRecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)` specifies algorithm parameters using `wlanRecoveryConfig` object `cfgRec`.

`[recBits,failCRC] = wlanHTSIGRecover(___)` returns the result of the CRC check, `failCRC`, using any of the arguments from the previous syntaxes.

`[recBits,failCRC,eqSym] = wlanHTSIGRecover(___)` returns the equalized symbols, `eqSym`.

`[recBits,failCRC,eqSym,cpe] = wlanHTSIGRecover(___)` returns the common phase error, `cpe`.

Examples

11. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Recover HT-SIG Information Bits in Perfect Channel

Create a `wlanHTConfig` object having a channel bandwidth of 40 MHz. Use the object to create an HT-SIG field.

```
cfg = wlanHTConfig('ChannelBandwidth','CBW40');  
[txSig,txBits] = wlanHTSIG(cfg);
```

Because a perfect channel is assumed, specify the channel estimate as a column vector of ones and the noise variance estimate as zero.

```
chEst = ones(104,1);  
noiseVarEst = 0;
```

Recover the HT-SIG information bits. Verify that the received information bits are identical to the transmitted bits.

```
rxBits = wlanHTSIGRecover(txSig,chEst,noiseVarEst,'CBW40');  
numerr = biterr(txBits,rxBits)  
  
numerr = 0
```

Recover HT-SIG Using Zero-Forcing Equalizer

Create a `wlanHTConfig` object having a channel bandwidth of 40 MHz. Use the object to create an HT-SIG field.

```
cfg = wlanHTConfig('ChannelBandwidth','CBW40');  
[txSig,txBits] = wlanHTSIG(cfg);
```

Pass the transmitted HT-SIG through an AWGN channel.

```
awgnChan = comm.AWGNChannel('NoiseMethod','Variance', ...  
    'Variance',0.1);  
  
rxSig = awgnChan(txSig);
```

Use a zero-forcing equalizer by creating a `wlanRecoveryConfig` object with its `EqualizationMethod` property set to 'ZF'.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Recover the HT-SIG field. Verify that the received information has no bit errors.

```
rxBits = wlanHTSIGRecover(rxSig,ones(104,1),0.1,'CBW40',cfgRec);
biterr(txBits,rxBits)
```

```
ans = 0
```

Recover HT-SIG in 2x2 MIMO Channel

Recover HT-SIG in a 2x2 MIMO channel with AWGN. Confirm that the CRC check passes.

Configure a 2x2 MIMO TGn channel.

```
chanBW = 'CBW20';
cfg = wlanHTConfig( ...
    'ChannelBandwidth',chanBW, ...
    'NumTransmitAntennas',2, ...
    'NumSpaceTimeStreams',2);
```

Generate L-LTF and HT-SIG waveforms.

```
txLLTF = wlanLLTF(cfg);
txHTSIG = wlanHTSIG(cfg);
```

Set the sample rate to correspond to the channel bandwidth. Create a TGn 2x2 MIMO channel without large scale fading effects.

```
fsamp = 20e6;
tgnChan = wlanTGnChannel('SampleRate',fsamp, ...
    'LargeScaleFadingEffect','None', ...
    'NumTransmitAntennas',2, ...
    'NumReceiveAntennas',2);
```

Pass the L-LTF and HT-SIG waveforms through a TGn channel with white noise.

```
rxLLTF = awgn(tgnChan(txLLTF),20);
rxHTSIG = awgn(tgnChan(txHTSIG),20);
```

Demodulate the L-LTF signal. Generate a channel estimate by using the demodulated L-LTF.

```
demodLLTF = wlanLLTFDemodulate(rxLLTF,chanBW,1);
chanEst = wlanLLTFChannelEstimate(demodLLTF,chanBW);
```

Recover the information bits, the CRC failure status, and the equalized symbols from the received HT-SIG field.

```
[recHTSIGBits, failCRC, eqSym] = wlanHTSIGRecover(rxHTSIG, ...  
        chanEst, 0.01, chanBW);
```

Verify that HT-SIG passed a CRC check by examining the status of `failCRC`.


```
failCRC
```

```
failCRC = logical  
        0
```

Because `failCRC` is `0`, HT-SIG passed the CRC check.

Visualize the scatter plot of the equalized symbols, `eqSym`.

```
scatterplot(eqSym(:))
```

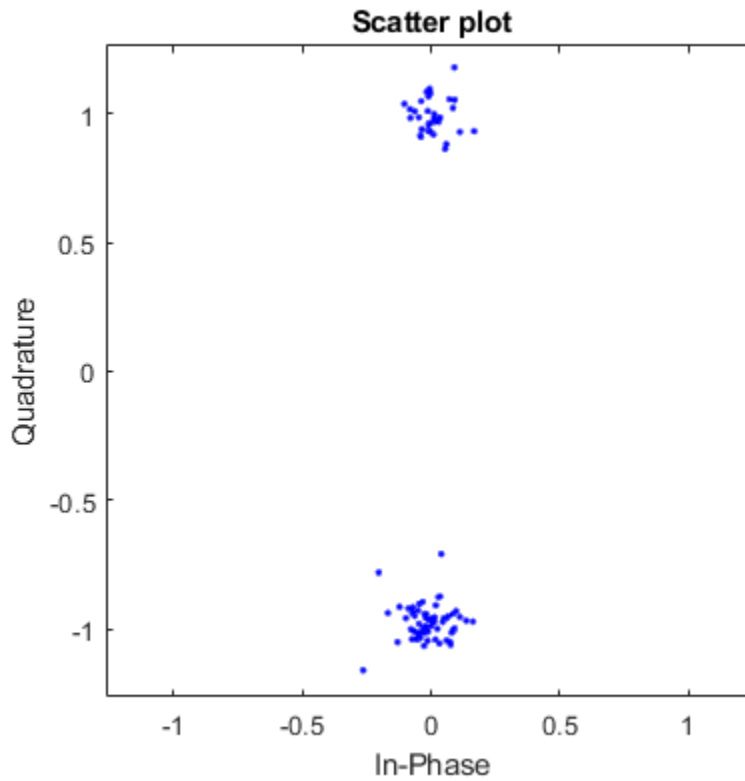

Input Arguments

rxSig — Received HT-SIG field
matrix

Received HT-SIG field, specified as an N_S -by- N_R matrix. N_S is the number of samples and increases with channel bandwidth.

Channel Bandwidth	N_S
'CBW20'	160

Channel Bandwidth	N_S
'CBW40'	320

N_R is the number of receive antennas.

Data Types: double

chEst — Channel estimate

vector | 3-D array

Channel estimate, specified as an N_{ST} -by-1-by- N_R array. N_{ST} is the number of occupied subcarriers and increases with channel bandwidth.

Channel Bandwidth	N_{ST}
'CBW20'	52
'CBW40'	104

N_R is the number of receive antennas.

The channel estimate is based on the “L-LTF” on page 2-288.

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

cfgRec — Algorithm parameters

wlanRecoveryConfig object


Algorithm parameters, specified as a wlanRecoveryConfig object. The function uses these properties.

Note If `cfgRec` is not provided, the function uses the default values of the `wlanRecoveryConfig` object.

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

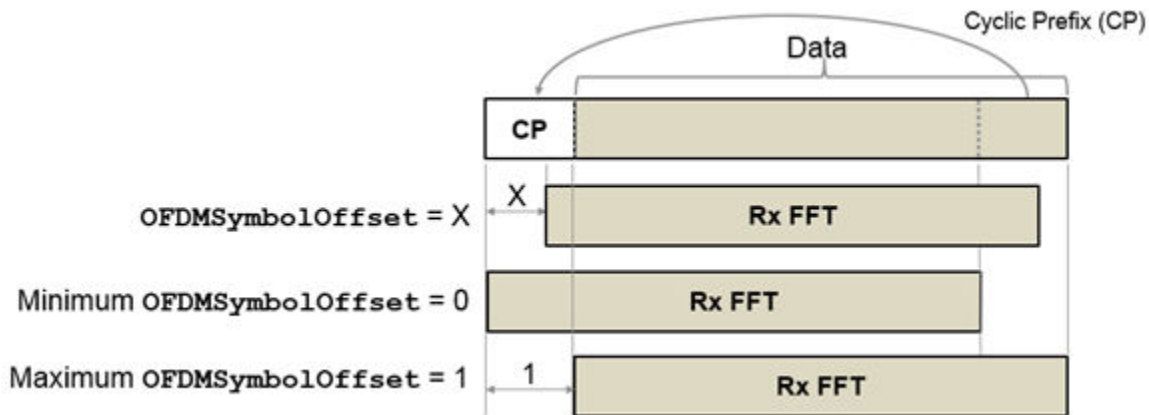

Data Types: double

EqualizationMethod — Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking — Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: `char` | `string`

Output Arguments

recBits — Recovered HT-SIG information

vector

Recovered HT-SIG information bits, returned as a 48-element column vector. The number of elements corresponds to the length of the HT-SIG field.

failCRC — CRC failure status

`true` | `false`

CRC failure status, returned as a logical scalar. If HT-SIG fails the CRC check, `failCRC` is `true`.

eqSym — Equalized symbols

matrix

Equalized symbols, returned as a 48-by-2 matrix corresponding to 48 data subcarriers and 2 OFDM symbols.

cpe — Common phase error


column vector

Common phase error in radians, returned as a 2-by-1 column vector.

More About

HT-SIG

The high throughput signal (HT-SIG) field is located between the L-SIG field and HT-STF and is part of the HT-mixed format preamble. It is composed of two symbols, HT-SIG₁ and HT-SIG₂.

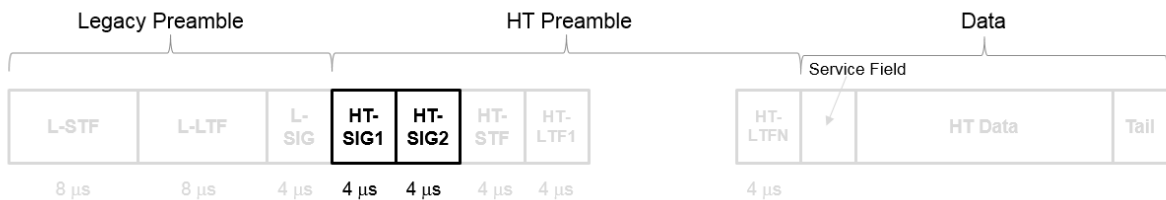

HT-SIG carries information used to decode the HT packet, including the MCS, packet length, FEC coding type, guard interval, number of extension spatial streams, and whether there is payload aggregation. The HT-SIG symbols are also used for auto-detection between HT-mixed format and legacy OFDM packets.



HT-SIG₁




HT-SIG₂

Refer to IEEE Std 802.11-2012, Section 20.3.9.4.3 for a detailed description of the HT-SIG field.


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

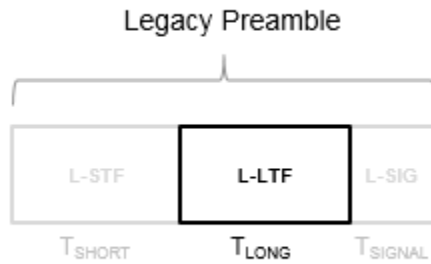

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

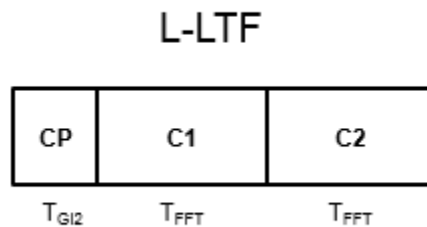

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{\text{FFT}} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{\text{GI2}} = T_{\text{FFT}} / 2$)	L-LTF Duration ($T_{\text{LONG}} = T_{\text{GI2}} + 2 \times T_{\text{FFT}}$)
20, 40, 80, and 160	312.5	3.2 μs	1.6 μs	8 μs
10	156.25	6.4 μs	3.2 μs	16 μs
5	78.125	12.8 μs	6.4 μs	32 μs

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanHTConfig | wlanHTSIG | wlanRecoveryConfig

Introduced in R2015b

wlanHTSTF

Generate HT-STF waveform

Syntax

```
y = wlanHTSTF(cfg)
```

Description

`y = wlanHTSTF(cfg)` generates an “HT-STF” on page 2-294¹² time-domain waveform for “HT-mixed” on page 2-294 format transmissions, given the parameters specified in `cfg`.

Examples

Generate HT Short Training Field

Create a `wlanHTConfig` object with a 40 MHz bandwidth.

```
cfg = wlanHTConfig('ChannelBandwidth','CBW40');
```

Generate an HT-STF. The function returns a complex output of 160 samples.

```
stf = wlanHTSTF(cfg);  
size(stf)
```

```
ans = 1×2
```

```
    160     1
```

Change the channel bandwidth to 20 MHz and create a new HT-STF.

12. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

```
cfg.ChannelBandwidth = 'CBW20';  
stf = wlanHTSTF(cfg);
```

Verify that the number of samples has been halved due to the bandwidth reduction.

```
size(stf)  
  
ans = 1×2  
  
80      1
```

Input Arguments

cfg — Format configuration

wlanHTConfig object

Format configuration, specified as a wlanHTConfig object. The wlanHTSTF function uses these properties.

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW40'

Channel bandwidth in MHz, specified as 'CBW20' or 'CBW40'.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as 1, 2, 3, or 4.

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to rotate and scale the constellation mapper output vector. This property applies when the SpatialMapping property is set to 'Custom'. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas.

- When specified as a scalar, NumTransmitAntennas = NumSpaceTimeStreams = 1 and a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be $(N_{STS} + N_{ESS})$ -by- N_T . N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. The spatial mapping matrix applies to all the subcarriers. The first N_{STS} and last N_{ESS} rows apply to the space-time streams and extension spatial streams respectively.
- When specified as a 3-D array, the size must be N_{ST} -by- $(N_{STS} + N_{ESS})$ -by- N_T . N_{ST} is the sum of the data and pilot subcarriers, as determined by ChannelBandwidth. N_{STS} is the number of space-time streams. N_{ESS} is the number of extension spatial streams. N_T is the number of transmit antennas. In this case, each data and pilot subcarrier can have its own spatial mapping matrix.

The table shows the ChannelBandwidth setting and the corresponding N_{ST} .

ChannelBandwidth	N_{ST}
'CBW20'	56
'CBW40'	114

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: $[0.5 \ 0.3; \ 0.4 \ 0.4; \ 0.5 \ 0.8]$ represents a spatial mapping matrix having three space-time streams and two transmit antennas.

Data Types: double

Complex Number Support: Yes

Output Arguments

y — HT-STF waveform

matrix


HT-STF waveform, returned as an N_S -by- N_T matrix. N_S is the number of samples, and N_T is the number of transmit antennas.

Data Types: double

More About

HT-STF

The high throughput short training field (HT-STF) is located between the HT-SIG and HT-LTF fields of an HT-mixed packet. The HT-STF is 4 μ s in length and is used to improve automatic gain control estimation for a MIMO system. For a 20 MHz transmission, the frequency sequence used to construct the HT-STF is identical to that of the L-STF. For a 40 MHz transmission, the upper subcarriers of the HT-STF are constructed from a frequency-shifted and phase-rotated version of the L-STF.

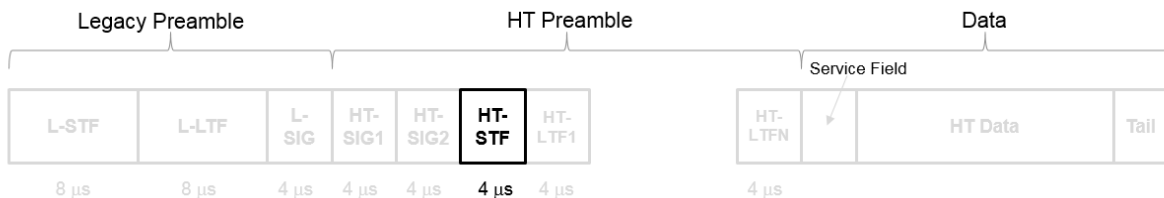

HT-mixed

As described in IEEE Std 802.11-2012, Section 20.1.4, high throughput mixed (HT-mixed) format packets contain a preamble compatible with IEEE Std 802.11-2012, Section 18 and Section 19 receivers. Non-HT (Section 18 and Section 19) STAs can decode the non-HT fields (L-STF, L-LTF, and L-SIG). The remaining preamble fields (HT-SIG, HT-STF, and HT-LTF) are for HT transmission, so the Section 18 and Section 19 STAs cannot decode them. The HT portion of the packet is described in IEEE Std 802.11-2012, Section 20.3.9.4. Support for the HT-mixed format is mandatory.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanHTConfig | wlanHTLTF | wlanHTSIG | wlanLSTF

Introduced in R2015b

wlanLLTF

Generate L-LTF waveform

Syntax

```
y = wlanLLTF(cfg)
```

Description

`y = wlanLLTF(cfg)` generates an “L-LTF” on page 2-299¹³ time-domain waveform for the specified configuration object.

Examples

Generate L-LTF Waveform

Generate the L-LTF for a 40 MHz single antenna VHT packet.


```
cfgVHT = wlanVHTConfig('ChannelBandwidth', 'CBW40');  
y = wlanLLTF(cfgVHT);  
size(y)
```

```
ans = 1×2
```

```
    320     1
```

```
plot(abs(y))  
xlabel('Samples')  
ylabel('Amplitude')
```

13. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

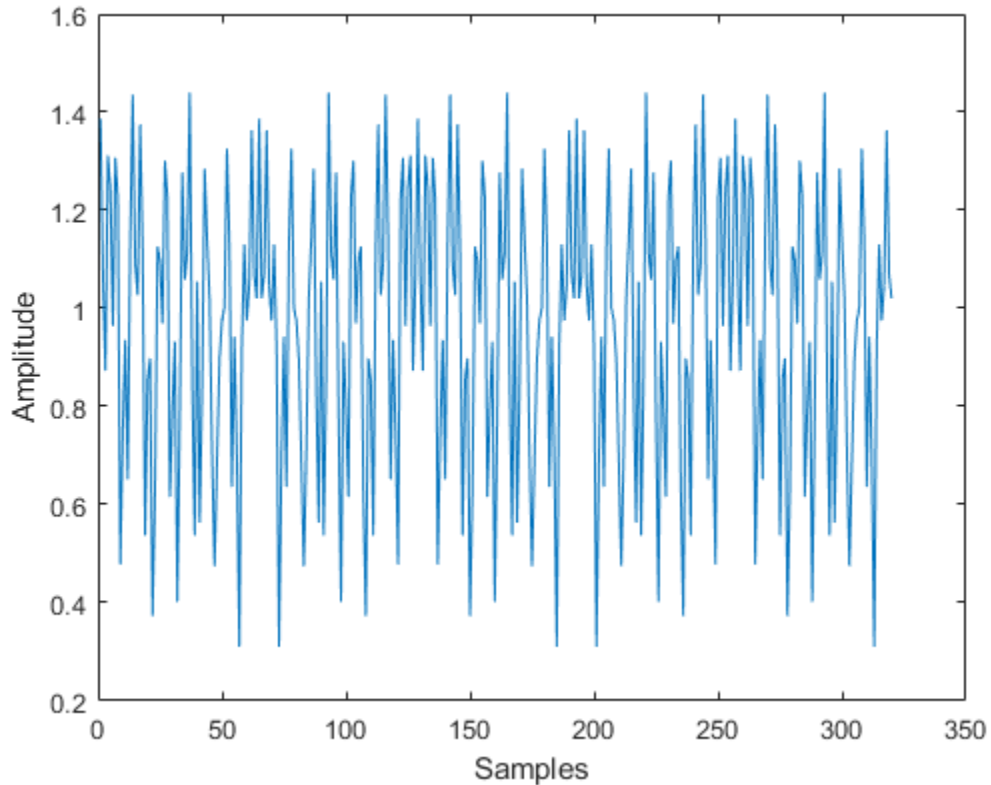

The output L-LTF waveform contains 320 time-domain samples for a 40 MHz channel bandwidth.

Input Arguments

cfg — Format configuration

`wlanVHTConfig` object | `wlanHTConfig` object | `wlanNonHTConfig` object

Format configuration, specified as a `wlanVHTConfig`, `wlanHTConfig`, or `wlanNonHTConfig` object. For a specified format, the `wlanLLTF` function uses only the object properties indicated.

Transmission Format	Configuration Object	Applicable Object Properties
VHT	wlanVHTConfig	ChannelBandwidth, NumTransmitAntennas
HT	wlanHTConfig	ChannelBandwidth, NumTransmitAntennas
non-HT See note.	wlanNonHTConfig	ChannelBandwidth, NumTransmitAntennas
<p>Note:</p> <p>1 For non-HT format, when channel bandwidth is 5 MHz or 10 MHz, NumTransmitAntennas is not applicable because only one transmit antenna is permitted.</p>		

Example: wlanVHTConfig

Output Arguments

y — L-LTF time-domain waveform

matrix

“L-LTF” on page 2-299 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth. The time-domain waveform consists of two symbols.

ChannelBandwidth	N_S
'CBW5', 'CBW10', 'CBW20'	160
'CBW40'	320
'CBW80'	640
'CBW160'	1280


Data Types: double

Complex Number Support: Yes

More About


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

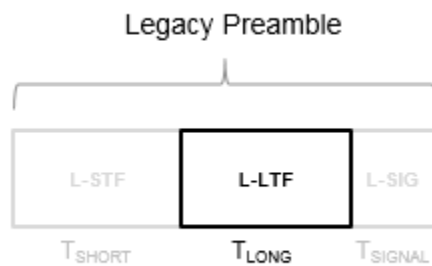

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

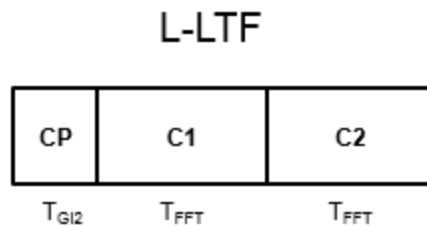

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{GI2} = T_{FFT} / 2$)	L-LTF Duration ($T_{LONG} = T_{GI2} + 2 \times T_{FFT}$)
20, 40, 80, and 160	312.5	3.2 μ s	1.6 μ s	8 μ s
10	156.25	6.4 μ s	3.2 μ s	16 μ s
5	78.125	12.8 μ s	6.4 μ s	32 μ s

Algorithms

The “L-LTF” on page 2-299 is two OFDM symbols long and follows the L-STF of the preamble in the packet structure for the VHT, HT, and non-HT formats. For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.8.2.3 and IEEE Std 802.11-2012 [2], Section 20.3.9.3.4.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanLLTFChannelEstimate](#) | [wlanLLTFDemodulate](#) | [wlanLSIG](#) | [wlanLSTF](#) | [wlanNonHTConfig](#) | [wlanVHTConfig](#)

Introduced in R2015b

wlanLLTFDemodulate

Demodulate L-LTF waveform

Syntax

```
y = wlanLLTFDemodulate(x,cbw)
y = wlanLLTFDemodulate(x,cfg)
y = wlanLLTFDemodulate( ____,symOffset)
```

Description

`y = wlanLLTFDemodulate(x,cbw)` returns the demodulated “L-LTF” on page 2-305¹⁴ waveform given time-domain input signal `x` and channel bandwidth `cbw`.

`y = wlanLLTFDemodulate(x,cfg)` returns the demodulated L-LTF given the format configuration object, `cfg`.

`y = wlanLLTFDemodulate(____,symOffset)` specifies the OFDM symbol offset, `symOffset`, using any of the arguments from the previous syntaxes.

Examples

Demodulate L-LTF for Non-HT Format Transmission

Demodulate the L-LTF used in a non-HT OFDM transmission, after passing the L-LTF through an AWGN channel.

Create a non-HT configuration object and use it to generate an L-LTF signal.

```
cfg = wlanNonHTConfig;
txSig = wlanLLTF(cfg);
```

14. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Pass the L-LTF signal through an AWGN channel. Demodulate the received signal.

```
rxSig = awgn(txSig,15,'measured');  
y = wlanLLTFDemodulate(rxSig,'CBW20');
```

Demodulate L-LTF for VHT Format Transmission

Demodulate the L-LTF used in a VHT transmission, after passing the L-LTF through an AWGN channel.

Create a VHT configuration object and use it to generate an L-LTF signal.

```
cfg = wlanVHTConfig;  
txSig = wlanLLTF(cfg);
```

Pass the L-LTF signal through an AWGN channel.

```
rxSig = awgn(txSig,5);
```

Demodulate the received L-LTF using the information from the `wlanVHTConfig` object.

```
y = wlanLLTFDemodulate(rxSig, cfg);
```

Demodulate L-LTF with OFDM Symbol Offset

Demodulate the L-LTF for the HT-mixed transmission format, given a custom OFDM symbol offset.

Set the channel bandwidth to 40 MHz and the OFDM symbol offset to 1. That way, the FFT takes place after the guard interval.

```
cbw = 'CBW40';  
ofdmSymOffset = 1;
```

Create an HT configuration object and use it to generate an L-LTF signal.

```
cfg = wlanHTConfig('ChannelBandwidth', cbw);  
txSig = wlanLLTF(cfg);
```

Pass the L-LTF signal through an AWGN channel.

```
rxSig = awgn(txSig,10);
```

Demodulate the received L-LTF using a custom OFDM symbol offset.

```
y = wlanLLTFDemodulate(rxSig, 'CBW40', ofdmSymOffset);
```

Input Arguments

x — Time-domain input signal

vector | matrix

Time-domain input signal corresponding to the L-LTF of the “PPDU” on page 2-307, specified as an N_S -by- N_R vector or matrix. N_S is the number of samples and N_R is the number of receive antennas.

N_S is proportional to the channel bandwidth. The time-domain waveform consists of two symbols.

ChannelBandwidth	N_S
'CBW5', 'CBW10', 'CBW20'	160
'CBW40'	320
'CBW80'	640
'CBW160'	1280

Data Types: double

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

cfig — Format information

wlanNonHTConfig | wlanHTConfig | wlanVHTConfig

Format information, specified as a WLAN configuration object. To create these objects, see wlanNonHTConfig, wlanHTConfig, or wlanVHTConfig.

symOffset — OFDM symbol offset

0.75 (default) | real scalar from 0 to 1

OFDM symbol offset as a fraction of the cyclic prefix length, specified as a real scalar from 0 to 1.

Data Types: double

Output Arguments

y — Demodulated L-LTF signal

3-D OFDM symbol array

Demodulated L-LTF signal, returned as an N_{ST} -by- N_{SYM} -by- N_R array. N_{ST} is the number of occupied subcarriers, N_{SYM} is the number of OFDM symbols, and N_R is the number of receive antennas. For the L-LTF, N_{SYM} is always 2.


N_{ST} varies with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})
'CBW20', 'CBW10', 'CBW5'	52
'CBW40'	104
'CBW80'	208
'CBW160'	416

More About


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

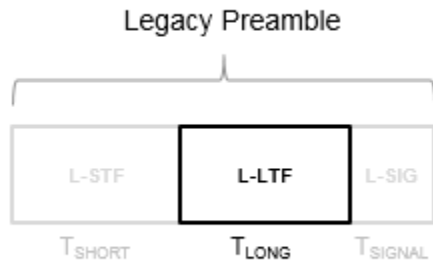

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

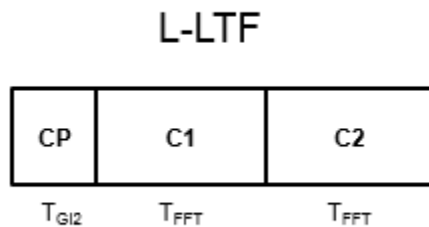

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{\text{FFT}} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{\text{GI2}} = T_{\text{FFT}} / 2$)	L-LTF Duration ($T_{\text{LONG}} = T_{\text{GI2}} + 2 \times T_{\text{FFT}}$)
20, 40, 80, and 160	312.5	3.2 μs	1.6 μs	8 μs
10	156.25	6.4 μs	3.2 μs	16 μs
5	78.125	12.8 μs	6.4 μs	32 μs

PPDU

The PLCP protocol data unit (PPDU) is the complete “PLCP” on page 2-307 frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers [2].

PLCP

The physical layer convergence procedure (PLCP) is the upper component of the physical layer in 802.11 networks. Each physical layer has its own PLCP, which provides auxiliary framing to the MAC [2].

References

- [1] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [2] Gast, Matthew S. *802.11n: A Survival Guide*. Sebastopol, CA: O’Reilly Media Inc., 2012, p. 120.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanLLTF` | `wlanLLTFChannelEstimate`

Introduced in R2015b

wlanLSIG

Generate L-SIG waveform

Syntax

```
[y, bits] = wlanLSIG(cfgFormat)
```

Description

[y, bits] = wlanLSIG(cfgFormat) generates an “L-SIG” on page 2-313¹⁵ time-domain waveform using the specified configuration object.

Examples

Generate L-SIG Waveform for 80 MHz VHT Packet

Generate the L-SIG waveform for an 80 MHz VHT transmission format packet.

```
cfgVHT = wlanVHTConfig;  
cfgVHT.ChannelBandwidth = 'CBW80';  
lsigOut = wlanLSIG(cfgVHT);  
size(lsigOut)
```

```
ans = 1×2
```

```
320    1
```

The L-SIG waveform returned contains one symbol with 320 complex samples for an 80 MHz channel bandwidth.

15. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Extract Rate Information from L-SIG

Create a non-HT configuration object. The default MCS is 0.

```
cfg = wlanNonHTConfig

cfg =
  wlanNonHTConfig with properties:
      Modulation: 'OFDM'
  ChannelBandwidth: 'CBW20'
      MCS: 0
      PSDULength: 1000
  NumTransmitAntennas: 1
```

Generate the L-SIG waveform and information bits. Extract the rate from the returned bits. The rate information is contained in the first four bits.

```
[y,bits] = wlanLSIG(cfg);
rateBits = bits(1:4)

rateBits = 4x1 int8 column vector

     1
     1
     0
     1
```

As defined in IEEE Std 802.11™-2012, Table 18-6, a value of [1 1 0 1] corresponds to a rate of 6 Mbps for 20 MHz channel spacing.

Change MCS to 7 then regenerate the L-SIG waveform and information bits. Extract the rate from the returned bits and analyze. The rate information is contained in the first four bits.

```
cfg.MCS = 7

cfg =
  wlanNonHTConfig with properties:
      Modulation: 'OFDM'
  ChannelBandwidth: 'CBW20'
      MCS: 7
```

```

        PSDULength: 1000
        NumTransmitAntennas: 1

[y, bits] = wlanLSIG(cfg);
rateBits = bits(1:4)

rateBits = 4x1 int8 column vector

    0
    0
    1
    1

```

As defined in IEEE Std 802.11-2012, Table 18-6, a value of [0 0 1 1] corresponds to a rate of 54 Mbps for 20 MHz channel spacing.

Input Arguments

cfgFormat — Format configuration

wlanVHTConfig object | wlanHTConfig object | wlanNonHTConfig object

Format configuration, specified as a wlanVHTConfig, wlanHTConfig, or wlanNonHTConfig object. For a specified format, the wlanLSIG function uses only the object properties indicated.

Transmission Format	Configuration Object	Applicable Object Properties
VHT	wlanVHTConfig	ChannelBandwidth, NumUsers, NumTransmitAntennas, NumSpaceTimeStreams, STBC, MCS, ChannelCoding, APEPLength, GuardInterval

Transmission Format	Configuration Object	Applicable Object Properties
HT	wlanHTConfig	ChannelBandwidth, NumTransmitAntennas, NumSpaceTimeStreams, MCS, GuardInterval, ChannelCoding, PSDULength
non-HT See note.	wlanNonHTConfig	ChannelBandwidth, Modulation, MCS, PSDULength, NumTransmitAntennas
<p>Note:</p> <ol style="list-style-type: none"> 1 Only OFDM modulation is supported for a wlanNonHTConfig object input. 2 For non-HT format, when channel bandwidth is 5 MHz or 10 MHz, NumTransmitAntennas is not applicable because only one transmit antenna is permitted. 		

Example: wlanVHTConfig

Output Arguments

y — L-SIG time-domain waveform

matrix

“L-SIG” on page 2-313 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth.

ChannelBandwidth	N_S
'CBW5', 'CBW10', 'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640

Data Types: double
Complex Number Support: Yes

bits — Signaling bits

column vector


Signaling bits from the legacy signal field, returned as a 24-by-1 bit column vector. See “L-SIG” on page 2-313 for the bit field description.

Data Types: int8

More About

L-SIG


The legacy signal (L-SIG) field is the third field of the 802.11 OFDM PLCP legacy preamble. It consists of 24 bits that contain rate, length, and parity information. The L-SIG is a component of VHT, HT, and non-HT PPDU. It is transmitted using BPSK modulation with rate 1/2 binary convolutional coding (BCC).

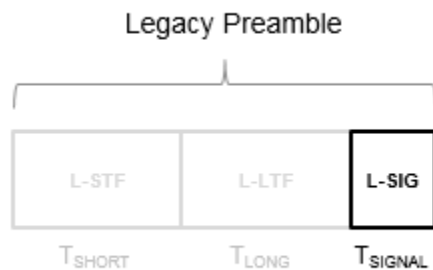

The L-SIG is one OFDM symbol with a duration that varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier frequency spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) period ($T_{FFT} = 1 / \Delta_F$)	Guard Interval (GI) Duration ($T_{GI} = T_{FFT} / 4$)	L-SIG duration ($T_{SIGNAL} = T_{GI} + T_{FFT}$)
20, 40, 80, and 160	312.5	3.2 μ s	0.8 μ s	4 μ s
10	156.25	6.4 μ s	1.6 μ s	8 μ s
5	78.125	12.8 μ s	3.2 μ s	16 μ s

The L-SIG contains packet information for the received configuration,

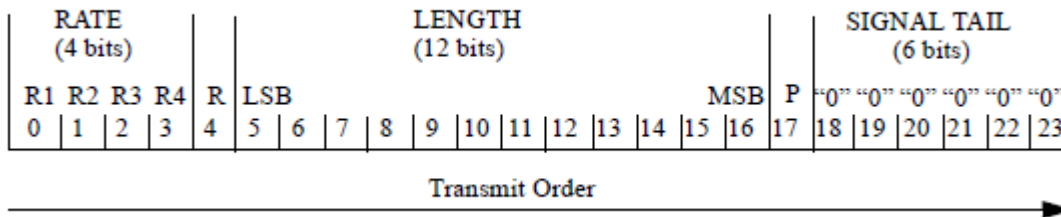

- Bits 0 through 3 specify the data rate (modulation and coding rate) for the non-HT format.

Rate (bits 0-3)	Modulation	Coding rate (R)	Data Rate (Mb/s)		
			20 MHz channel bandwidth	10 MHz channel bandwidth	5 MHz channel bandwidth
1101	BPSK	1/2	6	3	1.5
1111	BPSK	3/4	9	4.5	2.25
0101	QPSK	1/2	12	6	3
0111	QPSK	3/4	18	9	4.5
1001	16-QAM	1/2	24	12	6
1011	16-QAM	3/4	36	18	9
0001	64-QAM	2/3	48	24	12

Rate (bits 0-3)	Modulation	Coding rate (R)	Data Rate (Mb/s)		
			20 MHz channel bandwidth	10 MHz channel bandwidth	5 MHz channel bandwidth
0011	64-QAM	3/4	54	27	13.5

For HT and VHT formats, the L-SIG rate bits are set to '1 1 0 1'. Data rate information for HT and VHT formats is signaled in format-specific signaling fields.


- Bit 4 is reserved for future use.
- Bits 5 through 16:
 - For non-HT, specify the data length (amount of data transmitted in octets) as described in IEEE Std 802.11-2012, Table 18-1 and Section 9.23.4.
 - For HT-mixed, specify the transmission time as described in IEEE Std 802.11-2012, Section 20.3.9.3.5 and Section 9.23.4.
 - For VHT, specify the transmission time as described in IEEE Std 802.11ac-2013, Section 22.3.8.2.4.
- Bit 17 has the even parity of bits 0 through 16.
- Bits 18 through 23 contain all zeros for the signal tail bits.

Note Signaling fields added for HT (wlanHTSIG) and VHT (wlanVHTSIGA, wlanVHTSIGB) formats provide data rate and configuration information for those formats.

- For the HT-mixed format, IEEE Std 802.11-2012, Section 20.3.9.4.3 describes HT-SIG bit settings.
 - For the VHT format, IEEE Std 802.11ac-2013, Section 22.3.8.3.3 and Section 22.3.8.3.6 describe bit settings for VHT-SIG-A and VHT-SIG-B, respectively.
-

Algorithms


The “L-SIG” on page 2-313 follows the L-STF and L-LTF of the preamble in the packet structure.

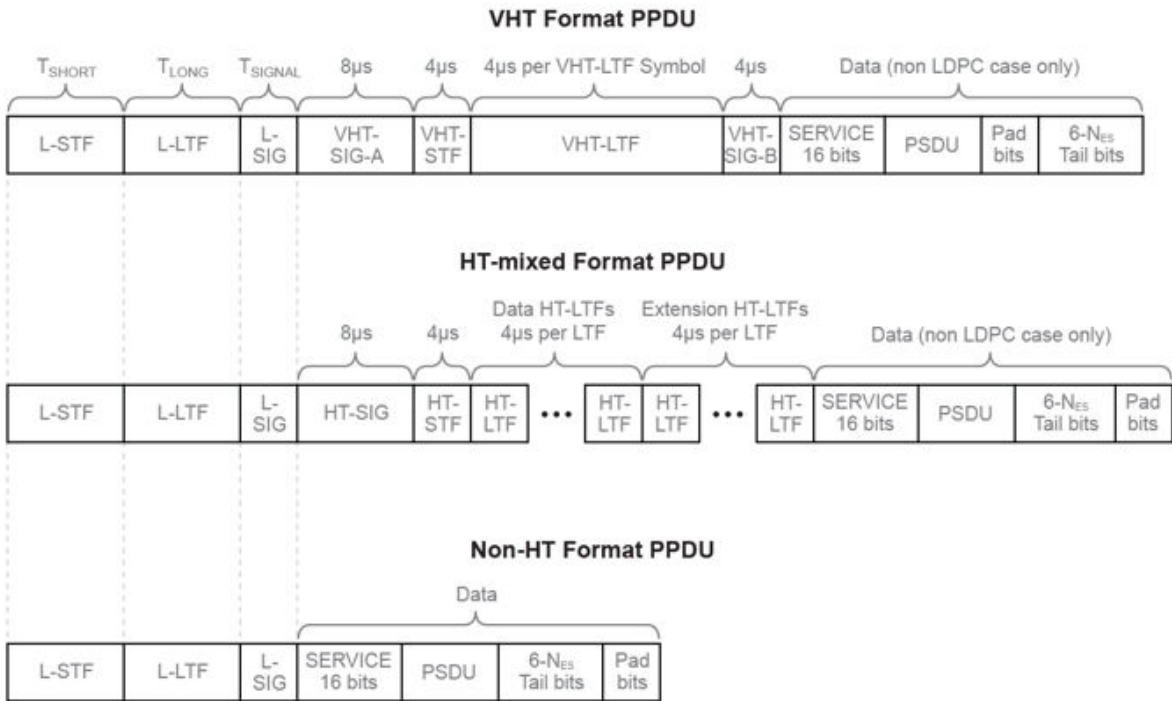

For “L-SIG” on page 2-313 transmission processing algorithm details, see:

- VHT format - refer to IEEE Std 802.11ac-2013 [1], Section 22.3.8.2.4
- HT format - refer to IEEE Std 802.11-2012 [2], Sections 20.3.9.3.5
- non-HT format - refer to IEEE Std 802.11-2012 [2], Sections 18.3.4

The wlanLSIG function performs transmitter processing on the “L-SIG” on page 2-313 field and outputs the time-domain waveform.

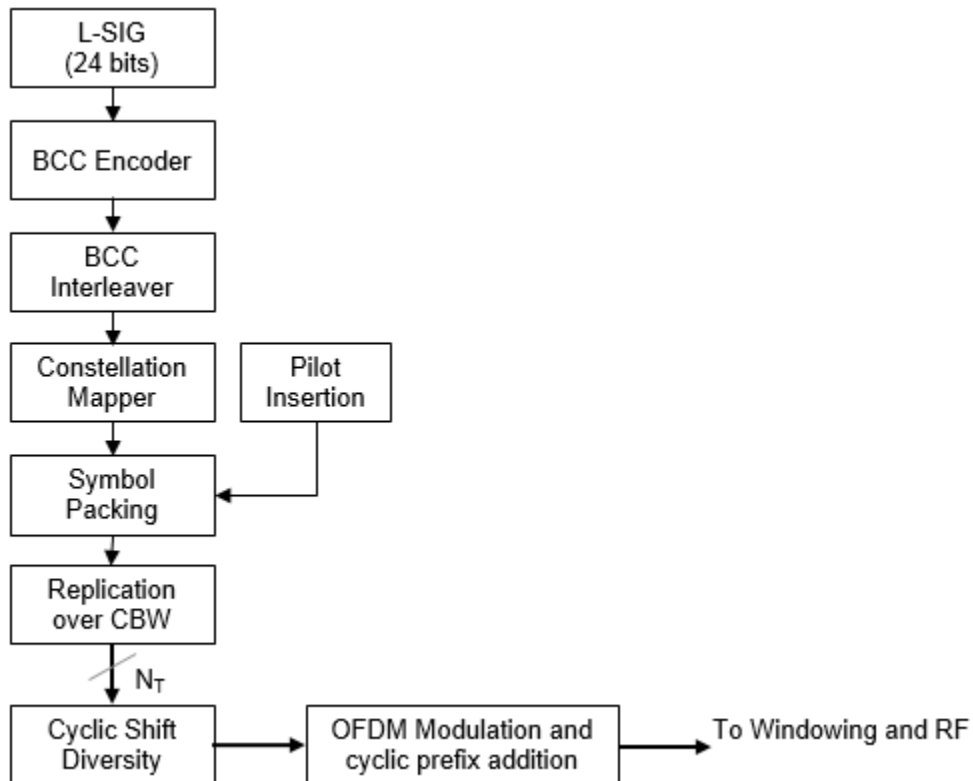

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications – Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information technology – Telecommunications and information

exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanHTConfig | wlanLLTF | wlanLSIGRecover | wlanNonHTConfig | wlanVHTConfig

Introduced in R2015b

wlanLSIGBitRecover

Recover information bits in L-SIG field

Syntax

```
[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst)
[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst, csi)
```

Description

[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst) recovers information bits, bits, for legacy signal (L-SIG) field lsig and channel noise variance estimate noiseVarEst. The function also returns failCheck, the result of the parity check on bits and info, a structure containing modulation and coding scheme (MCS) value and physical layer convergence procedure service data unit (PSDU) length.

[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst, csi) recovers the L-SIG information bits for channel state information csi.

Examples

Recover Information Bits in L-SIG Field

Recover the information bits in the L-SIG field of a WLAN HE single-user (HE-SU) waveform.

Create a WLAN HE-SU-format configuration object with default settings and use it to generate an HE-SU waveform.

```
cfgHE = wlanHESUConfig;
cbw = cfgHE.ChannelBandwidth;
waveform = wlanWaveformGenerator(1, cfgHE);
```

Obtain the WLAN field indices, which contain the modulated L-SIG and RL-SIG fields.

```
ind = wlanFieldIndices(cfgHE);  
rxLSIG = waveform(ind.LSIG(1):ind.RLSIG(2),:);
```

Perform orthogonal frequency-division multiplexing (OFDM) demodulation to extract the L-SIG field.

```
lsigDemod = wlanHEDemodulate(rxLSIG, 'L-SIG', cbw);
```

Average the L-SIG and RL-SIG symbols, return the pre-HE OFDM information, and extract the demodulated L-SIG symbols.

```
lsigDemodAverage = mean(lsigDemod,2);  
preHEInfo = wlanHEOFDMInfo('L-SIG', cbw);  
lsig = lsigDemodAverage(preHEInfo.DataIndices,:);
```

Recover the L-SIG information bits and other information, assuming no channel noise. Display the parity check result.

```
noiseVarEst = 0;  
[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst);  
disp(failCheck);
```

0

Recover L-SIG Information Bits with Channel State Information

Recover the information bits in the L-SIG field of a WLAN HE multiuser (HE-MU) waveform with specified channel state information.

Create a WLAN HE-MU-format configuration object with an allocation index of 192 and use it to generate an HE-MU waveform.

```
cfgHE = wlanHEMUConfig(192);  
cbw = cfgHE.ChannelBandwidth;  
waveform = wlanWaveformGenerator(1, cfgHE);
```

Obtain the WLAN field indices, which contain the modulated L-SIG and RL-SIG fields.

```
ind = wlanFieldIndices(cfgHE);  
rxLSIG = waveform(ind.LSIG(1):ind.RLSIG(2),:);
```

Perform OFDM demodulation to extract the L-SIG field.

```
lsigDemod = wlanHEDemodulate(rxLSIG, 'L-SIG', cbw);
```

Average the L-SIG and RL-SIG symbols, return the pre-HE OFDM information, and extract the demodulated L-SIG symbols.

```
lsigDemodAverage = mean(lsigDemod,2);
preHEInfo = wlanHEOFDMInfo('L-SIG', cbw);
lsig = lsigDemodAverage(preHEInfo.DataIndices,:);
```

Specify the channel state information and assume no channel noise.

```
csi = ones(52,1);
noiseVarEst = 0;
```

Recover the L-SIG information bits and other information. Display the parity check result.

```
[bits, failCheck, info] = wlanLSIGBitRecover(lsig, noiseVarEst, csi);
disp(failCheck);
```

```
0
```

Input Arguments

lsig — Demodulated L-SIG symbols

complex-valued column vector

Demodulated L-SIG symbols, specified as a complex-valued column vector. The size of `lsig` depends on the WLAN format. For a high-efficiency (HE) format, specify `lsig` as a 52-by-1 column vector. For a very-high-throughput (VHT), high-throughput (HT), or non-high-throughput (non-HT) format, specify `lsig` as a 48-by-1 column vector.

Data Types: `double`

Complex Number Support: Yes

noiseVarEst — Channel noise variance estimate

nonnegative scalar

Channel noise variance estimate, specified as a nonnegative scalar.

Data Types: `double`

csi — Channel state information

real-valued column vector

Channel state information, specified as a real-valued column vector. The size of `csi` depends on the WLAN format. For a high-efficiency (HE) format, specify `csi` as a 52-by-1 column vector. For a very-high-throughput (VHT), high-throughput (HT), or non-high-throughput (non-HT) formats, specify `csi` as a 48-by-1 column vector.

To use the channel state information for enhanced demapping of the orthogonal frequency-division multiplexing (OFDM) symbols, specify `csi`.

Data Types: `double`

Output Arguments

bits — Information bits recovered from L-SIG field

24-by-1 binary column vector

Information bits recovered from L-SIG field, returned as a 24-by-1 binary column.

Data Types: `int8`

failCheck — Parity check result

1 (true) | 0 (false)

Parity check result, returned as a logical value of 1 (true) or 0 (false). The `wlanLSIGBitRecover` function returns `failCheck` as 1 if the recovered bits fail the parity check.

Data Types: `logical`

info — MCS value and PSDU length

structure

MCS value and PSDU length, returned as a structure containing these fields.

MCS — MCS value

integer in the interval [0, 7]

MCS value, returned as an integer in the interval [0, 7]. Each value of MCS corresponds to a rate, as shown in this table.

MCS	Rate (Mb/s)
0	6

MCS	Rate (Mb/s)
1	9
2	12
3	18
4	24
5	36
6	48
7	54

For more information, see Section 17.3.4 of [1].

Data Types: double

Length — Length of PSDU

nonnegative integer

Length of PSDU, returned as a nonnegative integer. The value of `length` is the number of octets in the PSDU that the physical (PHY) layer attempts to send.

Data Types: double

Data Types: struct

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1 "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." Draft Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHERecoveryConfig | wlanRecoveryConfig

Functions

wlanFieldIndices | wlanHEDataBitRecover | wlanHESIGABitRecover | wlanLSIG
| wlanLSIGRecover

Introduced in R2019a

wlanLSIGRecover

Recover L-SIG information bits

Syntax

```
recBits = wlanLSIGRecover(rxSig,chEst,noiseVarEst,cbw)
recBits = wlanLSIGRecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)
[recBits,failCheck] = wlanLSIGRecover( ___ )
[recBits,failCheck,eqSym] = wlanLSIGRecover( ___ )
[recBits,failCheck,eqSym,cpe] = wlanLSIGRecover( ___ )
```

Description

`recBits = wlanLSIGRecover(rxSig,chEst,noiseVarEst,cbw)` returns the recovered “L-SIG” on page 2-333¹⁶ information bits, `recBits`, given the time-domain L-SIG waveform, `rxSig`. Specify the channel estimate, `chEst`, the noise variance estimate, `noiseVarEst`, and the channel bandwidth, `cbw`.

`recBits = wlanLSIGRecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)` returns information bits and specifies algorithm information using `wlanRecoveryConfig` object `cfgRec`.

`[recBits,failCheck] = wlanLSIGRecover(___)` returns the status of a validity check, `failCheck`, using the arguments from previous syntaxes.

`[recBits,failCheck,eqSym] = wlanLSIGRecover(___)` returns the equalized symbols, `eqSym`.

`[recBits,failCheck,eqSym,cpe] = wlanLSIGRecover(___)` returns the common phase error, `cpe`.

16. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Examples

Recover L-SIG Information from 2x2 MIMO Channel

Recover L-SIG information transmitted in a noisy 2x2 MIMO channel, and calculate the number of bit errors present in the received information bits.

Set the channel bandwidth and sample rate.

```
chanBW = 'CBW40';  
fs = 40e6;
```

Create a VHT configuration object corresponding to a 40 MHz 2x2 MIMO channel.

```
vht = wlanVHTConfig( ...  
    'ChannelBandwidth',chanBW, ...  
    'NumTransmitAntennas',2, ...  
    'NumSpaceTimeStreams',2);
```

Generate the L-LTF and L-SIG field signals.

```
txLLTF = wlanLLTF(vht);  
[txLSIG,txLSIGData] = wlanLSIG(vht);
```

Create a 2x2 TGac channel and an AWGN channel with an SNR=10 dB.

```
tgacChan = wlanTGacChannel('SampleRate',fs,'ChannelBandwidth',chanBW, ...  
    'NumTransmitAntennas',2,'NumReceiveAntennas',2);  
chNoise = comm.AWGNChannel('NoiseMethod','Signal to noise ratio (SNR)',...  
    'SNR',10);
```

Pass the signals through the noisy 2x2 multipath fading channel.

```
rxLLTF = chNoise(tgacChan(txLLTF));  
rxLSIG = chNoise(tgacChan(txLSIG));
```

Add additional white noise corresponding to a receiver with a 9 dB noise figure. The noise variance is equal to $k*T*B*F$, where k is Boltzmann's constant, T is the ambient temperature, B is the channel bandwidth (sample rate), and F is the receiver noise figure.

```
nVar = 10^((-228.6+10*log10(290) + 10*log10(fs) + 9)/10);  
rxNoise = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);
```

```
rxLLTF = rxNoise(rxLLTF);
rxLSIG = rxNoise(rxLSIG);
```

Perform channel estimation based on the L-LTF.

```
demodLLTF = wlanLLTFDemodulate(rxLLTF,chanBW,1);
chanEst = wlanLLTFChannelEstimate(demodLLTF,chanBW);
```

Recover the L-SIG information bits.

```
rxLSIGData = wlanLSIGRecover(rxLSIG,chanEst,0.1,chanBW);
```

Verify that there are no bit errors in the recovered L-SIG data.

```
numErrors = biterr(txLSIGData,rxLSIGData)
```

```
numErrors = 0
```

Recover L-SIG with Zero Forcing Equalizer

Recover L-SIG information using the zero-forcing equalizer algorithm. Calculate the number of bit errors in the received data.

Create an HT configuration object.

```
cfgHT = wlanHTConfig;
```

Create a recovery object with `EqualizationMethod` property set to zero forcing, 'ZF'.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Generate the L-SIG field and pass it through an AWGN channel.

```
[txLSIG,txLSIGData] = wlanLSIG(cfgHT);
rxLSIG = awgn(txLSIG,20);
```

Recover the L-SIG using the zero-forcing algorithm set in `cfgRec`. The channel estimate is a vector of ones because fading was not introduced.

```
rxLSIGData = wlanLSIGRecover(rxLSIG,ones(52,1),0.01,'CBW20',cfgRec);
```

Verify that there are no bit errors in the recovered L-SIG data.

```
numErrors = biterr(txLSIGData,rxLSIGData)
numErrors = 0
```

Recover L-SIG from Phase and Frequency Offset

Recover the L-SIG from a channel that introduces a fixed phase and frequency offset.

Create a VHT configuration object corresponding to a 160 MHz SISO channel. Generate the transmitted L-SIG field.

```
cfgVHT = wlanVHTConfig('ChannelBandwidth','CBW160');
txLSIG = wlanLSIG(cfgVHT);
```

Create a recovery configuration object and disable pilot phase tracking.

```
cfgRec = wlanRecoveryConfig('PilotPhaseTracking','None');
```

To introduce a 45 degree phase offset and a 100 Hz frequency offset, create a phase and frequency offset System object.

```
pf0ffset = comm.PhaseFrequencyOffset('SampleRate',160e6,'PhaseOffset',45, ...
    'FrequencyOffset',100);
```

Introduce phase and frequency offsets to the transmitted L-SIG. Pass the L-SIG through an AWGN channel.

```
rxLSIG = awgn(pf0ffset(txLSIG),20);
```

Recover the L-SIG information bits, the failure check status, and the equalized symbols.

```
[recLSIGData,failCheck,eqSym] = wlanLSIGRecover(rxLSIG,ones(416,1),0.01,'CBW160',cfgRe
```


Verify that the L-SIG passed the failure checks.

```
failCheck
```

```
failCheck = logical
    0
```

Plot the equalized symbols. The 45 degree phase offset is visible.

```
scatterplot(eqSym)  
grid
```

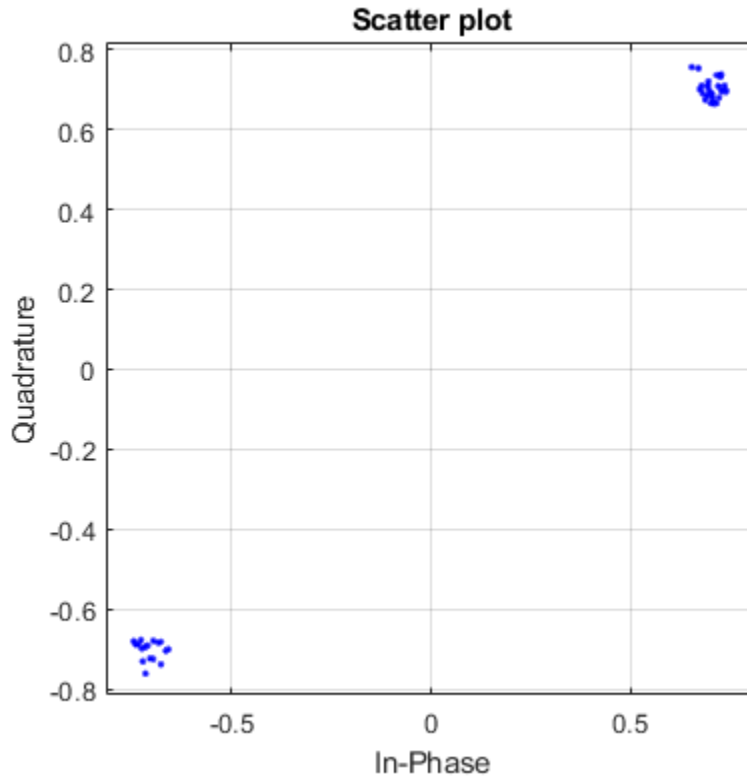

Input Arguments

rxSig — Received L-SIG field

vector | matrix

Received L-SIG field, specified as an N_S -by- N_R matrix. N_S is the number of samples, and N_R is the number of receive antennas.

N_S is proportional to the channel bandwidth.

ChannelBandwidth	N_S
'CBW5', 'CBW10', 'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640

Data Types: double

chEst — Channel estimate

vector | 3-D array

Channel estimate, specified as an N_{ST} -by-1-by- N_R array. N_{ST} is the number of occupied subcarriers, and N_R is the number of receive antennas.

Channel Bandwidth	N_{ST}
'CBW5', 'CBW10', 'CBW20'	52
'CBW40'	104
'CBW80'	208
'CBW160'	416

Data Types: double

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Example: 'CBW80' corresponds to a channel bandwidth of 80 MHz

Data Types: char | string

cfgRec – Algorithm parameters

wlanRecoveryConfig object


Algorithm parameters, specified as a wlanRecoveryConfig object. The function uses these properties:

Note If `cfgRec` is not provided, the function uses the default values of the `wlanRecoveryConfig` object.

OFDMSymbolOffset – OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

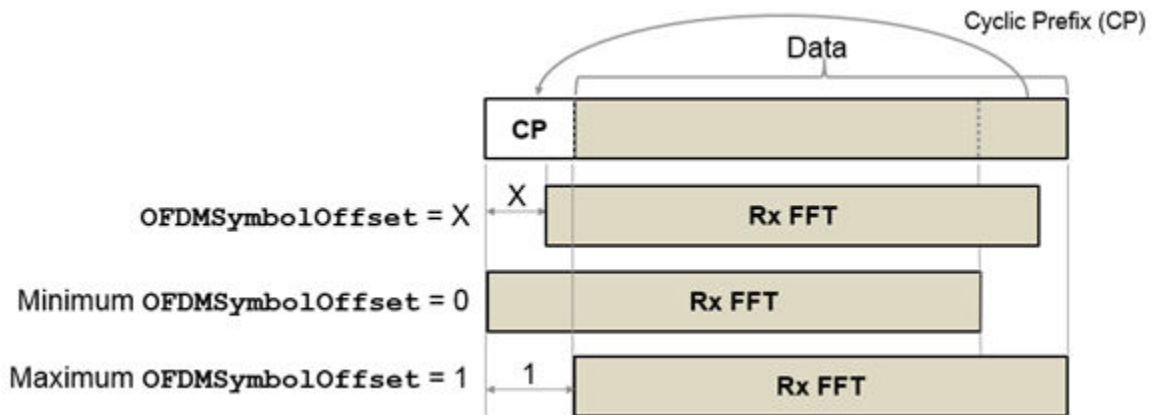

Data Types: double

EqualizationMethod – Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: `char` | `string`

PilotPhaseTracking — Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: `char` | `string`

Output Arguments

recBits — Recovered L-SIG information

binary vector

Recovered L-SIG information bits, returned as a 24-element column vector containing binary data. The 24 elements correspond to the length of the L-SIG field.

Data Types: `int8`

failCheck — Failure check status

`true` | `false`

Failure check status, returned as a logical scalar. If L-SIG fails the parity check, or if its first four bits do not correspond to one of the eight allowable data rates, `failCheck` is `true`.

Data Types: `logical`

eqSym — Equalized symbols

vector

Equalized symbols, returned as 48-by-1 vector. There are 48 data subcarriers in the L-SIG field.

Data Types: `double`

cpe — Common phase error


column vector

Common phase error in radians, returned as a scalar.

More About

L-SIG


The legacy signal (L-SIG) field is the third field of the 802.11 OFDM PLCP legacy preamble. It consists of 24 bits that contain rate, length, and parity information. The L-SIG is a component of VHT, HT, and non-HT PPDUs. It is transmitted using BPSK modulation with rate 1/2 binary convolutional coding (BCC).

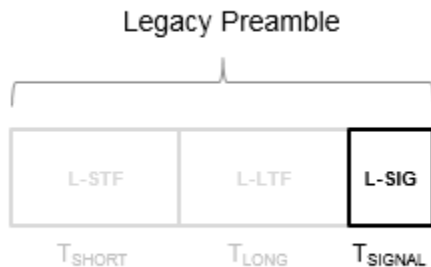

The L-SIG is one OFDM symbol with a duration that varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier frequency spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) period ($T_{\text{FFT}} = 1 / \Delta_F$)	Guard Interval (GI) Duration ($T_{\text{GI}} = T_{\text{FFT}} / 4$)	L-SIG duration ($T_{\text{SIGNAL}} = T_{\text{GI}} + T_{\text{FFT}}$)
20, 40, 80, and 160	312.5	3.2 μs	0.8 μs	4 μs
10	156.25	6.4 μs	1.6 μs	8 μs
5	78.125	12.8 μs	3.2 μs	16 μs

The L-SIG contains packet information for the received configuration,

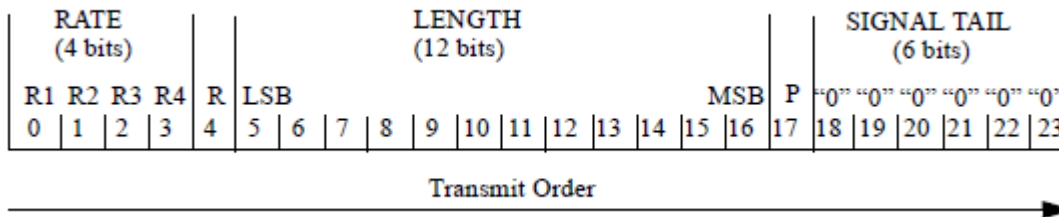

- Bits 0 through 3 specify the data rate (modulation and coding rate) for the non-HT format.

Rate (bits 0-3)	Modulation	Coding rate (R)	Data Rate (Mb/s)		
			20 MHz channel bandwidth	10 MHz channel bandwidth	5 MHz channel bandwidth
1101	BPSK	1/2	6	3	1.5
1111	BPSK	3/4	9	4.5	2.25
0101	QPSK	1/2	12	6	3
0111	QPSK	3/4	18	9	4.5
1001	16-QAM	1/2	24	12	6
1011	16-QAM	3/4	36	18	9
0001	64-QAM	2/3	48	24	12
0011	64-QAM	3/4	54	27	13.5

For HT and VHT formats, the L-SIG rate bits are set to '1 1 0 1'. Data rate information for HT and VHT formats is signaled in format-specific signaling fields.

- Bit 4 is reserved for future use.
- Bits 5 through 16:
 - For non-HT, specify the data length (amount of data transmitted in octets) as described in IEEE Std 802.11-2012, Table 18-1 and Section 9.23.4.

- For HT-mixed, specify the transmission time as described in IEEE Std 802.11-2012, Section 20.3.9.3.5 and Section 9.23.4.
- For VHT, specify the transmission time as described in IEEE Std 802.11ac-2013, Section 22.3.8.2.4.
- Bit 17 has the even parity of bits 0 through 16.
- Bits 18 through 23 contain all zeros for the signal tail bits.

Note Signaling fields added for HT (wlanHTSIG) and VHT (wlanVHTSIGA, wlanVHTSIGB) formats provide data rate and configuration information for those formats.

- For the HT-mixed format, IEEE Std 802.11-2012, Section 20.3.9.4.3 describes HT-SIG bit settings.
 - For the VHT format, IEEE Std 802.11ac-2013, Section 22.3.8.3.3 and Section 22.3.8.3.6 describe bit settings for VHT-SIG-A and VHT-SIG-B, respectively.
-

References

- [1] IEEE Std 802.11™-2016 (Revision of IEEE Std 802.11-2012). “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.” IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanLLTF | wlanLLTFChannelEstimate | wlanLLTFDemodulate | wlanLSIG

Introduced in R2015b

wlanLSTF

Generate L-STF waveform

Syntax

```
y = wlanLSTF(cfg)
```

Description

`y = wlanLSTF(cfg)` generates an “L-STF” on page 2-340¹⁷ time-domain waveform using the specified configuration object.

Examples

Generate L-STF Waveform

Generate the L-STF waveform for a 40 MHz single antenna VHT packet.

Create a VHT configuration object. Use this object to generate the L-STF waveform.


```
cfgVHT = wlanVHTConfig('ChannelBandwidth','CBW40');  
y = wlanLSTF(cfgVHT);  
size(y)
```

```
ans = 1x2
```

```
    320     1
```

```
plot(abs(y))  
xlabel('Samples')  
ylabel('Amplitude')
```

17. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

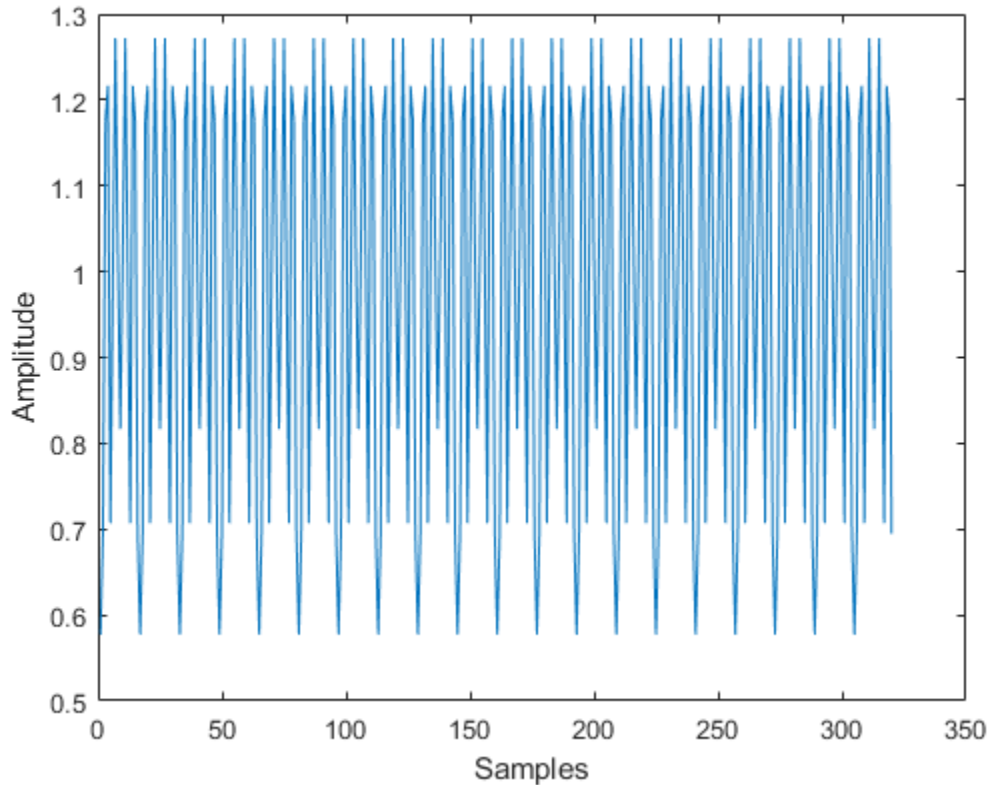

The output L-STF waveform contains 320 samples for a 40 MHz channel bandwidth.

Input Arguments

cfg — Format configuration

`wlanVHTConfig` object | `wlanHTConfig` object | `wlanNonHTConfig` object

Format configuration, specified as a `wlanVHTConfig`, `wlanHTConfig`, or `wlanNonHTConfig` object. For a specified format, the `wlanLSTF` function uses only the object properties indicated.

Transmission Format	Applicable Object Properties
VHT	ChannelBandwidth, NumTransmitAntennas
HT	ChannelBandwidth, NumTransmitAntennas
non-HT See note.	ChannelBandwidth, NumTransmitAntennas
Note:	
1 For non-HT format, when channel bandwidth is 5 MHz or 10 MHz, NumTransmitAntennas is not applicable because only one transmit antenna is permitted.	

Example: wlanVHTConfig

Output Arguments

y – L-STF time-domain waveform

matrix

(“L-STF” on page 2-340) time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth. The time-domain waveform consists of two symbols.

ChannelBandwidth	N_S
'CBW5', 'CBW10', 'CBW20'	160
'CBW40'	320
'CBW80'	640
'CBW160'	1280


Data Types: double

Complex Number Support: Yes

More About

L-STF

The legacy short training field (L-STF) is the first field of the 802.11 OFDM PLCP legacy preamble. The L-STF is a component of VHT, HT, and non-HT PPDUs.

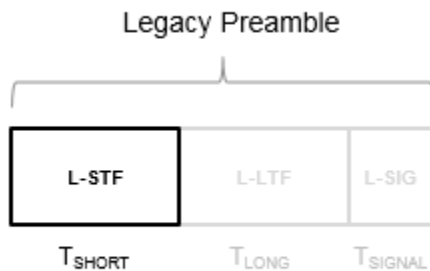

The L-STF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	L-STF Duration ($T_{SHORT} = 10 \times T_{FFT} / 4$)
20, 40, 80, and 160	312.5	3.2 μ s	8 μ s
10	156.25	6.4 μ s	16 μ s
5	78.125	12.8 μ s	32 μ s

Because the sequence has good correlation properties, it is used for start-of-packet detection, for coarse frequency correction, and for setting the AGC. The sequence uses 12 of the 52 subcarriers that are available per 20 MHz channel bandwidth segment. For 5 MHz, 10 MHz, and 20 MHz bandwidths, the number of channel bandwidths segments is 1.

Algorithms

The “L-STF” on page 2-340 is two OFDM symbols long and is the first field in the packet structure for the VHT, HT, and non-HT OFDM formats. For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.8.2.2.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanLLTF](#) | [wlanNonHTConfig](#) | [wlanVHTConfig](#)

Introduced in R2015b

wlanMPDUDecode

Decode MPDU

Syntax

```
[cfgMAC, payload, status] = wlanMPDUDecode(mpdu, cfgPHY)
[cfgMAC, payload, status] = wlanMPDUDecode( ____, 'DataFormat', format)
```

Description

[cfgMAC, payload, status] = wlanMPDUDecode(mpdu, cfgPHY) returns the MAC service data units (MSDUs), payload, by decoding the input MAC protocol data unit (MPDU), mpdu, for the given physical layer (PHY) format configuration object cfgPHY. The function also returns status, which indicates the result of MPDU decoding, and cfgMAC, a wlanMACFrameConfig configuration object.

[cfgMAC, payload, status] = wlanMPDUDecode(____, 'DataFormat', format) specifies the data format of the input MPDU to be decoded.

Examples

Decode MPDU in Bit Form

Create a WLAN MAC frame configuration object for a QoS data frame, and then generate the QoS data MPDU in octet form.

```
txCfgMAC = wlanMACFrameConfig('FrameType', 'QoS Data');
mpduOctets = wlanMACFrame(randi([0 255], 1, 40), txCfgMAC);
```

Convert the MPDU to bit form.

```
mpdu = reshape(de2bi(hex2dec(mpduOctets), 8)', [], 1);
```

Create a non-high-throughput-format (non-HT-format) configuration object with default settings.

```
cfgPHY = wlanNonHTConfig;
```

Return the MSDUs by decoding the MPDU for the specified PHY format configuration.

```
[rxCfgMAC,payload,status] = wlanMPDUDecode(mpdu, cfgPHY);
```

Decode MPDU in Octet Form.

Create a WLAN MAC frame configuration object for a QoS data frame, then generate the QoS data MPDU in octet form.

```
txCfgMAC = wlanMACFrameConfig('FrameType', 'QoS Data');
mpdu = wlanMACFrame(randi([0 255],1,40),txCfgMAC);
```

Create a non-HT-format configuration object with default settings.

```
cfgPHY = wlanNonHTConfig;
```

Return the MSDUs by decoding the MPDU for the specified PHY format configuration.

```
[rxCfgMAC,payload,status] = wlanMPDUDecode(mpdu, cfgPHY, 'DataFormat', 'octets');
```

Decode MPDUs Extracted from A-MPDU

Deaggregate a VHT-format A-MPDU and decode the extracted MPDUs.

Create a WLAN MAC frame configuration object for a VHT-format A-MPDU.

```
txCfgMAC = wlanMACFrameConfig('FrameType', 'QoS Data', 'FrameFormat', 'VHT');
```

Create a VHT-format configuration object with default settings.

```
cfgPHY = wlanVHTConfig;
```

Generate a random payload of eight MSDUs.

```
txPayload = repmat({randi([0 255],1,40)},1,8);
```

Generate the A-MPDU containing eight MPDUs for the specified MAC and PHY configurations.

```
ampdu = wlanMACFrame(txPayload,txCfgMAC,cfgPHY);
```

Return the list of MPDUs by deaggregating the A-MPDU. Display the status of the deaggregation and the delimiter CRC.

```
[mpduList, delimiterCRCFail, status] = ...  
    wlanAMPDUDeaggregate(ampdu,cfgPHY, 'DataFormat', 'octets');  
disp(status)
```

```
    Success
```

```
disp(delimiterCRCFail)
```

```
    0    0    0    0    0    0    0    0
```

Decode all the MPDUs in the extracted list.

```
if strcmp(status, 'Success')  
    for i = 1:numel(mpduList)  
        if ~delimiterCRCFail(i)  
            [cfgMAC, payload, decodeStatus] = ...  
                wlanMPDUDecode(mpduList{i},cfgPHY, 'DataFormat', 'octets');  
        end  
    end  
end
```

Input Arguments

mpdu — MPDU to be decoded

binary vector | numeric vector | string scalar | character array

MPDU to be decoded, specified as one of these values:

- a binary vector representing the MPDU in bit form;
- a numeric vector representing octets in decimal format, where each element is an integer in the interval [0, 255];
- a string scalar representing the MPDU as octets in hexadecimal format;
- a character vector representing the MPDU as octets in hexadecimal format;
- a character array, where each row represents an octet in hexadecimal format.

Data Types: double | char | string

cfgPHY — PHY format configuration

wlanHESUConfig object | wlanVHTConfig object | wlanHTConfig object |
wlanNonHTConfig object

PHY format configuration, specified as an object of type wlanHESUConfig, wlanVHTConfig, wlanHTConfig, wlanNonHTConfig. This object defines the PHY format configuration and its applicable properties.

format — Format of the input MPDU

'bits' (default) | 'octets'

Format of the input MPDU, specified as 'bits' or 'octets'.

Data Types: string

Output Arguments

cfgMAC — MAC frame configuration

wlanMACFrameConfig object

MAC frame configuration, returned as a wlanMACFrameConfig object.

payload — One or more MSDUs

cell array of character vectors

One or more MSDUs, returned as a cell array of character arrays. The function returns a character array for each MSDU. In these character arrays, each row is the hexadecimal representation of an octet. For each MAC frame that contains no data, the function returns payload as an empty cell array.

Data Types: cell

status — Status of MPDU decoding

nonpositive integer

Status of MPDU decoding, returned as a nonpositive integer in the interval [-20, 0]. Each value of status corresponds to a member of the wlanMACDecodeStatus enumeration class, which indicates the status of MAC frame decoding according to this table.

Enumeration value	Member of enumeration class	Decoding Status

0	Success	MAC frame successfully decoded
-1	FCSFailed	Frame check sequence (FCS) failed
-2	InvalidProtocolVersion	Invalid protocol version
-3	UnsupportedFrameType	Unsupported frame type
-4	UnsupportedFrameSubtype	Unsupported frame subtype
-5	NotEnoughData	Insufficient data to decode the frame
-6	UnsupportedBAVariant	Unsupported variant of Block Ack frame
-7	UnknownBitmapSize	Unknown bitmap size
-8	UnknownAddressExtMode	Unknown address extension mode
-9	MalformedAMSDULength	Malformed aggregated MAC service data unit (A-MSDU) with invalid length
-10	MalformedSSID	Malformed service set identifier (SSID) information element (IE)
-11	MalformedSupportedRatesIE	Malformed supported rates IE
-12	MalformedIELength	Malformed IE length field
-13	MissingMandatoryIEs	Mandatory IEs missing
-14	NoMPDUFound	No MPDU found in the A-MPDU
-15	CorruptedAMPDU	All the delimiters in the given A-MPDU failed the cyclic redundancy check (CRC)

-16	InvalidDelimiterLength	Invalid length field in MPDU delimiter
-17	MaxAMSDULenthExceeded	A-MSDU exceeded the maximum length limit
-18	MaxMPDULengthExceeded	MPDU exceeded the maximum length limit
-19	MaxMMPDULengthExceeded	MAC management frame exceeded the maximum length limit
-20	MaxMSDULengthExceeded	MSDU exceeded the maximum length limit

An enumeration value other than 0 means that MPDU decoding failed. If the decoding fails, the output `cfgMAC` displays no properties and the output `payload` is returned as an empty cell array.

Data Types: `int16`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanAMPDUDeaggregate` | `wlanMACFrame`

Objects

`wlanMACFrameConfig` | `wlanMACManagementConfig`

Introduced in R2019a

wlanNonHTData

Generate non-HT-Data field waveform

Syntax

```
y = wlanNonHTData(psdu,cfg)
y = wlanNonHTData(psdu,cfg,scramInit)
```

Description

`y = wlanNonHTData(psdu,cfg)` generates the “non-HT-Data field” on page 2-352¹⁸ time-domain waveform for the input “PSDU” on page 2-352 bits.

`y = wlanNonHTData(psdu,cfg,scramInit)` uses `scramInit` for the scrambler initialization state.

Examples

Generate Non-HT-Data Waveform

Generate the waveform for a 20MHz non-HT-Data field for 36 Mbps.

Create a non-HT configuration object and assign MCS to 5.

```
cfg = wlanNonHTConfig('MCS',5);
```

Assign random data to the PSDU and generate the data field waveform.

```
psdu = randi([0 1],cfg.PSDULength*8,1);
y = wlanNonHTData(psdu,cfg);
size(y)
```

18. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

ans = 1×2

4480 1

Input Arguments

psdu — PLCP service data unit

vector

PLCP service data unit (“PSDU” on page 2-352), specified as an N_{bits} -by-1 vector, where $N_{\text{bits}} = \text{PSDULength} \times 8$. “PSDU” on page 2-352 vector can range from 1 byte to 4095 bytes, as specified by PSDULength.

Data Types: double

cfg — Format configuration

wlanNonHTConfig object

Format configuration, specified as a wlanNonHTConfig object. The wlanNonHTData function uses the wlanNonHTConfig object properties associated with the 'OFDM' setting for Modulation.

Non-HT Format Configuration

ChannelBandwidth — Channel bandwidth

'CBW20' (default) | 'CBW10' | 'CBW5'

Channel bandwidth in MHz for OFDM, specified as 'CBW20', 'CBW10', or 'CBW5'. The default value of 'CBW20' sets the channel bandwidth to 20 MHz.

When channel bandwidth is 5 MHz or 10 MHz, only one transmit antenna is permitted and NumTransmitAntennas is not applicable.

Data Types: char | string

MCS — OFDM modulation and coding scheme

0 (default) | integer from 0 to 7 | integer

OFDM modulation and coding scheme to use for transmitting the current packet, specified as an integer from 0 to 7. The system configuration associated with an MCS setting maps to the specified data rate.

MCS	Modulation	Coding Rate	Coded bits per subcarrier (N_{BPSC})	Coded bits per OFDM symbol (N_{CBPS})	Data bits per OFDM symbol (N_{DBPS})	Data Rate (Mbps)		
						20 MHz channel bandwidth	10 MHz channel bandwidth	5 MHz channel bandwidth
0	BPSK	1/2	1	48	24	6	3	1.5
1	BPSK	3/4	1	48	36	9	4.5	2.25
2	QPSK	1/2	2	96	48	12	6	3
3	QPSK	3/4	2	96	72	18	9	4.5
4	16QAM	1/2	4	192	96	24	12	6
5	16QAM	3/4	4	192	144	36	18	9
6	64QAM	2/3	6	288	192	48	24	12
7	64QAM	3/4	6	288	216	54	27	13.5

See IEEE Std 802.11-2012, Table 18-4.

Data Types: double

PSDULength — Number of bytes carried in the user payload

1000 (default) | integer from 1 to 4095 | integer

Number of bytes carried in the user payload, specified as an integer from 1 to 4095.

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer from 1 to 8

Number of transmit antennas for OFDM, specified as a scalar integer from 1 to 8.

When channel bandwidth is 5 MHz or 10 MHz, NumTransmitAntennas is not applicable because only one transmit antenna is permitted.


Data Types: double

scramInit — Scrambler initialization state

93 (default) | integer from 1 to 127 | binary vector

Scrambler initialization state for each packet generated, specified as an integer from 1 to 127 or as the corresponding binary vector of length seven. The default value of 93 is the example state given in IEEE Std 802.11-2012, Section L.1.5.2.

The scrambler initialization used on the transmission data follows the process described in IEEE Std 802.11-2012, Section 18.3.5.5 and IEEE Std 802.11ad-2012, Section 21.3.9. The header and data fields that follow the scrambler initialization field (including data padding bits) are scrambled by XORing each bit with a length-127 periodic sequence generated by the polynomial $S(x) = x^7 + x^4 + 1$. The octets of the PSDU (Physical Layer Service Data Unit) are placed into a bit stream, and within each octet, bit 0 (LSB) is first and bit 7 (MSB) is last. The generation of the sequence and the XOR operation are shown in this figure:

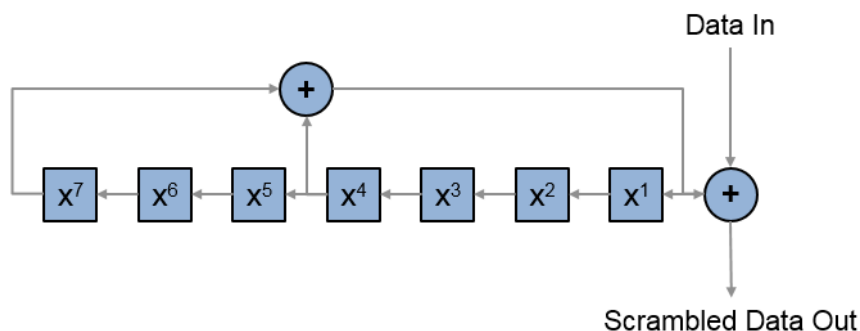

Conversion from integer to bits uses left-MSB orientation. For the initialization of the scrambler with decimal 1, the bits are mapped to the elements shown.

Element	x^7	x^6	x^5	x^4	x^3	x^2	x^1
Bit Value	0	0	0	0	0	0	1

To generate the bit stream equivalent to a decimal, use `de2bi`. For example, for decimal 1:

```
de2bi(1,7,'left-msb')
ans =
```

```
    0    0    0    0    0    0    1
```

Example: `[1; 0; 1; 1; 1; 0; 1]` conveys the scrambler initialization state of 93 as a binary vector.

Data Types: `double` | `int8`

Output Arguments

y — Non-HT-Data field time-domain waveform

matrix

Non-HT-Data field time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time domain samples, and N_T is the number of transmit antennas.


More About

PSDU

Physical layer convergence procedure (PLCP) service data unit (PSDU). This field is composed of a variable number of octets. The minimum is 0 (zero) and the maximum is 2500. For more information, see IEEE Std 802.11™-2012, Section 15.3.5.7.

non-HT-Data field

The non-high throughput data (non-HT data) field is used to transmit MAC frames and is composed of a service field, a PSDU, tail bits, and pad bits.

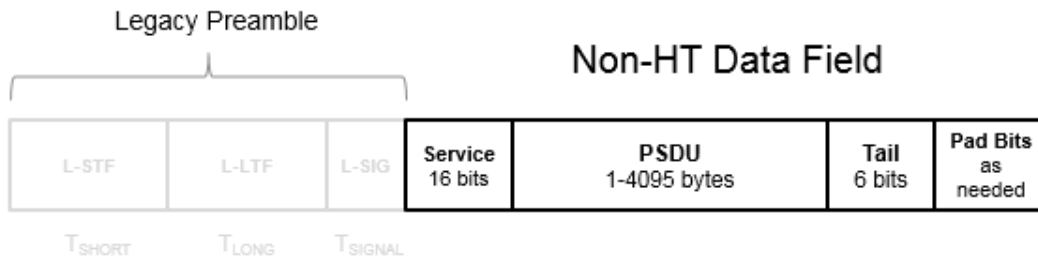


- **Service field** — Contains 16 zeros to initialize the data scrambler.
- **PSDU** — Variable-length field containing the PLCP service data unit (PSDU).
- **Tail** — Tail bits required to terminate a convolutional code. The field uses six zeros for the single encoding stream.
- **Pad Bits** — Variable-length field required to ensure that the non-HT data field contains an integer number of symbols.

Algorithms

non-HT-Data Field Processing

The “non-HT-Data field” on page 2-352 follows the L-SIG in the packet structure. For algorithm details, refer to IEEE Std 802.11-2012 [1], Section 18.3.5. The “non-HT-Data field” on page 2-352 includes the user payload in the *PSDU* plus 16 service bits, 6 tail bits, and additional padding bits as required to fill out the last OFDM symbol. The `wlanNonHTData` function performs transmitter processing on the “non-HT-Data field” on page 2-352 and outputs the time-domain waveform.

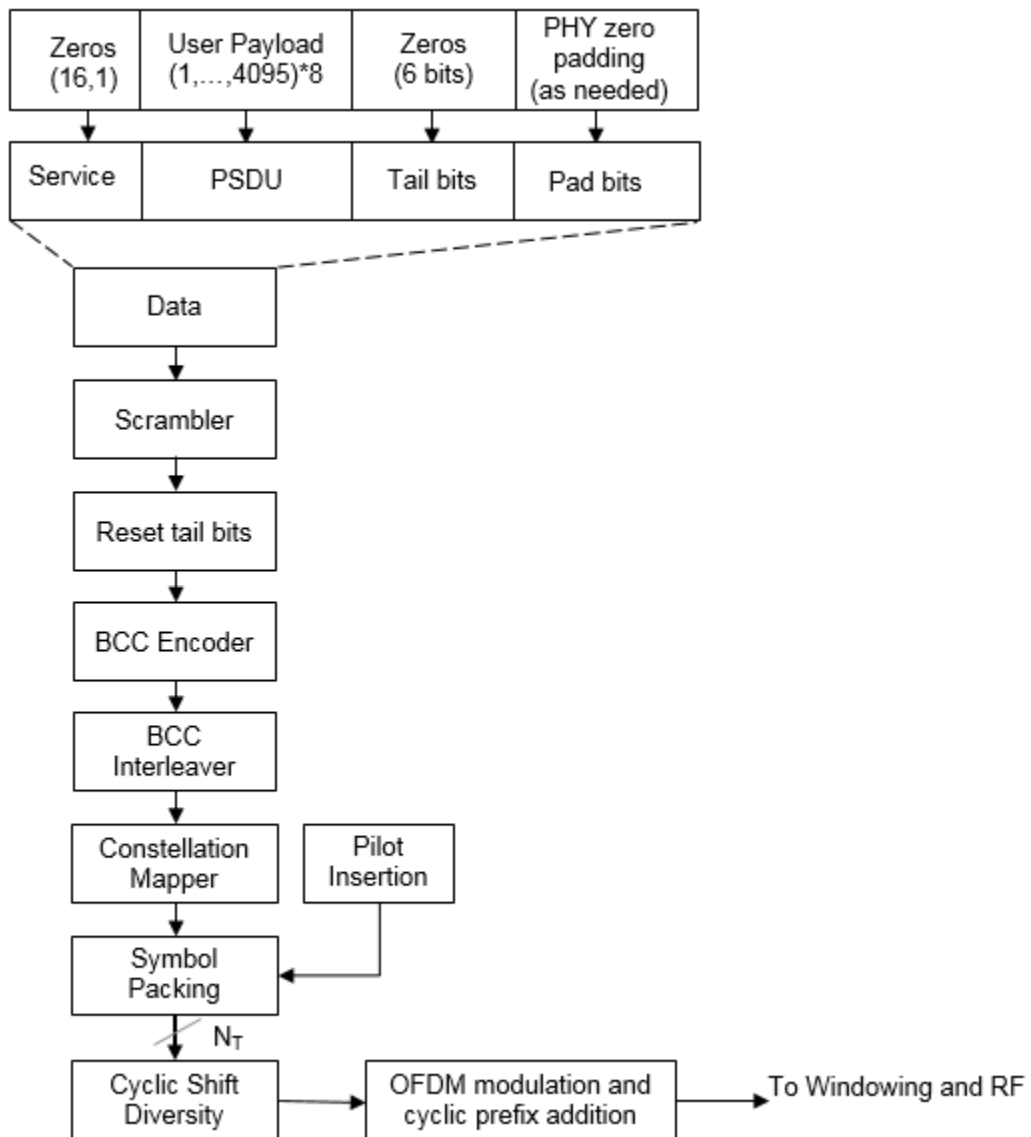

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanLSIG | wlanNonHTConfig | wlanNonHTDataRecover

Introduced in R2015b

wlanNonHTDataRecover

Recover non-HT data

Syntax

```
recData = wlanNonHTDataRecover(rxSig, chEst, noiseVarEst, cfg)
recData = wlanNonHTDataRecover(rxSig, chEst, noiseVarEst, cfg, cfgRec)
[recData, eqSym] = wlanNonHTDataRecover( ___ )
[recData, eqSym, cpe] = wlanNonHTDataRecover( ___ )
```

Description

`recData = wlanNonHTDataRecover(rxSig, chEst, noiseVarEst, cfg)` returns the recovered “Non-HT-Data field” on page 2-362¹⁹ bits, given received signal `rxSig`, channel estimate data `chEst`, noise variance estimate `noiseVarEst`, and `wlanNonHTConfig` object `cfg`.

Note This function only supports data recovery for OFDM modulation.

`recData = wlanNonHTDataRecover(rxSig, chEst, noiseVarEst, cfg, cfgRec)` specifies the recovery algorithm parameters using `wlanRecoveryConfig` object `cfgRec`.

`[recData, eqSym] = wlanNonHTDataRecover(___)` returns the equalized symbols, `eqSym`, using the arguments from the previous syntaxes.

`[recData, eqSym, cpe] = wlanNonHTDataRecover(___)` also returns the common phase error, `cpe`.

19. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Examples

Recover Non-HT Data Bits

Create a non-HT configuration object having a PSDU length of 2048 bytes. Generate the corresponding data sequence.

```
cfg = wlanNonHTConfig('PSDULength',2048);  
txBits = randi([0 1],8*cfg.PSDULength,1);  
txSig = wlanNonHTData(txBits,cfg);
```

Pass the signal through an AWGN channel with a signal-to-noise ratio of 15 dB.

```
rxSig = awgn(txSig,15);
```

Recover the data and determine the number of bit errors.

```
rxBits = wlanNonHTDataRecover(rxSig,ones(52,1),0.05,cfg);  
[numerr,ber] = biterr(rxBits,txBits)
```

```
numerr = 0
```

```
ber = 0
```

Recover Non-HT Data Bits Using Zero-Forcing Algorithm

Create a non-HT configuration object having a 1024-byte PSDU length. Generate the corresponding non-HT data sequence.

```
cfg = wlanNonHTConfig('PSDULength',1024);  
txBits = randi([0 1],8*cfg.PSDULength,1);  
txSig = wlanNonHTData(txBits,cfg);
```

Pass the signal through an AWGN channel with a signal-to-noise ratio of 10 dB.

```
rxSig = awgn(txSig,10);
```

Create a data recovery object that specifies the use of the zero-forcing algorithm.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Recover the data and determine the number of bit errors.

```
rxBits = wlanNonHTDataRecover(rxSig,ones(52,1),0.1,cfg,cfgRec);  
[numerr,ber] = biterr(rxBits,txBits)
```

```
numerr = 0
```

```
ber = 0
```

Recover Non-HT Data in Fading Channel

Configure a non-HT data object.

```
cfg = wlanNonHTConfig;
```

Generate and transmit a non-HT PSDU.

```
txPSDU = randi([0 1],8*cfg.PSDULength,1);  
txSig = wlanNonHTData(txPSDU,cfg);
```

Generate an L-LTF for channel estimation.

```
txLLTF = wlanLLTF(cfg);
```

Create an 802.11g channel with a 3 Hz maximum Doppler shift and a 100 ns RMS path delay. Disable the reset before filtering option so that the L-LTF and data fields use the same channel realization.

```
ch802 = comm.RayleighChannel('SampleRate',20e6,'MaximumDopplerShift',3,'PathDelays',100e-9);
```

Pass the L-LTF and data signals through an 802.11g channel with AWGN.

```
rxLLTF = awgn(ch802(txLLTF),10);  
rxSig = awgn(ch802(txSig),10);
```

Demodulate the L-LTF and use it to estimate the fading channel.

```
dLLTF = wlanLLTFDemodulate(rxLLTF,cfg);  
chEst = wlanLLTFChannelEstimate(dLLTF,cfg);
```

Recover the non-HT data using the L-LTF channel estimate and determine the number of bit errors in the transmitted packet.

```
rxPSDU = wlanNonHTDataRecover(rxSig,chEst,0.1,cfg);  
[numErr,ber] = biterr(txPSDU,rxPSDU)  
numErr = 0  
ber = 0
```

Input Arguments

rxSig — Received non-HT data signal

vector | matrix

Received non-HT data signal, specified as a matrix of size N_S -by- N_R . N_S is the number of samples and N_R is the number of receive antennas. N_S can be greater than the length of the data field signal.

Data Types: double

chEst — Channel estimate data

vector | 3-D array

Channel estimate data, specified as an N_{ST} -by-1-by- N_R array. N_{ST} is the number of occupied subcarriers, and N_R is the number of receive antennas.

Data Types: double

noiseVarEst — Noise variance estimate

nonnegative scalar

Estimate of the noise variance, specified as a nonnegative scalar.

Example: 0.7071

Data Types: double

cfg — Configure non-HT format parameters

wlanNonHTConfig object

Non-HT format configuration, specified as a wlanNonHTConfig object. The wlanHTDataRecover function uses the following wlanNonHTConfig object properties:

MCS — OFDM modulation and coding scheme

0 (default) | integer from 0 to 7 | integer

OFDM modulation and coding scheme to use for transmitting the current packet, specified as an integer from 0 to 7. The system configuration associated with an MCS setting maps to the specified data rate.

MCS	Modulation	Coding Rate	Coded bits per subcarrier (N_{BPSC})	Coded bits per OFDM symbol (N_{CBPS})	Data bits per OFDM symbol (N_{DBPS})	Data Rate (Mbps)		
						20 MHz channel bandwidth	10 MHz channel bandwidth	5 MHz channel bandwidth
0	BPSK	1/2	1	48	24	6	3	1.5
1	BPSK	3/4	1	48	36	9	4.5	2.25
2	QPSK	1/2	2	96	48	12	6	3
3	QPSK	3/4	2	96	72	18	9	4.5
4	16QAM	1/2	4	192	96	24	12	6
5	16QAM	3/4	4	192	144	36	18	9
6	64QAM	2/3	6	288	192	48	24	12
7	64QAM	3/4	6	288	216	54	27	13.5

See IEEE Std 802.11-2012, Table 18-4.

Data Types: double

PSDULength — Number of bytes carried in the user payload

1000 (default) | integer from 1 to 4095 | integer

Number of bytes carried in the user payload, specified as an integer from 1 to 4095.

Data Types: double

cfgRec — Algorithm parameters


wlanRecoveryConfig object

Algorithm parameters, specified as a wlanRecoveryConfig object. The object properties include:

OFDMSymbolOffset – OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

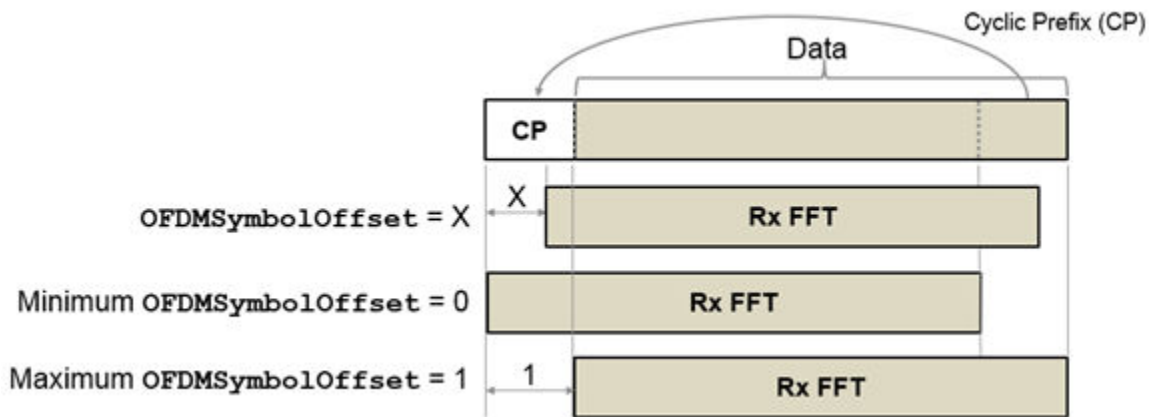

Data Types: double

EqualizationMethod – Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking – Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: char | string

Output Arguments

recData — Recovered binary output data

binary column vector

Recovered binary output data, returned as a column vector of length $8 \times N_{\text{PSDU}}$, where N_{PSDU} is the length of the PSDU in bytes. See `wlanNonHTConfig` for `PSDULength` details.

Data Types: int8

eqSym — Equalized symbols

column vector | matrix

Equalized symbols, returned as an N_{SD} -by- N_{SYM} matrix. N_{SD} is the number of data subcarriers, and N_{SYM} is the number of OFDM symbols in the non-HT data field.

Data Types: double

cpe — Common phase error


column vector

Common phase error in radians, returned as a column vector having length N_{SYM} . N_{SYM} is the number of OFDM symbols in the “Non-HT-Data field” on page 2-362.

More About

Non-HT-Data field

The non-high throughput data (non-HT data) field is used to transmit MAC frames and is composed of a service field, a PSDU, tail bits, and pad bits.

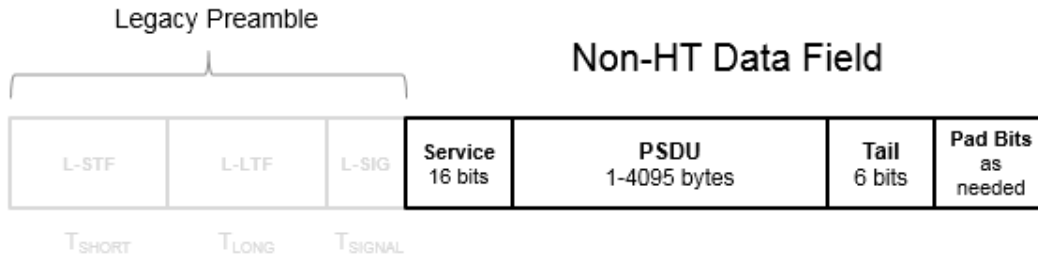

- **Service field** — Contains 16 zeros to initialize the data scrambler.
- **PSDU** — Variable-length field containing the PLCP service data unit (PSDU).
- **Tail** — Tail bits required to terminate a convolutional code. The field uses six zeros for the single encoding stream.
- **Pad Bits** — Variable-length field required to ensure that the non-HT data field contains an integer number of symbols.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanNonHTConfig | wlanNonHTData | wlanRecoveryConfig

Introduced in R2015b

wlanNonHTOFDMInfo

Get OFDM information for non-HT transmission

Syntax

```
info = wlanNonHTOFDMInfo(field)
```

Description

`info = wlanNonHTOFDMInfo(field)` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the input field in a non-high-throughput (non-HT) transmission.

Examples

Get OFDM Information for Non-HT-Data Field

Get and display the OFDM information for the non-HT-Data field.

```
info = wlanNonHTOFDMInfo('NonHT-Data');  
disp(info);  
  
          FFTLength: 64  
          CPLength: 16  
    NumSubchannels: 1  
          NumTones: 52  
    ActiveFFTIndices: [52x1 double]  
    ActiveFrequencyIndices: [52x1 double]  
          DataIndices: [48x1 double]  
          PilotIndices: [4x1 double]
```

Demodulate Non-HT L-LTF and Get OFDM Information

Perform OFDM demodulation of the L-LTF in a non-HT transmission, then extract the data and pilot subcarriers.

Generate a WLAN waveform for a non-HT transmission.

```
cfg = wlanNonHTConfig;  
bits = [1; 0; 0; 1];  
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the L-LTF.

```
ind = wlanFieldIndices(cfg);  
rx = waveform(ind.LLTF(1):ind.LLTF(2), :);
```

Perform OFDM demodulation on the L-LTF.

```
sym = wlanLLTFDemodulate(rx, cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanNonHTOFDMInfo('L-LTF');  
data = sym(info.DataIndices, :, :);  
pilots = sym(info.PilotIndices, :, :);
```

Input Arguments

field — Field for which to return OFDM information

'L-LTF' | 'L-SIG' | 'NonHT-Data'

Field for which to return OFDM information, specified as one of these values.

- 'L-LTF' - Return OFDM information for the legacy long training field (L-LTF).
- 'L-SIG' - Return OFDM information for the legacy signal (L-SIG) field.
- 'NonHT-Data' - Return OFDM information for the non-HT-Data field.

Data Types: char | string

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLength	Positive integer	Cyclic prefix length, in samples	double
NumTones	Nonnegative integer	Number of active subcarriers	double
NumSubchannels	Positive integer	Number of 20-MHz subchannels	double
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double

Name	Values	Description	Data Types
PilotIndices	Column vector of integers in the interval [1, NumTones]	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanLLTFDemodulate

Objects

wlanNonHTConfig

Introduced in R2019a

wlanPacketDetect

OFDM packet detection using L-STF

Syntax

```
startOffset = wlanPacketDetect(rxSig,cbw)
startOffset = wlanPacketDetect(rxSig,cbw,offset)
startOffset = wlanPacketDetect(rxSig,cbw,offset,threshold)
[startOffset,M] = wlanPacketDetect( ___ )
```

Description

`startOffset = wlanPacketDetect(rxSig,cbw)` returns the offset from the start of the input waveform to the start of the detected preamble, given a received time-domain waveform and the channel bandwidth. For more information, see “Packet Detection Processing” on page 2-376.

Note This function supports packet detection of OFDM modulated signals only.

`startOffset = wlanPacketDetect(rxSig,cbw,offset)` specifies an offset from the start of the received waveform and indicates where the autocorrelation processing begins. The returned `startOffset` is relative to the input offset.

`startOffset = wlanPacketDetect(rxSig,cbw,offset,threshold)` specifies the threshold which the decision statistic must meet or exceed to detect a packet.

`[startOffset,M] = wlanPacketDetect(___)` also returns the decision statistics of the packet detection algorithm for the received time-domain waveform, using any of the input arguments in the previous syntaxes.

Examples

Detect 802.11n Packet

Detect a received 802.11n packet at a signal-to-noise ratio (SNR) of 20 dB.

Create an HT configuration object and TGn channel object. Generate a transmit waveform.

```
cfgHT = wlanHTConfig;  
tgn = wlanTGnChannel('LargeScaleFadingEffect','None');  
  
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgHT);
```

Pass the waveform through the TGn channel with an SNR of 20 dB. Detect the start of the packet.

```
snr = 20;  
fadedSig = tgn(txWaveform);  
rxWaveform = awgn(fadedSig,snr,0);  
  
startOffset = wlanPacketDetect(rxWaveform, cfgHT.ChannelBandwidth)  
  
startOffset = 1
```

The packet is detected at the first sample of the received waveform, specifically the returned `startOffset` indicates an offset of zero samples from the start of the received waveform.

Detect Delayed 802.11ac Packet

Detect a received 802.11ac packet that has been delayed. Specify an offset of 25 to begin the autocorrelation process.

Create an VHT configuration object and generate the transmit waveform.

```
cfgVHT = wlanVHTConfig;  
  
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgVHT,...  
    'WindowTransitionTime',0);
```

Delay the signal by appending zeros at the start. Specify an offset of 25 for the beginning of autocorrelation processing. Detect the start of the packet.

```
rxWaveform = [zeros(100,1);txWaveform];
offset = 25;
startOffset = wlanPacketDetect(rxWaveform,cfgVHT.ChannelBandwidth,offset)

startOffset = 48
```

Calculate the detected packet offset by adding the returned `startOffset` and the input `offset`.

```
pktOffset = offset + startOffset

pktOffset = 73
```

The offset from the first sample of the received waveform to the start of the packet is detected to be 73 samples. This coarse approximation of the packet-start offset is useful for determining where to begin autocorrelation for the first packet and for subsequent packets when a multipacket waveform is transmitted.

Detect Delayed 802.11a Packet

Detect a received 802.11a packet that has been delayed. No channel impairments are added. Set the input offset to 5 and use a threshold setting very close to 1.

Create a non-HT configuration object. Generate the transmit waveform.

```
cfgNonHT = wlanNonHTConfig;

txWaveform = wlanWaveformGenerator([1;0;0;1],cfgNonHT,...
    'WindowTransitionTime',0);
```

Delay the signal by appending zeros at the start. Set an initial offset of 5 and a threshold very close to 1. Detect the delayed packet.

```
rxWaveform = [zeros(20,1);txWaveform];

offset = 5;
threshold = 1-10*eps;
startOffset = wlanPacketDetect(rxWaveform,...
    cfgNonHT.ChannelBandwidth,offset,threshold)

startOffset = 15
```

Calculate the detected packet offset by adding the returned `startOffset` and the input `offset`.

```
totalOffset = offset + startOffset
```

```
totalOffset = 20
```

Using a threshold close to 1 and an undistorted received waveform increases the accuracy of the packet detect location. The detected offset from the first sample of the received waveform to the start of the packet is determined to be 20 samples.

Generate WLAN Packet Decision Statistics

Return the decision statistics of a WLAN waveform that consists of five 802.11a packets.


Create a non-HT configuration object and a five-packet waveform. Delay the waveform by 4000 samples.

```
cfgNonHT = wlanNonHTConfig;  
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgNonHT, ...  
    'NumPackets',5,'IdleTime',20e-6);
```

```
rxWaveform = [zeros(4000,1);txWaveform];
```

Setting the threshold input to 1, generates packet decision statistics for the entire waveform and suppresses the `startOffset` output. Plot the decision statistics, `M`.

```
offset = 0;  
threshold = 1;  
[startOffset,M] = wlanPacketDetect(rxWaveform,cfgNonHT.ChannelBandwidth,...  
    offset,threshold);  
plot(M)
```

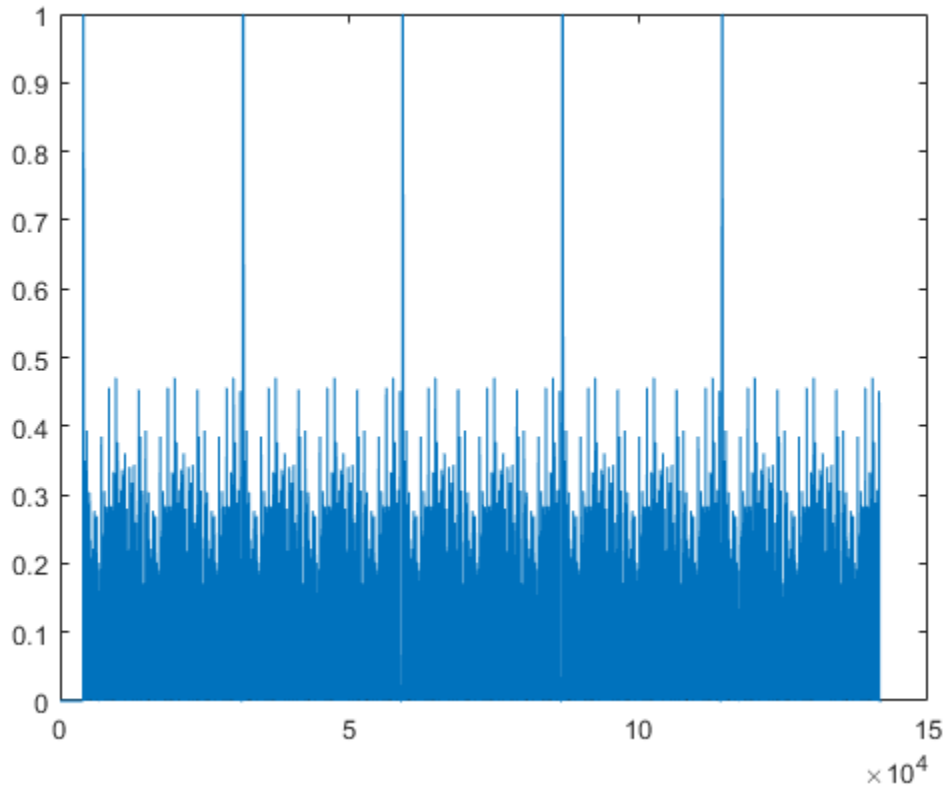Since `threshold = 1`, the decision statistics for the entire waveform are included in the output `M`. The decision statistics show five peaks. The peaks corresponds to the first sample of each packet detected. View `startOffset`.

```
startOffset
```

```
startOffset =
```

```
 []
```

The returned `startOffset` is empty because `threshold` was set to 1.

Input Arguments

rxSig — Received time-domain signal

matrix

Received time-domain signal, specified as an N_S -by- N_R matrix. N_R is the number of receive antennas. N_S represents the number of time-domain samples in the received signal.

Data Types: `double`

Complex Number Support: Yes

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: `char` | `string`

offset — Number of samples offset

0 (default) | nonnegative integer

Number of samples offset from the beginning of the received waveform, specified as a nonnegative integer. `offset` defines the starting sample for the autocorrelation process. `offset` is useful for advancing through and detecting the `startOffset` sample for successive packets in multipacket waveforms.

Note Since the packet detection searches forward in time, the first packet will not be detected if the initial setting for `offset` is beyond the first “L-STF” on page 2-375.

Data Types: `double`

threshold — Decision statistic threshold

0.5 (default) | real scalar | from >0 to 1

Decision statistic threshold that must be met or exceeded to detect a packet, specified as a real scalar greater than 0 and less than or equal to 1.

Data Types: `double`

Output Arguments

startOffset — Number of samples offset to the start of packet

nonnegative integer | []

Number of samples offset to the start of packet, returned as a nonnegative integer. This value, shifted by `offset`, indicates the detected start of a packet from the first sample of `rxSig`.

- An empty value, [], is returned if no packet is detected or if `threshold` is set to 1.
- Zero is returned if there is no delay, specifically the packet is detected at the first sample of the waveform.

M — Decision statistics

vector


Decision statistics based on autocorrelation of the input waveform, returned as an N -by-1 real vector. The length of N depends on the starting location of the autocorrelation process and the number of samples until a packet is detected. When `threshold` is set to 1, `M` returns the decision statistics of the full waveform and `startOffset` returns empty.

For more information, see “Packet Detection Processing” on page 2-376.

More About

L-STF

The legacy short training field (L-STF) is the first field of the 802.11 OFDM PLCP legacy preamble. The L-STF is a component of VHT, HT, and non-HT PPDUs.

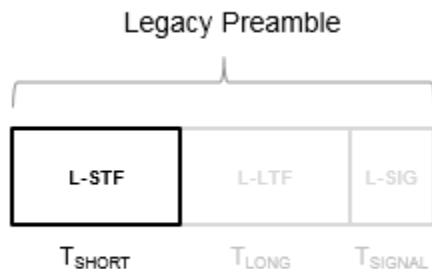

The L-STF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	L-STF Duration ($T_{SHORT} = 10 \times T_{FFT} / 4$)
20, 40, 80, and 160	312.5	3.2 μ s	8 μ s
10	156.25	6.4 μ s	16 μ s
5	78.125	12.8 μ s	32 μ s

Because the sequence has good correlation properties, it is used for start-of-packet detection, for coarse frequency correction, and for setting the AGC. The sequence uses 12 of the 52 subcarriers that are available per 20 MHz channel bandwidth segment. For 5 MHz, 10 MHz, and 20 MHz bandwidths, the number of channel bandwidths segments is 1.


Algorithms

Packet Detection Processing

The packet detection algorithm is implemented as a double sliding window as described in OFDM Wireless LANs [1], Chapter 2. The autocorrelation of “L-STF” on page 2-375 short training symbols is used to return an estimated packet-start offset. In a robust

system, the next stage will refine this estimate with symbol timing detection using the L-LTF.

As shown in the figure, the received signal, r_n , is delayed then correlated in two sliding windows independently. The packet detection processing output provides decision statistics (m_n) of the received waveform.

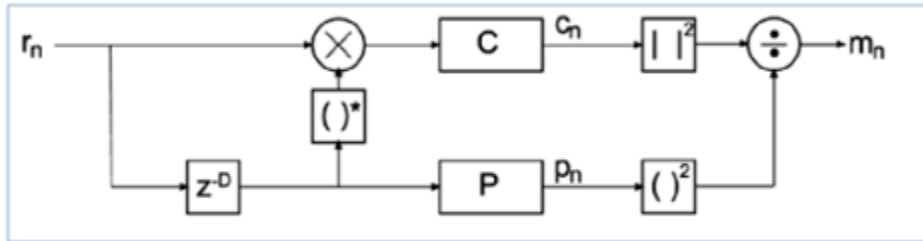

- Window C autocorrelates between the received signal and the delayed version, c_n .

$$c_n = \sum_{l=1}^{N_R} \sum_{k=0}^{D-1} r_{n+k,l} r_{n+k+D,l}^*$$

- Window P calculates the energy received in the autocorrelation window, p_n .

$$p_n = \sum_{l=1}^{N_R} \sum_{k=0}^{D-1} \left| r_{n+k+D,l} \right|^2$$

- The decision statistics, m_n , normalize the autocorrelation by p_n so that the decision statistic is not dependent on the absolute received power level.


$$m_n = \frac{|c_n|^2}{(p_n)^2}$$

The decision statistics provide visual information resulting from the autocorrelation process that is useful when selecting the appropriate threshold value for the input waveform. The recommended default value of 0.5 for threshold favors false

detections over missed detections considering a range of SNRs and various antenna configurations.

In the sliding window calculations, D is the period of the “L-STF” on page 2-375 short training symbols and N_R is the number of receive antennas.

Packet detection processing follows this flow chart:

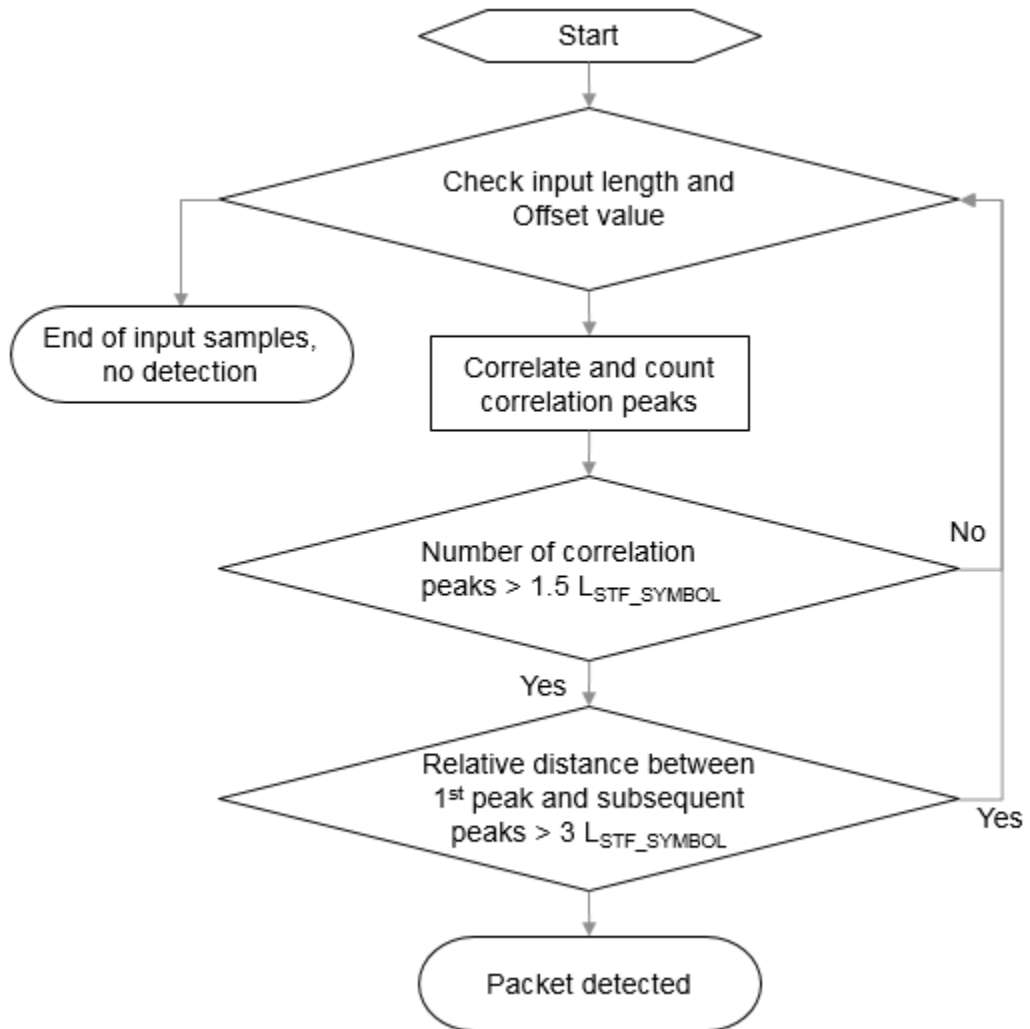

L_{STF_SYMBOL} is the length of an “L-STF” on page 2-375 symbol.

Note This function supports packet detection of OFDM modulated signals only.

References

- [1] Terry, J., and J. Heiskala. *OFDM Wireless LANs: A Theoretical and Practical Guide*. Indianapolis, IN: Sams, 2002.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanCoarseCF0Estimate` | `wlanFieldIndices`

Introduced in R2016b

wlanPSDULength

Calculate PSDU length in octets

Syntax

```
PSDULength = wlanPSDULength(cfgPHY,unit,value)
```

Description

`PSDULength = wlanPSDULength(cfgPHY,unit,value)` returns `PSDULength`, the physical layer conformance procedure (PLCP) service data unit (PSDU) length, in octets from the given `value` and the physical layer configuration `cfgPHY`. The `value` can be in terms of PLCP protocol data unit (PPDU) transmission time or number of data symbols, specified by the `unit` input argument.

Examples

Generate Non-HT Waveform with Specified Transmission Time

Create a `wlanNonHTConfig` object, `'cfgPHY'`, and specify the transmission time, `'txTime'`, in microseconds.

```
cfgPHY = wlanNonHTConfig;  
txTime = 300;
```

Calculate the PSDU length in octets.

```
psduLength = wlanPSDULength(cfgPHY,'TxTime',txTime)
```

```
psduLength = 207
```

Set the number of bytes carried in the user payload for the configuration object, `'cfgPHY'` to this PSDU length. Create a random PSDU, `'psdu'`, using the calculated PSDU length.

```
cfgPHY.PSDULength = psduLength;  
data = randi([0 1],psduLength*8,1);
```

Generate a non-HT waveform using 'cfgPHY' and 'data'.

```
waveform = wlanWaveformGenerator(data, cfgPHY);
```

Generate HT Waveform with Specified Number of Data Symbols

Create a wlanHTConfig object, 'cfgPHY', and specify the number of data symbols, 'numDataSymbols'.

```
cfgPHY = wlanNonHTConfig;  
numDataSymbols = 200;
```

Calculate the PSDU length in octets.

```
psduLength = wlanPSDULength(cfgPHY, 'NumDataSymbols', numDataSymbols)
```

```
psduLength = 597
```

Set the number of bytes carried in the user payload for the configuration object, 'cfgPHY', to this PSDU length. Create a random PSDU, 'psdu', with the calculated PSDU length.

```
cfgPHY.PSDULength = psduLength;  
data = randi([0 1],psduLength*8,1);
```

Generate a non-HT waveform using 'cfgPHY' and 'data'.

```
waveform = wlanWaveformGenerator(data, cfgPHY);
```

Input Arguments

cfgPHY — PHY format configuration

wlanHESUConfig object | wlanVHTConfig object | wlanHTConfig object |
wlanNonHTConfig object

PHY format configuration, specified as a `wlanHESUConfig`, `wlanVHTConfig`, `wlanHTConfig`, or `wlanNonHTConfig` object. This object defines a PHY format configuration and its applicable properties.

unit — Units of argument value

'TxTime' | 'NumDataSymbols'

Units of argument value, specified as 'TxTime' or 'NumDataSymbols'. This value indicates the units of value from which the PSDU length is calculated.

Data Types: char | string

value — Value from which PSDU length is calculated

numeric scalar

Value from which PSDU length is calculated, specified as a numeric scalar. Input argument `unit` specifies the unit of `value`. This table describes how the function interprets `value` based on `unit`.

unit Value	value Description
'TxTime'	Scalar number specifying PPDU transmission time in microseconds
'NumDataSymbols'	Scalar number specifying the number of symbols in the 'Data' field of PPDU

Data Types: double

Output Arguments

PSDULength — Length of PSDU

numeric scalar

Length of PSDU, in octets, returned as a numeric scalar.

Data Types: double

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanAPEPLength | wlanMSDULengths

Introduced in R2019b

wlanReferenceSymbols

Find reference symbols of constellation diagram

Syntax

```
refSym = wlanReferenceSymbols(mod)
refSym = wlanReferenceSymbols(mod,phase)

refSym = wlanReferenceSymbols(cfg)
refSym = wlanReferenceSymbols(cfg,userNumber)
```

Description

`refSym = wlanReferenceSymbols(mod)` returns the reference symbols of the constellation diagram for the specified modulation scheme.

`refSym = wlanReferenceSymbols(mod,phase)` returns reference symbols with counterclockwise rotation phase for the specified modulation scheme.

`refSym = wlanReferenceSymbols(cfg)` returns the reference symbols used in the data field of a single-user (SU) transmission or a recovered high-efficiency (HE) transmission parameterized by the configuration object `cfg`.

`refSym = wlanReferenceSymbols(cfg,userNumber)` returns the reference symbols used in the data field for the user specified by `userNumber` in a multiuser (MU) transmission specified by MU-format configuration object `cfg`.

Examples

Plot Noisy QPSK Constellation with Reference Symbols

Fine reference symbols for a quadrature phase-shift keying (QPSK) modulation scheme and plot the resulting constellation.

Generate noisy QPSK symbols.


```
sym = awgn(qammod(randi([0 3],100,1),4)/sqrt(2),20);
```

Find the reference symbols.

```
refSym = wlanReferenceSymbols('QPSK');
```

Plot the constellation diagram.


```
figure;  
plot(sym,'b.');
```

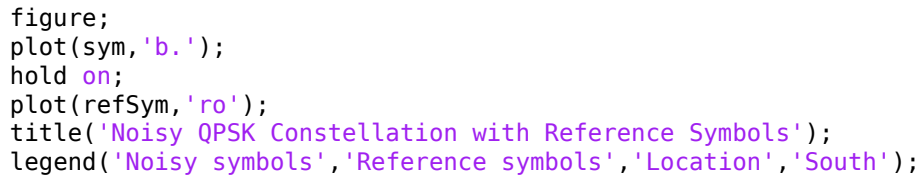

```
hold on;  
plot(refSym,'ro');
```

The plot displays a 2D constellation diagram. The x-axis represents the real part and the y-axis represents the imaginary part of the complex symbols. The reference symbols are located at the four corners of a square centered at the origin. The noisy symbols are scattered around these reference points. The plot is titled "Noisy QPSK Constellation with Reference Symbols" and includes a legend with entries for "Noisy symbols", "Reference symbols", "Location", and "South".

```
title('Noisy QPSK Constellation with Reference Symbols');  
legend('Noisy symbols','Reference symbols','Location','South');
```

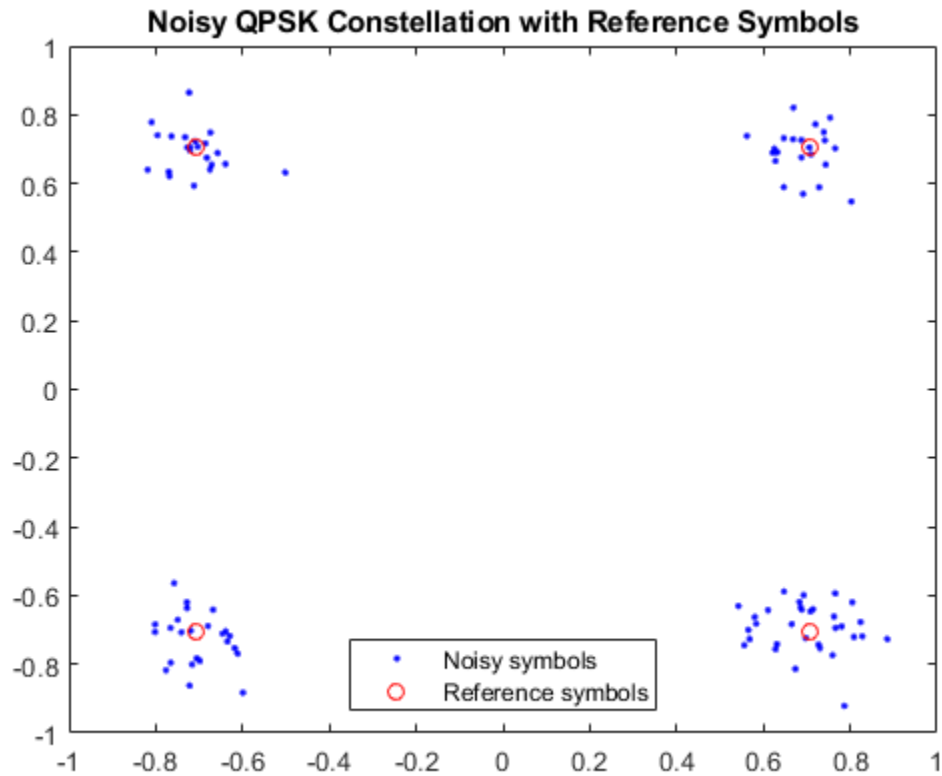

Find Reference Symbols with Counterclockwise Rotation

Find reference symbols for a chosen modulation scheme and counterclockwise rotation.

Reference Symbols for $\frac{\pi}{2}$ -BPSK

Specify a $\frac{\pi}{2}$ -BPSK modulation scheme and a counterclockwise rotation of $\frac{\pi}{6}$.


```
mod = 'pi/2-BPSK';
phase = pi/6;
```

Find the reference symbols for the chosen modulation and rotation.

```
refSym = wlanReferenceSymbols(mod,phase);
```

Display the reference symbols on a constellation diagram.

```
figure;  
plot(refSym,'b*');  
hold on;  
title('Reference Symbols for  $\frac{\pi}{2}$ -BPSK','Interpreter','latex');  
legend('Reference symbols');
```

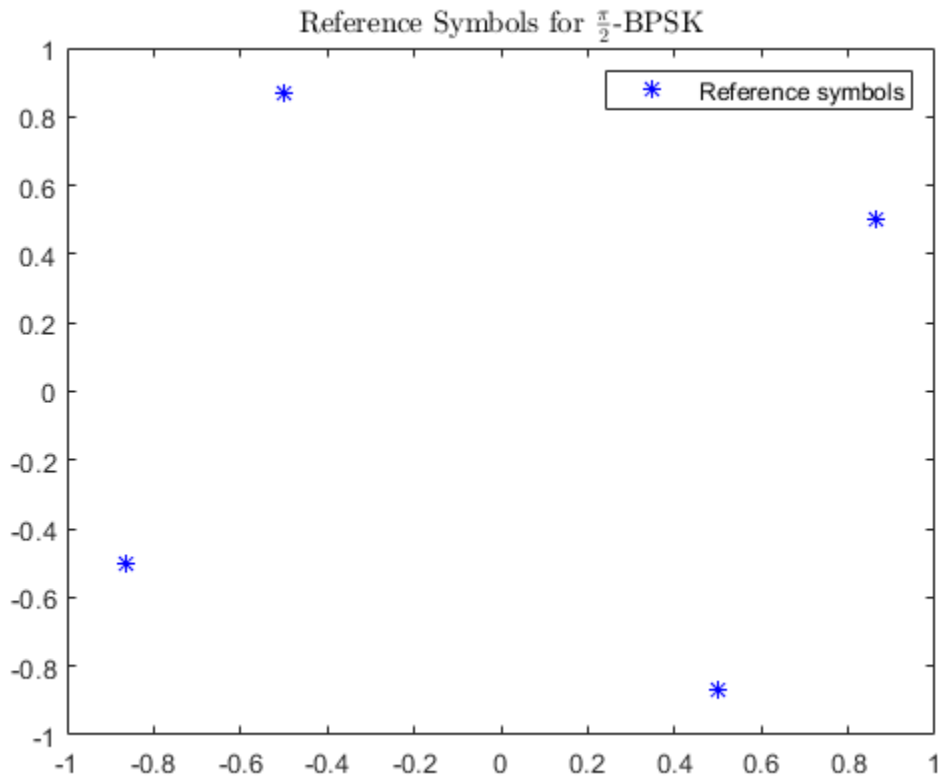

Reference Symbols for $\frac{\pi}{2}$ -16-QAM

Specify a $\frac{\pi}{2}$ -16-QAM modulation scheme and a counterclockwise rotation of $\frac{\pi}{3}$.


```
mod = 'pi/2-16QAM';  
phase = pi/3;
```

Find the reference symbols for the chosen modulation and rotation.

```
refSym = wlanReferenceSymbols(mod,phase);
```

Display the reference symbols on a constellation diagram.

```
figure;  
plot(refSym, 'b*');  
hold on;  
title('Reference Symbols for  $\frac{\pi}{2}$ -16-QAM', 'Interpreter', 'latex');  
legend('Reference symbols');
```

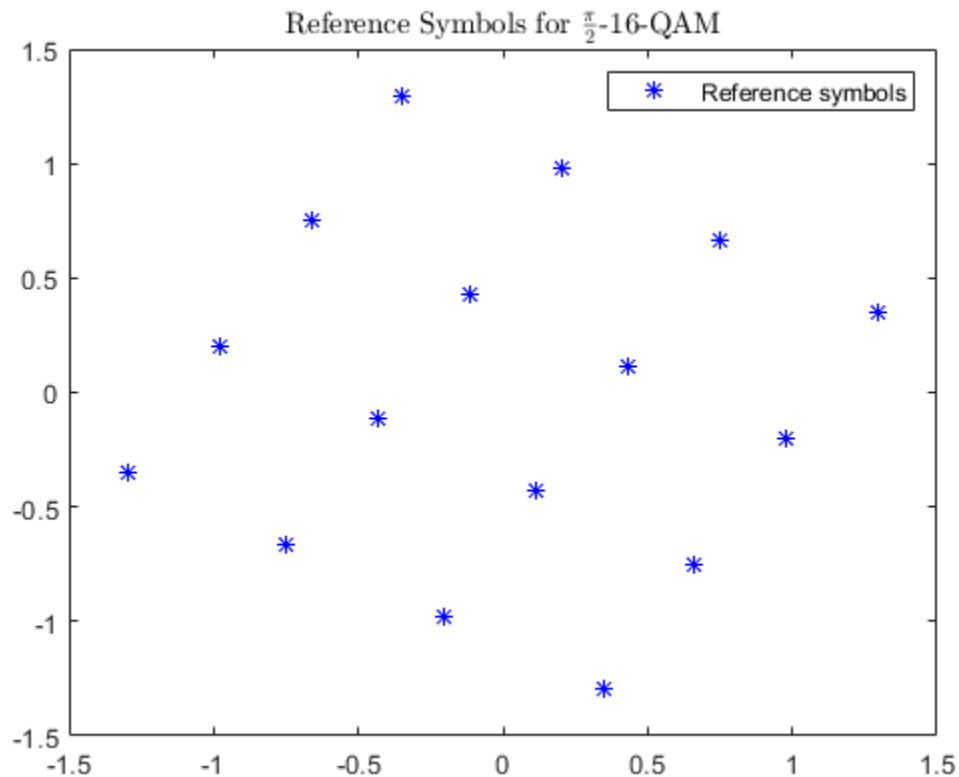

Plot Reference Constellation for User in VHT Configuration


Plot the reference constellation for a user in a very-high-throughput (VHT) multiuser configuration.

Create a VHT-format configuration object, setting channel bandwidth, number of users, group identifier, number of transmit antennas, number of space-time streams, and modulation and coding schemes.

```
cfg = wlanVHTConfig('ChannelBandwidth','CBW20','NumUsers',2,'GroupID',2, ...
    'NumTransmitAntennas',2,'NumSpaceTimeStreams',[1 1],'MCS',[8 4]);
```

Find the reference symbols for both users and plot the constellations.

```
refSym1 = wlanReferenceSymbols(cfg,1);  
refSym2 = wlanReferenceSymbols(cfg,2);  
figure;  
plot(refSym1,'b*'); hold on  
plot(refSym2,'ro');  
title('Reference Constellations for Both Users')  
legend('User 1','User 2','Location','bestoutside');
```

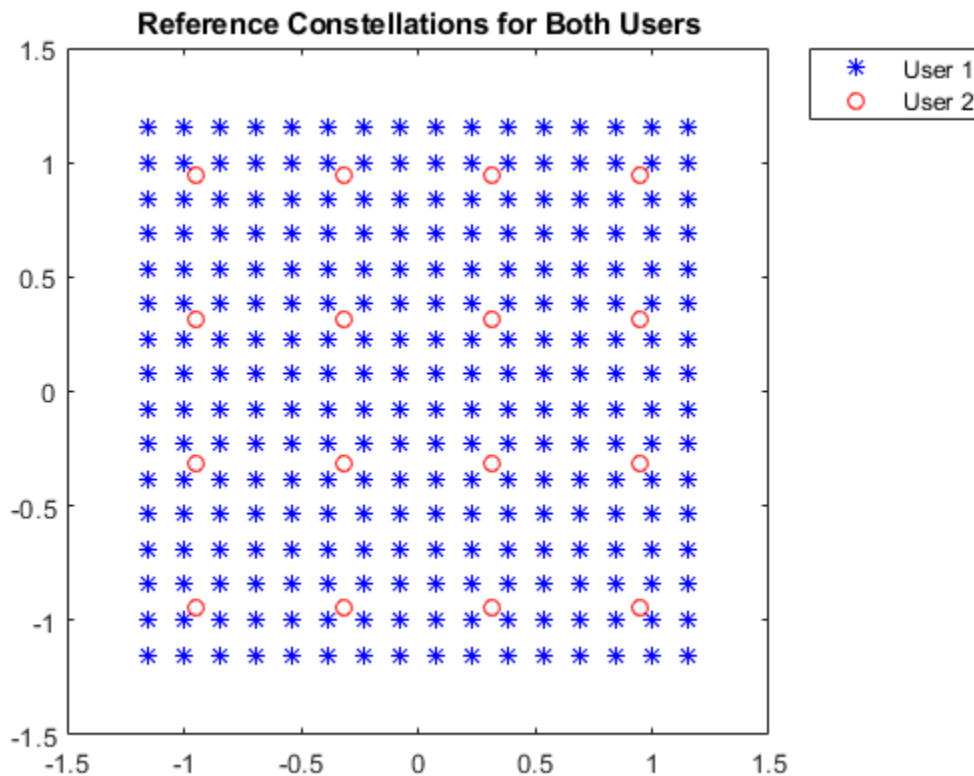

Input Arguments

mod — Modulation scheme

'BPSK' | 'pi/2-BPSK' | 'QPSK' | 'pi/2-QPSK' | '16QAM' | 'pi/2-16QAM' | '64QAM' | 'pi/2-64QAM' | '256QAM' | '1024QAM'

Modulation scheme, specified as one of these values:

- 'BPSK' - Indicates binary phase-shift keying (BPSK)
- 'pi/2-BPSK' - Indicates $\pi/2$ -BPSK
- 'QPSK' - Indicates quadrature phase-shift keying (QPSK)
- 'pi/2-QPSK' - Indicates $\pi/2$ -QPSK
- '16QAM' - Indicates 16-point quadrature amplitude modulation (16-QAM)
- 'pi/2-16QAM' - Indicates $\pi/2$ -16-QAM
- '64QAM' - Indicates 64-QAM
- 'pi/2-64QAM' - Indicates $\pi/2$ -64-QAM
- '256QAM' - Indicates 256-QAM
- '1024QAM' - Indicates 1024-QAM

Data Types: char | string

phase — Counterclockwise rotation

real-valued scalar (default) | real-valued row vector

Counterclockwise rotation, in radians, specified as a real-valued scalar or real-valued row vector. To return reference symbols for different phases, specify phase as a row vector in which each element represents a chosen phase.

Data Types: double

cfg — PHY format configuration

wlanHESUConfig object | wlanHEMUConfig object | wlanHERecoveryConfig object | wlanDMGConfig object | wlanSIGConfig object | wlanVHTConfig object | wlanHTConfig object | wlanNonHTConfig object

Physical layer (PHY) format configuration, specified as one of these objects: wlanHESUConfig, wlanHEMUConfig, wlanHERecoveryConfig, wlanDMGConfig, wlanSIGConfig, wlanVHTConfig, wlanHTConfig, or wlanNonHTConfig.

userNumber — Number assigned to user of interest

positive integer

Number assigned to user of interest, specified as a positive integer in the interval $[1, N_u]$, where N_u is the number users in the transmission.

This argument is required when you specify the `cfg` input as an object of type `wlanHEMUConfig`, `wlanS1GConfig`, or `wlanVHTConfig`.

If `cfg` is a `wlanHEMUConfig` object, N_u is equal to the number of elements in the value of its `User` property. If `cfg` is a `wlanS1GConfig` or `wlanVHTConfig` object, N_u is equal to the value of its `NumUsers`.

Dependencies

This argument applies only when the `cfg` input is an object of type `wlanHEMUConfig`, `wlanS1GConfig`, or `wlanVHTConfig`.

Data Types: `double`

Output Arguments

refSym — Reference symbols of constellation diagram

complex-valued column vector

Reference symbols of constellation diagram, returned as a complex-valued column vector.

Data Types: `double`

Complex Number Support: Yes

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`wlanClosestReferenceSymbol`

Objects

`comm.EVM`

Introduced in R2019a

packetFormat

Return WLAN packet format

Syntax

```
format = packetFormat(cfg)
```

Description

`format = packetFormat(cfg)` returns `format`, the WLAN packet format for the physical layer (PHY) format configuration specified in `cfg`.

Examples

Create WLAN S1G Configuration Object and Return Packet Format

Create an S1G configuration object with default property values.

```
cfgS1G = wlanS1GConfig;
```

Compute and display the packet format. The default properties specify a transmission with short preamble.

```
format = packetFormat(cfgS1G);  
disp(format)
```

S1G-Short

Now create an S1G configuration object, specifying a long preamble.

```
cfgS1GLongPreamble = wlanS1GConfig('Preamble', 'Long');
```

Compute and display the packet format.

```
format = packetFormat(cfgS1GLongPreamble);  
disp(format)
```

S1G-Long

Input Arguments

cfg — PHY format configuration

wlanS1GConfig object | wlanHESUConfig object | wlanHEMUConfig object

PHY format configuration, specified as a wlanS1GConfig, wlanHESUConfig, or wlanHEMUConfig object.

Output Arguments

format — WLAN packet format

character vector

WLAN packet format, returned as a character vector.

- When you specify the `cfg` input as a wlanS1GConfig object, the function returns 'S1G-1M', 'S1G-Short', or 'S1G-Long'.
- When you specify the `cfg` input as a wlanHESUConfig object, the function returns 'HE-EXT-SU' or 'HE-SU'.
- When you specify the `cfg` input as a wlanHEMUConfig object, the function returns 'HE-MU'.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHEMUConfig | wlanHESUConfig | wlanSIGConfig

Functions

getPSDULength | ruInfo | showAllocation | wlanWaveformGenerator

Introduced in R2017b

wlanS1GDemodulate

Demodulate fields of S1G waveform

Syntax

```
sym = wlanS1GDemodulate(rx,field,cfg)
sym = wlanS1GDemodulate(____,'OFDMSymbolOffset',symOffset)
```

Description

`sym = wlanS1GDemodulate(rx,field,cfg)` returns demodulated frequency-domain signal `sym` by performing orthogonal frequency-division multiplexing (OFDM) demodulation on received time-domain signal `rx`. The function performs demodulation for sub-1-GHz (S1G) configuration object `cfg` and uses parameters appropriate for the signal field specified in `field`.

`sym = wlanS1GDemodulate(____,'OFDMSymbolOffset',symOffset)` returns the frequency-domain signal for OFDM symbol sampling offset `symOffset`, specified as a fraction of the cyclic prefix length.

Examples

Demodulate S1G-SIG Field and Get OFDM Information

Perform OFDM demodulation on the S1G-SIG field and extract the data and pilot subcarriers.

Generate a WLAN waveform for an S1G transmission.

```
cfg = wlanS1GConfig;
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits,cfg);
```

Obtain the field indices and extract the S1G-SIG field.

```
ind = wlanFieldIndices(cfg);
rx = waveform(ind.S1GSIG(1):ind.S1GSIG(2),:);
```

Perform OFDM demodulation on the S1G-SIG field.

```
sym = wlanS1GDemodulate(rx, 'S1G-SIG', cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanS1GOFDMInfo('S1G-SIG', cfg);
data = sym(info.DataIndices, :, :);
pilots = sym(info.PilotIndices, :, :);
```

Demodulate S1G-Data field for OFDM Symbol Offset

Perform OFDM demodulation on the S1G-Data field for an OFDM symbol offset, specified as a fraction of the cyclic prefix length.

Generate a WLAN waveform for an S1G transmission with the specified modulation and coding scheme (MCS).

```
cfg = wlanS1GConfig('MCS', 7);
bits = [0; 0; 0; 1];
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the S1G-Data field.

```
ind = wlanFieldIndices(cfg);
rx = waveform(ind.S1GData(1):ind.S1GData(2),:);
```

Perform OFDM demodulation on the S1G-Data field, specifying an OFDM symbol offset of 0.

```
field = 'S1G-Data';
sym = wlanS1GDemodulate(rx, field, cfg, 'OFDMSymbolOffset', 0);
```

Input Arguments

rx — Received time-domain signal

complex-valued matrix

Received time-domain signal, specified as a complex-valued matrix. The size of this input must be N_S -by- N_R , where N_S is the number of time-domain samples and N_R is the number of receive antennas. If N_S is not an integer multiple of the OFDM symbol length, L_S , for the specified field, then the function ignores the remaining $\text{mod}(N_S, L_S)$ symbols.

Data Types: `double`

Complex Number Support: Yes

field — Field to be demodulated

'S1G-LTF1' | 'S1G-SIG' | 'S1G-LTF2N' | 'S1G-SIG-A' | 'S1G-SIG-B' | 'S1G-DLTF' | 'S1G-Data'

Field to be demodulated, specified as one of these values.

- 'S1G-LTF1' - Demodulate the first S1G long training field (S1G-LTF1).
- 'S1G-SIG' - Demodulate the S1G signaling (S1G-SIG) field.
- 'S1G-LTF2N' - Demodulate the subsequent S1G long training fields (S1G-LTF2N).
- 'S1G-SIG-A' - Demodulate the S1G signal A (S1G-SIG-A) field.
- 'S1G-SIG-B' - Demodulate the S1G signal B (S1G-SIG-B) field.
- 'S1G-Data' - Demodulate the S1G-Data field.

Data Types: `char` | `string`

cfg — PHY format configuration

`wlanS1GConfig` object


Physical layer (PHY) format configuration, specified as a `wlanS1GConfig` object.

symOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset, as a fraction of the cyclic prefix length, specified as a scalar in the interval [0, 1].

The value that you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix.

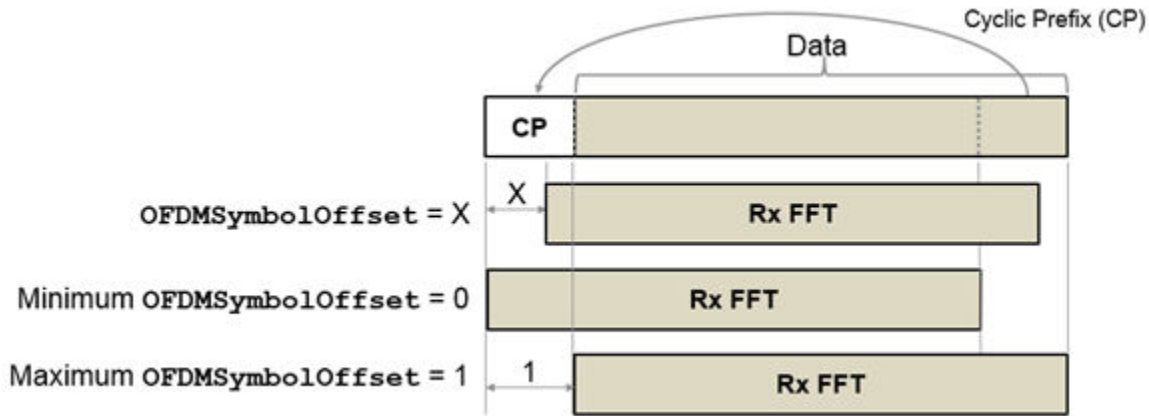

Example: `'OFDMSymbolOffset', 0.45`

Data Types: double

Output Arguments

sym — Demodulated frequency-domain signal

complex-valued array

Demodulated frequency-domain signal, returned as a complex-valued array of size `sym` is N_{SC} -by- N_{sym} -by- N_R , where:

- N_{SC} is the number of active occupied subcarriers in the demodulated field.
- N_{sym} is the number of OFDM symbols.
- N_R is the number of receive antennas.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanDMGOFDMDemodulate | wlanHEDemodulate | wlanSIGOFDMInfo

Objects

wlanSIGConfig

Introduced in R2019a

wlanS1GOFDMInfo

Get OFDM Information for S1G transmission

Syntax

```
info = wlanS1GOFDMInfo(field,cfg)
```

Description

`info = wlanS1GOFDMInfo(field,cfg)` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the input field of a sub-1-GHz (S1G) transmission parameterized by configuration object `cfg`.

Examples

Get OFDM Information for S1G-Data Field

Get OFDM information for the S1G-Data field in a transmission with specified channel bandwidth.

Create a WLAN S1G format configuration object, specifying the channel bandwidth.

```
cfg = wlanS1GConfig('ChannelBandwidth','CBW1');
```

Return and display the OFDM information for the S1G-Data field.

```
info = wlanS1GOFDMInfo('S1G-Data',cfg);  
disp(info)
```

```
          FFTLength: 32  
          CPLength: 8  
    NumSubchannels: 1  
          NumTones: 26  
ActiveFrequencyIndices: [26x1 double]  
    ActiveFFTIndices: [26x1 double]
```

```
DataIndices: [24x1 double]
PilotIndices: [2x1 double]
```

Demodulate S1G-SIG Field and Get OFDM Information

Perform OFDM demodulation on the S1G-SIG field and extract the data and pilot subcarriers.

Generate a WLAN waveform for an S1G transmission.

```
cfg = wlanS1GConfig;
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits, cfg);
```

Obtain the field indices and extract the S1G-SIG field.

```
ind = wlanFieldIndices(cfg);
rx = waveform(ind.S1GSIG(1):ind.S1GSIG(2), :);
```

Perform OFDM demodulation on the S1G-SIG field.

```
sym = wlanS1GDemodulate(rx, 'S1G-SIG', cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanS1GOFDMInfo('S1G-SIG', cfg);
data = sym(info.DataIndices, :, :);
pilots = sym(info.PilotIndices, :, :);
```

Input Arguments

field — Field for which to return OFDM information

'S1G-LTF1' | 'S1G-SIG' | 'S1G-LTF2N' | 'S1G-SIG-A' | 'S1G-SIG-B' | 'S1G-DLTF' | 'S1G-Data'

Field for which to return OFDM information, specified as one of these values.

- 'S1G-LTF1' - Return OFDM information for the first S1G long training field (S1G-LTF1).

- 'S1G-SIG' - Return OFDM information for the S1G signaling (S1G-SIG) field.
- 'S1G-LTF2N' - Return OFDM information for the subsequent S1G long training fields (S1G-LTF2N).
- 'S1G-SIG-A' - Return OFDM information for the S1G signal A (S1G-SIG-A) field.
- 'S1G-SIG-B' - Return OFDM information for the S1G signal B (S1G-SIG-B) field.
- 'S1G-DLTF' - Return OFDM information for the S1G beamformed LTF (D-LTF).
- 'S1G-Data' - Return OFDM information for the S1G-Data field.

Data Types: char | string

cfg — PHY format configuration

wlanS1GConfig object

Physical layer (PHY) format configuration, specified as a wlanS1GConfig object.

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLength	Positive integer	Cyclic prefix length, in samples	double
NumTones	Nonnnegative integer	Number of active subcarriers	double

Name	Values	Description	Data Types
NumSubchannels	Positive integer	Number of 20-MHz subchannels. The <code>wlanS1GOFDMInfo</code> function always returns this field as 1 when the packet format defined by the <code>cfg</code> input is 'S1G-1M', indicating a single 1-MHz subchannel. For all other packet formats, the subchannel bandwidth is 2 MHz.	double
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double

Name	Values	Description	Data Types
PilotIndices	Column vector of integers in the interval [1, NumTones]	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanSIGDemodulate

Objects

wlanSIGConfig

Introduced in R2019a

wlanSampleRate

Return nominal sample rate

Syntax

```
fs = wlanSampleRate(cfgFormat)
```

Description

`fs = wlanSampleRate(cfgFormat)` returns `fs`, the nominal sample rate for specified format configuration object `cfgFormat`.

Examples

Sample Rate for VHT format

Get the sample rate for a very-high-throughput-format (VHT-format) configuration in samples per second.

```
cfgVHT = wlanVHTConfig;  
fs = wlanSampleRate(cfgVHT);  
disp(fs)
```

```
80000000
```

Input Arguments

cfgFormat — Packet format configuration

wlanHESUConfig object | wlanHEMUConfig object | wlanHERRecoveryConfig object | wlanDMGConfig object | wlanSIGConfig object | wlanVHTConfig object | wlanHTConfig object | wlanNonHTConfig object

Packet format configuration, specified as one of these configuration objects: wlanHESUConfig, wlanHEMUConfig, wlanHERecoveryConfig, wlanDMGConfig, wlanSIGConfig, wlanVHTConfig, wlanHTConfig, or wlanNonHTConfig. The cfgFormat input determines the nominal sample rate.

Output Arguments

fs — Sample rate

scalar

Sample rate, in samples per second, returned as a scalar.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHERecoveryConfig | wlanHESUConfig | wlanHTConfig | wlanNonHTConfig | wlanSIGConfig | wlanVHTConfig

Introduced in R2017b

wlanScramble

Scramble and descramble binary input sequence

Syntax

```
y = wlanScramble(bits,scramInit)
```

Description

`y = wlanScramble(bits,scramInit)` scrambles or descrambles the binary input `bits` for the specified initial scramble state, using a 127-length frame-synchronous scrambler. The frame-synchronous scrambler uses the generator polynomial defined in IEEE 802.11-2012, Section 18.3.5.5 and IEEE 802.11ad-2012, Section 21.3.9. The same scrambler is used to scramble bits at the transmitter and descramble bits at the receiver.

Examples

Scramble and Descramble bits

Create the scrambler initialization and the input sequence of random bits.

```
scramInit = 93;  
bits = randi([0,1],1000,1);
```

Scramble and descramble the bits by using the scrambler initialization.

```
scrambledData = wlanScramble(bits,scramInit);  
descrambledData = wlanScramble(scrambledData,scramInit);
```

Verify that the descrambled data matches the original data.

```
isequal(bits,descrambledData)
```

```
ans = logical  
    1
```

Input Arguments

bits — Input sequence

column vector | matrix

Input sequence to be scrambled, specified as a binary column vector or matrix.


Data Types: `double` | `int8`

scramInit — Initial state of scrambler

integer from 1 to 127 | 7-by-1 binary column vector

Initial state of the scrambler, specified as an integer from 1 to 127, or a corresponding 7-by-1 column vector of binary bits.

The scrambler initialization used on the transmission data follows the process described in IEEE Std 802.11-2012, Section 18.3.5.5 and IEEE Std 802.11ad-2012, Section 21.3.9. The header and data fields that follow the scrambler initialization field (including data padding bits) are scrambled by XORing each bit with a length-127 periodic sequence generated by the polynomial $S(x) = x^7 + x^4 + 1$. The octets of the PSDU (Physical Layer Service Data Unit) are placed into a bit stream, and within each octet, bit 0 (LSB) is first and bit 7 (MSB) is last. The generation of the sequence and the XOR operation are shown in this figure:

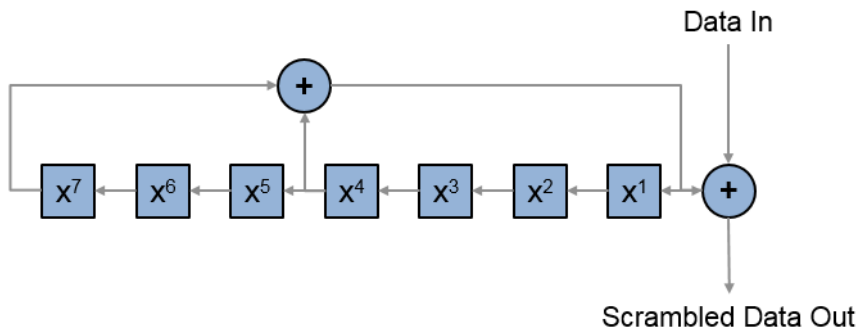

Conversion from integer to bits uses left-MSB orientation. For the initialization of the scrambler with decimal 1, the bits are mapped to the elements shown.

Element	X^7	X^6	X^5	X^4	X^3	X^2	X^1
Bit Value	0	0	0	0	0	0	1

To generate the bit stream equivalent to a decimal, use `de2bi`. For example, for decimal 1:

```
de2bi(1,7,'left-msb')
ans =
```

0 0 0 0 0 0 1

Same `scramInit` is applied across all the columns of bits when the input is a matrix.

Example: `[0 0 0 0 0 0 1]'`

Data Types: double

Output Arguments

y — Scrambled or descrambled output

column vector | matrix

Scrambled or descrambled output, returned as a binary column vector or matrix with the same size and type as bits.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`comm.Descrambler` | `comm.Scrambler` | `wlanWaveformGenerator`

Introduced in R2017b

wlanSegmentDeparseBits

Segment-deparse data bits

Syntax

```
y = wlanSegmentDeparseBits(bits,cbw,numES,numCBPS,numBPSCS)
```

Description

`y = wlanSegmentDeparseBits(bits,cbw,numES,numCBPS,numBPSCS)` performs the inverse operation of the segment parsing defined in IEEE 802.11ac-2013 Section 22.3.10.7 when `cbw` is 'CBW16' or 'CBW160'.

Note Segment deparsing of the bits applies only when the channel bandwidth is either 16 MHz or 160 MHz, and is bypassed for the remaining channel bandwidths (as stated in the aforementioned section of IEEE802.11ac-2013). Therefore, when `cbw` is any accepted value other than 'CBW16' or 'CBW160', `wlanSegmentParseBits` returns the input unchanged.

Examples

Segment-Deparse Coded Bits in Two OFDM Symbols

Segment-deparse the coded bits for a VHT configuration (with a channel bandwidth of 160 MHz and three spatial streams) into two OFDM symbols.

Define the input parameters. Set the channel bandwidth to 160 MHz, the number of coded bits per OFDM symbol to 2808, the number of spatial streams to 3, the number of encoded streams to 1, the number of coded bits per subcarrier per spatial stream to 2, and the number of OFDM symbols to 2. Calculate the number of coded bits per OFDM symbol per spatial stream by dividing the number of coded bits per OFDM symbol by the number of spatial streams.

```

chanBW = 'CBW160';
numCBPS = 2808;
numSS = 3;
numES = 1;
numBPSCS = 2;
numSym = 2;
numCBPSS = numCBPS/numSS;

```

Create the input sequence of bits.

```
bits = randi([0 1],numCBPSS*numSym,numSS);
```

Perform segment parsing on the bits.

```
parsedBits = wlanSegmentParseBits(bits,chanBW,numES,numCBPS,numBPSCS);
size(parsedBits)
```

```
ans = 1×3
```

```
    936     3     2
```

Perform segment deparsing on the parsed bits.

```
deparsedBits = wlanSegmentDeparseBits(parsedBits,chanBW,numES,numCBPS,numBPSCS);
size(deparsedBits)
```

```
ans = 1×2
```

```
    1872     3
```

Verify that the deparsed data matches the original data.

```
isequal(bits,deparsedBits)
```

```
ans = logical
```

```
    1
```

Input Arguments

bits — Input sequence

matrix | 3-D array

Input sequence of deinterleaved bits, specified as an $(N_{\text{CBPSSI}} \times N_{\text{SYM}})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
- N_{SEG} is the number of segments. When `cbw` is 'CBW16' or 'CBW160', N_{SEG} must be 2. Otherwise it must be 1.

Data Types: double | int8

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Example: 'CBW160'

Data Types: char | string

numES — Number of encoded streams

1 to 9 | 12

Number of encoded streams, specified as an integer from 1 to 9, or 12.

Data Types: double

numCBPS — Number of coded bits per OFDM symbol

positive integer

Number of coded bits per OFDM symbol, specified as a positive integer. When `cbw` is 'CBW16' or 'CBW160', `numCBPS` must be an integer equal to $468 \times N_{\text{BPSCS}} \times N_{\text{SS}}$, where:

- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream.

- N_{SS} is the number of spatial streams. It accounts for the number of columns (second dimension) of the input bits.

Data Types: double

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8

Number of coded bits per subcarrier per spatial stream, specified as $\log_2(M)$, where M is the modulation order. Therefore, numBPSCS must equal:

- 1 for a BPSK modulation
- 2 for a QPSK modulation
- 4 for a 16QAM modulation
- 6 for a 64QAM modulation
- 8 for a 256QAM modulation

Data Types: double

Output Arguments

y — Merged segments of data

matrix

Merged segments of data, specified as an $(N_{CBPSS} \times N_{SYM})$ -by- N_{SS} matrix, where:

- N_{CBPSS} is the number of coded bits per OFDM symbol per spatial stream.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanSegmentParseBits

Introduced in R2017b

wlanSegmentDeparseSymbols

Segment-deparse data subcarriers

Syntax

```
y = wlanSegmentDeparseSymbols(sym,cbw)
```

Description

`y = wlanSegmentDeparseSymbols(sym,cbw)` performs segment deparsing on the input `sym` as per IEEE 802.11ac-2013, Section 22.3.10.9.3, when `cbw` is 'CBW16' or 'CBW160'.

Note Segment deparsing of the data subcarriers applies only when the channel bandwidth is either 16 MHz or 160 MHz, and is bypassed for the remaining channel bandwidths (as stated in the aforementioned section of IEEE802.11ac-2013). Therefore, when `cbw` is any accepted value other than 'CBW16' or 'CBW160', `wlanSegmentDeparseSymbols` returns the input unchanged.

Examples

Segment-Deparse Symbols

Segment-deparse the symbols in four OFDM symbols for a VHT configuration with a channel bandwidth of 16 MHz and 3 spatial streams.

Define the input parameters. Since the channel bandwidth is 16 MHz, set the number of data subcarriers to 468 and the number of frequency segments to two.

```
chanBW = 'CBW16';  
numSD = 468;  
numSym = 4;
```

```
numSS = 3;  
numSeg = 2;
```

Create the input sequence of symbols.

```
data = randi([0 1], numSD/numSeg, numSym, numSS, numSeg);
```

Segment-deparse the symbols into data subcarriers. The first dimension of the parsed output accounts for the total number of data subcarriers.

```
deparsedData = wlanSegmentDeparseSymbols(data, chanBW);  
size(deparsedData)
```

```
ans = 1×3
```

```
    468     4     3
```

Get Symbol Order for a VHT Configuration

Get the symbol order after stream deparsing a sequence for a VHT configuration with a channel bandwidth of 160 MHz and one spatial stream.

Define the input parameters. Since the channel bandwidth is 160 MHz, set the number of data subcarriers to 468 and the number of frequency segments to two.

```
chanBW = 'CBW160';  
numSD = 468;  
numSym = 1;  
numSS = 1;  
numSeg = 2;
```

Create the input sequence of symbols.

```
sequence = (1:numSD*numSym*numSS).';  
inp = reshape(sequence, numSD/numSeg, numSym, numSS, numSeg);
```

Segment-deparse the symbols. The output is a column vector with the sequence order of the symbols.

```
deparsedData = wlanSegmentDeparseSymbols(inp, chanBW);  
deparsedData(1:10)
```



```
ans = 10x1
```

```

1
2
3
4
5
6
7
8
9
10
```

Input Arguments

sym — Input sequence

4-D array

Input sequence of frequency segments to deparse, specified as an (N_{SD}/N_{SEG}) -by- N_{SYM} -by- N_{SS} -by- N_{SEG} array, where:

- N_{SD} is the number of data subcarriers.
- N_{SEG} is the number of segments. When `cbw` is 'CBW16' or 'CBW160', N_{SEG} is 2. Otherwise it is 1.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Data Types: double

Complex Number Support: Yes

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Example: 'CBW160'

Data Types: `char` | `string`

Output Arguments

y — Deparsed frequency segments

3-D array

Deparsed frequency segments, specified as an N_{SD} -by- N_{SYM} -by- N_{SS} array, where:

- N_{SD} is the number of data subcarriers.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanSegmentParseSymbols`

Introduced in R2017b

wlanSegmentParseBits

Segment-parse data bits

Syntax

```
y = wlanSegmentParseBits(bits,cbw,numES,numCBPS,numBPSCS)
```

Description

`y = wlanSegmentParseBits(bits,cbw,numES,numCBPS,numBPSCS)` performs segment parsing on the input `bits` as per IEEE 802.11ac-2013, Section 22.3.10.7, when `cbw` is 'CBW16' or 'CBW160'.

Note Segment parsing of the bits applies only when the channel bandwidth is either 16 MHz or 160 MHz, and is bypassed for the remaining channel bandwidths (as stated in the aforementioned section of IEEE802.11ac-2013). Therefore, when `cbw` is any accepted value other than 'CBW16' or 'CBW160', `wlanSegmentParseBits` returns the input unchanged.

Examples

Segment-Parse Bits in Two OFDM Symbols

Segment-parse coded bits for a VHT configuration (with a channel bandwidth of 160 MHz and three spatial streams) into two OFDM symbols.

Define the input parameters. Set the channel bandwidth to 160 MHz, the number of coded bits per OFDM symbol to 2808, the number of spatial streams to 3, the number of encoded streams to 1, the number of coded bits per subcarrier per spatial stream to 2, and the number of OFDM symbols to 2. Calculate the number of coded bits per OFDM symbol per spatial stream by dividing the number of coded bits per OFDM symbol by the number of spatial streams.

```
chanBW = 'CBW160';
numCBPS = 2808;
numSS = 3;
numES = 1;
numBPSCS = 2;
numSym = 2;
numCBPSS = numCBPS/numSS;
```

Create the input sequence of bits.

```
bits = randi([0 1],numCBPSS*numSym,numSS,'int8');
```

Perform segment parsing on the bits.

```
parsedBits = wlanSegmentParseBits(bits,chanBW,numES,numCBPS,numBPSCS);
```

The parsed sequence is a three-dimensional array of bits.

```
size(parsedBits)
```

```
ans = 1×3
```

```
    936     3     2
```

```
parsedBits(1:5, :, :)
```

```
ans = 5×3×2 int8 array
```

```
ans(:, :, 1) =
```

```
    1     0     1
    0     1     1
    1     0     1
    0     0     0
    1     0     1
```

```
ans(:, :, 2) =
```

```
    1     1     1
    1     1     1
    0     0     1
    1     1     0
    1     0     0
```

Get Bit Order of OFDM Symbol

Get the bit order after the segment parsing of an OFDM symbol of an S1G configuration with a channel bandwidth of 16 MHz, and two spatial streams.

Define the input parameters. Set the channel bandwidth to 16 MHz, the number of coded bits per OFDM symbol to 1872, the number of spatial streams to 2, the number of encoded streams to 1, the number of coded bits per subcarrier per spatial stream to 2 and the number of OFDM symbols to 2. Calculate the number of coded bits per OFDM symbol per spatial stream by dividing the number of coded bits per OFDM symbol by the number of spatial streams.

```
chanBW = 'CBW16';
numCBPS = 1872;
numSS = 2;
numES = 1;
numBPSCS = 2;
numSym = 1;
numCBPSS = numCBPS/numSS;
```

Create the input sequence.

```
sequence = (1:numCBPS*numSym).';
inp = reshape(sequence,numCBPSS*numSym,numSS);
```

Perform segment parsing on the sequence.

```
parsedSequence = wlanSegmentParseBits(inp,chanBW,numES,numCBPS,numBPSCS);
```

The parsed sequence is a three-dimensional array containing the corresponding bit order.

```
size(parsedSequence)
```

```
ans = 1×3
```

```
468    2    2
```

Input Arguments

bits — Input sequence

matrix

Input sequence of stream-parsed bits, specified as an $(N_{\text{CBPSS}} \times N_{\text{SYM}})$ -by- N_{SS} matrix, where:

- N_{CBPSS} is the number of coded bits per OFDM symbol per spatial stream.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Data Types: double | int8

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Example: 'CBW160'

Data Types: char | string

numES — Number of encoded streams

1 to 9 | 12

Number of encoded streams, specified as an integer from 1 to 9, or 12.

Data Types: double

numCBPS — Number of coded bits per OFDM symbol

positive integer

Number of coded bits per OFDM symbol, specified as a positive integer. When `cbw` is 'CBW16' or 'CBW160', `numCBPS` must be an integer equal to $468 \times N_{\text{BPSCS}} \times N_{\text{SS}}$, where:

- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream.
- N_{SS} is the number of spatial streams. It accounts for the number of columns (second dimension) of the input bits.

Data Types: double

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8

Number of coded bits per subcarrier per spatial stream, specified as $\log_2(M)$, where M is the modulation order. Therefore, numBPSCS must equal:

- 1 for a BPSK modulation
- 2 for a QPSK modulation
- 4 for a 16QAM modulation
- 6 for a 64QAM modulation
- 8 for a 256QAM modulation

Data Types: double

Output Arguments

y — Segment-parsed bits

matrix | 3-D array

Segment-parsed bits, specified as an $(N_{\text{CBPSSI}} \times N_{\text{SYM}})$ -by- N_{SS} -by- N_{SEG} array, where:

- N_{CBPSSI} is the number of coded bits per OFDM symbol per spatial stream per interleaver block.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.
- N_{SEG} is the number of segments. When `cbw` is 'CBW16' or 'CBW160', N_{SEG} is 2. Otherwise it is 1.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanSegmentDeparseBits

Introduced in R2017b

wlanSegmentParseSymbols

Segment-parse data subcarriers

Syntax

```
y = wlanSegmentParseSymbols(sym,cbw)
```

Description

`y = wlanSegmentParseSymbols(sym,cbw)` performs the inverse operation of the segment deparing on the input `sym` defined in IEEE 802.11ac-2013, Section 22.3.10.9.3, when `cbw` is 'CBW16' or 'CBW160'.

Note Segment parsing of the data subcarriers applies only when the channel bandwidth is either 16 MHz or 160 MHz, and is bypassed for the remaining channel bandwidths (as stated in the aforementioned section of IEEE802.11ac-2013). Therefore, when `cbw` is any accepted value other than 'CBW16' or 'CBW160', `wlanSegmentParseSymbols` returns the input unchanged.

Examples

Segment-Parse Symbols

Segment-deparse and segment-parse the symbols in four OFDM symbols for a VHT configuration with a channel bandwidth of 160 MHz and two spatial streams.

Define the input parameters. Since the channel bandwidth is 160 MHz, set the number of data subcarriers to 468 and the number of frequency segments to two.

```
chanBW = 'CBW160';  
numSD = 468;  
numSym = 4;
```

```
numSS = 2;  
numSeg = 2;
```

Create the input sequence of symbols.

```
data = randi([0 1], numSD/numSeg, numSym, numSS, numSeg);
```

Segment-deparse the symbols into data subcarriers. The first dimension of the parsed output accounts for the total number of data subcarriers.

```
deparsedData = wlanSegmentDeparseSymbols(data, chanBW);  
size(deparsedData)
```

```
ans = 1×3
```

```
468    4    2
```

Segment-parse the symbols into data subcarriers. The size of the output is equal to the size of the original sequence.

```
segments = wlanSegmentParseSymbols(deparsedData, chanBW);  
size(segments)
```

```
ans = 1×4
```

```
234    4    2    2
```

Input Arguments

sym — Input sequence

3-D array

Input sequence of equalized data to be segmented, specified as an N_{SD} -by- N_{SYM} -by- N_{SS} array, where:

- N_{SD} is the number of data subcarriers.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Data Types: double

Complex Number Support: Yes

cbw — Channel bandwidth

'CBW1' | 'CBW2' | 'CBW4' | 'CBW8' | 'CBW16' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', 'CBW16', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Example: 'CBW160'

Data Types: char | string

Output Arguments

y — Frequency segments

4-D array

Frequency segments, specified as an (N_{SD}/N_{SEG}) -by- N_{SYM} -by- N_{SS} -by- N_{SEG} array, where:

- N_{SD} is the number of data subcarriers.
- N_{SEG} is the number of segments. When `cbw` is 'CBW16' or 'CBW160', N_{SEG} is 2. Otherwise it is 1.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanSegmentDeparseSymbols

Introduced in R2017b

wlanStreamDeparse

Stream-deparse binary input

Syntax

```
y = wlanStreamDeparse(bits,numES,numCBPS,numBPSCS)
```

Description

`y = wlanStreamDeparse(bits,numES,numCBPS,numBPSCS)` deparses the spatial streams specified in `bits` to form encoded streams. This operation is the inverse of the one defined in IEEE 802.11-2012 Section 20.3.11.8.2 and IEEE 802.11ac-2013 Section 22.3.10.6.

Examples

Stream-Deparse Input Bits

Stream-deparse five OFDM symbols with two spatial streams into one encoded stream.

Define the input parameters. Set the number of coded bits per OFDM symbol to 432, the number of coded bits per subcarrier per spatial stream to 2, the number of encoded streams to 1, the number of spatial streams to 2 and the number of OFDM symbols to 5.

```
numCBPS = 432;  
numBPSCS = 2;  
numES = 1;  
numSS = 2;  
numSym = 5;
```

Create a parsed input of hard bits.

```
parsed = randi([0 1],numCBPS/numSS*numSym,numSS)  
parsed = 1080×2
```

```
1    0
1    1
0    1
1    1
1    1
0    1
0    1
1    0
1    1
1    1
:
```

Stream-deparse the bits.

```
deparsed = wlanStreamDeparse(parsed, numES, numCBPS, numBPSCS)
```

```
deparsed = 2160x1
```

```
1
0
1
1
0
1
1
1
1
1
:
```

Input Arguments

bits — Input sequence

matrix

Input sequence of stream-parsed data, specified as a $(N_{\text{CBPSS}} \times N_{\text{SYM}})$ -by- N_{SS} matrix, where:

- N_{CBPSS} is the number of coded bits per OFDM symbol per spatial stream.
- N_{SYM} is the number of OFDM symbols.

- N_{SS} is the number of spatial streams.

Data Types: double | int8

numES — Number of encoded streams

integer from 1 to 9, 12

Number of encoded streams, specified as a integer from 1 to 9, or 12.

Data Types: double

numCBPS — Number of coded bits per OFDM symbol

positive integer

Number of coded bits per OFDM symbol, specified as an integer equal to $(N_{BPSCS} \times N_{SS} \times N_{SD})$, where:

- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream. See numBPSCS.
- N_{SS} is the number of spatial streams.
- N_{SD} is the number of complex data numbers per frequency segment, specified as 24, 52, 108, 234, or 468.

Data Types: double

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8

Number of coded bits per subcarrier per spatial stream, specified as 1, 2, 4, 6, or 8.

Data Types: double

Output Arguments

y — Stream-deparsed output

matrix

Stream-deparsed output data, returned as an $(N_{CBPS} \times N_{SYM})$ -by- N_{ES} matrix, where:

- N_{CBPS} is the number of coded bits per OFDM symbol.
- N_{SYM} is the number of OFDM symbols.

- N_{ES} is the number of encoded streams.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanStreamParse`

Introduced in R2017b

wlanStreamParse

Stream-parse binary input

Syntax

```
y = wlanStreamParse(bits,numSS,numCBPS,numBPSCS)
```

Description

`y = wlanStreamParse(bits,numSS,numCBPS,numBPSCS)` parses the encoded bits into spatial streams, as defined in IEEE 802.11-2012 Section 20.3.11.8.2 and IEEE 802.11ac-2013 Section 22.3.10.6.

Examples

Stream-Parse Input Bits

Stream-parse three OFDM symbols with two encoded streams into five spatial streams.

Define the input parameters. Set the number of coded bits per OFDM symbol to 3240, the number of coded bits per subcarrier per spatial stream to 6, the number of encoded streams to 2, the number of spatial streams to 5 and the number of OFDM symbols to 3.

```
numCBPS = 3240;  
numBPSCS = 6;  
numES = 2;  
numSS = 5;  
numSym = 3;
```

Create a random sequence of bits.

```
bits = randi([0 1],numCBPS*numSym/numES,numES,'int8');
```

Stream-parse the random bits.

```
parsedData = wlanStreamParse(bits,numSS,numCBPS,numBPSCS);
```

Verify the size of the parsed bits.

```
size(parsedData)
```

```
ans = 1×2
```

```
1944
```

```
5
```

Get Bit Order After Stream Parsing

Get the bit order of an OFDM symbol after stream-parsing it from one encoded stream into three spatial streams.

Define the input parameters. Set the number of coded bits per OFDM symbol to 156, the number of coded bits per subcarrier per spatial stream to 1, the number of encoded streams to 1, the number of spatial streams to 3 and the number of OFDM symbols to 1.

```
numCBPS = 156;
```

```
numBPSCS = 1;
```

```
numES = 1;
```

```
numSS = 3;
```

```
numSym = 1;
```

Create an input sequence of ordered symbols with the proper dimensions.

```
sequence = (1:numCBPS*numSym).';
```

```
inp = reshape(sequence,numCBPS*numSym/numES,numES)
```

```
inp = 156×1
```

```
1
```

```
2
```

```
3
```

```
4
```

```
5
```

```
6
```

```
7
```

```
8
```

```
9
```

```

10
  ⋮

```

Stream-parse the symbols.

```
parsedData = wlanStreamParse(inp, numSS, numCBPS, numBPSCS)
```

```
parsedData = 52×3
```

```

  1     2     3
  4     5     6
  7     8     9
 10    11    12
 13    14    15
 16    17    18
 19    20    21
 22    23    24
 25    26    27
 28    29    30
  ⋮

```

Input Arguments

bits — Input sequence

matrix

Input sequence of encoded bits, specified as a $(N_{\text{CBPS}} \times N_{\text{SYM}} / N_{\text{ES}})$ -by- N_{ES} matrix, where:

- N_{CBPS} is the number of coded bits per OFDM symbol.
- N_{SYM} is the number of OFDM symbols.
- N_{ES} is the number of encoded streams.

Data Types: double | int8

numSS — Number of spatial streams

integer from 1 to 8

Number of spatial streams (N_{SS}), specified as an integer from 1 to 8.

Data Types: double

numCBPS — Number of coded bits per OFDM symbol

positive integer

Number of coded bits per OFDM symbol, specified as an integer equal to $(N_{\text{BPSCS}} \times N_{\text{SS}} \times N_{\text{SD}})$, where:

- N_{BPSCS} is the number of coded bits per subcarrier per spatial stream. See numBPSCS.
- N_{SS} is the number of spatial streams.
- N_{SD} is the number of complex data numbers per frequency segment, specified as 24, 52, 108, 234, or 468.

Data Types: double

numBPSCS — Number of coded bits per subcarrier per spatial stream

1 | 2 | 4 | 6 | 8

Number of coded bits per subcarrier per spatial stream, specified as 1, 2, 4, 6, or 8.

Data Types: double

Output Arguments

y — Stream-parsed output

matrix

Stream-parsed output data, returned as an $(N_{\text{CBPSS}} \times N_{\text{SYM}})$ -by- N_{SS} matrix, where:

- N_{CBPSS} is the number of coded bits per OFDM symbol per spatial stream.
- N_{SYM} is the number of OFDM symbols.
- N_{SS} is the number of spatial streams.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanStreamDeparse

Introduced in R2017b

wlanSymbolTimingEstimate

Fine symbol timing estimate using L-LTF

Syntax

```
startOffset = wlanSymbolTimingEstimate(rxSig,cbw)
startOffset = wlanSymbolTimingEstimate(rxSig,cbw,threshold)
[startOffset,M] = wlanSymbolTimingEstimate( ___ )
```

Description

`startOffset = wlanSymbolTimingEstimate(rxSig,cbw)` returns the offset from the start of the input waveform to the estimated start of the “L-STF” on page 2-449²⁰.

`startOffset = wlanSymbolTimingEstimate(rxSig,cbw,threshold)` specifies the threshold that the decision metric must meet or exceed to obtain a symbol timing estimate.

`[startOffset,M] = wlanSymbolTimingEstimate(___)` also returns the decision metric of the symbol timing algorithm for the received time-domain waveform, using any of the input arguments in the previous syntaxes.

Examples

Detect HT Packet and Estimate Symbol Timing

Detect a received 802.11n™ packet and estimate its symbol timing at 20 dB SNR.

Create an HT format configuration object and TGn channel configuration object.

```
cfgHT = wlanHTConfig;
tgn = wlanTGnChannel;
```

20. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Generate a transmit waveform and add a delay at the start of the waveform.

```
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgHT);
txWaveform = [zeros(100,1);txWaveform];
```

Pass the waveform through the TGn channel model and add noise.

```
SNR = 20; % In decibels
fadedSig = tgn(txWaveform);
rxWaveform = awgn(fadedSig,SNR,0);
```

Detect the packet. Extract the non-HT fields. Estimate the fine packet offset using the coarse detection for the first symbol of the waveform and the non-HT preamble field indices.

```
startOffset = wlanPacketDetect(rxWaveform,cfgHT.ChannelBandwidth);
ind = wlanFieldIndices(cfgHT);
nonHTFields = rxWaveform(startOffset+(ind.LSTF(1):ind.LSIG(2)),:);
```

```
startOffset = wlanSymbolTimingEstimate(nonHTFields, ...
    cfgHT.ChannelBandwidth)
```

```
startOffset = 6
```

Detect HT Packet and Set Threshold When Estimating Symbol Timing

Impair an HT waveform by passing it through a TGn channel configured to model a large delay spread. Detect the waveform and estimate the symbol timing. Adjust the decision metric threshold and estimate the symbol timing again.

Create an HT format configuration object and TGn channel configuration object. Specify the Model-E delay profile, which introduces a large delay spread.

```
cfgHT = wlanHTConfig;

tgn = wlanTGnChannel;
tgn.DelayProfile = 'Model-E';
```

Generate a transmit waveform and add a delay at the start of the waveform.

```
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgHT);
txWaveform = [zeros(100,1);txWaveform];
```

Pass the waveform through the TGn channel model and add noise.

```
SNR = 50; % In decibels
fadedSig = tgn(txWaveform);
rxWaveform = awgn(fadedSig,SNR,0);
```

Detect the packet. Extract the non-HT fields. Estimate the fine packet offset using the coarse detection for the first symbol of the waveform and the non-HT preamble field indices. Adjust the decision metric threshold and estimate the fine packet offset again.

```
startOffset = wlanPacketDetect(rxWaveform,cfgHT.ChannelBandwidth);
ind = wlanFieldIndices(cfgHT);
nonHTFields = rxWaveform(startOffset+(ind.LSTF(1):ind.LSIG(2)),:);
```

```
startOffset = wlanSymbolTimingEstimate(nonHTFields, ...
    cfgHT.ChannelBandwidth)
```

```
startOffset = 5
```

```
threshold = 0.1
```

```
threshold = 0.1000
```

```
startOffset = wlanSymbolTimingEstimate(nonHTFields, ...
    cfgHT.ChannelBandwidth,threshold)
```

```
startOffset = 9
```

Detecting the correct timing offset is more challenging for a channel model with large delay spread. For large delay spread channels, you can try lowering the threshold setting to see if performance improves in an end-to-end simulation.

Estimate Symbol Timing of TGn-Impaired HT Waveform

Detect a received 802.11n™ packet and estimate its symbol timing at 15 dB SNR.

Create an HT format configuration object. Specify two transmit antennas and two space-time streams.

```
cfgHT = wlanHTConfig;
nAnt = 2;
cfgHT.NumTransmitAntennas = nAnt;
cfgHT.NumSpaceTimeStreams = nAnt;
```


Show the logic behind the MCS selection for BPSK modulation.

```
if cfgHT.NumSpaceTimeStreams == 1
    cfgHT.MCS = 0;
elseif cfgHT.NumSpaceTimeStreams == 2
    cfgHT.MCS = 8;
elseif cfgHT.NumSpaceTimeStreams == 3
    cfgHT.MCS = 16;
elseif cfgHT.NumSpaceTimeStreams == 4
    cfgHT.MCS = 24;
end
```

Generate a transmit waveform and add a delay at the start of the waveform.

```
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgHT);
txWaveform = [zeros(100,cfgHT.NumTransmitAntennas);txWaveform];
```

Create a TGn channel configuration object for two transmit antennas and two receive antennas. Specify the Model-B delay profile. Pass the waveform through the TGn channel model and add noise.

```
tgn = wlanTGnChannel;
tgn.NumTransmitAntennas = nAnt;
tgn.NumReceiveAntennas = nAnt;
tgn.DelayProfile = 'Model-B';

SNR = 15; % In decibels
fadedSig = tgn(txWaveform);
rxWaveform = awgn(fadedSig,SNR,0);
```

Detect the packet. Extract the non-HT fields. Estimate the fine packet offset using the coarse detection for the first symbol of the waveform and the non-HT preamble field indices.

```
startOffset = wlanPacketDetect(rxWaveform,cfgHT.ChannelBandwidth);
ind = wlanFieldIndices(cfgHT);
nonHTFields = rxWaveform(startOffset+(ind.LSTF(1):ind.LSIG(2)),:);

startOffset = wlanSymbolTimingEstimate(nonHTFields, ...
    cfgHT.ChannelBandwidth)

startOffset = 8
```

Estimate VHT Packet Symbol Timing

Return the symbol timing and decision metric of an 802.11ac™ packet without channel impairments.

Create a VHT format configuration object. Specify two transmit antennas and two space-time streams.

```
cfgVHT = wlanVHTConfig;  
cfgVHT.NumTransmitAntennas = 2;  
cfgVHT.NumSpaceTimeStreams = 2;
```

Generate a VHT format transmit waveform. Add a 50-sample delay at the start of the waveform.


```
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgVHT);  
txWaveform = [zeros(50,cfgVHT.NumTransmitAntennas); txWaveform];
```

Extract the non-HT preamble fields. Obtain the timing offset estimate and decision metric.

```
ind = wlanFieldIndices(cfgVHT);  
nonhtfields = txWaveform(ind.LSTF(1):ind.LSIG(2),:);  
[startOffset,M] = wlanSymbolTimingEstimate(nonhtfields, ...  
    cfgVHT.ChannelBandwidth);
```

Plot the returned decision metric for the non-HT preamble of the VHT format transmission waveform.

```
figure  
plot(M)  
xlabel('Symbol Timing Index')  
ylabel('Decision Metric (M)')
```

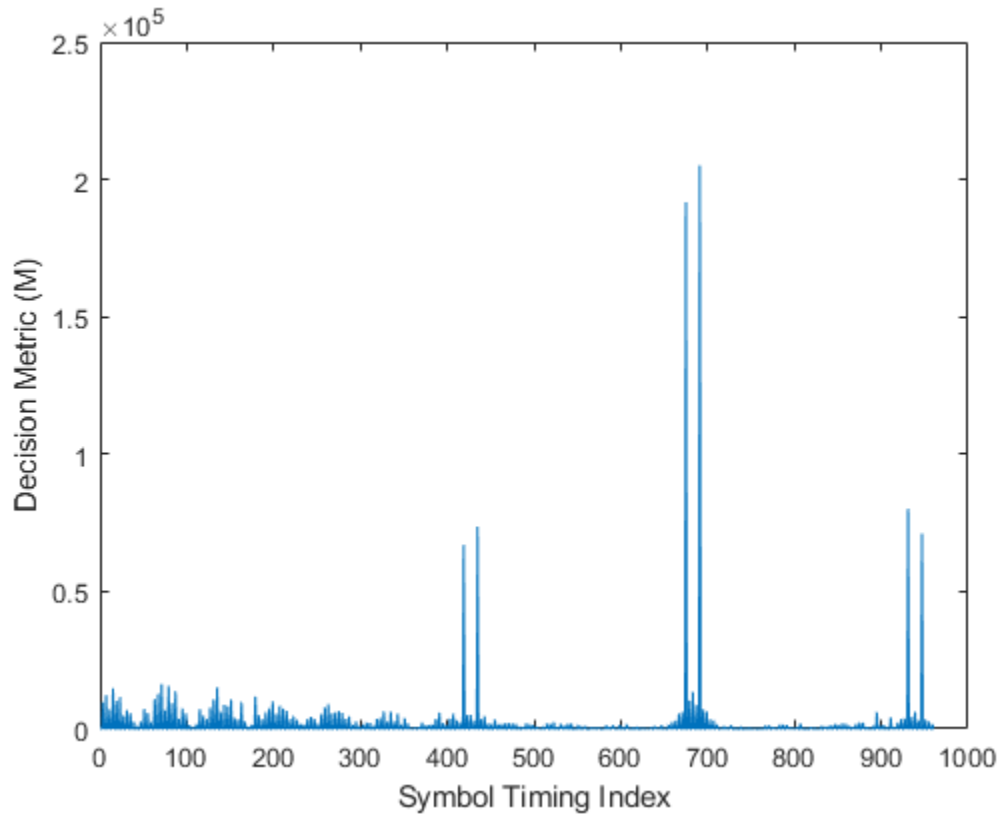

Input Arguments

rxSig — Received signal

matrix

Received signal containing an L-LTF, specified as an N_S -by- N_R matrix. N_S is the number of time-domain samples in the L-LTF and N_R is the number of receive antennas.

Data Types: double

cbw — Channel bandwidth

'CBW5' | 'CBW10' | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW5', 'CBW10', 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

threshold — Decision threshold

1 (default) | real scalar from 0 to 1

Decision threshold, specified as a real scalar from 0 to 1.

You can try out different threshold to maximize the packet reception performance. For channels with small delay spread with respect to the cyclic prefix length, the default value is recommended. For a wireless channel with large delay spread with respect to the cyclic prefix length, such as TGN channel with 'Model E' delay profile, a value of 0.5 is suggested.

By lowering the threshold setting, you add a non-negative corrector to the symbol timing estimate as compared to the estimate using the default threshold setting. The range of the timing corrector is [0, CSD ns/sampling duration]. For more information, see “Cyclic Shift Delay (CSD)” on page 2-451.

Data Types: double

Output Arguments

startOffset — Offset of L-STF start

integer

Offset of L-STF start, returned as an integer within the range $[-L, N_S - 2L]$, where L is the length of the L-LTF and N_S is the number of samples. Using the input channel bandwidth (cbw) to determine the range of symbol timing, wlanSymbolTimingEstimate estimates the offset to the start of L-STF by cross-correlating the received signal with a locally generated “L-LTF” on page 2-450 of the first antenna.

- startOffset is empty when $N_S < L$.
- startOffset is negative when the input waveform does not contain a complete “L-STF” on page 2-449.

M — Cross-correlation


vector

Cross-correlation, returned as an (N_S-L+1) -by-1 vector. M is the cross-correlation between the received signal and the locally generated “L-LTF” on page 2-450 of the first transmit antenna.

More About

L-STF

The legacy short training field (L-STF) is the first field of the 802.11 OFDM PLCP legacy preamble. The L-STF is a component of VHT, HT, and non-HT PPDU.

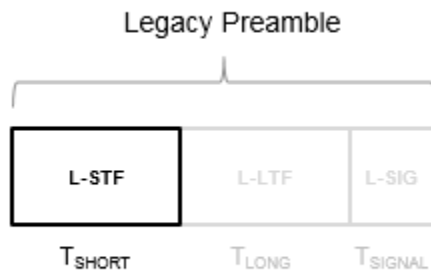

The L-STF duration varies with channel bandwidth.


Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{\text{FFT}} = 1 / \Delta_F$)	L-STF Duration ($T_{\text{SHORT}} = 10 \times T_{\text{FFT}} / 4$)
20, 40, 80, and 160	312.5	3.2 μs	8 μs
10	156.25	6.4 μs	16 μs
5	78.125	12.8 μs	32 μs

Because the sequence has good correlation properties, it is used for start-of-packet detection, for coarse frequency correction, and for setting the AGC. The sequence uses 12 of the 52 subcarriers that are available per 20 MHz channel bandwidth segment. For 5

MHz, 10 MHz, and 20 MHz bandwidths, the number of channel bandwidths segments is 1.


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

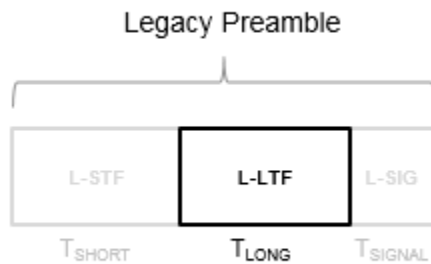

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

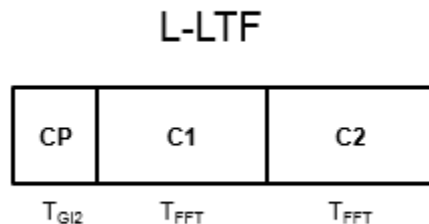

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{\text{FFT}} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{\text{GI2}} = T_{\text{FFT}} / 2$)	L-LTF Duration ($T_{\text{LONG}} = T_{\text{GI2}} + 2 \times T_{\text{FFT}}$)
20, 40, 80, and 160	312.5	3.2 μs	1.6 μs	8 μs
10	156.25	6.4 μs	3.2 μs	16 μs
5	78.125	12.8 μs	6.4 μs	32 μs

Cyclic Shift Delay (CSD)

A CSD is added to the L-LTF for each transmit antenna, which causes multiple strong peaks in the correlation function M . The multiple peaks affect the accuracy of fine symbol timing estimation. For more information, see IEEE 802.11ac, Section 22.3.8.2.1 and Table 22-10.

References

- [1] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.
- [2] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`comm.PhaseFrequencyOffset` | `wlanCoarseCF0Estimate` | `wlanLLTF`

Introduced in R2017a

wlanVHTData

Generate VHT-Data field

Syntax

```
y = wlanVHTData(psdu,cfg)
y = wlanVHTData(psdu,cfg,scramInit)
```

Description

`y = wlanVHTData(psdu,cfg)` generates a “VHT-Data field” on page 2-461²¹ time-domain waveform from the input user data bits, `psdu`, for the specified configuration object, `cfg`. See “VHT-Data Field Processing” on page 2-463 for waveform generation details.

`y = wlanVHTData(psdu,cfg,scramInit)` uses `scramInit` for the scrambler initialization state.

Examples

Generate VHT-Data Waveform

Generate the waveform for a MIMO 20 MHz VHT-Data field.

Create a VHT configuration object. Assign a 20 MHz channel bandwidth, two transmit antennas, two space-time streams, and set MCS to four.

```
cfgVHT = wlanVHTConfig('ChannelBandwidth','CBW20','NumTransmitAntennas',2,'NumSpaceTimeStreams',2,'MCS',4);
```

Generate the user payload data and the VHT-Data field waveform.

21. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

```
psdu = randi([0 1],cfgVHT.PSDULength*8,1);
y = wlanVHTData(psdu,cfgVHT);
size(y)

ans = 1×2

        2160         2
```

The 20 MHz waveform is an array with two columns, corresponding to two transmit antennas. There are 2160 complex samples in each column.

```
y(1:10,:)

ans = 10×2 complex

-0.0598 + 0.1098i  -0.1904 + 0.1409i
 0.6971 - 0.3068i  -0.0858 - 0.2701i
-0.1284 + 0.9268i  -0.8318 + 0.3314i
-0.1180 + 0.0731i   0.1313 + 0.4956i
 0.3591 + 0.5485i   0.9749 + 0.2859i
-0.9751 + 1.3334i   0.0559 + 0.4248i
 0.0881 - 0.8230i  -0.1878 - 0.2959i
-0.2952 - 0.4433i  -0.1005 - 0.4035i
-0.5562 - 0.3940i  -0.1292 - 0.5976i
 1.0999 + 0.3292i  -0.2036 - 0.0200i
```

Input Arguments

psdu — PHY service data unit

vector

PHY service data unit (“PSDU” on page 2-462), specified as an N_b -by-1 vector. N_b is the number of bits and equals $\text{PSDULength} \times 8$.

Data Types: double

cfg — Format configuration

wlanVHTConfig object

Format configuration, specified as a wlanVHTConfig object. The wlanVHTData function uses the object properties indicated.

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the range [1, 8]

Number of transmit antennas, specified as an integer in the range [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value of 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to apply a beamforming steering matrix, and to rotate and scale the constellation mapper output vector. If applicable, scale the space-time block coder output instead.

`SpatialMappingMatrix` applies when the `SpatialMapping` property is set to 'Custom'. For more information, see IEEE Std 802.11-2012, Section 20.3.11.11.2.

- When specified as a scalar, a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be N_{STS_Total} -by- N_T . The spatial mapping matrix applies to all the subcarriers. N_{STS_Total} is the sum of space-time streams for all users, and N_T is the number of transmit antennas.
- When specified as a 3-D array, the size must be N_{ST} -by- N_{STS_Total} -by- N_T . N_{ST} is the sum of the occupied data (N_{SD}) and pilot (N_{SP}) subcarriers, as determined by `ChannelBandwidth`. N_{STS_Total} is the sum of space-time streams for all users. N_T is the number of transmit antennas.

N_{ST} increases with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3 0.4; 0.4 0.5 0.8] represents a spatial mapping matrix having two space-time streams and three transmit antennas.

Data Types: double

Complex Number Support: Yes

STBC — Enable space-time block coding

false (default) | true

Enable space-time block coding (STBC) of the PPDU data field, specified as a logical. STBC transmits multiple copies of the data stream across assigned antennas.

- When set to false, no STBC is applied to the data field, and the number of space-time streams is equal to the number of spatial streams.

- When set to `true`, STBC is applied to the data field, and the number of space-time streams is double the number of spatial streams.

See IEEE 802.11ac-2013, Section 22.3.10.9.4 for further description.

Note STBC is relevant for single-user transmissions only.

Data Types: `logical`

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 9 | 1-by- N_{Users} vector of integers

Modulation and coding scheme used in transmitting the current packet, specified as a scalar or vector.

- For a single user, the MCS value is a scalar integer from 0 to 9.
- For multiple users, MCS is a 1-by- N_{Users} vector of integers or a scalar with values from 0 to 9, where the vector length, N_{Users} , is an integer from 1 to 4.

MCS	Modulation	Coding Rate
0	BPSK	1/2
1	QPSK	1/2
2	QPSK	3/4
3	16QAM	1/2
4	16QAM	3/4
5	64QAM	2/3
6	64QAM	3/4
7	64QAM	5/6
8	256QAM	3/4
9	256QAM	5/6

Data Types: `double`

ChannelCoding — Type of forward error correction coding

'BCC' (default) | 'LDPC'

Type of forward error correction coding for the data field, specified as 'BCC' (default) or 'LDPC'. 'BCC' indicates binary convolutional coding and 'LDPC' indicates low density parity check coding. Providing a character vector or a single cell character vector defines the channel coding type for a single user or all users in a multiuser transmission. By providing a cell array different channel coding types can be specified per user for a multiuser transmission.

Data Types: `char` | `cell` | `string`

GuardInterval — Cyclic prefix length for the data field within a packet

'Long' (default) | 'Short'

Cyclic prefix length for the data field within a packet, specified as 'Long' or 'Short'.

- The long guard interval length is 800 ns.
- The short guard interval length is 400 ns.

Data Types: `char` | `string`

APEPLength — Number of bytes in the A-MPDU pre-EOF padding

1024 (default) | nonnegative integer | vector of nonnegative integers

Number of bytes in the A-MPDU pre-EOF padding, specified as a scalar integer or vector of integers.

- For a single user, APEPLength is a nonnegative integer in the interval $[0, 2^{20} - 1]$.
- For multi-user, APEPLength is a 1-by- N_{Users} vector of nonnegative integers, where N_{Users} is an integer in $[1, 4]$. The entries in APEPLength are integers in the interval $[0, 2^{20} - 1]$.
- For a null data packet (NDP), APEPLength = 0.

APEPLength is used internally to determine the number of OFDM symbols in the data field. For more information, see IEEE Std 802.11ac-2013, Table 22-1.

Data Types: `double`

PSDULength — Number of bytes carried in the user payload

integer | vector of integers

This property is read-only.

Number of bytes carried in the user payload, including the A-MPDU and any MAC padding. For a null data packet (NDP) the PSDU length is zero.

- For a single user, the PSDU length is a scalar integer from 1 to 1,048,575.
- For multiple users, the PSDU length is a 1-by- N_{Users} vector of integers from 1 to 1,048,575, where the vector length, N_{Users} , is an integer from 1 to 4.
- When undefined, PSDULength is returned as an empty of size 1×0. This can happen when the set of property values for the object are in an invalid state.

PSDULength is a read-only property and is calculated internally based on the APEPLength property and other coding-related properties, as specified in IEEE Std 802.11ac-2013, Section 22.4.3. It is accessible by direct property call.

Example: [1035 4150] is the PSDU length vector for a wlanVHTConfig object with two users, where the MCS for the first user is 0 and the MCS for the second user is 3.


Data Types: double

scramInit — Scrambler initialization state

93 (default) | integer from 1 to 127 | integer row vector | binary vector | binary matrix

Initial scrambler state of the data scrambler for each packet generated, specified as an integer, a binary vector, a 1-by- N_U integer row vector, or a 7-by- N_U binary matrix. N_U is the number of users, from 1 to 4. If specified as an integer or binary vector, the setting applies to all users. If specified as a row vector or binary matrix, the setting for each user is specified in the corresponding column, as a scalar integer from 1 to 127 or the corresponding binary vector.

The scrambler initialization used on the transmission data follows the process described in IEEE Std 802.11-2012, Section 18.3.5.5 and IEEE Std 802.11ad-2012, Section 21.3.9. The header and data fields that follow the scrambler initialization field (including data padding bits) are scrambled by XORing each bit with a length-127 periodic sequence generated by the polynomial $S(x) = x^7 + x^4 + 1$. The octets of the PSDU (Physical Layer Service Data Unit) are placed into a bit stream, and within each octet, bit 0 (LSB) is first and bit 7 (MSB) is last. The generation of the sequence and the XOR operation are shown in this figure:

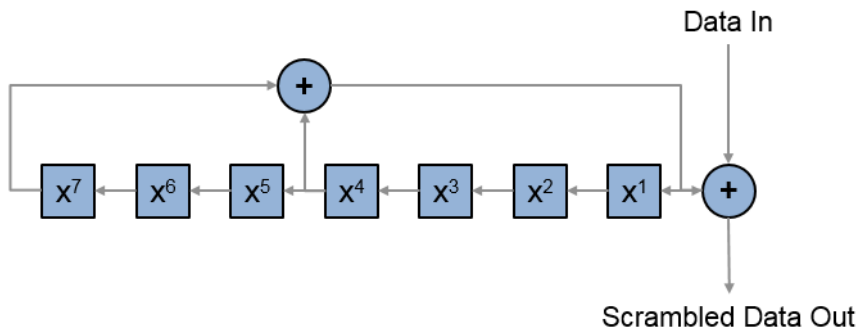

Conversion from integer to bits uses left-MSB orientation. For the initialization of the scrambler with decimal 1, the bits are mapped to the elements shown.

Element	X^7	X^6	X^5	X^4	X^3	X^2	X^1
Bit Value	0	0	0	0	0	0	1

To generate the bit stream equivalent to a decimal, use `de2bi`. For example, for decimal 1:

```
de2bi(1,7,'left-msb')
ans =
```

0 0 0 0 0 0 1

Example: `[1;0;1;1;1;0;1]` conveys the scrambler initialization state of 93 as a binary vector.

Data Types: double | int8

Output Arguments

y — VHT-Data field time-domain waveform


matrix

“VHT-Data field” on page 2-461 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples and N_T is the number of transmit antennas. See “VHT-Data Field Processing” on page 2-463 for waveform generation details.

More About


VHT-Data field

The very high throughput data (VHT data) field is used to transmit one or more frames from the MAC layer. It follows the VHT-SIG-B field in the packet structure for the VHT format PPDU.

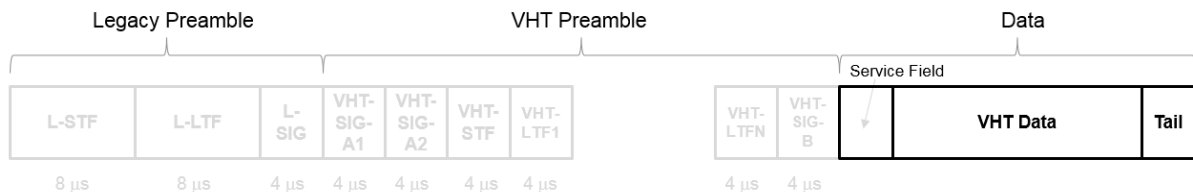

The VHT data field is defined in IEEE Std 802.11ac-2013, Section 22.3.10. It is composed of four subfields.

VHT Data Field

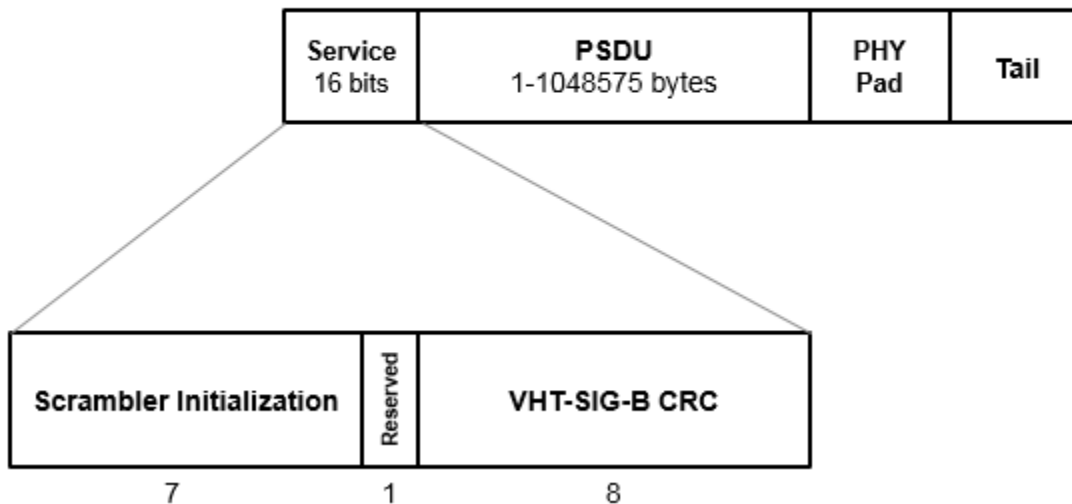

- **Service field** — Contains a seven-bit scrambler initialization state, one bit reserved for future considerations, and eight bits for the VHT-SIG-B CRC field.
- **PSDU** — Variable-length field containing the PLCP service data unit. In 802.11, the PSDU can consist of an aggregate of several MAC service data units.
- **PHY Pad** — Variable number of bits passed to the transmitter to create a complete OFDM symbol.
- **Tail** — Bits used to terminate a convolutional code. Tail bits are not needed when LDPC is used.


PSDU

Physical layer (PHY) Service Data Unit (PSDU). A PSDU can consist of one medium access control (MAC) protocol data unit (MPDU) or several MPDUs in an aggregate MPDU (A-MPDU). In a single user scenario, the VHT-Data field contains one PSDU. In a multi-user scenario, the VHT-Data field carries up to four PSDUs for up to four users.

Algorithms

VHT-Data Field Processing

The “VHT-Data field” on page 2-461 encodes the service, “PSDU” on page 2-462, pad bits, and tail bits. The `wlanVHTData` function performs transmitter processing on the “VHT-Data field” on page 2-461 and outputs the time-domain waveform for N_T transmit antennas.

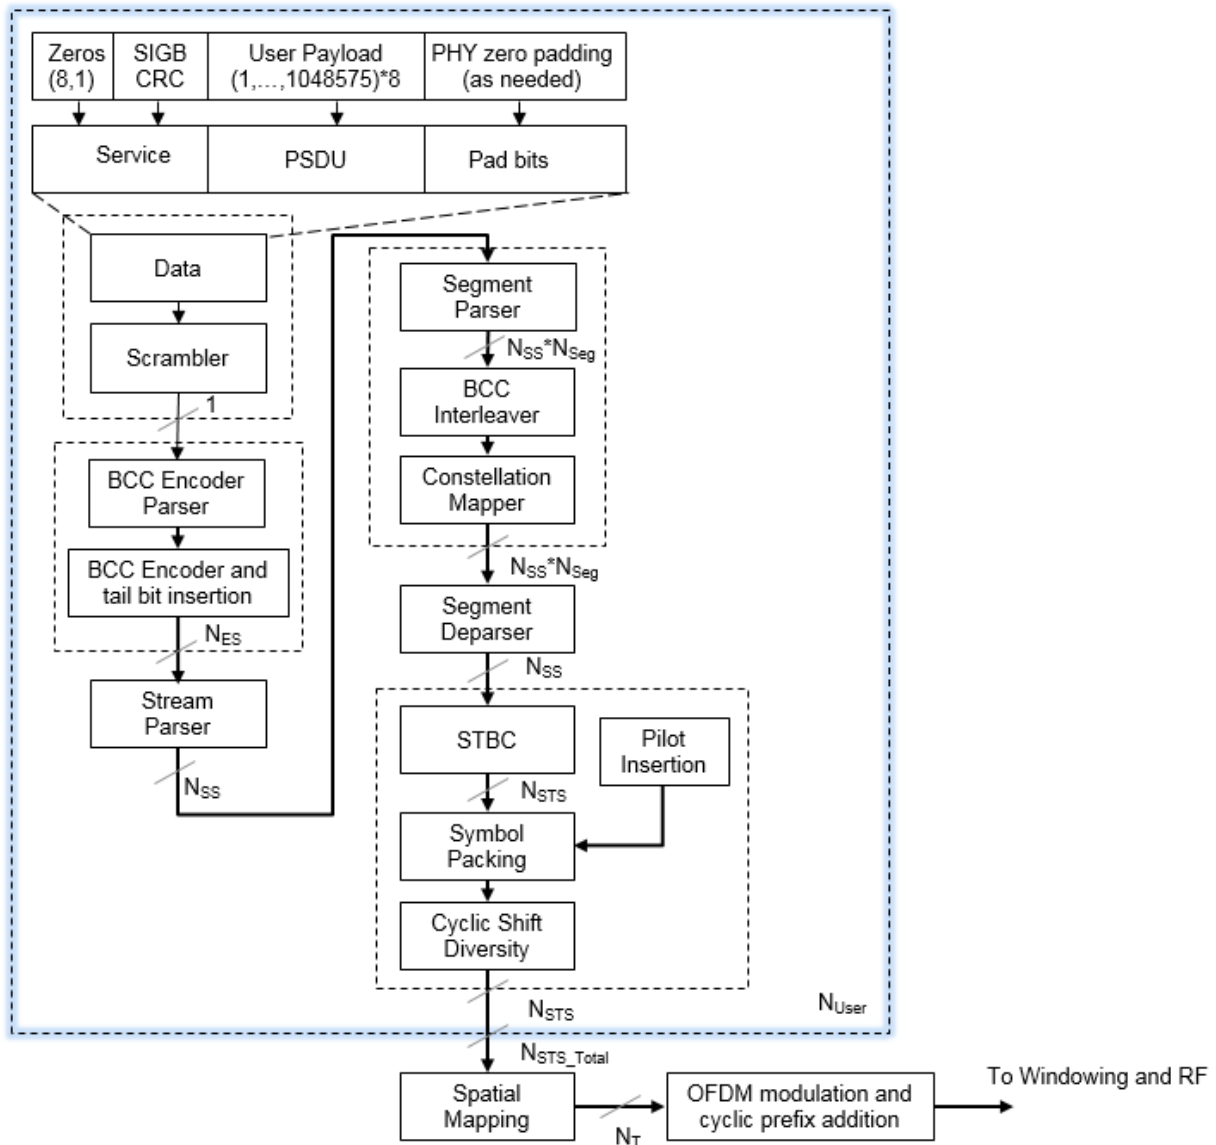

N_{ES} is the number of BCC encoders.
 N_{SS} is the number of spatial streams.

N_{STS} is the number of space-time streams.
 N_T is the number of transmit antennas.

BCC channel coding is shown.

For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.9 and 22.3.4.10, respectively, single user and multi-user.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanHTConfig](#) | [wlanVHTDataRecover](#) | [wlanWaveformGenerator](#)

Introduced in R2015b

wlanVHTDataRecover

Recover VHT data

Syntax

```
recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg)
recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg,userNumber)
recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg,userNumber,
numSTS)
recBits = wlanVHTDataRecover( ____,cfgRec)

[recBits,crcBits] = wlanVHTDataRecover( ____)
[recBits,crcBits,eqSym] = wlanVHTDataRecover( ____)
[recBits,crcBits,eqSym,cpe] = wlanVHTDataRecover( ____)
```

Description

`recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg)` returns the recovered payload bits from the “VHT data field” on page 2-476²² for a single-user transmission. Inputs include the received “VHT data field” on page 2-476 signal, the channel estimate, the noise variance estimate, and the format configuration object, `cfg`.

`recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg,userNumber)` returns the recovered payload bits, in a multiuser transmission, for the user specified by `userNumber`.

`recBits = wlanVHTDataRecover(rxSig,chEst,noiseVarEst,cfg,userNumber,numSTS)` also specifies the number of space-time streams, `numSTS`, for a multiuser transmission.

`recBits = wlanVHTDataRecover(____,cfgRec)` returns the recovered bits using the algorithm parameters specified in `cfgRec`.

22. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

`[recBits,crcBits] = wlanVHTDataRecover(___)` also returns the VHT-SIG-B checksum bits, `crcBits`, using the arguments from the previous syntaxes.

`[recBits,crcBits,eqSym] = wlanVHTDataRecover(___)` also returns the equalized symbols, `eqSym`.

`[recBits,crcBits,eqSym,cpe] = wlanVHTDataRecover(___)` also returns the common phase error, `cpe`.

Examples

Recover VHT-Data Field Over 2x2 Fading Channel

Recover bits in the VHT-Data field using channel estimation on a VHT-LTF field over a 2 x 2 quasi-static fading channel.

Create a VHT configuration object with 160 MHz channel bandwidth and two transmission paths.

```
cbw = 'CBW160';
vht = wlanVHTConfig('ChannelBandwidth',cbw,'NumTransmitAntennas',2,'NumSpaceTimeStreams',2);
```

Generate VHT-LTF and VHT-Data field signals.

```
txDataBits = randi([0 1],8*vht.PSDULength,1);
txVHTLTF = wlanVHTLTF(vht);
txVHTData = wlanVHTData(txDataBits,vht);
```

Pass the transmitted waveform through a 2 x 2 quasi-static fading channel with AWGN.

```
snr = 10;
H = 1/sqrt(2)*complex(randn(2,2),randn(2,2));
rxVHTLTF = awgn(txVHTLTF*H,snr);
rxVHTData = awgn(txVHTData*H,snr);
```

Calculate the received signal power and use it to estimate the noise variance.

```
powerDB = 10*log10(var(rxVHTData));
noiseVarEst = mean(10.^(0.1*(powerDB-snr)));
```

Perform channel estimation based on the VHT-LTF field.

```
demodVHTLTF = wlanVHTLTFDemodulate(rxVHTLTF,vht,1);  
chanEst = wlanVHTLTFChannelEstimate(demodVHTLTF,vht);
```

Recover payload bits in the VHT-Data field and compare against the original payload bits.

```
rxDataBits = wlanVHTDataRecover(rxVHTData,chanEst,noiseVarEst,vht);  
numErr = biterr(txDataBits,rxDataBits)
```

```
numErr = 0
```

Recover VHT-Data Field Signal

Recover a VHT-Data field signal through a SISO AWGN channel using ZF equalization.

Configure VHT format object, generate random payload bits, and generate the VHT-Data field.

```
cfgVHT = wlanVHTConfig('APEPLength',512);  
txBits = randi([0 1], 8*cfgVHT.PSDULength,1);  
txVHTData = wlanVHTData(txBits,cfgVHT);
```

Pass the transmitted VHT data through an AWGN channel.

```
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',0.1);  
rxVHTData = awgnChan(txVHTData);
```

Configure the recovery object and recover the payload bits using a perfect channel estimate of all ones. Compare the recovered bits against the transmitted bits.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');  
recBits = wlanVHTDataRecover(rxVHTData,ones(242,1),0.1,cfgVHT,cfgRec);  
numErrs = biterr(txBits,recBits)
```

```
numErrs = 0
```

Recover VHT-Data Field in MU-MIMO Channel

Recover VHT-Data field bits for a multiuser transmission using channel estimation on a VHT-LTF field over a quasi-static fading channel.

Create a VHT configuration object having a 160 MHz channel bandwidth, two users, and four transmit antennas. Assign one space-time stream to the first user and three space-time streams to the second user.

```
cbw = 'CBW160';
numSTS = [1 3];
vht = wlanVHTConfig('ChannelBandwidth',cbw,'NumUsers',2, ...
    'NumTransmitAntennas',4,'NumSpaceTimeStreams',numSTS);
```

Because there are two users, the PSDU length is a 1-by-2 row vector.

```
psduLen = vht.PSDULength
```

```
psduLen = 1×2
```

```
1050    3156
```

Generate multiuser input data. This data must be in the form of a 1-by- N cell array, where N is the number of users.

```
txDataBits{1} = randi([0 1],8*vht.PSDULength(1),1);
txDataBits{2} = randi([0 1],8*vht.PSDULength(2),1);
```

Generate VHT-LTF and VHT-Data field signals.

```
txVHTLTF = wlanVHTLTF(vht);
txVHTData = wlanVHTData(txDataBits,vht);
```

Pass the data field for the first user through a 4x1 channel because it consists of a single space-time stream. Pass the second user's data through a 4x3 channel because it consists of three space-time streams. Apply white Gaussian noise to each user signal.

```
snr = 15;
H1 = 1/sqrt(2)*complex(randn(4,1),randn(4,1));
H2 = 1/sqrt(2)*complex(randn(4,3),randn(4,3));

rxVHTData1 = awgn(txVHTData*H1,snr,'measured');
rxVHTData2 = awgn(txVHTData*H2,snr,'measured');
```

Repeat the process for the VHT-LTF fields.

```
rxVHTLTF1 = awgn(txVHTLTF*H1,snr,'measured');
rxVHTLTF2 = awgn(txVHTLTF*H2,snr,'measured');
```

Calculate the received signal power for both users and use it to estimate the noise variance.

```
powerDB1 = 10*log10(var(rxVHTData1));  
noiseVarEst1 = mean(10.^(0.1*(powerDB1-snr)));
```

```
powerDB2 = 10*log10(var(rxVHTData2));  
noiseVarEst2 = mean(10.^(0.1*(powerDB2-snr)));
```

Estimate the channel characteristics using the VHT-LTF fields.

```
demodVHTLTF1 = wlanVHTLTFDemodulate(rxVHTLTF1,cbw,numSTS);  
chanEst1 = wlanVHTLTFChannelEstimate(demodVHTLTF1,cbw,numSTS);
```

```
demodVHTLTF2 = wlanVHTLTFDemodulate(rxVHTLTF2,cbw,numSTS);  
chanEst2 = wlanVHTLTFChannelEstimate(demodVHTLTF2,cbw,numSTS);
```

Recover VHT-Data field bits for the first user and compare against the original payload bits.

```
rxDataBits1 = wlanVHTDataRecover(rxVHTData1,chanEst1,noiseVarEst1,vht,1);  
[~,ber1] = biterr(txDataBits{1},rxDataBits1)
```

```
ber1 = 0.4983
```

Determine the number of bit errors for the second user.

```
rxDataBits2 = wlanVHTDataRecover(rxVHTData2,chanEst2,noiseVarEst2,vht,2);  
[~,ber2] = biterr(txDataBits{2},rxDataBits2)
```

```
ber2 = 0.0972
```

The bit error rates are quite high because there is no precoding to mitigate the interference between streams. This is especially evident for the user 1 receiver because it receives energy from the three streams intended for user 2. The example is intended to show the workflow and proper syntaxes for the LTF demodulate, channel estimation, and data recovery functions.

Input Arguments

rxSig — Received VHT-Data field signal

matrix

Received VHT-Data field signal in the time domain, specified as an N_S -by- N_R matrix. N_R is the number of receive antennas. N_S must be greater than or equal to the number of time-domain samples in the VHT-Data field input.

Note wlanVHTDataRecover processes one PPDU data field per entry. If N_S is greater than the field length, extra samples at the end of rxSig are not processed. To process a concatenated stream of PPDU data fields, multiple calls to wlanVHTDataRecover are required. If rxSig is shorter than the length of the VHT-Data field, an error occurs.

Data Types: double

Complex Number Support: Yes

chEst — Channel estimation

matrix | 3-D array

Channel estimation for data and pilot subcarriers, specified as a matrix or array of size N_{ST} -by- N_{STS} -by- N_R . N_{ST} is the number of occupied subcarriers. N_{STS} is the number of space-time streams. For multiuser transmissions, N_{STS} is the total number of space-time streams for all users. N_R is the number of receive antennas. N_{ST} and N_{STS} must match the cfg configuration object settings for channel bandwidth and number of space-time streams.

N_{ST} increases with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

Data Types: double

Complex Number Support: Yes

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cfg — VHT PPDU configuration

wlanVHTConfig object

VHT PPDU configuration, specified as a wlanVHTConfig object.

cfgRec — Algorithm parameters

wlanRecoveryConfig object

Algorithm parameters containing properties used during data recovery, specified as a wlanRecoveryConfig object. The configurable properties include OFDM symbol sampling offset, equalization method, and the type of pilot phase tracking. If you do not specify a cfgRec object, the default object property values as described in wlanVHTConfig are used in the data recovery.


Note Use `cfgRec.EqualizationMethod = 'ZF'` when either of the following conditions are met:

- `cfg.NumSpaceTimeStreams=1`
 - `cfg.NumSpaceTimeStreams=2` and `cfg.STBC=true`
-

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

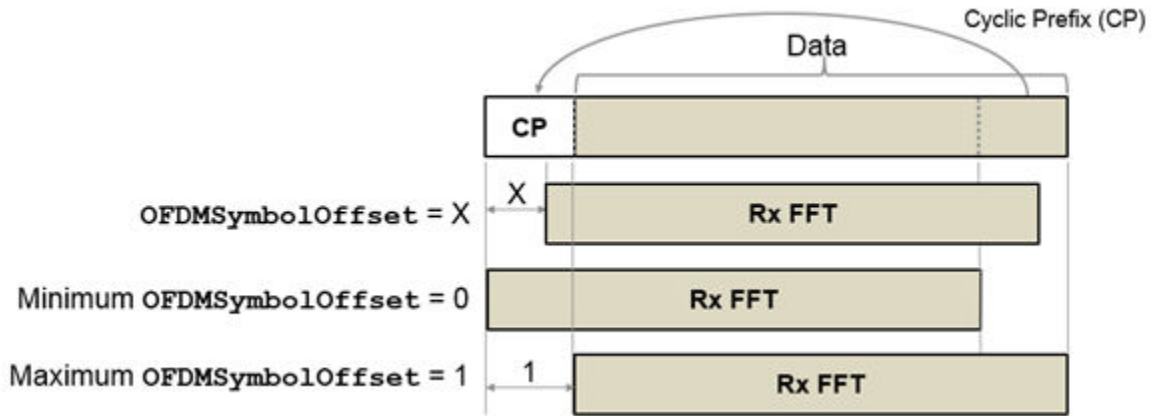

Data Types: double

EqualizationMethod — Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking — Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: char | string

MaximumLDPCIterationCount — Maximum number of decoding iterations in LDPC

12 (default) | positive integer

Maximum number of decoding iterations in low-density parity check (LDPC), specified as a positive integer. This argument applies when channel coding is set to LDPC for the user of interest.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: `double`

EarlyTermination — Enable early termination of LDPC decoding

`false` or `0` (default) | `true` or `1`

Enable early termination of LDPC decoding, specified as a logical value of `1` (`true`) or `0` (`false`). This property applies when channel coding is set to LDPC for the user of interest.

- When set to `false`, LDPC decoding completes the number of iterations specified by `MaximumLDPCIterationCount`, regardless of parity check status.
- When set to `true`, LDPC decoding terminates when all parity-checks are satisfied.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: `logical`

userNumber — Number of the user

integer from 1 to N_{Users}

Number of the user in a multiuser transmission, specified as an integer having a value from 1 to N_{Users} . N_{Users} is the total number of users.

numSTS — Number of space-time streams

1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in a multiuser transmission, specified as a vector. The number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where N_{Users} is an integer from 1 to 4.

Example: `[1 3 2]` is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

Output Arguments

recBits — Recovered payload bits in the VHT-Data field

1 | 0 | column vector

Recovered payload bits in the VHT-Data field, returned as a column vector of length $8 \times \text{cfgVHT.PSDULength}$. See `wlanVHTConfig` for `PSDULength` details. The output is for a single user as determined by `userNumber`.

Data Types: int8

crcBits — Checksum bits for VHT-SIG-B field

binary column vector

Checksum bits for VHT-SIG-B field, returned as a binary column vector of length 8.

Data Types: int8

eqSym — Equalized symbols

matrix | 3-D array

Equalized symbols, returned as an N_{SD} -by- N_{SYM} -by- N_{SS} matrix or array. N_{SD} is the number of data subcarriers. N_{SYM} is the number of OFDM symbols in the VHT-Data field. N_{SS} is the number of spatial streams assigned to the user. When `STBC` is `false`, $N_{SS} = N_{STS}$. When `STBC` is `true`, $N_{SS} = N_{STS}/2$.

Data Types: double

Complex Number Support: Yes

cpe — Common phase error

column vector

Common phase error in radians, returned as a column vector having length N_{SYM} . N_{SYM} is the number of OFDM symbols in the “VHT data field” on page 2-476.

Limitations


`wlanVHTDataRecover` processing limitations, restrictions, and recommendations:

- If only VHT format PPDU's are processed, then `isa(cfgVHT, 'wlanVHTConfig')` must be true.
- For single-user scenarios, `cfgVHT.NumUsers` must equal 1.
- When STBC is enabled, the number of space-time streams must be even.
- `cfgRec.EqualizationMethod = 'ZF'` is recommended when `cfgVHT.STBC = true` and `cfgVHT.NumSpaceTimeStreams = 2`
- `cfgRec.EqualizationMethod = 'ZF'` is recommended when `cfgVHT.NumSpaceTimeStreams = 1`

More About


VHT data field

The very high throughput data (VHT data) field is used to transmit one or more frames from the MAC layer. It follows the VHT-SIG-B field in the packet structure for the VHT format PPDU's.

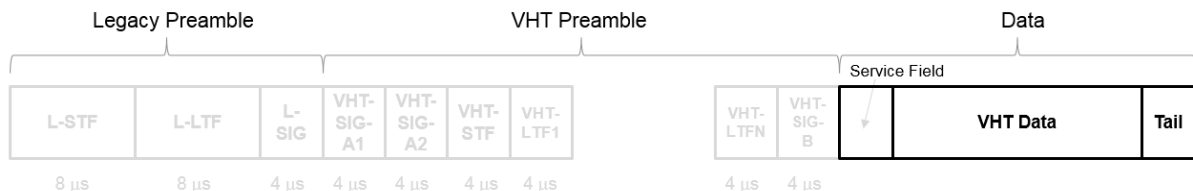

The VHT data field is defined in IEEE Std 802.11ac-2013, Section 22.3.10. It is composed of four subfields.

VHT Data Field

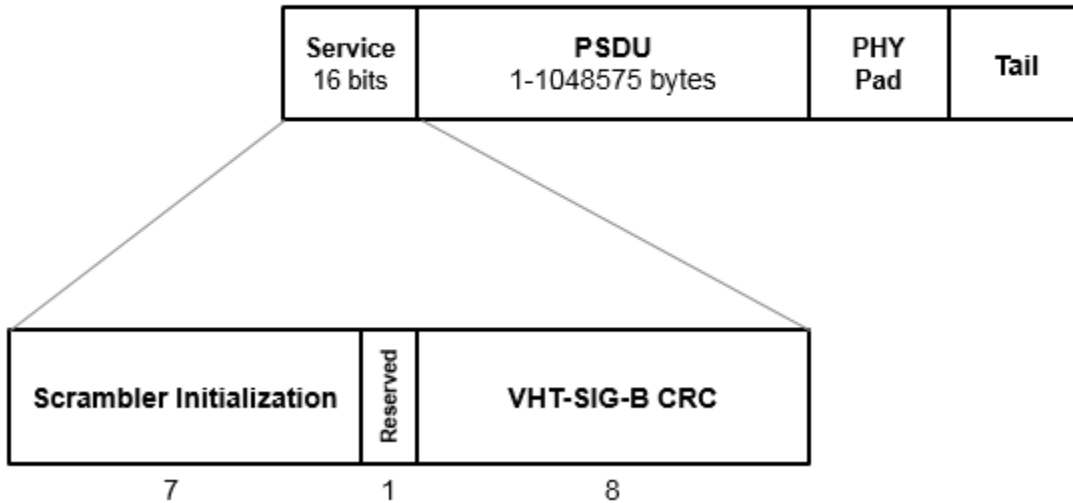

- **Service field** — Contains a seven-bit scrambler initialization state, one bit reserved for future considerations, and eight bits for the VHT-SIG-B CRC field.
- **PSDU** — Variable-length field containing the PLCP service data unit. In 802.11, the PSDU can consist of an aggregate of several MAC service data units.
- **PHY Pad** — Variable number of bits passed to the transmitter to create a complete OFDM symbol.
- **Tail** — Bits used to terminate a convolutional code. Tail bits are not needed when LDPC is used.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanRecoveryConfig](#) | [wlanVHTConfig](#) | [wlanVHTData](#) |
[wlanVHTLTFChannelEstimate](#) | [wlanVHTLTFDemodulate](#)

Introduced in R2015b

wlanVHTLTF

Generate VHT-LTF waveform

Syntax

`y = wlanVHTLTF(cfg)`

Description

`y = wlanVHTLTF(cfg)` generates a “VHT-LTF” on page 2-482²³ time-domain waveform for the specified configuration object. See “VHT-LTF Processing” on page 2-483 for waveform generation details.

Examples

Generate VHT-LTF Waveform

Create a VHT configuration object with an 80 MHz channel bandwidth.

```
cfgVHT = wlanVHTConfig;
cfgVHT.ChannelBandwidth = 'CBW80';
```

Generate a VHT-LTF waveform.

```
vltfOut = wlanVHTLTF(cfgVHT);
size(vltfOut)
```

```
ans = 1×2
```

```
    320     1
```

The 80 MHz waveform is a single OFDM symbol with 320 complex output samples.

23. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

Input Arguments

cfg — Format configuration

wlanVHTConfig object

Format configuration, specified as a wlanVHTConfig object. The wlanVHTLTF function uses the object properties indicated.

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the range [1, 8]

Number of transmit antennas, specified as an integer in the range [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value of 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to apply a beamforming steering matrix, and to rotate and scale the constellation mapper output vector. If applicable, scale the space-time block coder output instead.

SpatialMappingMatrix applies when the SpatialMapping property is set to 'Custom'. For more information, see IEEE Std 802.11-2012, Section 20.3.11.11.2.

- When specified as a scalar, a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be N_{STS_Total} -by- N_T . The spatial mapping matrix applies to all the subcarriers. N_{STS_Total} is the sum of space-time streams for all users, and N_T is the number of transmit antennas.
- When specified as a 3-D array, the size must be N_{ST} -by- N_{STS_Total} -by- N_T . N_{ST} is the sum of the occupied data (N_{SD}) and pilot (N_{SP}) subcarriers, as determined by ChannelBandwidth. N_{STS_Total} is the sum of space-time streams for all users. N_T is the number of transmit antennas.

N_{ST} increases with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3 0.4; 0.4 0.5 0.8] represents a spatial mapping matrix having two space-time streams and three transmit antennas.

Data Types: double
 Complex Number Support: Yes

Output Arguments

y — VHT-LTF time-domain waveform matrix

“VHT-LTF” on page 2-482 time-domain waveform, returned as an $(N_S \times N_{VHTLTF})$ -by- N_T matrix. N_S is the number of time-domain samples per N_{VHTLTF} , where N_{VHTLTF} is the number of OFDM symbols in the VHT-LTF. N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth.

ChannelBandwidth	N_S
'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640


See “VHT-LTF Processing” on page 2-483 for waveform generation details.

Data Types: double
 Complex Number Support: Yes

More About

VHT-LTF

The very high throughput long training field (VHT-LTF) is located between the VHT-STF and VHT-SIG-B portion of the VHT packet.

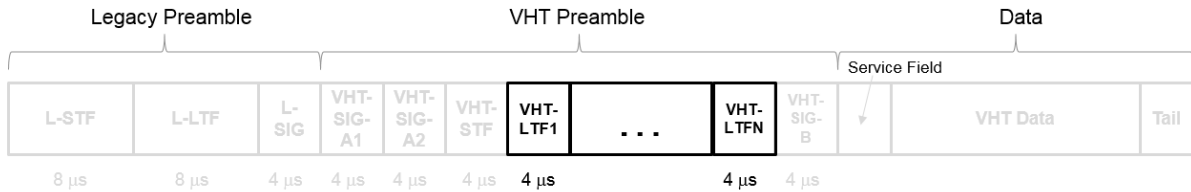

It is used for MIMO channel estimation and pilot subcarrier tracking. The VHT-LTF includes one VHT long training symbol for each spatial stream indicated by the selected MCS. Each symbol is 4 μ s long. A maximum of eight symbols are permitted in the VHT-LTF.

The VHT-LTF is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.5.

Algorithms

VHT-LTF Processing

The “VHT-LTF” on page 2-482 is used for MIMO channel estimation and pilot subcarrier tracking. The number of OFDM symbols in the “VHT-LTF” on page 2-482 (N_{VHTLTF}) is derived from the total number of space-time streams (N_{STS_Total}). $N_{STS_Total} = \sum N_{STS}(u)$ for user u , $u = 0, \dots, N_{Users}-1$ and $N_{STS}(u)$ is the number of space-time streams per user.

N_{STS_Total}	N_{VHTLTF}
1	1
2	2
3	4
4	4
5	6
6	6
7	8
8	8

For algorithm details refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.7.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanLLTF](#) | [wlanVHTConfig](#) | [wlanVHTData](#) | [wlanVHTLTFChannelEstimate](#) | [wlanVHTLTFDemodulate](#) | [wlanVHTSTF](#)

Introduced in R2015b

wlanVHTLTFDemodulate

Demodulate VHT-LTF waveform

Syntax

```
y = wlanVHTLTFDemodulate(x, cfg)
y = wlanVHTLTFDemodulate(x, cbw, numSTS)
y = wlanVHTLTFDemodulate( ____, OFDMSymbolOffset)
```

Description

`y = wlanVHTLTFDemodulate(x, cfg)` returns demodulated “VHT-LTF” on page 2-493²⁴ waveform `y` given time-domain input signal `x` and `wlanVHTConfig` object `cfg`.

`y = wlanVHTLTFDemodulate(x, cbw, numSTS)` demodulates the received signal for the specified channel bandwidth, `cbw`, and number of space-time streams, `numSTS`.

`y = wlanVHTLTFDemodulate(____, OFDMSymbolOffset)` specifies the OFDM symbol offset as a fraction of the cyclic prefix length.

Examples

Demodulate Received VHT-LTF Signal

Create a VHT format configuration object.

```
vht = wlanVHTConfig;
```

Generate a VHT-LTF signal.

```
txVHTLTF = wlanVHTLTF(vht);
```

24. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

Add white noise to the signal.

```
rxVHTLTF = awgn(txVHTLTF,1);
```

Demodulate the received signal.

```
y = wlanVHTLTFDemodulate(rxVHTLTF,vht);
```

Demodulate VHT-LTF and Estimate Channel Coefficients

Specify a VHT format configuration object and generate a VHT-LTF.

```
vht = wlanVHTConfig;  
txlftf = wlanVHTLTF(vht);
```

Multiply the transmitted VHT-LTF by $0.1 + 0.1i$. Pass the signal through an AWGN channel.


```
rxlftfNoNoise = txlftf * complex(0.1,0.1);  
rxlftf = awgn(rxlftfNoNoise,20,'measured');
```

Demodulate the received VHT-LTF with a symbol offset of 0.5.

```
dltf = wlanVHTLTFDemodulate(rxlftf,vht,0.5);
```

Estimate the channel using the demodulated VHT-LTF. Plot the result.

```
chEst = wlanVHTLTFChannelEstimate(dltf,vht);  
scatterplot(chEst)
```

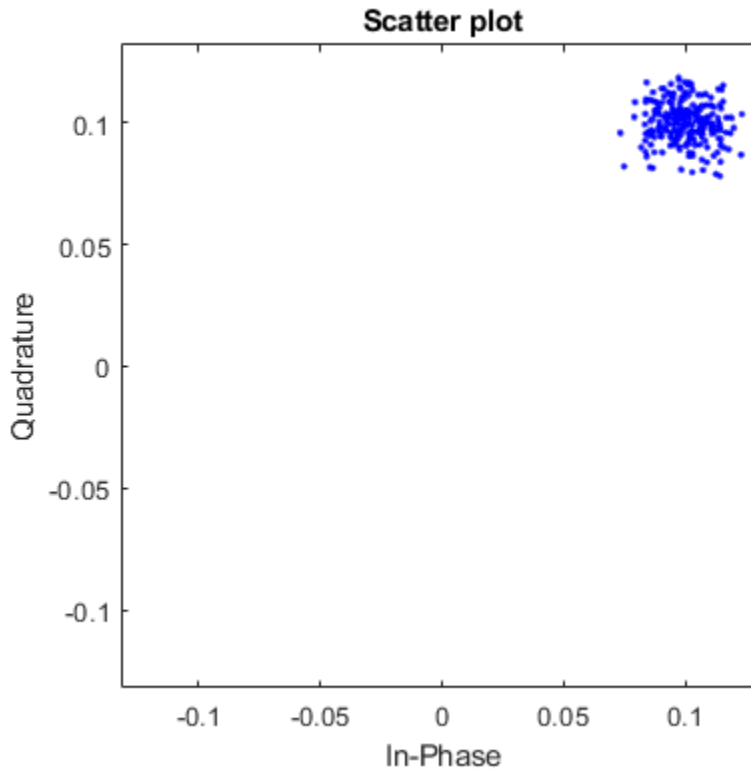

The estimate is very close to the previously introduced $0.1+0.1i$ multiplier.

Extract VHT-LTF and Recover VHT Data

Generate a VHT waveform. Extract and demodulate the VHT long training field (VHT-LTF) to estimate the channel coefficients. Recover the data field by using the channel estimate and use this field to determine the number of bit errors.

Configure a VHT-format configuration object with two paths.

```
vht = wlanVHTConfig('NumTransmitAntennas',2,'NumSpaceTimeStreams',2);
```

Generate a random PSDU and create the corresponding VHT waveform.

```
txPSDU = randi([0 1],8*vht.PSDULength,1);  
rxSig = wlanWaveformGenerator(txPSDU,vht);
```

Pass the signal through a TGac 2x2 MIMO channel.

```
tgacChan = wlanTGacChannel('NumTransmitAntennas',2,'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');  
rxSigNoNoise = tgacChan(txSig);
```

Add AWGN to the received signal. Set the noise variance for the case in which the receiver has a 9-dB noise figure.

```
nVar = 10^((-228.6+10*log10(290)+10*log10(80e6)+9)/10);  
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);  
rxSig = awgnChan(rxSigNoNoise);
```

Determine the indices for the VHT-LTF and extract the field from the received signal.

```
indVHT = wlanFieldIndices(vht,'VHT-LTF');  
rxLTF = rxSig(indVHT(1):indVHT(2),:);
```

Demodulate the VHT-LTF and estimate the channel coefficients.

```
dLTF = wlanVHTLTFDemodulate(rxLTF,vht);  
chEst = wlanVHTLTFChannelEstimate(dLTF,vht);
```

Extract the VHT-Data field and recover the information bits.

```
indData = wlanFieldIndices(vht,'VHT-Data');  
rxData = rxSig(indData(1):indData(2),:);  
rxPSDU = wlanVHTDataRecover(rxData,chEst,nVar,vht);
```

Determine the number of bit errors.

```
numErrs = biterr(txPSDU,rxPSDU)
```

```
numErrs = 0
```

Recover VHT-Data Field in MU-MIMO Channel

Recover VHT-Data field bits for a multiuser transmission using channel estimation on a VHT-LTF field over a quasi-static fading channel.

Create a VHT configuration object having a 160 MHz channel bandwidth, two users, and four transmit antennas. Assign one space-time stream to the first user and three space-time streams to the second user.

```
cbw = 'CBW160';
numSTS = [1 3];
vht = wlanVHTConfig('ChannelBandwidth',cbw,'NumUsers',2, ...
    'NumTransmitAntennas',4,'NumSpaceTimeStreams',numSTS);
```

Because there are two users, the PSDU length is a 1-by-2 row vector.

```
psduLen = vht.PSDULength
```

```
psduLen = 1×2
```

```
1050    3156
```

Generate multiuser input data. This data must be in the form of a 1-by- N cell array, where N is the number of users.

```
txDataBits{1} = randi([0 1],8*vht.PSDULength(1),1);
txDataBits{2} = randi([0 1],8*vht.PSDULength(2),1);
```

Generate VHT-LTF and VHT-Data field signals.

```
txVHTLTF = wlanVHTLTF(vht);
txVHTData = wlanVHTData(txDataBits,vht);
```

Pass the data field for the first user through a 4x1 channel because it consists of a single space-time stream. Pass the second user's data through a 4x3 channel because it consists of three space-time streams. Apply white Gaussian noise to each user signal.

```
snr = 15;
H1 = 1/sqrt(2)*complex(randn(4,1),randn(4,1));
H2 = 1/sqrt(2)*complex(randn(4,3),randn(4,3));

rxVHTData1 = awgn(txVHTData*H1,snr,'measured');
rxVHTData2 = awgn(txVHTData*H2,snr,'measured');
```

Repeat the process for the VHT-LTF fields.

```
rxVHTLTF1 = awgn(txVHTLTF*H1,snr,'measured');  
rxVHTLTF2 = awgn(txVHTLTF*H2,snr,'measured');
```

Calculate the received signal power for both users and use it to estimate the noise variance.

```
powerDB1 = 10*log10(var(rxVHTData1));  
noiseVarEst1 = mean(10.^(0.1*(powerDB1-snr)));
```

```
powerDB2 = 10*log10(var(rxVHTData2));  
noiseVarEst2 = mean(10.^(0.1*(powerDB2-snr)));
```

Estimate the channel characteristics using the VHT-LTF fields.

```
demodVHTLTF1 = wlanVHTLTFDemodulate(rxVHTLTF1,cbw,numSTS);  
chanEst1 = wlanVHTLTFChannelEstimate(demodVHTLTF1,cbw,numSTS);
```

```
demodVHTLTF2 = wlanVHTLTFDemodulate(rxVHTLTF2,cbw,numSTS);  
chanEst2 = wlanVHTLTFChannelEstimate(demodVHTLTF2,cbw,numSTS);
```

Recover VHT-Data field bits for the first user and compare against the original payload bits.

```
rxDataBits1 = wlanVHTDataRecover(rxVHTData1,chanEst1,noiseVarEst1,vht,1);  
[~,ber1] = biterr(txDataBits{1},rxDataBits1)
```

```
ber1 = 0.4983
```

Determine the number of bit errors for the second user.

```
rxDataBits2 = wlanVHTDataRecover(rxVHTData2,chanEst2,noiseVarEst2,vht,2);  
[~,ber2] = biterr(txDataBits{2},rxDataBits2)
```

```
ber2 = 0.0972
```

The bit error rates are quite high because there is no precoding to mitigate the interference between streams. This is especially evident for the user 1 receiver because it receives energy from the three streams intended for user 2. The example is intended to show the workflow and proper syntaxes for the LTF demodulate, channel estimation, and data recovery functions.

Input Arguments

x — Time-domain input signal

matrix

Time-domain input signal corresponding to the VHT-LTF of the PPDU, specified as a matrix of size N_S -by- N_R . N_S is the number of samples. N_R is the number of receive antennas. N_S can be greater than or equal to the VHT-LTF length as indicated by `cfg`. Trailing samples at the end of `x` are not used.

Data Types: double

cfg — VHT format configuration

wlanVHTConfig object

VHT format configuration, specified as a wlanVHTConfig object. The function uses the following wlanVHTConfig object properties:

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users.

Data Types: char | string

numSTS — Number of space-time streams

integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] indicates that one space-time stream is assigned to user 1, three space-time streams are assigned to user 2, and two space-time streams are assigned to user 3.


Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

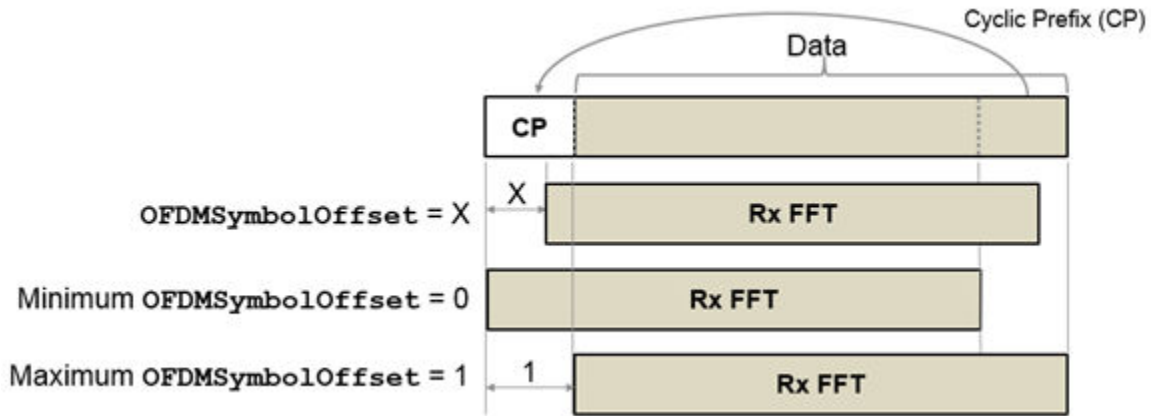

Data Types: double

Output Arguments

y — Demodulated VHT-LTF waveform

matrix | 3-D array

Demodulated VHT-LTF waveform, returned as an N_{ST} -by- N_{SYM} -by- N_R array. N_{ST} is the number of data and pilot subcarriers, N_{SYM} is the number of OFDM symbols in the VHT-LTF, and N_R is the number of receive antennas.


If the received VHT-LTF signal, x , is empty, then the output is also empty.

Data Types: double

More About

VHT-LTF

The very high throughput long training field (VHT-LTF) is located between the VHT-STF and VHT-SIG-B portion of the VHT packet.

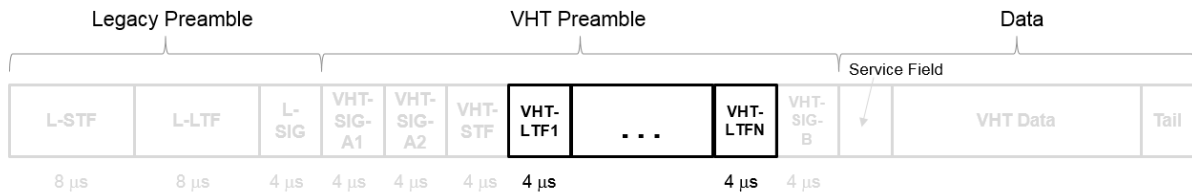

It is used for MIMO channel estimation and pilot subcarrier tracking. The VHT-LTF includes one VHT long training symbol for each spatial stream indicated by the selected MCS. Each symbol is 4 μs long. A maximum of eight symbols are permitted in the VHT-LTF.

The VHT-LTF is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.5.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanVHTConfig | wlanVHTLTF | wlanVHTLTFChannelEstimate

Introduced in R2015b

wlanVHTOFDMInfo

Get OFDM information for VHT transmission

Syntax

```
info = wlanVHTOFDMInfo(field,cfg)
info = wlanVHTOFDMInfo(field,cbw,gi)
info = wlanVHTOFDMInfo(field,cbw)
```

Description

`info = wlanVHTOFDMInfo(field,cfg)` returns `info`, a structure containing orthogonal frequency-division multiplexing (OFDM) information for the input field of a very-high-throughput (VHT) transmission parameterized by configuration object `cfg`.

`info = wlanVHTOFDMInfo(field,cbw,gi)` returns OFDM information for channel bandwidth `cbw` and guard interval `gi`. To return OFDM information for the VHT-Data field when the format configuration is unknown, use this syntax.

`info = wlanVHTOFDMInfo(field,cbw)` returns OFDM information for the specified field and channel bandwidth `cbw`. To return OFDM information for any field other than VHT-Data when the format configuration is unknown, use this syntax.

Examples

Demodulate VHT-LTF and Get OFDM Information

Perform OFDM demodulation on the VHT-LTF, then extract the data and pilot subcarriers.

Generate a WLAN waveform for a VHT transmission.

```
cfg = wlanVHTConfig;
bits = [1; 0; 0; 1];
waveform = wlanWaveformGenerator(bits,cfg);
```

Obtain the field indices and extract the VHT-LTF.

```
ind = wlanFieldIndices(cfg);
rx = waveform(ind.VHTLTF(1):ind.VHTLTF(2),:);
```

Perform OFDM demodulation on the VHT-LTF.

```
sym = wlanVHTLTFDemodulate(rx,cfg);
```

Get the OFDM information, then extract the data and pilot subcarriers.

```
info = wlanVHTOFDMInfo('VHT-LTF',cfg);
data = sym(info.DataIndices,,:);
pilots = sym(info.PilotIndices,,:);
```

Get OFDM Information for the VHT L-LTF

Get OFDM information for the VHT-LTF in a transmission with specified channel bandwidth.

Specify a channel bandwidth of 40 MHz.

```
cbw = 'CBW40';
```

Return and display the OFDM information for the L-LTF.

```
info = wlanVHTOFDMInfo('L-LTF',cbw);
disp(info);

          FFTLength: 128
          CLength: [64 0]
    NumSubchannels: 2
          NumTones: 104
ActiveFrequencyIndices: [104x1 double]
  ActiveFFTIndices: [104x1 double]
        DataIndices: [96x1 double]
        PilotIndices: [8x1 double]
```

Get OFDM Information for VHT-Data Field

Get OFDM information for the VHT-Data field in a transmission with specified channel bandwidth and guard interval.

Specify a channel bandwidth of 80 MHz and a short guard interval.

```
cbw = 'CBW80';  
gi = 'Short';
```

Return and display the OFDM information for the VHT-Data field.

```
info = wlanVHTOFDMInfo('VHT-Data',cbw,gi);  
disp(info);
```

```
          FFTLength: 256  
          CPLength: 32  
    NumSubchannels: 4  
          NumTones: 242  
ActiveFrequencyIndices: [242x1 double]  
  ActiveFFTIndices: [242x1 double]  
        DataIndices: [234x1 double]  
      PilotIndices: [8x1 double]
```

Input Arguments

field — Field for which to return OFDM information

'L-LTF' | 'L-SIG' | 'VHT-SIG-A' | 'VHT-SIG-B' | 'VHT-LTF' | 'VHT-Data'

Field for which to return OFDM information, specified as one of these values.

- 'L-LTF' - Return OFDM information for the legacy long training field (L-LTF).
- 'L-SIG' - Return OFDM information for the legacy signal (L-SIG) field.
- 'VHT-SIG-A' - Return OFDM information for the VHT signal A (VHT-SIG-A) field.
- 'VHT-SIG-B' - Return OFDM information for the VHT signal B (VHT-SIG-B) field.
- 'VHT-LTF' - Return OFDM information for the VHT long training field (VHT-LTF).
- 'VHT-Data' - Return OFDM information for the VHT-Data field.

Data Types: char | string

cfg — PHY format configuration

wlanVHTConfig object

Physical layer (PHY) format configuration, specified as a wlanVHTConfig object.

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as one of these values.

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

gi — Guard interval duration

'Short' | 'Long'

Guard interval duration, specified as 'Short' or 'Long'.

Data Types: double

Output Arguments

info — OFDM information

structure

OFDM information, returned as a structure containing these fields.

Name	Values	Description	Data Types
FFTLlength	Positive integer	Length of the fast Fourier transform (FFT)	double
CPLlength	Positive integer	Cyclic prefix length, in samples	double

Name	Values	Description	Data Types
NumTones	Nonnegative integer	Number of active subcarriers	double
NumSubchannels	Positive integer	Number of 20-MHz subchannels	double
ActiveFrequencyIndices	Column vector of integers in the interval $[-\text{FFTLength}/2, (\text{FFTLength}/2 - 1)]$	Indices of active subcarriers. Each element of this field is the index of an active subcarrier, such that the direct current (DC) or null subcarrier is at the center of the frequency band.	double
ActiveFFTIndices	Column vector of integers in the interval $[1, \text{FFTLength}]$	Indices of active subcarriers within the FFT	double
DataIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of data within the active subcarriers	double
PilotIndices	Column vector of integers in the interval $[1, \text{NumTones}]$	Indices of pilots within the active subcarriers	double

Data Types: struct

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanLLTFDemodulate | wlanVHTLTFDemodulate

Objects

wlanVHTConfig

Introduced in R2019a

wlanVHTSIGA

Generate VHT-SIG-A waveform

Syntax

```
y= wlanVHTSIGA(cfg)
[y, bits] = wlanVHTSIGA(cfg)
```

Description

`y = wlanVHTSIGA(cfg)` generates a “VHT-SIG-A” on page 2-509²⁵ time-domain waveform for the specified configuration object. See “VHT-SIG-A Processing” on page 2-511 for waveform generation details.

`[y, bits] = wlanVHTSIGA(cfg)` also outputs “VHT-SIG-A” on page 2-509 information bits.

Examples

Generate VHT-SIG-A Waveform

Generate the VHT-SIG-A waveform for an 80 MHz transmission packet.

Create a VHT configuration object, assign an 80 MHz channel bandwidth, and generate the waveform.

```
cfgVHT = wlanVHTConfig;
cfgVHT.ChannelBandwidth = 'CBW80';
y = wlanVHTSIGA(cfgVHT);
size(y)
```

25. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

```
ans = 1x2
      640      1
```

The 80 MHz waveform has two OFDM symbols and is a total of 640 samples long. Each symbol contains 320 samples.

Extract VHT-SIG-A Bandwidth Information

Generate the VHT-SIG-A waveform for a 40 MHz transmission packet.

Create a VHT configuration object, and assign a 40 MHz channel bandwidth.

```
cfgVHT = wlanVHTConfig;
cfgVHT.ChannelBandwidth = 'CBW40';
```

Generate the VHT-SIG-A waveform and information bits.

```
[y, bits] = wlanVHTSIGA(cfgVHT);
```

Extract the bandwidth from the returned bits and analyze. The bandwidth information is contained in the first two bits.

```
bwBits = bits(1:2);
bi2de(bwBits)

ans = 2x1 int8 column vector
```

```
  1
  0
```

As defined in IEEE Std 802.11ac-2013, Table 22-12, a value of '1' corresponds to 40 MHz bandwidth.

Input Arguments

cfg — Format configuration

wlanVHTConfig object

Format configuration, specified as a `wlanVHTConfig` object. The `wlanVHTSIGA` function uses the object properties indicated.

User Scenario	Applicable Object Properties
Multi-user	ChannelBandwidth, NumUsers, UserPositions, NumTransmitAntennas, NumSpaceTimeStreams, SpatialMapping, STBC, ChannelCoding, GuardInterval, and GroupID
Single user	ChannelBandwidth, NumUsers, NumTransmitAntennas, NumSpaceTimeStreams, SpatialMapping, STBC, MCS, ChannelCoding, GuardInterval, GroupID, Beamforming, and PartialAID

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumUsers — Number of users

1 (default) | 2 | 3 | 4

Number of users, specified as 1, 2, 3, or 4. (N_{Users})

Data Types: double

UserPositions — Position of users

[0 1] (default) | row vector of integers from 0 to 3 in strictly increasing order

Position of users, specified as an integer row vector with length equal to `NumUsers` and element values from 0 to 3 in a strictly increasing order. This property applies when `NumUsers > 1`.

Example: [0 2 3] indicates positions for three users, where the first user occupies position 0, the second user occupies position 2, and the third user occupies position 3.

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the range [1, 8]

Number of transmit antennas, specified as an integer in the range [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value of 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

Beamforming — Enable signaling of a transmission with beamforming

true (default) | false

Enable signaling of a transmission with beamforming, specified as a logical. Beamforming is performed when setting is true. This property applies when NumUsers equals 1 and SpatialMapping is set to 'Custom'. The SpatialMappingMatrix property specifies the beamforming steering matrix.

Data Types: logical

STBC — Enable space-time block coding

false (default) | true

Enable space-time block coding (STBC) of the PPDU data field, specified as a logical. STBC transmits multiple copies of the data stream across assigned antennas.

- When set to false, no STBC is applied to the data field, and the number of space-time streams is equal to the number of spatial streams.
- When set to true, STBC is applied to the data field, and the number of space-time streams is double the number of spatial streams.

See IEEE 802.11ac-2013, Section 22.3.10.9.4 for further description.

Note STBC is relevant for single-user transmissions only.

Data Types: logical

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 9 | 1-by- N_{Users} vector of integers

Modulation and coding scheme used in transmitting the current packet, specified as a scalar or vector.

- For a single user, the MCS value is a scalar integer from 0 to 9.
- For multiple users, MCS is a 1-by- N_{Users} vector of integers or a scalar with values from 0 to 9, where the vector length, N_{Users} , is an integer from 1 to 4.

MCS	Modulation	Coding Rate
0	BPSK	1/2
1	QPSK	1/2
2	QPSK	3/4
3	16QAM	1/2
4	16QAM	3/4
5	64QAM	2/3
6	64QAM	3/4
7	64QAM	5/6

MCS	Modulation	Coding Rate
8	256QAM	3/4
9	256QAM	5/6

Data Types: double

ChannelCoding — Type of forward error correction coding

'BCC' (default) | 'LDPC'

Type of forward error correction coding for the data field, specified as 'BCC' (default) or 'LDPC'. 'BCC' indicates binary convolutional coding and 'LDPC' indicates low density parity check coding. Providing a character vector or a single cell character vector defines the channel coding type for a single user or all users in a multiuser transmission. By providing a cell array different channel coding types can be specified per user for a multiuser transmission.

Data Types: char | cell | string

GuardInterval — Cyclic prefix length for the data field within a packet

'Long' (default) | 'Short'

Cyclic prefix length for the data field within a packet, specified as 'Long' or 'Short'.

- The long guard interval length is 800 ns.
- The short guard interval length is 400 ns.

Data Types: char | string

GroupID — Group identification number

63 (default) | integer from 0 to 63

Group identification number, specified as a scalar integer from 0 to 63.

- A group identification number of either 0 or 63 indicates a VHT single-user PPDU.
- A group identification number from 1 to 62 indicates a VHT multi-user PPDU.

Data Types: double

PartialAID — Abbreviated indication of the PSDU recipient

275 (default) | integer from 0 to 511

Abbreviated indication of the PSDU recipient, specified as a scalar integer from 0 to 511.

- For an uplink transmission, the partial identification number is the last nine bits of the basic service set identifier (BSSID).
- For a downlink transmission, the partial identification of a client is an identifier that combines the association ID with the BSSID of its serving AP.

For more information, see IEEE Std 802.11ac-2013, Table 22-1.

Data Types: double

Output Arguments

y — VHT-SIG-A time-domain waveform

matrix

“VHT-SIG-A” on page 2-509 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth. The time-domain waveform consists of two symbols.

ChannelBandwidth	N_S
'CBW20'	160
'CBW40'	320
'CBW80'	640
'CBW160'	1280

See “VHT-SIG-A Processing” on page 2-511 for waveform generation details.

Data Types: double

Complex Number Support: Yes

bits — Signaling bits used for the VHT-SIG-A field

48-bit column vector

Signaling bits used for the “VHT-SIG-A” on page 2-509, returned as a 48-bit column vector.


Data Types: int8

More About

VHT-SIG-A


The very high throughput signal A (VHT-SIG-A) field contains information required to interpret VHT format packets. Similar to the non-HT signal (L-SIG) field for the non-HT OFDM format, this field stores the actual rate value, channel coding, guard interval, MIMO scheme, and other configuration details for the VHT format packet. Unlike the HT-SIG field, this field does not store the packet length information. Packet length information is derived from L-SIG and is captured in the VHT-SIG-B field for the VHT format.

The VHT-SIG-A field consists of two symbols: VHT-SIG-A1 and VHT-SIG-A2. These symbols are located between the L-SIG and the VHT-STF portion of the VHT format PPDU.

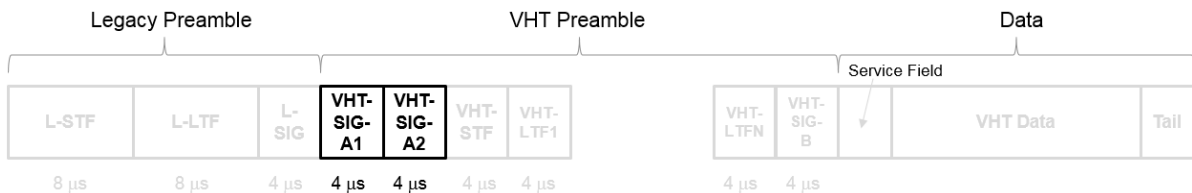


The VHT-SIG-A field is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.3.

VHT-SIG-A1 Structure

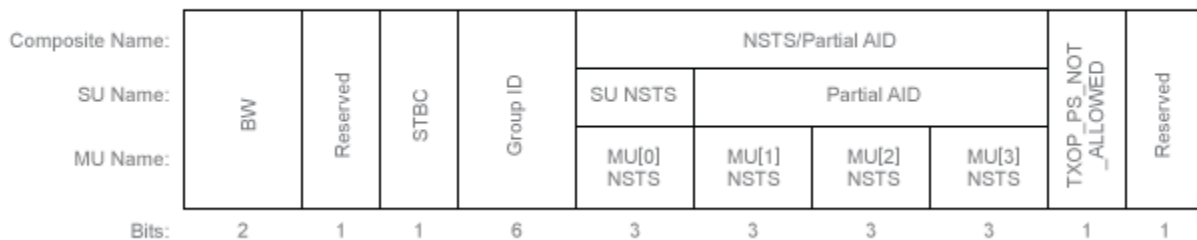

VHT-SIG-A2 Structure

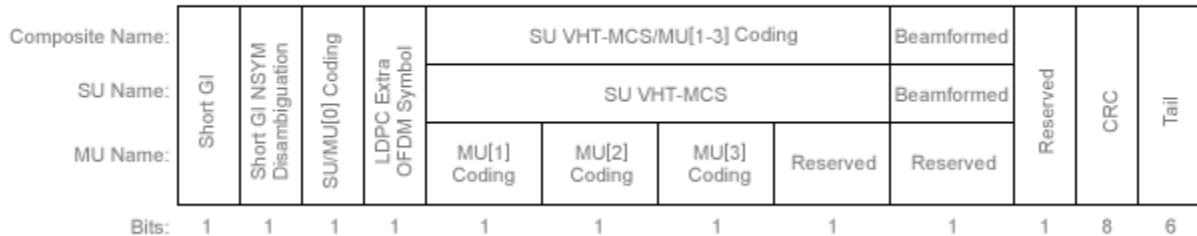

The VHT-SIG-A field includes these components. The bit field structures for VHT-SIG-A1 and VHT-SIG-A2 vary for single user or multiuser transmissions.

- **BW** — A two-bit field that indicates 0 for 20 MHz, 1 for 40 MHz, 2 for 80 MHz, or 3 for 160 MHz.
- **STBC** — A bit that indicates the presence of space-time block coding.
- **Group ID** — A six-bit field that indicates the group and user position assigned to a STA.
- **N_{STS}** — A three-bit field for a single user or 4 three-bit fields for a multiuser scenario, that indicates the number of space-time streams per user.
- **Partial AID** — An identifier that combines the association ID and the BSSID.
- **TXOP_PS_NOT_ALLOWED** — An indicator bit that shows if client devices are allowed to enter dose state. This bit is set to false when the VHT-SIG-A structure is populated, indicating that the client device is allowed to enter dose state.
- **Short GI** — A bit that indicates use of the 400 ns guard interval.
- **Short GI NSYM Disambiguation** — A bit that indicates if an extra symbol is required when the short GI is used.
- **SU/MU[0] Coding** — A bit field that indicates if convolutional or LDPC coding is used for a single user or for user MU[0] in a multiuser scenario.
- **LDPC Extra OFDM Symbol** — A bit that indicates if an extra OFDM symbol is required to transmit the data field.
- **MCS** — A four-bit field.
 - For a single user scenario, it indicates the modulation and coding scheme used.
 - For a multiuser scenario, it indicates use of convolutional or LDPC coding and the MCS setting is conveyed in the VHT-SIG-B field.


- **Beamformed** — An indicator bit set to 1 when a beamforming matrix is applied to the transmission.
- **CRC** — An eight-bit field used to detect errors in the VHT-SIG-A transmission.
- **Tail** — A six-bit field used to terminate the convolutional code.

Algorithms

VHT-SIG-A Processing

The “VHT-SIG-A” on page 2-509 field includes information required to process VHT format packets.

For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.5. The wlanVHTSIGA function performs transmitter processing on the “VHT-SIG-A” on page 2-509 field and outputs the time-domain waveform.

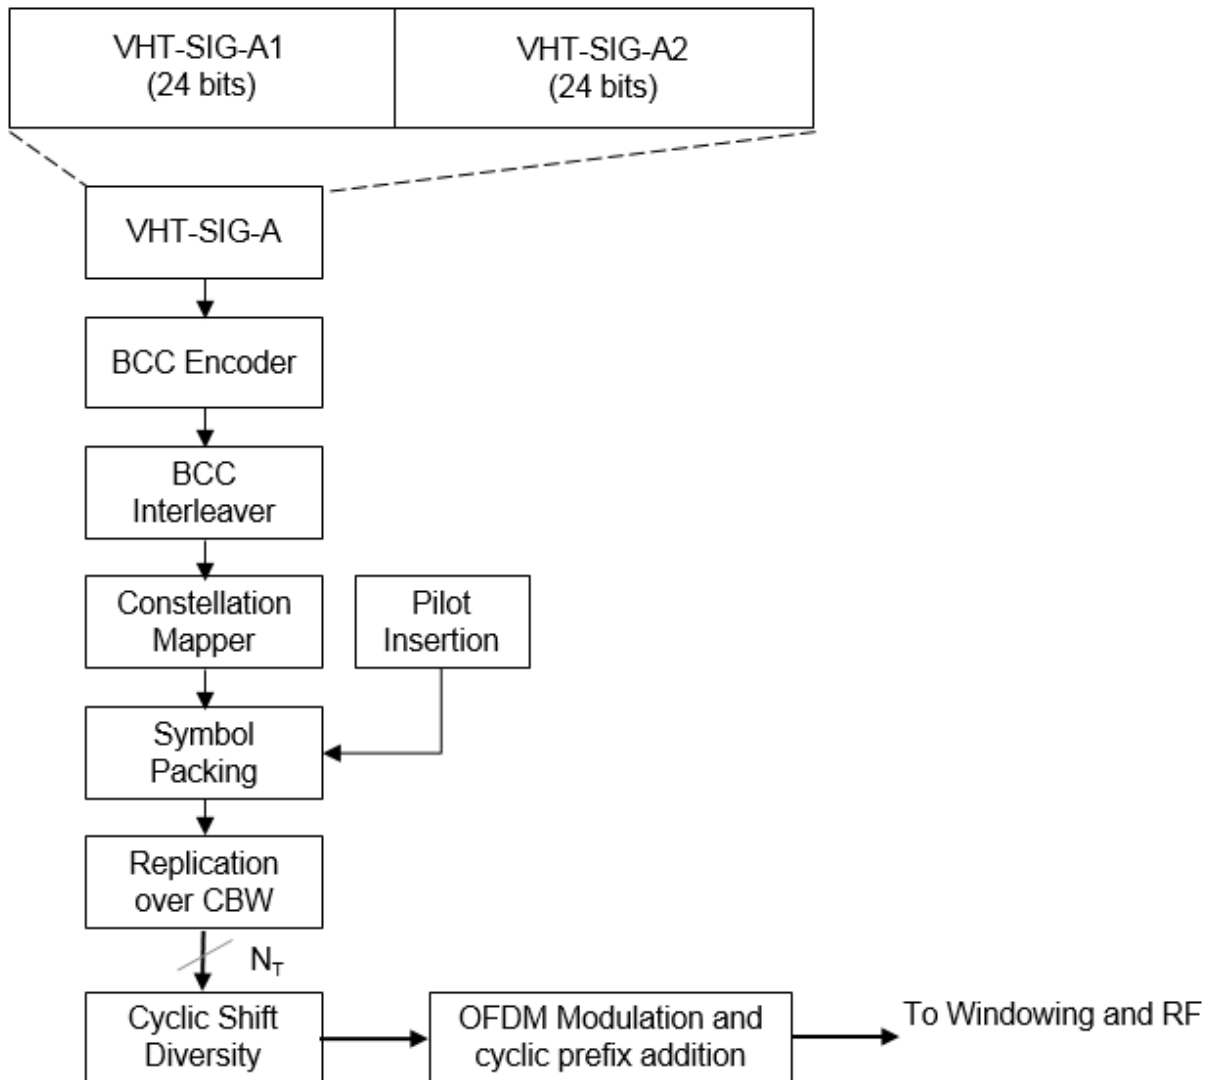

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanLSIG | wlanVHTConfig | wlanVHTSIGAResume | wlanVHTSTF

Introduced in R2015b

wlanVHTSIGARrecover

Recover VHT-SIG-A information bits

Syntax

```
recBits = wlanVHTSIGARrecover(rxSig,chEst,noiseVarEst,cbw)
recBits = wlanVHTSIGARrecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)
[recBits,failCRC] = wlanVHTSIGARrecover( ___ )
[recBits,failCRC,eqSym] = wlanVHTSIGARrecover( ___ )
[recBits,failCRC,eqSym,cpe] = wlanVHTSIGARrecover( ___ )
```

Description

`recBits = wlanVHTSIGARrecover(rxSig,chEst,noiseVarEst,cbw)` returns the recovered information bits from the “VHT-SIG-A” on page 2-522²⁶ field. Inputs include the received “VHT-SIG-A” on page 2-522 field, the channel estimate, the noise variance estimate, and the channel bandwidth.

`recBits = wlanVHTSIGARrecover(rxSig,chEst,noiseVarEst,cbw,cfgRec)` specifies algorithm information using `wlanRecoveryConfig` object `cfgRec`.

`[recBits,failCRC] = wlanVHTSIGARrecover(___)` returns the failure status of the CRC check, `failCRC`, using the arguments from previous syntaxes.

`[recBits,failCRC,eqSym] = wlanVHTSIGARrecover(___)` returns the equalized symbols, `eqSym`.

`[recBits,failCRC,eqSym,cpe] = wlanVHTSIGARrecover(___)` returns the common phase error, `cpe`.

Examples

26. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

Recover VHT-SIG-A Information Bits

Recover the information bits in the VHT-SIG-A field by performing channel estimation on the L-LTF over a 1x2 quasi-static fading channel

Create a `wlanVHTConfig` object having a channel bandwidth of 80 MHz. Generate L-LTF and VHT-SIG-A field signals using this object.

```
cfg = wlanVHTConfig('ChannelBandwidth', 'CBW80');
txLLTF = wlanLLTF(cfg);
[txVHTSIGA, txBits] = wlanVHTSIGA(cfg);
chanBW = cfg.ChannelBandwidth;
noiseVarEst = 0.1;
```

Pass the L-LTF and VHT-SIG-A signals through a 1x2 quasi-static fading channel with AWGN.

```
H = 1/sqrt(2)*complex(randn(1,2),randn(1,2));
rxLLTF = awgn(txLLTF*H,10);
rxVHTSIGA = awgn(txVHTSIGA*H,10);
```

Perform channel estimation based on the L-LTF.

```
demodLLTF = wlanLLTFDemodulate(rxLLTF,chanBW,1);
chanEst = wlanLLTFChannelEstimate(demodLLTF,chanBW);
```

Recover the VHT-SIG-A. Verify that the CRC check was successful.

```
[rxBits, failCRC] = wlanVHTSIGAREcover(rxVHTSIGA,chanEst,noiseVarEst, 'CBW80');
failCRC

failCRC = logical
    0
```

The CRC failure check returns a 0, indicating that the CRC passed.

Compare the transmitted bits to the received bits. Confirm that the reported CRC result is correct because the output matches the input.

```
isequal(txBits,rxBits)

ans = logical
    1
```

Recover VHT-SIG-A Using Zero-Forcing Equalizer

Recover the VHT-SIG-A in an AWGN channel. Configure the VHT signal to have a 160 MHz channel bandwidth, one space-time stream, and one receive antenna.

Create a `wlanVHTConfig` object having a channel bandwidth of 160 MHz. Using the object to create a VHT-SIG-A waveform.

```
cfg = wlanVHTConfig('ChannelBandwidth','CBW160');
```

Generate L-LTF and VHT-SIG-A field signals.

```
txLLTF = wlanLLTF(cfg);  
[txSig,txBits] = wlanVHTSIGA(cfg);  
chanBW = cfg.ChannelBandwidth;  
noiseVar = 0.1;
```

Pass the transmitted VHT-SIG-A through an AWGN channel.

```
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',noiseVar);  
rxLLTF = awgnChan(txLLTF);  
rxSig = awgnChan(txSig);
```

Using `wlanRecoveryConfig`, set the equalization method to zero-forcing, 'ZF'.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Perform channel estimation based on the L-LTF.

```
demodLLTF = wlanLLTFDemodulate(rxLLTF,chanBW,1);  
chanEst = wlanLLTFChannelEstimate(demodLLTF,chanBW);
```

Recover the VHT-SIG-A. Verify that there are no bit errors in the received information.

```
[rxBits,crcFail] = wlanVHTSIGARecover(rxSig,chanEst,noiseVar,'CBW160',cfgRec);  
crcFail
```

```
crcFail = logical  
0
```


The CRC failure check returns a 0, indicating the CRC passed. Comparing the transmitted bits to the received bits reconfirms the reported CRC result because the output matches the input.

```
biterr(txBits,rxBits)
ans = 0
```

Recover VHT-SIG-A in 2x2 MIMO Channel

Recover VHT-SIG-A in a 2x2 MIMO channel with AWGN. Confirm that the CRC check passes.

Configure a 2x2 MIMO VHT channel.

```
chanBW = 'CBW20';
cfgVHT = wlanVHTConfig('ChannelBandwidth', chanBW, 'NumTransmitAntennas', 2, 'NumSpace
```

Generate L-LTF and VHT-SIG-A waveforms.

```
txLLTF = wlanLLTF(cfgVHT);
txVHTSIGA = wlanVHTSIGA(cfgVHT);
```

Pass the L-LTF and VHT-SIG-A waveforms through a 2x2 MIMO channel with white noise.

```
mimoChan = comm.MIMOChannel('SampleRate', 20e6);
rxLLTF = awgn(mimoChan(txLLTF), 15);
rxVHTSIGA = awgn(mimoChan(txVHTSIGA), 15);
```

Demodulate the L-LTF signal. To generate a channel estimate, use the demodulated L-LTF.


```
demodLLTF = wlanLLTFDemodulate(rxLLTF, chanBW, 1);
chanEst = wlanLLTFChannelEstimate(demodLLTF, chanBW);
```

Recover the information bits in VHT-SIG-A.

```
[recVHTSIGABits, failCRC, eqSym] = wlanVHTSIGARecover(rxVHTSIGA, chanEst, 0, chanBW);
```

Visualize the scatter plot of the equalized symbols, eqSym.

```
scatterplot(eqSym(:))
```

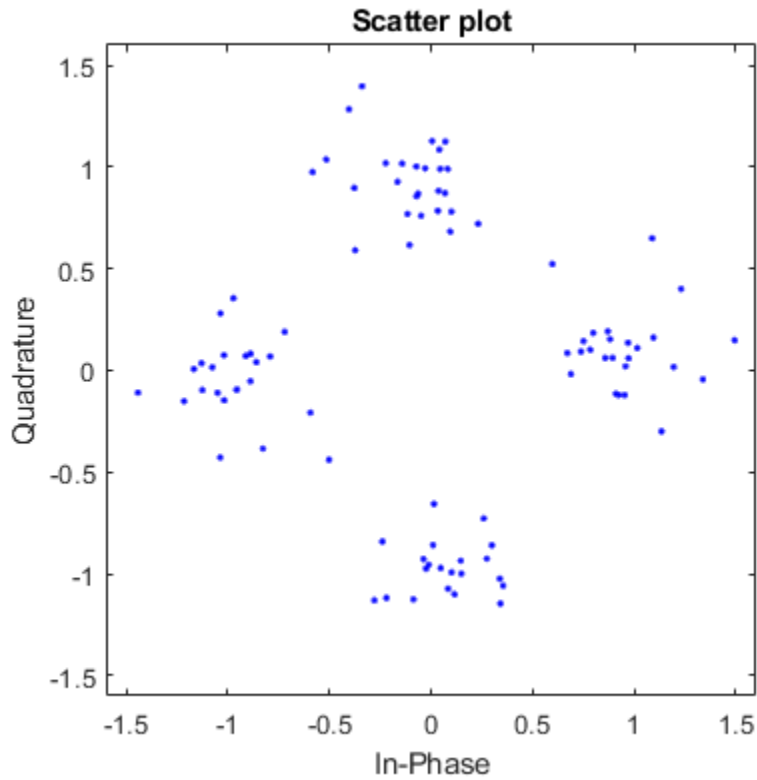

Input Arguments

rxSig — Received VHT-SIG-A

matrix

Received VHT-SIG-A field, specified as an N_S -by- N_R matrix. N_S is the number of samples and increases with channel bandwidth.

Channel Bandwidth	N_S
'CBW20'	160

Channel Bandwidth	N_S
'CBW40'	320
'CBW80'	640
'CBW160'	1280

N_R is the number of receive antennas.

Data Types: double

chEst — Channel estimate

3-D array

Channel estimate, specified as an N_{ST} -by-1-by- N_R array. N_{ST} is the number of occupied subcarriers and increases with channel bandwidth.

Channel Bandwidth	N_{ST}
'CBW20'	52
'CBW40'	104
'CBW80'	208
'CBW160'	416

N_R is the number of receive antennas.

The channel estimate is based on the “L-LTF” on page 2-522.

Data Types: double

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth in MHz, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

cfgRec — Algorithm parameters


wlanRecoveryConfig object

Algorithm parameters, specified as a wlanRecoveryConfig object. The function uses these properties:

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

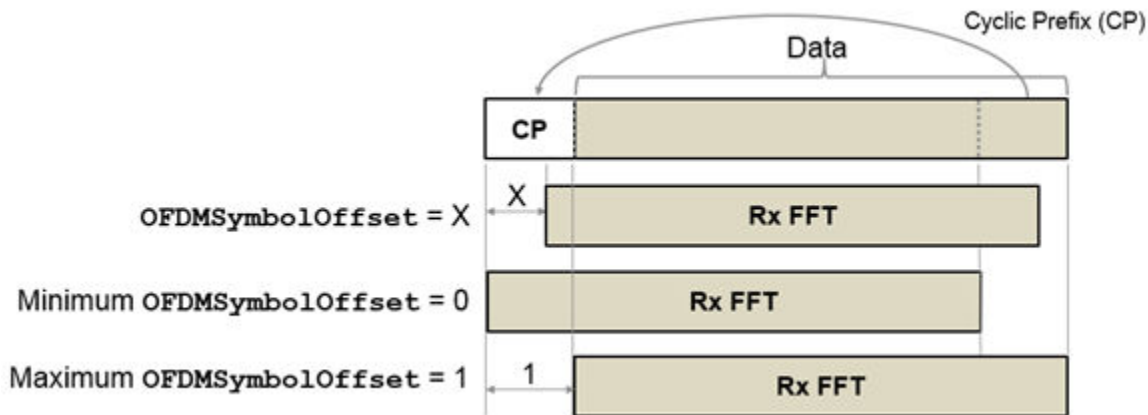

Data Types: double

EqualizationMethod — Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking — Pilot phase tracking`'PreEQ'` (default) | `'None'`

Pilot phase tracking, specified as one of these values:

- `'PreEQ'` — Enable pilot phase tracking, which is performed before any equalization operation.
- `'None'` — Disable pilot phase tracking.

Data Types: `char` | `string`

Output Arguments

recBits — Recovered VHT-SIG-A information bits`column vector`

Recovered VHT-SIG-A information bits, returned as a 48-by-1 column vector. See “VHT-SIG-A” on page 2-522 for more information.

failCRC — CRC failure check`true` | `false`

CRC failure check, returned as `true` if the CRC check fails or `false` if the CRC check passes.

eqSym — Equalized symbols`matrix`

Equalized symbols at the data carrying subcarriers, returned as 48-by-2 matrix. Each 20 MHz channel bandwidth segment has two symbols and 48 data carrying subcarriers. These segments are combined into a single 48-by-2 matrix that comprises the “VHT-SIG-A” on page 2-522 field.

cpe — Common phase error`column vector`


Common phase error in radians, returned as a 2-by-1 column vector.

More About


VHT-SIG-A

The very high throughput signal A (VHT-SIG-A) field consists of two symbols: VHT-SIG-A1 and VHT-SIG-A2. The VHT-SIG-A field carries information required to interpret VHT PPDU information.

VHT-SIG-A1 Structure

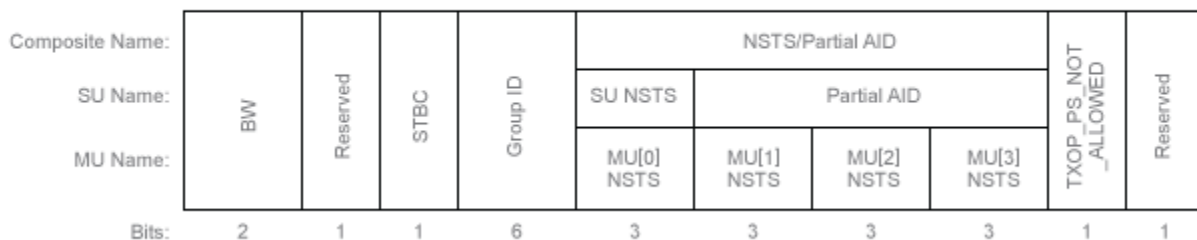


VHT-SIG-A2 Structure

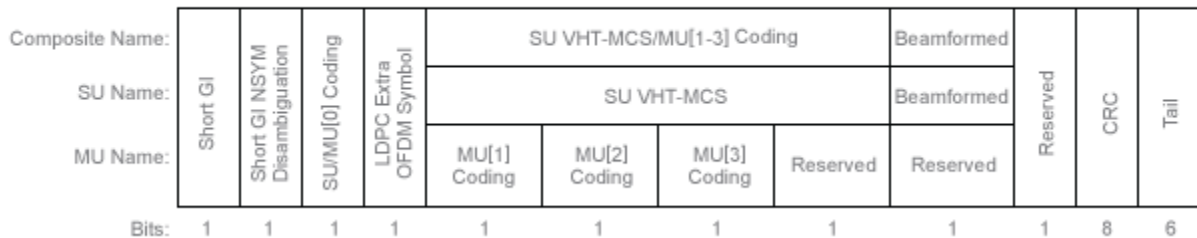

For VHT-SIG-A field bit details, refer to IEEE Std 802.11ac-2013 [1], Table 22-12.


L-LTF

The legacy long training field (L-LTF) is the second field in the 802.11 OFDM PLCP legacy preamble. The L-LTF is a component of VHT, HT, and non-HT PPDU.

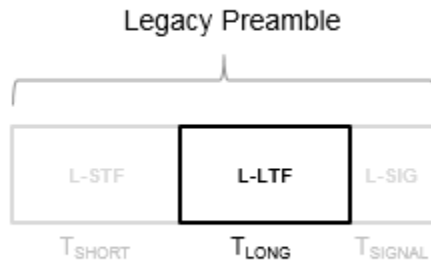

Channel estimation, fine frequency offset estimation, and fine symbol timing offset estimation rely on the L-LTF.

The L-LTF is composed of a cyclic prefix (CP) followed by two identical long training symbols (C1 and C2). The CP consists of the second half of the long training symbol.

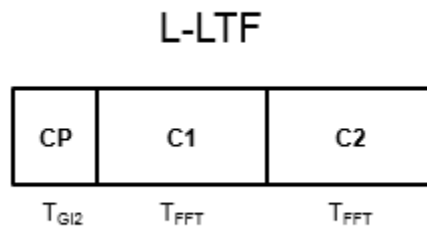

The L-LTF duration varies with channel bandwidth.

Channel Bandwidth (MHz)	Subcarrier Frequency Spacing, Δ_F (kHz)	Fast Fourier Transform (FFT) Period ($T_{FFT} = 1 / \Delta_F$)	Cyclic Prefix or Training Symbol Guard Interval (GI2) Duration ($T_{GI2} = T_{FFT} / 2$)	L-LTF Duration ($T_{LONG} = T_{GI2} + 2 \times T_{FFT}$)
20, 40, 80, and 160	312.5	3.2 μ s	1.6 μ s	8 μ s
10	156.25	6.4 μ s	3.2 μ s	16 μ s
5	78.125	12.8 μ s	6.4 μ s	32 μ s

PPDU


PLCP protocol data unit

The PPDU is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.


Algorithms

VHT-SIG-A Recovery

The “VHT-SIG-A” on page 2-522 field consists of two symbols and resides between the L-SIG field and the VHT-STF portion of the packet structure for the VHT format “PPDU” on page 2-524.

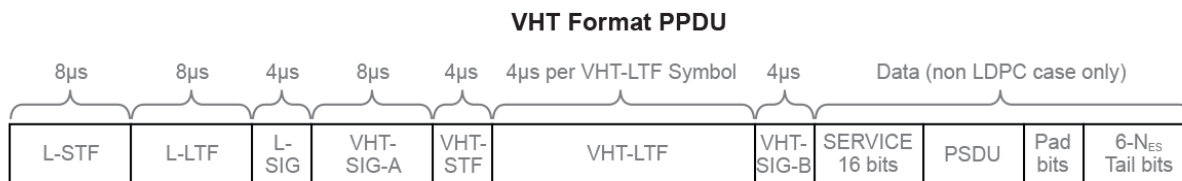

For single-user packets, you can recover the length information from the L-SIG and VHT-SIG-A field information. Therefore, it is not strictly required for the receiver to decode the “VHT-SIG-A” on page 2-522 field.

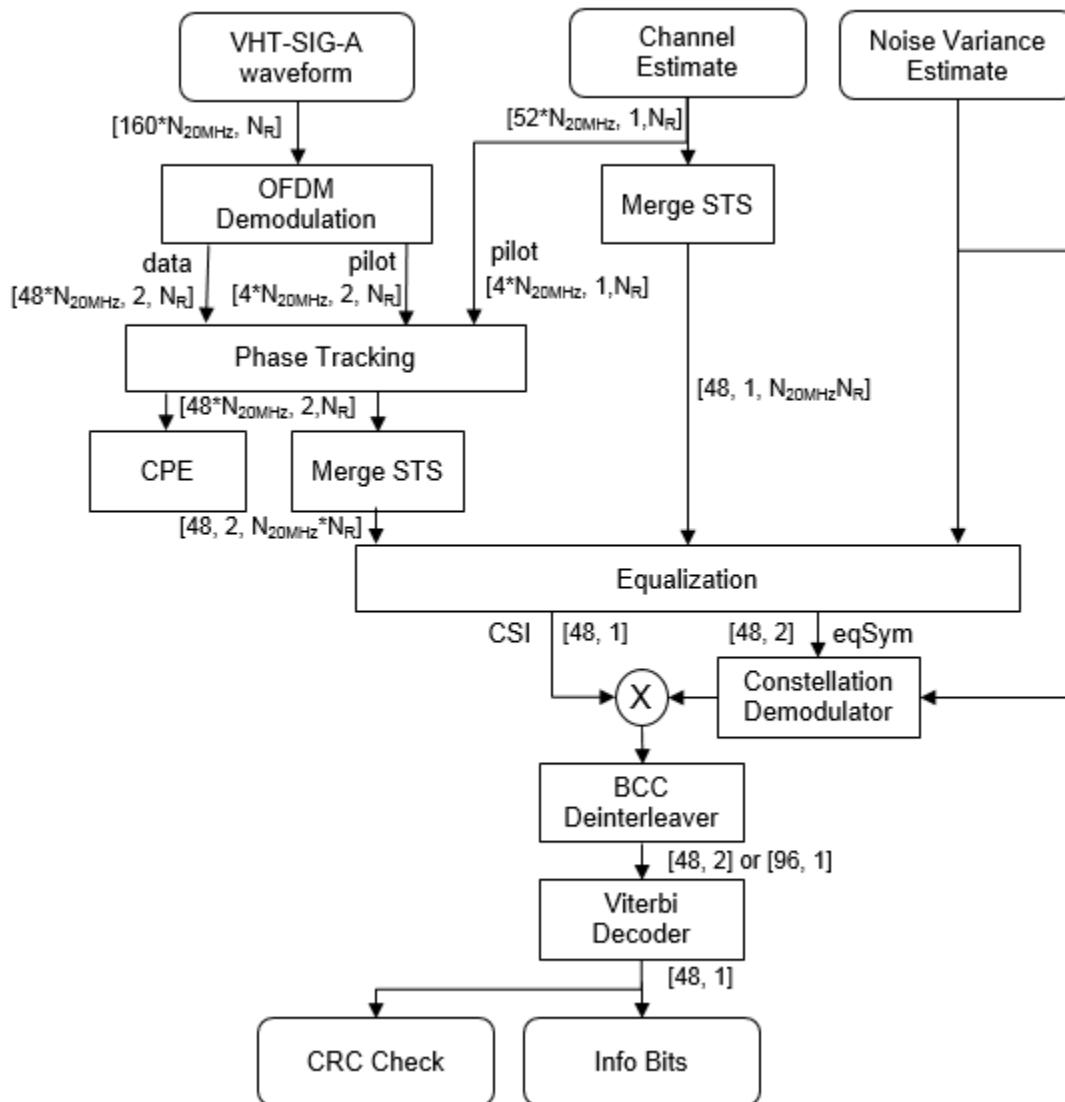

For “VHT-SIG-A” on page 2-522 details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.5, and Perahia [2], Section 7.3.2.1.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] Perahia, E., and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac*. 2nd Edition, United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanLLTF` | `wlanLLTFChannelEstimate` | `wlanLLTFDemodulate` | `wlanRecoveryConfig` | `wlanVHTSIGA`

Introduced in R2015b

wlanVHTSIGB

Generate VHT-SIG-B waveform

Syntax

```
y= wlanVHTSIGB(cfg)
[y, bits] = wlanVHTSIGB(cfg)
```

Description

`y = wlanVHTSIGB(cfg)` generates a “VHT-SIG-B” on page 2-532²⁷ time-domain waveform for the specified configuration object. See “VHT-SIG-B Processing” on page 2-535 for waveform generation details.

`[y, bits] = wlanVHTSIGB(cfg)` also outputs “VHT-SIG-B” on page 2-532 information bits.

Examples

Generate VHT-SIG-B Waveform

Generate the VHT-SIG-B waveform for an 80 MHz transmission packet.

Create a VHT configuration object, assign an 80 MHz channel bandwidth, and generate the waveform.

```
cfgVHT = wlanVHTConfig('ChannelBandwidth', 'CBW80');
vhtsigb = wlanVHTSIGB(cfgVHT);
size(vhtsigb)

ans = 1x2
```

27. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

320 1

The 80 MHz waveform has one OFDM symbol and is a total of 320 samples long.

Input Arguments

cfg — Format configuration

wlanVHTConfig object

Format configuration, specified as a wlanVHTConfig object. The wlanVHTSIGB function uses the object properties indicated.

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumUsers — Number of users

1 (default) | 2 | 3 | 4

Number of users, specified as 1, 2, 3, or 4. (N_{Users})

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the range [1, 8]

Number of transmit antennas, specified as an integer in the range [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

SpatialMapping – Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value of 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix – Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to apply a beamforming steering matrix, and to rotate and scale the constellation mapper output vector. If applicable, scale the space-time block coder output instead.

SpatialMappingMatrix applies when the **SpatialMapping** property is set to 'Custom'. For more information, see IEEE Std 802.11-2012, Section 20.3.11.11.2.

- When specified as a scalar, a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be N_{STS_Total} -by- N_T . The spatial mapping matrix applies to all the subcarriers. N_{STS_Total} is the sum of space-time streams for all users, and N_T is the number of transmit antennas.
- When specified as a 3-D array, the size must be N_{ST} -by- N_{STS_Total} -by- N_T . N_{ST} is the sum of the occupied data (N_{SD}) and pilot (N_{SP}) subcarriers, as determined by **ChannelBandwidth**. N_{STS_Total} is the sum of space-time streams for all users. N_T is the number of transmit antennas.

N_{ST} increases with channel bandwidth.

Channel Bandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3 0.4; 0.4 0.5 0.8] represents a spatial mapping matrix having two space-time streams and three transmit antennas.

Data Types: double

Complex Number Support: Yes

MCS — Modulation and coding scheme

0 (default) | integer from 0 to 9 | 1-by- N_{Users} vector of integers

Modulation and coding scheme used in transmitting the current packet, specified as a scalar or vector.

- For a single user, the MCS value is a scalar integer from 0 to 9.
- For multiple users, MCS is a 1-by- N_{Users} vector of integers or a scalar with values from 0 to 9, where the vector length, N_{Users} , is an integer from 1 to 4.

MCS	Modulation	Coding Rate
0	BPSK	1/2
1	QPSK	1/2
2	QPSK	3/4
3	16QAM	1/2
4	16QAM	3/4
5	64QAM	2/3
6	64QAM	3/4
7	64QAM	5/6
8	256QAM	3/4

MCS	Modulation	Coding Rate
9	256QAM	5/6

Data Types: double

APEPLength – Number of bytes in the A-MPDU pre-EOF padding

1024 (default) | nonnegative integer | vector of nonnegative integers

Number of bytes in the A-MPDU pre-EOF padding, specified as a scalar integer or vector of integers.

- For a single user, APEPLength is a nonnegative integer in the interval $[0, 2^{20} - 1]$.
- For multi-user, APEPLength is a 1-by- N_{Users} vector of nonnegative integers, where N_{Users} is an integer in $[1, 4]$. The entries in APEPLength are integers in the interval $[0, 2^{20} - 1]$.
- For a null data packet (NDP), APEPLength = 0.

APEPLength is used internally to determine the number of OFDM symbols in the data field. For more information, see IEEE Std 802.11ac-2013, Table 22-1.

Data Types: double

Output Arguments

y – VHT-SIG-B time-domain waveform

matrix

“VHT-SIG-B” on page 2-532 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth.

ChannelBandwidth	N_S
'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640

See “VHT-SIG-B Processing” on page 2-535. for waveform generation details.

Data Types: double

Complex Number Support: Yes

bits — Signaling bits used for the VHT-SIG-B field

N_{bits} column vector

Signaling bits used for “VHT-SIG-B” on page 2-532 field, returned as an N_{bits} column vector. N_{bits} is the number of bits.

The number of output bits changes with the channel bandwidth.

ChannelBandwidth	N_b
'CBW20'	26
'CBW40'	27
'CBW80'	29
'CBW160'	29

See “VHT-SIG-B Processing” on page 2-535. for waveform generation details.


Data Types: int8

More About

VHT-SIG-B

The very high throughput signal B field (VHT-SIG-B) is used for multiuser scenario to set up the data rate and to fine-tune MIMO reception. It is modulated using MCS 0 and is transmitted in a single OFDM symbol.

The VHT-SIG-B field consists of a single OFDM symbol located between the VHT-LTF and the data portion of the VHT format PPDU.

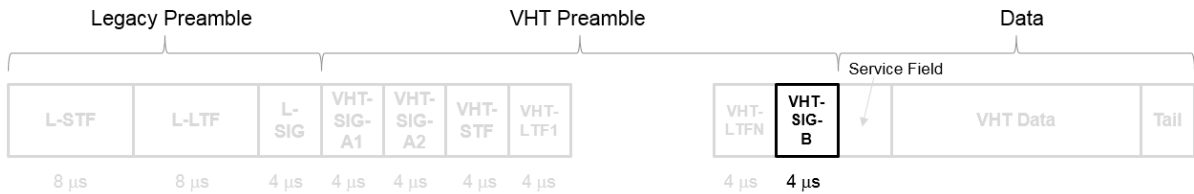

The very high throughput signal B (VHT-SIG-B) field contains the actual rate and A-MPDU length value per user. The VHT-SIG-B is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.6, and Table 22-14. The number of bits in the VHT-SIG-B field varies with the channel bandwidth and the assignment depends on whether single user or multiuser scenario is allocated. For single user configurations, the same information is available in the L-SIG field but the VHT-SIG-B field is included for continuity purposes.

Field	VHT MU PPDU Allocation (bits)			VHT SU PPDU Allocation (bits)			Description
	20 MHz	40 MHz	80 MHz, 160 MHz	20 MHz	40 MHz	80 MHz, 160 MHz	
VHT-SIG-B	B0-15 (16)	B0-16 (17)	B0-18 (19)	B0-16 (17)	B0-18 (19)	B0-20 (21)	A variable-length field that indicates the size of the data payload in four-byte units. The length of the field depends on the channel bandwidth.
VHT-MCS	B16-19 (4)	B17-20 (4)	B19-22 (4)	N/A	N/A	N/A	A four-bit field that is included for multiuser scenarios only.
Reserved	N/A	N/A	N/A	B17-19 (3)	B19-20 (2)	B21-22 (2)	All ones

Field	VHT MU PPDU Allocation (bits)			VHT SU PPDU Allocation (bits)			Description
	20 MHz	40 MHz	80 MHz, 160 MHz	20 MHz	40 MHz	80 MHz, 160 MHz	
Tail	B20-25 (6)	B21-26 (6)	B23-28 (6)	B20-25 (6)	B21-26 (6)	B23-28 (6)	Six zero-bits used to terminate the convolutional code.
Total # bits	26	27	29	26	27	29	
Bit field repetition	1	2	4 <i>For 160 MHz, the 80 MHz channel is repeated twice.</i>	1	2	4 <i>For 160 MHz, the 80 MHz channel is repeated twice.</i>	

For a null data packet (NDP), the VHT-SIG-B bits are set according to IEEE Std 802.11ac-2013, Table 22-15.

Algorithms

VHT-SIG-B Processing

The “VHT-SIG-B” on page 2-532 field is used to set up the data rate and to fine-tune MIMO reception. For single user packets, since the length information can be recovered from the L-SIG and VHT-SIG-A field information, it is not strictly required for the receiver to decode the “VHT-SIG-B” on page 2-532 field.

For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.8.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanVHTConfig` | `wlanVHTData` | `wlanVHTLTF` | `wlanVHTSIGBRecover`

Introduced in R2015b

wlanVHTSIGBRecover

Recover VHT-SIG-B information bits

Syntax

```
recBits = wlanVHTSIGBRecover(rxSig,chEst,noiseVarEst,cbw)
recBits = wlanVHTSIGBRecover(rxSig,chEst,noiseVarEst,cbw,userNumber,
numSTS)
recBits = wlanVHTSIGBRecover( ____,cfgRec)

[recBits,eqSym] = wlanVHTSIGBRecover( ____)
[recBits,eqSym,cpe] = wlanVHTSIGBRecover( ____)
```

Description

`recBits = wlanVHTSIGBRecover(rxSig,chEst,noiseVarEst,cbw)` returns the recovered information bits from the “VHT-SIG-B” on page 2-546²⁸ field for a single-user transmission. Inputs include the received “VHT-SIG-B” on page 2-546 field, the channel estimate, the noise variance estimate, and the channel bandwidth.

`recBits = wlanVHTSIGBRecover(rxSig,chEst,noiseVarEst,cbw,userNumber,numSTS)` returns the recovered information bits of a multiuser transmission for the user of interest, `userNumber`, and the number of space-time streams, `numSTS`.

`recBits = wlanVHTSIGBRecover(____,cfgRec)` specifies algorithm information using `wlanRecoveryConfig` object `cfgRec`.

`[recBits,eqSym] = wlanVHTSIGBRecover(____)` returns the equalized symbols, `eqSym`, using the arguments from previous syntaxes.

`[recBits,eqSym,cpe] = wlanVHTSIGBRecover(____)` returns the common phase error, `cpe`.

28. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

Examples

Recover VHT-SIG-B Information Bits

Recover VHT-SIG-B bits in a perfect channel having 80 MHz channel bandwidth, one space-time stream, and one receive antenna.

Create a `wlanVHTConfig` object having a channel bandwidth of 80 MHz. Using the object, create a VHT-SIG-B waveform.

```
cfg = wlanVHTConfig('ChannelBandwidth','CBW80');  
[txSig,txBits] = wlanVHTSIGB(cfg);
```

For a channel bandwidth of 80 MHz, there are 242 occupied subcarriers. The channel estimate array dimensions for this example must be $[N_{st},N_{sts},N_r] = [242,1,1]$. The example assumes a perfect channel and one receive antenna. Therefore, specify the channel estimate as a column vector of ones and the noise variance estimate as zero.

```
chEst = ones(242,1);  
noiseVarEst = 0;
```

Recover the VHT-SIG-B. Verify that the received information bits are identical to the transmitted bits.

```
rxBits = wlanVHTSIGBRecover(txSig,chEst,noiseVarEst,'CBW80');  
isequal(txBits,rxBits)
```

```
ans = logical  
     1
```

Recover VHT-SIG-B Using Zero-Forcing Equalizer

Recover the VHT-SIG-B using a zero-forcing equalizer in an AWGN channel having 160 MHz channel bandwidth, one space-time stream, and one receive antenna.

Create a `wlanVHTConfig` object having a channel bandwidth of 160 MHz. Using the object, create a VHT-SIG-B waveform.

```
cfg = wlanVHTConfig('ChannelBandwidth','CBW160');
[txSig,txBits] = wlanVHTSIGB(cfg);
```

Pass the transmitted VHT-SIG-B through an AWGN channel.

```
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',0.1);
rxSig = awgnChan(txSig);
```

Using `wlanRecoveryConfig`, set the equalization method to zero-forcing, 'ZF'.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF');
```

Recover the VHT-SIG-B. Verify that the received information has no bit errors.

```
rxBits = wlanVHTSIGBRecover(rxSig,ones(484,1),0.1,'CBW160',cfgRec);
numErr = biterr(txBits,rxBits)

numErr = 0
```

Recover VHT-SIG-B in 2x2 MIMO Channel

Recover VHT-SIG-B in a 2x2 MIMO channel for an SNR=10 dB and a receiver that has a 9 dB noise figure. Confirm that the information bits are recovered correctly.

Set the channel bandwidth and the corresponding sample rate.

```
cbw = 'CBW20';
fs = 20e6;
```

Create a VHT configuration object with 20 MHz bandwidth and two transmission paths. Generate the L-LTF and VHT-SIG-B waveforms.

```
vht = wlanVHTConfig('ChannelBandwidth',cbw,'NumTransmitAntennas',2, ...
    'NumSpaceTimeStreams',2);

txVHTLTF = wlanVHTLTF(vht);
[txVHTSIGB,txVHTSIGBbits] = wlanVHTSIGB(vht);
```

Pass the VHT-LTF and VHT-SIG-B waveforms through a 2x2 TGac channel.

```
tgacChan = wlanTGacChannel('NumTransmitAntennas',2, ...
    'NumReceiveAntennas',2, 'ChannelBandwidth',cbw, 'SampleRate',fs);
```

```
rxVHTLTF = tgacChan(txVHTLTF);  
rxVHTSIGB = tgacChan(txVHTSIGB);
```

Add white noise for an SNR = 10dB.

```
chNoise = comm.AWGNChannel('NoiseMethod','Signal to noise ratio (SNR)',...  
    'SNR',10);
```

```
rxVHTLTF = chNoise(rxVHTLTF);  
rxVHTSIGB = chNoise(rxVHTSIGB);
```

Add additional white noise corresponding to a receiver with a 9 dB noise figure. The noise variance is equal to $k*T*B*F$, where k is Boltzmann's constant, T is the ambient temperature, B is the channel bandwidth (sample rate), and F is the receiver noise figure.

```
nVar = 10^((-228.6+10*log10(290)+10*log10(fs)+9)/10);  
rxNoise = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);
```


```
rxVHTLTF = rxNoise(rxVHTLTF);  
rxVHTSIGB = rxNoise(rxVHTSIGB);
```

Demodulate the VHT-LTF signal and use it to generate a channel estimate.

```
demodVHTLTF = wlanVHTLTFDemodulate(rxVHTLTF,vht);  
chEst = wlanVHTLTFChannelEstimate(demodVHTLTF,vht);
```

Recover the VHT-SIG-B information bits. Display the scatter plot of the equalized symbols.

```
[recVHTSIGBBits,eqSym,cpe] = wlanVHTSIGBRecover(rxVHTSIGB,chEst,nVar,cbw);  
scatterplot(eqSym)
```

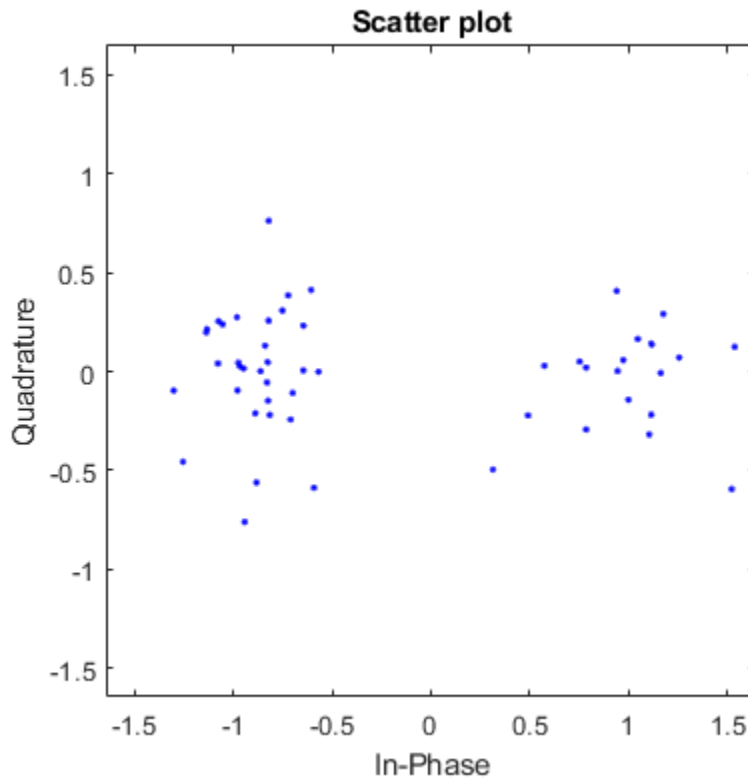Display the common phase error.

```
cpe
```

```
cpe = 0.0485
```

Determine the number of errors between the transmitted and received VHT-SIG-B information bits.

```
numErr = biterr(txVHTSIGBbits,recVHTSIGBbits)
```

```
numErr = 0
```

Input Arguments

rxSig — Received VHT-SIG-B matrix

Received VHT-SIG-B field, specified as an N_S -by- N_R matrix. N_S is the number of samples and increases with channel bandwidth.

Channel Bandwidth	N_S
'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640

N_R is the number of receive antennas.

Data Types: double

chEst — Channel estimate 3-D array

Channel estimate, specified as an N_{ST} -by- N_{STS} -by- N_R array. N_{ST} is the number of occupied subcarriers. N_{STS} is the number of space-time streams. For multiuser transmissions, N_{STS} is the total number of space-time streams for all users. N_R is the number of receive antennas.

N_{ST} increases with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

The channel estimate is based on the “VHT-LTF” on page 2-548.

noiseVarEst — Noise variance estimate

nonnegative scalar

Noise variance estimate, specified as a nonnegative scalar.

Data Types: double

cbw — Channel bandwidth

'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'.

Data Types: char | string

userNumber — Number of the userinteger from 1 to N_{Users} Number of the user in a multiuser transmission, specified as an integer having a value from 1 to N_{Users} . N_{Users} is the total number of users.

Data Types: double

numSTS — Number of space-time streams1-by- N_{Users} vector of integers from 1 to 4Number of space-time streams in a multiuser transmission, specified as a vector. The number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where N_{Users} is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

cfgRec — Algorithm parameters

wlanRecoveryConfig object


Algorithm parameters, specified as a wlanRecoveryConfig object. The function uses these properties:

Note If `cfgRec` is not provided, the function uses the default values of the `wlanRecoveryConfig` object.

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

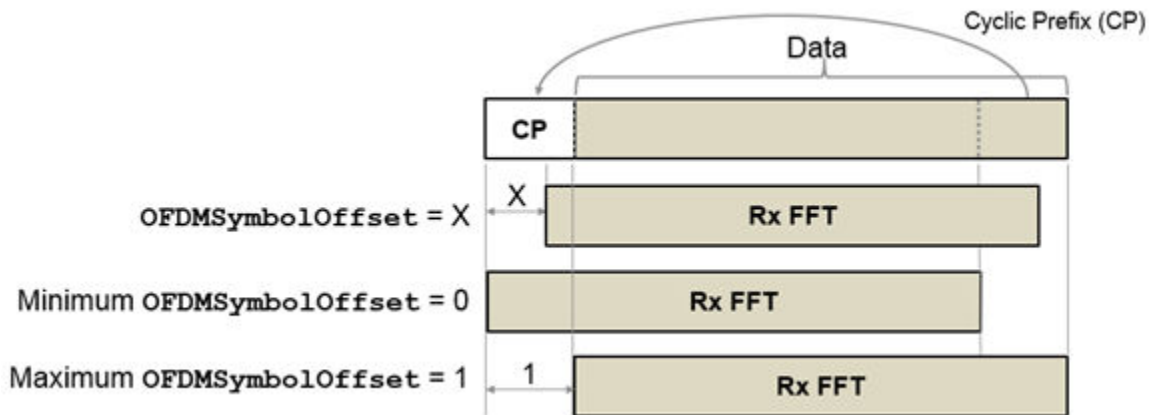

Data Types: double

EqualizationMethod — Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking — Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: char | string

Output Arguments

recBits — Recovered VHT-SIG information

vector

Recovered VHT-SIG-B information bits, returned as an N_b -by-1 column vector. N_b is the number of recovered VHT-SIG-B information bits and increases with the channel bandwidth. The output is for a single user as determined by `userNumber`.

The number of output bits is proportional to the channel bandwidth.

ChannelBandwidth	N_b
'CBW20'	26
'CBW40'	27
'CBW80'	29
'CBW160'	29

See “VHT-SIG-B” on page 2-546 for information about the meaning of each bit in the field.

eqSym — Equalized symbols

matrix

Equalized symbols, returned as an N_{SD} -by-1 column vector. N_{SD} is the number of data subcarriers.

N_{SD} increases with the channel bandwidth.

ChannelBandwidth	N_{SD}
'CBW20'	52
'CBW40'	108
'CBW80'	234
'CBW160'	468

cpe — Common phase error

column vector


Common phase error in radians, returned as a scalar.

More About

VHT-SIG-B

The very high throughput signal B field (VHT-SIG-B) is used for multiuser scenario to set up the data rate and to fine-tune MIMO reception. It is modulated using MCS 0 and is transmitted in a single OFDM symbol.

The VHT-SIG-B field consists of a single OFDM symbol located between the VHT-LTF and the data portion of the VHT format PPDU.

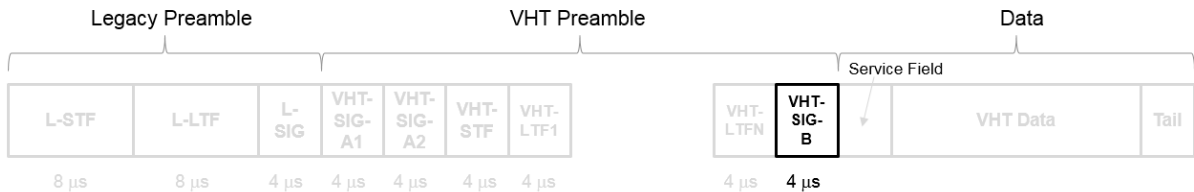

The very high throughput signal B (VHT-SIG-B) field contains the actual rate and A-MPDU length value per user. The VHT-SIG-B is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.6, and Table 22-14. The number of bits in the VHT-SIG-B field varies with the channel bandwidth and the assignment depends on whether single user or multiuser scenario is allocated. For single user configurations, the same information is available in the L-SIG field but the VHT-SIG-B field is included for continuity purposes.


Field	VHT MU PPDU Allocation (bits)			VHT SU PPDU Allocation (bits)			Description
	20 MHz	40 MHz	80 MHz, 160 MHz	20 MHz	40 MHz	80 MHz, 160 MHz	
VHT-SIG-B	B0-15 (16)	B0-16 (17)	B0-18 (19)	B0-16 (17)	B0-18 (19)	B0-20 (21)	A variable-length field that indicates the size of the data payload in four-byte units. The length of the field depends on the channel bandwidth.
VHT-MCS	B16-19 (4)	B17-20 (4)	B19-22 (4)	N/A	N/A	N/A	A four-bit field that is included for multiuser scenarios only.
Reserved	N/A	N/A	N/A	B17-19 (3)	B19-20 (2)	B21-22 (2)	All ones

Field	VHT MU PPDU Allocation (bits)			VHT SU PPDU Allocation (bits)			Description
	20 MHz	40 MHz	80 MHz, 160 MHz	20 MHz	40 MHz	80 MHz, 160 MHz	
Tail	B20-25 (6)	B21-26 (6)	B23-28 (6)	B20-25 (6)	B21-26 (6)	B23-28 (6)	Six zero-bits used to terminate the convolutional code.
Total # bits	26	27	29	26	27	29	
Bit field repetition	1	2	4 <i>For 160 MHz, the 80 MHz channel is repeated twice.</i>	1	2	4 <i>For 160 MHz, the 80 MHz channel is repeated twice.</i>	

For a null data packet (NDP), the VHT-SIG-B bits are set according to IEEE Std 802.11ac-2013, Table 22-15.

VHT-LTF

The very high throughput long training field (VHT-LTF) is located between the VHT-STF and VHT-SIG-B portion of the VHT packet.

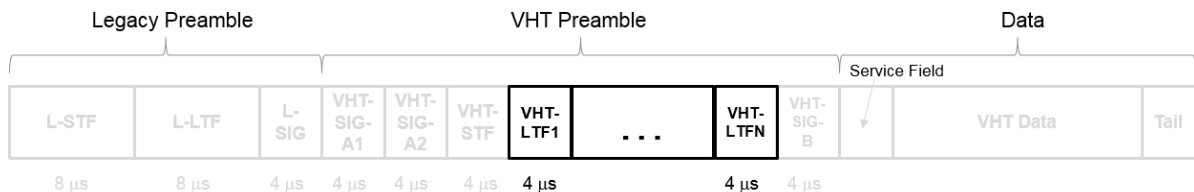

It is used for MIMO channel estimation and pilot subcarrier tracking. The VHT-LTF includes one VHT long training symbol for each spatial stream indicated by the selected MCS. Each symbol is 4 μ s long. A maximum of eight symbols are permitted in the VHT-LTF.

The VHT-LTF is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.5.

PPDU


PLCP protocol data unit

The PPDU is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.


Algorithms

VHT-SIG-B Recovery

The “VHT-SIG-B” on page 2-546 field consists of one symbol and resides between the VHT-LTF field and the data portion of the packet structure for the VHT format PPDUs.

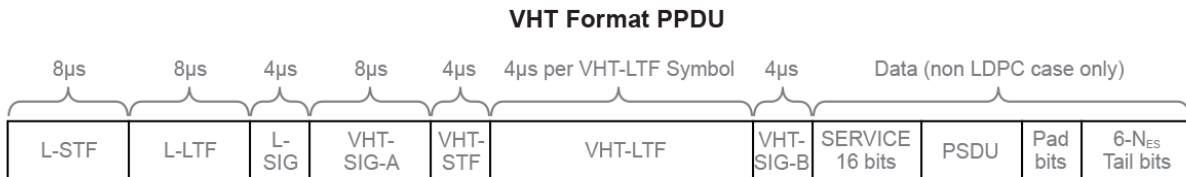

For single-user packets, you can recover the length information from the L-SIG and VHT-SIG-A field information. Therefore, it is not strictly required for the receiver to decode the “VHT-SIG-B” on page 2-546 field. For multiuser transmissions, recovering the VHT-SIG-B field provides packet length and MCS information for each user.

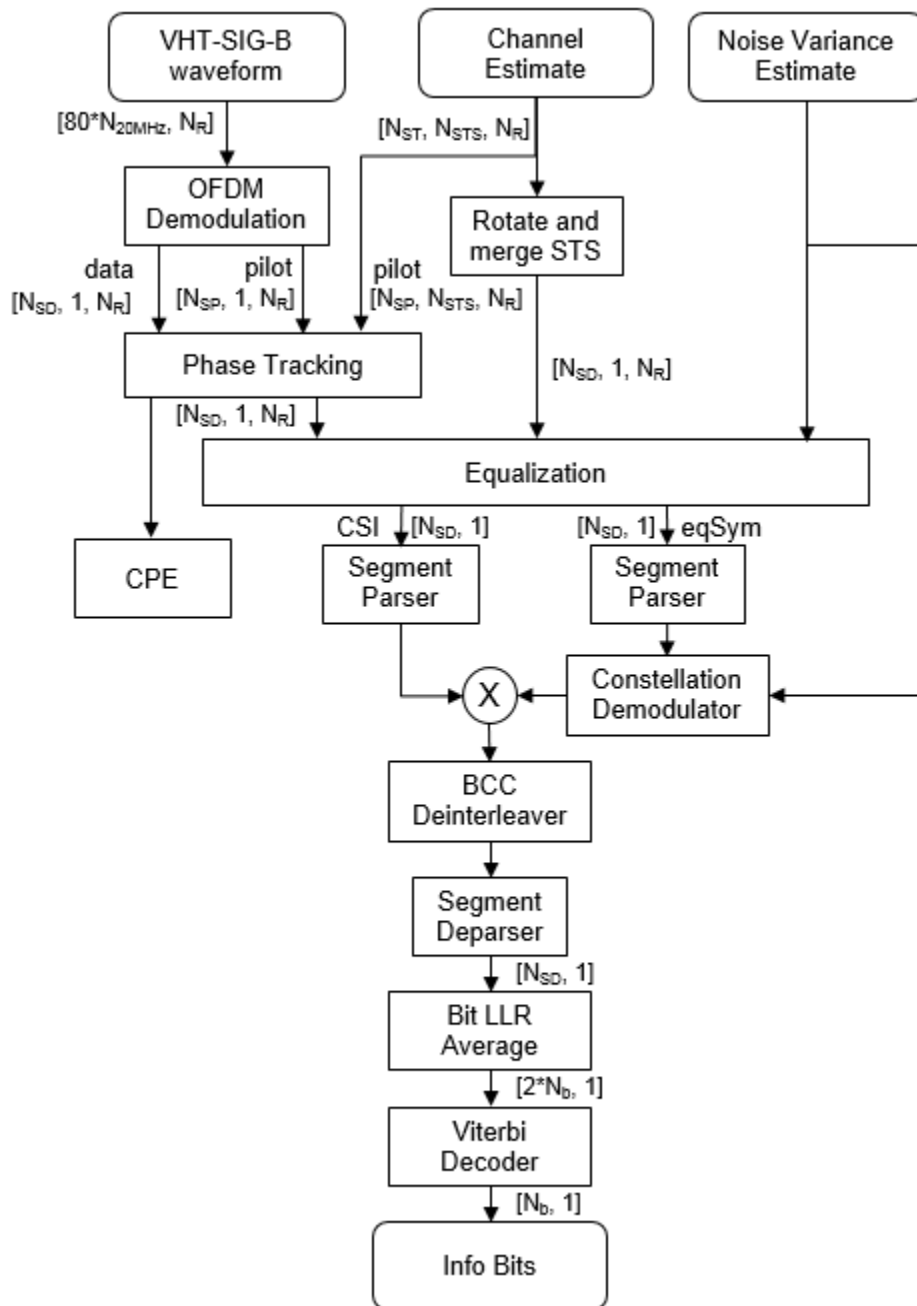

For “VHT-SIG-B” on page 2-546 details, refer to IEEE Std 802.11ac™-2013 [1], Section 22.3.4.8, and Perahia [2], Section 7.3.2.4.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.
- [2] Perahia, E., and R. Stacey. *Next Generation Wireless LANs: 802.11n and 802.11ac* . 2nd Edition, United Kingdom: Cambridge University Press, 2013.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

[wlanRecoveryConfig](#) | [wlanVHTConfig](#) | [wlanVHTLTFChannelEstimate](#) | [wlanVHTLTFDemodulate](#) | [wlanVHTSIGB](#)

Introduced in R2015b

wlanVHTSTF

Generate VHT-STF waveform

Syntax

```
y = wlanVHTSTF(cfg)
```

Description

`y = wlanVHTSTF(cfg)` generates a “VHT-STF” on page 2-556²⁹ time-domain waveform for the specified configuration object. See “VHT-STF Processing” on page 2-557 for waveform generation details.


Examples

Generate VHT-STF Waveform

Create a VHT configuration object with an 80 MHz channel bandwidth. Generate and plot the VHT-STF waveform.

```
cfgVHT = wlanVHTConfig;  
cfgVHT.ChannelBandwidth = 'CBW80';  
  
vstfOut = wlanVHTSTF(cfgVHT);  
size(vstfOut);  
plot(abs(vstfOut))  
xlabel('Samples')  
ylabel('Amplitude')
```

29. IEEE Std 802.11ac-2013 Adapted and reprinted with permission from IEEE. Copyright IEEE 2013. All rights reserved.

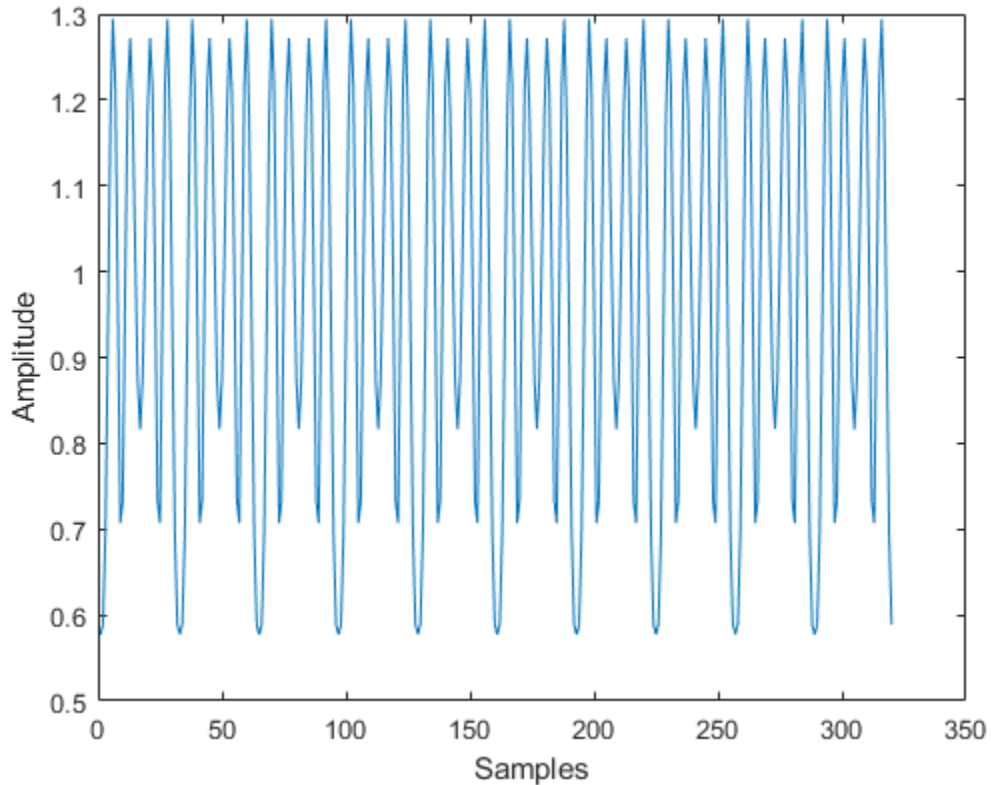

The 80 MHz waveform is a single OFDM symbol with 320 complex time-domain output samples. The waveform contains the repeating short training field pattern.

Input Arguments

cfg — Format configuration

wlanVHTConfig object

Format configuration, specified as a wlanVHTConfig object. The wlanVHTSTF function uses the object properties indicated.

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. If the transmission has multiple users, the same channel bandwidth is applied to all users. The default value of 'CBW80' sets the channel bandwidth to 80 MHz.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the range [1, 8]

Number of transmit antennas, specified as an integer in the range [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer from 1 to 8 | 1-by- N_{Users} vector of integers from 1 to 4

Number of space-time streams in the transmission, specified as a scalar or vector.

- For a single user, the number of space-time streams is a scalar integer from 1 to 8.
- For multiple users, the number of space-time streams is a 1-by- N_{Users} vector of integers from 1 to 4, where the vector length, N_{Users} , is an integer from 1 to 4.

Example: [1 3 2] is the number of space-time streams for each user.

Note The sum of the space-time stream vector elements must not exceed eight.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'. The default value of 'Direct' applies when NumTransmitAntennas and NumSpaceTimeStreams are equal.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | scalar | matrix | 3-D array

Spatial mapping matrix, specified as a scalar, matrix, or 3-D array. Use this property to apply a beamforming steering matrix, and to rotate and scale the constellation mapper output vector. If applicable, scale the space-time block coder output instead.

`SpatialMappingMatrix` applies when the `SpatialMapping` property is set to 'Custom'. For more information, see IEEE Std 802.11-2012, Section 20.3.11.11.2.

- When specified as a scalar, a constant value applies to all the subcarriers.
- When specified as a matrix, the size must be N_{STS_Total} -by- N_T . The spatial mapping matrix applies to all the subcarriers. N_{STS_Total} is the sum of space-time streams for all users, and N_T is the number of transmit antennas.
- When specified as a 3-D array, the size must be N_{ST} -by- N_{STS_Total} -by- N_T . N_{ST} is the sum of the occupied data (N_{SD}) and pilot (N_{SP}) subcarriers, as determined by `ChannelBandwidth`. N_{STS_Total} is the sum of space-time streams for all users. N_T is the number of transmit antennas.

N_{ST} increases with channel bandwidth.

ChannelBandwidth	Number of Occupied Subcarriers (N_{ST})	Number of Data Subcarriers (N_{SD})	Number of Pilot Subcarriers (N_{SP})
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3 0.4; 0.4 0.5 0.8] represents a spatial mapping matrix having two space-time streams and three transmit antennas.

Data Types: double

Complex Number Support: Yes

Output Arguments

y — VHT-STF time-domain waveform

matrix

“VHT-STF” on page 2-556 time-domain waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas.

N_S is proportional to the channel bandwidth.

ChannelBandwidth	N_S
'CBW20'	80
'CBW40'	160
'CBW80'	320
'CBW160'	640

See “VHT-STF Processing” on page 2-557 for waveform generation details.


Data Types: double

Complex Number Support: Yes

More About

VHT-STF

The very high throughput short training field (VHT-STF) is a single OFDM symbol (4 μ s in length) that is used to improve automatic gain control estimation in a MIMO transmission. It is located between the VHT-SIG-A and VHT-LTF portions of the VHT packet.

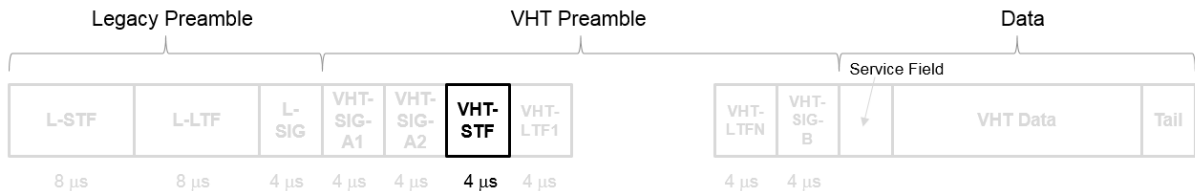

The frequency domain sequence used to construct the VHT-STF for a 20 MHz transmission is identical to the L-STF sequence. Duplicate L-STF sequences are frequency shifted and phase rotated to support VHT transmissions for the 40 MHz, 80 MHz, and 160 MHz channel bandwidths. As such, the L-STF and HT-STF are subsets of the VHT-STF.

The VHT-STF is defined in IEEE Std 802.11ac-2013, Section 22.3.8.3.4.

Algorithms

VHT-STF Processing

The “VHT-STF” on page 2-556 is one OFDM symbol long and is processed for improved gain control in MIMO configurations. For algorithm details, refer to IEEE Std 802.11ac-2013 [1], Section 22.3.4.6.

References

- [1] IEEE Std 802.11ac™-2013 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

wlanLSTF | wlanVHTConfig | wlanVHTLTF | wlanVHTSIGA

Introduced in R2015b

wlanWaveformGenerator

Generate WLAN waveform

Syntax

```
waveform = wlanWaveformGenerator(bits, cfgFormat)  
waveform = wlanWaveformGenerator(bits, cfgFormat, Name, Value)
```

Description

`waveform = wlanWaveformGenerator(bits, cfgFormat)` generates a waveform for `bits`, the specified information bits, and `cfg`, the physical layer (PHY) format configuration. For more information, see “IEEE 802.11 PPDU Format” on page 2-572.

`waveform = wlanWaveformGenerator(bits, cfgFormat, Name, Value)` overrides default generator configuration values using one or more `Name, Value` pair arguments.

Examples

Generate VHT Waveform

Generate a time-domain signal for an 802.11ac VHT transmission with one packet.

Create the format configuration object, `vht`. Assign two transmit antennas and two spatial streams, and disable STBC. Set the MCS to 1, which assigns QPSK modulation and a 1/2 rate coding scheme per the 802.11 standard. Set the number of bytes in the A-MPDU pre-EOF padding, `APEPLength`, to 1024.

```
vht = wlanVHTConfig;  
vht.NumTransmitAntennas = 2;  
vht.NumSpaceTimeStreams = 2;  
vht.STBC = false;  
vht.MCS = 1;  
vht.APEPLength = 1024;
```

Generate the transmission waveform.

```
bits = [1;0;0;1];  
txWaveform = wlanWaveformGenerator(bits,vht);
```

Demonstrate SIGB Compression in HE MU Waveforms

HE MU-MIMO Configuration With SIGB Compression

Use Only User Field Bits

Generate a full bandwidth HE MU-MIMO configuration at 20MHz bandwidth with SIGB compression. All three users are on a single content channel, which includes only the user field bits.


```
cfgHE = wlanHEMUConfig(194);  
cfgHE.NumTransmitAntennas = 3;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)  
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu, cfgHE);  
plot(abs(y))
```

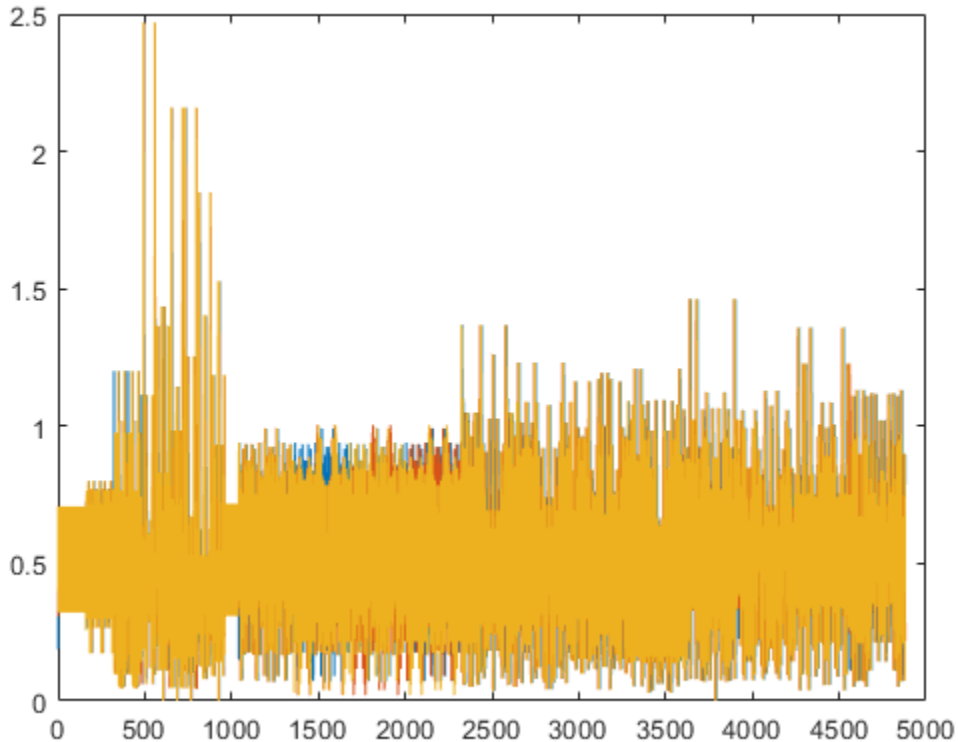

HE-SIG-B Content Assign 4 Users in Channel 1 and 3 Users in Channel 2

Generate a full bandwidth HE MU-MIMO waveform at 80MHz bandwidth with SIGB compression. HE-SIG-B content channel 1 has four users. HE-SIG-B content channel 2 has three users.

```
cfgHE = wlanHEMUConfig(214);  
cfgHE.NumTransmitAntennas = 7;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)
```

```

    psdu = randi([0 1],psduLength(j)*8,1,'int8');
end


```

Generate and plot the waveform.

```

y = wlanWaveformGenerator(psdu,cfgHE);
plot(abs(y));

```

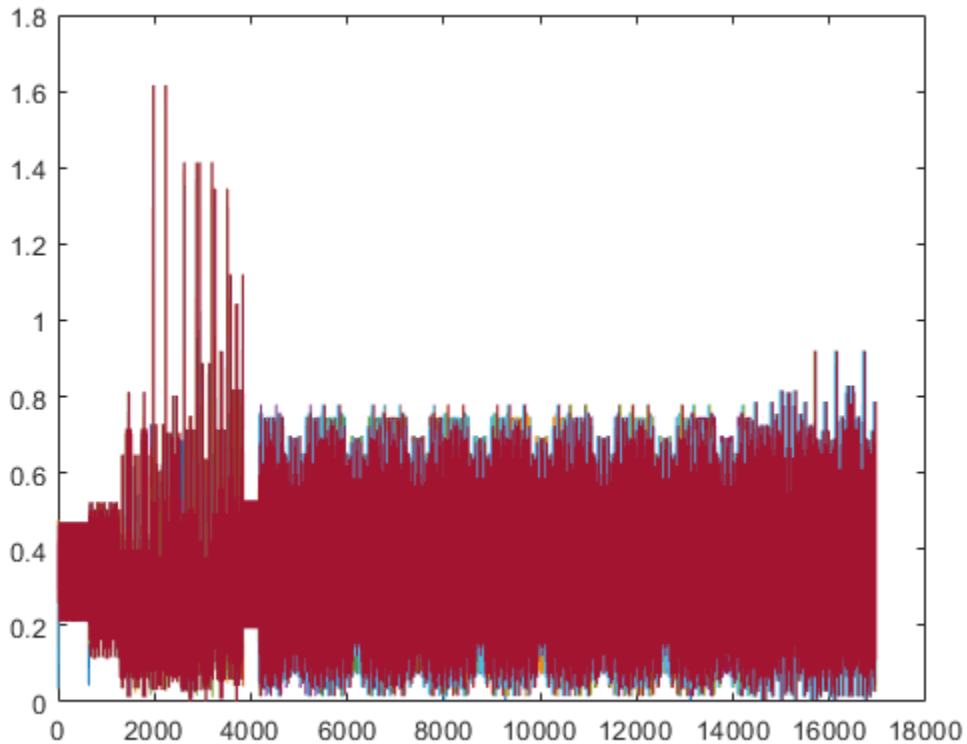

HE MU-MIMO Configuration Without SIGB Compression

Use Common and User Field Bits

Generate a full bandwidth HE MU-MIMO configuration at 20MHz bandwidth without SIGB compression. All three users are on a single content channel, which includes both common and user field bits.


```
cfgHE = wlanHEMUConfig(194);  
cfgHE.SIGBCompression = false;  
cfgHE.NumTransmitAntennas = 3;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)  
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu, cfgHE);  
plot(abs(y))
```

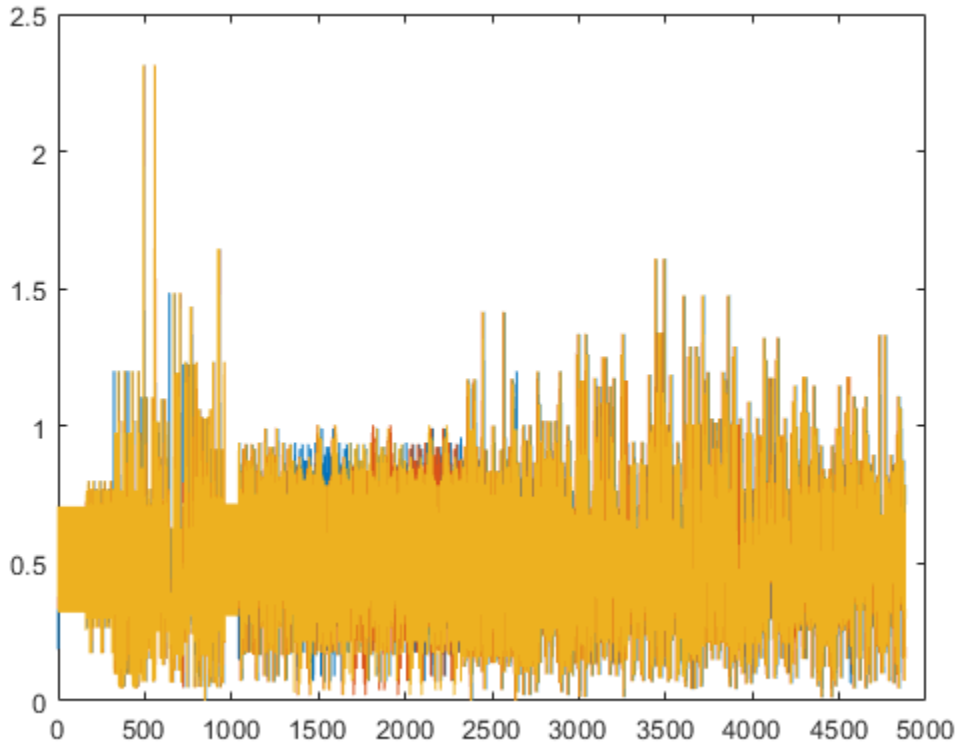

HE-SIG-B Content Assign 4 Users in Channel 1 and 2 Users in Channel 2

Generate an 80 MHz HE MU waveform for six users without SIGB compression. HE-SIG-B content channel 1 has four users. HE-SIG-B content channel 2 has two users.

```
cfgHE = wlanHEMUConfig([202 114 192 193]);
cfgHE.NumTransmitAntennas = 6;
for i = 1:numel(cfgHE.RU)
    cfgHE.RU{i}.SpatialMapping = 'Fourier';
end
```


Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));
psduLength = getPSDULength(cfgHE);
```

```
for j = 1:numel(cfgHE.User)
    psdu = randi([0 1],psduLength(j)*8,1,'int8');
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu, cfgHE);
plot(abs(y));
```

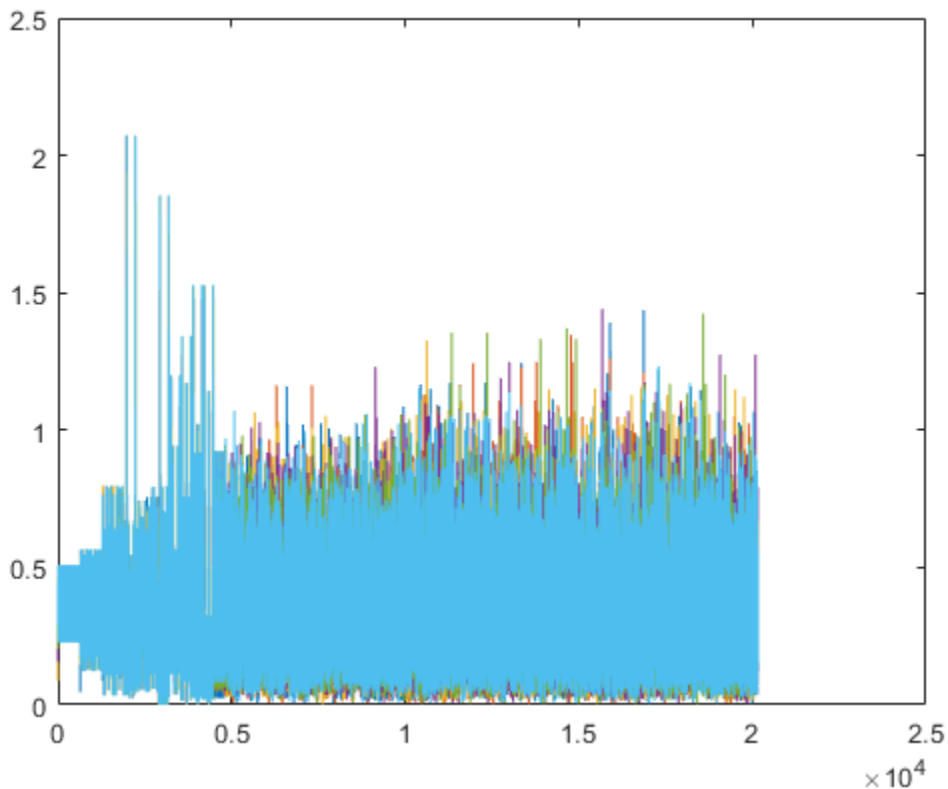

HE-SIG-B Content Assign 7 Users in Channel 1 and No Users in Channel 2

Generate a full bandwidth HE MU-MIMO waveform at 80MHz bandwidth without SIGB compression. HE-SIG-B content channel 1 has seven users. HE-SIG-B content channel 2 has no users.



```
cfgHE = wlanHEMUConfig([214 115 115 115]);  
cfgHE.NumTransmitAntennas = 7;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)  
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu,cfgHE);  
plot(abs(y))
```

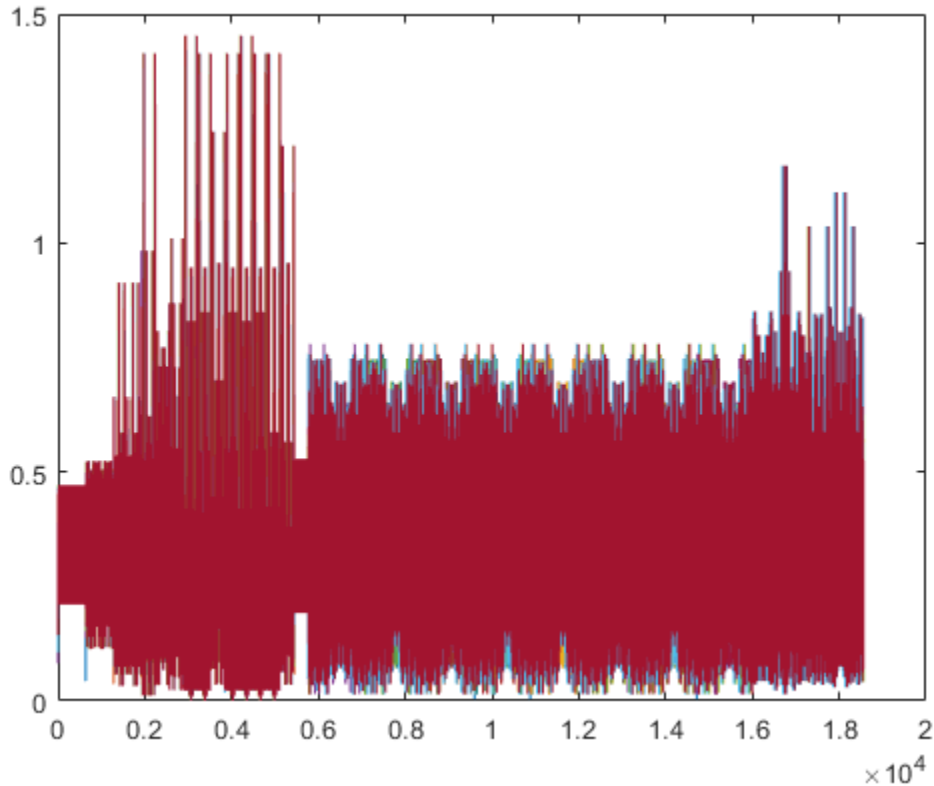

Generate VHT Waveform with Random Scrambler State

Configure `wlanWaveformGenerator` to produce a time-domain signal for an 802.11ac VHT transmission with five packets and a 30 microsecond idle period between packet. Use a random scrambler initial state for each packet.


Create a VHT configuration object and confirm the channel bandwidth for scaling the x -axis of the plot.

```
vht = wlanVHTConfig;  
vht.ChannelBandwidth
```

```
ans =  
'CBW80'
```

Generate and plot the waveform. Display the time in microseconds on the x-axis.

```
numPkts = 5;  
scramInit = randi([1 127],numPkts,1);  
txWaveform = wlanWaveformGenerator([1;0;0;1],vht,'NumPackets',numPkts,'IdleTime',30e-6;  
time = [0:length(txWaveform)-1]/80e-6;  
plot(time,abs(txWaveform))  
xlabel('Time (microseconds)')  
ylabel('Amplitude')
```

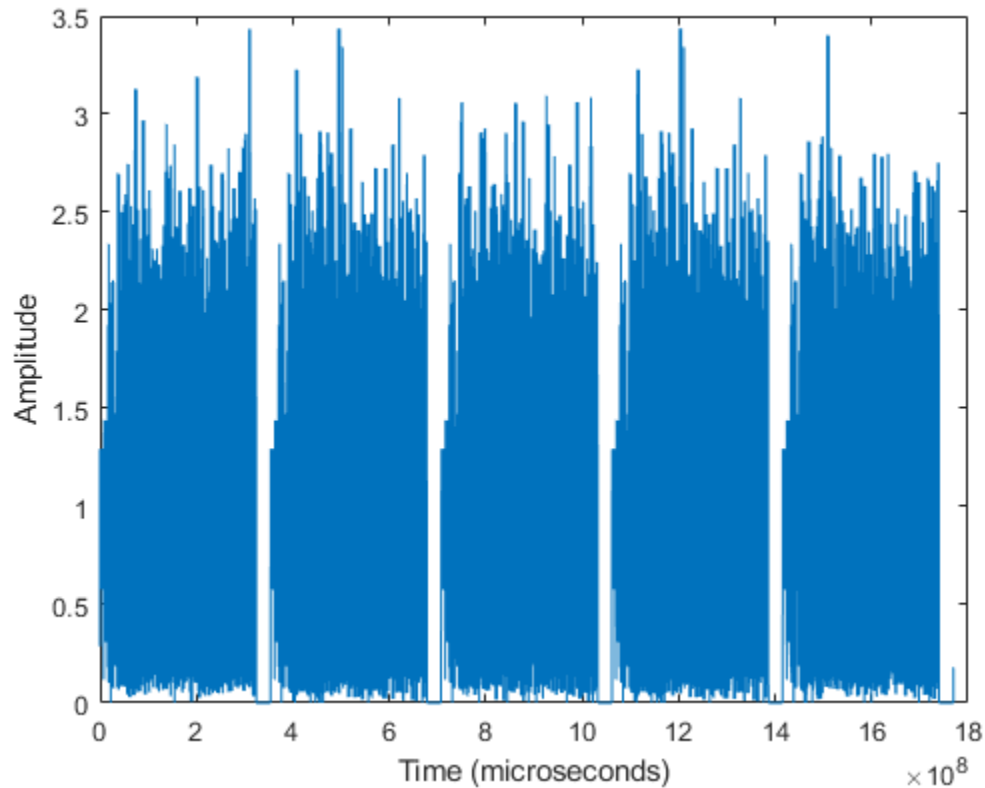

Five packets separated by 30 microsecond idle periods.

Input Arguments

bits — Information bits

0 | 1 | vector | cell array | vector cell array

Information bits for a single user, including any MAC padding representing multiple concatenated PSDUs, specified as a binary vector stream. Internally, the input `bits` vector is looped as required to generate the specified number of packets. The property `cfgFormat.PSDULength` specifies the number of data bits taken from the bit stream for each transmission packet generated. The property `NumPackets` specifies the number of packets to generate.

- When `bits` is a cell array, each element of the cell array must be a `double` or `int8` typed binary vector.
- When `bits` is a vector or scalar cell array, the specified bits apply to all users.
- When `bits` is a vector cell array, each element applies to each user correspondingly. For each user, if the number of bits required across all packets of the generation exceeds the length of the vector provided, the applied bit vector is looped. Looping on the bits allows you to define a short pattern, for example, `[1;0;0;1]`, that is repeated as the input to the PSDU coding across packets and users. In each packet generation, for the *i*th user, the *i*th element of the `cfgFormat.PSDULength` indicates the number of data bytes taken from its stream. Multiple `PSDULength` by eight to compute the number of bits

Example: `[1 1 0 1 0 1 1]`

Data Types: `double` | `int8`

cfgFormat — Packet format configuration

`wlanHEMUConfig` | `wlanHESUConfig` | `wlanDMGConfig` object | `wlanS1GConfig` object | `wlanVHTConfig` object | `wlanHTConfig` object | `wlanNonHTConfig` object

Packet format configuration, specified as a `wlanHEMUConfig`, `wlanHESUConfig`, `wlanDMGConfig`, `wlanS1GConfig`, `wlanVHTConfig`, `wlanHTConfig`, or `wlanNonHTConfig` object. The type of `cfgFormat` object determines the IEEE 802.11 format of the generated waveform.

The properties of the packet format configuration object determine the data rate and PSDU length of generated PPDU.

Name, Value — Name-Value Pair Arguments

Name1, Value1, . . . , NameN, ValueN

Specify optional comma-separated pairs of Name, Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside quotes. You can specify several name and value pair arguments in any order as Name1, Value1, . . . , NameN, ValueN.

Example: 'NumPackets', 21, 'ScramblerInitialization', [52, 17]

NumPackets — Number of packets

1 (default) | positive integer

Number of packets to generate in a single function call, specified as a positive integer.

Data Types: double

IdleTime — Idle time added after each packet

0 (default) | nonnegative scalar

Idle time added after each packet, specified as a nonnegative scalar in seconds. The default value is 0. If IdleTime is not set to the default value, it must be:

- $\geq 1e-06$ seconds for DMG format
- $\geq 2e-06$ seconds for VHT, HT-mixed, non-HT formats

Example: 20e-6

Data Types: double

ScramblerInitialization — Initial scrambler state

93 (default) | integer in the interval [1, 127] | matrix

Initial scrambler state of the data scrambler for each packet generated, specified as an integer in the interval [1, 127], or as an N_P -by- N_{Users} matrix of integers in the interval [1, 127]. N_P is the number of packets, and N_{Users} is the number of users.

The default value of 93 is the example state given in IEEE Std 802.11-2012 [3], Section L.1.5.2 and applies for S1G, VHT, HT, and Non-HT OFDM formats. For the DMG format, specifying ScramblerInitialization with wlanWaveformGenerator overrides the value specified by the wlanDMGConfig configuration object. For more information, see “Scrambler Initialization” on page 2-578.

- When specified as a scalar, the same scrambler initialization value is used to generate each packet for each user of a multipacket waveform.
- When specified as a matrix, each element represents an initial state of the scrambler for packets in the multipacket waveform generated for each user. Each column specifies the initial states for a single user, therefore up to four columns are supported. If a single column is provided, the same initial states are used for all users. Each row represents the initial state of each packet to generate. Therefore, a matrix with multiple rows enables you to use a different initial state per packet, where the first row contains the initial state of the first packet. If the number of packets to generate exceeds the number of rows of the matrix provided, the rows are looped internally.

Note ScramblerInitialization is not valid for non-HT DSSS.

Example: [3 56 120]

Data Types: double | int8

WindowTransitionTime — Duration of the window transition

nonnegative scalar

Duration of the window transition applied to each OFDM symbol, specified in seconds as a nonnegative scalar. No windowing is applied if WindowTransitionTime = 0. The default and maximum value permitted is shown for the various formats, type of guard interval, and channel bandwidth.

Format	Bandwidth h	Permitted WindowTransitionTime (seconds)					
		Default	Maximum	Maximum Permitted Based on Guard Interval Duration			
				3.2 μs	1.6 μs	0.8 μs (Long)	0.4 μs (Short)
DMG	2640 MHz	6.0606e-09 (= 16/2640e6)	9.6969e-08 (= 256/2640e6)	-	-	-	-

Format	Bandwidth	Permitted WindowTransitionTime (seconds)					
		Default	Maximum	Maximum Permitted Based on Guard Interval Duration			
				3.2 μ s	1.6 μ s	0.8 μ s (Long)	0.4 μ s (Short)
S1G	1, 2, 4, 8, or 16 MHz	1.0e-07	-	-	-	1.6e-05	8.0e-06
HESU / HEMU	20, 40, 80, or 160 MHz	1.0e-07	-	6.4e-06	3.2e-06	1.6e-06	-
VHT	20, 40, 80, or 160 MHz	1.0e-07	-	-	-	1.6e-06	8.0e-07
HT-mixed	20 or 40 MHz	1.0e-07	-	-	-	1.6e-06	8.0e-07
non-HT	20 MHz	1.0e-07	-	-	-	1.6e-06	-
	10 MHz	1.0e-07	-	-	-	3.2e-06	-
	5 MHz	1.0e-07	-	-	-	6.4e-06	-

Data Types: double

Output Arguments

waveform — Packetized waveform

matrix

Packetized waveform, returned as an N_S -by- N_T matrix. N_S is the number of time-domain samples, and N_T is the number of transmit antennas. **waveform** contains one or more packets of the same “IEEE 802.11 PPDU Format” on page 2-572. Each packet can contain different information bits. Waveform packet windowing is enabled by setting `WindowTransitionTime > 0`. Windowing is enabled by default.

For more information, see “Waveform Sampling Rate” on page 2-572, “OFDM Symbol Windowing” on page 2-574, and “Waveform Looping” on page 2-576.

Data Types: double
Complex Number Support: Yes

More About

IEEE 802.11 PDU Format

Supported IEEE 802.11³⁰ PDU formats defined for transmission include VHT, HT, non-HT, S1G, DMG, and HE. For all formats, the PDU field structure includes preamble and data portions. For a detailed description of the packet structures for the various formats supported, see “WLAN Packet Structure”.

Waveform Sampling Rate

At the output of `wlanWaveformGenerator`, the generated waveform has a sampling rate equal to the channel bandwidth.

For all HE, VHT, HT, and non-HT format OFDM modulation, the channel bandwidth is configured via the `ChannelBandwidth` property of the format configuration object.

For the DMG format modulation schemes, the channel bandwidth is always 2640 MHz and the channel spacing is always 2160 MHz. These values are specified in IEEE 802.11ad-2012 [4], Section 21.3.4 and Annex E-1, respectively.

For the non-HT format DSSS modulation scheme, the chipping rate is always 11 MHz, as specified in IEEE 802.11-2012[3], Section 17.1.1.

This table indicates the waveform sampling rates associated with standard channel spacing for each configuration format prior to filtering.

30. IEEE Std 802.11-2016 Adapted and reprinted with permission from IEEE. Copyright IEEE 2016. All rights reserved.

Configuration Object	Modulation	Channel Bandwidth	Channel Spacing (MHz)	Sampling Rate (MHz) (F_S , F_C)
wlanDMGConfig	Control PHY	For DMG, the channel bandwidth is fixed at 2640 MHz.	2160	$F_C = \frac{1}{3} F_S = 1760$
	SC			$F_S = 2640$
	OFDM			
wlanSIGConfig	OFDM	'CBW1'	1	$F_S = 1$
		'CBW2'	2	$F_S = 2$
		'CBW4'	4	$F_S = 4$
		'CBW8'	8	$F_S = 8$
		'CBW16'	16	$F_S = 16$
wlanHEMUConfig and wlanHESUConfig	OFDMA	'CBW20'	20	$F_S = 20$
		'CBW40'	40	$F_S = 40$
		'CBW80'	80	$F_S = 80$
		'CBW160'	160	$F_S = 160$
wlanVHTConfig	OFDM	'CBW20'	20	$F_S = 20$
		'CBW40'	40	$F_S = 40$
		'CBW80'	80	$F_S = 80$
		'CBW160'	160	$F_S = 160$
wlanHTConfig	OFDM	'CBW20'	20	$F_S = 20$
		'CBW40'	40	$F_S = 40$
wlanNonHTConfig	DSSS/CCK	Not applicable	11	$F_C = 11$
	OFDM	'CBW5'	5	$F_S = 5$
		'CBW10'	10	$F_S = 10$
		'CBW20'	20	$F_S = 20$


F_S is the OFDM sampling rate.

F_C is the chip rate for single carrier, control PHY, and DSSS/CCK modulations.

OFDM Symbol Windowing

OFDM naturally lends itself to processing with Fourier transforms. A negative side effect of using an IFFT to process OFDM symbols is the resulting symbol-edge discontinuities. These discontinuities cause out-of-band emissions in the transition region between consecutive OFDM symbols. To smooth the discontinuity between symbols and reduce the intersymbol out-of-band emissions, you can use the `wlanWaveformGenerator` function to apply OFDM symbol windowing. To apply windowing, set `WindowTransitionTime` to greater than zero.

When windowing is applied, transition regions are added to the leading and trailing edge of the OFDM symbol by the `wlanWaveformGenerator`. Windowing extends the length of the OFDM symbol by `WindowTransitionTime` (T_{TR}).

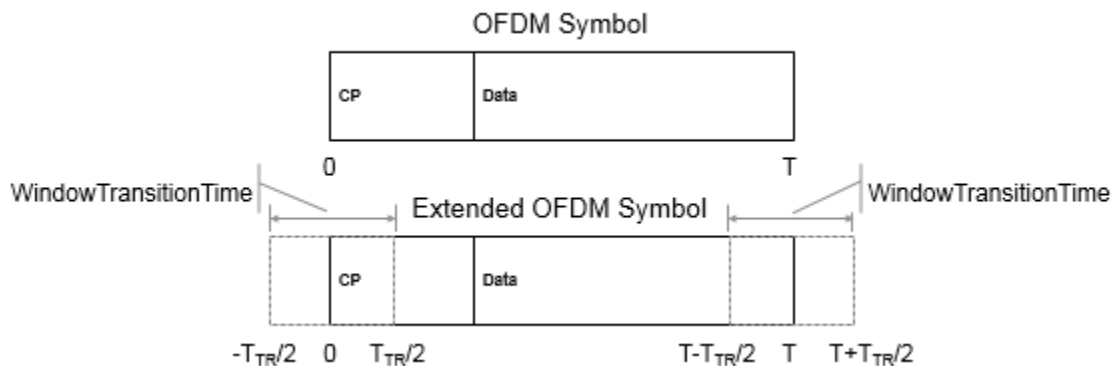


The extended waveform is windowed by pointwise multiplication in the time domain, using the windowing function specified in IEEE Std 802.11-2012 [3], Section 18.3.2.5:


$$w_T(t) = \begin{cases} \sin^2\left[\frac{\pi}{2}\left(\frac{1}{2} + \frac{t}{T_{TR}}\right)\right] & \text{if } t \in \left[-\frac{T_{TR}}{2}, \frac{T_{TR}}{2}\right], \\ 1 & \text{if } t \in \left[\frac{T_{TR}}{2}, T - \frac{T_{TR}}{2}\right], \\ \sin^2\left[\frac{\pi}{2}\left(\frac{1}{2} + \frac{t}{T_{TR}}\right)\right] & \text{if } t \in \left[T - \frac{T_{TR}}{2}, T + \frac{T_{TR}}{2}\right]. \end{cases}$$

The windowing function applies over the leading and trailing portion of the OFDM symbol:

- $-T_{TR}/2$ to $T_{TR}/2$
- $-T - T_{TR}/2$ to $T + T_{TR}/2$

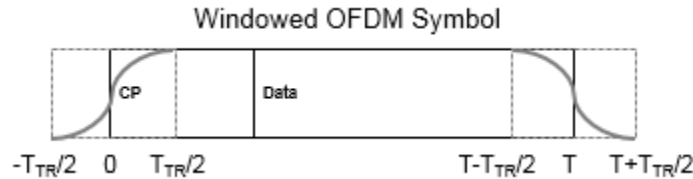

After windowing is applied to each symbol, pointwise addition is used to combine the overlapped regions between consecutive OFDM symbols. Specifically, the trailing shoulder samples at the end of OFDM symbol 1 ($T - T_{TR}/2$ to $T + T_{TR}/2$) are added to the leading shoulder samples at the beginning of OFDM symbol 2 ($-T_{TR}/2$ to $T_{TR}/2$).

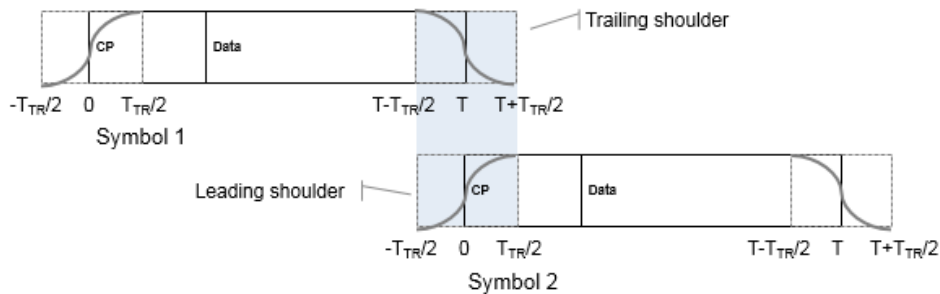


Smoothing the overlap between consecutive OFDM symbols in this manner reduces the out-of-band emissions. wlanWaveformGenerator applies OFDM symbol windowing between:

- Each OFDM symbol within a packet
- Consecutive packets within the waveform, considering the IdleTime between packets
- The last and the first packet of the generated waveform

Windowing DMG Format Packets

For DMG format, windowing is only applicable to packets transmitted using the OFDM PHY and is applied only to the OFDM modulated symbols. For OFDM PHY, only the header and data symbols are OFDM modulated. The preamble (STF and CEF) and the training fields are single carrier modulated and are not windowed. Similar to the out of


band emissions experienced by consecutive OFDM symbols, as shown here the CEF and the first training subfield are subject to a nominal amount out of band emissions from the adjacent windowed OFDM symbol.

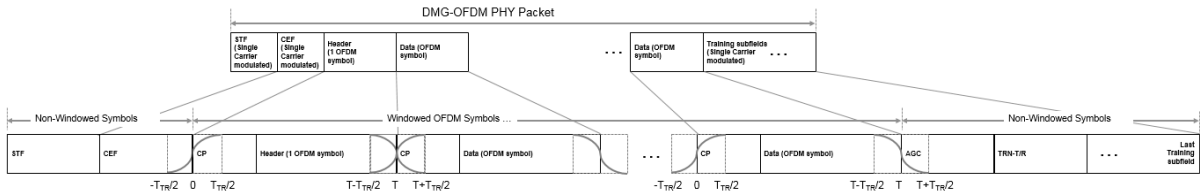

For more information on how `wlanWaveformGenerator` handles windowing for the consecutive packet `IdleTime` and for the last waveform packet, see “Waveform Looping” on page 2-576.

Waveform Looping

To produce a continuous input stream, you can have your code loop on a waveform from the last packet back to the first packet.

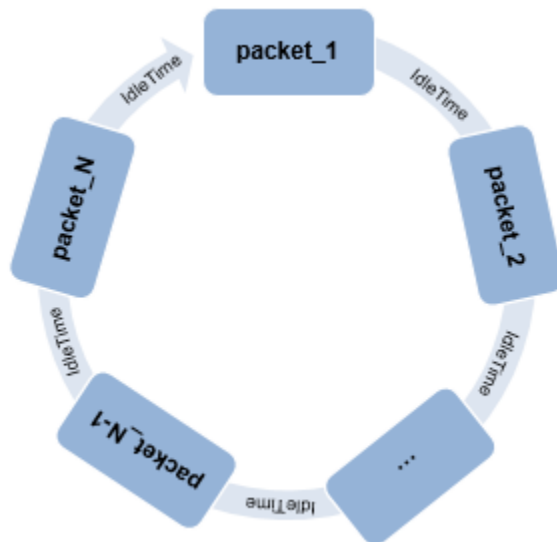


Applying windowing to the last and first OFDM symbols of the generated waveform smooths the transition between the last and first packet of the waveform. When `WindowTransitionTime` is greater than zero, `wlanWaveformGenerator` applies “OFDM Symbol Windowing” on page 2-574.

When looping a waveform, the last symbol of *packet_N* is followed by the first OFDM symbol of *packet_1*. If the waveform has only one packet, the waveform loops from the last OFDM symbol of the packet to the first OFDM symbol of the same packet.

When windowing is applied to the last OFDM symbol of a packet and the first OFDM of the next packet, the idle time between the packets factors into the windowing applied. Specify the idle time using the `IdleTime` property of `wlanWaveformGenerator`.


- If `IdleTime` is zero, “OFDM Symbol Windowing” on page 2-574 is applied as it would be for consecutive OFDM symbols within a packet.
- If the `IdleTime` is nonzero, the extended windowed portion of the first OFDM symbol in *packet_1* (from $-T_{TR}/2$ to $0 - T_S$), is included at the end of the waveform. This extended windowed portion is applied for looping when computing the “OFDM Symbol Windowing” on page 2-574 between the last OFDM symbol of *packet_N* and the first OFDM symbol of *packet_1*. T_S is the sample time.

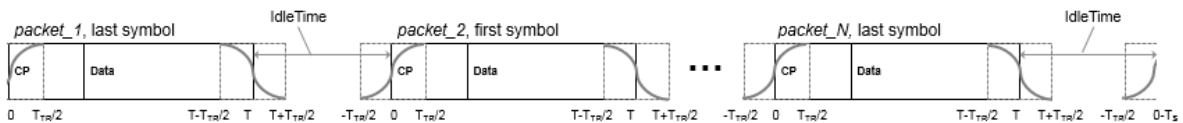

Looping DMG Format Waveforms

For DMG format waveforms there are three looping scenarios,

- The looping behavior for a waveform composed of DMG OFDM-PHY packets with no training subfields is similar to the general case outlined in “Waveform Looping” on page 2-576 but the first symbol of the waveform (and each packet) is not windowed.

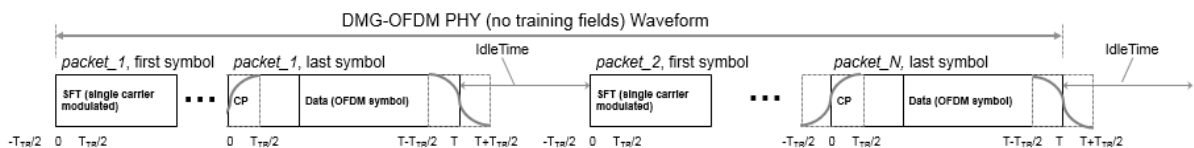


- If `IdleTime` is zero for the waveform, the windowed portion (from T to $T + T_{\text{TR}}/2$) of the last data symbols is added to the start of the STF field.
- If `IdleTime` is non-zero for the waveform, the `IdleTime` is appended at the end of the windowed portion (after $T + T_{\text{TR}}/2$) of the last OFDM symbol.
- When a waveform composed of DMG OFDM-PHY packets includes training subfields, no windowing is applied to the single carrier modulated symbols the end of the waveform. The last sample of the last training subfield is followed by the first STF sample of the first packet in the waveform.
 - If `IdleTime` is zero for the waveform, there is no overlap.
 - If `IdleTime` is nonzero for the waveform, the value specifies the delay between the last sample of `packet_N` and the first sample of in `packet_1`.
- When a waveform is composed of DMG-SC or DMG-Control PHY packets, the end of the waveform is single carrier modulated, so no windowing is applied to the last waveform symbol. The last sample of the last training subfield is followed by the first STF sample of the first packet in the waveform.
 - If `IdleTime` is zero for the waveform, there is no overlap.
 - If `IdleTime` is nonzero for the waveform, the value specifies the delay between the last sample of `packet_N` and the first sample of in `packet_1`.

Note The same looping behavior applies for a waveform composed of DMG OFDM-PHY packets with training subfields, DMG-SC PHY packets, or DMG-Control PHY packets.

Scrambler Initialization

The scrambler initialization used on the transmission data follows the process described in IEEE Std 802.11-2012, Section 18.3.5.5 and IEEE Std 802.11ad-2012, Section 21.3.9. The header and data fields that follow the scrambler initialization field (including data padding bits) are scrambled by XORing each bit with a length-127 periodic sequence generated by the polynomial $S(x) = x^7 + x^4 + 1$. The octets of the PSDU (Physical Layer Service Data Unit) are placed into a bit stream, and within each octet, bit 0 (LSB) is first and bit 7 (MSB) is last. The generation of the sequence and the XOR operation are shown in this figure:

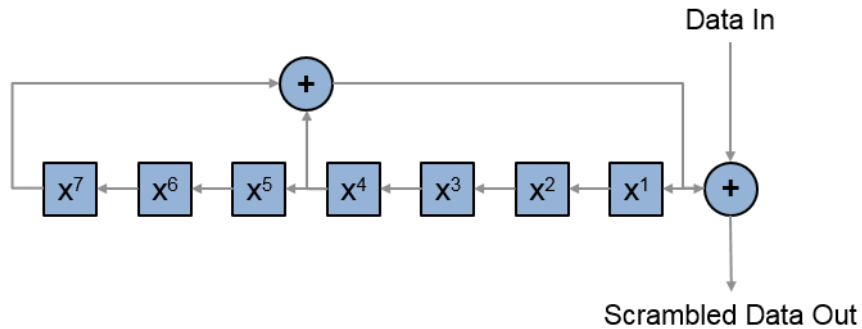

Conversion from integer to bits uses left-MSB orientation. For the initialization of the scrambler with decimal 1, the bits are mapped to the elements shown.

Element	X^7	X^6	X^5	X^4	X^3	X^2	X^1
Bit Value	0	0	0	0	0	0	1

To generate the bit stream equivalent to a decimal, use `de2bi`. For example, for decimal 1:

```
de2bi(1,7,'left-msb')
ans =
```

```
0 0 0 0 0 0 1
```

References

- [1] IEEE Std P802.11ax™/D2.0 Draft Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 6: Enhancements for High Efficiency WLAN.

- [2] IEEE Std 802.11™-2016 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.
- [3] IEEE Std 802.11™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.
- [4] IEEE Std 802.11ad™-2012 IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements — Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

`getPSDULength` | `packetFormat` | `phyType` | `ruInfo` | `wlanDMGConfig` | `wlanFieldIndices` | `wlanHEMUConfig` | `wlanHESUConfig` | `wlanHTConfig` | `wlanNonHTConfig` | `wlanSIGConfig` | `wlanVHTConfig`

Apps

Wireless Waveform Generator

Topics

“Packet Size and Duration Dependencies”
“WLAN Packet Structure”
“Multiuser HE Transmission”

Introduced in R2015b

wlanMACFrame

Generate WLAN MAC frame (MPDU or A-MPDU)

Syntax

```
[frame, frameLength] = wlanMACFrame(macConfig)
[frame, frameLength] = wlanMACFrame(payload, macConfig)
[frame, frameLength] = wlanMACFrame(payload, macConfig, phyConfig)
[frame, frameLength] = wlanMACFrame( ____, 'OutputFormat', format)
```

Description

`[frame, frameLength] = wlanMACFrame(macConfig)` generates `frame`, a WLAN medium access control (MAC) frame for the input MAC frame configuration object. The generated MAC frame is a MAC protocol data unit (MPDU) or aggregated MPDU (A-MPDU). The function also computes `frameLength`, the total length of the MAC frame.

`[frame, frameLength] = wlanMACFrame(payload, macConfig)` generates a WLAN MAC frame containing `payload`, one or more MAC service data units (MSDUs). For the MAC frame to contain the payload, the `FrameType` property of `macConfig` must be set to `'Data'` or `'QoS Data'`. Otherwise, `payload` is ignored.

`[frame, frameLength] = wlanMACFrame(payload, macConfig, phyConfig)` generates a WLAN MAC frame for `phyConfig`, a physical layer (PHY) format configuration object. Use this syntax to generate A-MPDUs.

`[frame, frameLength] = wlanMACFrame(____, 'OutputFormat', format)` specifies the data format of the output WLAN MAC frame.

Examples

Generate RTS MAC Frame

Create a `wlanMACFrameConfig` object for a request-to-send (RTS) MAC frame. Generate the frame by calling the `wlanMACFrame` function and display the result.

```
macConfig = wlanMACFrameConfig('FrameType','RTS');  
[frame,frameLength] = wlanMACFrame(macConfig);  
disp(frame')
```

```
B000FFFFFFFF013579A952  
4000FFFFFFFF02468B7AB8
```

Generate RTS MAC Frame in Bit Format

Create a `wlanMACFrameConfig` object for an RTS MAC frame. Generate the RTS MAC frame in bit format.

```
macConfig = wlanMACFrameConfig('FrameType','RTS');  
[frame,frameLength] = wlanMACFrame(macConfig,'OutputFormat','bits');
```

Generate QoS Data Frame with Specified Payload

Generate a quality of service (QoS) Data WLAN MAC frame with the specified payload.

```
macConfig = wlanMACFrameConfig('FrameType','QoS Data');  
payload = '00576000103afffe80';  
[frame,frameLength] = wlanMACFrame(payload,macConfig);  
disp(frame')
```

```
8000FFFFFFFF0135790135790020056013FF88241  
8200FFFFFFFF02468B02468B0000007000AFE0EA33
```

Generate HT-Format A-MPDU

Create MAC and physical layer (PHY) configuration objects, which are required to generate a high-throughput-format (HT-format) aggregated MAC protocol data unit (A-MPDU).

```
macConfig = wlanMACFrameConfig('FrameType','QoS Data','FrameFormat','HT-Mixed', ...
                               'MPDUAggregation',true);
phyConfig = wlanHTConfig('MCS',4);
```

Generate an HT-format A-MPDU containing the specified MAC service data unit (MSDU) payloads.

```
payload = {'00576000103afffe80','020000fffe00001ff0','002c0b0fffe000001f'};
[frame,frameLength] = wlanMACFrame(payload,macConfig,phyConfig);
```

Display the frame length.

```
disp(frameLength)
```

```
131
```

Generate Beacon MAC Frame with Service Set Identifier (SSID)

Create a `wlanMACManagementConfig` configuration object, specifying the SSID as 'demo SSID'.

```
mgmtConfig = wlanMACManagementConfig('SSID','demo SSID');
```

Create a `wlanMACFrameConfig` configuration object, specifying the management frame-body configuration object as `mgmtConfig` and a beacon MAC frame.

```
macConfig = wlanMACFrameConfig('FrameType','Beacon','ManagementConfig',mgmtConfig);
```

Generate the beacon MAC frame with the specified SSID.

```
[macFrame,frameLength] = wlanMACFrame(macConfig);
```

Display the frame length.

```
frameLength
```

```
frameLength = 56
```

Input Arguments

macConfig — MAC frame configuration

wlanMACFrameConfig object

MAC frame configuration, specified as a wlanMACFrameConfig object. This object defines the type of MAC frame and its applicable properties.

payload — One or more MSDUs

numeric vector | character vector | string | cell array

One or more MSDUs, specified as a numeric vector, character vector, string, or cell array. The value you specify depends on whether the frame is aggregated.

- To generate an MPDU, specify this argument as one of these values:
 - A numeric vector of octets in decimal format, where each element is an integer in the interval [0, 255]
 - A character vector of octets in hexadecimal format
 - A string scalar of octets in hexadecimal format

The value you specify represents one MSDU.

- To generate an A-MPDU, specify this argument as one of these values:
 - A cell array of numeric vectors
 - A cell array of character vectors
 - A string array

Each element of the specified array represents one MSDU.

Data Types: double | uint8 | char | string | cell

phyConfig — PHY format configuration

wlanHTConfig object (default) | wlanVHTConfig object | wlanHESUConfig object

PHY format configuration, specified as a configuration object of type wlanHESUConfig, wlanVHTConfig, or wlanHTConfig. The value you specify must be compatible with the frame format specified in the macConfig input.

- If the FrameFormat property of macConfig is 'HE-SU' or 'HE-EXT-SU', then you must specify this argument as a wlanHESUConfig object.

- If the `FrameFormat` property of `macConfig` is `'VHT'`, then you must specify this argument as a `wlanVHTConfig` object.
- If the `FrameFormat` property of `macConfig` is `'HT-Mixed'`, then you must specify this argument as a `wlanHTConfig` object.

Specify this argument to:

- Ensure that the frame does not exceed the transmission time limit.
- Add end-of-frame (EOF) padding to frames in very-high-throughput (VHT) or high-efficiency (HE) format.
- Maintain minimum start spacing between MPDUs in an A-MPDU.

format — Format of output MAC frame

`'bits'` (default) | `'octets'`

Format of output MAC frame, specified as `'bits'` or `'octets'`.

Data Types: `string`

Output Arguments

frame — Generated MPDU or A-MPDU MAC frame

character array

Generated MPDU or A-MPDU MAC frame, returned as a character array. Each row of the array is an octet in hexadecimal format.

Data Types: `char`

frameLength — Length of generated MAC frame

nonnegative integer

Length of the generated MAC frame, in octets, returned as a nonnegative integer. For VHT- and HE-format A-MPDUs, this output is the A-MPDU pre-EOF padding (APEP) length, which is less than or equal to the length of the `frame` output. For all other formats, this output is the physical layer convergence procedure (PLCP) service data unit (PSDU) length.

Data Types: `double`

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

- [2] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information technology - Telecommunications and information exchange between systems Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHESUConfig | wlanHTConfig | wlanMACFrameConfig |
wlanMACManagementConfig | wlanVHTConfig

Functions

wlanAMPDUDeaggregate | wlanMPDUDecode | wlanMSDULengths |
wlanWaveformGenerator

Introduced in R2018b

wlanMSDULengths

Calculate MSDU lengths

Syntax

```
msduLengths = wlanMSDULengths(frameLength,macConfig)  
msduLengths = wlanMSDULengths(frameLength,macConfig,phyConfig)
```

Description

`msduLengths = wlanMSDULengths(frameLength,macConfig)` returns `msduLengths`, a vector of medium access control (MAC) service data unit (MSDU) lengths for the specified MAC frame length and configuration. The function calculates the MSDU lengths by removing the overhead of MAC headers, frame check sequence (FCS), and subframe overheads (if applicable).

`msduLengths = wlanMSDULengths(frameLength,macConfig,phyConfig)` returns MSDU lengths for the specified physical layer (PHY) format configuration object. Use this syntax to return MSDU lengths for aggregated MAC protocol data units (A-MPDUs).

Examples

Generate QoS Data Frame

Generate a QoS Data frame of length 2000 octets.

Create a WLAN MAC frame configuration object.

```
macConfig = wlanMACFrameConfig('FrameType','QoS Data');
```

Calculate the MSDU lengths required to generate a 2000-octet QoS Data frame and display the result.


```

frameLength = 2000;
msduLengths = wlanMSDULengths(frameLength,macConfig);
disp(msduLengths)

```

```

    1970

```

Create a random payload of the obtained MSDU length.

```

msdu = randi([0 255],1,msduLengths);

```

Generate the 2000-octet QoS data frame.

```

[frame,frameLength] = wlanMACFrame(msdu,macConfig);
disp(frameLength)

```

```

    2000

```

Generate HT-Format A-MPDU

Generate a high-throughput-format (HT-format) A-MPDU frame of length 5000 octets.

Create a MAC frame configuration object.

```

macConfig = wlanMACFrameConfig('FrameType','QoS Data','FrameFormat','HT-Mixed', ...
                               'MPDUAggregation', true);

```

Create an HT-format configuration object.

```

phyConfig = wlanHTConfig('MCS',4);

```

Calculate the MSDU lengths required to generate a 5000-octet A-MPDU frame, displaying the result.

```

msduLengths = wlanMSDULengths(5000,macConfig,phyConfig);
disp(msduLengths)

```

```

    2302

```

```

    2302

```

```

    294

```

Create MSDUs with random data using the obtained MSDU length vector.

```

numMSDUs = numel(msduLengths);
msduList = cell(1,numMSDUs);
for i = 1:numMSDUs

```

```
msduList{i} = randi([0 255],1,msduLengths(i));  
end
```

Generate the 5000-octet A-MPDU.

```
[frame, frameLength] = wlanMACFrame(msduList,macConfig,phyConfig);  
disp(frameLength)  
5000
```

Input Arguments

frameLength — Total length of MAC frame

integer in the interval [28, 6500631]

Total length of the MAC frame, specified as an integer in the interval [28, 6,500,631].

Note The maximum value of this input depends on the MAC and PHY configuration in accordance with Table 9-19 of [2].

For MAC frames in very-high-throughput (VHT) or high-efficiency (HE) format, this input is the A-MPDU pre-end-of-frame padding (APEP) length. For all other formats, this input is the physical layer convergence procedure (PLCP) service data unit PSDU length.

Note APEP length is always a multiple of four octets due to final subframe padding. If you do not specify this argument as a multiple of four octets for VHT- or HE-format frames, the function rounds the value to the nearest multiple of four.

Data Types: double

macConfig — MAC frame configuration

wlanMACFrameConfig object (default)

MAC frame configuration, specified as a wlanMACFrameConfig object. This object defines the type of MAC frame and its applicable properties.

phyConfig — PHY format configuration

wlanHTConfig object (default) | wlanVHTConfig object | wlanHESUConfig object

PHY format configuration, specified as a configuration object of type `wlanHESUConfig`, `wlanVHTConfig`, or `wlanHTConfig`. The value you specify must be compatible with the frame format specified in the `macConfig` input.

- If the `FrameFormat` property of `macConfig` is 'HE-SU' or 'HE-EXT-SU', then you must specify this argument as a `wlanHESUConfig` object.
- If the `FrameFormat` property of `macConfig` is 'VHT', then you must specify this argument as a `wlanVHTConfig` object.
- If the `FrameFormat` property of `macConfig` is 'HT-Mixed', then you must specify this argument as a `wlanHTConfig` object.

Specify this argument to:

- Ensure that the frame does not exceed the transmission time limit.
- Add end-of-frame (EOF) padding to VHT- or HE-format frames.
- Maintain minimum start spacing between MPDUs in an A-MPDU.

Output Arguments

msduLengths — MSDU lengths

vector of integers

MSDU lengths, returned as a vector of integers. The number of elements in this vector corresponds to the number of MSDUs. Each element is the length of its corresponding MSDU.

Data Types: `double`

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information technology -

Telecommunications and information exchange between systems Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`wlanMACFrame` | `wlanMACFrameConfig`

Introduced in R2018b

Classes — Alphabetical List

wlanDMGConfig

Create DMG-format configuration object

Description

The `wlanDMGConfig` object is a directional-multi-gigabit-format (DMG-format) configuration object for the WLAN DMG packet format.

Creation

Syntax

```
cfgDMG = wlanDMGConfig  
cfgDMG = wlanDMGConfig(Name, Value)
```

Description

`cfgDMG = wlanDMGConfig` creates `cfgDMG`, a configuration object that initializes parameters for an IEEE 802.11 DMG-format “PPDU” on page 3-11.

`cfgDMG = wlanDMGConfig(Name, Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanDMGConfig('MCS', '13', 'TrainingLength', 4)` specifies a DMG format with these properties:

- A modulation and coding scheme corresponding to orthogonal frequency division multiplexing (OFDM) physical layer (PHY) modulation and a coding rate of $\frac{1}{2}$
- A PPDU with four training fields

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

MCS — MCS used for transmission

0 (default) | integer in the interval [0, 24] | '9.1' | '12.1' | '12.2' | '12.3' | '12.4' | '12.5' | '12.6'

Modulation and coding scheme (MCS) used for transmission, specified as an integer in the interval [0, 24], or as one of the extended MCS values: '9.1', '12.1', '12.2', '12.3', '12.4', '12.5', or '12.6'. Specify an extended (non-integer) MCS value as a character vector or string scalar. Specify an integer MCS value as a character vector, string scalar, or integer. The value of this property indicates the MCS used in transmitting the current packet in accordance with these tables:

- Control PHY:

MCS	Modulation	Coding Rate	Comment
0	Differential binary phase-shift keying (DBPSK)	1/2	The coding rate may be lower due to codeword shortening.

- Single-carrier modulation:

MCS	Modulation	Coding Rate	N_{CBPS}	Repetition
1	$\pi/2$ -BPSK	1/2	1	2
2		1/2		1
3		5/8		
4		3/4		
5		13/16		
6	$\pi/2$ quadrature phase-shift keying ($\pi/2$ -QPSK)	1/2	2	
7		5/8		
8		3/4		
9		13/16		
9.1		7/8		
10	$\pi/2$ -16-point quadrature	1/2	4	

MCS	Modulation	Coding Rate	N_{CBPS}	Repetition
11	amplitude modulation ($\pi/2$ -16-QAM)	5/8	6	
12		3/4		
12.1		13/16		
12.2		7/8		
12.3	$\pi/2$ -64QAM	5/8	6	
12.4		3/4		
12.5		13/16		
12.6		7/8		

N_{CBPS} is the number of coded bits per symbol.

- OFDM modulation:

MCS	Modulation	Coding Rate	N_{BPSC}	N_{CBPS}	N_{DBPS}
13	Staggered QPSK (SQPSK)	1/2	1	336	168
14		5/8			210
15	QPSK	1/2	2	672	336
16		5/8			420
17		3/4			504
18	16-QAM	1/2	4	1344	672
19		5/8			840
20		3/4			1008
21		13/16			1092
22	64-QAM	5/8	6	2016	1260
23		3/4			1512
24		13/16			1638

N_{BPSC} is the number of coded bits per single carrier.

N_{CBPS} is the number of coded bits per symbol.

N_{DBPS} is the number of data bits per symbol.

Data Types: double | char | string

TrainingLength — Number of training fields

0 (default) | multiple of four in the interval [0, 64]

Number of training fields, specified as a multiple of four in the interval [0, 64].

Data Types: double

PacketType — Packet training field type

'TRN-R' (default) | 'TRN-T'

Packet training field type, specified as one of these values:

- 'TRN-R' - Indicates that the packet includes or requests receive-training subfields
- 'TRN-T' - Indicates that the packet includes transmit-training subfields

Dependencies

This property applies only when the value of the TrainingLength property is positive.

Data Types: char | string

BeamTrackingRequest — Beam tracking request indicator

false or 0 (default) | true or 1

Beam tracking request indicator, specified as a numeric or logical value of 1 (true) or 0 (false). To indicate that beam tracking is requested, set this property to 1 (true).

Dependencies

This property applies only when the value of the TrainingLength property is positive.

Data Types: logical

TonePairingType — Tone pairing type

'Static' (default) | 'Dynamic'

Tone pairing type, specified as 'Static' or 'Dynamic'.

Dependencies

This property applies only when the MCS property is in the interval [13, 17], specifying OFDM modulation with either SQPSK or QPSK.

Data Types: char | string

DTPGroupPairIndex — DTP group pair index

(0:1:41) | (default) | 42-by-1 vector of integers

Dynamic tone pairing (DTP) group pair index, specified as a 42-by-1 vector of integers in the interval [0, 41] with no duplicated elements. Specify one vector for each pair.

Dependencies

This property applies only when the MCS property is in the interval [13, 17] and when the TonePairingType property is 'Dynamic'.

Data Types: double

DTPIndicator — DTP update indicator

false or 0 (default) | true or 1

DTP update indicator, specified as a numeric or logical value of 1 (true) or 0 (false). To indicate that the DTP mapping has been updated, set this property to 1 (true).

Dependencies

This property applies only when the MCS property is in the interval [13, 17] and when the TonePairingType property is 'Dynamic'.

Data Types: logical

PSDULength — PSDU length

1000 (default) | integer in the interval [1, 2¹⁸]

Physical layer convergence procedure (PLCP) service data unit (PSDU) length, in bytes, specified as an integer in the interval [1, 2¹⁸].

Data Types: double

ScramblerInitialization — Initial scrambler state

2 (default) | integer in the interval [0, 127] | binary column vector

Initial scrambler state of the data scrambler for each packet generated, specified as an integer in the interval [0, 127] or a corresponding binary column vector. For example, you can set the initial scrambler state to 26 by specifying 'ScramblerInitialization', 26 or 'ScramblerInitialization', [1;1;0;1;0]. The value of the MCS property determines the values to which you can set this property.

- If you set MCS to 0, specify this property as an integer in the interval [0, 15] or a 4-by-1 binary column vector.

- If you set MCS to '9.1', '12.1', '12.2', '12.3', '12.4', '12.5', or '12.6', specify this property as an integer in the interval [0, 31] or a 5-by-1 binary column vector.
- If you set MCS, specify this property as an integer in the interval [0, 127] or a 7-by-1 column vector.

The default value of 2 is the example state given in Section L.5.2 of [1].

Data Types: `double` | `int8`

AggregatedMPDU — MPDU aggregation indicator

`false` or `0` (default) | `true` or `1`

MPDU aggregation indicator, specified as a logical value of `1` (`true`) or `0` (`false`). To indicate that the current packet contains aggregated MPDUs (A-MPDUs), set this property to `1` (`true`).

Dependencies

This property applies only when you set the MCS property to a value other than `0`.

Data Types: `logical`

LastRSSI — Received power level of the last packet

`0` (default) | integer in the interval [0, 15]

Received power level of the last packet, specified as an integer in the interval [0, 15]. This property corresponds to the `LAST_RSSI` parameter within the `TXVECTOR` or `RXVECTOR` field.

When transmitting a response frame immediately following a short interframe space (SIFS) period, a DMG STA sets the `LAST_RSSI` parameter of `TXVECTOR` as specified in Section 9.3.2.3.3 of [1].

- To represent power values greater than or equal to -42 dBm, set this property to `15`.
- To represent power values p between -68 dBm and -42 dBm, set this property to a value v in the interval [2, 14]. The values of p and v are related by $v = \text{round}((p - (-71 \text{ dBm}))/2)$.
- To represent power values less than or equal to -68 dBm, set this property to `1`.
- To indicate that the last packet was not received following a SIFS period, set this property to `0`.

The `LAST_RSSI` parameter of `RXVECTOR` indicates the received power level of the last packet with a valid PHY header according to Table 21-1 of [1].

- To represent power values greater than or equal to -42 dBm, set this property to 15 .
- To represent power values p between -68 dBm and -42 dBm, set this property to a value v in the interval [2, 14]. The values of p and v are related by $v = \text{round}((p - (-71 \text{ dBm}))/2)$.
- To represent power values less than or equal to -68 dBm, set this property to 1.
- To indicate that the previous packet was not received during the SIFS period before the current transmission, set this property to 0.

Dependencies

This property applies only when you set the `MCS` property to a value other than 0.

Data Types: `double`

Turnaround — Turnaround indication

`false` or 0 (default) | `true` or 1

Turnaround indication, specified as a logical value of 1 (`true`) or 0 (`false`). To indicate that the STA is required to listen for an incoming PPDU immediately following the transmission of the PPDU, set this property to 1 (`true`). For more information, see Section 9.3.2.3.3 of [1].

Data Types: `logical`

Object Functions

`phyType` Return DMG PHY modulation type

Examples

Create DMG Configuration Object with Default Settings

```
cfgDMG = wlanDMGConfig
```

```
cfgDMG =  
    wlanDMGConfig with properties:
```

```

                MCS: '0'
    TrainingLength: 0
                PSDULength: 1000
ScramblerInitialization: 2
                Turnaround: 0

```

Create DMG Configuration Object and Return DMG PHY Type

Create DMG configuration objects and change the default property settings by using dot notation. Use the `phyType` object function to access the DMG PHY modulation type.

Create a DMG configuration object and return the DMG PHY modulation type. By default, the configuration object creates properties to model the DMG control PHY.

```

dmg = wlanDMGConfig;
phyType(dmg)

```

```

ans =
'Control'

```

Model the SC PHY by modifying the defaults by using the dot notation to specify an MCS of 5.

```

dmg.MCS = 5;
phyType(dmg)

```

```

ans =
'SC'

```

Create DMG Configuration Object and Modify Default Settings

Create a DMG configuration object and use Name, Value pairs to override default settings.

```

dtpgrouppairs = (randperm(42)-1)';
cfgDMG = wlanDMGConfig('MCS',13,'TonePairingType','Dynamic', ...
    'DTPGroupPairIndex',dtpgrouppairs)

```

```
cfgDMG =
  wlanDMGConfig with properties:
      MCS: 13
      TrainingLength: 0
      TonePairingType: 'Dynamic'
      DTPGroupPairIndex: [42x1 double]
      DTPIndicator: 0
      PSDULength: 1000
      ScramblerInitialization: 2
      AggregatedMPDU: 0
      LastRSSI: 0
      Turnaround: 0
```

Create DMG Configuration Object with Extended MCS

Create DMG configuration objects and change the default MCS setting by using dot notation.

Create a DMG configuration object and return the DMG PHY modulation type. By default, the configuration object creates properties to model the DMG control PHY.

```
dmg = wlanDMGConfig;
phyType(dmg)
```

```
ans =
'Control'
```

Model the SC PHY by modifying the defaults by using the dot notation to specify an extended MCS of 9.1.

```
dmg.MCS = '9.1';
phyType(dmg)
```

```
ans =
'SC'
```

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11ad-2012. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHEMUConfig | wlanHESUConfig | wlanHTConfig | wlanNonHTConfig | wlanSIGConfig | wlanVHTConfig

Functions

phyType | wlanDMGDataBitRecover | wlanDMGHeaderBitRecover | wlanDMGOFDMDemodulate | wlanDMGOFDMInfo | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

“Packet Size and Duration Dependencies”

Introduced in R2017b

wlanHEMUConfig

Create HE-MU-format configuration object

Description

The wlanHEMUConfig object is a high-efficiency-format (HE-format) configuration object for the WLAN HE multiuser (HE MU) packet format.

Creation

Syntax

```
cfgHEMU = wlanHEMUConfig(AllocationIndex)
cfgHEMU = wlanHEMUConfig(AllocationIndex,Name,Value)
```

Description

`cfgHEMU = wlanHEMUConfig(AllocationIndex)` creates `cfgHEMU`, a configuration object that initializes transmit parameters for a multiuser IEEE 802.11 HE-format “PPDU” on page 3-38 for `AllocationIndex`, the input resource unit allocation. For a detailed description of the HE WLAN format, see [1].

`cfgHEMU = wlanHEMUConfig(AllocationIndex,Name,Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanHEMUConfig([200 114 114 200], 'LowerCenter26ToneRU', true)` specifies an 80-MHz bandwidth allocation for three users on three RUs with lower center 26-tone RU allocation signaling.

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

AllocationIndex — Resource unit allocation index

integer | vector of integers | character vector | cell array

Resource unit (RU) allocation index, specified as one, two, four, or eight integer values in the interval [0,223]. You can specify this value as an integer, a vector of integers, a string array, a character vector, or a cell array of character vectors. The format in which you specify these indices depends on how many you are specifying.

- Specify a single allocation index using one integer in either of these forms:
 - A scalar integer
 - An 8-bit binary sequence specified as a string or character vector
- Specify multiple allocation indices using two, four, or eight integer values in any of these forms:
 - A vector of integers
 - An 8-bit binary sequence specified as a string array
 - An 8-bit binary sequence specified as a cell array of character vectors

The allocation defines the number of RUs, the size of each RU, and the number of users assigned to each RU. For more information, see “Allocation Index”.

Note This property is read-only after the object is created.

Data Types: double | char | string | cell

ChannelBandwidth — Channel bandwidth of PPDU transmission

'CBW20' (default) | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

When you create a `wlanHEMUConfig` object, this property is configured based on the value to which you set the `AllocationIndex` property.

Note This property is read-only after the object is created.

Data Types: `char` | `string`

LowerCenter26ToneRU — Enable lower center 26-tone RU allocation signaling

`false` or `0` (default) | `true` or `1`

Enable lower center 26-tone RU allocation signaling, specified as a logical value of `1` (`true`) or `0` (`false`). To enable the lower frequency center 26-tone RU, set this property to `1` (`true`). This property can be set during object creation only.

Dependencies

This property applies only when the `AllocationIndex` property defines a channel bandwidth of 80 MHz or 160 MHz and does not specify a full bandwidth allocation.

Data Types: `logical`

UpperCenter26ToneRU — Enable upper center 26-tone RU allocation signaling

`false` or `0` (default) | `true` or `1`

Enable upper center 26-tone RU allocation signaling, specified as a logical value of `1` (`true`) or `0` (`false`). To enable the upper frequency center 26-tone RU, set this property to `1` (`true`). This property can be set during object creation only.

Dependencies

This property applies only when the `AllocationIndex` property defines a channel bandwidth of 80 MHz or 160 MHz and does not specify a full bandwidth allocation.

Data Types: `logical`

RU — Transmission properties of each RU in transmission

cell array of `wlanHEMURU` objects

Transmission properties of each RU in the transmission, specified as a cell array of `wlanHEMURU` objects. When you create a `wlanHEMUConfig` object, this property is configured based on the value to which you set the `AllocationIndex` property.

Each element of the RU cell array contains these subproperties:

PowerBoostFactor — Power boost factor

1 (default) | scalar in the interval [0.5, 2]

Power boost factor, specified as a scalar in the interval [0.5, 2].

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies only when you set the NumTransmitAntennas property equal to the sum of the number space-time streams for all users assigned to the RU.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size $N_{\text{STS}_{\text{Total}}}$ -by- N_{T} , where:
 - $N_{\text{STS}_{\text{Total}}}$ is the sum of the number of the space-time streams for all users assigned to the RU;
 - N_{T} is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size Size-by- $N_{\text{STS}_{\text{Total}}}$ -by- N_{T} . The ChannelBandwidth property determines the value of the Size property. In this case, each occupied subcarrier has its own spatial mapping matrix.

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: [0.5 0.3; 0.4 0.4; 0.5 0.8] represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: double

Complex Number Support: Yes

Beamforming — Enable beamforming

true or 1 (default) | false or 0

Enable beamforming, specified as a logical value of 1 (true) or 0 (false). To apply a beamforming steering matrix, set this property to 1 (true). The `SpatialMappingMatrix` property specifies the beamforming steering matrix.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: logical

Size — Resource unit size

242 (default) | positive integer

Resource unit size, specified as 26, 52, 106, 242, 484, 996, or 1992.

Note This property is read-only after the object is created.

Data Types: double

Index — Resource unit index

1 (default) | integer in the interval [1, 74]

Resource unit index, specified as an integer in the interval [1, 74]. Use this property to indicate the location of the RU within the channel.

Note This property is read-only after the object is created.

Example: In an 80-MHz transmission there are four possible 242-tone RUs, one in each 20-MHz subchannel. RU 242-1 (Size = 242, Index = 1) is the RU occupying the lowest

absolute frequency within the 80MHz, and RU 242-4 (Size = 242, Index = 4) is the RU occupying the highest absolute frequency.

Data Types: double

UserNumbers — User index number

1 | integer | vector of integers

Indices of users transmitted on the RU, in one-based format, specified as an integer or a vector of integers. This property indexes the appropriate cell array element of the `User` property.

Data Types: double

Data Types: cell

User — Transmission properties of each user

cell array of `wlanHEMUUser` objects

Transmission properties of each user, specified as a cell array of `wlanHEMUUser` objects. When you create a `wlanHEMUConfig` object, this property is configured based on the value to which you set the `AllocationIndex` property.

Each element of the `User` cell array contains these subproperties:

APEPLength — APEP length

100 (default) | integer in the interval [0, 6500531]

Aggregated MPDU (A-MPDU) pre-end-of-frame (pre-EOF) padding (APEP) length, in bytes, specified as an integer in the interval [0, 6500531].

This property is used internally to determine the number of OFDM symbols in the data field. For more information, see [1].

Data Types: double

MCS — MCS used for transmission

0 (default) | integer in the interval [0, 11]

Modulation and coding scheme (MCS) used for transmission, specified as a nonnegative integer in the interval [0, 11]. Each value of this property corresponds to an MCS according to Tables 28-51-28-107 of [1]. This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Dual Carrier Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	0 or 1	1/2
1	Quadrature phase-shift keying (QPSK)	0 or 1	1/2
2		Not applicable	3/4
3	16-point quadrature amplitude modulation (16-QAM)	0 or 1	1/2
4			3/4
5	64-QAM	Not applicable	2/3
6			3/4
7			5/6
8			3/4
9	256-QAM	Not applicable	5/6
10			3/4
11			5/6
	1024-QAM		

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer

Number of space-time streams in the transmission, specified as an integer in the interval [1, 8]. The maximum number of space-time streams for any user within a MU-MIMO RU is four. The maximum value of the sum of the number of space-time streams over all users in an RU is eight. For information on these and other restrictions on the number of space-time streams, see Tables 28-1 and 28-27 of [1].

Data Types: double

DCM — DCM indicator

false or 0 (default) | true or 1

Dual carrier modulation (DCM) indicator, specified as a logical value of 1 (true) or 1 (false). To indicate that DCM is used for the HE-Data field, set this property to 1 (true).

Dependencies

You can only set this property to 1 (true) when all of these conditions are satisfied:

- The MCS property is 0, 1, 3, or 4.
- The STBC property is 0 (false).
- The NumSpaceTimeStreams property is less than or equal to 2.
- The RU property defines a single-user RU.

Data Types: logical

ChannelCoding — FEC coding type

'LDPC' (default) | 'BCC'

Forward-error-correction (FEC) coding type for the HE-Data field, specified as 'LDPC' for low-density parity-check (LDPC) coding or 'BCC' for binary convolutional coding (BCC).

Dependencies

You can only set this property to 'BCC' when all of these conditions are satisfied:

- The MCS property is not 10 or 11.
- The size of any RU is less than or equal to 242. Obtain the RU sizes by using the ruInfo object function.
- The NumSpaceTimeStreams property is less than or equal to 4.

Data Types: char | string

STAID — STA identifier

0 (default) | integer in the interval [0, 2047]

Station (STA) identifier, specified as an integer in the interval [0, 2047]. The value of this property specifies the station association identifier (AID) field as defined in Section 27.11.1 of [1]. The 11 least significant bits (LSBs) of the AID field are used to address the STA. When you set this property to 2046, the associated RU carries no data.

Data Types: double

RUNumber — RU number

1 (default) | integer | vector of integers

RU number, specified as an integer or a vector of integers. This property indexes the appropriate cell array elements of the RU property.

Note This property is read-only after the object is created.

Data Types: double

NominalPacketPadding — Nominal packet padding

0 (default) | 8 | 16

Nominal packet padding, in microseconds, specified as 0, 8, or 16. The wlanHEMUConfig object uses this property and the pre-forward-error-correction (pre-FEC) padding factor to calculate the duration, T_{PE} , of the packet extension field. For more information about the packet extension field, see Section 28.3.12 of [1].

This table shows the possible values of T_{PE} for different values of this property and a , a parameter defined by equation (28-72) or (28-73) of [1].

Value of a	Value of T_{PE} in Microseconds		
	NominalPacketPadding Set to 0	NominalPacketPadding Set to 8	NominalPacketPadding Set to 16
1	0	0	4
2	0	0	8
3	0	4	12
4	0	8	16

For an HE MU PPDU, equation (28-114) of [1] defines the value of T_{PE} as the maximum of the T_{PE} values specified for each user.

Data Types: double

Data Types: cell

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the interval [1, 8]

Number of transmit antennas, specified as an integer in the interval [1, 8].

Data Types: double

STBC — Enable space-time block coding

false or 0 (default) | true or 1

Enable space-time block coding (STBC) of the PPDU data field for all users, specified as a logical value of 1 (true) or 0 (false). STBC transmits multiple copies of the data stream across assigned antennas.

- When you set this property to 0 (false), STBC is not applied to the data field. The number of space-time streams is equal to the number of spatial streams.
- When you set this property to 1 (true), STBC is applied to the data field. The number of space-time streams is twice the number of spatial streams.

Dependencies

This property applies only when all of these conditions are satisfied:

- The NumSpaceTimeStreams subproperty of each element of the User property is 2.
- The DCM subproperty of each element of the User property is 0 (false).
- No RU specifies multiuser multiple input/multiple output (MU-MIMO).

Data Types: logical

GuardInterval — Guard interval (cyclic prefix) duration

3.2 (default) | 1.6 | 0.8

Guard interval (cyclic prefix) duration for the data field within a packet, in microseconds, specified as 3.2, 1.6, or 0.8.

Data Types: double

HELTFType — HE-LTF compression mode

4 (default) | 2

HE-LTF compression mode, specified as 4 or 2. This property indicates the type of HE-LTF, where a value of 4 or 2 corresponds to four times or two times HE-LTF duration compression mode, respectively. The HE-LTF type is enumerated in Table 28-1 of [1] as:

- 2xHE-LTF - Duration of 6.4 μ s with a guard interval duration of 0.8 μ s or 1.6 μ s
- 4xHE-LTF - Duration of 12.8 μ s with a guard interval duration of 0.8 μ s or 3.2 μ s

For more information on the HE-LTF, see Section 28.3.10.10 of [1].

Data Types: double

SIGBCompression — HE-SIG-B compression indicator

true or 1 (default) | false or 0

HE-SIG-B compression indicator, specified as a logical value of 1 (true) or 0 (false). To enable HE-SIG-B compression for a full-bandwidth 20-MHz MU-MIMO transmission, set this property to 1 (true).

Dependencies

This property applies only when you indicate a 20-MHz channel bandwidth by setting the AllocationIndex to a value in the interval [192,199].

Data Types: logical

SIGBMCS — MCS for HE-SIG-B field

0 (default) | integer in the interval [0, 5]

Modulation and coding scheme (MCS) for the HE-SIG-B field, specified as an integer in the interval [0, 5].

Data Types: double

SIGBDCM — Enable DCM for HE-SIG-B field

false or 0 (default) | true or 1

HE-SIG-B dual-carrier modulation (DCM) indicator, specified as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that the HE-SIG-B field is modulated with DCM. A value of 0 (false) indicates that the HE-SIG-B field is not modulated with DCM.

Dependencies

This property applies only when the MCS subproperty of each element of the User property is 0, 1, 3, or 4.

Data Types: logical

UplinkIndication — Uplink indication

false or 0 (default) | true or 1

Uplink indication, specified as a logical value of 1 (true) or 0 (false). To indicate that the PPDU is sent on a downlink transmission, set this property to 0 (false). To indicate that the PPDU is sent on an uplink transmission, set this property to 1 (true).

Data Types: logical

BSSColor — Basic service set color identifier

0 (default) | integer in the interval [0, 63]

Basic service set (BSS) color identifier, specified as an integer in the interval [0, 63].

Data Types: double

SpatialReuse — Spatial reuse indication

0 (default) | integer in the interval [0, 15]

Spatial reuse indication, specified as an integer in the interval [0, 15].

Data Types: double

TXOPDuration — Duration information for TXOP protection

127 (default) | integer in the interval [0, 127]

Duration information for transmit opportunity (TXOP) protection, specified as an integer in the interval [0, 127]. Except for the first bit, which specifies TXOP length granularity, each bit of the TXOP field of HE-SIG-A is equal to TXOPDuration. Therefore a duration in microseconds must be converted according to the procedure set out in Table 28-18 of [1].

Data Types: double

HighDoppler — High-Doppler mode indicator

false or 0 (default) | true or 1

High-Doppler mode indicator, specified as a logical value of 0 (false) or 1 (true). To indicate high-Doppler mode in the HE-SIG-A field, set this property to 1 (true).

Dependencies

The 1 (true) value for this property is valid only when the NumSpaceTimeStreams subproperty of each element of the RU property is less than or equal to 4.

Data Types: logical

MidamblePeriodicity — Midamble periodicity of HE-data field

10 (default) | 20

Midamble periodicity of the HE-data field, in number of OFDM symbols, specified as 10 or 20.

Dependencies

This property applies only when the HighDoppler property is 1 (true).

Data Types: double

Object Functions

getPSDULength	Return HE format PSDU length
packetFormat	Return WLAN packet format
ruInfo	Return HE format resource unit allocation information
showAllocation	Show resource unit (RU) allocation

Examples

Create Multiuser HE Configuration Object

Create a 20 MHz multiuser HE configuration object with the allocation index set to 0. An allocation index of 0 specifies nine 26-tone RUs in a 20 MHz channel.

```
cfgMU = wlanHEMUConfig(0);
for i=1:numel(cfgMU.User)
    % Set the APEPLength of each user
    cfgMU.User{i}.APEPLength = 100;
end
```

Display the configuration object properties for the fourth user.

```
cfgMU.User{4}

ans =
    wlanHEMUUser with properties:
        APEPLength: 100
        MCS: 0
        NumSpaceTimeStreams: 1
        DCM: 0
        ChannelCoding: 'LDPC'
        STAID: 0
        NominalPacketPadding: 0

    Read-only properties:
        RUNumber: 4
```

Create HE MU Object Using Binary Allocation Indexing

Create a 40-MHz HE MU configuration with an allocation index of 11000000 for each 20-MHz subchannel. This configuration specifies two 242-tone RUs, each with one user.

```
cfgHEMU = wlanHEMUConfig(["11000000" "11000000"], 'NumTransmitAntennas', 2);
```

Configure the first RU and the first user.

```
cfgHEMU.RU{1}.SpatialMapping = 'Direct';  
cfgHEMU.User{1}.APEPLength = 1e3;  
cfgHEMU.User{1}.MCS = 2;  
cfgHEMU.User{1}.NumSpaceTimeStreams = 2;  
cfgHEMU.User{1}.ChannelCoding = 'LDPC';  
cfgHEMU.User{1}.NominalPacketPadding = 16;
```

Configure the second RU and the second user.

```
cfgHEMU.RU{2}.SpatialMapping = 'Fourier';  
cfgHEMU.User{2}.APEPLength = 500;  
cfgHEMU.User{2}.MCS = 3;  
cfgHEMU.User{2}.NumSpaceTimeStreams = 1;  
cfgHEMU.User{2}.ChannelCoding = 'LDPC';  
cfgHEMU.User{2}.NominalPacketPadding = 8;
```

Display the configuration object properties for both RUs and both users.

```
disp(cfgHEMU)
```

```
    wlanHEMUConfig with properties:
```

```
                RU: {[1x1 wlanHEMURU] [1x1 wlanHEMURU]}  
                User: {[1x1 wlanHEMUUser] [1x1 wlanHEMUUser]}  
    NumTransmitAntennas: 2  
                STBC: 0  
    GuardInterval: 3.2000  
                HELTFTType: 4  
                SIGBMCS: 0  
                SIGBDCM: 0  
    UplinkIndication: 0  
                BSSColor: 0  
                SpatialReuse: 0  
                TXOPDuration: 127
```

```
        HighDoppler: 0

    Read-only properties:
        ChannelBandwidth: 'CBW40'
        AllocationIndex: [192 192]

cfgHEMU.RU{1:2}

ans =
    wlanHEMURU with properties:

        PowerBoostFactor: 1
        SpatialMapping: 'Direct'

    Read-only properties:
        Size: 242
        Index: 1
        UserNumbers: 1

ans =
    wlanHEMURU with properties:

        PowerBoostFactor: 1
        SpatialMapping: 'Fourier'

    Read-only properties:
        Size: 242
        Index: 2
        UserNumbers: 2

cfgHEMU.User{1:2}

ans =
    wlanHEMUUser with properties:

        APEPLength: 1000
        MCS: 2
        NumSpaceTimeStreams: 2
        DCM: 0
        ChannelCoding: 'LDPC'
        STAID: 0
        NominalPacketPadding: 16

    Read-only properties:
```

```
                RUNumber: 1

ans =
  wlanHEMUUser with properties:
        APEPLength: 500
            MCS: 3
    NumSpaceTimeStreams: 1
            DCM: 0
        ChannelCoding: 'LDPC'
            STAID: 0
    NominalPacketPadding: 8

    Read-only properties:
        RUNumber: 2
```

Demonstrate SIGB Compression in HE MU Waveforms

HE MU-MIMO Configuration With SIGB Compression

Use Only User Field Bits

Generate a full bandwidth HE MU-MIMO configuration at 20MHz bandwidth with SIGB compression. All three users are on a single content channel, which includes only the user field bits.


```
cfgHE = wlanHEMUConfig(194);
cfgHE.NumTransmitAntennas = 3;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));
psduLength = getPSDULength(cfgHE);
for j = 1:numel(cfgHE.User)
    psdu = randi([0 1],psduLength(j)*8,1,'int8');
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu, cfgHE);
plot(abs(y))
```

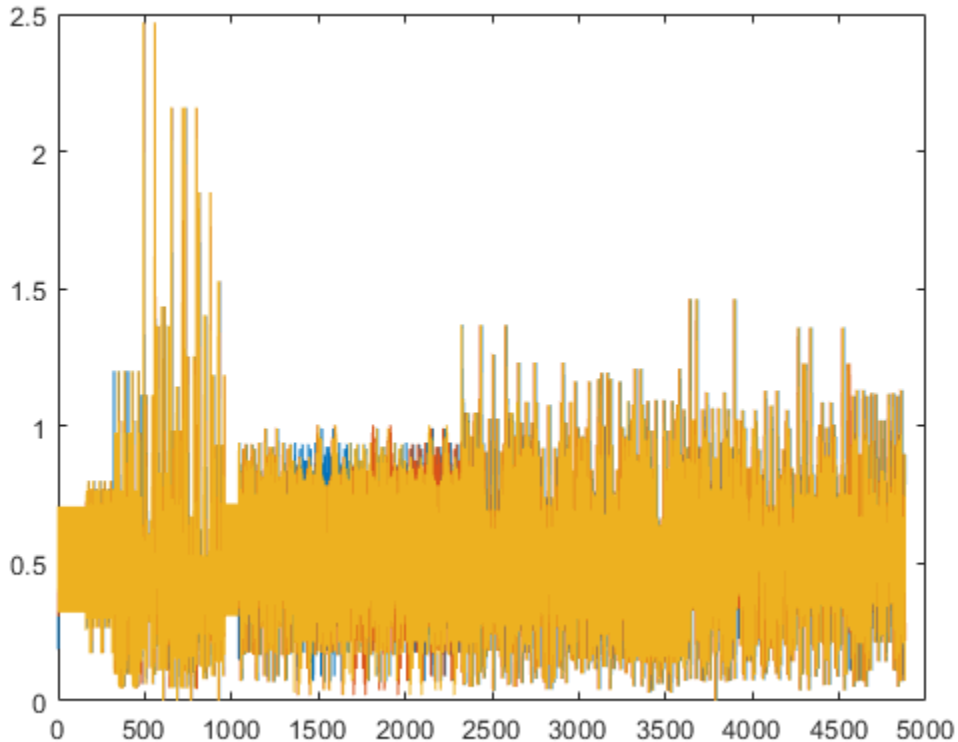HE-SIG-B Content Assign 4 Users in Channel 1 and 3 Users in Channel 2

Generate a full bandwidth HE MU-MIMO waveform at 80MHz bandwidth with SIGB compression. HE-SIG-B content channel 1 has four users. HE-SIG-B content channel 2 has three users.

```
cfgHE = wlanHEMUConfig(214);
cfgHE.NumTransmitAntennas = 7;
```


Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));
psduLength = getPSDULength(cfgHE);
for j = 1:numel(cfgHE.User)
```

```
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu,cfgHE);  
plot(abs(y));
```

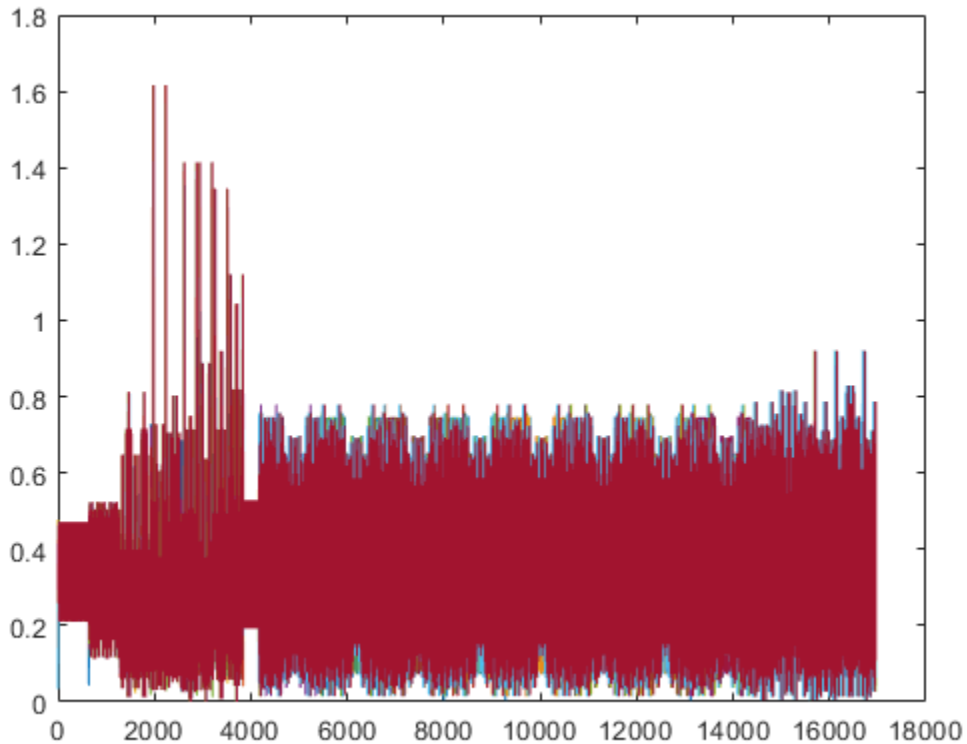

HE MU-MIMO Configuration Without SIGB Compression

Use Common and User Field Bits

Generate a full bandwidth HE MU-MIMO configuration at 20MHz bandwidth without SIGB compression. All three users are on a single content channel, which includes both common and user field bits.


```
cfgHE = wlanHEMUConfig(194);  
cfgHE.SIGBCompression = false;  
cfgHE.NumTransmitAntennas = 3;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)  
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu,cfgHE);  
plot(abs(y))
```

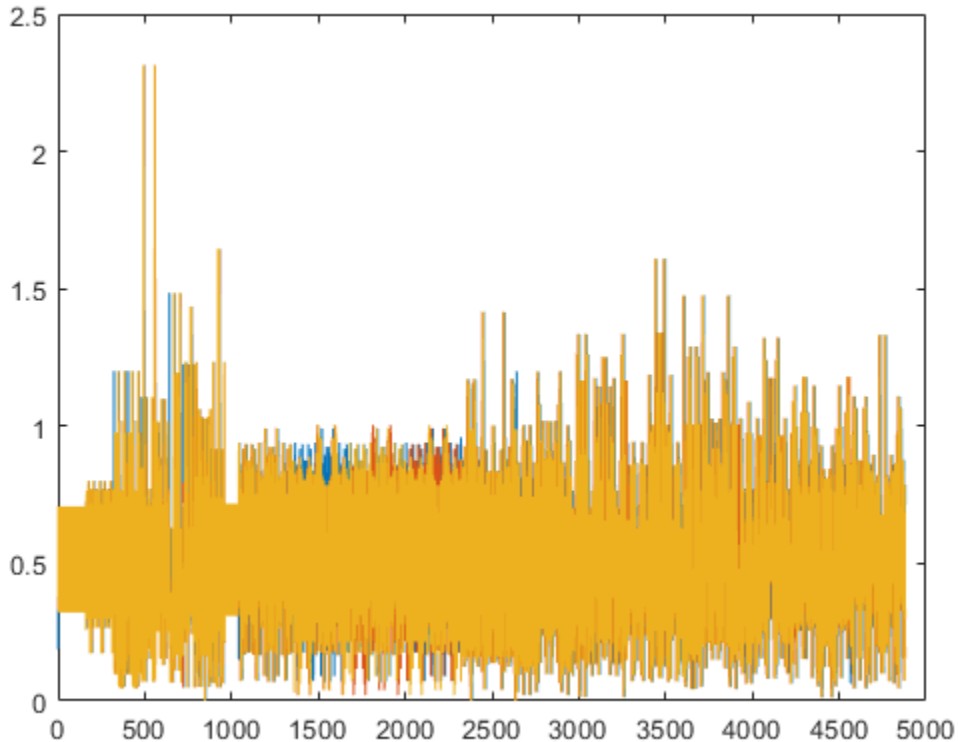

HE-SIG-B Content Assign 4 Users in Channel 1 and 2 Users in Channel 2

Generate an 80 MHz HE MU waveform for six users without SIGB compression. HE-SIG-B content channel 1 has four users. HE-SIG-B content channel 2 has two users.

```
cfgHE = wlanHEMUConfig([202 114 192 193]);
cfgHE.NumTransmitAntennas = 6;
for i = 1:numel(cfgHE.RU)
    cfgHE.RU{i}.SpatialMapping = 'Fourier';
end
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));
psduLength = getPSDULength(cfgHE);
```

```

for j = 1:numel(cfgHE.User)
    psdu = randi([0 1],psduLength(j)*8,1,'int8');
end


```

Generate and plot the waveform.

```

y = wlanWaveformGenerator(psdu,cfgHE);
plot(abs(y));

```

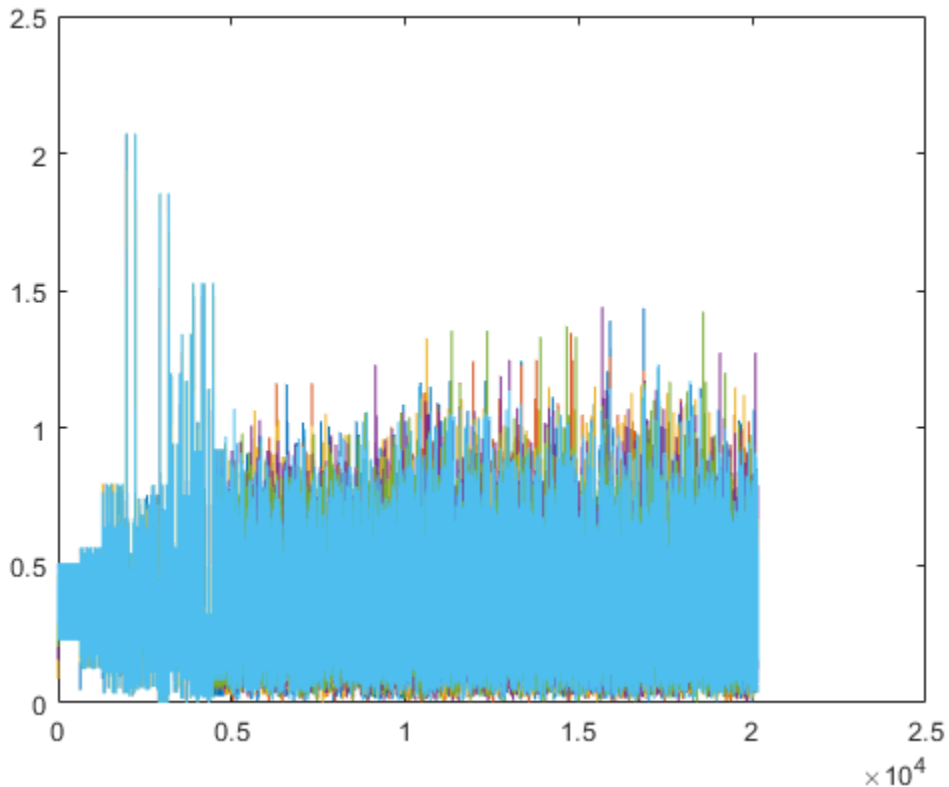

HE-SIG-B Content Assign 7 Users in Channel 1 and No Users in Channel 2

Generate a full bandwidth HE MU-MIMO waveform at 80MHz bandwidth without SIGB compression. HE-SIG-B content channel 1 has seven users. HE-SIG-B content channel 2 has no users.


```
cfgHE = wlanHEMUConfig([214 115 115 115]);  
cfgHE.NumTransmitAntennas = 7;
```

Create PSDU data for all users.

```
psdu = cell(1,numel(cfgHE.User));  
psduLength = getPSDULength(cfgHE);  
for j = 1:numel(cfgHE.User)  
    psdu = randi([0 1],psduLength(j)*8,1,'int8');  
end
```

Generate and plot the waveform.

```
y = wlanWaveformGenerator(psdu, cfgHE);  
plot(abs(y))
```

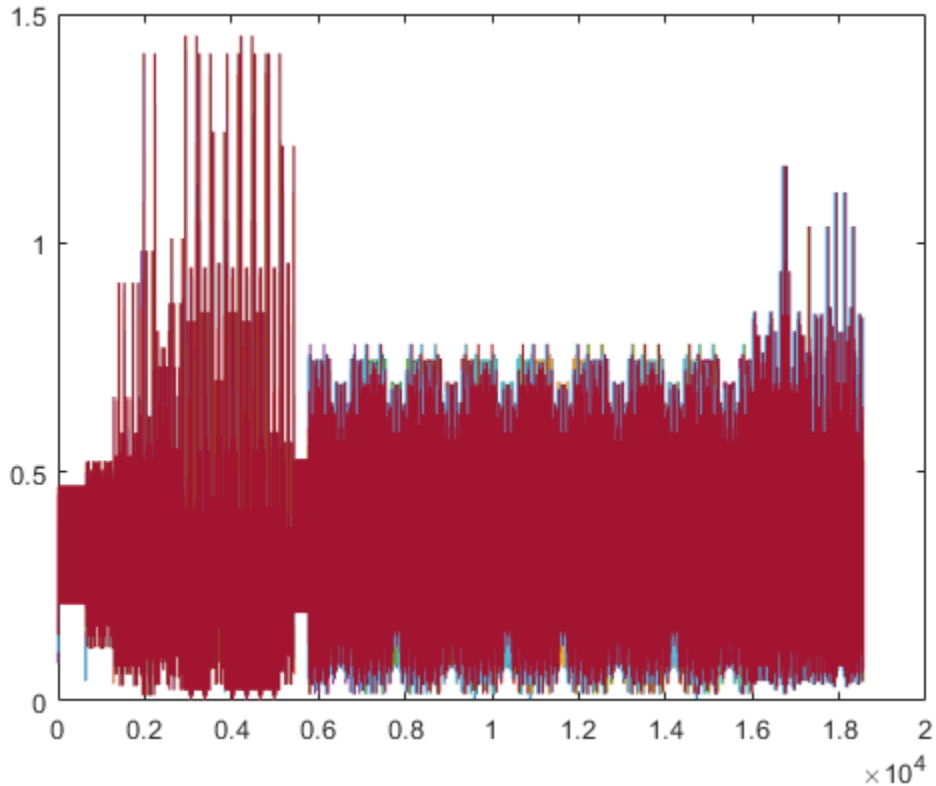

Create Multiuser HE Object for Three Users in One RU with SIG-B Compression

Create an 80 MHz MU-MIMO configuration with three users in a single RU with SIG-B compression. Display the configuration object properties.

```
cfgMU = wlanHEMUConfig(210);  
cfgMU.NumTransmitAntennas = 3;  
cfgMU.User{1}.NumSpaceTimeStreams = 1;  
cfgMU.User{2}.NumSpaceTimeStreams = 1;  
cfgMU.User{3}.NumSpaceTimeStreams = 1;  
disp(cfgMU)
```

wlanHEMUConfig with properties:

```
RU: {[1x1 wlanHEMURU]}
User: {1x3 cell}
NumTransmitAntennas: 3
STBC: 0
GuardInterval: 3.2000
HELTFTType: 4
SIGBMCS: 0
SIGBDCM: 0
UplinkIndication: 0
BSSColor: 0
SpatialReuse: 0
TXOPDuration: 127
HighDoppler: 0
```

Read-only properties:

```
ChannelBandwidth: 'CBW80'
AllocationIndex: 210
```

Create Multiuser HE Object Using Upper Center 26-Tone RU

Create a 160 MHz configuration using the upper center 26-tone RU. A total of four RUs are created. The RU tone assignments are 996, 484, 484, and 26. One user is allocated to each RU. The last RU created is the center 26-tone RU. Display the configuration properties of the object.

```
cfgMU = wlanHEMUConfig([208 115 115 115 200 114 114 200], ...
    'UpperCenter26ToneRU', true);
cfgMU.RU{:}
```

ans =

wlanHEMURU with properties:

```
PowerBoostFactor: 1
SpatialMapping: 'Direct'
```

Read-only properties:

```
Size: 996
Index: 1
UserNumbers: 1
```



```
ans =
wlanHEMURU with properties:

    PowerBoostFactor: 1
    SpatialMapping: 'Direct'

Read-only properties:
    Size: 484
    Index: 3
    UserNumbers: 2
```

```
ans =
wlanHEMURU with properties:

    PowerBoostFactor: 1
    SpatialMapping: 'Direct'

Read-only properties:
    Size: 484
    Index: 4
    UserNumbers: 3
```

```
ans =
wlanHEMURU with properties:

    PowerBoostFactor: 1
    SpatialMapping: 'Direct'

Read-only properties:
    Size: 26
    Index: 56
    UserNumbers: 4
```


More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.


RU and User Cell Arrays

When you create a `wlanHEMUConfig` object, the properties are set based on the chosen `AllocationIndex` property and any name-value pairs you include. Upon creation of the object, `RU` and `User` cell arrays are configured. The `RU` cell array elements contain the configuration properties for each `RU`. The `User` cell array elements contain the configuration properties for each user.

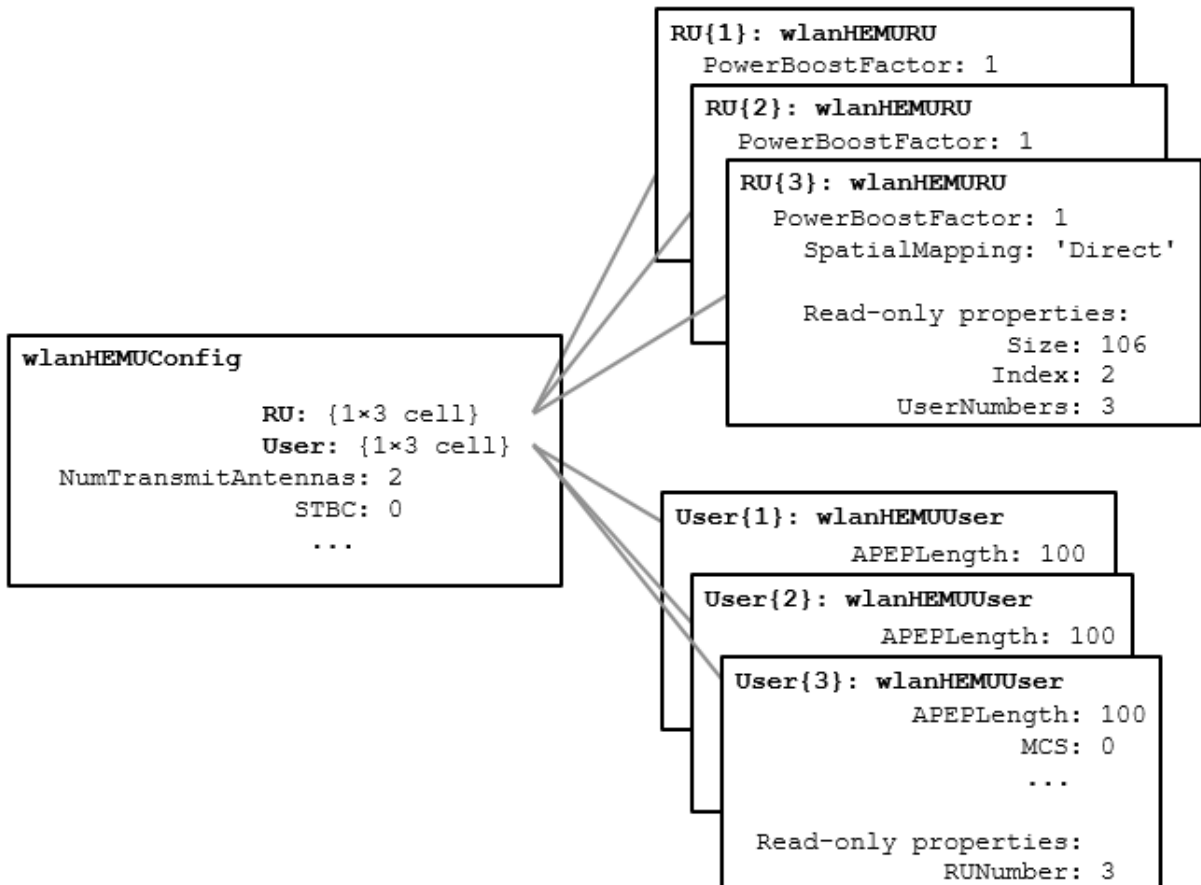


The `UserNumbers` subproperty of the `RU` property indicates which users are transmitted on each `RU`.

The `RUNumber` subproperty of the `User` property indicates which `RUs` are used to transmit data for each user.

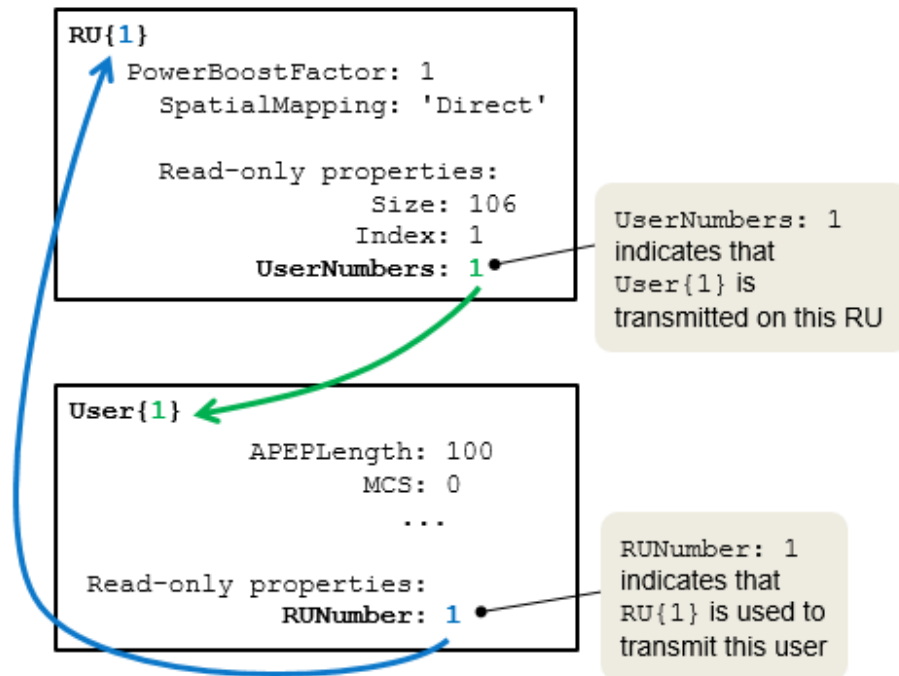

As shown here, an RU can be assigned to multiple users.

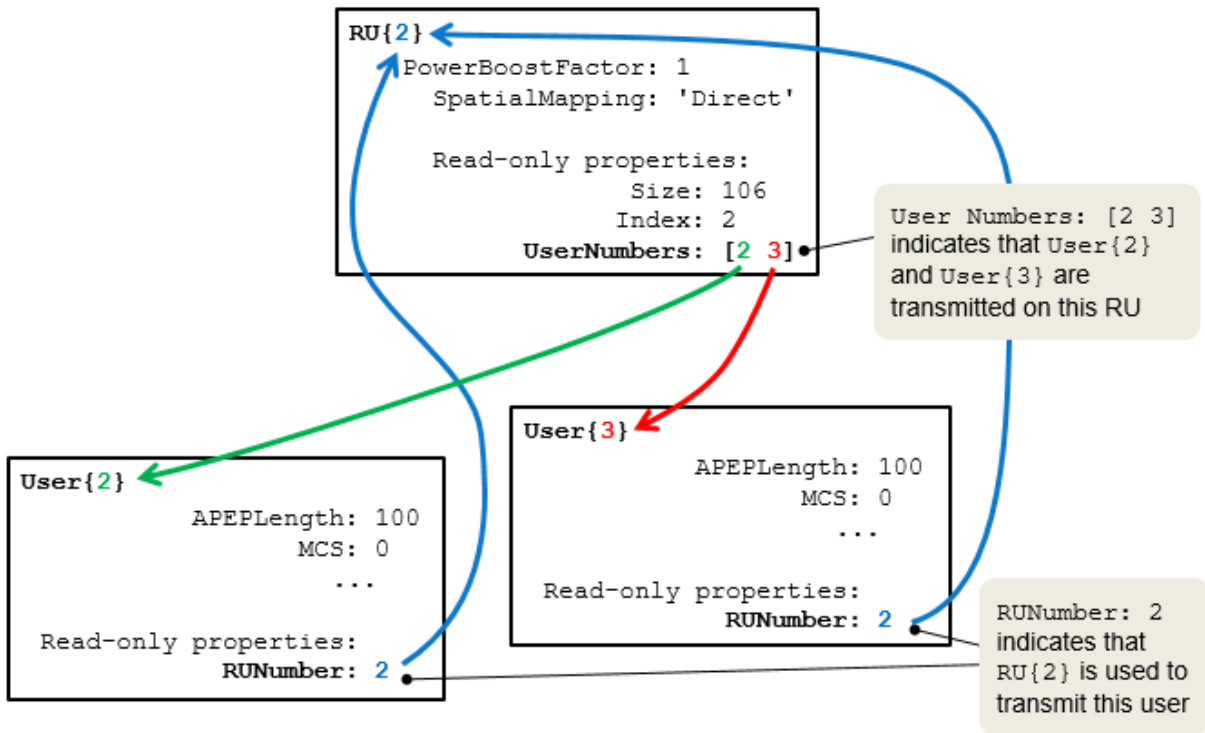

After creating the wlanHEMUConfig object, you can modify some of the RU and User properties but other RU and User properties are read-only. See wlanHEMURU for details on the elements of the RU cell array. See wlanHEMUUser for details on the elements of the User cell array.

References

- [1] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMURU | wlanHEMUUser | wlanHERecoveryConfig |
wlanHESUConfig | wlanHTConfig | wlanNonHTConfig | wlanSIGConfig |
wlanVHTConfig

Functions

getPSDULength | packetFormat | ruInfo | showAllocation |
wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

“Allocation Index”

Introduced in R2018b

wlanHEMURU

Create RU configuration object for HE MU transmission

Description

The wlanHEMURU object contains properties used to configure a WLAN high-efficiency (HE) resource unit (RU). When you create a wlanHEMUConfig object, the value to which you set its AllocationIndex property determines its RU property. The RU property is returned as a cell array of wlanHEMURU objects.

Creation

Syntax

```
cfgHEMU.RU = wlanHEMURU(Size,Index,UserNumbers)
cfgHEMU.RU = wlanHEMURU( ____,Name,Value)
```

Description

cfgHEMU.RU = wlanHEMURU(Size,Index,UserNumbers) creates an object that contains properties to configure an HE-format RU. The Size input is the RU size, Index is the RU index, and UserNumbers specifies the indices of users transmitted on the RU.

cfgHEMU.RU = wlanHEMURU(____,Name,Value) sets properties using one or more name-value pairs. Enclose each property name in quotation marks.

Properties

PowerBoostFactor — Power boost factor

1 (default) | scalar in the interval [0.5, 2]

Power boost factor, specified as a scalar in the interval [0.5, 2].

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies when you set the NumTransmitAntennas property of the associated wlanHEMUConfig object to the sum of the number of space-time streams for all users assigned to the RU.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size $N_{\text{STS}_{\text{Total}}}$ -by- N_{T} , where
 - $N_{\text{STS}_{\text{Total}}}$ is the sum of the number of space-time streams for all users assigned to the RU;
 - N_{T} is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size Size-by- $N_{\text{STS}_{\text{Total}}}$ -by- N_{T} . The ChannelBandwidth property of the associated wlanHEMUConfig object determines the value of the Size property. In this case, each occupied subcarrier has its own spatial mapping matrix.

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: $[0.5 \ 0.3; \ 0.4 \ 0.4; \ 0.5 \ 0.8]$ represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the SpatialMapping property to 'Custom'.

Data Types: double
Complex Number Support: Yes

Beamforming — Enable signaling of transmission with beamforming

true (default) | false

Enable signaling of a transmission with beamforming, specified as a logical value of `true` or `false`. To apply a beamforming steering matrix, set this property to `true`. The `SpatialMappingMatrix` property specifies the beamforming steering matrix.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: logical

Size — Resource unit size

242 (default) | positive integer

Resource unit size, specified as 26, 52, 106, 242, 484, 996, or 1992.

Note This property is read-only after the object is created.

Data Types: double

Index — Resource unit index

1 (default) | integer in the interval [1, 74]

Resource unit index, specified as an integer in the interval [1, 74]. Use this property to indicate the location of the RU within the channel.

Note This property is read-only after the object is created.

Example: In an 80-MHz transmission there are four possible 242-tone RUs, one in each 20-MHz subchannel. RU 242-1 (Size = 242, Index = 1) is the RU occupying the lowest absolute frequency within the 80MHz, and RU 242-4 (Size = 242, Index = 4) is the RU occupying the highest absolute frequency.

Data Types: double

UserNumbers — User index number

1 | integer | vector of integers

Indices of users transmitted on the RU, in one-based format, specified as an integer or a vector of integers. This property indexes the appropriate cell array elements of the User property within the associated wlanHEMUConfig object.

Data Types: double

Examples

Create HE MU Object Using Binary Allocation Indexing

Create a 40-MHz HE MU configuration with an allocation index of 11000000 for each 20-MHz subchannel. This configuration specifies two 242-tone RUs, each with one user.

```
cfgHEMU = wlanHEMUConfig(["11000000" "11000000"], 'NumTransmitAntennas', 2);
```

Configure the first RU and the first user.

```
cfgHEMU.RU{1}.SpatialMapping = 'Direct';  
cfgHEMU.User{1}.APEPLength = 1e3;  
cfgHEMU.User{1}.MCS = 2;  
cfgHEMU.User{1}.NumSpaceTimeStreams = 2;  
cfgHEMU.User{1}.ChannelCoding = 'LDPC';  
cfgHEMU.User{1}.NominalPacketPadding = 16;
```

Configure the second RU and the second user.

```
cfgHEMU.RU{2}.SpatialMapping = 'Fourier';  
cfgHEMU.User{2}.APEPLength = 500;  
cfgHEMU.User{2}.MCS = 3;  
cfgHEMU.User{2}.NumSpaceTimeStreams = 1;  
cfgHEMU.User{2}.ChannelCoding = 'LDPC';  
cfgHEMU.User{2}.NominalPacketPadding = 8;
```

Display the configuration object properties for both RUs and both users.

```
disp(cfgHEMU)  
  
wlanHEMUConfig with properties:
```

```

        RU: {[1x1 wlanHEMURU] [1x1 wlanHEMURU]}
        User: {[1x1 wlanHEMUUser] [1x1 wlanHEMUUser]}
NumTransmitAntennas: 2
        STBC: 0
        GuardInterval: 3.2000
        HELTFTType: 4
        SIGBMCS: 0
        SIGBDCM: 0
UplinkIndication: 0
        BSSColor: 0
        SpatialReuse: 0
        TXOPDuration: 127
        HighDoppler: 0

Read-only properties:
ChannelBandwidth: 'CBW40'
AllocationIndex: [192 192]

```

cfgHEMU.RU{1:2}

```

ans =
wlanHEMURU with properties:

    PowerBoostFactor: 1
    SpatialMapping: 'Direct'

Read-only properties:
    Size: 242
    Index: 1
    UserNumbers: 1

```

```

ans =
wlanHEMURU with properties:

    PowerBoostFactor: 1
    SpatialMapping: 'Fourier'

Read-only properties:
    Size: 242
    Index: 2
    UserNumbers: 2

```

cfgHEMU.User{1:2}

```
ans =  
  wlanHEMUUser with properties:  
  
      APEPLength: 1000  
      MCS: 2  
  NumSpaceTimeStreams: 2  
      DCM: 0  
  ChannelCoding: 'LDPC'  
      STAID: 0  
  NominalPacketPadding: 16  
  
  Read-only properties:  
      RUNumber: 1
```

```
ans =  
  wlanHEMUUser with properties:  
  
      APEPLength: 500  
      MCS: 3  
  NumSpaceTimeStreams: 1  
      DCM: 0  
  ChannelCoding: 'LDPC'  
      STAID: 0  
  NominalPacketPadding: 8  
  
  Read-only properties:  
      RUNumber: 2
```

See Also

`ruInfo` | `wlanHEMUConfig`

Introduced in R2018b

wlanHEMUUser

Create user configuration object for HE MU transmission

Description

The `wlanHEMUUser` object contains properties of a user within a WLAN high-efficiency (HE) resource unit (RU). When you create a `wlanHEMUConfig` object, the value to which you set its `AllocationIndex` property determines its `User` property. The `User` property is returned as a cell array of `wlanHEMUUser` objects.

Creation

Syntax

```
cfgHEMU.User = wlanHEMUUser(RUNumber)
cfgHEMU.User = wlanHEMUUser(RUNumber, Name, Value)
```

Description

`cfgHEMU.User = wlanHEMUUser(RUNumber)` creates an HE user configuration object for `RUNumber`, the input RU number.

`cfgHEMU.User = wlanHEMUUser(RUNumber, Name, Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks.

Properties

APEPLength — APEP length

100 (default) | integer in the interval [1, 6500531]

Aggregated MPDU (A-MPDU) pre-end-of-frame (pre-EOF) padding (APEP) length, in bytes, specified as an integer in the interval [1, 6500531].

This property is used internally to determine the number of OFDM symbols in the data field. For more information, see [1].

Data Types: double

MCS — MCS used for transmission

0 (default) | integer in the interval [0, 11]

Modulation and coding scheme (MCS) used for transmission, specified as a nonnegative integer in the interval [0, 11]. Each value of this property corresponds to an MCS according to Tables 28-51-28-107 of [1]. This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Dual Carrier Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	0 or 1	1/2
1	Quadrature phase-shift keying (QPSK)	0 or 1	1/2
2		Not applicable	3/4
3	16-point quadrature amplitude modulation (16-QAM)	0 or 1	1/2
4			3/4
5	64-QAM	Not applicable	2/3
6			3/4
7			5/6
8	256-QAM		3/4
9			5/6
10	1024-QAM		3/4
11			5/6

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer

Number of space-time streams in the transmission, specified as an integer in the interval [1, 8]. The maximum number of space-time streams for any user within a MU-MIMO RU is

4. The maximum value of the sum of the number of space-time streams over all users in an RU is 8. For information on these and other restrictions on the number of space-time streams, see Tables 28-1 and 28-27 of [1].

Data Types: `double`

DCM — DCM indicator

`false` or `0` (default) | `true` or `1`

Dual carrier modulation (DCM) indicator, specified as a logical value of `1` (`true`) or `0` (`false`). To indicate that DCM is used for the HE-Data field, set this property to `1` (`true`).

Dependencies

You can only set this property to `1` (`true`) when all of these conditions are satisfied:

- The `MCS` property is `0`, `1`, `3`, or `4`.
- The `STBC` property of the associated `wlanHEMUConfig` object is `0` (`false`).
- The `NumSpaceTimeStreams` property is less than or equal to `2`.
- The `RU` property of the associated `wlanHEMUConfig` object defines a single-user RU.

Data Types: `logical`

ChannelCoding — FEC coding type

`'LDPC'` (default) | `'BCC'`

Forward-error-correction (FEC) coding type for the HE-Data field, specified as `'LDPC'` for low-density parity-check (LDPC) coding or `'BCC'` for binary convolutional coding (BCC).

Dependencies

You can only set this property to `'BCC'` when all of these conditions are satisfied:

- The `MCS` property is not `10` or `11`.
- The size of any RU is less than or equal to `242`. Obtain the RU sizes by using the `ruInfo` object function with the associated `wlanHEMUConfig` object.
- The `NumSpaceTimeStreams` property is less than or equal to `4`.

Data Types: `char` | `string`

STAID — STA identifier

`0` (default) | integer in the interval `[0, 2047]`

Station (STA) identifier, specified as an integer in the interval [0, 2047]. The value of this property specifies the station association identifier (AID) field as defined in Section 27.11.1 of [1]. The 11 least significant bits (LSBs) of the AID field are used to address the STA. When you set this property to 2046, the associated RU carries no data.

Data Types: double

RUNumber — RU number

1 (default) | integer | vector of integers

RU number, specified as an integer or a vector of integers. This property indexes the appropriate cell array elements of the RU property within the associated wlanHEMUConfig object.

Note This property is read-only after the object is created.

Data Types: double

NominalPacketPadding — Nominal packet padding

0 (default) | 8 | 16

Nominal packet padding, in microseconds, specified as 0, 8, or 16. The associated wlanHEMUConfig object uses this property and the pre-forward-error-correction (pre-FEC) padding factor to calculate the duration, T_{PE} , of the packet extension field. For more information about the packet extension field, see Section 28.3.12 of [1].

This table shows the possible values of T_{PE} for different values of this property and a , a parameter defined by equation (28-72) or (28-73) of [1].

Value of a	Value of T_{PE} in Microseconds		
	NominalPacketPadding Set to 0	NominalPacketPadding Set to 8	NominalPacketPadding Set to 16
1	0	0	4
2	0	0	8
3	0	4	12
4	0	8	16

Data Types: double

Examples

Create Multiuser HE Configuration Object

Create a 20 MHz multiuser HE configuration object with the allocation index set to 0. An allocation index of 0 specifies nine 26-tone RUs in a 20 MHz channel.

```
cfgMU = wlanHEMUConfig(0);
for i=1:numel(cfgMU.User)
    % Set the APEPLength of each user
    cfgMU.User{i}.APEPLength = 100;
end
```

Display the configuration object properties for the fourth user.

```
cfgMU.User{4}

ans =
    wlanHEMUUser with properties:
        APEPLength: 100
           MCS: 0
    NumSpaceTimeStreams: 1
           DCM: 0
    ChannelCoding: 'LDPC'
           STAID: 0
    NominalPacketPadding: 0

    Read-only properties:
        RUNumber: 4
```

Create HE MU Object Using Binary Allocation Indexing

Create a 40-MHz HE MU configuration with an allocation index of 11000000 for each 20-MHz subchannel. This configuration specifies two 242-tone RUs, each with one user.

```
cfgHEMU = wlanHEMUConfig(["11000000" "11000000"], 'NumTransmitAntennas', 2);
```

Configure the first RU and the first user.

```
cfgHEMU.RU{1}.SpatialMapping = 'Direct';
cfgHEMU.User{1}.APEPLength = 1e3;
cfgHEMU.User{1}.MCS = 2;
cfgHEMU.User{1}.NumSpaceTimeStreams = 2;
cfgHEMU.User{1}.ChannelCoding = 'LDPC';
cfgHEMU.User{1}.NominalPacketPadding = 16;
```

Configure the second RU and the second user.

```
cfgHEMU.RU{2}.SpatialMapping = 'Fourier';
cfgHEMU.User{2}.APEPLength = 500;
cfgHEMU.User{2}.MCS = 3;
cfgHEMU.User{2}.NumSpaceTimeStreams = 1;
cfgHEMU.User{2}.ChannelCoding = 'LDPC';
cfgHEMU.User{2}.NominalPacketPadding = 8;
```

Display the configuration object properties for both RUs and both users.

```
disp(cfgHEMU)
```

```
wlanHEMUConfig with properties:
```

```
RU: {[1x1 wlanHEMURU] [1x1 wlanHEMURU]}
User: {[1x1 wlanHEMUUser] [1x1 wlanHEMUUser]}
NumTransmitAntennas: 2
STBC: 0
GuardInterval: 3.2000
HELTFTType: 4
SIGBMCS: 0
SIGBDCM: 0
UplinkIndication: 0
BSSColor: 0
SpatialReuse: 0
TXOPDuration: 127
HighDoppler: 0
```

```
Read-only properties:
```

```
ChannelBandwidth: 'CBW40'
AllocationIndex: [192 192]
```

```
cfgHEMU.RU{1:2}
```

```
ans =
```

```
wlanHEMURU with properties:
```

```
PowerBoostFactor: 1
  SpatialMapping: 'Direct'
```

```
Read-only properties:
  Size: 242
  Index: 1
  UserNumbers: 1
```

```
ans =
```

```
wlanHEMURU with properties:
```

```
PowerBoostFactor: 1
  SpatialMapping: 'Fourier'
```

```
Read-only properties:
  Size: 242
  Index: 2
  UserNumbers: 2
```

```
cfgHEMU.User{1:2}
```

```
ans =
```

```
wlanHEMUUser with properties:
```

```
    APEPLength: 1000
           MCS: 2
  NumSpaceTimeStreams: 2
           DCM: 0
    ChannelCoding: 'LDPC'
           STAID: 0
  NominalPacketPadding: 16
```

```
Read-only properties:
  RUNumber: 1
```

```
ans =
```

```
wlanHEMUUser with properties:
```

```
    APEPLength: 500
           MCS: 3
  NumSpaceTimeStreams: 1
           DCM: 0
```

```
ChannelCoding: 'LDPC'  
    STAID: 0  
NominalPacketPadding: 8  
  
Read-only properties:  
    RUNumber: 2
```

References

- [1] IEEE P802.11ax/D3.1. “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN.” IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

See Also

`ruInfo` | `wlanHEMUConfig`

Introduced in R2018b

wlanHERecoveryConfig

Create HE recovery configuration object

Description

The `wlanHERecoveryConfig` is a high-efficiency (HE) recovery configuration object for HE single-user (HE SU), HE extended-range single-user (HE ER SU), and HE multiuser (HE MU) packet formats.

Creation

Syntax

```
cfg = wlanHERecoveryConfig
cfg = wlanHERecoveryConfig(Name, Value)
```

Description

`cfg = wlanHERecoveryConfig` creates an HE recovery configuration object, `cfg`, for HE SU, HE ER SU, and HE MU packet formats. The output `cfg` contains the parameters recovered from decoding the signaling fields of HE SU, HE ER SU, and HE MU transmissions as defined in [2].

On creation, the properties of a `wlanHERecoveryConfig` object are set to either `-1` or `'Unknown'` to indicate an unknown or undefined value or status. You can set and update the properties of this object by specifying the values as decoded signaling fields, as demonstrated in the “802.11ax Signal Recovery with Preamble Decoding” example. You can update the properties relevant to the HE-SIG-A field by using the `interpretHESIGABits` object function.

`cfg = wlanHERecoveryConfig(Name, Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanHERecoveryConfig('PacketFormat', 'HE-SU', 'GuardInterval', 1.6)`

creates an HE recovery configuration object for an HE SU packet with a guard interval of 1.6 microseconds.

Properties

PacketFormat — Recovered HE packet format

'Unknown' (default) | 'HE-SU' | 'HE-EXT-SU' | 'HE-MU'

Recovered HE packet format, specified as 'Unknown', 'HE-SU', 'HE-EXT-SU', or 'HE-MU'.

The length information in the L-SIG field and the four orthogonal frequency-division multiplexing (OFDM) symbols following the RL-SIG field determine the packet format. For more information, see “802.11ax Signal Recovery with Preamble Decoding”.

Data Types: char | string

ChannelBandwidth — Channel bandwidth of PPDU transmission

'Unknown' (default) | 'CBW20' | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth of “PPDU” on page 3-76 transmission, specified as one of these values:

- 'Unknown' - Unknown or undefined channel bandwidth
- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

LSIGLength — Length of L-SIG field

-1 (default) | integer in the interval [1, 4095]

Length of L-SIG field, specified as -1 to indicate an unknown or undefined packet length or as an integer in the interval [1, 4095]. You can set this property after decoding the L-SIG field by using the `wlanLSIGBitRecover` function.

Data Types: double

PreamblePuncturing — Preamble puncturing mode

'Unknown' (default) | 'None' | 'Mode-1' | 'Mode-2' | 'Mode-3' | 'Mode-4'

Preamble puncturing mode, specified as one of these values:

- 'Unknown' - Unknown or undefined preamble puncturing in the recovered waveform
- 'None' - No preamble puncturing in the recovered waveform
- 'Mode-1' - Preamble puncturing in the secondary 20-MHz subchannel. This value applies only when the ChannelBandwidth property is 'CBW80'.
- 'Mode-2' - Preamble puncturing in one of the 20-MHz subchannels of the secondary 40 MHz. This value applies only when the ChannelBandwidth property is 'CBW80'.
- 'Mode-3' - Preamble puncturing in the secondary 20-MHz subchannel. This value applies only when the ChannelBandwidth property is 'CBW160'.
- 'Mode-4' - Preamble puncturing in the primary 40-MHz subchannel. This value applies only when the ChannelBandwidth property is 'CBW160'.

Specifying PreamblePuncturing indicates a punctured 20-MHz or 40-MHz subchannel in the preamble. You can set this property by using the interpretHESIGABits object function after decoding the HE-SIG-A field.

Dependencies

This property applies only when the PacketFormat property is 'HE-MU'.

Data Types: char | string

SIGBCompression — HE-SIG-B compression indicator

-1 (default) | 1 (true) | 0 (false)

HE-SIG-B compression indicator, specified as -1 to indicate an unknown or undefined state or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that the HE-SIG-B field is compressed. A value of 0 (false) indicates that the HE-SIG-B field is not compressed

You can set this property by using the interpretHESIGABits object functions after decoding the HE-SIG-A field.

Dependencies

This property applies only when the PacketFormat property is 'HE-MU' and the ChannelBandwidth property is 'CBW20'.

Data Types: `double` | `logical`

SIGBMCS — MCS of HE-SIG-B field

-1 (default) | integer in the interval [-1, 5]

Modulation and coding scheme (MCS) of the HE-SIG-B field, specified as an integer in the interval [-1, 5]. A value of -1 indicates an unknown or undefined MCS.

You can set this property by using the `interprethESIGABits` object function after decoding the HE-SIG-A field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU'.

Data Types: `double`

SIGBDCM — HE-SIG-B DCM indicator

-1 (default) | 1 (true) | 0 (false)

HE-SIG-B dual-carrier modulation (DCM) indicator, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that the HE-SIG-B field is modulated with DCM. A value of 0 (false) indicates that the HE-SIG-B field is not modulated with DCM.

You can set this property by using the `interprethESIGABits` object function after decoding the HE-SIG-A field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU' and when the `SIGBMCS` property is 0, 1, 3, or 4.

Data Types: `double` | `logical`

NumSIGBSymbolsSignaled — Number of HE-SIG-B symbols signaled in HE-SIG-A field

-1 (default) | integer in the interval [1, 16]

Number of HE-SIG-B symbols signaled in the HE-SIG-A field, specified as -1 to indicate an unknown or undefined number of symbols or as an integer in the interval [1, 16]. A value of 16 indicates that there are 16 or more HE-SIG-B symbols signaled.

You can set this property by using the `interprethESIGABits` object function after decoding the HE-SIG-A field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU' and when the `SIGBCompression` property is 0 (false).

Data Types: double

STBC — Space-time block coding indicator

-1 (default) | 1 (true) | 0 (false)

Space-time block coding (STBC) indicator, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that STBC is enabled in the PPDU data field transmission. A value of 0 (false) indicates that STBC is not enabled.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Dependencies

This property can only be 1 (true) when the `NumSpaceTimeStreams` is 2 and when the `DCM` is 0.

Data Types: double | logical

LDPCExtraSymbol — Extra OFDM symbol segment indicator

-1 (default) | 1 (true) | 0 (false)

Extra orthogonal frequency-division multiplexing (OFDM) symbol segment indicator, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates the presence of an extra OFDM symbol segment for low-density parity-check (LDPC) coding. A value of 0 (false) indicates the absence of an extra OFDM symbol.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: double | logical

PreFECPaddingFactor — Pre-FEC padding factor

-1 (default) | integer

Pre-forward-error-correction (pre-FEC) padding factor, specified as -1 to indicate an unknown or undefined padding factor or as a positive integer in the interval [1, 4].

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double`

PEDisambiguity — PE-disambiguity indicator

-1 (default) | 1 (true) | 0 (false)

Packet extension (PE) disambiguity indicator, specified as -1 to indicate an unknown or undefined PE disambiguity status or as a logical value of 1 (true) or 0 (false). For more information, see Table 8-4 in [2].

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double` | `logical`

GuardInterval — Guard interval (cyclic prefix) duration

-1 (default) | 0.8 | 1.6 | 3.2

Guard interval (cyclic prefix) duration for the data field within a packet, in microseconds, specified as -1 to indicate an unknown or undefined guard interval length, or as 0.8, 1.6, or 3.2.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double`

HELTFType — HE-LTF compression mode of recovered packet

-1 (default) | 1 | 2 | 4

HE long training field (HE-LTF) compression type of recovered packet, specified as one of these values:

- -1 - Unknown or undefined HE-LTF compression mode
- 1 - A compression of HE-LTF duration
- 2 - A compression of twice the HE-LTF duration
- 4 - A compression of four times the HE-LTF duration

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: double

NumHELTFSymbols — Number of HE-LTF symbols

-1 (default) | integer in the interval [1, 8]

Number of HE-LTF symbols, specified as -1 or an integer in the interval [1, 8]. A value of -1 indicates an unknown or undefined number of HE-LTF symbols.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: double

UplinkIndication — Uplink transmission indicator

-1 (default) | 1 (true) | 0 (false)

Uplink transmission indicator, specified as -1 to indicate an unknown or undefined transmission direction or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that the PPDU is sent on an uplink transmission. A value of 0 (false) indicates that the PPDU is sent on a downlink transmission.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: double | logical

BSSColor — BSS color identifier

-1 (default) | integer in the interval [-1, 63]

Basic service set (BSS) color identifier, specified as an integer in the interval [-1, 63]. A value of -1 indicates an unknown or undefined color. For more information, see Section 27.11.4 of [2].

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: double

SpatialReuse — Spatial reuse indicator

-1 (default) | integer in the interval [-1, 15]

Spatial reuse indicator, specified as an integer in the interval [-1, 15]. A value of -1 indicates an unknown or undefined status.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double`

TXOPDuration — Duration information for TXOP protection

-1 (default) | integer in the interval [-1, 127]

Duration for transmit opportunity (TXOP) protection, specified as an integer in the interval [-1, 127]. A value of -1 indicates an unknown or undefined duration.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double`

HighDoppler — High-Doppler mode indicator

-1 (default) | 1 (true) | 0 (false)

High-Doppler mode indicator, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates high-Doppler mode in the HE-SIG-A field.

You can set this property by using `interpretHESIGABits` after decoding the HE-SIG-A field.

Data Types: `double` | `logical`

MidamblePeriodicity — Midamble periodicity of HE-Data field

-1 (default) | 10 | 20

Midamble periodicity of the HE-Data field, in OFDM symbols, specified as -1 to indicate an unknown or undefined periodicity, or as 10 or 20.

You can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Data Types: `double`

AllocationIndex — RU allocation indices for each 20-MHz subchannel

-1 (default) | integer | vector of integers

Resource unit (RU) allocation indices for each 20-MHz subchannel, specified as an integer or a vector of integers in the interval [-1, 223]. A value of -1 indicates an unknown or

undefined allocation index. The recovered bits determine how many allocation indices are set, which determines the format of this property.

The allocation indices define bandwidth allocation by specifying the number of RUs, size of each RU, and number of users assigned to each RU. For more information, see “Multiuser HE Transmission”.

For a full-bandwidth multiuser multiple-input/multiple output (MU-MIMO) waveform, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an OFDM waveform, you can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when `PacketFormat` is 'HE-MU'.

Data Types: `double`

LowerCenter26ToneRU — Enable lower center 26-tone RU allocation signaling

-1 (default) | 1 (true) | 0 (false)

Indicate lower center 26-tone RU signaling, specified as -1 to indicate an unknown status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates the presence of the lower frequency center 26-tone RU.

You can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU', the `ChannelBandwidth` property is 'CBW80' or 'CBW160', and a full bandwidth allocation is not used.

Data Types: `double` | `logical`

UpperCenter26ToneRU — Enable upper center 26-tone RU allocation signaling

-1 (default) | 1 (true) | 0 (false)

Enable upper center 26-tone RU signaling, specified as -1 to indicate an unknown status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates the presence of the upper frequency center 26-tone RU.

You can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU', the `ChannelBandwidth` property is 'CBW160', and a full bandwidth allocation is not used.

Data Types: `double` | `logical`

NumUsersPerContentChannel — Number of users per SIGB content channel

-1 (default) | `positive integer`

Number of users per SIGB content channel, specified as -1 or a positive integer. A value of -1 indicates an unknown or undefined number of users.

This property is applicable for both full-bandwidth MU-MIMO and OFDMA allocation. For a full-bandwidth MU-MIMO waveform, the distribution of users on the SIGB content channel is defined in Section 28.3.10.8 of [2]. For an OFDMA waveform, the decoded HE-SIG-B common field determines the distribution of users.

For a full-bandwidth MU-MIMO waveform, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an OFDMA waveform, you can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU'.

Data Types: `double`

RUTotalSpaceTimeStreams — Total number of space-time streams in RU of interest

-1 (default) | `integer in the interval [1, 8]`

Total number of space-time streams in RU of interest, specified as -1 or as an integer in the interval [1, 8]. A value of -1 indicates an unknown or undefined number of space-time streams.

You can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when `PacketFormat` is 'HE-MU'.

Data Types: `double`

RUSize — RU size for user of interest

-1 (default) | 26 | 52 | 106 | 242 | 484 | 996 | 1992

RU size for user of interest, specified as -1, 26, 52, 106, 242, 484, 996, or 1992. A value of -1 indicates an unknown or undefined RU size.

For an HE SU or HE ER SU packet, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU packet, you can set this property after decoding the HE-SIG-B field.

Data Types: double

RUIndex — RU index for user of interest

-1 (default) | positive integer

RU index for user of interest, specified as -1 or a positive integer. A value of -1 indicates an unknown or undefined RU index. The RU index specifies the location of the RU within the channel. For example, an 80-MHz transmission contains four 242-tone RUs (one for each 20-MHz subchannel). RU number 242-1 (size 242, index 1) is the lowest absolute frequency within the 80-MHz channel. RU number 242-4 is the highest absolute frequency.

For an HE SU or HE ER SU packet, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU packet, you can set this property after decoding the HE-SIG-B field.

Data Types: double

STAID — STA identification number

-1 (default) | integer in the interval [-1, 2047]

Station (STA) identification number, specified as an integer in the interval [-1, 2047]. A value of -1 indicates an unknown or undefined STA identification number.

The STA identification number is defined in Section 27.11.1 of [2]. The 11 least significant bits (LSBs) of the association identifier (AID) field are used to address the STA. The associated RU carries no data when STAID is 2046.

You can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-MU'.

Data Types: double

MCS — User-specific MCS

-1 (default) | integer in the interval [-1, 11]

User-specific MCS, specified as an integer in the interval [-1, 11]. A value of -1 indicates an unknown or undefined MCS. Each value of MCS corresponds to an MCS according to Tables 28-51-28-28-107 of [2]. This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	1/2
1	Quadrature phase-shift keying (QPSK)	1/2
2		3/4
3	16-point quadrature amplitude modulation (16-QAM)	1/2
4		3/4
5	64-QAM	2/3
6		3/4
7		5/6
8	256-QAM	3/4
9		5/6
10	1024-QAM	3/4
11		5/6

You can set this property after decoding the HE-SIG-B field.

Data Types: double

DCM — DCM indicator

-1 (default) | 1 (true) | 0 (false)

DCM indicator, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that DCM is used for the HE-Data field. A value of 0 (false) indicates that DCM is not used.

For an HE SU or HE ER SU packet, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU packet, you can set this property after decoding the HE-SIG-B field.

Dependencies

DCM can be used only when all of these conditions are satisfied:

- The `PacketFormat` property is 'HE-SU'.
- The `NumSpaceTimeStreams` property is less than or equal to 2.
- `STBC` is `0` (`false`).
- The `MCS` property is `0`, `1`, `3`, or `4`.

Data Types: `double` | `logical`

ChannelCoding – FEC coding type

'Unknown' (default) | 'BCC' | 'LDPC'

Forward-error-correction (FEC) coding type for the HE-Data field, specified as one of these values:

- 'Unknown' - Unknown or undefined channel coding type
- 'BCC' - Binary convolutional coding (BCC)
- 'LDPC' - LDPC coding

For an HE SU or HE ER SU packet, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU packet, you can set this property after decoding the HE-SIG-B field.

Data Types: `char` | `string`

Beamforming – Beamforming steering matrix indicator

-1 (default) | 1 (true) | 0 (false)

Beamforming steering matrix indicator, specified as `-1` to indicate an unknown or undefined status or as a logical value of `1` (`true`) or `0` (`false`). A value of `1` (`true`) indicates that a beamforming steering matrix is applied to the received waveform.

For an HE SU waveform, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU waveform, you can set this property after decoding the HE-SIG-B field.

Data Types: `double` | `logical`

PreHESpatialMapping — Spatial mapping of pre-HE-STF portion

-1 (default) | 1 (true) | 0 (false)

Spatial mapping of pre-HE-short-training-field (pre-HE-STF) portion of the PPDU, specified as -1 to indicate an unknown or undefined status or as a logical value of 1 (true) or 0 (false). A value of 1 (true) indicates that the pre-HE-STF portion of the PPDU is spatially mapped in the same way as the first symbol of the HE-LTF on each tone.

For a full-bandwidth MU-MIMO waveform, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field.

Dependencies

This property applies only when the `PacketFormat` property is 'HE-SU'.

Data Types: `double` | `logical`

NumSpaceTimeStreams — Number of space-time streams for user of interest

-1 (default) | integer in the interval [1, 8]

Number of space-time streams for user of interest, specified as -1 or as an integer in the interval [1, 8]. A value of -1 indicates an unknown or undefined number of space-time streams.

For an HE SU or HE ER SU packet, you can set this property by using the `interpretHESIGABits` object function after decoding the HE-SIG-A field. For an HE MU packet, you can set this property after decoding the HE-SIG-B field.

Data Types: `double`

SpaceTimeStreamStartIndex — Starting space-time stream index

-1 (default) | integer

Starting space-time stream index, specified as an integer. A value of -1 indicates an unknown or undefined index.

When multiple users are transmitting in the same RU in a MU-MIMO configuration, each user must transmit on different space-time streams. The `NumSpaceTimeStreams` and

SpaceTimeStreamStartIndex properties determine the starting space-time stream for each user. You can set this property after decoding the HE-SIG-B field.

Dependencies

This property applies only when the PacketFormat property is 'HE-MU'

Data Types: double

Object Functions

getSIGBLength Return information relevant to HE-SIG-B field length
interpretHESIGABits Update recovery configuration object with HE-SIG-A bits

Examples

Create HE-SU Recovery Configuration Object

Create a recovery configuration object with default property values.

```
cfg = wlanHERecoveryConfig;
```

Overwrite the default settings by specifying the channel bandwidth, packet format, and L-SIG length of the recovered signal. Display the resultant object.

```
cfg.ChannelBandwidth = 'CBW40';  
cfg.PacketFormat = 'HE-SU';  
cfg.LSIGLength = 100;  
disp(cfg);
```

wlanHERecoveryConfig with properties:

```
    PacketFormat: 'HE-SU'  
    ChannelBandwidth: 'CBW40'  
    LSIGLength: 100  
    STBC: -1  
    LDPCExtraSymbol: -1  
    PreFECPaddingFactor: -1  
    PEDisambiguity: -1  
    GuardInterval: -1  
    HELTFTType: -1
```

```
    NumHELTFSymbols: -1
    UplinkIndication: -1
        BSSColor: -1
        SpatialReuse: -1
        TXOPDuration: -1
        HighDoppler: -1
    MidamblePeriodicity: -1
        RUSize: -1
        RUIndex: -1
        MCS: -1
        DCM: -1
    ChannelCoding: 'Unknown'
        Beamforming: -1
    PreHESpatialMapping: -1
    NumSpaceTimeStreams: -1
```

Create HE-MU Recovery Configuration Object

Create an HE recovery configuration object for the specified packet format, channel bandwidth, and L-SIG length.

```
cfg = wlanHERecoveryConfig('PacketFormat', 'HE-MU', 'ChannelBandwidth', 'CBW80', 'LSIGLength')
```

Display the recovery configuration object.

```
disp(cfg);
```

wlanHERecoveryConfig with properties:

```
    PacketFormat: 'HE-MU'
    ChannelBandwidth: 'CBW80'
    LSIGLength: 100
    PreamblePuncturing: 'Unknown'
        SIGBCompression: -1
        SIGBMCS: -1
        SIGBDCM: -1
    NumSIGBSymbolsSignaled: -1
        STBC: -1
        LDPCEXtraSymbol: -1
    PreFECPaddingFactor: -1
    PEDisambiguity: -1
    GuardInterval: -1
```

```

        HELTFTType: -1
        NumHELTFSymbols: -1
        UplinkIndication: -1
            BSSColor: -1
            SpatialReuse: -1
            TXOPDuration: -1
            HighDoppler: -1
        MidamblePeriodicity: -1
            AllocationIndex: -1
        LowerCenter26ToneRU: -1
        NumUsersPerContentChannel: -1
        RUTotalSpaceTimeStreams: -1
            RUSize: -1
            RUIndex: -1
            STAID: -1
            MCS: -1
            DCM: -1
        ChannelCoding: 'Unknown'
            Beamforming: -1
        NumSpaceTimeStreams: -1
        SpaceTimeStreamStartingIndex: -1

```

Return HE-SIG-B Field Length Information

Create a WLAN HE-MU-format configuration object, specifying the allocation index.

```
cfgHEMU = wlanHEMUConfig(0);
```

Generate a WLAN waveform for the specified configuration and return the PPDU field indices.

```
waveform = wlanWaveformGenerator(1, cfgHEMU);
ind = wlanFieldIndices(cfgHEMU);
```

Decode the L-SIG field and obtain the OFDM information. This information is required to obtain the L-SIG length, which is used in the recovery configuration object.

```
lsig = waveform(ind.LSIG(1):ind.LSIG(2), :);
lsigDemod = wlanHEDemodulate(lsig, 'L-SIG', cfgHEMU.ChannelBandwidth);
preHEInfo = wlanHEOFDMInfo('L-SIG', cfgHEMU.ChannelBandwidth);
```

Recover the L-SIG information bits and related information, making sure that the bits pass the parity check. For this example, we assume a noiseless channel. For more realistic

results you can pass the waveform through an 802.11ax™ channel model by using the `wlanTGaxChannel System object™` and work with the received waveform.

```
csi = ones(52,1);  
[lsigBits, failCheck, lsigInfo] = wlanLSIGBitRecover(lsigDemod(preHEInfo.DataIndices, :, :),
```

Decode the HE-SIG-A field and recover the HE-SIG-A information bits, ensuring that the bits pass the cyclic redundancy check (CRC).

```
sigA = waveform(ind.HESIGA(1):ind.HESIGA(2), :);  
sigADemod = wlanHEDemodulate(sigA, 'HE-SIG-A', cfgHEMU.ChannelBandwidth);  
preHEInfo = wlanHEOFDMInfo('HE-SIG-A', cfgHEMU.ChannelBandwidth);  
[bits, failCRC] = wlanHESIGABitRecover(sigADemod(preHEInfo.DataIndices, :, :), 0, csi);
```

Create a WLAN recovery configuration object, specifying an HE-MU-format packet and the length of the L-SIG field.

```
cfg = wlanHERecoveryConfig('PacketFormat', 'HE-MU', 'LSIGLength', lsigInfo.Length);
```

Update the recovery configuration object with the recovered HE-SIG-A bits.

```
cfgUpdated = interpretHESIGABits(cfg, bits);
```

Return and display the HE-SIG-B information.

```
info = getSIGBLength(cfgUpdated);  
disp(info);
```

```
    NumSIGBCommonFieldSamples: 80  
        NumSIGBSymbols: 10
```

Recover HE-Data Field for HE-SU-Format Packet

Recover the HE-Data field for an HE-SU-format packet by decoding the HE signaling fields, updating the unknown properties in the recovery configuration object, and passing the updated object into the HE-Data recovery function.

Create an HE-SU-format configuration object, specifying the MCS, and extract the channel bandwidth.

```
cfgHESU = wlanHESUConfig('MCS', 0);  
cbw = cfgHESU.ChannelBandwidth;
```

Generate a waveform for the specified configuration object.

```
bits = randi([0 1],8*getPSDULength(cfgHESU),1,'int8');
waveform = wlanWaveformGenerator(bits,cfgHESU);
```

Create a WLAN recovery configuration object, specifying the known channel bandwidth and an HE-SU-format packet.

```
cfgRx = wlanHERecoveryConfig('ChannelBandwidth',cbw,'PacketFormat','HE-SU');
```

Recover the HE signaling fields by retrieving the field indices and performing the relevant demodulation operations.

```
ind = wlanFieldIndices(cfgRx);
heLSIGandRLSIG = waveform(ind.LSIG(1):ind.RLSIG(2),:);
symLSIG = wlanHEDemodulate(heLSIGandRLSIG,'L-SIG',cbw);
info = wlanHEOFDMInfo('L-SIG',cbw);
```

Merge the L-SIG and RL-SIG fields for diversity and obtain the data subcarriers.

```
symLSIG = mean(symLSIG,2);
lsig = symLSIG(info.DataIndices,:);
```

Decode the L-SIG field, assuming a noiseless channel, and use the length field to update the recovery object.

```
[~,~,lsigInfo] = wlanLSIGBitRecover(lsig,0);
cfgRx.LSIGLength = lsigInfo.Length;
```

Recover and demodulate the HE-SIG-A field, obtain the data subcarriers and recover the HE-SIG-A bits.

```
heSIGA = waveform(ind.HESIGA(1):ind.HESIGA(2),:);
symSIGA = wlanHEDemodulate(heSIGA,'HE-SIG-A',cbw);
siga = symSIGA(info.DataIndices,:);
[sigaBits,failCRC] = wlanHESIGABitRecover(siga,0);
```

Update the recovery configuration object with the recovered HE-SIG-A bits and obtain the updated field indices.

```
cfgRx = interpretHESIGABits(cfgRx,sigaBits);
ind = wlanFieldIndices(cfgRx);
```

Retrieve and decode the HE-Data field.

```
heData = waveform(ind.HEData(1):ind.HEData(2),:);
symData = wlanHEDemodulate(heData, 'HE-Data', ...
    cbw, cfgRx.GuardInterval, [cfgRx.RUSize cfgRx.RUIndex]);
infoData = wlanHEOFDMInfo('HE-Data', cbw, cfgRx.GuardInterval, [cfgRx.RUSize cfgRx.RUIndex]);
data = symData(infoData.DataIndices, :, :);
dataBits = wlanHEDataBitRecover(data, 0, cfgRx);
```

Check that the returned data bits are the same as the transmitted data bits.

```
isequal(bits, dataBits)
```

```
ans = logical
     1
```

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanHEMUConfig | wlanHESUConfig | wlanRecoveryConfig

Functions

wlanFieldIndices | wlanHEDataBitRecover | wlanHESIGABitRecover |
wlanHESIGBCommonBitRecover | wlanHESIGBUserBitRecover |
wlanLSIGBitRecover | wlanSampleRate | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

“Multiuser HE Transmission”

Introduced in R2019a

wlanHESUConfig

Create HE-SU-format configuration object

Description

The `wlanHESUConfig` object is a high-efficiency-format (HE-format) configuration object for the HE single-user (HE SU) or HE extended-range single-user (HE ER SU) packet format.

Creation

Syntax

```
cfgHESU = wlanHESUConfig  
cfgHESU = wlanHESUConfig(Name,Value)
```

Description

`cfgHESU = wlanHESUConfig` creates a configuration object that initializes parameters for a single-user IEEE 802.11 HE-format “PPDU” on page 3-90. For a detailed description of the HE WLAN format, see [1].

`cfgHESU = wlanHESUConfig(Name,Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanHESUConfig('GuardInterval',1.6)` specifies a 1.6-microsecond guard interval (cyclic prefix) duration.

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

ChannelBandwidth — Channel bandwidth of PPDU transmission

'CBW20' (default) | 'CBW40' | 'CBW80' | 'CBW160'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

ExtendedRange — Enable HE ER SU format

false or 0 (default) | true or 1

Enable HE ER SU format, specified as a logical value of 1 (true) or 0 (false). To create an HE ER SU-format configuration object, set this property to 1 (true).

Dependencies

This property applies only when you set the ChannelBandwidth property to 'CBW20'.

Data Types: logical

Upper106ToneRU — Enable higher frequency 106-tone TU

false or 0 (default) | true or 1

Enable higher frequency 106-tone resource unit (RU), specified as a logical value of 1 (true) or 0 (false). To use only the higher frequency 106-tone RU within the primary 20-MHz channel bandwidth of an HE ER SU-format transmission, set this property to 1 (true).

Dependencies

This property applies only when you set the ChannelBandwidth property to 'CBW20' and the ExtendedRange property to 1 (true).

Data Types: logical

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the interval [1, 8]

Number of transmit antennas, specified as an integer in the interval [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer in the interval [1, 8]

Number of space-time streams in the transmission, specified as an integer in the interval [1, 8].

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies only when you set the NumTransmitAntennas and NumSpaceTimeStreams properties to the same value.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size N_{STS} -by- N_T , where:
 - N_{STS} is the number of space-time streams;
 - N_T is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size N_{ST} -by- N_{STS} -by- N_T , where N_{ST} is the number of occupied subcarriers. The ChannelBandwidth property determines the value of N_{ST} . In this case, each occupied subcarrier has its own spatial mapping matrix.

This table shows the ChannelBandwidth setting and the corresponding N_{ST} :

ChannelBandwidth	N_{ST}
'CBW20'	242
'CBW40'	484
'CBW80'	996
'CBW160'	1992

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: $[0.5 \ 0.3; \ 0.4 \ 0.4; \ 0.5 \ 0.8]$ represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: double

Complex Number Support: Yes

Beamforming — Enable signaling of transmission with beamforming

true or 1 (default) | false or 0

Enable signaling of a transmission with beamforming, specified as a logical value of 1 (true) or 0 (false). To apply a beamforming steering matrix, set this property to 1 (true). The `SpatialMappingMatrix` property specifies the beamforming steering matrix.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: logical

PreHESpatialMapping — Enable spatial mapping of pre-HE-STF portion

false or 0 (default) | true or 1

Enable spatial mapping of the pre-HE-short-training-field (pre-HE-STF) portion of the PPDU, specified as a logical value of 1 (true) or 0 (false). To spatially map the pre-HE-STF portion of the PPDU in the same way as the first symbol of the HE-LTF on each tone,

set this property to 1 (true). To apply no spatial mapping to the pre-HE-STF portion of the PDU, set this property to 0 (false).

Data Types: logical

STBC — Enable STBC

false or 0 (default) | true or 1

Enable space-time block coding (STBC) of the PDU data field, specified as a logical value of 1 (true) or 0 (false). STBC transmits multiple copies of the data stream across assigned antennas.

- When you set this property to 0 (false), STBC is not applied to the data field. The number of space-time streams is equal to the number of spatial streams.
- When you set this property to 1 (true), STBC is applied to the data field. The number of space-time streams is twice the number of spatial streams.

Dependencies

This property applies only when the NumSpaceTimeStreams property is 2 and the DCM property is 0 (false).

Data Types: logical

MCS — Modulation and coding scheme

0 (default) | integer in the interval [0, 11]

Modulation and coding scheme (MCS) used in transmitting the current packet, specified as a nonnegative integer in the interval [0, 11]. Each value of this property corresponds to an MCS according to Tables 28-51-28-107 of [1]. This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Dual Carrier Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	0 or 1	1/2
1	Quadrature phase-shift keying (QPSK)	0 or 1	1/2
2		Not applicable	3/4

MCS	Modulation	Dual Carrier Modulation	Coding Rate
3	16-point quadrature amplitude modulation (16-QAM)	0 or 1	1/2
4			3/4
5	64-QAM	Not applicable	2/3
6			3/4
7			5/6
8	256-QAM		3/4
9			5/6
10	1024-QAM		3/4
11			5/6

Dependencies

- When you set the `ExtendedRange` to 1 (`true`), you can only set this property to 0, 1, or 2.
- When you set the `Upper106ToneRU` to 1 (`true`), you can only set this property to 0.

Data Types: `double`

DCM — DCM indicator

`false` or 0 (default) | `true` or 1

Dual carrier modulation (DCM) indicator, specified as a logical value of 1 (`true`) or 0 (`false`). To indicate that DCM is used for the HE-Data field, set this property to 1 (`true`).

Dependencies

You can only set this property to 1 (`true`) when all of these conditions are satisfied:

- The `MCS` property is 0, 1, 3, or 4.
- The `STBC` property is 0 (`false`).
- The `NumSpaceTimeStreams` property is less than or equal to 2.

Data Types: `logical`

ChannelCoding — FEC coding type

'LDPC' (default) | 'BCC'

Forward-error-correction (FEC) coding type for the HE-Data field, specified as 'LDPC' for low-density parity-check (LDPC) coding or 'BCC' for binary convolutional coding (BCC).

Dependencies

You can only set this property to 'BCC' when all of these conditions are satisfied:

- The MCS property is not 10 or 11.
- The size of any RU is less than or equal to 242. Obtain the RU sizes by using the `ruInfo` object function.
- The `NumSpaceTimeStreams` property is less than or equal to 4.

Data Types: `char` | `string`

APEPLength — APEP length

100 (default) | integer in the interval [0, 6,500,531]

aggregated MPDU (A-MPDU) pre-end-of-frame (pre-EOF) padding (APEP) length, in bytes, specified as an integer in the interval [0, 6,500,531]. Setting this property to 0 specifies transmission of an HE null data packet (NDP).

The `wlanHESUConfig` uses this property to determine the number of OFDM symbols in the data field. For more information, see [1].

Data Types: `double`

GuardInterval — Guard interval (cyclic prefix) duration

3.2 (default) | 1.6 | 0.8

Guard interval (cyclic prefix) duration for the data field within a packet, in microseconds, specified as 3.2, 1.6, or 0.8.

Data Types: `double`

HELTFType — HE-LTF compression mode of HE PPDU

4 (default) | 2 | 1

HE-LTF compression mode of HE PPDU, specified as 4, 2, or 1. This property indicates the type of HE-LTF, where a value of 4, 2, or 1 corresponds to four times, two times, or one times HE-LTF duration compression mode, respectively. The HE-LTF type is enumerated in Table 28-1 of [1] as:

- 1xHE-LTF - Duration of 3.2 μ s with a guard interval duration of 0.8 μ s or 1.6 μ s

- 2xHE-LTF - Duration of 6.4 μ s with a guard interval duration of 0.8 μ s or 1.6 μ s
- 4xHE-LTF - Duration of 12.8 μ s with a guard interval duration of 0.8 μ s or 3.2 μ s

For more information on the HE-LTF, see Section 28.3.10.10 of [1].

Data Types: double

UplinkIndication — Uplink transmission indicator

false or 0 (default) | true or 1

Uplink indication, specified as a logical value of 1 (true) or 0 (false). To indicate that the PPDU is sent on a downlink transmission, set this property to 0 (false). To indicate that the PPDU is sent on an uplink transmission, set this property to 1 (true).

Data Types: logical

BSSColor — BSS color identifier

0 (default) | integer in the interval [0, 63]

Basic service set (BSS) color identifier, specified as an integer in the interval [0, 63].

Data Types: double

SpatialReuse — Spatial reuse indicator

0 (default) | integer in the interval [0, 15]

Spatial reuse indicator, specified as an integer in the interval [0, 15].

Data Types: double

TXOPDuration — Duration information for transmit opportunity (TXOP) protection

127 (default) | integer in the interval [0, 127]

Duration information for TXOP protection, specified as an integer in the interval [0, 127]. Except for the first bit, which specifies TXOP length granularity, each bit of the TXOP field of HE-SIG-A is equal to TXOPDuration. Therefore a duration in microseconds must be converted according to the procedure set out in Table 28-18 of [1].

Data Types: double

HighDoppler — High-Doppler mode indicator

false or 0 (default) | true or 1

High-Doppler mode indicator, specified as a logical value of 1 (true) or 0 (false). To indicate high-Doppler mode in the HE-SIG-A field, set this property to 1 (true).

Dependencies

The 1 (true) value of this property is valid only when the NumSpaceTimeStreams property is less than or equal to 4 for any RU.

Data Types: logical

MidamblePeriodicity — Midamble periodicity of HE-Data field

10 (default) | 20

Midamble periodicity of the HE-Data field, in number of OFDM symbols, specified as 10 or 20.

Dependencies

This property applies only when the HighDoppler property is 1 (true).

Data Types: double

NominalPacketPadding — Nominal packet padding

0 (default) | 8 | 16

Nominal packet padding, in microseconds, specified as 0, 8, or 16. The wlanHESUConfig object uses this property and the pre-forward-error-correction (pre-FEC) padding factor to calculate the duration, T_{PE} , of the packet extension (PE) field. For more information about the packet extension field, see Section 28.3.12 of [1].

This table shows the possible values of T_{PE} for different values of this property and a , a parameter defined by equation (28-72) or (28-73) of [1].

Value of a	Value of T_{PE} in Microseconds		
	NominalPacketPadding Set to 0	NominalPacketPadding Set to 8	NominalPacketPadding Set to 16
1	0	0	4
2	0	0	8
3	0	4	12
4	0	8	16

Dependencies

To enable this property, set the `APEPLength` property to an integer in the interval [1, 6,500,531]. The duration of the PE field for an NDP, regardless of the nominal packet padding, is 4 microseconds.

Data Types: double

Object Functions

<code>getPSDULength</code>	Return HE format PSDU length
<code>packetFormat</code>	Return WLAN packet format
<code>ruInfo</code>	Return HE format resource unit allocation information
<code>showAllocation</code>	Show resource unit (RU) allocation

Examples

Create HE SU Configuration Object

Create an HE SU configuration object for a 40-MHz transmission.

```
cfgHE = wlanHESUConfig;
cfgHE.ChannelBandwidth = 'CBW40'

cfgHE =
    wlanHESUConfig with properties:

        ChannelBandwidth: 'CBW40'
        NumTransmitAntennas: 1
        NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
        PreHESpatialMapping: 0
        STBC: 0
        MCS: 0
        DCM: 0
        ChannelCoding: 'LDPC'
        APEPLength: 100
        GuardInterval: 3.2000
        HELTFTType: 4
        UplinkIndication: 0
        BSSColor: 0
```

```
SpatialReuse: 0
TXOPDuration: 127
HighDoppler: 0
NominalPacketPadding: 0
```

Create HE ER SU Configuration Object

Create an HE ER SE configuration object for a 20-MHz transmission.

```
cfgHE = wlanHESUConfig('ExtendedRange',true)
```

```
cfgHE =
  wlanHESUConfig with properties:
```

```
    ChannelBandwidth: 'CBW20'
      ExtendedRange: 1
      Upper106ToneRU: 0
    NumTransmitAntennas: 1
    NumSpaceTimeStreams: 1
      SpatialMapping: 'Direct'
    PreHESpatialMapping: 0
      STBC: 0
      MCS: 0
      DCM: 0
    ChannelCoding: 'LDPC'
      APEPLength: 100
    GuardInterval: 3.2000
      HELTFTType: 4
    UplinkIndication: 0
      BSSColor: 0
      SpatialReuse: 0
      TXOPDuration: 127
      HighDoppler: 0
    NominalPacketPadding: 0
```

Create HE SU Configuration Object for Packet Extension

Create an HE SU configuration object, specifying a channel bandwidth of 40 MHz and nominal packet padding value of eight microseconds.

```
cfgHESU = wlanHESUConfig('ChannelBandwidth', 'CBW40', 'NominalPacketPadding', 8)
```

```
cfgHESU =
    wlanHESUConfig with properties:

        ChannelBandwidth: 'CBW40'
        NumTransmitAntennas: 1
        NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
        PreHESpatialMapping: 0
            STBC: 0
            MCS: 0
            DCM: 0
        ChannelCoding: 'LDPC'
        APEPLength: 100
        GuardInterval: 3.2000
        HELTFTType: 4
        UplinkIndication: 0
            BSSColor: 0
        SpatialReuse: 0
        TXOPDuration: 127
        HighDoppler: 0
        NominalPacketPadding: 8
```

Update the configuration object to specify NDP transmission mode. Because the duration of the PE field for an NDP is always four microseconds, the `NominalPacketPadding` property does not apply.

```
cfgHESU.APEPLength = 0
```

```
cfgHESU =
    wlanHESUConfig with properties:

        ChannelBandwidth: 'CBW40'
        NumTransmitAntennas: 1
        NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
        PreHESpatialMapping: 0
            STBC: 0
```

```
MCS: 0
DCM: 0
ChannelCoding: 'LDPC'
APEPLength: 0
GuardInterval: 3.2000
HELTFTType: 4
UplinkIndication: 0
BSSColor: 0
SpatialReuse: 0
TXOPDuration: 127
HighDoppler: 0
```

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE P802.11ax/D3.1. “Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN.” IEEE Standard for Information Technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHERecoveryConfig | wlanHTConfig |
wlanNonHTConfig | wlanSIGConfig | wlanVHTConfig

Functions

getPSDULength | packetFormat | ruInfo | showAllocation | wlanHEDemodulate |
wlanWaveformGenerator

Apps

Wireless Waveform Generator

Introduced in R2018b

wlanHTConfig

Create HT-format configuration object

Description

The `wlanHTConfig` object is a high-throughput-format (HT-format) configuration object for the WLAN HT packet format.

Creation

Syntax

```
cfgHT = wlanHTConfig  
cfgHT = wlanHTConfig(Name, Value)
```

Description

`cfgHT = wlanHTConfig` creates a configuration object that initializes parameters for an IEEE 802.11 HT-format “PPDU” on page 3-98.

`cfgHT = wlanHTConfig(Name, Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanHTConfig('GuardInterval', 'Short')` specifies a 400-nanosecond guard interval (cyclic prefix) duration.

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

ChannelBandwidth — Channel bandwidth of PPDU transmission

'CBW20' (default) | 'CBW40'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as 1, 2, 3, or 4.

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | 2 | 3 | 4

Number of space-time streams in the transmission, specified as 1, 2, 3, or 4.

Data Types: double

NumExtensionStreams — Number of extension spatial streams

0 (default) | 1 | 2 | 3

Number of extension spatial streams in the transmission, specified as 0, 1, 2, or 3.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies only when you set the NumTransmitAntennas and NumSpaceTimeStreams properties to the same value. This property must be set to 'Custom' when the NumExtensionStreams property is greater than zero.

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size $(N_{\text{STS}}+N_{\text{ESS}})$ -by- N_{T} , where:
 - N_{STS} is the number of space-time streams;
 - N_{ESS} is the number of extension spatial streams;
 - N_{T} is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size N_{ST} -by- $(N_{\text{STS}} + N_{\text{ESS}})$ -by- N_{T} , where N_{ST} is the number of occupied subcarriers. The value of N_{ST} is the sum of the occupied data and pilot subcarriers. The `ChannelBandwidth` property determines the value of N_{ST} . In this case, each occupied subcarrier has its own spatial mapping matrix.

This table shows the `ChannelBandwidth` setting and the corresponding N_{ST} :

ChannelBandwidth	Number of Occupied Subcarriers, N_{ST}	Number of Data Subcarriers	Number of Pilot Subcarriers
'CBW20'	56	52	4
'CBW40'	114	108	6

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. For more information, see Section 20.3.11.11.2 of [1]. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: `[0.5 0.3; 0.4 0.4; 0.5 0.8]` represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the `SpatialMapping` property to 'Custom'.

Data Types: `double`

Complex Number Support: Yes

MCS — MCS used for transmission

0 (default) | integer in the interval [0, 31]

Modulation and coding scheme (MCS) used for transmission, specified as an integer in the interval [0, 31]. Each value of this property corresponds to a modulation type and coding rate in accordance with this table.

MCS	Modulation	Coding Rate
0, 8, 16, or 24	Binary phase-shift keying (BPSK)	1/2
1, 9, 17, or 25	Quadrature phase-shift keying (QPSK)	1/2
2, 10, 18, or 26	QPSK	3/4
3, 11, 19, or 27	16-point quadrature amplitude modulation (16-QAM)	3/4
4, 12, 20, or 28	16-QAM	3/4
5, 13, 21, or 29	64-QAM	2/3
6, 14, 22, or 30	64-QAM	3/4
7, 15, 23, or 31	64-QAM	5/6

Values of this property in the interval [0, 7] specify one spatial stream. Values in the interval [8, 15] specify two spatial streams. Values in the interval [16, 23] specify three spatial streams. Values in the interval [24, 31] specify four spatial streams.

For more information on MCS-dependent transmission parameters, see Section 20.6 of [1]. If the number of space-time streams is equal to the number of spatial streams, no space-time block coding (STBC) is applied to the HT-Data field. For a description of STBC, see Section 20.3.11.9.2 of [1].

Example: A value of 22 specifies an MCS with three spatial streams, 64-QAM, and a coding rate of $\frac{3}{4}$.

Data Types: double

GuardInterval — Guard interval (cyclic prefix) duration

'Long' (default) | 'Short'

Guard interval (cyclic prefix) duration for the data field within a packet, specified as one of these values:

- 'Long' - Guard interval duration of 800 ns

- 'Short' - Guard interval duration of 400 ns

Data Types: char | string

ChannelCoding — FEC coding type

'BCC' (default) | 'LDPC'

Forward-error-correction (FEC) coding type for the HT-Data field, specified as 'BCC' for binary convolutional coding (BCC) or 'LDPC' for low-density parity-check (LDPC) coding. For more information, see Section 22.3.10.9.4 of [1].

Data Types: char | string

PSDULength — PSDU length

1024 (default) | integer in the interval $[0, 2^{16} - 1]$

Physical layer convergence procedure (PLCP) service data unit (PSDU) length, in bytes, specified as an integer in the interval $[0, 2^{16} - 1]$. To indicate a sounding packet for which there are no data bits to recover, set this property to 0.

Data Types: double

AggregatedMPDU — MPDU aggregation indicator

false or 0 (default) | true or 1

MAC protocol data unit (MPDU) aggregation indicator, specified as a numeric or logical value of 1 (true) or 0 (false). To specify that the generated packet uses MPDU aggregation, set this property to 1 (true).

Dependencies

This property does not apply when you set the MCS property to 0

Data Types: logical

RecommendSmoothing — Recommend smoothing for channel estimation

true or 1 (default) | false or 0

Recommend smoothing for channel estimation, specified as a numeric or logical value of 1 (true) or 0 (false).

- If the frequency profile does not vary across the channel, the receiver sets this property to 1 (true). In this case, frequency-domain smoothing is recommended as part of channel estimation.

- If the frequency profile varies across the channel, the receiver sets this property to 0 (false). In this case, frequency-domain smoothing is not recommended as part of channel estimation.

Data Types: logical

Examples

Create HT Configuration Object with Default Settings

Create an HT configuration object. After creating the object update the number of transmit antennas and space-time streams.

```
cfgHT = wlanHTConfig

cfgHT =
    wlanHTConfig with properties:

        ChannelBandwidth: 'CBW20'
        NumTransmitAntennas: 1
        NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
        MCS: 0
        GuardInterval: 'Long'
        ChannelCoding: 'BCC'
        PSDULength: 1024
        AggregatedMPDU: 0
        RecommendSmoothing: 1
```

Update the number of antennas to two, and number of space-time streams to four.

```
cfgHT.NumTransmitAntennas = 2;
cfgHT.NumSpaceTimeStreams = 4

cfgHT =
    wlanHTConfig with properties:

        ChannelBandwidth: 'CBW20'
        NumTransmitAntennas: 2
        NumSpaceTimeStreams: 4
        SpatialMapping: 'Direct'
```

```
        MCS: 0
    GuardInterval: 'Long'
    ChannelCoding: 'BCC'
        PSDULength: 1024
    AggregatedMPDU: 0
    RecommendSmoothing: 1
```

Create wlanHTConfig Object

Create a `wlanHTConfig` object with a PSDU length of 2048 bytes, and using BCC forward error correction.

```
cfgHT = wlanHTConfig('PSDULength',2048);
cfgHT.ChannelBandwidth = 'CBW20'
```

```
cfgHT =
    wlanHTConfig with properties:

        ChannelBandwidth: 'CBW20'
    NumTransmitAntennas: 1
    NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
            MCS: 0
        GuardInterval: 'Long'
        ChannelCoding: 'BCC'
            PSDULength: 2048
        AggregatedMPDU: 0
        RecommendSmoothing: 1
```

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11-2012. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHESUConfig | wlanNonHTConfig | wlanSIGConfig | wlanVHTConfig

Functions

wlanHTData | wlanHTDataRecover | wlanHTLTF | wlanHTLTFDemodulate | wlanHTOFDMInfo | wlanHTSIG | wlanHTSIGRecover | wlanHTSTF | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

“Packet Size and Duration Dependencies”

Introduced in R2015b

wlanMACFrameConfig

Create WLAN MAC frame configuration object

Description

The `wlanMACFrameConfig` object is a WLAN medium access control (MAC) frame configuration object that initializes properties for an IEEE 802.11 MAC frame.

Creation

Syntax

```
config = wlanMACFrameConfig  
config = wlanMACFrameConfig(Name,Value)
```

Description

`config = wlanMACFrameConfig` creates a WLAN MAC frame configuration object, `config`, with default property values.

`config = wlanMACFrameConfig(Name,Value)` sets properties of `config` using one or more `Name,Value` pair arguments.

At run time, the calling function, `wlanMACFrame`, validates object settings for properties relevant to its operation.

Properties

FrameType — Type of MAC frame

'Beacon' (default) | 'RTS' | 'CTS' | 'ACK' | 'Block Ack' | 'Data' | 'Null' | 'QoS Data' | 'QoS Null'

Type of MAC frame, specified as one of these values: 'Beacon', 'RTS', 'CTS', 'ACK', 'Block Ack', 'Data', 'Null', 'QoS Data', or 'QoS Null'.

Data Types: char | string

FrameFormat — Format of MAC frame

'Non-HT' (default) | 'HT-Mixed' | 'VHT' | 'HE-SU' | 'HE-EXT-SU'

Format of the MAC frame, specified as 'Non-HT', 'HT-Mixed', 'VHT', 'HE-SU', or 'HE-EXT-SU'.

Dependencies

To enable this property, set the `FrameType` property to 'QoS Data' or 'QoS Null'. The 'VHT', 'HE-SU', and 'HE-EXT-SU' values of this property apply only when you set the `FrameType` to 'QoS Data'.

Data Types: char | string

ToDS — Frame is directed to DS

false or 0 (default) | true or 1

Frame is directed to a distributed system (DS), specified as a numeric or logical value of 1 (true) or 0 (false). To indicate that the frame is directed from a non-access point (non-AP) station to a DS, set this property to 1 (true).

Data Types: logical

FromDS — Frame is exiting DS

true or 1 (default) | false or 0

Frame is exiting a DS, specified as a logical value of 1 (true) or 0 (false). To indicate that the frame is directed from a DS to a non-AP station, set this property to 1 (true).

Data Types: logical

Retransmission — Retransmitted frame

false or 0 (default) | true or 1

Retransmitted frame, specified as a logical value of 1 (true) or 0 (false). To indicate that the frame is a retransmission, set this property to 1 (true).

Data Types: logical

PowerManagement — Power management mode

false or 0 (default) | true or 1

Power management mode, specified as a logical value of 1 (true) or 0 (false). To indicate that the sender is in power-saving mode, set this property to 1 (true).

Data Types: logical

MoreData — More data indication

false or 0 (default) | true or 1

More data indication, specified as a logical value of 1 (true) or 0 (false). To indicate that the sender has more frames to send, set this property to 1 (true).

Data Types: logical

HTControlPresent — Frame includes HT control field

false or 0 (default) | true or 1

Frame includes the high-throughput (HT) control field, specified as a logical value of 1 (true) or 0 (false). To indicate that the HT control field is included in the MAC header, set this property to 1 (true)

Data Types: logical

Duration — Amount of time for which channel is reserved

0 (default) | integer in the interval $[0, 2^{15} - 1]$

Amount of time, in microseconds, for which the channel is reserved after frame transmission ends, specified as an integer in the interval $[0, 2^{15} - 1]$.

Data Types: double

Address1 — Receiver address

'FFFFFFFFFFFF' (default) | 12-element character vector | string scalar

Receiver address, specified as a 12-element character vector or a string scalar representing a six-octet hexadecimal value. The default value, 'FFFFFFFFFFFF', is a broadcast address.

Data Types: char | string

Address2 — Transmitter address

'00123456789B' (default) | 12-element character vector | string scalar

Transmitter address, specified as a 12-element character vector or a string scalar representing a six-octet hexadecimal value.

Data Types: `char` | `string`

Address3 — BSSID, DA, or SA

'00123456789B' (default) | 12-element character vector | string scalar

Basic service set identifier (BSSID), destination address (DA), or source address (SA), specified as a 12-element character vector or string scalar representing a six-octet hexadecimal value.

- When the `ToDS` and `FromDS` properties are `0` (`false`), this property represents a BSSID.
- When the `ToDS` property is `1` (`true`) and the `FromDS` property is `0` (`false`), this property represents a DA.
- When the `ToDS` property is `0` (`false`) and the `FromDS` property is `1` (`true`), this property represents an SA.

Data Types: `char` | `string`

SequenceNumber — Frame sequence number

`0` (default) | integer in the interval `[0, 4095]`

Frame sequence number, specified as an integer in the interval `[0, 4095]`.

- When the `MPDUAggregation` property is `1` (`true`), this property represents the sequence number of the first MAC protocol data unit (MPDU). The sequence numbers for subsequent MPDUs increase in increments of one.
- When the `FrameType` property is `'Block Ack'`, this property represents the starting sequence number.

Data Types: `double`

TID — Traffic identifier representing user priority

`0` (default) | integer in the interval `[0, 7]`

Traffic identifier representing user priority, specified as an integer in the interval `[0, 7]`.

Data Types: `double`

AckPolicy — Acknowledgment policy

'No Ack' (default) | 'Normal Ack/Implicit Block Ack Request' | 'No explicit acknowledgment/PSMP Ack/HTP Ack' | 'Block Ack'

Acknowledgment policy, specified as 'No Ack', 'Normal Ack/Implicit Block Ack Request', 'No explicit acknowledgment/PSMP Ack/HTP Ack', or 'Block Ack'.

Data Types: string | char

HTControl — HT control field of MAC header

'00000000' (default) | eight-element character vector | string scalar

HT control field of the MAC header, specified as an eight-element character vector or a string scalar representing a four-octet hexadecimal value. The leftmost byte in `HTControl` must be the most significant byte.

Data Types: string | char

MSDUAggregation — Form A-MSDUs using MSDU aggregation

false or 0 (default) | true or 1

Form aggregated MAC service data units (A-MSDUs) using MSDU aggregation, specified as a logical value of 1 (true) or 0 (false).

When you set this property to 1 (true), the MAC frame returned on calling `wlanMACFrameConfig` in the `wlanMACFrame` function contains A-MSDUs instead of MSDUs.

Dependencies

To enable this property, set the `FrameType` property to 'QoS Data'.

Data Types: logical

MPDUAggregation — Form A-MPDUs using MPDU aggregation

false or 0 (default) | true or 1

Form A-MPDUs using MPDU aggregation, specified as a logical value of 1 (true) or 0 (false). To indicate that the MAC frame initialized by `wlanMACMFrameConfig` contains A-MPDUs instead of MPDUs, set this property to 1 (true).

When you set the `FrameType` to 'QoS Data' and `FrameFormat` to 'VHT', the MAC frame returned on calling `wlanMACFrameConfig` in `wlanMACFrame` contains A-MPDUs instead of MPDUs.

Dependencies

To enable this property, set the `FrameType` property to 'QoS Data' and the `FrameFormat` property to 'HT-Mixed'.

Data Types: `logical`

AMSDUDestinationAddress — Destination address of all A-MSDU subframes

'00123456789A' (default) | 12-element character vector | string scalar

Destination address of all A-MSDU subframes, specified as a 12-element character vector or a string scalar representing a six-octet hexadecimal value.

Data Types: `char` | `string`

AMSDUSourceAddress — Source address of all A-MSDU subframes

'00123456789B' (default) | 12-element character vector | string scalar

Source address of all A-MSDU subframes, specified as a 12-element character vector or a string scalar representing a six-octet hexadecimal value.

Data Types: `char` | `string`

MinimumMPDUStartSpacing — Minimum spacing between start of MPDUs

0 (default) | integer in the interval [0, 7]

Minimum spacing between the start of MPDUs, specified as an integer in the interval [0, 7]. For more information, see Table 9.163 in [1].

Data Types: `double`

BlockAckBitmap — Block ack bitmap

character vector | string scalar

Block ack bitmap, specified as a character vector or string scalar of octets in hexadecimal format. To indicate an eight-octet block ack bitmap, specify a 16-element character vector or string scalar. To indicate a 32-octet block ack bitmap, specify a 64-element character vector or string scalar.

Data Types: `char` | `string`

ManagementConfig — Management frame-body configuration

`wlanManagementConfig` object

Management frame-body configuration, specified as a `wlanMACManagementConfig` object. This property applies only to management frames. This property specifies the

fields and information elements (IEs) present within the frame body of the management frame.

Dependencies

To enable this property, set the `FrameType` property to `'Beacon'`.

Examples

Create WLAN MAC Frame Configuration Object

Create a `wlanMACFrameConfig` object for a request to send (RTS) frame and display the properties of the object.

```
cfgMAC = wlanMACFrameConfig;  
cfgMAC.FrameType = 'RTS';  
disp(cfgMAC)
```

`wlanMACFrameConfig` with properties:

```
FrameType: 'RTS'  
PowerManagement: 0  
MoreData: 0  
Duration: 0  
Address1: 'FFFFFFFFFFFF'  
Address2: '00123456789B'
```

Create WLAN MAC Frame Configuration Object for QoS Data Frame

Create a `wlanMACFrameConfig` object for a quality-of-service (QoS) Data frame. Disable acknowledgement and enable power-saving mode.

```
config = wlanMACFrameConfig('FrameType', 'QoS Data', 'AckPolicy', 'No Ack', ...  
    'PowerManagement', true);
```

Specify the frame sequence number and traffic identifier. Display the properties of the MAC frame configuration object.

```
config.SequenceNumber = 5;  
config.TID              = 7;  
disp(config);
```

wlanMACFrameConfig with properties:

```
    FrameType: 'QoS Data'  
    FrameFormat: 'Non-HT'  
        ToDS: 0  
        FromDS: 1  
    Retransmission: 0  
    PowerManagement: 1  
        MoreData: 0  
        Duration: 0  
        Address1: 'FFFFFFFFFFFF'  
        Address2: '00123456789B'  
        Address3: '00123456789B'  
    SequenceNumber: 5  
        TID: 7  
    AckPolicy: 'No Ack'  
    MSDUAggregation: 0
```

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information technology - Telecommunications and information exchange between systems Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanMACFrame | wlanMSDULengths

Objects

wlanMACManagementConfig

Topics

“802.11 MAC Frame Generation”

Introduced in R2019b

wlanMACManagementConfig

Create WLAN MAC management frame-body configuration object

Description

The `wlanMACManagementConfig` is a WLAN medium access control (MAC) management frame-body configuration object. This object contains properties for configuring the fields and information elements (IEs) in a management frame body.

Creation

Syntax

```
config = wlanMACManagementConfig  
config = wlanMACManagementConfig(Name, Value)
```

Description

`config = wlanMACManagementConfig` creates `config`, a WLAN MAC management frame-body configuration object with default property values

`config = wlanMACManagementConfig(Name, Value)` sets properties of `config` using one or more `Name, Value` pair arguments. At run time, the calling function, `wlanMACFrame`, validates object settings for properties relevant to its operation.

Properties

FrameType — Type of MAC management frame

'Beacon' (default)

Type of MAC management frame, specified as 'Beacon'.

Note Currently you can only set this property to 'Beacon'.

Data Types: char | string

Timestamp — TSF timer value

0 (default) | integer in the interval $[0, 2^{64} - 1]$

Timing synchronization function (TSF) timer value, specified as an integer in the interval $[0, 2^{64} - 1]$.

Data Types: double | uint64

BeaconInterval — Number of time units between two beacon transmissions

100 (default) | integer in the interval $[0, 2^{16} - 1]$

Number of time units between two beacon transmissions, specified as a nonnegative integer in the interval $[0, 2^{16} - 1]$.

Note A TU is equivalent to 1024 microseconds.

Data Types: double

ESSCapability — ESS capability

true or 1 (default) | false or 0

Extended service set (ESS) capability, specified as a logical value of 1 (true) or 0 (false).

Setting this property to 1 (true) sets the IBSSCapability property to 0 (false).
Setting the IBSSCapability property to 1 (true) sets this property to 0 (false).

Data Types: logical

IBSSCapability — IBSS capability

false or 0 (default) | true or 1

Independent basic service set (IBSS) capability, specified as a logical value of 1 (true) or 0 (false).

If you set the ESSCapability property to 1 (true), then you must set this property to 0 (false).

Data Types: logical

Privacy — Privacy required for all data frames

false or 0 (default) | true or 1

Privacy required for all data frames, specified as a logical value of 1 (true) or 0 (false). To enable the privacy flag in the capability information field, set this property to 1 (true).

Data Types: logical

ShortPreamble — Support short preamble

false or 0 (default) | true or 1

Support short preamble, specified as a logical value of 1 (true) or 0 (false). To enable support for short preamble in the capability information field, set this property to 1 (true).

Data Types: logical

SpectrumManagement — Spectrum management required

false or 0 (default) | true or 1

Spectrum management required, specified as a logical value of 1 (true) or 0 (false). To enable the spectrum management flag in the capability information field, set this property to 1 (true). This flag indicates that spectrum management is required for device operation

Data Types: logical

QoSsupport — Support QoS

true or 1 (default) | false or 0

Support quality of service (QoS), specified as a logical value of 1 (true) or 0 (false). To enable QoS support in the capability information field, set this property to 1 (true).

Data Types: logical

APSDsupport — Support APSD

false or 0 (default) | true or 1

Support automatic power save delivery (APSD), specified as a logical value of 1 (true) or 0 (false). To enable the APSD feature in the capability information field, set this property to 1 (true).

Data Types: logical

ShortSlotTimeUsed — Use short slot time

false or 0 (default) | true or 1

Use short slot time, specified as a logical value of 1 (true) or 0 (false). To enable the short slot time flag in the capability information field, set this property to 1 (true).

Data Types: logical

RadioMeasurement — Enable radio measurement

false or 0 (default) | true or 1

Enable radio measurement, specified as a logical value of 1 (true) or 0 (false). To enable the radio measurement flag in the capability information field, set this property to 1 (true). This flag indicates that radio measurement is active.

Data Types: logical

DelayedBlockAckSupport — Support delayed block ack

false (default) | true

Support delayed block ack, specified as a logical value of 1 (true) or 0 (false). To indicate delayed block ack support in the capability information field, set this property to 1 (true).

Data Types: logical

ImmediateBlockAckSupport — Support immediate block ack

false or 0 (default) | true or 1

Support immediate block ack, specified as a logical value of 1 (true) or 0 (false). To indicate immediate block ack support in the capability information field, set this property to 1 (true).

Data Types: logical

SSID — Service set identifier

'default SSID' (default) | string scalar | character vector

Service set identifier (name of the WLAN network), specified as a string scalar or a character vector with no more than 32 elements.

Data Types: char | string

BasicRates — Basic rates included in supported rates IE

{ '6 Mbps' '12 Mbps' '24 Mbps' } (default) | character array | string array | cell array

Basic rates included in supported rates information element (IE), specified as a character array, string array, or cell array containing one or more of these values: '1 Mbps', '2 Mbps', '5.5 Mbps', '6 Mbps', '9 Mbps', '11 Mbps', '12 Mbps', '18 Mbps', '24 Mbps', '36 Mbps', '48 Mbps', or '54 Mbps'.

The combined number of unique rate values in the `BasicRates` and `AdditionalRates` properties must be an integer in the interval [1, 8].

Data Types: char | string | cell

AdditionalRates — Additional rates included in supported rates IE

{ } (default) | character array | string array | cell array

Additional rates included in supported rates IE, specified as a character array, string array, or cell array containing one or more of these values: '1 Mbps', '2 Mbps', '5.5 Mbps', '6 Mbps', '9 Mbps', '11 Mbps', '12 Mbps', '18 Mbps', '24 Mbps', '36 Mbps', '48 Mbps', or '54 Mbps'.

The combined number of unique rate values in the `BasicRates` and `AdditionalRates` properties must be an integer in the interval [1, 8].

Data Types: char | string | cell

InformationElements — IEs added using addIE object function

cell array

This property is read-only.

IEs added using the `addIE` object function, specified as a cell array. Each row in the cell array represents an IE. Each IE holds an element ID and information. For element with ID 255, the IE also holds an optional element ID extension. These IEs are carried in the management frame body in addition to any IEs included in the configuration properties.

You can change this property by using the `addIE` object function and display IEs by using the `displayIEs` object function. If you add an IE that is already specified as a configuration property of this object, the value listed in this property takes precedence.

Data Types: cell

Object Functions

`addIE` Update MAC management frame configuration object with specified IE
`displayIEs` Display the list of information elements (IEs)

Examples

Create Default WLAN MAC Management Frame-Body Configuration Object

Create a WLAN MAC management frame-body configuration object with default property values.

```
config = wlanMACManagementConfig;
```

Display the resulting object.

```
disp(config);
```

```
wlanMACManagementConfig with properties:
```

```
    FrameType: 'Beacon'  
    Timestamp: 0  
    BeaconInterval: 100  
    ESSCapability: 1  
    IBSSCapability: 0  
    Privacy: 0  
    ShortPreamble: 0  
    SpectrumManagement: 0  
    QoSsupport: 1  
    ShortSlotTimeUsed: 0  
    APSDSupport: 0  
    RadioMeasurement: 0  
    DelayedBlockAckSupport: 0  
    ImmediateBlockAckSupport: 0  
    SSID: 'default SSID'  
    BasicRates: {'6 Mbps' '12 Mbps' '24 Mbps'}  
    AdditionalRates: {}
```

```
Read-only properties:
```

```
    InformationElements: {511x2 cell}
```

Create MAC Management Frame-Body Configuration Object with SSID and Beacon Interval

Create a MAC management frame-body configuration object for a beacon frame, setting the service set identifier (SSID) to 'demo ssid' and the beacon interval to 100 TUs (1 TU = 1024 microsecond). Display the properties of the object.

```
config = wlanMACManagementConfig('SSID', 'demo ssid', 'BeaconInterval', 100);
disp(config)
```

wlanMACManagementConfig with properties:

```

        FrameType: 'Beacon'
        Timestamp: 0
    BeaconInterval: 100
        ESSCapability: 1
        IBSSCapability: 0
            Privacy: 0
        ShortPreamble: 0
    SpectrumManagement: 0
        QoSsupport: 1
    ShortSlotTimeUsed: 0
        APSDSupport: 0
    RadioMeasurement: 0
    DelayedBlockAckSupport: 0
    ImmediateBlockAckSupport: 0
        SSID: 'demo ssid'
        BasicRates: {'6 Mbps' '12 Mbps' '24 Mbps'}
        AdditionalRates: {}

```

```

Read-only properties:
    InformationElements: {511x2 cell}

```

Add Information Element to WLAN MAC Management Frame-Body Configuration Object

Add the DSSS Parameter Set information element to a WLAN MAC management frame-body configuration object by using the `addIE` object function. The element ID for this information element is 3. The information is '0b', representing the current channel (11) in hexadecimal format.

```
config = wlanMACManagementConfig('FrameType','Beacon');
id = 3;
information = '0b'

information =
'0b'

config = addIE(config,id,information);
```

Display the information elements of the frame-body configuration object by using the `displayIEs` object function.

```
displayIEs(config)
```

```
Element ID: 0, Information: 0x646566661756C742053534944
Element ID: 1, Information: 0x8C98B0
Element ID: 3, Information: 0x0B
```

References

- [1] IEEE Std 802.11- 2016. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements.
- [2] IEEE P802.11ax/D3.1. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. Amendment 6: Enhancements for High Efficiency WLAN." IEEE Standard for Information technology - Telecommunications and information exchange between systems Local and metropolitan area networks - Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

[addIE](#) | [displayIEs](#) | [wlanMACFrame](#) | [wlanMSDULengths](#)

Objects

[wlanMACFrameConfig](#)

Introduced in R2019b

wlanNonHTConfig

Create non-HT-format configuration object

Description

The `wlanNonHTConfig` object is a non-high-throughput-format (non-HT-format) configuration object for the WLAN non-HT packet format.

Creation

Syntax

```
cfgNonHT = wlanNonHTConfig  
cfgNonHT = wlanNonHTConfig(Name, Value)
```

Description

`cfgNonHT = wlanNonHTConfig` creates a configuration object that initializes parameters for an IEEE 802.11 non-HT-format “PPDU” on page 3-124.

`cfgNonHT = wlanNonHTConfig(Name, Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanNonHTConfig('Modulation', 'DSSS')` specifies the modulation type as direct-sequence spread spectrum (DSSS).

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

Modulation — Modulation type for non-HT transmission

'OFDM' (default) | 'DSSS'

Modulation type for the non-HT transmission, specified as 'OFDM' for orthogonal frequency division multiplexing (OFDM) or 'DSSS' for direct-sequence spread spectrum (DSSS).

Data Types: char | string

ChannelBandwidth – Channel bandwidth of PPDU transmission

'CBW20' (default) | 'CBW5' | 'CBW10'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW5' - Channel bandwidth of 5 MHz
- 'CBW10' - Channel bandwidth of 10 MHz
- 'CBW20' - Channel bandwidth of 20 MHz

Data Types: char | string

MCS – OFDM MCS used for transmission

0 (default) | integer in the interval [0, 7]

OFDM MCS used for transmission, specified as an integer in the interval [0, 7]. This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Coding Rate	Coded Bits Per Subcarrier	Coded Bits Per OFDM Symbol	Data Bits Per OFDM Symbol	Data Rate in Mbps		
						5-MHz Channel Bandwidth	10-MHz Channel Bandwidth	20-MHz Channel Bandwidth
0	Binary phase-shift keying (BPSK)	1/2	1	48	24	1.5	3	6
1	BPSK	3/4	1	48	36	2.25	4.5	9

MCS	Modulation	Coding Rate	Coded Bits Per Subcarrier	Coded Bits Per OFDM Symbol	Data Bits Per OFDM Symbol	Data Rate in Mbps		
						5-MHz Channel Bandwidth	10-MHz Channel Bandwidth	20-MHz Channel Bandwidth
2	quadrature phase-shift keying (QPSK)	1/2	2	96	48	3	6	12
3	QPSK	3/4	2	96	72	4.5	9	18
4	16-point quadrature amplitude modulation (16-QAM)	1/2	4	192	96	6	12	24
5	16-QAM	3/4	4	192	144	9	18	36
6	64-QAM	2/3	6	288	192	12	24	48
7	64-QAM	3/4	6	288	216	13.5	27	54

For more information, see Table 18-4 of [1].

Data Types: double

DataRate — Data rate for DSSS modulation

'1Mbps' (default) | '2Mbps' | '5.5Mbps' | '11Mbps'

Data rate for DSSS modulation, specified as a one of these values:

- '1Mbps' - Differential binary phase-shift keying (DBPSK) with a data rate of 1 Mbps
- '2Mbps' - Differential quadrature phase-shift keying (DQPSK) with a data rate of 2 Mbps

- '5.5Mbps' - Complementary code keying (CCK) with a data rate of 5.5 Mbps
- '11Mbps' - CCK with a data rate of 11 Mbps

Data Types: char | string

Preamble — DSSS modulation preamble type

'Long' (default) | 'Short'

DSSS modulation preamble type, specified as 'Long' or 'Short'.

Dependencies

The 'Short' value of this property does not apply when you set the `DataRate` property to '1Mbps'.

Data Types: char | string

LockedClocks — Clock locking indicator for DSSS modulation

true or 1 (default) | false or 0

Clock locking indicator for DSSS modulation, specified as a numeric or logical value of 1 (true) or 0 (false). This property corresponds to the locked clocks bit (bit b2) of the *SERVICE* field as specified in Section 17.2.3.5 of [1]. To indicate that the physical layer (PHY) implementation derives its transmit frequency clock and symbol clock from the same oscillator, set this property to 1 (true). For more information, see Sections 17.2.3.5 and 19.1.3 of [1].

Note Section 19.3.2.2 of [1] specifies that the locked clocks bit must be 1 for all extended rate PHY (ERP) systems when transmitting at any of these rates:

- An optional ERP-packet binary convolutional coding (ERP-PBCC) rate
- A data rate described in Section 17 of [1]

Therefore, to model ERP systems, you must set this property to 1 (true).

Data Types: logical

PSDULength — PSDU length

1000 (default) | integer in the interval [0, 4095]

Physical layer convergence procedure (PLCP) service data unit (PSDU) length, in bytes, specified as an integer in the interval [0, 4095].

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the interval [1, 8]

Number of transmit antennas, specified as an integer in the interval [1, 8].

Dependencies

This property applies only when you set the ChannelBandwidth property to 'CBW20'.

Data Types: double

Examples

Create Non-HT Format Configuration Object

Create a wlanNonHTConfig object for OFDM operation for a PSDU length of 2048 bytes.

```
cfgNHT = wlanNonHTConfig('Modulation','OFDM');  
cfgNHT.PSDULength = 2048;  
cfgNHT
```

```
cfgNHT =  
    wlanNonHTConfig with properties:
```

```
        Modulation: 'OFDM'  
    ChannelBandwidth: 'CBW20'  
             MCS: 0  
        PSDULength: 2048  
    NumTransmitAntennas: 1
```

Create Non-HT Format Configuration Object for DSSS Modulation

Create a wlanNonHTConfig object for DSSS operation for a PSDU length of 2048 bytes.

```
cfgNHT = wlanNonHTConfig('Modulation','DSSS','PSDULength',2048)
```

```
cfgNHT =  
    wlanNonHTConfig with properties:
```

```

Modulation: 'DSSS'
DataRate: '1Mbps'
LockedClocks: 1
PSDULength: 2048

```

More About

OFDM PLCP Timing Parameters

Section 18 of [1] specifies OFDM PLCP 5-MHz, 10-MHz, and 20-MHz channel bandwidth operation.

Timing parameters associated with the OFDM PLCP are listed in this table:³¹.

Parameter	Value	20-MHz Channel Bandwidth	10-MHz Channel Bandwidth	5-MHz Channel Bandwidth
N_{SD} : Number of data subcarriers	48	48	48	48
N_{SP} : Number of pilot subcarriers	4	4	4	4
N_{ST} : Total number of subcarriers	$N_{SD} + N_{SP}$	52	52	52
$\Delta / >_F$: Subcarrier frequency spacing, in MHz	(Channel bandwidth) / 64	0.3125	0.15625	0.078125

31. IEEE Std 802.11-2012 Adapted and reprinted with permission from IEEE. Copyright IEEE 2012. All rights reserved.

Parameter	Value	20-MHz Channel Bandwidth	10-MHz Channel Bandwidth	5-MHz Channel Bandwidth
T_{FFT} : Inverse Fast Fourier Transform (IFFT) / Fast Fourier Transform (FFT) period, in μs	$1 / \Delta_F$	3.2	6.4	12.8
T_{PREAMBLE} : PLCP preamble duration, in μs	$T_{\text{SHORT}} + T_{\text{LONG}}$	16	32	64
T_{SIGNAL} : Duration of the L-SIG symbol, in μs	$T_{\text{GI}} + T_{\text{FFT}}$	4	8	16
T_{GI} : GI duration, in μs	$T_{\text{FFT}}/4$	0.8	1.6	3.2
T_{GI2} : Training symbol GI duration, in μs	$T_{\text{FFT}}/2$	1.6	3.2	6.4
T_{SYM} : Symbol interval, in μs	$T_{\text{GI}} + T_{\text{FFT}}$	4	8	16
T_{SHORT} : L-STF duration, in μs	$10 \times T_{\text{FFT}} / 4$	8	16	32
T_{LONG} : L-LTF duration, in μs	$T_{\text{GI2}} + 2 \times T_{\text{FFT}}$	8	16	32
Note The standard refers to operation at 10 MHz as “half-clocked” and operation at 5 MHz as “quarter-clocked”.				

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11ad-2012. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications — Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHESUConfig | wlanHTConfig | wlanSIGConfig | wlanVHTConfig

Functions

wlanNonHTData | wlanNonHTDataRecover | wlanNonHTOFDMInfo | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

“Packet Size and Duration Dependencies”

Introduced in R2015b

wlanRecoveryConfig

Create data recovery configuration object

Description

The `wlanRecoveryConfig` object is a WLAN configuration object for recovering data from IEEE 802.11 transmissions.

Creation

Syntax

```
cfgRec = wlanRecoveryConfig  
cfgRec = wlanRecoveryConfig(Name,Value)
```

Description

`cfgRec = wlanRecoveryConfig` creates a configuration object that initializes parameters for use in recovery of signal and data information.

`cfgRec = wlanRecoveryConfig(Name,Value)` creates an information recovery configuration object that overrides the default settings using one or more `Name, Value` pair arguments.


At run time, the calling function validates object settings for properties relevant to the operation of that function.

Properties

OFDMSymbolOffset — OFDM symbol sampling offset

0.75 (default) | scalar in the interval [0, 1]

OFDM symbol sampling offset represented as a fraction of the cyclic prefix (CP) length, specified as a scalar in the interval [0, 1]. The value you specify indicates the start location for OFDM demodulation relative to the beginning of the cyclic prefix. The value 0 represents the start of the cyclic prefix and the value 1 represents the end of the cyclic prefix.

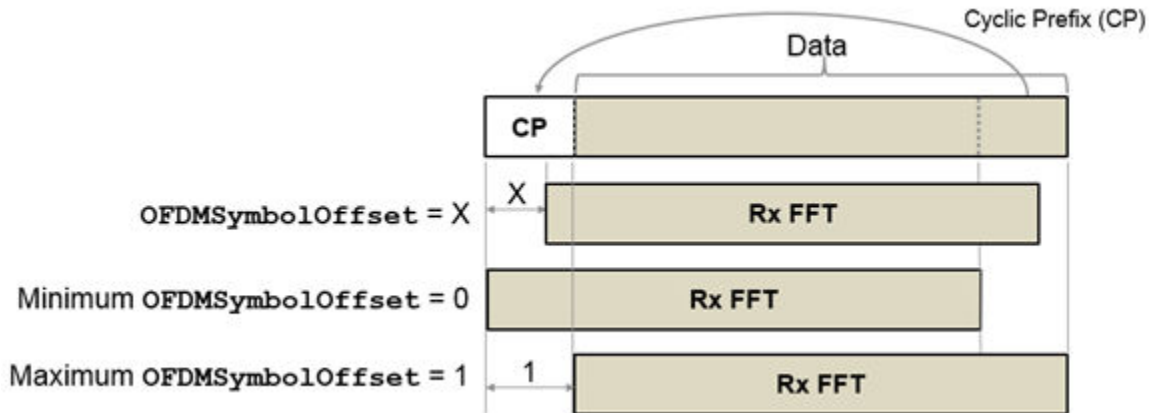

Data Types: double

EqualizationMethod — Equalization method

'MMSE' (default) | 'ZF'

Equalization method, specified as one of these values:

- 'MMSE' — The receiver uses a minimum mean squared error equalizer.
- 'ZF' — The receiver uses a zero-forcing equalizer.

Data Types: char | string

PilotPhaseTracking — Pilot phase tracking

'PreEQ' (default) | 'None'

Pilot phase tracking, specified as one of these values:

- 'PreEQ' — Enable pilot phase tracking, which is performed before any equalization operation.
- 'None' — Disable pilot phase tracking.

Data Types: `char` | `string`

MaximumLDPCIterationCount — Maximum number of decoding iterations in LDPC

12 (default) | positive integer

Maximum number of decoding iterations in low-density parity check (LDPC), specified as a positive integer. This argument applies when channel coding is set to LDPC for the user of interest.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: `double`

EarlyTermination — Enable early termination of LDPC decoding

`false` or `0` (default) | `true` or `1`

Enable early termination of LDPC decoding, specified as a logical value of `1` (`true`) or `0` (`false`). This property applies when channel coding is set to LDPC for the user of interest.

- When set to `0` (`false`), LDPC decoding completes the number of iterations specified by the `MaximumLDPCIterationCount`, regardless of parity check status.
- When set to `true`, LDPC decoding terminates when all parity-checks are satisfied.

For information on channel coding options, see the 802.11 format configuration object of interest.

Data Types: `logical`

Examples

Create wlanRecoveryConfig Object

Create an information recovery configuration object using a `Name,Value` pairs to update the equalization method and OFDM symbol sampling offset.

```
cfgRec = wlanRecoveryConfig('EqualizationMethod','ZF', ...  
    'OFDMSymbolOffset',0.5)
```

```
cfgRec =  
    wlanRecoveryConfig with properties:  
  
        OFDMSymbolOffset: 0.5000  
        EqualizationMethod: 'ZF'  
        PilotPhaseTracking: 'PreEQ'  
        MaximumLDPCIterationCount: 12  
        EarlyTermination: 0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Functions

wlanHTDataRecover | wlanHTSIGRecover | wlanLSIGRecover |
wlanNonHTDataRecover | wlanVHTDataRecover | wlanVHTSIGAREcover |
wlanVHTSIGBREcover

Objects

wlanHERecoveryConfig | wlanHTConfig | wlanNonHTConfig | wlanVHTConfig

Introduced in R2019b

wlanS1GConfig

Create S1G-format configuration object

Description

The `wlanS1GConfig` object is a sub-1-GHz-format (S1G-format) configuration object for the WLAN S1G packet format.

Creation

Syntax

```
cfgS1G = wlanS1GConfig  
cfgS1G = wlanS1GConfig(Name,Value)
```

Description

`cfgS1G = wlanS1GConfig` creates a configuration object that initializes parameters for an IEEE 802.11 S1G-format “PPDU” on page 3-141.

`cfgS1G = wlanS1GConfig(Name,Value)` sets properties using one or more name-value pair arguments. Enclose each property name in quotation marks. For example, `wlanS1GConfig('ChannelBandwidth','CBW4','STBC',true)` specifies an S1G format with a channel bandwidth of 4 MHz and space-time block coding enabled.

Properties

ChannelBandwidth — Channel bandwidth of PPDU transmission

'CBW2' (default) | 'CBW1' | 'CBW4' | 'CBW8' | 'CBW16'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW1' - Channel bandwidth of 1 MHz
- 'CBW2' - Channel bandwidth of 2 MHz
- 'CBW4' - Channel bandwidth of 4 MHz
- 'CBW8' - Channel bandwidth of 8 MHz
- 'CBW16' - Channel bandwidth of 16 MHz

Data Types: char | string

Preamble — Preamble type

'Short' (default) | 'Long'

Preamble type, specified as 'Short' or 'Long'.

Dependencies

This property applies only when you set the ChannelBandwidth property to a value other than 'CBW1'.

Data Types: char | string

NumUsers — Number of users

1 (default) | 2 | 3 | 4

Number of users, specified as 1, 2, 3, or 4.

Data Types: double

UserPositions — User positions

[0 1] (default) | vector of integers

User positions, specified as a 1-by-NumUsers vector of integers in the interval [0, 3] in strictly increasing order.

Example: [0 2 3] specifies the positions for three users. The first user occupies position 0, the second user occupies position 2, and the third user occupies position 3.

Dependencies

This property applies only when you specify the NumUsers property as a value greater than 1.

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as 1, 2, 3, or 4.

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer in the interval [1, 4] | row vector of integers

Number of space-time streams in the transmission, specified as a 1-by-NumUsers vector of integers in the interval [1, 4].

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies only when you set the NumTransmitAntennas and NumSpaceTimeStreams properties to the same value.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size N_{STS} -by- N_{T} , where:
 - N_{STS} is the number of space-time streams;
 - N_{T} is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size N_{ST} -by- N_{STS} -by- N_{T} , where N_{ST} is the number of occupied subcarriers. The value of N_{ST} is the sum of the occupied data and pilot subcarriers. The ChannelBandwidth property determines the value of N_{ST} . In this case, each occupied subcarrier has its own spatial mapping matrix.

This table shows the ChannelBandwidth setting and the corresponding N_{ST} :

ChannelBandwidth	Number of Occupied Subcarriers, N_{ST}	Number of Data Subcarriers	Number of Pilot Subcarriers
'CBW1'	26	24	2
'CBW2'	56	52	4
'CBW4'	114	108	6
'CBW8'	242	234	8
'CBW16'	484	468	16

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. For more information, see Section 20.3.11.11.2 of [1]. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: $[0.5 \ 0.3; \ 0.4 \ 0.4; \ 0.5 \ 0.8]$ represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the SpatialMapping property to 'Custom'.

Data Types: double

Complex Number Support: Yes

Beamforming — Enable beamforming in a long-preamble packet

true or 1 (default) | false or 0

Enable beamforming in a long-preamble packet, specified as a numeric or logical value of 1 (true) or 0 (false). To apply a beamforming steering matrix, set this property to 1 (true). The SpatialMappingMatrix property specifies the beamforming steering matrix.

Dependencies

This property applies only when all of these conditions are satisfied:

- The Preamble property is set to 'Long'.
- The NumUsers property is set to 1.

- The `SpatialMapping` property is set to 'Custom'.

Data Types: `logical`

STBC — Enable space-time block coding

`false` or `0` (default) | `true` or `1`

Enable space-time block coding (STBC) of the PDU data field for all users, specified as a numeric or logical value of `1` (`true`) or `0` (`false`). STBC transmits multiple copies of the data stream across assigned antennas.

- When you set this property to `0` (`false`), STBC is not applied to the data field. The number of space-time streams is equal to the number of spatial streams.
- When you set this property to `1` (`true`), STBC is applied to the data field. The number of space-time streams is twice the number of spatial streams.

For more information, see Section 22.3.10.9.4 of [2].

Dependencies

This property applies only when the `NumUsers` property is `1`.

Data Types: `logical`

MCS — Modulation and coding scheme

`0` (default) | integer in the interval `[0, 10]` | vector of integers

Modulation and coding scheme specified as one of these values:

- an integer in the interval `[0, 10]`, applicable when the `NumUsers` property is `1`
- a 1-by-`NumUsers` vector of integers in the interval `[0, 10]`.

This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	1/2
1	Quadrature phase-shift keying (QPSK)	1/2
2	QPSK	3/4

MCS	Modulation	Coding Rate
3	16-point quadrature amplitude modulation (16-QAM)	1/2
4	16-QAM	3/4
5	64-QAM	2/3
6	64-QAM	3/4
7	64-QAM	5/6
8	256-QAM	3/4
9	256-QAM	5/6
10	BPSK	1/2

Data Types: double

ChannelCoding — FEC coding type

'BCC' (default)

This property is read-only.

Forward error correction (FEC) coding type, specified as 'BCC'. The wlanS1GConfig object supports only binary convolutional coding (BCC).

Data Types: char

APEPLength — APEP length

256 (default) | nonnegative integer | vector of nonnegative integers

Aggregated MPDU (A-MPDU) pre-end-of-frame (pre-EOF) padding (APEP) length, in bytes.

- When the NumUsers property is 1, specify this property as a nonnegative integer in the interval $[0, 2^{16} - 1]$.
- When the NumUsers property is a value other than 1, specify this property as a 1-by-NumUsers vector of integers in the interval $[0, 2^{16} - 1]$.
- For a null data packet (NDP), set this property to 0.

The wlanS1GConfig uses this property to determine the number of OFDM symbols in the data field. For more information, see Table 22-1 of [2].

Note This object supports only aggregated data transmission.

Data Types: double

PSDULength — PSDU length

nonnegative integer

This property is read-only.

Physical layer convergence procedure (PLCP) service data unit (PSDU) length, in bytes, specified as an integer. The `wlanS1GConfig` object calculates this property internally based on other properties.

Data Types: double

GuardInterval — Guard interval (cyclic prefix) duration

'Long' (default) | 'Short'

Guard interval (cyclic prefix) duration for the data field within a packet, specified as one of these values:

- 'Long' - Guard interval duration of 800 ns
- 'Short' - Guard interval duration of 400 ns

Note For S1G format, the first OFDM symbol within the data field always has a long guard interval, even when you set this property to 'Short'.

Data Types: char | string

GroupID — Group identification number

1 (default) | integer in the interval [1, 62]

Group identification number, specified as an integer in the interval [1, 62]. The group identification number is signaled during a multiuser transmission.

Dependencies

This property applies only when you set the `Preamble` property to 'Long' and the `NumUsers` property to a value greater than 1.

Data Types: double

PartialAID — Abbreviated indication of PSDU recipients

37 (default) | integer in the interval [0, 511]

Abbreviated indication of the PSDU recipients, specified as an integer in the interval [0, 511].

- When you set the `UplinkIndication` property to 1 (`true`), the partial identification number is the last nine bits of the basic service set identifier (BSSID). This property must be an integer in the interval [0, 511].
- When you set the `UplinkIndication` property to 0 (`false`), the partial identification number is an identifier that combines the association ID with the BSSID of its serving AP. This property must be an integer in the interval [0, 63].

For more information, see Table 22-1 of [2].

Data Types: `double`

UplinkIndication — Uplink indication

`false` or 0 (default) | `true` or 1

Uplink indication, specified as a numeric or logical value of 1 (`true`) or 0 (`false`). To indicate that the PPDU is sent on a downlink transmission, set this property to 0 (`false`). To indicate that the PPDU is sent on an uplink transmission, set this property to 1 (`true`).

Dependencies

This property applies only when you set the `ChannelBandwidth` property to a value other than 'CBW1' and the `NumUsers` property to 1.

Data Types: `logical`

Color — AP color identifier

0 (default) | integer in the interval [0, 7]

Access point (AP) color identifier, specified as an integer in the interval [0, 7]. An AP includes a color number for the basic service set (BSS). An S1G station (STA) can use the color setting to determine if the transmission is within a BSS with which it is associated. The STA can terminate the reception process for transmissions received from a BSS with which it is not associated.

Dependencies

This property applies only when these conditions are satisfied:

- The ChannelBandwidth property is not 'CBW1'.
- The NumUsers property is 1.
- The UplinkIndication property is 0 (false).

Data Types: double

TravelingPilots — Enable traveling pilots

false or 0 (default) | true or 1

Enable traveling pilots, specified as a numeric or logical value of 1 (true) or 0 (false). To specify non-constant pilot locations, set this property to 1 (true). Traveling pilots allow a receiver to track a changing channel due to Doppler spread.

Data Types: logical

ResponseIndication — Response indication type

'None' (default) | 'NDP' | 'Normal' | 'Long'

Response indication type, specified as 'None', 'NDP', 'Normal', or 'Long'. This information is used to indicate the presence and type of frame that will be sent a short interframe space (SIFS) after the current frame transmission. The value to which you set this property sets the response indication field, which is transmitted in these fields:

- The SIG2 field of the S1G_SHORT preamble
- The SIG-A-2 field of the S1G_LONG preamble
- The SIG field of the S1G_1M preamble

Data Types: char | string

RecommendSmoothing — Recommend smoothing for channel estimation

true or 1 (default) | false or 0

Recommend smoothing for channel estimation, specified as a numeric or logical value of 1 (true) or 0 (false).

- If the frequency profile does not vary across the channel, the receiver sets this property to 1 (true). In this case, frequency-domain smoothing is recommended as part of channel estimation.
- If the frequency profile varies across the channel, the receiver sets this property to 0 (false). In this case, frequency-domain smoothing is not recommended as part of channel estimation.

Data Types: logical

Object Functions

packetFormat Return WLAN packet format

Examples

Create wlanS1GConfig Object for Single User

Create an S1G configuration object with default settings for a single user. Override the default by specifying a 4 MHz channel bandwidth and short preamble configuration.

```
cfgS1G = wlanS1GConfig;
cfgS1G.ChannelBandwidth = 'CBW4';
cfgS1G.Preamble = 'Short';
cfgS1G
```

```
cfgS1G =
  wlanS1GConfig with properties:

    ChannelBandwidth: 'CBW4'
      Preamble: 'Short'
      NumUsers: 1
    NumTransmitAntennas: 1
    NumSpaceTimeStreams: 1
      SpatialMapping: 'Direct'
        STBC: 0
        MCS: 0
      APEPLength: 256
      GuardInterval: 'Long'
      PartialAID: 37
    UplinkIndication: 0
      Color: 0
    TravelingPilots: 0
    ResponseIndication: 'None'
    RecommendSmoothing: 1

  Read-only properties:
    ChannelCoding: 'BCC'
```

PSDULength: 261

Create wlanS1GConfig Object for Two Users

Create an S1G configuration object that assigns a 2 MHz bandwidth and two users. Use a combination of Name,Value pairs and in-line initialization to change default settings. In vector-valued properties, each element applies to a specific user.

```
cfgMU = wlanS1GConfig('ChannelBandwidth','CBW2', ...  
    'Preamble','Long', ...  
    'NumUsers',2, ...  
    'GroupID',2, ...  
    'NumTransmitAntennas', 2);  
cfgMU.NumSpaceTimeStreams = [1 1];  
cfgMU.MCS = [4 8];  
cfgMU.APEPLength = [1024 2048];  
cfgMU
```

```
cfgMU =  
    wlanS1GConfig with properties:  
  
        ChannelBandwidth: 'CBW2'  
            Preamble: 'Long'  
            NumUsers: 2  
            UserPositions: [0 1]  
        NumTransmitAntennas: 2  
        NumSpaceTimeStreams: [1 1]  
            SpatialMapping: 'Direct'  
                MCS: [4 8]  
            APEPLength: [1024 2048]  
            GuardInterval: 'Long'  
            GroupID: 2  
            TravelingPilots: 0  
        ResponseIndication: 'None'  
  
        Read-only properties:  
            ChannelCoding: 'BCC'  
            PSDULength: [1031 2065]
```

NumUsers is set to 2 and the user-dependent properties are two-element vectors.

Create WLAN S1G Configuration Object and Return Packet Format

Create an S1G configuration object with default property values.

```
cfgS1G = wlanS1GConfig;
```

Compute and display the packet format. The default properties specify a transmission with short preamble.

```
format = packetFormat(cfgS1G);  
disp(format)
```

S1G-Short

Now create an S1G configuration object, specifying a long preamble.

```
cfgS1GLongPreamble = wlanS1GConfig('Preamble','Long');
```

Compute and display the packet format.

```
format = packetFormat(cfgS1GLongPreamble);  
disp(format)
```

S1G-Long

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11-2012. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology

— Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

[2] IEEE 802.11ac-2013. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHESUConfig | wlanHTConfig | wlanNonHTConfig | wlanVHTConfig

Functions

wlanSIGDemodulate | wlanSIGOFDMInfo | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

"Packet Size and Duration Dependencies"

Introduced in R2016b

wlanTGacChannel

Filter signal through 802.11ac multipath fading channel

Description

The `wlanTGacChannel` System object filters an input signal through an 802.11ac (TGac) multipath fading channel.

The fading processing assumes the same parameters for all N_T -by- N_R links of the TGac channel, where N_T is the number of transmit antennas and N_R is the number of receive antennas. Each link comprises all multipaths for that link.

To filter an input signal using a TGac multipath fading channel:

- 1 Create the `wlanTGacChannel` object and set its properties.
- 2 Call the object with arguments, as if it were a function.

To learn more about how System objects work, see [What Are System Objects? \(MATLAB\)](#).

Creation

Syntax

```
tgac = wlanTGacChannel  
tgac = wlanTGacChannel(Name,Value)
```

Description

`tgac = wlanTGacChannel` creates a TGac fading channel System object, `tgac`. This object filters a real or complex input signal through the TGac channel to obtain the channel-impaired signal.

`tgac = wlanTGacChannel(Name,Value)` creates a TGac channel object, `tgac`, and sets properties using one or more name-value pairs. Enclose each property name in

quotes. For example, `wlanTGacChannel('NumReceiveAntennas',2,'SampleRate',10e6)` creates a TGac channel with two receive antennas and a 10-MHz sample rate.

Properties

Unless otherwise indicated, properties are *nontunable*, which means you cannot change their values after calling the object. Objects lock when you call them, and the `release` function unlocks them.

If a property is *tunable*, you can change its value at any time.

For more information on changing property values, see System Design in MATLAB Using System Objects (MATLAB).

SampleRate — Sample rate of the input signal

80e6 (default) | real positive scalar

Sample rate of the input signal in Hz, specified as a real positive scalar.

Data Types: `double`

DelayProfile — Delay profile model

'Model-B' (default) | 'Model-A' | 'Model-C' | 'Model-D' | 'Model-E' | 'Model-F'

Delay profile model, specified as 'Model-A', 'Model-B', 'Model-C', 'Model-D', 'Model-E', or 'Model-F'. To enable the `FluorescentEffect` property, select either 'Model-D' or 'Model-E'.

The table summarizes the models properties before the bandwidth reduction factor.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance (m)	5	5	5	10	20	30
RMS delay spread (ns)	0	15	30	50	100	150
Maximum delay (ns)	0	80	200	390	730	1050

Parameter	Model					
	A	B	C	D	E	F
Rician K-factor (dB)	0	0	0	3	6	6
Number of taps	1	9	14	18	18	18
Number of clusters	1	2	2	3	4	6

The number of clusters represents the number of independently modeled propagation paths.

Data Types: char | string

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. The default is 'CBW80', which corresponds to an 80 MHz channel bandwidth.

Data Types: char | string

CarrierFrequency — RF carrier frequency

5.25e9 (default) | real positive scalar

RF carrier frequency in Hz, specified as a real positive scalar.

Data Types: double

EnvironmentalSpeed — Speed of the scatterers

0.089 (default) | real positive scalar

Speed of the scatterers in km/h, specified as a real positive scalar.

Data Types: double

TransmitReceiveDistance — Distance between transmitter and receiver

3 (default) | real positive scalar

Distance between the transmitter and receiver in meters, specified as a real positive scalar.

TransmitReceiveDistance is used to compute the path loss, and to determine whether the channel has a line of sight (LOS) or non line of sight (NLOS) condition. The path loss

and standard deviation of shadow fading loss depend on the separation between the transmitter and the receiver.

Data Types: `double`

NormalizePathGains — Normalize path gains

`true` (default) | `false`

Normalize path gains, specified as `true` or `false`. To normalize the fading processes such that the total power of the path gains, averaged over time, is 0 dB, set this property to `true`. When you set this property to `false`, the path gains are not normalized.

Data Types: `logical`

UserIndex — User index for single or multi-user scenario

0 (default) | nonnegative integer

User index, specified as a nonnegative integer. This property specifies the single user or a particular user in a multiuser scenario.

Data Types: `double`

TransmissionDirection — Transmission direction

'Downlink' (default) | 'Uplink'

Transmission direction of the active link, specified as either 'Downlink' or 'Uplink'.

Data Types: `char` | `string`

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4 | 5 | 6 | 7 | 8

Number of transmit antennas, specified as a positive integer from 1 to 8.

Data Types: `double`

TransmitAntennaSpacing — Distance between transmit antenna elements

0.5 (default) | real positive scalar

Distance between transmit antenna elements, specified as a real positive scalar expressed in wavelengths.

`TransmitAntennaSpacing` supports uniform linear arrays only.

Dependencies

This property applies only when NumTransmitAntennas is greater than 1.

Data Types: double

NumReceiveAntennas — Number of receive antennas

1 (default) | 2 | 3 | 4 | 5 | 6 | 7 | 8

Number of receive antennas, specified as a positive integer from 1 to 8.

Data Types: double

ReceiveAntennaSpacing — Distance between receive antenna elements

0.5 (default) | real positive scalar

Distance between receive antenna elements, specified as a real positive scalar expressed in wavelengths.

ReceiveAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumReceiveAntennas is greater than 1.

Data Types: double

LargeScaleFadingEffect — Large-scale fading effects

'None' (default) | 'Pathloss' | 'Shadowing' | 'Pathloss and shadowing'

Large-scale fading effects applied in the channel, specified as 'None', 'Pathloss', 'Shadowing', or 'Pathloss and shadowing'.

Data Types: char | string

FluorescentEffect — Fluorescent effect

true (default) | false

Fluorescent effect, specified as true or false. To include Doppler effects from fluorescent lighting, set this property to true.

Dependencies

The FluorescentEffect property applies only when DelayProfile is 'Model-D' or 'Model-E'.

Data Types: `logical`

PowerLineFrequency — Power line frequency

`'60Hz'` (default) | `'50Hz'`

Power line frequency in Hz, specified as `'50Hz'` or `'60Hz'`.

The power line frequency is 60 Hz in the United States and 50 Hz in Europe.

Dependencies

This property applies only when you set `FluorescentEffect` to `true` and `DelayProfile` to `'Model-D'` or `'Model-E'`.

Data Types: `char` | `string`

NormalizeChannelOutputs — Normalize channel outputs

`true` (default) | `false`

Normalize channel outputs by the number of receive antennas, specified as a `true` or `false`.

Data Types: `logical`

ChannelFiltering — Enable channel filtering

`true` (default) | `false`

Enable channel filtering, specified as a logical value of `true` or `false`. To enable channel filtering, set this property to `true`. To disable channel filtering, set this property to `false`.

Note If you set this property to `false`, the `step` object function does not accept an input signal. In this case, the `NumSamples` and `SampleRate` properties determine the duration of the fading process realization.

Data Types: `logical`

NumSamples — Number of time-domain samples

`320` (default) | `positive integer`

Number of time-domain samples used to get path gain samples, specified as a positive integer.

Dependencies

To enable this property, set the ChannelFiltering property to false.

Data Types: double

RandomStream — Source of random number stream

'Global stream' (default) | 'mt19937ar with seed'

Source of random number stream, specified as 'Global stream' or 'mt19937ar with seed'.

If you set RandomStream to 'Global stream', the current global random number stream generates normally distributed random numbers. In this case, the reset function resets the filters only.

If you set RandomStream to 'mt19937ar with seed', the mt19937ar algorithm generates normally distributed random numbers. In this case, the reset function also reinitializes the random number stream to the value of the Seed property.

Data Types: char | string

Seed — Initial seed of mt19937ar random number stream

73 (default) | nonnegative integer

Initial seed of an mt19937ar random number stream, specified as a nonnegative integer. The Seed property reinitializes the mt19937ar random number stream in the reset function.

Dependencies

This property applies only when you set the RandomStream property to 'mt19937ar with seed'.

Data Types: double

PathGainsOutputPort — Enable path gain output

false (default) | true

Enable path gain output computation, specified as true or false.

Data Types: logical

Usage

Syntax

```
y = tgac(x)
[y,pathGains] = tgac(x)
```

Description

`y = tgac(x)` filters input signal `x` through the TGac fading channel defined by the `wlanTGacChannel` System object, `tgac`, and returns the result in `y`.

`[y,pathGains] = tgac(x)` also returns in `pathGains` the TGac channel path gains of the underlying fading process.

This syntax applies when you set the `PathGainsOutputPort` property to `true`.

Input Arguments

x — Input signal

complex matrix

Input signal, specified as a real or complex N_S -by- N_T matrix, where:

- N_S is the number of samples.
- N_T is the number of transmit antennas and must be equal to the `NumTransmitAntennas` property value.

Data Types: `double`

Complex Number Support: Yes

Output Arguments

y — Output signal

complex matrix

Output signal, returned as an N_S -by- N_R complex matrix, where:

- N_S is the number of samples.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value.

Data Types: double

pathGains — Path gains of the fading process

complex array

Path gains of the fading process, returned as an N_S -by- N_P -by- N_T -by- N_R complex array, where:

- N_S is the number of samples.
- N_P is the number of resolvable paths, that is, the number of paths defined for the case specified by the DelayProfile property.
- N_T is the number of transmit antennas and is equal to the NumTransmitAntennas property value.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value.

Data Types: double

Object Functions

To use an object function, specify the System object as the first input argument. For example, to release system resources of a System object named `obj`, use this syntax:

```
release(obj)
```

Specific to wlanTGacChannel

info Characteristic information about TGn, TGah, TGac, and TGax multipath fading channels

Common to All System Objects

step Run System object algorithm
 release Release resources and allow changes to System object property values and input characteristics

reset Reset internal states of System object

Note reset: If the `RandomStream` property of the System object is set to 'Global stream', the reset function resets the filters only. If you set `RandomStream` to 'mt19937ar with seed', the reset function also reinitializes the random number stream to the value of the `Seed` property.

Examples

Transmit VHT Waveform Through TGac Channel

Generate a VHT waveform and pass it through a TGac SISO channel. Display the spectrum of the resultant signal.

Set the channel bandwidth and the corresponding sample rate.

```
bw = 'CBW80';  
fs = 80e6;
```

Generate a VHT waveform.

```
cfg = wlanVHTConfig;  
txSig = wlanWaveformGenerator(randi([0 1],1000,1),cfg);
```

Create a TGac SISO channel with path loss and shadowing enabled.


```
tgacChan = wlanTGacChannel('SampleRate',fs,'ChannelBandwidth',bw, ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');
```

Pass the VHT waveform through the channel.

```
rxSig = tgacChan(txSig);
```

Plot the spectrum of the received waveform.

```
saScope = dsp.SpectrumAnalyzer('SampleRate',fs,'YLimits',[-120 -40]);  
saScope(rxSig)
```

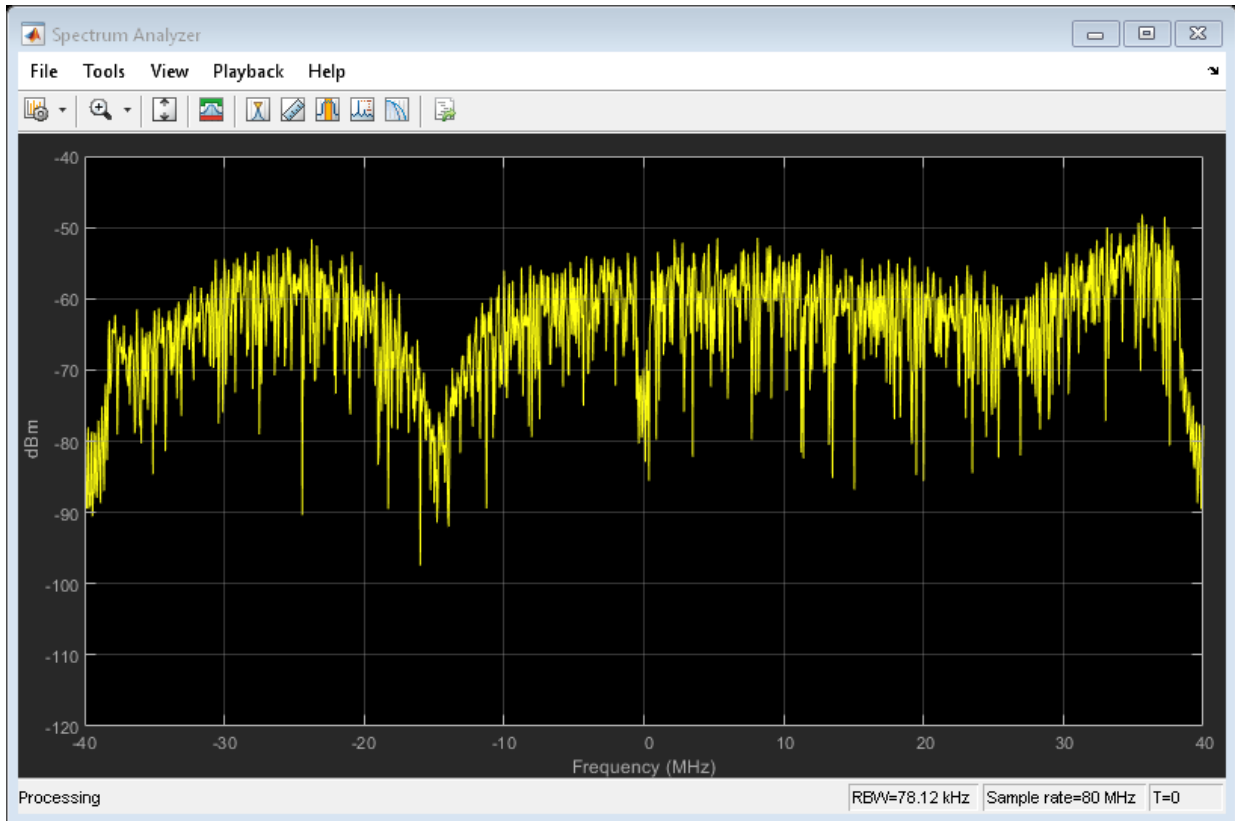

Because path loss and shadowing are enabled, the mean received power across the spectrum is approximately -60 dBm.

Transmit VHT Waveform Through 4x2 MIMO Channel

Create a VHT waveform having four transmit antennas and two space-time streams.

```
cfg = wlanVHTConfig('NumTransmitAntennas',4,'NumSpaceTimeStreams',2, ...
    'SpatialMapping','Fourier');
txSig = wlanWaveformGenerator([1;0;0;1],cfg);
```

Create a 4x2 MIMO TGac channel and disable large-scale fading effects.

```

tgacChan = wlanTGacChannel('SampleRate',80e6,'ChannelBandwidth','CBW80', ...
    'NumTransmitAntennas',4,'NumReceiveAntennas',2, ...
    'LargeScaleFadingEffect','None');

```

Pass the transmit waveform through the channel.


```
rxSig = tgacChan(txSig);
```

Display the spectrum of the two received space-time streams.

```

saScope = dsp.SpectrumAnalyzer('SampleRate',80e6, ...
    'ShowLegend',true, ...
    'ChannelNames',{'Stream 1','Stream 2'});
saScope(rxSig)

```

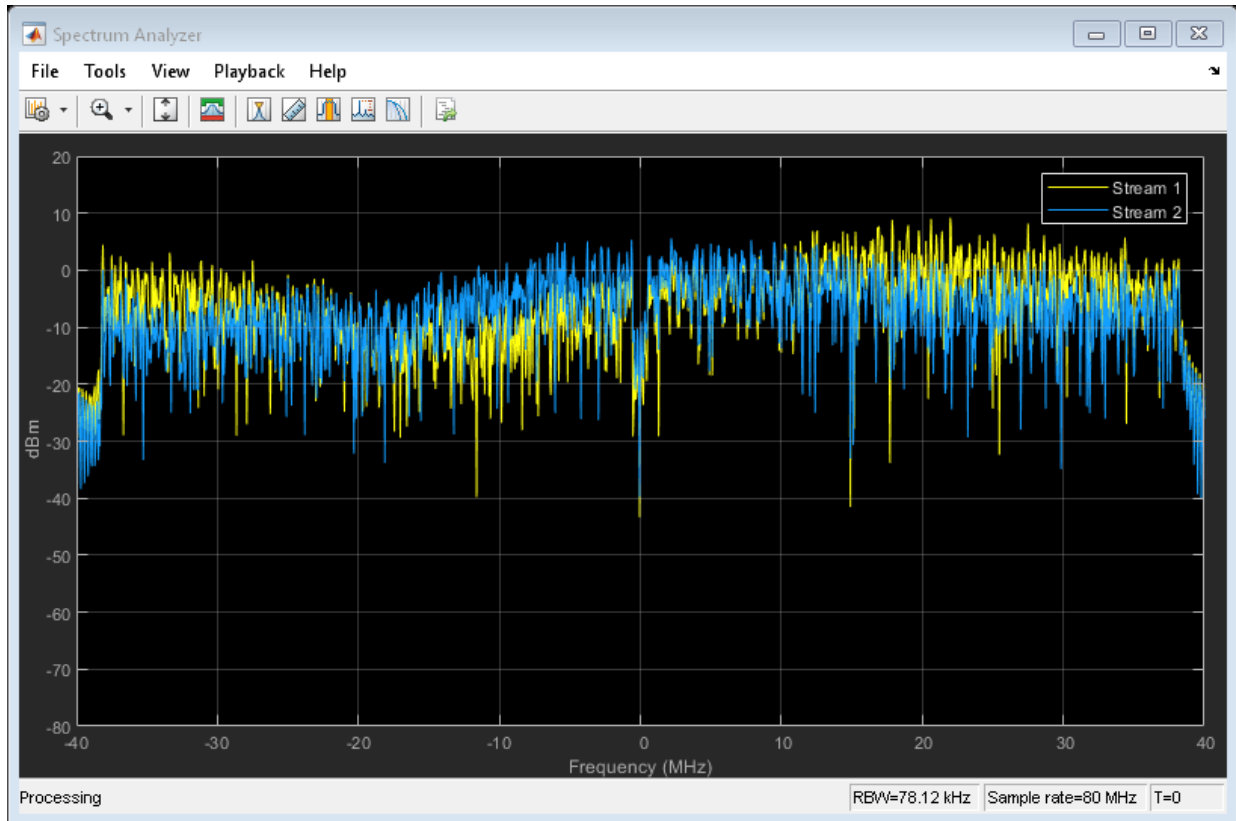

Recover VHT Data from 2x2 MIMO Channel

Transmit a VHT-LTF and a VHT data field through a noisy 2x2 MIMO channel. Demodulate the received VHT-LTF to estimate the channel coefficients. Recover the VHT data and determine the number of bit errors.

Set the channel bandwidth and corresponding sample rate.

```
bw = 'CBW160';
fs = 160e6;
```

Create VHT-LTF and VHT data fields having two transmit antennas and two space-time streams.

```
cfg = wlanVHTConfig('ChannelBandwidth',bw, ...
    'NumTransmitAntennas',2,'NumSpaceTimeStreams',2);
txPSDU = randi([0 1],8*cfg.PSDULength,1);
txLTF = wlanVHTLTF(cfg);
txDataSig = wlanVHTData(txPSDU,cfg);
```

Create a 2x2 MIMO TGac channel.

```
tgacChan = wlanTGacChannel('SampleRate',fs,'ChannelBandwidth',bw, ...
    'NumTransmitAntennas',2,'NumReceiveAntennas',2);
```

Create an AWGN channel noise, setting SNR = 15 dB.

```
chNoise = comm.AWGNChannel('NoiseMethod','Signal to noise ratio (SNR)',...
    'SNR',15);
```

Pass the signals through the TGac channel and noise models.

```
rxLTF = chNoise(tgacChan(txLTF));
rxDataSig = chNoise(tgacChan(txDataSig));
```

Create an AWGN channel for a 160 MHz channel with a 9 dB noise figure. The noise variance, $nVar$, is equal to $kTBF$, where k is Boltzmann's constant, T is the ambient temperature of 290 K, B is the bandwidth (sample rate), and F is the receiver noise figure.

```
nVar = 10^((-228.6 + 10*log10(290) + 10*log10(fs) + 9)/10);
rxNoise = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);
```

Pass the signals through the receiver noise model.

```
rxLTF = rxNoise(rxLTF);  
rxDataSig = rxNoise(rxDataSig);
```

Demodulate the VHT-LTF. Use the demodulated signal to estimate the channel coefficients.

```
dLTF = wlanVHTLTFDemodulate(rxLTF, cfg);  
chEst = wlanVHTLTFChannelEstimate(dLTF, cfg);
```

Recover the data and determine the number of bit errors.

```
rxPSDU = wlanVHTDataRecover(rxDataSig, chEst, nVar, cfg);  
numErr = biterr(txPSDU, rxPSDU)
```

```
numErr = 0
```

Algorithms

The algorithms used to model the TGac channel are based on those used for the TGn channel and are described in `wlanTGnChannel` and [1]. The changes to support the TGac channel include:

- increased bandwidth
- higher-order MIMO
- multi-user MIMO
- reduced Doppler

Complete information on the changes required to support TGac channels can be found in [2].

Increased Bandwidth

TGac channels support bandwidths of up to 1.28 GHz, whereas TGn channels have a maximum bandwidth of 40 MHz. By increasing the sampling rate and decreasing the tap spacing of the power delay profile (PDP), the TGn model is used as the basis for TGac.

The channel sampling rate is increased by a factor of $2^{\lceil \log_2(W/40) \rceil}$, where W is the bandwidth. The PDP tap spacing is reduced by the same factor.

Bandwidth, W	Sampling Rate Expansion Factor	PDP Tap Spacing (ns)
$W \leq 40$ MHz	1	10
40 MHz < $W \leq 80$ MHz	2	5
80 MHz < $W \leq 160$ MHz	4	2.5
160 MHz < $W \leq 320$ MHz	8	1.25
320 MHz < $W \leq 640$ MHz	16	0.625
640 MHz < $W \leq 1280$ MHz	32	0.3125

MIMO Enhancements

The TGn channel model supports no more than 4x4 MIMO, while the TGac model supports 8x8 MIMO.

The TGac model also includes support for multiple users while simultaneous communication takes place between access points and user stations. Accordingly, the TGac model extends the concept of cluster angles of arrival and departure to account for point-to-multipoint transmission. For more details, see [3].

Reduced Doppler

Indoor channel measurements indicate that the magnitude of Doppler assumed in the TGn channel model is too high for stationary users. As such, the TGac channel model uses a reduced environment velocity of 0.089 km/hr. This model assumes a coherence time of 800 ms or, equivalently, an RMS Doppler spread of 0.4 Hz for a 5 GHz carrier frequency.

References

- [1] Erceg, V., L. Schumacher, P. Kyritsi, et al. *TGn Channel Models*. Version 4. IEEE 802.11-03/940r4, May 2004.
- [2] Breit, G., H. Sampath, S. Vermani, et al. *TGac Channel Model Addendum*. Version 12. IEEE 802.11-09/0308r12, March 2010.
- [3] Kermaol, J. P., L. Schumacher, K. I. Pedersen, P. E. Mogensen, and F. Frederiksen. "A Stochastic MIMO Radio Channel Model with Experimental Validation". *IEEE*

Journal on Selected Areas in Communications. Vol. 20, No. 6, August 2002, pp. 1211-1226.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

See “System Objects in MATLAB Code Generation” (MATLAB Coder).

See Also

Objects

`wlanTGahChannel` | `wlanTGaxChannel` | `wlanTGayChannel` | `wlanTGnChannel`

Introduced in R2015b

wlanTGahChannel

Filter signal through 802.11ah multipath fading channel

Description

The `wlanTGahChannel` System object filters an input signal through an 802.11ah (TGah) indoor MIMO channel as specified in [1], following the MIMO modeling approach described in [4].

The fading processing assumes the same parameters for all N_T -by- N_R links of the TGah channel, where N_T is the number of transmit antennas and N_R is the number of receive antennas. Each link comprises all multipaths for that link.

To filter an input signal using a TGah multipath fading channel:

- 1 Create the `wlanTGahChannel` object and set its properties.
- 2 Call the object with arguments, as if it were a function.

To learn more about how System objects work, see [What Are System Objects? \(MATLAB\)](#).

Creation

Syntax

```
tgah = wlanTGahChannel  
tgah = wlanTGahChannel(Name,Value)
```

Description

`tgah = wlanTGahChannel` creates a TGah channel System object, `tgah`. This object filters a real or complex input signal through the TGah channel to obtain the channel-impaired signal.

`tgah = wlanTGahChannel(Name, Value)` creates a TGah channel object, `tgah`, and sets properties using one or more name-value pairs. Enclose each property name in quotes. For example, `wlanTGahChannel('NumReceiveAntennas', 4, 'SampleRate', 4e6)` creates a TGah channel with four receive antennas and a 4 MHz sample rate.

Properties

Unless otherwise indicated, properties are *nontunable*, which means you cannot change their values after calling the object. Objects lock when you call them, and the `release` function unlocks them.

If a property is *tunable*, you can change its value at any time.

For more information on changing property values, see *System Design in MATLAB Using System Objects (MATLAB)*.

SampleRate — Sample rate of the input signal

2e6 (default) | real positive scalar

Sample rate of the input signal in Hz, specified as a real positive scalar.

Data Types: `double`

DelayProfile — Delay profile model

'Model-B' (default) | 'Model-A' | 'Model-C' | 'Model-D' | 'Model-E' | 'Model-F'

Delay profile model, specified as 'Model-A', 'Model-B', 'Model-C', 'Model-D', 'Model-E', or 'Model-F'.

The table summarizes the models properties before the bandwidth reduction factor.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance (m)	5	5	5	10	20	30
RMS delay spread (ns)	0	15	30	50	100	150

Parameter	Model					
	A	B	C	D	E	F
Maximum delay (ns)	0	80	200	390	730	1050
Rician K-factor (dB)	0	0	0	3	6	6
Number of taps	1	9	14	18	18	18
Number of clusters	1	2	2	3	4	6

The number of clusters represents the number of independently modeled propagation paths.

Data Types: char | string

ChannelBandwidth – Channel bandwidth

'CBW2' (default) | 'CBW1' | 'CBW4' | 'CBW8' | 'CBW16'

Channel bandwidth, specified as 'CBW1', 'CBW2', 'CBW4', 'CBW8', or 'CBW16'. The default is 'CBW2', which corresponds to a 2 MHz channel bandwidth.

For channel bandwidths greater than 4 MHz, the TGah channel applies a reduction factor to the multipath spacing of the power delay profile. The reduction factor applied is $2^{\text{ceil}(\log_2(BW/4))}$, where BW is the channel bandwidth in MHz. For more information, see *TGac Channel Model Addendum* [3].

Data Types: char | string

CarrierFrequency – RF carrier frequency

915e6 (default) | real positive scalar

RF carrier frequency in Hz, specified as a real positive scalar.

Data Types: double

EnvironmentalSpeed – Speed of the scatterers

0.089 (default) | real positive scalar

Speed of the scatterers in km/h, specified as a real positive scalar.

Data Types: double

TransmitReceiveDistance – Distance between transmitter and receiver

3 (default) | real positive scalar

Distance between the transmitter and receiver in meters, specified as a real positive scalar.

`TransmitReceiveDistance` is used to compute the path loss, and to determine whether the channel has a line of sight (LOS) or no line of sight (NLOS) condition. The path loss and standard deviation of shadow fading loss depend on the separation between the transmitter and the receiver.

Data Types: `double`

NormalizePathGains — Normalize path gains

`true` (default) | `false`

Normalize path gains, specified as `true` or `false`. To normalize the fading processes such that the total power of the path gains, averaged over time, is 0 dB, set this property to `true` (default). When you set this property to `false`, the path gains are not normalized.

Data Types: `logical`

UserIndex — User index for single or multi-user scenario

0 (default) | nonnegative integer

User index, specified as a nonnegative integer. `UserIndex` specifies the single user or a particular user in a multi-user scenario.

To support a multi-user scenario, a pseudorandom per-user angle-of-arrival (AoA) and angle-of-departure (AoD) rotation is applied. A value of 0 indicates a simulation scenario that does not require per-user angle diversity and assumes the *TGn defined* cluster AoAs and AoDs.

Data Types: `double`

TransmissionDirection — Transmission direction

'Downlink' (default) | 'Uplink'

Transmission direction of the active link, specified as either 'Downlink' or 'Uplink'.

Data Types: `char` | `string`

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as a positive integer from 1 to 4.

Data Types: double

TransmitAntennaSpacing — Distance between transmit antenna elements

0.5 (default) | real positive scalar

Distance between transmit antenna elements, specified as a real positive scalar expressed in wavelengths.

TransmitAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumTransmitAntennas is greater than 1.

Data Types: double

NumReceiveAntennas — Number of receive antennas

1 (default) | 2 | 3 | 4

Number of receive antennas, specified as a positive integer from 1 to 4.

Data Types: double

ReceiveAntennaSpacing — Distance between receive antenna elements

0.5 (default) | real positive scalar

Distance between receive antenna elements, specified as a real positive scalar expressed in wavelengths.

ReceiveAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumReceiveAntennas is greater than 1.

Data Types: double

LargeScaleFadingEffect — Large-scale fading effects

'None' (default) | 'Pathloss' | 'Shadowing' | 'Pathloss and shadowing'

Large-scale fading effects applied in the channel, specified as 'None', 'Pathloss', 'Shadowing', or 'Pathloss and shadowing'.

Data Types: char | string

NumPenetratedFloors — Number of building floors

0 (default) | real positive integer

Number of building floors between the transmitter and the receiver, specified as a real positive integer. Use this property in multiple floor scenarios to account for the floor attenuation loss in the path loss calculation. The default is 0, which represents a communication link between a transmitter and a receiver located on the same floor.

Dependencies

The NumPenetratedFloors property applies only when DelayProfile is 'Model-A' or 'Model-B'.

Data Types: double

FluorescentEffect — Fluorescent effect

true (default) | false

Fluorescent effect, specified as true or false. To include Doppler effects from fluorescent lighting set this property as true.

Dependencies

The FluorescentEffect property applies only when DelayProfile is 'Model-D' or 'Model-E'.

Data Types: logical

PowerLineFrequency — Power line frequency

'60Hz' (default) | '50Hz'

Power line frequency in Hz, specified as '50Hz' or '60Hz'.

The power line frequency is 60 Hz in the United States and 50 Hz in Europe.

Dependencies

This property applies only when you set FluorescentEffect to true and DelayProfile to 'Model-D' or 'Model-E'.

Data Types: char | string

NormalizeChannelOutputs — Normalize channel outputs

true (default) | false

Normalize channel outputs by the number of receive antennas, specified as a `true` or `false`.

Data Types: `logical`

ChannelFiltering — Enable channel filtering

`true` (default) | `false`

Enable channel filtering, specified as a logical value of `true` or `false`. To enable channel filtering, set this property to `true`. To disable channel filtering, set this property to `false`.

Note If you set this property to `false`, the `step` object function does not accept an input signal. In this case, the `NumSamples` and `SampleRate` properties determine the duration of the fading process realization.

Data Types: `logical`

NumSamples — Number of time-domain samples

80 (default) | positive integer

Number of time-domain samples used to get path gain samples, specified as a positive integer.

Dependencies

To enable this property, set the `ChannelFiltering` property to `false`.

Data Types: `double`

RandomStream — Source of random number stream

'Global stream' (default) | 'mt19937ar with seed'

Source of random number stream, specified as 'Global stream' or 'mt19937ar with seed'.

If you set `RandomStream` to 'Global stream', the current global random number stream generates normally distributed random numbers. In this case, the `reset` function resets the filters only.

If you set `RandomStream` to `'mt19937ar with seed'`, the `mt19937ar` algorithm generates normally distributed random numbers. In this case, the `reset` function also reinitializes the random number stream to the value of the `Seed` property.

Data Types: `char` | `string`

Seed — Initial seed of mt19937ar random number stream

73 (default) | nonnegative integer

Initial seed of an `mt19937ar` random number stream, specified as a nonnegative integer. The `Seed` property reinitializes the `mt19937ar` random number stream in the `reset` function.

Dependencies

This property applies only when you set the `RandomStream` property to `'mt19937ar with seed'`.

Data Types: `double`

PathGainsOutputPort — Enable path gain output

false (default) | true

Enable path gain output computation, specified as `true` or `false`.

Data Types: `logical`

Usage

Syntax

```
y = tgah(x)
[y,pathGains] = tgah(x)
```

Description

`y = tgah(x)` filters input signal `x` through the `TGah` fading channel defined by the `wlanTGahChannel` System object, `tgah`, and returns the result in `y`.

`[y,pathGains] = tgah(x)` also returns in `pathGains` the `TGah` channel path gains of the underlying fading process.

This syntax applies when you set the `PathGainsOutputPort` property to `true`.

Input Arguments

x — Input signal

complex matrix

Input signal, specified as a real or complex N_S -by- N_T matrix, where:

- N_S is the number of samples.
- N_T is the number of transmit antennas and must be equal to the `NumTransmitAntennas` property value.

Data Types: `double`

Complex Number Support: Yes

Output Arguments

y — Output signal

complex matrix

Output signal, returned as an N_S -by- N_R complex matrix, where:

- N_S is the number of samples.
- N_R is the number of receive antennas and is equal to the `NumReceiveAntennas` property value.

Data Types: `double`

pathGains — Path gains of the fading process

complex array

Path gains of the fading process, returned as an N_S -by- N_P -by- N_T -by- N_R complex array, where:

- N_S is the number of samples.
- N_P is the number of resolvable paths, that is, the number of paths defined for the case specified by the `DelayProfile` property.
- N_T is the number of transmit antennas and is equal to the `NumTransmitAntennas` property value.

- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value.

Data Types: double

Object Functions

To use an object function, specify the System object as the first input argument. For example, to release system resources of a System object named `obj`, use this syntax:

```
release(obj)
```

Specific to wlanTGahChannel

info Characteristic information about TGn, TGah, TGac, and TGax multipath fading channels

Common to All System Objects

step Run System object algorithm
release Release resources and allow changes to System object property values and input characteristics
reset Reset internal states of System object

Note reset: If the RandomStream property of the System object is set to 'Global stream', the reset function resets the filters only. If you set RandomStream to 'mt19937ar with seed', the reset function also reinitializes the random number stream to the value of the Seed property.

Examples

Pass S1G Waveform Through TGah Channel

Filter an 802.11ah waveform through a TGah channel.

```
cfgS1G = wlanS1GConfig;  
txWaveform = wlanWaveformGenerator([1;0;0;1],cfgS1G);
```

Create a TGah channel object and adjust some default properties. Specify a seed value to produce a repeatable channel output. Create an S1G configuration object and waveform. Pass the S1G waveform through the channel by supplying it as an input to the TGah channel object.

```
tgah = wlanTGahChannel;  
tgah.LargeScaleFadingEffect = 'PathLoss and shadowing';  
tgah.FloorSeparation = 2;  
tgah.RandomStream = 'mt19937ar with seed';  
tgah.Seed = 10;
```

```
channelOutput = tgah(txWaveform);
```

Confirm the channel bandwidth and set the corresponding sample rate.


```
cfgS1G.ChannelBandwidth  
fs = 2e6;
```

```
ans =
```

```
    'CBW2'
```

Plot the spectrum of the channel output waveform.

```
saScope = dsp.SpectrumAnalyzer('SampleRate',fs,'YLimits',[-110 -30]);  
saScope(channelOutput)
```

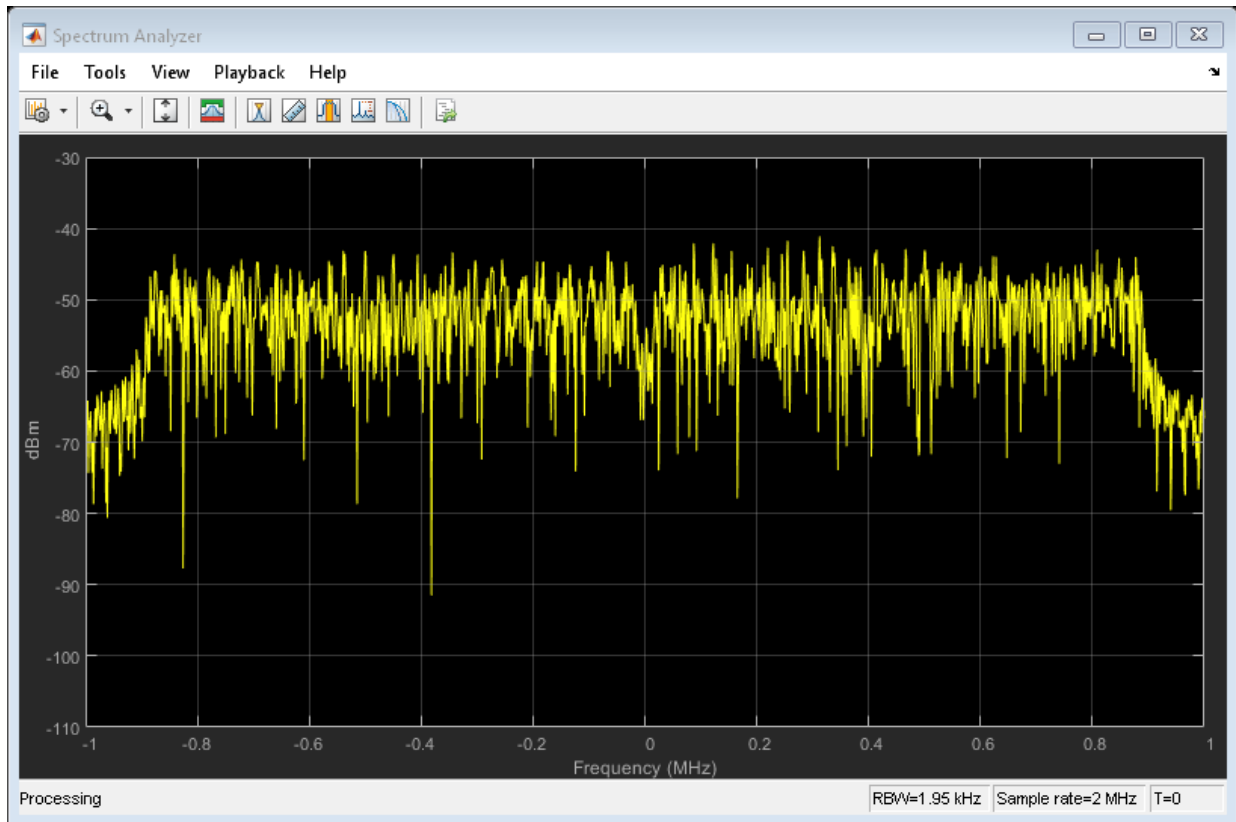

Across the spectrum, the mean power of the channel output waveform is approximately -50 dBm.

TGah Channel Model-B Delay Profile

Plot the delay profile for an impulse waveform passed through a TGah channel.

Create an impulse waveform. Delay the impulse by 10 samples, which is equivalent to 10 ns in time.


```
txWaveform = zeros(100,1);  
txWaveform(11) = 1;
```

Create a TGah channel object. Specify the seed for reproducible results.

```
tgah = wlanTGahChannel;  
tgah.RandomStream = 'mt19937ar with seed';  
tgah.Seed = 10;
```

Set the sample rate so that sampling of the channel multipaths are integer multiples of integer sampling delay.

```
tgah.SampleRate = 1e9;  
  
chOut = tgah(txWaveform);  
plot((0:length(chOut)-1)*1/tgah.SampleRate,abs(chOut));  
xlabel('Time[s]'); ylabel('abs(chOut)');  
title('Channel Power Delay Profile: Model-B')
```

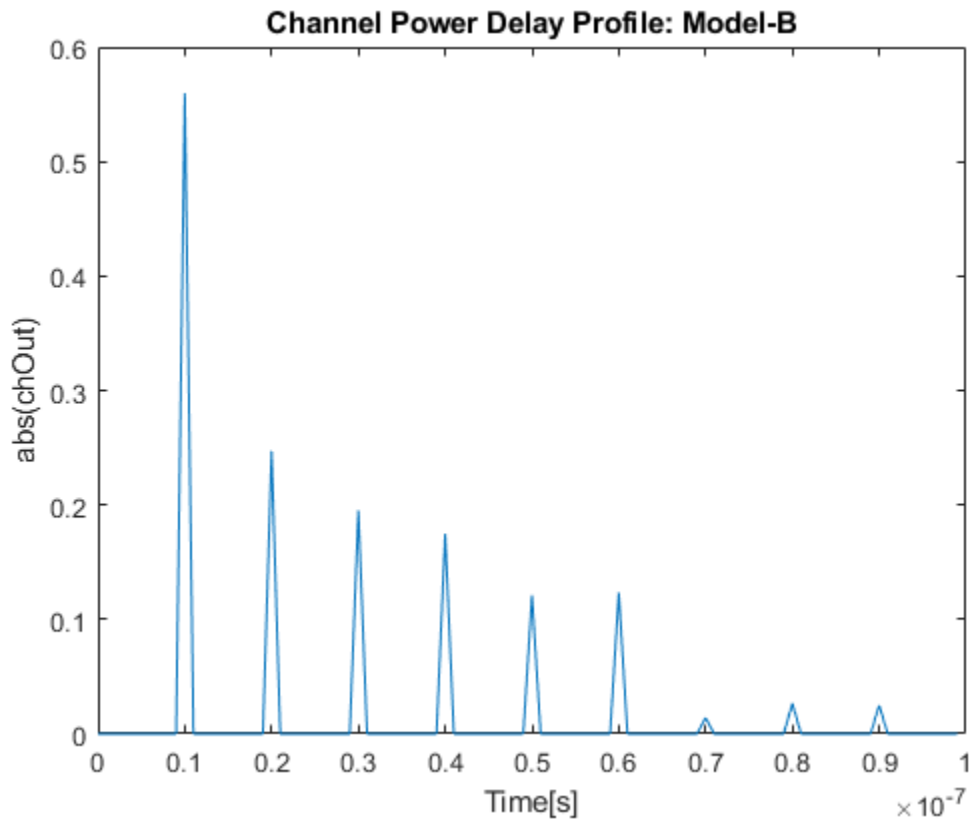

Transmit S1G Waveform Through 4x2 MIMO Channel

Create a S1G waveform generated using four transmit antennas and two spatial streams.

```
cfg = wlanS1GConfig('NumTransmitAntennas',4,'NumSpaceTimeStreams',2, ...  
    'SpatialMapping','Fourier');  
txSig = wlanWaveformGenerator([1;0;0;1],cfg);
```

Create a 4x2 MIMO TGah channel and disable large-scale fading effects.



```
tgahChan = wlanTGahChannel('SampleRate',1e6,'ChannelBandwidth','CBW1', ...  
    'NumTransmitAntennas',4,'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','None');
```

Pass the transmit waveform through the channel.

```
rxSig = tgahChan(txSig);
```

Display the spectrum of the two received space-time streams.

```
saScope = dsp.SpectrumAnalyzer('SampleRate',1e6, ...  
    'ShowLegend',true, ...  
    'ChannelNames',{'Stream 1','Stream 2'});  
saScope(rxSig)
```

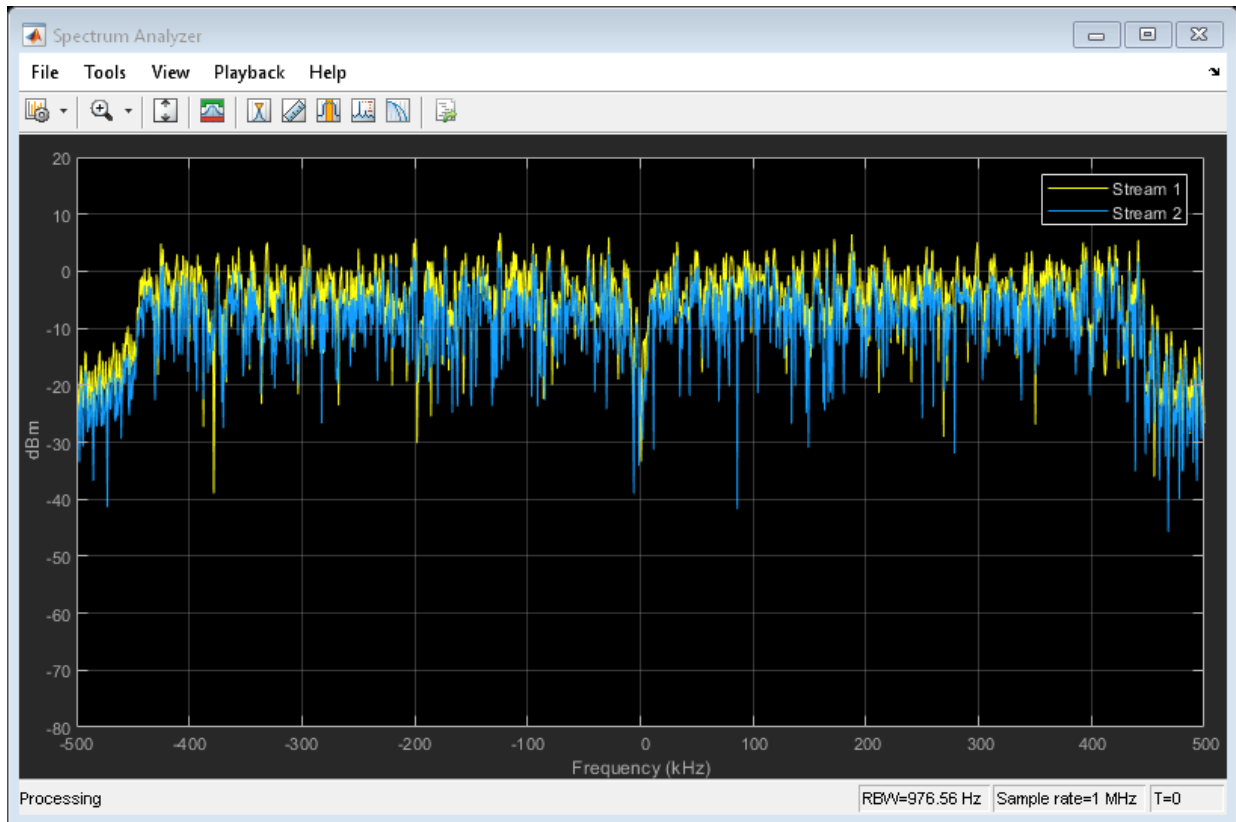

Algorithms

The algorithms used to model the TGah channel are based on those used for the TGn channel (as described in `wlanTGnChannel` and *TGn Channel Models* [2]) and the TGac channel (as described in `wlanTGacChannel` and *TGac Channel Model Addendum* [3]). Complete information on the changes required to support TGah channels can be found in *TGah Channel Model* [1]. The changes to support the TGah channel include lower bandwidths, floor separation attenuation, Wall Separation Attenuation, and path loss and shadowing.

Lower Bandwidths

The TGah channel model supports channel bandwidths down to 1 MHz.

Floor Separation Attenuation

In the TGah channel, the path loss model used to compute the spatial correlation accounts for floor separation attenuation effects. The floor separation loss depends on the number of floors penetrated as shown in the equation:

$$PEL_{\text{floor}} = 18.3n^{(n+2)/(n+1)-0.46},$$

where n is the number of floors, represented by `NumPenetratedFloors` property of the System object. For more information, see *TGah Channel Model* [1].

MIMO Enhancements

The TGah channel model supports up to 4x4 MIMO.

The TGah model also includes support for multiple users while simultaneous communication takes place between access points and user stations. Accordingly, the TGah model extends the concept of cluster angles of arrival and departure to account for point-to-multipoint transmission. For more information, see *Stochastic MIMO Radio Channel Model with Experimental Validation* [4].

Path Loss and Shadowing

TGah Channel Model [1], Table 2 defines path loss parameters that are slightly modified from those defined for TGn. Specifically, the shadow fading values corresponding to breakpoint distance are 1 dB less for all TGah channel models.

The path loss exponent and the standard deviation of the shadow fading loss characterize each model. The two parameters depend on the presence of a line of sight (LOS) between the transmitter and receiver. For paths with a transmitter-to-receiver distance, d , less than the breakpoint distance, d_{BP} , the LOS parameters apply. For $d > d_{\text{BP}}$, the non line of sight (NLOS) parameters apply. The table summarizes the path loss and shadow fading parameters.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance, d_{BP} (m)	5	5	5	10	20	30
Path loss exponent for $d \leq d_{BP}$	2	2	2	2	2	2
Path loss exponent for $d > d_{BP}$	3.5	3.5	3.5	3.5	3.5	3.5
Shadow fading σ (dB) for $d \leq d_{BP}$	2	2	2	2	2	2
Shadow fading σ (dB) for $d > d_{BP}$	3	3	4	4	5	5

References

- [1] Porat R., S. K. Yong, and K. Doppler. *TGah Channel Model*. IEEE 802.11-11/0968r4, March 2015.
- [2] Erceg, V., L. Schumacher, P. Kyritsi, et al. *TGn Channel Models*. Version 4. IEEE 802.11-03/940r4, May 2004.
- [3] Breit, G., H. Sampath, S. Vermani, et al. *TGac Channel Model Addendum*. Version 12. IEEE 802.11-09/0308r12, March 2010.
- [4] Kermaol, J. P., L. Schumacher, K. I. Pedersen, P. E. Mogensen, and F. Frederiksen. "A Stochastic MIMO Radio Channel Model with Experimental Validation." *IEEE Journal on Selected Areas in Communications*. Vol. 20, No. 6, August 2002, pp. 1211-1226.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

See "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

Objects

wlanTGacChannel | wlanTGaxChannel | wlanTGayChannel | wlanTGnChannel

Introduced in R2017a

wlanTGaxChannel

Filter signal through an 802.11ax multipath fading channel

Description

The `wlanTGaxChannel` System object filters an input signal through an 802.11ax (TGax) indoor MIMO channel as specified in [1], following the MIMO modeling approach described in [4].

The fading processing assumes the same parameters for all N_T -by- N_R links of the TGax channel, where N_T is the number of transmit antennas and N_R is the number of receive antennas. Each link comprises all multipaths for that link.

To filter an input signal using a TGax multipath fading channel:

- 1 Create the `wlanTGaxChannel` object and set its properties.
- 2 Call the object with arguments, as if it were a function.

To learn more about how System objects work, see [What Are System Objects? \(MATLAB\)](#).

Creation

Syntax

```
tgax = wlanTGaxChannel  
tgax = wlanTGaxChannel(Name,Value)
```

Description

`tgax = wlanTGaxChannel` creates a TGax channel System object, `tgax`. This object filters a real or complex input signal through the TGax channel to obtain the channel-impaired signal.

`tgax = wlanTGaxChannel(Name, Value)` creates a TGax channel object, `tgax`, and sets properties using one or more name-value pairs. Enclose each property name in quotes. For example, `wlanTGaxChannel('NumReceiveAntennas', 2, 'SampleRate', 10e6)` creates a TGax channel with two receive antennas and a 10 MHz sample rate.

Properties

Unless otherwise indicated, properties are *nontunable*, which means you cannot change their values after calling the object. Objects lock when you call them, and the `release` function unlocks them.

If a property is *tunable*, you can change its value at any time.

For more information on changing property values, see *System Design in MATLAB Using System Objects (MATLAB)*.

SampleRate — Sample rate of the input signal

80e6 (default) | real positive scalar

Sample rate of the input signal in Hz, specified as a real positive scalar.

Data Types: `double`

DelayProfile — Delay profile model

'Model-B' (default) | 'Model-A' | 'Model-C' | 'Model-D' | 'Model-E' | 'Model-F'

Delay profile model, specified as 'Model-A', 'Model-B', 'Model-C', 'Model-D', 'Model-E', or 'Model-F'.

The table summarizes the models properties before the bandwidth reduction factor.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance (m)	5	5	5	10	20	30
RMS delay spread (ns)	0	15	30	50	100	150

Parameter	Model					
	A	B	C	D	E	F
Maximum delay (ns)	0	80	200	390	730	1050
Rician K-factor (dB)	0	0	0	3	6	6
Number of taps	1	9	14	18	18	18
Number of clusters	1	2	2	3	4	6

The number of clusters represents the number of independently modeled propagation paths.

Data Types: char | string

ChannelBandwidth — Channel bandwidth

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth, specified as 'CBW20', 'CBW40', 'CBW80', or 'CBW160'. The default is 'CBW80', which corresponds to an 80 MHz channel bandwidth.

Data Types: char | string

CarrierFrequency — RF carrier frequency

5.25e9 (default) | real positive scalar

RF carrier frequency in Hz, specified as a real positive scalar.

Data Types: double

EnvironmentalSpeed — Speed of the scatterers

0.089 (default) | real positive scalar

Speed of the scatterers in km/h, specified as a real positive scalar.

Data Types: double

TransmitReceiveDistance — Distance between transmitter and receiver

3 (default) | real positive scalar

Distance between the transmitter and receiver in meters, specified as a real positive scalar.

TransmitReceiveDistance is used to compute the path loss, and to determine whether the channel has a line of sight (LOS) or non line of sight (NLOS) condition. The path loss

and standard deviation of shadow fading loss depend on the separation between the transmitter and the receiver.

Data Types: double

NormalizePathGains — Normalize path gains

true (default) | false

Normalize path gains, specified as true or false. To normalize the fading processes such that the total power of the path gains, averaged over time, is 0 dB, set this property to true (default). When you set this property to false, the path gains are not normalized.

Data Types: logical

UserIndex — User index for single or multi-user scenario

0 (default) | nonnegative integer

User index, specified as a nonnegative integer. UserIndex specifies the single user or a particular user in a multiuser scenario.

To support a multi-user scenario, a pseudorandom per-user angle-of-arrival (AoA) and angle-of-departure (AoD) rotation is applied. A value of 0 indicates a simulation scenario that does not require per-user angle diversity and assumes the *TGn defined* cluster AoAs and AoDs.

Data Types: double

TransmissionDirection — Transmission direction

'Downlink' (default) | 'Uplink'

Transmission direction of the active link, specified as either 'Downlink' or 'Uplink'.

Data Types: char | string

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4 | 5 | 6 | 7 | 8

Number of transmit antennas, specified as a positive integer from 1 to 8.

Data Types: double

TransmitAntennaSpacing — Distance between transmit antenna elements

0.5 (default) | real positive scalar

Distance between transmit antenna elements, specified as a real positive scalar expressed in wavelengths.

TransmitAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumTransmitAntennas is greater than 1.

Data Types: double

NumReceiveAntennas — Number of receive antennas

1 (default) | 2 | 3 | 4 | 5 | 6 | 7 | 8

Number of receive antennas, specified as a positive integer from 1 to 8.

Data Types: double

ReceiveAntennaSpacing — Distance between receive antenna elements

0.5 (default) | real positive scalar

Distance between receive antenna elements, specified as a real positive scalar expressed in wavelengths.

ReceiveAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumReceiveAntennas is greater than 1.

Data Types: double

LargeScaleFadingEffect — Large-scale fading effects

'None' (default) | 'Pathloss' | 'Shadowing' | 'Pathloss and shadowing'

Large-scale fading effects applied in the channel, specified as 'None', 'Pathloss', 'Shadowing', or 'Pathloss and shadowing'.

Data Types: char | string

NumPenetratedFloors — Number of building floors

0 (default) | real positive integer

Number of building floors between the transmitter and the receiver, specified as a real positive integer. Use this property in multiple floor scenarios to account for the floor

attenuation loss in the path loss calculation. The default is 0, which represents a communication link between a transmitter and a receiver located on the same floor.

Dependencies

The NumPenetratedFloors property applies only when DelayProfile is 'Model-A' or 'Model-B'.

Data Types: double

NumPenetratedWalls — Number of walls

0 (default) | real positive integer

Number of walls between the transmitter and receiver, specified as a real positive integer. Use this property to account for the wall penetration loss in the path loss calculation.

The default is 0, which represents a communication link between a transmitter and a receiver without wall penetration loss.

Data Types: double

WallPenetrationLoss — Penetration loss of a single wall

5 (default) | real scalar

Penetration loss of a single wall in dB, specified as a real scalar.

Dependencies

The WallPenetrationLoss property applies only when NumPenetratedWalls is greater than 0.

Data Types: double

FluorescentEffect — Fluorescent effect

true (default) | false

Fluorescent effect, specified as true or false. To include Doppler effects from fluorescent lighting, set this property to true.

Dependencies

The FluorescentEffect property applies only when DelayProfile is 'Model-D' or 'Model-E'.

Data Types: logical

PowerLineFrequency — Power line frequency

'60Hz' (default) | '50Hz'

Power line frequency in Hz, specified as '50Hz' or '60Hz'.

The power line frequency is 60 Hz in the United States and 50 Hz in Europe.

Dependencies

This property applies only when you set `FluorescentEffect` to `true` and `DelayProfile` to 'Model-D' or 'Model-E'.

Data Types: `char` | `string`

NormalizeChannelOutputs — Normalize channel outputs

`true` (default) | `false`

Normalize channel outputs by the number of receive antennas, specified as a `true` or `false`.

Data Types: `logical`

ChannelFiltering — Enable channel filtering

`true` (default) | `false`

Enable channel filtering, specified as a logical value of `true` or `false`. To enable channel filtering, set this property to `true`. To disable channel filtering, set this property to `false`.

Note If you set this property to `false`, the `step` object function does not accept an input signal. In this case, the `NumSamples` and `SampleRate` properties determine the duration of the fading process realization.

Data Types: `logical`

NumSamples — Number of time-domain samples

1280 (default) | positive integer

Number of time-domain samples used to get path gain samples, specified as a positive integer.

Dependencies

To enable this property, set the ChannelFiltering property to false.

Data Types: double

RandomStream — Source of random number stream

'Global stream' (default) | 'mt19937ar with seed'

Source of random number stream, specified as 'Global stream' or 'mt19937ar with seed'.

If you set RandomStream to 'Global stream', the current global random number stream generates normally distributed random numbers. In this case, the reset function resets the filters only.

If you set RandomStream to 'mt19937ar with seed', the mt19937ar algorithm generates normally distributed random numbers. In this case, the reset function also reinitializes the random number stream to the value of the Seed property.

Data Types: char | string

Seed — Initial seed of mt19937ar random number stream

73 (default) | nonnegative integer

Initial seed of an mt19937ar random number stream, specified as a nonnegative integer. The Seed property reinitializes the mt19937ar random number stream in the reset function.

Dependencies

This property applies only when you set the RandomStream property to 'mt19937ar with seed'.

Data Types: double

PathGainsOutputPort — Enable path gain output

false (default) | true

Enable path gain output computation, specified as true or false.

Data Types: logical

Usage

Syntax

```
y = tgax(x)
[y,pathGains] = tgax(x)
```

Description

`y = tgax(x)` filters input signal `x` through the TGax fading channel defined by the `wlanTGaxChannel` System object, `tgax`, and returns the result in `y`.

`[y,pathGains] = tgax(x)` also returns in `pathGains` the TGax channel path gains of the underlying fading process.

This syntax applies when you set the `PathGainsOutputPort` property of `tgax` to `true`.

Input Arguments

x — Input signal

complex matrix

Input signal, specified as a real or complex N_S -by- N_T matrix, where:

- N_S is the number of samples.
- N_T is the number of transmit antennas and must be equal to the `NumTransmitAntennas` property value of `tgax`.

Data Types: `double`

Complex Number Support: Yes

Output Arguments

y — Output signal

complex matrix

Output signal, returned as an N_S -by- N_R complex matrix, where:

- N_S is the number of samples.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value of `tgax`.

Data Types: `double`

pathGains — Path gains of the fading process

`complex array`

Path gains of the fading process, returned as an N_S -by- N_P -by- N_T -by- N_R complex array, where:

- N_S is the number of samples.
- N_P is the number of resolvable paths, that is, the number of paths defined for the case specified by the `DelayProfile` property.
- N_T is the number of transmit antennas and is equal to the NumTransmitAntennas property value of `tgax`.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value of `tgax`.

Data Types: `double`

Object Functions

To use an object function, specify the System object as the first input argument. For example, to release system resources of a System object named `obj`, use this syntax:

```
release(obj)
```

Specific to wlanTGaxChannel

`info` Characteristic information about TGn, TGah, TGac, and TGax multipath fading channels

Common to All System Objects

`step` Run System object algorithm

`release` Release resources and allow changes to System object property values and input characteristics

reset Reset internal states of System object

Note reset: If the RandomStream property of the System object is set to 'Global stream', the reset function resets the filters only. If you set RandomStream to 'mt19937ar with seed', the reset function also reinitializes the random number stream to the value of the Seed property.

Examples

TGax Channel Impulse Response

Obtain a channel impulse response by filtering an impulse through a TGax channel.

Create an impulse.


```
input = zeros(100,1);  
input(10) = 1;
```

Create the TGax channel System Object with path loss and shadowing, two penetrated floors, and a sampling rate of 1 GHz.

```
tgax = wlanTGaxChannel;  
tgax.LargeScaleFadingEffect = 'Pathloss and shadowing';  
tgax.NumPenetratedFloors = 2;  
tgax.RandomStream = 'mt19937ar with seed';  
tgax.Seed = 10;  
tgax.SampleRate = 1e9;
```

Plot the output impulse response of the channel.

```
figure  
time = (1/tgax.SampleRate)*(0:length(input)-1);  
stem(time,abs(tgax(input)))  
xlabel('Time (s)')  
ylabel('Amplitude')  
title('Channel Impulse Response')
```

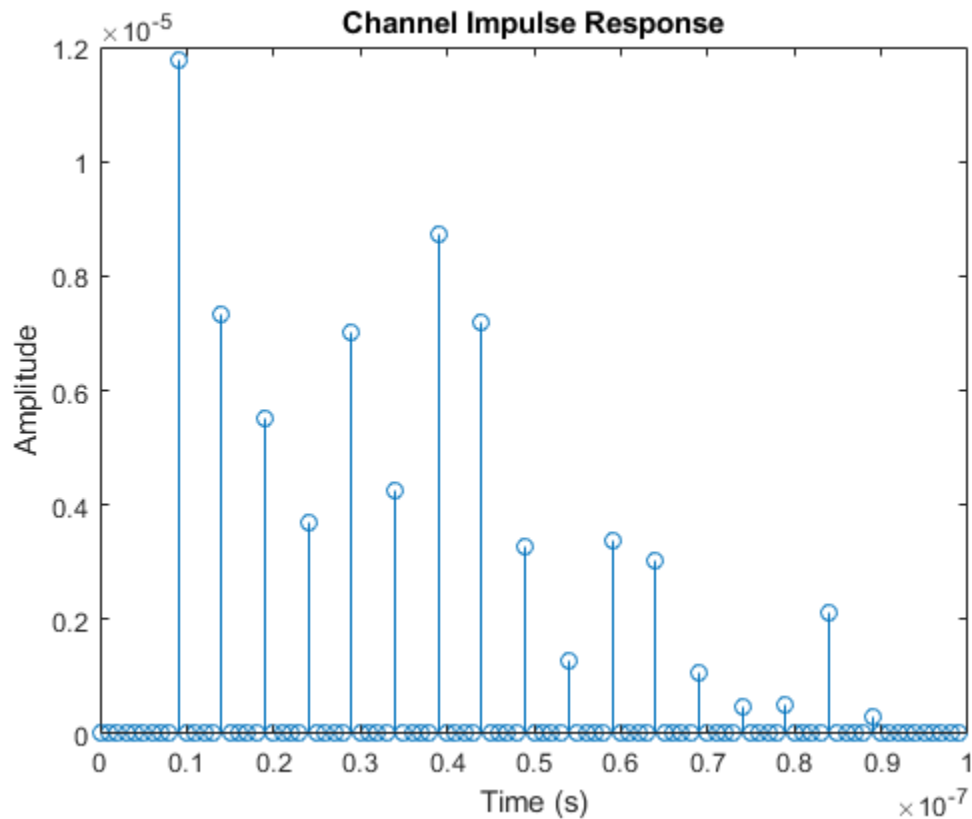TGax Channel Delay Profile and Path Gains

Plot the delay profile and path gains of a TGax channel.

Create an impulse.

```
input = zeros(100,4);
input(10) = 1;
```

Create the TGax channel System Object. Enable path gains at the output, and specify path loss, 20 MHz of channel bandwidth, a 4x2 MIMO channel, four penetrated floors, and a sampling rate of 1 GHz.


```
tgax = wlanTGaxChannel;  
tgax.LargeScaleFadingEffect = 'Pathloss';  
tgax.ChannelBandwidth = 'CBW20';  
tgax.NumTransmitAntennas = 4;  
tgax.NumReceiveAntennas = 2;  
tgax.NumPenetratedFloors = 4;  
tgax.RandomStream = 'mt19937ar with seed';  
tgax.Seed = 10;  
tgax.SampleRate = 1e9;  
tgax.PathGainsOutputPort = true;
```

Filter the input impulse. Use the TGax channel object to generate the output response and the path gains.

```
[out,pathgains]= tgax(input);
```

Plot the output impulse response of the channel. The channel has two delay profiles, one per each receive antenna.

```
figure  
time = (1/tgax.SampleRate)*(0:length(input)-1);  
stem(time,abs(out))  
xlabel('Time (s)')  
ylabel('Amplitude')  
title('Delay Profile')
```

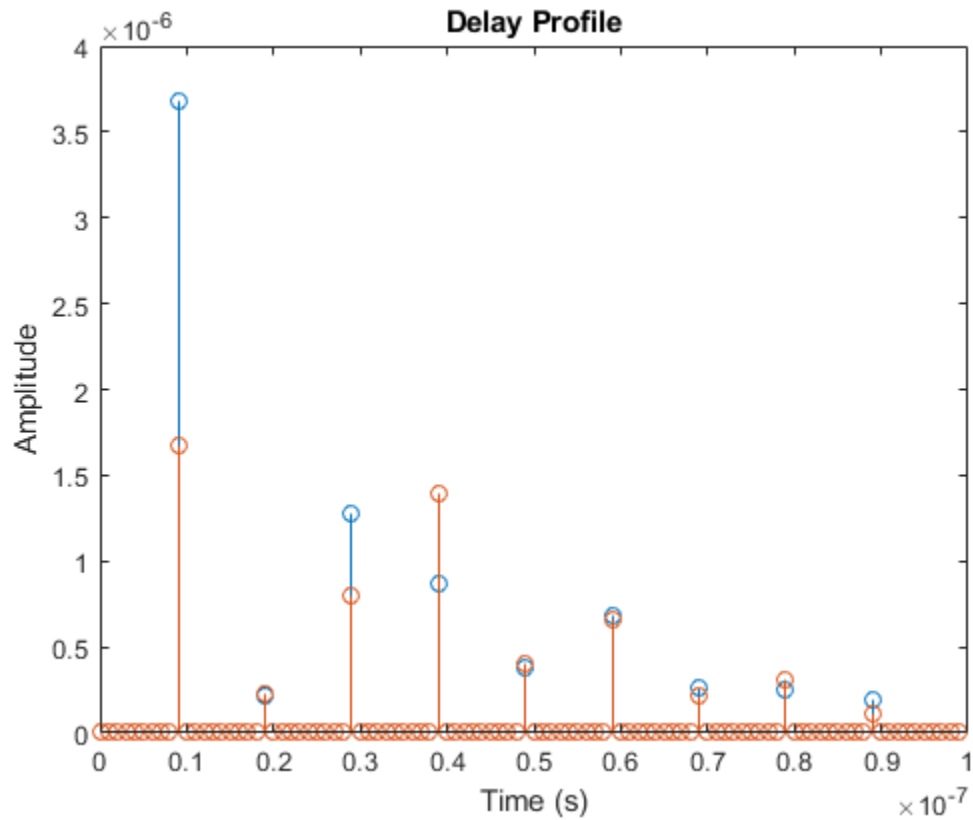

The path gains of the channel are contained in a four dimensional array since the channel has nine resolvable paths, four transmit antennas and two receive antennas.

```
size(pathgains)
```

```
ans = 1x4
```

```
100    9    4    2
```

Algorithms

The algorithms used to model the TGax channel are based on those used for the TGn channel (as described in `wlanTGnChannel` and *TGn Channel Models* [2]) and the TGac channel (as described in `wlanTGacChannel` and *TGac Channel Model Addendum* [3]). Complete information on the changes required to support TGax channels can be found in *TGax Channel Model* [1]. The changes to support the TGax channel include lower bandwidths, floor separation attenuation, wall separation attenuation, and path loss and shadowing.

Floor Separation Attenuation

In the TGax channel, the path loss model used to compute the spatial correlation accounts for floor separation attenuation effects. The floor separation loss depends on the number of floors penetrated, as shown in the equation:

$$PEL_{\text{floor}} = 18.3n^{(n+2)/(n+1)-0.46},$$

where n is the number of floors, represented by the `NumPenetratedFloors` property of the System object. For more information, see *TGax Channel Model* [1].

Wall Separation Attenuation

In the TGax channel, the path loss model used to compute the spatial correlation accounts for wall separation attenuation effects. The wall separation loss is defined by the following equation:

$$PEL_{\text{wall}} = m \times L_{\text{iw}}.$$

Where m is the number of walls penetrated, and L_{iw} is the penetration loss for a single wall. The variables m and L_{iw} are represented by the `NumPenetratedWalls` and `WallPenetrationLoss` properties of the System object, respectively. For more information, see *TGax Channel Model* [1].

MIMO Enhancements

The TGax channel model supports up to 8x8 MIMO.

The TGax model also includes support for multiple users while simultaneous communication takes place between access points and user stations. Accordingly, the TGax model extends the concept of cluster angles of arrival and departure to account for

point-to-multipoint transmission. For more information, see *Stochastic MIMO Radio Channel Model with Experimental Validation* [4].

Path Loss and Shadowing

In *TGax Channel Model* [1], Table 3 defines path loss parameters that are slightly modified from those defined for TGn. The floor penetration loss and wall penetration loss are added to this path loss.

The path loss exponent and the standard deviation of the shadow fading loss characterize each model. The two parameters depend on the presence of a line of sight (LOS) between the transmitter and receiver. For paths with a transmitter-to-receiver distance, d , less than the breakpoint distance, d_{BP} , the LOS parameters apply. For $d > d_{BP}$, the non line of sight (NLOS) parameters apply. The table summarizes the path loss and shadow fading parameters.

Parameter	Model	
	B	D
Breakpoint distance, d_{BP} (m)	5	10
Path loss exponent for $d \leq d_{BP}$	2	2
Path loss exponent for $d > d_{BP}$	3.5	3.5
Shadow fading σ (dB) for $d \leq d_{BP}$	3	3
Shadow fading σ (dB) for $d > d_{BP}$	4	5

References

- [1] Jianhan, L., Ron, P. *et al.* *TGax Channel Model*. IEEE 802.11-14/0882r4, September 2014.
- [2] Erceg, V., Schumacher, L., Kyritsi, P. *et al.* *TGn Channel Models*. Version 4. IEEE 802.11-03/940r4, May 2004.
- [3] Breit, G., Sampath, H., Vermani, S. *et al.* *TGac Channel Model Addendum*. Version 12. IEEE 802.11-09/0308r12, March 2010.
- [4] Kermaol, J. P., L. Schumacher, K. I. Pedersen, P. E. Mogensen, and F. Frederiksen. "A Stochastic MIMO Radio Channel Model with Experimental Validation." *IEEE*

Journal on Selected Areas in Communications. Vol. 20, No. 6, August 2002, pp. 1211-1226.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

See “System Objects in MATLAB Code Generation” (MATLAB Coder).

See Also

Objects

wlanTGacChannel | wlanTGahChannel | wlanTGayChannel | wlanTGnChannel

Introduced in R2018a

wlanTGayChannel

Filter signal through 802.11ay multipath fading channel

Description

The `wlanTGayChannel` System object filters an input signal through an IEEE 802.11ay (TGay) multipath fading channel. The channel model follows the quasi-deterministic (Q-D) approach specified in [1].

To filter an input signal by using a TGay multipath fading channel:

- 1 Create the `wlanTGayChannel` object and set its properties.
- 2 Call the object with arguments, as if it were a function.

To learn more about how System objects work, see [What Are System Objects? \(MATLAB\)](#).

Creation

Syntax

```
tgay = wlanTGayChannel  
tgay = wlanTGayChannel(Name,Value)
```

Description

`tgay = wlanTGayChannel` creates a TGay channel System object, `tgay`. This System object filters a real or complex input signal through the TGay channel to obtain a channel-impaired signal.

`tgay = wlanTGayChannel(Name,Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanTGayChannel('SampleRate',1e9,'Environment','Large hotel lobby')` creates a TGay channel with a 1-GHz sample rate in a large hotel lobby environment.

Properties

Unless otherwise indicated, properties are *nontunable*, which means you cannot change their values after calling the object. Objects lock when you call them, and the `release` function unlocks them.

If a property is *tunable*, you can change its value at any time.

For more information on changing property values, see *System Design in MATLAB Using System Objects (MATLAB)*.

SampleRate — Sample rate of input signal

2.64e9 (default) | positive scalar

Sample rate of the input signal, in Hz, specified as a positive scalar.

Data Types: double

CarrierFrequency — Center frequency of input signal

6e10 (default) | positive scalar

Center frequency of the input signal, in Hz, specified as a positive scalar.

Data Types: double

Environment — Channel model environment

'Open area hotspot' (default) | 'Street canyon hotspot' | 'Large hotel lobby'

Channel model environment, specified as 'Open area hotspot', 'Street canyon hotspot', or 'Large hotel lobby'. For more information, see [1].

Data Types: char | string

RoadWidth — Street canyon road width

16 (default) | positive scalar

Street canyon road width, in meters, specified as a positive scalar. The road is parallel to the *y*-axis, on which it has its center.

Dependencies

To enable this property, set `Environment` to 'Street canyon hotspot'.

Data Types: double

SidewalkWidth — Street canyon sidewalk width

6 (default) | positive scalar

Street canyon sidewalk width, in meters, specified as a positive scalar.

Dependencies

To enable this property, set Environment to 'Street canyon hotspot'.

Data Types: double

RoomDimensions — Hotel lobby dimensions

[20 15 6] (default) | 1-by-3 vector of positive values

Hotel lobby dimensions, in meters, specified as a 1-by-3 vector of positive values. Each element of **RoomDimensions** specifies the length of the hotel lobby measured along an axis of the Cartesian coordinate system (x,y,z). The first element specifies the length along the x -axis. The second element specifies the length along the y -axis. The third element specifies the length along the z -axis. The origin of the coordinate system is on the floor of the hotel lobby, at the midpoint between the bounding walls.

Dependencies

To enable this property, set Environment to 'Large hotel lobby'.

Data Types: double

UserConfiguration — User configuration

'SU-SISO' (default) | 'SU-MIMO 1x1' | 'SU-MIMO 2x2'

User configuration, specified as one of these values:

- 'SU-SISO' - specify one transmit antenna array, one receive antenna array, and one data stream
- 'SU-MIMO 1x1' - specify one transmit antenna array, one receive antenna array, and two data streams
- 'SU-MIMO 2x2' - specify two transmit antenna arrays, two receive antenna arrays, and either two or four data streams, depending on the value of the **ArrayPolarization** property. You can check the number of data streams by using the **info** object function.

Use this property to specify the number of transmit and receive antenna arrays and the number of data streams at the transmitter and receiver. For more information, see Table 3-2 in [1].

Data Types: `char` | `string`

ArraySeparation — Separation between transmit arrays and receive arrays

[0.5 0.5] (default) | 1-by-2 vector of positive values

Separation between transmit arrays and receive arrays, in meters, specified as a 1-by-2 vector of positive values. The first element specifies the separation between centers of the transmit arrays. The second element specifies the separation between centers of the receive arrays. The distances between the relevant array centers are measured along the x-axes of the local array coordinate systems, in accordance with Figure 3-10 in [1].

Dependencies

To enable this property, set `UserConfiguration` to `'SU-MIMO 2x2'`.

Data Types: `double`

ArrayPolarization — Transmit and receive antenna array polarization type for SU-MIMO

'Single, Single' (default) | 'Single, Dual' | 'Dual, Dual'

Transmit and receive antenna array polarization type for SU-MIMO, specified as 'Single, Single', 'Single, Dual', or 'Dual, Dual'. For more information, refer to Table 3-2 in [1].

Dependencies

To enable this property, set `UserConfiguration` to `'SU-MIMO 1x1'` or `'SU-MIMO 2x2'`.

Data Types: `char` | `string`

TransmitArray — Transmit antenna array

2-by-2 URA with 0.2 m element spacing (default) | `wlanURAConfig` object

Transmit antenna array, specified as a `wlanURAConfig` object. You can specify `TransmitArray` as a uniform rectangular array (URA), uniform linear array (ULA), or single element by setting the `Size` property of the `wlanURAConfig` object.

TransmitArrayPosition — Center of transmit antenna array

[0; 0; 5] (default) | 3-by-1 real-valued vector

Center of transmit antenna array, specified as a 3-by-1 real-valued vector. This property specifies the displacement, in meters, from the origin of the Cartesian coordinate system to the center of the transmit antenna array.

Data Types: double

TransmitArrayOrientation — Transmit antenna array orientation

[0; 0; 0] (default) | 3-by-1 real-valued vector

Transmit antenna array orientation, in degrees, specified as a 3-by-1 real-valued vector. Each element specifies the angle by which the local coordinate system of the transmit antenna array is rotated with respect to an axis of the global Cartesian coordinate system. The first element is the angle of rotation about the z-axis, and determines the target azimuthal angle. The second element is the angle of rotation about the rotated x-axis, and determines the target elevation angle. The third element is the angle of rotation about the rotated z-axis, and is specified for the non-symmetric azimuth distribution of the antenna gain. A positive value indicates a counterclockwise rotation. For more information, refer to Section 6.3.3 in [2].

Data Types: double

TransmitArrayPolarization — Transmit antenna array polarization type

'None' (default) | 'Vertical' | 'Horizontal' | 'LHCP' | 'RHCP'

Transmit antenna array polarization type, specified as one of these values:

- 'None' - An unpolarized transmit antenna array
- 'Vertical' - A vertically polarized transmit antenna array
- 'Horizontal' - A horizontally polarized transmit antenna array
- 'LHCP' - A left-hand circularly polarized transmit antenna array
- 'RHCP' - A right-hand circularly polarized transmit antenna array

Dependencies

To enable this property, set `UserConfiguration` to 'SU-SISO'.

Data Types: char | string

ReceiveArray — Receive antenna array

2-by-2 URA with element spacing of 0.2 m (default) | wlanURAConfig object

Receive antenna array, specified as a `wlanURAConfig` object. You can specify `ReceiveArray` as a URA, ULA, or single element by setting the `Size` property of the `wlanURAConfig` object.

ReceiveArrayPosition — Center of receive antenna array

[8; 0; 1.5] (default) | 3-by-1 real-valued vector

Center of receive antenna array, specified as a 3-by-1 real-valued vector. This property specifies the displacement, in meters, from the origin of the Cartesian coordinate system to the center of the receive antenna array.

Data Types: `double`

ReceiveArrayOrientation — Receive antenna array orientation

[0; 0; 0] (default) | 3-by-1 real-valued vector

Receive antenna array orientation, in degrees, specified as a 3-by-1 real-valued vector. Each element specifies the angle by which the local coordinate system of the receive antenna array is rotated with respect to an axis of the global Cartesian coordinate system. The first element is the angle of rotation about the z -axis, and determines the target azimuthal angle. The second element is the angle of rotation about the rotated x -axis, and determines the target elevation angle. The third element is the angle of rotation about the rotated z -axis, and is specified for the non-symmetric azimuth distribution of the antenna gain. A positive value indicates a counterclockwise rotation. For more information, refer to Section 6.3.3 in [2].

Data Types: `double`

ReceiveArrayPolarization — Receive antenna array polarization type

'None' (default) | 'Vertical' | 'Horizontal' | 'LHCP' | 'RHCP'

Receive antenna array polarization type, specified as one of these values:

- 'None' - An unpolarized receive antenna array
- 'Vertical' - A vertically polarized receive antenna array
- 'Horizontal' - A horizontally polarized receive antenna array
- 'LHCP' - A left-hand circularly polarized receive antenna array
- 'RHCP' - A right-hand circularly polarized receive antenna array

Dependencies

To enable this property, set `UserConfiguration` to 'SU-SISO'.

Data Types: char | string

ReceiveArrayVelocitySource — Receive antenna array velocity source

'Auto' (default) | 'Custom'

Receive antenna array velocity source, specified as 'Auto' or 'Custom'. To specify a randomly generated receive array velocity, as defined in [1], set this property to 'Auto'.

Data Types: char | string

ReceiveArrayVelocity — Receive antenna array velocity

[1; 1; 0] (default) | 3-by-1 real-valued vector

Receive antenna array velocity, in meters per second, specified as a 3-by-1 real-valued vector.

Data Types: double

RandomRays — Generate random rays

true (default) | false

Generate random rays (R-Rays), specified as a logical value of true or false.

Data Types: logical

IntraClusterRays — Generate intra-cluster rays

true (default) | false

Generate intra-cluster rays, specified as a logical value of true or false.

Data Types: logical

OxygenAbsorption — Power losses due to oxygen absorption

0.015 (default) | nonnegative scalar

Power losses due to oxygen absorption, in dB/m, specified as a nonnegative scalar.

Data Types: double

BeamformingMethod — Beamforming method

'Maximum power ray' (default) | 'Custom'

Beamforming method, specified as 'Maximum power ray' or 'Custom'. For more information, see Section 6.5 in [2].

Data Types: `char` | `string`

TransmitBeamformingVectors — Transmit beamforming vectors

`[0.5; 0.5; 0.5; 0.5]` (default) | N_{TE} -by- N_{TS} complex-valued matrix

Transmit beamforming vectors, specified as an N_{TE} -by- N_{TS} complex-valued matrix.

- N_{TE} is the number of elements in each transmit antenna array.
- N_{TS} is the number of input data streams.

You can obtain N_{TE} and N_{TS} by using the `info` object function.

Tunable: Yes

Dependencies

To enable this property, set `BeamformingMethod` to `'Custom'`.

Data Types: `double`

Complex Number Support: Yes

ReceiveBeamformingVectors — Receive beamforming vectors

`[0.5; 0.5; 0.5; 0.5]` (default) | N_{RE} -by- N_{RS} complex-valued matrix

Receive beamforming vectors, specified as an N_{RE} -by- N_{RS} complex-valued matrix.

- N_{RE} is the number of elements in each receive antenna array.
- N_{RS} is the number of output data streams.

You can obtain N_{RE} and N_{RS} by using the `info` object function.

Tunable: Yes

Dependencies

To enable this property, set `BeamformingMethod` to `'Custom'`.

Data Types: `double`

NormalizeImpulseResponses — Normalize channel impulse responses

`true` (default) | `false`

Normalize channel impulse responses (CIRs), specified as a logical value of `true` or `false`. To normalize CIRs to 0 dB per stream, set this property to `true`.

Data Types: logical

NormalizeChannelOutputs — Normalize output by number of output streams

true (default) | false

Normalize output by number of output streams, specified as a logical value of true or false.

Data Types: logical

RandomStream — Source of random number stream

'Global stream' (default) | 'mt19937ar with seed'

Source of random number stream, specified as 'Global stream' or 'mt19937ar with seed'. To use the current global random number stream for random number generation, set this property to 'Global stream'. Using the reset object function when this property is set to 'Global stream':

- Regenerates R-Rays when RandomRays is set to true
- Regenerates intra-cluster rays when IntraClusterRays is set to true
- Regenerates the receive antenna array velocity when ReceiveArrayVelocitySource is set to 'Auto'

To use the mt19937ar algorithm for self-contained random number generation, set this property to 'mt19937ar with seed'.

Data Types: char | string

Seed — Initial seed of random number generator

73 (default) | nonnegative integer

Initial seed of random number generator, specified as a nonnegative integer.

Dependencies

To enable this property, set RandomStream to 'mt19937ar with seed'.

Data Types: double

Usage

Syntax

```
y = tgray(x)
[y,CIR] = tgray(x)
```

Description

`y = tgray(x)` returns output signal `y` by filtering input signal `x` through the TGay fading channel defined by the `wlanTGayChannel` System object `tgray`.

`[y,CIR] = tgray(x)` also returns the TGay channel impulse response, `CIR`, of the underlying fading process.

Object Functions

To use an object function, specify the System object as the first input argument. For example, to release system resources of a System object named `obj`, use this syntax:

```
release(obj)
```

Specific to `wlanTGayChannel`

<code>info</code>	Return characteristic information about TGay multipath fading channel
<code>showEnvironment</code>	Display channel environment with D-Rays from ray tracing

Common to All System Objects

<code>step</code>	Run System object algorithm
<code>release</code>	Release resources and allow changes to System object property values and input characteristics
<code>reset</code>	Reset internal states of System object

Note `reset`: If the `RandomStream` property of the `wlanTGayChannel` System object is set to `'Global stream'`, using `reset`:

- Regenerates R-Rays when `RandomRays` is set to `true`
 - Regenerates intra-cluster rays when `IntraClusterRays` is set to `true`
 - Regenerates the receive antenna array velocity when `ReceiveArrayVelocitySource` is set to `'Auto'`
-

Examples

Return Characteristic Information of WLAN TGay Channel

Create a WLAN TGay channel System object™ and return its characteristic information.

Create a WLAN TGay multipath fading channel System object with default property values.

```
tgay = wlanTGayChannel;
```

Return and display the characteristic information of the TGay channel.

```
tgayInfo = info(tgay);  
disp(tgayInfo);  
  
    NumTxStreams: 1  
    NumRxStreams: 1  
    NumTxElements: 4  
    NumRxElements: 4  
    ChannelFilterDelay: 7  
    NumSamplesProcessed: 0
```

Filter 802.11ad Waveform Through TGay Channel

Filter an 802.11ad™ single-carrier unpolarized waveform through an SU-SISO 802.11ay™ channel, specifying a large hotel lobby environment. Check that the output signal is consistent when the same input waveform is filtered through the channel.

Create a directional-multi-gigabit-format (DMG-format) configuration object with the specified modulation and coding scheme (MCS).

```
cfgDMG = wlanDMGConfig('MCS','4');
```

Generate a DMG waveform for a randomly generated PSDU.

```
psdu = randi([0 1], 8*cfgDMG.PSDULength, 1);  
txWaveform = wlanWaveformGenerator(psdu, cfgDMG);
```

Configure a TGay channel System object for a large hotel lobby environment, specifying the sample rate, transmit and receive antenna arrays, and source of the random number stream.

```
tgay = wlanTGayChannel('SampleRate', wlanSampleRate(cfgDMG), 'Environment', 'Large hotel'  
    'TransmitArray', wlanURAConfig('Size', [4 4]), 'ReceiveArray', wlanURAConfig('Size', [3  
    'RandomStream', 'mt19937ar with seed', 'Seed', 100);
```

Filter the waveform through the TGay channel.

```
rxWaveform1 = tgay(txWaveform);
```

Reset the channel and filter the waveform through the TGay channel again. Check that the output waveform is consistent when the same input waveform is filtered through the TGay channel after calling the `reset` object function.

```
reset(tgay);  
rxWaveform2 = tgay(txWaveform);  
isequal(rxWaveform1, rxWaveform2)
```

```
ans = logical  
     1
```

Filter Dual-Polarized Signal Through 802.11ay Channel

Filter a dual-polarized signal through a WLAN 802.11ay™ channel, specifying a street canyon environment.

Configure a TGay channel System object for a street canyon environment, specifying a user configuration of single-user multiple-input/multiple-output (SU-MIMO) with two transmit antenna arrays and two receive antenna arrays. Specify the transmit antenna arrays as two-element uniform linear arrays (ULAs) and the receive antenna arrays as single isotropic elements. Use a custom beamforming method to specify the transmit and receive beamforming vectors, and specify the source of the random number stream.

```

tgay = wlanTGayChannel('SampleRate',2e9,'Environment','Street canyon hotspot', ...
    'UserConfiguration','SU-MIMO 2x2','ArraySeparation',[0.8 0.8],'ArrayPolarization',
    'TransmitArray',wlanURAConfig('Size',[1 2]),'TransmitArrayOrientation',[10; 10; 10],
    'ReceiveArray',wlanURAConfig('Size',[1 1]),'BeamformingMethod','Custom','Normalized',
    'RandomStream','mt19937ar with seed','Seed',100);


```

Display the environment of the TGay channel.

```

showEnvironment(tgay);
title('Street Canyon Hotspot with Antenna Arrays and D-Rays');

```

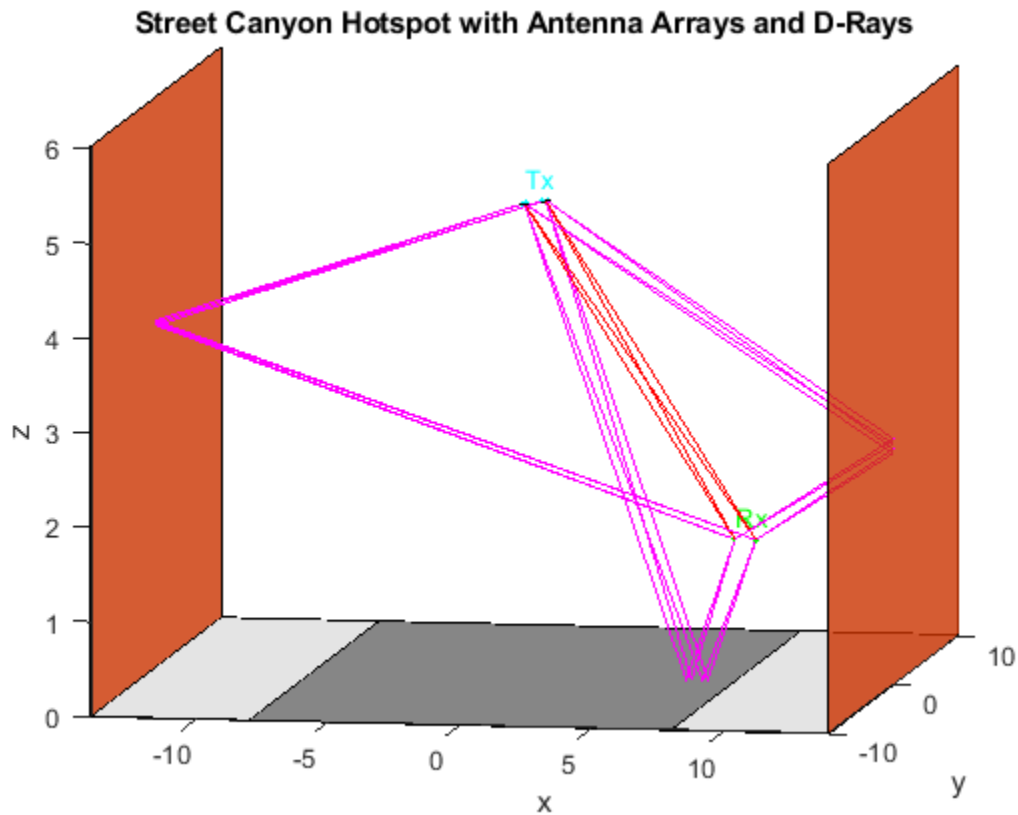

Retrieve channel characteristics by using the `info` object function.

```

tgayInfo = tgay.info;

```

Formulate the beamforming vectors in terms of the number of transmit elements, receive elements, transmit streams, and receive streams obtained from `tgayInfo`.

```
NTE = tgayInfo.NumTxElements;
NTS = tgayInfo.NumTxStreams;
NRE = tgayInfo.NumRxElements;
NRS = tgayInfo.NumRxStreams;
tgay.TransmitBeamformingVectors = ones(NTE,NTS)/sqrt(NTE);
tgay.ReceiveBeamformingVectors = ones(NRE,NRS)/sqrt(NRE);
```

Create a random input signal and filter it through the `TGay` channel.


```
txSignal = complex(rand(100,NTS),rand(100,NTS));
rxSignal = tgay(txSignal);
```

Algorithms


Channel Impulse Response

These diagrams show the Q-D algorithm and base steps for generating the channel impulse response. For more information, see Section 4 of [1].

Q-D Algorithm

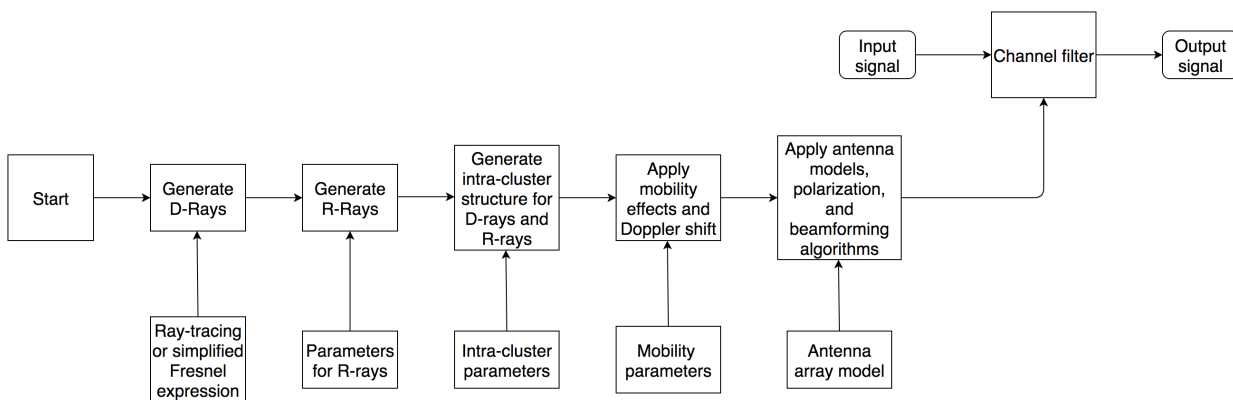

Base Steps

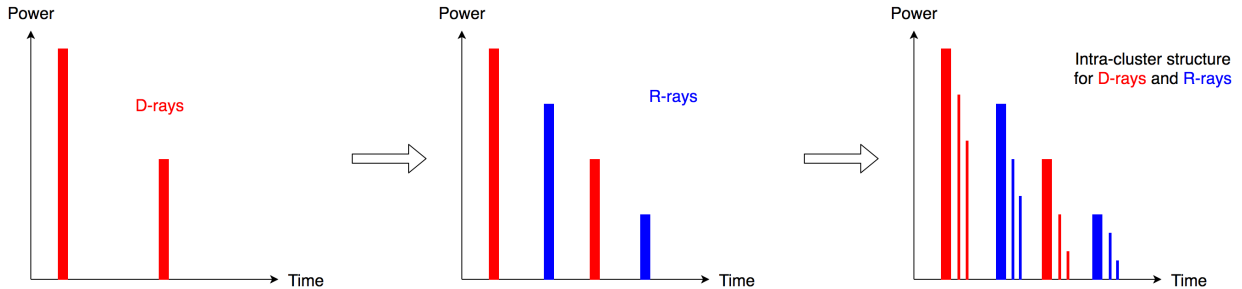

References

- [1] Maltsev, A., *et al.* *Channel Models for 802.11ay*. IEEE 802.11-15/1150r9, March 2017.
- [2] Maltsev, A., *et al.* *Channel Models for 60GHz WLAN Systems*. IEEE 802.11-09/0334r8, May 2010.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

See “System Objects in MATLAB Code Generation” (MATLAB Coder).

See Also

System Objects

wlanTGacChannel | wlanTGahChannel | wlanTGaxChannel | wlanTGnChannel

Introduced in R2019a

wlanTGnChannel

Filter signal through 802.11n multipath fading channel

Description

The `wlanTGnChannel` System object filters an input signal through an 802.11n™ (TGn) multipath fading channel.

The fading processing assumes the same parameters for all N_T -by- N_R links of the TGn channel. N_T is the number of transmit antennas and N_R is the number of receive antennas. Each link comprises all multipaths for that link.

To filter an input signal using a TGn multipath fading channel:

- 1 Create the `wlanTGnChannel` object and set its properties.
- 2 Call the object with arguments, as if it were a function.

To learn more about how System objects work, see [What Are System Objects? \(MATLAB\)](#).

Creation

Syntax

```
tgn = wlanTGnChannel  
tgn = wlanTGnChannel(Name,Value)
```

Description

`tgn = wlanTGnChannel` creates a TGn fading channel System object, `tgn`. This object filters a real or complex input signal through the TGn channel to obtain the channel-impaired signal.

`tgn = wlanTGnChannel(Name,Value)` creates a TGn channel object, `tgn`, and sets properties using one or more name-value pairs. Enclose each property name in quotes.

For example, `wlanTGnChannel('NumReceiveAntennas',2,'SampleRate',10e6)` creates a TGn channel with two receive antennas and a 10 MHz sample rate.

Properties

Unless otherwise indicated, properties are *nontunable*, which means you cannot change their values after calling the object. Objects lock when you call them, and the `release` function unlocks them.

If a property is *tunable*, you can change its value at any time.

For more information on changing property values, see *System Design in MATLAB Using System Objects (MATLAB)*.

SampleRate — Sample rate of the input signal

20e6 (default) | real positive scalar

Sample rate of the input signal in Hz, specified as a real positive scalar.

Data Types: double

DelayProfile — Delay profile model

'Model-B' (default) | 'Model-A' | 'Model-C' | 'Model-D' | 'Model-E' | 'Model-F'

Delay profile model, specified as 'Model-A', 'Model-B', 'Model-C', 'Model-D', 'Model-E', or 'Model-F'.

The table summarizes the models properties before the bandwidth reduction factor.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance (m)	5	5	5	10	20	30
RMS delay spread (ns)	0	15	30	50	100	150
Maximum delay (ns)	0	80	200	390	730	1050
Rician K-factor (dB)	0	0	0	3	6	6
Number of clusters	1	2	2	3	4	6

Parameter	Model					
	A	B	C	D	E	F
Number of taps	1	9	14	18	18	18

Data Types: char | string

CarrierFrequency — RF carrier frequency

5.25e9 (default) | real positive scalar

RF carrier frequency in Hz, specified as a real positive scalar.

Data Types: double

EnvironmentalSpeed — Speed of the scatterers

1.2 (default) | real positive scalar

Speed of the scatterers in km/h, specified as a real positive scalar.

Data Types: double

TransmitReceiveDistance — Distance between transmitter and receiver

3 (default) | real positive scalar

Distance between the transmitter and receiver in meters, specified as a real positive scalar.

TransmitReceiveDistance is used to compute the path loss, and to determine whether the channel has a line of sight (LOS) or non line of sight (NLOS) condition. The path loss and standard deviation of shadow fading loss depend on the separation between the transmitter and the receiver.

Data Types: double

NormalizePathGains — Normalize path gains

true (default) | false

Normalize path gains, specified as true or false. To normalize the fading processes such that the total power of the path gains, averaged over time, is 0 dB, set this property to true (default). When you set this property to false, the path gains are not normalized.

Data Types: logical

NumTransmitAntennas — Number of transmit antennas

1 (default) | 2 | 3 | 4

Number of transmit antennas, specified as a positive integer from 1 to 4.

Data Types: double

TransmitAntennaSpacing — Distance between transmit antenna elements

0.5 (default) | real positive scalar

Distance between transmit antenna elements, specified as a real positive scalar expressed in wavelengths.

TransmitAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumTransmitAntennas is greater than 1.

Data Types: double

NumReceiveAntennas — Number of receive antennas

1 (default) | 2 | 3 | 4

Number of receive antennas, specified as a positive integer from 1 to 4.

Data Types: double

ReceiveAntennaSpacing — Distance between receive antenna elements

0.5 (default) | real positive scalar

Distance between receive antenna elements, specified as a real positive scalar expressed in wavelengths.

ReceiveAntennaSpacing supports uniform linear arrays only.

Dependencies

This property applies only when NumReceiveAntennas is greater than 1.

Data Types: double

LargeScaleFadingEffect — Large-scale fading effects

'None' (default) | 'Pathloss' | 'Shadowing' | 'Pathloss and shadowing'

Large-scale fading effects applied in the channel, specified as 'None', 'Pathloss', 'Shadowing', or 'Pathloss and shadowing'.

Data Types: `char` | `string`

FluorescentEffect — Fluorescent effect

`true` (default) | `false`

Fluorescent effect, specified as `true` or `false`. To include Doppler effects from fluorescent lighting set this property to `true`.

Dependencies

The `FluorescentEffect` property applies only when `DelayProfile` is 'Model-D' or 'Model-E'.

Data Types: `logical`

PowerLineFrequency — Power line frequency

'60Hz' (default) | '50Hz'

Power line frequency in Hz, specified as '50Hz' or '60Hz'.

The power line frequency is 60 Hz in the United States and 50 Hz in Europe.

Dependencies

This property applies only when you set `FluorescentEffect` to `true` and `DelayProfile` to 'Model-D' or 'Model-E'.

Data Types: `char` | `string`

NormalizeChannelOutputs — Normalize channel outputs

`true` (default) | `false`

Normalize channel outputs by the number of receive antennas, specified as a `true` or `false`.

Data Types: `logical`

ChannelFiltering — Enable channel filtering

`true` (default) | `false`

Enable channel filtering, specified as a logical value of `true` or `false`. To enable channel filtering, set this property to `true`. To disable channel filtering, set this property to `false`.

Note If you set this property to `false`, the `step` object function does not accept an input signal. In this case, the `NumSamples` and `SampleRate` properties determine the duration of the fading process realization.

Data Types: `logical`

NumSamples — Number of time-domain samples

80 (default) | positive integer

Number of time-domain samples used to get path gain samples, specified as a positive integer.

Dependencies

To enable this property, set the `ChannelFiltering` property to `false`.

Data Types: `double`

RandomStream — Source of random number stream

'Global stream' (default) | 'mt19937ar with seed'

Source of random number stream, specified as 'Global stream' or 'mt19937ar with seed'.

If you set `RandomStream` to 'Global stream', the current global random number stream generates normally distributed random numbers. In this case, the `reset` function resets the filters only.

If you set `RandomStream` to 'mt19937ar with seed', the `mt19937ar` algorithm generates normally distributed random numbers. In this case, the `reset` function also reinitializes the random number stream to the value of the `Seed` property.

Data Types: `char` | `string`

Seed — Initial seed of mt19937ar random number stream

73 (default) | nonnegative integer

Initial seed of an `mt19937ar` random number stream, specified as a nonnegative integer. The `Seed` property reinitializes the `mt19937ar` random number stream in the `reset` function.

Dependencies

This property applies only when you set the `RandomStream` property to `'mt19937a'` with `seed`.

Data Types: `double`

PathGainsOutputPort — Enable path gain output

`false` (default) | `true`

Enable path gain output computation, specified as `true` or `false`.

Data Types: `logical`

Usage

Syntax

```
y = tgn(x)
[y,pathGains] = tgn(x)
```

Description

`y = tgn(x)` filters input signal `x` through the TGn fading channel defined by the `wlanTGnChannel` System object, `tgn`, and returns the result in `y`.

`[y,pathGains] = tgn(x)` also returns in `pathGains` the TGn channel path gains of the underlying fading process.

This syntax applies when you set the `PathGainsOutputPort` property to `true`.

Input Arguments

x — Input signal

complex matrix

Input signal, specified as a real or complex N_S -by- N_T matrix, where:

- N_S is the number of samples.
- N_T is the number of transmit antennas and must be equal to the NumTransmitAntennas property value.

Data Types: double

Complex Number Support: Yes

Output Arguments

y — Output signal

complex matrix

Output signal, returned as an N_S -by- N_R complex matrix, where:

- N_S is the number of samples.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value.

Data Types: double

pathGains — Path gains of the fading process

complex array

Path gains of the fading process, returned as an N_S -by- N_P -by- N_T -by- N_R complex array, where:

- N_S is the number of samples.
- N_P is the number of resolvable paths, that is, the number of paths defined for the case specified by the DelayProfile property.
- N_T is the number of transmit antennas and is equal to the NumTransmitAntennas property value.
- N_R is the number of receive antennas and is equal to the NumReceiveAntennas property value.

Data Types: double

Object Functions

To use an object function, specify the System object as the first input argument. For example, to release system resources of a System object named `obj`, use this syntax:

```
release(obj)
```

Specific to wlanTGnChannel

`info` Characteristic information about TGn, TGah, TGac, and TGax multipath fading channels

Common to All System Objects

`step` Run System object algorithm

`release` Release resources and allow changes to System object property values and input characteristics

`reset` Reset internal states of System object

Note `reset`: If the `RandomStream` property of the System object is set to 'Global stream', the `reset` function resets the filters only. If you set `RandomStream` to 'mt19937ar with seed', the `reset` function also reinitializes the random number stream to the value of the `Seed` property.

Examples

Transmit HT Waveform Through TGn Channel

Generate an HT waveform and pass it through a TGn SISO channel. Display the spectrum of the resultant signal.

Set the channel bandwidth and the corresponding sample rate.

```
bw = 'CBW40';  
fs = 40e6;
```

Generate an HT waveform for a 40 MHz channel.

```
cfg = wlanHTConfig('ChannelBandwidth', bw);  
txSig = wlanWaveformGenerator(randi([0 1], 1000, 1), cfg);
```

Create a TGn SISO channel with path loss and shadowing enabled.


```
tgnChan = wlanTGnChannel('SampleRate',fs, ...  
    'LargeScaleFadingEffect','Pathloss and shadowing');
```

Pass the HT waveform through the channel.

```
rxSig = tgnChan(txSig);
```

Plot the spectrum of the received waveform.

```
saScope = dsp.SpectrumAnalyzer('SampleRate',fs,'YLimits',[-120 -40]);  
saScope(rxSig)
```

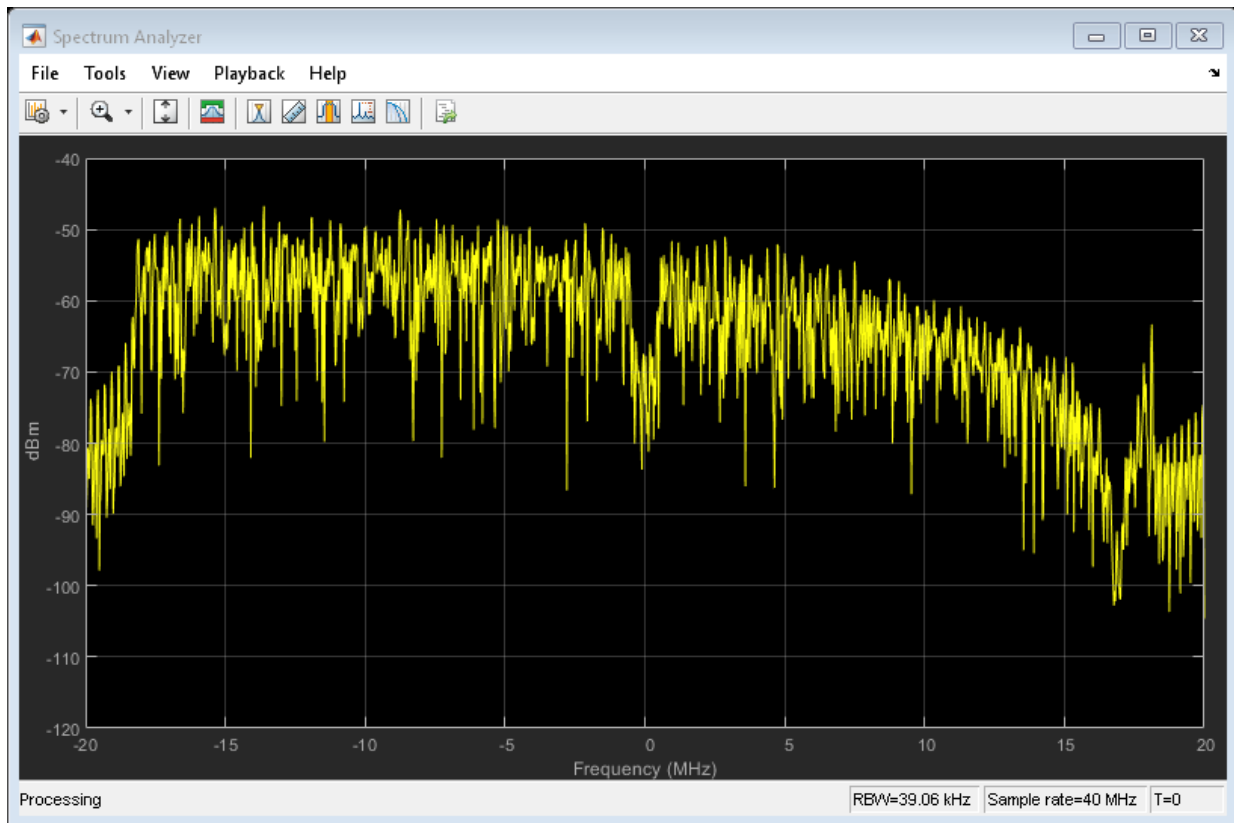

Because path loss and shadowing are enabled, the mean received power across the spectrum is approximately -60 dBm.

Transmit HT Waveform Through 4x2 MIMO Channel

Create an HT waveform having four transmit antennas and two space-time streams.

```
cfg = wlanHTConfig('NumTransmitAntennas',4,'NumSpaceTimeStreams',2, ...  
    'SpatialMapping','Fourier');  
txSig = wlanWaveformGenerator([1;0;0;1],cfg);
```

Create a 4x2 MIMO TGn channel and disable large-scale fading effects.


```
tgnChan = wlanTGnChannel('SampleRate',20e6, ...  
    'NumTransmitAntennas',4, ...  
    'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','None');
```

Pass the transmit waveform through the channel.

```
rxSig = tgnChan(txSig);
```

Display the spectrum of the two received space-time streams.

```
saScope = dsp.SpectrumAnalyzer('SampleRate',20e6, ...  
    'ShowLegend',true, ...  
    'ChannelNames',{'Stream 1','Stream 2'});  
saScope(rxSig)
```

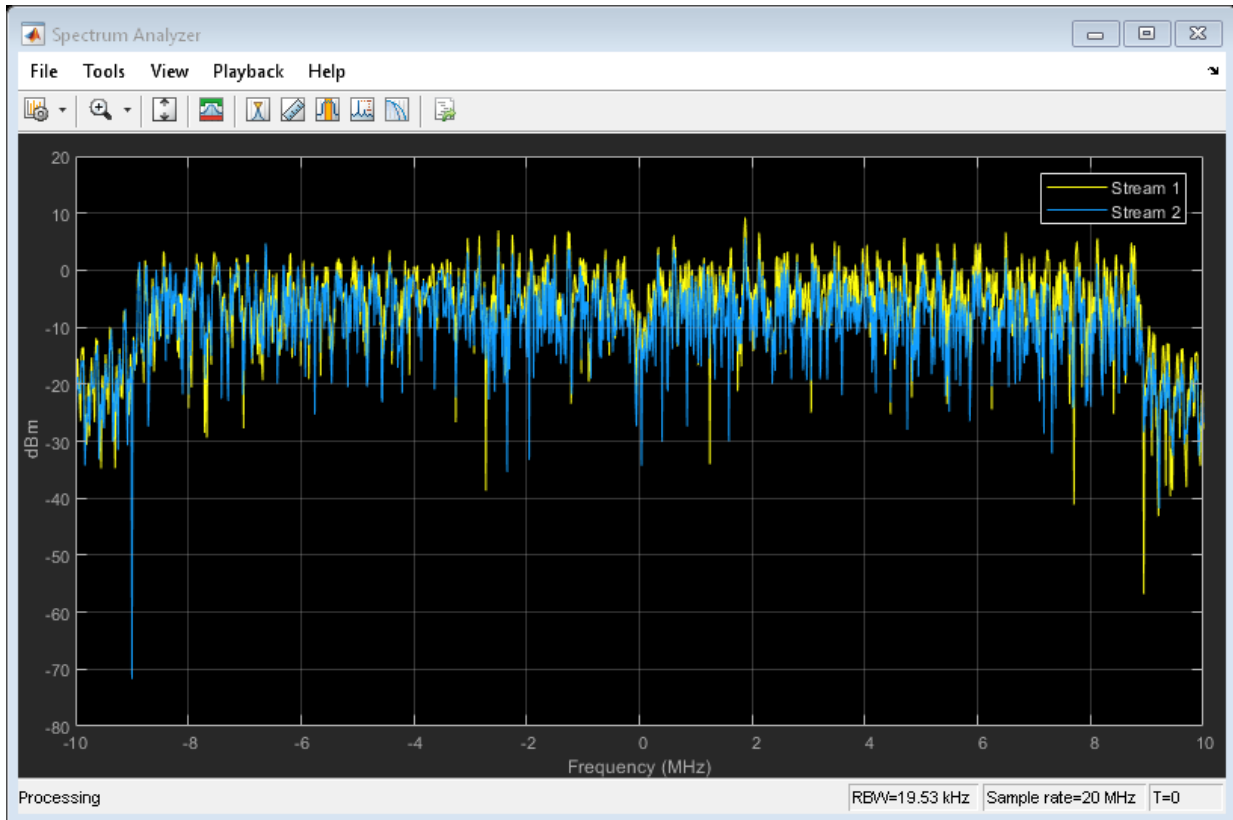Recover HT Data from 2x2 MIMO Channel

Transmit an HT-LTF and an HT data field through a noisy 2x2 MIMO channel. Demodulate the received HT-LTF to estimate the channel coefficients. Recover the HT data and determine the number of bit errors.

Set the channel bandwidth and corresponding sample rate.

```
bw = 'CBW40';
fs = 40e6;
```

Create HT-LTF and HT data fields having two transmit antennas and two space-time streams.

```
cfg = wlanHTConfig('ChannelBandwidth',bw, ...  
    'NumTransmitAntennas',2,'NumSpaceTimeStreams',2);  
txPSDU = randi([0 1],8*cfg.PSDULength,1);  
txLTF = wlanHTLTF(cfg);  
txDataSig = wlanHTData(txPSDU, cfg);
```

Create a 2x2 MIMO TGn channel with path loss and shadowing enabled.

```
tgnChan = wlanTGnChannel('SampleRate',fs, ...  
    'NumTransmitAntennas',2,'NumReceiveAntennas',2, ...  
    'LargeScaleFadingEffect','None');
```

Create AWGN channel noise, setting SNR = 15 dB.

```
chNoise = comm.AWGNChannel('NoiseMethod','Signal to noise ratio (SNR)',...  
    'SNR',15);
```

Pass the signals through the TGn channel and noise models.

```
rxLTF = chNoise(tgnChan(txLTF));  
rxDataSig = chNoise(tgnChan(txDataSig));
```

Create an AWGN channel for a 40 MHz channel with a 9 dB noise figure. The noise variance, $nVar$, is equal to $kTBF$, where k is Boltzmann's constant, T is the ambient temperature of 290 K, B is the bandwidth (sample rate), and F is the receiver noise figure.

```
nVar = 10^((-228.6 + 10*log10(290) + 10*log10(fs) + 9)/10);  
awgnChan = comm.AWGNChannel('NoiseMethod','Variance','Variance',nVar);
```

Pass the signals through the channel.

```
rxLTF = awgnChan(rxLTF);  
rxDataSig = awgnChan(rxDataSig);
```

Demodulate the HT-LTF. Use the demodulated signal to estimate the channel coefficients.

```
dLTF = wlanHTLTFDemodulate(rxLTF, cfg);  
chEst = wlanHTLTFChannelEstimate(dLTF, cfg);
```

Recover the data and determine the number of bit errors.

```
rxPSDU = wlanHTDataRecover(rxDataSig, chEst, nVar, cfg);  
numErr = biterr(txPSDU, rxPSDU)
```

```
numErr = 0
```

Algorithms

The 802.11n channel object uses a filtered Gaussian noise model in which the path delays, powers, angular spread, angles of arrival, and angles of departure are determined empirically. The specific modeling approach is described in [1].

Multipath Parameters

The channel is modeled as several clusters, each of which represents an independent propagation path between the transmitter and the receiver. A cluster is composed of subpaths, or taps, which share angular spreads, angles of arrival, and angles of departure. Delay and power level vary from tap to tap. Within the TGn model, clusters comprise 1-7 taps. The cluster parameters for cluster 1 of model B are shown in the table.

Parameter	Tap				
	1	2	3	4	5
Delay (ns)	0	10	20	30	
Power (dB)	0	-5.4	-10.8	-16.2	
Angle of arrival (°)	4.3	4.3	4.3	4.3	
Receiver angular spread (°)	14.4	14.4	14.4	14.4	
Angle of departure (°)	225.1	225.1	225.1	225.1	
Transmitter angular spread (°)	14.4	14.4	14.4	14.4	

For each model, the first tap has a line of sight (LOS) between the transmitter and receiver, whereas all other taps are non line of sight (NLOS). As a result, the first tap exhibits Rician behavior, while the others exhibit Rayleigh behavior. The Rician K-factor is the ratio between the power in the first tap and the power in the other taps. A large K-factor indicates a strong LOS component.

The angles of arrival and departure for each cluster are randomly selected from a uniform distribution over $[0, 2\pi]$. These angles are independent of each other and are fixed for all channel realizations. By fixing the values, the transmit and receive correlation matrices are computed only once. Angular spread values were indirectly determined from empirical data and fall within the 20° to 40° range.

Path Loss and Shadowing

The path loss exponent and the standard deviation of the shadow fading loss characterize each model. The two parameters depend on the presence of a LOS between the transmitter and receiver. For paths with a transmitter-to-receiver distance, d , less than the breakpoint distance, d_{BP} , the LOS parameters apply. For $d > d_{BP}$, the NLOS parameters apply. The table summarizes the path loss and shadow fading parameters.

Parameter	Model					
	A	B	C	D	E	F
Breakpoint distance, d_{BP} (m)	5	5	5	10	20	30
Path loss exponent for $d \leq d_{BP}$	2	2	2	2	2	2
Path loss exponent for $d > d_{BP}$	3.5	3.5	3.5	3.5	3.5	3.5
Shadow fading σ (dB) for $d \leq d_{BP}$	3	3	3	3	3	3
Shadow fading σ (dB) for $d > d_{BP}$	4	4	5	5	6	6

Doppler Effects

In indoor environments, the transmitter and receiver are stationary, and Doppler effects arise from people moving between them. The TGn model employs a bell-shaped Doppler spectrum in which the environmental speed, ν_0 , is 1.2 km/h by default (it is specified by the `EnvironmentalSpeed` property). The Doppler spread, f_d , is calculated as $f_d = \nu_0/\lambda$, where λ is the carrier wavelength.

The channel sampling rate, F_s , must be lower than the input sampling rate to avoid aliasing. It is calculated as:

$$F_s = (\nu_0 \times F_c) / (300 \times c)$$

where F_c is the carrier frequency, specified by the `CarrierFrequency` property, c is the speed of light and ν_0 is defined in m/s.

In addition to basic Doppler effects resulting from environmental motion, fluorescent lights introduce signal fading at twice the power line frequency. The effects show up as frequency-selective amplitude modulation. Again, to avoid aliasing, the Nyquist frequency of the first interpolation factor must be greater than the highest harmonic.

The effect is included in models D and E. To disable this effect, set the `FluorescentEffect` property to `false`.

References

- [1] Erceg, V., L. Schumacher, P. Kyritsi, et al. *TGn Channel Models*. Version 4. IEEE 802.11-03/940r4, May 2004.
- [2] Kermoal, J. P., L. Schumacher, K. I. Pedersen, P. E. Mogensen, and F. Frederiksen, "A Stochastic MIMO Radio Channel Model with Experimental Validation". *IEEE Journal on Selected Areas in Communications.*, Vol. 20, No. 6, August 2002, pp. 1211-1226.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

See "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

System Objects

`wlanTGacChannel` | `wlanTGahChannel` | `wlanTGaxChannel` | `wlanTGayChannel`

Introduced in R2015b

wlanURAConfig

Create antenna array configuration object for 802.11ay channel model

Description

The `wlanURAConfig` object is a uniform rectangular array (URA) configuration object. It models a URA consisting of isotropic antenna elements. Use a `wlanURAConfig` object to specify the `TransmitArray` and `ReceiveArray` properties of the `wlanTGayChannelSystem` object.

Creation

Syntax

```
URA = wlanURAConfig
URA = wlanURAConfig(Name,Value)
```

Description

`URA = wlanURAConfig` creates a URA object, `URA`, to be used as the transmit and receive antenna arrays of a `wlanTGayChannelSystem` object.

`URA = wlanURAConfig(Name,Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanURAConfig('Size',[4 4])` creates a 4-by-4 URA.

Properties

Element — Array element

'isotropic' (default)

This property is read-only.

Array element, specified as 'isotropic'.

Data Types: char

Size – Antenna array size

[2 2] (default) | 1-by-2 vector of positive integers

Antenna array size, specified as a 1-by-2 vector of positive integers. Each element in the vector specifies the number of antenna elements along an axis of the Cartesian coordinate system (x,y,z). The first element specifies the number of elements along the y -axis. The second element specifies the number of elements along the x -axis. The normal to the antenna array points along the z -axis.

When one of the elements in **Size** is 1, the array is a uniform linear array (ULA). When **Size** is [1 1], the antenna array is a single antenna element.

Data Types: double

ElementSpacing – Spacing between array elements

[0.2 0.2] (default) | 1-by-2 vector of positive scalars

Spacing between array elements, in meters, specified as a 1-by-2 vector of positive scalars. Each element in the vector specifies the spacing between antenna elements along an axis of the Cartesian coordinate system. The first element specifies the spacing between antenna elements along the y -axis. The second element specifies the spacing between antenna elements along the x -axis.

Data Types: double

Examples

Create 3-by-3 URA

Create a 3-by-3 URA with an element spacing of 0.5 m for use with a WLAN TGay channel model.

Create a configuration object for a 3-by-3 URA with an element spacing of 0.5 m.

```
URA = wlanURAConfig('Size',[3 3],'ElementSpacing',[0.5 0.5]);
```

Create a WLAN TGay channel System object, specifying the URA as the transmit array.

```
tgay = wlanTGayChannel('TransmitArray',URA);  
disp(tgay.TransmitArray);
```

wlanURAConfig with properties:

```
Element: 'isotropic'  
Size: [3 3]  
ElementSpacing: [0.5000 0.5000]
```

Create ULA

Create an eight-element ULA for use with a WLAN TGay channel model.

Define an eight-element ULA along the x-axis by creating a configuration object for a 1-by-8 URA. Specify the element spacing as 0.1 m.

```
ULA = wlanURAConfig('Size',[1 8],'ElementSpacing',[0.1 0.1]);
```

Create a WLAN TGay channel System object, specifying the ULA as the receive antenna array.

```
tgay = wlanTGayChannel('ReceiveArray',ULA);  
disp(tgay.ReceiveArray);
```

wlanURAConfig with properties:

```
Element: 'isotropic'  
Size: [1 8]  
ElementSpacing: [0.1000 0.1000]
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanTGayChannel

Introduced in R2019a

wlanVHTConfig

Create VHT-format configuration object

Description

The `wlanVHTConfig` object is a very-high-throughput-format (VHT-format) configuration object for the WLAN VHT packet format.

Creation

Syntax

```
cfgVHT = wlanVHTConfig  
cfgVHT = wlanVHTConfig(Name,Value)
```

Description

`cfgVHT = wlanVHTConfig` creates a configuration object that initializes parameters for an IEEE 802.11 VHT-format “PPDU” on page 3-239.

`cfgVHT = wlanVHTConfig(Name,Value)` sets properties using one or more name-value pairs. Enclose each property name in quotation marks. For example, `wlanVHTConfig('GuardInterval','Short')` specifies a 400-nanosecond guard interval (cyclic prefix) duration.

At runtime, the calling function validates object settings for properties relevant to the operation of the function.

Properties

ChannelBandwidth — Channel bandwidth of PPDU transmission

'CBW80' (default) | 'CBW20' | 'CBW40' | 'CBW160'

Channel bandwidth of PPDU transmission, specified as one of these values:

- 'CBW20' - Channel bandwidth of 20 MHz
- 'CBW40' - Channel bandwidth of 40 MHz
- 'CBW80' - Channel bandwidth of 80 MHz
- 'CBW160' - Channel bandwidth of 160 MHz

Data Types: char | string

NumUsers — Number of users

1 (default) | 2 | 3 | 4

Number of users, specified as 1, 2, 3, or 4.

Data Types: double

UserPositions — User positions

[0 1] (default) | vector of integers

User positions, specified as a 1-by-NumUsers vector of integers in the interval [0, 3] in strictly increasing order.

Example: [0 2 3] specifies the positions for three users. The first user occupies position 0, the second user occupies position 2, and the third user occupies position 3.

Dependencies

This property applies only when you specify the NumUsers property as a value greater than 1.

Data Types: double

NumTransmitAntennas — Number of transmit antennas

1 (default) | integer in the interval [1, 8]

Number of transmit antennas, specified as an integer in the interval [1, 8].

Data Types: double

NumSpaceTimeStreams — Number of space-time streams

1 (default) | integer in the interval [1, 8] | vector of integers in the interval [1, 4]

Number of space-time streams in the transmission, specified as one of these values:

- An integer in the interval [1, 8], applicable when the NumUsers property is 1
- A 1-by-NumUsers vector of integers in the interval [1, 4], applicable when the NumUsers property is greater than 1.

Example: [1 3 2] is the number of space-time streams for each user in a three-user transmission.

Note The sum of the elements of this property must not exceed eight.

Data Types: double

SpatialMapping — Spatial mapping scheme

'Direct' (default) | 'Hadamard' | 'Fourier' | 'Custom'

Spatial mapping scheme, specified as 'Direct', 'Hadamard', 'Fourier', or 'Custom'.

Dependencies

The default value, 'Direct', applies only when you set the NumTransmitAntennas and NumSpaceTimeStreams properties to the same value.

Data Types: char | string

SpatialMappingMatrix — Spatial mapping matrix

1 (default) | complex-valued scalar | complex-valued matrix | complex-valued 3-D array

Spatial mapping matrix, specified as one of these values:

- A complex-valued scalar. This value applies to all the subcarriers.
- A complex-valued matrix of size N_{STS} -by- N_{T} , where:
 - N_{STS} is the number of space-time streams;
 - N_{T} is the number of transmit antennas.

In this case, the spatial mapping matrix applies to all the subcarriers.

- A complex-valued 3-D array of size N_{ST} -by- N_{STS} -by- N_{T} , where N_{ST} is the number of occupied subcarriers. The value of N_{ST} is the number of occupied subcarriers. The ChannelBandwidth property determines the value of N_{ST} . In this case, each occupied subcarrier has its own spatial mapping matrix.

This table shows the ChannelBandwidth setting and the corresponding N_{ST} :

ChannelBandwidth	Number of Occupied Subcarriers, N_{ST}	Number of Data Subcarriers	Number of Pilot Subcarriers
'CBW20'	56	52	4
'CBW40'	114	108	6
'CBW80'	242	234	8
'CBW160'	484	468	16

Use this property to rotate and scale the output vector of the constellation mapper. The spatial mapping matrix is used for beamforming and mixing space-time streams over the transmit antennas. For more information, see Section 20.3.11.11.2 of [1]. The calling function normalizes the spatial mapping matrix for each subcarrier.

Example: $[0.5 \ 0.3; \ 0.4 \ 0.4; \ 0.5 \ 0.8]$ represents a spatial mapping matrix with three space-time streams and two transmit antennas.

Dependencies

This property applies only when you set the SpatialMapping property to 'Custom'.

Data Types: double

Complex Number Support: Yes

Beamforming — Enable beamforming

true or 1 (default) | false or 0

Enable beamforming, specified as a numeric or logical value of 1 (true) or 0 (false). To apply a beamforming steering matrix, set this property to 1 (true). The SpatialMappingMatrix property specifies the beamforming steering matrix.

Dependencies

This property applies only when the NumUsers property is set to 1 and the SpatialMapping property is set to 'Custom'.

Data Types: logical

STBC — Enable STBC

false or 0 (default) | true or 1

Enable space-time block coding (STBC) of the PPDU data field, specified as a numeric or logical value of 1 (true) or 0 (false). STBC transmits multiple copies of the data stream across assigned antennas.

- When you set this property to 0 (false), STBC is not applied to the data field. The number of space-time streams is equal to the number of spatial streams.
- When you set this property to 1 (true), STBC is applied to the data field. The number of space-time streams is twice the number of spatial streams.

For more information, see Section 22.3.10.9.4 of

Dependencies

This property applies only when the NumUsers property is 1.

Data Types: logical

MCS — Modulation and coding scheme used for transmission

0 (default) | integer in the interval [0, 9] | vector of integers

Modulation and coding scheme used for transmission, specified as one of these values:

- an integer in the interval [0, 9], applicable when the NumUsers property is 1
- a 1-by-NumUsers vector of integers in the interval [0, 9], applicable when the NumUsers property is greater than 1.

This table shows the modulation type and coding rate for each valid value of MCS:

MCS	Modulation	Coding Rate
0	Binary phase-shift keying (BPSK)	1/2
1	Quadrature phase-shift keying (QPSK)	1/2
2	QPSK	3/4
3	16-point quadrature amplitude modulation (16-QAM)	1/2
4	16-QAM	3/4
5	64-QAM	2/3

MCS	Modulation	Coding Rate
6	64-QAM	3/4
7	64-QAM	5/6
8	256-QAM	3/4
9	256-QAM	5/6

Data Types: double

ChannelCoding – FEC coding type

'BCC' (default) | 'LDPC' | cell array of character vectors | cell array of strings

Forward-error-correction (FEC) coding type for the HE-Data field, specified as one of these values:

- 'LDPC' - Low-density parity-check (LDPC) coding applies to all users in the transmission
- 'BCC' - binary convolutional coding (BCC) applies to all users in the transmission
- A 1-by-NumUsers cell array containing the values 'LDPC' and 'BCC', where the k th element specifies the channel coding for user k

For more information, see Section 22.3.10.9.4 of [2].

Data Types: char | cell | string

APEPLength – APEP length

1024 (default) | nonnegative integer | vector of nonnegative integers

Aggregated MPDU (A-MPDU) pre-end-of-frame (pre-EOF) padding (APEP) length, in bytes.

- When the NumUsers property is 1, specify this property as a nonnegative integer in the interval $[0, 2^{20} - 1]$.
- When the NumUsers property is a value other than 1, specify this property as a 1-by-NumUsers vector of integers in the interval $[0, 2^{20} - 1]$.
- For a null data packet (NDP), set this property to 0.

The wlanVHTConfig object uses this property to determine the number of OFDM symbols in the data field. For more information, see Table 22-1 of [2].

Note This object supports only aggregated data transmission.

Data Types: double

PSDULength — PSDU length

integer in the interval $[0, 2^{20} - 1]$ | vector of integers in the interval $[0, 2^{20}-1]$

This property is read-only.

Physical layer convergence procedure (PLCP) service data unit (PSDU) length, in bytes, specified as one of these values:

- An integer in the interval $[0, 2^{20} - 1]$, applicable when the NumUsers property is 1. A value of 0 corresponds to a null data packet (NDP).
- A vector of integers in the interval $[0, 2^{20} - 1]$, applicable when the NumUsers property is greater than 1.
- An empty array, applicable when this property is undefined, for example, when the set of property values is invalid.

The wlanVHTConfig object calculates this property based on the value of the APEPLength property and other coding related properties. The details of this calculation are specified in Section 22.4.3 of [2].

Example: [1035 4150] is the PSDU length vector for a wlanVHTConfig object where the NumUsers property is 2 and the MCS property is [0 3].

Data Types: double

GuardInterval — Guard interval (cyclic prefix) duration

'Long' (default) | 'Short'

Guard interval (cyclic prefix) duration for the data field within a packet specified as one of these values:

- 'Long' - Guard interval duration of 800 ns
- 'Short' - Guard interval duration of 400 ns

Data Types: char | string

GroupID — Group identification number

63 (default) | integer in the interval $[0, 63]$

Group identification number, specified as an integer in the interval [0, 63].

Dependencies

The values 0 and 63 apply only when you set the NumUsers property to 1. Values in the interval [1, 62] apply only when you set the NumUsers property to a value other than 1.

Data Types: double

PartialAID — Abbreviated indication of PSDU recipients

275 (default) | integer in the interval [0, 511]

Abbreviated indication of the PSDU recipients, specified as an integer in the interval [0, 511].

- For an uplink transmission, the partial identification number is the last nine bits of the basic service set identifier (BSSID).
- For a downlink transmission, the partial identification number is an identifier that combines the association ID with the BSSID of its serving AP.

For more information, see Table 22-1 of [2].

Data Types: double

Examples

Create wlanVHTConfig Object for Single User

Create a VHT configuration object with the default settings.

```
cfgVHT = wlanVHTConfig
cfgVHT =
    wlanVHTConfig with properties:
        ChannelBandwidth: 'CBW80'
        NumUsers: 1
        NumTransmitAntennas: 1
        NumSpaceTimeStreams: 1
        SpatialMapping: 'Direct'
        STBC: 0
        MCS: 0
```

```
        ChannelCoding: 'BCC'  
        APEPLength: 1024  
        GuardInterval: 'Long'  
        GroupID: 63  
        PartialAID: 275  
  
    Read-only properties:  
        PSDULength: 1035
```

Update the channel bandwidth.

```
cfgVHT.ChannelBandwidth = 'CBW40'
```

```
cfgVHT =  
    wlanVHTConfig with properties:  
  
        ChannelBandwidth: 'CBW40'  
        NumUsers: 1  
        NumTransmitAntennas: 1  
        NumSpaceTimeStreams: 1  
        SpatialMapping: 'Direct'  
        STBC: 0  
        MCS: 0  
        ChannelCoding: 'BCC'  
        APEPLength: 1024  
        GuardInterval: 'Long'  
        GroupID: 63  
        PartialAID: 275  
  
    Read-only properties:  
        PSDULength: 1030
```

Create wlanVHTConfig Object for Two Users

Create a VHT configuration object for a 20MHz two-user configuration and one antenna per user.

Create a `wlanVHTConfig` object using a combination of `Name, Value` pairs and in-line initialization to change default settings. Vector-valued properties apply user-specific settings.

```

cfgMU = wlanVHTConfig('ChannelBandwidth','CBW20','NumUsers',2, ...
    'GroupID',2,'NumTransmitAntennas',2);

cfgMU.NumSpaceTimeStreams = [1 1];
cfgMU.MCS = [4 8];
cfgMU.APEPLength = [1024 2048];
cfgMU.ChannelCoding = {'BCC' 'LDPC'}

cfgMU =
    wlanVHTConfig with properties:

        ChannelBandwidth: 'CBW20'
            NumUsers: 2
            UserPositions: [0 1]
        NumTransmitAntennas: 2
        NumSpaceTimeStreams: [1 1]
            SpatialMapping: 'Direct'
                MCS: [4 8]
                ChannelCoding: {'BCC' 'LDPC'}
                APEPLength: [1024 2048]
            GuardInterval: 'Long'
                GroupID: 2

    Read-only properties:
        PSDULength: [1030 2065]

```

The configuration object settings reflect the updates specified. Default values are used for properties that were not modified.

More About

PPDU

The physical layer convergence procedure (PLCP) protocol data unit (PPDU) is the complete PLCP frame, including PLCP headers, MAC headers, the MAC data field, and the MAC and PLCP trailers.

References

- [1] IEEE Std 802.11-2012. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.
- [2] IEEE 802.11ac-2013. "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. — Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz." IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

Objects

wlanDMGConfig | wlanHEMUConfig | wlanHESUConfig | wlanHTConfig | wlanNonHTConfig | wlanSIGConfig

Functions

wlanVHTData | wlanVHTDataRecover | wlanVHTLTF | wlanVHTLTFDemodulate | wlanVHTOFDMInfo | wlanVHTSIGA | wlanVHTSIGAREcover | wlanVHTSIGB | wlanVHTSIGBRecover | wlanVHTSTF | wlanWaveformGenerator

Apps

Wireless Waveform Generator

Topics

"Packet Size and Duration Dependencies"

Introduced in R2015b

