

# Sensor Fusion and Tracking Toolbox™ Release Notes



# MATLAB®



## How to Contact MathWorks



Latest news: [www.mathworks.com](http://www.mathworks.com)  
Sales and services: [www.mathworks.com/sales\\_and\\_services](http://www.mathworks.com/sales_and_services)  
User community: [www.mathworks.com/matlabcentral](http://www.mathworks.com/matlabcentral)  
Technical support: [www.mathworks.com/support/contact\\_us](http://www.mathworks.com/support/contact_us)



Phone: 508-647-7000



The MathWorks, Inc.  
1 Apple Hill Drive  
Natick, MA 01760-2098

### *Sensor Fusion and Tracking Toolbox™ Release Notes*

© COPYRIGHT 2018 - 2020 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

### **Trademarks**

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See [www.mathworks.com/trademarks](http://www.mathworks.com/trademarks) for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

### **Patents**

MathWorks products are protected by one or more U.S. patents. Please see [www.mathworks.com/patents](http://www.mathworks.com/patents) for more information.

## R2020b

<b>Create Earth-centered waypoint trajectory</b> .....	1-2
<b>Track objects using grid-based RFS tracker</b> .....	1-2
<b>Generate synthetic point cloud data using simulated lidar sensor</b> .....	1-2
<b>Improve inertial sensor fusion performance using filter tuner</b> .....	1-2
<b>Perturb tracking scenarios, sensors, and trajectories for Monte Carlo simulation</b> .....	1-2
<b>Import trackingScenario object into Tracking Scenario Designer app</b> ...	1-3
<b>Model and simulate INS sensor in Simulink</b> .....	1-3
<b>Model and simulate Singer acceleration motion</b> .....	1-3
<b>Time Scope object: Bilevel measurements, triggers, and compiler support</b> .....	1-3
<b>New examples</b> .....	1-3

## R2020a

<b>Tracking Scenario Designer App: Interactively design tracking scenarios</b> .....	2-2
<b>Design and run Monte Carlo simulations</b> .....	2-2
<b>Visualize sensor coverage area</b> .....	2-2
<b>New time scope object: Visualize signals in the time domain</b> .....	2-2
Scopes Tab .....	2-3
Measurements Tab .....	2-3
<b>Evaluate tracking performance using GOSPA metric</b> .....	2-4
<b>Collect emissions and detections from platforms in tracking scenario</b> .....	2-4

<b>Access residuals and residual covariance of insfilters and ahrs10filter</b>	<b>2-4</b>
<b>Track objects using TOMHT tracker Simulink block</b>	<b>2-4</b>
<b>Model inertial measurement unit using IMU Simulink block</b>	<b>2-4</b>
<b>Estimate device orientation using AHRS Simulink block</b>	<b>2-4</b>
<b>Calculate angular velocity from quaternions</b>	<b>2-4</b>
<b>Transform position and velocity between two frames to motion quantities in a third frame</b>	<b>2-4</b>
<b>Import Parameters to imuSensor</b>	<b>2-5</b>
<b>New examples</b>	<b>2-5</b>

## **R2019b**

<b>Perform track-level fusion using a track fuser</b>	<b>3-2</b>
<b>Track objects using a Gaussian mixture PHD tracker</b>	<b>3-2</b>
<b>Evaluate tracking performance using the OSPA metric</b>	<b>3-2</b>
<b>Estimate orientation using a complementary filter</b>	<b>3-2</b>
<b>Track objects using tracker Simulink blocks</b>	<b>3-2</b>
<b>Features supporting ENU reference frame</b>	<b>3-2</b>
<b>INS filter name and creation syntax changes</b>	<b>3-3</b>
<b>New examples</b>	<b>3-3</b>

## **R2019a**

<b>Track objects using a Joint Probabilistic Data Association (JPDA) tracker</b>	<b>4-2</b>
<b>Track extended objects using a Probability Hypothesis Density (PHD) tracker</b>	<b>4-2</b>
<b>Simulate radar and IR detections from extended objects</b>	<b>4-2</b>

<b>Improve tracker performance for large number of targets</b> . . . . .	<b>4-2</b>
<b>Estimate pose using accelerometer, gyroscope, GPS, and monocular visual odometry data</b> . . . . .	<b>4-3</b>
<b>Estimate pose using an extended continuous-discrete Kalman filter</b> . . . .	<b>4-3</b>
<b>Estimate height and orientation using MARG and altimeter data</b> . . . . .	<b>4-3</b>
<b>Simulate altimeter sensor readings</b> . . . . .	<b>4-3</b>
<b>Model and simulate bistatic radar tracking systems</b> . . . . .	<b>4-3</b>
<b>Correct magnetometer readings for soft- and hard-iron effects</b> . . . . .	<b>4-3</b>
<b>Determine Allan variance of gyroscope data</b> . . . . .	<b>4-3</b>
<b>Generate quaternions from uniformly distributed random rotations</b> . . . .	<b>4-3</b>
<b>New application examples</b> . . . . .	<b>4-4</b>

**R2018b**

<b>Single-Hypothesis and Multi-Hypothesis Multi-Object Trackers</b> . . . . .	<b>5-2</b>
<b>Estimation Filters for Tracking</b> . . . . .	<b>5-2</b>
<b>Inertial Sensor Fusion to Estimate Pose</b> . . . . .	<b>5-2</b>
<b>Active and Passive Sensor Models</b> . . . . .	<b>5-3</b>
<b>Trajectory and Scenario Generation</b> . . . . .	<b>5-3</b>
<b>Visualization and Analytics</b> . . . . .	<b>5-3</b>
<b>Orientation, Rotations, and Representation Conversions</b> . . . . .	<b>5-3</b>
<b>Sensor Fusion and Tracking Examples</b> . . . . .	<b>5-4</b>



# R2020b

---

**Version: 2.0**

**New Features**

**Bug Fixes**

## Create Earth-centered waypoint trajectory

Use the `geoTrajectory System` object™ to create an Earth-centered waypoint trajectory. To define a `geoTrajectory` object in a tracking scenario, set the value of the `IsEarthCentered` property of the `trackingScenario` object to `true`.

For more details, see the “Simulate and Track En-Route Aircraft in Earth-Centered Scenarios” example.

## Track objects using grid-based RFS tracker

Use the grid-based random finite set (RFS) tracker, the `trackerGridRFS System` object, to track objects using a grid-based occupancy evidence approach. To visualize the dynamic occupancy grid map of the tracking scene, use the `showDynamicMap` function.

For more details, see the “Grid-based Tracking in Urban Environments Using Multiple Lidars” example.

## Generate synthetic point cloud data using simulated lidar sensor

Use the `monostaticLidarSensor System` object to model a lidar sensor and generate synthetic point cloud data from platforms in a tracking scenario. The `monostaticLidarSensor System` object obtains data from mesh representations of platforms within the scenario.

- To define a mesh representation other than the default cuboid mesh for a platform, use the `extendedObjectMesh` object. The toolbox also provides a predefined mesh object, `tracking.scenario.airplaneMesh`.
- To obtain the meshes of platforms in a tracking scenario, use the `targetMeshes` function.
- To obtain point cloud data from all the `monostaticLidarSensor` objects mounted on a platform, use the `lidarDetect` function of the platform. To obtain point cloud data from all the `monostaticLidarSensor` objects in a tracking scenario, use the `lidarDetect` function of the scenario.

For more details, see the “Extended Object Tracking with Lidar for Airport Ground Surveillance” example.

## Improve inertial sensor fusion performance using filter tuner

Use the `tune` function and the `tunerconfig` object to adjust properties of the `imuFilter`, `ahrsFilter`, and `insFilterAsync` objects for performance improvement.

For more details, see the “Automatic Tuning of the `insFilterAsync` Filter” example.

## Perturb tracking scenarios, sensors, and trajectories for Monte Carlo simulation

Use the `perturbations` and `perturb` functions to perturb tracking scenarios, sensors, and trajectories. You can run Monte Carlo simulations on the perturbed objects using the `monteCarloRun` function.



---

For more details, see the “Simulate, Detect, and Track Anomalies in a Landing Approach” example.

## **Import trackingScenario object into Tracking Scenario Designer app**

Import a `trackingScenario` object into the **Tracking Scenario Designer** app to visualize and redesign the imported tracking scenario. For the limitations of importing a `trackingScenario` object, see the “Programmatic Use” section.

## **Model and simulate INS sensor in Simulink**

Use the INS block to model and simulate an INS sensor and generate INS measurements in Simulink®.

## **Model and simulate Singer acceleration motion**

Use the `singer` function to model and simulate Singer acceleration motion. You can also use the `initsingerekf`, `singerjac`, `singermeas`, `singermeasjac`, and `singerProcessNoise` functions to construct a Singer model-based extended Kalman filter as a `trackingEKF` object.

For more details, see the “Track Multiple Lane Boundaries with a Global Nearest Neighbor Tracker” example.

## **Time Scope object: Bilevel measurements, triggers, and compiler support**

The `timescope` object now includes support for:

- Bilevel measurements - Measure transitions, overshoots, undershoots, and cycles.
- Triggers - Set triggers to sync repeating signals and pause the display when events occur.
- MATLAB® Compiler™ support - Use the `mcc` function to compile code for deployment.

## **New examples**

This release contains several new examples:

- “Simulate and Track En-Route Aircraft in Earth-Centered Scenarios”
- “Grid-based Tracking in Urban Environments Using Multiple Lidars”
- “Extended Object Tracking with Lidar for Airport Ground Surveillance”
- “Detect, Classify, and Track Vehicles Using Lidar”
- “Simulate, Detect, and Track Anomalies in a Landing Approach”
- “Track Multiple Lane Boundaries with a Global Nearest Neighbor Tracker”
- “Automatic Tuning of the `insfilterAsync` Filter”
- “Generate Code for a Track Fuser with Heterogeneous Source Tracks”



# R2020a

---

**Version: 1.3**


**New Features**

**Bug Fixes**

## Tracking Scenario Designer App: Interactively design tracking scenarios

Use the Tracking Scenario Designer app to interactively design a tracking scenario composed of platforms, sensors, and trajectories. You can also output scripts for the designed tracking scenario.

For more details, see the Design and Simulate Tracking Scenario with Tracking Scenario Designer example.

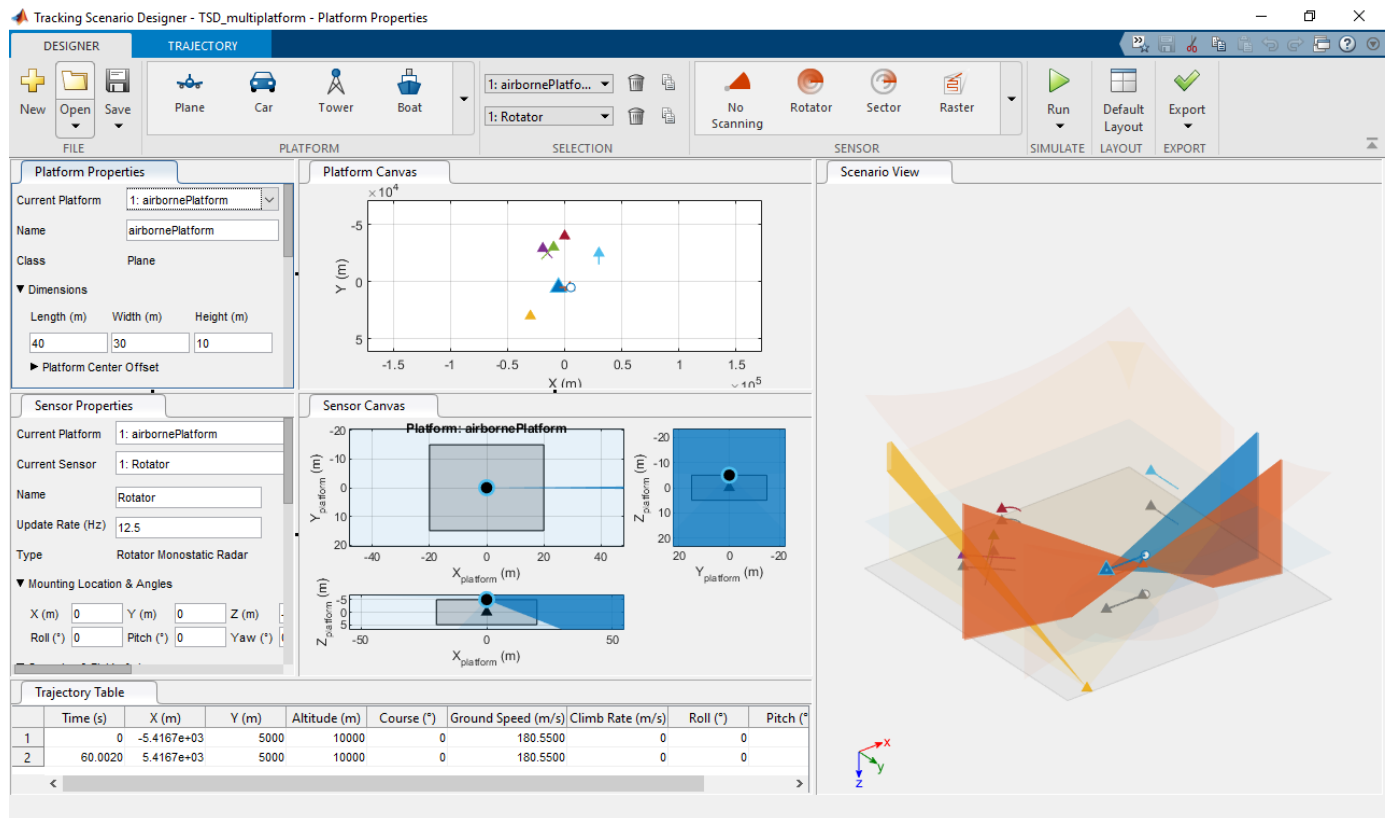

## Design and run Monte Carlo simulations

Use `trackingScenario`, `trackingScenarioRecording`, and `monteCarloRun` to design and run Monte Carlo simulations for tracking applications.

## Visualize sensor coverage area

Use `coveragePlotter` and `plotCoverage` along with `theaterPlot` to plot and visualize beam and coverage area of sensors in a tracking scenario.


## New time scope object: Visualize signals in the time domain

Use the `timescope` object to visualize real- and complex-valued floating-point and fixed-point signals in the time domain.

The Time Scope window has two toolstrip tabs:

## Scopes Tab


On the **Scopes** tab, you can control the layout and configuration settings, and set the display settings of the Time Scope. You can also generate script to recreate your time scope with the same settings. When doing so, an editor window opens with the code required to recreate your timescope object.

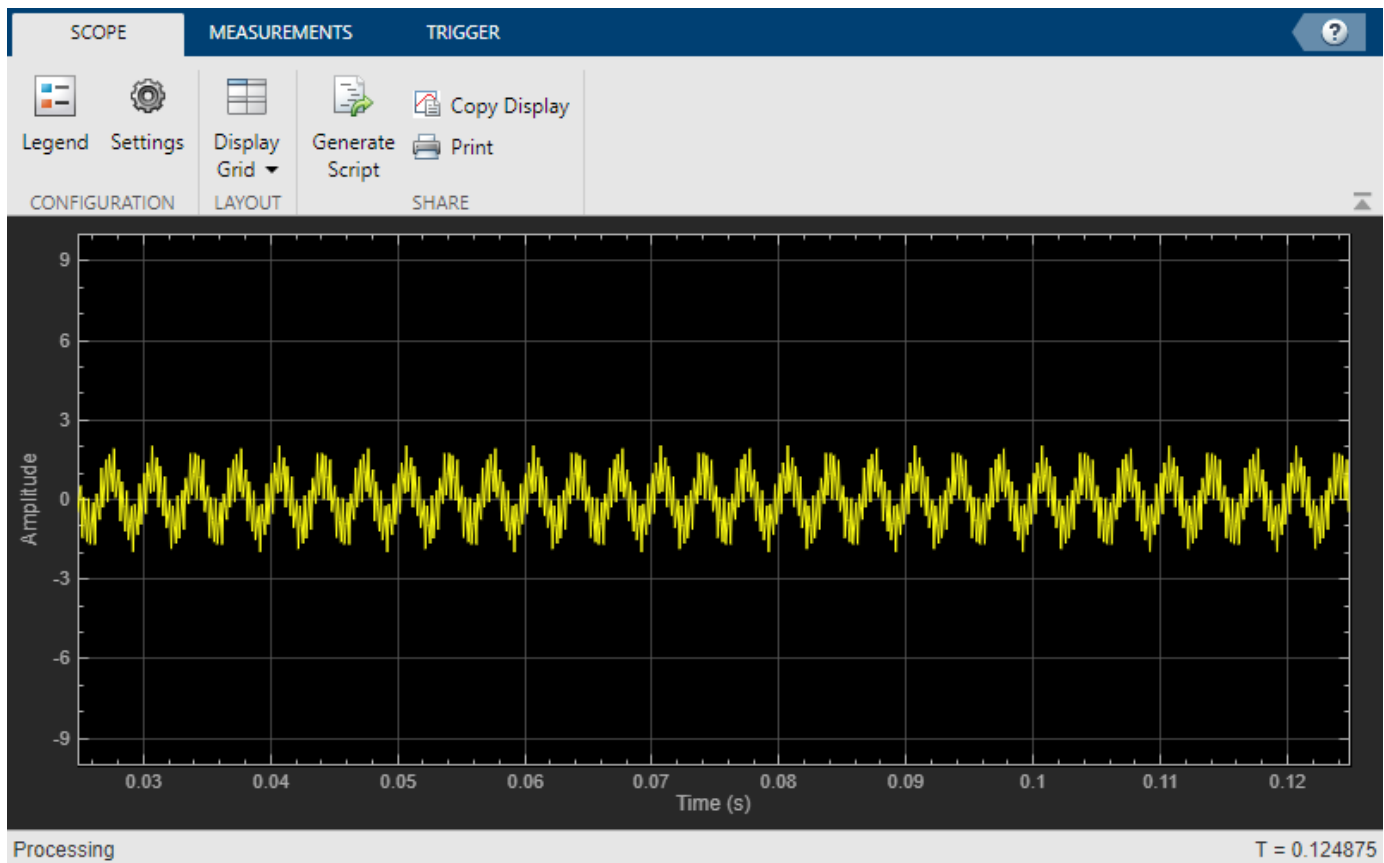

## Measurements Tab

In the **Measurements** tab, all measurements are made for a specified channel.

- **Data Cursors** — Display the screen cursors.
- **Signal Statistics** — Display the various statistics of the selected signal, such as maximum/minimum values, peak-to-peak values, mean, median, and RMS.
- **Peak Finder** — Display peak values for the selected signal.

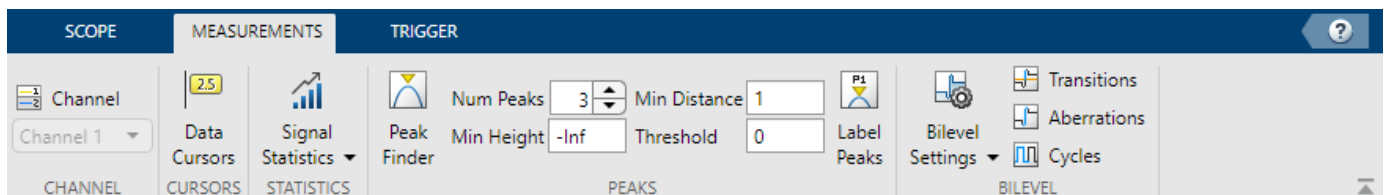

## Evaluate tracking performance using GOSPA metric

Use `trackGOSPAMetric` to evaluate the performance of a tracking system against truths based on the global optimal subpattern assignment metric.

For more details, see the Introduction to Tracking Metrics example.

## Collect emissions and detections from platforms in tracking scenario

Use `emit`, `propagate`, and `detect` to collect emissions and detections from platforms in a `trackingScenario`.

## Access residuals and residual covariance of insfilters and ahrs10filter

You can access the residuals and residual covariance information of `insfilters` (`insfilterMARG`, `insfilterAsync`, `insfilterErrorState`, and `insfilterNonholonomic`) and `ahrs10filter` through their object functions such as `fusegps`, `fusegyro`, `residual`, and `residualgps`.

For more details, see the Detect Noise in Sensor Readings with Residual Filtering example.

## Track objects using TOMHT tracker Simulink block

Use the Track-Oriented Multi-Hypothesis Tracker Simulink block to track objects.

## Model inertial measurement unit using IMU Simulink block

Use the IMU Simulink block to model an inertial measurement unit (IMU) composed of accelerometer, gyroscope, and magnetometer sensors.

For more details, see the IMU Sensor Fusion with Simulink example.

## Estimate device orientation using AHRS Simulink block

Use the AHRS Simulink block to estimate the orientation of a device from its accelerometer, magnetometer, and gyroscope sensor readings.

For more details, see the IMU Sensor Fusion with Simulink example.

## Calculate angular velocity from quaternions

Use `angvel` to calculate angular velocity from an array of quaternions.

## Transform position and velocity between two frames to motion quantities in a third frame

Use `transformMotion` to transform position and velocity between two coordinate frames to motion quantities in a third coordinate frame.

For more details, see the Generate Off-centered IMU Readings examples.

---

## Import Parameters to imuSensor

Use the `loadparams` object function to import parameters in JSON files to the `imuSensor` System object.

### New examples

This release contains several new examples:

- Track-Level Fusion of Radar and Lidar Data
- Track Point Targets in Dense Clutter Using GM-PHD Tracker
- Track Space Debris Using a Keplerian Motion Model
- Introduction to Tracking Metrics
- Tuning a Multi-Object Tracker
- Detect Noise in Sensor Readings with Residual Filtering
- Generate Off-centered IMU Readings
- IMU Sensor Fusion with Simulink





# R2019b

---

**Version: 1.2**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## Perform track-level fusion using a track fuser

Use `trackFuser` to fuse tracks generated by tracking sensors or trackers and architect decentralized tracking systems.

For more details, see the [Track-to-Track Fusion for Automotive Safety Applications](#) example.

## Track objects using a Gaussian mixture PHD tracker

Use `trackerPHD` with a `gmphd` filter to track point objects and extended objects with designated shapes. With `gmphd`, you can also use rectangular object models (such as `ctrect` and `ctrectmeas`) to track objects of rectangular shape.

For more details, see the [Extended Object Tracking and Performance Metrics Evaluation](#) example.

## Evaluate tracking performance using the OSPA metric

Use `trackOSPAMetric` to evaluate the performance of a tracking system against truth based on the optimal subpattern assignment metric.

For more details, see the [Extended Object Tracking and Performance Metrics Evaluation](#) example.

## Estimate orientation using a complementary filter

You can use `complementaryFilter` to estimate orientation based on accelerometer, gyroscope, and magnetometer sensor data.

For more details, see the [Estimate Orientation with a Complementary Filter and IMU Data](#) example.

## Track objects using tracker Simulink blocks

You can use the GNN tracker and JPDA tracker Simulink blocks to track objects.

For more details on how to use these two blocks, see these example:

- [Track Vehicles Using Lidar Data in Simulink](#)
- [Track Closely Spaced Targets Under Ambiguity in Simulink](#)
- [Track Simulated Vehicles Using GNN and JPDA Trackers in Simulink](#)

## Features supporting ENU reference frame

By specifying the 'ReferenceFrame' argument, you can set the output reference frame for the following functions and objects as the ENU (east-north-up) frame. The default reference frame for these functions and objects is the NED (north-east-down) frame.

Features Supporting ENU	Description
<code>imuSensor</code>	IMU simulation model
<code>gpsSensor</code>	GPS receiver simulation model
<code>altimeterSensor</code>	Altimeter simulation model

Features Supporting ENU	Description
ecompass	Orientation from magnetometer and accelerometer readings
imufilter	Orientation from accelerometer and gyroscope readings
ahrsfilter	Orientation from accelerometer, gyroscope, and magnetometer readings
ahrs10filter	Height and orientation from MARG and altimeter readings
insfilterMARG	Estimate pose from MARG and GPS data
insfilterAsync	Estimate pose from asynchronous MARG and GPS data
insfilterErrorState	Estimate pose from IMU, GPS, and monocular visual odometry (MVO) data
insfilterNonholonomic	Estimate pose with nonholonomic constraints
complementaryFilter	Orientation estimation from a complementary filter

## INS filter name and creation syntax changes

The names of these four INS (inertial navigation system) filters have changed.

Old Name	New Name
MARGGPSFuser	insfilterMARG
AsyncMARGGPSFuser	insfilterAsync
ErrorStateIMUGPSFuser	insfilterErrorState
NHConstrainedIMUGPSFuser	insfilterNonholonomic

Also, the old creation syntaxes, which can create INS filters with new names, will be removed in a future release. The new and recommended creation syntaxes directly create these filters by calling their names.

Old and Discouraged	New and Recommended
<code>filter = insfilter</code>	<code>filter = insfilterMARG</code>
<code>filter = insfilter('asyncimu')</code>	<code>filter = insfilterAsync</code>
<code>filter = insfilter('errorstate')</code>	<code>filter = insfilterErrorState</code>
<code>filter = insfilter('nonholonomic')</code>	<code>filter = insfilterNonholonomic</code>

## New examples

This release contains several new examples:

- Track-to-Track Fusion for Automotive Safety Applications
- Simulate a Tracking Scenario Using an Interactive Application

- Estimate Orientation with a Complementary Filter and IMU Data
- Logged Sensor Data Alignment for Orientation Estimation
- Track Vehicles Using Lidar Data in Simulink
- Track Closely Spaced Targets Under Ambiguity in Simulink
- Track Simulated Vehicles Using GNN and JPDA Trackers in Simulink
- Convert Detections to `objectDetection` Format
- Remove Bias from Angular Velocity Measurement
- Estimating Orientation Using Inertial Sensor Fusion and MPU-9250
- Read and Parse NMEA Data Directly From GPS Receiver

# R2019a

---

**Version: 1.1**

**New Features**

**Bug Fixes**

## Track objects using a Joint Probabilistic Data Association (JPDA) tracker

Sensor Fusion and Tracking Toolbox includes `trackerJPDA` as an alternative to the existing `trackerGNN` and `trackerTOMHT`. `trackerJPDA` applies a soft assignment where multiple detections can contribute to each track, and balances the robustness and computational cost between `trackerGNN` and `trackerTOMHT`.

For more details on using `trackerJPDA`, see these examples:

- Track Vehicles Using Lidar: From Point Cloud to Track List
- Tracking Closely Spaced Targets Under Ambiguity

## Track extended objects using a Probability Hypothesis Density (PHD) tracker

You can use `trackerPHD` to track extended objects using a Gamma Gaussian Inverse Wishart (GGIW) PHD filter, `ggiwphd`. `trackerPHD` creates a multisensor, multiobject tracker utilizing the multitarget PHD filters to estimate the states of the target.

For more details on using `trackerPHD`, see these examples:

- Marine Surveillance Using a PHD Tracker
- Extended Object Tracking

## Simulate radar and IR detections from extended objects

To represent a platform's location as a "spatial extent" instead of a single point, you can use `radarSensor` and `irSensor` to simulate radar and IR detections from extended objects by specifying the `Dimensions` property of `platform`.

For more details on how to simulate radar detections from extended objects, see the `Marine Surveillance` example.

## Improve tracker performance for large number of targets

`trackerGNN`, `trackerTOMHT` and `trackerJPDA` enable you to reduce the time required to update the tracker by setting a cost calculation threshold via the `AssignmentThreshold` property. This, along with other performance improvements, reduces the processing time when tracking a large number of targets.

For more details, see these examples:

- How to Efficiently Track Large Numbers of Objects
- Tracking a Flock of Birds

---

## Estimate pose using accelerometer, gyroscope, GPS, and monocular visual odometry data

The `insfilter` can create an error-state Kalman filter suitable for pose (position and orientation) estimation based on accelerometer, gyroscope, GPS, and monocular visual odometry data. To create the error-state Kalman filter, use the `'errorState'` input argument.

## Estimate pose using an extended continuous-discrete Kalman filter

The `insfilter` can create a continuous-discrete Kalman filter suitable for pose (position and orientation) estimation based on accelerometer, gyroscope, GPS, and magnetometer input. To create the continuous-discrete Kalman filter, use the `'asyncIMU'` input argument.

For more details, see the Pose Estimation From Asynchronous Sensors example.

## Estimate height and orientation using MARG and altimeter data

Use `ahrs10filter` to estimate height and orientation based on altimeter readings and MARG (magnetic, angular rate, gravity) data. Typically, MARG data is derived from magnetometer, gyroscope, and accelerometer readings.

## Simulate altimeter sensor readings

Use `altimeterSensor` to simulate altimeter sensor readings based on a ground-truth position.

## Model and simulate bistatic radar tracking systems

`radarSensor`, `radarEmitter`, and `radarChannel` support modeling a radar tracking system with bistatic sensors (physically separated transmitter and receiver), including the effects of signal reflections from the target. To create a bistatic radar sensor, set the `DetectionMode` property of `radarSensor` to `'bistatic'`.

For more details, see the Tracking Using Bistatic Range Detections example.

## Correct magnetometer readings for soft- and hard-iron effects

Use `magcal` to determine the coefficients needed to correct uncalibrated magnetometer data. You can correct for soft-iron effects, hard-iron effects, or both.

For more details, see the Magnetometer Calibration example.

## Determine Allan variance of gyroscope data

Use `allanvar` to determine the Allan variance of gyroscope data. You can use the Allan variance to set noise parameters on your sensor models.

## Generate quaternions from uniformly distributed random rotations

Use `randrot` to generate unit quaternions drawn from a uniform distribution of random rotations.

## **New application examples**

This release contains several new application examples:

- Marine Surveillance Using a PHD Tracker shows how to use a PHD tracker to track extended ship targets with radar detections.
- Track Vehicles Using Lidar: From Point Cloud to Track List shows how to use a JPDA tracker to track vehicles with Lidar detections.
- How to Efficiently Track Large Numbers of Objects.
- Tracking a Flock of Birds.
- Tracking Using Bistatic Range Detections.
- Pose Estimation From Asynchronous Sensors.
- Magnetometer Calibration.
- How to Generate C Code for a Tracker.



# R2018b

---

**Version: 1.0**

**New Features**

## Single-Hypothesis and Multi-Hypothesis Multi-Object Trackers

Sensor Fusion and Tracking Toolbox provides multi-object trackers that fuse information from various sensors. Use `trackerGNN` to maintain a single hypothesis about the objects it tracks. Use `trackerTOMHT` to maintain multiple hypotheses about the objects it tracks.

## Estimation Filters for Tracking

Sensor Fusion and Tracking Toolbox provides estimation filters that are optimized for specific scenarios, such as linear or nonlinear motion models, linear or nonlinear measurement models, or incomplete observability.

Estimation filters include:

Estimate Filters	Description
<code>trackingABF</code>	Alpha-beta filter
<code>trackingKF</code>	Linear Kalman filter
<code>trackingEKF</code>	Extended Kalman filter
<code>trackingUKF</code>	Unscented Kalman filter
<code>trackingCKF</code>	Cubature Kalman filter
<code>trackingPF</code>	Particle filter
<code>trackingMSCEKF</code>	Extended Kalman filter in modified spherical coordinates
<code>trackingGSF</code>	Gaussian-sum filter
<code>trackingIMM</code>	Interacting multiple model filter

## Inertial Sensor Fusion to Estimate Pose

Sensor Fusion and Tracking Toolbox provides algorithms to estimate orientation and position from IMU and GPS data. The algorithms are optimized for different sensor configurations, output requirements, and motion constraints.

Inertial sensor fusion algorithms include:

Inertial Sensor Fusion Algorithm	Description
<code>ecompass</code>	Estimate orientation using magnetometer and accelerometer readings.
<code>imufilter</code>	Estimate orientation using accelerometer and gyroscope readings
<code>ahrsfilter</code>	Estimate orientation using accelerometer, gyroscope, and magnetometer readings
<code>insfilter</code>	Estimate position and orientation (pose) using IMU and GPS readings.

---

## Active and Passive Sensor Models

Sensor Fusion and Tracking Toolbox provides active and passive sensor models. You can mimic environmental, channel, and sensor configurations by modifying parameters of the sensor models. For active sensors, you can model the corresponding emitters and channels as separate models.

Sensor models include:

Sensor Model	Description
<code>imuSensor</code>	IMU measurements of accelerometer, gyroscope, and magnetometer
<code>gpsSensor</code>	GPS position, velocity, groundspeed, and course measurements
<code>insSensor</code>	INS/GPS position, velocity, and orientation emulator
<code>monostaticRadarSensor</code>	Radar detection generator
<code>sonarSensor</code>	Active or passive sonar detection generator
<code>irSensor</code>	Infrared (IR) detection generator
<code>radarSensor</code>	Radio frequency detection generator

## Trajectory and Scenario Generation

Generate ground-truth trajectories to drive sensor models using the `kinematicTrajectory` and `waypointTrajectory` System objects. Simulate tracking of multiple platforms in a 3-D arena using `trackingScenario`.

## Visualization and Analytics

Use `theaterPlot` with `trackingScenario` to plot the ground-truth pose, detections, and estimated pose tracks for multi-object scenarios. Get error metrics for tracks using `trackErrorMetrics`. Analyze and compare the performance of multi-object tracking systems using `trackAssignmentMetrics`.

## Orientation, Rotations, and Representation Conversions

The quaternion data type enables efficient representation of orientation and rotations. Sensor Fusion and Tracking Toolbox provides the following functions for use with the quaternion data type:

Rotations	
<code>rotateframe</code>	Quaternion frame rotation
<code>rotatepoint</code>	Quaternion point rotation

Representation Conversion	
<code>rotmat</code>	Convert quaternion to rotation matrix
<code>rotvec</code>	Convert quaternion to rotation vector (radians)

<b>Representation Conversion</b>	
rotvecd	Convert quaternion to rotation vector (degrees)
parts	Extract quaternion parts
euler	Convert quaternion to Euler angles (radians)
eulerd	Convert quaternion to Euler angles (degrees)
compact	Convert quaternion array to N-by-4 matrix

<b>Metrics and Interpolation</b>	
dist	Angular distance in radians
norm	Quaternion norm
meanrot	Quaternion mean rotation
slerp	Spherical linear interpolation

<b>Initialization and Convenience Functions</b>	
ones	Create quaternion array with real parts set to one and imaginary parts set to zero
zeros	Create quaternion array with all parts set to zero
classUnderlying	Class of parts within quaternion
normalize	Quaternion normalization

<b>Mathematics</b>	
times, .*	Element-wise quaternion multiplication
mtimes, *	Quaternion multiplication
prod	Product of a quaternion array
minus, -	Quaternion subtraction
uminus, -	Quaternion unary minus
conj	Complex conjugate of quaternion
ldivide, ./	Element-wise quaternion left division
rdivide, ./	Element-wise quaternion right division
exp	Exponential of quaternion array
log	Natural logarithm of quaternion array
power, .^	Element-wise quaternion power

<b>Array Manipulation</b>	
ctranspose, '	Complex conjugate transpose of quaternion array
transpose, .'	Transpose of quaternion array

## Sensor Fusion and Tracking Examples

The release of Sensor Fusion and Tracking Toolbox includes the following examples.

<b>Applications</b>
Air Traffic Control
Multiplatform Radar Detection Fusion
Passive Ranging Using a Single Maneuvering Sensor
Tracking Using Distributed Synchronous Passive Sensors
Search and Track Scheduling for Multifunction Phased Array Radar
Extended Object Tracking
Visual-Inertial Odometry Using Synthetic Data
IMU and GPS Fusion for Inertial Navigation
<b>Multi-Object Trackers</b>
Multiplatform Radar Detection Fusion
Tracking Closely Spaced Targets Under Ambiguity
Tracking Using Distributed Synchronous Passive Sensors
Extended Object Tracking
Introduction to Using the Global Nearest Neighbor Tracker
Introduction to Track Logic
<b>Estimation Filters</b>
Tracking Maneuvering Targets
Tracking with Range-Only Measurements
Passive Ranging Using a Single Maneuvering Sensor
<b>Inertial Sensor Fusion</b>
Estimate Orientation Through Inertial Sensor Fusion
IMU and GPS Fusion for Inertial Navigation
Estimate Position and Orientation of a Ground Vehicle
Estimate Orientation and Height Using IMU, Magnetometer, and Altimeter
<b>Sensor Models</b>
Inertial Sensor Noise Analysis Using Allan Variance
Simulating Passive Radar Sensors and Radar Interferences
Introduction to Simulating IMU Measurements
Introduction to Tracking Scenario and Simulating Radar Detections
Scanning Radar Mode Configuration
<b>Trajectory and Scenario Generation</b>
Introduction to Tracking Scenario and Simulating Radar Detections
Benchmark Trajectories for Multi-Object Tracking
Multiplatform Radar Detection Generation

**Quaternion Representation**

Rotations, Orientation and Quaternions

Lowpass Filter Orientation Using Quaternion SLERP