# NAG Fortran Library Routine Document G10BAF

Note: before using this routine, please read the Users' Note for your implementation to check the interpretation of **bold italicised** terms and other implementation-dependent details.

## 1 Purpose

G10BAF performs kernel density estimation using a Gaussian kernel.

# 2 Specification

```
SUBROUTINE G10BAF(N, X, WINDOW, SLO, SHI, NS, SMOOTH, T, USEFFT, FFT,

IFAIL)

INTEGER

N, NS, IFAIL

real

X(N), WINDOW, SLO, SHI, SMOOTH(NS), T(NS), FFT(NS)

LOGICAL

USEFFT
```

## 3 Description

Given a sample of n observations,  $x_1, x_2, \ldots, x_n$ , from a distribution with unknown density function, f(x), an estimate of the density function,  $\hat{f}(x)$ , may be required. The simplest form of density estimator is the histogram. This may be defined by

$$\hat{f}(x) = \frac{1}{nh}n_j;$$
  $a + (j-1)h < x < a+jh,$   $j = 1, 2, \dots, n_s$ 

where  $n_j$  is the number of observations falling in the interval a + (j-1)h to a + jh, a is the lower bound to the histogram and  $b = n_s h$  is the upper bound. The value h is known as the window width. To produce a smoother density estimate a kernel method can be used. A kernel function, K(t), satisfies the conditions:

$$\int_{-\infty}^{\infty} K(t) dt = 1 \quad \text{and} \quad K(t) \ge 0.$$

The kernel density estimator is then defined as

$$\hat{f}(x) = \frac{1}{nh} \sum_{i=1}^{n} K\left(\frac{x - x_i}{h}\right).$$

The choice of K is usually not important but to ease the computational burden use can be made of the Gaussian kernel defined as

$$K(t) = \frac{1}{\sqrt{2\pi}} e^{-t^2/2}.$$

The smoothness of the estimator depends on the window width h. The larger the value of h the smoother the density estimate. The value of h can be chosen by examining plots of the smoothed density for different values of h or by using cross-validation methods; see Silverman (1990).

Silverman (1982) and Silverman (1990) show how the Gaussian kernel density estimator can be computed using a fast Fourier transform (FFT). In order to compute the kernel density estimate over the range a to b the following steps are required.

- (i) Discretize the data to give  $n_s$  equally spaced points  $t_l$  with weights  $\xi_l$  (see Jones and Lotwick (1984)).
- (ii) Compute the FFT of the weights  $\xi_l$  to give  $Y_l$ .
- (iii) Compute  $\zeta_l = e^{-\frac{1}{2}h^2s_l^2}Y_l$  where  $s_l = 2\pi l/(b-a)$ .
- (iv) Find the inverse FFT of  $\zeta_l$  to give  $\hat{f}(x)$ .

[NP3546/20A] G10BAF.1

To compute the kernel density estimate for further values of h only steps (iii) and (iv) need be repeated.

## 4 References

Jones M C and Lotwick H W (1984) Remark AS R50. A remark on algorithm AS 176 Appl. Statist. 33 120-122

Silverman B W (1982) Algorithm AS 176. Kernel density estimation using the fast Fourier transform *Appl. Statist.* **31** 93–99

Silverman B W (1990) Density Estimation Chapman and Hall

## 5 Parameters

1: N – INTEGER Input

On entry: the number of observations in the sample, n.

Constraint: N > 0.

2: X(N) - real array Input

On entry: the n observations,  $x_i$ , for i = 1, 2, ..., n.

3: WINDOW – real Input

On entry: the window width, h.

Constraint: WINDOW > 0.0.

4: SLO – real Input

On entry: the lower limit of the interval on which the estimate is calculated, a. For most applications SLO should be at least three window widths below the lowest data point.

Constraint: SLO < SHI.

5: SHI – real Input

On entry: the upper limit of the interval on which the estimate is calculated, b. For most applications SHI should be at least three window widths above the highest data point.

6: NS – INTEGER Input

On entry: the number of points at which the estimate is calculated,  $n_s$ .

Constraints:

 $NS \geq 2$ .

The largest prime factor of NS must not exceed 19, and the total number of prime factors of NS, counting repetitions, must not exceed 20.

#### 7: SMOOTH(NS) – *real* array

Output

On exit: the  $n_s$  values of the density estimate,  $\hat{f}(t_l)$ , for  $l=1,2,\ldots,n_s$ .

8: T(NS) - real array

Output

On exit: the points at which the estimate is calculated,  $t_l$ , for  $l = 1, 2, \dots, n_s$ .

#### 9: USEFFT – LOGICAL

Input

On entry: must be set to .FALSE. if the values of  $Y_l$  are to be calculated by G10BAF and to .TRUE. if they have been computed by a previous call to G10BAF and are provided in FFT. If USEFFT = .TRUE. then the arguments N, SLO, SHI, NS and FFT must remain unchanged from the previous call to G10BAF with USEFFT = .FALSE..

G10BAF.2 [NP3546/20A]

## 10: FFT(NS) - *real* array

Input/Output

On entry: if USEFFT = .TRUE., then FFT must contain the fast Fourier transform of the weights of the discretized data,  $\xi_l$ , for  $l=1,2,\ldots,n_s$ . Otherwise FFT need not be set.

On exit: the fast Fourier transform of the weights of the discretized data,  $\xi_l$ , for  $l=1,2,\ldots,n_s$ .

#### 11: IFAIL – INTEGER

Input/Output

On entry: IFAIL must be set to 0, -1 or 1. Users who are unfamiliar with this parameter should refer to Chapter P01 for details.

On exit: IFAIL = 0 unless the routine detects an error (see Section 6).

For environments where it might be inappropriate to halt program execution when an error is detected, the value -1 or 1 is recommended. If the output of error messages is undesirable, then the value 1 is recommended. Otherwise, for users not familiar with this parameter the recommended value is 0. When the value -1 or 1 is used it is essential to test the value of IFAIL on exit.

## 6 Error Indicators and Warnings

If on entry IFAIL = 0 or -1, explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors or warnings detected by the routine:

#### IFAIL = 1

```
\begin{array}{lll} \text{On entry,} & N \leq 0, \\ \text{or} & NS < 2, \\ \text{or} & SHI \leq SLO, \\ \text{or} & WINDOW \leq 0.0. \end{array}
```

## IFAIL = 2

On entry, G10BAF has been called with USEFFT = .TRUE. but the routine has not been called previously with USEFFT = .FALSE.,

or G10BAF has been called with USEFFT = .TRUE. but some of the arguments N, SLO, SHI, NS have been changed since the previous call to G10BAF with USEFFT = .FALSE..

#### IFAIL = 3

On entry, at least one prime factor of NS is greater than 19 or NS has more than 20 prime factors (see C06EAF).

#### IFAIL = 4

On entry, the interval given by SLO to SHI does not extend beyond three window widths at either extreme of the data set. This may distort the density estimate in some cases.

## 7 Accuracy

See Jones and Lotwick (1984) for a discussion of the accuracy of this method.

#### **8 Further Comments**

The time for computing the weights of the discretized data is of order n, while the time for computing the FFT is of order  $n_s \log(n_s)$ , as is the time for computing the inverse of the FFT.

[NP3546/20A] G10BAF.3

# 9 Example

A sample of 1000 standard Normal (0,1) variates are generated using G05FDF and the density estimated on 100 points with a window width of 0.1. The resulting estimate of the density function is plotted using G01AGF.

## 9.1 Program Text

**Note:** the listing of the example program presented below uses *bold italicised* terms to denote precision-dependent details. Please read the Users' Note for your implementation to check the interpretation of these terms. As explained in the Essential Introduction to this manual, the results produced may not be identical for all implementations.

```
G10BAF Example Program Text
      Mark 20 Revised. NAG Copyright 2001.
*
      Mark 20 Revised. To call thread-safe G05 routines.
      .. Parameters ..
      INTEGER
                       NIN, NOUT
      PARAMETER
                       (NIN=5,NOUT=6)
                      N, NS
      INTEGER
                       (N=1000,NS=100)
      PARAMETER
      .. Local Scalars ..
      real
                       SHI, SLO, WINDOW
      INTEGER
                       IFAIL, IGEN, NSTEPX, NSTEPY
      LOGICAL
                       USEFFT
      .. Local Arrays ..

real

FFT(NS), S(NS), SMOOTH(NS), X(N)
                       ISEED(4), ISORT(NS)
      .. External Subroutines .. EXTERNAL GO1AGF, GO5LAF, G10BAF
      EXTERNAL
      .. Executable Statements ..
      WRITE (NOUT,*) 'G10BAF Example Program Results'
      Skip heading in data file
      READ (NIN, *)
      READ (NIN,*) WINDOW
      READ (NIN,*) SLO, SHI
      Generate Normal (0,1) Distribution
      IGEN = 0
      ISEED(1) = 6698
      ISEED(2) = 7535
      ISEED(3) = 26792
      ISEED(4) = 30140
      IFAIL = 0
      CALL GO5LAF(0.0e0,1.0e0,N,X,IGEN,ISEED,IFAIL)
      Perform kernel density estimation
      USEFFT = .FALSE.
      IFAIL = 0
      CALL G10BAF(N,X,WINDOW,SLO,SHI,NS,SMOOTH,S,USEFFT,FFT,IFAIL)
      Display smoothed data
      WRITE (NOUT, *)
      NSTEPX = 40
      NSTEPY = 20
      IFAIL = 0
      CALL GO1AGF(S, SMOOTH, NS, ISORT, NSTEPX, NSTEPY, IFAIL)
      STOP
      END
```


G10BAF.4 [NP3546/20A]

## 9.2 Program Data

G10BAF Example Program Data 0.1 -4.0, 4.0

## 9.3 Program Results

G10BAF Example Program Results

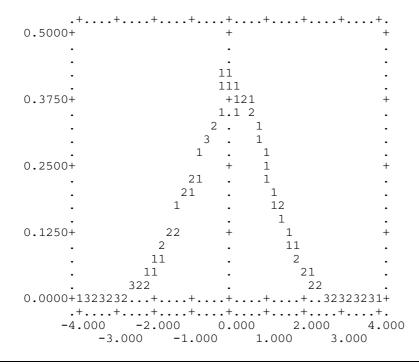

[NP3546/20A] G10BAF.5 (last)