

# Specifications for the NI SCXI™-1190

## 1.3 GHz Quad 4x1 50 Ω Multiplexer

This document lists specifications for the NI SCXI-1190 multiplexer module. All specifications are subject to change without notice. Visit [ni.com/manuals](http://ni.com/manuals) for the most current specifications.

Configuration ..... Quad 4x1 multiplexers

## RF Performance Characteristics

---

Characteristic impedance ( $Z_0$ )..... 50 Ω nominal

### Insertion loss

≤100 MHz ..... <0.4 dB  
≤500 MHz ..... <0.9 dB  
≤1.3 GHz..... <1.5 dB  
≤2 GHz..... <3 dB

### VSWR

≤100 MHz ..... <1.15  
≤500 MHz ..... <1.35  
≤1.3 GHz..... <1.5  
≤2 GHz..... <2.5

### Channel-to-channel isolation

≤500 MHz ..... >60 dB  
≤1.3 GHz..... >50 dB  
≤2 GHz..... >30 dB

Propagation delay ..... <3 ns

Rise time ..... <300 ps

---

National Instruments™, NI™, ni.com™, and SCXI™ are trademarks of National Instruments Corporation. Product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or [ni.com/patents](http://ni.com/patents).

April 2003  
323480A-01

# Input Characteristics

---

All input characteristics are DC,  $AC_{rms}$ , or a combination unless otherwise specified.

Maximum switching voltage .....24 V  
(channel-to-channel and channel-to-ground)

Maximum switching current.....1 A  
(per channel)

Maximum carry current .....1 A  
(per channel)

Maximum switching power .....24 W  
(per channel)



**Note** National Instruments recommends against switching active RF signals. As a relay actuates, the channel is momentarily unterminated. Some RF sources can be damaged by reflections if their outputs are not properly terminated. Consult your RF source documentation for more information.

Maximum RF carry power .....10 W up to 900 MHz  
(per channel)

DC path resistance

Initial.....<0.1  $\Omega$

End of life.....>1  $\Omega$

Path resistance is a combination of relay contact resistance and trace resistance. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above 1.0  $\Omega$ .

# Dynamic Characteristics

---

Relay operate time (at 20 °C) .....15 ms

Release time (at 20 °C).....15 ms

Expected relay life

Mechanical .....5,000,000 cycles


Electrical.....100,000 cycles  
(maximum load)

# Physical Characteristics

Relay type .....	Electromechanical, non-latching
I/O connectors .....	20 SMB jacks
Contact material .....	Gold-clad silver
Dimensions (W × H × D).....	3.0 cm × 17.3 cm × 19.6 cm (1.2 in. × 6.7 in. × 7.6 in.)
Weight.....	925 g (2 lb, 1 oz)

## Environment

Operating temperature.....	0 °C to 50 °C
Storage temperature .....	-20 °C to 70 °C
Relative humidity .....	5% to 85% noncondensing
Pollution Degree .....	2

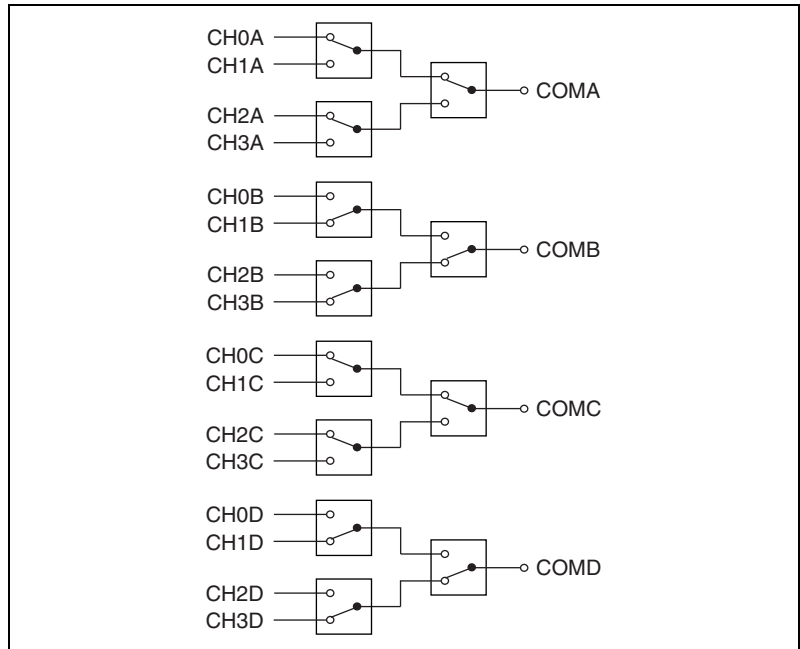

**Figure 1.** NI SCXI-1190 Power-On State

# Compliance and Certifications

---

## Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1



**Note** For UL and other safety certifications refer to the product label or visit [ni.com](http://ni.com).

## Electromagnetic Compatibility

Emissions .....EN 55011 Class A at 10 m  
FCC Part 15A above 1 GHz

Immunity .....EN 61326:1997 + A2:2001,  
Table 1

EMC/EMI .....CE, C-Tick, and FCC Part 15  
(Class A) Compliant



**Note** For EMC compliance, you *must* operate this device with shielded cabling.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:

Low-Voltage Directive (safety).....73/23/EEC

Electromagnetic Compatibility  
Directive (EMC) .....89/336/EEC



**Note** Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, click **Declarations of Conformity Information** at [ni.com/hardref.nsf/](http://ni.com/hardref.nsf/).



323480A-01

Apr03