
Features :

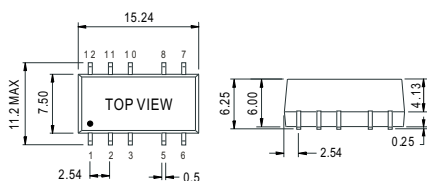
- 3000VDC I/O isolation
- Internal SMD technology
- Protection: Short circuit
- Non-conductive plastic case
- SMD package styles
- 100% full load burn-in test
- Low cost / High reliability
- Approved: UL / CUL
- 1 year warranty

SPECIFICATION

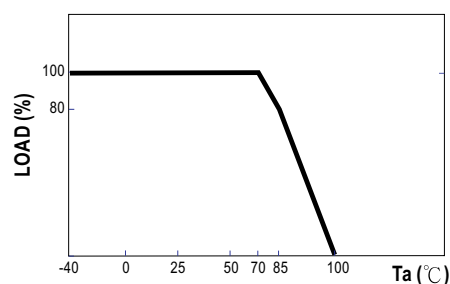

ORDER NO.		SFT01L-05	SFT01M-05	SFT01L-09	SFT01M-09	SFT01L-12	SFT01M-12	SFT01L-15	SFT01M-15
OUTPUT	DC OUTPUT VOLTAGE	5V		9V		12V		15V	
	OUTPUT CURRENT RANGE	0 ~ 200mA		0 ~ 111mA		0 ~ 84mA		0 ~ 67mA	
	EFFICIENCY	70%	70%	75%	73%	78%	73%	79%	74%
	RATED POWER	1W							
	RIPPLE & NOISE (max.) Note.2	100mVp-p							
	LINE REGULATION Note.3	±1.2% for 1% input variation							
	LOAD REGULATION Note.4	±8.0%							
	VOLTAGE TOLERANCE	±8.0%							
	SWITCHING FREQUENCY(Typ.)	100KHz							
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V
	NORMAL VOLTAGE	5V	12V	5V	12V	5V	12V	5V	12V
	INPUT CURRENT	Full load	264mA	123mA	264mA	123mA	264mA	123mA	123mA
PROTECTION	OVERLOAD	Momentary							
		Protection type : Broken							
	SHORT CIRCUIT	Momentary							
ENVIRONMENT		Protection type : Broken							
	WORKING TEMP.	-40 ~ +85°C (Refer to output load derating curve)							
	WORKING HUMIDITY	20% ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)							
SAFETY & EMC	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes							
	SAFETY STANDARDS	UL60950-1, CSAC22.2							
	WITHSTAND VOLTAGE	I/P-O/P:3KVDC							
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH							
OTHERS	MTBF	500khrs min. MIL-HDBK-217F(25°C)							
	DIMENSION	15.24*7.5*6.0mm or 0.60"*0.30"*0.24" inch (L*W*H)							
	WEIGHT	1.7g							

Mechanical Specification

Unit: mm (inch)


Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	NC
5	-Vout
6	NC
7	NC
8	+Vout
10	NC
11	NC
12	NC

Derating Curve

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH Ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 20% to 100% rated load.