



Application System/400™

SC21-8076-2

**Programming:  
Command Reference Summary**





---

Application System/400™

SC21-8076-2

**Programming:  
Command Reference Summary**

---

---

| **Second Edition (September 1989)**

| This revision makes obsolete SC21-8076-1. Changes or additions to the text are indicated by a vertical line to the left of the change or addition. See "About This Manual" for a summary of major changes to this edition.

| This edition applies to Release 2 Modification Level 0 of the IBM Operating System/400 Licensed Program (Program 5728-SS1) and to all subsequent releases and modifications until otherwise indicated in new editions or technical newsletters.

Changes are periodically made to the information herein; any such changes will be reported in subsequent revisions or technical newsletters.

References in this publication to IBM products, programs, or services do not imply that IBM intends to make these available in all countries in which IBM operates. Any reference to an IBM licensed program in this publication is not intended to state or imply that only IBM's licensed program may be used. Any functionally equivalent program may be used instead.

The numbers at the bottom right of illustrations are publishing control numbers and are not part of the technical content of this manual.

Publications are not stocked at the address given below. Requests for IBM publications should be made to your IBM representative or to your IBM-approved remarketer.

This publication could contain technical inaccuracies or typographical errors. A form for readers' comments is provided at the back of this publication. If the form has been removed, comments may be addressed to IBM Corporation, Information Development, Department 245, Rochester, Minnesota, U.S.A. 55901. IBM may use or distribute whatever information you supply in any way it believes appropriate without incurring any obligation to you.

| Application System/400, AS/400, Operating System/400, and OS/400 are trademarks of the International Business Machines Corporation.

| 400 is a registered trademark of the International Business Machines Corporation.

| © Copyright International Business Machines Corporation 1988, 1989. All rights reserved.

---

## About This Manual

This manual shows the control language (CL) commands and the associated escape (E), status (S), and notify (N) error messages that can be monitored for those commands. More detailed information can be found in the manuals listed under "Related Printed Information."

To use this manual, you should know how to use CL commands and understand the functions of the operating system.

This manual may refer to products that are announced, but are not yet available.

This manual first describes the format of the CL command descriptions. Secondly, this manual lists all the CL commands and shows their syntax. This manual then contains the error messages that can be monitored and lists files used by CL commands.

---

## How This Manual Has Changed

The following shows all the new CL commands added to the OS/400 control language since the previous release. Also listed are many of the significant parameters and values added to existing commands in this release.

Changes since the previous edition of the manual are indicated by a vertical line to the left of each change.

## New Commands

The following are the new CL commands added in this release:

- TCP/IP communications commands (for Transmission Control Protocol/Internet Protocol):
  - CFGTCP (Configure TCP/IP)
  - STRTCPFTP (Start TCP/IP File Transfer Protocol)
  - VFYTCPCNN (Verify TCP/IP Connection)
  - WRKNAMSMTP (Work with Names for SMTP—Simple Mail Transfer Protocol)
- Communications network commands:
  - CRTCTLNET (Create Controller Description (Network))
  - CHGCTLNET (Change Controller Description (Network))
  - CRTDEVNET (Create Device Description (Network))
  - CHGDEVNET (Change Device Description (Network))
- Retail communications commands:
  - CRTCLRRTL (Create Controller Description (Retail))
  - CHGCLRRTL (Change Controller Description (Retail))
  - CRTDEVRTL (Create Device Description (Retail))
  - CHGDEVRTL (Change Device Description (Retail))
- Intrasystem communications commands:
  - CRTDEVINTR (Create Device Description (Intrasystem))
  - CHGDEVINTR (Change Device Description (Intrasystem))
- Alert support commands:
  - ADDALRD (Add Alert Description)
  - CHGALRD (Change Alert Description)
  - RMVALRD (Remove Alert Description)
  - WRKALRD (Work with Alert Descriptions)
  - CRTALRTBL (Create Alert Table)
  - CHGALRTBL (Change Alert Table)
  - DLTALRTBL (Delete Alert Table)

- WRKALRTBL (Work with Alert Tables)
- Prestart communications jobs commands:
  - ADDPJE (Add Prestart Job Entry)
  - CHGPJE (Change Prestart Job Entry)
  - RMVPJE (Remove Prestart Job Entry)
  - CHGPJ (Change Prestart Jobs)
  - STRPJ (Start Prestart Jobs)
  - ENDPJ (End Prestart Jobs)
  - DSPACTPJ (Display Active Prestart Jobs)
- Miscellaneous communications-related commands:
  - RLSRMPHS (Release Remote Phase)
  - RTVCFGSRC (Retrieve Configuration Source)
  - RTVCFGSTS (Retrieve Configuration Status)
  - SNDFNCIMG (Send Finance Diskette Image)
- C language commands:
  - CRTSQLC (Create Structured Query Language C)
  - CRTCLD (Create C Locale Description)
  - CRTCPGM (Create C Program)
  - DLTCLD (Delete C Locale Description)
  - RTVCLDSRC (Retrieve C Locale Description Source)
- Cross-System Product (CSP/AE) commands:
  - CHGCSPPGM (Change CSP/AE Program)
  - CRTCSPPAPP (Create CSP/AE Application Objects)
  - CRTCSPPMSGF (Create CSP/AE User Message File)
  - DLTCSPMAP (Delete CSP/AE Map Group)
  - DLTCSPPTBL (Delete CSP/AE Table)
  - DSPCSPOBJ (Display CSP/AE Object)
  - PRTCSPAPP (Print CSP/AE Application)
  - STRCSP (Start CSP/AE Utilities)
  - TRCCSP (Trace CSP/AE Application)
  - WRKOBJCSP (Work with Objects for CSP/AE Applications)
- Printer and font support commands:
  - CRTFNTRSC (Create Font Resources)
  - CRTFORMDF (Create Form Definition)
  - CRTPAGSEG (Create Page Segment)
  - CRTOVL (Create Overlay)
  - DLTFNTRSC (Delete Font Resources)
  - DLTFORMDF (Delete Form Definition)
  - DLTPAGSEG (Delete Page Segment)
  - DLTOVL (Delete Overlay)
  - PRTAFPDTA (Print Advanced Function Printer Data)
  - WRKFNTRSC (Work with Font Resources)
  - WRKFORMDF (Work with Form Definitions)
  - WRKPAGSEG (Work with Page Segments)
  - WRKOVL (Work with Overlays)
- Tape support commands:
  - CRTCTLTAP (Create Controller Description (Tape))
  - CHGCTLTAP (Change Controller Description (Tape))
  - VFYTAP (Verify Tape)
- Hardware and software support commands:
  - DSPPRB (Display Problem)
  - DSPLCLHDW (Display Local Hardware)
  - DSPSFWRSC (Display Software Resources)
  - ENDRMTSPT (End Remote Support)
  - STRRMTSPT (Start Remote Support)
  - TRCICF (Trace ICF)
- Performance tool commands:

- CVTPFRDTA (Convert Performance Data)
- DSPPFRDTA (Display Performance Data)
- WRKSYSACT (Work with System Activity)
- PRTACTRPT (Print Activity Report)
- PRTRCRPT (Print Trace Report)
- PRTJOB RPT (Print Job Report)
- PRTPOLRPT (Print Pool Report)
- PRTRSCRPT (Print Resource Report)
- Distribution queue commands:
  - SNDDSTQ (Send Distribution Queue)
  - HLDDSTQ (Hold Distribution Queue)
  - RLS DSTQ (Release Distribution Queue)
- Document-related commands:
  - CHGDSTD (Change Distribution Description)
  - CHKDLO (Check Document Library Object)
- Work with commands (for various object types):
  - WRKCHTFMT (Work with Chart Formats)
  - WRKCLS (Work with Classes)
  - WRKDTAARA (Work with Data Areas)
  - WRKDTAQ (Work with Data Queues)
  - WRKEDTD (Work with Edit Descriptions)
  - WRKGSS (Work with Graphics Symbol Sets)
  - WRKJRNRCV (Work with Journal Receivers)
  - WRKMSGF (Work with Message Files)
  - WRKPGM (Work with Programs)
  - WRKPNLGRP (Work with Panel Groups)
  - WRKSCHIDX (Work with Search Indexes)
  - WRKSPADCT (Work with Spelling Aid Dictionaries)
  - WRKTBL (Work with Tables)
- Miscellaneous noncommunications-related commands:
  - CHGS36MSGL (Change System/36 Message List)
  - DSCJOB (Disconnect Job)
  - INZSYS (Initialize System)
  - RTVMBRD (Retrieve Member Description)
  - SAVSECDA (Save Security Data)
  - SAVSTG (Save Storage)

## Significant Areas of Parameter Changes and Additions

Following are the significant areas of parameter and value changes made to existing commands:

- For controlling *release-to-release compatibility*, the TGTRLS parameter is added to several commands (CRTxxxPGM, CRTSQLxxxx, CRTS36xxxx, and SAVxxxxxx commands).
- For *PTF* (xxxPTF) commands, parameters and values are added (such as the SPRPTR parameter, and the \*APYPERM and \*NOAPY values on the IPLAPY parameter).
- Communications command changes:
  - For *configuration list* (xxxCFGLx) commands, the RTL PASTHRE parameter is added for retail pass-through support.
  - For *communications line* (xxxLINxxxx) commands, several parameters and values are added (such as the DIALCMD, CALLNBR, MAXFRAME, CMNRCYLMT, and NETCTL parameters; and, for X.21 short-hold mode, the SHMNODE, SHM CALLTMR, SHM CALLFMT, and SHMACC parameters are added).
  - For *communications controller* (xxxCTLxxxx) commands, several parameters and values are added (such as the MAXFRAME, C>NNBR, and CMNRCYLMT parameters).

ters; and, for X.21 short-hold mode, the SHM, SHMDSCLMT, and SHMDSCTMR parameters are added).

- For *communications device* (xxxDEVxxxx) commands, several parameters and values are added (such as the APPTYPE, RMTLOCNAME, and HCPEML parameters).
- For *intersystem communications function device entry* (xxxICFDEVE) commands, several parameters and values are added (such as the EMLDEV parameter and the \*INTRA, \*FINANCE, and \*RETAIL values for the CMNTYPE parameter).
- For *communications entry* (xxxCMNE) commands, several values are added (such as the \*INTRA, \*FINANCE, \*RETAIL, and generic name values for the DEV parameter).
- For *work station entry* (xxxWSE) commands, the 3476 Display is now supported on the WRKSTNTYPE parameter.
- For *device description* (xxxDEVDSP, xxxDEVPRN, and xxxDEVTPR) commands, several parameters and values are added (such as the SWTSET, TYPE, MODEL, EMLASCII, LINESPEED, and PARITY parameters).
- For *printer file and tape file* (xxxPRTF and xxxTAPF) commands, several parameters and values are added (such as the DUPLEX, DRAWER, LPI, CPI, and SEQNBR parameters).
- New *advanced function printing* support for several printers is added. Refer, for example, to the FONT and CHRID parameters (and their associated tables) on the CRTPRTF and CRTDEVPRN commands.
- For *work management* support (xxxJOB and xxxJOBP) commands, several parameters and values are added (such as the OPTION, TSEPOOL, STSMMSG, and DEVRCYACN parameters).
- For *distribution services* (xxxDSTx) commands, several parameters and values are added (such as the DSTID, DSTIDEXN, and KEEP parameters).
- For *3270 emulation*, parameters are added to the SNDEMLIGC and STREML3270 commands.
- For *pass-through* support, parameters are added to the STRPASTHR command.
- For *document* support (xxxDOC and xxxDLO) commands, several parameters and values are added (such as the DOCL, OUTFILE, OUTMBR, DSTID, DSTIDEXN, and KEEP parameters; the \*OPTFILE value on the OPTIONS parameter; and the \*FLR and \*MAIL values on the DLO parameter).
- For *save/restore* (SAVxxx and RSTxxx) commands, several parameters and values are added (such as the ALWOBIDIF and MAIL parameters, and the \*DEV value on the DTACPR parameter).
- For *security* (xxxUSRPRF) commands, several parameters, values, and special authorities are added (such as the OUTFILE, OUTMBR, and USROPT parameters).
- For *IDDU*, parameters are added to the DSPDTADCT, WRKDBFIDD, and WRKDTADFN commands.
- For *System/36* support, parameters are added to the CHGS36SRCA, CRTS36DSPF, and RSTS36F commands.
- For *command definition*, the DSPINPUT parameter is added to the ELEM, PARM, and QUAL command definition statements.
- *OS/400 object types* are added (see Chapter 1 for a brief description of each): \*ALRTBL, \*CLD, \*CSPMAP, \*CSPTBL, \*FNTRSC, \*FORMDF, \*OVL, and \*PAGSEG.



---

## Related Online Information

The following online information is available on the AS/400 system. After pressing the Help key on any menu, you can press the Help key a second time to see an explanation of how the online information works, including the index search function. You can press either the Help key or F1 for help.

### Help for Displays

You can press the Help key on any display to see information about the display. There are two types of help available:

- Field
- Extended

Field help explains the field on which the cursor is positioned when you press the Help key. For example, it describes the choices available for a prompt. If a system message appears at the bottom of the display, position the cursor on the message and press the Help key to see information about the cause of the message and the appropriate action to take.

Extended help explains the purpose of the display. Extended help appears if you press the Help key when the cursor is outside the areas for which field help is available.

To exit the online information, press F3 (Exit). You return to the display on which you pressed the Help key.

### Index Search

Index search allows you to specify words or phrases that identify the information that you want to see. To use index search, press the Help key, then press F11 (Search index). You can also use index search by entering the Start Index Search (STRIDXSCH) command on any command line or by selecting option 2 on the User Support and Education menu.

### Help for Control Language Commands

To see prompts for parameters for a control language command, type the command, then press F4 (Prompt) instead of the Enter key. To see extended help for the command, type the command on any command line and press the Help key.

### Online Education

AS/400 online education provides training on a wide variety of topics. To use the online education, press F13 (User support) on any system menu to show the User Support menu. Then select the option to use online education.

### Question-and-Answer Function

The question-and-answer (Q & A) function provides answers to questions you may have about using the AS/400 system. To use the Q & A function, press F13 (User support) on any system menu to show the User Support menu. Then select the option to use the question-and-answer function. You can also use the question-and-answer function by entering the Start Question and Answer (STRQST) command on any command line.

---

## Related Printed Information

Many AS/400 manuals contain more information about the use of the CL commands listed in this manual. You can see a short description of the manuals in the AS/400 library by referring to the *Information Directory*, GC21-9678. This manual is a summary of the information in the *Programming: Control Language Reference*, SBOF-0481 that is described below.

*Programming: Control Language Reference*, SBOF-0481, is a set of manuals that provides the application programmer or system programmer with a description of the AS/400 control language (CL) and its commands. Each command is defined including its syntax diagram, parameters, default values, and keywords. The information should be used as a reference for using the control language commands to request functions of the system's control program (5728-SS1) and of the various languages and utilities.

---

# Contents

<b>Format of Command Descriptions</b> .....	1
How to Interpret Syntax Diagrams .....	1
Sample Syntax Diagram .....	1
Syntax Diagram Rules .....	3
<b>Command Syntax</b> .....	11
ADDACC (Add Access Code) Command .....	11
ADDAJE (Add Autostart Job Entry) Command .....	11
ADDALRD (Add Alert Description) Command .....	12
ADDAUTLE (Add Authorization List Entry) Command .....	13
ADDBKP (Add Breakpoint) Command .....	14
ADDCFGLE (Add Configuration List Entries) Command .....	15
ADDCMNE (Add Communications Entry) Command .....	17
ADDDIRE (Add Directory Entry) Command .....	18
ADDDLOAUT (Add Document Library Object Authority) Command .....	19
ADDDSTLE (Add Distribution List Entry) Command .....	20
ADDDTADFN (Add Data Definition) Command .....	20
ADDFCTE (Add Forms Control Table Entry) Command .....	21
ADDICFDEVE (Add Intersystem Communications Function Program Device Entry) Command .....	22
ADDJOBQE (Add Job Queue Entry) Command .....	23
ADDLFM (Add Logical File Member) Command .....	24
ADDLIBLE (Add Library List Entry) Command .....	24
ADDMSGD (Add Message Description) Command .....	25
ADDNETJOBE (Add Network Job Entry) Command .....	27
ADDPFM (Add Physical File Member) Command .....	27
ADDPFVLM (Add Physical File Variable-Length Member) Command .....	28
ADDPGM (Add Program) Command .....	28
ADDPJE (Add Prestart Job Entry) Command .....	29
ADDRJECMNE (Add RJE Communications Entry) Command .....	31
ADDRJERDRE (Add RJE Reader Entry) Command .....	31
ADDRJEWTR (Add RJE Writer Entry) Command .....	32
ADDRPYLE (Add Reply List Entry) Command .....	33
ADDRTGE (Add Routing Entry) Command .....	34
ADDTRC (Add Trace) Command .....	35
ADDWSE (Add Work Station Entry) Command .....	36
ALCOBJ (Allocate Object) Command .....	37
ANSLIN (Answer Line) Command .....	37
ANSQST (Answer Questions) Command .....	38
ANZACCGRP (Analyze Access Group) Command .....	38
ANZDBF (Analyze Database File) Command .....	39
ANZDBFKEY (Analyze Database File Keys) Command .....	39
ANZPGM (Analyze Program) Command .....	40
ANZPRB (Analyze Problem) Command .....	40
APYJRNCHG (Apply Journalized Changes) Command .....	41
APYPTF (Apply Program Temporary Fix) Command .....	42
ASKQST (Ask Question) Command .....	42
BCHJOB (Batch Job) Command .....	43
CALL (Call Program) Command .....	44
CFGDSTSRV (Configure Distribution Services) Command .....	45
CFGRPDS (Configure RSCS/PROFS Distribution Services) Command .....	45
CFGTCP (Configure TCP/IP) Command .....	45
CHGACGCDE (Change Accounting Code) Command .....	46
CHGAJE (Change Autostart Job Entry) Command .....	46
CHGALRD (Change Alert Description) Command .....	47
CHGALRTBL (Change Alert Table) Command .....	48
CHGAUTLE (Change Authorization List Entry) Command .....	48
CHGCFGLE (Change Configuration List) Command .....	49
CHGCMD (Change Command) Command .....	51
CHGCMDDFT (Change Command Default) Command .....	52
CHGCMNE (Change Communications Entry) Command .....	53



CHGMSGQ (Change Message Queue) Command	128
CHGNETA (Change Network Attributes) Command	129
CHGNETJOBE (Change Network Job Entry) Command	130
CHGOBJD (Change Object Description) Command	131
CHGOBJOWN (Change Object Owner) Command	131
CHGOUTQ (Change Output Queue) Command	132
CHGPCOPRF (Change PC Support Organizer Profile) Command	132
CHGPF (Change Physical File) Command	133
CHGPFM (Change Physical File Member) Command	134
CHGPGM (Change Program) Command	134
CHGPGMVAR (Change Program Variable) Command	135
CHGPJ (Change Prestart Job) Command	135
CHGPJE (Change Prestart Job Entry) Command	136
CHGPRF (Change Profile) Command	138
CHGPRTF (Change Printer File) Command	140
CHGPTR (Change Pointer) Command	143
CHGPWD (Change Password) Command	143
CHGQSTDB (Change Question-and-Answer Database) Command	144
CHGRJECMNE (Change RJE Communications Entry) Command	144
CHGRJERDRE (Change RJE Reader Entry) Command	145
CHGRJEWTR (Change RJE Writer Entry) Command	146
CHGRPYLE (Change Reply List Entry) Command	147
CHGRTGE (Change Routing Entry) Command	148
CHGSAVF (Change Save File) Command	149
CHGSBSD (Change Subsystem Description) Command	150
CHGSPLFA (Change Spooled File Attributes) Command	151
CHGSRCPF (Change Source Physical File) Command	153
CHGSSND (Change Session Description) Command	154
CHGSSNMAX (Change Session Maximum) Command	155
CHGSYSLIBL (Change System Library List) Command	155
CHGSYSVAL (Change System Value) Command	156
CHGS36 (Change System/36) Command	156
CHGS36MSGL (Change S/36 Message List) Command	156
CHGS36PGMA (Change System/36 Program Attributes) Command	157
CHGS36PRCA (Change System/36 Procedure Attributes) Command	157
CHGS36SRCA (Change System/36 Source Attributes) Command	158
CHGTAPF (Change Tape File) Command	159
CHGUSRPRF (Change User Profile) Command	161
CHGVAR (Change Variable) Command	163
CHGWSE (Change Work Station Entry) Command	163
CHGWTR (Change Writer) Command	164
CHKDKT (Check Diskette) Command	164
CHKDLO (Check Document Library Object) Command	165
CHKDOC (Check Document) Command	165
CHKIGCTBL (Check DBCS Font Table) Command	166
CHKOBJ (Check Object) Command	166
CHKPWD (Check Password) Command	167
CHKRCDLCK (Check Record Locks) Command	167
CHKTAP (Check Tape) Command	167
CLOF (Close File) Command	168
CLRDKT (Clear Diskette) Command	168
CLRJOBQ (Clear Job Queue) Command	168
CLRLIB (Clear Library) Command	169
CLRMSGQ (Clear Message Queue) Command	169
CLRROUTQ (Clear Output Queue) Command	169
CLRPFM (Clear Physical File Member) Command	170
CLRSAVF (Clear Save File) Command	170
CLRTRCDTA (Clear Trace Data) Command	170
CMPJRNIMG (Compare Journal Images) Command	171
CNLRJERDR (Cancel RJE Reader) Command	172
CNLRJEWTR (Cancel RJE Writer) Command	172
COMMIT (Commit) Command	172
CPYCFGL (Copy Configuration List) Command	173
CPYDOC (Copy Document) Command	173

CPYF (Copy File) Command . . . . .	174
CPYFRMDKT (Copy from Diskette) Command . . . . .	177
CPYFRMPCD (Copy from PC Document) Command . . . . .	178
CPYFRMTAP (Copy from Tape) Command . . . . .	179
CPYIGCSRT (Copy IGC Sort) Command . . . . .	180
CPYIGCTBL (Copy DBCS Font Table) Command . . . . .	181
CPYLIB (Copy Library) Command . . . . .	182
CPYPTF (Copy Program Temporary Fix) Command . . . . .	183
CPYSPLF (Copy Spooled File) Command . . . . .	184
CPYSRCF (Copy Source File) Command . . . . .	185
CPYTODKT (Copy to Diskette) Command . . . . .	186
CPYTOPCD (Copy to PC Document) Command . . . . .	187
CPYTOTAP (Copy to Tape) Command . . . . .	188
CRTALRTBL (Create Alert Table) Command . . . . .	189
CRTAPAR (Create Authorized Program Analysis Report) Command . . . . .	190
CRTAUTHLR (Create Authority Holder) Command . . . . .	192
CRTAUTL (Create Authorization List) Command . . . . .	192
CRTBASPGM (Create Basic Program) Command . . . . .	193
CRTCBLPGM (Create COBOL Program) Command . . . . .	194
CRTCFGL (Create Configuration List) Command . . . . .	196
CRTCLD (Create C Locale Description) Command . . . . .	198
CRTCLPGM (Create Control Language Program) Command . . . . .	199
CRTCLS (Create Class) Command . . . . .	200
CRTCMD (Create Command) Command . . . . .	201
CRTCOSD (Create Class-of-Service Description) Command . . . . .	202
CRTCPGM (Create C Program) Command . . . . .	204
CRTCSPAPP (Create CSP/AE Application Objects) Command . . . . .	206
CRTCSPMSGF (Create CSP/AE User Message File) Command . . . . .	207
CRTCTLAPPC (Create Controller Description (APPC)) Command . . . . .	208
CRTCTLASC (Create Controller Description (Async)) Command . . . . .	212
CRTCTLBSC (Create Controller Description (BSC)) Command . . . . .	214
CRTCTLFNC (Create Controller Description (Finance)) Command . . . . .	215
CRTCTLHOST (Create Controller Description (SNA Host)) Command . . . . .	217
CRTCTLLWS (Create Controller Description (Local Work Station)) Command . . . . .	220
CRTCTLNET (Create Controller Description (Network)) Command . . . . .	221
CRTCTLRTL (Create Controller Description (Retail)) Command . . . . .	222
CRTCTLRWS (Create Controller Description (Remote Work Station)) Command . . . . .	224
CRTCTLTAP (Create Controller Tape) Command . . . . .	227
CRTCTLVWS (Create Controller Description (Virtual Work Station)) Command . . . . .	227
CRTDDMF (Create Distributed Data Management File) Command . . . . .	228
CRTDEVAPPC (Create Device Description (APPC)) Command . . . . .	229
CRTDEVASC (Create Device Description (Async)) Command . . . . .	230
CRTDEVBSC (Create Device Description (BSC)) Command . . . . .	231
CRTDEVDKT (Create Device Description (Diskette)) Command . . . . .	232
CRTDEVDSP (Create Device Description (Display)) Command . . . . .	233
CRTDEVFNC (Create Device Description (Finance)) Command . . . . .	235
CRTDEVHOST (Create Device Description (SNA Host)) Command . . . . .	236
CRTDEVINTR (Create Device Description (Intrasystem)) Command . . . . .	237
CRTDEVNET (Create Device Description (Network)) Command . . . . .	237
CRTDEVPRTR (Create Device Description (Printer)) Command . . . . .	238
CRTDEVRTL (Create Device Description (Retail)) Command . . . . .	240
CRTDEVSNUF (Create Device Description (SNUF)) Command . . . . .	241
CRTDEVTAP (Create Device Description (Tape)) Command . . . . .	242
CRTDKTF (Create Diskette File) Command . . . . .	243
CRTDOC (Create Document) Command . . . . .	244
CRTDSPF (Create Display File) Command . . . . .	245
CRTDSTL (Create Distribution List) Command . . . . .	246
CRTDTAARA (Create Data Area) Command . . . . .	246
CRTDTADCT (Create a Data Dictionary) Command . . . . .	247
CRTDTAQ (Create Data Queue) Command . . . . .	247
CRTDUPOBJ (Create Duplicate Object) Command . . . . .	248
CRTEDTD (Create Edit Description) Command . . . . .	249
CRTFCT (Create Forms Control Table) Command . . . . .	250
CRTFLR (Create Folder) Command . . . . .	250

CRTFNTRSC (Create Font Resources) Command	251
CRTFORMDF (Create Form Definition) Command	251
CRTGSS (Create Graphics Symbol Set) Command	252
CRTICFF (Create Intersystem Communications Function File) Command	253
CRTIGCDCT (Create DBCS Conversion Dictionary) Command	254
CRTJOBQ (Create Job Description) Command	255
CRTJOBQ (Create Job Queue) Command	256
CRTJRN (Create Journal) Command	257
CRTJRNRCV (Create Journal Receiver) Command	257
CRTL (Create Logical File) Command	258
CRTL (Create Library) Command	259
CRTLINASC (Create Line Description (Async)) Command	260
CRTLINBSC (Create Line Description (BSC)) Command	262
CRTLINSDLC (Create Line Description (SDLC)) Command	264
CRTLINTDLC (Create Line Description (TDL)) Command	267
CRTLINTRN (Create Line Description (Token-Ring Network)) Command	268
CRTLINX25 (Create Line Description (X.25)) Command	270
CRTMNU (Create Menu) Command	272
CRTMODD (Create Mode Description) Command	273
CRTMSGF (Create Message File) Command	274
CRTMSGFMNU (Create Message File Menu) Command	275
CRTMSGQ (Create Message Queue) Command	276
CRTOUTQ (Create Output Queue) Command	276
CRTOVL (Create Overlay) Command	277
CRTPAGSEG (Create Page Segment) Command	277
CRTPASPGM (Create Pascal Program) Command	278
CRTPF (Create Physical File) Command	280
CRTPLIPGM (Create PL/I Language Program) Command	282
CRTPRTF (Create Printer File) Command	284
CRTQSTDB (Create Question and Answer Database) Command	286
CRTQSTLOD (Create Question-and-Answer Load) Command	287
CRTRJEBSCF (Create RJE BSC File) Command	287
CRTRJECFG (Create RJE Configuration) Command	288
CRTRJECMNF (Create RJE Communications File) Command	290
CRTRPGPGM (Create RPG/400 Program) Command	291
CRTRPTPGM (Create Auto Report Program) Command	293
CRTSAVF (Create Save File) Command	295
CRTSBSD (Create Subsystem Description) Command	296
CRTSPADCT (Create Spelling Aid Dictionary) Command	297
CRTSQLC (Create Structured Query Language C) Command	299
CRTSQLCBL (Create Structured Query Language COBOL) Command	300
CRTSQLPLI (Create Structured Query Language PL/I) Command	301
CRTSQLRPG (Create Structured Query Language RPG) Command	302
CRTSRCPF (Create Source Physical File) Command	303
CRTSSND (Create Session Description) Command	304
CRTS36CBL (Create System/36 COBOL) Command	305
CRTS36DSPF (Create System/36 Display File) Command	307
CRTS36MNU (Create System/36 Menu) Command	308
CRTS36MSGF (Create System/36 Message File) Command	309
CRTS36RPG (Create System/36 RPG) Command	310
CRTS36RPGR (Create System/36 RPGR) Command	311
CRTS36RPT (Create System/36 RPT) Command	312
CRTTAPF (Create Tape File) Command	314
CRTTBL (Create Table) Command	316
CRTUSRPRF (Create User Profile) Command	317
CVTCLSRC (Convert CL Source) Command	319
CVTDAT (Convert Date) Command	319
CVTPFRDTA (Convert Performance Data) Command	320
CVTRJEDTA (Convert RJE Data) Command	320
CVTTOFLR (Convert to Folder) Command	321
DATA (Data) Command	321
DCL (Declare CL Variable) Command	322
DCLF (Declare File) Command	322
DLCOBJ (Deallocate Object) Command	323

DLTALRTBL (Delete Alert Table) Command	323
DLTAUTHLR (Delete Authority Holder) Command	324
DLTAUTL (Delete Authorization List) Command	324
DLTCFGL (Delete Configuration List) Command	324
DLTCHTFMT (Delete Chart Format) Command	325
DLTCLD (Delete C Locale Description) Command	325
DLTCLS (Delete Class) Command	325
DLTCMD (Delete Command) Command	326
DLTCOSD (Delete Class-of Service Description) Command	326
DLTCSPMAP (Delete CSP/AE Map Group) Command	326
DLTCSPTBL (Delete CSP/AE Table) Command	327
DLTCTLD (Delete Controller Description) Command	327
DLTDEVD (Delete Device Description) Command	327
DLTDFUPGM (Delete DFU Program) Command	328
DLTDKTLBL (Delete Diskette Label) Command	328
DLTDLO (Delete Document Library Object) Command	329
DLTDOCL (Delete Document List) Command	330
DLTDST (Delete Distribution) Command	330
DLTDSTL (Delete Distribution List) Command	331
DLTDTAARA (Delete Data Area) Command	331
DLTDTADCT (Delete Data Dictionary) Command	331
DLTDTAQ (Delete Data Queue) Command	332
DLTEDTD (Delete Edit Description) Command	332
DLTF (Delete File) Command	332
DLTFCT (Delete Forms Control Table) Command	333
DLTFNTRSC (Delete Font Resources) Command	333
DLTFORMDF (Delete Form Definition) Command	333
DLTGSS (Delete Graphics Symbol Set) Command	334
DLTIGCDCT (Delete DBCS Conversion Dictionary) Command	334
DLTIGCSRT (Delete IGC Sort) Command	334
DLTIGCTBL (Delete DBCS Font Table) Command	335
DLTJOB (Delete Job Description) Command	335
DLTJOBQ (Delete Job Queue) Command	335
DLTJRN (Delete Journal) Command	336
DLTJRNRCV (Delete Journal Receiver) Command	336
DLTLIB (Delete Library) Command	336
DLTLICPGM (Delete Licensed Program) Command	337
DLTLIND (Delete Line Description) Command	337
DLTMNU (Delete Menu) Command	337
DLTMO (Delete Mode Description) Command	338
DLTMSGF (Delete Message File) Command	338
DLTMSGQ (Delete Message Queue) Command	338
DLTNETF (Delete Network File) Command	339
DLTOUTQ (Delete Output Queue) Command	339
DLTOVL (Delete Overlay) Command	339
DLTOVR (Delete Override) Command	340
DLTOVRDEVE (Delete Override Device Entry) Command	340
DLTPAGSEG (Delete Page Segment) Command	340
DLTPGM (Delete Program) Command	341
DLTPNLGRP (Delete Panel Group) Command	341
DLTPRB (Delete Problem) Command	341
DLTQRY (Delete Query) Command	342
DLTQST (Delete Question) Command	342
DLTQSTDB (Delete Question-and Answer-Database) Command	342
DLTRJECFG (Delete RJE Configuration) Command	343
DLTSBSD (Delete Subsystem Description) Command	343
DLTSCHIDX (Delete Search Index) Command	343
DLTSPADCT (Delete Spelling Aid Dictionary) Command	344
DLTSPLF (Delete Spooled File) Command	344
DLTSSND (Delete Session Description) Command	345
DLTTBL (Delete Table) Command	345
DLTUSRPRF (Delete User Profile) Command	345
DLYJOB (Delay Job) Command	346
DMPCLPGM (Dump CL Program) Command	346





DSPNETA (Display Network Attributes) Command	384
DSPOBJAUT (Display Object Authority) Command	384
DSPOBJD (Display Object Description) Command	385
DSPOVR (Display Override) Command	385
DSPPFM (Display Physical File Member) Command	386
DSPPFRDTA (Display Performance Data) Command	386
DSPPGM (Display Program) Command	387
DSPPGMADP (Display Program Adopt) Command	387
DSPPGMREF (Display Program References) Command	388
DSPPGMVAR (Display Program Variable) Command	389
DSPPRB (Display Problem) Command	390
DSPPTF (Display Program Temporary Fix) Command	390
DSPRCDLCK (Display Record Locks) Command	391
DSPRJECFG (Display RJE Configuration) Command	391
DSPSAVF (Display Save File) Command	392
DSPSBSD (Display Subsystem Description) Command	392
DSPSFWRSC (Display Software Resources) Command	393
DSPSOCSTS (Display Sphere of Control Status) Command	393
DSPSPLF (Display Spooled File) Command	394
DSPSRVSTS (Display Service Status) Command	394
DSPSYSVAL (Display System Value) Command	395
DSPS36 (Display System/36) Command	395
DSP TAP (Display Tape) Command	396
DSPTRC (Display Trace) Command	396
DSPTRCDTA (Display Trace Data) Command	397
DSPUSRPMN (Display User Permission) Command	397
DSPUSRPRF (Display User Profile) Command	398
DUPDKT (Duplicate Diskette) Command	398
EDTAUTL (Edit Authorization List) Command	399
EDTDLOAUT (Edit Document Library Object Authority) Command	399
EDTDOC (Edit Document) Command	399
EDTIGCDCT (Edit DBCS Conversion Dictionary) Command	400
EDTIGCTBL (Edit DBCS Table) Command	400
EDTLIBL (Edit Library List) Command	401
EDTOBJAUT (Edit Object Authority) Command	401
EDTQST (Edit Questions and Answers) Command	401
EDTS36PGMA (Edit System/36 Program Attributes) Command	402
EDTS36PRCA (Edit System/36 Procedure Attributes) Command	402
EDTS36SRCA (Edit System/36 Source Attributes) Command	402
EJTEMLOUT (Eject Emulation Output) Command	403
ELSE (Else) Command	403
EMLPRTKEY (Emulate Printer Key) Command	403
ENDBCHJOB (End Batch Job) Command	404
ENDCBLDBG (End COBOL Debug) Command	404
ENDCMTCTL (End Commitment Control) Command	404
ENDCPYSCN (End Copy Screen) Command	404
ENDCTLRCY (End Controller Recovery) Command	405
ENDDBG (End Debug) Command	405
ENDDEVRCY (End Device Recovery) Command	405
ENDDO (End Do) Command	405
ENDDSKCOL (End Disk Data Collection) Command	406
ENDGRPJOB (End Group Job) Command	406
ENDINP (End Input) Command	407
ENDJOB (End Job) Command	407
ENDJOBABN (End Job Abnormal) Command	407
ENDJOBTRC (End Job Trace) Command	408
ENDJRNAP (End Journal Access Path) Command	409
ENDJRNP (End Journal Physical File Changes) Command	409
ENDLINRCY (End Line Recovery) Command	410
ENDMOD (End Mode) Command	410
ENDPASTHR (End Pass-Through) Command	411
ENDPFRMON (End Performance Monitor) Command	411
ENDPGM (End Program) Command	411
ENDPJ (End Prestart Jobs) Command	412

ENDPRTEML (End Printer Emulation) Command	412
ENDRCV (End Receive) Command	413
ENDRDR (End Reader) Command	413
ENDRJESSN (End RJE Session) Command	414
ENDRMTSPT (End Remote Support) Command	414
ENDRQS (End Request) Command	414
ENDSAM (End Sampled Address Monitor) Command	415
ENDSAMCOL (End Sampled Address Monitor Data Collection) Command	415
ENDSBS (End Subsystem) Command	416
ENDSRVJOB (End Service Job) Command	416
ENDSYS (End System) Command	416
ENDS36 (End System/36) Command	417
ENDTIESSN (End Technical Information Exchange Session) Command	417
ENDWTR (End Writer) Command	417
EXTPGMINF (Extract Program Information) Command	418
FILDOC (File Document) Command	419
FMTDTA (Format Data) Command	421
GO (Go to Menu) Command	422
GOTO (Go To) Command	422
GRTACCAUT (Grant Access Code Authority) Command	423
GRTOBJAUT (Grant Object Authority) Command	424
GRTUSRAUT (Grant User Authority) Command	425
GRTUSRPMN (Grant User Permission) Command	425
HLDCMNDEV (Hold Communications Device) Command	425
HLDDSTQ (Hold Distribution Queue) Command	426
HLDJOB (Hold Job) Command	426
HLDJOBQ (Hold Job Queue) Command	426
HLDOUTQ (Hold Output Queue) Command	427
HLDRDR (Hold Reader) Command	427
HLDSPLF (Hold Spooled File) Command	428
HLDWTR (Hold Writer) Command	428
IF (If) Command	429
INZDKT (Initialize Diskette) Command	429
INZPCS (Initialize PC Support) Command	430
INZPFM (Initialize Physical File Member) Command	430
INZSYS (Initialize System) Command	431
INZTAP (Initialize Tape) Command	431
LNKDTADFN (Link Data Definition) Command	432
LODPTF (Load Program Temporary Fix) Command	433
LODQSTDB (Load Question-and-Answer Database) Command	433
MDLSYS (Model System) Command	434
MONMSG (Monitor Message) Command	434
MOVOBJ (Move Object) Command	435
MRGDOC (Merge Document) Command	436
MRFORMD (Merge Form Description) Command	437
MMSGF (Merge Message File) Command	438
OPNDBF (Open Database File) Command	438
OPNQRYF (Open Query File) Command	439
OVRDBF (Override with Database File) Command	441
OVRDKTF (Override with Diskette File) Command	443
OVRDSPF (Override with Display File) Command	444
OVRICFDEVE (Override Intersystem Communications Function Program Device Entry) Command	445
OVRICFF (Override with Intersystem Communications Function File) Command	447
OVRMSGF (Override with Message File) Command	447
OVRPRTF (Override with Printer File) Command	448
OVRSAVF (Override Save File) Command	450
OVRTAPF (Override with Tape File) Command	451
PAGDOC (Paginate Document) Command	452
PGM (Program) Command	453
POSDBF (Position Database File) Command	453
PRTACTRPT (Print Activity Report) Command	454
PRTAFPDTA (Print Advanced Function Printer Data) Command	455
PRTCMDUSG (Print Command Usage) Command	455

PRTCPTPT (Print Component Report) Command	456
PRTCSPAPP (Print CSP/AE Application) Command	457
PRTDEVADR (Print Device Addresses) Command	458
PRTDOC (Print Document) Command	458
PRTDSKRPT (Print Disk Activity Report) Command	462
PRTERLOG (Print Error Log) Command	463
PRTINTDTA (Print Internal Data) Command	464
PRTJOBTRPT (Print Job Report) Command	465
PRTJOBTRC (Print Job Trace) Command	467
PRTLCKRPT (Print Lock Report) Command	468
PRTPOLRPT (Print Pool Report) Command	469
PRTRSCRPT (Print Resource Report) Command	471
PRTSAMDTA (Print Sampled Address Monitor Data) Command	471
PRTSYSRPT (Print System Report) Command	472
PRTTNSRPT (Print Transaction Report) Command	474
PRTRCRPT (Print Trace Report)	475
PWRDWNSYS (Power Down System) Command	475
QRYDOCLIB (Query Document Library) Command	476
QRYDST (Query Distribution) Command	478
QRYTIEF (Query Technical Information Exchange File) Command	478
RCLDDMCNV (Reclaim Distributed Data Management Conversations) Command	479
RCLDLO (Reclaim Document Library Object) Command	479
RCLRSC (Reclaim Resources) Command	480
RCLSTG (Reclaim Storage) Command	480
RCVDST (Receive Distribution) Command	481
RCVF (Receive File) Command	482
RCVJRNE (Receive Journal Entry) Command	482
RCVMSG (Receive Message) Command	484
RCVNETF (Receive Network File) Command	485
RCVTIEF (Receive Technical Information Exchange File) Command	485
RETURN (Return) Command	486
RGZPFM (Reorganize Physical File Member) Command	486
RLSCMNDEV (Release Communications Device) Command	487
RLSDSTQ (Release Distribution Queue) Command	487
RLSJOB (Release Job) Command	487
RLSJOBQ (Release Job Queue) Command	488
RLSOUTQ (Release Output Queue) Command	488
RLSRDR (Release Reader) Command	488
RLSRMTPHS (Release Remote Phase) Command	489
RLSSPLF (Release Spooled File) Command	489
RLSWTR (Release Writer) Command	490
RMVACC (Remove Access Code) Command	490
RMVAJE (Remove Autostart Job Entry) Command	491
RMVALRD (Remove Alert Description) Command	491
RMVAUTLE (Remove Authorization List Entry) Command	492
RMVBKP (Remove Breakpoint) Command	492
RMVCFGLE (Remove Configuration List Entries) Command	493
RMVCMNE (Remove Communications Entry) Command	494
RMVDIRE (Remove Directory Entry) Command	495
RMVDLOAUT (Remove Document Library Object Authority) Command	495
RMVDSTLE (Remove Distribution List Entry) Command	496
RMVFCTE (Remove Forms Control Table Entry) Command	496
RMVICFDEVE (Remove Intersystem Communications Function Program Device Entry) Command	497
RMVJOBQE (Remove Job Queue Entry) Command	497
RMVJRNCHG (Remove Journalized Changes) Command	498
RMVLIBLE (Remove Library List Entry) Command	498
RMVM (Remove Member) Command	499
RMVMSG (Remove Message) Command	499
RMVMSGD (Remove Message Description) Command	500
RMVNETJOBE (Remove Network Job Entry) Command	500
RMVPGM (Remove Program) Command	500
RMVPJE (Remove Prestart Job Entry) Command	501
RMVPTF (Remove Program Temporary Fix) Command	501

RMVRJECMNE (Remove RJE Communications Entry) Command	502
RMVRJERDRE (Remove RJE Reader Entry) Command	502
RMVRJEWTR (Remove RJE Writer Entry) Command	502
RMVRPYLE (Remove Reply List Entry) Command	503
RMVRTGE (Remove Routing Entry) Command	503
RMVTRC (Remove Trace) Command	503
RMVWSE (Remove Work Station Entry) Command	504
RNMDKT (Rename Diskette) Command	504
RNMDLO (Rename Document Library Object) Command	505
RNMM (Rename Member) Command	505
RNMOBJ (Rename Object) Command	506
ROLLBACK (Rollback) Command	506
RPLDOC (Replace Document) Command	507
RRTJOB (Reroute Job) Command	507
RSMBKP (Resume Breakpoint) Command	508
RSMCTLCY (Resume Controller Recovery) Command	508
RSMDEVRCY (Resume Device Recovery) Command	508
RSMLINRCY (Resume Line Recovery) Command	509
RSTAUT (Restore Authority) Command	509
RSTCFG (Restore Configuration) Command	510
RSTDLO (Restore Document Library Object) Command	511
RSTLIB (Restore Library) Command	512
RSTLICPGM (Restore Licensed Program) Command	513
RSTOBJ (Restore Object) Command	514
RSTS36F (Restore System/36 File) Command	516
RSTS36FLR (Restore System/36 Folder) Command	517
RSTS36LIBM (Restore System/36 Library Members) Command	518
RSTUSRPRF (Restore User Profiles) Command	519
RTVAUTLE (Retrieve Authorization List Entry) Command	520
RTVCFGSRC (Retrieve Configuration Source) Command	521
RTVCFGSTS (Retrieve Configuration Status) Command	521
RTVCLDSRC (Retrieve C Locale Description Source) Command	522
RTVCLSRC (Retrieve CL Source) Command	522
RTVDOC (Retrieve Document) Command	523
RTVDTAARA (Retrieve Data Area) Command	524
RTVGRPA (Retrieve Group Attributes) Command	524
RTVJOBA (Retrieve Job Attributes) Command	525
RTVJRNE (Retrieve Journal Entry) Command	526
RTVMBRD (Retrieve Member Description) Command	528
RTVMSG (Retrieve Message) Command	529
RTVNETA (Retrieve Network Attributes) Command	530
RTVSYVAL (Retrieve System Value) Command	530
RTVUSRPRF (Retrieve User Profile) Command	531
RUNQRY (Run Query) Command	532
RVKACCAUT (Revoke Access Code Authority) Command	533
RVKOBJAUT (Revoke Object Authority) Command	534
RVKUSRPMN (Revoke User Permission) Command	535
SAVCHGOBJ (Save Changed Object) Command	536
SAVDLO (Save Document Library Object) Command	538
SAVLIB (Save Library) Command	540
SAVLICPGM (Save Licensed Program) Command	541
SAVOBJ (Save Object) Command	542
SAVSAVFTA (Save Save File Data) Command	544
SAVSECDA (Save Security Data) Command	545
SAVSTG (Save Storage) Command	546
SAVSYS (Save System) Command	546
SAVS36F (Save System/36 File) Command	547
SAVS36LIBM (Save System/36 Library Members) Command	548
SBMDBJOB (Submit Database Jobs) Command	549
SBMDKTJOB (Submit Diskette Jobs) Command	550
SBMFNCJOB (Submit Finance Job) Command	551
SBMJOB (Submit Job) Command	552
SBMNETJOB (Submit Network Job) Command	554
SBMRJEJOB (Submit RJE Job) Command	555

SBMRMTCMD (Submit Remote Command) Command	556
SETATNPGM (Set Attention Program) Command	556
SETKBDMAP (Set Keyboard Map) Command	557
SETPGMINF (Set Program Information) Command	559
SIGNOFF (Sign Off) Command	559
SLTCMD (Select Command) Command	560
SNDBRKMSG (Send Break Message) Command	560
SNDDOC (Send Document) Command	560
SNDDST (Send Distribution) Command	561
SNDDSTQ (Send Distribution Queue) Command	563
SNDEMLIGC (Send DBCS 3270PC Emulation Code) Command	563
SNDF (Send File) Command	564
SNDFNCIMG (Send Finance Diskette Image) Command	564
SNDJRNE (Send Journal Entry) Command	565
SNDMSG (Send Message) Command	566
SNDNETF (Send Network File) Command	567
SNDNETMSG (Send Network Message) Command	567
SNDNETSPLF (Send Network Spooled File) Command	568
SNDPGMMSG (Send Program Message) Command	569
SNDPTFORD (Send Program Temporary Fix Order) Command	570
SNDRCVF (Send/Receive File) Command	570
SNDRPY (Send Reply) Command	571
SNDSVRQS (Send Service Request) Command	571
SNDTIEF (Send Technical Information Exchange File) Command	572
SNDUSRMSG (Send User Message) Command	573
STRAPF (Start Advanced Printer Function) Command	574
STRAPW (Start Advanced Print Writer) Command	574
STRBAS (Start Basic) Command	574
STRBASPRC (Start Basic Procedure) Command	575
STRBGU (Start Business Graphics Utility) Command	575
STRCBLDBG (Start COBOL Debug) Command	575
STRCGU (Start CGU) Command	576
STRCMTCTL (Start Commitment Control) Command	576
STRCPYSCN (Start Copy Screen) Command	577
STRCSP (Start CSP/AE Utilities) Command	577
STRDBG (Start Debug) Command	578
STRDBRDR (Start Database Reader) Command	578
STRDFU (Start DFU) Command	579
STRDKTRDR (Start Diskette Reader) Command	579
STRDKTWTR (Start Diskette Writer) Command	580
STRDSKCOL (Start Disk Data Collection) Command	580
STREDU (Start Education) Command	581
STREML3270 (Start 3270 Display Emulation) Command	581
STRFMA (Start Font Management Aid) Command	582
STRIDD (Start Interactive Data Definition Utility) Command	582
STRIDXSCH (Start Index Search) Command	582
STRITF (Start Interactive Terminal Facility) Command	583
STRJOBTRC (Start Job Trace) Command	583
STRJRNAP (Start Journal Access Path) Command	583
STRJRNPf (Start Journal Physical File) Command	584
STRKPF (Start Kanji Printer Function) Command	584
STRMOD (Start Mode) Command	585
STROFC (Start Office) Command	585
STRPASTHR (Start Pass-Through) Command	586
STRPCCMD (Start PC Command) Command	587
STRPCO (Start PC Support Organizer) Command	587
STRPDM (Start Programming Development Manager) Command	587
STRPFRMON (Start Performance Monitor) Command	588
STRPFRT (Start Performance Tools) Command	589
STRPGMMNU (Start Programmer Menu) Command	589
STRPJ (Start Prestart Jobs) Command	590
STRPPW (Start Page Printer Writer) Command	590
STRPRTEML (Start Printer Emulation) Command	591
STRPRTWTR (Start Printer Writer) Command	592

STRQRY (Start Query) Command . . . . .	593
STRQST (Start Question and Answer) Command . . . . .	593
STRRJECSL (Start RJE Console) Command . . . . .	593
STRRJERDR (Start RJE Reader) Command . . . . .	594
STRRJESSN (Start RJE Session) Command . . . . .	594
STRRJEWTR (Start RJE Writer) Command . . . . .	595
STRRMTSPT (Start Remote Support) Command . . . . .	596
STRSAM (Start Sampled Address Monitor) Command . . . . .	596
STRSAMCOL (Start Sampled Address Monitor Data Collection) Command . . . . .	597
STRSBS (Start Subsystem) Command . . . . .	597
STRSDA (Start SDA) Command . . . . .	598
STRSEU (Start SEU) Command . . . . .	599
STRSPTN (Start Support Network) Command . . . . .	599
STRSQL (Start Structured Query Language) Command . . . . .	600
STRSRVJOB (Start Service Job) Command . . . . .	600
STRSST (Start System Service Tools) Command . . . . .	601
STRS36 (Start System/36) Command . . . . .	601
STRS36PRC (Start System/36 Procedure) Command . . . . .	601
STRTCPFTP (Start TCP/IP File Transfer Protocol) Command . . . . .	602
STRTESSN (Start Technical Information Exchange Session) Command . . . . .	602
STRWP (Start Word Processing) Command . . . . .	602
TFRBCHJOB (Transfer Batch Job) Command . . . . .	603
TFRCTL (Transfer Control) Command . . . . .	603
TFRGRPJOB (Transfer to Group Job) Command . . . . .	604
TFRJOB (Transfer Job) Command . . . . .	604
TFRSECJOB (Transfer Secondary Job) Command . . . . .	605
TRCCSP (Trace CSP/AE Application) Command . . . . .	605
TRCICF (Trace ICF) Command . . . . .	606
TRCINT (Trace Internal) Command . . . . .	607
TRCJOB (Trace Job) Command . . . . .	608
UPDDTA (Update Data) Command . . . . .	608
VFYCMN (Verify Communications) Command . . . . .	609
VFYPRT (Verify Printer) Command . . . . .	609
VFYTAP (Verify Tape) Command . . . . .	609
VFYTCPNN (Verify TCP/IP Connection) Command . . . . .	610
VRFCFG (Vary Configuration) Command . . . . .	610
WAIT (Wait) Command . . . . .	611
WRKACTJOB (Work with Active Jobs) Command . . . . .	611
WRKALR (Work with Alerts) Command . . . . .	612
WRKALRD (Work with Alert Descriptions) Command . . . . .	612
WRKALRTBL (Work With Alert Tables) Command . . . . .	613
WRKAUTL (Work with Authorization Lists) Command . . . . .	613
WRKCFG (Work with Configuration Lists) Command . . . . .	613
WRKCFGSTS (Work with Configuration Status) Command . . . . .	614
WRKCHTFMT (Work with Chart Formats) Command . . . . .	615
WRKCLS (Work with Classes) Command . . . . .	615
WRKCMD (Work with Commands) Command . . . . .	616
WRKCNTINF (Work with Contact Information) Command . . . . .	616
WRKCOSD (Work with Class-of-Service Descriptions) Command . . . . .	616
WRKCTLD (Work with Controller Descriptions) Command . . . . .	617
WRKDBFIDD (Work with DB Files Using IDDU) Command . . . . .	617
WRKDDMF (Work with Distributed Data Management Files) Command . . . . .	618
WRKDEVD (Work with Device Descriptions) Command . . . . .	618
WRKDEVTBL (Work with Device Tables) Command . . . . .	619
WRKDIR (Work with Directory) Command . . . . .	619
WRKDOC (Work with Documents) Command . . . . .	620
WRKDOCLIB (Work with Document Libraries) Command . . . . .	620
WRKDOCPTQ (Work with Document Print Queue) Command . . . . .	620
WRKDPCQ (Work with DSNX/PC Distribution Queues) Command . . . . .	621
WRKDSKSTS (Work with Disk Status) Command . . . . .	621
WRKDSTL (Work with Distribution Lists) Command . . . . .	622
WRKDSTQ (Work with Distribution Queue) Command . . . . .	622
WRKDTAARA (Work with Data Areas) Command . . . . .	623
WRKDTADCT (Work with Data Dictionaries) Command . . . . .	623





WRKUSRTBL (Work with User Tables) Command . . . . .	651
WRKWTR (Work with Writers) Command . . . . .	651
<b>Appendix A. Error Messages That Can Be Monitored . . . . .</b>	<b>653</b>
<b>Appendix B. Files Used by CL Commands . . . . .</b>	<b>715</b>



---

## Appendix A. Error Messages That Can Be Monitored

This appendix contains the escape, notify, and status messages that can be issued by each CL command. The commands are listed in alphabetic order. The following information is given for each message:

- The message identifier
- The message type code (E for escape messages, N for notify messages, and S for status messages)
- The message text

**\*ALL • ADDDSTLE**

**\*ALL**

CPF0001 E Error found on &1 command.  
CPF0010 E Command &1 is not supported.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9805 E Object &2 in library &3 destroyed.  
CPF9807 E One or more libraries in library list deleted.  
CPF9808 E Cannot allocate one or more libraries on library list.  
CPF9830 E Cannot assign library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9871 E Error occurred while processing.  
CPF9901 S Request check. &1 unmonitored by &2 at &3.  
CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**ADDACC**

CPF9001 E Add access code request failed.  
CPF9009 E System requires file &1 in &2 be journaled.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

**ADDAJE**

CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1697 E Subsystem description &1 not changed.

**ADDALRD**

CPF1A01 E Alert table &1 in &2 cannot be extended.  
CPF1A02 E Alert code &1 already in alert table &2.  
CPF1A03 E Alert identifier &1 already in alert table &2.  
CPF1A05 E Alert table &1 in &2 damaged.  
CPF2499 E Message ID &1 not allowed.  
CPF7BB0 E Alert description already exists.  
CPF7BB5 E Alert description &1 could not be added to alert table &2 in library &3.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9807 E One or more libraries in library list deleted.  
CPF9808 E Cannot allocate one or more libraries on library list.  
CPF9810 E Library &1 not found.  
CPF9811 E Program &1 in library &2 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9814 E Device &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9821 E Not authorized to program &1 in library &2.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9825 E Not authorized to device &1.  
CPF9830 E Cannot assign library &1.  
CPF9831 E Cannot assign device &1.  
CPF9899 E Error occurred during processing of command.  
CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**ADDAUTLE**

CPF22AA E Only \*AUTLMGT authority can be specified with \*ALL authority.  
CPF22AB E Only \*AUTLMGT can be specified with \*CHANGE authority.  
CPF22AC E Only \*AUTLMGT authority can be specified with \*USE authority.  
CPF2253 E No objects found for &1 in library &2.

CPF2280 E \*PUBLIC is always on authorization list, cannot be added.  
CPF2281 E The users specified do not exist on the system.  
CPF2282 E &1 errors adding users, &2 authorization lists processed.  
CPF2283 E Authorization list &1 does not exist.  
CPF2284 E Not authorized to change authorization list &1.  
CPF2289 E Unable to allocate authorization list &1.  
CPF2290 E \*EXCLUDE cannot be specified with another authority.

**ADDBKP**

CPF1999 E Errors occurred on command.

**ADDCFGLE**

CPF260F E Configuration list &1 not found.  
CPF261C E Index for configuration list &1 not changed.  
CPF261D E Index for configuration list &1 not changed.  
CPF2613 E Too many entries were added.  
CPF2625 E Not able to allocate object &1.  
CPF263A E CFGL type &1 does not match existing type &2.  
CPF2634 E Not authorized to object &1.  
CPF2663 E Configuration list &1 previously deleted.

**ADDCMNE**

CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1697 E Subsystem description &1 not changed.

**ADDIRE**

CPF8360 E Not enough storage to perform commit operation.  
CPF90A8 E \*SECADM special authority required to do requested operation.  
CPF905C E Error occurred trying to find a translation table.  
CPF9054 E &1 already exists.  
CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**ADDLOAUT**

CPF8A77 E Folder &1 not found.  
CPF8A78 E Folder &1 in use.  
CPF8A79 E Folder &1 is logically damaged.  
CPF8A80 E Document &2 in use in folder &1.  
CPF8A82 E Document &2 not found in folder &1.  
CPF8A88 E Operation is not allowed on document &2 in folder &1.  
CPF8A89 E Document &2 in folder &1 is logically damaged.  
CPF90BA E Authority request for document library object failed.  
CPF9073 E No authority to view or change the security of document library object &1.  
CPF908A E Requester &1 not enrolled.  
CPF908B E Document library object not found.  
CPF908E E &1 objects changed; &2 objects not changed.  
CPF909A E Document &2 in folder &1 is damaged.  
CPF9095 E Folder &1 is damaged.

**ADDSTLE**

CPF8360 E Not enough storage to perform commit operation.  
CPF905C E Error occurred trying to find a translation table.

- CPF9096 E Cannot use CMDCHRID(\*DEV D),  
DOCCHRID(\*DEV D) in batch job.
- CPF9838 E Storage needed is larger than maximum  
storage limit for user profile &6.
- ADDDTADFN**
- CPF2E9E E Not enough space to add to dictionary &1.
- CPF2FE0 E Error occurred while opening dictionary &1.
- CPF2FE1 E Error occurred while closing dictionary &1.
- CPF2FE2 E Dictionary &1 currently in use.
- CPF2F02 E Not authorized to use dictionary &1.
- CPF2F07 E Dictionary &1 in error.
- CPF2F08 E Dictionary &1 not found.
- CPF2F61 E File &2 in &3 currently in use.
- CPF2F72 E File &2 in &3 not valid for ADDDTADFN.
- CPF2F73 E ADDDTADFN not allowed for SQL database  
files.
- CPF2F74 E Attributes of file &2 in &3 not supported.
- CPF9812 E File &1 in library &2 not found.
- CPF9820 E Not authorized to use library &1.
- CPF9822 E Not authorized to file &1 in library &2.
- ADDFCTE**
- RJE0024 E Errors found. Processing of request ended.
- ADDICFDEVE**
- CPF7365 E Device not added to file &1 in &2.
- ADDJOBQE**
- CPF1619 E Subsystem description &1 in library &2  
damaged.
- CPF1697 E Subsystem description &1 not changed.
- ADDLFM**
- CPF2207 E Not authorized to use object &1 in library &3  
type \*&2.
- CPF3204 E Cannot find object needed for file &1 in &2.
- CPF7306 E Member &1 not added to file &2 in &3.
- ADDLIBLE**
- CPF2103 E Library &1 already exists in library list.
- CPF2106 E Library list not changed.
- CPF2110 E Library &1 not found.
- CPF2113 E Cannot allocate library &1.
- CPF2118 E Library &1 not added.
- CPF2176 E Library &1 damaged.
- CPF2182 E Not authorized to library &1.
- CPF9807 E One or more libraries in library list deleted.
- ADDMSGD**
- CPF2401 E Not authorized to library &1.
- CPF2407 E Message file &1 in &2 not found.
- CPF2411 E Not authorized to message file &1 in &2.
- CPF2412 E Message ID &1 already exists in message file  
&2 in &3.
- CPF2430 E Message description not added to message file
- CPF2461 E Message file &1 could not be extended.
- CPF2483 E Message file currently in use.
- CPF2510 E Message file &1 in &2 logically damaged.
- CPF9830 E Cannot assign library &1.
- ADDNETJOB**
- CPF8050 E Network job table could not be accessed.
- CPF8051 E \*ANY not correct for second part of user ID.
- CPF8052 E Network job entry &1 &2 not added.
- CPF9040 E Wrong characters used in User ID or address,  
or List identifier &1 &2.
- CPF9845 E Error occurred while opening file &1.
- CPF9846 E Error while processing file &1 in library &2
- CPF9847 E Error occurred while closing file &1 in library  
&2.
- ADDPFM**
- CPF2207 E Not authorized to use object &1 in library &3  
type \*&2.
- CPF3204 E Cannot find object needed for file &1 in &2.
- CPF7306 E Member &1 not added to file &2 in &3.
- ADDPGM**
- CPF1999 E Errors occurred on command.
- ADDRJECMNE**
- RJE0036 E Maximum of &1 &2 entries was surpassed.
- RJE0082 E Communications entry &1 already exists in &3.
- ADDRJERDRE**
- RJE0018 E &1 already exists in &2 in library &3.
- ADDRJEWTR**
- RJE0018 E &1 already exists in &2 in library &3.
- RJE0067 E No members were found in file &1 in &2.
- ADDRPYLE**
- CPF2435 E System reply list not found.
- CPF2436 E System Reply List entry not added or changed.
- CPF2499 E Message ID &1 not allowed.
- CPF2555 E Sequence number &1 already defined in  
system reply list.
- CPF2557 E System reply list damaged.
- CPF2558 E System reply list currently in use.
- ADDRTGE**
- CPF1619 E Subsystem description &1 in library &2  
damaged.
- CPF1697 E Subsystem description &1 not changed.
- ADDTRC**
- CPF1999 E Errors occurred on command.
- ADDWSE**
- CPF1619 E Subsystem description &1 in library &2  
damaged.
- CPF1697 E Subsystem description &1 not changed.
- ALCOBJ**
- CPF1002 E Cannot allocate objects.
- CPF1040 E Maximum number of objects allocated on  
system.
- CPF1085 E Objects not allocated.
- ANSLIN**
- CPF2704 E Line description &1 not found.
- CPF5914 E Answer Line (ANSLIN) command for line &1  
failed.
- CPF5915 E Line &23 not in a valid state for answering.
- CPF5917 E Not authorized to line description &1.
- CPF5919 E Line &1 not available.
- CPF5935 E Error occurred during command processing.
- CPF5938 E Another job using line &1.
- CPF5939 E Another job using line &1.
- CPF5945 E ANSLIN command not valid for line &1.
- ANZACGRP**
- PFR5431 E Cannot access process access group data file.
- ANZDBFKEY**
- PFR5251 E Cannot access data to analyze data base file.
- ANZPRB**

**APYJRNCHG • CHGACGCDE**

CPF2B01 E Problem analysis cannot continue because of an error in the program.

**APYJRNCHG**

CPF7002 E File &1 in library &2 not physical file.  
 CPF7003 E Entry not journaled to journal &1. Reason code &3.  
 CPF7006 E Member &3 not found in file &1 in &2.  
 CPF7007 E Cannot allocate member &3 file &1 in &2.  
 CPF7041 E Entry for job &3/&2/&1 not found.  
 CPF7042 E File not journaled or journaled to different journal.  
 CPF7044 E Apply or remove of journaled entries failed, reason code &7.  
 CPF7045 E Journal receiver &1 in &2 partially damaged.  
 CPF7046 E Duplicate key not allowed for member &3.  
 CPF7047 E Member &3 file &1 in &2 full.  
 CPF7048 E Cannot perform journaled change to member &3.  
 CPF7049 E Cannot perform operation beyond journal entry &6.  
 CPF7050 E LASTSAVE date not same as restored version of member &3.  
 CPF7051 E Save entry for member &3 not found in RCVRNG.  
 CPF7052 E Select/omit failure in logical file over member &3.  
 CPF7053 E Error on RCVRNG specifications, reason code &1.  
 CPF7054 E FROM and TO values not valid.  
 CPF7055 E Maximum number of members exceeded.  
 CPF7057 E \*LIBL not allowed with FILE(\*ALL).  
 CPF7058 E Apply or remove journaled entries operation failed.  
 CPF7059 E Entry for &1 not found in RCVRNG.  
 CPF7067 E FROMENT option not valid. Commit boundary violation.  
 CPF7068 E Entry needed for apply or remove operation not found.  
 CPF7069 E No entries applied or removed using journal &1.  
 CPF7075 E Restore date of member &3 not same as in journal.  
 CPF7076 E Restore entry for member &3 not found in RCVRNG.  
 CPF7077 E Key mapping error on member &3.  
 CPF7078 E Cannot apply or remove changes to member &3.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9809 E Library &1 cannot be accessed.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.

**APYPTF**

CPF35AA E Licensed internal code PTF &1 already applied.  
 CPF35AB E Licensed internal code PTF &1 cannot be applied.  
 CPF35A1 E Wrong copy of licensed internal code in use.  
 CPF35A2 E Required hardware changes not installed for PTF &1.

CPF35A3 E Prerequisite program temporary fixes (PTFs) not temporarily applied for PTF &1.  
 CPF35A5 E Prerequisite licensed internal code PTFs for PTF &1 not permanently applied.  
 CPF35A9 E Error occurred while processing licensed internal code PTFs.  
 CPF3558 E Cannot allocate &1 in &3 type \*&2.  
 CPF3564 E PTF &1-&2 damaged.  
 CPF3583 E PTF not applied because error occurred.  
 CPF3596 E PTF numbers in select/omit list not permitted.  
 CPF3597 E Requirements for PTFs to be applied not met.  
 CPF3598 E PTF function already in process.  
 CPF3612 E Library &1 not found.  
 CPF3614 E Data area &1 not found.  
 CPF3640 E No immediate PTFs applied.  
 CPF3660 E No program temporary fixes identified.  
 CPF3677 E Not authorized to library &1.  
 CPF3693 E Service function ended because error occurred.  
 CPF37A1 E Licensed program &1 option &4 not installed.  
 CPF37A2 E Licensed program &1 not valid.  
 CPF37A3 E Data area &2 in &3 not available.  
 CPF3931 E Required programs not found. PTF incomplete.  
 CPF3945 E Records of PTF activity for licensed program are deleted.  
 CPF3956 E Error occurred during PTF processing.

**BCHJOB**

CPF1374 E BCHJOB command not valid in current environment.

**CALL**

CPD0783 E Variable &3 for parameter &2 must be TYPE(\*DEC), LEN(&4,&5).  
 CPF0005 E Returned command string exceeds variable provided length.  
 CPF0006 E Errors occurred in command.  
 CPF0805 E Error found when program &1 in &2 started.  
 CPF6801 E Command prompting ended by user.

**CFGDSTSRV**

CPF8801 E Document Library Services (\*DLS) queue type not allowed in routing table.  
 CPF8806 E Value not correct for system name or system group.  
 CPF8807 E Error occurred while using QSNADS journal.  
 CPF8809 E Errors detected on SNADS internal queues.  
 CPF8814 E Queue &1 not found.  
 CPF8815 E Routing table entry &1 &2 not found.  
 CPI8854 E DSNX error while journaling.

**CHGACGCDE**

CPF1314 E Value &1 for parameter &2 not allowed.  
 CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1321 E Job &1 user &2 job number &3 not found.  
 CPF1332 E End of duplicate job names.  
 CPF1334 E BRKMSG(\*NOTIFY) only valid for interactive jobs.  
 CPF1336 E Errors on CHGJOB command for job &3/&2/&1.  
 CPF1337 E &3/&2/&1 not authorized to change parameters.  
 CPF1340 E Job control function not performed.  
 CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.  
 CPF1343 E Job &3/&2/&1 not valid job type for function.  
 CPF1344 E Not authorized to control job &3/&2/&1.

CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.

**CHGAJE**  
 CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**CHGALRD**  
 CPF1A01 E Alert table &1 in &2 cannot be extended.  
 CPF1A02 E Alert code &1 already in alert table &2.  
 CPF1A03 E Alert identifier &1 already in alert table &2.  
 CPF1A05 E Alert table &1 in &2 damaged.  
 CPF2499 E Message ID &1 not allowed.  
 CPF7BB1 E Alert description not found.  
 CPF7BB5 E Alert description &1 could not be added to alert table &2 in library &3.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9814 E Device &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.  
 CPF9830 E Cannot assign library &1.  
 CPF9831 E Cannot assign device &1.  
 CPF9899 E Error occurred during processing of command.  
 CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**CHGALRTBL**  
 CPF2150 E Object information function failed.  
 CPF2151 E Operation failed for &2 in &1 type \*&3.  
 CPF2152 E Objects of type \*&1 cannot be created into QTEMP.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.

**CHGAUTLE**  
 CPF22AA E Only \*AUTLMGT authority can be specified with \*ALL authority.  
 CPF22AB E Only \*AUTI MGT can be specified with \*CHANGE authority.  
 CPF22AC E Only \*AUTLMGT authority can be specified with \*USE authority.  
 CPF2253 E No objects found for &1 in library &2.  
 CPF2281 E The users specified do not exist on the system.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF2284 E Not authorized to change authorization list &1.  
 CPF2286 E \*PUBLIC cannot be given \*AUTLMGT authority.  
 CPF2287 E &1 errors changing users, &2 authorization lists processed.  
 CPF2289 E Unable to allocate authorization list &1.

CPF2290 E \*EXCLUDE cannot be specified with another authority.

**CHGCFGL**  
 CPF260F E Configuration list &1 not found.  
 CPF261C E Index for configuration list &1 not changed.  
 CPF261D E Index for configuration list &1 not changed.  
 CPF261F E Configuration list &1 has been deleted.  
 CPF2625 E Not able to allocate object &1.  
 CPF263A E CFGL type &1 does not match existing type &2.  
 CPF2634 E Not authorized to object &1.  
 CPF2663 E Configuration list &1 previously deleted.

**CHGCMD**  
 CPF6209 E Library &1 not found.  
 CPF6210 E Command &1 in library &2 not found.  
 CPF6211 E Not authorized to change command &1.  
 CPF6212 E Command &1 not changed.  
 CPF6213 E Cannot allocate command &1 in library &2.  
 CPF6214 E Errors detected while changing command &1.  
 CPF6219 E Not authorized to library &2.

**CHGCMDDFT**  
 CPF6260 E Errors detected while changing defaults.  
 CPF6261 E Cannot change command &1 in library &2.

**CHGCMNE**  
 CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**CHGCOSD**  
 CPF2621 E Class-of-service description &1 not changed.

**CHGCSPPGM**  
 CAE9046 E Program &1 in library &2 not a CSP/AE program.  
 CAE9069 E User profile storage limit exceeded.  
 CAE9094 E Program &2/&1 not changed, &3 max error severity.  
 CAE9102 E Errors occurred. &1 of &2 objects created.

**CHGCTLAPPC**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLASC**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLBSC**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLFNC**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLLWS**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLNET**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLRTL**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLRWS**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLTAP**  
 CPF2652 E Controller description &1 not changed.

**CHGCTLVWS**  
 CPF2652 E Controller description &1 not changed.

**CHGCURLIB**

CPF2106 E Library list not changed.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2133 E First product library on library list destroyed.  
 CPF2134 E Second product library on library list destroyed.  
 CPF2137 E Current library on library list destroyed.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.

**CHGDBG**

CPF1999 E Errors occurred on command.

**CHGDMMF**

CPF7304 E File &1 in &2 not changed.

**CHGDEVAPPC**

CPF2618 E Device description &1 not changed.

**CHGDEVASC**

CPF2618 E Device description &1 not changed.

**CHGDEVBSC**

CPF2618 E Device description &1 not changed.

**CHGDEVDKT**

CPF2618 E Device description &1 not changed.

**CHGDEVDSP**

CPF2618 E Device description &1 not changed.

**CHGDEVFNC**

CPF2618 E Device description &1 not changed.

**CHGDEVHOST**

CPF2618 E Device description &1 not changed.

**CHGDEVINTR**

CPF2618 E Device description &1 not changed.

**CHGDEVNET**

CPF2618 E Device description &1 not changed.

**CHGDEVPRT**

CPF2618 E Device description &1 not changed.

**CHGDEVRTL**

CPF2618 E Device description &1 not changed.

**CHGDEVSNUF**

CPF2618 E Device description &1 not changed.

**CHGDEVTAP**

CPF2618 E Device description &1 not changed.

**CHGDIRE**

CPF8360 E Not enough storage to perform commit operation.

CPF905C E Error occurred trying to find a translation table.

CPF907E E You can only change your own directory entry.

CPF907F E Specified parameters not allowed.

CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.

CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**CHGDKTF**

CPF7304 E File &1 in &2 not changed.

**CHGDLOAUT**

CPF8A75 E Not authorized to access folder &1.

CPF8A77 E Folder &1 not found.

CPF8A78 E Folder &1 in use.  
 CPF8A79 E Folder &1 is logically damaged.  
 CPF8A80 E Document &2 in use in folder &1.  
 CPF8A82 E Document &2 not found in folder &1.  
 CPF8A83 E Not authorized to access document &2 in folder &1.

CPF8A88 E Operation is not allowed on document &2 in folder &1.

CPF8A89 E Document &2 in folder &1 is logically damaged.

CPF90BA E Authority request for document library object failed.

CPF90B8 E No authority to specify a reference object for document library object &1.

CPF901F E \*AUTL was specified for a user other than \*PUBLIC.

CPF9073 E No authority to view or change the security of document library object &1.

CPF908A E Requester &1 not enrolled.

CPF908B E Document library object not found.

CPF908E E &1 objects changed; &2 objects not changed.

CPF909A E Document &2 in folder &1 is damaged.

CPF9095 E Folder &1 is damaged.

**CHGDLOWN**

CPF2204 E User profile &1 not found.

CPF2232 E Not authorized to user profile &1.

CPF2233 E No delete authority to user profile &1.

CPF8A48 E Storage limit exceeded for user profile &5.

CPF8360 E Not enough storage to perform commit operation.

CPF9005 E System resource required to complete this request not available.

CPF9006 E User not enrolled in system distribution directory.

CPF9009 E System requires file &1 in &2 be journaled.

CPF9012 E Start of document interchange session not successful for &1.

CPF9029 E Not allowed to specify owner profile &1.

CPF9032 E Document interchange session not started.

CPF9048 E Ownership of &2 document library objects changed to profile &1; &3 not changed.

CPF908A E Requester &1 not enrolled.

CPF9847 E Error occurred while closing file &1 in library &2.

**CHGDOCD**

CPF8A87 E Document name &2 not correct.

CPF8A97 E Folder name &1 not correct.

CPF900B E User ID and address &1 &2 not in System Distribution Directory.

CPF900C E Sign on and verify of user failed.

CPF902B E Authority of \*AUTL is allowed only with USRAUT(\*PUBLIC).

CPF903D E Incorrect document identifier specified.

CPF905C E Error occurred trying to find a translation table.

CPF905E E Cannot specify \*RMV when USRAUT(\*PUBLIC) is specified.

CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.

CPF9099 E Document description not changed.

**CHGDSPF**

CPF7304 E File &1 in &2 not changed.



- CPF7308 E &5 files not changed for &1 in &2. &4 files changed.
- CHGDSTD**
- CPF90D5 E Distribution description not changed.  
 CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
 CPF900C E Sign on and verify of user failed.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.
- CHGDSTPWD**
- CPF2275 E Not authorized to change DST master security officer password.
- CHGDTA**
- IDU0120 E Critical table missing. Command terminated.  
 IDU0141 E Critical table inconsistent. Command terminated.  
 IDU0167 E Not authorized to &1.&2.  
 IDU1205 E Application &1.&2 not found.  
 IDU9001 E Error found on &1 command.
- CHGDTAARA**
- CPF1015 E Data area &1 in &2 not found.  
 CPF1018 E No authority to change data area.  
 CPF1019 E VALUE parameter not correct.  
 CPF1020 E VALUE parameter too long.  
 CPF1021 E Library &1 not found for data area &2.  
 CPF1022 E No authority to library &1 data area &2.  
 CPF1026 E VALUE parameter must be '0' or '1'.  
 CPF1043 E Boundary alignment for data area not valid.  
 CPF1044 E AREA parameter not valid for data area.  
 CPF1045 E CPYPTR parameter not valid for data area.  
 CPF1046 E DTAARA(\*GDA) not valid because job not group job.  
 CPF1062 E Null string not valid as character value.  
 CPF1063 E Cannot allocate data area &1 in library &2.  
 CPF1067 E Cannot allocate library &1.  
 CPF1072 E DTAARA(\*PDA) not valid because job not pre-start job.  
 CPF1087 E Substring not allowed for decimal or logical data area.  
 CPF1088 E Starting position outside of data area.  
 CPF1089 E Substring specified for data area not valid.  
 CPF1138 E VALUE parameter not valid type for data area &1.  
 CPF1155 E VALUE parameter too long for data area &1.  
 CPF1162 E Boundary alignment for data area &1 not valid.  
 CPF1163 E AREA parameter not valid for data area &1.  
 CPF1168 E CPYPTR parameter not valid for data area &1.  
 CPF1170 E Starting position outside of data area &1.  
 CPF1192 E Substring specified for data area &1 not valid.
- CHGFCTE**
- RJE0024 E Errors found. Processing of request ended.  
 RJE0028 E Device type &2 for form type &1 does not exist in &3.
- CHGGRPA**
- CPF1305 E Changing group job name not allowed.  
 CPF1306 E Specifying GRPJOB(\*NONE) not allowed at this time.  
 CPF1307 E Group job &1 already belongs to this group.  
 CPF1308 E Parameters that do not agree were found.
- CPF1309 E Subsystem cannot complete the &1 command.  
 CPF1312 E Change group attribute request not valid; job not group job.  
 CPF1313 E Value &1 for parameter &2 not allowed name.  
 CPF1316 E &1 in &2 not allowed as group message queue.  
 CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1328 E No authority to use queue &2 in &3.  
 CPF1329 E Message queue &1 in &2 not found.  
 CPF1330 E Message queue &1 in &2 not available.  
 CPF1331 E &1 in &2 not allowed as group message queue.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.
- CHGICFDEVE**
- CPF7367 E Device not changed in file &1 in &2.
- CHGICFF**
- CPF7304 E File &1 in &2 not changed.
- CHGJOB**
- CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1321 E Job &1 user &2 job number &3 not found.  
 CPF1332 E End of duplicate job names.  
 CPF1334 E BRKMSG(\*NOTIFY) only valid for interactive jobs.  
 CPF1336 E Errors on CHGJOB command for job &3/&2/&1.  
 CPF1337 E &3/&2/&1 not authorized to change parameters.  
 CPF1340 E Job control function not performed.  
 CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.  
 CPF1343 E Job &3/&2/&1 not valid job type for function.  
 CPF1344 E Not authorized to control job &3/&2/&1.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.
- CHGJOBDD**
- CPF1618 E Job description &1 in library &2 damaged.  
 CPF1625 E Job description &1 in library &2 not changed.
- CHGJOBQE**
- CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.
- CHGJRN**
- CPF7003 E Entry not journaled to journal &1. Reason code &3.  
 CPF7004 E Maximum number of objects journaled to journal &1.  
 CPF7011 E Not enough storage.  
 CPF7013 E Journal receiver not created.  
 CPF7015 E Error on JRNRCV specifications.  
 CPF7017 E Library QTEMP not valid for message queue parameter.  
 CPF7018 E Resetting sequence number not allowed.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9804 E Object &2 in library &3 damaged.  
 CPF9806 E Cannot allocate object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.
- CHGKBDMAP**
- CPF8701 E Specified device &1 not a 3270 device type.

## CHGKBDMAP • CHGOBJOWN

- CPF8702 E &1 function key not correctly defined.  
 CPF8703 E Device &1 not ready.
- CHGLF**  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF7304 E File &1 in &2 not changed.
- CHGLFM**  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF3288 E Member &3 file &1 in &2 not changed.
- CHGLIB**  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9830 E Cannot assign library &1.
- CHGLIBL**  
 CPF2106 E Library list not changed.  
 CPF2184 E Library list not replaced.
- CHGLINASC**  
 CPF261E E Line description &1 not changed.
- CHGLINBSC**  
 CPF261E E Line description &1 not changed.
- CHGLINS DLC**  
 CPF261E E Line description &1 not changed.
- CHGLINTDLC**  
 CPF261E E Line description &1 not changed.
- CHGLINTRN**  
 CPF261E E Line description &1 not changed.
- CHGLINX25**  
 CPF261E E Line description &1 not changed.
- CHGMODD**  
 CPF262D E Mode description &1 not changed.
- CHGMSGD**  
 CPF2401 E Not authorized to library &1.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2419 E Message ID &1 not found in message file &2 in &3.  
 CPF2461 E Message file &1 could not be extended.  
 CPF2483 E Message file currently in use.  
 CPF2499 E Message ID &1 not allowed.  
 CPF2510 E Message file &1 in &2 logically damaged.  
 CPF2542 E Message description not changed for &1.  
 CPF9830 E Cannot assign library &1.
- CHGMSGQ**  
 CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2405 E Break program &1 in &2 not found for message queue &3 in &4.  
 CPF2406 E Not authorized to break program &1 in &2 for message queue &3 in &4.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2437 E MSGQ(\*WRKSTN) not allowed unless done interactively.  
 CPF2446 E Delivery mode specified not valid for system log message queue.  
 CPF2450 E Work station message queue &1 not allocated to job.
- CPF2451 E Message queue &1 not allocated to job.  
 CPF2467 E &3 message queue &1 in library &2 logically damaged.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2485 E Number of parameters for break program &1 in &2 message queue &3 in &4 not valid.  
 CPF2507 E MODE(\*NOTIFY) not allowed in batch mode.  
 CPF2534 E MSGQ(\*USRPRF) specified and no msg queue with user profile.  
 CPF8127 E &8 damage on message queue &4 in &9. VLOG-&7.  
 CPF8176 E Message queue for device description &4 damaged.
- CHGNETA**  
 CPF0BFF E Error occurred during SRM data base processing.  
 CPF1007 E Character is not valid for value &1.  
 CPF1066 E Network attributes not changed.  
 CPF1097 E No authority to change certain network attributes.  
 CPF7B14 E Primary focal point cannot be changed at this time.  
 CPF7B15 E Default focal point cannot be changed at this time.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9899 E Error occurred during processing of command.
- CHGNETJOBE**  
 CPF8050 E Network job table could not be accessed.  
 CPF8051 E \*ANY not correct for second part of user ID.  
 CPF8053 E Network job entry &1 &2 not changed.  
 CPF9040 E Wrong characters used in User ID or address, or List identifier &1 &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.
- CHGOBJD**  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9803 E Cannot assign object &2 in library &3.
- CHGOBJOWN**  
 CPF0601 E Not allowed to do operation to file &1 in &2.  
 CPF0605 E Device file &1 in &2 saved with storage freed.  
 CPF0608 E Specified user profile not available.  
 CPF0609 E Not allowed to use specified user profile.  
 CPF0610 E File &1 in &2 not available.  
 CPF22BD E Ownership may not have been changed for object &1 in &3 type \*&2.  
 CPF22BE E Function not done for user profile &1.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF2208 E Object &1 in library &3 type \*&2 not found.  
 CPF2209 E Library &1 not found.  
 CPF2210 E Operation not allowed for object type \*&1.  
 CPF2211 E Not able to allocate object &1 in &3 type \*&2.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2216 E Not authorized to use library &1.  
 CPF2217 E Not authorized to user profile &1.  
 CPF2222 E Storage limit is greater than specified for user profile &1.

- CPF2226 E Function not done for user profile &1.  
 CPF2230 E Not authorized to object &1 in library &3.  
 CPF2231 E Not authorized to change ownership for program &1.  
 CPF2232 E Not authorized to user profile &1.  
 CPF2233 E No delete authority to user profile &1.  
 CPF2298 E Authority not revoked for object &2 in &3 from user &1.  
 CPF320B E Operation was not valid for database file &1.  
 CPF3202 E File &1 in library &2 in use.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF3245 E Damage to file &1 prevents operation on file &3.  
 CPF3252 E Maximum number of machine locks exceeded.
- CHGOUTQ**  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3319 E Cannot change number of separators. Output queue &1 in library &2 is active.  
 CPF3330 E Necessary resource not available.  
 CPF3357 E Output queue &1 in library &2 not found.  
 CPF3361 E Output queue &1 in library &2 not changed. Output queue in use.
- CHGPF**  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF7304 E File &1 in &2 not changed.
- CHGPFM**  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF3288 E Member &3 file &1 in &2 not changed.
- CHGPGM**  
 CPF0540 E \*USRLIBL not allowed with generic name or \*ALL.  
 CPF0541 E Program &1 in &2 not changed.  
 CPF0542 E Program &1 in library &2 not changed.  
 CPF0543 E User &3 not authorized to change &1.  
 CPF0544 E Programs in libraries QSYS and QGDDM cannot be changed.  
 CPF0545 E No programs changed.  
 CPF0546 E &1 changed. &2 did not require change. &3 not changed.  
 CPF0547 E Cannot remove observable information.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9804 E Object &2 in library &3 damaged.  
 CPF9806 E Cannot allocate object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9818 E Object &2 in library &3 not created.  
 CPF9819 E Object &2 in library &3 not created.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9830 E Cannot assign library &1.
- CHGPGMVAR**  
 CPF1999 E Errors occurred on command.
- CHGPJ**  
 CPF1314 E Value &1 for parameter &2 not allowed.  
 CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1321 E Job &1 user &2 job number &3 not found.  
 CPF1332 E End of duplicate job names.  
 CPF1334 E BRKMSG(\*NOTIFY) only valid for interactive jobs.
- CPF1336 E Errors on CHGJOB command for job &3/&2/&1.  
 CPF1337 E &3/&2/&1 not authorized to change parameters.  
 CPF1340 E Job control function not performed.  
 CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.  
 CPF1343 E Job &3/&2/&1 not valid job type for function.  
 CPF1344 E Not authorized to control job &3/&2/&1.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.
- CHGPJE**  
 CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.
- CHGPRF**  
 CPF2209 E Library &1 not found.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2225 E Not able to allocate internal system object.  
 CPF2228 E Not authorized to change user profile.  
 CPF2242 E Object &1 type \*&2 not found in library list. Qualified name not created.  
 CPF2244 E Object &1 type \*&2 cannot be found.  
 CPF2294 E Initial program value cannot be changed.  
 CPF2295 E Initial menu value cannot be changed.  
 CPF2296 E Attention program value cannot be changed.  
 CPF2297 E Current library value cannot be changed.  
 CPF9802 E Not authorized to object &2.  
 CPF9820 E Not authorized to use library &1.  
 CPF9825 E Not authorized to device &1.
- CHGPRTF**  
 CPF7304 E File &1 in &2 not changed.  
 CPF7308 E &5 files not changed for &1 in &2. &4 files changed.
- CHGPTR**  
 CPF1999 E Errors occurred on command.
- CHGPWD**  
 CPF22C0 E Password does not meet password rules. Return code &1.  
 CPF22C2 E Password less than &1 characters.  
 CPF22C3 E Password longer than &1 characters.  
 CPF22C4 E Password matches one of 32 previous passwords.  
 CPF22C5 E Password contains one of the following: &1.  
 CPF22C6 E Password contains two numbers next to each other.  
 CPF22C7 E Password contains a character used more than once.  
 CPF22C8 E Same character in same position as previous password.  
 CPF22C9 E Password must contain a number.  
 CPF22D1 E Password must be different than user ID.  
 CPF22D2 E Password approval program &1 not found.  
 CPF22D3 E Password approval program signaled an exception.  
 CPF22D4 E Not allowed to use password approval program.  
 CPF22D5 E Parameters in password approval program not correct.

**CHGRJECMNE • CHGUSRPRF**

- CPF2356 E Password not changed.
- CHGRJECMNE**  
RJE0111 E &1 does not exist in session description &3.
- CHGRJERDRE**  
RJE0017 E &1 was not found in session description &2.
- CHGRJEWTR E**  
RJE0017 E &1 was not found in session description &2.  
RJE0067 E No members were found in file &1 in &2.
- CHGRPYLE**  
CPF2435 E System reply list not found.  
CPF2436 E System Reply List entry not added or changed.  
CPF2499 E Message ID &1 not allowed.  
CPF2556 E Sequence number &1 not defined in system reply list.  
CPF2557 E System reply list damaged.  
CPF2558 E System reply list currently in use.
- CHGRTGE**  
CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1697 E Subsystem description &1 not changed.
- CHGSAVF**  
CPF7304 E File &1 in &2 not changed.
- CHGSBSD**  
CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1691 E Active subsystem description may or may not have changed.  
CPF1697 E Subsystem description &1 not changed.
- CHGSPLFA**  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3303 E File &1 not found in job &5/&4/&3.  
CPF3309 E No files names &1 are active.  
CPF3330 E Necessary resource not available.  
CPF3335 E File &1 number &2 attributes not changed.  
CPF3340 E More than one file with specified name found in job &5/&4/&3.  
CPF3341 E File &1 number &2 attributes not changed.  
CPF3342 E Job &5/&4/&3 not found.  
CPF3343 E Duplicate job names found.  
CPF3344 E File &1 number &2 no longer in the system.  
CPF3401 E Cannot change COPIES for files in PRT status.  
CPF3464 E Not authorized to output queue for device &1.  
CPF3492 E Not authorized to spooled file.
- CHGSRCPF**  
CPF3203 E Cannot allocate object for file &1 in &2.  
CPF7304 E File &1 in &2 not changed.
- CHGSSNMAX**  
CPF598B E The &1 command failed for one or more modes.
- CHGSYSLIBL**  
CPF2103 E Library &1 already exists in library list.  
CPF2106 E Library list not changed.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2118 E Library &1 not added.  
CPF2128 E Library &1 not in system portion of library list.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.
- CPF9807 E One or more libraries in library list deleted.
- CHGSYSVAL**  
CPF1001 E Wait time expired for system response.  
CPF1028 E &1 not valid for parameter SYSVAL.  
CPF1030 E System value &1 cannot be changed.  
CPF1058 E VALUE parameter not correct for system value &1.  
CPF1059 E VALUE parameter length not correct.  
CPF1074 E SYSVAL(QMONTH) not valid for Julian date format.  
CPF1076 E VALUE parameter not valid for system value &1.  
CPF1078 E System value &1 not changed.  
CPF1079 E Incorrect number of values listed for system value &1.  
CPF1127 E Device specified for QPRTDEV not printer device.  
CPF1132 E Name specified for system value &1 not valid.  
CPF1203 E Keyboard identifier &1 on VALUE parameter not valid.  
CPF1830 E Specified values not valid for system value &1.  
CPF1831 E User not authorized to change system value &1.  
CPF1832 E Cannot change system value &1 during IPL.
- CHGS36MSGL**  
SSP0520 E System/36 environment is not active.  
SSP0521 E Command is not allowed in first-level procedure.  
SSP0522 E System/36 procedure is not active.
- CHGS36PGMA**  
CPF2C01 E Program &1 attributes not changed.  
CPF2C02 E Changing attributes not allowed for SSP program &1.  
CPF2C03 E MRTMAX parameter value &3 not correct.
- CHGS36PRCA**  
CPF2C0A E Member &3 attributes not changed.  
CPF2C0B E Changing attributes not allowed for SSP member &3.  
CPF2C08 E File &1 is not a source file.
- CHGS36SRCA**  
CPF2C0A E Member &3 attributes not changed.  
CPF2C0B E Changing attributes not allowed for SSP member &3.  
CPF2C08 E File &1 is not a source file.
- CHGTAPF**  
CPF7304 E File &1 in &2 not changed.
- CHGUSRPRF**  
CPF2201 E User password &1 already exists.  
CPF2203 E User profile &1 not correct.  
CPF2204 E User profile &1 not found.  
CPF2209 E Library &1 not found.  
CPF2213 E Not able to allocate user profile &1.  
CPF2225 E Not able to allocate internal system object.  
CPF2228 E Not authorized to change user profile.  
CPF2242 E Object &1 type \*&2 not found in library list. Qualified name not created.  
CPF2244 E Object &1 type \*&2 cannot be found.  
CPF2259 E Group profile &1 not found.  
CPF2260 E User profile &1 cannot be a group profile.  
CPF2261 E OWNER or GRPAUT value not permitted.  
CPF2262 E Value for GRPAUT not correct.

CPF2264 E	User profile &1 not allowed to be a group member.	CPF9899 E	Error occurred during processing of command.
CPF2269 E	Special authority *ALLOBJ required when granting *SECADM.	<b>CHKPWD</b>	
CPF2272 E	Cannot allocate user profile &1.	CPF2362 E	Password not correct.
CPF9802 E	Not authorized to object &2.	CPF2363 E	Only 1 attempt left to check password.
<b>CHGVAR</b>		CPF2364 E	Maximum number of attempts to check password reached.
CPF0816 E	%SWITCH mask &1 not valid.	<b>CHKRCDLCK</b>	
<b>CHGWSE</b>		CPF321F E	Job holds &1 record locks.
CPF1619 E	Subsystem description &1 in library &2 damaged.	<b>CHKTAP</b>	
CPF1697 E	Subsystem description &1 not changed.	CPF6708 E	Command ended due to error.
<b>CHGWTR</b>		CPF6718 E	Cannot allocate device &1.
CPF2207 E	Not authorized to use object &1 in library &3 type *&2.	CPF6720 E	Incorrect volume &2 found on device &1.
CPF3313 E	Writer &1 not active nor on job queue.	CPF6721 E	Device &1 not a tape device.
CPF3330 E	Necessary resource not available.	CPF6728 E	LABEL(*NONE) CRTDATE(*NONE) required for nonlabeled volume.
CPF3331 E	Not authorized to control writer &3/&2/&1.	CPF6734 E	File sequence number &3 not found on volume &2.
CPF3357 E	Output queue &1 in library &2 not found.	CPF6735 E	Label ID &6 not found at &3.
CPF3456 E	Cannot change writer &1 to output queue &4 in library &5.	CPF6736 E	Creation date &6 not found at &3.
CPF3457 E	Cannot change writer &1.	CPF6737 E	Label &4 not found on volume &2.
CPF3458 E	Change writer &1 not allowed. End writer pending.	CPF6751 E	Load failure occurred on device &4.
CPF3459 E	Writer &1 not eligible for change.	CPF6752 E	SEQNBR(*FIRST) or SEQNBR(*NEXT) is not valid.
CPF3460 E	Change writer &1 not allowed.	CPF6760 E	Device &1 not ready.
CPF3463 E	Output queue for device &1 not found.	CPF6772 E	Volume on device &1 cannot be processed.
CPF3464 E	Not authorized to output queue for device &1.	CPF9814 E	Device &1 not found.
CPF9803 E	Cannot assign object &2 in library &3.	CPF9825 E	Not authorized to device &1.
<b>CHKDKT</b>		<b>CLOF</b>	
CPF6112 S	Diskette has extended label area that is not searched.	CPF4519 E	Member &3 file &1 not closed.
CPF6162 E	Diskette does not contain specified identifiers.	CPF4520 E	No file open with identifier &4.
CPF6164 S	Cannot read diskette in device &1.	<b>CLRDKT</b>	
CPF6165 S	Device &1 is not ready.	CPF6156 E	Cancel reply received for message &6.
CPF6708 E	Command ended due to error.	CPF6159 E	Clear diskette ended; previous errors occurred.
CPF6716 E	Device &1 not a diskette device.	CPF9814 E	Device &1 not found.
CPF6718 E	Cannot allocate device &1.	CPF9825 E	Not authorized to device &1.
CPF9814 E	Device &1 not found.	<b>CLRJOBQ</b>	
CPF9825 E	Not authorized to device &1.	CPF2207 E	Not authorized to use object &1 in library &3 type *&2.
<b>CHKDLO</b>		CPF3307 E	Job queue &1 in &2 not found.
CPF8A11 E	CHKDLO command failed.	CPF3330 E	Necessary resource not available.
CPF8A75 E	Not authorized to access folder &1.	CPF9843 E	Object &1 in library &3 type &2 cannot be accessed.
CPF8A77 E	Folder &1 not found.	<b>CLRLIB</b>	
CPF8A82 E	Document &2 not found in folder &1.	CPF2110 E	Library &1 not found.
CPF8A83 E	Not authorized to access document &2 in folder &1.	CPF2113 E	Cannot allocate library &1.
<b>CHKIGCTBL</b>		CPF2161 E	Cannot delete some objects in library &1.
CPF8421 E	DBCS font table &1 not found.	CPF2182 E	Not authorized to library &1.
<b>CHKOBJ</b>		CPF2189 E	Not authorized to object &1 in &2 type *&3.
CPF0BFF E	Error occurred during SRM data base processing.	CPF8122 E	&8 damage on library &4.
CPF88C4 E	Value &1 for NEWOBJ is more than 8 characters.	<b>CLROUTQ</b>	
CPF9801 E	Object &2 in library &3 not found.	CPF2207 E	Not authorized to use object &1 in library &3 type *&2.
CPF9802 E	Not authorized to object &2.	CPF3330 E	Necessary resource not available.
CPF9810 E	Library &1 not found.	CPF3357 E	Output queue &1 in library &2 not found.
CPF9815 E	Member &5 file &2 in library &3 not found.	CPF9843 E	Object &1 in library &3 type &2 cannot be accessed.
CPF9820 E	Not authorized to use library &1.	<b>CLRPFM</b>	
CPF9830 E	Cannot assign library &1.	CPF3130 E	Member &2 already in use.
		CPF3133 E	File &1 in library &3 contains no members.
		CPF3136 E	File &1 in &3 not allowed on command.

CPF3137 E No authority to clear, initialize, or copy member &2.  
 CPF3141 E Member &2 not found.  
 CPF3142 E File &1 in library &3 not found.  
 CPF3144 E Member &2 not cleared or initialized.  
 CPF3156 E File &1 in library &3 in use.  
 CPF3159 E Member &2 saved with STG(\*FREE).  
 CPF3160 E Operation on member &2 ended. Entry cannot be journaled.  
 CPF320B E Operation was not valid for database file &1.

**CLRSVAVF**

CPF3782 E File &1 in &2 not a save file.  
 CPF3812 E Save file &1 in &2 in use.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9830 E Cannot assign library &1.

**CLRTRCDTA**

CPF1999 E Errors occurred on command.

**CMPJRNIMG**

CPF7002 E File &1 in library &2 not physical file.  
 CPF7006 E Member &3 not found in file &1 in &2.  
 CPF7027 E Operation cannot be performed beyond entry &1.  
 CPF7028 E Member &3 file &1 in &2 never journaled.  
 CPF7029 E Image comparison failed. Ending sequence number &1.  
 CPF7036 E File &1 in &2 not journaled with before images.  
 CPF7038 E No entries compared for member &3.  
 CPF7053 E Error on RCVRNG specifications, reason code &1.  
 CPF7054 E FROM and TO values not valid.  
 CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9815 E Member &5 file &2 in library &3 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.

**CNLRJERDR**

RJE0003 E RJE session &1 is not active.  
 RJE0004 E You are not permitted to access session description &1.  
 RJE0024 E Errors found. Processing of request ended.  
 RJE0063 E RJE session &1 is already ending.  
 RJE0143 E No RJE readers were defined for this RJE session.  
 RJE0144 E RJE device &3 was not defined in RJE session &1.  
 RJE0145 E You do not have authority to library QRECOVERY.

RJE0146 E You do not have authority to message queue &1.  
 RJE0147 E RJE did not find message file QRJEMSG.

**CNLRJEWTR**

RJE0003 E RJE session &1 is not active.  
 RJE0004 E You are not permitted to access session description &1.  
 RJE0004 E You are not permitted to access session description &1.  
 RJE0024 E Errors found. Processing of request ended.  
 RJE0034 E No writers were defined in session &1.  
 RJE0063 E RJE session &1 is already ending.  
 RJE0145 E You do not have authority to library QRECOVERY.  
 RJE0146 E You do not have authority to message queue &1.  
 RJE0147 E RJE did not find message file QRJEMSG.

**COMMIT**

CPF5001 S End of file &2 detected in library &3.  
 CPF5018 N Member &4 at maximum size. Increment not allowed.  
 CPF5026 N Duplicate key not allowed for member &4.  
 CPF5029 N Data mapping error on member &4.  
 CPF5030 N Partial damage on member &4.  
 CPF5033 N Select/omit error on member &4.  
 CPF5034 N Duplicate key on access path for based-on member of &4.  
 CPF5079 N Commitment control resource limit exceeded for this job.  
 CPF5084 N Duplicate key not allowed for member &4.  
 CPF5085 N Duplicate key on access path for based-on member of &4.  
 CPF509F E Job has successfully connected after I/O error.  
 CPF5090 N Unique access path problems prevent updates to member &4.  
 CPF5097 N Key mapping error on member &4.  
 CPF5104 E Cancel reply received for message &7.  
 CPF5134 E Not authorized to process request on member &4.  
 CPF5149 E Operation for program device or member &4, file &2 in library &3 is not valid.  
 CPF5168 E Cannot open member &3 file &1 in &2.  
 CPF5173 E &6 records in buffer not valid.  
 CPF5235 E Entry for member &4 not journaled.  
 CPF5257 E Failure for device or member &4 file &2 in library &3.  
 CPF5272 E Records not added to member &4.  
 CPF8350 E Commitment control not active.

**CPYCFGL**

CPF260D E Configuration list &1 already exists.  
 CPF260E E Configuration list &1 not created.  
 CPF260F E Configuration list &1 not found.  
 CPF2612 E List type &1 not correct for copy.  
 CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.  
 CPF2663 E Configuration list &1 previously deleted.

**CPYDOC**

CPF8A12 E Document &2 in folder &1 not copied.

**CPYF**

CPF2816 E File &1 in &2 not copied because of error.  
 CPF2817 E Copy command ended because of error.  
 CPF2818 E TOMBR(\*FROMMBR) is not allowed.

CPF2835 E INCCHAR starting position and length too long.  
 CPF2857 E Multiple member or label copy not allowed with override.  
 CPF2858 E File attributes not valid for printed output.  
 CPF2859 E Shared open data path not allowed.  
 CPF2864 E Not authorized to file &1 in library &2.  
 CPF2875 E Wrong file member or label opened.  
 CPF2883 E Error creating file &1 in library &2.  
 CPF2888 E Member &3 not added to file because of error.  
 CPF2904 E Diskette labels not valid for multiple label copy.  
 CPF2906 E Numeric value not valid for INCREL field.  
 CPF2909 E Error clearing member &3 in file &1 in &2.  
 CPF2949 E Error closing member &3 in file &1 in &2.  
 CPF2952 E Error opening file &1 in library &2.  
 CPF2968 E Position error occurred copying file &1 in &2.  
 CPF2971 E Error reading member &3 in file &1.  
 CPF2972 E Error writing to member &3 in file &1.  
 CPF2975 E Error while reading from keyed file.  
 CPF2976 E Number of errors greater than ERRVLV value.  
 CPF3140 E Initialize or copy of member &2 canceled.  
 CPF3143 E Increments not allowed for member &2.  
 CPF3148 E New records need too much space for member &2.  
 CPF3150 E Data base copy failed for member &2.  
 CPF9212 E Cannot load or unload DDM file &2 in &3.  
 CPF9267 E Cannot copy DDM file &2 in &3.

**CPYFRMDKT**

CPF2816 E File &1 in &2 not copied because of error.  
 CPF2817 E Copy command ended because of error.  
 CPF2818 E TOMBR(\*FROMMBR) is not allowed.  
 CPF2857 E Multiple member or label copy not allowed with override.  
 CPF2858 E File attributes not valid for printed output.  
 CPF2859 E Shared open data path not allowed.  
 CPF2875 E Wrong file member or label opened.  
 CPF2888 E Member &3 not added to file because of error.  
 CPF2904 E Diskette labels not valid for multiple label copy.  
 CPF2909 E Error clearing member &3 in file &1 in &2.  
 CPF2949 E Error closing member &3 in file &1 in &2.  
 CPF2952 E Error opening file &1 in library &2.  
 CPF2971 E Error reading member &3 in file &1.  
 CPF2972 E Error writing to member &3 in file &1.  
 CPF9212 E Cannot load or unload DDM file &2 in &3.

**CPYFRMPCD**

IWS1603 E PC document copied to file with &6 truncated records.  
 IWS1611 E PC document &1 not copied.

**CPYFRMTAP**

CPF2816 E File &1 in &2 not copied because of error.  
 CPF2817 E Copy command ended because of error.  
 CPF2818 E TOMBR(\*FROMMBR) is not allowed.  
 CPF2858 E File attributes not valid for printed output.  
 CPF2859 E Shared open data path not allowed.  
 CPF2875 E Wrong file member or label opened.  
 CPF2888 E Member &3 not added to file because of error.  
 CPF2909 E Error clearing member &3 in file &1 in &2.  
 CPF2949 E Error closing member &3 in file &1 in &2.  
 CPF2952 E Error opening file &1 in library &2.  
 CPF2971 E Error reading member &3 in file &1.  
 CPF2972 E Error writing to member &3 in file &1.

CPF9212 E Cannot load or unload DDM file &2 in &3.

**CPYIGCTBL**

CPF8181 E DBCS font table &4 damaged.  
 CPF8416 E DBCS font table &1 not updated and no images copied.  
 CPF8417 E Error found in RANGE keyword.  
 CPF8418 E Data file &2 cannot be used to copy DBCS font table &1.  
 CPF8419 E DBCS font table &1 not created and no images copied.  
 CPF8420 E CPYIGCTBL command ended due to error.  
 CPF8421 E DBCS font table &1 not found.  
 CPF8422 E Not able to use DBCS font table &1.  
 CPF8423 E Error found in keyword IGCTBL.  
 CPF8426 E Device &1 either not found, or not valid for command.  
 CPF8427 E DBCS font table &1 not migrated.

**CPYLIB**

CPF2358 E Library &1 not copied or partially copied.  
 CPF2365 E FROMLIB and TOLIB parameters cannot specify the same library.

**CPYPTF**

CPF35CC E Library required for building PTFs already exists.  
 CPF35C2 E Selected PTFs not valid for copy function.  
 CPF35C3 E PTF &1 cannot be included.  
 CPF35C4 E CPYPTF ended abnormally.  
 CPF35C6 E TOVOL parameter must be specified.  
 CPF35C8 E PTF file to be copied is not valid.  
 CPF3558 E Cannot allocate &1 in &3 type \*&2.  
 CPF3586 E List of PTFs not correct.  
 CPF3598 E PTF function already in process.

**CPYSPLF**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3207 E Member not added. Errors occurred.  
 CPF3303 E File &1 not found in job &5/&4/&3.  
 CPF3309 E No files names &1 are active.  
 CPF3311 E Copy request failed for file &6 in &7.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3344 E File &1 number &2 no longer in the system.  
 CPF3394 E Cannot convert spooled file data.  
 CPF3429 E File &1 number &2 cannot be displayed or copied.  
 CPF3482 E Copy request failed. Spool file &1 is open.  
 CPF3483 E Copy request failed for file &6 in &7.  
 CPF3486 E CHLVAL parameter value not valid.  
 CPF3492 E Not authorized to spooled file.  
 CPF3493 E CTLCHAR parameter not correct for file &1.  
 CPF3499 E Records in file &1 preceded all assigned channel values.  
 CPF5812 E Member &3 already exists in file &1 in library &2.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9837 E Attempt made to override file &1 to MBR(\*ALL).  
 CPF9845 E Error occurred while opening file &1.

## CPYSRCF • CRTCLPGM

CPF9846 E Error while processing file &1 in library &2

### CPYSRCF

CPF2816 E File &1 in &2 not copied because of error.  
CPF2817 E Copy command ended because of error.  
CPF2858 E File attributes not valid for printed output.  
CPF2859 E Shared open data path not allowed.  
CPF2864 E Not authorized to file &1 in library &2.  
CPF2875 E Wrong file member or label opened.  
CPF2888 E Member &3 not added to file because of error.  
CPF2909 E Error clearing member &3 in file &1 in &2.  
CPF2949 E Error closing member &3 in file &1 in &2.  
CPF2952 E Error opening file &1 in library &2.  
CPF2968 E Position error occurred copying file &1 in &2.  
CPF2971 E Error reading member &3 in file &1.  
CPF2972 E Error writing to member &3 in file &1.  
CPF3140 E Initialize or copy of member &2 canceled.  
CPF3143 E Increments not allowed for member &2.  
CPF3148 E New records need too much space for member &2.  
CPF3150 E Data base copy failed for member &2.  
CPF9212 E Cannot load or unload DDM file &2 in &3.  
CPF9267 E Cannot copy DDM file &2 in &3.

### CPYTODKT

CPF2816 E File &1 in &2 not copied because of error.  
CPF2817 E Copy command ended because of error.  
CPF2857 E Multiple member or label copy not allowed with override.  
CPF2859 E Shared open data path not allowed.  
CPF2864 E Not authorized to file &1 in library &2.  
CPF2875 E Wrong file member or label opened.  
CPF2904 E Diskette labels not valid for multiple label copy.  
CPF2949 E Error closing member &3 in file &1 in &2.  
CPF2952 E Error opening file &1 in library &2.  
CPF2968 E Position error occurred copying file &1 in &2.  
CPF2971 E Error reading member &3 in file &1.  
CPF2972 E Error writing to member &3 in file &1.  
CPF9212 E Cannot load or unload DDM file &2 in &3.

### CPYTOPCD

IWS1612 E Member &1 not copied to PC document.

### CPYTOTAP

CPF2816 E File &1 in &2 not copied because of error.  
CPF2817 E Copy command ended because of error.  
CPF2859 E Shared open data path not allowed.  
CPF2864 E Not authorized to file &1 in library &2.  
CPF2875 E Wrong file member or label opened.  
CPF2904 E Diskette labels not valid for multiple label copy.  
CPF2949 E Error closing member &3 in file &1 in &2.  
CPF2952 E Error opening file &1 in library &2.  
CPF2968 E Position error occurred copying file &1 in &2.  
CPF2971 E Error reading member &3 in file &1.  
CPF2972 E Error writing to member &3 in file &1.  
CPF9212 E Cannot load or unload DDM file &2 in &3.

### CRTALRTBL

CPF2112 E Object &1 in &2 type \*&3 already exists.  
CPF2113 E Cannot allocate library &1.  
CPF2151 E Operation failed for &2 in &1 type \*&3.  
CPF2152 E Objects of type \*&1 cannot be created into QTEMP.  
CPF2182 E Not authorized to library &1.  
CPF9810 E Library &1 not found.

CPF9820 E Not authorized to use library &1.

### CRTAPAR

CPF35B0 E Error log identifier &1 not found.  
CPF35B1 E Not authorized to PRTERLOG command. No records retrieved.  
CPF35B2 E Specified licensed program not found.  
CPF35B3 E Specified lic int code program not found.  
CPF35B4 E &1 on parameter &2 not found.  
CPF35B6 E No problem log record found within specified number of days.  
CPF35B8 E &1 on parameter &2 not found.  
CPF35B9 E No data parameters were specified.  
CPF3540 E Error occurred while getting internal data.  
CPF3545 E Cannot allocate tape or diskette device.  
CPF3553 E Spooled file &1 not found.  
CPF3554 E Cannot allocate spooled file &1.  
CPF3557 E Error occurred copying spooled file to data base file.  
CPF3940 E Error occurred while saving APAR data.  
CPF3953 E Specified device contains a previously created APAR.  
CPF3955 E Library QSRV cannot be allocated.  
CPF3960 E Value for DEV parameter incorrect.  
CPF3965 E Error occurred during create APAR processing.  
CPF3973 E File QPCSMPT containing internal data not found.

### CRTAUTHLR

CPC2212 E Authority holder created.  
CPF2122 E Storage limit exceeded for user profile &1.  
CPF2163 E Creation of authority holder in &2 not allowed.  
CPF22BA E Authority holder could not be created.  
CPF22BC E Object &1 type &3 is not program defined.  
CPF22B2 E Not authorized to create or delete authority holder.  
CPF22B5 E Authority holder already exists.  
CPF22B6 E Authority holder could not be created.  
CPF2283 E Authorization list &1 does not exist.  
CPF2289 E Unable to allocate authorization list &1.  
CPF9803 E Cannot assign object &2 in library &3.

### CRTAUTL

CPF2122 E Storage limit exceeded for user profile &1.  
CPF22AD E Group profile for user not found.  
CPF22A6 E User creating an authorization list must have \*ADD authority to his user profile  
CPF2204 E User profile &1 not found.  
CPF2217 E Not authorized to user profile &1.  
CPF2222 E Storage limit is greater than specified for user profile &1.  
CPF2278 E Authorization list &1 already exists.  
CPF2289 E Unable to allocate authorization list &1.

### CRTBASPGM

BAS9001 E Program &2/&1 was not created successfully

### CRTCLPGM

CBL9001 E Compile failed. Program not created.  
LBL9001 E Compile failed. Program not created.  
LBL9004 E Program already exists. Compile failed.  
LBL9006 E TGTRLS(\*PRV) specified and the previous compiler is not installed.  
LBL9007 E The product library is damaged or the user is not allowed to use the product library.  
SBL9001 E Compile failed. Program not created.



SBL9006 E TGTRLS(\*PRV) specified and the previous compiler is not installed.  
 SBL9007 E The product library is damaged or the user is not allowed to use the product library.

**CRTCFGL**

CPF260D E Configuration list &1 already exists.  
 CPF260E E Configuration list &1 not created.  
 CPF261C E Index for configuration list &1 not changed.  
 CPF261D E Index for configuration list &1 not changed.  
 CPF261F E Configuration list &1 has been deleted.

**CRTCLPGM**

CPF0801 E Program &1 not created.  
 CPF0807 E File containing compiler printout not opened.  
 CPF0808 E Error in compiler-created code.  
 CPF0814 E Licensed Program 5728-SS1 Option 9 not installed.  
 CPF0815 E CL program &1 in &2 cannot be created for previous release.  
 CPF0816 E %SWITCH mask &1 not valid.  
 CPF0849 E Space addressing violation.  
 CPF3202 E File &1 in library &2 in use.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF3224 E Not authorized to perform operation on file &1.

**CRTCLS**

CPF1027 E No authority to library &1.  
 CPF1039 E Class library &1 not found.  
 CPF1064 E Class &1 exists in library &2.  
 CPF1067 E Cannot allocate library &1.

**CRTCMD**

CPF0201 E Command &2 not created in library &3.  
 CPF0210 E Cannot open printer file.  
 CPF0212 E Unable to open source file.

**CRTCOSD**

CPF2610 E Parameter not valid.  
 CPF2660 E Class-of-service description &1 already exists.

**CRTCSPAPP**

CAE9040 S Create objects running  
 CAE9998 E Command &1 failed.

**CRTCSPMSGF**

CAE9053 S Create CSP/AE User Message File command is running.  
 CAE9998 E Command &1 failed.

**CRTCTLAPPC**

CPF2716 E Controller description &1 not created.

**CRTCTLASC**

CPF2716 E Controller description &1 not created.

**CRTTLBSC**

CPF2716 E Controller description &1 not created.

**CRTCTLFNC**

CPF2716 E Controller description &1 not created.

**CRTCTLHOST**

CPF2716 E Controller description &1 not created.

**CRTCTLLWS**

CPF2716 E Controller description &1 not created.

**CRTCTLNET**

CPF2716 E Controller description &1 not created.

**CRTCTLRTL**

CPF2716 E Controller description &1 not created.

**CRTCTLRWS**

CPF2716 E Controller description &1 not created.

**CRTCTLTAP**

CPF2716 E Controller description &1 not created.

**CRTCTLVWS**

CPF2716 E Controller description &1 not created.

**CRTDDMF**

CPF7302 E File &1 not created in library &2.

**CRTDEVAPPC**

CPF261A E Device description &1 not created due to errors.

**CRTDEVASC**

CPF261A E Device description &1 not created due to errors.

**CRTDEVBSC**

CPF261A E Device description &1 not created due to errors.

**CRTDEVDKT**

CPF261A E Device description &1 not created due to errors.

**CRTDEVDSP**

CPF261A E Device description &1 not created due to errors.

CPF2631 E Device type &2 not valid.

**CRTDEVFNC**

CPF261A E Device description &1 not created due to errors.

**CRTDEVHOST**

CPF261A E Device description &1 not created due to errors.

**CRTDEVINTR**

CPF261A E Device description &1 not created due to errors.

**CRTDEVNET**

CPF261A E Device description &1 not created due to errors.

**CRTDEVPRT**

CPF261A E Device description &1 not created due to errors.

CPF2631 E Device type &2 not valid.

**CRTDEVRTL**

CPF261A E Device description &1 not created due to errors.

**CRTDEVSNUF**

CPF261A E Device description &1 not created due to errors.

**CRTDEVTAP**

CPF261A E Device description &1 not created due to errors.

**CRTDKTF**

CPF7302 E File &1 not created in library &2.

**CRTDOC**

OFCEFFFC E User storage capacity exceeded.

**CRTDSPF • CRTJRNRCV**

OFCFFFD E A damaged object was found.  
OFC800A E Folder is in use.  
OFC800E E &1 already exists as document or folder.  
OFC800F E Display does not support text.  
OFC8006 E Folder was not found.  
OFC8008 E Request not allowed with folder.  
OFC801D E Maximum number of text sessions active.  
OFC801E E DW/4 or text assist cannot be loaded.  
OFC8017 E Folder directory is full.  
OFC8019 E Required module not on system.  
OFC802E E Request failed for PC editor.  
OFC9811 E Folder needs to be reclaimed.

**CRTDSPF**  
CPF7302 E File &1 not created in library &2.

**CRTDSTL**  
CPF8360 E Not enough storage to perform commit operation.  
CPF905C E Error occurred trying to find a translation table.  
CPF9096 E Cannot use CMDCHRID(\*DEV D), DOCCHRID(\*DEV D) in batch job.  
CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**CRTDTAARA**  
CPF1008 E Data area &2 not created.  
CPF1015 E Data area &1 in &2 not found.  
CPF1021 E Library &1 not found for data area &2.  
CPF1022 E No authority to library &1 data area &2.  
CPF1023 E Data area &1 exists in &2.  
CPF1024 E TYPE and VALUE parameters not compatible.  
CPF1025 E LEN and VALUE parameters not compatible.  
CPF1026 E VALUE parameter must be '0' or '1'.  
CPF1047 E Length not valid for data area &1 in &2  
CPF1062 E Null string not valid as character value.  
CPF1092 E Cannot create data area &2 in library &1.

**CRTDTADCT**  
CPF2DAB E Authority list &1 not found  
CPF2D71 E Dictionary name cannot be &1.  
CPF2F04 E Dictionary &1 already exists.  
CPF2F07 E Dictionary &1 in error.  
CPF2F11 E Dictionary &1 not created.  
CPF9820 E Not authorized to use library &1.  
CPF9830 E Cannot assign library &1.

**CRTDTAQ**  
CPF2113 E Cannot allocate library &1.  
CPF2182 E Not authorized to library &1.  
CPF9870 E Object &2 type \*&5 already exists in library &3.

**CRTDUOBJ**  
CPF0678 E Operation not performed for file name &1 in &2.  
CPF2109 E NEWOBJ must be \*SAME when OBJ parameter is \*ALL or generic name.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2116 E DATA(\*YES) specified and \*ALL or \*FILE not in OBJTYPE list.  
CPF2122 E Storage limit exceeded for user profile &1.  
CPF2123 E No objects of specified name or type exist in library &2.  
CPF2130 E &1 objects duplicated. &2 objects not duplicated.

CPF2151 E Operation failed for &2 in &1 type \*&3.  
CPF2152 E Objects of type \*&1 cannot be created into QTEMP.  
CPF2162 E Duplication of all objects in library &1 not allowed.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.  
CPF2185 E TOLIB or NEWOBJ parameters not correct

**CRTEDTD**  
CPF9805 E Object &2 in library &3 destroyed.

**CRTFCT**  
RJE0015 E Forms control table &1 already exists in library &2.

**CRTFLR**  
CPF8A18 E Folder &1 not created.

**CRTFNTRSC**  
CPF88C1 E Printer resource type &1 &2 was not created in library &3.

**CRTFORMDF**  
CPF88C1 E Printer resource type &1 &2 was not created in library &3.

**CRTGSS**  
CPF8660 E Symbol set &1 not created in library &2.

**CRTICFF**  
CPF7302 E File &1 not created in library &2.

**CRTIGCDCT**  
CPF8431 E DBCS conversion dictionary &2 not created in library &3.

**CRTJOB D**  
CPF1621 E Job description &1 not created in library &2.

**CRTJOBQ**  
CPF2182 E Not authorized to library &1.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3323 E Job queue &1 in &2 already exists.  
CPF3351 E Temporary library &1 invalid for job queue &2.  
CPF3354 E Library &1 not found.  
CPF3356 E Cannot allocate library &1.  
CPF3371 E Spool user profile QSPL damaged or not found.

**CRTJRN**  
CPF7003 E Entry not journaled to journal &1. Reason code &3.  
CPF7010 E Object &1 in &2 type \*&3 already exists.  
CPF7011 E Not enough storage.  
CPF7012 E Auxiliary storage pool &4 not found for object &1.  
CPF7015 E Error on JRNRCV specifications.  
CPF7017 E Library QTEMP not valid for message queue parameter.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9806 E Cannot allocate object &2 in library &3.  
CPF9810 E Library &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9830 E Cannot assign library &1.

**CRTJRNRCV**  
CPF2105 E Object &1 in &2 type \*&3 not found.

CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2125 E No objects deleted.  
 CPF2160 E Object type \*&1 not eligible for requested function.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF5702 E File not a DDM file or not found.  
 CPF7010 E Object &1 in &2 type \*&3 already exists.  
 CPF7011 E Not enough storage.  
 CPF7012 E Auxiliary storage pool &4 not found for object &1.  
 CPF9802 E Not authorized to object &2.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9830 E Cannot assign library &1.

**CRTL F**  
 CPF3204 E Cannot find object needed for file &1 in &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF5702 E File not a DDM file or not found.  
 CPF7302 E File &1 not created in library &2.

**CRTLIB**  
 CPF2111 E Library &1 already exists.  
 CPF2122 E Storage limit exceeded for user profile &1.  
 CPF2138 E Creation of library &3 not allowed.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF8D05 E Library &1 already exists.

**CRTLINASC**  
 CPF2718 E Line description &1 not created due to errors.

**CRTLINBSC**  
 CPF2718 E Line description &1 not created due to errors.

**CRTLINS DLC**  
 CPF2718 E Line description &1 not created due to errors.

**CRTLINT DLC**  
 CPF2718 E Line description &1 not created due to errors.

**CRTLINTRN**  
 CPF2718 E Line description &1 not created due to errors.

**CRTLINX25**  
 CPF2718 E Line description &1 not created due to errors.

**CRTMODD**  
 CPF261B E Mode description &1 not created due to errors.

**CRTMSGF**  
 CPF2112 E Object &1 in &2 type \*&3 already exists.  
 CPF2113 E Cannot allocate library &1.  
 CPF2182 E Not authorized to library &1.  
 CPF2402 E Library &1 not found  
 CPF2497 E Size for &1 in &2 exceeds machine limit.

**CRTMSGFMNU**  
 SSP4464 E Member &3 in file &1 in use, cannot be shared.  
 SSP5004 E &1--This load member exists, but is not a \$SFGR member.  
 SSP5005 E &1--This \$SFGR display file already exists.  
 SSP5011 E &1 not allowed for display file name.

SSP5017 E TOFILE library &1 not found.  
 SSP5019 E Terminating errors in \$SFGR input specifications.  
 SSP5027 E TGTRLS(\*PRV) allowed with changes only when existing display file created for previous release.  
 SSP5451 E Existing file &1 is not a display file.  
 SSP5750 E Command message file messages 1-24 contain only blank text.  
 SSP5751 E Command text message file name must end with ##.  
 SSP5752 E Command text message file library &1 not found.  
 SSP5753 E Command text message file &1 not found.  
 SSP5754 E Option text message file &1 not found.  
 SSP5755 E Unable to create \$BMENU work file.  
 SSP5756 E Command message file name must be longer than 2 characters.  
 SSP5757 E Command text message file has no MIC in 0001-0024 range  
 SSP5762 E Option text message file name cannot be same as menu name.  
 SSP5770 E Option text message file required for free format menu.  
 SSP5774 E Command and option message files must not be the same.  
 SSP6124 E Unexpected error occurred.  
 SSP7375 E Error &1 received by &2 utility.  
 SSP8663 E User not authorized to access &1.  
 SSP8679 E Not authorized to access member &1.

**CRTMSGQ**  
 CPF2112 E Object &1 in &2 type \*&3 already exists.  
 CPF2113 E Cannot allocate library &1.  
 CPF2182 E Not authorized to library &1.  
 CPF2402 E Library &1 not found  
 CPF2497 E Size for &1 in &2 exceeds machine limit.

**CRTOUTQ**  
 CPF2182 E Not authorized to library &1.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3352 E Temporary library &1 invalid for output queue &2.  
 CPF3353 E Output queue &1 in &2 already exists.  
 CPF3354 E Library &1 not found.  
 CPF3356 E Cannot allocate library &1.  
 CPF3371 E Spool user profile QSPL damaged or not found.

**CRTOVL**  
 CPF88C1 E Printer resource type &1 &2 was not created in library &3.

**CRTPAGSEG**  
 CPF88C1 E Printer resource type &1 &2 was not created in library &3.

**CRTPF**  
 CPF3204 E Cannot find object needed for file &1 in &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF5702 E File not a DDM file or not found.  
 CPF7302 E File &1 not created in library &2.

**CRTPLIPGM**  
 PLC9001 E The compilation is not successful.

**CRTPRTF**

CPF7302 E File &1 not created in library &2.

**CRTRJECFG**

RJE0013 E RJE configuration for session &1 was not created.  
 RJE0024 E Errors found. Processing of request ended.  
 RJE5303 E Create RJE Configuration (CRTRJECFG) command was canceled.

**CRTRPGPGM**

QRG9001 E Compile failed. Program not created.  
 QRG9003 E The product library is damaged or the user is not allowed to use the product library.  
 QRG9004 E TGTRLS(\*PRV) specified, but the previous RPG/400 is not installed.

**CRTRPTPGM**

RPT9001 E Auto Report failed.  
 RPT9003 E The product library is damaged or the user is not allowed to use the product library.  
 RPT9004 E TGTRLS(\*PRV) specified, but the previous RPG/400 is not installed.

**CRTSAVF**

CPF7302 E File &1 not created in library &2.

**CRTSBSD**

CPF1696 E Subsystem description &1 not created.  
 CPF1699 E Subsystem description &1 created, but warnings exist.

**CRTSPADCT**

CPF2283 E Authorization list &1 does not exist.  
 CPF4102 E File &2 in library &3 with member &4 not found.  
 CPF4104 E User not authorized to operation on file &2 in &3, member, device, or program device &4.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9832 E Function not supported for DDM file &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9848 E Cannot open file &1 in library &2 member &3.  
 CPF9899 E Error occurred during processing of command.

**CRTSQLC**

SQL9001 E SQL precompile failed.

**CRTSQLCBL**

SQL9001 E SQL precompile failed.

**CRTSQLPLI**

SQL9001 E SQL precompile failed.

**CRTSQLRPG**

SQL9001 E SQL precompile failed.

**CRTSRCPF**

CPF323C E QRECOVERY library could not be allocated.  
 CPF5702 E File not a DDM file or not found.  
 CPF7302 E File &1 not created in library &2.

**CRTSSND**

RJE0001 E Session description &1 already exists in library &2.

**CRTS36CBL**

CBL1019 E Compile failed. Program not created.  
 CBL1019 E Compile failed. Program not created.

SBL9001 E Compile failed. Program not created.

SBL9006 E TGTRLS(\*PRV) specified and the previous compiler is not installed.

SBL9007 E The product library is damaged or the user is not allowed to use the product library.

**CRTS36DSPF**

SSP4464 E Member &3 in file &1 in use, cannot be shared.  
 SSP5003 E Source member &1 not found.  
 SSP5004 E &1--This load member exists, but is not a \$SFGR member.  
 SSP5005 E &1--This \$SFGR display file already exists.  
 SSP5007 E Source member &1 already given.  
 SSP5009 E Display file &1 not found in library &2.  
 SSP5010 E Load member &1 not a \$SFGR display file.  
 SSP5011 E &1 not allowed for display file name.  
 SSP5012 E Format &1 not found in display file  
 SSP5015 E Source file library &1 not found.  
 SSP5016 E Display file library &1 not found.  
 SSP5017 E TOFILE library &1 not found.  
 SSP5019 E Terminating errors in \$SFGR input specifications.  
 SSP5027 E TGTRLS(\*PRV) allowed with changes only when existing display file created for previous release.  
 SSP5451 E Existing file &1 is not a display file.  
 SSP6124 E Unexpected error occurred.  
 SSP7375 E Error &1 received by &2 utility.  
 SSP8663 E User not authorized to access &1.  
 SSP8679 E Not authorized to access member &1.  
 SSP9080 E Object &1 in use, cannot be shared.

**CRTS36MNU**

SSP4464 E Member &3 in file &1 in use, cannot be shared.  
 SSP5004 E &1--This load member exists, but is not a \$SFGR member.  
 SSP5005 E &1--This \$SFGR display file already exists.  
 SSP5011 E &1 not allowed for display file name.  
 SSP5017 E TOFILE library &1 not found.  
 SSP5019 E Terminating errors in \$SFGR input specifications.  
 SSP5027 E TGTRLS(\*PRV) allowed with changes only when existing display file created for previous release.  
 SSP5451 E Existing file &1 is not a display file.  
 SSP5750 E Command message file messages 1-24 contain only blank text.  
 SSP5751 E Command text message file name must end with ##.  
 SSP5755 E Unable to create \$BMENU work file.  
 SSP5756 E Command message file name must be longer than 2 characters.  
 SSP5758 E Command text source member &1 not found.  
 SSP5759 E Option text source member &1 not found.  
 SSP5760 E Command text message file has wrong name.  
 SSP5761 E Option text message file has wrong name.  
 SSP5763 E Option text member name should not be same as menu name.  
 SSP5766 E Option text source library &1 was not found.  
 SSP5767 E Menu library &1 not found.  
 SSP5768 E Command text source library &1 not found.  
 SSP5772 E Option text source member required for free format menu.  
 SSP5773 E Command and option text member names must not be the same.

- SSP6124 E Unexpected error occurred.
  - SSP7375 E Error &1 received by &2 utility.
  - SSP8663 E User not authorized to access &1.
  - SSP8679 E Not authorized to access member &1.
  - SSP9080 E Object &1 in use, cannot be shared.
- CRTS36MSGF**
- SSP1727 E Message file &1 not found in library &2.
  - SSP5017 E TOFILE library &1 not found.
  - SSP6124 E Unexpected error occurred.
  - SSP7375 E Error &1 received by &2 utility.
  - SSP8663 E User not authorized to access &1.
- CRTS36RPG**
- QRG9001 E Compilation failed. Program is not created.
  - QRG9004 E TGTRLS(\*PRV) specified, but the previous S/36-Compatible RPG II is not installed.
  - QRG9005 E The product library is damaged or the user is not allowed to use the product library.
- CRTS36RPT**
- RPT9001 E Auto Report failed.
  - RPT9004 E TGTRLS(\*PRV) specified, but the previous S/36-Compatible RPG II is not installed.
  - RPT9005 E The product library is damaged or the user is not allowed to use the product library.
- CRTTAPF**
- CPF7302 E File &1 not created in library &2.
- CRTTBL**
- CPF2614 E Table &1 in &2 already exists.
  - CPF2623 E Library &1 not found.
  - CPF2678 E Data in source file &1 in &2 not valid.
- CRTUSRPRF**
- CPF2201 E User password &1 already exists.
  - CPF2202 E Do not have authority to create user profile.
  - CPF2209 E Library &1 not found.
  - CPF2212 E Not able to allocate library &1.
  - CPF2213 E Not able to allocate user profile &1.
  - CPF2214 E User profile &1 already exists.
  - CPF2225 E Not able to allocate internal system object.
  - CPF2242 E Object &1 type \*&2 not found in library list. Qualified name not created.
  - CPF2244 E Object &1 type \*&2 cannot be found.
  - CPF2259 E Group profile &1 not found.
  - CPF2260 E User profile &1 cannot be a group profile.
  - CPF2261 E OWNER or GRPAUT value not permitted.
  - CPF2262 E Value for GRPAUT not correct.
  - CPF2269 E Special authority \*ALLOBJ required when granting \*SECADM.
  - CPF9802 E Not authorized to object &2.
- CVTCLSRC**
- CPF0781 E File &1 in library &2 not a source file.
  - CPF0784 E Specified to-file same as from-file.
- CVTDAT**
- CPF0550 E Date too short for specified format.
  - CPF0551 E Separators in date are not valid.
  - CPF0552 E Date contains misplaced or extra separators.
  - CPF0553 E Date contains too many or too few numeric characters.
  - CPF0554 E Variable specified too short for converted date format.
  - CPF0555 E Date not in specified format or date not valid.
- CPF0556 E Date contains two or more kinds of separators.
- CVTTOFLR**
- IWS1613 E Virtual disk converted. Errors occurred.
  - IWS1614 E Unable to convert virtual disk to folder.
  - IWS1621 S Converting virtual disk to folder.
- DATA**
- CPF1753 E Command cannot be run.
- DLCOBJ**
- CPF1005 E Objects not deallocated.
- DLTALRTBL**
- CPF2105 E Object &1 in &2 type \*&3 not found.
  - CPF2110 E Library &1 not found.
  - CPF2113 E Cannot allocate library &1.
  - CPF2114 E Cannot allocate object &1 in &2 type \*&3.
  - CPF2176 E Library &1 damaged.
  - CPF2182 E Not authorized to library &1.
  - CPF2189 E Not authorized to object &1 in &2 type \*&3.
- DLTAUTHLR**
- CPC2213 E Authority holder deleted.
  - CPF22B1 E Authority holder does not exist.
  - CPF22B2 E Not authorized to create or delete authority holder.
  - CPF9803 E Cannot assign object &2 in library &3.
- DLTAUTL**
- CPF2105 E Object &1 in &2 type \*&3 not found.
  - CPF2110 E Library &1 not found.
  - CPF2113 E Cannot allocate library &1.
  - CPF2114 E Cannot allocate object &1 in &2 type \*&3.
  - CPF2116 E DATA(\*YES) specified and \*ALL or \*FILE not in OBJTYPE list.
  - CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.
  - CPF2125 E No objects deleted.
  - CPF2160 E Object type \*&1 not eligible for requested function.
  - CPF2176 E Library &1 damaged.
  - CPF2182 E Not authorized to library &1.
  - CPF2189 E Not authorized to object &1 in &2 type \*&3.
  - CPF2279 E Authorization list &1 cannot be deleted.
  - CPF2289 E Unable to allocate authorization list &1.
  - CPF5702 E File not a DDM file or not found.
  - CPF9801 E Object &2 in library &3 not found.
- DLTCFGL**
- CPF2105 E Object &1 in &2 type \*&3 not found.
  - CPF2625 E Not able to allocate object &1.
- DLTCHTFMT**
- CPF2105 E Object &1 in &2 type \*&3 not found.
  - CPF2110 E Library &1 not found.
  - CPF2113 E Cannot allocate library &1.
  - CPF2114 E Cannot allocate object &1 in &2 type \*&3.
  - CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.
  - CPF2182 E Not authorized to library &1.
  - CPF2189 E Not authorized to object &1 in &2 type \*&3.
- DLTCLS**
- CPF2105 E Object &1 in &2 type \*&3 not found.
  - CPF2110 E Library &1 not found.
  - CPF2113 E Cannot allocate library &1.
  - CPF2114 E Cannot allocate object &1 in &2 type \*&3.

## DLTCMD • DLTDTAARA

CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2160 E Object type \*&1 not eligible for requested function.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.  
CPF5702 E File not a DDM file or not found.  
CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

### DLTCMD

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.

### DLTCOSD

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2634 E Not authorized to object &1.

### DLTCTLD

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2615 E Controller &1 must be varied off for this operation.  
CPF2634 E Not authorized to object &1.  
CPF2636 E Command not processed. Controller &1 in use.  
CPF2697 E The request did not complete in the time allotted.  
CPF2717 E Controller description &1 not deleted.  
CPF2782 E Function check occurred in system arbiter.

### DLTDEVD

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.  
CPF2605 E Not able to allocate &1.  
CPF2615 E Controller &1 must be varied off for this operation.  
CPF2616 E Device Description &1 not deleted. Device in use.  
CPF2634 E Not authorized to object &1.  
CPF2646 E Delete request failed.  
CPF2648 E Delete request not allowed for device &1.  
CPF2668 E Object description not deleted.  
CPF2697 E The request did not complete in the time allotted.  
CPF2782 E Function check occurred in system arbiter.

### DLTDKTLBL

CPF6155 E File labeled &1 on device &2 not found.  
CPF6156 E Cancel reply received for message &6.  
CPF6158 E Delete diskette label ended; previous error occurred.  
CPF6716 E Device &1 not a diskette device.  
CPF6718 E Cannot allocate device &1.  
CPF9814 E Device &1 not found.  
CPF9825 E Not authorized to device &1.

### DLTDLO

CPF2204 E User profile &1 not found.  
CPF2749 E Character identifier outside of valid range.  
CPF2750 E Table &1 in QUSRSYS not found.  
CPF8A16 E Document library objects not deleted. &1 objects deleted.  
CPF9005 E System resource required to complete this request not available.  
CPF9006 E User not enrolled in system distribution directory.  
CPF9012 E Start of document interchange session not successful for &1.  
CPF9029 E Not allowed to specify owner profile &1.  
CPF903A E Office activity not stopped, requested operation cannot be done  
CPF9031 E No authority to specify DLO(\*ALL).  
CPF9032 E Document interchange session not started.  
CPF9046 E No documents found satisfying search specification in folder &1.  
CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

### DLTDOCL

CPF9002 E Not allowed to delete specified document lists.  
CPF9009 E System requires file &1 in &2 be journaled.  
CPF9012 E Start of document interchange session not successful for &1.  
CPF9032 E Document interchange session not started.  
CPF9051 E &1 document lists deleted; &2 document lists not deleted.  
CPF9810 E Library &1 not found.  
CPF9830 E Cannot assign library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

### DLTDST

CPF900A E &2 distribution deleted, could not delete &1 distribution.  
CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
CPF900C E Sign on and verify of user failed.  
CPF9016 E Request to cancel distribution &2-&3-&4 unsuccessful for &1.  
CPF905C E Error occurred trying to find a translation table.  
CPF906C E Distribution not deleted.  
CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.

### DLTDSTL

CPF8360 E Not enough storage to perform commit operation.  
CPF905C E Error occurred trying to find a translation table.  
CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

### DLTDTAARA

CPF2105 E Object &1 in &2 type \*&3 not found.

CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTDTADCT**  
 CPF2FE2 E Dictionary &1 currently in use.  
 CPF2FE3 E System cross reference file is in error.  
 CPF2FE4 E System cross reference file not available.  
 CPF2F0B E Data dictionary &1 cannot be deleted.  
 CPF2F0C E Deleting a SQL data dictionary &1 not allowed.  
 CPF2F0D E Data dictionary &1 partially deleted.  
 CPF2F0F E Data dictionary &1 not deleted.  
 CPF2F05 E Not authorized to delete dictionary &1.  
 CPF2F08 E Dictionary &1 not found.  
 CPF9820 E Not authorized to use library &1.

**DLTDTAQ**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTEDTD**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF2625 E Not able to allocate object &1.

**DLTF**  
 CPF0601 E Not allowed to do operation to file &1 in &2.  
 CPF0605 E Device file &1 in &2 saved with storage freed.  
 CPF0607 E File deleted by another job.  
 CPF0610 E File &1 in &2 not available.  
 CPF0675 E Device file &1 in &2 is in use.  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF2190 E Not able to do remote delete or rename request.  
 CPF320B E Operation was not valid for database file &1.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF3220 E Cannot do operation on file &1 in &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF324B E Cannot allocate dictionary for file &1.  
 CPF3252 E Maximum number of machine locks exceeded.  
 CPF3273 E File or member not created, deleted or changed.

**DLTFCT**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.

CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTIGCDCT**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTIGCTBL**  
 CPF8422 E Not able to use DBCS font table &1.  
 CPF8425 E Cancel reply received for message &1.  
 CPF9830 E Cannot assign library &1.

**DLTJOB**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTJOBQ**  
 CPF1763 E Cannot allocate one or more libraries.  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3324 E Job queue &1 in &2 not deleted. Job queue in use.  
 CPF3330 E Necessary resource not available.

**DLTJRN**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF7021 E Cannot delete journal &1 in &2.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9830 E Cannot assign library &1.

**DLTJRNRCV**  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF7022 E Cannot delete journal receiver &1 while attached.  
 CPF7023 E Cannot delete journal receiver &1 in &2.  
 CPF7024 E Receiver &1 in &2 not deleted.

## DLTLIB • DLTRJECFG

CPF7025 E Delete of receiver &1 in &2 canceled.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9810 E Library &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9830 E Cannot assign library &1.

### DLTLIB

CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2161 E Cannot delete some objects in library &1.  
CPF2167 E Library &1 on library list and cannot be deleted.  
CPF2168 E Library &1 not deleted.  
CPF2182 E Not authorized to library &1.  
CPF8122 E &8 damage on library &4.

### DLTLICPGM

CPF3875 E Licensed program &1 option &2 not deleted.

### DLTLIND

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.  
CPF2625 E Not able to allocate object &1.  
CPF2627 E Controller description previously deleted.  
CPF2633 E Line description &1 must be varied off.  
CPF2634 E Not authorized to object &1.  
CPF2668 E Object description not deleted.

### DLTMNU

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2107 E Library not cleared or deleted. Function check occurred.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2125 E No objects deleted.  
CPF2160 E Object type \*&1 not eligible for requested function.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.  
CPF5702 E File not a DDM file or not found.

### DLTMODD

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2634 E Not authorized to object &1.

### DLTMSGF

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.

### DLTMSGQ

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2110 E Library &1 not found.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.

CPF2182 E Not authorized to library &1.  
CPF2403 E Message queue &1 in &2 not found.  
CPF2408 E Not authorized to message queue &1.  
CPF2450 E Work station message queue &1 not allocated to job.  
CPF2451 E Message queue &1 not allocated to job.  
CPF2477 E Message queue &1 currently in use.  
CPF2505 E Deleting work station message queue not allowed.  
CPF9830 E Cannot assign library &1.

### DLTNETF

CPF8063 E Cannot assign necessary resource.  
CPF8070 E Not allowed to process files for user &1.  
CPF8077 E More than one file with same name found. See previously displayed messages.  
CPF8081 E File &5 member &6 number &7 already processed.  
CPF8082 E Cannot get network file &5 member &6 number &7.  
CPF8083 E No network files deleted.  
CPF905C E Error occurred trying to find a translation table.  
CPF9830 E Cannot assign library &1.

### DLTOUTQ

CPF1763 E Cannot allocate one or more libraries.  
CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2110 E Library &1 not found.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2182 E Not authorized to library &1.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3330 E Necessary resource not available.  
CPF3360 E Output queue &1 in &2 not deleted. Output queue in use.  
CPF3469 E Operation not allowed for output queue.

### DLTOVR

CPF9841 E Override not found at current call level.

### DLTOVRDEVE

CPF9841 E Override not found at current call level.

### DLTPGM

CPF2105 E Object &1 in &2 type \*&3 not found.  
CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
CPF2176 E Library &1 damaged.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.

### DLTPRB

CPF7A9C E Problem analysis not allowed.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2

### DLTRJECFG

RJE0024 E Errors found. Processing of request ended.  
RJE0026 E RJE configuration for session &1 was not deleted.  
RJE0029 E RJE configuration for session &1 was not found.



RJE5340 E Configuration for &1 was not completely deleted.

**DLTSBSD**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2160 E Object type \*&1 not eligible for requested function.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF5702 E File not a DDM file or not found.

**DLTSCHIDX**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2125 E No objects deleted.  
 CPF2160 E Object type \*&1 not eligible for requested function.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF5702 E File not a DDM file or not found.

**DLTSPADCT**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTSPLF**

CPF3303 E File &1 not found in job &5/&4/&3.  
 CPF3309 E No files names &1 are active.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3344 E File &1 number &2 no longer in the system.  
 CPF3478 E File &1 not found in job &5/&4/&3 on output queue &6 in library &7.  
 CPF3492 E Not authorized to spooled file.

**DLTSSND**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.

**DLTTBL**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2117 E &4 objects type \*&3 deleted. &5 objects not deleted.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF2625 E Not able to allocate object &1.

**DLTUSRPRF**

CPF22BF E User profile &1 not deleted.  
 CPF22B3 E User profile &1 not deleted.  
 CPF22C1 E NEWOWN and USRPRF parameters cannot be the same.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2215 E User profile &1 not deleted.  
 CPF2217 E Not authorized to user profile &1.  
 CPF2222 E Storage limit is greater than specified for user profile &1.  
 CPF2225 E Not able to allocate internal system object.  
 CPF2227 E One or more errors occurred during processing of command.  
 CPF2229 E Not authorized to delete user profile.  
 CPF2258 E Group profile &1 not deleted.  
 CPF2263 E Group information removed from &1 user profiles.  
 CPF2265 E User profile &1 not deleted.  
 CPI2236 S Deleting owned objects.

**DMPCLPGM**

CPF0570 E Unable to dump CL program &1 in &2.

**DMPDLO**

CPF8A43 E Dump failed or partially failed for &2 of type &4 in folder path &1.

**DMPJOB**

CPF3546 E Program parameters specified were not found.  
 CPF3560 E Job being serviced not running.  
 CPF3563 E Overflow value for file &1 in &2 too large.  
 CPF3585 E Library name \*ALL and call level cannot be used together.  
 CPF3909 E Previous service request not complete.  
 CPF3918 E Service request canceled.  
 CPF3925 E Cannot open file &1.  
 CPF3935 E Job being serviced ended during dump.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3951 E File &1 cannot be overridden by file name &2.  
 CPF3967 E Dump not started because serviced job not running.  
 CPF3968 E Dump not started because serviced job completed running.  
 CPF3969 E Error during close of file &1. Output may not be complete.

**DMPJOBINT**

CPF3560 E Job being serviced not running.  
 CPF3636 E Internal job not dumped.  
 CPF3909 E Previous service request not complete.  
 CPF3918 E Service request canceled.  
 CPF3935 E Job being serviced ended during dump.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3967 E Dump not started because serviced job not running.

CPF3968 E Dump not started because serviced job completed running.

**DMPOBJ**

CPF3560 E Job being serviced not running.  
 CPF3561 E Context &8 &9 &7 not found.  
 CPF3562 E Object &8 &9 &7 not found.  
 CPF3673 E Not authorized to library &7.  
 CPF3909 E Previous service request not complete.  
 CPF3918 E Service request canceled.  
 CPF3925 E Cannot open file &1.  
 CPF3935 E Job being serviced ended during dump.  
 CPF3946 E Context damaged.  
 CPF3947 E Library &7 not available.  
 CPF3948 E Library &3 previously deleted.  
 CPF3949 E Library &7 damaged.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3951 E File &1 cannot be overridden by file name &2.  
 CPF3967 E Dump not started because serviced job not running.  
 CPF3968 E Dump not started because serviced job completed running.  
 CPF3969 E Error during close of file &1. Output may not be complete.

**DMPSYSOBJ**

CPF3502 E No objects printed because no objects found.  
 CPF3508 E SUBTYPE (&5) value is not permitted.  
 CPF3523 E Starting offset &8 greater than size of space.  
 CPF3534 E Not authorized to object.  
 CPF3537 E Object &2 is damaged.  
 CPF3538 E Cannot allocate object.  
 CPF3539 E Object destroyed while being dumped.  
 CPF3560 E Job being serviced not running.  
 CPF3561 E Context &8 &9 &7 not found.  
 CPF3562 E Object &8 &9 &7 not found.  
 CPF3563 E Overflow value for file &1 in &2 too large.  
 CPF3566 E No objects dumped because no objects found.  
 CPF3577 E Data object &7 not found.  
 CPF3578 E Base data object &7 not found.  
 CPF3642 E Address of chain pointer &7 not permitted.  
 CPF3643 E Address for chain pointer &7 not 16-byte aligned.  
 CPF3644 E Base object &7 has no associated space.  
 CPF3645 E Not authorized to base object &7.  
 CPF3646 E Base object &2 is damaged.  
 CPF3647 E Base object &8 or previous base object destroyed.  
 CPF3648 E Base object &2 data area not found.  
 CPF3649 E Chaining pointer &7 does not exist at location specified.  
 CPF3650 E Chaining pointer &7 is instruction pointer.  
 CPF3651 E Offset too large for base object &7.  
 CPF3652 E Offset to last chaining pointer too large.  
 CPF3653 E Location for last chaining pointer not 16-byte aligned.  
 CPF3654 E Object &2 is damaged.  
 CPF3655 E Last base object or final object previously deleted.  
 CPF3656 E Base object &2 data area not found.  
 CPF3663 E Base object number &7 not found.  
 CPF3664 E Object &2 has no associated space.  
 CPF3665 E Not authorized to dump object &2.  
 CPF3666 E Object &2 is damaged.

CPF3667 E Object to be dumped was destroyed.  
 CPF3668 E Object &2 data area not found.  
 CPF3669 E Final pointer does not exist at specified location.  
 CPF3670 E Final pointer is instruction pointer.  
 CPF3671 E Starting offset &8 too large.  
 CPF3672 E Object specified by final pointer not found.  
 CPF3673 E Not authorized to library &7.  
 CPF3909 E Previous service request not complete.  
 CPF3913 E Context &7 previously deleted.  
 CPF3914 E Context &7 data area not found.  
 CPF3915 E Context &7 damaged.  
 CPF3916 E Context &7 not available.  
 CPF3918 E Service request canceled.  
 CPF3925 E Cannot open file &1.  
 CPF3935 E Job being serviced ended during dump.  
 CPF3941 E CONTEXT(\*MCHCTX) and TYPE(&4) cannot be used together.  
 CPF3942 E CONTEXT(\*MCHCTX) and OBJTYPE(\*&6) cannot be used together.  
 CPF3946 E Context damaged.  
 CPF3947 E Library &7 not available.  
 CPF3948 E Library &3 previously deleted.  
 CPF3949 E Library &7 damaged.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3951 E File &1 cannot be overridden by file name &2.  
 CPF3967 E Dump not started because serviced job not running.  
 CPF3968 E Dump not started because serviced job completed running.  
 CPF3969 E Error during close of file &1. Output may not be complete.

**DMPTAP**

CPF6708 E Command ended due to error.  
 CPF6718 E Cannot allocate device &1.  
 CPF6720 E Incorrect volume &2 found on device &1.  
 CPF6721 E Device &1 not a tape device.  
 CPF6723 E File not found on volume &2 on device &1.  
 CPF6724 E File label &5 not found on volume &2.  
 CPF6725 E Ending file sequence number less than starting sequence number.  
 CPF6726 E Ending data block less than starting block.  
 CPF6727 E Dump type not allowed for nonlabeled volume on device &1.  
 CPF6728 E LABEL(\*NONE) CRTDATE(\*NONE) required for nonlabeled volume.  
 CPF6729 E No authority to file data on volume &2 device &1.  
 CPF6730 E Cannot access file sequence number &3.  
 CPF6731 E File label &5 not found on volume &2.  
 CPF6751 E Load failure occurred on device &4.  
 CPF6760 E Device &1 not ready.  
 CPF6772 E Volume on device &1 cannot be processed.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.

**DSCJOB**

CPF1385 E Disconnect Job (DSCJOB) command not allowed at this time.  
 CPF1386 E DSCJOB not allowed for target pass-through jobs.  
 CPF1387 E DSCJOB is not valid.  
 CPF1388 E Disconnect Job command not allowed at this device.  
 CPF1389 E DSCJOB not allowed for workstation function jobs.  
 CPF1391 E Disconnect Job (DSCJOB) command not allowed at this time.

**DSPACC**

CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.

**DSPACCAUT**

CPF9022 E Access code authority not displayed because error occurred.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.

**DSPACGRP**

PFR5411 E Job not found.  
 PFR5412 E No secondary interactive job is active.

**DSPACTPJ**

CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1833 E Display Active Prestart Job command is not currently allowed.  
 CPF1834 E Prestart job entry for program &1 in &2 does not exist.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9810 E Library &1 not found.  
 CPF9871 E Error occurred while processing.

**DSPAUTLR**

CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPAUTL**

CPF2204 E User profile &1 not found.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF2208 E Object &1 in library &3 type \*&2 not found.  
 CPF2209 E Library &1 not found.  
 CPF2211 E Not able to allocate object &1 in &3 type \*&2.  
 CPF2216 E Not authorized to use library &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF9843 E Object &1 in library &3 type &2 cannot be accessed.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.

CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPAUTLDLO**

CPF22AF E Not authorized to display objects secured by authorization list &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF2289 E Unable to allocate authorization list &1.  
 CPF9012 E Start of document interchange session not successful for &1.  
 CPF9032 E Document interchange session not started.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.

**DSPAUTOBJ**

CPF22AF E Not authorized to display objects secured by authorization list &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF2289 E Unable to allocate authorization list &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPAUTUSR**

CPF2225 E Not able to allocate internal system object.  
 CPF2237 E Not authorized to display list of users.

**DSPBKP**

CPF1999 E Errors occurred on command.

**DSPCFGL**

CPF260F E Configuration list &1 not found.  
 CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.  
 CPF2663 E Configuration list &1 previously deleted.

**DSPCHT**

BGU0670 E BGU is already active.  
 BGU9002 E BGU session ended abnormally.  
 BGU9003 E Unrecoverable error detected during BGU operation.

**DSPCLS**

CPF1029 E No authority to library &1.  
 CPF1039 E Class library &1 not found.  
 CPF1065 E Class &1 in library &2 not found.  
 CPF1067 E Cannot allocate library &1.  
 CPF1068 E Cannot allocate class &1 in library &2.  
 CPF1098 E No authority to class &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**DSPCMD**

CPF6210 E Command &1 in library &2 not found.  
 CPF6250 E Cannot display command &1 in library &2.  
 CPF6251 E Page length of file &1 too small.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9805 E Object &2 in library &3 destroyed.  
 CPF9807 E One or more libraries in library list deleted.

CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9824 E Not authorized to command &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.

**DSPCOSD**

CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.  
 CPF2670 E Class-of-service description &1 not found.  
 CPF2671 E Class-of-service description &1 previously deleted.  
 CPF2675 E Class-of-service description &1 damaged.

**DSPCSPOBJ**

CAE9046 E Program &1 in library &2 not a CSP/AE program.  
 CAE9102 E Errors occurred. &1 of &2 objects created.  
 CAE9998 E Command &1 failed.

**DSPCTLD**

CPF2602 E Controller &1 not found.  
 CPF2625 E Not able to allocate object &1.  
 CPF2627 E Controller description previously deleted.  
 CPF2634 E Not authorized to object &1.  
 CPF2778 E Controller description &1 damaged.

**DSPDBR**

CPF3010 E No database files found for &1 in &2.  
 CPF3012 E File &1 in library &2 not found.  
 CPF3014 E No file specified as &1 in &2 can be displayed.  
 CPF3028 E Record format &1 not found in file &2.  
 CPF3029 E Member &1 not found in file &2 in &3.  
 CPF3052 E Description for file &1 not available.  
 CPF3061 E Record format &3 not found for outfile &1.  
 CPF3063 E Output file &1 in &2 not physical file.  
 CPF3064 E Library &1 not found.  
 CPF3066 E Error creating output file &1 in &2.  
 CPF3067 E Error while opening file &1 in &2.  
 CPF3068 E Error while writing to file &1 in &2.  
 CPF3069 E Error while closing file &1 in &2.  
 CPF3070 E Error creating member &3 in file &1.  
 CPF3072 E File &1 in &2 is a system file.  
 CPF3074 E Not authorized to library &1.  
 CPF3075 E Library &1 not available.  
 CPF3076 E Error occurred when on display.  
 CPF3077 E Error occurred when canceling display.  
 CPF3084 E Error clearing member &3 in file &1.

**DSPDEV**

CPF2603 E Device description &1 not found.  
 CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.

**DSPDIR**

CPF2204 E User profile &1 not found.  
 CPF8360 E Not enough storage to perform commit operation.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF9009 E System requires file &1 in &2 be journaled.  
 CPF905C E Error occurred trying to find a translation table.

CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
 CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPDKT**

CPF3704 E Display ended; data management error occurred.  
 CPF3738 E Device &1 used for save or restore is damaged.  
 CPF3743 E File cannot be restored or displayed.  
 CPF3791 E End of file &4 while processing &2 &1 in &3.  
 CPF3793 E Machine storage limit reached.  
 CPF3796 E Storage limit exceeded for user profile &4.  
 CPF6017 E Display diskette ended; previous error occurred.  
 CPF6716 E Device &1 not a diskette device.  
 CPF6718 E Cannot allocate device &1.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.

**DSPDLOUT**

CPF8A77 E Folder &1 not found.  
 CPF8A78 E Folder &1 in use.  
 CPF8A79 E Folder &1 is logically damaged.  
 CPF8A80 E Document &2 in use in folder &1.  
 CPF8A82 E Document &2 not found in folder &1.  
 CPF8A88 E Operation is not allowed on document &2 in folder &1.  
 CPF8A89 E Document &2 in folder &1 is logically damaged.  
 CPF90A6 E \*PUBLIC authority cannot be removed.  
 CPF90BA E Authority request for document library object failed.  
 CPF9073 E No authority to view or change the security of document library object &1.  
 CPF908A E Requester &1 not enrolled.  
 CPF908B E Document library object not found.  
 CPF909A E Document &2 in folder &1 is damaged.  
 CPF9095 E Folder &1 is damaged.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.

**DSPDOC**

OFCFFFD E A damaged object was found.  
 OFC800A E Folder is in use.  
 OFC800B E Document &1 is in use.  
 OFC800F E Display does not support text.  
 OFC8006 E Folder was not found.  
 OFC8007 E Document &1 not found in folder.  
 OFC8008 E Request not allowed with folder.  
 OFC8009 E Request not allowed with document &1.  
 OFC801A E Document has been saved on diskette or tape.  
 OFC801D E Maximum number of text sessions active.  
 OFC801E E DW/4 or text assist cannot be loaded.  
 OFC8010 E Document &1 cannot be processed.  
 OFC8011 E Document &1 needs to be recovered.  
 OFC8016 E Document &1 is checked out.  
 OFC8018 E Document &1 is empty.

OFC8019 E Required module not on system.  
 OFC802E E Request failed for PC editor.  
 OFC8951 E Data name must be specified.  
 OFC8952 E Type must be &9 or &10.  
 OFC8953 E Data &9 does not exist.  
 OFC8954 E Display terminal does not have graphics ability.  
 OFC8955 E PC Text-assist function required to view image.  
 OFC9811 E Folder needs to be reclaimed.

**DSPDSTL**

CPF8360 E Not enough storage to perform commit operation.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9052 E List ID, &1 &2, cannot be found.  
 CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
 CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPDSTSRV**

CPF8801 E Document Library Services (\*DLS) queue type not allowed in routing table.  
 CPF8806 E Value not correct for system name or system group.  
 CPF8808 E SNADS cannot allocate more queue space.  
 CPF8813 E No entries exist.  
 CPF8814 E Queue &1 not found.  
 CPF8815 E Routing table entry &1 &2 not found.

**DSPDTA**

IDU0120 E Critical table missing. Command terminated.  
 IDU0141 E Critical table inconsistent. Command terminated.  
 IDU0167 E Not authorized to &1.&2.  
 IDU1205 E Application &1.&2 not found.  
 IDU9001 E Error found on &1 command.

**DSPDTAARA**

CPF1015 E Data area &1 in &2 not found.  
 CPF1016 E No authority to data area &1 in &2.  
 CPF1021 E Library &1 not found for data area &2.  
 CPF1022 E No authority to library &1 data area &2.  
 CPF1046 E DTAARA(\*GDA) not valid because job not group job.  
 CPF1048 E OUTFMT(\*HEX) not valid for data area &1 in library &2.  
 CPF1063 E Cannot allocate data area &1 in library &2.  
 CPF1067 E Cannot allocate library &1.  
 CPF1072 E DTAARA(\*PDA) not valid because job not pre-start job.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**DSPDTADCT**

CPF2DAA E Printer device &1 not found.

CPF2DAC E Not authorized to use printer device &4.  
 CPF2DAD E Printer device &4 not currently available.  
 CPF2D76 E Name cannot contain an embedded \*.  
 CPF2E9B E Definition &1 not found.  
 CPF2F02 E Not authorized to use dictionary &1.  
 CPF2F08 E Dictionary &1 not found.  
 CPF3012 E File &1 in library &2 not found.  
 CPF3014 E No file specified as &1 in &2 can be displayed.  
 CPF3024 E File &1 not allowed for SYSTEM(&3).  
 CPF3064 E Library &1 not found.  
 CPF3067 E Error while opening file &1 in &2.  
 CPF3068 E Error while writing to file &1 in &2.  
 CPF3069 E Error while closing file &1 in &2.  
 CPF3074 E Not authorized to library &1.  
 CPF3076 E Error occurred when on display.  
 CPF3077 E Error occurred when canceling display.  
 CPF4253 E Not authorized to output queue for device &6.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9852 E Page size too narrow for file &1 in &2.

**DSPEDTD**

CPF2617 E Edit description not found.  
 CPF2624 E Edit description &1 in &2 previously deleted.  
 CPF2625 E Not able to allocate object &1.

**DSPFD**

CPF3011 E TYPE not found for file &1 in library &2.  
 CPF3012 E File &1 in library &2 not found.  
 CPF3014 E No file specified as &1 in &2 can be displayed.  
 CPF3020 E No files in &1 in &2 have the specified FILEATR.  
 CPF3021 E File &1 not allowed with SYSTEM(\*RMT).  
 CPF3022 E SYSTEM(\*RMT) not allowed for files &1 in &2.  
 CPF3030 E &3 records added to member &4 in file &1 in &2.  
 CPF3061 E Record format &3 not found for outfile &1.  
 CPF3064 E Library &1 not found.  
 CPF3067 E Error while opening file &1 in &2.  
 CPF3068 E Error while writing to file &1 in &2.  
 CPF3069 E Error while closing file &1 in &2.  
 CPF3070 E Error creating member &3 in file &1.  
 CPF3072 E File &1 in &2 is a system file.  
 CPF3074 E Not authorized to library &1.  
 CPF3075 E Library &1 not available.  
 CPF3076 E Error occurred when on display.  
 CPF3077 E Error occurred when canceling display.  
 CPF3084 E Error clearing member &3 in file &1.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9852 E Page size too narrow for file &1 in &2.

**DSPFFD**

CPF3012 E File &1 in library &2 not found.  
 CPF3014 E No file specified as &1 in &2 can be displayed.  
 CPF3024 E File &1 not allowed for SYSTEM(&3).  
 CPF3052 E Description for file &1 not available.  
 CPF3061 E Record format &3 not found for outfile &1.  
 CPF3063 E Output file &1 in &2 not physical file.  
 CPF3064 E Library &1 not found.  
 CPF3066 E Error creating output file &1 in &2.  
 CPF3067 E Error while opening file &1 in &2.  
 CPF3068 E Error while writing to file &1 in &2.  
 CPF3069 E Error while closing file &1 in &2.  
 CPF3070 E Error creating member &3 in file &1.  
 CPF3072 E File &1 in &2 is a system file.  
 CPF3074 E Not authorized to library &1.

**DSPGDF • DSPLIBL**

CPF3075 E Library &1 not available.  
CPF3076 E Error occurred when on display.  
CPF3077 E Error occurred when canceling display.  
CPF3084 E Error clearing member &3 in file &1.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9852 E Page size too narrow for file &1 in &2.

**DSPGDF**

BGU0670 E BGU is already active.  
BGU9002 E BGU session ended abnormally.  
BGU9003 E Unrecoverable error detected during BGU operation.

**DSPHLPDOC**

OFC87B2 E The help document could not be opened.  
OFC87B4 E Document interchange session not started.  
OFC9040 E Help text label not found.  
OFC9041 E Document is not final form.

**DSPIGCDCT**

CPF8138 E &8 damage on DBCS conversion dictionary &4 in &9.  
CPF8433 E Form length of file &1 in &2 less than five lines.  
CPF8451 E Entry value &1 not correct.  
CPF8455 E Work station is not a DBCS device.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9810 E Library &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.

**DSPJOB**

CPF0941 E Job &3/&2/&1 no longer in system.  
CPF1069 E End of duplicate names.  
CPF1070 E Job &3/&2/&1 not found.  
CPF1071 E No authority to job &3/&2/&1.  
CPF3330 E Necessary resource not available.  
CPF3336 E Job &5/&4/&3 no longer in the system.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

**DSPJOBDB**

CPF1618 E Job description &1 in library &2 damaged.  
CPF1623 E Job description &1 not displayed.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

**DSPJOBLOG**

CPF1069 E End of duplicate names.  
CPF1070 E Job &3/&2/&1 not found.  
CPF2441 E Not authorized to display job log.

CPF2443 E Job log not displayed because job has ended.  
CPF2523 E No job log information.

**DSPJRN**

CPF7002 E File &1 in library &2 not physical file.  
CPF7006 E Member &3 not found in file &1 in &2.  
CPF7007 E Cannot allocate member &3 file &1 in &2.  
CPF7053 E Error on RCVRNG specifications, reason code &1.  
CPF7054 E FROM and TO values not valid.  
CPF7055 E Maximum number of members exceeded.  
CPF7057 E \*LIBL not allowed with FILE(\*ALL).  
CPF7060 E File &1 never journaled to journal &3.  
CPF7061 E Conversion of journal entries failed.  
CPF7062 E No entries converted or received from journal &1.  
CPF7065 E Entry type (ENTTYP) not valid for journal code (JRNCD E).  
CPF7074 E RCVRNG for specified SEARCH not valid.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9809 E Library &1 cannot be accessed.  
CPF9810 E Library &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9850 E Override of printer file &1 not allowed.  
CPF9860 E Error occurred during output file processing.

**DSPJRNRCVA**

CPF7071 E Journal receiver &1 not same as requested.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9804 E Object &2 in library &3 damaged.  
CPF9810 E Library &1 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9850 E Override of printer file &1 not allowed.  
CPF9871 E Error occurred while processing.

**DSPKBDMAP**

CPF8701 E Specified device &1 not a 3270 device type.

**DSPLIB**

CPF2110 E Library &1 not found.  
CPF2113 E Cannot allocate library &1.  
CPF2148 E Library marked \*DELETED not found.  
CPF2150 E Object information function failed.  
CPF2176 E Library &1 damaged.  
CPF2179 E Cannot display library.  
CPF2182 E Not authorized to library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

**DSPLIBL**

CPF2113 E Cannot allocate library &1.  
CPF2148 E Library marked \*DELETED not found.  
CPF2176 E Library &1 damaged.  
CPF2179 E Cannot display library.  
CPF2182 E Not authorized to library &1.  
CPF9845 E Error occurred while opening file &1.

CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.

**DSPLIND**

CPF2601 E Line description &1 not found.  
 CPF2625 E Not able to allocate object &1.  
 CPF2626 E Line description previously deleted.  
 CPF2634 E Not authorized to object &1.  
 CPF2779 E Line description &1 has been damaged.

**DSPLLOG**

CPF2403 E Message queue &1 in &2 not found.  
 CPF2447 E No entries exist in current version of log.  
 CPF2478 E Not authorized to requested version of log.  
 CPF2480 E Requested version of log damaged.  
 CPF2499 E Message ID &1 not allowed.  
 CPF2519 E Invalid message ID list.  
 CPF2537 E Too many records written to file &2 in &3.

**DSPMNUA**

CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9814 E Device &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.  
 CPF9830 E Cannot assign library &1.  
 CPF9831 E Cannot assign device &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9871 E Error occurred while processing.

**DSPMODD**

CPF260A E Mode description &1 not found.  
 CPF262B E Mode description &1 previously deleted.  
 CPF262C E Mode description &1 damaged.  
 CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.

**DSPMODSTS**

CPF2625 E Not able to allocate object &1.  
 CPF2634 E Not authorized to object &1.  
 CPF2688 E Device &1 is not in a proper status to get mode information.  
 CPF2698 E Mode &1 not found for device &2.  
 CPF2702 E Device description &1 not found.  
 CPF2706 E Device &1 not \*APPC type device.  
 CPF9850 E Override of printer file &1 not allowed.

**DSPMSG**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2433 E Function not allowed for system log message queue &1.

CPF2450 E Work station message queue &1 not allocated to job.

CPF2451 E Message queue &1 not allocated to job.  
 CPF2467 E &3 message queue &1 in library &2 logically damaged.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2513 E Message queue &1 cannot be displayed.  
 CPF2537 E Too many records written to file &2 in &3.  
 CPF8127 E &8 damage on message queue &4 in &9.  
 VLOG-&7.

CPF8176 E Message queue for device description &4 damaged.

CPF9830 E Cannot assign library &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.

**DSPMSGD**

CPF2401 E Not authorized to library &1.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2483 E Message file currently in use.  
 CPF2515 E Invalid message ID range.  
 CPF2516 E Unable to open display file &1 in &2.  
 CPF2519 E Invalid message ID list.  
 CPF2537 E Too many records written to file &2 in &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9810 E Library &1 not found.  
 CPF9830 E Cannot assign library &1.

**DSPNETA**

CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**DSPOBJAUT**

CPF2204 E User profile &1 not found.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF2208 E Object &1 in library &3 type \*&2 not found.  
 CPF2209 E Library &1 not found.  
 CPF2211 E Not able to allocate object &1 in &3 type \*&2.  
 CPF2216 E Not authorized to use library &1.  
 CPF2266 E Value \*GROUP not allowed for user profile &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF9843 E Object &1 in library &3 type &2 cannot be accessed.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**DSPOBJD**

CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2115 E Object &1 in &2 type \*&3 damaged.  
 CPF2121 E One or more libraries cannot be accessed.

## DSPOVR • DSPSOCSTS

CPF2123 E No objects of specified name or type exist in library &2.  
CPF2124 E No specified objects can be displayed from library &2.  
CPF2150 E Object information function failed.  
CPF2176 E Library &1 damaged.  
CPF2177 E OBJTYPE value not compatible with OBJ value.  
CPF2182 E Not authorized to library &1.  
CPF2189 E Not authorized to object &1 in &2 type \*&3.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9860 E Error occurred during output file processing.

### DSPOVR

CPF9842 E Overrides not found for file &1.

### DSPPFM

CPF8056 E File &1 in &2 not a physical file.  
CPF9810 E Library &1 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

### DSPPFRTA

PFR7001 E Library &1 does not contain performance data.  
PFR7003 E Cannot show performance data.

### DSPPGM

CPF2150 E Object information function failed.  
CPF2151 E Operation failed for &2 in &1 type \*&3.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9806 E Cannot allocate object &2 in library &3.  
CPF9807 E One or more libraries in library list deleted.  
CPF9808 E Cannot allocate one or more libraries on library list.  
CPF9810 E Library &1 not found.  
CPF9811 E Program &1 in library &2 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9821 E Not authorized to program &1 in library &2.  
CPF9830 E Cannot assign library &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.

### DSPPGMADP

CPF2204 E User profile &1 not found.  
CPF2213 E Not able to allocate user profile &1.  
CPF2217 E Not authorized to user profile &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9850 E Override of printer file &1 not allowed.  
CPF9860 E Error occurred during output file processing.

### DSPPGMREF

CPF3033 E Program &1 in library &2 not found.  
CPF3034 E No programs in &1 in &2 can be displayed.  
CPF3052 E Description for file &1 not available.  
CPF3061 E Record format &3 not found for outfile &1.  
CPF3063 E Output file &1 in &2 not physical file.

CPF3064 E Library &1 not found.  
CPF3066 E Error creating output file &1 in &2.  
CPF3067 E Error while opening file &1 in &2.  
CPF3068 E Error while writing to file &1 in &2.  
CPF3069 E Error while closing file &1 in &2.  
CPF3070 E Error creating member &3 in file &1.  
CPF3072 E File &1 in &2 is a system file.  
CPF3074 E Not authorized to library &1.  
CPF3075 E Library &1 not available.  
CPF3076 E Error occurred when on display.  
CPF3077 E Error occurred when canceling display.  
CPF3084 E Error clearing member &3 in file &1.

### DSPPGMVAR

CPF1999 E Errors occurred on command.

### DSPPTF

CPF3598 E PTF function already in process.  
CPF3612 E Library &1 not found.  
CPF3677 E Not authorized to library &1.  
CPF3925 E Cannot open file &1.  
CPF3945 E Records of PTF activity for licensed program are deleted.  
CPF3950 E Error message &2 received for file &1. Request ended.  
CPF3951 E File &1 cannot be overridden by file name &2.  
CPF6601 E No PTF activity exists for licensed program &1.  
CPF6602 E PTF &1-&2 in library &3 not found.  
CPF6603 E No PTFs found.  
CPF6604 E Cannot display PTFs in library &1.  
CPF6605 E Master PTF Index for library &1 deleted.

### DSPRCDLCK

CPF3130 E Member &2 already in use.  
CPF3210 E File &1 in library &2 not correct type.  
CPF3247 E Record number &4 does not exist in member &3.  
CPF3275 E Member &3 file &1 in &2 not found.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9810 E Library &1 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9871 E Error occurred while processing.

### DSPSAVF

CPF3704 E Display ended; data management error occurred.  
CPF3782 E File &1 in &2 not a save file.  
CPF3812 E Save file &1 in &2 in use.  
CPF9812 E File &1 in library &2 not found.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.

### DSPSBSD

CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1692 E Subsystem description &1 not displayed.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9861 E Output file &1 created in library &2.  
CPF9871 E Error occurred while processing.

### DSPSOCSTS

CPF7B13 E Internal error in alert processing.



CPF7B16 E No status displayed. Focal point not active.  
 CPF7B19 E Sphere of control is not available.

**DSPSPLF**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3303 E File &1 not found in job &5/&4/&3.  
 CPF3308 E Error occurred when trying to display data.  
 CPF3309 E No files names &1 are active.  
 CPF3309 E No files names &1 are active.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3344 E File &1 number &2 no longer in the system.  
 CPF3359 E Not able to display data.  
 CPF3386 E File &1 in &2 not a data base file.  
 CPF3387 E Cannot display data in file &1 in &2.  
 CPF3394 E Cannot convert spooled file data.  
 CPF3427 E Job &5/&4/&3 not interactive job.  
 CPF3428 E DSPSPLF command ended for file &1 number &2.  
 CPF3429 E File &1 number &2 cannot be displayed or copied.  
 CPF3434 E Data in file &1 in &2 member &3 not in required format.  
 CPF3435 E Requested data not found in file &1 in &2 member &3.  
 CPF3478 E File &1 not found in job &5/&4/&3 on output queue &6 in library &7.  
 CPF3492 E Not authorized to spooled file.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9815 E Member &5 file &2 in library &3 not found.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9871 E Error occurred while processing.

**DSPSRVSTS**

CPF3520 E Job not found.  
 CPF3524 E More than one job with specified name found.  
 CPF3925 E Cannot open file &1.  
 CPF3950 E Error message &2 received for file &1. Request ended.

**DSPSYSVAL**

CPF1028 E &1 not valid for parameter SYSVAL.  
 CPF1074 E SYSVAL(QMONTH) not valid for Julian date format.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.  
 CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**DSPTAP**

CPF3704 E Display ended; data management error occurred.  
 CPF6708 E Command ended due to error.  
 CPF6718 E Cannot allocate device &1.  
 CPF6721 E Device &1 not a tape device.  
 CPF6723 E File not found on volume &2 on device &1.

CPF6724 E File label &5 not found on volume &2.  
 CPF6751 E Load failure occurred on device &4.  
 CPF6760 E Device &1 not ready.  
 CPF6772 E Volume on device &1 cannot be processed.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.

**DSPTRC**

CPF1999 E Errors occurred on command.

**DSPTRCDTA**

CPF1999 E Errors occurred on command.

**DSPUSRPMN**

CPF9043 E User permission is not displayed because error occurred.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.

**DSPUSRPRF**

CPF2204 E User profile &1 not found.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2217 E Not authorized to user profile &1.  
 CPF2257 E User profile &1 not a group profile.  
 CPF9860 E Error occurred during output file processing.

**DUPDKT**

CPF5102 E Permanent I/O error on volume &9 in device &4.  
 CPF6151 E Cannot duplicate diskette in device &1.  
 CPF6157 E Duplicate diskette ended; previous error occurred.  
 CPF6716 E Device &1 not a diskette device.  
 CPF6718 E Cannot allocate device &1.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.

**EDTAUTL**

CPF22B9 E Not authorized to change authorities.  
 CPF2204 E User profile &1 not found.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF2208 E Object &1 in library &3 type \*&2 not found.  
 CPF2209 E Library &1 not found.  
 CPF2211 E Not able to allocate object &1 in &3 type \*&2.  
 CPF2216 E Not authorized to use library &1.  
 CPF2217 E Not authorized to user profile &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF9843 E Object &1 in library &3 type &2 cannot be accessed.

**EDTDLOAUT**

CPF8A77 E Folder &1 not found.  
 CPF8A78 E Folder &1 in use.  
 CPF8A79 E Folder &1 is logically damaged.  
 CPF8A80 E Document &2 in use in folder &1.  
 CPF8A82 E Document &2 not found in folder &1.  
 CPF8A88 E Operation is not allowed on document &2 in folder &1.

CPF8A89 E Document &2 in folder &1 is logically damaged.

CPF90BA E Authority request for document library object failed.

CPF90B6 E You have specified an incorrect input value.

CPF9073 E No authority to view or change the security of document library object &1.

CPF908A E Requester &1 not enrolled.

CPF908B E Document library object not found.

CPF909A E Document &2 in folder &1 is damaged.

CPF9095 E Folder &1 is damaged.

**EDTDOC**

OFCFFFC E User storage capacity exceeded.

OFCFFFD E A damaged object was found.

OFC800A E Folder is in use.

OFC800B E Document &1 is in use.

OFC800F E Display does not support text.

OFC8006 E Folder was not found.

OFC8007 E Document &1 not found in folder.

OFC8008 E Request not allowed with folder.

OFC8009 E Request not allowed with document &1.

OFC801A E Document has been saved on diskette or tape.

OFC801D E Maximum number of text sessions active.

OFC801E E DW/4 or text assist cannot be loaded.

OFC8010 E Document &1 cannot be processed.

OFC8011 E Document &1 needs to be recovered.

OFC8016 E Document &1 is checked out.

OFC8018 E Document &1 is empty.

OFC8019 E Required module not on system.

OFC802E E Request failed for PC editor.

OFC8951 E Data name must be specified.

OFC8952 E Type must be &9 or &10.

OFC8953 E Data &9 does not exist.

OFC8954 E Display terminal does not have graphics ability.

OFC8955 E PC Text-assist function required to view image.

OFC903A E Document &1 is final form.

OFC9811 E Folder needs to be reclaimed.

**EDTIGCDCT**

CPF2122 E Storage limit exceeded for user profile &1.

CPF8138 E &8 damage on DBCS conversion dictionary &4 in &9.

CPF8439 E Number of dictionary entries greater than maximum allowed (99,999).

CPF8440 E Entries cannot be added to the system DBCS conversion dictionary.

CPF8451 E Entry value &1 not correct.

CPF8455 E Work station is not a DBCS device.

CPF8461 E Entry &1 of DBCS conversion dictionary is logically damaged.

CPF9801 E Object &2 in library &3 not found.

CPF9802 E Not authorized to object &2.

CPF9803 E Cannot assign object &2 in library &3.

CPF9810 E Library &1 not found.

CPF9820 E Not authorized to use library &1.

CPF9845 E Error occurred while opening file &1.

CPF9846 E Error while processing file &1 in library &2

CPF9847 E Error occurred while closing file &1 in library &2.

**EDTIGCTBL**

CGS0041 E Response required. CGU cannot be run from job queue.

CGS0043 E Response required. You cannot use EVOKE for CGU.

CGU0100 S Character Generator Utility is starting up.

CGU0102 E Display station is not DBCS-capable.

CGU0103 E The &1 DBCS font table &2 is currently in use.

CGU0104 E There are no 24x24 DBCS font tables on the system.

CGU0106 E You are not authorized to use any of the DBCS font tables.

CGU0108 E &1 DBCS master sort table &2 does not exist.

CGU0109 E The &1 DBCS master sort table &2 is currently in use.

CGU0118 E You are not authorized to use DBCS font table &2.

CGU0119 E You are not authorized to use DBCS master sort table &2.

CGU0121 E You are not authorized to use DBCS active sort table &2.

CGU3206 S Listing of &1 user-defined DBCS characters in progress.

CGU4103 S &1 synchronization report is in progress.

CGU7105 E &1 DBCS font file &2 is currently in use.

CGU9001 E Error(s) occurred during running of command.

CGU9101 S Update of DBCS active sort table &1 in progress.

CGU9500 E You are not authorized to DBCS master sort table &1.

CGU9503 E DBCS master sort table &1 not found.

CGU9504 E DBCS active sort table &1 not found.

CGU9505 E You are not authorized to the DBCS active sort table &1.

CGU9515 E Command terminated due to error.

CGU9516 S DBCS master sort table &1 being copied.

**EDTLIBL**

CPF2106 E Library list not changed.

CPF2184 E Library list not replaced.

**EDTOBJAUT**

CPF22B8 E Not authorized to change authorities.

CPF22B9 E Not authorized to change authorities.

CPF2204 E User profile &1 not found.

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.

CPF2208 E Object &1 in library &3 type \*&2 not found.

CPF2209 E Library &1 not found.

CPF2211 E Not able to allocate object &1 in &3 type \*&2.

CPF2216 E Not authorized to use library &1.

CPF2217 E Not authorized to user profile &1.

CPF2283 E Authorization list &1 does not exist.

CPF9843 E Object &1 in library &3 type &2 cannot be accessed.

**EDTS36PGMA**

CPF2C01 E Program &1 attributes not changed.

CPF2C02 E Changing attributes not allowed for SSP program &1.

CPF2C03 E MRTMAX parameter value &3 not correct.

**EDTS36PRCA**

CPF2C0A E Member &3 attributes not changed.

CPF2C0B E Changing attributes not allowed for SSP member &3.

CPF2C08 E File &1 is not a source file.

**EDTS36SRCA**

CPF2C0A E Member &3 attributes not changed.

CPF2C0B E Changing attributes not allowed for SSP member &3.

CPF2C08 E File &1 is not a source file.

#### EJTEMLOUT

CPF8595 E Eject emulation output function not performed.

#### EMLPRTKEY

CPF8598 E Emulate print key function not performed.

#### ENDBCHJOB

CPF1753 E Command cannot be run.

#### ENDCBLDBG

CBE7018 E Program &1 not found.

CBE7019 E Library &1 not found.

LBE7018 E Program &1 not found.

LBE7019 E Library &1 not found.

#### ENDCMTCTL

CPF6970 E Access paths built over file &1 are being journaled.

CPF6972 E Cannot allocate access path for file &1 in &2.

CPF7002 E File &1 in library &2 not physical file.

CPF7008 E Cannot start or end access path journaling for file &1.

CPF7031 E Cannot allocate member &3 file &1 in &2.

CPF7032 E ENDJRNPF or ENDJRNAP command failed.

CPF7033 E Start or end journaling failed for member &3.

CPF7034 E Logical damage of file &1 in &2.

CPF8350 E Commitment control not active.

CPF8354 E Secondary commit cycle not active.

CPF8355 E ENDCMTCTL not allowed. Files under commitment control open.

CPF8356 E Commitment control ended with &6 changes not committed.

CPF9801 E Object &2 in library &3 not found.

CPF9802 E Not authorized to object &2.

CPF9803 E Cannot assign object &2 in library &3.

CPF9810 E Library &1 not found.

CPF9812 E File &1 in library &2 not found.

CPF9820 E Not authorized to use library &1.

CPF9822 E Not authorized to file &1 in library &2.

#### ENDCPYSCN

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.

CPF7AF7 E Device name &1 not correct.

CPF7AF8 E Device name &1 not being copied.

#### ENDCTLRcy

CPF2703 E Controller description &1 not found.

CPF5924 E Controller &1 does not allow automatic error recovery.

CPF5928 E Controller &1 not varied on.

CPF5929 E Controller &1 assigned to another job.

CPF5935 E Error occurred during command processing.

CPF5936 E Not authorized to controller &1.

#### ENDDBG

CPF1999 E Errors occurred on command.

#### ENDDEVRCY

CPF5923 E Device &1 does not allow automatic error recovery.

CPF5925 E Device &1 not varied on.

CPF5935 E Error occurred during command processing.

CPF9814 E Device &1 not found.

#### ENDGRPJOB

CPF1309 E Subsystem cannot complete the &1 command.

CPF1314 E Value &1 for parameter &2 not allowed.

CPF1317 E No response from subsystem for job &3/&2/&1.

CPF1322 E The End Group Job command not allowed at this time.

CPF1323 E Group job &1 not ended; parameters do not agree.

CPF1324 E Group job &1 not ended; parameters do not agree.

CPF1325 E Group job &1 not ended; group job &2 does not exist.

CPF1326 E Group job &1 does not exist.

CPF1327 E Cannot end group job &1 with ENDGRPJOB.

CPF1351 E Function check occurred in subsystem for job &3/&2/&1.

#### ENDINP

CPF1753 E Command cannot be run.

#### ENDJOB

CPF1317 E No response from subsystem for job &3/&2/&1.

CPF1321 E Job &1 user &2 job number &3 not found.

CPF1332 E End of duplicate job names.

CPF1340 E Job control function not performed.

CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.

CPF1342 E Current job not allowed as job name on this command.

CPF1343 E Job &3/&2/&1 not valid job type for function.

CPF1344 E Not authorized to control job &3/&2/&1.

CPF1351 E Function check occurred in subsystem for job &3/&2/&1.

CPF1352 E Function not done. &3/&2/&1 in transition condition.

CPF1359 E ENDJOBABN not allowed at this time for job &3/&2/&1.

CPF1360 E &3/&2/&1 already ending because of ENDJOBABN.

CPF1361 E Job &3/&2/&1 already ending with \*IMMED option.

CPF1362 E Job &3/&2/&1 has completed.

CPF1363 E Job &3/&2/&1 is already ending \*CNTRLd.

CPF8172 E Spool control block for job &10/&9/&8 damaged.

#### ENDJOBABN

CPF1317 E No response from subsystem for job &3/&2/&1.

CPF1321 E Job &1 user &2 job number &3 not found.

CPF1332 E End of duplicate job names.

CPF1340 E Job control function not performed.

CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.

CPF1342 E Current job not allowed as job name on this command.

CPF1343 E Job &3/&2/&1 not valid job type for function.

CPF1351 E Function check occurred in subsystem for job &3/&2/&1.

CPF1359 E ENDJOBABN not allowed at this time for job &3/&2/&1.

CPF1360 E &3/&2/&1 already ending because of ENDJOBABN.

CPF1362 E Job &3/&2/&1 has completed.

#### ENDJRNAP

## ENDJRNPf • FILDOf

CPF6972 E Cannot allocate access path for file &1 in &2.  
CPF7008 E Cannot start or end access path journaling for file &1.  
CPF7032 E ENDJRNPf or ENDJRNP command failed.  
CPF7033 E Start or end journaling failed for member &3.

### ENDJRNPf

CPF6970 E Access paths built over file &1 are being journaled.  
CPF7002 E File &1 in library &2 not physical file.  
CPF7031 E Cannot allocate member &3 file &1 in &2.  
CPF7032 E ENDJRNPf or ENDJRNP command failed.  
CPF7033 E Start or end journaling failed for member &3.  
CPF7034 E Logical damage of file &1 in &2.  
CPF9801 E Object &2 in library &3 not found.  
CPF9802 E Not authorized to object &2.  
CPF9803 E Cannot assign object &2 in library &3.  
CPF9810 E Library &1 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.

### ENDLINRCY

CPF2704 E Line description &1 not found.  
CPF5917 E Not authorized to line description &1.  
CPF5932 E Cannot access line &1.  
CPF5933 E Line &1 not varied on.  
CPF5935 E Error occurred during command processing.

### ENDMOD

CPF5988 E The &1 command failed for one or more modes.

### ENDPASTHR

CPF8914 E ENDPASTHR command not allowed.  
CPF8915 E ENDPASTHR not allowed. System request job active.

### ENDPFRMON

CPF0A61 E End Performance Monitor command already submitted for job &3/&2/&1  
CPF0A64 E ENDPFRMON command cannot be submitted at this time.

### ENDPJ

CPF1083 E Prestart jobs already are ending controlled.  
CPF1084 E Prestart jobs are already ending immediately.  
CPF1227 E No authority has been granted to use command.  
CPF1317 E No response from subsystem for job &3/&2/&1.  
CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
CPF1834 E Prestart job entry for program &1 in &2 does not exist.

### ENDPRTEML

CPF8599 E End printer emulation function not performed.

### ENDRCV

CPF0883 E \*FILE not valid in DEV parameter for file &1.

### ENDRDR

CPF1317 E No response from subsystem for job &3/&2/&1.  
CPF1317 E No response from subsystem for job &3/&2/&1.  
CPF1352 E Function not done. &3/&2/&1 in transition condition.  
CPF3312 E Reader &1 neither active nor on job queue.  
CPF3330 E Necessary resource not available.

CPF3490 E Not authorized to specified reader.

### ENDSAM

PPR5351 E Sampled address monitor data collection not yet started.

### ENDSAMCOL

PPR5331 E Sampled address monitor not started.

### ENDSBS

CPF1001 E Wait time expired for system response.  
CPF1032 E System ending with \*CNTRLD option.  
CPF1033 E System ending with \*IMMED option.  
CPF1034 E All subsystems ending with \*CNTRLD option.  
CPF1035 E Subsystems ending with \*IMMED option.  
CPF1036 E System powering down with \*CNTRLD option.  
CPF1037 E System powering down with \*IMMED option.  
CPF1038 E No authority to use command.  
CPF1052 E ENDSBS \*ALL not allowed in current environment.  
CPF1053 E Ending controlling subsystem &1 not allowed.  
CPF1054 E No subsystem &1 active.  
CPF1055 E Subsystem &1 ending with \*CNTRLD option.  
CPF1056 E Subsystem &1 already ending with \*IMMED option.  
CPF1081 E Controlling subsystem already ending to a single job.  
CPF1091 E Function check occurred in system arbiter.

### ENDSYS

CPF1001 E Wait time expired for system response.  
CPF1017 E ENDSYS not allowed when console powered or varied off.  
CPF1032 E System ending with \*CNTRLD option.  
CPF1033 E System ending with \*IMMED option.  
CPF1034 E All subsystems ending with \*CNTRLD option.  
CPF1035 E Subsystems ending with \*IMMED option.  
CPF1036 E System powering down with \*CNTRLD option.  
CPF1037 E System powering down with \*IMMED option.  
CPF1038 E No authority to use command.  
CPF1051 E Command can only be run in controlling subsystem.  
CPF1082 E Controlling subsystem already ending to single job.  
CPF1091 E Function check occurred in system arbiter.

### ENDWTR

CPF1317 E No response from subsystem for job &3/&2/&1.  
CPF1340 E Job control function not performed.  
CPF1352 E Function not done. &3/&2/&1 in transition condition.  
CPF3313 E Writer &1 not active nor on job queue.  
CPF3330 E Necessary resource not available.  
CPF3331 E Not authorized to control writer &3/&2/&1.  
CPF3339 E Previous end request to writer &3/&2/&1 pending.  
CPF3438 E \*PAGEEND not valid for writer &3/&2/&1.

### FILDOf

CPF8A87 E Document name &2 not correct.  
CPF8A97 E Folder name &1 not correct.  
CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
CPF900C E Sign on and verify of user failed.  
CPF901B E Document filing request failed.  
CPF902B E Authority of \*AUTL is allowed only with USRAUT(\*PUBLIC).

CPF905C E Error occurred trying to find a translation table.

CPF9096 E Cannot use CMDCHRID(\*DEV D), DOCCHRID(\*DEV D) in batch job.

CPF9845 E Error occurred while opening file &1.

CPF9846 E Error while processing file &1 in library &2

CPF9847 E Error occurred while closing file &1 in library &2.

**FMTDTA**

FMT9001 E \*\*\* ABNORMAL END \*\*\* &1.

**GRTACCAUT**

CPF9009 E System requires file &1 in &2 be journaled.

CPF9013 E Access code authority given to &1 users, not granted to &2 users.

CPF9024 E System cannot get correct record to finish operation.

CPF9065 E Not allowed to give access code authority.

CPF9845 E Error occurred while opening file &1.

CPF9846 E Error while processing file &1 in library &2

CPF9847 E Error occurred while closing file &1 in library &2.

**GRTOBJAUT**

CPF0601 E Not allowed to do operation to file &1 in &2.

CPF0605 E Device file &1 in &2 saved with storage freed.

CPF0608 E Specified user profile not available.

CPF0610 E File &1 in &2 not available.

CPF2160 E Object type \*&1 not eligible for requested function.

CPF22A0 E Authority of \*AUTL is allowed only with USER(\*PUBLIC).

CPF22A1 E OBJTYPE(\*AUTL) not valid on this command.

CPF22A2 E Authority of \*AUTL not allowed for object type \*USRPRF.

CPF22A3 E AUTL parameter not allowed for object type \*USRPRF.

CPF22A9 E Authority of \*AUTL cannot be specified.

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.

CPF2208 E Object &1 in library &3 type \*&2 not found.

CPF2209 E Library &1 not found.

CPF2210 E Operation not allowed for object type \*&1.

CPF2211 E Not able to allocate object &1 in &3 type \*&2.

CPF2216 E Not authorized to use library &1.

CPF2223 E Not authorized to give authority to object &1 in &3 type \*&2.

CPF2227 E One or more errors occurred during processing of command.

CPF2235 E AUT input value not correct for object type \*&1.

CPF2236 E AUT input value not supported.

CPF2243 E Library name &1 not allowed with OBJ(generic name) or OBJ(\*ALL).

CPF2245 E Process profile not owner of object &1 in &3 type \*&2.

CPF2253 E No objects found for &1 in library &2.

CPF2254 E No libraries found for &1 request.

CPF2273 E Authority may not have been changed for object &1 in &3 type \*&2 for user &4.

CPF2283 E Authorization list &1 does not exist.

CPF2290 E \*EXCLUDE cannot be specified with another authority.

CPF3202 E File &1 in library &2 in use.

CPF3203 E Cannot allocate object for file &1 in &2.

CPF323C E QRECOVERY library could not be allocated.

CPF3245 E Damage to file &1 prevents operation on file &3.

CPF3252 E Maximum number of machine locks exceeded.

CPF9804 E Object &2 in library &3 damaged.

**GRTUSRAUT**

CPF2204 E User profile &1 not found.

CPF2211 E Not able to allocate object &1 in &3 type \*&2.

CPF2213 E Not able to allocate user profile &1.

CPF2217 E Not authorized to user profile &1.

CPF2222 E Storage limit is greater than specified for user profile &1.

CPF2223 E Not authorized to give authority to object &1 in &3 type \*&2.

CPF2252 E Authority given to &2 objects. Authority not given to &3 objects.

**GRTUSRPMN**

CPF9007 E User permission given for &1 users, not given &2 users.

CPF9009 E System requires file &1 in &2 be journaled.

CPF9847 E Error occurred while closing file &1 in library &2.

**HLDCMNDEV**

CPF5920 E Device &1 varied off or in diagnostic mode.

CPF5921 E Device &1 not a communications device.

CPF5922 E Device &1 already held with option \*IMMED.

CPF5935 E Error occurred during command processing.

CPF5984 E Not authorized to perform function.

CPF9814 E Device &1 not found.

CPF9825 E Not authorized to device &1.

**HLDDSTQ**

CPF8802 E Distribution queue &1 was not found.

**HLDJOB**

CPF1317 E No response from subsystem for job &3/&2/&1.

CPF1321 E Job &1 user &2 job number &3 not found.

CPF1332 E End of duplicate job names.

CPF1340 E Job control function not performed.

CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.

CPF1342 E Current job not allowed as job name on this command.

CPF1343 E Job &3/&2/&1 not valid job type for function.

CPF1344 E Not authorized to control job &3/&2/&1.

CPF1345 E Cannot hold job &3/&2/&1.

CPF1346 E Job &3/&2/&1 already held.

CPF1347 E Cannot hold job &3/&2/&1.

CPF1348 E Job &3/&2/&1 held but unable to hold its files.

CPF1350 E SPLFILE(\*NO) specified but job &3/&2/&1 on OUTQ.

CPF1351 E Function check occurred in subsystem for job &3/&2/&1.

CPF1352 E Function not done. &3/&2/&1 in transition condition.

**HLDJOBQ**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.

CPF3307 E Job queue &1 in &2 not found.

CPF3330 E Necessary resource not available.

CPF3425 E Job queue &1 in &2 already held.

**HLDOUTQ**

## HLDRDR • INZTAP

- CPF2207 E Not authorized to use object &1 in library &3 type \*&2.
- CPF3330 E Necessary resource not available.
- CPF3357 E Output queue &1 in library &2 not found.
- CPF3426 E Output queue &1 in library &2 already held.
- HLDRDR**
- CPF1317 E No response from subsystem for job &3/&2/&1.
- CPF1340 E Job control function not performed.
- CPF1345 E Cannot hold job &3/&2/&1.
- CPF1347 E Cannot hold job &3/&2/&1.
- CPF1350 E SPLFILE(\*NO) specified but job &3/&2/&1 on OUTQ.
- CPF1351 E Function check occurred in subsystem for job &3/&2/&1.
- CPF1352 E Function not done. &3/&2/&1 in transition condition.
- CPF3312 E Reader &1 neither active nor on job queue.
- CPF3330 E Necessary resource not available.
- CPF3333 E Reader &3/&2/&1 already held.
- CPF3490 E Not authorized to specified reader.
- HLDSPLF**
- CPF3303 E File &1 not found in job &5/&4/&3.
- CPF3309 E No files names &1 are active.
- CPF3330 E Necessary resource not available.
- CPF3337 E File &1 number &2 already held or saved.
- CPF3340 E More than one file with specified name found in job &5/&4/&3.
- CPF3342 E Job &5/&4/&3 not found.
- CPF3343 E Duplicate job names found.
- CPF3344 E File &1 number &2 no longer in the system.
- CPF34A4 E File &1 number &2 not held or deleted.
- CPF3492 E Not authorized to spooled file.
- HLDWTR**
- CPF1340 E Job control function not performed.
- CPF3313 E Writer &1 not active nor on job queue.
- CPF3330 E Necessary resource not available.
- CPF3331 E Not authorized to control writer &3/&2/&1.
- CPF3332 E Writer &3/&2/&1 already held.
- CPF3334 E Previous hold to writer &3/&2/&1 pending.
- CPF3438 E \*PAGEEND not valid for writer &3/&2/&1.
- IF**
- CPF0816 E %SWITCH mask &1 not valid.
- INZDKT**
- CPF6156 E Cancel reply received for message &6.
- CPF6716 E Device &1 not a diskette device.
- CPF6717 E Initialize diskette ended; previous errors occurred.
- CPF6718 E Cannot allocate device &1.
- CPF6757 E Owner identifier &1 contains wrong characters.
- CPF6758 E Volume identifier &1 contains wrong characters.
- CPF6779 E Format (FMT) specified for diskette in device &1 not valid.
- CPF9814 E Device &1 not found.
- CPF9825 E Not authorized to device &1.
- INZPCS**
- IWS16D0 E Initialize PC Support (INZPCS command) failed.
- IWS169F E PTF MRI merge processing failed.
- INZPFM**
- CPF3130 E Member &2 already in use.
- CPF3131 E Cannot initialize member &2 with default records.
- CPF3132 E TOTRCDS parameter value either missing or too small.
- CPF3133 E File &1 in library &3 contains no members.
- CPF3136 E File &1 in &3 not allowed on command.
- CPF3137 E No authority to clear, initialize, or copy member &2.
- CPF3140 E Initialize or copy of member &2 canceled.
- CPF3141 E Member &2 not found.
- CPF3142 E File &1 in library &3 not found.
- CPF3143 E Increments not allowed for member &2.
- CPF3144 E Member &2 not cleared or initialized.
- CPF3148 E New records need too much space for member &2.
- CPF3156 E File &1 in library &3 in use.
- CPF3159 E Member &2 saved with STG(\*FREE).
- CPF3160 E Operation on member &2 ended. Entry cannot be journaled.
- CPF3180 E Member &2 not initialized.
- CPF320B E Operation was not valid for database file &1.
- CPF6971 E Damage prevents object &1 from being journaled.
- CPF6972 E Cannot allocate access path for file &1 in &2.
- CPF6979 E Journal &1 in library &2 is unusable.
- CPF7002 E File &1 in library &2 not physical file.
- CPF7003 E Entry not journaled to journal &1. Reason code &3.
- CPF7004 E Maximum number of objects journaled to journal &1.
- CPF7008 E Cannot start or end access path journaling for file &1.
- CPF7009 E Not all based-on files being journaled to &3.
- CPF7011 E Not enough storage.
- CPF7030 E File or access paths for file &1 being journaled.
- CPF7031 E Cannot allocate member &3 file &1 in &2.
- CPF7033 E Start or end journaling failed for member &3.
- CPF7034 E Logical damage of file &1 in &2.
- CPF7035 E Object &1 in &2 already known to journal.
- CPF7079 E Access path journaling for file &1 not started.
- CPF7084 E Member &3 could not be journaled.
- CPF9801 E Object &2 in library &3 not found.
- CPF9802 E Not authorized to object &2.
- CPF9803 E Cannot assign object &2 in library &3.
- CPF9810 E Library &1 not found.
- CPF9812 E File &1 in library &2 not found.
- CPF9820 E Not authorized to use library &1.
- CPF9822 E Not authorized to file &1 in library &2.
- INZSYS**
- CPF372A E INZSYS or GO LICPGM currently running in another job.
- CPF90E2 E Error occurred for previous release file &1 in library &2.
- CPF90E3 E Error occurred for file &1 in library &2.
- CPF90E4 E System function in use. Reason code &1.
- INZTAP**
- CPF6702 E Error processing volume on device &1.
- CPF6708 E Command ended due to error.
- CPF6715 E Error at beginning of tape on device &1.
- CPF6718 E Cannot allocate device &1.
- CPF6720 E Incorrect volume &2 found on device &1.
- CPF6721 E Device &1 not a tape device.
- CPF6722 E End of tape found on device &1.

CPF6750 E NEWVOL(\*NONE) not valid for device &1.  
 CPF6751 E Load failure occurred on device &4.  
 CPF6754 E Active file &4 found on volume &2.  
 CPF6760 E Device &1 not ready.  
 CPF6768 E Volume on device &1 is write protected.  
 CPF6772 E Volume on device &1 cannot be processed.  
 CPF6774 E New volume &2 is a nonstandard labeled tape.  
 Volume not prepared.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.

**LNKDTADFN**

CPF2E9B E Definition &1 not found.  
 CPF2FE0 E Error occurred while opening dictionary &1.  
 CPF2FE1 E Error occurred while closing dictionary &1.  
 CPF2FE2 E Dictionary &1 currently in use.  
 CPF2FE3 E System cross reference file is in error.  
 CPF2FE4 E System cross reference file not available.  
 CPF2F02 E Not authorized to use dictionary &1.  
 CPF2F07 E Dictionary &1 in error.  
 CPF2F08 E Dictionary &1 not found.  
 CPF2F6A E File &2 in &3 not valid for LNKDTADFN.  
 CPF2F6C E All files were not unlinked.  
 CPF2F61 E File &2 in &3 currently in use.  
 CPF2F7B E File &2 not linked. Record lengths not equal.  
 CPF2F7C E Start key position &1 splits field &2.  
 CPF2F7D E End key position &1 splits field &2.  
 CPF2F7F E File &2 in &3 is already linked.  
 CPF2F76 E Only file definitions for physical files can be  
 linked.  
 CPF2F77 E File not keyed. Cannot link to keyed file defi-  
 nition.  
 CPF2F78 E Definition &1 in error.  
 CPF2F79 E Key fields do not match.  
 CPF2F80 E File &2 in &3 is not linked.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library  
 &2.

**LODPTF**

CPF35AA E Licensed internal code PTF &1 already applied.  
 CPF35AB E Licensed internal code PTF &1 cannot be  
 applied.  
 CPF35A1 E Wrong copy of licensed internal code in use.  
 CPF35A2 E Required hardware changes not installed for  
 PTF &1.  
 CPF35A3 E Prerequisite program temporary fixes (PTFs)  
 not temporarily applied for PTF &1.  
 CPF35A5 E Prerequisite licensed internal code PTFs for  
 PTF &1 not permanently applied.  
 CPF35A6 E Language option &1 not installed for licensed  
 program.  
 CPF35A7 E Language sensitive PTF &1 can not be loaded.  
 CPF35A8 E No program temporary fixes (PTFs) to be  
 loaded.  
 CPF35A9 E Error occurred while processing licensed  
 internal code PTFs.  
 CPF35C1 E LODPTF ended. No more storage available.  
 CPF3558 E Cannot allocate &1 in &3 type \*&2.  
 CPF3559 E Required licensed internal code PTFs not  
 loaded.

CPF3564 E PTF &1-&2 damaged.  
 CPF3583 E PTF not applied because error occurred.  
 CPF3586 E List of PTFs not correct.  
 CPF3587 E PTF requirements not loaded or met.  
 CPF3590 E PTF &1 not loaded.  
 CPF3598 E PTF function already in process.  
 CPF3612 E Library &1 not found.  
 CPF3614 E Data area &1 not found.  
 CPF3616 E No PTFs loaded.  
 CPF3619 E PTFs for release &1, but release &2 is  
 installed.  
 CPF3657 E PTFs not loaded because error occurred.  
 CPF3677 E Not authorized to library &1.  
 CPF37A1 E Licensed program &1 option &4 not installed.  
 CPF37A2 E Licensed program &1 not valid.  
 CPF37A3 E Data area &2 in &3 not available.  
 CPF3924 E PTF not loaded.  
 CPF3931 E Required programs not found. PTF incomplete.  
 CPF3945 E Records of PTF activity for licensed program  
 are deleted.  
 CPF3956 E Error occurred during PTF processing.

**MOVOBJ**

CPF0601 E Not allowed to do operation to file &1 in &2.  
 CPF0602 E File &1 already in library &2.  
 CPF0605 E Device file &1 in &2 saved with storage freed.  
 CPF0610 E File &1 in &2 not available.  
 CPF0678 E Operation not performed for file name &1 in  
 &2.  
 CPF1763 E Cannot allocate one or more libraries.  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2112 E Object &1 in &2 type \*&3 already exists.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2135 E Object &1 type \*&3 already exists in library.  
 CPF2150 E Object information function failed.  
 CPF2151 E Operation failed for &2 in &1 type \*&3.  
 CPF2152 E Objects of type \*&1 cannot be created into  
 QTEMP.  
 CPF2160 E Object type \*&1 not eligible for requested func-  
 tion.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF22BC E Object &1 type &3 is not program defined.  
 CPF2512 E Operation not allowed for message queue &1.  
 CPF320B E Operation was not valid for database file &1.  
 CPF320C E File &1 not allowed in SQL collection &2.  
 CPF3201 E File &1 in library &2 already exists.  
 CPF3202 E File &1 in library &2 in use.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF322D E Operation not done for data base file &1.  
 CPF3220 E Cannot do operation on file &1 in, &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF323D E User does not have correct authority.  
 CPF3231 E Cannot move file &1 from library &2.  
 CPF324B E Cannot allocate dictionary for file &1.  
 CPF324C E Concurrent authority holder operation prevents  
 move, rename or restore.  
 CPF3245 E Damage to file &1 prevents operation on file  
 &3.  
 CPF3323 E Job queue &1 in &2 already exists.  
 CPF3330 E Necessary resource not available.  
 CPF3353 E Output queue &1 in &2 already exists.

**MRGDOC • PRTDEVADR**

CPF3373 E Job queue &1 in &2 not moved. Job queue in use.  
 CPF3374 E Output queue &1 in &2 not moved. Output queue in use.  
 CPF3469 E Operation not allowed for output queue.  
 CPF7010 E Object &1 in &2 type \*&3 already exists.  
 CPF7014 E Object &1 cannot be moved to library &4.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.

**MRGDOC**

CPF9012 E Start of document interchange session not successful for &1.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 OFCFFFC E User storage capacity exceeded.  
 OFCFFFD E A damaged object was found.  
 OFC800A E Folder is in use.  
 OFC800B E Document &1 is in use.  
 OFC800E E &1 already exists as document or folder.  
 OFC8006 E Folder was not found.  
 OFC8007 E Document &1 not found in folder.  
 OFC8008 E Request not allowed with folder.  
 OFC8009 E Request not allowed with document &1.  
 OFC801A E Document has been saved on diskette or tape.  
 OFC8010 E Document &1 cannot be processed.  
 OFC8011 E Document &1 needs to be recovered.  
 OFC8016 E Document &1 is checked out.  
 OFC8017 E Folder directory is full.  
 OFC8018 E Document &1 is empty.  
 OFC8019 E Required module not on system.  
 OFC903A E Document &1 is final form.  
 OFC947E E Fill-in document &1 could not be opened.  
 OFC9801 E Document &1 could not be opened.  
 OFC9802 E Folder could not be opened.  
 OFC9811 E Folder needs to be reclaimed.

**MGRFORMD**

APF5101 E Not able to open printer file &1.  
 APF5102 E Error occurred accessing spooled file.  
 APF5104 E Form description not available.  
 APF5105 E Form description not valid.  
 APF5106 E Not authorized to perform requested function.  
 APF5107 E Error occurred on device &3.  
 APF5121 E File &1 in &2 not correct for APF Utility.  
 APF9901 E Error in APF utility.  
 APF9910 E Not able to complete display file I/O operation.  
 APF9911 E Not able to complete data base file I/O operation.  
 APF9912 E Not able to open advanced printer function file.

**MRGMSGF**

CPF2401 E Not authorized to library &1.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2461 E Message file &1 could not be extended.  
 CPF2483 E Message file currently in use.  
 CPF2510 E Message file &1 in &2 logically damaged.  
 CPF2561 E &1 messages merged; &2 messages not merged.  
 CPF2562 E Cannot merge the same message file.  
 CPF9830 E Cannot assign library &1.

**OPNDBF**

CPF4125 E Open of member &3 file &1 in &2 failed.  
 CPF4152 E Error opening member \*ALL file &2 in &3.  
 CPF4174 E OPNID(&4) for file &1 already exists.  
 CPF4175 E Output only and MBR(\*ALL) cannot be used together.  
 CPF4176 E File &1 in &2 not a data base file.  
 CPF5168 E Cannot open member &3 file &1 in &2.

**OPNQRYF**

CPF0BFF E Error occurred during SRM data base processing.  
 CPF4174 E OPNID(&4) for file &1 already exists.  
 CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9815 E Member &5 file &2 in library &3 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9826 E Cannot allocate file &2.  
 CPF9830 E Cannot assign library &1.  
 CPF9899 E Error occurred during processing of command.

**POSDBF**

CPF5213 E Positioning of member &3 failed.  
 CPF5230 E No file open with OPNID(&4).

**PRTACTRPT**

PFR7017 E Cannot print activity report.

**PRTAFPDTA**

PQT4001 E Data stream not valid in record &2 in file &1.  
 PQT4003 E Form definition &2 not found in library.  
 PQT4004 E Starting page number &1 greater than ending page number &2.

**PRTCMDUSG**

CPF0593 E PRTCMDUSG command ended by controlled end.  
 CPF0595 E PRTCMDUSG command ended.  
 CPF0596 E PRTCMDUSG command ended. Cannot open print file.

**PRTCPTRPT**

PFR3002 E Cannot print report because of missing data.  
 PFR3004 E Incorrect measurement interval specified.  
 PFR3006 E Measurement interval specified is not valid.  
 PFR3111 E Functional area &1 does not exist.  
 PFR5501 E Performance data files are not upward compatible.  
 PFR5502 E Performance data files are not downward compatible.

**PRTCSPAPP**

CAE9046 E Program &1 in library &2 not a CSP/AE program.  
 CAE9102 E Errors occurred. &1 of &2 objects created.  
 CAE9998 E Command &1 failed.

**PRTDEVADR**



CPF263B E Controller &1 not a local work station controller.

**PRTDOC**

CPF6C01 E Error occurred during datastream transformation.

CPF9012 E Start of document interchange session not successful for &1.

CPF9801 E Object &2 in library &3 not found.

CPF9810 E Library &1 not found.

CPF9820 E Not authorized to use library &1.

OFCFFFC E User storage capacity exceeded.

OFCFFFD E A damaged object was found.

OFC8E01 E Printer ID selected is not correct.

OFC8E1C E Cannot delay output when spooling is not active.

OFC8E1D E Printer for large print is not correct.

OFC8E2A E Output file member is in use.

OFC8E2B E Not authorized to output disk file or library.

OFC8E2C E Output disk file member could not be opened.

OFC8E30 E Incorrect character set ID specified.

OFC8E38 E Member is not a document output file member.

OFC8E4D E Output file name &9 is incorrect.

OFC8E50 E Job has been canceled because of error.

OFC8E6B E Not authorized to output disk file member.

OFC8E6D E Could not access the output disk file member.

OFC800A E Folder is in use.

OFC800B E Document &1 is in use.

OFC800E E &1 already exists as document or folder.

OFC800F E Display does not support text.

OFC8006 E Folder was not found.

OFC8007 E Document &1 not found in folder.

OFC8008 E Request not allowed with folder.

OFC8009 E Request not allowed with document &1.

OFC801A E Document has been saved on diskette or tape.

OFC8010 E Document &1 cannot be processed.

OFC8011 E Document &1 needs to be recovered.

OFC8016 E Document &1 is checked out.

OFC8018 E Document &1 is empty.

OFC802C E Label option specified with a non-label document.

OFC8029 E Cannot save resolved output when printing a resolved document

OFC820D E Library &4 was not found.

OFC820F E Member &3 is in use.

OFC947E E Fill-in document &1 could not be opened.

OFC948E E Printer file or printer file library was not found.

OFC980B E &9 documents printed, &10 documents not processed.

OFC980C E Error printing document &1 to a file.

OFC980D E Error converting document &1.

OFC980E E Error converting document &1.

OFC980F E Could not delete document &1 from folder.

OFC9801 E Document &1 could not be opened.

OFC9802 E Folder could not be opened.

OFC9806 E No documents were selected for printing.

OFC9808 E Document &1 does not have selected status.

OFC9809 E Error log incorrect with document descriptions only.

OFC9810 E Could not update status for document &1.

OFC9811 E Folder needs to be reclaimed.

**PRTDSKRPT**

PFR5651 E Cannot access main storage management trace data.

**PRTERLOG**

CPD36CA E OUTPUT(\*OUTFILE) cannot be specified with DEV(\*ALL).

CPD36C2 E DEV and RSRNAME cannot be used together.

CPD36C3 E PRTFMT parameter not valid with TYPE(\*VOLSTAT).

CPD36C4 E OUTFILE not valid with PRTFMT parameter.

CPD36C5 E RSRNAME parameter can only be used with TYPE(\*DEV) parameter.

CPD36C7 E ERRLOGID valid only with TYPE(\*ERRLOGID).

CPD36C8 E VOLTYPE, VOL, MODEL and VOLSTAT must be specified with TYPE(\*VOLSTAT).

CPF3535 E Error log not available for printing.

CPF3541 E No error log entries were found.

CPF3593 E PERIOD parameter start time exceeds end time.

CPF3693 E Service function ended because error occurred.

CPI36CA E Resource name &1 not found.

CPI36CC E No error log entries were found for &1 &2.

**PRTINTDTA**

CPF3519 E Cannot start service function.

**PRTJOB RPT**

PFR3002 E Cannot print report because of missing data.

PFR3004 E Incorrect measurement interval specified.

PFR3006 E Measurement interval specified is not valid.

PFR3101 E The SLTJOB and OMTJOB parameters are mutually exclusive.

PFR3102 E SLTUSRID and OMTUSRID parameters cannot both be specified.

PFR3103 E SLTPOOLS and OMTPOOLS parameters cannot both be specified.

PFR3104 E SLTSBS and OMTSBS parameters cannot both be specified.

PFR3105 E SLTLINE and OMTLINE parameters cannot both be specified.

PFR3106 E SLTCTL and OMTCTL parameters cannot both be specified.

PFR3107 E SLTFCNARA and OMTFCNARA parameters cannot both be specified.

PFR3108 E SLTLOC and OMTLOC parameters cannot both be specified.

PFR3111 E Functional area &1 does not exist.

PFR5501 E Performance data files are not upward compatible.

PFR5502 E Performance data files are not downward compatible.

**PRTLCKRPT**

PFR5511 E Cannot access resource management trace data.

PFR5512 E Cannot access processed seize or lock conflict data.

**PRTPOLRPT**

PFR3002 E Cannot print report because of missing data.

PFR3004 E Incorrect measurement interval specified.

PFR3006 E Measurement interval specified is not valid.

PFR3101 E The SLTJOB and OMTJOB parameters are mutually exclusive.

PFR3102 E SLTUSRID and OMTUSRID parameters cannot both be specified.

## PRTRSCRIPT • RCLSTG

PFR3103 E SLTPOOLS and OMTPOOLS parameters cannot both be specified.  
PFR3104 E SLTSBS and OMTSBS parameters cannot both be specified.  
PFR3105 E SLTLINE and OMTLINE parameters cannot both be specified.  
PFR3106 E SLTCTL and OMTCTL parameters cannot both be specified.  
PFR3107 E SLTFCNARA and OMTFCNARA parameters cannot both be specified.  
PFR3108 E SLTLOC and OMTLOC parameters cannot both be specified.  
PFR3111 E Functional area &1 does not exist.  
PFR5501 E Performance data files are not upward compatible.  
PFR5502 E Performance data files are not downward compatible.

### PRTRSCRIPT

PFR3002 E Cannot print report because of missing data.  
PFR3004 E Incorrect measurement interval specified.  
PFR3006 E Measurement interval specified is not valid.  
PFR3101 E The SLTJOB and OMTJOB parameters are mutually exclusive.  
PFR3102 E SLTUSRID and OMTUSRID parameters cannot both be specified.  
PFR3103 E SLTPOOLS and OMTPOOLS parameters cannot both be specified.  
PFR3104 E SLTSBS and OMTSBS parameters cannot both be specified.  
PFR3105 E SLTLINE and OMTLINE parameters cannot both be specified.  
PFR3106 E SLTCTL and OMTCTL parameters cannot both be specified.  
PFR3107 E SLTFCNARA and OMTFCNARA parameters cannot both be specified.  
PFR3108 E SLTLOC and OMTLOC parameters cannot both be specified.  
PFR3111 E Functional area &1 does not exist.  
PFR5501 E Performance data files are not upward compatible.  
PFR5502 E Performance data files are not downward compatible.

### PRTSYSRPT

PFR3002 E Cannot print report because of missing data.  
PFR3004 E Incorrect measurement interval specified.  
PFR3006 E Measurement interval specified is not valid.  
PFR3111 E Functional area &1 does not exist.  
PFR5501 E Performance data files are not upward compatible.  
PFR5502 E Performance data files are not downward compatible.

### PRTNSRPT

PFR3002 E Cannot print report because of missing data.  
PFR3111 E Functional area &1 does not exist.  
PFR5501 E Performance data files are not upward compatible.  
PFR5502 E Performance data files are not downward compatible.

### PRTRCRPT

PFR5515 E Cannot access trace data.

### PWRDWN SYS

CPF1001 E Wait time expired for system response.

CPF1036 E System powering down with \*CNTRLD option.  
CPF1037 E System powering down with \*IMMED option.  
CPF1038 E No authority to use command.  
CPF1091 E Function check occurred in system arbiter.

### QRYDOCLIB

CPF8A80 E Document &2 in use in folder &1.  
CPF8A97 E Folder name &1 not correct.  
CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
CPF900C E Sign on and verify of user failed.  
CPF903E E Incorrect comparison value was specified.  
CPF903F E A relational operator other than \*EQ was specified.  
CPF905C E Error occurred trying to find a translation table.  
CPF905D E Query of document library failed.  
CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9860 E Error occurred during output file processing.

### QRYDST

CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
CPF900C E Sign on and verify of user failed.  
CPF905C E Error occurred trying to find a translation table.  
CPF907C E &1 requested distributions completed, acknowledge failed.  
CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
CPF9097 E Query distribution request failed.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9860 E Error occurred during output file processing.

### RCLDLO

CPF8A29 E &2 of type &4 in folder &1 not reclaimed or partially reclaimed.  
CPF903A E Office activity not stopped, requested operation cannot be done

### RCLSTG

CPF2119 E Library &1 locked.  
CPF2120 E Cannot delete library &1.  
CPF2126 E Attempt to create library &1 failed.  
CPF2127 E Security officer user profile damaged.  
CPF2129 E Attempt to convert library &1 failed.  
CPF8201 E IBM-supplied user profile &1 does not exist or is damaged.  
CPF8204 E Commitment control cannot be active during reclaim storage.  
CPF8205 E Library &1 does not exist or is damaged.  
CPF8209 E System not in proper state to reclaim storage.  
CPF8211 E RCLSTG command ended. Library &1 damaged.  
CPF8224 E Duplicate object found while moving or renaming member.  
CPF8251 E RCLSTG command ended. Library &1 damaged.

CPF8252 E Error occurred during rebuild of damaged library &1.  
 CPI8206 S Objects owned by user profile &1 being processed.  
 CPI8210 S Processing data base relationships.  
 CPI8212 S Data base/library recovery in progress.  
 CPI8213 S Search started for objects without owner.  
 CPI8214 S All permanent objects have valid owners.  
 CPI8215 S Object description verification in progress.  
 CPI8216 S Final clean up in progress.

**RCDVST**

CPF8A87 E Document name &2 not correct.  
 CPF8A97 E Folder name &1 not correct.  
 CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
 CPF900C E Sign on and verify of user failed.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9096 E Cannot use CMDCHRID(\*DEV), DOCCHRID(\*DEV) in batch job.  
 CPF9098 E Distribution not received.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9860 E Error occurred during output file processing.

**RCVF**

CPF0859 E File override caused I/O buffer size to be exceeded.  
 CPF0860 E File &1 in &2 not a data base file.  
 CPF0861 E File &1 in library &2 is not a display file.  
 CPF0863 E Value of binary data too large for decimal CL variable.  
 CPF0864 E End of file detected for file &1 in &2.  
 CPF0865 E File &1 has more than one record format.  
 CPF0883 E \*FILE not valid in DEV parameter for file &1.  
 CPF0886 E Character data not valid. Specify decimal data.  
 CPF5068 E Program device &4 not found in file &2 in library &3.  
 CPF5070 E File &2 in library &3 has no program devices acquired.

**RCVJRNE**

CPF7002 E File &1 in library &2 not physical file.  
 CPF7006 E Member &3 not found in file &1 in &2.  
 CPF7007 E Cannot allocate member &3 file &1 in &2.  
 CPF7053 E Error on RCVRNG specifications, reason code &1.  
 CPF7054 E FROM and TO values not valid.  
 CPF7055 E Maximum number of members exceeded.  
 CPF7057 E \*LIBL not allowed with FILE(\*ALL).  
 CPF7060 E File &1 never journaled to journal &3.  
 CPF7061 E Conversion of journal entries failed.  
 CPF7062 E No entries converted or received from journal &1.  
 CPF7065 E Entry type (ENTTYP) not valid for journal code (JRNCDE).  
 CPF7074 E RCVRNG for specified SEARCH not valid.  
 CPF7096 E Ending receiver for RCVRNG must identify an attached receiver.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9806 E Cannot allocate object &2 in library &3.

CPF9809 E Library &1 cannot be accessed.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9860 E Error occurred during output file processing.

**RCVMSG**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2410 E Message key not found in message queue &1.  
 CPF2415 E End of requests.  
 CPF2419 E Message ID &1 not found in message file &2 in &3.  
 CPF2423 E Variable specified in SENDER parameter less than 80 bytes.  
 CPF2433 E Function not allowed for system log message queue &1.  
 CPF2450 E Work station message queue &1 not allocated to job.  
 CPF2451 E Message queue &1 not allocated to job.  
 CPF2458 E Message CPF2457 not found in message file QCPFMSG.  
 CPF2471 E Length of field not valid.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2479 E Program message queue &1 not found.  
 CPF2482 E Message type &1 not valid.  
 CPF2547 E Damage to message file QCPFMSG.  
 CPF2548 E Damage to message file &1 in &2.  
 CPF2551 E Invalid MRK and MSGTYPE combination.

**RCVNETF**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF4101 E File &2 in library &3 not found or in-line data file missing.  
 CPF4243 E File type does not match.  
 CPF5715 E File &1 in library &2 not found.  
 CPF8059 E Member name not allowed for save file.  
 CPF8062 E Record length of network file larger than receiving file.  
 CPF8063 E Cannot assign necessary resource.  
 CPF8070 E Not allowed to process files for user &1.  
 CPF8074 E Receiving file (TOFILE) not a save file.  
 CPF8075 E Receiving file (TOFILE) not a physical file.  
 CPF8077 E More than one file with same name found. See previously displayed messages.  
 CPF8080 E MBROPT(\*ADD) not allowed for save file.  
 CPF8081 E File &5 member &6 number &7 already processed.  
 CPF8082 E Cannot get network file &5 member &6 number &7.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.

**RETURN • RLSSPLF**

CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9830 E Cannot assign library &1.  
 CPF9843 E Object &1 in library &3 type &2 cannot be accessed.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**RETURN**

CPF2415 E End of requests.

**RGZPFM**

CPF2981 E Member &3 file &1 in &2 not reorganized.  
 CPF2985 N Source sequence numbers exceeded maximum value allowed. (G C)  
 CPF3130 E Member &2 already in use.  
 CPF3135 E Access path for member &2 already in use.  
 CPF3148 E New records need too much space for member &2.  
 CPF3160 E Operation on member &2 ended. Entry cannot be journaled.  
 CPF320B E Operation was not valid for database file &1.  
 CPF7002 E File &1 in library &2 not physical file.  
 CPF7003 E Entry not journaled to journal &1. Reason code &3.  
 CPF7006 E Member &3 not found in file &1 in &2.  
 CPF7007 E Cannot allocate member &3 file &1 in &2.  
 CPF7041 E Entry for job &3/&2/&1 not found.  
 CPF7042 E File not journaled or journaled to different journal.  
 CPF7045 E Journal receiver &1 in &2 partially damaged.  
 CPF7046 E Duplicate key not allowed for member &3.  
 CPF7047 E Member &3 file &1 in &2 full.  
 CPF7048 E Cannot perform journaled change to member &3.  
 CPF7050 E LASTSAVE date not same as restored version of member &3.  
 CPF7051 E Save entry for member &3 not found in RCVRNG.  
 CPF7052 E Select/omit failure in logical file over member &3.  
 CPF7053 E Error on RCVRNG specifications, reason code &1.  
 CPF7054 E FROM and TO values not valid.  
 CPF7055 E Maximum number of members exceeded.  
 CPF7056 E File &1 not being journaled with before images.  
 CPF7057 E \*LIBL not allowed with FILE(\*ALL).  
 CPF7058 E Apply or remove journaled entries operation failed.  
 CPF7059 E Entry for &1 not found in RCVRNG.  
 CPF7067 E FROMENT option not valid. Commit boundary violation.  
 CPF7068 E Entry needed for apply or remove operation not found.  
 CPF7069 E No entries applied or removed using journal &1.  
 CPF7075 E Restore date of member &3 not same as in journal.  
 CPF7076 E Restore entry for member &3 not found in RCVRNG.  
 CPF7077 E Key mapping error on member &3.

CPF7078 E Cannot apply or remove changes to member &3.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9809 E Library &1 cannot be accessed.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.

**RLSCMNDEV**

CPF5920 E Device &1 varied off or in diagnostic mode.  
 CPF5921 E Device &1 not a communications device.  
 CPF5935 E Error occurred during command processing.  
 CPF5984 E Not authorized to perform function.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.

**RLSDSTQ**

CPF8802 E Distribution queue &1 was not found.

**RLSJOB**

CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1321 E Job &1 user &2 job number &3 not found.  
 CPF1332 E End of duplicate job names.  
 CPF1340 E Job control function not performed.  
 CPF1341 E Reader or writer &3/&2/&1 not allowed as job name.  
 CPF1343 E Job &3/&2/&1 not valid job type for function.  
 CPF1344 E Not authorized to control job &3/&2/&1.  
 CPF1349 E Job &3/&2/&1 not released, the job is not held.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.

**RLSJOBQ**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3307 E Job queue &1 in &2 not found.  
 CPF3330 E Necessary resource not available.  
 CPF3423 E Job queue &1 in library &2 not released. Job queue not held.

**RLSOUTQ**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3330 E Necessary resource not available.  
 CPF3357 E Output queue &1 in library &2 not found.  
 CPF3424 E Output queue &1 in library &2 not released. Output queue not held.

**RLSRDR**

CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1340 E Job control function not performed.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.  
 CPF3312 E Reader &1 neither active nor on job queue.  
 CPF3315 E Reader &3/&2/&1 not released. Reader not held.  
 CPF3330 E Necessary resource not available.  
 CPF3490 E Not authorized to specified reader.

**RLSSPLF**

CPF3303 E File &1 not found in job &5/&4/&3.

CPF3304 E File &1 number &2 cannot be released.  
 CPF3309 E No files names &1 are active.  
 CPF3322 E File &1 number &2 not released.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3344 E File &1 number &2 no longer in the system.  
 CPF3492 E Not authorized to spooled file.

**RLSWTR**

CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1340 E Job control function not performed.  
 CPF1352 E Function not done. &3/&2/&1 in transition condition.  
 CPF3313 E Writer &1 not active nor on job queue.  
 CPF3314 E PAGE parameter allowed only for print writers.  
 CPF3316 E Writer &3/&2/&1 not released because writer not held.  
 CPF3317 E OPTION parameter value not allowed for diskette writer.  
 CPF3330 E Necessary resource not available.  
 CPF3331 E Not authorized to control writer &3/&2/&1.  
 CPF3334 E Previous hold to writer &3/&2/&1 pending.

**RMVACC**

CPF90A5 E Access codes could not be removed.  
 CPF9009 E System requires file &1 in &2 be journaled.  
 CPF9011 E &1 access codes removed, &2 not removed.  
 CPF9024 E System cannot get correct record to finish operation.  
 CPF9847 E Error occurred while closing file &1 in library &2.

**RMVAJE**

CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**RMVALRD**

CPF1A04 E Alert code &1 not found in alert table &2.  
 CPF1A05 E Alert table &1 in &2 damaged.  
 CPF2499 E Message ID &1 not allowed.  
 CPF7BB1 E Alert description not found.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9814 E Device &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.  
 CPF9830 E Cannot assign library &1.  
 CPF9831 E Cannot assign device &1.  
 CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**RMVAUTLE**

CPF2253 E No objects found for &1 in library &2.

CPF2281 E The users specified do not exist on the system.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF2284 E Not authorized to change authorization list &1.  
 CPF2285 E &1 errors removing users, &2 authorization lists processed.  
 CPF2288 E \*PUBLIC cannot be removed from an authorization list.  
 CPF2289 E Unable to allocate authorization list &1.

**RMVBKP**

CPF1999 E Errors occurred on command.

**RMVCFGLE**

CPF260F E Configuration list &1 not found.  
 CPF261C E Index for configuration list &1 not changed.  
 CPF261D E Index for configuration list &1 not changed.  
 CPF2625 E Not able to allocate object &1.  
 CPF263A E CFGLE type &1 does not match existing type &2.  
 CPF2634 E Not authorized to object &1.  
 CPF2663 E Configuration list &1 previously deleted.  
 CPF2666 E Cannot remove all entries from configuration list &1.

**RMVCMNE**

CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**RMVDIRE**

CPF8360 E Not enough storage to perform commit operation.  
 CPF90A8 E \*SECADM special authority required to do requested operation.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
 CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**RMVDLOAUT**

CPF8A77 E Folder &1 not found.  
 CPF8A78 E Folder &1 in use.  
 CPF8A79 E Folder &1 is logically damaged.  
 CPF8A80 E Document &2 in use in folder &1.  
 CPF8A82 E Document &2 not found in folder &1.  
 CPF8A88 E Operation is not allowed on document &2 in folder &1.  
 CPF8A89 E Document &2 in folder &1 is logically damaged.  
 CPF90BA E Authority request for document library object failed.  
 CPF9073 E No authority to view or change the security of document library object &1.  
 CPF908A E Requester &1 not enrolled.  
 CPF908B E Document library object not found.  
 CPF908E E &1 objects changed; &2 objects not changed.  
 CPF909A E Document &2 in folder &1 is damaged.  
 CPF9095 E Folder &1 is damaged.

**RMVDSTLE**

CPF8360 E Not enough storage to perform commit operation.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.

**RMVFCTE • RMVPTF**

CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**RMVFCTE**

RJE0024 E Errors found. Processing of request ended.  
RJE0028 E Device type &2 for form type &1 does not exist in &3.

**RMVICFDEVE**

CPF7366 E Devices not removed from file &1 in &2.

**RMVJOBQE**

CPF1619 E Subsystem description &1 in library &2 damaged.  
CPF1697 E Subsystem description &1 not changed.

**RMVJRNCHG**

CPF7002 E File &1 in library &2 not physical file.  
CPF7003 E Entry not journaled to journal &1. Reason code &3.

CPF7006 E Member &3 not found in file &1 in &2.  
CPF7007 E Cannot allocate member &3 file &1 in &2.  
CPF7041 E Entry for job &3/&2/&1 not found.

CPF7042 E File not journaled or journaled to different journal.

CPF7044 E Apply or remove of journaled entries failed, reason code &7.

CPF7045 E Journal receiver &1 in &2 partially damaged.

CPF7046 E Duplicate key not allowed for member &3.

CPF7048 E Cannot perform journaled change to member &3.

CPF7049 E Cannot perform operation beyond journal entry &6.

CPF7052 E Select/omit failure in logical file over member &3.

CPF7053 E Error on RCVRNG specifications, reason code &1.

CPF7054 E FROM and TO values not valid.

CPF7055 E Maximum number of members exceeded.

CPF7056 E File &1 not being journaled with before images.

CPF7057 E \*LIBL not allowed with FILE(\*ALL).

CPF7058 E Apply or remove journaled entries operation failed.

CPF7067 E FROMENT option not valid. Commit boundary violation.

CPF7068 E Entry needed for apply or remove operation not found.

CPF7069 E No entries applied or removed using journal &1.

CPF7077 E Key mapping error on member &3.

CPF7078 E Cannot apply or remove changes to member &3.

CPF9801 E Object &2 in library &3 not found.

CPF9802 E Not authorized to object &2.

CPF9803 E Cannot assign object &2 in library &3.

CPF9809 E Library &1 cannot be accessed.

CPF9810 E Library &1 not found.

CPF9812 E File &1 in library &2 not found.

CPF9820 E Not authorized to use library &1.

CPF9822 E Not authorized to file &1 in library &2.

**RMVLIBLE**

CPF2103 E Library &1 already exists in library list.

CPF2104 E Library &1 not removed from the library list.

CPF2106 E Library list not changed.

CPF2110 E Library &1 not found.

CPF2113 E Cannot allocate library &1.

CPF2118 E Library &1 not added.

CPF2176 E Library &1 damaged.

CPF2182 E Not authorized to library &1.

CPF9807 E One or more libraries in library list deleted.

**RMVM**

CPF320A E Member &3 cannot be removed.

CPF320B E Operation was not valid for database file &1.

CPF3203 E Cannot allocate object for file &1 in &2.

CPF3220 E Cannot do operation on file &1 in &2.

CPF3273 E File or member not created, deleted or changed.

CPF7301 E &5 members not removed from file &2 in &3.

CPF7310 E Member &1 not removed from file &2 in &3.

**RMVMSG**

CPF2401 E Not authorized to library &1.

CPF2403 E Message queue &1 in &2 not found.

CPF2408 E Not authorized to message queue &1.

CPF2410 E Message key not found in message queue &1.

CPF2433 E Function not allowed for system log message queue &1.

CPF2450 E Work station message queue &1 not allocated to job.

CPF2477 E Message queue &1 currently in use.

CPF2479 E Program message queue &1 not found.

CPF8127 E &8 damage on message queue &4 in &9. VLOG-&7.

**RMVMSGD**

CPF2401 E Not authorized to library &1.

CPF2407 E Message file &1 in &2 not found.

CPF2411 E Not authorized to message file &1 in &2.

CPF2419 E Message ID &1 not found in message file &2 in &3.

CPF2483 E Message file currently in use.

CPF2499 E Message ID &1 not allowed.

CPF9830 E Cannot assign library &1.

**RMVNETJOB**

CPF8050 E Network job table could not be accessed.

CPF8051 E \*ANY not correct for second part of user ID.

CPF8054 E Network job entry &1 &2 not removed.

CPF9040 E Wrong characters used in User ID or address, or List identifier &1 &2.

CPF9845 E Error occurred while opening file &1.

CPF9846 E Error while processing file &1 in library &2

CPF9847 E Error occurred while closing file &1 in library &2.

**RMVPGM**

CPF1999 E Errors occurred on command.

**RMVPJE**

CPF1619 E Subsystem description &1 in library &2 damaged.

CPF1697 E Subsystem description &1 not changed.

**RMVPTF**

CPF35A1 E Wrong copy of licensed internal code in use.

CPF35A4 E Licensed internal code program temporary fix (PTF) &1 cannot be removed.

CPF35A9 E Error occurred while processing licensed internal code PTFs.

CPF3558 E Cannot allocate &1 in &3 type \*&2.

CPF3564 E PTF &1-&2 damaged.

CPF3596 E PTF numbers in select/omit list not permitted.

CPF3598 E PTF function already in process.

CPF3604 E PTF not removed because an error occurred.  
 CPF3612 E Library &1 not found.  
 CPF3614 E Data area &1 not found.  
 CPF3641 E No immediate PTFs removed.  
 CPF3658 E No program temporary fixes identified.  
 CPF3660 E No program temporary fixes identified.  
 CPF3677 E Not authorized to library &1.  
 CPF3693 E Service function ended because error occurred.  
 CPF3931 E Required programs not found. PTF incomplete.  
 CPF3945 E Records of PTF activity for licensed program are deleted.  
 CPF3956 E Error occurred during PTF processing.

**RMVRJECMNE**  
 RJE0111 E &1 does not exist in session description &3.

**RMVRJERDRE**  
 RJE0017 E &1 was not found in session description &2.

**RMVRJEWTRE**  
 RJE0017 E &1 was not found in session description &2.

**RMVRPYLE**  
 CPF2435 E System reply list not found.  
 CPF2556 E Sequence number &1 not defined in system reply list.  
 CPF2557 E System reply list damaged.  
 CPF2558 E System reply list currently in use.

**RMVRTGE**  
 CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**RMVTRC**  
 CPF1999 E Errors occurred on command.

**RMVWSE**  
 CPF1619 E Subsystem description &1 in library &2 damaged.  
 CPF1697 E Subsystem description &1 not changed.

**RNMDKT**  
 CPF6153 E NEWOWNID parameter value not correct.  
 CPF6154 E NEWVOL parameter value not correct.  
 CPF6156 E Cancel reply received for message &6.  
 CPF6160 E Rename diskette ended; previous errors occurred.  
 CPF6716 E Device &1 not a diskette device.  
 CPF6718 E Cannot allocate device &1.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.

**RNMDLO**  
 CPF8A14 E &2 of type &4 not renamed to &3 in folder &1.

**RNMM**  
 CPF3178 E Member &3 not renamed to &4.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF3220 E Cannot do operation on file &1 in &2.

**RNMOBJ**  
 CPF0601 E Not allowed to do operation to file &1 in &2.  
 CPF0602 E File &1 already in library &2.  
 CPF0605 E Device file &1 in &2 saved with storage freed.  
 CPF0610 E File &1 in &2 not available.  
 CPF0678 E Operation not performed for file name &1 in &2.

CPF1763 E Cannot allocate one or more libraries.  
 CPF2105 E Object &1 in &2 type \*&3 not found.  
 CPF2110 E Library &1 not found.  
 CPF2111 E Library &1 already exists.  
 CPF2112 E Object &1 in &2 type \*&3 already exists.  
 CPF2113 E Cannot allocate library &1.  
 CPF2114 E Cannot allocate object &1 in &2 type \*&3.  
 CPF2132 E Object &1 already exists in library &2.  
 CPF2136 E Renaming library &1 failed.  
 CPF2139 E Rename of library &1 failed.  
 CPF2140 E Rename of library &1 previously failed.  
 CPF2150 E Object information function failed.  
 CPF2151 E Operation failed for &2 in &1 type \*&3.  
 CPF2152 E Objects of type \*&1 cannot be created into QTEMP.  
 CPF2160 E Object type \*&1 not eligible for requested function.  
 CPF2164 E Rename of library &2 not complete.  
 CPF2176 E Library &1 damaged.  
 CPF2182 E Not authorized to library &1.  
 CPF2189 E Not authorized to object &1 in &2 type \*&3.  
 CPF2190 E Not able to do remote delete or rename request.  
 CPF22BC E Object &1 type &3 is not program defined.  
 CPF2512 E Operation not allowed for message queue &1.  
 CPF320B E Operation was not valid for database file &1.  
 CPF3201 E File &1 in library &2 already exists.  
 CPF3202 E File &1 in library &2 in use.  
 CPF3203 E Cannot allocate object for file &1 in &2.  
 CPF322D E Operation not done for data base file &1.  
 CPF3220 E Cannot do operation on file &1 in &2.  
 CPF323C E QRECOVERY library could not be allocated.  
 CPF323D E User does not have correct authority.  
 CPF324C E Concurrent authority holder operation prevents move, rename or restore.  
 CPF3245 E Damage to file &1 prevents operation on file &3.  
 CPF3323 E Job queue &1 in &2 already exists.  
 CPF3330 E Necessary resource not available.  
 CPF3353 E Output queue &1 in &2 already exists.  
 CPF3375 E Job queue &1 in &2 not renamed. Job queue in use.  
 CPF3376 E Output queue &1 in &2 not renamed. Output queue in use.  
 CPF3469 E Operation not allowed for output queue.  
 CPF5702 E File not a DDM file or not found.  
 CPF8D05 E Library &1 already exists.  
 CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9809 E Library &1 cannot be accessed.

**ROLLBACK**  
 CPF8350 E Commitment control not active.  
 CPF8359 E Roll back operation failed.

**RPLDOC**  
 CPF8A87 E Document name &2 not correct.  
 CPF8A97 E Folder name &1 not correct.  
 CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
 CPF900C E Sign on and verify of user failed.  
 CPF903D E Incorrect document identifier specified.

## RRTJOB • RSTLIB

CPF905C E Error occurred trying to find a translation table.  
CPF906A E Document was not replaced in the library.  
CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

### RRTJOB

CPF1315 E Command &1 not allowed in this environment.

### RSMBKP

CPF1999 E Errors occurred on command.

### RSMCTLR

CPF2703 E Controller description &1 not found.  
CPF5924 E Controller &1 does not allow automatic error recovery.  
CPF5928 E Controller &1 not varied on.  
CPF5929 E Controller &1 assigned to another job.  
CPF5930 E Recovery not resumed for controller &1.  
CPF5931 E Recovery not resumed for controller &1.  
CPF5935 E Error occurred during command processing.  
CPF5936 E Not authorized to controller &1.

### RSMDEVRCY

CPF5923 E Device &1 does not allow automatic error recovery.  
CPF5925 E Device &1 not varied on.  
CPF5926 E Recovery not resumed for device &1.  
CPF5927 E Recovery not resumed for device &1.  
CPF5935 E Error occurred during command processing.  
CPF9814 E Device &1 not found.  
CPF9825 E Not authorized to device &1.

### RSMLINRCY

CPF2704 E Line description &1 not found.  
CPF5917 E Not authorized to line description &1.  
CPF5932 E Cannot access line &1.  
CPF5933 E Line &1 not varied on.  
CPF5934 E Recovery not resumed for line &1.  
CPF5935 E Error occurred during command processing.

### RSTAUT

CPF2206 E User needs authority to do requested function on object.  
CPF3776 E Not all user profiles had all authorities restored.  
CPF3785 E Not all subsystems ended.

### RSTCFG

CPF370C E Not authorized to ALWOBJDIF parameter.  
CPF3709 E Tape devices do not support same densities.  
CPF3727 E Duplicate device &1 specified in device name list.  
CPF3728 E Diskette device &1 specified with other devices.  
CPF3738 E Device &1 used for save or restore is damaged.  
CPF3743 E File cannot be restored or displayed.  
CPF3767 E Device &1 not found.  
CPF3768 E Device &1 not valid for command.  
CPF3769 E File found on media not save/restore file.  
CPF3770 E No objects saved or restored for library &1.  
CPF3773 E &1 objects restored, &2 not restored to &4.  
CPF3780 E Specified file for library &1 not found.

CPF3791 E End of file &4 while processing &2 &1 in &3.  
CPF3793 E Machine storage limit reached.  
CPF3794 E Save/restore operation ended. Data management error occurred.  
CPF3796 E Storage limit exceeded for user profile &4.  
CPF3883 E S/38 device configuration objects not restored.  
CPF5729 E Not able to allocate object &1.  
CPF9825 E Not authorized to device &1.

### RSTDLO

CPF370C E Not authorized to ALWOBJDIF parameter.  
CPF3718 E Restore command not valid for file &1.  
CPF3767 E Device &1 not found.  
CPF3780 E Specified file for library &1 not found.  
CPF3782 E File &1 in &2 not a save file.  
CPF90AF E Multiple copies of documents to be restored prevents RENAME/RSTFLR  
CPF90A2 E &2 owns folder &1.  
CPF90A3 E System object name &1 is in use by another object.  
CPF90A4 E Invalid RENAME or RSTFLR options specified.  
CPF90B2 E Folder name list is not valid  
CPF90B4 E &1 folders restored to system, &2 not restored.  
CPF90CD E User &1 does not have authority to restore unfiled documents.  
CPF90CF E Search index data base is damaged.  
CPF90E0 E User &1 does not have authority to specify ALWOBJDIF(\*ALL).  
CPF9003 E &1 documents restored to system, &2 not restored.  
CPF902D E Document name &1 is in use by another object.  
CPF905C E Error occurred trying to find a translation table.  
CPF9050 E Ending sequence number not valid.  
CPF9069 E User not permitted to restore into folder &1.  
CPF908A E Requester &1 not enrolled.  
CPF909B E &1 objects restored to the system, &2 objects not restored.  
CPF9810 E Library &1 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9825 E Not authorized to device &1.  
CPF9830 E Cannot assign library &1.  
CPF9831 E Cannot assign device &1.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9899 E Error occurred during processing of command.

### RSTLIB

CPF370C E Not authorized to ALWOBJDIF parameter.  
CPF3705 E &2 &1 in &3 not journaled.  
CPF3706 E &2 &1 not restored to library &3.  
CPF3707 E Save file &1 in &2 contains no data.  
CPF3709 E Tape devices do not support same densities.  
CPF371B E System/36 environment library not restored.  
CPF3727 E Duplicate device &1 specified in device name list.  
CPF3728 E Diskette device &1 specified with other devices.  
CPF3730 E Not authorized to &2 &1 in &3.  
CPF3731 E Cannot use &2 &1 in library &3.



CPF3732 E	&2 &1 status changed during restore operation.	CPF3733 E	&2 &1 in &3 previously damaged.
CPF3733 E	&2 &1 in &3 previously damaged.	CPF3738 E	Device &1 used for save or restore is damaged.
CPF3738 E	Device &1 used for save or restore is damaged.	CPF3739 E	Data base file &1 member in &3 damaged.
CPF3739 E	Data base file &1 member in &3 damaged.	CPF3743 E	File cannot be restored or displayed.
CPF3740 E	&2 &1 in &3 not found.	CPF3748 E	Not able to get object information for library &1.
CPF3743 E	File cannot be restored or displayed.	CPF3767 E	Device &1 not found.
CPF3748 E	Not able to get object information for library &1.	CPF3768 E	Device &1 not valid for command.
CPF3752 E	No record of save operation exists for library &1.	CPF3769 E	File found on media not save/restore file.
CPF3757 E	&2 &1 not restored to &3.	CPF3770 E	No objects saved or restored for library &1.
CPF3758 E	&2 &1 not restored to &3.	CPF3770 S	No objects saved or restored for library &1.
CPF3767 E	Device &1 not found.	CPF3773 E	&1 objects restored, &2 not restored to &4.
CPF3768 E	Device &1 not valid for command.	CPF3773 S	&1 objects restored, &2 not restored to &4.
CPF3769 E	File found on media not save/restore file.	CPF3779 E	Not all libraries restored.
CPF3770 E	No objects saved or restored for library &1.	CPF3780 E	Specified file for library &1 not found.
CPF3770 S	No objects saved or restored for library &1.	CPF3781 E	Library &1 not found.
CPF3773 E	&1 objects restored, &2 not restored to &4.	CPF3782 E	File &1 in &2 not a save file.
CPF3773 S	&1 objects restored, &2 not restored to &4.	CPF3783 E	Cannot determine VOL(*SAVVOL) location. No objects restored.
CPF3779 E	Not all libraries restored.	CPF3784 E	Restore device specified in the DEV parameter does not match VOL(*SAVVOL) device.
CPF3780 E	Specified file for library &1 not found.	CPF3785 E	Not all subsystems ended.
CPF3781 E	Library &1 not found.	CPF3791 E	End of file &4 while processing &2 &1 in &3.
CPF3782 E	File &1 in &2 not a save file.	CPF3793 E	Machine storage limit reached.
CPF3783 E	Cannot determine VOL(*SAVVOL) location. No objects restored.	CPF3794 E	Save/restore operation ended. Data management error occurred.
CPF3784 E	Restore device specified in the DEV parameter does not match VOL(*SAVVOL) device.	CPF3796 E	Storage limit exceeded for user profile &4.
CPF3785 E	Not all subsystems ended.	CPF3805 E	Objects from save file &1 in &2 not restored.
CPF3791 E	End of file &4 while processing &2 &1 in &3.	CPF3807 E	Data decompression error for save file &1 in &2.
CPF3793 E	Machine storage limit reached.	CPF3812 E	Save file &1 in &2 in use.
CPF3794 E	Save/restore operation ended. Data management error occurred.	CPF3867 E	Contents of FILEMBR parameter not correct.
CPF3796 E	Storage limit exceeded for user profile &4.	CPF3868 E	FILEMBR specified but OBJTYPE must be (*ALL) or (*FILE).
CPF3805 E	Objects from save file &1 in &2 not restored.	CPF3871 E	No objects saved or restored; &3 objects not included.
CPF3807 E	Data decompression error for save file &1 in &2.	CPF3872 E	Not all objects restored from library &3 to library &4.
CPF3812 E	Save file &1 in &2 in use.	CPF5729 E	Not able to allocate object &1.
CPF3785 E	Not all subsystems ended.	CPF9812 E	File &1 in library &2 not found.
CPF3791 E	End of file &4 while processing &2 &1 in &3.	CPF9822 E	Not authorized to file &1 in library &2.
CPF3793 E	Machine storage limit reached.	CPF9825 E	Not authorized to device &1.
CPF3794 E	Save/restore operation ended. Data management error occurred.	CPF9829 E	Auxiliary storage pool &1 not found.
CPF3796 E	Storage limit exceeded for user profile &4.		
CPF3805 E	Objects from save file &1 in &2 not restored.	<b>RSTS36F</b>	
CPF3807 E	Data decompression error for save file &1 in &2.	CPF2C4A E	Device &1 not correct for command.
CPF3812 E	Save file &1 in &2 in use.	CPF2C4B E	Duplicate device &1 specified in device name list.
CPF5729 E	Not able to allocate object &1.	CPF2C4C E	Diskette device &1 included in multiple device specification.
CPF9812 E	File &1 in library &2 not found.	CPF2C4D E	Not all files were restored.
CPF9822 E	Not authorized to file &1 in library &2.	CPF2C45 E	Input file &1 cannot be processed by RSTS36F.
CPF9825 E	Not authorized to device &1.	CPF2C47 E	Existing file &1 or member &3 in library &2 not replaced.
CPF9829 E	Auxiliary storage pool &1 not found.	CPF2C48 E	Input file &1 in &2 not correct for command.
		CPF2C49 E	Output file &1 in &2 not correct for command.
<b>RSTLICPGM</b>		CPF2C5A E	Alternate index file &1 in library &2 not replaced.
CPF37A2 E	Licensed program &1 not valid.	CPF2C50 E	File description for file &1 is not available.
CPF371B E	System/36 environment library not restored.	CPF2C52 E	Error occurred during attempt to create file &1 in library &2.
CPF3820 E	Licensed program &1 option &2 not restored.		
CPF3880 E	No language objects exist.	<b>RSTS36FLR</b>	
CPF3884 E	Licensed program &1 option &2 not processed.	CPF8D09 E	Folder &1 not restored.
CPI36C9 E	Error occurred while removing PTFs.		
		<b>RSTS36LIBM</b>	
<b>RSTOBJ</b>		CPF2C4A E	Device &1 not correct for command.
CPF370C E	Not authorized to ALWOBJDIF parameter.	CPF2C4B E	Duplicate device &1 specified in device name list.
CPF3705 E	&2 &1 in &3 not journaled.		
CPF3706 E	&2 &1 not restored to library &3.		
CPF3707 E	Save file &1 in &2 contains no data.		
CPF3709 E	Tape devices do not support same densities.		
CPF3727 E	Duplicate device &1 specified in device name list.		
CPF3728 E	Diskette device &1 specified with other devices.		
CPF3730 E	Not authorized to &2 &1 in &3.		
CPF3731 E	Cannot use &2 &1 in library &3.		

CPF2C4C E Diskette device &1 included in multiple device specification.  
 CPF2C41 E &2 members restored, &3 members not restored, &4 members excluded.  
 CPF2C42 E No members restored to library &1, &4 members excluded.  
 CPF2C46 E Input file &1 cannot be processed by RSTS36LIBM.  
 CPF2C48 E Input file &1 in &2 not correct for command.  
 CPF2C49 E Output file &1 in &2 not correct for command.  
 CPF2C50 E File description for file &1 is not available.  
 CPF2C52 E Error occurred during attempt to create file &1 in library &2.  
 CPF2C53 E Member &3 not added to file &1 in library &2 because error occurred.  
 CPF2C57 E DBCS attribute not same as existing file &1 in &2.  
 CPF2C70 E Input file &1 contains incorrect control statement record.  
 CPF2C71 E NAME keyword on COPY statement missing or incorrect.  
 CPF2C72 E LIBRARY keyword on COPY statement missing or incorrect.

**RSTUSRPRF**

CPF2206 E User needs authority to do requested function on object.  
 CPF370C E Not authorized to ALWOBJDIF parameter.  
 CPF3709 E Tape devices do not support same densities.  
 CPF3727 E Duplicate device &1 specified in device name list.  
 CPF3728 E Diskette device &1 specified with other devices.  
 CPF3738 E Device &1 used for save or restore is damaged.  
 CPF3743 E File cannot be restored or displayed.  
 CPF3767 E Device &1 not found.  
 CPF3768 E Device &1 not valid for command.  
 CPF3775 E Not all user profiles or authority objects restored.  
 CPF3780 E Specified file for library &1 not found.  
 CPF3782 E File &1 in &2 not a save file.  
 CPF3785 E Not all subsystems ended.  
 CPF3793 E Machine storage limit reached.  
 CPF3794 E Save/restore operation ended. Data management error occurred.  
 CPF3796 E Storage limit exceeded for user profile &4.  
 CPF3812 E Save file &1 in &2 in use.  
 CPF908A E Requester &1 not enrolled.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.

**RTVAUTLE**

CPF22A7 E User &1 not on authorization list &2, no authorities retrieved.  
 CPF22A8 E Not authorized to retrieve authorities for user &1.  
 CPF2283 E Authorization list &1 does not exist.  
 CPF2289 E Unable to allocate authorization list &1.

**RTVCLSRC**

CPF0560 E Program &1 in &2 not a CL program.  
 CPF0561 E Unable to retrieve CL source from CL program &2.

CPF0562 E File &1 in &2 not a data base source file.  
 CPF0563 E Record length too small for data base source file.  
 CPF0564 E Unable to add data base member &3 to file.  
 CPF0565 E Source from CL program &4 not retrieved.  
 CPF0566 E Source not available for CL program &1 in &2.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9805 E Object &2 in library &3 destroyed.  
 CPF9806 E Cannot allocate object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9809 E Library &1 cannot be accessed.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9830 E Cannot assign library &1.  
 CPF9848 E Cannot open file &1 in library &2 member &3.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**RTVDOC**

CPF8A87 E Document name &2 not correct.  
 CPF8A97 E Folder name &1 not correct.  
 CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
 CPF900C E Sign on and verify of user failed.  
 CPF903D E Incorrect document identifier specified.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF905F E Retrieval of document from library has failed.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9860 E Error occurred during output file processing.

**RTVDTAARA**

CPF0811 E RTNVAR parameter has incorrect length for data area.  
 CPF0812 E RTNVAR parameter type not valid for data area &1.  
 CPF0813 E Value in data area &1 not logical value.  
 CPF1015 E Data area &1 in &2 not found.  
 CPF1016 E No authority to data area &1 in &2.  
 CPF1021 E Library &1 not found for data area &2.  
 CPF1022 E No authority to library &1 data area &2.  
 CPF1043 E Boundary alignment for data area not valid.  
 CPF1044 E AREA parameter not valid for data area.  
 CPF1045 E CPYPTR parameter not valid for data area.  
 CPF1046 E DTAARA(\*GDA) not valid because job not group job.  
 CPF1063 E Cannot allocate data area &1 in library &2.  
 CPF1067 E Cannot allocate library &1.  
 CPF1072 E DTAARA(\*PDA) not valid because job not pre-start job.  
 CPF1087 E Substring not allowed for decimal or logical data area.  
 CPF1088 E Starting position outside of data area.

CPF1089 E Substring specified for data area not valid.

**RTVGRPA**

CPF1309 E Subsystem cannot complete the &1 command.  
 CPF1311 E Job is not a group job.  
 CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.

**RTVJRNE**

CPF7002 E File &1 in library &2 not physical file.  
 CPF7006 E Member &3 not found in file &1 in &2.  
 CPF7007 E Cannot allocate member &3 file &1 in &2.  
 CPF7053 E Error on RCVRNG specifications, reason code &1.  
 CPF7054 E FROM and TO values not valid.  
 CPF7055 E Maximum number of members exceeded.  
 CPF7057 E \*LIBL not allowed with FILE(\*ALL).  
 CPF7060 E File &1 never journaled to journal &3.  
 CPF7061 E Conversion of journal entries failed.  
 CPF7062 E No entries converted or received from journal &1.  
 CPF7065 E Entry type (ENTTYP) not valid for journal code (JRNCD).  
 CPF7072 E Retrieval of journal entry failed.  
 CPF7073 E No entry retrieved from journal &1 in &2.  
 CPF7074 E RCVRNG for specified SEARCH not valid.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9809 E Library &1 cannot be accessed.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9860 E Error occurred during output file processing.

**RTVMBRD**

CPF3018 E Member &3 for file &1 in &2 not available.  
 CPF3019 E File &1 in library &2 has no members.  
 CPF3027 E File &1 in &2 not a database file.  
 CPF3049 E \*NEXT or \*PRV member does not exist.  
 CPF3051 E File &1 in library &2 not available.  
 CPF8109 E &8 damage on physical data base file &4.  
 CPF8110 E &8 damage on logical data base file &4 in &9.  
 VLOG-&7.  
 CPF8111 E &8 damage on member &9 file &4.  
 CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9806 E Cannot allocate object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9815 E Member &5 file &2 in library &3 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.

**RTVMSG**

CPF2401 E Not authorized to library &1.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2419 E Message ID &1 not found in message file &2 in &3.

CPF2458 E Message CPF2457 not found in message file QCPFMSG.

CPF2465 N Replacement text of message &1 in &2 in &3 not valid for format specified.  
 CPF2471 E Length of field not valid.  
 CPF2499 E Message ID &1 not allowed.  
 CPF2547 E Damage to message file QCPFMSG.  
 CPF2548 E Damage to message file &1 in &2.

**RTVSYSVAL**

CPF1028 E &1 not valid for parameter SYSVAL.  
 CPF1074 E SYSVAL(QMONTH) not valid for Julian date format.  
 CPF1094 E CL variable not same type as system value &1.  
 CPF1095 E CL variable length not valid for system value &1.

**RTVUSRPRF**

CPF2203 E User profile &1 not correct.  
 CPF2204 E User profile &1 not found.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2217 E Not authorized to user profile &1.  
 CPF2225 E Not able to allocate internal system object.  
 CPF8134 E &8 damage on user profile &4.

**RVKACCAUT**

CPF9009 E System requires file &1 in &2 be journaled.  
 CPF9014 E Access code authority removed from &1 users, not revoked from &2 users.  
 CPF9024 E System cannot get correct record to finish operation.  
 CPF9037 E Not allowed to specify USER(\*ALL).  
 CPF9847 E Error occurred while closing file &1 in library &2.

**RVKOBJAUT**

CPF0601 E Not allowed to do operation to file &1 in &2.  
 CPF0605 E Device file &1 in &2 saved with storage freed.  
 CPF0608 E Specified user profile not available.  
 CPF0610 E File &1 in &2 not available.  
 CPF2160 E Object type \*&1 not eligible for requested function.  
 CPF22A0 E Authority of \*AUTL is allowed only with USER(\*PUBLIC).  
 CPF22A1 E OBJTYPE(\*AUTL) not valid on this command.  
 CPF22A2 E Authority of \*AUTL not allowed for object type \*USRPRF.  
 CPF22A3 E AUTL parameter not allowed for object type \*USRPRF.  
 CPF22A4 E \*EXCLUDE cannot be revoked from \*PUBLIC.  
 CPF22A5 E Object &1 in &3 type \*&2 not secured by authorization list &4.  
 CPF2204 E User profile &1 not found.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF2208 E Object &1 in library &3 type \*&2 not found.  
 CPF2209 E Library &1 not found.  
 CPF2210 E Operation not allowed for object type \*&1.  
 CPF2211 E Not able to allocate object &1 in &3 type \*&2.  
 CPF2216 E Not authorized to use library &1.  
 CPF2223 E Not authorized to give authority to object &1 in &3 type \*&2.  
 CPF2224 E Not authorized to revoke authority for object &1 in &3 type \*&2.  
 CPF2227 E One or more errors occurred during processing of command.

## RVKUSRPMN • SAVDLO

- CPF2235 E AUT input value not correct for object type \*&1.
- CPF2236 E AUT input value not supported.
- CPF2243 E Library name &1 not allowed with OBJ(generic name) or OBJ(\*ALL).
- CPF2245 E Process profile not owner of object &1 in &3 type \*&2.
- CPF2253 E No objects found for &1 in library &2.
- CPF2254 E No libraries found for &1 request.
- CPF2256 S Specified authority for the object not revoked from all users.
- CPF2273 E Authority may not have been changed for object &1 in &3 type \*&2 for user &4.
- CPF2283 E Authorization list &1 does not exist.
- CPF3202 E File &1 in library &2 in use.
- CPF3203 E Cannot allocate object for file &1 in &2.
- CPF323C E QRECOVERY library could not be allocated.
- CPF3245 E Damage to file &1 prevents operation on file &3.
- CPF3252 E Maximum number of machine locks exceeded.
- CPF3381 E Revoke authority not allowed from spool user profile QSPL.
- CPF9804 E Object &2 in library &3 damaged.
- RVKUSRPMN**
- CPF9008 E User permission revoked for &1 users, not revoked for &2.
- CPF9009 E System requires file &1 in &2 be journaled.
- CPF9024 E System cannot get correct record to finish operation.
- CPF9847 E Error occurred while closing file &1 in library &2.
- SAVCHGOBJ**
- CPF3702 E &1 objects saved; &2 not saved; &9 not included.
- CPF3703 E &2 &1 in &3 not saved.
- CPF3708 E Save file &1 in &2 too small.
- CPF3709 E Tape devices do not support same densities.
- CPF3727 E Duplicate device &1 specified in device name list.
- CPF3728 E Diskette device &1 specified with other devices.
- CPF3730 E Not authorized to &2 &1 in &3.
- CPF3731 E Cannot use &2 &1 in library &3.
- CPF3733 E &2 &1 in &3 previously damaged.
- CPF3735 E Storage limit exceeded for user profile &1.
- CPF3738 E Device &1 used for save or restore is damaged.
- CPF3745 E No record of SAVLIB operation exists for &1.
- CPF3746 E System date/time less than reference date/time.
- CPF3747 E Object names cannot be specified with more than one library.
- CPF3749 E &1 objects from library &2 not saved.
- CPF3767 E Device &1 not found.
- CPF3768 E Device &1 not valid for command.
- CPF3770 E No objects saved or restored for library &1.
- CPF3770 S No objects saved or restored for library &1.
- CPF3774 E &1 objects saved, &2 not saved, &8 were not included.
- CPF3774 S &1 objects saved, &2 not saved, &8 were not included.
- CPF3778 E Not all objects saved from all libraries.
- CPF3781 E Library &1 not found.
- CPF3789 E Only one library allowed with specified parameters.
- CPF3790 E No available space on mounted diskette.
- CPF3793 E Machine storage limit reached.
- CPF3794 E Save/restore operation ended. Data management error occurred.
- CPF3797 E No objects saved from library &1. Save limit exceeded.
- CPF3812 E Save file &1 in &2 in use.
- CPF3815 E Save file &1 in &2 too small for save operation.
- CPF3871 E No objects saved or restored; &3 objects not included.
- CPF3871 S No objects saved or restored; &3 objects not included.
- CPF3891 E &2 &1 in &3 not saved.
- CPF3892 E &2 &1 in &3 not saved.
- CPF3894 E Cancel reply received for message &1.
- CPF5729 E Not able to allocate object &1.
- CPF9812 E File &1 in library &2 not found.
- CPF9820 E Not authorized to use library &1.
- CPF9822 E Not authorized to file &1 in library &2.
- CPF9825 E Not authorized to device &1.
- SAVDLO**
- CPD9059 E Document &1 not found.
- CPF3767 E Device &1 not found.
- CPF90B1 E &1 documents not saved.
- CPF90B2 E Folder name list is not valid
- CPF90C1 E Document list &2 is empty.
- CPF90C2 E Document list &2 could not be used.
- CPF90D7 E Document list &2 is from a remote search.
- CPF90E1 E Folder &1 cannot be used with TGTRLS(\*PREV).
- CPF90E5 E Not authorized to \*DOCL &1 in folder &2.
- CPF9006 E User not enrolled in system distribution directory.
- CPF902E E &1 document library objects saved.
- CPF902F E &1 folders saved, &9 not saved.
- CPF903A E Office activity not stopped, requested operation cannot be done
- CPF903B E Not able to save more than 7999 objects in on-line save file.
- CPF903C E Cannot specify file label if saving more than 7999 objects. The label has been reset.
- CPF9030 E Owner profile (&1) not found.
- CPF9046 E No documents found satisfying search specification in folder &1.
- CPF9053 E Not permitted to specify DLO(\*ALL) FLR(\*ANY) or DLO(\*MAIL).
- CPF9055 E &1 documents saved, &9 not saved.
- CPF9056 E No authority to specify OWNER(&1).
- CPF908A E Requester &1 not enrolled.
- CPF9096 E Cannot use CMDCHRID(\*DEVVD), DOCCHRID(\*DEVVD) in batch job.
- CPF9810 E Library &1 not found.
- CPF9812 E File &1 in library &2 not found.
- CPF9820 E Not authorized to use library &1.
- CPF9822 E Not authorized to file &1 in library &2.
- CPF9825 E Not authorized to device &1.
- CPF9830 E Cannot assign library &1.
- CPF9831 E Cannot assign device &1.
- CPF9845 E Error occurred while opening file &1.
- CPF9846 E Error while processing file &1 in library &2
- CPF9850 E Override of printer file &1 not allowed.

CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.  
 CPF9899 E Error occurred during processing of command.

**SAVLIB**

CPF3701 E &1 objects were saved; &2 objects were not saved.  
 CPF3703 E &2 &1 in &3 not saved.  
 CPF3708 E Save file &1 in &2 too small.  
 CPF3709 E Tape devices do not support same densities.  
 CPF3727 E Duplicate device &1 specified in device name list.  
 CPF3728 E Diskette device &1 specified with other devices.  
 CPF3730 E Not authorized to &2 &1 in &3.  
 CPF3731 E Cannot use &2 &1 in library &3.  
 CPF3733 E &2 &1 in &3 previously damaged.  
 CPF3735 E Storage limit exceeded for user profile &1.  
 CPF3738 E Device &1 used for save or restore is damaged.  
 CPF3749 E &1 objects from library &2 not saved.  
 CPF3751 E Some libraries not saved.  
 CPF3767 E Device &1 not found.  
 CPF3768 E Device &1 not valid for command.  
 CPF3770 E No objects saved or restored for library &1.  
 CPF3770 S No objects saved or restored for library &1.  
 CPF3771 E &1 objects saved from &3. &2 not saved.  
 CPF3771 S &1 objects saved from &3. &2 not saved.  
 CPF3777 E Not all libraries were saved.  
 CPF3781 E Library &1 not found.  
 CPF3785 E Not all subsystems ended.  
 CPF3789 E Only one library allowed with specified parameters.  
 CPF3790 E No available space on mounted diskette.  
 CPF3793 E Machine storage limit reached.  
 CPF3794 E Save/restore operation ended. Data management error occurred.  
 CPF3797 E No objects saved from library &1. Save limit exceeded.  
 CPF3812 E Save file &1 in &2 in use.  
 CPF3815 E Save file &1 in &2 too small for save operation.  
 CPF3818 E Beginning library &1 not found. No libraries saved.  
 CPF3871 E No objects saved or restored; &3 objects not included.  
 CPF3871 S No objects saved or restored; &3 objects not included.  
 CPF3891 E &2 &1 in &3 not saved.  
 CPF3892 E &2 &1 in &3 not saved.  
 CPF3894 E Cancel reply received for message &1.  
 CPF5729 E Not able to allocate object &1.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.

**SAVLICPGM**

CPF37A2 E Licensed program &1 not valid.  
 CPF3884 E Licensed program &1 option &2 not processed.  
 CPF3887 E Licensed program &1 option &2 not restored.

**SAVOBJ**

CPF3701 E &1 objects were saved; &2 objects were not saved.  
 CPF3702 E &1 objects saved; &2 not saved; &9 not included.

CPF3703 E &2 &1 in &3 not saved.  
 CPF3708 E Save file &1 in &2 too small.  
 CPF3709 E Tape devices do not support same densities.  
 CPF3727 E Duplicate device &1 specified in device name list.  
 CPF3728 E Diskette device &1 specified with other devices.  
 CPF3730 E Not authorized to &2 &1 in &3.  
 CPF3731 E Cannot use &2 &1 in library &3.  
 CPF3733 E &2 &1 in &3 previously damaged.  
 CPF3735 E Storage limit exceeded for user profile &1.  
 CPF3738 E Device &1 used for save or restore is damaged.  
 CPF3747 E Object names cannot be specified with more than one library.  
 CPF3749 E &1 objects from library &2 not saved.  
 CPF3767 E Device &1 not found.  
 CPF3768 E Device &1 not valid for command.  
 CPF3770 E No objects saved or restored for library &1.  
 CPF3770 S No objects saved or restored for library &1.  
 CPF3771 E &1 objects saved from &3. &2 not saved.  
 CPF3771 S &1 objects saved from &3. &2 not saved.  
 CPF3774 E &1 objects saved, &2 not saved, &8 were not included.  
 CPF3778 E Not all objects saved from all libraries.  
 CPF3781 E Library &1 not found.  
 CPF3789 E Only one library allowed with specified parameters.  
 CPF3790 E No available space on mounted diskette.  
 CPF3793 E Machine storage limit reached.  
 CPF3794 E Save/restore operation ended. Data management error occurred.  
 CPF3797 E No objects saved from library &1. Save limit exceeded.  
 CPF3812 E Save file &1 in &2 in use.  
 CPF3815 E Save file &1 in &2 too small for save operation.  
 CPF3867 E Contents of FILEMBR parameter not correct.  
 CPF3868 E FILEMBR specified but OBJTYPE must be (\*ALL) or (\*FILE).  
 CPF3871 E No objects saved or restored; &3 objects not included.  
 CPF3871 S No objects saved or restored; &3 objects not included.  
 CPF3891 E &2 &1 in &3 not saved.  
 CPF3892 E &2 &1 in &3 not saved.  
 CPF3894 E Cancel reply received for message &1.  
 CPF5729 E Not able to allocate object &1.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.

**SAVSAVFDTA**

CPF3707 E Save file &1 in &2 contains no data.  
 CPF3709 E Tape devices do not support same densities.  
 CPF3727 E Duplicate device &1 specified in device name list.  
 CPF3728 E Diskette device &1 specified with other devices.  
 CPF3767 E Device &1 not found.  
 CPF3768 E Device &1 not valid for command.  
 CPF3782 E File &1 in &2 not a save file.  
 CPF3794 E Save/restore operation ended. Data management error occurred.

## SAVSECDTA • SBMDKTJOB

CPF3812 E Save file &1 in &2 in use.  
CPF5729 E Not able to allocate object &1.  
CPF9812 E File &1 in library &2 not found.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9825 E Not authorized to device &1.

### SAVSECDTA

CPF370A E Not all security objects saved to save file &3.  
CPF3709 E Tape devices do not support same densities.  
CPF3727 E Duplicate device &1 specified in device name list.  
CPF3731 E Cannot use &2 &1 in library &3.  
CPF3735 E Storage limit exceeded for user profile &1.  
CPF3737 E Save and restore data area &1 not found.  
CPF3738 E Device &1 used for save or restore is damaged.  
CPF3767 E Device &1 not found.  
CPF3768 E Device &1 not valid for command.  
CPF3793 E Machine storage limit reached.  
CPF3794 E Save/restore operation ended. Data management error occurred.  
CPF3893 E Not all security objects saved.  
CPF3896 E Tried to save too many office mail objects.  
CPF5729 E Not able to allocate object &1.  
CPF9812 E File &1 in library &2 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.

### SAVSTG

CPF2206 E User needs authority to do requested function on object.  
CPF3767 E Device &1 not found.  
CPF3768 E Device &1 not valid for command.  
CPF3785 E Not all subsystems ended.  
CPF9825 E Not authorized to device &1.

### SAVSYS

CPF2206 E User needs authority to do requested function on object.  
CPF3703 E &2 &1 in &3 not saved.  
CPF3709 E Tape devices do not support same densities.  
CPF3727 E Duplicate device &1 specified in device name list.  
CPF3728 E Diskette device &1 specified with other devices.  
CPF3733 E &2 &1 in &3 previously damaged.  
CPF3735 E Storage limit exceeded for user profile &1.  
CPF3738 E Device &1 used for save or restore is damaged.  
CPF3767 E Device &1 not found.  
CPF3768 E Device &1 not valid for command.  
CPF3772 E SAVSYS incomplete. One or more objects not saved.  
CPF3785 E Not all subsystems ended.  
CPF3793 E Machine storage limit reached.  
CPF3794 E Save/restore operation ended. Data management error occurred.  
CPF3797 E No objects saved from library &1. Save limit exceeded.  
CPF3798 E Installation &2 &1 in &3 not found.  
CPF3873 E Licensed program &1 option &2 not saved.  
CPF3891 E &2 &1 in &3 not saved.  
CPF3892 E &2 &1 in &3 not saved.  
CPF9825 E Not authorized to device &1.

### SAVS36F

CPF2C4A E Device &1 not correct for command.  
CPF2C4B E Duplicate device &1 specified in device name list.  
CPF2C4C E Diskette device &1 included in multiple device specification.  
CPF2C47 E Existing file &1 or member &3 in library &2 not replaced.  
CPF2C48 E Input file &1 in &2 not correct for command.  
CPF2C49 E Output file &1 in &2 not correct for command.  
CPF2C50 E File description for file &1 is not available.  
CPF2C52 E Error occurred during attempt to create file &1 in library &2.  
CPF2C54 E FROMFILE name &1 too long to use for TOLABEL parameter.  
CPF2C55 E TOLABEL parameter value &1 contains embedded blank(s).  
CPF2C56 E Physical file name &1 too long.  
CPF2C58 E Diskette format not acceptable for System/36.  
CPF2C59 E FROMFILE name &1 too long.

### SAVS36LIBM

CPF2C4A E Device &1 not correct for command.  
CPF2C4B E Duplicate device &1 specified in device name list.  
CPF2C4C E Diskette device &1 included in multiple device specification.  
CPF2C43 E Saved &2 members from library &1, &3 members not saved.  
CPF2C44 E No members saved from library &1.  
CPF2C48 E Input file &1 in &2 not correct for command.  
CPF2C49 E Output file &1 in &2 not correct for command.  
CPF2C50 E File description for file &1 is not available.  
CPF2C51 E Member information for file &1 in library &2 is not available.  
CPF2C52 E Error occurred during attempt to create file &1 in library &2.  
CPF2C55 E TOLABEL parameter value &1 contains embedded blank(s).  
CPF2C58 E Diskette format not acceptable for System/36.

### SBMDBJOB

CPF1751 E Error while processing job &3/&2/&1.  
CPF1754 E File &1 in library &2 not database file or DDM file.  
CPF1760 E Submit jobs command not allowed.  
CPF1762 S Reading job &3/&2/&1.  
CPF3307 E Job queue &1 in &2 not found.  
CPF3330 E Necessary resource not available.  
CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
CPF9802 E Not authorized to object &2.  
CPF9812 E File &1 in library &2 not found.  
CPF9815 E Member &5 file &2 in library &3 not found.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2

### SBMDKTJOB

CPF1751 E Error while processing job &3/&2/&1.  
CPF1752 E Device &1 not correct device type.  
CPF1755 S Reading job &3/&2/&1 from volume &4.  
CPF1760 E Submit jobs command not allowed.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3307 E Job queue &1 in &2 not found.  
CPF3330 E Necessary resource not available.  
CPF3363 E Message queue &1 in library &2 not found.

CPF9802 E Not authorized to object &2.  
 CPF9814 E Device &1 not found.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2

**SBMFNCJOB**

CPF8382 E Finance job cannot be processed.

**SBMJOB**

CPF1338 E Errors occurred on SBMJOB command.

**SBMNETJOB**

CPF8056 E File &1 in &2 not a physical file.  
 CPF8058 E File &1 is a spooled file.  
 CPF8063 E Cannot assign necessary resource.  
 CPF8065 E Input stream &1 in &2 member &3 not sent to any users.  
 CPF8066 E One or more user identifiers on this command is not correct.  
 CPF8068 E Error detected while processing file to be sent.  
 CPF8072 E Size of object to be sent is greater than maximum size of 16 M.  
 CPF9005 E System resource required to complete this request not available.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9830 E Cannot assign library &1.  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9848 E Cannot open file &1 in library &2 member &3.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**SBMRJEJOB**

RJE0003 E RJE session &1 is not active.  
 RJE0017 E &1 was not found in session description &2.  
 RJE0024 E Errors found. Processing of request ended.  
 RJE0035 E &1 in &2 must be a data-base file.  
 RJE0041 E Remote job was not submitted.  
 RJE0067 E No members were found in file &1 in &2.  
 RJE0080 E You must define at least one batch reader in session &1.  
 RJE0112 E RJE reader &1 is not available.  
 RJE0113 E No RJE readers are available.  
 RJE0204 E FILE(\*) is not valid on SBMRJEJOB in batch program.  
 RJE0216 E No SNA sessions are available now. Try later.

**SBMRMTCMD**

CPF9164 E Target system does not support SBMRMTCMD.  
 CPF9165 E File &1 in library &2 not a DDM File.  
 CPF9172 E SBMRMTCMD command ended abnormally.  
 CPF9174 E Error on call to user exit program on target system.  
 CPF9175 E Error during processing of user exit program.  
 CPF9177 E User exit program did not complete successfully.

CPF9178 E Processing of the command specified by SBMRMTCMD failed.

**SETATNPGM**

CPF1318 E Attention key program &1 in &2 not set.  
 CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**SETKBDMAP**

CPF8701 E Specified device &1 not a 3270 device type.  
 CPF8702 E &1 function key not correctly defined.  
 CPF8703 E Device &1 not ready.

**SNDBRKMSG**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2428 E Only one message queue allowed for \*INQ and \*NOTIFY type messages.  
 CPF2460 E Message queue &1 could not be extended.  
 CPF2467 E &3 message queue &1 in library &2 logically damaged.  
 CPF2469 E Error occurred when sending message &1.  
 CPF2471 E Length of field not valid.  
 CPF2477 E Message queue &1 currently in use.

**SNDDOC**

OFC0810 E AS/400 Office already active.  
 OFC0811 E AS/400 Office ended abnormally.  
 OFC0855 E You are currently being removed from AS/400 Office.

**SNDDST**

CPF8A87 E Document name &2 not correct.  
 CPF8A97 E Folder name &1 not correct.  
 CPF900B E User ID and address &1 &2 not in System Distribution Directory.  
 CPF900C E Sign on and verify of user failed.  
 CPF901A E Send distribution request failed.  
 CPF903D E Incorrect document identifier specified.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.

**SNDDSTQ**

CPF8802 E Distribution queue &1 was not found.  
 CPF8816 E QSNADS communications subsystem is not active.  
 CPF8817 E Distribution queue is held.

**SNDEMLIGC**

CPF85B1 E Not able to open 3270PC file &1 in library &2.

**SNDF**

CPF0859 E File override caused I/O buffer size to be exceeded.  
 CPF0861 E File &1 in library &2 is not a display file.  
 CPF0864 E End of file detected for file &1 in &2.  
 CPF0883 E \*FILE not valid in DEV parameter for file &1.  
 CPF0887 E Data available from previous input request.  
 CPF5068 E Program device &4 not found in file &2 in library &3.

**SNDJRNE • SNDPGMMSG**

CPF5070 E File &2 in library &3 has no program devices acquired.

**SNDJRNE**

CPF6968 E Journal entry cannot be associated with file &1.  
 CPF6969 E Access paths for file &1 not journaled to &3.  
 CPF7002 E File &1 in library &2 not physical file.  
 CPF7003 E Entry not journaled to journal &1. Reason code &3.  
 CPF7037 E File &1 not journaled to journal &3.  
 CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9815 E Member &5 file &2 in library &3 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.

**SNDMSG**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2428 E Only one message queue allowed for \*INQ and \*NOTIFY type messages.  
 CPF2460 E Message queue &1 could not be extended.  
 CPF2467 E &3 message queue &1 in library &2 logically damaged.  
 CPF2469 E Error occurred when sending message &1.  
 CPF2471 E Length of field not valid.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2488 E RPYMSGQ(\*WRKSTN) not valid for batch job.

**SNDNETF**

CPF8056 E File &1 in &2 not a physical file.  
 CPF8057 E File &1 in &2 not a physical file or save file.  
 CPF8058 E File &1 is a spooled file.  
 CPF8059 E Member name not allowed for save file.  
 CPF8063 E Cannot assign necessary resource.  
 CPF8064 E File &1 in &2 member &3 not sent to any users.  
 CPF8066 E One or more user identifiers on this command is not correct.  
 CPF8068 E Error detected while processing file to be sent.  
 CPF8072 E Size of object to be sent is greater than maximum size of 16 M.  
 CPF9005 E System resource required to complete this request not available.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9830 E Cannot assign library &1.  
 CPF9847 E Error occurred while closing file &1 in library &2.

CPF9848 E Cannot open file &1 in library &2 member &3.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**SNDNETMSG**

CPF8063 E Cannot assign necessary resource.  
 CPF8066 E One or more user identifiers on this command is not correct.  
 CPF8069 E Message not sent to any users.  
 CPF9005 E System resource required to complete this request not available.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9830 E Cannot assign library &1.  
 CPF9847 E Error occurred while closing file &1 in library &2.

**SNDNETSPLF**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3205 E File not created.  
 CPF3207 E Member not added. Errors occurred.  
 CPF3303 E File &1 not found in job &5/&4/&3.  
 CPF3309 E No files names &1 are active.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3344 E File &1 number &2 no longer in the system.  
 CPF3482 E Copy request failed. Spool file &1 is open.  
 CPF3486 E CHLVAL parameter value not valid.  
 CPF3492 E Not authorized to spooled file.  
 CPF3493 E CTLCHAR parameter not correct for file &1.  
 CPF3499 E Records in file &1 preceded all assigned channel values.  
 CPF8055 E Spooled file contains special device requirements. File not sent.  
 CPF8063 E Cannot assign necessary resource.  
 CPF8066 E One or more user identifiers on this command is not correct.  
 CPF8067 E File &1 not sent to any users.  
 CPF8068 E Error detected while processing file to be sent.  
 CPF8072 E Size of object to be sent is greater than maximum size of 16 M.  
 CPF9005 E System resource required to complete this request not available.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9830 E Cannot assign library &1.  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**SNDPGMMSG**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.



CPF2409 E Specified message type not valid with specified program message queue.  
 CPF2428 E Only one message queue allowed for \*INQ and \*NOTIFY type messages.  
 CPF2453 E Reply queue not sender's program message queue.  
 CPF2460 E Message queue &1 could not be extended.  
 CPF2467 E &3 message queue &1 in library &2 logically damaged.  
 CPF2469 E Error occurred when sending message &1.  
 CPF2471 E Length of field not valid.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2479 E Program message queue &1 not found.  
 CPF2499 E Message ID &1 not allowed.  
 CPF2525 E Status messages can only be sent to program message queues.  
 CPF2547 E Damage to message file QCPFMSG.  
 CPF2548 E Damage to message file &1 in &2.

**SNDPTFORD**

CPF7C08 E No support network connection.  
 CPF8C0C E Problem log record content not valid.  
 CPF8C0E E Library QGPL not found.  
 CPF8C01 E Cannot connect to Service Support System. One session allowed.  
 CPF8C04 E PTF number not valid for AS/400.  
 CPF8C07 E Parameter not valid.  
 CPF8C16 E Record type not permitted.  
 CPF8C2A E Cannot connect to remote support system.  
 CPF8C24 E Error occurred while processing request.  
 CPF8C27 E Alternate load device missing.  
 CPF9846 E Error while processing file &1 in library &2

**SNDRCVF**

CPF0859 E File override caused I/O buffer size to be exceeded.  
 CPF0861 E File &1 in library &2 is not a display file.  
 CPF0863 E Value of binary data too large for decimal CL variable.  
 CPF0864 E End of file detected for file &1 in &2.  
 CPF0883 E \*FILE not valid in DEV parameter for file &1.  
 CPF0886 E Character data not valid. Specify decimal data.  
 CPF0887 E Data available from previous input request.  
 CPF5068 E Program device &4 not found in file &2 in library &3.  
 CPF5070 E File &2 in library &3 has no program devices acquired.

**SNDRPY**

CPF2401 E Not authorized to library &1.  
 CPF2403 E Message queue &1 in &2 not found.  
 CPF2408 E Not authorized to message queue &1.  
 CPF2410 E Message key not found in message queue &1.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2420 E Reply already sent for inquiry or notify message.  
 CPF2422 E Reply not valid.  
 CPF2432 E Cannot send reply to message type other than \*INQ or \*NOTIFY.  
 CPF2433 E Function not allowed for system log message queue &1.  
 CPF2460 E Message queue &1 could not be extended.  
 CPF2471 E Length of field not valid.  
 CPF2477 E Message queue &1 currently in use.  
 CPF2547 E Damage to message file QCPFMSG.  
 CPF2548 E Damage to message file &1 in &2.

CPF9830 E Cannot assign library &1.

**SNDSRVRQS**

CPF7C08 E No support network connection.  
 CPF8C0C E Problem log record content not valid.  
 CPF8C0E E Library QGPL not found.  
 CPF8C01 E Cannot connect to Service Support System. One session allowed.  
 CPF8C06 E No problems in problem log prepared for sending.  
 CPF8C07 E Parameter not valid.  
 CPF8C16 E Record type not permitted.  
 CPF8C2A E Cannot connect to remote support system.  
 CPF8C24 E Error occurred while processing request.  
 CPF8C27 E Alternate load device missing.  
 CPF9824 E Not authorized to command &1 in library &2.  
 CPF9846 E Error while processing file &1 in library &2

**SNDUSRMSG**

CPF2559 E Error occurred in SNDUSRMSG command.

**STRBAS**

BAS3001 E BASIC already called and running  
 BAS3004 E BGNBAS invalid in noninteractive environment

**STRBASPRC**

BAS3001 E BASIC already called and running  
 BAS3703 E Member, file or library not found

**STRBGU**

BGU0670 E BGU is already active.  
 BGU9002 E BGU session ended abnormally.  
 BGU9003 E Unrecoverable error detected during BGU operation.

**STRCBLDBG**

LBE7018 E Program &1 not found.  
 LBE7019 E Library &1 not found.

**STRCMTCTL**

CPF6971 E Damage prevents object &1 from being journaled.  
 CPF6972 E Cannot allocate access path for file &1 in &2.  
 CPF6979 E Journal &1 in library &2 is unusable.  
 CPF7002 E File &1 in library &2 not physical file.  
 CPF7003 E Entry not journaled to journal &1. Reason code &3.  
 CPF7004 E Maximum number of objects journaled to journal &1.  
 CPF7008 E Cannot start or end access path journaling for file &1.  
 CPF7009 E Not all based-on files being journaled to &3.  
 CPF7011 E Not enough storage.  
 CPF7030 E File or access paths for file &1 being journaled.  
 CPF7031 E Cannot allocate member &3 file &1 in &2.  
 CPF7033 E Start or end journaling failed for member &3.  
 CPF7034 E Logical damage of file &1 in &2.  
 CPF7035 E Object &1 in &2 already known to journal.  
 CPF7079 E Access path journaling for file &1 not started.  
 CPF7084 E Member &3 could not be journaled.  
 CPF8351 E Commitment control already active.  
 CPF8352 E Attribute in notify object &1 type \*&3 not valid.  
 CPF8353 E Secondary commit cycle already active.  
 CPF8357 E Secondary commit cycle not allowed.  
 CPF8360 E Not enough storage to perform commit operation.  
 CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.

**STRCPYSCN • STREML3270**

CPF9803 E Cannot assign object &2 in library &3.  
CPF9807 E One or more libraries in library list deleted.  
CPF9808 E Cannot allocate one or more libraries on library list.  
CPF9810 E Library &1 not found.  
CPF9812 E File &1 in library &2 not found.  
CPF9815 E Member &5 file &2 in library &3 not found.  
CPF9820 E Not authorized to use library &1.  
CPF9822 E Not authorized to file &1 in library &2.  
CPF9830 E Cannot assign library &1.

**STRCPYSCN**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF7AF4 E Library QTEMP is not valid for OUTFILE keyword.  
CPF7AF5 E From device cannot be used with device.  
CPF7AF6 E Device &1 not available.  
CPF7AF7 E Device name &1 not correct.  
CPF9845 E Error occurred while opening file &1.  
CPF9860 E Error occurred during output file processing.  
CPI7AF9 N Screen image not displayed.

**STRDBG**

CPF1999 E Errors occurred on command.

**STRDBRDR**

CPF1338 E Errors occurred on SBMJOB command.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3301 E Reader &1 already started.  
CPF3307 E Job queue &1 in &2 not found.  
CPF3330 E Necessary resource not available.  
CPF3362 E Objects in QTEMP not valid for parameter values.  
CPF3363 E Message queue &1 in library &2 not found.  
CPF3364 E File &1 in library &2 not database file or DDM file.  
CPF88C4 E Value &1 for NEWOBJ is more than 8 characters.  
CPF9812 E File &1 in library &2 not found.  
CPF9815 E Member &5 file &2 in library &3 not found.

**STRDFU**

DFU0005 E The command failed.  
DFU0018 E The Run option is not valid.

**STRDKTRDR**

CPF1338 E Errors occurred on SBMJOB command.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3301 E Reader &1 already started.  
CPF3307 E Job queue &1 in &2 not found.  
CPF3330 E Necessary resource not available.  
CPF3347 E Device &1 not found.  
CPF3362 E Objects in QTEMP not valid for parameter values.  
CPF3363 E Message queue &1 in library &2 not found.  
CPF3367 E Device &1 not diskette device.

**STRDKTWTR**

CPF1338 E Errors occurred on SBMJOB command.  
CPF1764 E Writer already started for device &1.  
CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
CPF3303 E File &1 not found in job &5/&4/&3.

CPF3305 E Output queue &1 in library &2 assigned to another writer.  
CPF3310 E Writer &1 already started.  
CPF3330 E Necessary resource not available.  
CPF3340 E More than one file with specified name found in job &5/&4/&3.  
CPF3342 E Job &5/&4/&3 not found.  
CPF3343 E Duplicate job names found.  
CPF3347 E Device &1 not found.  
CPF3357 E Output queue &1 in library &2 not found.  
CPF3362 E Objects in QTEMP not valid for parameter values.  
CPF3363 E Message queue &1 in library &2 not found.  
CPF3367 E Device &1 not diskette device.  
CPF3478 E File &1 not found in job &5/&4/&3 on output queue &6 in library &7.

**STRDSKCOL**

PFR5612 E VLIC tracing is already active.

**STREML3270**

CPF2619 E Table &1 not found.  
CPF8503 E Emulation controller &1 not found.  
CPF8504 E Controller &1 does not support 3270 emulation.  
CPF8505 E Emulation device &2 not found.  
CPF8506 E Emulation location &1 not found.  
CPF8507 E Display emulation cannot open required file.  
CPF8508 E Host system did not respond.  
CPF8510 E Internal error occurred on device &1.  
CPF8511 E Emulation ended by errors on device &2.  
CPF8512 E Emulation ended because device &2 was held.  
CPF8513 E Emulation ended by errors on device &2.  
CPF8514 E Error recovery stopped on device &1.  
CPF8515 E 3270 emulation session ended by host.  
CPF8516 E No match between host and device &2.  
CPF8517 E More than 960 input fields received from host.  
CPF8518 E Emulation ended because of internal failure in system.  
CPF8519 E Function check in 3270 emulation.  
CPF8521 E Not authorized to controller &1.  
CPF8522 E Not authorized to emulation device &2.  
CPF8524 E Emulation cannot open its required display file.  
CPF8525 E KBDTYPE(\*LCL) not allowed for remote display devices.  
CPF8526 E No 3270 display emulation devices available.  
CPF8527 E Emulation device &2 not available.  
CPF8528 E Device &2 is not a display emulation device.  
CPF8530 E Not authorized to use any display emulation device.  
CPF8533 E Display device not specified in a batch job.  
CPF8534 E Display device &1 is not available.  
CPF8535 E Display device &1 not found.  
CPF8536 E Not authorized to display device &1.  
CPF8539 E &1 keyboard type not supported by 3270 emulation.  
CPF8546 E No 3270 display emulation devices available.  
CPF8547 E No 3270 printer emulation devices available.  
CPF8548 E PC printer has not been set up with host direct print.  
CPF8550 E Emulation ended due to time-out internal failure.  
CPF8551 E Emulation ended with error code &1.  
CPF8552 E Emulation ended because of return code.  
CPF8553 E BSC controller or device not allowed without translation.

CPF8554 E Display station must be a 5555 B01 device.  
 CPF8555 E SNA DBCS emulation is already active at this display.  
 CPF8556 E SNA DBCS 3270PC emulation not loaded at this display.  
 CPF8557 E SNA DBCS 3270PC emulation code level is not correct.  
 CPF8558 E SNA DBCS 3270PC emulation at PC requested sign-off.  
 CPF8565 E Emulation device &1 not found.  
 CPF8568 E Device &1 not printer emulation device.  
 CPF8569 E Not authorized to use any printer emulation device.  
 CPF8571 E No 3270 printer emulation devices available.  
 CPF8572 E Emulation device &1 not available.

**STRJRNPF**  
 CPF6979 E Journal &1 in library &2 is unusable.

**STRMOD**  
 CPF598B E The &1 command failed for one or more modes.

**STROFC**  
 OFC0806 E Security officer not enrolled or system resource unavailable.  
 OFC0810 E AS/400 Office already active.  
 OFC0811 E AS/400 Office ended abnormally.  
 OFC0855 E You are currently being removed from AS/400 Office.

**STRPASTHR**  
 CPF2702 E Device description &1 not found.  
 CPF2703 E Controller description &1 not found.  
 CPF5383 E Mode &7 specified for device &4 not valid.  
 CPF5536 E System cannot automatically select an APPC device description for the remote location.  
 CPF5546 E Class-of-service for device &4 not valid.  
 CPF8901 E Virtual device &1 not varied on.  
 CPF8902 E Virtual device &1 not available.  
 CPF8903 E Device &1 not valid for pass-through.  
 CPF8904 E Pass-through request not accepted.  
 CPF8905 E Pass-through not allowed on a target system.  
 CPF8906 E Error during session initialization. Reason code &1.  
 CPF8907 E Communications failure for device &1.  
 CPF8908 E Controller &1 not varied on.  
 CPF8909 E Old software release. Pass-through ended.  
 CPF8910 E Controller &1 not valid for pass-through.  
 CPF8911 E Communications failure. Session was not started.  
 CPF8912 E Pass-through session ended. Reason code &1.  
 CPF8913 E Pass-through ended abnormally.  
 CPF8916 E Cannot select virtual device &1 at system &2.  
 CPF8917 E Not authorized to &1.  
 CPF8918 E Job canceled at system &1.  
 CPF8919 E Device &1 not accessed by system &2.  
 CPF8920 E Pass-through failed. &1 must be varied off and on.  
 CPF8921 E APPC failure. Failure code is &3.  
 CPF8922 E Negative response from device &1 at system &2.  
 CPF8923 E Data stream received at system &1 not valid.  
 CPF8924 E No available virtual controller.  
 CPF8925 E Device &1 not created.  
 CPF8928 E Device &1 could not be changed.

CPF8929 E Device &1 could not be varied on.  
 CPF8931 E Location &1 not an APPC location.  
 CPF8932 E Device &1 must be non-networking APPC device.  
 CPF8933 E Route to specified location not found.  
 CPF8935 E Pass-through not allowed to system &1.  
 CPF8936 E Pass-through failed for security reasons.  
 CPF8937 E Automatic sign on not allowed.  
 CPF8938 E Error in QRMTSIGN program. Pass-through failed.  
 CPF8940 E Cannot automatically select virtual device.  
 CPI8901 S No matching device on remote system. Function limited.  
 CPI8902 S Pass-through started at system &1.  
 CPI8903 S Virtual device &1 selected at system &2.  
 CPI8906 S Automatic sign-on not allowed.

**STRPDM**  
 PDM0055 E Error while processing the &1 command.

**STRPFRMON**  
 CPF0A63 E Performance trace cannot be stored in database file.  
 CPF0A81 E Performance trace cannot be sent to database file.

**STRPJ**  
 CPF1226 E Start prestart jobs failed.  
 CPF1227 E No authority has been granted to use command.  
 CPF1317 E No response from subsystem for job &3/&2/&1.  
 CPF1351 E Function check occurred in subsystem for job &3/&2/&1.  
 CPF1834 E Prestart job entry for program &1 in &2 does not exist.  
 CPF1835 E Not authorized to subsystem description.

**STRPRTEML**  
 CPF8510 E Internal error occurred on device &1.  
 CPF8511 E Emulation ended by errors on device &2.  
 CPF8512 E Emulation ended because device &2 was held.  
 CPF8513 E Emulation ended by errors on device &2.  
 CPF8514 E Error recovery stopped on device &1.  
 CPF8515 E 3270 emulation session ended by host.  
 CPF8516 E No match between host and device &2.  
 CPF8517 E More than 960 input fields received from host.  
 CPF8518 E Emulation ended because of internal failure in system.  
 CPF8519 E Function check in 3270 emulation.  
 CPF8561 E Printer emulation not started.  
 CPF8564 E Printer emulation job &3/&2/&1 ended.  
 CPF8570 E Translate of 3270 printer data stream failed.  
 CPF8579 E Cannot open printer file &1 in library &2.  
 CPF8580 E File &1 is not a printer file or has been overridden.  
 CPF8582 E Cannot open printer file &1 again in library &2.  
 CPF8583 E Printer emulation cannot open required file.

**STRPRTWTR**  
 CPF1338 E Errors occurred on SBMJOB command.  
 CPF1764 E Writer already started for device &1.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3303 E File &1 not found in job &5/&4/&3.  
 CPF3305 E Output queue &1 in library &2 assigned to another writer.  
 CPF3309 E No files names &1 are active.

**STRRJCSL • TFRJOB**

CPF3310 E Writer &1 already started.  
 CPF3330 E Necessary resource not available.  
 CPF3340 E More than one file with specified name found in job &5/&4/&3.  
 CPF3342 E Job &5/&4/&3 not found.  
 CPF3343 E Duplicate job names found.  
 CPF3347 E Device &1 not found.  
 CPF3357 E Output queue &1 in library &2 not found.  
 CPF3362 E Objects in QTEMP not valid for parameter values.  
 CPF3363 E Message queue &1 in library &2 not found.  
 CPF3369 E Device &1 not printer device.  
 CPF3463 E Output queue for device &1 not found.  
 CPF3464 E Not authorized to output queue for device &1.  
 CPF3478 E File &1 not found in job &5/&4/&3 on output queue &6 in library &7.

**STRRJCSL**

RJE0003 E RJE session &1 is not active.

**STRRJERDR**

RJE0041 E Remote job was not submitted.  
 RJE0059 E RJEJF cannot send host command to complete request.  
 RJE0065 E Reader &1 can be used only for interactive jobs.  
 RJE0067 E No members were found in file &1 in &2.  
 RJE0143 E No RJE readers were defined for this RJE session.  
 RJE0144 E RJE device &3 was not defined in RJE session &1.

**STRRJESSN**

RJE0012 E RJE session &1 in &2 is already active.  
 RJE0024 E Errors found. Processing of request ended.  
 RJE0045 E Session &1 needs at least two communications entries.  
 RJE4411 E &1 occurred in MSRJE procedure.  
 RJE4412 E &1 occurred in &2 command.

**STRRJEWTR**

RJE0004 E You are not permitted to access session description &1.  
 RJE0034 E No writers were defined in session &1.  
 RJE0059 E RJEJF cannot send host command to complete request.  
 RJE0144 E RJE device &3 was not defined in RJE session &1.  
 RJE0147 E RJEJF did not find message file QRJEMSG.

**STRSAM**

PFR5311 E Sampled address monitor already started.  
 PFR5312 E Limit of 16 windows exceeded.

**STRSAMCOL**

PFR5332 E Sampled address monitor data collection already started.

**STRSBS**

CPF1001 E Wait time expired for system response.  
 CPF1004 E Function check occurred during start subsystem.  
 CPF1010 E Subsystem name &1 active.  
 CPF1011 E Start subsystem failed for SBSDB &1 in library &2.  
 CPF1012 E No authority to start subsystem.  
 CPF1013 E Subsystem &1 in library &2 not found.

CPF1014 E Subsystem &1 not started.  
 CPF1031 E Not authorized to library &1.  
 CPF1049 E Cannot allocate subsystem &1 in library &2.  
 CPF1050 E Not enough storage to start subsystem.  
 CPF1057 E Subsystem &1 in library &2 damaged.  
 CPF1067 E Cannot allocate library &1.  
 CPF1080 E Library &1 not found.  
 CPF1086 E Subsystem &1 in &2 allocated to your job.  
 CPF1099 E Subsystem not started because system ending.

**STRSDA**

SDA0001 E SDA does not support a &1 work station.  
 SDA0002 E SDA cannot access its display file.  
 SDA0003 E SDA ended because of a serious error.  
 SDA0004 E Error while processing the STRSDA command.  
 SDA0601 E SDA is already active.

**STRSQL**

CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.

**STRSRVJOB**

CPF3501 E Job is already being serviced or traced.  
 CPF3520 E Job not found.  
 CPF3524 E More than one job with specified name found.  
 CPF3531 E Job cannot be serviced.  
 CPF3536 E Job completed and cannot be serviced.  
 CPF3676 E Not authorized to service specified job.  
 CPF3909 E Previous service request not complete.  
 CPF3918 E Service request canceled.  
 CPF3938 E Already servicing another job.

**STRSST**

CPC7210 E System Service Tools detected function check. CAUTION: Any device(s) in diagnostic mode not reset.  
 CPF7215 E Invalid command request.  
 CPF7242 E Not authorized to system service tools.  
 CPF7243 E Previous request not completed.

**TFRBCHJOB**

CPF1288 E Job queue &1 in library &2 damaged.  
 CPF1289 E Transfer job is not allowed.  
 CPF1291 E Job &3/&2/&1 cannot be transferred.  
 CPF1368 E &1 not authorized to job queue &2 in library &3.  
 CPF1369 E Job queue &1 in &2 not found.  
 CPF1370 E Job queue &1 in &2 not accessible.  
 CPF1372 E Job not transferred. Job currently being ended.  
 CPF1376 E Library on library search list deleted.  
 CPF1377 E Library on library search list damaged.

**TFRCTL**

CPF0805 E Error found when program &1 in &2 started.  
 CPF0809 E Transfer control (TFRCTL) to C program not allowed.

**TFRGRPJOB**

CPF1310 E Request to transfer to group job failed with reason code &1.  
 CPF1313 E Value &1 for parameter &2 not allowed name.  
 CPF1314 E Value &1 for parameter &2 not allowed.  
 CPF9871 E Error occurred while processing.

**TFRJOB**

CPF1289 E Transfer job is not allowed.  
 CPF1315 E Command &1 not allowed in this environment.

CPF1364 E Job not transferred. Job queue &1 in library &2 not active.  
 CPF1365 E Job not transferred. Subsystem &1 ending.  
 CPF1366 E Subsystem &1 has no usable work station entry for &2.  
 CPF1367 E User &1 not authorized to subsystem &2  
 CPF1368 E &1 not authorized to job queue &2 in library &3.  
 CPF1369 E Job queue &1 in &2 not found.  
 CPF1370 E Job queue &1 in &2 not accessible.  
 CPF1372 E Job not transferred. Job currently being ended.  
 CPF1373 E Job not transferred. System request in effect for job.  
 CPF1375 E Job not transferred. Single active device not allowed to transfer.

**TFRSECJOB**

CPF1380 E Transfer to secondary interactive job not valid.  
 CPF1381 E Transfer to secondary interactive job not valid.  
 CPF1383 E Transfer to secondary interactive job not valid.  
 CPF1384 E Transfer to a secondary interactive job not valid.

**TRCCSP**

CAE9998 E Command &1 failed.

**TRCICF**

CPF2C90 E Maximum storage specified too small.  
 CPF2C93 E No trace records logged.  
 CPF2C94 E Error occurred during OUTFILE processing, trace stopped.  
 CPF2C95 E Trace already active.  
 CPF2C96 E Trace already off.  
 CPF3205 E File not created.  
 CPF3501 E Job is already being serviced or traced.  
 CPF3530 E Conflicting entries in index QSERVICE.  
 CPF3548 E Serviced job completed running.  
 CPF3925 E Cannot open file &1.  
 CPF3936 E Job being serviced ended before trace started.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3951 E File &1 cannot be overridden by file name &2.  
 CPF3969 E Error during close of file &1. Output may not be complete.  
 CPF5004 E Printer overflow line detected for file &1.  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9848 E Cannot open file &1 in library &2 member &3.  
 CPF9849 E Error while processing file &1 in library &2 member &3.

**TRCINT**

CPD36C0 E OUTDEV parameter only valid with SET(\*SAVE).  
 CPD36C1 E SIZE parameter only valid with SET(\*SIZE).  
 CPD3678 E Controller, device, or line not specified for trace.  
 CPD3679 E TRCTYPE(010803) required when CTL, DEV, or LIN specified.  
 CPF3515 E Number of trace requests is larger than maximum allowed.  
 CPF3516 E Cannot start specified trace types.  
 CPF3518 E End time and date earlier than start time and date.  
 CPF3659 E Total of specified CTL, DEV, and LIN greater than allowed.

CPF3679 E Service function returned completion code &1 qualifier &2.  
 CPF3683 E Error occurred trying to open printer file.  
 CPF3684 E Error occurred while trying to close a print file.  
 CPF3685 E Error occurred while data being put to print file.  
 CPF3686 E Service function ended with error message.  
 CPF3687 E Error occurred while trying to open file.  
 CPF3688 E Error occurred while tape or diskette file being closed.  
 CPF3689 E Error occurred while writing data to tape or diskette.  
 CPF3692 E Error occurred while trying to write data to tape or diskette.  
 CPF3693 E Service function ended because error occurred.  
 CPF3694 E Cannot start service function.  
 CPF3695 E No trace tables exist.  
 CPF3696 E No traces recorded.  
 CPF3697 E Trace type parameter value missing.

**TRCJOB**

CPF2C94 E Error occurred during OUTFILE processing, trace stopped.  
 CPF2C95 E Trace already active.  
 CPF2C96 E Trace already off.  
 CPF3510 E User exit program not found in specified library.  
 CPF3511 E Trace already active.  
 CPF3512 E Trace already off.  
 CPF3521 E Not enough storage for the trace table.  
 CPF3530 E Conflicting entries in index QSERVICE.  
 CPF3542 E Job not traced because it is being serviced.  
 CPF3548 E Serviced job completed running.  
 CPF3675 E Cannot allocate QSYS library.  
 CPF3909 E Previous service request not complete.  
 CPF3918 E Service request canceled.  
 CPF3925 E Cannot open file &1.  
 CPF3936 E Job being serviced ended before trace started.  
 CPF3950 E Error message &2 received for file &1. Request ended.  
 CPF3951 E File &1 cannot be overridden by file name &2.  
 CPF3957 E Not authorized to use exit program library &2.  
 CPF3958 E Not authorized to use program &1 in library &2.  
 CPF3969 E Error during close of file &1. Output may not be complete.  
 CPF6611 E Error occurred during OUTFILE processing, trace ended.  
 CPF9810 E Library &1 not found.

**UPDDTA**

DFU0251 S DFU is creating temporary program &1 for you to run.

**VFYPR**

CPF3943 E Incorrect value specified for device parameter.  
 CPF9814 E Device &1 not found.  
 CPF9825 E Not authorized to device &1.  
 CPF9831 E Cannot assign device &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2

**VFYTAP**

CPF2B31 E Tape unit description &1 not found.  
 CPF2B32 E Resource &1 not found.

CPF2B33 E Device description &1 not a tape unit.  
 CPF2B34 E Resource &1 not a tape unit.  
 CPF2B35 E Tape verification not available for '&1' type tape units.  
 CPF2B36 E No device description was found for resource &1.  
 CPF2B37 E Tape verification request not correct.  
 CPF2B39 E Problem analysis did not complete due to an error.

**VRYCFG**

CPF262E E QDCSTF stopped due to failure.  
 CPF262F E QDCTRF stopped due to failure.  
 CPF2640 E Vary command not processed.  
 CPF2659 E Vary command may not have completed.

**WAIT**

CPF0859 E File override caused I/O buffer size to be exceeded.  
 CPF0882 E No corresponding RCVF or SNDRCVF command for WAIT command.  
 CPF0886 E Character data not valid. Specify decimal data.  
 CPF0888 E Command not run because job being ended.  
 CPF0889 E No data available for input request within specified time.  
 CPF5068 E Program device &4 not found in file &2 in library &3.  
 CPF5070 E File &2 in library &3 has no program devices acquired.

**WRKACTJOB**

CPF1093 E Override of file device type not valid.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**WRKALRD**

CPF2499 E Message ID &1 not allowed.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9808 E Cannot allocate one or more libraries on library list.  
 CPF9810 E Library &1 not found.  
 CPF9811 E Program &1 in library &2 not found.  
 CPF9812 E File &1 in library &2 not found.  
 CPF9814 E Device &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9821 E Not authorized to program &1 in library &2.  
 CPF9822 E Not authorized to file &1 in library &2.  
 CPF9825 E Not authorized to device &1.  
 CPF9830 E Cannot assign library &1.  
 CPF9831 E Cannot assign device &1.  
 CPF9871 E Error occurred while processing.  
 CPF9999 E Function check. &1 unmonitored by &2 at statement &5, instruction &3.

**WRKCFGSTS**

CPF2602 E Controller &1 not found.  
 CPF2702 E Device description &1 not found.  
 CPF2703 E Controller description &1 not found.

CPF2704 E Line description &1 not found.

**WRKCNTINF**

CPF8C84 E Error detected while processing support contact data.

**WRKDEVTBL**

CPF8379 E Error while processing file &1 in &2.  
 CPF8380 E Error while opening file &1 in &2.  
 CPF8381 E Error while closing file &1 in &2.  
 CPF8383 E Finance command not allowed on this work station.

**WRKDIR**

CPF8360 E Not enough storage to perform commit operation.  
 CPF90D9 E Nickname does not exist.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF9024 E System cannot get correct record to finish operation.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9054 E &1 already exists.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
 CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.  
 CPZ9002 S Change of distribution lists in progress.  
 CPZ9003 S Change of user authority in progress.

**WRKDOCLIB**

CPF90A8 E \*SECADM special authority required to do requested operation.  
 CPF9024 E System cannot get correct record to finish operation.

**WRKDSTL**

CPF8360 E Not enough storage to perform commit operation.  
 CPF90B5 E Option selected not correct for default \*ANY entry.  
 CPF90B7 E Distribution list is being updated by another user.  
 CPF90D9 E Nickname does not exist.  
 CPF9024 E System cannot get correct record to finish operation.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9052 E List ID, &1 &2, cannot be found.  
 CPF9096 E Cannot use CMDCHRID(\*DEVD), DOCCHRID(\*DEVD) in batch job.  
 CPF9838 E Storage needed is larger than maximum storage limit for user profile &6.

**WRKDSTQ**

CPF8802 E Distribution queue &1 was not found.  
 CPF8806 E Value not correct for system name or system group.  
 CPF8807 E Error occurred while using QSNADS journal.  
 CPF8809 E Errors detected on SNADS internal queues.  
 CPF8812 E Error occurred while processing distribution queues.  
 CPF8813 E No entries exist.

**WRKJOB**

CPF0941 E Job &3/&2/&1 no longer in system.  
 CPF1069 E End of duplicate names.

CPF1070 E Job &3/&2/&1 not found.  
 CPF1071 E No authority to job &3/&2/&1.  
 CPF3330 E Necessary resource not available.  
 CPF3336 E Job &5/&4/&3 no longer in the system.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**WRKJOBQ**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3302 E Override of print file &1 to file &2 not valid.  
 CPF3307 E Job queue &1 in &2 not found.  
 CPF3330 E Necessary resource not available.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9871 E Error occurred while processing.

**WRKJRN**

CPF9871 E Error occurred while processing.

**WRKJRNA**

CPF9801 E Object &2 in library &3 not found.  
 CPF9802 E Not authorized to object &2.  
 CPF9803 E Cannot assign object &2 in library &3.  
 CPF9810 E Library &1 not found.  
 CPF9820 E Not authorized to use library &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9871 E Error occurred while processing.

**WRKLIBPDM**

PDM0055 E Error while processing the &1 command.

**WRKMBRPDM**

PDM0055 E Error while processing the &1 command.

**WRKMSGD**

CPF2401 E Not authorized to library &1.  
 CPF2407 E Message file &1 in &2 not found.  
 CPF2411 E Not authorized to message file &1 in &2.  
 CPF2483 E Message file currently in use.  
 CPF2499 E Message ID &1 not allowed.  
 CPF2510 E Message file &1 in &2 logically damaged.  
 CPF2516 E Unable to open display file &1 in &2.  
 CPF9807 E One or more libraries in library list deleted.  
 CPF9810 E Library &1 not found.  
 CPF9830 E Cannot assign library &1.

**WRKNETF**

CPF2204 E User profile &1 not found.  
 CPF3205 E File not created.  
 CPF8070 E Not allowed to process files for user &1.  
 CPF9005 E System resource required to complete this request not available.  
 CPF9006 E User not enrolled in system distribution directory.  
 CPF905C E Error occurred trying to find a translation table.  
 CPF9830 E Cannot assign library &1.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2

CPF9847 E Error occurred while closing file &1 in library &2.

CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**WRKNETJOBE**

CPF8050 E Network job table could not be accessed.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9860 E Error occurred during output file processing.

**WRKOBJCSP**

CAE9998 E Command &1 failed.

**WRKOBJLCK**

CPF0919 E Library in library list damaged.  
 CPF0924 E Cannot use library in library list.  
 CPF0935 E Cannot use member name for object type \*&2.  
 CPF0939 E Object &3 type &2 was not found in library &4.  
 CPF0948 E Member &1 file &3 in library &4 not found.  
 CPF0950 E &2 &3 in library &4 not found.  
 CPF0951 E QSYS only valid library for object type &2.  
 CPF0952 E Library &4 not found for &2 &3.  
 CPF0953 E Library in library list previously deleted.  
 CPF0958 E &2 &3 in library &4 saved with storage freed.  
 CPF0988 E Library &4 damaged.  
 CPF1093 E Override of file device type not valid.  
 CPF9804 E Object &2 in library &3 damaged.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9847 E Error occurred while closing file &1 in library &2.  
 CPF9850 E Override of printer file &1 not allowed.  
 CPF9851 E Overflow value for file &1 in &2 too small.  
 CPF9871 E Error occurred while processing.

**WRKOBJOWN**

CPF2204 E User profile &1 not found.  
 CPF2213 E Not able to allocate user profile &1.  
 CPF2217 E Not authorized to user profile &1.

**WRKOBJPDM**

PDM0055 E Error while processing the &1 command.

**WRKOUTQ**

CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3302 E Override of print file &1 to file &2 not valid.  
 CPF3330 E Necessary resource not available.  
 CPF3357 E Output queue &1 in library &2 not found.  
 CPF9845 E Error occurred while opening file &1.  
 CPF9846 E Error while processing file &1 in library &2  
 CPF9871 E Error occurred while processing.

**WRKOUTQD**

CPF2150 E Object information function failed.  
 CPF2151 E Operation failed for &2 in &1 type \*&3.  
 CPF2152 E Objects of type \*&1 cannot be created into QTEMP.  
 CPF2207 E Not authorized to use object &1 in library &3 type \*&2.  
 CPF3302 E Override of print file &1 to file &2 not valid.  
 CPF3330 E Necessary resource not available.  
 CPF3357 E Output queue &1 in library &2 not found.  
 CPF9845 E Error occurred while opening file &1.

## WRKPGMTBL • WRKWTR

CPF9846 E Error while processing file &1 in library &2  
CPF9871 E Error occurred while processing.

### WRKPGMTBL

CPF8379 E Error while processing file &1 in &2.  
CPF8380 E Error while opening file &1 in &2.  
CPF8381 E Error while closing file &1 in &2.  
CPF8383 E Finance command not allowed on this work station.

### WRKPRB

CPF7A9C E Problem analysis not allowed.  
CPF9845 E Error occurred while opening file &1.  
CPF9871 E Error occurred while processing.

### WRKRDR

CPF0941 E Job &3/&2/&1 no longer in system.  
CPF1070 E Job &3/&2/&1 not found.  
CPF1071 E No authority to job &3/&2/&1.  
CPF3302 E Override of print file &1 to file &2 not valid.  
CPF3312 E Reader &1 neither active nor on job queue.  
CPF3330 E Necessary resource not available.  
CPF3336 E Job &5/&4/&3 no longer in the system.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9871 E Error occurred while processing.

### WRKRPLYE

CPF2435 E System reply list not found.  
CPF2557 E System reply list damaged.  
CPF2558 E System reply list currently in use.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.

### WRKSBMJOB

CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

### WRKSBS

CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

### WRKSBSJOB

CPF1003 E Subsystem &1 not active.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

### WRKSOC

CPF7B13 E Internal error in alert processing.  
CPF7B19 E Sphere of control is not available.  
CPF7B20 E Sphere of control does not exist.

### WRKSPLF

CPF3302 E Override of print file &1 to file &2 not valid.  
CPF3330 E Necessary resource not available.  
CPF3420 E System/36 display format not allowed in batch.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9871 E Error occurred while processing.

### WRKSPLFA

CPF3302 E Override of print file &1 to file &2 not valid.  
CPF3303 E File &1 not found in job &5/&4/&3.  
CPF3309 E No files names &1 are active.  
CPF3330 E Necessary resource not available.  
CPF3336 E Job &5/&4/&3 no longer in the system.  
CPF3340 E More than one file with specified name found in job &5/&4/&3.  
CPF3342 E Job &5/&4/&3 not found.  
CPF3343 E Duplicate job names found.  
CPF3344 E File &1 number &2 no longer in the system.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9871 E Error occurred while processing.

### WRKSYSACT

PFR7018 E Work with System Activity already active.

### WRKSYSSTS

CPF1009 E Statistics elapsed time too long. Start time reset.  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

### WRKXTPRF

OFC9D02 E Profile &7 created.  
OFC9D03 E Profile &7 was revised.

### WRKUSRJOB

CPF1003 E Subsystem &1 not active.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2  
CPF9847 E Error occurred while closing file &1 in library &2.  
CPF9850 E Override of printer file &1 not allowed.  
CPF9851 E Overflow value for file &1 in &2 too small.  
CPF9871 E Error occurred while processing.

### WRKUSRTBL

CPF8379 E Error while processing file &1 in &2.  
CPF8380 E Error while opening file &1 in &2.  
CPF8381 E Error while closing file &1 in &2.  
CPF8383 E Finance command not allowed on this work station.

### WRKWTR

CPF0941 E Job &3/&2/&1 no longer in system.  
CPF1070 E Job &3/&2/&1 not found.  
CPF1071 E No authority to job &3/&2/&1.  
CPF3302 E Override of print file &1 to file &2 not valid.  
CPF3313 E Writer &1 not active nor on job queue.  
CPF3330 E Necessary resource not available.  
CPF3336 E Job &5/&4/&3 no longer in the system.  
CPF3388 E System/36 display format not allowed in batch.  
CPF9845 E Error occurred while opening file &1.  
CPF9846 E Error while processing file &1 in library &2



---

## Appendix B. Files Used by CL Commands

Many of the IBM-supplied CL commands use database and device files during processing.

The lists in this appendix provide a cross-reference between the commands and the OS/400-provided files used by the commands. Only the database files, diskette, tape, and printer device files used by CL commands are included here. The display device files are not listed because they should not be changed or overridden.

The first column lists the CL commands that use OS/400-provided files. The list is in alphabetic order by command name and by file name when there is more than one file listed for a command.

An asterisk (\*) following the description of a file indicates that the file is used only when the output from a display command is to be printed (when OUTPUT(\*) is specified in a batch job, or when OUTPUT(\*PRINT) is specified in a batch or interactive job).

**Note:** Database files used by directory commands and document library object commands are not listed as they cannot be overridden.

## Appendix B

Table 4 (Page 1 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
ADDNETJOBE	QUSRSYS	QANFNJE	PF	Network job entry database file.
CFGDSTSRV	QUSRSYS	QASNADSC	PF	Next system table database file.
	QUSRSYS	QASNADSR	PF	Routing table database file.
	QUSRSYS	QASNADSA	PF	Secondary node ID table database file.
CHGDTA	QIDU	QDTALOG	PRTF	Audit control log printer file.
	QIDU	QDTAPRT	PRTF	Record and accumulator total printer file.
CLRDKT	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
CPYF	QSYS	QSYSPRT	PRTF	Copy file printer file.
CPYFRMDKT	QSYS	QSYSPRT	PRTF	Copy file printer file.
CPYFRMTAP	QSYS	QSYSPRT	PRTF	Copy file printer file.
CPYIGCTBL	QSYS	QSYSDKT	DKTF	Diskette device file used for input and output.
	QSYS	QSYSTAP	TAPF	Tape device file used for input and output.
CPYPTF	QSYS	QSYSDKT	DKTF	Diskette device file used for input and output.
	QSYS	QSYSTAP	TAPF	Tape device file used for input and output.
CPYSRCF	QSYS	QSYSPRT	PRTF	Copy file printer file.
CRTAPAR	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
CRTBASPGM	QGPL	QBASSRC	PF	Database source input file.
CRTCBLPGM	QGPL	QCBLSRC	PF	COBOL source default input file.
	QSYS	QSYSPRT	PRTF	COBOL source printer file.
CRTCLPGM	QGPL	QCLSRC	PF	CL source default input file.
	QSYS	QSYSPRT	PRTF	CL source listing printer file.
CRTCMD	QSYS	QCMDSRC	PF	Default source input file.
	QSYS	QSYSPRT	PRTF	Command definition printer file.
CRTDFUAPP	QGPL	QUDSSRC	PF	DFU source default input file.
	QSYS	QSYSPRT	PRTF	DFU source printer file.
CRTDFUDEF	QSYS	QSYSPRT	PRTF	DFU source printer file.
CRTDSPF	QSYS	QPDDSSRC	PRTF	DDS source printer file.
CRTICFF	QGPL	QDDSSRC	PF	DDS source default input file.
	QSYS	QPDDSSRC	PRTF	DDS source printer file.
CRTLF	QGPL	QDDSSRC	PF	DDS source default input file.
	QSYS	QPDDSSRC	PRTF	DDS source printer file.
CRTPF	QGPL	QDDSSRC	PF	DDS source default input file.
	QSYS	QPDDSSRC	PRTF	DDS source printer file.
CRTPLIPGM	QGPL	QPLISRC	PF	PL/I source input file.
	QSYS	QSYSPRT	PRTF	PL/I source printer file.
CRTPRTF	QSYS	QPDDSSRC	PRTF	DDS source printer file.
	QSYS	QSYSPRT	PRTF	Query source printer file.
	QSYS	QSYSPRT	PRTF	Query source printer file.
CRTRPGPGM	QGPL	QRPGRSRC	PF	RPG source default input file.
	QSYS	QSYSPRT	PRTF	RPG source printer file.
CRTRPTPGM	QGPL	QRPGRSRC	PF	RPG source default input file.
	QSYS	QSYSPRT	PRTF	RPG source printer file.
CRTSRCPF	QGPL	QDDSSRC	PF	DDS source default input file.
	QSYS	QPDDSSRC	PRTF	DDS source printer file.
CRTTBL	QGPL	QTBLSRC	PF	Table source default input file.

Table 4 (Page 2 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
CRTS36DSPF	QGPL	QDDSSRC	DBF	DDS source output work file.
	QSSP	QPUTSFGR	PRTF	SFGR syntax checker printer file.
CRTS36MNU	QGPL	QDDSSRC	DBF	DDS source output work file.
CRTMSGFMNU	QGPL	QDDSSRC	DBF	DDS source output work file.
	QSSP	QPUTMENU	PRTF	Build menu printer file.
DLTPRB	QUSRSYS	QASXPROB	DBF	Problem log problem file.
	QUSRSYS	QASXFRU	DBF	Problem log possible cause file.
	QUSRSYS	QASXCALL	DBF	Problem log call override file.
	QUSRSYS	QASXNOTE	DBF	Problem log user notes file.
	QUSRSYS	QASXPTF	DBF	Problem log PTF file.
DMPCLPGM	QUSRSYS	QASXSYMP	DBF	Problem log symptom string file.
	QSYS	QPPGMDMP	PRTF	CL program dump printer file.
DMPJOB	QSYS	QPSRVDMP	PRTF	Service dump printer file.
DMPOBJ	QSYS	QPSRVDMP	PRTF	Service dump printer file.
DMPSYSOBJ	QSYS	QPSRVDMP	PRTF	Service dump printer file.
DMPTAP	QSYS	QPTAPDMP	PRTF	Tape dump printer.
DMPTRC	QSYS	QAPMDMPT	PF	Performance trace file.
	QSYS	QSYSPRT	PRTF	SDA source printer file.
DSPACC	QSYS	QPDSPACC	PRTF	Display access code printer file.
DSPACCAUT	QSYS	QPDSPAUAU	PRTF	Display access code authority printer file.
DSPAUTHLR	QSYS	QADSHLR	PF	Database file that contains the record formats for the authority holder object entries.
	QSYS	QPSYDSSL	PRTF	Display authority holders printer file.
	QSYS	QAOBJAUT	PF	Object authority printer file.*
DSPAUTL	QSYS	QPOBJAUT	PRTF	Database file that contains the record format for the authorization list entries.
	QSYS	QPOSDALO	PRTF	Display authorization list for document library objects printer file.
DSPAUTLDLO	QSYS	QPOBJAUT	PRTF	Authorization list printer files.
	QSYS	QADALO	PF	Database file that contains the record formats for the authorization list object entries.
DSPAUTLOBJ	QSYS	QPSYDALO	PRTF	Display authorization list objects printer file.
	QSYS	QPAUTUSR	PRTF	Authorized users printer file.*
DSPAUTUSR	QSYS	QPAUTUSR	PRTF	Authorized users printer file.*
DSPBKP	QSYS	QPDBGDSP	PRTF	Breakpoint printer file (debug mode).*
DSPCFGL	QSYS	QPDCCFGL	PRTF	Configuration list printer file.*
DSPCLS	QSYS	QPDSPCLS	PRTF	Class printer file.*
DSPCMD	QSYS	QPCMD	PRTF	DSPCMD printer file.
DSPCOSD	QSYS	QPDCCOS	PRTF	Class-of-service description printer file.*
DSPCTLD	QSYS	QPDCCTL	PRTF	Controller description printer file.*
DSPDBG	QSYS	QPDBGDSP	PRTF	Debug display printer file (debug mode).*
DSPDBR	QSYS	QADSPDBR	PF	Database file that defines the record format of the created file used to store database relationships.
	QSYS	QPDSPDBR	PRTF	Database relations printer file.
DSPDDMF	QSYS	QPDDSPDDM	PRTF	Distributed data management file listing printer file.*
DSPDEV	QSYS	QPDCDEV	PRTF	Device description printer file.*
DSPDIR	QSYS	QPDDSPDDL	PRTF	Print file for display directory entry details.
	QSYS	QAOSDIRO	PF	Display directory output file.

## Appendix B

Table 4 (Page 3 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
	QSYS	QPDSPDSM	PRTF	Print file for display directory entries.
DSPDKT	QSYS	QPDSPDKT	PRTF	Printer file for diskettes in basic data exchange format.*
	QSYS	QPSRODSP	PRTF	Printer file for diskettes in save/restore format.*
	QSYS	QSYSDKT	DKTF	Diskette device file for input.
DSPDLOAUT	QSYS	QPDLOAUT	PRTF	Display document library object authority printer file.
DSPDSTL	QSYS	QPDSPLSM	PRTF	Distribution list summary print file.
	QSYS	QPDSPLDL	PRTF	Distribution list detail print file.
	QSYS	QAOSDSTO	PF	Distribution list output file.
DSPDSTSRV	QSYS	QPDSTSRV	PRTF	Distribution services printer file.
	QUSRSYS	QASNADSR	PF	Routing table database file.
	QUSRSYS	QASNADSA	PF	Secondary node ID table database file.
DSPDTA	QIDU	QDTAPRT	PRTF	DFU audit control print file.
DSPDTAARA	QSYS	QPDSPDTA	PRTF	Data area printer file.*
DSPEDTD	QSYS	QPDCEESP	PRTF	Edit description printer file.*
DSPFD	QSYS	QPDSPFD	PRTF	File description printer file.
	QSYS	QAFDACC	PF	Database file that defines the record format of the created file used to store access path file information.
	QSYS	QAFDBASI	PF	Database file that defines the record format of the created file used to store basic file information common to all files.
	QSYS	QAFDBSC	PF	Database file that defines the record format of the created file used to store BSC file and mixed file device attribute information.
	QSYS	QAFDCMN	PF	Database file that defines the record format of the created file used to store communications file and mixed file device attribute information.
	QSYS	QAFDICF	PF	Database file that defines the record format of the created file used to store ICF file attribute information.
	QSYS	QAFDDDM	PF	Database file that defines the record format of the created file used to store distributed data management file attribute information.
	QSYS	QAFDDKT	PF	Database file that defines the record format of the created file used to store diskette file attribute information.
	QSYS	QAFDDSP	PF	Database file that defines the record format of the created file used to store display file and mixed file display device attribute information.
	QSYS	QAFDJOIN	PF	Database file that defines the record format of the created file used to store join logical file information.
	QSYS	QAFDLGL	PF	Database file that defines the record format of the created file used to store logical file attribute information.
	QSYS	QAFDMBR	PF	Database file that defines the record format of the created file used to store database member information.
	QSYS	QAFDMBRL	PF	Database file that defines the record format of the created file used to store database member list information.
DSPFFD	QSYS	QAFDPHY	PF	Database file that defines the record format of the created file used to store physical file attribute information.
	QSYS	QAFDPRT	PF	Database file that defines the record format of the created file used to store print file attribute information.
	QSYS	QAFDRFMT	PF	Database file that defines the record format of the created file used to store record format information.

Table 4 (Page 4 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
	QSYS	QAFDSAV	PF	Database file that defines the record format of the created file used to store save file information.
	QSYS	QAFDSELO	PF	Database file that defines the record format of the created file used to store select/omit information.
	QSYS	QAFDSPOL	PF	Database file that defines the record format of the created file used to store device file spool information.
	QSYS	QAFDTAP	PF	Database file that defines the record format of the created file used to store tape file attribute information.
	QSYS	QADSPFFD	PF	Database file that defines the record format of the created file used to store file field descriptions.
	QSYS	QPDSPPFD	PRTF	File field description printer file.
DSPFLR	QSYS	QPDSPPFLR	PRTF	Display folder printer file.
	QSYS	QADSPFLR	PF	Folder list output file.
	QSYS	QADSPDOC	PF	Document list put file.
DSPIGCDCT	QSYS	QPDSPPDCT	PRTF	DBCS printer file.*
DSPJOB	QSYS	QPDSPPJOB	PRTF	Display job printer file.*
DSPJOBBD	QSYS	QPRTJOBBD	PRTF	Job description printer file.*
DSPJOBLOG	QSYS	QPJOBLOG	PRTF	Job log printer file.*
DSPJRN	QSYS	QADSPJRN	PF	Database file that defines the record format of the created file used for the converted journal entries.
	QSYS	QAPTACG	PF	Database file that defines record format of the print job accounting statistics.
	QSYS	QAJBACG	PF	Database file that defines the record format of the job accounting statistics.
DSPJRN	QSYS	QPDSPPJRN	PRTF	Display journal printer file.*
DSPJRNRCVA	QSYS	QPDSPPRCV	PRTF	Journal receiver attributes printer file.*
DSPLIB	QSYS	QPDSPLIB	PRTF	Library printer file.*
DSPLIBL	QSYS	QPRTLIBL	PRTF	Library list printer file.*
DSPLIND	QSYS	QPDCLINE	PRTF	Line description printer file.*
DSPLOG	QSYS	QPDSPPLOG	PRTF	Log display printer file.*
DSPMNUA	QSYS	QPDSPPMNU	PRTF	Menu attributes printer file.*
DSPMODD	QSYS	QPDCMOD	PRTF	Mode description printer file.*
DSPMODSTS	QSYS	QPDCMODE	PRTF	Mode status printer file.*
DSPMSG	QSYS	QPDSPPMSG	PRTF	Message display printer file.*
DSPMSGD	QSYS	QPMSGD	PRTF	Message description printer file.*
DSPMSGF	QSYS	QPMSGD	PRTF	Message file printer file.*
DSPNETA	QSYS	QPDSPPNET	PRTF	Display network attributes printer file.*
	QSYS	QANFDNTF	PF	Database file used to define the record format for network file entries.
	QSYS	QPNFNJE	PRTF	Display network job entries printer file.
DSPOBJAUT	QSYS	QPOBJAUT	PRTF	Object authority printer file.*
	QSYS	QAOBJAUT	PF	Database file that defines the record format for the object authority entries.
DSPOBJD	QSYS	QPRTOBJD	PRTF	Object description printer file.*
	QSYS	QADSPOBJ	PF	Database file that defines the record format for the object description entries.
DSPOVR	QSYS	QPDSPOVR	PRTF	Display overrides printer file.*
DSPPGM	QSYS	QPDPGM	PRTF	Program display printer file.*
	QSYS	QADPGMAD	PF	Database file used to store names of programs that adopt. Not an actual output file.

## Appendix B

Table 4 (Page 5 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
DSPPGMREF	QSYS	QADSPPGM	PF	Database file that defines the record format of the created file used to store program references.
	QSYS	QPDSPPGM	PRTF	Program references printer file.
DSPPGMVAR	QSYS	QPDBGDSP	PRTF	Program variable printer file (debug mode).*
DSPPRB	QSYS	QASXPBOF	PF	File that contains the layout for output files.
	QSYS	QASXFEOF	PF	File that contains the layout for output files.
	QSYS	QASXCAOF	PF	File that contains the layout for output files.
	QSYS	QASXTXOF	PF	File that contains the layout for output files.
DSPPTF	QSYS	QPDSPPC	PRTF	Programming temporary fix display printer file.*
	QSYS	QADSPPTF	PF	Database file that defines the record format of the created file used to store program temporary fix (PTF) information. Not an actual output file.
DSPRCDLCK	QSYS	QPDSPLK	PRTF	Record locks display printer file.*
DSPSAVF	QSYS	QPSRODSP	PRTF	Printer file for save file save/restore information.*
DSPSBSD	QSYS	QPRTSBSD	PRTF	Subsystem description printer file.*
DSPSYSVAL	QSYS	QPDSPSVL	PRTF	System value printer file.*
DSPTAP	QSYS	QPTAPDSP	PRTF	Printer file for tape output.*
	QSYS	QPSRODSP	PRTF	Printer file for tapes in save/restore format.*
	QSYS	QSYSTAP	TAPF	Tape device file for input.
DSPTRC	QSYS	QPDBGDSP	PRTF	Trace printer file (debug mode).
DSPTRCDTA	QSYS	QPDBGDSP	PRTF	Trace data printer file (debug mode).*
DSPUSRPMN	QSYS	QPDSFDA	PRTF	Display document authority printer file.
DSPUSRPRF	QSYS	QPUSRPRF	PRTF	User profile printer file.*
EDTIGCDCT	QSYS	QPDSFDCT	PRTF	DBCS printer file.
EMLPRTKEY	QSYS	QPEMPRTF	PRTF	Emulation printer file.
ENDPRTEML	QSYS	QPEMPRTF	PRTF	Emulation printer file.
FMTDTA	QSYS	QSYSPRT	PRTF	Data format printer file.
INZDKT	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
INZTAP	QSYS	QSYSTAP	TAPF	Tape device file used for output.
LODPTF	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
PRTCMDUSG	QSYS	QSYSPRT	PRTF	Command usage printer file.
PRTERLOG	QSYS	QPCSMPT	PRTF	Error log printer file (concurrent service monitor).
	QSYS	QAPRTELG	PF	Database file that defines the record format of the created file used to store error log records. Not an actual output file.
PRTINTDTA	QSYS	QPCSMPT	PRTF	Internal data printer file (concurrent service monitor).
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
QRYDOCLIB	QSYS	QAOSIQDL	PF	Query document library output file.
QRYDST	QSYS	QAOSILIN	PF	Incoming distribution output file.
	QSYS	QAOSILOT	PF	Outgoing distribution output file.
QRYDTA	QIDU	QQRYPRT	PRTF	Query application printer file.
	QIDU	QQRYPRT2	PRTF	Secondary query application printer file.
QRYDTA	QSYS	QSYSPRT	PRTF	Query source printer file.
PRTDOC	QSYS	QAPOUFL	PF	Document output file.
RCLSTG	QSYS	QPRCLDMP	PRTF	Reclaim dump output listing.
RCVDST	QSYS	QAOSIRCV	PF	Receive incoming distribution output file model name.

Table 4 (Page 6 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
RCVTIEF	QSYS	QPTIRCV	PRTF	Received files summary print file.
RMVNETJOBE	QUSRSYS	QANFNJE	PF	Network job entry database file.
RSTDLO	QSYS	QPRSTDLO	PRTF	Print file for restore document printer file.
	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
RSTLIB	QSYS	QPSRLDSP	PRTF	Restored objects status printer file.
	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
RSTLICPGM	QSYS	QPSRLDSP	PRTF	Restored objects status printer file.
	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
RSTOBJ	QSYS	QPSRLDSP	PRTF	Restored objects status printer file.
	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
RSTUSRPRF	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
RTVDOC	QSYS	QAOSIRTV	PF	Retrieve document from document library output file.
SAVCHGOBJ	QSYS	QSYSDKT	DKTF	Diskette device file used for input.
	QSYS	QSYSTAP	TAPF	Tape device file used for input.
SAVDLO	QSYS	QPSAVDLO	PRTF	Print file for save document printer file.
	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
SAVLIB	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
SAVOBJ	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
SAVSAVFDTA	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
SAVSYS	QSYS	QSYSDKT	DKTF	Diskette device file used for output.
	QSYS	QSYSTAP	TAPF	Tape device file used for output.
SBMDKTJOB	QSYS	QKSPLDKT	DKTF	Diskette device file used for all diskette reading.
SNDPTFORD	QSYS	QESPRTF	PRTF	Printer file for PTF cover letters.
	QGPL	Qnnnnnnn	SAVF	PTF save file where Q is the prefix, and nnnnnnn is the PTF number.
SNDSRVQSQS	QUSRSYS	QAEDCDBPF	PF	File containing service contact data.
	QSYS	QESPRTF	PRTF	Printer file for PTF cover letters.
	QGPL	Qnnnnnnn	SAVF	PTF save file where Q is the prefix, and nnnnnnn is the PTF number.
STRBAS	QGPL	QBASSRC	PF	Database source input file.
STRBASPRC	QGPL	QBASSRC	PF	Database source input file.
STRCPYSCN	QSYS	QASCCPY	PF	Pattern for copy screen outfile.
STRCPYSCN	QSYS	QASCCPY	PF	Database output file.
STRDKTRDR	QSYS	QKSPLDKT	DKTF	Diskette device file used for all diskette reading.
STRDKTWTR	QSYS	QKSPLDKT	DKTF	Diskette device file used for all diskette writing.
STRPRTEML	QSYS	QPEMPRTF	PRTF	Emulation printer file.
STRSDA	QGPL	QDDSSRC	PF	DDS source default input file.

## Appendix B

Table 4 (Page 7 of 7). Files Used by CL Commands.

Command Name	Library Name	File Name	File Type	Description of File
STRSEU	QGPL	QTXTSRC	PF	SEU source default input file.
TRCINT	QSYS	QPCSMPT	PRTF	Internal trace printer output file (concurrent service monitor).
	QSYS	QSYSDKT	DKTF	Diskette device file for output.
	QSYS	QSYSTAP	TAPF	Tape device file for output.
TRCJOB	QSYS	QPRSRVTRC	PRTF	Job trace printer output file.
	QSYS	QATRCJOB	PF	Database file that defines the record format of the created files used to store trace records. Not an actual output file.
WRKACTJOB	QSYS	QPDSPAJB	PRTF	Active jobs display printer file.*
WRKCFGSTS	QSYS	QPNETSTS	PRTF	Configuration status printer file.*
WRKCNTINF	QUSRSYS	QAEDCDBPF	PF	File containing contact data.
WRKDDMF	QSYS	QPWRKDDM	PRTF	Distributed data management file attributes printer file.*
WRKDSTQ	QSYS	QPDSTSTS	PRTF	Distribution status display file.
WRKFCT	QRJE	QPDSPFCT	PRTF	Forms control table printer file.*
WRKJOB	QSYS	QPDSPJOB	PRTF	Job display printer file.*
WRKJOBQ	QSYS	QPRTSPLQ	PRTF	Job queue printer file (spooling queue).*
WRKJRNA	QSYS	QPDSPJNA	PRTF	Journal attributes printer file.*
WRKNETF	QSYS	QPNFDNTF	PRTF	Display network file printer file.
WRKNETJOB	QUSRSYS	QANFNJE	PF	Network job entry database file.
WRKOBJLCK	QSYS	QPDSPOLK	PRTF	Object locks display printer file.*
WRKOUTQ	QSYS	QPRTSPLQ	PRTF	Output queue printer file (spooling queue).*
WRKOUTQD	QSYS	QPDSPSQD	PRTF	Output queue description.*
WRKPRB	QSYS	QASXPRTL	PRTF	Problem log summary printer file.
	QSYS	QASXPRTD	PRTF	Problem log detail printer file.
	QUSRSYS	QASXPJOB	DBF	Problem log problem failure.
	QUSRSYS	QASXFRU	DBF	Problem log possible cause file.
	QUSRSYS	QASXCALL	DBF	Problem log call override file.
	QUSRSYS	QASXNOTE	DBF	Problem log user notes file.
	QUSRSYS	QASXPTF	DBF	Problem log PTF file.
	QUSRSYS	QASXSYP	DBF	Problem log symptom string file.
WRKRDR	QSYS	QPRTRDWT	PRTF	Reader display printer file.*
WRKRJESSN	QRJE	QPRJESTS	PRTF	RJE session display printer file.*
WRKSBMJOB	QSYS	QPDSPSBJ	PRTF	Submitted jobs printer file.*
WRKSBS	QSYS	QPDSPSBS	PRTF	Subsystem display printer file.*
WRKSBSJOB	QSYS	QPDSPSBJ	PRTF	Subsystem jobs display printer file.*
WRKSPLF	QSYS	QPRTSPLF	PRTF	Spooled file printer file.*
WRKSPLFA	QSYS	QPDSPSFA	PRTF	Spooled file attributes printer file.*
WRKSSND	QRJE	QPRTSSND	PRTF	Session description printer file.*
WRKSYSSTS	QSYS	QPDSPSTS	PRTF	System status printer file.*
WRKUSRJOB	QSYS	QPDSPSBJ	PRTF	User jobs display printer file.*
WRKWTR	QSYS	QPRTRDWT	PRTF	Writer display printer file.*
WRKTIE	QSYS	QPTIRCV	PRTF	Print file summary of files received.



### READER'S COMMENT FORM

**Please use this form only to identify publication errors or to request changes in publications.** Direct any requests for additional publications, technical questions about IBM systems, changes in IBM programming support, and so on, to your IBM representative or to your IBM-approved remarketer. You may use this form to communicate your comments about this publication, its organization, or subject matter, with the understanding that IBM may use or distribute whatever information you supply in any way it believes appropriate without incurring any obligation to you.

- If your comment does not need a reply (for example, pointing out a typing error), check this box and do not include your name and address below. If your comment is applicable, we will include it in the next revision of the manual.
- If you would like a reply, check this box. Be sure to print your name and address below.

Page number(s):

Comment(s):

**Please contact your IBM representative or your IBM-approved remarketer to request additional publications.**

Name \_\_\_\_\_

Company or  
Organization \_\_\_\_\_

Address \_\_\_\_\_

\_\_\_\_\_ City

\_\_\_\_\_ State

\_\_\_\_\_ Zip Code

Phone No. \_\_\_\_\_

\_\_\_\_\_ Area Code

No postage necessary if mailed in the U.S.A.

Cut  
Along

Fold and Tape

Please do not staple

Fold and Tape




# BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

International Business Machines Corporation  
Information Development  
Department 245  
3605 North Hwy 52  
ROCHESTER MN 55901-9986

NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES



Fold and Tape

Please do not staple

Fold and Tape



Cu  
Alc

### READER'S COMMENT FORM

**Please use this form only to identify publication errors or to request changes in publications.** Direct any requests for additional publications, technical questions about IBM systems, changes in IBM programming support, and so on, to your IBM representative or to your IBM-approved remarketer. You may use this form to communicate your comments about this publication, its organization, or subject matter, with the understanding that IBM may use or distribute whatever information you supply in any way it believes appropriate without incurring any obligation to you.

- If your comment does not need a reply (for example, pointing out a typing error), check this box and do not include your name and address below. If your comment is applicable, we will include it in the next revision of the manual.
- If you would like a reply, check this box. Be sure to print your name and address below.

Page number(s):

Comment(s):

**Please contact your IBM representative or your IBM-approved remarketer to request additional publications.**

Name

Company or  
Organization

Address

City

State

Zip Code

Phone No.

Area Code

No postage necessary if mailed in the U.S.A.

Cut  
Along

Fold and Tape

Please do not staple

Fold and Tape



NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES



# BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

International Business Machines Corporation  
Information Development  
Department 245  
3605 North Hwy 52  
ROCHESTER MN 55901-9986



Fold and Tape

Please do not staple

Fold and Tape



Cut  
Along

### READER'S COMMENT FORM

**Please use this form only to identify publication errors or to request changes in publications.** Direct any requests for additional publications, technical questions about IBM systems, changes in IBM programming support, and so on, to your IBM representative or to your IBM-approved remarketer. You may use this form to communicate your comments about this publication, its organization, or subject matter, with the understanding that IBM may use or distribute whatever information you supply in any way it believes appropriate without incurring any obligation to you.

- If your comment does not need a reply (for example, pointing out a typing error), check this box and do not include your name and address below. If your comment is applicable, we will include it in the next revision of the manual.
- If you would like a reply, check this box. Be sure to print your name and address below.

Page number(s):

Comment(s):

**Please contact your IBM representative or your IBM-approved remarketer to request additional publications.**

Name

---

Company or  
Organization

---

Address

---

City

State

Zip Code

Phone No.

---

Area Code

No postage necessary if mailed in the U.S.A.

Cut  
Along

Fold and Tape

Please do not staple

Fold and Tape

**BUSINESS REPLY MAIL**


FIRST CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

International Business Machines Corporation  
Information Development  
Department 245  
3605 North Hwy 52  
ROCHESTER MN 55901-9986



NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES



Fold and Tape

Please do not staple

Fold and Tape




Cut  
Along





Program Number  
5728-SS1

93X0352

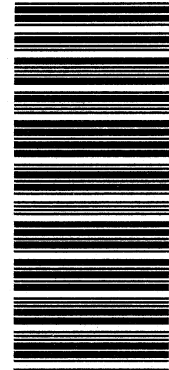

SC21-8076-2

