

Complete Programs Included

NO. 71 PRINTER CONTROL

U.S. Edition: \$2.50
International Edition: \$3.00

APR/MAY 84


MICRO™

for the **Serious Computerist**

PRINTER CONTROL




- * Double Vision
- * Micro Mouse
- * Easy DOES-IT
- * The Accurate Printer
- * HiRes Screen Dump



0

Shoot the Works With an Arrow™

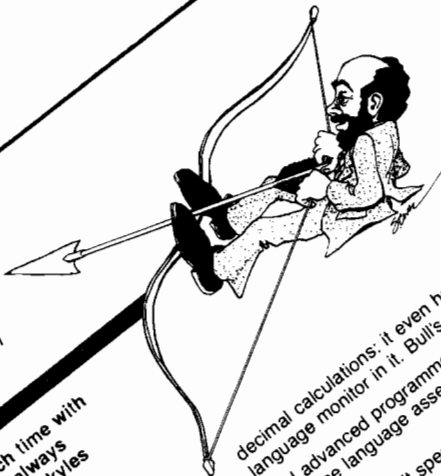

Have you been spending too much time with your VIC? If it's because you are always waiting for your programs to load, Skyles Electric Works can help.

Enter the ARROW

This cartridge can load programs off cassette at about eight times the normal speed. It can record a program once at up to eight times the density on tape. This means that you can get 200 kbytes of programs on a single C-20 tape. In the long run, you will be able to put 10 tapes into one.

The ARROW cartridge will pay for itself in the tape and the vast amount of loading time it saves.

- • • **and it's easy to use**
- ARROW . . . adds 4 commands: S, L, V, and VERIFY and APPEND at a high speed (3600 baud).
- ARROW . . . leaves the usual messages that appear on the screen.
- ARROW . . . adds a message telling you the length of the program that has been loaded (or saved).
- ARROW . . . keeps all the usual shorthand features of program naming.
- ARROW . . . starts automatically when you turn on your VIC-20 or CBM-64.

It gives the length of the program that has loaded or saved. It can handle hexadecimal!

If your programs are slow, BLITZ!™ them

Bob has discovered a spectacular compiler for the COMMODORE 64 that he calls BLITZ! BLITZ! is faster than PET SPEED, faster than any other Commodore compiler that has come down the pike. Your BLITZ!-compiled program will run from five to 20 times faster than it did before you blitzed it.

This disk program translates your slow BASIC programs into a much, much faster code. The BLITZ! compiler significantly improves the performance of your BASIC routines. It reads the entire program, reduces that program's size by deciding which operations need only run once, interprets the operations, and then re-writes the program into its own special P-code.

For more advanced programmers, the BLITZ! compiler offers another benefit besides speed. It provides an almost infinite number of ways to

Skyles Catalogue Page 2

decimal calculations; it even has a machine language monitor in it. Bull's eye!

And advanced programmers can get an optional machine language assembler in the same cartridge.

Even though it speeds up program loading it does not effect the tape recorder. It's an extremely reliable device.

But this great device does more than cut down on loading time and tape space. It is a fine programmer's aid, too. With some sharp but simple program text editing commands, the ARROW might be the best bargain around in personal software for your VIC-20. The ARROW is always on target with auto line number and line deleting features.

Only \$49.95 for the VIC-20 or COMMODORE 64 version. The high-speed cartridge with machine language assembler costs just \$89.95. And the easy-to-use ARROW comes with the clear Skyles manual.

If you want lightning-fast cassette operations, shoot for the ARROW.

- AR20 (VIC-20), AR64 (CBM-64) \$49.95*
- ARAS20 (VIC-20), ARAS64 (CBM-64) \$89.95*

add protection to your programs because a compiled program is not readable. So security is inherent in the re-writing!

Using this compiler, you can now create a string of BASIC programs such that one automatically loads the next. You can also pass information from one program to another. You will find the BLITZ! compiler a treasured tool in your programming kit.

In disk for the COMMODORE 64, BLITZ! Bob can also get you one for the older PET CBMs, on a special-order basis.

Don't wait all day for your programs to run. BLITZ! them.

BLITZ, COMMODORE 64, disk \$99.00*

*There is an additional \$3.50 US and Canada, \$10.00 Europe and Asia, shipping charge per order. California residents add sales tax.

For CBM-64 and VIC owners only:

This is just 1 of 20 pages of the newest and biggest Skyles catalog, hot off the press.

We know you'll want this page, in its full 7 x 10 splendor, and another 19 pages of peripherals, software and books that will make your CBM-64 or VIC computer even nicer to live with. So, if we missed

sending you your very own copy within the last few weeks, call us at **(800) 227-9998** (unless you live in California, in which case call **(415) 965-1735**.)

From Skyles Electric Works, the oldest and largest professional specialists in the business.



Skyles Electric Works
231-E S. Whisman Road
Mountain View, California 94041

CAD / CAM! DON'T SPEND 25k, 50k or \$500,000 BEFORE YOU SPEND \$79⁰⁰

OBJECTIVES

This book will provide managers, engineers, manufacturing personnel and any interested persons an understanding of the fundamentals of Computer Aided Design [CAD] and Computer Aided manufacturing [CAM] applications and technology.

PROGRAM DESCRIPTION

The program will expose you to the various CAD/CAM terminologies used. Hardware and software comparisons will be explored with heavy emphasis on their advantages and disadvantages. Cost justification and implementation are presented using case studies.

WHO SHOULD PARTICIPATE

The course is designed for but not limited to:

— Those managers, engineers and research professionals associated with the manufacturing industry.

— Personnel from Product, Tool Design, Plant Layout and Plant Engineering who are interested in CAD/CAM.

ADVANTAGES— END RESULT

This program will enable participants to:

1. Learn basic CAD/CAM Vocabulary.
2. Better understand the various hardware and software components used in a typical CAD work station.
3. Select the existing CAD/CAM system most appropriate for current and projected needs.
4. Make an effective cost justification as to Why they SHOULD or SHOULD NOT implement a CAD/CAM system.

5. Apply and use computer graphics as a productivity tool.

PROGRAM CONTENT

1. Introduction
 - a. History of CAD/CAM
 - b. Importance of CAD/CAM
2. Graphics work station peripherals
 - a. Input
 - b. Output
 - c. Advantages and disadvantages of input and output devices.
3. Computer Graphics Systems [Hardware]
 - a. Micros
 - b. Minis
 - c. Main Frames
 - d. Turnkey Graphics systems
4. Software
 - a. Operating systems
 - b. Graphics Packages
 - c. Graphics Modules
5. Computer Aided Design
 - a. Geometric Definitions [Points, Lines, Circles, ETC..]
 - b. Control functions
 - c. Graphics Manipulations
 - d. Drafting Functions
 - e. Filing functions
 - f. Applications

6. Implementation
 - a. Determining needs
 - b. Purchasing and Installing
 - c. Getting Started
7. Cost Justification and Survey
 - a. Cost comparisons of two and four work station systems.
 - b. Presentation of recent survey of CAD system users

ZANIM SYSTEMS MAKES THIS SPECIAL OFFER: IF YOU BUY **CAD/CAM: A PRODUCTIVITY ENHANCEMENT TOOL** BEFORE APRIL 15TH, WE WILL INCLUDE *FREE OF CHARGE* THESE TWO PAPERS PUBLISHED NATIONALLY BY ZANIM SYSTEMS CAD/CAM EXPERT.

1. "Creation of a Large Data Base for a Small Graphics System"
2. "Shortest Path Algorithm Using Computer Graphics"


Of course you could spend as much as \$495, \$595 or \$695 for a similar 3 day seminar even though this book is not a computer program.

We tell you April 15th for a special reason...this product may be tax deductible depending on your field or needs. This 170 page course will satisfy any of your CAD/CAM needs. We guarantee it.

Please send \$79 to:

**ZANIM SYSTEMS
CAD/CAM GROUP
P.O. BOX 4364
FLINT, MI 48504
(313) 233-5731**

QUANTITY DISCOUNTS AVAILABLE FOR COLLEGES, UNIVERSITIES AND/OR SEMINAR USE.

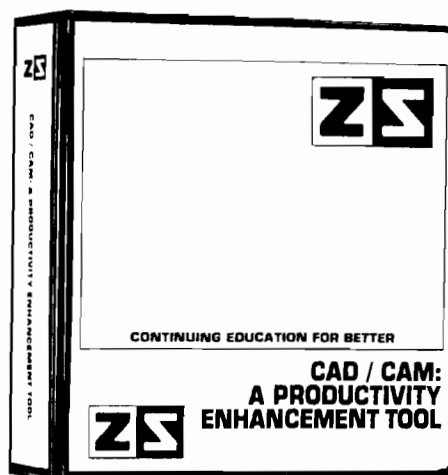

There are three ways to learn 6502 Assembly Language on your Apple Computer:

Hard

Easy


Easiest



OTHER ASSEMBLERS

LISA v2.6

LISA ED PAC

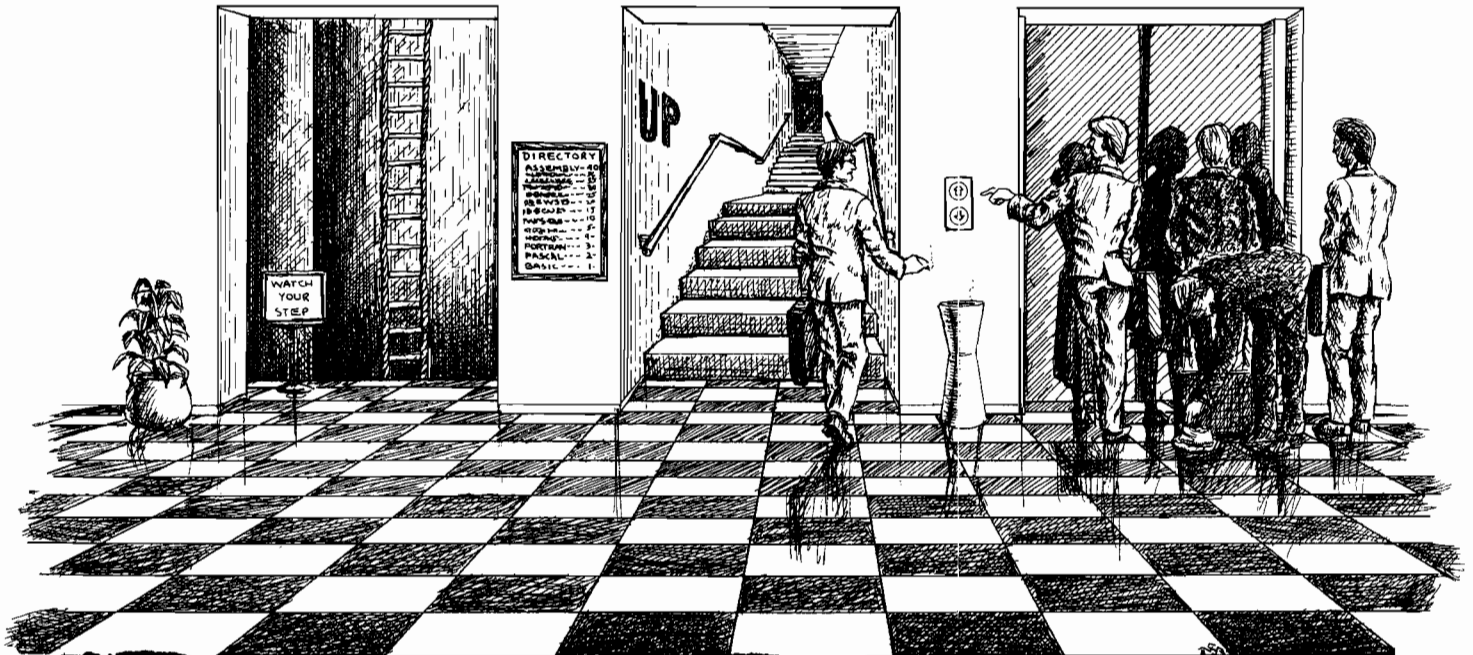

Introducing the Easiest Way: The LISA Ed Pac™

You can't deny that learning assembly is extremely important for you if you want to make the most of your work. If assembly language wasn't so important, why are almost all of the top selling programs available for the Apple II written in assembly language? But let's face it, learning 6502 assembly language isn't a piece of cake. At least not until now. Because now there's the LISA Education Package™ from Lazerware. It'll have you up to speed with assembly language in a fraction of the time it would otherwise take.

The LISA Ed Pac™ begins with LISA v2.6, the favorite assembler of beginners and professionals alike. More Apple owners have learned 6502 assembly language using LISA than all the other assemblers combined. More tutorial material is available for LISA, including books by D. Fudge, R. Hyde, W. Maurer, and R. Mottola. Randy Hyde's 300-page *Using 6502 Assembly Language* is included in the LISA Ed Pac™.

Next we threw in SPEED/ASM™, a set of 6502 subroutines that make programming in assembly language as easy as BASIC. And for those who want to see how it's done, the SPEED/ASM source listings are also included. We also included the LUD #1 (Lisa Utility Disk #1) which includes an extended editor for LISA and a LISA source file listing utility. Finally, we added MAXWELL'S Debugger™ to the LISA Ed Pac. This ultra-powerful debugger/monitor makes learning and debugging 6502 assembly language a breeze.

LISA Ed Pac Price \$149.95, A \$229.75 Value (suggested retail).
Available at dealers everywhere, or directly from:

LAZERWARE

For a copy of Lazerware's *A Guide to Purchasing a 6502 Assembler for Your Apple II or Apple IIc*, write to: Lazerware, 925 Linden St., Corona, CA 91720 or call us at (714) 735-1041.
Note: LISA, LISA v2.6, LISA Ed Pac, LISA Educational Package, Speed/ASM, Maxwell's Debugger, and LUD are trademarks of Lazerware.
Apple, Apple II, and Apple IIc are trademarks of Apple Computer, Inc.

MICRO™

for the **Serious Computerist**

MICRO
P.O. Box 6502
Chelmsford, MA 01824
617/256-3649

Publisher/Editor-in-Chief

Robert M. Tripp

Associate Publisher

Cindy Kocher

Production Manager

Jennifer Collins

Technical Editor

Mark Morano

Advertising Manager

Cindy Kocher

Sales Manager

C. Skip Bentle

Circulation Manager

Linda Hensdill

Customer Service

Kim Dundas

Accounting

Donna M. Tripp

Contributing Editors

Cornelis Bongers

Phil Daley

David Malmberg

John Steiner

Jim Strasma

Paul Swanson

Richard C. Vile, Jr.

Loren Wright

MICRO is published monthly by:
MICRO, Chelmsford, MA 01824.

Second Class postage paid at:

Chelmsford, MA 01824 and additional
mailing offices.

USPS Publication Number: 483470.

ISSN: 0271-9002.

Send subscriptions, change of address,
USPS Form 3579, requests for back issues
and all other fulfillment questions to:

MICRO

P.O. Box 6502

Chelmsford, MA 01824

or call 617/256-3649.

Subscription Rates: (per year):

U.S. \$24.00 or \$42.00 for two years

Foreign surface mail: \$27.00

Air mail: Europe \$42.00

Mexico, Central America, Middle East,

North Africa, Central Africa \$48.00

South America, South Africa, Far East,

Australia, New Zealand \$72.00

Copyright © 1984 by MICRO.

All Rights Reserved.

Features

20 The Accurate Printer

Richard Marmon

Reproduce Atari
characters on your Epson

29 A Low Cost Mouse for the Vic-20 (or any computer)

Robert L. Martin

Build the latest computer
device for inputting data

32 Double Vision Catalog for 40 or 80 Columns

Alan and Valerie Floeter

List your CATALOG in two
or three columns

35 A New Variation on an Old Theme: Replace Your 6502

Ron M. Battle

A new R65C00 family has
interesting enhancements

37 Spec Box: 16K Color Computer

Mike Hamilton

Generate PMODE 4 HiRes
graphics on the CoCo
without Extended BASIC

40 Easy DOES—IT (Not DosPlus), Pt.4

Michael Keryan

Add new utility functions
to a Commodore 64

47 Four Techniques to Make Your Programs Fast

Chris Williams

Become the fastest
programmer in town

49 Talking to Your Printer

Dick Buchanan, Jr., et al

A printer control program
and Generic BASIC notes

55 HiRes Screen Dump for the EPSON MX-80

Robert D. Walker

Subroutine for dumping
Apple II hi-res graphics

62 A Timely Interrupt

Mike Hamilton

Make an accurate timer
with just a few POKES

63 Disk Abuse: A True Story

Mark S. Morano

The sad confessions of a
disk junkie

Departments

6 Editorial

8 Letterbox

12 Reviews in Brief

64 CoCo Bits

66 Interface Clinic

71 Commodore Compass

73 From Here to Atari

74 Hardware Catalog

77 Review Index

79 Listing Conventions

80 Advertiser Index

COMPUTER MAIL ORDER

NEC PRINTERS
 NEC 2050\$999.00
 NEC 3550\$1679.00

PERCOM/TANDOM DISK DRIVES
 5 1/4" 320K Floppy\$229.00
 5 Meg Hard w/Controller CALL
 10 Meg Hard w/Controller CALL
 15 Meg Hard w/Controller CALL
 20 Meg Hard w/Controller CALL

AMDEK
 310A Amber Monitor\$169.00
 OXY 100 Plotter\$599.00
 Color II\$399.00

AST RESEARCH
 Six Pak Plus from\$279.00
 Combo Plus II from\$279.00
 Mega Plus from\$309.00
 I/O Plus from\$139.00

QUADRAM
 Quadlink\$479.00
 Quadboard as low as\$289.00
 Quad 512 Plus as low as\$249.00
 Quadcolor as low as\$219.00
 Chronograph\$89.00
 Parallel interface Board\$89.00
 64K RAM Chips Kit\$59.00

MICROPRO
 WordStar/MailMerge\$349.00
 InfoStar\$299.00
 SpellStar\$159.00
 CalcStar\$99.00

MICROSTUF
 Crosstalk\$105.00

MICROSOFT
 Multiplan\$159.00

ASHTON-TATE
 dBASE II\$389.00
 Friday!\$185.00

IUS
 EasyWriter II\$249.00
 EasySpeller\$119.00
 EasyFiler\$229.00

CONTINENTAL SOFTWARE
 1st Class Mail/Form Letter\$79.00
 Home Accountant Plus\$88.00

IBM VISICORP

IBM APPLE
 VisiCalc\$159.00\$159.00
 VisiCalc 4\$159.00\$269.00
 VisiCalc Advanced\$249.00\$199.00
 VisiWord/Spell\$199.00\$199.00
 VisiWord/Plot\$199.00\$199.00
 VisiLink\$169.00\$169.00
 VisiFile\$199.00\$199.00
 VisiSchedule\$199.00\$199.00
 VisiIndex\$159.00\$135.00
 VisiPlot\$135.00\$75.00
 VisiTerm\$75.00\$169.00
 Desktop Plan\$199.00\$75.00
 Bus Forecast Model\$75.00\$75.00
 StretchCalc\$75.00\$59.00
 VisiTutor Calc\$59.00\$75.00
 VisiTutor Advanced\$75.00\$59.00
 VisiTutor Word\$259.00\$289.00
 Visi-On Calc\$289.00\$179.00
 Visi-On Graph\$179.00\$275.00
 Visi-On Word\$275.00\$159.00
 Visi-On Mouse\$159.00\$319.00
 Visi-On Host\$319.00

pfs IBM APPLE
 Write\$89.00\$79.00
 Graph\$89.00\$79.00
 Report\$79.00\$79.00
 File\$89.00\$79.00
 Solutions* as low as\$16.00\$16.00
 *Call On Tides

MONOGRAM
 Dollars and Sense\$109.00

LOTUS
 1-2-3\$399.00


PROFESSIONAL SOFTWARE
 PC Plus/The Boss\$349.00

SYNAPSE
 File Manager\$89.00

SOFTWARE ARTS
 TK Solver\$189.00

MBC-550.....CALL
MBC-555.....CALL
 MBC 1100\$1499.00
 FDD 3200-32CK Drive\$389.00
 MBC 1150\$1899.00
 MBC 1200\$1849.00
 FDD 6400-64CK Drive\$469.00
 MBC 1250\$2099.00
 PR 5500 Printer\$599.00

SANYO



APPLE/FRANKLIN DISK DRIVES MICRO-SCI
 A2\$219.00
 A40\$299.00
 A70\$319.00
 C2 Controller\$179.00
 C47 Controller\$89.00

RANA
 Bite 1\$279.00
 Bite 2\$369.00
 Bite 3\$569.00

APPLE IIe STARTER PACK
 64K Apple IIe, Disk Drive & Controller, 80 Column Card, Monitor II & DOS 3.3
COMPLETE.....CALL

FRANKLIN




ACE 1000 Color ComputerCALL
 ACE Family Pack SystemCALL
 ACE PRD PLUS SystemCALL
 ACE 1200 Office Mgmt. SystemCALL
 *Not the Expensive!

TERMINALS
 914\$569.00
 924\$689.00
 925\$739.00
 950\$929.00
 970\$1039.00

COMPUTERS
 Teleport PortableCALL
 800A\$1099.00
 802\$2699.00
 803\$1949.00
 802H\$4695.00
 806/20\$4999.00
 816/40\$9199.00
 1602\$3399.00
 1603CALL

TeleVideo



AXIOM
 AT-100 Atari Interface\$239.00
 GP-100 Parallel Interface\$199.00
 AT-846 Interface\$89.00

BMC
 401 Letter Quality\$589.00
 BX-80 Dot Matrix\$269.00

CENTRONICS
 122 Parallel\$299.00
 739-1 Parallel\$199.00
 739-3 Serial\$249.00

C.I.TOH
 Gorilla Banana\$209.00
 Prowriter 8510P\$379.00
 Prowriter 1550P\$599.00
 A10 (18 cps)\$569.00
 8600 P\$929.00
 F10-40\$999.00
 F10-55\$1499.00

COMREX
 ComWriter II Letter Quality\$499.00

DIABLO
 620 Letter Quality\$949.00
 630 Letter Quality\$1749.00

DAISYWRITER
 2000\$999.00
 Tractor Feed\$109.00

EPSON
 MX-80FT, MX-100, FX-80, FX-80FT, FX-80, FX-100CALL

IDS
 Phsm 80 For ConfigurationsCALL
 Phsm 32 For ConfigurationsCALL

MANNESMAN TALLY
 160L\$589.00
 180L\$799.00
 Spmt 80\$309.00

PRINTERS
NEC
 2010/2030\$899.00
 8023 Dot Matrix\$379.00
 8025 Dot Matrix\$669.00
 3510 Serial/Letter Quality\$1449.00
 3530 Parallel/Letter Quality\$1499.00
 7710/7730 Serial/Parallel\$1949.00

OKIDATA
 82, 83, 84, 92, 93, 2350, 2410CALL

SMITH CORONA
 TP-2\$399.00
 Tractor Feed\$119.00

SILVER REED
 500 Letter Quality\$469.00
 550 Letter Quality\$699.00

STAR
 Gemini 10X\$299.00
 Gemini P15X\$399.00
 Delta 10\$559.00
 Serial Board\$75.00

TOSHIBA
 1350\$1699.00

TRANSTAR
 120P\$499.00
 130P\$689.00
 315 Color\$499.00

APPLE INTERFACE CARDS & BUFFERS
 Choose from PKASO, Orange Micro, MPC, MicroMax, Tymac, Quadram & Practical
PRINTER CABLES
 are available for most all computers on the market. We supply all your computer needs.

PAPER SUPPLIES
 1000 shts. 8 1/2x11 Tractor Paper\$19**
 1000 shts. 14 1/4x11 Tractor Paper\$24**
 1 or 2" Address Labels\$9**

ANCHOR
 Volksmodem\$59.00
 Mark II\$79.00
 Mark VII (Auto Ans/Auto Dial)\$119.00
 Mark XII (1200 Baud)\$299.00
 TRS-80 Color Computer\$99.00
 9 Volt Power Supply\$9.00

HAYES
 Smartmodem 3100\$209.00
 Smartmodem 1300\$499.00
 Smartmodem 1200B\$449.00
 Micromodem IIe\$269.00
 Micromodem 1C0\$299.00
 Smart Com II\$89.00
 Chronograph\$199.00

MODEMS
NOVATION
 J-Cat\$99.99
 SmartCat 103\$179.00
 SmartCat 103/212\$399.00
 AutoCat\$219.00
 212 AutoCat\$549.00
 Apple Cat II\$249.00
 212 Apple Cat\$569.00
 Apple Cat 212 Upgrade Cat\$309.00
\$399.99

ZENITH
 ZT1\$339.00
 ZT10\$309.00
 ZT11\$369.00

MONITORS
AMDEK
 300 Green\$149.00
 300 Amber\$159.00
 310 Amber\$169.00
 Color 1\$279.00
 Color 1 Plus\$299.00
 Color 2\$399.00
 Color 2 Plus\$419.00
 Color 3\$349.00
 Color 4\$699.00

BMC
 12" Green\$88.99
 12" Green Hi-Res\$119.99
 9191-13" Color\$249.00

GORILLA
 12" Green\$88.99
 12" Amber\$95.99

NEC
 JB 1260 Green\$109.00
 JB 1201 Green\$149.99
 JB 1205 Amber\$159.99
 JC 1215 Color\$269.00
 JC 1216 RGB\$429.00
 JC 1460 Color\$359.00

PRINCETON GRAPHICS
 HX-12 RGB\$519.00

SAKATA
 100\$269.00

TAXAN
 210 Color RGB\$299.00
 400 Med-Res RGB\$319.00
 415 Hi-Res RGB\$439.00
 420 Hi-Res RGB (IBM)\$489.00
 100 12" Green\$125.00
 105 12" Amber\$135.00

USI
 P1 1, 9" Green\$99.99
 P1 2, 12" Green\$119.99
 P1 3, 12" Amber\$149.99
 P1 4, 9" Amber\$139.99
 1400 Color\$269.99

QUADRAM
 Quadchrome 8400\$549.00

ZENITH
 ZVM 122 Amber\$109.00
 ZVM 123 Green\$89.99
 ZVM 135 Color/RGB\$469.99

east
800-233-8950

In PA call (717)327-9575, Dept. 40515
 Order Status Number: 327-9576
 Customer Service Number: 327-1450
 477 E. 3rd St., Williamsport, PA 17701



canada
 Ontario/Quebec

800-268-3974

Other Provinces 800-268-4559
 In Toronto call (416)928-0866, Dept. 40515
 Order Status Number: 828-0866
 2505 Dunwin Drive, Unit 3B
 Mississauga, Ontario, Canada L5L1T1

west

800-648-3311

In NV call (702)588-5654, Dept. 40515
 Order Status Number: 588-5654
 P.O. Box 6689
 Stateline, NV 89449

No risk, no deposit on C.O.D. orders and no waiting period for certified checks or money orders. Add 3% (minimum \$5) shipping and handling on all orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. Call today for our catalog.

COMPUTER MAIL ORDER




Koala
Technologies Corporation


KOALA SOFTWARE.....CALL

KOALA PADS

Atari [Disk].....	\$75 00
Atari [ROM].....	\$82 00
C-64 [Disk].....	\$75 00
C-64 [ROM].....	\$82 00
IBM.....	\$95 00
Apple/Franklin.....	\$85 00



HOME COMPUTERS

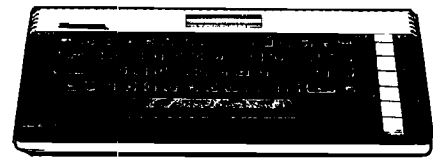

**WHILE SUPPLIES LAST!
ATARI 600XL
\$149**

Commodore
CBM 8032.....\$599
CBM 4032.....\$599

SX-64 PORTABLE \$839

VIC 20.....CALL
CBM 64.....\$199

C1541 Disk Drive.....	\$249.00
C1530 Datasette.....	\$69.00
C1520 Color Printer/Plotter.....	\$129.00
M-801 Dot Matrix Printer.....	\$219.00
C1526 Dot Matrix/Sensal.....	\$299.00
C1702 Color Monitor.....	\$499.00
C1311 Joystick.....	\$4.99
C1312 Paddles.....	\$11.99
C1600 VIC Modem.....	\$59.00
C1650 Auto Modem.....	\$89.00
Logo 64.....	\$49.00
Plot 64.....	\$39.00
Word Pro 64 Plus.....	\$59.00
Parallel Printer Interface.....	\$49.00
Calc Result 64.....	\$65.00
Calc Result Easy.....	\$39.00
Codewriter 64.....	\$75.00
Quick Brown Fox.....	\$49.00
MCS 801 Color Printer.....	\$499.00
OPS 1101 Daisy Printer.....	\$459.00
Magic Voice Speech Module.....	\$54.00
Desk Organizer Lock.....	\$49.00
Vidtex Telecommunications.....	\$34.95

MSD SD1 Disk Drive.....	\$349.00
MSD SD2 Disk Drive.....	\$599.00
CBM 8096.....	\$869.00
CBM 8000.....	\$999.00
8128-80.....	\$769.00
8032 to 9000 Upgrade.....	\$269.00
2031 LP Disk Drive.....	\$299.00
8050 Disk Drive.....	\$949.00
8250 Disk Drive.....	\$1199.00
4223 Printer.....	\$379.00
8023 Printer.....	\$589.00
6400 Printer.....	\$1399.00
Z-RAM.....	\$499.00
Silicon Office.....	\$699.00
The Manager.....	\$199.00
SoftROM.....	\$125.00
VisiCalc.....	\$159.00

PROFESSIONAL SOFTWARE

Word Pro 2 Plus.....	\$159.00
Word Pro 3 Plus.....	\$189.00
Word Pro 4 Plus/5 Plus.....	\$279.00
InfoPro.....	\$179.00
Administrator.....	\$399.00
Power.....	\$79.00

We stock a full inventory of software for Commodore, such as: Artworx, Broderbund, Commercial Data, Creative Software, EPYX, HES, MicroSpec, Nufekop, Romox, Sirius, Synapse, Thorn EMI, Tronix, UMI, Victory, Spinnaker, Rainbow & Timeworks!

INFOCOM

Zork 1,2,3 (AT/AT/CBM/IBM).....	\$29.00
Deadline (AT/AT/CBM/IBM).....	\$32.95
Enchanter (AT/AT/CBM/IBM).....	\$32.95
Planetfall (AT/AT/CBM/IBM).....	\$32.95
Witness (AT/AT/CBM/IBM).....	\$32.95
Starcross (AT/AT/CBM/IBM).....	\$29.00

ATARISOFT

IBM/AP C64/VIC.....	\$29.99	\$37.99
PacMan.....	\$29.99	\$37.99
Centipede.....	\$29.99	\$37.99
Dig Dug.....	\$29.99	\$37.99
Donkey Kong.....	\$29.99	\$37.99
Defender.....	\$29.99	\$37.99
Robotron.....	\$29.99	\$37.99
Star Gate.....	\$29.99	\$37.99

CMO'S PORTABLE CORNER

HP 71B \$499**

PC-8201 \$599

41CV.....\$199**	
41CX.....\$249**	
HP 10C.....	\$51.99
HP 11C.....	\$69.99
HP 12C.....	\$88.99
HP 15C.....	\$88.99
HP 16C.....	\$88.99
HP 75C.....	\$749.99
HPIL Module.....	\$98.99
HPIL Cassette or Printer.....	\$359.99
Card Reader.....	\$143.99
Extended Function Module.....	\$63.99
Time Module.....	\$63.99

NEC

PC-8221A Thermal Printer.....	\$149.99
PC-8281A Data Recorder.....	\$99.00
PC-8201-06 8K RAM Chips.....	\$105.00
PC-8206A 32K RAM Cartridge.....	\$329.00

SHARP

TIMEX/SINCLAIR

Timex/Sinclair 1000.....	CALL
Timex/Sinclair 2085.....	CALL
18K Memory.....	\$25.00
2040 Printer.....	\$99.99
VuCalc.....	\$17.99
Mindware Printer.....	\$99.99

PC-1500A.....\$165**
PC-1250A.....\$88**

CE-125 Printer/Cassette.....	\$128.99
CE-150 Color Printer/Cassette.....	\$171.99
CE-155 8K RAM.....	\$93.99
CE-161 16K RAM.....	\$134.99
CE-500 ROM Library.....	\$29.99

101D Recorder.....\$74.00

1020 Color Printer.....	\$249.00
1025 Dot Matrix Printer.....	\$349.00
1027 Letter Quality.....	\$309.00
1030 Direct Connect Modem.....	\$119.00
1050 Disk Drive.....	\$339.00
CX30 Paddle.....	\$12.00
CX40 Joystick.....	\$6.00
CX77 Touch Tablet.....	\$64.00
CX80 Trak Ball.....	\$48.00
CX85 Keypad.....	\$105.00
488 Communicator II.....	\$229.00
4003 Assorted Education.....	\$47.00
4011 Star Readers.....	\$33.00
4012 Missile Command.....	\$29.00
4013 Asteroids.....	\$29.00
5049 VisiCalc.....	\$159.00
7079 Logo.....	\$79.00
7101 Entertainer.....	\$69.00
7102 Arcade Champ.....	\$75.00
8026 Dig Dug.....	\$33.00
8030 E.T. Phone Home.....	\$33.00
8031 Donkey Kong.....	\$39.00
8033 Robotron.....	\$35.00
8034 Pole Position.....	\$39.00
8036 Atari Winter.....	\$79.00
8040 Donkey Kong, Jr.....	\$39.00
8043 Ms. Pacman.....	\$39.00
8044 Joust.....	\$39.00

DISKETTES MAXELL

5 1/4" MD-1.....	\$29.00
5 1/4" MD-2.....	\$39.00
8" FD-1 (SS/DD).....	\$39.00
8" FD-2 (DS/DD).....	\$49.00

VERBATIM

5 1/4" SS/DD.....	\$26.99
5 1/4" DS/DD.....	\$36.99

ELEPHANT

5 1/4" SS/SD.....	\$18.49
5 1/4" SS/DD.....	\$22.99
5 1/4" DS/DD.....	\$28.99

HEAD

5 1/4" Disk Head Cleaner.....	\$14.99
-------------------------------	---------

DISK HOLDERS INNOVATIVE CONCEPTS

Rip-n-File 10.....	\$3.99
Rip-n-File 50.....	\$17.99
Rip-n-File (400/500 ROM)Holder.....	\$17.99

LJK

Atari Letter Perfect Disk(40/80).....	\$79.99
Atari Letter Perfect ROM(40 col).....	\$79.99
Atari Letter Perfect ROM(80 col).....	\$79.99
Atari Data Perfect ROM(80 col).....	\$79.99
Atari Spell Perfect Disk.....	\$59.99
Atari Utility/MailMerge.....	\$21.00
Apple Letter Perfect.....	\$99.00
Apple Data Perfect.....	\$75.00
Apple LJK Utility.....	\$21.00
Apple Lower Case Generator.....	\$19.00

800XL.....\$299
1200XL.....CALL
1400XL.....CALL



AT 88-S1.....	\$369.00
AT 88-A1.....	\$259.00
AT 88-S1 PD.....	\$449.00
AT 88-OCA.....	\$119.00
RFD 40-S1.....	\$449.00
RFD 40-A1.....	\$269.00
RFD 40-S2.....	\$699.00
RFD 44-S1.....	\$539.00
RFD 44-S2.....	\$669.00

TEXAS INSTRUMENTS

TX 99-S1.....	\$279.00
---------------	----------

RANA

1000.....	\$329.00
-----------	----------

TRAK

AT-02.....	\$389.00
------------	----------

INDUS

GT-Drive.....	\$379.00
---------------	----------

MEMORY BOARDS

Axlon 32K.....	\$59.00
Axlon 48K.....	\$99.00
Axlon 128K.....	\$299.00
Intec 32K.....	\$59.00
Intec 48K.....	\$84.00
Intec 64K.....	\$99.00
Intec Real Time Clock.....	\$29.00

ALIEN VOICE BOX

Atari.....	\$119.00
Apple.....	\$149.00

CONTROLLERS & JOYSTICKS WICO

Joystick.....	\$21.99
3-Way Joystick.....	\$22.99
Famous Red Ball.....	\$23.99
Power Grip.....	\$21.99
BOSS Joystick.....	\$17.99
ATARI/VIC Trak Ball.....	\$34.99
Apple Trak Ball.....	\$54.99
Apple Adapter.....	\$15.99
Apple Analog.....	\$37.99

KRAFT

Atari Single Fire.....	\$12.99
Atari Switch Hitter.....	\$15.99
Apple Paddles.....	\$34.99
IBM Paddles.....	\$34.99
IBM Joystick.....	\$46.99

AMIGA

3100 Single.....	\$13.99
3101 Par.....	\$19.99
Joyboard.....	\$37.99

TG

Atari Trak Ball.....	\$47.99
Apple Joystick.....	\$47.99
Apple Trak Ball.....	\$47.99

east
800-233-8950

canada
Ontario/Quebec
800-268-3974

west
800-648-3311

In PA call (717)327-9575, Dept. 40515
Order Status Number: 327-9576
Customer Service Number: 327-1450
477 E. 3rd St., Williamsport, PA 17701

Other Provinces 800-268-4559
In Toronto call (416)928-0866, Dept. 40515
Order Status Number: 828-0866
2505 Dunwin Drive, Unit 38
Mississauga, Ontario, Canada L5L1T1

In NV call (702)588-5654, Dept. 40515
Order Status Number: 588-5654
P.O. Box 6689
Stateline, NV 89449



CANADIAN ORDERS: All prices are subject to shipping, tax and currency fluctuations. Call for exact pricing in Canada.
INTERNATIONAL ORDERS: All shipments outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum \$5) shipping and handling.
EDUCATIONAL DISCOUNTS: Additional discounts are available to qualified Educational Institutions.
APO & FPO: Add 3% (minimum \$5) shipping and handling.

Once Upon a MICRO

Once upon a time, MICRO began as a magazine to promote the 6502 microprocessor. At that time, back in the murky mists of microcomputing, 1977, no one was giving this marvelous chip any attention. You could read many issues of Byte without even encountering it. We felt that this chip, and the KIM-1 microcomputer that MOS Technology had produced to demonstrate the abilities of the 6502, deserved better treatment. The rapid growth of MICRO showed that we were right!

Once upon a time, MICRO was more a 'community' of 6502 users than it was a 'publication'. MICRO's readers were willing to tackle the new micros, solve the many problems that were encountered, and share their information with other readers. It was an exciting time of exploration and experimentation. Many important features were discovered, problems solved and projects generated by the MICRO reader/author.

Once upon a time, MICRO helped lead its readers into new areas by systematically exposing them to other microcomputers, microprocessors, languages, techniques, hardware projects, and so forth.

Once upon a time, MICRO provided very rapid turn-around on material submitted for publication. Articles were typically published within two or three months of initial receipt. This rapid turn-around was satisfying to the authors and useful to the readers.

Once upon a time, MICRO was a small, over-worked but happy staff that took pride in producing a top quality product.

Once upon a time, MICRO was directed by an individual who had experience in software - from operating system design through applications, and hardware knowledge - from simple interfacing up to designing a complete disk-oriented microcomputer system.

Once upon a time, MICRO provided an up-to-date catalog of important hardware and software products, in a standardized format that made it easy to use.

Once upon a time, MICRO had a panel of expert reviewers who provided accurate, unbiased, and timely reviews of new products.

Well, "Once Upon A Time" is now! While MICRO has tried a lot of different ideas, particularly during the past year, it has now returned to its 'roots'. We have worked hard to get MICRO back on track as the premier magazine for people who are serious about all aspects of the 6502/6809/68000 family of microcomputers. Some of the obvious changes have included moving MICRO back to Chelmsford, MA where it began, my reassuming the **active** role of Publisher and Editor-in-Chief, and numerous


changes in the staff to streamline and improve our overall operation. In the past few months we have cleared the queue of all out-of-date articles and reviews that had been accumulated, have re-established active dialog with many key authors, have worked out internal procedures to insure rapid response to all submissions, have developed improved listing methods for both assembly and BASIC listings, and much more. Other changes are underway, some of which will take time to develop, all of which are aimed at making MICRO work for you.

One new way in which MICRO will work is to present material on diskette. Many program/articles are received that are '**too long**' to print or to key in but are '**too good**' not to use. Rather than ignore this significant material, or hold it for an eventual book/disk, MICRO will now offer certain materials on disk. See the announcement on page 80 of this issue for details on our first offerings.

If you are an author, MICRO guarantees that your manuscript will be reviewed and you will receive notification within two weeks of receipt. This rapid response will serve to get your material into print quickly with prompt payment, and will insure that the MICRO readers are getting the most current information.

If you are a reader, MICRO invites you to become a more active participant in the world of microcomputing. Tell us, through the June Reader Survey, what you want MICRO to do for you. Send us your ideas, suggestions, feedback. (We do listen! The negative reader feedback that we received on our 'new, improved' listing techniques in the November and December issues made us find better methods.) And, most of all, write articles to share your knowledge and understanding with others. In this fantastic world of microcomputers, nobody knows everything, and everyone knows something.

MICRO is your magazine. Make it work for you.



Editor-in-Chief

This Month's Cover


When he looked at this windmill, Don Quixote saw double. He fought an imaginary giant, and he lost.

In *Double Vision*, Valerie and Alan Floeter fight a real giant ... the problem of one long listing using the CATALOG routine. Unlike Don Quixote, the Floeters win their battle. Now your listing can be condensed into two, three, or four columns, but don't worry—your not imagining it—you've got Double Vision.

SPECIALS ON INTEGRATED CIRCUITS

6502 @ 4.90 6520 @ 4.00 6522 @ 5.00 4116 @ 1.85
2532 @ 5.90 2716 @ 4.45 6116 @ 6.45 4164 @

**Anchor
Automation
Signalman
MODEMS**



FREE SOURCE MEMBERSHIP WITH SIGNALMAN

All Signalman Modems are Direct Connect, and provide the best price-performance values. Dealer and OEM inquiries invited

Volkmodem with computer cable	68
Mark VII Auto Dial/Auto Answer	99
Mark XII Smart Model 1200/300	279
DC HAYES Smartmodem	219
DC Hayes Smartmodem 1200/300	519



PROM QUEEN for C64 or VIC	130
Apple Emulator for Commodore 64	Call
STAT Statistics Package for C64	95
Solid Oak 2 Level Stand for C64 or VIC	29
C64/VIC Switch (networking)	129
BACKUP V1.0 tape copier for C64 or VIC	20
CARDBOARD/6 Motherboard - VIC	64
CARDBOARD/5 Motherboard - C64	56
CARD PRINT G Printer Int. with Graphics	79
CARD PRINT B Printer Interface—C64/VIC	48
CARDBOARD/3s Motherboard - VIC	22
CARDCO C64/VIC Calculator Keypad	32
CARDRAM/16 RAM Expansion - VIC	49
Complete CAROCO Line in stock	
CIE and VIE IEEE Interfaces in stock	
MSD Dual SuperDisk for C64 or IEEE	570
MAE Assembler for C64	50
Koala Pad Touch Tablet—C64 or VIC	75
CBC 4/12 Analog to Digital 4 chan/12 bit	179
MULTIPLAN for C64	79
Dust Cover for C64 or VIC	6
Grand Master Chess for C64	24
COMAL Language for C64	14
with sprites, color graphics, sound, turtle graphics.	
BusCard II from Batteries Included	159
ULTRA BASIC - 64 with Turtle Graphics	37
Super Disk Utility - C64 - includes backup	19
MicroChess - C64 - 8 levels of play	17
HES MODEM with software for C64	45
Commodore 64 Programmers Reference Guide	16
WordPro 3+/64 with Spellright	85
VIController (also C64) - BSR Controller	50
COM VOICE Synthesizer for C64 or VIC	139
VIC products in stock - call for extra discounts.	
Victory Software for VIC and C64 in stock.	

APPLE—FRANKLIN ITEMS

FRANKLIN—complete line in stock	
QUENTIN Drives for Apple/Franklin	189
Swapper Stopper	26
automatic switch between paddles and joystick	
KRAFT Apple Joystick	40
Kraft Apple Paddle Pair	30
Koala Pad Touch Tablet-Apple/Franklin	90
SPINNAKER Software in stock	
Broderbund Software in stock	
16K RAM Card for Apple	59
Multiplan—Microsoft	185
Solid Oak 2 Level Stand for Apple	29
Serial Card for Apple	89
MPC RAM/80 column card for IIe (AP/TXT)	139
Z80 Softcard and CP/M (Microsoft)	235
RANA Elite I with Controller	389
Parallel Printer Interface/Cable	69
Microtek and MPC Interfaces in stock	
Grappier + Interface	135
DC Hayes Micromodem II, IIe with Smartcom	245
PFS: File or PFS: Report or PFS: Graph	95
Videx 80 Column Card	209
Apple Blue Book	19

Commodore

See us for Personal, Business, and Educational requirements. Educational Discounts available.

PETSCAN I \$245 base price

Allows you to connect up to 30 CBM/PET Computers to shared disk drives and printers. Completely transparent to the user. Perfect for schools or multiple word processing configurations. Base configuration supports 2 computers. Additional computer hookups \$100 each.

COMPACT/STCP \$115

Intelligent Terminal Package for PET, CBM, C64
Includes ACIA Hardware / STCP Software

MSO Dual Super Disk for IEEE or C64 570
replaces 4040 drive

SCREENMAKER 80 Column Adapter for C64 139
Provide big screen capability for business applications.

Copy-Writer Word Processor for C64 49
Full-featured package with 800 lines of text in memory. Includes double column printing, graphic capability, full printer support.

Special Screenmaker/Copy-Writer Combo 179

VICTORY Software for VIC and C64

Metamorphosis	16	Creator's Revenge	16
Labyrinth of Creator	16	Galactic Conquest	16
Kongo Kong	16	Annihilator	16
Chomper Man	16	Grave Robbers	13
Bounty Hunter	16	Adventure Pack I or II	16

PAPER CLIP Word Processor - CBM/C64 60

ORACLE Data Base from Batteries Included 89

SPINNAKER Software C64, Apple, IBM, Atari

Compute's First Book of PET/CBM

POWER ROM Utilities for PET/CBM

WordPro 4+ - 8032, disk, printer

VISICALC for PET, ATARI, or Apple

Compute's First Book of 64 Sound & Graphics 11

SM-KIT enhanced PET/CBM ROM Utilities 40

PET Spacemaker II ROM Switch

Compute's First Book of Games

Dust Cover for PET, CBM, 4040, or 8050

CmC Interfaces (ADA1800, ADA1450, SADI in stock)

Compute's Reference Guide to 64 Graphics 11

Compute's Machine Language for Beginners 11

HES Software and Hardware in stock

FlexFile for PET/CBM/C64 \$59

DataBase, Report Writer with calculations, Mailing Lists.

Easy to use, and can be modified.

FORTH for PET/C64 full FIG model - Cargile/Riley 50

includes all FORTH 79 Standard extensions, structured 6502 assembler with nested decision macros, standard 16x64 screens, ability to read/write BASIC sequential files, sample programs, introductory + reference manual.

Metacompiler for FORTH for independent object code 30

Floating Point for FORTH 20

KMMM PASCAL IV for PET/CBM/C64 99

Virtually full Jensen-Wirth implementation is now suitable for advanced placement courses.

EARL for PET/CBM Disk-based ASSEMBLER 65

SuperGraphics - BASIC Language Extensions 45

Fast graphics, sound, turtle graphics routines for PET/CBM.

RAM/ROM for PET/CBM 4K \$75 8K \$90

COMAL Language for C64, CBM, PET 14

CBM Public Domain Software - C64 27 disks 75

STAT for PET/CBM/C64 and Apple 95

Comprehensive Statistical Analysis Routines

Includes complete file handling capabilities, summary statistics, confidence intervals, hypothesis tests, exponential mean tests, multiple and power series regression, analysis of variance, histograms, and non-parametric tests.

PageMate 60 Command Word Processor 20

Full-featured package for all Commodore computers.

Full screen editing, and supports disk, tape, and all printers.

DISK SPECIALS



Scotch (3M) 5" ss/dd	10/ 2.10	50/ 1.90	100/ 1.86
Scotch (3M) 5" ds/dd	10/ 2.65	50/ 2.45	100/ 2.40
Scotch (3M) 8" ss/sd	10/ 2.20	50/ 2.00	100/ 1.98
Scotch (3M) 8" ss/dd	10/ 2.80	50/ 2.50	100/ 2.47

We stock VERBATIM DISKS

Write for Dealer and OEM prices.

Sentinel 5" ss/dd	10/ 1.80	50/ 1.75	100/ 1.65
Sentinel 5" ds/dd	10/ 2.40	50/ 2.35	100/ 2.25

We stock Dysan disks

Wabash 5" ss/sd	10/ 1.50	50/ 1.45	100/ 1.40
Wabash 5" ss/dd	10/ 1.80	50/ 1.75	100/ 1.65
Wabash 5" ds/dd	10/ 2.50	50/ 2.45	100/ 2.35

We stock MAXELL DISKS

Write for dealer and OEM prices.

Disk Storage Pages	10 for \$4	Hub Rings 50 for \$6
Disk Library Cases	8"—3.00	5"—2.25
Head Disk Cleaning Kits	12	
AMARAY Disk Storage Systems in stock		
Innovative Concepts FLIP 'N' FILES in stock		

CASSETTE TAPES—AGFA PE-611 PREMIUM

C-10	10/ .61	50/ .58	100/ .50
C-30	10/ .85	50/ .82	100/ .70



ZVM-122A	99	ZVM-123G	89
ZVM-131	300	ZVM-135	490
Z100 16-bit/8-bit System			CALL
Z29 Terminal (DEC and ADM compatible)			680

Z-150 IBM PC COMPATIBLE CALL

Z-160 PORTABLE PC CALL

We stock entire Zenith line.

USI Video Monitors - Green or AMBER 20 MHz hi-res
Dealer and OEM inquiries invited

WRITE FOR IBM PC COMPATIBLE PRICES

Multiplan—IBM or Apple	179
Quadboard for IBM available	
KOALA PAD Touch Tablets—Apple, Atari, IBM, CBM	
Peachtext 5000 Software Package	199
PFS Software for IBM and Apple in stock	
SPINNAKER Software C64/VIC, Apple, IBM, Atari	
VOTRAX Personal Speech System	269
BMC 9191 Color Monitor	229
BMC 12A 12" Green Monitor	79
Dynax (Brether) DX-15 Daisy Wheel Printer	469
Brother HR-25 Daisy Wheel Printer (25 cps)	749
Itoh Prowriter Parallel Printer	379
Panasonic 1090 Printer with Correspondence Mode	279
Gemini 10X	289
EPSON, Okidata, Star Micronics printers in stock	
USI CompuMOD 4 R F Modulator	29
We Stock AMDEK Monitors	
A P Products	15% OFF
COMPUTER COVERUPS IN STOCK	
BROOKS 6 Outlet Surge Suppressor/Noise Filter	54
Surge Suppressor-6 outlet	29
Electrohome 1302-2 13" Hi-Res RGB Monitor	335
Panasonic 12" Monitor (20 MHz) with audio	135
Synerfek SYM-1 Microcomputer	189

Hewlett Packard



Write or call for prices.

DATASHIELD BACKUP POWER SOURCE \$265

Battery back up Uninterruptible Power Supply with surge and noise filtering. The answer to your power problems.

ATARI - WE STOCK ENTIRE LINE
SPINNAKER and Broderbund Software in stock.

215-822-7727
252 Bethlehem Pike
Colmar, PA 18915

A B Computers

WRITE FOR CATALOG. Add \$1.50 per order for United Parcel. We pay balance of UPS surface shipping charges on all prepaid orders (add extra for mail, APO/FPO, air). Prices include cash discount. Regular prices slightly higher. Prices subject to change.

Letterbox

Dear MICRO:

Some of your recent issues have had parallel articles for the various computers you cover. I like this feature. In fact, it is the main reason I renewed my subscription. It is frustrating to see neat programs written for other computers, but not for mine.

Consequently, I was very disappointed that the well-written article on *Fast Low Cost A/D Converter*, MICRO 69, did not have listings for use of the converter with the Atari Computers. No A/D converters are available for the Atari (to my knowledge). This could have been very useful. The Atari was also slighted in the **Adding Computer Senses to Your Micro**.

Your excellent **Interface Clinic** suffers from the same problem. I should think that there are other Atari users who might also wish to have routines useful for interfacing the Atari with analog circuitry.

I hope you can extend this type of article to include the Atari in the future. Thank you for your consideration.

Michael Soso
Seattle, WA

*Your points are well taken. The generality problem discussed above is even more prevalent when dealing with the Atari. The BASIC used in the Atari is somewhat unique. While there are many minor differences between the BASICs on the Apple, Commodore and Color Computer - they do have a lot in common. Atari is sort of out-in-left-field. For this issue, for example, I went to generalize the **Talking to your Printer**.*

*First I had to wade through the Atari **OPEN** and **XIO** commands to setup the input and output, then had to **DIMension** all of the string variables, and then realized that due to the strange way Atari BASIC handles string concatenation - there was no way to get the program to work!!! Talk about frustration!*

Some of the other programs you mentioned could have been, and probably should have been, converted. If any Atarist has converted them, we would be happy to print updates. Let

me make two proposals for future articles. First, MICRO will make a greater effort to perform Atari conversions where possible/practical. Second, if any Atari readers are interested in performing such conversions, we will work with them, pay a modest remuneration, and provide program/projects to convert. We can not do it all, but we can all do it together.

Dear Editor,

I read your editorial "Is It Reasonable?" in February 1984 MICRO #69 with interest. Many of your thoughts and statements are true and I agreed with them. I do think you touched on a very important aspect of the APPLE success (and failure). That is "Third Party" vendors, which I'll come back to in a moment.

I believe the success of the microcomputer in the home and workplace stems from the fact that we are trained to use tools of "convenience", for example, log tables, slide rule, electronic calculator and the microcomputer. We must have some knowledge of their function to use them successfully and effectively. It is exciting to watch a human float effortlessly in space, but the thoughts of the details of what it really took to put him there and get him back are much more exciting. Some knowledge of the intricate steps required is where it is really at. So it is with the microcomputer.

What Apple, Inc. did with the Apple II was give the curious the opportunity to learn the intricate details which cause the II to function. They produced a Disk Operating System and Monitor that was easily and quickly understood. Your publication published a complete understanding of the Apple II's operating system. I think the way the 'Steve(s)' started made this environment necessary. They needed the support of the Home Brew Computer Clubs, and also of Third Party Vendors. If the software didn't get written and published as fast as it did, I believe Apple wouldn't be as successful as it is. The resources

weren't available at the time. It is the software vendors and publications such as yours that contributed a measureable amount of resources to Apple's success.

It seems to me the Apple III, Lisa, MAC, et al, will follow the path of the TI-99 unless Apple will facilitate easier learning of the Operating System. The person in the business place may only want applications software, but there are orders of magnitude more at home wanting to write their own software hoping it will be of sufficient quality to be published. Apple needs to loosen their management philosophies regarding the MAC and provide a simpler operating system.

I am a co-founder of a 170 member Apple users group here in Silicon Valley. We were fortunate to have Apple's sales department demonstrate the MAC the day after it was unveiled. We had 300 people attend the presentation - an exciting turn out! Disappointment quickly set in when I discovered the complexity of the operating system. I decided the MAC was not something I would be interested in. I think MAC will follow Lisa unless Apple wakes up and provides a much simpler operating system so the Third Party vendors can contribute again.

I am now waiting for the new 650XX chip that has been reported in various news releases. If it doesn't satisfy the simple Apple II operating system concept with much expanded memory, I will seriously look at the Saybrook or QWERTY system again. I suppose you have guessed what I think is reasonable. It is a source of hardware and information that will give our tools of convenience a chance to be even more so.

Robert C. Madden
San Jose, CA

Sir


"The Apple/// had limited capabilities...!!!?"

Surely you jest! 256K of pure RAM: what could be more versatile? An operating system which BYTE magazine called "the most

another
FLEXIDUCT® OFFICE
SAFETY PRODUCT



When you
least expect it,
ZAP!!!

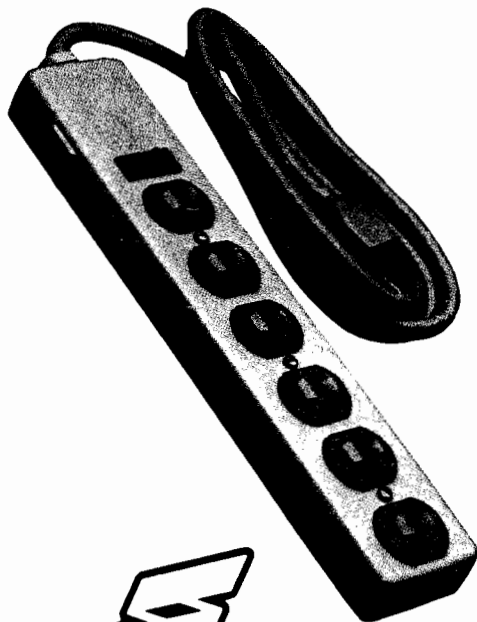

In a few millionths of a second, common electrical surges and spikes can enter your data processing equipment and cause memory loss, false logic and misregistration. Surges very often do permanent damage to microcircuitry.

FLEXIDUCT Surge Suppressors catch surges and spikes before they have a chance to enter your equipment. In billionths of a second (Nanoseconds), **FLEXIDUCT** Surge Suppressors dissipate surges and spikes from any side of the line (most protect only one side).

The multi-outlet unit is ideally suited to the computerized workstation. It gives you the advantage of circuit breaker protection with plenty of outlets for data processor and peripheral equipment.

No computer should be without the protection of a **FLEXIDUCT** Surge Suppressor...**especially yours!** Write or call for further information. Available from office products retailers.

FLEXIDUCT® Surge Suppressors

a product of Winders & Geist, Inc. P.O. Box 83088 Lincoln, NE 68501 402/474-3400



sophisticated operating system available for an 8-bit machine". The ability to run virtually all Apple II software. Can you seriously consider this to be limited capability?

Now, there is no doubt that the III had some early hardware problems, which in turn discouraged software developers from jumping on the bandwagon. This, rather than "limited capability" resulted in the lack of early acceptance of the III. Apple has now revitalized the III, set up specific resources for it, and even published a booklet (approximately entitled 'Will someone tell me what you can do with an Apple III?') which lists a great range of software available for the III.

I develop software on the III for both it and the II. I also use the III for all my other work: word processing, data base, modem, Pascal, BASIC, Assembly ... etc. I will gladly stack up the capabilities of the Apple III against any other 8-bit machine on the market, regardless of price or manufacturer (and even against some of the pseudo-16s). Would you care to enumerate its limitations?

Tracy Valteau
Pacific Grove, CA

I personally was unimpressed with the Apple III when I saw it. I was at that time completing development of a 6809-based system that sold for \$500 less than the basic Apple III and offered almost eight times the disk capacity, had a far superior keyboard, included many hardware features and a complete package of user-friendly software. I really had expected a lot more from Apple for the price - not just more memory. I guess today I would say it is perhaps a good computer, certainly not a great one. The next writer provides another possible reason for the lukewarm reception the Apple III got.

Dear Sirs:

Although this letter will refer to the program by Joseph Kattan in **MICRO 71**, my criticisms are really directed at MICRO's editorial policies, rather than the specific program. The Credit Register program looks like a good idea, and I would like to run it on my

computer. However, it is written in such a way that it is essentially not transferable to any computer other than the Atari. The GRAPHICS commands, as also the PEEKs and POKEs are totally specific to the Atari, and lacking REMs as to their function, it is impossible to reproduce them on another machine. If the program involved something that had to be hardware dependent, such as a hi-res graphics presentation, there might be excuse for this. However, the screen presentation that is shown looks like fairly straightforward printing, which it should be possible to generate with standard PRINT statements.

You are in a favorable position for insisting on some kind of **standard BASIC** in your program listings, to improve as far as possible the portability of programs from one computer to another. If this means that all programs are restricted to a minimum implementation of BASIC (a sort of *lowest common denominator*), this is not necessarily a bad thing. It is very elegant to use all possible bells and whistles that are specific to your computer, in order to get the most sophisticated display; but if this is only achieved at the expense of portability, I believe it is a bad bargain.

Rolf B. Johannesen
Rockville, MD

*I agree with everything that you say, except for the problem being one of 'MICRO's editorial policies'! We evaluate every article with machine generality in mind. Literally hundreds of programs/articles have been rejected because they were limited to a single computer. The ideal would be for every program to work on every machine. Unfortunately, there are a number of factors working against this ideal. First, most authors have expertise on one micro and are often not aware of what is specific to their BASIC. Second, it is easier to write machine specific BASIC. Third, most authors do not have multiple micros for testing various versions. Fourth, it takes a great deal of work to take a program that has not been written with generality in mind and generalize it. We have worked many hours recently just to generalize a few programs, including **Smart***

Modem, (converted for three additional microcomputers), MICRO 68; Adding Computer Senses, (converted for two additional microcomputers), MICRO 69; Least-Squares Curve Fitter and PEEKing TOM, MICRO 70; Talking to Your Printer, in this issue; and so forth. Fifth, a generalized program requires testing. It may require hardware configurations that neither the author nor MICRO possess. Sixth, errors may be induced into the program during the generalization process.

The Talking to Your Printer article shows one technique that we use and hope that other programmers will adopt where possible. We plan to describe other techniques in future issues. Unfortunately we are not in a position to insist: we request, and we conjole, and we do reject.

Dear Sir,


I haven't been able to enter the program *Master Directory for the Apple, MICRO 67/69* into my Apple II+ with Language Card. My usual procedure with Machine Language programs is to convert to a Hex dump but the Master Directory listing is one that I have never seen before and it does not seem suitable to this method.

Would you please advise how I could go about using this program.

Herman F. Schulz
Schenectady, NY

*Mr. Hill's program was too long to print and too good to ignore! We normally print the object code along with the source. In this case we dropped the object code to save space. Due to a number of letters and phone calls, we planned to print the hex dump in this issue. Turns out it would take a full four pages, four columns per page! What to do! We have arrived at two solutions: 1. We will provide a complete listing including the object code for \$1.00 to cover copying and a self-addressed, stamped-envelope; or, 2. We will provide the assembler source (in LISA format) and the binary file (BRUN format) on a diskette, and the printed listing, for \$15.00. See the **MICRO Diskette Service** announcement on page 80*

Raise your Apple's IQ Twelve Times A Year!

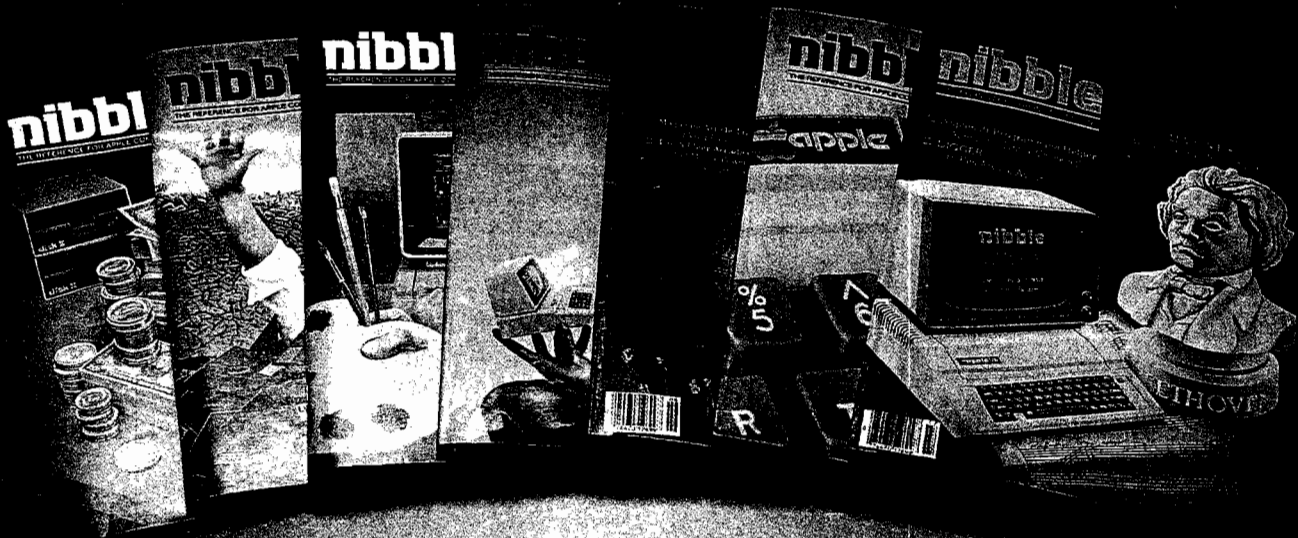

Subscribe Now & Save \$12.00 off the Cover Price!

A one-year subscription to NIBBLE brings you twelve issues packed with programs and comprehensive articles to help you get the best out of your Apple.

You'll get over \$500 worth of programs for Home, Business, Education and Entertainment with complete instructions.

Nibble articles show what each program does, how to use it and enter it into your Apple, Franklin ACE or other Applesoft-compatible computer.

You'll enjoy regular features for the beginner as well as the expert. Among

these are the Educational Corner, where programs help make learning fun, Tips & Techniques which showcases little-known programming tricks, Utilities to facilitate Basic, DOS & Printing, and Games with arcade fun you can type and run.

Try a NIBBLE!

Here's what some of our Readers say:




- "Certainly the best magazine on the Apple!"
- "Programs remarkably easy to enter."
- "Your service is fantastic... as a matter of fact, I'm amazed!"

Apple® is a registered trademark of Apple Computer, Inc.
ACE® is a registered trademark of Franklin Computer, Inc.

Note
 Canada surface subscription rate is \$34.95
 Outside the U.S. and Canada surface subscription rate is \$39.95
 Domestic U.S. First Class subscription rate is \$51.95
 Canada Air Mail subscription rate is \$59.95
 Outside the U.S. and Canada Air Mail subscription rate is \$69.95
 All payments must be in U.S. funds drawn on a U.S. bank.

Join the more than
120,000 Apple/ACE
users who say:

"NIBBLE is terrific!"

We accept Master Charge & Visa

Box 325, Lincoln, MA 01773 (617) 259-9710 M154

I'll try nibble!
 Enclosed is my \$26.95 (for 12 issues)
 (Outside U.S., see special note on this page.)

check money order
 bill me (U.S. only)

Your subscription will begin with the next issue published after receipt of your check/money order.

Card # _____ Expires _____
PLEASE PRINT CLEARLY

Signature _____

Name _____

Address _____

City _____

State _____ Zip _____

Reviews in Brief

Product Name: IDS, An Integrated Development System for the Apple II Plus

Equip. Req'd: Apple II or II+

Price: \$85.00

Manufacturer: R.R. Michaels, Inc.,
Box 565
Leesburg, VA, 22075
703/777-1933

Description: A utility package, written in 6502 machine language, to support Applesoft programming. Allows for the easy construction of screen displays for data entry, file structures for record storage and retrieval of output formatting for reports.

Pluses: The package is easy to use. It includes an editor for constructing display screens, which are keyed to variable labels; this permits the Applesoft programmer to coordinate their variables directly with the input display screen. Input edit checks can be performed to reduce the chance of key-stroke error. The record definition system permits easy storage and retrieval of both sequential and randomly accessed files. Individual fields, as well as entire records, may be stored or retrieved. One Applesoft weakness is in the output of data, where it lacks a PRINT USING capability. IDS permits the programmer a variety of display formatting, including specified decimal places, embedded commas and dollar signs and right justification. The IDS system uses CALLS to reserved variable names which perform each function (all of the calls begin with Z to avoid confusion with other BASIC variables).

Minuses: The IDS package has a modest RAMN overhead of a minimum of \$2000 bytes. In addition, several of the structure definition tables reside just below this address. Thus, the user will sacrifice at least 8K to use the IDS software, although many Applesoft routines are eliminated, shortening the space needed for BASIC code.

Documentation: The manual is well written. It begins with a tutorial on the use of the IDS routines, including the construction and use of each of the three subsystems. A reference section describes each command available.

Skill level: The package will be of most interest to the Applesoft programmer writing commercial grade software.

Reviewer: David Morganstein

Product Name: Magic Memory

Equip. Req'd: Apple II+, IIe with one disk drive and 48K RAM

Price: \$100

Manufacturer: ARTSCI
5547 Satsuma Blvd.
North Hollywood, CA 91601

Description: Magic Memory bills itself as an electronic address book. It is, in fact, a flexible way to create and recall a variety of information. All entries can be cross-indexed, easily updated, and printed. Files can be saved on any disk, making it virtually impossible to run out of storage space.

Pluses: Looking to future developments, the program is entirely compatible with a hard disk drive and disk space is reserved within a submodule for new utilities that may be created.

Minuses: The copy-protected master disk cannot be copied to a hard drive and the 70-column video driver can only be used with a 64K system. Memory does not let you carry a file format from one file to another; rather you start each file blank and have to enter all data.

Documentation: A looseleaf manual provides ample instructions and some technical information.

Skill level: Intermediate to advanced.

Reviewer: Mike Cherry

Product Name: Super Text

Equip. Req'd: Commodore 64 with one disk drive and a printer

Price: \$100

Manufacturer: Muse Software
347 N. Charles Street
Baltimore, MD 21201

Description: A word-processor with a software-based 80 column display, Super-Text is loaded with features: creating/saving files, block moves, justification, automatic page numbering, find and replace, tabs, and imbedded control characters. Also available are file merge, on-screen help, word counting, and "autolinking" your files to the printer.

Pluses: Super-Text provides several printer parameters which can be adapted to fit almost any printer and interface., The 80 column display is a "bonus" feature and does not gobble up all your memory.

Minuses: Creating and editing text occur in separate modes. Jumping from mode to mode will slow you down and confuse you at first. Also, the screen will not

necessarily show the printer's format. You will need to refer to a preview section to verify the printout is the way you want it.

Documentation: A spiral booklet contains tutorial and technical information.

Skill level: Beginner and up.

Reviewer: Mike Cherry

Product Name: **Computer Mechanic**
Equip. Req'd: Commodore 64 with disk drive or cassette
Price: \$60
Manufacturer: Softsync, Inc.
14 East 34th Street
New York, NY 10016

Description: A diagnostic program to help pinpoint mechanical problems with your car. Mechanic also teaches the basics of car maintenance and sets up a repair history and maintenance schedule for any car.

Pluses: Mechanic will prepare a standard disk to accept files giving you room for hundreds of records. The use of the Commodore's graphics and color abilities is excellent and the advice is sound and helpful.

Minuses: Error-handling is marginal. Data entries are not adequately checked for proper input and error messages may confuse the beginner. Mechanic's simple approach limits the diagnostic advice/record-keeping to an introductory level.

Documentation: A thin 6-page pamphlet provides orientation but no technical information.

Skill level: Intermediate to advanced level. Poor error-handling means a beginner may have trouble with this program.

Reviewer: Mike Cherry

Product Name: **Delta Drawing**
Equip. Req'd: Apple II, II+, IIe with one disk drive & 48K RAM
Price: \$40
Manufacturer: Spinnaker Software
215 First Street
Cambridge, MA

Description: A FORTH-based program geared towards elementary school use lets you create drawings with simple keyboard commands. Various configurations allow for color fill, background color, preprogrammed patterns, saving and printing programs in text or graphics modes.

Pluses: Easy to learn, Delta Drawing is fast and pleasing. Children will be able to create interesting pictures with only a little practice. The "color fill" command is especially fun to watch.

Minuses: Only the Grappler+ interface is supported for printing graphics; all else will print only text. Patterns saved can not later be recalled and included in BASIC programs.

Documentation: An excellent tutorial and separate 'flash cards' illustrating various patterns are included.

Skill level: Beginner and up.

Reviewer: Mike Cherry

Product Name: **Mail Controller**
Equip. Req'd: Commodore 64 with 1541 Disk Drive, 1525 printer or other with interface.
Manufacturer: Orbyte Software
Box 948
Waterbury, CT 06720

Description: An easy to use mail list program. Allows over 2000 entries per disk with editing functions available. Will print labels in one across format or print out on paper stock taking advantage of your paper width. The program allows formatting a new data disk in order to access more records. This makes it possible to have extremely large files across several d.sks.

Pluses: The program is powerful and easy to use. All work starts at the menu and the function keys are taken advantage of to simplify work. A help screen is provided for the New Disk and Data Entry functions. Mail Controller may also be used as a small database for other than mail lists, although the amount of information storage is limited.

Minuses: There is a limit of 73 characters that may be used for the fields in a standard mail list format. This requires careful field setup.

Documentation: The 38-page manual is one of the easiest to use that I have seen. Each function is made clearly understandable.

Skill level: Anyone, from beginner to expert, would be able to use this program.

Reviewer: Richard E. DeVore

Product Name: **Experiments in Human Physiology**
Equip. Req'd: Apple II, II+, IIe
Price: \$249 (Demo disk available for 30-day preview)
Manufacturer: HRM Software
175 Tompkins Avenue
Pleasantville, NY 10570

Description: A combination of hardware and software to implement a variety of experiments in Biology and Human Physiology including: Psychomotor Response Time, Calibration of Temperature Probe, Skin Temperature, Respiration Rate, Heart Rate and Polygraph Testing. A useful supplement of a High School Biology class. All of the experiments would easily fit into the classroom curriculum, helping the student to further understand basic functions by first hand experiments and encouraging further exploration in this area.

Pluses: The experiments are simple but dramatic, giving the impression of a "mini-laboratory". The students learn by doing, gaining not only class work, but experience in using computers as well.

Minuses: None.

Documentation: Well written and clearly explaining the experiments.

Skill level: Beginner; the hardware connections are clearly explained, although they probably should be done by the teacher.

Reviewer: Edouard Garcia

Product Name: **Pro-Color-File 2.1**
Equip. Req'd: TRS-80 Color Computer
Price: \$79.95
Manufacturer: Derringer Software
P.O. Box 5300
Florence, SC 29502

Description: A database utility. File definition capability allows up to 60 fields per record, to a maximum length of 1024 bytes. Fields can be defined as numeric or alphanumeric. Report formatting capabilities include math functions, report layout and definable work fields for use in reports. Up to five distinct report formats may be defined and invocable at any one time. Search, select and

sort features are available for database manipulation. Data entry is accomplished via quick entry screens designed by the user. Up to 5 separate data entry screens may be defined per logical record.

Pluses: Good flexibility in design allows for a wide variety of applications. Subtotals, totals and averages can be automatically calculated in reports. Other user-definable formulas can add versatility to the report writer feature. The entire program is written in Extended Color Basic and is provided as user-modifiable code. This allows the user to make such things as printer baud rate settings a permanent part of the program. Record segmentation provides the ability to add fields even after records have been entered. Select and sort features are quick and efficient. Special menu format allows for end user input with reduced menu. Password protection is available on selected fields.

Minuses: The program does not provide for boolean operations during report writing aside from the standard selection process. The documentation claims that a field name can be up to 15 bytes long, but the program would allow only a 12 byte name. The program does not provide any automated word processing capabilities. While this can be accomplished using the report writer, much manual intervention is required during the printing phase.

Documentation: A 35-page manual is well-written and easy to understand. It makes good use of examples and the diskette also includes those same examples to give the new user an established database to practice with.

Skill level: Intermediate. Programming skill is not required, but some familiarity with computer records is useful.

Reviewer: Norman Garrett

Product Name: **HJL-57 ColorComputer Replacement Keyboard**
Equip. Req'd: TRS-80 Color Computer
Price: \$79.95
Manufacturer: HJL Products
P.O. Box 24954
Rochester, NY 14624

Description: A direct replacement for the standard Color Computer keyboard, but unlike others on the market, it has the layout and color scheme of the original with the addition of a longer spacebar and four function keys (one locking). It includes installation instructions, necessary hardware and a replacement bezel. The keyboard is fully shielded and has the connecting cable installed (the purchaser must specify the computer version desired so that the correct connecting cable can be determined). The keyboard rests at about the same angle as the original,

with the overall contour slightly modified. It comes with a one year guarantee.

Pluses: The contour of the keyboard (the slight variation of angle between rows of keys) is modified a bit to give it a more natural feel. This is especially apparent with the spacebar, which is much more accessible than on the original. The texture and sculpture of the low profile keys are significantly improved. An additional benefit is the RFI shielding included, which noticeably reduced the RFI on my television.

Installation is straightforward. For a person who has never opened the computer case, it would probably take a maximum of 30 minutes. The only modification is to shorten one plastic post. The unit rests on the original posts. Manufacturer telephone response to questions is good. The finished appearance is good, blending well with the original and being truly a replacement and not a modification.

Minuses: The effect of the locked PF2 key on other keys needs to be explained (more explanation on the actual use of the function keys in general would be helpful). This would allow a programmer to better utilize the programmed key functions.

Documentation: Consists of excellent, easy to follow installation instructions, the decimal values generated by the function keys, and a sample program which will program your function keys as follows: F1 dumps the current screen to the printer; F2 allows auto repeat of any key (F2 locks); F3 flips between upper and all lower case; F4 acts as a control key and subtracts 64 from the ASCII value of any key.

Skill level: Installation requires no technical experience. The instructions are geared to a non-technical installer.

Reviewer: Norman Garrett

Product Name: **Flight Simulator II**
Equip. Req'd: Apple II+ 48K, DiskDrive
Price: \$49.99
Manufacturer: SubLOGIC Corporation
713 Edgebrook Drive
Champaign, IL 61820

Description: The long awaited sequel to Flight Simulator I. An incredibly well thought out product of real value to pilots and fascinating to those not aviation minded. The package includes maps of the four areas of the U.S. modeled in detail on the main disk. The company advertises the availability of other scenery disks. Care has been taken to simulate the intricacies of communications and navigation that are in real life the most demanding tasks of a pilot.

Pluses: Sheer attention to detail. User variable weather is a particularly valuable feature in that it brings home to the user precisely how poor weather creates chaos with flying. For the younger user, a World War I dogfight game is included as a special option of the main disk.

Minuses: There really are not many. In places, the instructions could be improved. There is a tendency to assume too much aeronautical knowledge on the part of the user. The authors seemed to be aware of it, but were not entirely successful in avoiding the problem.

Documentation: Overall, I was pleased with it. The manual was printed in a professional manner, and the incredible detail of the product was handled nicely. Each feature is explained without hype or unnecessary enthusiasm.

Skill level: A novice computer user who follows the manual should have no trouble using the product.

Reviewer: Chris Williams

Product Name: **The World of Counting**
Equip. Req'd: Apple II+ or IIe
Price: \$24.95
Manufacturer: Educomp Enterprises
191 North 650 East
Bountiful, UT 84010

Description: Designed to teach counting principles to learning-disabled class or regular preschool. Provides examples, demonstrations, quiz questions, and a final test, using hires graphics, music and sound effects for reinforcement. Student scores and response times are displayed at end of lesson.

Pluses: Lots of repetition and reinforcement. Program written in Apple Pilot - can be customized to meet user's specific needs. Good graphics.

Minuses: Pictures are drawn very slowly (inherent problem in Pilot). Musical reward may be confused with musical number prompt. Scores are not stored on disk for later reference.

Documentation: 8-page pamphlet with excellent program description and directions. Software also shows instructions.

Skill level: 3 to 6 year old (mental age); adult to start program.

Reviewer: Mary Gasiorowski

Product Name: **Practicalc II**
 Equip. Req'd: 48K Apple II+, IIe and compatible computer
 Price: \$69.95
 Manufacturer: Micro Software International Inc.
 The Silk Mill
 44 Oak Street
 Newton Upper Falls, MA 02164

Description: This is not another Visicalc clone although it does have the same basic features; 80 column width, scrolling, columnar movement/expansion, and all the other spreadsheet "musts." It has some things that the others are lacking, for instance database management that enables you to do alpha and numeric sorting and searching. There are also prompts for entry during calculation and printing of list formulas.

Practicalc II was designed with the nonprofessional user in mind. It certainly is capable of being used in a business setting but unlike most "professional" packages it has some friendlier additions. For example, you may not use a particular spreadsheet but once a month, so chances are the next time around you won't remember how you set things up. This is not a trivial matter when you are dealing with columns and numbers. Practicalc II

saves a spreadsheet with the menu that contains all of the printer settings and other pertinent information.

Pluses: Unlike the other spreadsheet packages you have seen, the price for this one is only \$69.95! Perhaps you had previously found it hard to justify an expenditure of several hundred dollars for something that you only needed a few times a month. At this price intermittent use is justifiable, particularly when you think of the time saved and the frustration avoided.

One unique and handy "extra" offered by Practicalc II is that it includes a word processing package. It is your basic WP, but has a few nice additions not usually found. One of these is the capability of typing columnar - newspaper style. This is a feature many major WP packages do not have. It is one of those things that might not be useful to most people on a regular basis, but when you need it - what a blessing! The standards - insert, delete, etc., are nicely implemented. When deleting/inserting in newspaper-style typed text, correcting one column does not affect the other.

Besides the bargain price, Practicalc II has another major difference - it is not copy protected. Microsoft hopes this feature will not be abused, but instead will aid its customers by allowing them to have a copy of Practicalc II on different diskettes. This certainly would enable more facile use of their product and make life a little easier for the user. Using 15K of memory, there is plenty of room for other things. The actual code can be accessed if you are willing to disassemble it (use Big Mac) and put the whole thing back together. I would suggest you make a few copies for backup first.

Minuses: The one area in which Practicalc II is not as proficient is speed. The difference is minimal, most noticeable when saving a spreadsheet. Because each sheet is saved with a copy of the menu and its settings, it takes a little longer to be stored on disk - a reasonable tradeoff to most users. The scrolling and screen movement are not as fast as its competitors, but again the difference is negligible.

Documentation: The documentation for Practicalc II is clearly written with examples and logical steps for procedures. It contains an Index and a good Table of Contents - both very useful. Future addenda should be available to users for a nominal fee. Also available will be diskettes containing new versions to help kill the bigger bugs. These will sell for \$5.00 a diskette.

Skill level: The level of expertise needed by the user ranges from beginner to expert. The beginner can learn the basics rather easily; the more advanced the user the more options and features he/she will be able to utilize.

Reviewer: Mark S. Morano

MICRO™

CHECKBOOK MANAGER

This is a superb checkbook package evolving from over 3 years of rigorous testing and usage. Stores up to 6,000 checks on one Disk. Machine language where it counts!

- Easily and quickly enter checks & deposits, with "Shorthand" options. No waiting for disk with each entry. Entries are automatically saved to disk when you return to the main menu... stores 1000 checks in approximately 8 seconds.
- Payee and category entry up to 39 characters each. 255 different categories possible. Check No.'s up to 32766
- Powerful search feature, very fast, prints to screen or printer, locates by all fields. Locate a range of Check No.'s! Dates! Even payees or categories between dates. Totals all checks/deposits located.
- Look at your spending trends with Hi-Res charting
- Easily make corrections
- Checkbook balancing
- Up to 6 checking accounts per disk
- User friendly, menu driven, fully documented

\$34.95

— CHECK PRINTER MODULE: —

User - Definable Check Forms allows Printing to almost all computer checks. (Include your Checkbook Manager Serial No. when ordering.)

\$14.95

ORDER BOTH FOR \$43.50

Add \$1.50 Shipping & Handling Chg. to all prices.

J & M SOFTWARE Dept. E

P.O. Box 2132
 Athens, Texas 75751
 (214) 675-8479



Programs for APPLE II+ and APPLE IIe*, with one or two disk drives (Preferably two)

*APPLE is a registered trademark of Apple Computer, Inc.



SANYO MONITOR SALE!!



9" Data Monitor

- 80 Columns x 24 lines
- Green text display
- Easy to read - no eye strain
- Up front brightness control
- High resolution graphics
- Quick start - no preheating
- Regulated power supply
- Attractive metal cabinet
- UL and FCC approved

- **15 Day Free Trial - 90 Day Immediate Replacement Warranty**

9" Screen - Green Text Display	*\$ 69.00
12" Screen - Green Text Display (anti-reflective screen)	*\$ 99.00
12" Screen - Amber Text Display (anti-reflective screen)	*\$ 99.00
14" Screen - Color Monitor (national brand)	*\$239.00
* PLUS \$9.95 for Connecting Cable.	

Display Monitors From Sanyo

With the need for computing power growing every day, Sanyo has stepped in to meet the demand with a whole new line of low cost, high quality data monitors. Designed for commercial and personal computer use. All models come with an array of features, including up-front brightness and contrast controls. The capacity 5 x 7 dot characters as the input is 24 lines of characters with up to 80 characters per line.

Equally important, all are built with Sanyo's commitment to technological excellence. In the world of Audio/Video, Sanyo is synonymous with reliability and performance. And Sanyo quality is reflected in our reputation. Unlike some suppliers, Sanyo designs, manufactures and tests virtually all the parts that go into our products, from cameras to stereos. That's an assurance not everybody can give you!




• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS

Add \$10.00 for shipping, handling and insurance. Illinois residents please add 6% tax. Add \$20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.
Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail!
Canada orders must be in U.S. dollars. Visa - MasterCard - C.O.D.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

80 COLUMN PRINTER SALE—\$149.00*

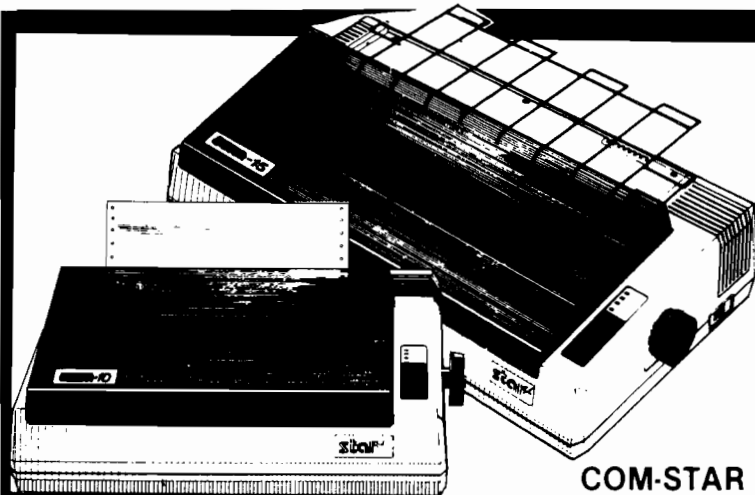

COM-STAR T/F

Tractor
Friction
Printer

only **\$199****

• 15 Day Free Trial - 180 Day Immediate Replacement Warranty

• **Lowest Priced, Best Quality, Tractor-Friction Printers in the U.S.A.**

- **Fast 80-120-160 Characters Per Second** • 40, 46, 66, 80, 96, 132 Characters Per Line Spacing
- **Word Processing** • **Print Labels, Letters, Graphs and Tables** • **List Your Programs**
- **Print Out Data from Modem Services** • **"The Most Important Accessory for Your Computer"**

*STX-80 COLUMN PRINTER—\$149.00

Prints full 80 columns. Super silent operation, 60 CPS, prints Hi-resolution graphics and block graphics, expanded character set, exceptionally clear characters, fantastic print quality, uses inexpensive thermal paper! Best thermal printer in the U.S.A.! (Centronics Parallel Interface).

**DELUXE COMSTAR T/F 80 CPS PRINTER—\$199.00

The COMSTAR T/F (Tractor Friction) PRINTER is exceptionally versatile. It prints 8 1/2" x 11" standard size single sheet stationary or continuous feed computer paper. Bi-directional, impact dot matrix, 80 CPS, 224 characters. (Centronics Parallel Interface).

Premium Quality—120 CPS COMSTAR T/F SUPER-10X PRINTER—\$289.00

COMSTAR T/F (Tractor Friction) SUPER-10X PRINTER gives you all the features of the COMSTAR T/F PRINTER plus a 10" carriage, 120 CPS, 9 x 9 dot matrix with double strike capability for 18 x 18 dot matrix (near letter quality), high resolution bit image (120 x 144 dot matrix), underlining, back spacing, left and right margin settings, true lower decenders with super and subscripts, prints standard, italic, block graphics

and special characters, plus 2K of user definable characters! The COMSTAR T/F SUPER-10X PRINTER was Rated No. 1 by "Popular Science Magazine." It gives you print quality and features found on printers costing twice as much!! (Centronics Parallel Interface) (Better than Epson FX 80).

Premium Quality—120 CPS COMSTAR T/F SUPER-15 1/2" PRINTER—\$379.00

COMSTAR T/F SUPER 15 1/2" PRINTER has all the features of the COMSTAR T/F SUPER-10X PRINTER plus a 15 1/2" carriage and more powerful electronics components to handle large ledger business forms! (Better than Epson FX 100).

Superior Quality SUPER HIGH SPEED—160 CPS COMSTAR T/F 10" PRINTER—\$489.00

SUPER HIGH SPEED COMSTAR T/F (Tractor Friction) PRINTER has all the features of the COMSTAR SUPER-10X PRINTER plus SUPER HIGH SPEED PRINTING—160 CPS, 100% duty cycle, 8K buffer, diverse character fonts, special symbols and true decenders, vertical and horizontal tabs. RED HOT BUSINESS PRINTER at an unbelievable low price!! (Serial or Centronics Parallel Interface)

Superior Quality SUPER HIGH SPEED—160 CPS COMSTAR T/F 15 1/2" PRINTER—\$579.00

SUPER HIGH SPEED COMSTAR T/F 15 1/2" PRINTER has all the features of the SUPER HIGH SPEED COMSTAR T/F 10" PRINTER plus a 15 1/2" carriage and more powerful electronics to handle larger ledger business forms! Exclusive bottom paper feed!!

PARALLEL INTERFACES

For VIC-20 and COM-64—\$49.00

For All Apple Computers—\$79.00

NOTE: Other printer interfaces are available at computer stores!

Double Immediate Replacement Warranty

We have doubled the normal 90 day warranty to 180 days. Therefore if your printer fails within "180 days" from the date of purchase you simply send your printer to us via United Parcel Service, prepaid. We will IMMEDIATELY send you a replacement printer at no charge, prepaid. This warranty, once again, proves that WE LOVE OUR CUSTOMERS!

Add \$17.50 for shipping, handling and insurance. WE DO NOT EXPORT TO OTHER COUNTRIES EXCEPT CANADA.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. VISA — MASTER CARD ACCEPTED. We ship C.O.D.

PROTECTO ENTERPRISES (WE LOVE OUR CUSTOMERS)


BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

SUPER-10"

ABCDEFGHIJKLMNOPQRSTUVWXYZ
ABCDEFGHIJKLMNOPQRSTUVWXYZ 1234567890

EXECUTIVE LETTER QUALITY
DAISY WHEEL PRINTER SALE \$379⁰⁰


COMSTAR 13"

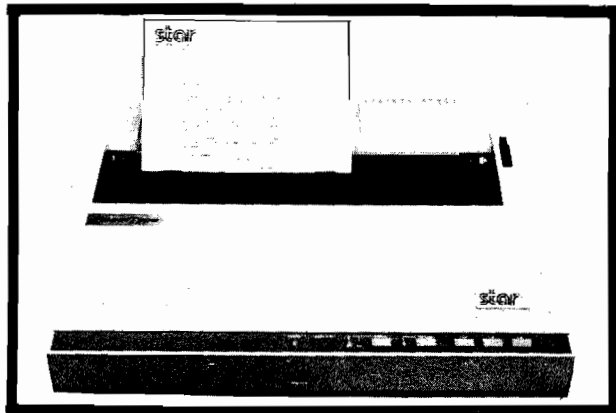

computer printer

COMSTAR 13" "DAISY WHEEL" POWER TYPE PRINTER is typewriter friendly. It uses a simple drop in cassette ribbon. Just turn on the COMSTAR 13" for Crisp executive quality correspondence at 18 CPS with a daisy wheel that prints 96 power type flawless characters, bi-directional. Designed for personal and business applications. COMSTAR 13" carriage accepts paper from letter to legal size, continuous computer paper or single sheets, you can set right and left margins, vertical and horizontal tabs. LIST PRICE \$599⁰⁰ SALE PRICE \$379⁰⁰

**OLYMPIA "DAISY WHEEL" COMBINATION
PRINTER/TYPEWRITER SALE \$489⁰⁰**

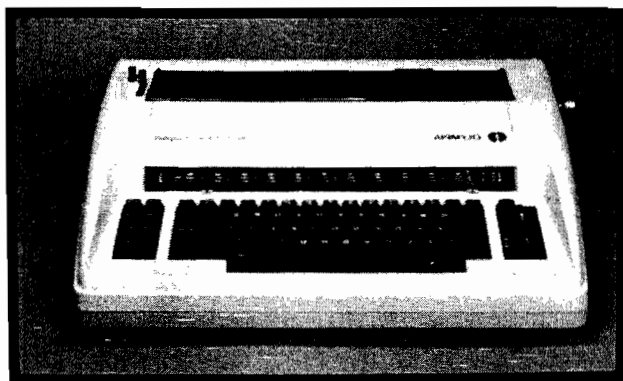

Olympia (WORLD'S FINEST)

THE **Olympia** COMPUTER PRINTER ELECTRONIC TYPEWRITER is the ultimate for Home, Office, and Word Processing. You get the **best Electronic Typewriter made** and used by the world's largest corporations (better than IBM Selectric) plus a **Superb Executive Correspondence Computer Printer!!** (Two machines in one!) Just flick the switch for the option you want to use. The extra large carriage allows 14 1/2" printer paper width. It has cassette ribbon lift off correction. Baud rates, Jumper selectable 75 through 19,200 (serial or parallel interface) LIST \$799⁰⁰ SALE \$489⁰⁰


• 15 DAY FREE TRIAL — 90 DAY FREE REPLACEMENT GUARANTEE

Add \$17.50 for shipping and handling!!

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. VISA — MASTER CARD ACCEPTED. We ship C.O.D.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

The Accurate Printer

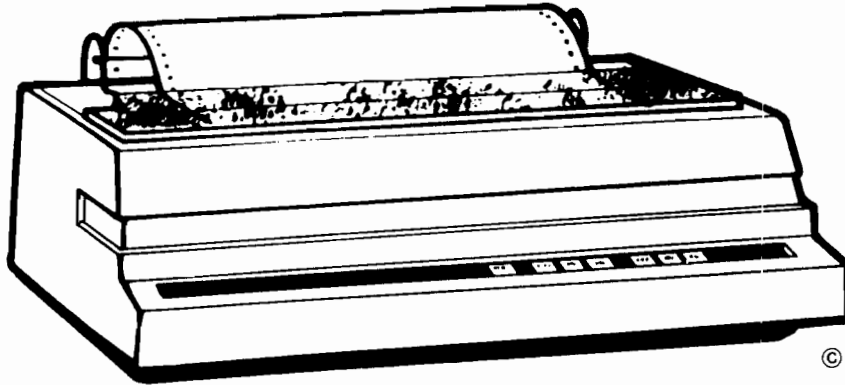

by Richard Marmon

Have you ever typed a program from a book or magazine into your Atari computer that used graphics characters or inverse characters? Have you been frustrated when you tried to list the program on your Epson (or Epson-compatible) printer only to have the printer go crazy? If you have the Graftrax or Graftrax-plus option for your printer, then Accu-Print will solve this problem for you - and give you some added desirable features as well. With Accu-Print in control of your printing, your Epson printer will faithfully reproduce each and every character that the Atari line of computers can generate on the screen with no exceptions.

What Accu-Print Can Do

Figure 1 shows a little nonsense listing using Atari graphics characters and inverse characters. If you type these statements into your computer (using the appropriate keystrokes to obtain the special characters as described in the Atari Basic manual) and then list them to your printer, you will obtain the results shown in Figures 2, 3, and 4 printed on three sheets of paper. The printer will pretty much garble the listing and seem to go crazy with form feeds as it is printing.

This is because there is an incompatibility between the ATASCII

codes used to represent the computer's character set and the ASCII codes used to represent the printer's character set. Some ATASCII values representing inverse characters to the computer represent different Epson-style graphics characters to the printer. In fact, the special Atari graphics and inverse characters just aren't included in the Epson printable character set. And some ATASCII values are interpreted by the printer as special control characters. Hence, the printer form feeds when you don't really want it to. This is quite a messy state of affairs!

I wrote Accu-Print in order to get around these difficulties. It seemed to me that the printer's graphics capabilities could somehow be used to form the special characters. After much experimentation and some pain, I finally succeeded, and now I'd like to share the result with you. When Accu-Print is controlling the printing, the program shown in Figure 1 will print on paper exactly as it's shown in the figure. As you can see, all Atari characters can be printed.

Accu-Print System Description

In its usual configuration, printing on the Atari computer is controlled by a routine within the Operating System ROM called the printer driver. Each

time a character is to be printed, either by a cartridge (such as BASIC or the Assembler-Editor) or by an application program (such as the Atari Program Text Editor, APX Forms, or a user-written one), the printer driver is executed and sends the ATASCII code for the character to the printer. The printer then responds to the code according to its internal character set, not the Atari's. Under the Accu-Print system, a new printer driver replaces the one contained in the OS ROM. Once loaded, the new printer driver controls all subsequent printing by any program. The new printer driver is contained in an AUTORUN.SYS file and is located automatically and attached to the Operating System during system startup. To use the system, all you have to do is make sure AUTORUN.SYS file is on your boot disk and then start and use the computer system normally. No differences will be noticeable until Atari graphics or inverse characters are printed. Then, the special characters will simply be reproduced on the printer, although the printing will slow down somewhat due to the use of the printer's graphic mode.

There are basically two parts to the Accu-Print system. The first is the AUTORUN.SYS file which contains

Listing 1

```

; ACCU-PRINT
;
; THIS ROUTINE RUNS AS AN AUTO RUN ROUTINE
; IT CAUSES THE OPERATING SYSTEM TO USE THE
; NEW DEVICE WRITE PORTION OF THE PRINTER HANDLER.
;
1CFC          ORG #1CFC
;
001D          ZINIT   EQU #1D
001E          ZCHAR   EQU #1E
001F          ZSAVE   EQU #1F
;
02F4          CBASE   EQU #02F4
1D17          NPTAB   EQU #1D17
;
1CFC AD 1F D0 BEGIN   LDA #D01F      ; CHECK FOR OPTION KEY
1CFF 29 04      AND #04
1D01 F0 13      BEQ FINIS
; IF = DON'T USE NEW PRINTER ROUTINE
1D03 A9 17      LDA #NPTAB      ; REVECTOR PRINTER
1D05 8D 1B 03   STA #031B
1D0B A9 1D      LDA #NPTAB
1D0A 8D 1C 03   STA #031C
1D0D EE E8 02   INC #2EB
1D10 EE E8 02   INC #2EB
1D13 EE E8 02   INC #2EB
1D16 60        FINIS   RTS      ; RETURN
;
; SUBROUTINE VECTORS
1D17 9E EE      ADR #EE9E      ; OPEN
1D19 DB EE      ADR #EEDB      ; CLOSE
1D1B 9D EE      ADR #EE9D      ; READ
1D1D B7 1D      ADR #PWRIT-1   ; NEW WRITE
1D1F 80 EE      ADR #EE80      ; STATUS
1D21 9D EE      ADR #EE9D      ; SPECIAL
1D23 4C         BYT #4C        ; JUMP VECTOR TO
1D24 78 EE      ADR #EE78      ; DEVICE INIT ROUTINE
;
; NEW DEVICE WRITE ROUTINE
;
1D26 00        DW   BYT 0      ; DOUBLE WIDE
1D27 00        CHCNT BYT 0      ; LINE CHAR COUNT
1D28 01        CHINC BYT 1      ; INCREMENT FOR GRAPHICS
1D29 51        LEN   BYT 81     ; LINE OVERFLOW LENGTH
1D2A 00        FT    BYT 0      ; FIRST TIME INDICATOR
1D2B 00        IS    BYT 0      ; PRINTER INIT STRING
1D2C 00 00 00  BYT 0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0
;
; NOTE: DUE TO SPACE CONSTRAINTS WE DO NOT LIST OUT
; EVERY BYTE SEPARATELY, INSTEAD WE COMBINE THEM,
; WE USE THIS CONVENTION PARTICULARLY WHEN LISTING TEXT
;
1D34 00        AS    BYT 0      ; SPECIAL CONTROL CHAR ALLOW
1D35 00 00 00  DBY 0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0
1D53 00 00 00  DBY 0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0
1D71 00 00 00  DBY 0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0
1D8F 00 00 00  DBY 0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0
1DAD 00 00 00  DBY 0,0,0,0
1DB5 00        GR    BYT 0      ; GRAPHIC INDICATOR
1DB6 00        COLCT BYT 0      ; CURRENT COLUMN OF CHAR
1DB7 00        FRET  BYT 0      ; FOUND 155 (CR) INDICATOR
;

```

The OPTION Key

When the AUTORUN.SYS file containing the new printer driver is on one of your boot disks, it will automatically control the printing whenever you start your system using that disk. However, there may be times when you don't want the Accu-Print system to handle the printing. Instead of using another disk that doesn't contain Accu-Print's AUTORUN.SYS file, simply press the OPTION key and turn your computer on. Keep the OPTION key depressed until the disk drive stops and the startup operation is complete. Now printing will be controlled by the normal Operating System printer driver. To use Accu-Print again, just turn your computer off and restart your system without depressing the OPTION key.

Compatibility With Other Programs

The Accu-Print printer driver uses 768 bytes of memory, which is subtracted from the amount of memory available for application programs. The AUTORUN.SYS file, upon booting, modifies the LOMEM pointer so that application programs may be loaded and run in conjunction with the printer driver without overwriting it.

Since Accu-Print is designed to coexist and run with other programs, it is compatible with language cartridges such as BASIC, PILOT and Assembler-Editor. It is also compatible with standalone programs such as the Atari Program Text Editor and APX Forms. It is not compatible with any program that has its own AUTORUN.SYS file or that directly calls the Operating System's printer driver routine. In short, Accu-Print is compatible with any program or cartridge that uses or supports normal Atari Operating System printing conventions.

Control Characters

The Epson (and Epson-compatible) printers, without software support like Accu-Print, will not normally print Atari graphics or inverse characters. The reason is that while the Atari computer will display graphics symbols in response to certain numeric values, the Epson printers will consider those same values as control codes and respond accordingly. For example, the BASIC statement PRINT CHR\$(12) will cause a graphics symbol to appear on the screen. However, the statement

LPRINT CHR\$(12) will cause the Epson printers to form feed.

When the Accu-Print printer driver as created above is controlling the printing, the only control character the Epson printers will respond to is the carriage return. All other control characters will cause the printers to print the same graphics characters that would appear on the screen. For program listings and other uses, this is precisely what you want. However, there are other applications for which you would want your Epson printer to respond normally to certain control characters while responding to others by printing the Atari graphics or inverse symbols. For example, the Assembler-Editor cartridge generates form feed control characters when printing assembly listings. But you might want to put inverse characters in comment lines for emphasis. Therefore, you'd like to use the Accu-Print printer driver, but not have it treat form feeds as Atari graphics symbols. The Customizer program allows you to customize the Accu-Print printer driver for this type of use.

The Customizer Program

This program (Listing 1) creates an Accu-Print printer driver that has been customized for your use. As an option, you may select among any of 24 typestyles allowed by the Epson printers with Graftrax. All text except graphics or inverse characters will be printed in the typestyle you select. Note that you may not change typestyles while you are printing with the Accu-Print driver unless you select a control code option.

A second option is the specification of allowed control characters. You may specify up to 128 control characters which your Epson printer will respond to normally. That is, the Atari graphics or inverse characters corresponding to these symbols will not be printed in response to these control codes. Instead, the printer will respond as specified in its instruction manual.

Running the Customizer program is simple. With the BASIC language cartridge inserted, just load and run CUST.BAS. After initialization is completed, you will see a menu of typestyle choices. Just type the number corresponding to the typestyle you want followed by the RETURN key. You will then be asked if you want to allow control characters. If you do, type Y and RETURN in response to the question:

```

1DB8 B5 1F      PWRIT STA ZSAVE      ; STORE ATASCII CHAR
1DBA 20 1A EF      JSR %EF1A
1DBD A0 00      LDY #0        ; INIT COLUMN COUNT
1DBF 8C B5 1D      STY GR        ; AND INDICATORS
1DC2 8C B6 1D      STY COLCT
1DC5 8C B7 1D      STY FRET
1DCB CC 2A 1D      CPY FT        ; FIRST TIME THRU ?
1DCB D0 13      BNE GOON     ; BRANCH IF NOT
1DCD EE 2A 1D      INC FT        ; BYPASS AFTER THIS
1DD0 B9 2B 1D      LOP LDA IS,Y   ; CHECK FOR MORE
1DD3 C9 00      CMP #0       ; PRINTER INIT CHARS
1DD5 F0 09      BEQ GOON     ; BRANCH IF NO MORE
1DD7 A6 1D      LDX ZINIT    ; INIT CHAR IN PRINTER
1DD9 20 CF 1E      JSR STCHR
1DDC CB      INY         ; POINT TO NEXT INIT
1DDD 4C D0 1D      JMP LOP      ; CHAR AND GET IT
1DE0 A5 1F      GOON LDA ZSAVE
1DE2 20 0A 1F      JSR CHRCK   ; CHECK FOR NON-COMPATIBLE
1DE5 C0 01      CPY #1      ; CHARACTER
1DE7 F0 03      BEQ INCOMP  ; BRANCH IF INCOMPATIBLE
1DE9 4C BC 1E      JMP CMPAT   ; COMPATIBLE
1DEC EE B5 1D      INCOMP INC GR     ; SET GRAPHIC FLAG
1DEF 18      CLC
1DF0 AD 28 1D      LDA CHINC   ; INCREMENT LINE
1DF3 6D 27 1D      ADC CHCNT   ; CHAR COUNT
1DF6 8D 27 1D      STA CHCNT
1DF9 CD 29 1D      CMP LEN     ; CHECK FOR LINE OVERFLOW
1DFC D0 0D      BNE CTRL    ; BRANCH IF NO OVERFLOW
1DFE A9 9B      LDA #155   ; ELSE, SEND CARRIAGE RETURN
1E00 A6 1D      LDX ZINIT
1E02 20 CF 1E      JSR STCHR
1E05 AD 28 1D      LDA CHINC   ; CLEAR CHAR COUNT
1E08 8D 27 1D      STA CHCNT
1E0B A9 1B      CTRL LDA #1B    ; PUT GRAPHICS CONTROL
1E0D A6 1D      LDX ZINIT   ; CHARS INTO PRINTER BUFFER
1E0F 20 CF 1E      JSR STCHR   ; STORE CHAR
1E12 A9 4C      LDA #76
1E14 AC 26 1D      LDY DW      ; CHECK FOR DOUBLE WIDE
1E17 C0 00      CPY #0
1E19 F0 02      BEQ LD76   ; BRANCH IF NOT
1E1B A9 4B      LDA #75
1E1D A6 1D      LD76 LDX ZINIT
1E1F 20 CF 1E      JSR STCHR
1E22 A9 0B      LDA #8
1E24 A6 1D      LDX ZINIT
1E26 20 CF 1E      JSR STCHR
1E29 A9 00      LDA #0
1E2B A6 1D      LDX ZINIT
1E2D 20 CF 1E      JSR STCHR
1E30 AC B6 1D      BACK LDY COLCT  ; COLUMN COUNT IN Y
1E33 A5 1F      LDA ZSAVE   ; ATASCII CODE IN A
1E35 20 40 1F      JSR GETCL   ; GET COLUMN VALUD
1E38 8A      TXA        ; PUT INTO A
1E39 C9 9B      CMP #155   ; 155 IS ATASCII EOL
1E3B D0 05      BNE PUTC   ; SET FOUND 155 FLAG
1E3D EE B7 1D      INC FRET   ; SEND A 144 INSTEAD
1E40 A9 90      LDA #144   ; INDEX INTO PRINTER BUFFER
1E42 A6 1D      PUTC LDX ZINIT  ; SET COLUMN COUNT
1E44 EE B6 1D      INC COLCT  ; PUT COLUMN VALUE IN PB
1E47 20 CF 1E      JSR STCHR
1E4A A9 0B      LDA #8
1E4C CD B6 1D      CMP COLCT
1ED9 C9 9B      CMP #9B

```

```

1E4F D0 DF      BNE BACK      ; BRANCH IF NOT LAST COLUMN
1E51 A9 00      LDA #0        ; IF FRET SET
1E53 CD B7 1D   CMP FRET     ; NEED TO REPEAT CHAR
1E56 F0 61      BEQ ORD
1E58 BD B6 1D   STA COLCT    ; ZERO COLCT
1E5B AC 28 1D   LDY CHINC
1E5E A9 08      BSI         LDA #8      ; PUT BACKSPACE IN BUFFER
1E60 A6 1D      LDX ZINIT
1E62 20 CF 1E   JSR STCHR
1E65 AC 26 1D   LDY DW       ; CHECK FOR DOUBLE WIDE
1E68 C0 00      CPY #0
1E6A F0 07      BEQ BS2     ; BRANCH IF NOT
1E6C A9 08      LDA #8      ; PUT IN ANOTHER
1E6E A6 1D      LDX ZINIT   ; BACKSPACE
1E70 20 CF 1E   JSR STCHR
1E73 A9 18      BSI         LDA #18     ; PUT GRAPHICS CONTROL
1E75 A6 1D      LDX ZINIT   ; CHAR IN BUFFER
1E77 20 CF 1E   JSR STCHR
1E7A A9 4C      LDA #76
1E7C AC 26 1D   LDY DW
1E7F C0 00      CPY #0
1E81 F0 02      BEQ BS3     ; BRANCH IF NOT DOUBLE WIDE
1E83 A9 4B      LDA #75
1E85 A6 1D      BSI         LDX ZINIT
1E87 20 CF 1E   JSR STCHR
1E8A A9 08      LDA #8
1E8C A6 1D      LDX ZINIT
1E8E 20 CF 1E   JSR STCHR
1E91 A9 00      LDA #0
1E93 A6 1D      LDX ZINIT
1E95 20 CF 1E   JSR STCHR
1E98 AC B6 1D   BK1         LDY COLCT    ; COLUMN COUNT IN Y
1E9B A5 1F      LDA ZSAVE   ; ATASCII IN A
1E9D 20 48 1F   JSR GETCL  ; COLUMN VALUE
1EA0 BA        TXA      ; INTO A
1EA1 A2 00      LDX #0
1EA3 C9 9B      CMP #155    ; TEST FOR 155
1EA5 D0 02      BNE OK     ; BRANCH IF NOT 155
1EA7 A2 0B      LDX #11    ; REPLACE 155 WITH 11
1EA9 BA        OK      TXA      ; PUT CORRECT VALUE IN A
1EAA A6 1D      LDX ZINIT  ; INDEX INTO PB IN X
1EAC EE B6 1D   INC COLCT  ; SET COLUMN COUNT
1EAF 20 CF 1E   JSR STCHR  ; PUT COLUMN VALUE IN PB
1EB2 A9 08      LDA #8
1EB4 CD B6 1D   CMP COLCT
1EB7 D0 DF      BNE BK1    ; BRANCH IF NOT LAST COLUMN
1EB9 A0 01      ORD       LDY #01
1EBB 60        RTS      ; RETURN
1EBC AD 27 1D   CMPAT     LDA CHCNT   ; INC. CHAR COUNT
1EBF 6D 28 1D   ADC CHINC
1EC2 8D 27 1D   STA CHCNT
1EC5 A5 1F      LDA ZSAVE
1EC7 A6 1D      LDX ZINIT
1EC9 20 CF 1E   JSR STCHR ; STORE CHAR IN PB
1ECC 4C B9 1E   JMP ORD   ; AND EXIT

;
; STORE CHAR IN A INTO PB AT OFFSET X
; PRINT IF BUFFER FULL OR CR.
;
1ECF 9D C0 03   STCHR    STA #03C0,X ; STORE CHAR
1ED2 E8        INX
1ED3 E4 1E     CPX ZCHAR
1ED5 F0 16     BEQ LAST  ; BRANCH IF LAST CHAR FOR PB
1ED7 B6 1D     STX ZINIT ; UPDATE POINTERS

```

ANY CONTROL CHARACTERS TO ALLOW?

Then type the decimal value of the control character you wish your Epson printer to respond to normally followed by the RETURN key. You will then be asked:

ANY MORE?

Respond with a Y and RETURN to specify more control characters, and continue in this way until you have typed all the control characters you wish to allow. You can specify up to 128 control characters in this manner.

You will then be asked for a file name. This is the name of the file your customized printer driver will be written to. You may give any legal file name and must give the complete specifier, including the disk drive. For example, this could be D1:SPECIAL.OBJ. Follow the file specification with the RETURN key. The file will then be written to the disk. Next you will be asked if you want to create another printer driver file. Type Y and RETURN if you want to create another customized printer driver, or N and RETURN if you want to exit the program.

To use your new printer driver, just copy the file you created to the AUTORUN.SYS file and reboot your system with the disk containing it. You should also turn your printer off and then on again before you use a new printer driver so it will be cleared of any previous settings.

You will probably want to create several Accu-Print printer drivers for different uses. For example, you might have one using normal Pica type and no control characters allowed for BASIC program listings, another using Pica type and allowing form feeds for assembly listings using the Assembler-Editor cartridge, and perhaps another using Emphasized Pica type and allowing several control characters for word processing applications.

Additional Details

Pressing the RESET key will make the Accu-Print printer driver inactive. You will have to restart your Atari computer system to use Accu-Print again.

Accu-Print uses the character definitions stored inside your Atari computer to generate the graphics and inverse characters on your printer. In fact, it uses the CHBAS Operating System vector to find the character set definitions in memory. Thus, if you use the Accu-Print printer driver with

an application program that uses a redefined character set, the redefined characters will be printed on your printer. This is useful for many special applications, and can be the basis for special graphics character screen dump programs.

How Accu-Print Works

Listing 2 is an assembly language listing of the Accu-Print printer driver. I've included it for those of you who might like to understand how the printer driver works. Additionally, you might wish to modify it for your own special purposes. I've tried to liberally comment the listing to make it a little easier to understand.

The basic idea behind Accu-Print is to replace the normal Operating System printer driver with one of my own design. This is made possible by two features of the Atari system. The first is the capability to load and execute a program stored in an AUTORUN.SYS file at system startup after the system is initialized, but before the user is given control of the system. The second is the fact that the Operating System uses RAM to store pointers (or vectors) to input/output control routines. Combining these features, the system allows us to execute a program (continued in AUTORUN.sys) during system startup that changes the print pointer from the standard printer driver to our own. Labels BEGIN through FINIS show these operations. At system startup, the entire AUTORUN.SYS file is loaded into memory and execution begins at BEGIN. If the OPTION key is pressed, the program simply exits and nothing happens. Otherwise, the address of our new printer device table (located at NPTAB) is stored in locations \$31B and \$31C, which contain the pointer to the Operating System's standard printer device table. Next, the LOMEM pointer is incremented by 768 to make sure the following code isn't overwritten by an application. The program then exits and the user is given control of the system. Only a few instructions are executed at system startup, but the effect is great! All printing will now be vectored through our new printer driver. The data for the driver starts at DW and the executable code starts at PWRIT.

Chapter 8 of the De Re Atari gives more information about Operating System vectors and device tables if you're interested in more detail about

```

1ED8 F0 01          BEQ CR          ; BRANCH IF CHAR IS EOL
1EDD 60           NEXT   RTS          ; RETURN
1EDE A9 20        CR     LDA #120
1EE0 A0 00                LDY #0
1EE2 8C 27 1D                STY CHCNT      ; CLEAR CHAR COUNT FOR NEW LIN
1EE5 9D C0 03        NXT   STA #03C0,X      ; PAD BUFFER WITH
1EE8 E0                INX          ; BLANKS
1EE9 E4 1E                CPX ZCHAR
1EEB D0 F8                BNE NXT
1EED A9 00        LAST   LDA #000          ; SEND BUFFER TO PRINTER
1EEF 85 1D                STA ZINIT
1EF1 AE 7F EE                LDX #EE7F
1EF4 AC 80 EE                LDY #EE80
1EF7 20 E6 EE                JSR #EEE6
1EFA 20 59 E4                JSR #E459
1EFD AD 26 1D                LDA DW          ; CHECK DOUBLE WIDE
1F00 C9 00                CMP #0
1F02 F0 05                BEQ OUT        ; BRANCH IF NOT
1F04 A9 00                LDA #0          ; FORCT
1F06 8D 2A 1D                STA FT         ; INITIALIZATION
1F09 60           OUT    RTS          ; RETURN
;
; CHECK CHAR FOR COMPATIBILITY WITH
; PRINTER CHAR SET. RETURN Y=0 IF COMPATIBLE,
; Y=1 IF NOT, ATASCII VALUES INCOMPATIBLE;
; 0-31,96,123-154,156-255
;
1F0A 30          CHRCK  SEC
1F0B C9 9C                CMP #156
1F0D B0 27                BCS SONE      ; >155 - NEED GRAPHICS
1F0F C9 9B                CMP #155
1F11 F0 20                BEQ SZERO     ; = 155 - DON'T NEED GRAPHICS
1F13 A0 00                LDY #0
1F15 BE 34 1D        ANXT   LDX AS,Y      ; CHECK FOR SPECIAL
1F18 E0 00                CPX #0        ; ALLOW CHARACTERS
1F1A F0 09                BEQ NMOR     ; BRANCH IF NO MORE
1F1C D9 34 1D                CMP AS,Y      ; CHECK CHAR
1F1F F0 12                BEQ SZERO     ; ALLOW IT IF EQUAL
1F21 C0                INY          ; POINT TO NEXT ALLOW CHAR
1F22 4C 15 1F                JMP ANXT      ; AND CHECK I
1F25 30          NMOR   SEC
1F26 C9 7B                CMP #123
1F28 B0 0C                BCS SONE      ; >122 - NEED GRAPHICS
1F2A 30          SEC
1F2B C9 20                CMP #32
1F2D 90 07                BCC SONE      ; <32 - NEED GRAPHICS
1F2F C9 60                CMP #96
1F31 F0 03                BEQ SONE      ; = 96 - NEED GRAPHICS
1F33 A0 00        SZERO  LDY #0        ; DON'T NEED GRAPHICS
1F35 60          RTS
1F36 A0 01        SONE   LDY #1        ; NEED GRAPHICS
1F38 60          RTS
;
; COMPUTE COLUMN VALUE TO CONSTRUCT CHAR
; A = ATASCII VALUE OF CHAR
; Y = COLUMN VALUE TO COMPUTE
; X = COLUMN VALUE ON EXIT
;
1F39 00          ANS    BYT 0          ; COMPUTER COLUMN VALUE
1F3A 00          ATVAL  BYT 0          ; ATASCII CHAR VALUE
1F3B 00          CVAL   BYT 0          ; INTERNAL CHAR VALUE
1F3C 00          CLNUM  BYT 0          ; COLUMN NUMBER
1F3D 00          INFLG  BYT 0          ; INVERSE CHAR FLAG

```

```

1F3E 00 00   CHBAS   DBY 0       ; CHAR SET BASE ADDRESS
1F40 80 40 20 MASKS   BYT 128,64,32,16,8,4,2,1 ; MASKS FOR COLUMNS 0 TO
7
;
; SEE 'NOTE' IN FIRST PAGE OF LISTING
;
1F48 8D 3A 1F   GETCL   STA ATVAL   ; SAVE ATASCII VALUE
1F4B 8C 3C 1F   STY CLNUM  ; SAVE COLUMN NUMBER
1F4E A0 00      LDY #0     ; INITIALIZE
1F50 8C 39 1F   STY ANS
1F53 38        SEC
1F54 C9 80      CMP #128
1F56 90 0B      BCC NCHAR  ; BRANCH IF NOT INVERSE
1F58 AD 3A 1F   LDA ATVAL
1F5B 38        SEC
1F5C E9 80      SBC #128   ; CONVERT TO NON-INVERSE
1F5E 8D 3A 1F   STA ATVAL
1F61 A0 01      LDY #1
1F63 8C 3D 1F   NCHAR    STY INFLG  ; SET INVERSE FLAG
1F66 AC F4 02   LDY CBASE ; GET CHAR SET BASE
1F69 8D 3F 1F   STA CHBAS+1 ; AND SAVE IT
1F6C AD 3A 1F   LDA ATVAL  ; CONVERT ATVAL TO
1F6F 38        SEC
1F70 C9 60      CMP #60    ; INTERNAL CODE
1F72 90 04      BCC L60    ; BRANCH IF <#60
1F74 4C B9 1F   JMP CSTDOR ; ELSE, CONTINUE
1F77 38        SEC
1F78 C9 40      L60      CMP #64    ;
1F7A 90 06      BCC L40    ; BRANCH IF <#64
1F7C 38        G20      SEC
1F7D E9 20      SBC #20
1F7F 4C B9 1F   JMP CSTDOR
1F82 38        L40      SEC
1F83 C9 20      CMP #20
1F85 B0 F5      BCS G20    ; BRANCH IF >#20
1F87 69 40      ADC #64
1F89 8D 3B 1F   CSTDOR   STA CVAL   ; STORE INTERNAL VALUE
1F8C AA        TAX        ; COMPUTE ADDRESS OF CHAR
1F8D A9 00      LDA #0     ; DEFINITION.
1F8F E0 00      LOOP     CPX #0
1F91 F0 0E      BEQ CMPCL ; NO MORE ADJUSTMENT NECESSARY
1F93 18        CLC
1F94 69 0B      ADC #8
1F96 CA        DEX        ; DECR. INTERNAL VALUE
1F97 90 F6      BCC LOOP   ; SEE IF OFFSET = 256
1F99 EE 3F 1F   INC CHBAS+1 ; BUMP HIGH
1F9C A9 00      LDA #0
1F9E 4C 8F 1F   JMP LOOP
1FA1 8D 3E 1F   CMPCL   STA CHBAS  ; STORE LOW BYTE
1FA4 8D B6 1F   STA MOD1+1
1FA7 AD 3F 1F   LDA CHBAS+1
1FAA 8D B7 1F   STA MOD1+2
1FAD A0 00      LDY #0     ; CONTROLS LOOP
1FAF AE 3C 1F   LDX CLNUM ; INDEX TO MASKS
1FB2 8D 40 1F   LOOP1   LDA MASKS,X ; GET COLUMN MASK
1FB5 39 3E 1F   MOD1    AND CHBAS,Y ; MODIFIED - WILL POINT TO
1FB8 C9 00      CMP #0    ; CHAR. DEFINITION
1FBA F0 0A      BEQ CHECK ; BRANCH IF COLUMN BIT NOT SET
1FBC AD 39 1F   LDA ANS  ; ELSE, UPDATE COLUMN VALUE
1FBF 18        CLC
1FC0 79 40 1F   ADC MASKS,Y ; ADD VALUE TO AND
1FC3 8D 39 1F   STA ANS
1FC6 C8        CHECK   INY
1FC7 C0 0B      CPY #8

```

that area. To set the stage for understanding the printer driver code itself, let's notice that when a character is to be printed, its ATASCII code will be placed in the A-register and the code beginning at PWRIT will be executed.

The driver first checks to see if this is the very first time the printer driver is being executed. If it is, then the characters contained in the data string starting at IS will be sent to the printer to initialize it. The particular character string stored here is a function of the typestyle selected when you ran the Customizer program. The driver then checks to see if the character to be printed is a graphics or inverse character. The subroutine at CHRCK is used for this. If it is not a special character, then subsequent code is bypassed and the driver operates exactly like the standard one.

If a special character is to be printed, then some special processing takes place. Each special character is printed in bit graphics mode. This means that data values corresponding to the individual 8-dot columns of the printed characters have to be sent to the printer in addition to control characters putting the printer into and out of graphics mode. This accounts for the slowdown while printing these characters. For each special character printed, 12 data characters have to be sent. In addition, special handling has to be given if a column data value happens to be 155. The Atari system will recognize this value as a carriage return and send a line feed character after it. Since we really want this value to be printed as a single 8-dot column, the automatic insertion of additional data is unacceptable. So if this value occurs (as it does with an inverse A) the driver breaks it apart, prints part of the column, backspaces the printer, and prints the second part. At any rate, the code between INCOMP and CMPAT is devoted to sending data to the printer that causes it to print the 8-dot columns that form the graphics or inverse character being printed. After this data is sent, the printer is taken out of graphics mode and the printer driver is exited.

Two subroutines worthy of note are CHRCK and GETCL. CHRCK determines when a character needs special handling. It does this by checking the character's ATASCII code with the codes of the graphics and inverse characters. Also, it checks the character's code against the list of legal control codes (if any) you specified

while running the Customizer program. The character string AS contains those control codes. So it is this routine which allows for passing certain control characters intact to the printer.

GETCL is the real workhorse of the printer driver. It accesses the internal character definitions and computes the data values to send to the printer so it can reconstruct the characters precisely as the Atari defines them. The routine is executed 8 times for each special character, once for each 8-dot column. The algorithm used is interesting, since it has to translate between the row-by-row internal character set definitions and the column-by-column data required by the printer. You can also see why Accu-Print works with custom character sets. It uses the standard character set vector to find the character definitions. Custom character sets use this vector too! My technique is probably not the most sophisticated possible. An interesting exercise would be to make it shorter and more efficient. I have a feeling that one of you whizzes out there can write this subroutine using one quarter of the code I did. Any takers?

Well, I hope this explanation of how the code works will help you understand some of the subtleties of the Atari Operating System and of assembly language. I highly recommend De Re Atari and the Technical Reference Notes for more in-depth treatments of the techniques used.

A Concluding Note

I've found the Accu-Print system to be very useful in my work. I can now feel free to use graphics strings in my programs at will, particularly to represent assembly language routines where it saves me a lot of typing and leads to faster execution times for initialization. I don't get gibberish on my printer anymore, and I find that most programs work with Accu-Print easily. I hope you find the system helpful to you as well.

```

1FC9 D0 E7          BNE LOOP1      ; BRANCH IF NOT DONE
1FCB AE 3D 1F       LDX INFL6     ; HANDLE INVERSE
1FCE E0 01          CPX #1
1FD0 D0 08          BNE FIN        ; BRANCH IF NOT INVERSE
1FD2 A9 FF          LDA #255      ; ELSE, FLIP BITS
1FD4 4D 39 1F       EOR ANS
1FD7 8D 39 1F       STA ANS
1FDA AD 3A 1F       FIN LDA ATVAL   ; LOAD REGS FOR EXIT
1FDD AC 3C 1F       LDY CLNUM
1FE0 AE 39 1F       LDX ANS
1FE3 60             RTS
1FE4             END

```


Listing 2

```

1 REM ACCU-PRINT CUSTOMIZER
4 REM
10 GRAPHICS 0:POSITION 15,8:? "ACCU-PRINT"
20 POSITION 15,10:? "CUSTOMIZER"
40 POSITION 5,15:? "(REVERSE ON)PLEASE WAIT FOR
INITIALIZATION(REVERSE OFF)"
50 REM PUT ACCU-PRINT IN STRING
60 DIM R$(744):RESTORE 900
70 FOR I=1 TO 744:READ A:R$(LEN(R$)+1)=CHR$(A):NEXT I
80 GRAPHICS 0:POSITION 15,0:? "ACCU-PRINT"
90 POSITION 13,1:? "TYPESTYLE MENU"
100 POSITION 2,3:? " 1 PICA"
110 POSITION 2,4:? " 2 ITAL"
120 POSITION 2,5:? " 3 PICA EMPH"
130 POSITION 2,6:? " 4 ITAL EMPH"
140 POSITION 2,7:? " 5 PICA DS"
150 POSITION 2,8:? " 6 ITAL DS"
160 POSITION 2,9:? " 7 PICA EMPH DS"
170 POSITION 2,10:? " 8 ITAL EMPH DS"
180 POSITION 2,11:? " 9 COND PICA"
190 POSITION 2,12:? "10 COND ITAL"
200 POSITION 2,13:? "11 COND PICA DS"
210 POSITION 2,14:? "12 COND ITAL DS"
220 POSITION 20,3:? "13 COND-EXP PICA"
230 POSITION 20,4:? "14 COND-EXP ITAL"
240 POSITION 20,5:? "15 COND-EXP PICA DS";
250 POSITION 20,6:? "16 COND-EXP ITAL DS";
260 POSITION 20,7:? "17 EXP PICA"
270 POSITION 20,8:? "18 EXP ITAL"
280 POSITION 20,9:? "19 EXP PICA EMPH"
290 POSITION 20,10:? "20 EXP ITAL EMPH"
300 POSITION 20,11:? "21 EXP PICA DS"
310 POSITION 20,12:? "22 EXP ITAL DS"
320 POSITION 20,13:? "23 EXP PICA EMPH DS";
330 POSITION 20,14:? "24 EXP ITAL EMPH DS";
340 POSITION 2,16:? "YOUR CHOICE";
350 INPUT CH
360 ON CH GOTO 400,405,410,415,420,425,430,435,440,445,
450,455,460,465,470,475,480,485,490,495,500,505,510,515
370 PRINT CHR$(253);:GOTO 340
400 RESTORE 401:GOTO 600
401 DATA 255
405 RESTORE 406:GOTO 600
406 DATA 27,52,255
410 RESTORE 411:GOTO 600
411 DATA 27,69,255
415 RESTORE 416:GOTO 600
416 DATA 27,52,27,69,255
420 RESTORE 421:GOTO 600

```


Figure 1. The mouse in use on the VIC-20.

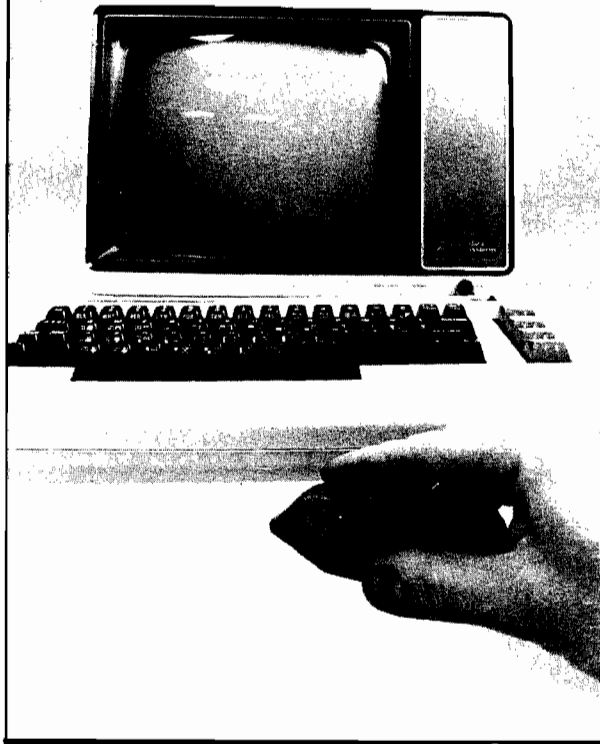

A Low Cost Mouse for the VIC-20

by Robert L. Martin WB2KTG

As most readers of this magazine are aware, the "mouse" is a popular easy-to-use device for inputting data to computer or terminal. Many newly designed computers, such as Apple's Macintosh, are being built with mice as standard factory equipment.

Having recently purchased a VIC-20, and being unwilling to spend several thousand dollars to get a new mouse-equipped computer, I decided to build a mouse which could be used to upgrade my present system.

To begin this project I decided on the objectives of the design. First, my mouse should be a "hardware-only" design. I don't enjoy programming and, besides, it will be more of a challenge this way. Second, if I do upgrade my hardware at some time in the future, I don't want the mouse to be incompatible with whatever it is I buy. The mouse shall be usable with all computer systems in existence or planned. Third, the design should be simple enough that anyone could make a duplicate in one evening's time. And fourth, it should not be expensive. As you will soon see, these objectives limit the performance of the final product, but we do produce a mouse.

Not wishing to be inconvenienced by the care and feeding of a live mouse, I decided to start with the next best thing. A rubber mouse from the local pet store looked great. The mouse I bought cost less than two dollars. As an added bonus, my mouse was available in several colors.

A quick incision on the mouse's lower abdomen (no anesthetic necessary) with my trusty Swiss Army Knife and a control port was available for interconnecting cable insertion. I used a telephone extension cord with modular end connectors. The connector keeps the cable from pulling

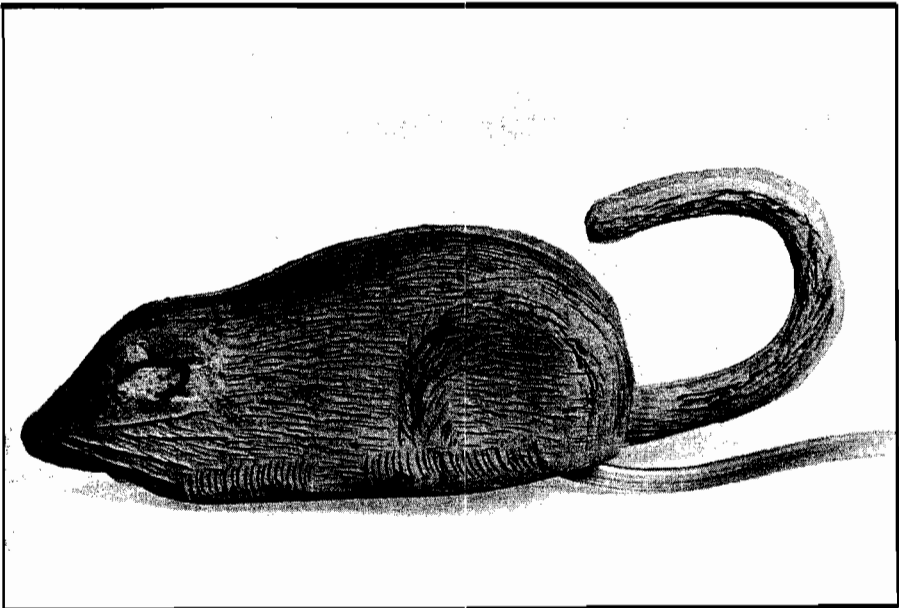


Figure 2. Detailed illustration of the mouse.

out of the control port. The other end of the cable is secured to the computer with a suitable length of masking tape. The assembly and checkout are now complete.

Operating Hints and Suggestions

The mouse, used in conjunction with the intensity control on the monitor, is useful for varying the brightness of the video display. When the mouse is used with the contrast control, the user can adjust the luminous intensity ratio between the screen characters and the background. A little experimentation with the mouse will quickly demonstrate its other capabilities.

One caution--feline quadrupeds sometimes find the mouse interesting also


Some method was needed to hold the mouse between operating sessions. While chatting with the manager of our local hardware store, I mentioned the project and my need. He suggested something which appears to be almost designed for the job. He called it a "trap." That seems to be as good a name as any. The trap can be fastened to the monitor, the wall, or even to your computer table.

Future Trends

One industrial espionage agent, whom I have done some business with in the past, furnished me with a photograph he took in the secret research and development laboratories of a major computer manufacturer. Reportedly, their new interface will be named the "Hippo." One distinguishing feature of this advanced controller will be the fact that it is wireless. Presumably it communicates with the computer via infra-red or uses some kind of R.F. link.

I hope you will have as much fun building and using the mouse as I did. After the novelty wears off, it can always be used as a decoy for your next mouse hunt!

Robert Martin may be corresponded with at 45 Salem Lane, Little Silver, NJ 07739, or by ham radio at WB2KTG.

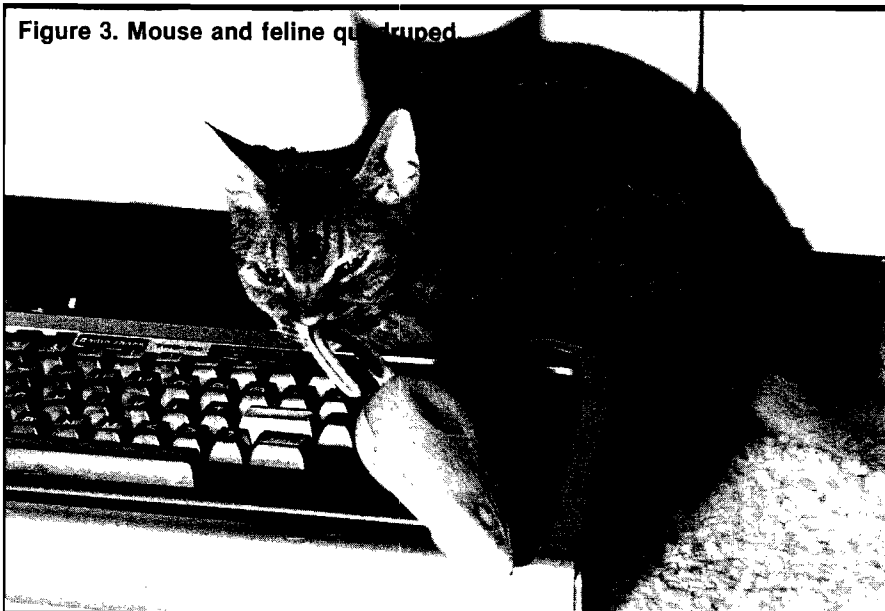

Raise your Apple's IQ Twelve Times A Year!



A One Year Subscription Brings You 12 Issues With:

Over \$500 of Programs for your Home, Business, Education and Entertainment. Complete Program Listings with Instructions.

Comprehensive Articles that show what each program does, how to use it and how to type it into your Apple, Franklin ACE or other Applesoft-compatible computer.

Regular Features for the Beginner and Expert.

On The Scene

The Latest New Software/Hardware Releases.

Products! Inside and Out

Comprehensive Product Reviews.

Education Corner

Programs that help make Learning Fun.

Tips 'N Techniques

Little known programming Tricks you can Use.

Disassembly Lines

An Expert reveals the mysteries of Applesoft.

Utilities

Superchargers for Basic, DOS, Printing, and More.

Games

Arcade Fun you can Type and Run.

Note

- Domestic U.S. First Class subscription rate is \$51.95
- Canada Air Mail subscription rate is \$59.95
- Outside the U.S. and Canada Air Mail subscription rate is \$89.95

All payments must be in U.S. funds drawn on a U.S. bank.

©1983 by MicroSPARC Inc. All Rights Reserved.

Apple® is a registered trademark of Apple Computer, Inc.
ACE® is a registered trademark of Franklin Computer, Inc.

Try a NIBBLE!

Here's what some of our Readers say:

- "Certainly the best magazine on the Apple!"
- "Impressed with the quality and content."
- "Programs remarkably easy to enter."
- "I'll be a subscriber for life!"
- "Your service is fantastic . . . as a matter of fact, I'm amazed!"

Try a NIBBLE!

NIBBLE is focused completely on the Apple and Applesoft-compatible computers.

Buy NIBBLE through your local Apple Dealer or subscribe now with the Coupon or Order Card in this issue.

You'll want Back Issues Too!

Here are some examples of programs you can get:

The Investor—Stock Tracking, Reporting, and Graphing.

Recipe Box—Kitchen/Menu Management made Fun.

The Librarian—Auto Logging and Retrieval of your Disks.

Designer/Illustrator—Art/Design Creation and Composition with Graphics.

Machine Language Editor—Quick and Easy Aid for Typing and Changing M/L Programs.



And Much . . . Much More!

NIBBLE will become a permanent part of your Reference Library. Discover why 95% of NIBBLE Readers save every issue!

Join more than 120,000 Apple/Ace users who say:

"NIBBLE IS TERRIFIC!"

SUBSCRIBE NOW AND SAVE \$12.00 OFF THE COVER PRICE!

nibble  
We accept Master Charge & Visa

Box 325, Lincoln, MA 01773 (617) 259-9710

I'll try nibble!
Enclosed is my \$26.95 (for 12 issues)
(Outside U.S., see special note on this page.)

check money order bill me (U.S. only)

Your subscription will begin with the next issue published after receipt of your check/money order.

Card # _____ Expires _____
PLEASE PRINT CLEARLY

Signature _____

Name _____

Address _____

City _____


State _____ Zip _____

Double Vision Catalog Double Vision Catalog

for
for

40 or 80 Columns 40 or 80 Columns

by **Alan and Valerie Floeter**
by **Alan and Valerie Floeter**

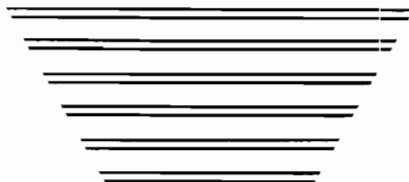

As more people buy Apple IIe's, we will be seeing more software using 80 columns. It is something to be expected. One logical usage of an 80 column width is in the CATALOG program, using the other half of the screen for listing file information. In the past, several DOS patches have appeared in publications to display two columns of file information for the normal 40 column display. Although we generally use short filenames, [we hate typing], the patches did shorten the amount of information sent to the screen. Now with a full 80 columns available, the complete file information can fit in two columns of 40 characters each.

When you think of it, most people's printers already have 80 or 132 columns, so why not have the CATALOG use all the available space, whether there are 40, 80, or 120. Why not take it even one step further and allow the CATALOG to shorten the filenames when wanted, printing multiple columns of files?

With these dreams, we set out to work on the CATALOG command for DOS. We were not only successful in the results we produced, but accomplished them with a patch that

merely replaces the original CATALOG. This saved valuable patch space needed for other DOS enhancements already published.

So exactly what does this CATALOG patch do? Well, it depends on the number of characters your output device has and whether you use it in the normal or shortened mode. The chart in Figure 1 summarizes this.

Figure 1: Number of columns of filenames displayed

	COLUMNS		
	40	80	120
Normal	1	2	3
Shortened	2	4	6

If you use the normal CATALOG mode, 40 characters of information are displayed per filename. In the shortened mode, 20 characters are displayed per file, since the end of the filename is chopped off. If you send a CATALOG to an Apple II and Apple II Plus screen (40 column width), you'll see either one or two files per line depending on the mode. If you sent a CATALOG to an Apple IIe (80 column width), or an 80 column printer, such

as an EPSON MX-80, you will see either 2 or 4 column files. Many printers have at least 120 characters per line, enabling them to produce 3 or 6 columns of file information.

How Was This Done?

When the Apple screen receives 40 characters, it automatically does a carriage return and line feed. We used this feature when we developed our CATALOG patch to DOS. Since the screen will take care of its own carriage returns, we just keep sending it information without telling it where the next line starts. This way the patch doesn't have to know how many columns the device has available. This CATALOG command sends out either 20 or 40 characters per file name continuously, and the printer or screen decides how much will fit on each line.

This works well for screens, but some printers or their interface cards might not be set up to send out a carriage return when their line is full. There is usually a switch on the printer or the interface to do this, or some specified control sequence will accomplish this. If you are unsure as to how your system handles this, just follow the suggestions we will give later.

One nice side benefit of this patch is that you don't need to do any POKE's to set up the number of columns. When you send out a CATALOG listing to two devices at the same time you will get different listings. For example, if you have a 132 column printer and an 80 column card and then enter "CATALOG", your screen will show two columns of filenames, while your printer will produce three columns.

Entering the Patch

We have written the assembly language routine to patch DOS for you. Enter the program, either into an assembler, or enter the opcodes, and save it to disk. Whenever you wish to have this patch in your DOS, BRUN the program. This could be part of your HELLO routine.

How to Shorten Filenames

When you want to shorten the filenames to store more information on the screen, enter POKE 44561,10 and POKE 44592,2. This will print 20 characters per file. To reset it back to the full 40 characters per file, enter POKE 44561,29 and POKE 44592,3.

DOS Warning

We always like to warn people about using a patched DOS. This patch doesn't use any of the patch space used by some of the other DOS improvements, so you shouldn't have any conflicts with other patches, but we can't guarantee it. Although we haven't had any problems, whenever you change a standard you can't predict if someone else assumed that part would stay the same.

Conclusion

Now you can utilize the entire line for CATALOG's, whether it is 40, 80 or 120 columns. Not only will you make better use of your display area, but you won't have to tell your device how many columns you have.

Figure 2. Sample CATALOGS for 40 and 80 columns.

<p>Normal 40 Column Screen</p> <pre> CATALOG DISK VOLUME 254 A 002 HELLO T 001 PRINTER A 003 TEXT-TO-FOCUS A 003 FOCUS-TO-TEXT A 119 BUCHANAN A 003 FOCUS NEW A 039 BUCH-2 B 054 MASTER DIRECTORY.L A 003 NEW FOCUS B 008 MASTER DIRECTORY B 009 MASTER DIR/DISPLAY.L T 001 HILISTER.MS T 008 BOOTMON2 A 027 FLYNN A 027 MICRO MLR B 006 FLOETER A 041 BUCH1] </pre>	<p>Normal 80 Column Printer</p> <pre> DISK VOLUME 254 A 002 HELLO A 003 TEXT-TO-FOCUS A 119 BUCHANAN A 039 BUCH-2 A 003 NEW FOCUS B 009 MASTER DIR/DISPLAY.L T 008 BOOTMON2 A 027 MICRO MLR A 041 BUCH1 T 001 PRINTER A 003 FOCUS-TO-TEXT A 003 FOCUS NEW B 054 MASTER DIRECTORY.L B 008 MASTER DIRECTORY T 001 HILISTER.MS A 027 FLYNN B 006 FLOETER] </pre>
<p>Shortened 80 Column Printer</p> <pre> CATALOG DISK VOLUME 254 A 002 HELLO A 119 BUCHANAN A 003 NEW FOCUS T 008 BOOTMON2 A 041 BUCH1 T 001 PRINTER A 003 FOCUS NEW B 008 MASTER DIRE A 027 FLYNN A 003 TEXT-TO-FOC A 039 BUCH-2 B 009 MASTER DIR/ A 027 MICRO MLR A 003 FOCUS-TO-TE B 054 MASTER DIRE T 001 HILISTER.MS B 006 FLOETER] </pre>	

Listing 1

```

; PATCH FOR 80 COLUMN CATALOG FOR DOS 3.3
;
; BY AL FLOETER
;
;
0300                                ORG 0300
;
0085                                IND    EQU 085
0087                                COUNT EQU 087
;
0300 A2 00                          LDX 00
0302 BD 26 03                        LOOP LDA PATCH,X
0305 F0 1E                          BEQ DONE
0307 85 86                          STA IND+1    ; GET HI ORDER
0309 EB                              INX
030A BD 26 03                        LDA PATCH,X
030D 85 85                          STA IND    ; GET LO ORDER
030F EB                              INX
0310 BD 26 03                        LDA PATCH,X ; GET COUNT
0313 85 87                          STA COUNT
0315 EB                              INX
0316 A0 00                          LDY 00

```




FLIP SORT PLUS™

Smoke acrylic
eight dividers
holds 110 diskettes
\$27.95


THE FLIP PAK™

Smoke acrylic
holds 10 diskettes
easel back stand
6 for \$12.00



HEAD CLEANING KIT

2 cleaning disks
non-abrasive
30 cleanings
\$14.95



THE FLIP SORT™

Smoke acrylic
five dividers
holds 70 disks
\$19.95



THE PAPER BOSS™

Bottom clamping
36" flexible arm
beige steel
\$19.95



YES! Please rush me the items I've checked above! I am enclosing my check or Charge Card information and I understand that you'll pay the shipping!

CALIFORNIA RESIDENTS PLEASE ADD SALES TAX

Name _____

Street _____

City _____ State _____

Zip _____ Phone _____



HOME BASE SUPPLY

422 Soquel Avenue
Santa Cruz, CA 95062
(408) 458-1377

IN CA
(800) 824-3252

OUTSIDE CA
(800) 824-3251

Listing 1 (continued)

```

0318 BD 26 03 DOIT LDA PATCH,X ; GET BYTE OF PATCH
031B 91 85 STA (IND),Y ; PUT IT WHERE IT G
QES
031D E8 INX
031E C8 INY
031F C6 07 DEC COUNT ; DONE YET
0321 D0 F5 BNE DOIT ; NO
0323 F0 DD BEQ LOOP ; YES
0325 60 DONE RTS
;
; PATCH AREA IN ORDER OF:
; ADDRESS OF WHERE TO PUT IT
; NUMBER OF BYTES TO MOVE
; PATCH ITSELF
;
0326 AD A8 PATCH BYT $AD,$A8
0328 06 BYT 6
0329 EA NOP
032A A9 0D LDA $A0D ; OUTPUT CR
032C 20 ED FD JSR $FDED
;
032F AD C3 BYT $AD,$C3
0331 06 BYT 6
0332 EA NOP
0333 A9 0D LDA $A0D ; OUTPUT CR
0335 20 ED FD JSR $FDED
;
0338 AD E8 BYT $AD,$E8
033A 30 BYT $30
033B A0 07 LDY #7
033D 0A SHIFT ASL ; FIND A BIT
033E 30 03 BMI GOTIT
0340 08 DEY
0341 D0 FA BNE SHIFT
0343 B9 A7 B3 GOTIT LDA $B3A7,Y ; GET PROGRAM TYPE
0346 20 ED FD JSR $FDED ; OUTPUT IT
0349 A9 A0 LDA $A0 ; SPACE
034B 20 ED FD JSR $FDED
034E BD E7 B4 LDA $B4E7,X
0351 B5 44 STA $44
0353 BD E8 B4 LDA $B4E8,X ; GET SIZE
0356 B5 45 STA $45
0358 20 42 AE JSR $AE42 ; OUTPUT IT
035B A9 A0 LDA $A0 ; SPACE
035D 20 ED FD JSR $FDED
0360 A0 1D LDY #1D ; FILE NAME SIZE($A
FOR 4 ACRO
0362 BD C9 B4 OLDOP LDA $B4C9,X ; GET NAME
0365 C9 A0 CMP $A0 ; CONTROL CHARACTER
0367 B0 02 BCS NO
0369 A9 AA LDA $AA ; MAKE IT A ASTERIS
K
;
036B AE 21 NO BYT $AE,$21
036D 01 BYT 1
036E F0 BYT $F0
;
036F AE 2F BYT $AE,$2F
0371 05 BYT 5
0372 A2 03 LDX #3 ; 3 SPACES(2 FOR FO
UR ACROSS)
0374 20 4A F9 JSR $F94A
0377 00 BYT 0
0378 END

```

A New Variation on an Old Theme: *Replace Your 6502*

by Ron M. Battle

There are probably a lot of computer enthusiasts out there who have waited for a high-performance successor to the trusty 6502. Enter Rockwell's new CMOS 6502 product line. Although not the ultimate successor to the "old" 6502, the R65C00 family has many enhancements you might find quite interesting.

New Features

This new family of CMOS microprocessors comes in 3 models:

R65C02
R65C102
R65C112

All three will be available with your choice of operating frequency:

2 MHz
3 MHz
4 MHz

Each uses a single 5 volt \pm 20% power supply drawing only 4 mA per MHz. By stopping the input clock, the processor will go into a standby mode and dissipate only 10 uW of power. In addition, 12 new instructions are added to the instruction set plus 2 new addressing modes.

Processor Description

Figure 1 has the pinouts of these new chips and, as you can see, the R65C02 and R65C102 are pin compatible with the 6502.

R65C02: This is a direct replacement for the 6502.

R65C102: This new chip has functions on pins not used by the original 6502. No external time base is needed when a crystal is connected between pins 35 and 37, but the crystal frequency will be divided by four.

Alternatively, you can input a TTL level single phase clock signal to pin 37 [XTLI] for compatibility with the 6502. Pin 3 [Phase 4] is a quadrature clock output used for peripheral timing. This output clock replaces the Phase 1 on the 6502. Pin 4 [ML], memory lock, is an output used by arbitration circuitry so read-modify-write instructions are not interrupted by external devices. Pin 36 [BE], bus enable, allows an external device to tri-state the data, address, and R/W lines by pulling this pin low. The R65C102 would be an interesting substitute for the 6502 so direct memory access (DMA) devices could be implemented easily.

R65C112: Designed as a slave processor, this model is used in conjunction with the R65C102 for a master-slave configuration. Pin 37 [Phase 2] is the input clock derived from the R65C102 Phase 2 output. This

Figure 1

R65C02				R65C102				R65C112			
VSS	01	40	RES	VSS	01	40	RES	VSS	01	40	RES
RDY	02	39	ϕ_2 (out)	RDY	02	39	ϕ_2 (out)	RDY	02	39	N.C.
ϕ_1 (out)	03	38	S.O.	ϕ_1 (out)	03	38	S.O.	N.C.	03	38	S.O.
IRQ	04	37	ϕ_4 (in)	IRQ	04	37	XTLI	IRQ	04	37	ϕ_2 (in)
N.C.	05	36	N.C.	ML	05	36	BE	ML	05	36	BE
NMI	06	35	N.C.	NMI	06	35	XTLO	NMI	06	35	N.C.
SYNC	07	34	R/W	SYNC	07	34	R/W	SYNC	07	34	R/W
VCC	08	33	D0	VCC	08	33	D0	VCC	08	33	D0
A0	09	32	D1	A0	09	32	D1	A0	09	32	D1
A1	10	31	D2	A1	10	31	D2	A1	10	31	D2
A2	11	30	D3	A2	11	30	D3	A2	11	30	D3
A3	12	29	D4	A3	12	29	D4	A3	12	29	D4
A4	13	28	D5	A4	13	28	D5	A4	13	28	D5
A5	14	27	D6	A5	14	27	D6	A5	14	27	D6
A6	15	26	D7	A6	15	26	D7	A6	15	26	D7
A7	16	25	A15	A7	16	25	A15	A7	16	25	A15
A8	17	24	A14	A8	17	24	A14	A8	17	24	A14
A9	18	23	A13	A9	18	23	A13	A9	18	23	A13
A10	19	22	A12	A10	19	22	A12	A10	19	22	A12
A11	20	21	V55	A11	20	21	V55	A11	20	21	V55

chip has DMA capability like the R65C102.

New Addressing Modes

Indexed Absolute Indirect: This new 3 byte instruction takes 6 machine cycles to execute. The new opcode is C7H and new mnemonic is JMP(IND),X. In execution, the contents of the second and third bytes are added to the X register. The effective address is pointed to by this 16 bit result. This addressing mode comes in handy when you don't have room in zero page for a table of jump vectors or if you have a table of jump vectors in Read Only Memory (ROM).

Indirect: This new 2 byte instruction takes 5 or 6 machine cycles to execute. The second byte of this instruction is a zero page address. The zero page address points to the effective address, stored as low byte first, then high byte. This new addressing mode works with instructions ORA, AND, EOR, ADC, STA, LDA, CMP, and SBC.

New Instructions

Table 1 gives an overview of the new instructions. Most notable of these are the bit manipulation instructions. Most of these work on zero page bytes

Table 1

Mnemonic	Function
BBR	Branch on Bit Reset
BBS	Branch on Bit Set
BRA	Branch Always
PHX	Push X Register on Stack
PHY	Push Y Register on Stack
PLX	Pull X Register from Stack
PLY	Pull Y Register from Stack
RMB	Reset Memory Bit
SMB	Set Memory Bit
STZ	Store Zero
TRB	Test and Reset Bits
TSB	Test and Set Bits

so that individual bits can be set (1) or reset (0), and program branching can be controlled by the status of each bit. These instructions facilitate coding for microprocessor based controller applications. The BRA, branch always instruction, is a handy tool for designing relocatable code and saves memory and machine cycles. The PHX, PHY, PLX, PLY instructions save memory and machine cycles, especially when used for interrupt processing. The STZ, store zero instruction, simplifies coding and will also save memory and machine cycles compared with alternate techniques.

Peripheral Support

To round out the R65C00 family, Rockwell has also introduced two CMOS peripheral chips, the R65C21 PIA and R65C24 PIA with timer. Both are low power versions of the 6521 Peripheral Interface Adapter which offers the user two 8-bit ports with handshaking. In addition, the R65C24 has a 16 bit timer on board for use in timing applications. Initially, two versions will be offered, 1 MHz and 2 MHz.

Things To Come

A high performance microcomputer system could be built using the 4 MHz R65C102, a DMA controller and fast arithmetic processor chip. With its bit manipulation instructions and low power consumption, the R65C02 could make a high performance controller utilizing FORTH. With the read access time of the 4 MHz processor being 168 nanoseconds, it will work with the newer 6116 CMOS 150 ns. memory chips. In fact, my next project is converting my Ohio Scientific 2 MHz micro to 4 MHz operation with the R65C102. Talk about computing in the FAST land!!!

For more information on the R65C00 family, contact: Rockwell International, Electronic Devices, P.O. Box C, Newport Beach, CA 92660; 714/833-4700.



P.O. Box 4364
Flint, Michigan 48504
(313) 233-5731
(313) 233-3125

**ZANIM
SYSTEMS**

WE CARRY MANY VIC AND APPLE PRODUCTS. PLEASE SEND FOR A CATALOGUE.

CP/M BOARD

BARE BOARD \$29.00

128K RAM*

* COMPATIBLE WITH ALL SATURN SYSTEMS SOFTWARE *

BARE BOARD \$29.00

80 COLUMN BOARD*

* COMPATIBLE WITH THE VIDEX VIDEOTERM WITH SOFTSWITCH BUILT IN *

BARE BOARD \$29.00

ALL BOARDS HAVE SOLDER MASKING, COMPONENT LAYOUT, AND GOLD EDGE FINGERS

BUILD YOUR OWN APPLE PERIPHERAL CARDS AND SAVE UP TO 80%

WE WILL SUPPLY THE IC LIST FOR ANY BOARD

□□ Spec Box: 16K CoCo □□

Mike Hamilton

Requirements:
Any TRS-80C Color Computer

Have you ever wished you could have Extended BASIC for one day, just to see what high-resolution was like? Whether in text or high-resolution, the many modes of the Color Computer are generated by programs controlling the VDG (Video Display Generator). The graphics of Extended BASIC are programs stored in the Extended ROM chip. The program for high-resolution can easily be written in BASIC or assembly language, as illustrated by the following programs.

Three programs are provided, each accomplishing the same thing: high-resolution. **FAST** is for those that like fast, complex programs written in assembly language. **LOADER** is a BASIC utility program that loads and stores the **FAST** machine-code data. The second program, **SLOW**, is written in pure and simple, but slow, BASIC. The third, and my favorite, is **HYBRID**, combining the simplicity of BASIC and the speed of machine-code to create an efficient compromise. Use whichever you prefer, or use them all! Please note that only **HYBRID** contains a demonstration of the high-resolution.

How it Works

Certain steps must be taken to program the VDG for proper functioning. Each distinct step is documented in all the programs to help in understanding.

The first step in programming the VDG is reserving memory. This can be done via the clear statement. Line 10 of each program 'clears' the required amount of memory. Since **FAST** is actually entered by **LOADER**, it does not require its own statement to reserve memory.

The second step is setting the proper values to the appropriate registers. This is the subroutine labeled 'PMODE 4' in lines 700-800 of **FAST**, 1000-1030 of **SLOW**, and 10000-10030 of **HYBRID**.

The third is clearing the screen or video memory. Lines 640-690 of **FAST**, 10040 of **HYBRID**, and 1040 of **SLOW** accomplish this. As you can see in **SLOW**, this takes considerable time. **HYBRID** implements a machine-code subroutine that takes about 1/5 of a second. This is the only distinction between **SLOW** and **HYBRID**.

All that's left is plotting-setting, resetting, and pointing of a dot. Each can be implemented by various logical operations. Prior to the plotting in **SLOW** and **HYBRID**, the correct values of X and Y must be put in the X and Y variables. If, after calling the point subroutine, the variable PT is not equal to zero, then the point is set; else, it is reset.

FAST uses a slightly different approach. Before plotting, one must place the corresponding values of X and Y into Xval and Yval and set the SRP register. The SRP (set/reset/point) register must contain a zero to set, 255 to point, and any other value to reset. If, after calling the point subroutine, P reg contains 0, the point is reset; otherwise, a value of 255 means it's set.

Now you're ready to start experimenting with high-resolution. I recommend you use **HYBRID**, since it includes a demonstration and is considerably faster than **SLOW**. Try experimenting, such as changing the value of 248 to 240 in line 1020 of **SLOW** and line 10020 of **HYBRID**. If you're really ready to experiment, read section 4 of *Getting Started with Color BASIC*.

There are many other modes waiting to be used. Some are unavailable even through Extended BASIC, such as 192 x 64 resolution with 8 colors available at once. Good luck.

Mike Hamilton is a 15 year old computerist who lives in the small town of Checotah, Oklahoma, where the computer revolution is just starting. He has slightly over 3 years of programming experience and has never had a formal programming class. His equipment consists of an Extended Color Computer with 16K, a tape recorder, and small printer.

<pre>1 HYBRID USE ALL LINES EXCEPT ** 2 SLOW USE ALL LINES EXCEPT ** 10 CLEAR 255,10227 'RESERVE MEMORY 19 ' READ AND STORE BIT PATTERNS 20 FOR I=0 TO 7:READ A:VL(I)=A:NEXT I ** 29 'READ AND STORE CLS SUBROUTINE ** 30 FOR I=10228 TO 10239:READ A:POKE I,A:NEXT I 35 GOSUB 10000:GOSUB 10040 40 PI=3.14159:R=80 50 FOR I=0 TO 2*PI STEP PI/330 60 X=INT(R*SIN((90-I)*8)*SIN(I)+128)</pre>	<pre>70 Y=INT(R*SIN((90-I)*1)*SIN(90-I)+96) 80 GOSUB 10050: NEXT I 90 GOTO 90 9998 ' PMODE4 SUBROUTINE 9999 'SET OFFSET VAL 10000 POKE 65487,0:POKE 65483,0:POKE 65480,0 10009 'SET VDG REGISTER 10010 POKE 65472,0:POKE 65475,0:POKE 65477,0 10019 'SET CONTROL REGISTER 10020 POKE 65314,(PEEK(65314) AND 7) OR 248</pre>
---	---

What's Where in the APPLE

WE'VE
ADDED APPLE IIe
GUIDE & ATLAS
SO NOW THERE'S
NOTHING MORE
TO SAY!

This famous book now contains the most comprehensive description of firmware and hardware ever published for *the whole Apple II family*. A new section with guide, atlas and gazeteer now provides Apple IIe specific information.

- Gives names and locations of various **Monitor**, **DOS**, **Integer BASIC** and **Applesoft** routines and tells what they're used for
- Lists **Peeks**, **Pokes** and **Calls** in over 2000 memory locations
- Allows easy movement between BASIC and Machine Language
- Explains how to use the information for easier, better, faster software writing

This expanded edition is available at the new low price of only \$19.95

For the 35,000 people who already own previous editions, the IIe Appendix is available separately for just \$5.00.

Please send me:			
_____ What's Where in the Apple @ \$19.95 ea. (Plus \$2.00 per copy shipping/handling)	_____	Name	_____
_____ Apple IIe Appendix @ \$5.00 ea. (includes shipping charges)	_____	Address	_____
Mass residents add 5% sales tax \$ _____	_____	City	State Zip
Total Enclosed \$ _____	_____	Signature	_____
		<input type="checkbox"/> Check	<input type="checkbox"/> VISA <input type="checkbox"/> MasterCard
		Acct # _____	Expres _____
<p>For faster service Phone 617/256-3649</p> <p>MICRO, P.O. Box 8502, Chelmsford, MA 01824</p>			

Easy DOES-IT (Not DOSPLUS)

Part 4

by Michael Keryan

DOES-IT -- Add new utility functions to a Commodore 64 by use of the RESTORE key.

Editor's Note: It has been brought to our attention that Micro System Software, Inc. has manufactured a software package under the trademark of DOS PLUS since 1981. We wish to make it clear that the programs included in the four parts of this article are in no way related to that product and that, had we been aware of the product, we would not have allowed the use of the name. To avoid further infringement on the trademark in question, we have renamed the series "DOES-IT," because in almost any case, no matter what utility your C-64 needs, this program "does-it".

This article adds two new functions to the recently published utility program (improperly named DOSPLUS in previous issues). The first is a program that allows BASIC programs to be hidden under ROM and swapped with the currently active BASIC program. The second is a time and alarm routine.

This is the fourth in a series of articles in which a number of machine language utility programs have been added to a Commodore 64. To access these utilities, you press the RESTORE key, which generates a Non-Maskable-Interrupt. The next key pressed determines which utility program is to be run.

The series of programs reside in unused RAM starting at location \$C800. Called DOES-IT, they can be loaded and initialized at the same time as the DOS WEDGE (located at \$CC00). In addition to the permanent utilities, additional transient programs can be called in from 'hidden' RAM located in the same address space as the

BASIC ROM (\$A000-\$BFFF) and executed at \$C000.

The framework was given to a low anyone experienced with machine language programming to add their own routines and assign unique keys to access them. However, what if you have a BASIC program that you would want instant access to? If we can tuck away machine language programs in hidden RAM, why can't we do the same thing with our BASIC programs?

Hidden BASIC Programs

From the viewpoint of the computer's memory cells, a BASIC program is not much different than a machine language program; they both consist of a lot of 8 bit binary numbers. The procedure illustrated here can be used to store any BASIC program into hidden memory, provided that it can fit into this area. The hidden program is pulled out by the RESTORE key, followed by the left arrow key. In

addition to pulling out this program, the BASIC program currently in memory is transferred to the same area of hidden RAM--the two programs exchange places. Therefore, the RESTORE, left arrow sequence can be used to toggle between two completely different BASIC programs.

Listing 1 is a BASIC program called DIRECTORY.PRINT that we will use to demonstrate hiding BASIC programs. The program is quite handy for producing compact directory listings on the printer. The directory entries can be listed as-is (unsorted) or sorted in alphanumeric order. The number of columns for the listing can be changed from the default of 3 by changing line 1. Using three columns (with the compressed mode of a printer) allows the listing to be small enough to be cut out and taped to the front of a diskette jacket.

To store this program (or any other BASIC program), proceed as follows. First (with DOES-IT activated) load the

Listing 1

```

0 :REM      M. J. KERYAN 11-12-83
1 :REM      MICRO #71 - APRIL 1984
2 :REM
9 :WIDTH=3: WD=WI-1: REM WIDTH=COLUMNS
10 DATA*****
20 DATA* * *
30 DATA*   DIRECTORY   PRINTER *
40 DATA* * *
50 DATA*****
60 DATA* * *
65 DATA* 'S' SORTED   'U' UNSORTED *
70 DATA* 'N' NO PRINT 'Q' QUIT *
80 DATA* * *
90 DATA*****
100 POKE 53280,13:POKE 53281,7:POKE 646,0: DIM B$(100)
110 FOR I = 1 TO 10: READ A$(I): NEXT
120 PRINT"(CLEAR,DOWN6)": J=0 :FOR I = 1 TO 100:
    B$(I)="": NEXT
130 FOR I = 1 TO 10: PRINT"      (RVS)"A$(I)"(RVSOFF)":
    NEXT
140 GET Q$: IF Q$>" " THEN 140
150 GET Q$: IF Q$="" THEN 150
160 IF Q$="Q" THEN CLOSE 15: PRINT"(CLEAR)": END
170 IF Q$<>"S" AND Q$<>"U" AND Q$<>"N" THEN 120
200 PRINT"(CLEAR)      (RVS,SPACE32,RVSOFF)": Z=-1
210 GOSUB 880
280 GET#1,A$,B$
290 GET#1,A$,B$
300 GET#1,A$,B$
310 C=0
320 IF A$<>" " THEN C=ASC(A$)
330 IF B$<>" " THEN C=C+ASC(B$)*256
340 Z$=MID$(STR$(C),2)
350 IF LEN(Z$)<1 THEN Z$=" "
360 IF LEN(Z$)=1 THEN Z$=" "+Z$
370 IF LEN(Z$)=2 THEN Z$=" "+Z$
380 B$(J)=" "+Z$+" "+CHR$(34)
390 LZ=0
400 GET#1,B$: IF ST<>0 THEN GO TO 510
410 IF B$<>CHR$(34) THEN 400
420 GET#1,B$: IF B$<>CHR$(34) THEN B$(J)=B$(J)+B$:
    LZ=LZ+1: GOTO 420
430 GET#1,B$: IF B$=CHR$(32) THEN 430
440 B$(J)=B$(J)+CHR$(34): IF LZ>15 THEN 460
450 FOR JZ=LZ TO 15: B$(J)=B$(J)+" ": NEXT JZ
460 C$=""
470 C$=C$+B$: GET#1,B$: IF B$<>" " THEN 470
480 SS=ST: B$(J)=B$(J)+LEFT$(C$,3)
490 PRINT"      (RVS)  "B$(J)"      (RVSOFF)": J=J+1
500 IF SS=0 THEN 290
510 B$(J)=LEFT$(B$(J),LEN(B$(J))-1)+" BLOCKS FREE."
520 PRINT"      (RVS)  "B$(J)"      (RVSOFF)":
    CLOSE 1
530 IF Q$<>"N" THEN 570
540 GET Q$: IF Q$>" " THEN 540
550 GET Q$: IF Q$="" THEN 550
560 GO TO 120
570 IF Q$="U" THEN 680
580 LB=2
590 FOR II=J-1 TO LB STEP -1
600 IF MID$(B$(II-1),7,15) <= MID$(B$(II),7,15) THEN 650

```

```

610 EX$ = B$(II)
620 B$(II) = B$(II-1)
630 B$(II-1) = EX$
640 FX = II
650 NEXT II
660 IF LB=FX+1 THEN 680
670 LB = FX+1: GO TO 590
680 OPEN 4,4
690 PRINT#4: REM PRINT THE HEADER
700 PRINT#4,B$(0)
710 REM THE NEXT COMMANDS SENDS CONTROL TO PROWRITER
715 REM OR NEC-8023 PRINTERS THRU TYMAC 'CONNECTION'
720 REM TO SWITCH 'O' CONDENSED MODE AND WIDE LINES
730 IF WI>2 THEN PRINT#4,CHR$(27)CHR$(27)"Q";:
    REM CONDENSED MODE FOR > 2 COL.
740 IF WI>3 THEN PRINT#4,CHR$(27)"W"CHR$(132);:
    REM WIDE LINES TO PREVENT CR'S
750 REM NOW PRINT THE DIRECTORY
760 RW = INT((J + WD) / WI)
770 FOR I=1 TO RW: FOR W=1 TO WI
780 IF (I + (W-1)*RW ) > J THEN PRINT#4,"(SPACE26)";:
    GOTO 800
790 PRINT#4,B$(I + (W-1)*RW );
800 NEXT W: PRINT#4
810 NEXT I
820 PRINT#4
830 REM SWITCH PRINTER TO NORMAL
840 IF WI>2 THEN PRINT#4,CHR$(27)CHR$(27)"N";:
    REM UNCONDENSED
850 IF WI>3 THEN PRINT#4,CHR$(27)"W"CHR$(80);:
    REM BACK TO 80 COLUMN LINE
860 CLOSE 4
870 GO TO 120
880 CLOSE 15: OPEN 15,8,15
890 OPEN 1,8,0,"#0"
900 INPUT#15,E1,E2$,E3,E4
910 IF E1>0 THEN PRINT "(CLEAR,DOWN10,SPACE12)"E2$:
    CLOSE 1: GO TO 930
920 RETURN
930 GET W$: IF W$>" " THEN 930
940 GET W$: IF W$="" THEN 940
950 GO TO 890

```

Listing 2

C000		ORG \$C000	
0001	R6510	EQU \$01	;ROM SWITCH
002D	VARTAB	EQU \$2D	;VAR. POINTER
00C6	NDX	EQU \$C6	;KBD BF COUNT
0277	KEYD	EQU \$0277	;KBD BUFFER
CB41	MESSAG	EQU \$CB41	;MESSAGE PRINT
C8BD	BFLAG	EQU \$C8BD	;FLAG
C000 AD BE CB	BASWAP	LDA BFLAG+1	;IS FLAG=0?
C003 C9 00		CMP #00	
C005 00 14		BNE SPECL	;NO. BRANCH
C007 A6 2D		LDX VARTAB	;YES, ORIG PGM
C009 8E BD CB		STX BFLAG	;VAR POINTER
C00C A6 2E		LDX VARTAB+1	;SAVE IT
C00E 8E BE CB		STX BFLAG+1	
C011 E0 14		CPX #20	<20?
C013 80 15		BCS SWAPB	;NO. LEAVE PNTR
C015 A9 14		LDA #20	;YES, EXPAND

```

C017 85 2E          STA VARTAB+1
C019 00 0F          BNE SWAPB      ;BRANCH ALWAYS
C01B AE 0D CB      SPECL LDX BFLAG      ;GET BACK FLAG
C01E 86 2D          STX VARTAB      ;RESTORE PNTR
C020 AE BE CB          LDX BFLAG+1
C023 86 2E          STX VARTAB+1
C025 A9 00          LDA #00        ;SET FLAG
C027 8D BE CB          STA BFLAG+1
C02A A9 A7          SWAPB LDA #A7        ;MAKE SURE
C02C 8D 47 C0          STA BAS1+2    ;THAT ROUTINE
C02F 8D 4E C0          STA BAS2+2    ;IS SET-UP IN
C032 A9 08          LDA #08        ;CASE OF REENTRY
C034 8D 48 C0          STA RAM1+2
C037 8D 52 C0          STA RAM2+2
C03A 78             SEI             ;NOW SWAP
C03B A5 01          LDA R6510
C03D 29 FE          AND #FE
C03F 85 01          STA R6510
C041 A0 0B          LDY #11       ;11 BLOCKS
C043 A2 00          LDX #00
C045 8D 00 A7      BAS1  LDA $A700,X
C048 48             PHA
C049 8D 00 0B      RAM1  LDA $0800,X
C04C 9D 00 A7      BAS2  STA $A700,X
C04F 68             PLA
C050 9D 00 0B      RAM2  STA $0800,X
C053 E9             INX
C054 D0 EF          BNE BAS1
C056 EE 47 C0          INC BAS1+2
C059 EE 4E C0          INC BAS2+2
C05C EE 4B C0          INC RAM1+2
C05F EE 52 C0          INC RAM2+2
C062 88             DEY
C063 D0 E0          BNE BAS1
C065 A5 01          LDA R6510     ;RESTORE BASIC
C067 09 01          ORA #01
C069 85 01          STA R6510
C06B 58             CLI
C06C 20 41 CB          JSR MESSAG
C06F 93             BYT #93
C070 20 20 20          ASC             PRESS
C081 12             BYT #12
C082 52 45 54          ASC 'RETURN'
C088 92             BYT #92
C089 20 54 4F          ASC ' TO RUN'
C090 0D 43 4C          BYT #0D,$43,$4C,$52,$0D
C095 11 11 52          BYT #11,$11,$52,$55,$4E,$91,$91,$0
C09D A9 20          LDA #20
C09F 8D 77 02          STA KEYD
C0A2 A9 20          LDA #20
C0A4 8D 78 02          STA KEYD+1
C0A7 A9 20          LDA #20
C0A9 8D 79 02          STA KEYD+2
C0AC A9 13          LDA #13      ;STORE SOME
C0AE 8D 7A 02          STA KEYD+3  ;STUFF IN THE
C0B1 A9 11          LDA #11      ;KEYBOARD
C0B3 8D 7B 02          STA KEYD+4  ;BUFFER
C0B6 A9 0D          LDA #0D
C0B8 8D 7C 02          STA KEYD+5
C0BB A9 06          LDA #06
C0BD 85 C6          STA NDX
C0BF 60             RTS
C0C0             ;
C0C0             END

```

Listing 3

```

0340             ORG #0340
;
0314             CINV     EQU #0314
0420             TIMDIS  EQU #0420
D020             BORDER  EQU #D020
0286             COLOR   EQU #0286
D418             SIDVOL  EQU #D418
D820             DISCLR  EQU #D820
DC08             TENTHS  EQU #DC08
DC09             SECS    EQU TENTHS+1
DC0A             MINS    EQU TENTHS+2
DC0B             HOURS   EQU TENTHS+3
DC0D             CIAINT  EQU TENTHS+5
;
0340 AD 0D DC     TIMIRQ  LDA CIAINT
0343 29 04          AND #04
0345 F0 03          BEQ BEGIN
0347 8D FA 03          STA ALFLAG
034A AD FA 03      BEGIN  LDA ALFLAG
034D F0 20          BEQ DISTIM
034F 8D F9 03          STA DISPFL
0352 A5 A2          LDA #A2
0354 6A             ROR A
0355 6A             ROR A
0356 6A             ROR A
0357 29 0C          AND #0C
0359 8D 20 D0          STA BORDER
035C 29 04          AND #04
035E 8D 18 D4          STA SIDVOL
0361 A5 C5          LDA #C5
0363 C9 04          CMP #04
0365 D0 C8          BNE DISTIM
0367 A2 C0          LDX #00
0369 BE FA 03          STX ALFLAG
036C BE F9 03          STX DISPFL
036F AD F9 03      DISTIM LDA DISPFL
0372 F0 60          BEQ TIMRET
0374 AD 0B DC          LDA HOURS
0377 AA             TAX
0378 29 0F          AND #0F
037A 1B             CLC
037B 69 30          ADC #30
037D 8D 21 04          STA TIMDIS+1
0380 8A             TXA
0381 10 04          BPL LBLA
0383 A2 10          LDX #10
0385 10 02          BPL LBLB
0387 A2 01          LBLA  LDX #01
0389 BE 26 04      LBLB  STX TIMDIS+6
038C A2 20          LDX #20
038E 29 10          AND #10
0390 F0 02          BEQ LBLC
0392 A2 31          LDX #31
0394 BE 20 04      LBLC  STX TIMDIS
0397 AD 0A DC          LDA MINS
039A AA             TAX
039B 29 0F          AND #0F
039D 69 30          ADC #30
039F 8D 24 04          STA TIMDIS+4
03A2 8A             TXA
03A3 4A             LSR A

```

Listing 3 (continued)

03A4 4A	LSR A	03D7 78	TMINIT	SEI
03A5 4A	LSR A	03D8 AD 14 03		LDA CINV
03A6 4A	LSR A	03DB A2 40		LDX #<TIMIRQ
03A7 18	CLC	03DD 8D D5 03		STA TIMRET+1
03A8 69 30	ADC #30	03E0 BE 14 03		STX CINV
03AA BD 23 04	STA TIMDIS+3	03E3 AD 15 03		LDA CINV+1
03AD A9 3A	LDA #3A	03E6 A2 03		LDX #>TIMIRQ
03AF BD 22 04	STA TIMDIS+2	03E8 8D D6 03		STA TIMRET+2
03B2 A9 0D	LDA #0D	03EB BE 15 03		STX CINV+1
03B4 BD 27 04	STA TIMDIS+7	03EE 58		CLI
03B7 A2 20	LDX #20	03EF 60		RTS
03B9 BE 25 04	STX TIMDIS+5			
03BC AD 09 DC	LDA SECS			TIME FUNCTION--TOGGLE DISPLAY
03BF 29 01	AND #01			ON AND OFF--ALARM REMAINS ACTIVE
03C1 F0 03	BEQ STCLOCK	03F0 A9 01	TIME	LDA #01
03C3 BE 22 04	STX TIMDIS+2	03F2 4D F9 03		EOR DISPFL
03C6 AD 08 DC	STCLOCK LDA TENTHS	03F5 8D F9 03		STA DISPFL
03C9 AD 86 02	LDA COLOR	03F8 60		RTS
03CC A2 07	LDX #07			
03CE 9D 20 DB	LBL	03F9 00	DISPFL	BYT #00
03D1 CA	DEX	03FA 00	ALFLAG	BYT #00
03D2 D0 FA	BNE LBL			
03D4 4C 31 EA	TIMRET JMP #EA31	03FB		END

Listing 4

```

10 REM*****
20 REM* *
30 REM* DOS+ LOADER M.J.KERYAN *
40 REM* MICRO #71 - APRIL 1984 *
50 REM* NEW FEATURES INCLUDE *
60 REM* THE ML ROUTINES: REPEAT, *
70 REM* DIRECT.PRINT, FORMAT PRINTER, *
80 REM* SETS UP TIME, SUPERMON, KILL *
90 REM*****
900 IF PEEK(52159)=96 THEN GOTO 1040
1000 LOAD " D+++ .ML",8,1
1040 SYS 51200
1050 IF A=1 THEN 1150
1100 PRINT"(CLEAR,DOWN2)WANT TO USE THE TIMER/ALARM CLOCK? (Y/N)":A=1
1110 GET AQ$:IF AQ$=""THEN 1110
1150 IF PEEK(2)=115 THEN GOTO 1400
1200 PRINT"(CLEAR,DOWN2)WANT TO USE SUPERMON":PRINT"AND/OR FORMAT PRINTER"
1205 PRINT"AND/OR PRINT DIRECTORY (Y/N)"
1210 GET AS$:IF AS$=""THEN 1210
1220 IF AS$="N" THEN 1400
1230 POKE 2,115: LOAD " FPDPSM.ML",8,1
1400 REM*****
1410 REM* *
1420 REM* USRHELP SCREEN CALL BY *
1430 REM* RESTORE, U OR SYS 51265 *
1440 REM* *
1450 REM*****
1500 POKE 53280,0: POKE 53281,0
1510 PRINT"(GREEN,CLEAR,DOWN11) (RVS)PLACE YOUR SCREEN HERE(RVSOFF)"
1520 POKE 53128,4: POKE 53131,232
1530 SYS 53164
1540 POKE 60392,PEEK(53280)
1550 POKE 60393,PEEK(53281)
1560 POKE 53128,216: POKE 53131,236
1570 SYS 53164

```

BASIC program into memory. Then save it to disk and get a directory listing [by pressing @ then \$]. Multiply the required number of blocks by 256, then subtract 1 (you should get 11x256 -1 2815). Next, in immediate mode, type the following:

```
FOR I=0T02815: A=PEEK(I+2048): POKE
I+42752, A: NEXT
```

[If you got a number other than 2815, use it above.] Now load into memory at \$C000 the one-block machine language program as shown in Listing 2. Use either an assembler, the monitor, or a BASIC loader that POKES DATA into memory. If your required number of blocks was not 11, place your number at \$C042, add nine and place this number at \$C012 and at \$C016. Then move this program to hidden RAM also:

```
FOR I=0T0255: A=PEEK(I+49152): POKE
I+42496, A: NEXT
```

```
POKE 40991,1: POKE 41023,166
```

So far, we've moved the one-block boot program to \$A600, the BASIC program starting at \$A700, and set up table pointers for the left arrow function. Now press RESTORE, S to get into the monitor and type:

```
.S "FPDPSM.ML",08,A000,C000
```

This saves to disk the BASIC program as well as the other programs previously hidden (printer formatting and the monitor).

The machine language BASIC boot program deserves some explanation (refer to Listing 2). A flag (located at \$CBBE) is initially set to zero. If it is zero, then the program BASWAP knows that this function hasn't yet been activated and our hidden BASIC program is still hidden. If so, the pointers to the beginning of the variables table (located at \$002D, \$002E) are saved in \$CBBD, \$CBBE. If the current BASIC program is larger than our hidden program, everything is OK, but if it is smaller, then we move the variable pointer table up to make room for the new program.

Next, the two basic programs are swapped (or at least the first 11 blocks of the current program is swapped in this example). A CLR command is activated; then the option is given to RUN the new program by pressing the RETURN key. This is accomplished by printing appropriate information on the screen and stuffing carriage returns into the keyboard buffer. A few spaces stuck into the buffer guard against multiple

Listing 4 (continued)

```
1900 REM*****
1910 REM*
1920 REM* HELP SCREEN CALL BY *
1930 REM* RESTORE, H OR SYS 51232 *
1940 REM*
1950 REM*****
2000 POKE 53280,5: POKE 53281,1
2010 PRINT"(CLEAR) (RED,RVS)COMMAND SUMMARY(RVSOFF)"
2020 PRINT" DOS 5.1 DOES-IT 1.2"
2030 PRINT"-----"
2040 PRINT"(BLACK) (UP ARROW)PGM(BLUE) LOAD & RUN (BLACK)RESTORE
(BLUE) STOP SCROLL"
2050 PRINT"(BLACK) /PGM(BLUE) LOAD PGM"
2060 PRINT"(BLACK) %PGM(BLUE) LOAD ML PGM --FOLLOW BY:"
2070 IF AS$="N" THEN PRINT
2075 IF AS$(">")" THEN PRINT (GREEN,BACK ARROW,
BLUE) PRINT DIRECTORY"
2080 PRINT"(BLACK) (BACK ARROW)PGM(BLUE) SAVE PGM (BLACK)A
(BLUE) APPEND PGMS"
2090 PRINT
2100 PRINT"(BLACK) @$(BLUE) LIST DIR (BLACK)B(BLUE) BACKGND COLOR"
2110 PRINT" (BLACK)C(BLUE) CHARACTER COLORS"
2120 PRINT"(BLACK) @NO:NAME,ID E(BLUE) EDGE COLORS"
2130 PRINT" FORMAT DISK"
2135 IF AS$(">")" THEN PRINT"(UP) FORMAT DISK (GREEN)F
(BLUE) FORMAT PRINTER"
2140 PRINT"(BLACK) @RO:NEWNM=OLDNM D(BLUE) DUMP TO PRINTER"
2150 PRINT" RENAME DISK (BLACK)O(BLUE) PRINTER OFF"
2160 PRINT"(BLACK) @CO:NEWPGM=OLDPGM P(BLUE) PRINTER ON"
2170 PRINT" COPY PGM (BLACK)R(BLUE) REPEAT ON/OFF"
2180 PRINT"(BLACK) @SO:PGM H(BLUE) HELP (THIS LIST)"
2190 PRINT" SCRATCH PGM (BLACK)U(BLUE) USER HELP"
2200 PRINT"(BLACK) @I(BLUE) INITIALIZE"
2205 IF AQ$(">")" THEN PRINT"(UP,BLACK) @I(BLUE) INITIALIZE (BLACK)T
(BLUE) TIMER/ALARM"
2210 PRINT"(BLACK) @UI(BLUE) RESET (BLACK)N(BLUE) NUMBER CONVERS.N"
2220 PRINT"(BLACK) @V(BLUE) VALIDATE "
2225 IF AS$(">")" THEN PRINT"(UP,BLACK) @V(BLUE) VALIDATE (GREEN)S
(BLUE) SUPERMON"
2230 PRINT"(BLACK) @Q(BLUE) QUIT DOS 5.1 (BLACK)K(BLUE) KILL ALL (RESET)"
2240 PRINT" (BLACK)RETURN(BLUE) CANCEL"
2250 PRINT" (RED)PRESS (RVS)RETURN(RVSOFF) TO CONTINUE";
3000 POKE 53128,4: POKE 53131,248
3010 SYS 53164
3020 POKE 64488,PEEK(53280)
3030 POKE 64489,PEEK(53281)
3040 POKE 53128,216: POKE 53131,252
3050 SYS 53164
3055 IF AS$="N" THEN GOTO 3060
3056 POKE 52179,89:POKE 52211,207:POKE 52166,89:POKE 52198,207: POKE 52157,0
3057 POKE 52191,89:POKE 52223,207: POKE 52158,0: POKE 53123,0
3060 IF AQ$="Y" THEN GOSUB 5000
3065 GETB$:IF B$="" THEN 3065
3066 PRINT"(CLEAR)":IF AQ$="Y" THEN GOSUB 5030
3080 POKE 52171,226:POKE 52203,252
3090 POKE 53280,6: POKE 53281,12:POKE 646,0
3100 PRINT"(HOME,DOWN)PRINT (FRE(0)+65535) (DOWN,LEFT12)BYTES FREE":POKE 198,6
3110 POKE 631,19:POKE 632,17:POKE 633,17:POKE 634,17:POKE 635,17:POKE 636,13
3200 NEW
5000 FOR I=832 TO 1018:READ A:POKE I,A:NEXT I
5010 POKE 52180,240:POKE 52212,3:SYS 983
5020 POKE 51560,32:POKE 51561,215:POKE 51562,3
5025 RETURN
```

RESTORE key activations which sometimes occur when you press this key. If you don't want to RUN the program, press the cursor down key instead of the RETURN key.

To go back to the original BASIC program, hit RESTORE, left arrow again. Now the variable table pointers are restored (from \$CBBB, \$CBBE) and then the swap is performed again. This sticks our originally hidden program back in its hiding place and returns our original BASIC program to the BASIC workspace, unharmed.

Time Routine

In the December 1983 MICRO, a very nice machine language time/alarm routine was described. Unfortunately, this program is incompatible with DOES-IT's since they both use the same memory area at \$02A7. Therefore, Ian Adam's program was shortened and revised somewhat to tie it into DOES-IT.

The revised program is shown in Listing 3. The entire program fits into the cassette buffer from \$0340 to \$03FB. The changes from the original program are as follows:

The RESTORE, T key sequence is used to toggle only the time display on and off. This allows the alarm to remain active even if the time is not displayed. No SYS calls are necessary.

Only hours, minutes, and AM/PM is shown in the upper right corner of the screen. The seconds and tenths of seconds proved to be distracting; they were replaced by a blinking colon to let you know the clock is still ticking.

The alarm function is nearly the same, except the word ALARM was left out to save space. Function key F1 turns off both the alarm and the display (but you can reactivate the display with RESTORE, T).

The characters used in the time display always use the currently active character color. This assures visibility. A warning: never leave the time display on the screen when you are editing programs. It is very easy to accidentally edit the current time of day into your BASIC programs. The time and alarm setting is done through the new DOES-IT boot program, DOS +.

Getting It All Together

The machine language routine DOES-IT.ML must be changed to incorporate the vectors for the Repeat and Kill functions from Part 3 [or the required

Listing 4 (continued)

```

5030 INPUT"(DOWN5) IS IT NOW (RVS) AM (RVSOFF) OR (RVS) PM
      (RVSOFF)";A$:INPUT"(DOWN) THE HOUR";H
5040 PRINT"(DOWN2) ENTER THE MINUTE TO START THE CLOCK"
5050 PRINT"(DOWN)THE CLOCK WILL START WHEN YOU HIT (RVS)RETURN(RVSOFF,
      DOWN) ENTER THE MINUTE";
5060 IF H>12 THEN A$="P":H=H-12:GOTO 5061
5070 IF H>9 THEN H=H+6
5080 IF LEFT$(A$,1)="P" THEN H=H+12
5090 C=56328:POKE C+3,H:POKE C+1,0
5100 INPUT M:M=M+INT(M/10)*6
5110 POKE C+2,M:POKE C,0:SYS 1008:PRINT"(DOWN2,RVS) IF TIME NOT OK,
      PRESS ANY KEY "
5120 FOR I=1 TO 1000:IF PEEK(198) THEN POKE 198,0:SYS 1008:GOTO 5030
5130 NEXT
5140 PRINT"(CLEAR,DOWN5) WHAT TIME WOULD YOU LIKE THE ALARM(DOWN)";
      INPUT"(RVS) AM (RVSOFF) OR (RVS) PM (RVSOFF)";A$
5150 A$=LEFT$(A$,1):INPUT"(DOWN) THE HOUR";H:HH=H
5155 IF H>12 THEN A$="P":H=H-12:GOTO 5155
5160 H=H-6*(H>9)-12*(A$="P"):INPUT"(DOWN) THE MINUTE";M:MM=M:M=M+INT(M/10)*6
5175 POKE C+7,136:POKE C+3,H:POKE C+2,M:POKE C,1:POKE C+7,8
5180 POKE 54273,99:POKE 54278,240:POKE 54276,21:POKE 54287,2:POKE 54290,17
5185 IF MM<10 THEN PRINT"(CLEAR,DOWN2)"SPC(27-HH/9.9);HH;"(LEFT)";
      MM;A$*M ALARM":GOTO 5195
5190 PRINT"(CLEAR,DOWN2)"SPC(27-HH/9.9);HH;"(LEFT)";
      RIGHT$(STR$(MM),2);" "A$*M ALARM"
5195 RETURN
6000 DATA 173, 13, 220, 41, 4, 240, 3, 141, 250, 3
6010 DATA 173, 250, 3, 240, 32, 141, 249, 3, 165, 162
6020 DATA 106, 106, 106, 41, 12, 141, 32, 208, 41, 4
6030 DATA 141, 24, 212, 165, 197, 201, 4, 208, 8, 162
6040 DATA 0, 142, 250, 3, 142, 249, 3, 173, 249, 3
6050 DATA 240, 96, 173, 11, 220, 170, 41, 15, 24, 105
6060 DATA 48, 141, 33, 4, 138, 16, 4, 162, 16, 16
6070 DATA 2, 162, 1, 142, 38, 4, 162, 32, 41, 16
6080 DATA 240, 2, 162, 49, 142, 32, 4, 173, 10, 220
6090 DATA 170, 41, 15, 105, 48, 141, 36, 4, 138, 74
6100 DATA 74, 74, 74, 24, 105, 48, 141, 35, 4, 169
6110 DATA 58, 141, 34, 4, 169, 13, 141, 39, 4, 162
6120 DATA 32, 142, 37, 4, 173, 9, 220, 41, 1, 240
6130 DATA 3, 142, 34, 4, 173, 8, 220, 173, 134, 2
6140 DATA 162, 8, 157, 31, 216, 202, 208, 250, 76, 49
6150 DATA 234, 120, 173, 20, 3, 162, 64, 141, 213, 3
6160 DATA 142, 20, 3, 173, 21, 3, 162, 3, 141, 214
6170 DATA 3, 142, 21, 3, 88, 96, 169, 1, 77, 249
6180 DATA 3, 141, 249, 3, 96, 0, 0

```

Figure 1. DOES-IT Help Screen

```

                COMMAND SUMMARY
DOS 5.1                DOES-IT
-----                -----
^PGM LOAD & RUN      RESTORE STOP SCROLL
/PGM LOAD PGM
%PGM LOAD ML PGM
+PGM SAVE PGM
@# LIST DIR
@N0:NAME, ID
  FORMAT DISK
@R0:NEWNM=OLDNM
  RENAME DISK
@C0:NEWPGM=OLDPGM
  COPY PGM
@S0:PGM
  SCRATCH PGM
@I INITIALIZE
@UI RESET
@V VALIDATE
@Q QUIT DOS 5.1
                --FOLLOW BY:
                ← PRINT DIRECTORY
                A APPEND PGMS
                B BACKGND COLOR
                C CHARACTER COLORS
                E EDGE COLORS
                F FORMAT PRINTER
                D DUMP TO PRINTER
                O PRINTER OFF
                P PRINTER ON
                R REPEAT ON/OFF
                H HELP (THIS LIST)
                U USER HELP
                T TIMER/ALARM
                N NUMBER CONVERSN.
                S SUPERMON
                K KILL ALL (RESET)
                RETURN CANCEL
                PRESS RETURN TO CONTINUE

```

routines from the four articles in this series on disk, along with all the assembly source listings. For foreign requests, please send sufficient postage. For those hackers interested in adding more functions, five blocks of memory is unused in the hidden RAM from \$B200-\$B6FF, eight block are available from \$E000-\$E7FF, and all sixteen blocks are available in the hidden \$D000-\$DFFF area.

MICRO™

POKEs should be included in the loader program). However, it is desirable to keep the Time function and the transient programs as options so we can bypass loading and executing them if we desire. Therefore the loader program, now called DOS+, has been changed; see Listing 4.

If the machine language portion of DOES-IT from \$C800 is not in memory, the loader program will load it (it is now called D+++ .ML) as shown in lines 900-1000. A SYS to 51200 is made to initialize DOES-IT and the wedge. Then you are asked if you want the Time routine and the transient programs. If you answer yes to the second question, the 8K block FPDPSM.ML is loaded into hidden RAM at \$A000-\$BFFF, only if the flag (at location \$0002) indicates that it is not yet in memory

The HELP screen was changed to reflect all the additions to DOES-IT and will only print out those additions that are actually loaded into memory. A


printout of the latest HELP screen is shown in Figure 1 (but it looks better on a color monitor).

If the time routine is desired, then lines 5000 are run, in which the current time and the alarm time are entered. Ending the program leaves the time display on, the program NEWS itself, then prints the available free memory.

The DOES-IT routines now consist of three programs that can be copied to copies to your other disks: DOS+, the BASIC boot program, D+++ .ML, the permanent ML programs and tables that load into \$C800-\$CFFF (this also contains the DOS WEDGE), and FPDPSM.ML, the 8K block that loads into hidden RAM (\$A000-\$BFFF). To activate DOES-IT, type in LOAD "DOS+", then RUN.

In general the routines are quite easy to use. However, entering them from the keyboard for the first time can be confusing due to the complexity of operations involved. For \$10 (US), MICRO will provide the DOES-IT

ATARI 48K * TRS C/C 32K
COMMODORE 64
747 FLIGHT SIMULATOR

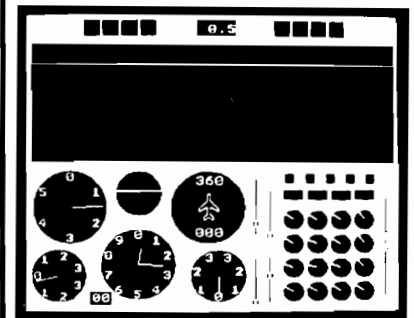

ACTUAL SCREEN PHOTOGRAPH

Superbly realistic instrumentation and pilot's view in lifelike simulation which includes emergencies such as engine fires and systems failures. This program uses high resolution graphics to the full to produce the most realistic flight-deck display yet seen on a home computer. There are 21 real dials and 25 other indicators. Your controls operate throttle, ailerons, elevators, flaps, slats, spoilers, landing gear, reverse thrust, brakes, etc. You see the runway in true perspective. Uses joysticks and includes options to start with take-off or random landing approach. A real simulation, not just another game! **Cassette only, \$27.95 (add 6% in Calif.). Sole U.S. distributor for D.A.C.C. Ltd., England.**

F. Ashton
P.O. Box 7037
Chula Vista, CA 92012

Four Techniques to Make Your Assembly Programs **FAST**

by Chris Williams

These four 6502 assembly language programming techniques are designed with one and only one consideration in mind. Speed. Raw, unadulterated, eyebrow-raising speed.

These techniques are applicable to any 6502 microcomputer. They have nothing whatsoever to do with graphics or sound or anything else that would require special machine-specific arrangements. They are meant to be entirely generic. In fact, the underlying concepts are not limited to the 6502. They are readily applicable to all 8-bit machines.

A relentless pursuit of speed-of-execution is perhaps the noblest of activities for a programmer. While speed isn't the only characteristic of a fine program, it usually is the characteristic most difficult to achieve. As a result, when a programmer has a finished routine that absolutely screams through its task, he tends to grin a bit wider and finds himself a bit more anxious to show it off--especially to knowledgeable friends who will appreciate what they're seeing.

So, if you're sitting there now nodding at the familiarity of that scene, and if you suspect that your routines could execute faster, then you'd be well advised to study the following techniques carefully...and use them! Writing fast programs is a skill, not a talent, and skills are perfected through practice.

Counting Up or Counting Down

From the perspective of speed, choosing to count up is the single most common mistake in the typical assembly language program. If you're taking notes, write this down. *In general, counting up is slower than counting down.* Watch.

Suppose I have an application that requires an index to count through a

list of values. Here's how the typical program does it:

```
LDY #0 ;initialize index
LOOP LDA (LOC),Y;get value from list
STA PLACE ;do something with it
INY ;increment index
CPY MAXVAL ;check to see if done
BNE LOOP ;not done, loop
DONE --- ---- ;else, proceed
```

Count the instructions. There's six, four for loop management, two (the LDA and STA) functional. That's about the best we can do counting up.

Instead, let's arrange things to count down.

```
LDY MAXVAL ;initialize index
LOOP LDA (LOC),Y;get value from list
STA PLACE ;do something with it
DEY ;decrement index
BNE LOOP ;check for zero to finish
DONE --- ---- ;else, proceed
```

Five instructions this time. No CPY, which is a four-cycle instruction (absolute addressing). So our loop here is four machine cycles faster than w⁷ counting up.

This kind of thing is always true. You are never better off counting up and checking a count. If MAXVAL is 256, you can eliminate the CPY when counting up and achieve identical speed, but MAXVAL is rarely 256. Count down!

Fast Double Precision

All 6502 microcomputers have a 64K memory maximum, assuming no bank switching. 64K is 65536 which is \$FFFF hex. \$FFFF hex cannot be represented by a single byte; it requires two.

What this all means is that any addressing routines you might need have to be double precision (assuming you're looking for more than just 256 bytes). Below is a fast, general technique for doing additive double-byte addressing. And below that is a special case method for doing the same thing even faster.

```
CLC
LDA $LOC ;get least significant byte
ADC #VAL ;add immediate value
STA $LOC ;store result in L.S. byte
LDA $LOC+1;get M.S. byte
ADC #0 ;add with carry zero
STA $LOC+1;store in M.S. byte
RTS
```

The carry from the least significant byte operation flows into the most significant byte operation. This results in a nice, tight, double precision add.

If #VAL is equal to 1, as it often is, we can get even faster.

```
INC $LOC ;increment L.S. byte
BNE OUT ;RTS unless = 0, from
;previous FF
INC $LOC+1 ;overflow from L.S. byte
OUT RTS ;OUT, done
```

Use Immediate Addressing

In general, immediate addressing is the fastest way to get a value for just about any purpose. In all instructions, immediate addressing results in a two-cycle operation as opposed to absolute addressing which burns four cycles doing the same thing.

Even if the value to be used changes occasionally, you can still get away with immediate addressing. The byte in question always follows the op-code of the relevant instruction and,

therefore, has a fixed address. Simply write to it using absolute addressing when you can afford to be slow. The new value will then be there the next time you need speed.

Be careful when you calculate where to write or you'll clobber the program.

Select Branches Wisely

When you have to do a compare and branch, keep speed in mind when choosing the type of branch. For example:

```

LOOP LDX LOC
      CPX #TESTVAL
      BCC OUT
      BCS LOOP
OUT   --- ---- ;continue
  
```

This seems fine at first glance, but watch what happens if you simply reverse the order of the branches.

```

LOOP LDX LOC
      CPX #TESTVAL
      BCS LOOP
      --- ---- ;continue
  
```

There's no need for the BCC since you continue execution anyway, so don't put it in. Keep a sharp eye out for this error. It seems so obvious that programmers tend to devote inadequate attention to it.

So, those are four good ones, and I think that's plenty for now. Let me once again admonish you to practice. Use the techniques. Use them even when you don't think you need them. In the long run--and for your programs

there should be no such thing--you'll be glad you did.

Mr. Williams is a frequent contributor to MICRO with both articles and reviews of new products. He can be contacted at 1165 E. Edgewood Dr. 10, Ogden, Utah 84403. Please enclose S.A.S.E. with any questions.

MICRO

OS9 APPLICATION SOFTWARE

ACCOUNTS
PAYABLE
\$299

GENERAL
LEDGER
with
CASH

PAYROLL
\$499


ACCOUNTS
RECEIVABLE
\$299

JOURNAL
\$399

SMALL
BUSINESS
INVENTORY
\$299

COMPLETE DOCUMENTATION \$19.95

OS9 & BASIC 09 ARE TRADEMARK OF
MICROWARE, INC. & MOTOROLA CORP.



**SPECIALTY
ELECTRONICS**

(405) 233-5564
2110 W. WILLOW — ENID, OK 73701

SOPHISTICATED TELE-COMMUNICATION IS HERE

THE COMMUNICATOR for 4.0 Commodore Computers

JIM STRASMA'S REVIEW:

"THE BEST TERMINAL PACKAGE I'VE SEEN YET"

By April 1 (maybe sooner) It Will Be Even Better

SPEEDS UP TO 9600 BAUD
XON — XOFF

TRUE CTRL KEY (we do our own keyboard scan)

THE HARDWARE — A printed circuit board; easily installed in the CBM. It uses no CBM connectors; gives a serial port with true RS232C standard.

THE SOFTWARE —

- Emulates the ADDS Regent 100, ADM 31 and/or the TeleVideo 950.1 Or choose the VT100 model for use with DEC and VAX computers.
- Runs coresident with BASIC programs; lets BASIC programs and program on host computer communicate to develop really sophisticated communication and control capabilities.
- The program is on ROM at either address; no disk loading required. Uses only 512 bytes of RAM; will relocate itself around any other machine language program at top of memory.
- Will upload and download and run BASIC programs. With BASIC program will upload and download standard data files. 100 page manual gives program listing for BASIC programs.

Excellent text editor designed to work with THE COMMUNICATOR
THE COMMUNICATOR \$200

Text Editor \$40

1200 baud modems beginning at low, low \$385, and even less when purchased with THE COMMUNICATOR

AMPLIFY, INC.

2325 Macbride, Iowa City, Iowa 52240 319-337-8378

1 trademarks Adds Regent, Inc., Lear Liegler, Inc., Televideo Systems, Inc.

Talking to Your Printer

**Original Program by
Dick Buchanan, Jr.**

Text by Mark S. Morano

Editor's Note: The original printer program was written by Dick Buchanan for the Apple. The program was then modified and enhanced by Robert T. Tripp and Mark S. Morano.

Getting an electric typewriter to listen to a piece of fruit is not easy. If you own an Apple and a printer you probably know what we're talking about. Regardless of what micro and printer you may have you are probably familiar with the difficulty of getting your computer to talk to your printer. The size of this program should give you some idea of the scope of these problems. But don't despair --in order to use this program you are not committed to keying in the entire listing. It is an easy extract those elements that are useful to you and leave out those that are not. that are not. For example many people will never use the international style font. They would simply leave out the references to this style and the accompanying code. The same would apply to any other features you haven't any use for.

During the creation of this printer control program many interesting and frustrating problems arose. Hopefully in examining these you will find a solution applicable to your own particular problems.

To begin with each printer has its own set of printer control codes that are composed of a combination of Escape, Control and other keys, used separately and in conjunction with one another. Each printer has different control codes

- why make life simple. There were a few codes that we did find in common, so these we grouped together and used for both the Epson and the Gemini. Of course this looked fine in print but we soon discovered that there was more to it than met the eye. On the Epson you must use Escape "W1" to turn Enlarge Mode on. Looking at the manual it seemed to be the same for the Gemini. We discovered that the Gemini will not accept the codes in the same form. It needed an Escape "W" CHR\$(1). (Happily the Epson does accept the form needed by the Gemini). This was the kind of "obvious" bug that we ran into time and time again.

Now to make matters more complicated there is the problem of upper versus lower case letters. The printers make a distinction -the Apple doesn't. This fact was brought to our attention when the printer only printed out a line of garbled graphics. Tracing through the code we found an Escape combined with an upper case 'L' where a lower case 'l' should have been. Unfortunately, on the Apple II and II there aren't any lower case letters. As luck would have it the combination of Escape and upper case 'L' was used by the Epson to turn on the graphics mode. Undaunted we set our variable

to the ASCII numeric for lower case 'l' - CHR\$(108). This solution proved to be a great success, not only here but elsewhere.

Working with different printers we learned that within one machine there were certain modes that, when in operation, automatically cancelled or turned on other features. As additional styles can be obtained by using various combination of styles, it is important to know which combinations are compatible. Those styles that cannot be used together vary with each printer and should be noted so as to avoid unnecessary aggravation. For instance, with the Epson, turning on the superscript or subscript type activates the double strike style, or when using emphasized type - condensed, superscript, and subscript are not available. Usually these peculiarities do not cause any problems as everyday printing needs are not very complicated.

Another "detail" to be aware of is how your printer and computer are connected. If they are connected serially you should use PR#2 when sending an output string to the printer (ex: line 18). If you are using a parallel cable then you would use PR#3 (which is how we set the program up). The

only problem you will encounter if you haven't made the right choice is that your printer won't hear your computer - rendering the program useless.

The use of output strings gives the programmer greater and easier control in matters of ports, varying differences in control codes, etc. For a further explanation of this technique read the accompanying article - String Power.

String Power

Notes Toward Generic BASIC

Concepts apply to all BASICs
Example for Apple, Commodore, CoCo and Atari

Probably the first thing everyone learns about BASIC is that:

```
PRINT "HELLO"
```

will result in the word "HELLO" being printed on the display. Then they go on to learn other ways of using the PRINT statement. Unfortunately, most of what is taught results in BASIC programs that are difficult to maintain, update, or convert to other micro BASICs. A program written in BASIC for one computer will normally not run on any other computer without some modification. This has been one of our greatest frustrations at MICRO. A good program submitted for micro X could be converted to run on other micros, but due to the eccentricities of BASIC, is not worth the effort. Often the differences are relatively trivial and could be avoided entirely if the programmer would use a few simple techniques to generate more *generic* code. We took the program submitted by Buchanan as a sample case and generalized it to run on several micros. One of the techniques used, **Output Strings**, can help you make your BASIC better.

Changing the Printer Port

The original program was written in standard BASIC using simple PRINT statements. To output a master reset to the printer, the Applesoft BASIC statement was:

```
[ 30 PR# 7: PRINT ESC$; CHR$(64); PR# 0 ]
```

which selected port 7 as the printer output port, output the characters required to reset the Gemini printer, and reset the output device to the display. Applesoft BASIC PRINTs to the currently selected device. Each time the device is switched between the screen (device 0 *always*) and the printer (connected as device 7 *on this system*) a PR# command must be issued. Every time output was directed to the printer, instead of the display, the PR# 7 command was issued within the print statement line. Changing the printer port would require changing every one of these print lines within the program! That is a lot of work. And, miss just one and your system will probably 'hang'. If there was some way to have the printer port defined only once in the program, then changing the printer port would only require changing one reference. There is a way. If every set of information that is destined for the printer is turned into an output string, then a subroutine that will handle the output string can be called whenever output is required. The statement:

```
[ OS$ = ESC$ + CHR(64) ]
```

defines a string variable OS\$ that contains the two characters required for a master reset. This string is output to the printer via a short subroutine:

```
[ 18 PR# 7: PRINT OS$; PR# 0: RETURN ]
```

and is called as:

```
[ 30 OS$ = ESC$ + CHR(64): GOSUB 18 ]
```

Every time the subroutine at line 18 is called, it selects port 7 for output, outputs the current value of the OS\$ string, resets the output port to the screen, and returns. All of the statements in the original program that generated output to the printer were rewritten as output strings, using the string variable OS\$, and calling subroutine at line 18 for the actual output. Now, if the printer is changed to port 2, then only this single line has to be changed. It is changed to:

```
[ 18 PR# 2: PRINT OS$; PR# 0: RETURN ]
```

It is obviously much easier to change the printer port when only one line needs to be changed. This makes the program a lot easier to use, maintain and update. Output strings are defined within many of the 'working' lines of the program. The basic printer control

strings for the Gemini are defined in lines 9100 through 9183, plus lines 9820 through 9890.

Changing Printers

The output string technique also allows us to change printers. The original program was written only for the Gemini. To change the original code to support the Epson, or any other printer, would have required searching out every direct PR# 7 statement and changing those that were different for the Epson. Since we rewrote the program to use output strings instead, all that was required was to redefine those printer control strings that were different between the Gemini and the Epson. This is taken care of in the lines 9500 through 9583, plus lines 9000 to 9019 that allow us to choose between the Gemini and Epson at run time. Note that the Gemini and Epson people were considerate and defined many of the strings to be identical on the two printers. All of the definition strings in lines 9820 through 9850 are the same for these two popular printers.

If you wanted to modify this program for another printer, all that is required is to redefine these strings. No other program modifications should be required. If you want to key the program in for only the Gemini or the Epson, then the lines specific to the printer that you are not using may be omitted.

Changing Micros

The output string technique makes going to another micro easier. The OS\$ string is defined in the exact same way, but the output subroutine is changed to fit the requirements of the new micro. In FLEX BASIC, on our FOCUS or a CoCo, the print subroutine is:

```
[ 18 PRINT #1,OS$; RETURN ]
```

On a Commodore 64 it would be:

```
[ 18 PRINT# 4,OS$; RETURN ]
```

These two BASIC implementations are quite different from the Applesoft BASIC since they specify the printer port as part of the PRINT command, rather than changing the printer port.

On an Atari it would be:

```
xxxxxxx
```

See the micro specific listings at the end of the main program listing for the details on using one of these micros with this program.

Summary

The concept of using an output string instead of immediate printer commands has been discussed, and it has been shown that this technique can

make your BASIC program more flexible. In the particular example, it made it easier to change printer port, to change type of printer, and, to change micro. This is but one of a number of techniques that can be used to make

your BASIC more *generic*. Other techniques will be described in additional articles on this subject. If you have discovered other techniques, we would like to hear about them.

Listing 1

```
1 REM PRINTER FORMAT PROGRAM
2 REM ORIGINAL APPLE/GEMINI 10 VERSION
3 REM BY DICK BUCHANAN
4 REM MODIFIED BY R. M. TRIPP
5 REM FOR GENERAL MICROCOMPUTERS AND
6 REM THE EPSON PRINTER
13 REM MICRO - MARCH 1984 - #70
14 REM
15 GOSUB 9900: REM SYSTEM INITIALIZATION
16 GOSUB 9000: GOTO 30:
   REM PRINTER INITIALIZATION
*****
$
$ Microcomputer Specific Code to $
$ Service Input/Output Must Be $
$ Entered Here. See Modules at End $
$
*****
30 OS% = MR% + MS%: GOSUB 18:
   REM OUTPUT TO PRINTER
50 GOSUB 20
51 OS% = " A) FONT STYLE CONTROLS" + CR%:
   GOSUB 19
52 OS% = " B) FONT PITCH CONTROLS" + CR%:
   GOSUB 19
53 OS% = " C) SPECIAL PRINT MODES" + CR%:
   GOSUB 19
54 OS% = " D) SPECIAL PRINT EFFECTS" + CR%:
   GOSUB 19
55 OS% = " E) LINE FEED CONTROLS" + CR%: GOSUB 19
56 OS% = " F) FORM FEED CONTROLS" + CR%: GOSUB 19
57 OS% = " G) VERTICAL TABS" + CR%: GOSUB 19
58 OS% = " H) HORIZONTAL CONTROLS" + CR%:
   GOSUB 19
59 OS% = " I) INITIALIZE PRINTER RESET" + CR%:
   GOSUB 19
60 OS% = " J) PRINT PRESENT PARAMETERS" + CR%:
   GOSUB 19
61 OS% = " K)
   DISPLAY PRESENT PARAMETERS" + CR% + CR%:
   GOSUB 19
63 OS% = " X) TO EXIT" + CR%: GOSUB 19
65 OS% = CR%: GOSUB 19
70 OS% = SN%: GOSUB 19: GOSUB 21
75 IF N% = "" THEN 70
80 IF N% = "X" THEN END
90 N = ASC (N%) - ASC ("0"):
   IF N < 1 OR N > 11 THEN 70
100 ON N GOSUB 1000,2000,3000,4000,5000,6000,7000,
   8000,30,300,400
110 GOTO 50
200 REM PRESENT VALUES
205 GOSUB 20
210 OS% = AA% + " " + BS% + CQ% + B3% + CQ% + A2% +
   PT% + CR%
211 OS% = OS% + CS% + CQ% + C2% + CQ% + DS% + CR%
212 OS% = OS% + RS% + RC% + CQ% + LS% + LC% + CR%
213 OS% = OS% + D2% + CQ% + LF% + " " + LT% + "/" +
   LB% + CHR% (34) + CR%
214 OS% = OS% + PL% + FS% + CQ% + PN% + F1% + CHR%
   (34) + CQ%
215 OS% = OS% + HL% + F2% + CQ% + BL% + F3% + CR%
220 RETURN
299 REM DISPLAY PRESENT VALUES
300 CQ% = ", "; GOSUB 210: GOTO 18:
   REM OUTPUT TO PRINTER
400 CQ% = CR%: GOSUB 205: GOSUB 19: GOTO 21:
   REM OUTPUT TO DISPLAY
1000 REM FONT STYLE
1005 GOSUB 20
1010 OS% = " 1) SELECT STANDARD ASCII" + CR%
1011 OS% = OS% + " 2) SELECT ITALIC" + CR%
1012 OS% = OS% + " 3) SELECT INTERNATIONAL" + CR%:
   GOSUB 19
1040 OS% = SN%: GOSUB 19: GOSUB 21:
   IF N% = "" THEN RETURN
1045 IF N% < "1" OR N% > "3" THEN 1040
1050 IF N% = "1" THEN OS% = IX%: GOSUB 18:
   AA% = "STANDARD ASCII": RETURN
1060 IF N% = "2" THEN OS% = IN%: GOSUB 18:
   AA% = "ITALIC PRINT": RETURN
1070 IF N% < > "3" THEN 1000
1071 GOSUB 20: OS% = "INTERNATIONAL FONTS" + CR%:
   GOSUB 19
1072 FOR I = 0 TO AX:
   OS% = CHR% (I + 48) + " = " + AX%(I) + CR%
1073 GOSUB 19: NEXT I
1075 OS% = SN%: GOSUB 19: GOSUB 21:
   IF N% = "" THEN RETURN
1080 IF N% < "0" OR N% > CHR% (AX + 48) THEN 1075
1090 AA% = AX% (VAL (N%))
1100 OS% = SI% + CHR% (VAL (N%)): GOSUB 18:
   RETURN
2000 REM FONT PITCH
2005 GOSUB 20
2010 OS% = " 1) SET PICA STANDARD (" + PX% + ")
   " + CR%
2011 OS% = OS% + " 2)
   SET ELITE STANDARD (" + EX% + ") " + CR%
2012 OS% = OS% + " 3)
   SET CONDENSED (" + CX% + ") " + CR%
2013 OS% = OS% + " 4)
   SET ENLARGED (" + EN% + ") " + CR%
2014 OS% = OS% + " 5) CANCEL ENLARGED MODE" + CR%:
   GOSUB 19
2050 OS% = SN%: GOSUB 19: GOSUB 21:
   IF N% = "" THEN RETURN
2060 IF N% < "1" OR N% > "5" THEN 2050
2065 ON VAL (N%) GOTO 2110,2120,2130,2140,2150
2110 OS% = PF% + ES% + CHR% (81) + PC%: GOSUB 18:
   PT% = PX%
```

```

2111 RC# = PC#:BS# = "PICA"; RETURN
2120 OS# = EF# + ES# + CHR# (81) + EC#: GOSUB 18;
PT# = EX#
2121 RC# = EC#:BS# = "ELITE"; RETURN
2130 OS# = CF# + ES# + CHR# (81) + CC#: GOSUB 18;
PT# = CX#
2131 RC# = CC#:BS# = "CONDENSED"; RETURN
2140 OS# = EM#: GOSUB 18;B3# = "ENLARGED"; RETURN
2150 OS# = EY#: GOSUB 18;B3# = "NON-ENLARGED";
RETURN
3000 REM SPECIAL PRINT
3005 GOSUB 20
3010 OS# = " 1) DOUBLE STRIKE PRINT" + CR#
3011 OS# = OS# + " 2) CANCEL DOUBLE STRIKE" + CR#
3012 OS# = OS# + " 3) EMPHASIZED MODE" + CR#
3013 OS# = OS# + " 4)
CANCEL EMPHASIZED MODE" + CR# + CR#
3050 GOSUB 19
3060 OS# = SN#: GOSUB 19; GOSUB 21;
IF N# = "" THEN RETURN
3070 IF N# < "1" OR N# > "4" THEN 3060
3090 ON VAL (N#) GOTO 3110,3120,3130,3140
3110 CS# = "DOUBLE STRIKE":OS# = SD#: GOSUB 18;
GOTO 3005
3120 CS# = "NON-DOUBLE STRIKE":OS# = CD#: GOSUB 18;
GOTO 3005
3130 C2# = "EMPHASIZED":OS# = SE#: GOSUB 18;
GOTO 3005
3140 C2# = "NON-EMPHASIZED":OS# = CE#: GOSUB 18;
GOTO 3005
4000 REM SPECIAL EFFECTS
4005 GOSUB 20
4010 OS# = " 1) UNDERLINE CHARACTERS" + CR#
4011 OS# = OS# + " 2) CANCEL UNDERLINE" + CR#
4012 OS# = OS# + " 3) SUPERSCRIPIT MODE" + CR#
4013 OS# = OS# + " 4) SUBSCRIPIT MODE" + CR#
4014 OS# = OS# + " 5)
CANCEL SUPER/SUBSCRIPIT MODE" + CR#
4015 OS# = OS# + " 6) UNI-DIRECTIONAL MODE" + CR#
4016 OS# = OS# + " 7)
BI-DIRECTIONAL MODE" + CR# + CR#
4080 GOSUB 19
4090 OS# = SN#: GOSUB 19; GOSUB 21;
IF N# = "" THEN RETURN
4100 IF N# < "1" OR N# > "7" THEN 4090
4106 N = VAL (N#);
ON N GOTO 4110,4120,4130,4140,4150,4160,4170
4110 OS# = UN#: GOSUB 18; GOTO 4005
4120 OS# = UF#: GOSUB 18; GOTO 4005
4130 DS# = "SUPERSCRIPIT MODE":OS# = SS#: GOSUB 18;
GOTO 4005
4140 DS# = "SUBSCRIPIT MODE":OS# = SB#: GOSUB 18;
GOTO 4005
4150 DS# = "NORMAL MODE":OS# = SF#: GOSUB 18;
GOTO 4005
4160 D2# = "UNI-DIRECTIONAL MODE":OS# = UD#:
GOSUB 18; GOTO 4005
4170 D2# = "BI-DIRECTIONAL MODE":OS# = BD#:
GOSUB 18; GOTO 4005
5000 REM LINE FEED CONTROLS
5005 GOSUB 20
5010 OS# = " 1) SET LF TO 9/72 (1/8) INCH" + CR#
5011 OS# = OS# + " 2) SET LF TO 7/72 INCH" + CR#

```

```

5012 OS# = OS# + " 3) SET LF TO 12/72 (1/6)
INCH" + CR#
5013 OS# = OS# + " 4)
SET LF TO N/72 INCH (N=1 TO 127)" + CR#
5014 OS# = OS# + " 5)
SET LF TO N/" + HM# + " INCH (N=1 TO 127)
" + CR# + CR#
5060 GOSUB 19
5070 OS# = SN#: GOSUB 19; GOSUB 21;
IF N# = "" THEN RETURN
5080 IF N# < "1" OR N# > "5" THEN 5070
5100 N = VAL (N#);
ON N GOTO 5110,5120,5130,5140,5140
5110 LT# = "1":LB# = "8":OS# = L0#: GOTO 18
5120 LT# = "7":LB# = "72":OS# = L1#: GOTO 18
5130 LT# = "1":LB# = "6":OS# = L2#: GOTO 18
5140 INPUT "ENTER N (1-127): ";P#
5142 IF VAL (P#) < 1 OR VAL (P#)
> 127 THEN GOTO 5140
5145 IF VAL (P#) > 0 OR VAL (P#)
< 128 THEN LT# = P#: ON N-3 GOTO 5160,5170
5160 LB# = "72":OS# = L3# + CHR# ( VAL (P#));
GOTO 18
5170 LB# = HM#:OS# = L4# + CHR# ( VAL (P#));
GOTO 18
6000 REM FORM FEED CONTROLS
6005 GOSUB 20
6010 OS# = " 1) SET LINES PER PAGE (1-127)" + CR#
6011 OS# = OS# + " 2)
SET PAGE LENGTH IN INCHES (1-32)" + CR#
6012 OS# = OS# + " 3) SET HEADER LINE" + CR#
6013 OS# = OS# + " (FIRST LINE PRINTED, 1-16)
" + CR#
6014 OS# = OS# + " 4)
SET MAXIMUM LINES FROM BOTTOM OF" + CR#
6015 OS# = OS# + " THE PAGE (1-127)" + CR#
6016 OS# = OS# + " 5)
CANCEL LINES FROM BOTTOM SETTING" + CR# + CR#
6060 GOSUB 19
6070 OS# = SN#: GOSUB 19; GOSUB 21;
IF N# = "" THEN RETURN
6080 IF N# < "1" OR N# > "5" THEN 6070
6090 N = VAL (N#);
ON N GOTO 6110,6120,6130,6140,6150
6110 INPUT "ENTER LLP (1-127): ";P#
6111 IF VAL (P#) < 1 OR VAL (P#) > 127 THEN 6110
6115 FS# = P#:OS# = FL# + CHR# ( VAL (P#));
GOSUB 18; GOTO 6005
6120 INPUT "ENTER PL (1-32): ";P#:
IF VAL (P#) < 1 OR VAL (P#) > 32 THEN 6120
6125 F1# = P#:OS# = FI# + CHR# ( VAL (P#));
GOSUB 18; GOTO 6005
6130 INPUT "ENTER HL (1-16): ";P#:
IF VAL (P#) < 1 OR VAL (P#) > 16 THEN 6130
6135 F2# = P#:OS# = HD# + CHR# ( VAL (P#));
GOSUB 18; GOTO 6005
6140 INPUT "ENTER LFB (1-127): ";P#
6141 IF VAL (P#) < 1 OR VAL (P#) > 127 THEN 6140
6145 F3# = P#:OS# = SD# + CHR# ( VAL (P#));
GOSUB 18; GOTO 6005
6150 OS# = SX#: GOSUB 18; GOTO 6005
7000 REM VERTICAL TABS
7005 GOSUB 20
7010 OS# = " 1) ADVANCE TO NEXT TAB" + CR#

```

```

7011 OS# = OS# + " (6,12,18, ... ,60 STANDARD)
      + CR#
7012 OS# = OS# + " 2)
      SET NEW VERTICAL TAB POSITIONS" + CR#
7013 OS# = OS# + " (MAXIMUM OF 20)" + CR#
7014 OS# = OS# + CR# + CR#
7040 GOSUB 19
7050 OS# = SN#: GOSUB 19: GOSUB 21:
      IF N# = "" THEN RETURN
7060 IF N# = "1" THEN OS# = VT#: GOSUB 18:
      GOTO 7005
7065 J = 0: IF N# < > "2" THEN 7050
7070 INPUT "ENTER TAB: ";T$(J + 1):J = J + 1
7075 INPUT "SET NEXT TAB (Y/N): ";P#:
      IF LEFT$(P#,1) = "Y" THEN 7070
7080 OS# = SV#: OS# = TS#: FOR I = 1 TO J:
      OS# = OS# + CHR$(VAL(T$(I))):NEXT:GOSUB 18
7085 FOR I = 1 TO J:
      OS# = OS# + CHR$( VAL (T$(I))): NEXT
7090 OS# = OS# + CHR$(0): GOSUB 18: GOTO 7005
8000 REM HORIZONTAL CONTROLS
8005 GOSUB 20
8010 OS# = " 1) SEND CARRIAGE RETURN" + CR#
8011 OS# = OS# + " 2) SET LEFT MARGIN" + CR#
8012 OS# = OS# + " 3) SET RIGHT MARGIN" + CR#
8013 OS# = OS# + " 4)
      MOVE TO NEXT HORIZONTAL TAB" + CR#
8014 OS# = OS# + " (10,20,30,
      ...SET STANDARD" + CR#
8015 OS# = OS# + CR# + " 5)
      SET NEW TAB POSITIONS" + CR# + CR#
8070 GOSUB 19
8080 OS# = SN#: GOSUB 19: GOSUB 21:
      IF N# = "" THEN RETURN
8090 IF N# < "1" OR N# > "5" THEN 8080
8100 ON VAL (N#) GOTO 8110,8120,8130,8140,8150
8110 OS# = CR#: GOSUB 18: GOTO 8005
8120 INPUT "ENTER LEFT MARGIN: ";P#:LC# = P#:
      OS# = SL# + CHR$( VAL (P#))
8125 GOSUB 18: GOTO 8005
8130 INPUT "ENTER RIGHT MARGIN: ";P#:RC# = P#:
      OS# = SR# + CHR$( VAL (P#))
8135 GOSUB 18: GOTO 8005
8140 OS# = CHR$(9): GOSUB 18: GOTO 8005
8150 J = 0
8155 INPUT "ENTER TAB: ";T$(J + 1):J = J + 1:
8160 INPUT " SET NEXT TAB (Y/N): ";P#:
      IF LEFT$(P#,1) = "Y" THEN 8155
8165 OS# = TS#: FOR I = 1 TO J:
      OS# = OS# + CHR$( VAL (T$(I))): NEXT
8170 OS# = OS# + CHR$(0): GOSUB 18: GOTO 8005
8999 REM INITIALIZATION
9000 REM APPLE VERSION
9010 GOSUB 20: INPUT "GEMINI OR EPSON [G/E]: ";TY#
9011 IF TY# = "G" THEN TY = 1: GOTO 9100
9012 IF TY# = "E" THEN TY = 2: GOTO 9500
9019 GOTO 9010
9100 REM GEMINI CHARACTER SET STRINGS
9101 DIM AX$(8)
9102 AX$(0) = "USA"
9103 AX$(1) = "ENGLAND"
9104 AX$(2) = "GERMANY"
9105 AX$(3) = "DENMARK"
9106 AX$(4) = "FRANCE"

```

GEMINI

```

9107 AX$(5) = "SWEDEN"
9108 AX$(6) = "ITALY"
9109 AX$(7) = "SPAIN"
9110 AX = 7: REM NUMBER OF COUNTRIES
9120 REM GEMINI COMMAND STRINGS
9131 SI# = ES# + "7"
9140 PF# = ES# + "B" + CHR$(1): REM PICA MODE
9150 EF# = ES# + "B" + CHR$(2): REM ELITE MODE
9160 CF# = ES# + "B" + CHR$(3):
      REM CONDENSED MODE
9170 SS# = ES# + "S" + CHR$(0):
      REM SUPERSCRIPT MODE
9171 SB# = ES# + "S" + CHR$(1):
      REM SUBSCRIPT MODE
9180 SL# = ES# + "M": REM SET LEFT MARGIN
9181 SV# = ES# + "P": REM SET VERTICAL TAB
9182 SR# = ES# + "Q": REM RIGHT MARGIN
9183 HM# = "144": REM HIGH DENSITY LINES
9300 GOTO 9800
9500 REM EPSON CHARACTER SET STRINGS
9501 DIM AX$(9)
9502 AX$(0) = "USA"
9503 AX$(1) = "FRANCE"
9504 AX$(2) = "GERMANY"
9505 AX$(3) = "ENGLAND"
9506 AX$(4) = "DENMARK"
9507 AX$(5) = "SWEDEN"
9508 AX$(6) = "ITALY"
9509 AX$(7) = "SPAIN"
9510 AX$(8) = "JAPAN"
9511 AX = 8: REM NUMBER OF COUNTRIES
9520 REM EPSON COMMAND STRINGS
9531 SI# = ES# + "R": REM SET INTERNATIONAL
9540 PF# = ES# + "P": REM PICA MODE
9550 EF# = ES# + "M": REM ELITE MODE
9560 CF# = CHR$(15): REM CONDENSED MODE
9570 SS# = ES# + "S" + CHR$(1):
      REM SUPERSCRIPT MODE
9571 SB# = ES# + "S" + CHR$(0):
      REM SUBSCRIPT MODE
9580 SL# = ES# + CHR$(100): REM SET LEFT MARGIN
9581 SV# = ES# + "B": REM SET VERTICAL TAB
9582 HM# = "216": REM HIGH DENSITY LINE MODE
9583 SR# = ES# + "Q": REM RIGHT MARGIN
9800 REM STANDARD STRINGS
9801 AA# = "STANDARD ASCII":A2# = "FONT PITCH IS "
9802 BS# = "PICA":PT# = "10 CPI/80 CPL"
9803 B3# = "NON-ENLARGED":CS# = "NON-DOUBLE STRIKE"
9804 C2# = "NON-EMPHASIZED":RC# = "80":LC# = "1"
9805 RS# = "RIGHT MARGIN SET TO ":
      DS# = "NORMAL MODE"
9806 LS# = "LEFT MARGIN SET TO ":LT# = "1":
      LB# = "6"
9807 D2# = "BI-DIRECTIONAL MODE":
      LF# = "LINE FEED IS"
9808 PL# = "LLP=":PN# = "PL=":HL# = "HL=":
      BL# = "LFB="
9809 FS# = "66":F1# = "11":F2# = "1":F3# = "0"
9819 REM
9820 REM COMMON COMMAND STRINGS - GEMINI AND
      EPSON
9821 MR# = ES# + CHR$(64): REM MASTER RESET
9822 SR# = ES# + "Q" + CHR$(80):
      REM SET RIGHT MARGIN 80

```

SPECIFIC CODE

EPSON SPECIFIC CODE

```

9823 IN$ = ES$ + "4"; REM ITALIC ON
9824 IX$ = ES$ + "5"; REM ITALIC OFF
9825 EM$ = ES$ + "M" + CHR$(1) ;
      REM ENLARGED MODE ON
9826 EY$ = ES$ + "N" + CHR$(0) ;
      REM ENLARGED MODE OFF
9827 UN$ = ES$ + CHR$(-1) ; REM UNDERLINE MODE ON
9828 UF$ = ES$ + CHR$(-0) ; REM UNDERLINE MODE OFF
9829 NM$ = ES$ + "T"; REM TURN SCRIPT MODE OFF
9830 UD$ = ES$ + "U" + CHR$(1) ;
      REM UNI-DIRECTIONAL MODE
9831 BD$ = ES$ + "U" + CHR$(0) ;
      REM BI-DIRECTIONAL MODE
9832 L0$ = ES$ + "0"; REM 1/8 INCH LINE SPACE
9833 L1$ = ES$ + "1"; REM 7/72 INCH LINE SPACE
9834 L2$ = ES$ + "2"; REM 1/6 INCH LINE SPACE
9835 L3$ = ES$ + "A"; REM 1/72 INCH LINE SPACE
9836 L4$ = ES$ + "3";
      REM X/144 GEMINI, X/216 EPSON
9837 FL$ = ES$ + "C"; REM FORM LINES
9838 FI$ = ES$ + "C" + CHR$(0);
      REM FORM LENGTH IN INCHES
9839 SO$ = ES$ + "N"; REM SKIP OVER PERFORATION
9840 SX$ = ES$ + "O"; REM TURN SKIP OVER OFF
9841 VT$ = CHR$(11); REM EXECUTE VERTICAL TAB
9842 SR$ = ES$ + "Q"; REM SET RIGHT MARGIN
9843 TS$ = ES$ + "D"; REM HORIZONTAL TAB SET
9844 SE$ = ES$ + "E"; REM SET EMPHASIZED MODE
9845 CE$ = ES$ + "F"; REM CLEAR EMPHASIZED MODE
9846 SD$ = ES$ + "G"; REM SET DOUBLE STRIKE MODE
9847 CD$ = ES$ + "H"; REM CLEAR DOUBLE STRIKE MODE
9850 HD$ = ES$ + "R"; REM HEADER LINE
9890 RETURN
9899 REM
9900 REM SYSTEM SPECIFIC STUFF
9905 ES$ = CHR$(27); REM ESCAPE CODE
9906 CR$ = CHR$(13);
      REM CARRIAGE RETURN/LINEFEED
9907 SN$ = CR$ + "SELECT;"; REM SELECT MESSAGE
*****
*                               *
* Printer Initialization Code, If *
* Required, Must Be Entered Here. *
*                               *
*****
*****
*                               *
* The following statements should be *
* altered according to your printer. *
* As we had an 8 inch printer we set *
* 10 CPI/80 CPL (line 9912-9917) *
*                               *
*****
9911 PX$ = "10 CPI/80 CPL"
9912 PC = 80; REM CHARACTERS PER LINE
9913 EX$ = "12 CPI/96 CPL"
9914 EC = 96; REM CHARACTERS PER LINE
9915 CX$ = "17 CPI/136 CPL"
9916 CC = 136; REM CHARACTERS PER LINE
9917 EN$ = "5, 6, 8.5 CPI"
9920 RETURN

```

E
P
S
O
N

&

G
E
M
I
N
I

modules

Subroutines for Apple II

```

18 PR# 7:PRINT OS$;PR# 0:RETURN; REM OUTPUT TO PRINTER
19 PRINT OS$;RETURN; REM OUTPUT TO DISPLAY
20 HOME;RETURN; REM HOME COMMAND
21 INPUT N$;RETURN

```

Subroutines for FLEX used on Color Computer

```

18 PRINT #0,OS$;RETURN; REM OUTPUT TO PRINTER
19 PRINT OS$;RETURN; REM OUTPUT TO DISPLAY
20 PRINT CHR$(12);RETURN; REM CLEAR SCREEN
21 INPUT #0,N$;RETURN

```

```

9910 OPEN "0.PRINT.SYS" AS 0: REM OPEN PRINTER DEVICE

```

Subroutines for FLEX used on FOCUS

```

18 PRINT #0,OS$;RETURN; REM OUTPUT TO PRINTER
19 PRINT OS$;RETURN; REM OUTPUT TO DISPLAY
20 PRINT CHR$(11);CHR$(24);RETURN; REM CLEAR SCREEN
21 INPUT #0,N$;RETURN

```

```

9910 OPEN "0.PARALLEL.CMD" AS 0

```

Subroutines for Commodore 64/VIC-20

```

18 PRINT# 1,OS$;RETURN; REM OUTPUT TO PRINTER
19 PRINT OS$;RETURN; REM OUTPUT TO DISPLAY
20 PRINT (CLEAR);RETURN; REM CLEAR SCREEN
21 INPUT N$;RETURN

```

```

9910 CLOSE 1:OPEN 1,4; REM OPEN PRINTER PORT

```

Subroutine for the Atari

Unfortunately this program could not be adapted to the Atari. The problem arose in the output strings that had to be concatenated. Given how laboriously Atari handles concatenation and how often it would have to be used in this program, conversion was made virtually impossible.

MICRO

HI-RES SCREEN DUMP for the EPSON MX-80

by Robert D. Walker

A machine language subroutine for dumping high resolution Apple II graphics to the Epson MX-80 printer which allows choice of screen dump size.

graphics with the Epson MX-80 equipped with the Grafrax option. For those with a parallel interface capable of sending 8 bits, this program worked flawlessly, but slowly. Let's face it, the Apple p-code interpreter is generally faster than BASIC, but it is not exceptionally fast. In addition, one must realize that the entire HiRes screen contains 53,760 pixels. Each pixel must be processed individually, this accounting for the slow execution of this program.

In this article I have included a fast 768 byte machine language subroutine which dumps the HiRes screen to the Epson MX-80. In addition to the usual dot-for-dot format (see figure 1), I have included an optional format for creating an expanded printout (see figure 2). Careful examination of figure 2 will reveal that each screen pixel is printed as a two by two dot matrix.

To demonstrate the method of calling this machine language subroutine from your own BASIC program, I have included a useful

Requirements:

- Apple II with 48K
- Epson MX-80 equipped with Grafrax
- 8 bit parallel interface

In the February 1983 issue of MICRO I published a short article which included an Apple Pascal program for printing the Apple II HiRes (abbreviation for high resolution)

Figure 2 Expanded Size Screen Dump

Figure 1 Normal Size Screen Dump



**Table 1
Screen Dump Memory Locations**

Location Hex	Location Dec	Explanation	Default Value
\$9300	37632	call this location to dump the screen normal size	
\$9303	37635	call this location to dump the screen expanded size	
\$9306	37638	screen page, for HiRes page 1 use \$20 (32), for page 2 use \$40 (63)	32
\$9307	37639	left column of screen area to be dumped DIV 7	0
\$9308	37640	right column of screen area to be dumped DIV 7	39
\$9309	37641	top row of screen area to be dumped DIV 8	0
\$930A	37642	bottom row of screen area to be dumped DIV 8	23
\$930B	37643	number of spaces in left margin of normal size dump	16
\$930C	37644	number of spaces in left margin of expanded size dump	10
\$930D	37645	byte exclusive-ored with image, 0 = normal image, 255 = reversed image.	0

Listing 2

```

10 REM *****
11 REM *
12 REM * PROGRAM: APPLE II -> EPSON MX-80 *
13 REM * HIRES SCREEN DUMP *
14 REM *
15 REM * AUTHOR: ROBERT D. WALKER *
16 REM * MARIETTA, GA *
17 REM *
18 REM *
19 REM *
20 REM *****
21 REM ** INITIALIZE **
100 HIMEM: 37631
110 D$ = CHR$(4)
120 PRINT D$;"BLOAD OBJ.DUMP,A$9300"
130 SC = 32: REM SCREEN PAGE
140 LC = 0: REM LEFT SCREEN COLUMN
150 RC = 279: REM RIGHT SCREEN COLUMN
160 TR = 0: REM TOP SCREEN ROW
170 BR = 191: REM BOTTOM SCREEN ROW
180 L1 = 16: REM LEFT MARGIN (NORMAL SIZE DUMP)
190 L2 = 10: REM LEFT MARGIN (EXPANDED DUMP)
200 IM = 0: REM IMAGE (0=NORMAL, 255=INVERSE)
210 REM ** GET PICTURE **
220 HOME
230 VTAB (3): HTAB (8): PRINT "APPLE II -> EPSON MX-80"
240 HTAB (11): PRINT "HIRES SCREEN DUMP"
250 VTAB (10): INPUT "FILE NAME- ";F$
260 IF LEN (F$) = 0 THEN END
270 HOME : FLASH : PRINT "LOADING ";F$: NORMAL
280 PRINT D$;"BLOAD ";F$;"A$2000"
290 POKE - 16297,0
300 POKE - 16304,0
310 POKE - 16302,0
320 FOR I = 1 TO 1000: NEXT
330 POKE - 16301,0
340 VTAB (23): PRINT "HIT SPACE TO CONTINUE...";
350 GET A$
360 REM ** SELECT SIZE AND PARAMETERS **
370 TEXT : HOME
380 PRINT "N(NORMAL SIZE DUMP)"
390 PRINT "E(EXPANDED DUMP)"
400 PRINT : GET A$
410 IF A$ < > "N" AND A$ < > "E" GOTO 370
420 IF A$ = "N" THEN F2 = 1: GOTO 440
430 F2 = 2
440 HOME
450 PRINT "SCREEN DUMP PARAMETERS:"
460 PRINT
470 PRINT " 1. SCREEN PAGE";: HTAB (35): PRINT SC
480 PRINT " 2. LEFT SCREEN COLUMN";: HTAB (35):
PRINT LC
490 PRINT " 3. RIGHT SCREEN COLUMN";: HTAB (35):
PRINT RC
500 PRINT " 4. TOP SCREEN ROW";: HTAB (35): PRINT TR
510 PRINT " 5. BOTTOM SCREEN ROW";: HTAB (35):
PRINT BR
520 PRINT " 6. LEFT MARGIN";: HTAB (35)
530 IF F2 = 1 THEN PRINT L1: GOTO 550
540 PRINT L2
550 PRINT " 7. IMAGE";: HTAB (35): PRINT IM
560 VTAB (15): PRINT "ENTER PARAMETER NUMBER TO MAKE
CHANGES."
570 PRINT "WHEN NO MORE, HIT RETURN."

```

```

580 VTAB (20): GET A$
590 A = ASC (A$) - 48
600 IF A = - 35 GOTO 720
610 ON A GOTO 630,640,650,660,670,680,710
620 GOTO 440
630 INPUT "SCREEN PAGE- ";SC: GOTO 440
640 INPUT "LEFT SCREEN COLUMN- ";LC: GOTO 440
650 INPUT "RIGHT SCREEN COLUMN- ";RC: GOTO 440
660 INPUT "TOP SCREEN ROW- ";TR: GOTO 440
670 INPUT "BOTTOM SCREEN ROW- ";BR: GOTO 440
680 INPUT "LEFT MARGIN- ";L
690 IF F2 = 1 THEN L1 = L: GOTO 440
700 L2 = L: GOTO 440
710 INPUT "IMAGE- ";IM: GOTO 440
720 REM ** SEND PARAMETERS TO MACHINE LANGUAGE ROUTINE
730 POKE 37630,SC
740 POKE 37639, INT (LC / 7)
750 POKE 37640, INT (RC / 7)
760 POKE 37641, INT (TR / 8)
770 POKE 37642, INT (BR / 8)
780 POKE 37643,L1
790 POKE 37644,L2
800 POKE 37645,IM
810 REM ** DUMP IMAGE TO PRINTER **
820 HOME : VTAB (10): FLASH : PRINT "DUMPING IMAGE.":
NORMAL
830 PRINT "HIT ESC TO STOP AT ANY TIME..."
840 IF F2 = 1 THEN CALL 37632: GOTO 220
850 CALL 37635: GOTO 220

```

Listing 1

```

;*****
;
; APPLE II -> EPSON MX-80
; HIRES SCREEN DUMP ROUTINES
;
; ROBERT D. WALKER
; MARIETTA, GA
;
;*****
;
; SUBROUTINE WRITTEN FOR THE
; EPSON MX-80 WITH GRAFTRAX OPTION
;
; HIMEM SHOULD BE SET LOWER THAN
; 37632 ($9300) FOR A 48K SYSTEM
;*****
;
; ZERO PAGE USAGE
00FC BLKPT EQU 00FC ; POINTER TO BLOCK
00FE TBLKPT EQU 00FE ; TEMP POINTER TO BLOCK
;
; MISC CONSTANTS AND LOCATIONS
009B ESC EQU 009B ; INTERRUPT KEY
C000 KEYDATA EQU C000 ; KEYBOARD DATA LOCATION
C010 KEYSTRB EQU C010 ; KEYBOARD STROBE LOCATION
;
; PRINTER SLOT #1
C090 PROUT EQU C090 ; PRINTER OUTPUT LOCATION
C1C1 PRWAIT EQU C1C1 ; CHECK IF PRINTER READY LOC
;

```

```

9300                ORG $9300
;
; ROUTINE ENTRY POINTS
9300 4C 22 93      JMP DUMP
9303 4C 98 93      JMP DUMPE
;
; PARAMETERS
9306 20          SCRMPG  BYT $20
9307 00          LCOL    BYT $00
9308 27          RCOL    BYT $27
9309 00          TROW    BYT $00
930A 17          BROW    BYT $17
930B 10          LMARG   BYT $10
930C 0A          LMARGE  BYT $0A
930D 00          IMAGE   BYT $00
;
; TEMP STORAGE
930E 00          ROW     BYT 0
930F 00          COL     BYT 0
9310 00          BLKROW  BYT 0
9311 00          BLKCOL  BYT 0
9312 00          EXBYTE  BYT 0
9313 00          TIME    BYT 0
9314 00          MULTI1  BYT 0
9315 00          MULTI2  BYT 0
9316 00 00       PROD    BYT 0,0
9318 00 00       DOTS    BYT 0,0
931A 00 00 00    BLKTAB  BYT 0,0,0,0,0,0,0
;
;*****
; * DUMP THE HIRES SCREEN, DOT FOR *
; * DOT -- NORMAL SIZE             *
;*****
;
9322 A9 00       DUMP    LDA ##08      ; LINE SPACING
9324 20 77 95    JSR LINESPC ; - 8 DOTS
9327 AD 09 93    LDA TROW      ; START AT TOP
932A BD 0E 93    STA ROW
;
; PRINT ONE ROW OF BLOCK --
; I.E. 8 ROWS OF DOTS
932D 20 64 95    PROW    JSR CHKKEY   ; INTERRUPT ?
9330 AD 08 93    LDA LMARG     ; LEFT MARGIN
9333 20 89 95    JSR TAB
9336 AD 07 93    LDA LCOL      ; START AT LEFT
9339 BD 0F 93    STA COL
933C 38          SEC          ; COMPUTER # DOTS
933D AD 08 93    LDA RCOL      ; IN ONE ROW
9340 ED 07 93    SBC LCOL
9343 BD 14 93    STA MULTI1
9346 EE 14 93    INC MULTI1
9349 A9 07       LDA ##07
934B BD 15 93    STA MULTI2
934E 20 44 95    JSR MULTPLY
9351 20 B6 95    JSR PDOTS     ; TELL PRINTER DOTS IN ROW
9354 AD 16 93    LDA PROD
9357 20 9F 95    JSR PRODOT
935A AD 17 93    LDA PROD+1
935D 20 9F 95    JSR PRODOT
9360 20 C0 94    PBLK    JSR CALCBLK  ; CALC ADDRESS
9363 20 A3 94    JSR ROTBLK   ; ROTATE IMAGE
9366 A2 00       LDA ##00
9368 BD 1A 93    PCOL    LDA BLKTAB,X ; GET BYTE

```



Sure it's insured?

SAFWARESM Insurance provides full replacement of hardware, media and purchased software after a low \$50 deductible.

As little as \$35/yr covers:

- Fire • Theft • Power Surges
- Earthquake • Water Damage • Auto Accident

Select the coverage you want from the table.

Amount of Insurance	Annual Premium
Up to \$ 2,000	\$ 35
\$ 2,001-\$ 5,000	\$ 60
\$ 5,001-\$ 8,000	\$ 75
\$ 8,001-\$11,000	\$ 90
\$11,001-\$14,000	\$105


Call for higher coverages.

Not avail. in AK, DC, HI, KY, IA, ME, MS, NV, SC, or WY.

Call for immediate protection.

1-800-848-3469

(In Ohio call 1-800-848-2112)



COLUMBIA NATIONAL GENERAL AGENCY

Subscribers - Check Your Labels !

As part of our recent reorganization, we have changed subscription fulfillment houses.

As programmers, you can appreciate that any change such as this, no matter how carefully done, is likely to cause some errors during the transition period. This is especially true with the foreign subscriptions. While the new system uses a better method of generating country information, we had to make some guesses in converting from the existing labels.

Please examine your subscription label on this issue of MICRO. If you find any problems - wrong address, incorrect spelling, incorrect zip code, etc. - please notify us immediately.

MICRO Circulation
P.O. Box 6502
Chelmsford, MA 01824

Applesoft program for loading and printing HiRes pictures.

The Machine Language Subroutine

Listing 1 shows the assembly listing of the screen dump subroutine. In this listing the subroutine was assembled to reside in memory locations \$9300 through \$95FF, just below DOS for a 48K system. Table 1 shows the important memory locations for calling this subroutine.

As shown in Table 1, the area of the screen to be printed is determined by four parameters: left (\$9307), right (\$9308), top (\$9309), bottom (\$930A). These parameters require special consideration.

The left and right parameters are each divided by 7. Assume, for example, that the entire screen is to be printed. The far left column would be 0, while the far right column would be 279. Dividing both of these numbers by 7 and taking the integer portion yields 0 and 39, respectively. Thus the value 0 would be stored in location \$9307. In addition, the value 39 would be stored in location \$9308.

The top and bottom parameters are each divided by 8. In keeping with the Applesoft standard, the top row would be 0, and the bottom row would be 191. Dividing both of these values by 8 and taking the integer portion yields 0 and 23, respectively. In a similar manner, the value 0 would be stored in location \$9309, and the value 23 stored in location \$930A.

This technique of dividing the parameters by 7 or 8 significantly shortens the size of the screen dump subroutine. The one drawback, however, is that the screen area to be printed cannot be specified exactly. Instead, it is specified in blocks of 7 dots horizontally and 8 dots vertically.

Another feature of this subroutine is the ability to terminate the screen dump at any time simply by pressing the escape key. Pressing this key will return control to the calling program.

The following instructions show the steps required in creating a binary disk file containing this object code.

1. Protect memory locations above \$92FF by setting high memory pointers to \$92FF (37631). While in Applesoft type "HMEM: 37631".
2. Enter the monitor by typing "CALL -151".

```

936B 4D 0D 93      EOR IMAGE
936E 20 9F 95      JSR PRCOUT
9371 EB            INX
9372 E0 07          CPX #07          ; 7 BYTES/BLK
9374 D0 F2          BNE PCOL
9376 AD 0F 93      LDA COL
9379 CD 0B 93      CMP RCOL          ; DONE WITH BLK ?
937C F0 06          BEQ NEXROW
937E EE 0F 93      INC COL
9381 4C 60 93      JMP PBLK
9384 20 9B 95      NEXROW JSR CRLF    ; OUTPUT CR, LF
;
; CALCULATE NEXT ROW
9387 AD 0E 93      LDA ROW
938A CD 0A 93      CMP BROW          ; DONE ?
938D F0 06          BEQ DONE
938F EE 0E 93      INC ROW
9392 4C 2D 93      JMP PROW
9395 4C 75 95      DONE  JMP RESETPR  ; RESET PRINTER
;
; *****
; * DUMP THE HIRRES SCREEN, EXPANDED *
; * VERSION. EACH DOT ON SCREEN IS *
; * REPRESENTED BY 4 DOTS ON THE *
; * PRINTER (2 DOTS X 2 DOTS). *
; *****
;
9398 A9 07          DUMPE  LDA #07          ; LINE SPACING
939A 20 77 95      JSR LINESPC       ; = 7 DOTS
939D AD 0B 93      LDA RCOL          ; START AT RIGHT
93A0 8D 0F 93      STA COL
;
; PRINT FAR RIGHT DOTS IN ONE COLUMN
; OF BLOCK -- 7 COLUMNS OF DOTS
93A3 20 64 95      PCOLR JSR CHKKEY       ; INTERRUPT ?
93A6 AD 0C 93      LDA LMARGE       ; LEFT MARGIN
93A9 20 89 95      JSR TAB
93AC 38            SEC          ; COMPUTER DOTS
93AD AD 0A 93      LDA EROW          ; IN ONE COL
93B0 ED 09 93      SBC TROW
93B3 8D 14 93      STA MULT1
93B6 EE 14 93      INC MULT1
93B9 A9 10          LDA #10
93BB 8D 15 93      STA MULT2
93BE 20 44 95      JSR MULTPLY
93C1 20 86 95      JSR PDOTS         ; TELL PRINTER DOTS IN COL
93C4 AD 16 93      LDA FROW
93C7 8D 18 93      STA DOTS          ; SAVE # DOTS
93CA 20 9F 95      JSR PRCOUT
93CD AD 17 93      LDA FROW+1
93D0 8D 19 93      STA DOTS+1
93D3 20 9F 95      JSR PRCOUT
93D6 AD 09 93      LDA TROW          ; START AT TOP
93D9 8D 0E 93      STA ROW
93DC 20 C0 94      PCOLR1 JSR CALCBLK    ; CALC ADDRESS
;
; CREATE EXPANDED BYTES FROM 4 MSB F
; BLOCK TABLE, THEN PRINT
;
93DF A2 00          LDX #000
93E1 A9 00          PCOLR2 LDA #000
93E3 8D 12 93      STA EXBYTE
93E6 3E 1A 93      ROL BLKTAB,X     ; DISCARD MSB

```

```

93E9 A0 03          LDY ##03
93EB BD 1A 93      PCOLR3 LDA BLKTAB,X
93EE 2A           ROL
93EF 2E 12 93     ROL EXBYTE
93F2 3E 1A 93     ROL BLKTAB,X
93F5 2E 12 93     ROL EXBYTE
93F8 88           DEY
93F9 C0 00        CPY ##00
93FB D0 EE        BNE PCOLR3
93FD 3E 1A 93     ROL BLKTAB,X
9400 2E 12 93     ROL EXBYTE
9403 20 9A 94     JSR PXBYTE      ; PRINT BYTE
9406 20 9A 94     JSR PXBYTE      ; TWICE !
9409 E8           INX
940A E0 08        CPX ##08      ; DOWN WITH BLK?
940C D0 D3        BNE PCOLR2
940E AD 0E 93     LDA ROW        ; DONE WITH COL?
9411 CD 0A 93     CMP BROW
9414 F0 06        BEQ PCOLR4
9416 EE 0E 93     INC ROW
9419 4C DC 93     JMP PCOLR1
941C 20 98 95     PCOLR4 JSR CRLF      ; PRINT CR, LF
;
; PRINT FAR LEFT DOTS IN ONE COLUMN
; OF BLOCKS -- 7 COLUMNS OF DOTS
;
941F 20 64 95     PCOLL JSR CHKKEY   ; INTERRUPT ?
9422 AD 0C 93     LDA LMARGE    ; LEFT MARGIN
9425 20 89 95     JSR TAB
9428 20 86 95     JSR PDOTS     ; TELL PRINTER DOTS IN COL
942B AD 18 93     LDA DOTS
942E 20 9F 95     JSR PRCOUT
9431 AD 19 93     LDA DOTS+1
9434 20 9F 95     JSR PRCOUT
9437 AD 09 93     LDA TROW     ; START AT TOP
943A 8D 0E 93     STA ROW
943D 20 C0 94     PCOLL1 JSR CALCBLK  ; CALC ADDRESS
;
; CREATE EXPANDED BYTES FROM 4 LSB F
; BLOCK TABLE, THEN PRINT
;
9440 A2 00        LDX ##00
9442 A9 00        PCOLL2 LDA ##00
9444 8D 12 93     STA EXBYTE
9447 3E 1A 93     ROL BLKTAB,X  ; DISCARD 4 MSB
944A 3E 1A 93     ROL BLKTAB,X
944D 3E 1A 93     ROL BLKTAB,X
9450 3E 1A 93     ROL BLKTAB,X
9453 3E 1A 93     ROL BLKTAB,X  ; GET 4 LSB
9456 2E 12 93     ROL EXBYTE
9459 A0 03        LDY ##03
945B BD 1A 93     PCOLL3 LDA BLKTAB,X
945E 2A           ROL
945F 2E 12 93     ROL EXBYTE
9462 3E 1A 93     ROL BLKTAB,X
9465 2E 12 93     ROL EXBYTE
9468 88           DEY
9469 C0 00        CPY ##00
946B D0 EE        BNE PCOLL3
946D 20 9A 94     JSR PXBYTE    ; PRINT BYTE
9470 20 9A 94     JSR PXBYTE    ; TWICE !
9473 E8           INX
9474 E0 08        CPX ##08      ; DONE WITH BLOCK ?

```

3. Enter the binary code into locations \$9300 through \$95FF. For example, the first 8 bytes would be entered as follows:

9300:4C 22 93 4C AA 93 20 00

See page 44 of the *Apple II Reference Manual* for more detail.

4. Exit the monitor by typing a control-B followed by a return.

5. Save the object file to the disk by typing:

"BSAVE OBJ.DUMP,A\$9300,LS\$2FF"

To use this subroutine as part of a BASIC program it is first necessary to protect all memory locations above \$92FF (37631). In Applesoft this is done by the command **HIMEM: 37631**. Second, the object code must be loaded from the disk. In this case one would type **"BLOAD OBJ.DUMP,A\$9300"**. The subroutine is now ready for use.

The BASIC Program

Listing 2 is the BASIC program which demonstrates the use of the screen dump subroutine. This program provides an easy means of loading, displaying and dumping HiRes graphics.

The program consists of five main parts. Lines 100 through 200 load the object code and initialize the screen dump parameters. Lines 210 through 350 prompt the user for the binary file name. Line 280 will then load the image into HiRes page 1.

The third section of this program, lines 360 through 710, allows the user to select different screen dump parameters. When first run, these parameters are set to the default values shown in Table 1.

Lines 730 through 800 pass the screen dump parameters to the machine language subroutine through the use of POKE statements.

The final section, lines 810 through 850, calls either the normal or expanded size screen dump subroutine. Once the screen dump is complete or terminated by pressing the escape key, control is once again returned to the Applesoft program.

Concluding Remarks

I have used this subroutine since August 1981, and have found it to work quickly and flawlessly. I am presently working on linking this machine language subroutine into an Apple Pascal library unit. This will improve upon the program published in *Micro*, February 1983.

```

9476 D0 CA      BNE PCOLL2
947B AD 0E 93   LDA ROW      ; DONE WITH COL?
947B CD 0A 93   CMP BROW
947E F0 06      BEQ PCOLL4
9480 EE 0E 93   INC ROW
9483 4C 3D 94   JMP PCOLL1
9486 20 98 95   PCOLL4 JSR CRLF   ; PRINT CR, LF
;
; CALCULATE NEXT COLUMN
;
9489 AD 0F 93   LDA COL      ; DONE?
948C CD 07 93   CMP LCOL
948F F0 06      BEQ DONEE
9491 CE 0F 93   DEC COL
9494 4C A3 93   JMP PCOLR
9497 4C 75 95   DONEE  JMP RESETPR ; RESET PRINTER
;
;*****
; * PRINT BYTE
;*****
949A AD 12 93   FXBYTE  LDA EXBYTE
949D 4D 0D 93   EOR IMAGE
94A0 4C 9F 95   JMP PRCOUT
;
;*****
; * ROTBLK - ROTATE BLK TABLE SO THA *
; * BITS ARE NOT ALIGNED FOR PRINT- *
; * ING TOP OF IMAGE AT TOP OF PAPER *
;*****
94A3 A0 07     ROTBLK  LDY #07   ; 7 BITS
94A5 A2 07     ROTBLK1 LDX #07   ; 8 BYTES
;
; MAKE BYTE FROM LSB BITS IN BLKTAB
;
94A7 5E 1A 93  MAKEBYT  LSR BLKTAB,X
94AA 6A        ROR
94AB CA        DEX
94AC E0 FF     CPX #FF
94AE D0 F7     BNE MAKEBYT
94B0 48        PHA      ; PUSH BYTE ON STACK
94B1 88        DEY
94B2 D0 F1     BNE ROTBLK1
;
; MAKE NEW BLKTAB FROM 7 BYTES
; STORED ON STACK
;
94B4 A2 06     GETBLK  LDX #06   ; 7 BYTES
94B6 68        GETBYTE PLA      ; POP BYTE OFF STACK
94B7 9D 1A 93  STA BLKTAB,X
94BA CA        DEX
94BB E0 FF     CPX #FF
94BD D0 F7     BNE GETBYTE
94BF 60        RTS
;
;*****
; * CALCULATE BLKPT (BLOCK POINTER)- *
; * BLKPT IS THE ADDRESS OF THE TOP *
; * BYTE IN THE BLOCK DEFINED BY ROW *
; * AND COL.
;*****

```

```

94C0 A9 00     CALCBLK LDA #000   ; BLKPT = SCRNPB
94C2 85 FC     STA BLKPT
94C4 AD 06 93   LDA SCRNPB
94C7 85 FD     STA BLKPT+1
;
; A= M0,M1,M3 OF ROW
;
94C9 A9 00     LDA #000   ; BLKPT =
94CB 8D 14 93   STA MULT1   ; BLKPT+A:#00
94CE AD 0E 93   LDA ROW
;
; MASK OFF A
;
94D1 29 07     AND #07    ; MASK = 0000111
94D3 8D 15 93   STA MULT2
94D6 20 44 95   JSR MULTPLY
94D9 18        CLC
94DA A5 FC     LDA BLKPT
94DC 6D 16 93   ADC PROD
94DF 85 FC     STA BLKPT
94E1 A5 FD     LDA BLKPT+1
94E3 6D 17 93   ADC PROD+1
94E6 85 FD     STA BLKPT+1
;
; B= M4,M5 OF ROW
;
94E8 A9 28     LDA #28    ; BLKPT=
94EA 8D 14 93   STA MULT1   ; BLKPT+B*28
94ED AD 0E 93   LDA ROW
;
; MASK OFF B THEN SHIFT TO LSB POSIION
;
94F0 29 18     AND #18    ; MASK = 00011000
94F2 4A        LSR
94F3 4A        LSR
94F4 4A        LSR
94F5 8D 15 93   STA MULT2
94F8 20 44 95   JSR MULTPLY
94FB 18        CLC
94FC A5 FC     LDA BLKPT
94FE 6D 16 93   ADC PROD
9501 85 FC     STA BLKPT
9503 A5 FD     LDA BLKPT+1
9505 6D 17 93   ADC PROD+1
9508 85 FD     STA BLKPT+1
950A 18        CLC      ; BLKPT=
950B A5 FC     LDA BLKPT   ; BLKPT+COL
950D 6D 0F 93   ADC COL
9510 85 FC     STA BLKPT
9512 A5 FD     LDA BLKPT+1
9514 69 00     ADC #000
9516 85 FD     STA BLKPT+1
;
;*****
; * STORE 8 BYTES OF BLOCK (BLKPT) I *
; * BLOCK TABLE (BLKTAB). TOP BYTE *
; * IS STORED IN BLKTAB,0
;*****
;
9518 A5 FC     STOBLK  LDA BLKPT   ; INITIALIZE
951A 85 FE     STA TBLKPT ; TBLKPT WITH
951C A5 FD     LDA BLKPT+1 ; BLKPT
951E 85 FF     STA TBLKPT+1

```

```

9520 A9 00      LDA #000      ; START AT TOP
9522 8D 10 93   STA BLKROW   ; OF BLOCK
9525 A2 00      STOBYTE LDX #000      ; SAVE BYTE IN
9527 A1 FE      LDA (BLKPT,X) ; TEMP LOC
9529 48        PHA
952A AD 10 93   LDA BLKROW   ; SAVE TEMP
952D AA        TAX          ; IN BLKTAB
952E 68        PLA
952F 9D 1A 93   STA BLKTAB,X
9532 18        CLC          ; TBLKPT=
9533 A5 FF      LDA TBLKPT+1 ; TBLKPT+400
9535 69 04      ADC #04
9537 85 FF      STA TBLKPT+1
9539 EE 10 93   INC BLKROW   ; COUNT BYTES
953C AD 10 93   LDA BLKROW   ; B BYTES
953F C9 08      CMP #08      ; TRANSFERRED ?
9541 D0 E2      BNE STOBYTE
9543 60        RTS

;
;*****
; B * B BIT MULTIPLICATION *
; PROD = MULTI * MULT2 *
;*****
;
9544 A2 00      MULTPLY LDX #08      ; MULT 8 BITS
9546 A9 00      LDA #000      ; CLEAR MSB PROD
9548 8D 17 93   STA PROD+1
954B 0A        SHIFTL ASL
954C 2E 17 93   ROL PROD+1
954F 0E 14 93   ASL MULT1
9552 90 09      BCC CHECKCT  ; CHECK BIT
9554 18        CLC          ; ADD TO PROD
9555 6D 15 93   ADC MULT2
9558 90 03      BCC CHECKCT
955A EE 17 93   INC PROD+1
955D CA        CHECKCT DEX
955E D0 EB      BNE SHIFTL  ; DONE ?
9560 8D 16 93   STA PROD
9563 60        RTS

;
;*****
; CHECK TO SEE IF ESC KEY HAS BEEN *
; PRESSED. RETURN TO CALLING PROG. *
; IF ESC HAS BEEN PRESSED, ELSE *
; CONTINUE. *
;*****
;
9564 AD 00 C0   CHKKEY LDA KEYDATA ; LOOK AT KEYBRD
9567 8D 10 C0   STA KEYSTRB ; CLEAR STROBE
956A C9 80      CMP #80     ; KEYPRESS ?
956C 90 06      BCC CONT
956E C9 9B      CMP #ESC   ; ESC KEY ?
9570 D0 02      BNE CONT
9572 68        STOP   PLA          ; PULL OFF
9573 68        PLA          ; RETURN ADDRESS
9574 60        CONT   RTS

;
;*****
; RESET PRINTER TO ORIGINAL LINE *
; SPACING, 12 DOTS *
;*****
;
9575 A9 0C      RESETPR LDA #12

```

```

;*****
; SET LINE SPACING TO NUMBER OF DOTS *
; PASSED IN ACCUMULATOR *
;*****
9577
9577 48        LINESPC PHA
9578 20 98 95   JSR CRLF    ; PRINT CR, LF
957B A9 1B      LDA #1B    ; ESC
957D 20 9F 95   JSR PRCOUT
9580 A9 41      LDA #41    ; 'A'
9582 20 9F 95   JSR PRCOUT
9585 68        PLA          ; # DOTS
9586 4C 9F 95   JMP PRCOUT

;
;*****
; SEND NUMBER OF SPACES, PASSED *
; IN ACCUMULATOR TO PRINTER *
;*****
;
9589 A8        TAB      TAY
958A C0 00      SPACE   CPY #00
958C F0 09      BEQ RETTAB ; RETURN
958E A9 20      LDA #20   ; SPACE
9590 20 9F 95   JSR PRCOUT
9593 88        DEY
9594 4C BA 95   JMP SPACE
9597 60        RETTAB  RTS

;
;*****
; OUTPUT A CARRIAGE RETURN AND A *
; LINE FEED TO PRINTER *
;*****
;
9598 A9 0D      CRLF    LDA #0D    ; ASCII CR
959A 20 9F 95   JSR PRCOUT
959D A9 0A      LDA #0A   ; ASCII LF

;
;*****
; SEND CHARACTER, PASSED IN ACCUM. *
; TO THE PRINTER. SLOT = 1 *
;*****
;
959F 8D 90 C0   PRCOUT STA PROUT   ; SEND CHAR
95A2 A9 00      LDA #00    ; DELAY
95A4 8D 13 93   STA TIME
95A7 CE 13 93   DELAY  DEC TIME
95AA D0 FB      BNE DELAY
95AC AD C1 C1   WAIT    LDA PRWAIT ; WAIT UNTIL
95AF 29 80      AND #80    ; PRINTER READY
95B1 C9 00      CMP #00    ; FOR NEXT CHAR
95B3 D0 F7      BNE WAIT
95B5 60        RTS

;
;*****
; SEND PRINTER ESC X TO SET UP TO *
; ACCEPT NUMBER OF DOTS INFO. *
;*****
;
95B6 A9 1B      PDOTS   LDA #1B    ; ASCII ESC
95B8 20 9F 95   JSR PRCOUT
95BB A9 4B      LDA #4B    ; ASCII K
95BD 4C 9F 95   JMP PRCOUT

;
95C0        END

```

A Timely Interrupt

by Mike Hamilton

A most accurate timer for Standard Color BASIC, Extended Color BASIC, or ML programs can be made with just a few POKEs

The Color Computer probably has one of the most accurate and simple interrupt timers available on any microcomputer. All that is required to use it is understanding of a few points about the Color Computer hardware and software.

The Video Display Generator (VDG) displays an entire screen 60 times per second. After each screen display, the VDG toggles its horizontal synchronization line which is tied to the interrupt input of a Peripheral Interface Adapter (PIA). When bit zero of the control register of this PIA is set, the interrupt is enabled and is passed on to the Interrupt ReQuest (IRQ) pin of the 6809 MicroProcessor Unit (MPU). When the MPU receives this interrupt, it fetches the address of the IRQ routine from memory locations \$FFF8 (65528) [high address byte] and \$FFF9 (65529) [low address byte]. This ROM address is permanently set to point to RAM location \$010C (268) which is a three byte JMP program that we can easily alter to fit our needs.

The idea behind using IRQ as a timer is simple: every interrupt from the VDG, add one to a 16-bit register, reset bit seven of the PIA control register to enable the next interrupt, and return to processing. Extended Color BASIC does something similar with its TIMER command. You can check by comparing the TIMER value with the 16-bit register at \$0112 (274) and \$0113 (275) with this program:

```
10 PRINT PEEK(274)*256+PEEK(275);  
    TIMER:GOTO 10
```

Doing the same in Standard Color BASIC requires a bit more programming. Listing 1 is the short BASIC program. Line 10 reserves memory space for a short IRQ processing machine language routine that is POKEd into memory. The assembly listing for this interrupt processor is shown in Listing 2. Note that the Data Direction Register of the PIA at \$FF03 (65283) must be read to reset the IRQ interrupt. This is done by the LDA \$FF03. Line 20 changes the JMP instruction at \$010C (268) to point to the new IRQ routine. Line 30 POKEs the ML routine into memory. Line 40 enables the IRQ interrupt. Line 50 is the DATA for the ML routine. Line 60 shows the timer operating.

Now, even if you erase the BASIC program, the timer will continue to

operate. Resetting the computer will reset the interrupt enable bit to its normal value and the timer will stop. Another way of stopping either the 'homemade' timer or Extended BASIC's TIMER is to:

```
POKE(65283),PEEK(65283) AND 254
```

which will disable the IRQ interrupt. A timer is one of the simplest uses of the interrupt, but other tasks that require constant updating, such as printing a message in the corner of the screen, are also easily implemented. Proceed with caution though, because the more elaborate and time consuming the task, the slower the main program will function, especially in BASIC.

Listing 1 BASIC Timer


```
10 CLEAR 255,16367 REM RESERVE ML SPACE  
20 POKE 269,63:POKE 270,240 REM IRQ JMP VALUE  
30 FOR I=1 TO 12:READ A:POKE 16367+I:NEXT I REM POKE ML  
40 POKE 65283,PEEK(65283) OR 1 REM ENABLE INTERRUPT  
50 DATA 190,63,253,48,1,191,63,253,182,255,2,59  
60 PRINT PEEK(16381)*256+PEEK(16382):GOTO 60
```

Listing 2 IRQ Handler

```
TIME EQU $3FFD ; 16381  
DRG $3FF0  
  
3FF0 BE 3FFD START LDX TIME  
3FF3 30 01 LEAX 1,X ; ADD 1 TO TIME  
3FF5 BF 3FFD BTX TIME  
3FFB B6 FF02 LDA $FF02 ; READ DDR TO RESET  
3FFB 3B RTI ; RETURN
```


— Disk Abuse — A True Story

by Mark S. Morano

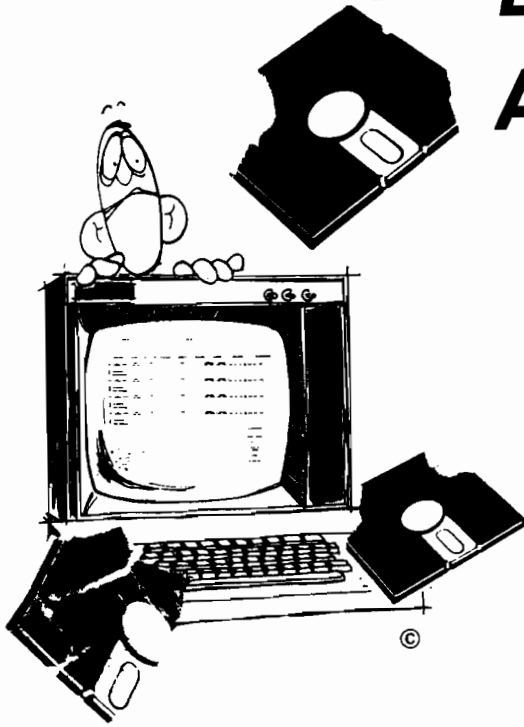

The sad confessions of a disk junkie. Beware lest you, too, fall upon this sad fate.

It is always uncomfortable broaching a subject such as this. People would rather not know, would like to believe it's just a story, a rumor, a bad dream. But we both know the truth - its a nightmare.

I should know - I've been there. I remember how it first started. You know that first time always sticks with you. It had been a long tense day at the office. We had this package to get out before a competitor, so we were working pretty hard. The pressure had been mounting and there were more bugs than mosquitos in a swamp. You know how it is - seems like they're breeding in an invisible subroutine somewhere. About 3 a.m. I was alone, huddled over my terminal when Error 13 - disk error, popped up on the screen. It always seems to creep out at the worst time. But now it had made its last interrupt. I was mad, raging like a bull. I slammed my fist on the desk, punched the disk drive open and ripped that diskette into a thousand pieces.

There I sat, tracks and sectors everywhere. Then this strange sense of relief, a calming came over me. The kind of feeling you didn't want to let go of ... but, inexorably, it faded and was gone. I came to my senses and cleaned up the mess before I was discovered by the security guard, or worse yet - the night janitor. Still shaken, I powered down and called it a night.

At first I thought it was a one time thing; I wrote it off to nerves, a bad day, too much pressure. But then, it happened again. Another late night alone with my terminal. Feeling tired and tense, thinking about a drink, but knowing what I really wanted -- that release. And there was only one way I knew how to get it. Suddenly it was upon me. I found myself jumping up and down on a poor defenseless diskette. Trampling it to bits, I couldn't stop myself. After it was over, surrounded with cardboard and tape, that euphoric peace came over me. I was caught in an infinite loop.

No one knew for a while. A few suspected in Purchasing when the requests for diskettes started growing. A box or two soon deteriorated into cartons and cases. Being a group leader I put the blame on my subordinates, but I knew discovery was inevitable.

Then one day George came in to get a diskette I had borrowed. You can imagine the horror when he found it covered with teeth marks. I said it fell on the floor and I accidentally rolled over it with my chair. It was run over by a motorcycle, it ... he wasn't buying it. I confessed the truth was my dog got a hold of it. That was my slipup; George knew I didn't have a dog. He just shook his head and walked away.

My excuses wore thin - faulty drive, bad lot - people stopped believing. I found myself selling my peripherals to support what was now a \$500 a week habit - diskettes don't come cheap these days.

Well, now I'm out a job, my wife and kids have left me and I sit around thinking up mail order scams -- you know, offering great games on diskette for five dollars if you send a diskette. They never see either again. And so it goes, on and on. Someday I'll be able to pass the local computer store without getting the shakes. But right now I can't; I just lie awake at night thinking of Winchester's. Its a hard way to go.

CoCo Bits



by John Steiner

As promised last month, we are going to take a closer look at **BASIC09**, and its advantages for the CoCo user. First, there is an omission in the documentation about loading BASIC09 that has caused a few problems for Tandy, and I am sure has frustrated some users. In the documentation, the only instruction to enable the user to access BASIC09 is to type 'basic09' ENTER. The user is then confronted with an ERROR 216 (file not found). Putting the BASIC09 disk in drive 1 and entering /d1/basic09 causes OS-9 to display ERROR 214 (file not accessible).

After some frustrating attempts at circumventing the problem, I finally resorted to calling my salesman at the Radio Shack store. As it turned out, I had called at just the right time, as his morning mail that day contained the solution to the problem in the form of a technical note from Tandy. In case you run into the problem with your OS-9, here is the simple solution. Either use the COPY command to copy BASIC09 into the command directory, so it will be accessible from command level, the way Tandy uses it in the BASIC09 manual, or use the LOAD command to load BASIC09 into OS-9's workspace:

```
COPY      /D1/basic09
/D0/cmd/basic09
LOAD /D1/basic09
```

Either choice works, but using COPY to put BASIC09 into the cmd directory is the most convenient for future use. Create an OS-9 diskette with basic-09 in the cmd directory, and you will have it available as needed.

One of the questions I am most often asked is what will BASIC09 do that I can't do from Extended Color BASIC. Programming in the highly structured BASIC09 is quite a bit different from working with Color BASIC. BASIC09 is a much more powerful language and, if you learn it well, you will be able to create faster, more powerful operating programs.

Currently, it is the closest thing to a full-fledged compiler CoCo users have access to, in that the packed modules are really compacted BASIC code executed from a run time package.

Programs written in BASIC09 are written in modules. Use the Edit mode to enter your program. Type E procedurename to open the edit file for your procedure. At this point, the first character of the line is expected to be an edit command. To insert a line in your procedure just type a space, the program line and the ENTER key. All program lines must begin with a space.

The other edit commands are + (go to next line), - (move back one line), L (list current line) and D (delete current line). One unique advantage of BASIC09 over Color BASIC is that error checking is done at the time each line is entered. Syntax errors, and similar line entry errors are trapped before you leave the line. In addition, an error check is done before leaving the procedure to check for undefined gotos, gosubs, etc. Also, if there is not enough memory for your procedure and any arrays, you will be warned at that point.

After typing a space, your program line can begin with a number if you want. If you plan to use GOTO or GOSUB to call the line you are typing, it will have to have a line number. Once you type a few lines you can list the procedure by typing L*. Your program will be listed with the hexadecimal I-code address next to each line. The I-code address is used to refer to individual program lines when an error occurs, or for other reasons.

BASIC09 has four modes. We have been working with the edit mode. The system mode is used to save, load, pack, rename and otherwise manipulate procedures from workspace to disk, or vice versa. The execution mode is entered whenever it is time to run your procedures. There is also an autorun feature that allows you to load and run programs from OS-9. If an error

occurs, BASIC09 automatically enters the debug mode unless ON ERROR GOTO has been implemented.

Debug is one of the most powerful programming aids I have seen. It is even possible to execute the procedure one line of source code at a time. You can even display the source code on the screen while it is executing. Debug mode is very powerful, and has much more ability to assist with errors in programming than Extended Color BASIC.

BASIC09 will be a useful package for you, if you can justify the \$170.00 or so that the language will add to the cost of your system. I hope to have some practical BASIC09 programs for you in the future. If you have hints or techniques regarding either BASIC09 or OS-9, send them in; we will pass them along.

New Tandy Drives for COCO

The TEC drive which Tandy has sold with the CoCo seems to have been replaced with a new unit. Not many people I have talked with have been overly impressed with the performance level of the TEC drive, so this is good news. Tandy is now supplying the same drive unit that is found in the Model III and 4. A redesigned controller to work with the CoCo 2 has also been released, which doesn't require the 12 volt line that the CoCo 2 doesn't have at the cartridge port.

The new package should be a reliable addition to the CoCo line. The redesigned controller uses phase lock loop technology for data separation, which will also improve performance and stability. The only minus is Tandy's insistence on saving pennies by not gold plating the contacts on either the drive or controller cards. By the way, if you have a multi-pack interface, you can use the old drive controller with the CoCo 2. Also, Tandy still configures the cables, so if you are mixing drives be aware of the configuration situation.

Two Disk Utilities

I have received two utilities for review that are useful for the person who has to duplicate large quantities of software for production purposes. I am impressed with both of them.

Disk Manager by Elite Software contains two programs that allow copying to tape or disk. Load either DTCOPY (tape) or DDCOPY (disk), and RUN. Insert the source disk in drive zero and press ENTER. The drive will read the directory and list the title of each entry by a number. Load the destination disk or tape, and enter the number of the program(s) desired. (e.g.

1,5,6, 12,14). The copy utility will copy only those files on the destination disk or tape. Entering ALL will cause the entire disk to be backed up. The disk version will make multiple copies with only one entry, and will offer Copy, and Abort options if a file is already on the destination disk. Other options include single drive operation, and rearranging the order of files on the destination diskette. The disk version requires installation of a formatted diskette.

FASTDUPE by Spectrum Projects allows duplication and formatting of an entire diskette. The only requirement is that the size of programs on the

diskette must be small enough for all of them to fit in the 64K CoCo. FASTDUPE will first read the source disk and ask you to remove it. Install unformatted diskettes in drives 0 through 4 and press ENTER. FASTDUPE will then format and copy all four drives in succession, and let you install four more to do it again. If you don't have four drives, it will work with three, two, or even a single drive. Any bad copies are flagged, and the process continues. If you are just reproducing diskettes with a few small programs FASTDUPE will save you a lot of time.

MICRO



P.O. Box 4364
Flint, Michigan 48504
(313) 233-5731

ALL NEW

**ZANIM
SYSTEMS**

WE CARRY MANY VIC AND APPLE PRODUCTS. PLEASE SEND FOR A CATALOGUE.

APPLE DUAL DISK CONTROLLER BOARD \$29.00

RS232 SERIAL INTERFACE BOARD \$29.00

PARALLEL PRINTER INTERFACE \$29.00
*CENTRONICS TYPE COMPATIBLE BOARD

EPROM PROGRAMMER BOARD \$29.00
(2708, 2716, 2732, 2764)

ALL BOARDS HAVE SOLDER MASKING, COMPONENT LAYOUT, AND GOLD EDGE FINGERS

BUILD YOUR OWN APPLE PERIPHERAL CARDS AND SAVE UP TO 80%

WE WILL SUPPLY THE IC LIST FOR ANY BOARD

APPLE 11 IS TRADEMARK OF APPLE COMPUTERS, INC.
CP/M IS REGISTERED TRADEMARK OF DIGITAL RESEARCH, INC.
VIDEX IS REGISTERED TRADEMARK OF VIDEX INC.

by Ralph Tenny

As promised in the last issue, we're going to look at programming the 6526 CIA (Complex Interface Adapter) I/O chips in the Commodore 64. This is a very complex IC which has a high capability and a correspondingly complex programming sequence to use all the CIA features. Here's a list of the I/O assignments for the two 6526s in the C-64:

U1 - Base Address \$DC00

PA0 -
PA7: Keyboard Column Strobes
Joystick B
Paddle Multiplex
PB0 -
PB7: Keyboard Row Input
Joystick A
Fire Button/Light Pen
SR: Shift Register #
User Port
CNT: Count Input
User Port
PC: Output Handshake Line
Not used
FLAG: Input Handshake/Interrupt
Input
Serial Bus
Timers
(2): System use
Time of Day Clock: Available for User

U2 - Base Address \$DD00

PA0 -
PA1: Memory Address Mapping
PA2 -
PA3: User Port
PA4 -
PA7: Serial Bus Control and
Data
SR: Shift Register #2 I/O
User Port
CNT: Count Input
User Port
PC: Output Handshake
User Port
FLAG: Input Handshake/Interrupt
User Port
Timers
(2): Available for User
Time of Day Clock: Available for User.

When you add it all up that is 16 User I/O lines. There are also two 9 Volt AC lines 5 VDC and four ground [power supply common] lines. Of these 16 I/O lines only PB0 - PB7 on U2 program in a completely straightforward manner. If you have the HESMON 64 machine language monitor cartridge or one of the several monitors available on disk (MINIMON, SUPERMON or others not from Commodore) you can follow this discussion more easily.

The B port is addressed at \$DD01 and the B Data Direction Register (DDR) is at \$DD03. The lines are set for output on a line-by-line basis. For example set Bit 0 of the DDR to logic 0 to make Bit 0 an input; otherwise set it to logic 1 for output. Once the direction assignments are made simply write 0 or 1 to output lines as needed or read input lines.

Turn on your C-64 and enter the monitor (with HESMON 64 plug in the cartridge and turn on power). Assign PB0-PB3 as input and PB4-PB7 as output by writing \$F0 to \$DD03. Now write 00 to \$DD01 and try to read it back. What do you read? If there are no external connections made to the User Port you will read back \$0F. The following lines illustrate that sequence as performed with HESMON 64. (User input appears in italics and the HESMON response in normal characters.) In HESMON memory modification is performed by positioning the cursor on a displayed memory value then entering the new value. In the display below this is shown by having the new entry

immediately below the byte to be changed:

```

MDD00(ret)
:DD00 97 FF 3F FF FF FF FF
      F0(ret)
MDD00(ret)
:DD00 97 FF 3F F0 FF FF FF FF
      00(ret)
MDD00(ret)
:DD00 97 0F 3F F0 FF FF FF FF

```

Although it is possible to accomplish the above experiment in BASIC the nature of PEEKs and POKEs will obscure the experiment's outcome. Programming the User Port lines PB0-

PB7 in BASIC is possible but the rest of the lines are much more difficult to program in BASIC.

Listing 1 demonstrates the fundamentals of programming PA2 and PA3 of U2 and Listing 2 does the same for using the SP line in an assembly language program. Listing 1 assumes that Port A data direction assignments made during the C-64 power-up sequence have not been changed from \$3F in \$DD02. In fact careless modifications to location \$DD02 can crash the computer as can any uninformed data manipulations involving U1.


The required sequence for controlling PA2 or PA3 of U2 is to set bits high with a logical OR and to set bits low with a logical AND operation. If you merely wish to change the logic level (toggle) the bit use an EXCLUSIVE OR with the same bit mask as the OR operation. Listing 1 lines 8 & 9 gives the OR bit mask which will set either PA2 or PA3 high. The proper instruction sequence to insure that PA2 is high is:

```

LDA #$04 ;BIT MASK FOR
ORA $DD00 ; BIT 2 = HIGH
STA $DD00

```

Figure 1

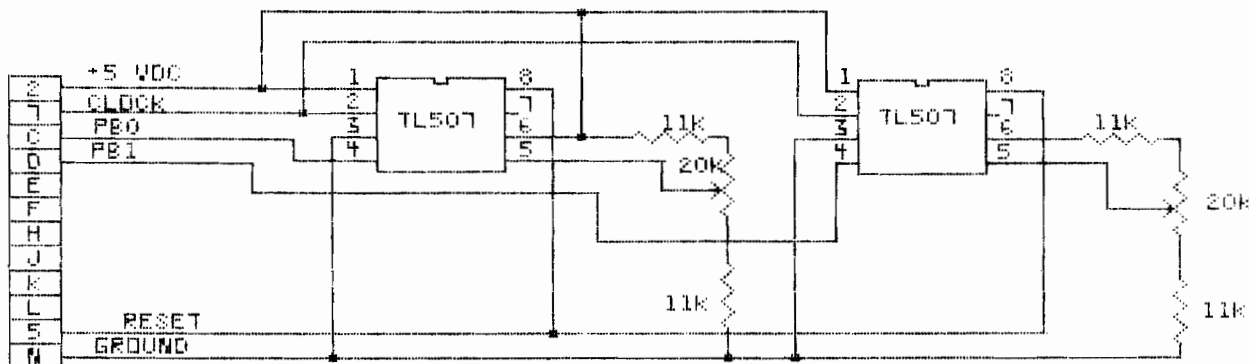

Listing 1

```

; THIS PROGRAM DEMONSTRATES THE
; ONLY SAFE WAY TO CHANGE PA2
; AND PA3 OF CA1 U2. USE THESE
; LINE AS OUTPUTS ONLY. IT IS
; ASSUMED THAT PORT A DATA
; DIRECTIONS ASSIGNMENTS REMAIN
; AS INITIALIZED BY BASIC.
;
; EQUATES
DD00      APORT EQU $DD00 ; PORT LOCATIONS
DD01      BPORT EQU $DD01
DD02      ADDR  EQU $DD02

```

```

DD03      BDDR      EQU $DD03
DD0E      THRACR    EQU $DD0E
DD0F      THRBCR    EQU $DD0F
;
; CONSTANTS
0004      A2T0G     EQU $04      ; BIT MASKS
0008      A3T0G     EQU $08
0040      SPT0G     EQU $40
;
; BUFFERS
007C      SAV1      EQU $7C
007E      REPCNT    EQU $7E
;
C000      ORG $C000
C000 A9 FF      LDA #$FF      ; SET # OF REPEATS
C002 85 7E      STA REPCNT
C004 A9 04      IN          LDA #A2T0G ; INVERT PA2
C006 4D 00 DD    EOR APORT
C009 8D 00 DD    STA APORT
C00C A9 04      LDA #A2T0G ; INVERT PA2 AGAIN
C00E 4D 00 DD    EOR APORT
C011 8D 00 DD    STA APORT
C014 20 1C C0   JSR DELAY
C017 C6 7E      DEC REPCNT ; COUNT DOWN
C019 D0 E9      BNE IN
C01B 00         BRK          ; RETURN TO HESMON
;
C01C 48         DELAY      PHA          ; SAVE REGISTERS
C01D 98         TYA
C01E 48         PHA
C01F 8A         TXA
C020 48         PHA
C021 A9 FF      LDA #$FF      ; FULL COUNT
C023 8A         TXA
C024 4A         LSR A          ; HALF COUNT
C025 98         TYA
C026 CA         SPIN        DEX          ; DELAY ROUTINE
C027 D0 FD      BNE SPIN
C029 88         DEY
C02A D0 FA      BNE SPIN
C02C 68         PLA          ; RETRIEVE REGISTERS
C02D AA         TAX
C02E 68         PLA
C02F A8         TAY
C030 68         PLA
C031 60         RTS
C032           END

```

Listing 2

```

; THIS PROGRAM DEMONSTRATES
; HOW TO TOGGLE THE SP LINES.
; BIT 6 OF THE CONTROL REGISTER
; PROGRAMS THE SHIFT REGISTER
; DATA DIRECTIONS (0 = IN; 1 =
; OUT). THE OUTPUT PIN GOES
; TO LOGIC ONE WHEN SET FOR
; INPUT (LOGIC ZERO FOR OUTPUT).
;
; EQUATES
DD00      APORT     EQU $DD00      ; PORT LOCATIONS

```

```

DD01      BPORT     EQU $DD01
DD02      ADDR      EQU $DD02
DD03      BDDR      EQU $DD03
DD0E      THRACR    EQU $DD0E
DD0F      THRBCR    EQU $DD0F
;
; CONSTANTS
0004      A2T0G     EQU $04      ; BIT MASKS
0008      A3T0G     EQU $08
0040      SPT0G     EQU $40
;
; BUFFERS
007C      SAV1      EQU $7C
007E      REPCNT    EQU $7E
;
C000      ORG $C000
C000 A9 FF      LDA #$FF      ; SET # OF REPEATS
C002 85 7E      STA REPCNT
C004 A9 40      IN          LDA #SPT0G ; TOGGLE SP
C006 4D 0E DD    EOR THRACR
C009 8D 0E DD    STA THRACR
C00C A9 40      LDA #SPT0G ; TOGGLE SP AGAIN
C00E 4D 0E DD    EOR THRACR
C011 8D 0E DD    STA THRACR
C014 20 1C C0   JSR DELAY
C017 C6 7E      DEC REPCNT ; COUNT DOWN
C019 D0 E9      BNE IN
C01B 00         BRK          ; RETURN TO HESMON
;
C01C 48         DELAY      PHA          ; SAVE REGISTERS
C01D 98         TYA
C01E 48         PHA
C01F 8A         TXA
C020 48         PHA
C021 A9 FF      LDA #$FF      ; FULL COUNT
C023 8A         TXA
C024 4A         LSR A          ; HALF COUNT
C025 98         TYA
C026 CA         SPIN        DEX          ; DELAY ROUTINE
C027 D0 FD      BNE SPIN
C029 88         DEY
C02A D0 FA      BNE SPIN
C02C 68         PLA          ; RETRIEVE REGISTERS
C02D AA         TAX
C02E 68         PLA
C02F A8         TAY
C030 68         PLA
C031 60         RTS
C032           END

```

Listing 3

```

; THIS PROGRAM DEMONSTRATES HOW TO
; USE TL-507 A/D CONVERTERS. IT
; IS ASSUMED THAT EACH TL-507 IS
; POWERING A POT AND READING THE
; POT WIPER. THE POT POSITION IS
; EXPRESSED AS A NUMBER BETWEEN
; $00 AND $7F. PROVISION IS MADE
; FOR CONTROLLING 8 TL-507 PARTS.

```

```

; WITH THE RESULTING CONVERSIONS
; DISPLAYED IN A LINE ACROSS THE
; LOWER PART OF THE C-64 SCREEN.
;
; EQUATES
DD00      APORT   EQU $DD00  ; PORT LOCATIONS
DD01      BPORT   EQU $DD01
DD02      ADDR    EQU $DD02
DD03      BDDR    EQU $DD03
DC0E      SP1SET  EQU $DC0E
DD0E      SP2SET  EQU $DD0E

;
; CONSTANTS
0002      LIMIT   EQU 2      ; NUMBER OF A/DS TESTED
0040      SPINIT  EQU $40
0040      SPTOG   EQU $40

;
; BUFFERS
007C      SAVY    EQU $7C
007D      MASK    EQU $7D
007E      YINDEX  EQU $7E
007F      XINDEX  EQU $7F
0080      BUFFER  EQU $80    ; COUNT BUFFER AREA
0770      WINDOW  EQU $0770  ; FIRST DISPLAY LOCATION
DB70      WINCLR  EQU $DB70  ; COLOR RAM

;
C000      ORG $C000

;
; INIT PORTS AND PROGRAM
C000 A9 00  INIT   LDA #00    ; BPORT = INPUT
C002 8D 03 DD      STA BDDR
C005 8D 01 DD      STA BPORT
C008 A9 40        LDA #SPINIT ; SET SP LINES LOW
C00A 0D 0E DC      ORA SP1SET
C00D 8D 0E DC      STA SP1SET
C010 A9 40        LDA #SPINIT
C012 0D 0E DD      ORA SP2SET
C015 8D 0E DD      STA SP2SET

;
; CLEAR COUNT BUFFERS
C018 A9 00        LDA #00
C01A A2 07        LDX #07    ; INIT INDEX
C01C 95 80        WIPE1 STA BUFFER,X
C01E CA           DEX
C01F 10 FB        BPL WIPE1

;
; RESET A/DS
C021 A9 40        NEW     LDA #SPTOG ; RESET LINE HIGH
C023 4D 0E DC      EOR SP1SET
C026 8D 0E DC      STA SP1SET
C029 A9 40        LDA #SPTOG ; THEN LOW AGAIN
C02B 4D 0E DC      EOR SP1SET
C02E 8D 0E DC      STA SP1SET
C031 AD 01 DD      LDA BPORT ; GET INITIAL MASK
C034 85 7D        STA MASK
C036 A0 00        LDY #00    ; CLEAR COUNTER
C038 84 7C        STY SAVY

;
; CLOCK A/D
C03A A9 40        CLOCK   LDA #SPTOG ; CLOCK LINE HIGH
C03C 4D 0E DD      EOR SP2SET
C03F 8D 0E DD      STA SP2SET
C042 A9 40        LDA #SPTOG ; AND THEN LOW
C044 4D 0E DD      EOR SP2SET

```

This sequence modifies only PA2 leaving all other bits of Port A alone. To insure that PA2 is low use:

```

LDA #$FB ; ONLY BIT 2 IS LOW
AND $DD00
STA $DD00

```

Study the sequence of operations in Listing 1. This program toggles PA2 255 times with a delay between each operation. This allows you to monitor the action with a logic probe to verify the activity. Note in the DELAY subroutine that lines 26-30 save the A Y and X registers during the delay countdown and lines 39-43 restore the registers after the delay. This was not necessary for this program's operation but is good programming practice if you develop any routine which can be used as a mini-utility in all your programs.

Listing 2 is quite similar once you understand how to manipulate the SP line. This line is used to input or output 8 bits of synchronous serial data using the shift register internal to the 6526 CIA devices. If the Shift Register is set for input (Bit 6 of the CIA Control Register A 0) the SP line goes high. Conversely programming the Shift Register for output (Bit 6 1) toggles SP low. Listing 2 toggles SP high then low 255 times with a delay between toggle operations. Note that exactly the same programming techniques can be used for SP1 (pin 5 of the User Port) by addressing \$DC0E instead of \$DD0E.

Both Listing 1 and Listing 2 were generated using the Commodore Assembler Development package (disk based) with intention of using HESMON 64 as a debugger. The BRK instruction (line 38) causes our program to stop by returning to HESMON. These examples will get you started on I/O programming on the C-64. We have not yet dealt with serial I/O using the Shift Register but we may get to that next time. Note also that PC and FLAG are not programmable directly. PC strobes low and back high automatically whenever Port B is written to or read from, furnishing an automatic handshake signal.

Whenever FLAG is pulled low bit 4 of the Control Register (\$DC0D on U1 and \$DD0D on U2) is set high. If the FLAG interrupt has been enabled an interrupt will be enabled. Otherwise you can poll this bit using:

```

LDA $DD0D ; GET INTERRUPT STATUS
AND #$10 ; TEST BIT 4
BEQ NOTHI ; BRANCH TAKEN IF NO BIT

```

Your own code to process the bit received condition should follow directly.

Last month's experiment was a home-built single-slope A/D converter capable of operating from just two I/O lines. The TL507CP is a very low cost flexible A/D converter with 7 bits resolution (one part in 128) which is excellent to read pot or joystick position or two-wire sensors such as thermistors. Figure 1 shows a test circuit with two TL507s driven from the C-64 User Port. Up to eight TL507s can be controlled with this circuit and the results are displayed in a line across the lower one-fourth of the CRT. If fewer than eight A/Ds are connected all eight buffer locations will display but only those with data will change.

The TL507 is a single-slope A/D converter which contains a resistive ladder and a digital counter to generate the ramp. The ramp begins (count 0) at .75 Vcc and runs to maximum (count \$7f) which occurs at 1.25 Vcc. Although this is inconvenient for converting DC voltages, potentiometers work very well. The TL507 works this way; the reset line (pin 8) is set high and then low. The output (pin 4) then switches high. Next the clock line (pin 2) is pulsed repeatedly until the output switches low. Just as in the experiment last time, the number of clock pulses required to switch the output is kept in a CPU register.

Listing 3 is the program which exercises the circuit of Figure 1. SP1 drives the Reset line, SP2 drives the Clock line, and the output lines of up to eight TL507s are sensed by PBO-PB7. It works this way: the TL507s are reset by lines 58-60 and the output lines all go high. This condition is stored in MASK and a counter is initialized. The clock lines are pulsed (simultaneously) one time and the post input pattern is compared to MASK (lines 67-76). If any TL507 output changes, lines 77-82 detect the change and save this new pattern in MASK. Lines 83-91 identify the TL508 which signalled Conversion Complete, save the clock count and display the count. This process is repeated until all input lines have been switched low, or until 127 clock pulses have been issued. Lines 93-104 control the display process. If fewer than 8 TL507s are connected, data buffers associated with the missing converters are reported as '00'

```

C047 8D 0E DD      S" A SP2SET
C04A A5 7C        LDY SAVY      ; GET COUNT
C04C C8           INY           ; COUNT CLOCK PULSES
C04D 84 7C        S" Y SAVY      ; AND REMEMBER COUNT
C04F 30 D0        BMI NEW      ; START OVER IF COUNT >127
C051 AD 01 DD     LDA BPORT    ; READ A/D OUTPUTS
C054 A5 7D        EOR MASK    ; TEST FOR A/D DONE
C056 F0 E2        BEQ CLOCK   ; NONE? CLOCK AGAIN
C058 AE 01 DD     LDX BPORT    ; READ PORT AGAIN
C05B 86 7D        S" X MASK    ; MAKE THIS NEW MASK
C05D A2 00        LDX #00     ; CLEAR INDEX
C05F 4A           BITID      LSR A       ; TEST WHICH BIT HIGH
C060 90 08        BCC NXTBIT   ; IF TRUE, NOT THIS BIT
C062 94 80        STY BUFFER,X ; IT WAS TRUE, SAVE COUNT
C064 20 71 C0     JSR SHOW    ; DISPLAY COUNTS
C067 4C 3A C0     JMP CLOCK   ; TEST OTHER A/Ds
C06A E8           NXTBIT   INX         ; COUNT SHIFTS
C06B E0 02        CPX #LIMIT  ; ALL BITS TESTED?
C06D F0 B2        BEQ NEW      ; ALL DONE, START OVER
C06F D0 EE        BNE BITID   ; ELSE TEST NEXT BIT

;
C071 86 7F        SHOW     STX XINDEX  ; SAVE VALUES
C073 84 7E        STY YINDEX
C075 A2 00        LDX #00     ; CLEAR INDEX REGS
C077 A0 00        LDY #00
C079 B5 80        READ     LDA BUFFER,X ; GET COUNT VALUE
C07B 20 88 C0     JSR OUTPUT  ; DISPLAY IT
C07E E8           INX         ; POINT TO NEXT
C07F E0 08        CPX #08     ; TEST FOR LAST
C081 90 F6        BCC READ
C083 A6 7F        LDX XINDEX  ; RETURN WITH DATA
C085 A4 7E        LDY YINDEX
C087 60           RTS

;
C088 4B           OUTPUT   PHA         ; SAVE DATA
C089 4A           LSR A       ; GET HIGH NIBBLE
C08A 4A           LSR A
C08B 4A           LSR A
C08C 4A           LSR A
C08D 20 9E C0     JSR CONVRT  ; MAKE DISPLAYABLE CHAR
C090 20 AB C0     JSR DISPLY  ; SHOW IT
C093 6B           PLA         ; GET DATA AGAIN
C094 29 0F        AND #0F     ; MASK TO LOW NIBBLE
C096 20 9E C0     JSR CONVRT
C099 20 AB C0     JSR DISPLY
C09C C8           INY         ; SPACE BETWEEN BYTES
C09D 60           RTS

;
C09E C9 0A        CONVRT  CMP #0A    ; ALPHA OR DIGIT?
C0A0 90 04        BCC NUMBER  ; 0 - 9
C0A2 38           SEC         ; A - F
C0A3 E9 09        SBC #09     ; MAKE IT C-64 SCREEN CODE
C0A5 60           EXIT     RTS

;
C0A6 18           NUMBER   CLD         ; CONVERT TO ASCII
C0A7 69 30        ADC #30
C0A9 D0 FA        BNE EXIT    ; BRANCH ALWAYS

;
C0AB 99 70 07     DISPLY  STA WINDOW,Y ; PUT IN SCREENBUFFER
C0AE A9 00        LDA #00     ; CHAR, COLOR = BLACK
C0B0 99 70 DB     STA WINCLR,Y ; UPDATE COLOR RAM
C0B3 C8           INY         ; BUMP INDEX
C0B4 60           RTS
C0B5              END

```


Commodore Compass

by Loren Wright



New Commodore Computers?

Commodore's CES announcement of two new computers was at least partially withdrawn. It appears now that the 264, if it appears at all, will be introduced late in the year. The 364 has been indefinitely postponed. It's probably just as well. I, and a number of others, doubted the wisdom of bringing out a whole new line just when the Commodore 64 had become established. The Commodore 64 finally has a respectable assortment of software available, and it is doing very well, I might add. The 1701 processor would have been the biggest hurdle. It would have taken a while to convert a significant amount of 6502/6510 software, and Commodore would have started again with the same problem it has always had with new computers - little, if any software!

Side Scrolling Update

Because of space limitations in last month's issue, you may have been left a little in the dark regarding how to use the side scrolling routine. What the routine does is move the screen contents, along with the corresponding color memory, to the right or left. If the move is to the left, then column 1 (actually the 2nd column) is copied into column 0. Column 2 is copied into column 1, and so on, until the move is complete. If the move is to the right, then column 38 is copied into column 39, column 37 into 38, and so on, until the move is complete. The program allows you to specify a range of columns to be moved. The left column (LCOL) must be POKEd into 49152, and the right column (RCOL) must be POKEd into 49153. On a left move LCOL must not be less than one, and on a right move RCOL must not be greater than 38. If there is a 0 in location 49154, then the last column copied will remain unchanged--i.e., there will be two identical columns

adjacent. Most of the time, you will want that last column replaced with spaces, and any number besides 0 POKEd into 49154 will accomplish that result. The left move is called with SYS 49155, and the right move is called with SYS 49182.

It is a simple matter to add this feature to the screen editor [MICRO 66:28]. In addition to the subroutine provided last month (70:59), only three lines are required:

```
5 GOSUB 19000: LC49152: RCLC1: POKE LC2,1
361 IF T$[ THEN GOSUB 1000: POKELC,1: POKE RC,H:
SYS49155: GOTO200
362 IF T$] THEN GOSUB 1000: POKELC,H: POKE
RC,38: SYS49182: GOTO200
```

The horizontal cursor position [H] is used to determine the end of the screen move. This is the quick-and-dirty implementation. It removes the two square brackets characters from use in a graphic, though. To get them back, I would suggest using one of the unused function keys {f4 and f8} to enter a command mode, which expects another key to complete the command. This allows for future expansion, such as up and down screen moves, fill routines, etc. To avoid errors, it would be a good idea to have some audible or visible (flashing border?) indication that another key is expected.

Communications Update

I was serious about including bulletin board listings and information in this column. So far I only have one such item (coming up next). I will also be checking my CompuServe EMAIL regularly, so for those who missed it, my CompuServe number is 70626,636. I won't always be able to give direct responses to questions, but information and news that you think would be of general interest is welcome.

TPUG BBS New Number and Policies

The Toronto PET Users Group (TPUG) has a new number for its bulletin board service: (416)-429-6044, 24 hrs, 7 days. The biggest change in policy is that users will no longer be able to download programs from the club library. To get library programs you must purchase the club's library disks or cassettes. However, the board may be used to upload programs, and this use is encouraged. The club librarians will go through programs so received regularly. Acceptable ones will be added to the library, and the contributor of an accepted program will get to choose a free library disk.

TPUG Conference


The Third Annual TPUG Conference will be held May 26 and 27, 1984, at the Constellation Hotel in Toronto. Features of the conference include two full days of lectures, workshops, and panel discussions conducted by local, as well as out-of-town, experts. The preliminary schedule shows at least five different speakers going at once all day Saturday and Sunday. Typical topics: Evaluating Commercial Software, Speech Synthesis, Hi-res Graphics on the

C-64, Networking, How to Use Spreadsheets, and a Computer Music Overview.

Some of the more popular sessions, such as Jim Butterfield's day-long machine-language workshop, may be filled, but there should still be a lot to choose from. I enjoyed participating last year, and look forward to it again this year. My topics will be Sprite Programming Techniques (intermediate level), and C-64 Graphics: A Little Machine Language Goes a Long Way (intermediate/advanced).

Other activities at the conference include easy availability of copies of club library disks, an exhibit area for hardware and software vendors, an answer room, a trader's corner, and an optional banquet.

If you've never been to Toronto, I should tell you that it is a beautiful city with a lot going on! Registration (required to participate in events) is \$25. In addition, you must be a club member, which costs \$30 (regular) and \$20 (associate). Associate membership is intended for out-of-town members. You still receive the club's magazine TORPET and have access to the club library. The number to call for more information is (416)-782-9252 (business hours only).



*Dealer
Inquiries
Invited*

COMPLETE PRODUCT LINES FOR

D.C. Hayes • HDE • Microsoft • Nashua • Okidata

APPLE • FRANKLIN • IBM-PC/XT

We carry many products at competitive prices to expand these fine computers. Request Catalog No. AFP*

HDE • AIM • SYM • KIM

HDE hardware and software for ASK, DLC, OMNI-65 systems
KIM replacement modules (1K — 4K) and keyboards
AIM-65 (1K — 4K) and accessories. Request Catalog No. TASK*

COMPUTER REPAIR SERVICE

Professional Workmanship
Guaranteed Repairs
Quick Turn-around

Apple	•	Franklin	•	Atari
	PET	•	HDE	
AIM	•	SYM	•	KIM

Perry Peripherals

*Catalogs
AFP \$2.00 TASK \$1.50
Catalog price refunded
with first order

Repair Center
6 Brookhaven Drive
Rocky Point, NY 11778

Orders
P.O. Box 924
Miller Place NY 11764

(516) 744-6462
9AM—5PM Weekdays



From Here to Atari

by Paul S. Swanson

I recently added an Atari 800xl computer to my collection. The main differences between that system and the earlier Atari 400, 800 and 1200xl computers is that no BASIC cartridge is required. BASIC is built in. I also noted some differences in the keyboard. The Atari 1200xl keyboard is still the best of the series and I use that system for my word processing. However, the Atari 800xl keyboard is close competition. The keys are non-glare type finish and have shorter strokes than the ones on the Atari 1200xl computer, which may be preferable to some touch typists.

What really impressed me about the Atari 800xl computer was one of the details of the design. The cartridge slot has two metal strips forming a double door configuration, opening inward when a cartridge is inserted. When the cartridge is removed they spring closed again. The impressive detail is that there is no way to trap your finger in it. This seems like a minor point until you consider having a small child at the computer. The configuration of the cartridge door looks like an ideal setup for trapping small fingers, but after spending about 20 minutes studying the door, I concluded that there was no way it could trap anything.

MYDOS UPDATE

Last month I reported a few bugs in MYDOS. Since then I have been in communication with SWP concerning that product. The updating of random access files has been corrected in versions 3.012 and 3.17. I noted that other minor bugs that I had uncovered have also been corrected. The new version should be available by the time you read this column.

I also acquired an 80-track disk drive for my ATR8000. Using MYDOS to configure it, the 80-track double sided Qume disk holds about 734K of usable disk space. That is a little more than eight times the capacity of an Atari 810 disk drive.

TELECOM UPDATE

Nite Lite, the computer bulletin board I'm running every night, has been a good source of information concerning how people are setting their Ataris up for telecommunication. If you have an Atari 850 interface or

an ATR8000 you still have the widest selection. Any RS-232 compatible modem will connect to either of these devices directly.

There are many callers who do not have Atari 850 interfaces or ATR8000's connected to their systems. These Atari owners use either the Atari 835 modem or the MPP-1000. The Atari 835 is a little more expensive, but connects along the serial bus like other peripherals. The MPP-1000 plugs into a joystick port.

I have noted one problem with the MPP-1000C, which is that it doesn't respond as device R: so no custom software or any other software not specifically written for that modem will work. That eliminates what seems to be the most popular software on the Atari computer in this area, which is a public domain program called AMODEM. However, the MPP-1000 comes with software that is at least comparable. The problem arises when you want to do other things with the modem. For example, there are several people who want to start their own computer bulletin boards, which requires different software.

If you are looking for ways to get into telecommunication with your Atari computer, without an Atari 850 interface module or an ATR8000, the MPP-1000 is the least expensive route. Other than that one problem, I have heard no complaints, so that modem seems to be worthy of consideration. I will be looking into the features of that modem and ways around the problem of interfacing it to other software. This will be reported in future columns.

Information such as this can also be found on Nite Lite if you already have telecommunications capabilities at either 300 or 1200 baud. Nite Lite operates from 7:00 pm until 7:00 am, eastern time, at (617) 576-2426. If you call, leave me a message telling me that you got the number from this column. You are, of course, welcome to leave suggestions of issues for me to address in this column on Nite Lite.

Telecommunications is a rapidly expanding area on personal computers. As the number of callers increases, the amount of information and entertainment available from these computer bulletin boards increases proportionally. There are also other new services opening up that are accessible using the same equipment and software required to access the free bulletin boards.

Hardware Catalog

A Perfect 2nd Computer for the Apple Owner

HAVAC (Home/Academic Very Affordable Computer) is a transportable (14.2 lbs), 64K RAM, 40 column computer system compatible with the Apple II family. Its designed around the 6502 chip and a new 5.25", 164K disk drive. A stand alone drive is also offered as an expansion product.

Over 1000 of the most popular Apple programs have been successfully run on the system. Each HAVAC is shipped with an updated list of tested programs, and any special instructions needed to run them. These programs include games, education and business software.

This computer is aimed at first time users, but its low price of \$850 also makes it the perfect 2nd computer for the two-computer family. That price includes 64K RAM, 8K ROM; 164K floppy disk drive; 62 Key detached keyboard supporting upper and lower case and 4 cursor keys, HiRES color graphics; printer port, serial port, game port and video hookup. Free software includes HAVAC DOS, Typewriter, Card File, Calculator, Utilities, HAVAC BASIC and HAVACOM.

MicroSci
2158 S. Hathaway Street
Santa Ana, CA 92705
714/241-5600

Three Useful Commodore Devices

The C-64 is missing an important feature...a *reset switch*. The only way to regain control on a hung-up computer is to turn it off and lose the data entered already. A reset switch is available which attaches with two simple solder connections, either externally in a separate box or through a hole drilled in the computer cover. With an enclosed software program, it allows recovery of entered data, and costs only \$9.95.

An *Interference Filter Kit* solves the problem of RF emissions from the computer unit of older 64's. It requires opening the computer and making three simple solder connections, but can be done in minutes. Price is \$19.95.


A *Monitor Cable with 5-Pin Din Plug* with attach Commodore, Atari and other computers to the new 1702 Commodore Monitor. The cable packed with the monitor has an 8-pin din plug that won't work with many machines. This retails for \$24.95.

Bytes & Pieces
550 N. 68th Street
Wauwatosa, WI 53213

Inexpensive Atari Printer Interface

APE-FACE allows Atari computer owners to choose from a variety of standard printers, including Epson, Okidata, Centronics and many other parallel style printers. There are currently two models: the 48P works with the Atari 400 and 800 computers; the XLP is for all Atari computers including the new XL line. There is no installation needed; simply plug in the cable to the printer and computer. The suggested price is \$89.95.

Digital Devices Corp.
151 Sixth Street
Suite 127, O'Keefe Bldg.
Atlanta, GA 30313
404/872-4430

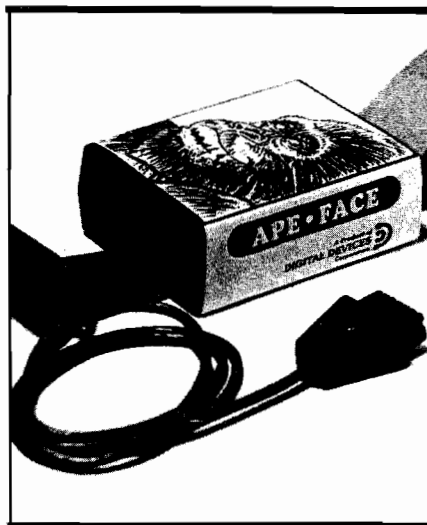

Modem Adapter for the Atari Serial Bus

The R-Verter, Serial Bus Modem Adapter for Atari 400, 600XL, 800 and 800XL home computer systems allows most modems and other RS-232C devices to be used directly without using the Atari 850 Interface Module or other interfaces. It comes with a software package which includes a smart terminal emulator and an RS-232C device handler, and will work with any RE-232C device which will accept TTL-level inputs (the majority will). The R-Verter requires no modifications of the computer or other peripherals and it does not use up a




joystick port. All circuitry is contained in an RS-232C type connector to minimize size.

It comes with a built-in 3 foot cable and is available in either male or female connector configurations. When used with the A.I.D. Interfast-1 buffered printer interface (not included), it allows modem or RS-232C data to be echoed to a printer without first storing to a cassette or disk. Most common RS-232C handshaking configurations are available using internal jumpers. Price with terminal and print echo software is \$49.95.

Advanced Interface Devices, Inc.
P.O. Box 2188
Melbourne, FL 32902
305/676-1275

The drives are different in size and shape from typical OEM drives. This is largely due to the horizontal clutch carrier plate which is lowered via a nylon coated, miniature steel cable and activated by turning an ergonomically designed knob. The new drives are packaged in plastic housings and are slightly larger than standard OEM drives. According to the manufacturer, product maintenance and cost of maintenance is low due to fewer parts and simpler manufacturing process. End user pricing for the XL and XL80 are: \$199 and \$299.

MicroSci
2158 S. Hathaway Street
Santa Ana, CA 92705
714/241-5600

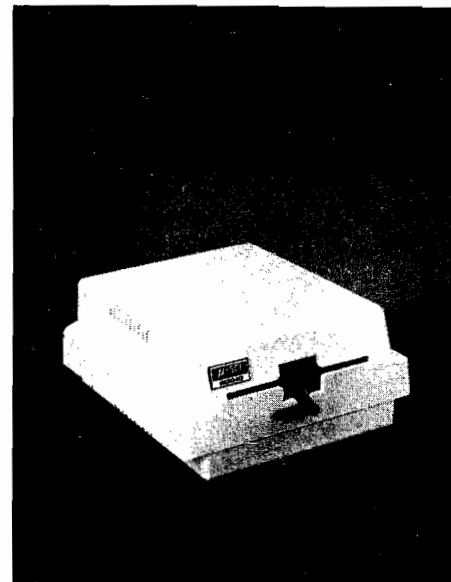

Apple Compatible Disk Drives Designed for End User

The XL and XL80 disk subsystems are Apple compatible floppy disk drives with capacities of 164K-bytes and 328K-bytes respectively. With access times of 18msec, the 40 and 80 track drives are useful for applications ranging from software requiring 35 track, 100% Apple compatibility on the small drive, to CP/M, PRODOS and volume sensitive software on the larger drive.

Parallel Interface Card for Apple

The UniPrint card is an easy-to-use and inexpensive interface card for parallel printers. It is compatible with the Apple II+, Apple IIe, and a wide variety of printers. The purchase price of \$89.00 includes a Centronics compatible cable and graphic transfer capabilities.

UniPrint provides transfers of HiRes graphics pages one and two, expands and shrinks the images, or rotates the images in any direction by

90 degrees. Color transfers are also possible on the Dataproducts (IDS) Prism printer.

The manual provides a step-by-step procedure for installation of the UniPrint and even includes pre-tested configurations for the most popular parallel printers available. Over 25 printers are listed, including: Epson, C-ITOH, Apple DMP, Anadex.

Videx, Inc.
1105 N.E. Circle Blvd.
Corvallis, OR 97330
503/758-0521

Data Line Surge Protection

The SurgeSentry offers data line protection against power-induced problems such as static, electrical storms and other electrical interference problems. When a modem transmits its data signal via long distance phone lines, high voltage spikes and transients caused by storms, power stations, etc. can't be avoided and are carried along with the data being transmitted.

The data line protector constantly monitors the line as a passive device and, when a voltage spike is detected, clamps on the surge and absorbs the power from the line. This two-stage



Surge Suppressor Outlet Strip

The LG20 Surge Suppressor Multi-Outlet Strip offers small computer owners protection against voltage surges that can damage and even destroy electronic solid state components. Since this product can easily be installed by simply plugging into any 15A125V AC outlet, it is ideal for home, business or office use.

This UL-listed 9 3/4" product features four "U ground" outlets, an on/off switch with pilot light, a six foot cord with three prong grounding plug, and a push-to-reset circuit breaker which protects against power overloads. The suppression circuit acts as a shock absorber by limiting surges or spikes without interfering with normal current flow. The LG20 will absorb surges up to 6000 volts or 6500 Amps in less than 10 nanoseconds. The unit limits voltage to a safe 205 volts. The LG20 sells for \$34.95 plus \$2 shipping and handling.

suppression device was designed to provide the fastest reaction time and the highest absorption level, using silicon avalanche diodes and gas discharge tubes (spark gaps).

The SurgeSentry plugs directly into a household phone jack, and the modem cable plugs into it, thus

protecting the line to the modem and equipment connected to it. The SurgeSentry retails for \$89.50.

RKS Industries
4865 Scotts Valley Drive
Scotts Valley, CA 95066
408/438-5760

Gadgeteer
1524 Pine Street
Philadelphia, PA 19102
215/732-0965

C64-FORTH/79 New and Improved for the Commodore 64

C64-Forth/79™ for the Commodore 64-\$99.95

- New and improved FORTH-79 implementation with extensions.
- Extension package including lines, circles, scaling, windowing, mixed high res-character graphics and sprite graphics.
- Fully compatible floating point package including arithmetic, relational, logical and transcendental functions.
- String extensions including LEFT\$, RIGHT\$, and MID\$.
- Full feature screen editor and macro assembler.
- Compatible with VIC peripherals including disks, data set, modem, printer and cartridge.
- Expanded 167 page manual with examples and application screens.
- "SAVE TURNKEY" normally allows application program distribution without licensing or royalties.

(Commodore 64 is a trademark of Commodore)


TO ORDER

- Disk only.
- Check, money order, bank card, COD's add \$1.65
- Add \$4.00 postage and handling in USA and Canada
- Mass. orders add 5% sales tax
- Foreign orders add 20% shipping and handling
- Dealer inquiries welcome

PERFORMANCE MICRO PRODUCTS



770 Dedham Street
Canton, MA 02021
(617) 828-1209

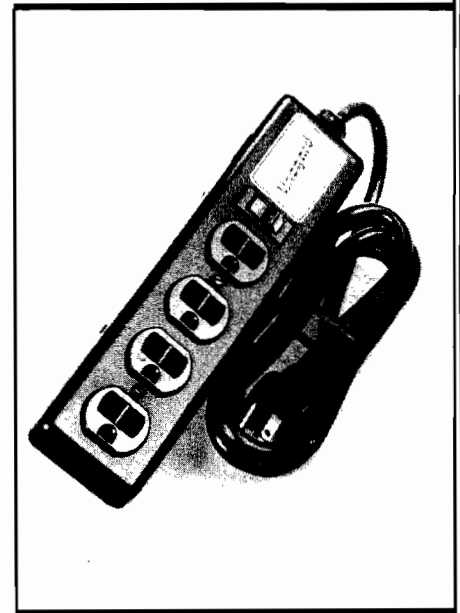

NOTE: When you contact the manufacturers about these products, please be sure to tell them "I saw it in MICRO." We appreciate your support.

MICRO™

Index of Reviews

June 1983 through May 1984

Title	Manufacturer	Type	Micro	Issue
Magic Memory	ARTSCI	A	APPLE	71
Apple Record Manager	CONN. INFO SYSTEMS	A	APPLE	68
Personal Finance Manager	APPLE COMPUTER INC	A	APPLE	67
File-Fax	TMQ SOFTWARE	A	APPLE	64
TGS: The Graphic Solution	ACCENT SOFTWARE	A	APPLE	63
Master Grades	MIDWEST SOFTWARE	A	AP/PET	64
Form Letter Writer	MMG MICRO SOFTWARE	A	ATARI	70
Mail List	MMG MICRO SOFTWARE	A	ATARI	68
Data Manager	MMG MICRO SOFTWARE	A	ATARI	67
Career Counselor	MMG MICRO SOFTWARE	A	ATARI	66
Homebase	HOMEBASE COMP. SYS.	A	COCO	70
C.C.Calc Disk Version	TRANSFORMATION TECH	A	COCO	67
Disk Data Handler	CUSTOM SOFTWARE ENGIN.	A	COCO	61
Semi-Draw	COMPUTERWARE	A	COCO	61
Mail controller	ORBYTE	A	C64	71
Diary 64	COMPUTER MARKETING	A	C64	68
Passive Solar Design for Home	DON DANVLYK	A	C64	67
64 Mail List	COMPUTER MARKETING	A	C64	66
Hello Central!	HOWARD W. SAMS	C	APPLE	63
Disk COLORCOM/E Smart Term.	EIGEN SYSTEMS	C	COCO	67
The Color Connection	COMPUTERWARE	C	COCO	65
BugByter	COMPUTER-ADVENTURE	D	APPLE	68
Ultra Disassembler	ADVENTURE INTER.	D	ATARI	66
BASIC Debugger	MMG MICRO SOFTWARE	D	ATARI	66
Atari BASIC Compiler	DATASOFT	D	ATARI	65
ABC	MONARCH DATA SYS	D	ATARI	63
DISKEDT	SPECTRAL ASSOCIATES	D	COCO	70
STARDOS 64	STAR KITS	D	COCO	70
BASIC Aid	EIGEN SYSTEMS	D	COCO	68
CCREAD Editor/Assmb/Debugger	EIGEN SYSTEMS	D	COCO	68
Disassembler for 6809	GRANITE COMPUTER SYS	D	COCO	67
Platinum Worksaver	PLATINUM SOFTWARE	D	COCO	62
Ultra 80CC	SPECTRAL ASSOCIATES	D	COCO	61
Computer Mechanic	SOFTSYNC	D	C64	71
SYSRES	SOLIDUS INTERNATIONAL	D	C64	67
Delta Drawing	SPINNAKER SOFTWARE	E	APPLE	71
Exper. in Human Physiology	HRM SOFTWARE	E	APPLE	71
Flight Simulator II	SUBLOGIC	E	APPLE	71
Word Attack	DAVIDSON & ASSOCIATES	E	APPLE	65
Watchwords & Wordisk Maker	MICROMEDIA SOFTWARE	E	APPLE	64
Bumble Games	THE LEARNING CO.	E	APPLE	64
General Chemistry	COMPRESS	E	APPLE	64
Face Maker	SPINNAKER SOFTWARE	E	APPLE	63
Multiploy	RESTON PUBLISHING CO	E	APPLE	62

Type Key: Application, Communication, Development, Educational, Forth, Game, Hardware, Language, Software, Tutorial, Utility or Word processor.

Title	Manufacturer	Type	Micro	Issue
Earl's Word Power: Homonyms	GEORGE EARL	E	APPLE	61
Decimal Practice	CONTROL DATA PUBL.	E	ATARI	70
Preparing for the SAT	PROGRAM DESIGN, INC	E	ATARI	67
Square Pairs	SCHOLASTIC INC	E	ATARI	67
Turtle Tracks	SCHOLASTIC INC	E	ATARI	67
Wordrace	DON'T ASK SOFTWARE	E	ATARI	67
Mathmenu 1.0	INTER+ACTION	E	COCO	70
Fundamentals of Mathematics	STERLING SWIFT PUBL.	E	C64	67
C64-FORTH	COMPUTER MARKETING	F	C64	67
Mickey in the Great Outdoors	WALT DISNEY	G	ATARI	66
Shrink	STAR KITS	G	COCO	68
Printmate 99 Printer	MICRO PERIPHERALS	H	ALL	70
Printmate 150G Printer	MICRO PHERIPHERALS	H	ALL	68
RAM/EPROM Memory Board	JOHN BELL ENGINEERING	H	ALL	62
APPLE Pin Saver	KEN BRANSCOME ASSOC.	H	APPLE	70
Ultra ROM Board/Editor	HOLLYWOOD HARDWARE	H	APPLE	67
KoalaPad Touch Tablet	KOALA TECHNOLOGIES	H	APPLE	67
KoalaPad	KOALA TECHNOLOGIES	H	ATARI	70
HJL-57 CoCo Replacement Kbrd.	HJL PRODUCTS	H	COCO	71
CCP-1 Serial/Parallel Int.	BOTEK INSTRUMENTS	H	COCO	68
Disk Interface/ROM Pack Ext.	SPECTRUM PROJECTS	H	COCO	68
RS-232/C Expansion Cable	SPECTRUM PROJECTS	H	COCO	66
Spectrum Stick	SPECTRUM PROJECTS	H	COCO	63
TRS-80 Model 100 Port. Comp.	TANDY CORPORATION	H	OTHER	67
Interpod	OXFORD COMP. SYS.	H	64/20	68
Smart Ascii	MIDWEST MICRO ASSOC	H/C	64/20	67
Robographics CAD-1	ROBO GRAPHICS	H/S	APPLE	67
VoiceBox II	THE ALIEN GROUP	H/S	ATARI	68
TYMAC Universal Tape Interface	MICRO-WARE DIST.	H/U	64/20	66
Vanilla PILOT	COMPUTER MARKETING	L	64/20	65
DataFax	LINK SYSTEMS	S	APPLE	70
Aztec C	MANX SOFTWARE SYS.	S	APPLE	70
ANA-List	SYNOPTIC SOFTWARE	S	APPLE	70
Micro Illustrator	KOALA TECHNOLOGIES	S	APPLE	68
Money Tool	HOWARD W. SAMS	S	APPLE	68
Modula-2	VOLITION SYSTEMS	S	APPLE	66
The Stripper	EIGEN SYSTEMS	S	COCO	68
NEWTALK	STAR KITS	S	COCO	66
The World of Counting	EDUCOMP ENTERPRISES	T	APPLE	71
Cdex Training for VisiCalc	CDEX CORPORATION	T	APPLE	67
The Visible Computer: 6502	SOFTWARE MASTERS	T	APPLE	66
Discover BASIC	STERLING SWIFT PUBL.	T	APPLE	64
CoCo	ISA SOFTWARE	T	C64	65
Disk Library	MODULAR MEDIA	U	APPLE	64
Insta-Load	EDEN II COMPUTING	U	APPLE	64
The Prime Plotter	PRIMESOFT CORP	U	APPLE	63
Apple Mechanic	BEAGLE BROTHERS	U	APPLE	61
BASIC Commander	MMG MICRO SOFTWARE	U	ATARI	63
Pro-Color-File	DERRINGER	U	COCO	71
64K Disk Utility Package	SPECTRUM PROJECTS	U	COCO	67
Disk Utilities with Repair	COMPUTERWARE	U	COCO	62
Bank Street Writer	BRODERBUND SOFTWARE	W	AP/AT	65
Super Text	MUSE	W	C64	71
Casual Writer	E.N. PUBLICATIONS	W	VIC	66

MICRO Program Listing Conventions

Commodore

LISTING C64 KEYBOARD

Commands

{CLEAR} ☐ CLR
 {HOME} ☐ HOME
 {INSERT} ☐ INST
 {DOWN} ☐ CRSR DOWN
 {UP} ☐ CRSR UP
 {RIGHT} ☐ CRSR RIGHT
 {LEFT} ☐ CRSR LEFT

Colors

{BLACK} ■ CTRL 1 BLK
 {WHITE} ■ CTRL 2 WHT
 {RED} ■ CTRL 3 RED
 {CYN} ■ CTRL 4 CYN
 {PURPLE} ■ CTRL 5 PUR
 {GREEN} ■ CTRL 6 GRN
 {BLUE} ■ CTRL 7 BLU
 {YELLOW} ■ CTRL 8 YEL
 {RVS} ■ CTRL 9 RVS ON
 {RVSOFF} ■ CTRL 0 RVS OFF

{ORANGE} ■ = 1
 {BROWN} ■ = 2
 {GREY 1} ■ = 3
 {GREY 1} ■ = 4
 {GREY 2} ■ = 5
 {LT GREEN} ■ = 6
 {LT BLUE} ■ = 7
 {GREY 3} ■ = 8

Functions

{F1} ■ f1
 {F2} ■ f2
 {F3} ■ f3
 {F4} ■ f4
 {F5} ■ f5
 {F6} ■ f6
 {F7} ■ f7
 {F8} ■ f8

Special Characters

{PI} π Pi Char
 {POUND} £ Pound Sign
 {UP ARROW} ↑ Up Arrow
 {BACK ARROW} ← Back Arrow

Atari

Conventions used in ATARI Listings.

Normal Alphanumeric appear as UPPER CASE:
 SAMPLE

Reversed Alphanumeric appear as lower case:
 YES (y is reversed)

Special Control Characters in quotes appear as:
 {command} as follows:

Listing	Command	ATARI Keys
{UP}	Cursor Up	↑ ESC/CTRL -
{DOWN}	Cursor Down	↓ ESC/CTRL =
{LEFT}	Cursor Left	← ESC/CTRL +
{RIGHT}	Cursor Right	→ ESC/CTRL *
{CLEAR}	Clear Screen	☐ ESC/CLEAR
{BACK}	Back Space	◀ ESC/BACK S
{TAB}	Cursor to Tab	▶ ESC/TAB
{DELETE LINE}	Delete Line	☐ ESC/SHIFT DELETE
{INSERT LINE}	Insert Line	☐ ESC/SHIFT INSERT
{CLEAR TAB}	Clear Tab Stop	☐ ESC/CTRL TAB
{SET TAB}	Set Tab Stop	☐ ESC/SHIFT TAB
{BEEP}	Beep Speaker	☐ ESC/CTRL 2
{DELETE}	Delete Char.	☐ ESC/CTRL BACK S
{INSERT}	Insert Char.	☐ ESC/CTRL INSERT
{CTRL A}	Graphic Char.	☐ CTRL A

where A is any Graphic Letter Key

Non-Keyboard Commands

{DIS=} CHR\$(8)
 {ENB=} CHR\$(9)
 {LOWER CASE} CHR\$(14)
 {UPPER CASE} CHR\$(142)
 {^RETURN} CHR\$(142)
 {DEL} CHR\$(20)
 {SPACE} CHR\$(160)

Notes:

- ☐ represents SHIFT KEY
- = represents Commodore key in lower left corner of keyboard
- CTRL represents CTRL key
- Graphics characters represented in Listing by keystrokes required to generate the character
- A number directly after a {SYMBOL} indicates multiples of the SYMBOL: {DOWN6} would mean DOWN 6 times

Advertiser's Index

A B Computers	7
Amplify	48
Computer Mail Order	4,5
F. Ashton	57
Home Base Supply	34
J & M Software	16
JJ Wild	Inside Back Cover
Lazerware	2
MICRO Magazine	39,57
Nibble	11,31
Percom	Back Cover
Performance Micro Products	76
Perry Peripherals	72
Protecto	17,18,19
Safeware	46
Skyles Electric Works	Ins. Front Cvr
Specialty Electronics	48
Winders & Geist	9
Zanim Systems	1,36,80

Coming in June

As a special bonus to Micro readers, we are including the complete all-new Apple IIe Supplement to What's Where in th Apple.

We will also share with you the fruits of someone's seven years of labor ... a Random Number Generator that has endless possibilities. For those unfamiliar with Macro's, we have an informative article explaining what Macro's are and how to incorporate them in your programming. The musical minded will enjoy our Musical Notes article putting a 5-octive range at your fingertips.

WHERE'S THE MicroCalc !

Those of you who took advantage of our recent subscription promotion which featured a free copy of our new **MicroCalc** Screen-Oriented Calculation Program - please be patient a little while longer. Our original plan was to make a few 'minor' improvements to the MicroCalc that was published in MICRO 68 (December 1983) and release it on disk. Well, once we got into making changes, we sort of got 'carried away'. This has been the primary cause of the delay.

The version of MicroCalc to be released shortly has many major improvements and completely new functions. These include:

- the ability to handle strings and string functions as well as numbers,
- program control functions for looping and testing limits,
- informative help screens,
- disk I/O routines that allow for automatic calling of subsidiary screens from disk,
- printer routines for dumping the display screen,

- printer routines for generating formatted output,
- plus an extensive manual, complete listings, and demonstration screens.

Due to these additional features, and the extra effort that has gone into development of the MicroCalc package, the price has been increased from \$14.95 to \$29.95. Those of you who have already ordered MicroCalc, or who are owed it as part of your subscription, will not be charged anything extra.

We are sorry it has taken the extra time, but you will find that the time was well spent. The Commodore 64 version will be completed by the time you read this. The Apple version will be available in May and the Atari and CoCo versions in May or June.

Disk Service Now Available.

In response to your requests, we are now offering selected programs from recent issues on diskette. We will expand this

service, if there is adequate demand. Each diskette will include all of the programs in BASIC and/or Assembly Source, plus binary 'load-and-go' files. The price includes shipping and handling.

Master Disk Directory

Charles Hill
Apple II with disk
MD-1 MICRO 67/69

Does-it Monitor
Michael Keryan
Commodore 64
MD-2 MICRO 68/69/70/71

Accurate Printer
Richard Marmon
Atari with Epson Printer
MD-3 MICRO 71

Send us your requests. If there is enough interest for any particular program, we will issue a diskette.

Please order each diskette by Name and Number
Send \$15.00 for each diskette to:

MICRO Diskettes
P.O. Box 6502
Chelmsford, MA 01824

Computer's Choice.



Primage I

The revolutionary office duty, letter quality daisy printer system from Primages.

In word processing and data communications applications, where high quality printing at high speed means higher computer productivity—The Primage I daisy printer by Primages is the computer's first choice.

That's because Primage I, with its PAGEMATE I* sheet feeder, costs much less than any other office-quality, high-speed daisy printer. And because it's easy to interface with any micro-computer system.

*PAGEMATE is a trademark of Primages, Inc.

Primage I features:

- 45 cps speed in heavy duty applications
- Word processing features
- Consistent letter quality production
- Wide choice of fonts
- Easy connection to your computer
- Easy to install sheet feeder that handles up to 11" x 14" sheets, either landscape or portrait
- Full 13½" writing line
- Switch selectable multiple languages
- Patented technology for greater reliability

Main Office: 163 Reservoir Street, Needham, MA 02194, (617) 449-5600

Branch Offices: P.O. Box 214, Rock Hill, CT 06067, (203) 529-9123

70 Oriole Drive, Bedford, NH 03102, (603) 472-2123

jiwild

ATARI COMPUTER OWNERS:

Pick the positively perfect, practical, printer-port peripheral package, from **PERCOM DATA!**



That's right... the positively perfect PERCOM DATA 5¼", floppy disk drive with a BUILT-IN PRINTER-PORT, for your Atari® 400/800 is now available!

Until now, Atari computer owners who wanted to hook a printer to their computer had only one choice... spend about \$220 for an interface device. THOSE DAYS ARE OVER. PERCOM DATA has built a parallel printer-port right into its new AT88 PD model. Now you can add a quality disk drive system AND have a place to plug in a printer... WITHOUT BUYING an interface.

The AT88 S1 PD™ disk drive operates in both single density (88K bytes formatted) and double density (176K bytes formatted).

What more could you want? NO INTERFACE... a high quality PERCOM DATA disk drive... AND a built-in PRINTER-PORT... all with a price of \$599.

Pick up a positively perfect PERCOM DATA disk drive, with printer-port... pronto!

For the name of an authorized PERCOM DATA Dealer near you, call our **TOLL-FREE HOTLINE 1-800-527-1222 NOW**, or write for more information.

Perfectly Priced

\$599.

PERCOM DATA
CORPORATION

Expanding Your Peripheral Vision

DRIVES • NETWORKS • SOFTWARE

11220 Pagemill Road, Dallas, Texas 75243 (214) 340-5800
1-800-527-1222

Atari is a registered trademark of Atari, Inc. • AT88 S1 PD is a trademark of Percom Data Corporation. • COPYRIGHT PERCOM DATA CORPORATION 1983.
Prices subject to change without notice.