


**Independent
guide to the
BBC MICRO!**

THE MICRO USER

Volume 3
Number 4
June 1985
£1.25


Othello

Board game
strategy on
your micro

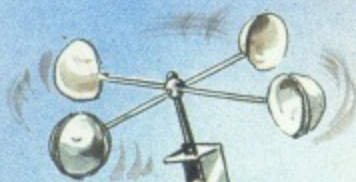

Build your own wind station

Three vital print routines
Rescue Fido from the well
Create machine code sprites
Use EVAL in Assembler

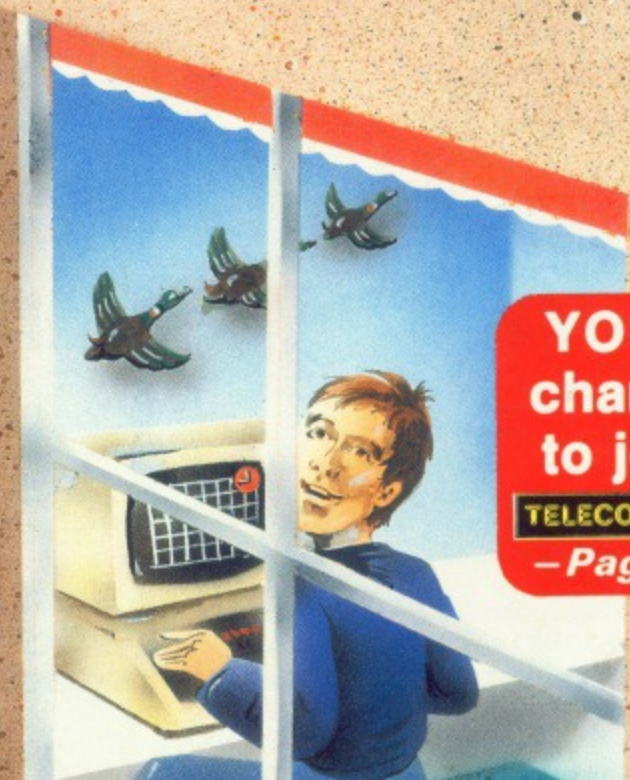

**YOUR
chance
to join**

TELECOM GOLD

- Page 95

SERIOUS SOFTWARE

FOR THE B.B.C. MICRO

TOOLKIT

£27.00



- Adds 27 new commands for Basic program development and debugging
- Automatic error detection
- Full screen editor for Basic
- Host of utilities instantly available

SLEUTH

£29.00



- Revolutionary new debugging tool for Basic programmers
- Dual screen operation
- Single step facility
- Speed adjuster
- Gives YOU control over Basic.

HELP

£25.00



- The Information ROM
- On screen Help facility to aid programming
- Includes Basic keywords • Sound • Colour • Teletext • VDU commands • FX Calls • GCOL • Screen Modes • Memory usage • PAGE/HIMEM etc

EXMON II

£29.00



- Dual screen operation
- Full screen memory editor
- 60 machine code commands
- Invaluable if you wish to program, debug, or learn about assembler

!FREE!

information pack

To find out about these and other Beebugsoft products please phone for a FREE information pack. 24 hour 0494 81 5228

BEEBUG SOFT

DISCMASTER

£19.00



- Eleven powerful utilities to support the disc user:- Disc Editor • String Search • Recover • Movedown • Disc Menu • Indexer • Copier • Link • Overlay • 40 to 80 • Dual Catalogue • Formatter

MASTERFILE II

£19.00



- General purpose file management package
- Allows large amounts of information to be stored and processed
- Extremely flexible
- Easy to use

ORDERING INFORMATION

All these products are available from your local dealer and larger branches of Boots.



Post and packing 50p Prices include VAT

Telephone orders (24 hours) 0494 81 6666



Mail order:- P.O. Box 50 St Albans Herts

For further information telephone (0727) 60263

SPELLCHECK II

£31.00



- ROM-based spelling checker for Wordwise or View
- Extremely fast on test timings Watford 1.3 DFS - 920 wpm Acorn 1.2 DFS + tube - 1450 wpm
- 6,000 word dictionary disc
- Dictionary increased with usage

ARE YOU HALF A USER

TEN MAGAZINES PER YEAR • NEWS •

SOFTWARE • DIS

SPECIAL OFFERS

INFORMATION •

TECHNICAL SUPP

USER GROUPS •

REVIEWS • NEWS

HINTS & TIPS • DI

APPLICATIONS •

PROGRAMS • SP

GAMES PROGRA

UTILITIES • SOFT

DISCOUNTS • RE

SOFTWARE • NE

INFORMA

TECHN

USER

RE



Become a complete user with BEEBUG

Send or phone for a FREE information pack (UK only),
OR take out a subscription NOW.

(£11.90 1 year, £6.40 6 months UK only)

Telephone (049481) 5228
BEEBUG dept 16, PO Box 109, High Wycombe, Bucks.



Vol. 3 No. 4 June 1985

Managing Editor
Derek Meakin

Features Editor
Mike Bibby

Production Editor
Peter Glover

Layout Design
Heather Sheldrick

Associate Editor
Alan McLachlan

News Editor
Mike Cowley

Technical Editor
Mike Cook

Advertisement Manager
John Riding

Advertising Sales
Mike Hayes
Margaret Clarke

Editor in Chief,
Database Publications
Peter Brameld

Tel: 061-456 8835 (Editorial)
061-456 8383 (Administration)
061-456 8500 (Advertising)
061-480 0171 (Subscriptions)

Telex: 667664 SHARETG
Prestel Mailbox: 614568383

Published by:
Database Publications Ltd,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

Subscription rates for
12 issues, post free:

£15 - UK
£15 - Eire (IR £18)
£20 - Rest of world
(surface)
£65 - Rest of world
(airmail)

ABC 68,328
January-June 1984

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1985 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution:
Europress Sales and Distribution Limited,
11 Brighton Road, Crawley, West Sussex
RH10 6AF. Circulation 0293 27053.

NEWS

23

Read all about it! All the latest events in the BBC Micro's ever changing world.

ROM REVIEW

42

We look at Sleuth, Microscope, Buffer and Backup, ROM manager and Securit.

PROBLEM PAGE

53

Our electronics guru discusses monitors, disco lights, 3in drives and pendulums.

OTHELLO

68

Hours of mind bending enjoyment with this simulation of the popular game.

BODY BUILDING

73

Troubled by wind? You'll soon be able to measure the problem with your micro.

SOFTWARE SCENE

79

Our fearless reviewers present their in-depth evaluation of some recent releases.

6502 GAMES

90

It's time to create your own machine code sprites with our superb definer program.

ADVENTURES

100

Once again our frank columnist takes her critical look at the world of Adventures.

FIRST EDITION

106

Your chance to obtain Mike Bibby's highly praised beginner's series in one book.

In last month's
issue of

THE MICRO USER

We gave the first
announcement of
the creation, with
the help of

TELECOM GOLD

of a new national
database for
micro users . . .

MicroLink

This month we can
give full details of
the scheme,
including the
facilities on offer
and the costs,
together with your
application form.

— See Page 95.

109 WORKSHOP

Typesetting, outputting strings and a pound/hash ROM fix for the Epson.

114 SIMON QUACKERS

Hours of fun with this delightful version of Simon written especially for the light pen.

117 EVAL

Incorporate the power of this vital Basic command into your own m/c routines.

122 STRIPPER

Remove line numbers and manipulate your Basic listings with this utility.

124 ACTIVITIES

Link the pictures with the words: a game that will provide hours of fun for all.

134 SHAPE RECOGNITION

Teach your micro to recognise simple objects with this powerful program.

139 CATNAP

Ding dong bell Fido's in the well. Can you entice her out by collecting all the mice?

169 MICROMAIL

This is the part you write yourself — your news, views, ideas, praise and moans.

183 ORDER FORM

Back issues to binders, cassettes to cases, discs to dust covers — they're all here.

NEW 16K EPROM

***HEX**, Is a full HEX dump, displaying 8 bytes of HEX and ASCII equivalent per line. A status line shows the current address and the byte at this address in: HEX, ASCII, Decimal and either the binary, basic token or assembler mnemonic. Forward and reverse scrolling of the display at normal and

high speeds is a feature, as is a full on screen memory editing facility which allows inputs in either hexadecimal, ASCII characters or assembler mnemonics.

***MON**, Serves the same function as *HEX, but the display is in disassembled opcodes, rather than *HEX. The editing and scrolling facilities are the same as for *HEX. An additional feature of *MON is the ability to directly follow JSR's, branch's etc.

***DEBUG**, A full featured program debugging aid, allowing the programmer to see the most intimate details of the program under examination. Features, variable speed, single stepping, breakpoints, continuously updated disassembler, selective HEX dumps (up to 6) plus current stack, all continuously displayed on screen, plus many other features.

***DISCED**, A comprehensive disc sector editor enabling any sector of a disc to be read, inspected, edited and written back. It will work with any 40, 80 or dual formatted single density disc.

***DGET**, Searches a disc for all occurrences of a string or group of bytes.

***REL**, Enables machine code to be easily moved around in memory, automatically adjusting JSR's, JMP's etc.

***SLOW**, This command causes the entire computer to slow down to any variable speed between 1 and 255. This can allow the in depth study of graphic's methods etc.

***EDIT**, A dynamic basic screen editor, cursor controlled with full forward/reverse scrolling of listing, incorporating insert/delete lines, insert/overwrite characters, enter line from any position after editing.

"No need to Sweat! Let me be your slave."

***REF**, Produces a cross-reference listing of the current basic program. All variable names are listed (WITHOUT HAVING TO RUN THE PROGRAM!) in alphabetical order followed by the line numbers on which they are referenced. Numeric items can also be crossed referenced if desired.

***SORT**, A built in sort routine allowing any single dimension array, be it integer, real or string, to be sorted.

BASIC COMMAND LIST:
*PROG, *BAD, *EXTEND,
*PACK, *SORT, *PAGE,
*ENVELOPE, *FIND,
*REPLACE, *XREF,
*TRON, *TROFF, *CHAR,
*EDIT, *EDKEY.

**MACHINE CODE
COMMAND LIST:**
*MCODE, *MOVE,
*CROM, *SLOW, *GET,
*PHEX, *GO, *MON,
*HEX, *SPACE, *DGET,
*DISCED, *DIS, *DEBUG,
*CRC, *REL.

A&F Software Ltd.,
Unit 8, Canal Side Ind. Est.,
Woodbine St East,
Rochdale OL16 5LB

"The
Slave
Drivers
Guide."

24 hrs HOTLINE
0706 341111

Designed with the serious programmer in mind, a 16K Eprom packed with a multitude of programmer friendly utilities, as with all SLAVE'S, SLAVE is instantly available and will obey an extensive range of commands. So why not invest in more muscle for your BEEB, and get some help with the heavy work!!! SLAVE has over 30 comprehensive machine code and basic tools.

Slave is available direct from A&F Software Ltd for only £49.95. This includes post, packing, VAT, and User Guide.

Please send me a Slave, I enclose my cheque/PO for £49.95.

Cheque N° _____ Please debit my
Access/Visa N° _____

Name _____

Address _____

Telephone: _____



Remittance to:
A&F Software Ltd.,
Unit 8, Canal Side Ind. Est.,
Woodbine St East,
Rochdale OL16 5LB

Please allow 14 days for delivery.

Your BBC would not be without it

Solidisk Sideways RAM is indispensable to all BBC computers

SOLIDISK's SIDEWAYS RAM is an almost indispensable add-on for the BBC user. It is available in either 32k, 64k or 128k byte capacity and is compatible with all issues of BBC microcomputers along with most of the add-ons and ROMs obtainable for it. To date, more than 37,000 units have been sold.

The Sideways RAM occupies the right most ROM socket of the BBC and sits in the same position in the micro's memory map as the paged ROMs.

This means that the Sideways RAM can run almost all ROM type software including languages, utilities and filing systems.

The difference between Sideways RAM and Sideways ROM is that RAM can be written to meaning that only the presently required software has to be loaded into the machine, thus making redundant the multitude of high current consumption and often unsightly ROM extension boards.

Sideways RAM is also an invaluable tool for writing ROM type software to run on the BBC since software may be assembled straight into the area in which the final version will run. This will save a lot of time over using offset assembly and eprom programming/erasing on a non Sideways RAM equipped BBC.

For the user who is not interested in writing ROM type software but is in need of the utilities provided by the use of the Sideways RAM, we supply free software to make maximum use of the Sideways RAM facilities.

These are included in the Sideways RAM Software package, a collection of no less than 5 diskettes containing nearly 100 programs, from database, word processor, music system, sprite graphic, printer buffer, virtual memory, spelling checker, RAM disk, RAM filing system, VDU replay, disassembler, machine code monitor, macro basic, video digitised pictures etc. and Solidisk Most Advanced Disk Filing System version 2.0.

Another extremely useful feature is the ability to configure the Sideways RAM as a 'SILICON DISC' as in our STLDISC program. It makes use of available Sideways RAM as an extra disc drive.

Once the STLDISC program is loaded it acts exactly like a normal DFS with the exception that one drive is now allocated to the Sideways RAM. All operations on this drive are much faster than a physical disc drive and, of course, impart no mechanical wear to them. This means that programs may be repetitively loaded, saved, spooled or exec'd many times and only the final version need actually be saved to disc.

The extensive use of the facilities offered in the STLDISC program will allow the physical disc drives to go longer between services and the discs themselves to last longer and could in fact pay back for itself in a fairly short while.

The STLDISC program will operate on any size of Sideways RAM and will configure itself to the available space. Therefore a 16k board will give 4k bytes of storage, whereas the 32k will give 20k bytes and the 128k up to 116k bytes of 'Silicon disc' storage space.

PRICES

The listed price (effective from the 15 April onwards) comprises the Sideways RAM fully guaranteed for 1 year, comprehensive manual and a software package consisting of 5 diskettes formatted either in 40 or 80 track. Please specify when ordering.

- SWR32 (32k unit, by far the most popular): £58.95
- SWR64 (64k unit, new introduction model): £85.00
- SWR128 (128k unit, the second most popular): £149.00

As Solidisk Software Support Service has to produce in excess of 16,000 diskettes every month, we regret that we can no longer provide personalised service for disk copying. In extreme cases, when you need to update your software diskette, either reorder a new software package (which is always sold to you at nominal media cost (plus post and packing) or return the old package with £2.00 to cover post and packing. You may avoid post and packing costs if you call at Solidisk's stand at any BBC micro exhibition or at the Solidisk office.

UPGRADING

Upgrading from a smaller model is very simple: you return the old RAM board to us with your payment.

The listed prices include the full software package and new manual.

SOLIDISK TECHNOLOGY LIMITED, 17 SWEYNE AVE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ. TEL. SOUTHEND (0702) 354674 (10 lines).

THE SOFTWARE PACKAGE

The Software package comprises of 5 diskettes, formatted either in 40 or 80 track. Please specify when ordering.

Volume 1:

Volume 1 contains all the general applications of Sideways RAM such as load and save ROMs (the Menu program), printer buffer (the Printer program), Improved Disk Filing System with unlimited catalog or PAGE at &E00 (STL0E00 and 2.0 ROM), Silicon Disc (the STLDISC program), the Quickcopy and the Fast Backup programs which use Sideways RAM to save you time and disk swapping effort.

Volume 2:

Volume 2 contains the Wordprocessor, Spelling Checker and the English Dictionary.

Volume 3:

Volume 3 contains the Macro Basic (a program generator), a Linker-Editor and the Virtual Memory Program, which lets you use Sideways RAM to store Basic programs thus allowing otherwise too large programs to run.

Volume 4:

Volume 4 contains a suite of programs, all part of the Solidisk Database system. This Database allows you to retrieve any record of up to 6500 records quicker than you can remove your finger; each record can have up to 15 fields of up to 60 characters long. 15 utilities are included allowing printing of forms, tabulation, mailmerge, maths etc.

Volume 5:

Volume 5 contains extensive programming aids such as the powerful Solimon, the 65C02 assembler, the Solitrace, a dual screen tracing utility, the Invisible trace, the Sprite and Sprite generator capable of moving 32 sprites anywhere in a single picture frame, the VDU Recorder, which mimics a £10,000 graphic computer and more.

WHAT THE SPECIALISTS SAY:

ACORN USER

(JAN 84):


'Exciting . . .'

PCN (MAY 84):

'Power to your BEEB'

A&B: 'Break the RAM barrier'

FROM:	TO SWR32	TO SWR64	TO SWR128
SWR16	£20	£43	
SWR 32		£23	
SWR 64			£56

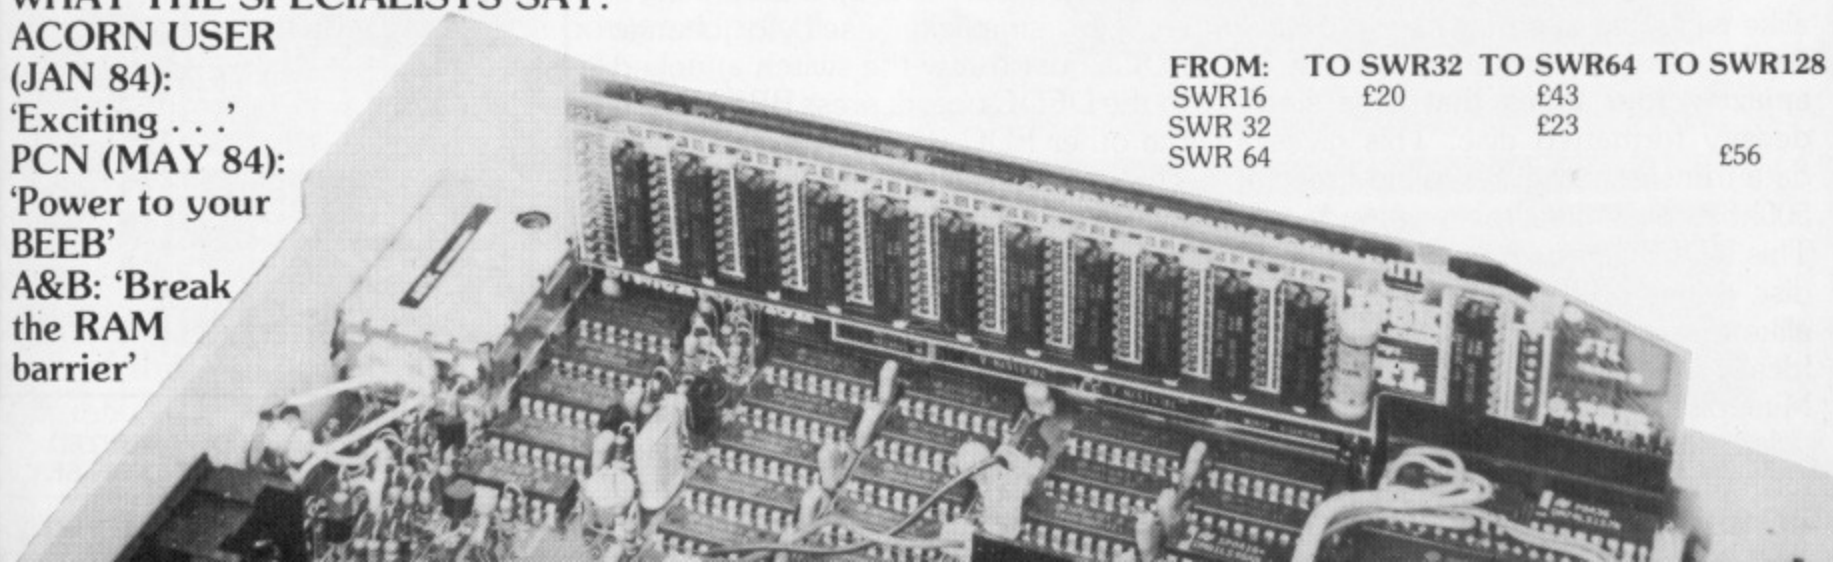

Introduced only last November the SOLIDISK DDFS has enjoyed an unprecedented popularity in a very short time. We think the reason for this is the ease and simplicity of installation and use, along with the capability of 60% extra disc capacity in the Double Density mode. This coupled with realistic pricing makes our DDFS an absolute best seller.

WHICH DFS DO YOU NEED?

SOLIDISK produce no less than three types of Disc Filing Systems to cover all your requirements.

1. THE FLEXIBLE DDFS

The basic SOLIDISK DDFS (£38.95) is suitable for all ordinary users. It is supplied with the SOLIDISK 1.9 ROM. This ROM is compatible with the ACORN DFS; running all unprotected commercial software and disks from Acornsoft (Elite), Micro Power (Castle Quest), Island Logic (The Music System).

The 1.9 ROM offers both single and double density formats, with built in disc formatter and verifying, along with such features as automatic density sensing and 40/80 track software controlled switching. The speed is now programmable by the keyboard links to suit almost any type of disc drive and the maximum file size is now only limited by the capacity of the disc.

The DDFS can now be supplied with the Solidisk Most Advanced Disc Filing System (our 2.0 ROM). The total price of this system is £48.95 and the specifications are outlined below.


2. THE FAST 8" CONTROLLER

This a totally new product intended for the business user where speed and reliability are paramount.

The data transfer rate of the 8" look alike is double that of a standard 5.25" double density formatted disc or an amazing four times that of a single density formatted disc. This gives a data transfer at the incredible speed of 500kbits or 64 k bytes a second.

This DDFS can be used with either 8" disc drives or the Mitsubishi 8" look alike or a mixture of the two.


Ideally suitable to be used with the Mitsubishi M4855 80 track double sided (2 MB unformatted or 1.3 MB formatted), the 8" DFS costs only £69.95 inclusive.



SOLIDISK TECHNOLOGY LIMITED

COMPUTERS PERIPHERALS MICROPROCESSOR DEDICATED SYSTEMS
Tel: (0702) 354674 Trade Name: AUDIO COMPUTERS
17 SWEYNE AVENUE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ

SOLIDISK DISK FILING SYSTEM

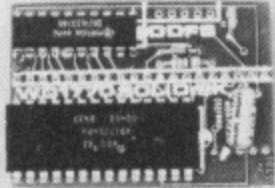

7,000 SOLD

3. THE SEDUCTIVE DFDC

Ideally suitable if you already have an Acorn DFS. The DFDC will not only add Double Density capability but also improve the speed of your 8271 chip. The SOLIDISK DFDC (Dual Floppy Disc Controllers) is making a very large impact on the BBC user community with its extraordinary capability. It is currently supplied with the Solidisk Advanced Disk Filing System ROM 2.0 (£54.95).

The DFDC board simply sits in the place of the 8271 FDC chip (i.c.78) in the BBC. The 8271 is then inserted into the DFDC board and the ROM 2.0 inserted in place of the original DFS ROM.

Once the machine is up and running it is then simplicity itself to change FDCs; just throw the switch attached to the DFDC board, press BREAK and the other FDC is now selected.

This allows the user to get the best facilities available from both the 1770 and 8271 floppy disc controller chips with the minimum of fuss.

The DFDC board may also be used as a Stand Alone DFS if your BBC is not yet upgraded for disc systems. All the necessary chips and instructions are supplied and the 8271 may be added as an optional extra at a later date.


The SOLIDISK DDFS is now the ultimate in reliability with a minimum component count and software error trapping.

The DDFS consists of only a few components to be plugged in to the BBC Microcomputer and can be fitted in just a few minutes by novice and expert alike.

Whilst many other manufacturers rely heavily on distribution outlets to do the selling for them, SOLIDISK relies on a good product and a large support network to win the heart of the user. With over 60 local experts, covering England, Scotland and Wales, SOLIDISK National User Group in Holland and soon in Australia SOLIDISK can offer many users

regional free fitting and advice. Also with an ever increasing catalogue of free software, available to all SOLIDISK users, comprising Programming tools, Graphic windows, Musical tunes, Spelling checker, Computer Aided Design, Disc utilities etc., even users who are new to the DDFS can expect to build up a large disc program library in a fairly short time.

Solidisk Software Support Service now has a responsibility to over 35,000 users and the ability to give you the best possible support matched only by the largest companies.

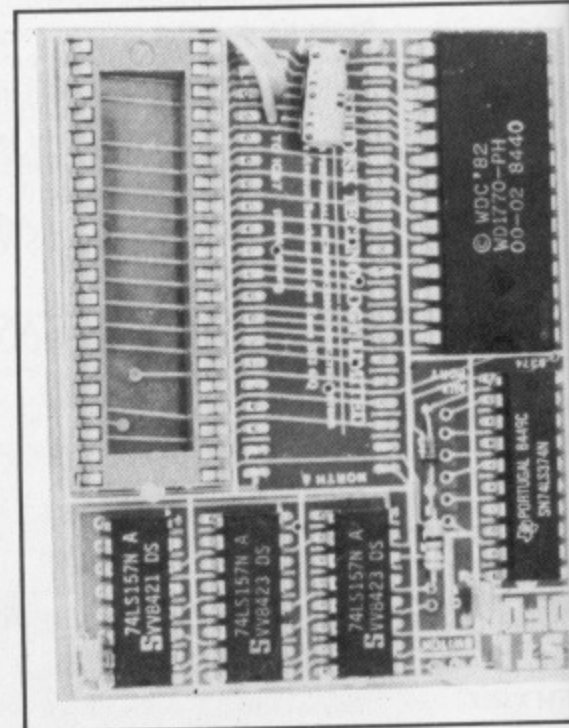

SOLIDISK TECHNOLOGY LIMITED
17 SWEYNE AVE, SOUTHEND-ON-SEA,
ESSEX SS2 6JQ
TEL. SOUTHEND (0702) 354674 (10 lines)

SOLIDISK DFS ROM 2.0 IS OUT:

The Solidisk Advanced Disk Filing System for the BBC computer is now available for both Solidisk DDFS users and Acorn DFS users as an upgrade for the DNFS 1.2ROM.

Standard features include:

1) Unlimited Catalogue entries (up to disc capacity) without any special preparation.

With Computer Concepts's Disc Doctor or Watford's DFS, you have to specify BEFORE formatting if you want 62 filenames. Once formatted, you can no longer modify the format.

With ROM 2.0, there is no limit to the number of files and programs you can have on the same diskette. Until it is completely full.

2) Unlimited filesize.

This feature is sometimes a very good sales argument for databases.

3) Automatic Write Error Correction.

Every disk write operation is immediately followed by a read operation to ensure that the recorded data is free of all errors. Then if needs be, ROM 2.0 will restart the write operation from the unsafe sector.

4) Automatic 40/80 track stepping.

No other DFS allows you to directly backup a 40 track disk to an 80 track disk, even if you have a switchable disk drive, since the hardware cannot replace the software! ROM 2.0 allows you to backup and copy any 40 track disk to 80 track, single to double density (if available) even on the same drive without any special care.

5) DISC REPAIR FACILITIES.

Disc sector editor (*DZAP), memory editor (*MZAP), recover good sectors (*RECOVER), re-write multiple sectors (*RESTORE), Read disk format (*R40 and *R80), recover bad sectors and bad track (*RTRACK), repair and restore bad sectors and track (*WTRACK) and the powerful disc copy (*DCOPY) which is capable of duplicating even some non BBC disks in under 1 minute in both single and double density (if available).

6) Tape to disc facilities.

This facility allows automatic transfer of all programs and most games to disk (*TAPEDISC and *LOADTAPE). Only in some cases (multi-part game cassettes), will you need Clare's utilities.

7) Wordprocessing facilities.

This facility allows !BOOT and other text files to be edited, saved and printed. Any screen mode and text up to 24k can be handled.

8) PRICE

The 2.0 ROM costs £20.00 to all Acorn DFS users. Included in the price are the Advanced DFS User Manual and VAT.

As an upgrade for the 8k Solidisk DDFS 1.9, the price is only £10.00 inclusive. Please note that you do not have to send back your present DDFS ROM when ordering, but post it later in the return envelope sent together with the 2.0 ROM, quoting your credit card number as a guarantee.

SOLIDISK KEYBOARD AND CPU ARE NOT JUST PRETTY . . .

The keyboard is 12 mm lower than the normal BBC case, 2-3 degrees more angled, weighs only 5lbs, does not skid about on the desk while enjoying 2 feet of freedom from the computer unit — and makes a lot of difference to the typist (even 2 fingered ones!).

The CPU accommodates 2 disk drives and withstands any heavy weight monitor while providing easy attachment for the whole system, CPU and disk drives, to the desk if need be. There is good ventilation to the power supply too and all untidy cables are hidden away.

PRICE

The complete CPU and keyboard case costs £30.00 inclusive + £3.00 post and packing. The system could be yours free as part of the Mitsubishi twin discs offer. Actually the best thing that happened to the BBC computer for a long time!



SOLIDISK + MITSUBISHI BIG DEAL:

THE MITSUBISHI 640K DISK OUTFIT:

This offer comprises:

- One Double Sided, 80 track Mitsubishi M4853 disk drive, cased in beige.
- One Solidisk DDFS Single and Double Density Disc Upgrade.
- All leads and manuals (2).
- One Software package comprising 5 program diskettes as detailed below.
- Full one year guarantee.
- All for £209.95 inclusive of VAT and carriage.

IMPORTANT

If you upgrade (now or later) to twin Mitsubishi M4853 disk system, Solidisk will offer you, subject to stock availability, absolutely free a CPU and keyboard case as shown earlier.

For that, you have the choice of ordering a 640k Mitsubishi disk outfit now and then later on, of returning your disk drive, enclosing payment of £160 to cover the second disk drive and carriage. Alternatively, save by ordering right now a complete twin Mitsubishi (2MB unformatted, 1.3 MB formatted) Fantastic Offer at only £359.95 inclusive.

THE HARDWARE:

As described earlier as shown opposite.

THE SOFTWARE:

The software comprises 5 diskettes, formatted in 80 tracks. Volume 1 contains the Word Processor, Volume 2 the Database, Volume 3 the new Spreadsheet 1.1, Volume 4 the disc, tape utilities and a blank dictionary.

It would take several pages to describe them all. In general, they are of the highest standard as our hardware products. Only the first 2 volumes will be described below.

Volume 1:

Solidisk Word Processor and Spelling Checker with English dictionary. Easier than View, Wordwise or

Scribe, you enter the WP by *WP (filename), then start typing. What you see on the screen will be exactly printed on paper.

You don't even need to read the manual twice, the most useful commands are all displayed on the top part of the screen.

This Word Processor features 80 column screen throughout, direct on screen justification, automatic margins, page numbering, printer special commands Wordstar like editing commands for block move, block delete, block copy, print, save, load text to cursor insert and overwrite, search and replace, total word count, word frequency count, free space, * command etc, etc.

Solidisk WP loads and saves texts under 1 second flash and also you may save the edited version as many times and under any filename you like.

And also better than any other wordprocessor, you can spell check your document without leaving it, simply type in Control-U.



It has self dictionary generating capability too. You may create any dictionary you like simply by entering the words. Solidisk WP is also excellent as a training tutor for Wordstar, as used on most 16 bit computers.

Volume 2:

Solidisk Database. Solidisk Database is a random access system, completely menu driven and more importantly, very easily customised to suit any particular need.

Important features include unlimited filesize and number of records, all maths functions and 80 column screen throughout. Solidisk Database is particularly simple to understand and easy to use. You are first presented with an option menu, which comprises 15 different options. Each option will then lead to a new menu and so on. Mostly you only have to enter an appropriate data or hit the RETURN key.

You can design a new database, list all records, edit them, merge them, split them, making mailshot with Solidisk WP etc. For instance, Solidisk telephone enquiries are dealt with by an ordinary BBC with twin Mitsubishi holding the last 4000 sales records. Typing in the name you retrieve the complete record quicker than you can remove your finger. It of course runs Solidisk Datafile.

NEW PRODUCT ANNOUNCEMENTS

Solidisk MODEM.

Single chip FSK, Multistandard internal MODEM, requires no soldering, no adjustment.

Supplied with Menu Driven SoliComms 16k ROM, ready to be connected to any information provider such as Prestel or Gold. Auto dialling, auto answer, auto baud rate, auto error correction.


Available soon. Price: £39.95 inclusive.

Solidisk Third Processor

Internally fitted 6502 compatible with Acorn Second Processor, 128k as standard, upgradable to 256k, 4 Sideways ROM sockets, software supplied in ROM allowing unused RAM to be loaded with Sideways Software or used as Silicon Disk. Available soon.

128k 6502 TP: £179.00 inclusive.

256k 6502 TP: £229.00 inclusive.

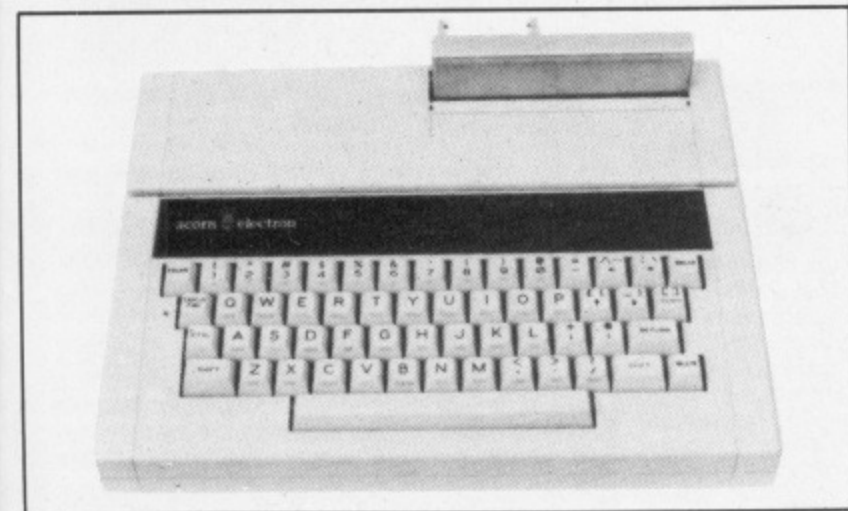

IN STOCK:


- 1) NEW LOW PRICE EPROMS.**
2764s and 27128s are going down in price.
5 x 2764s now cost you only 24.95 per pack.
3 x 27128 now only 25.95 per pack.
- 2) PLENTY OF UVIPROMS AND UVIPACS.**
- 3) ELECTRON DISK INTERFACE.**
This interface is BBC compatible and includes 3 Sideways ROM sockets.
It Plugs into the PLUS-1 and allows direct attachment of disk drive and software compatibility with BBC disks.

PRICE: £39.95 inclusive, P&P: £1.00.

SOLIDISK LOCAL EXPERTS

We have people able to fit your equipment free of charge in all the following towns. If your area is not mentioned, ring the office!

Dunstable, Leighton Buzzard, Reading, Peterborough, Wimslow, Penzance, Torquay, Wimborne, Basildon, Stroud, Southampton, Hoddesdon, Watford, Bexley, Margate, Rochdale, Boston, London (all areas), Oldham, Hunts Cross, East Dereham, Rushden, West Bridgford, Wantage, Bambury, Grimsby, Kingston, New Malden, Woking, Taunton, King Norton, Sutton Coldfield, Halesowen, Leamington Spa, Hassocks, Salisbury, Swallowne, Leeds, Huddersfield, Treowen Newtown, Newtownards, Co Fermanagh, Co Londonderry, Le Mesnil St Denis (France), Kalgoolie (Australia), Paramatta (New Sth Wales), Manawatu (New Zealand).

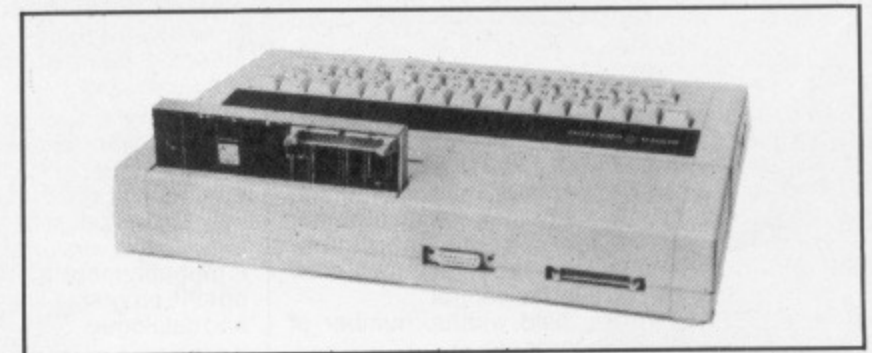

Short form price list. Full price list on request.

Qty Items	Prices	P&P
Sideways RAMs:		
SWR32	£58.95	£1.00
SWR64	£85.00	£1.00
SWR128	£149.95	£1.00
CPU & Keyboard		
Case (both)	£30.00	£3.00
Solidisk DDFS.		
DDFS (with 1.9 ROM)	£38.95	£1.00
DDFS (with 2.0 ROM)	£48.95	£1.00
DFDC (with 2.0 ROM)	£54.95	£1.00
8" Controller	£69.95	£1.00
Special Offers.		
640k Disc Offer	£206.95	£3.00
1.3MB Fantastic Offer	£356.95	£3.00
Eprom Equipment.		
Programmer	£19.95	£1.00
Eraser	£19.95	£1.00
2764 x 5 new low price	£24.95	£1.00
27128 x 3 new low price	£25.95	£1.00
Datalife Diskettes.		
MD525 SS/DD	£17.00	£1.00
MD550 DS/DD	£22.00	£1.00
MD557 2S/4D	£28.00	£1.00
65C02 with Software	£13.00	£1.00
Solimon-2 16k ROM	£13.00	£1.00
2.0 DFS 16k ROM	£20.00	£1.00

Total =

Name: _____

Address: _____

Barclay/Access:

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Prices and specifications correct at time of going to press: we do reserve the right however to change without prior notice.

MUB

CLARES NO1 IN UTILITY SOFTWARE!

Enhanced BETA-BASE £25

WHAT IS A DATABASE?

It is a FILE containing RECORDS, each record consists of a number of FIELDS containing the information—an analogy can be drawn with a card index in which a box of cards is the file, each card is a record and each line on the card is a field.

SPECIFICATION

- 1) Random Access—disc based, single or dual drives.
- 2) File Sizes—max 65,000 records.
- 3) Record Size—up to a 2048 characters and 200 fields.
- 4) Field Size—up to 254 characters.
- 5) Holds—approx 1200 ADDRESS records per 100k.
- 6) Search—5 search fields using powerful options.
- 7) Sort—500 records on 3 fields in 60 seconds.

SYSTEM FEATURES

- ★ CALCULATE—using any valid expression and store results.
- ★ POWERFUL PRINTOUT OPTION—eliminates need for separate mailing program, parallel/Serial Printout allows setting of printer control codes, line spacing, tabulation, Headings etc., plus label printing with horizontal and vertical tab control.
- ★ REDEFINE—Titles, field widths, number of fields, number of records etc.
- ★ TRANSFER—Records from one file to another.
- ★ SEARCH LISTS—Allow creation of sub Databases within main Database.
- ★ GLOBAL ENTRY—provides easy entry of repetitive data and a powerful global edit/update facility that will save hours of typing.
- ★ SPOOLER—enables you to create spooled files that are compatible with Wordwise, View and other word processors. The spooler program will allow you to format your spooled file in the same way as the powerful printout option. You can therefore have headings, columns, titles, numbers etc.
- ★ INPUT—is a routine included on the disc which will allow you to write your own utilities for accessing your data. Many of the programs on the coming utilities disc were written using this procedure.
- ★ TUBE—compatible with the 6502 second processor.
- ★ Comprehensive manual and tutorial.

Coming soon, (Honest!)

Beta-Base Utilities disc containing many advanced features such as full disc sort, AND/OR search on 10 fields, wildcards, mail merge + many other features.

If you would like information as soon as it is ready please send a SAE and we will advise release date and price (about £12).

"Beta-Base is a joy to use"
BEEBUG March 85

"Excellent value for money"
A & B Computing OCT 84

"rated best value for money"
ACORN USER Dec 84

REPLICA II £12.00

In addition to working with the standard single density DFS's REPLICA II is now compatible with the following double density DFS: OPUS 3.45, UDM v. 2.00 and CUMANA QFS.

The original REPLICA set a very high standard so the specification that we set our chief programmer presented him with a real challenge. In fact REPLICA II is now 2 separate programs, one for DFS using the 8271 controller and the other for the various DDFS that fully implement OSWORD & 7F. REPLICA II will transfer many of your cassette based programs to disc, even more than REPLICA did. Now when you buy disc drives you do not have to throw away your expensive cassette based programs.

REPLICA II transfers 'LOCKED' programs, programs loading as files, programs that load below & EOO, those with up to 9 sections and those up to & 6E in length e.g. adventure programs. No more waiting for 6 minutes whilst your adventure programs load.

REPLICA II is very easy to use and the user just enters a name, how many sections and whether CHAIN, *RUN or *LOAD is used to load the first section. Press play and let the program do the rest, even a menu. Just think how much it will cost you to buy a disc version of your favourite program—it is probably more than REPLICA II, which will hold up to 16 programs, limited only by the disc capacity and catalogue.

STATE DFS & 40 or 80 tracks

New! PROFILE £12.00

A PROCEDURE LIBRARY MANAGEMENT SYSTEM

Now you can start the procedure library that you always promised yourself. PROFILE allows you to store, list, merge and grab procedures without any of the headaches. Automatic alteration of LINE NUMBERS and resident variables such as TOP, LOMEM etc release you from the tedious chore of setting and resetting, checking and rechecking. PROFILE leaves you free to create your programs without disturbing your chain of thoughts.

- ★ 100 Procedures can be stored on each disc (disc space allowing)
- ★ NO LIMIT to the number of procedure discs used
- ★ MERGE Procedures into your programs easily
- ★ LIST Procedures from disc to check suitability etc
- ★ RENAME Procedures on disc
- ★ GRAB new Procedures from existing programs
- ★ NESTED Procedures can also be grabbed automatically

A Procedure can be a FUNCTION, a BASIC program or part of it or a PROCEDURE.

With PROFILE you will quickly amass a wealth of procedures which will enable you to write programs quickly and easily. Simply write the controlling program containing the procedure calls and PROFILE will merge the procedures for you.

PROFILE in effect provides you with a MACRO BASIC in which you only have to define the procedure once and it can be re-used automatically thereafter.

Make life easier for yourself and order PROFILE today.

98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9—5pm Monday—Friday
LUNCH 12.30—1.30

New! BETA-ACCOUNTS INVOICE & DELIVERY NOTE MODULE £25.00

This is the first module in an integrated accounting suite of programs written to be used and not simply to please an accountant. This module contains an INVOICE and DELIVERY NOTE program with 80 column input and screen editing, you see what will be printed before committing yourself. Account customer details are inserted automatically and delivery notes generated automatically when required. Customer details without account numbers can be automatically placed in a Beta-Base compatible file for use as a mailing list.

A sales ledger sheet is printed automatically when there is enough data to fill a page, alternatively the user can print the ledger sheet before a full page to suit his needs. VAT details are generated at the end of the VAT period and the year to date figures can be viewed at any time. Provision is made for multiple VAT rates including standard, zero, export and exempt.

A transaction file is generated for account customers for use with the STATEMENTS and ACCOUNTS RECEIVABLE module.

Future modules will be STATEMENT and ACCOUNTS RECEIVABLE, STOCK CONTROL, ACCOUNTS PAYABLE and NOMINAL LEDGER. All relative files are compatible with CLARES Beta-Base which can be used to manipulate the files as required. A Beta-Base Utilities Disc will soon be available and will provide Mail-Merge facilities and links into ULTRACALC plus many other features.

- ★ INTEGRATED ACCOUNTS and DATABASE
- ★ MULTIPLE VAT rates
- ★ SCREEN EDITING with insert & overwrite
- ★ AUTOMATIC DELIVERY NOTES
- ★ INVOICE COMMENTS
- ★ ACCOUNT HOLDERS details inserted automatically
- ★ MAILING LIST generated automatically
- ★ LEDGER SHEET printed automatically
- ★ VAT sales returns prepared
- ★ TRANSACTION FILE generated
- ★ Beta-Base compatible

This program was written for our own use and is used to prepare hundreds of invoices per week. It has no unnecessary questions or keys to press and extensive but easy edit options, we have made life as easy as possible for ourselves so why not take advantage of our efforts.

Requires double sided single or twin single sided drives for minimum configuration—no stock control or customer database. Double sided twin drives will enable a full integrated system to be used.

FUN HOUSE £10.00

FUN HOUSE is a highly original suite of educational programs suitable for ages 3 to 13. The program is designed to encourage children to spell words which relate to objects found around the home. Animation and music are used to good effect and some highly original ideas are incorporated. Each room exercise is terminated with a warning item e.g. the lounge finishes with 'FIRE' which goes on to engulf the whole lounge. Tests with a newly hired 4 year old resulted in us having to prise him away from the keyboard after 2 hours. In that time he had gone from never having used a keyboard to finding the location of all the keys very quickly and entering the correct answer. He had thus started on the path to learning spelling and familiarised himself with the keyboard including the use of DELETE to correct his mistakes. Can you afford not to give your children the same start?

Send for detailed newsletter.
All prices inclusive of VAT & Carriage—
NO EXTRAS! Please state 40 or 80 track disc
and state which D.F.S. you use

clares
MICRO SUPPLIES

BROM

21

EXTRA COMMANDS

THE NUMBER ONE

TOOLKIT ROM FROM CLARES

BROM



£34.50



£27.50

BROM is the first toolkit ROM to provide a FULL SCREEN EDITOR, which means that you can scroll your program up and down just like WORDWISE does with text, do not confuse this powerful editor with the line editor used in other toolkit ROMs. The EDITOR allows insertion and deletion of lines and insert and overwrite within a line. This is the editor that the BBC micro should have had.

Closely related to the EDITOR is the EXTENDED ERROR HANDLING which will trap errors in a program and enter the EDITOR at the line generating the error, not only that but it will also position the cursor as near to the statement causing the error as possible, no more wading through multi statement lines trying to identify the error.

Commands unique to BROM are:

ROMON & ROMOFF which enable you to turn on/off sideways ROMs so that they stay off even after CTRL/BREAK, very useful for avoiding clashes especially for users with second processors. This also works with the DFS and reverts to PAGE & EOO automatically.

CASE which forces input into upper or lower case irrespective of caps/shift lock.

FLIST which lists a program one statement to a line but more importantly it will even list 'BAD PROGRAMS.'

ONEKEY is a single key entry option but you can also define your own strings to any ASCII key, just like an extra 48 function keys.

Another group of commands provide FIND and selective or global SEARCH and REPLACE facilities. These commands work with strings and keywords or a mixture of both e.g. "FIND PROChelp T", will list the full line containing PROChelp, the 'T' simply tokenizes any keywords.

Yet another group of commands allow lines to be moved or copied to a new location.






The other commands provide function key editor, 'BAD PROGRAM' cure, variable lister, integer variable flush, program compacter etc.

This is a genuinely useful ROM that no user should be without. Be warned, once used you will not be able to live without it!

"... this is the best On-Screen BASIC Editor I have ever used; it is far superior to ***** softs Toolkit."

Viewfax Tubelink & ACORN USER.

The Brom disc is suitable for use with SOLIDISK SIDEWAYS RAM.

-  DISC
-  40 TRACK
-  80 TRACK
-  3" DISC—ADD £3
-  EPROM

clares

UTILITY SOFTWARE

UNLESS STATED ALL DISCS COMPATIBLE WITH ACORN, WATFORD 1.3, AMCOM, UDM 2.0, OPUS 3.45 AND CUMANA QFS. PLEASE RING FOR COMPATIBILITY WITH OTHER DFS.

SOFTWARE, FIRMWARE AND HARDWARE FOR YOUR BBC

Buy direct through Prestel (Page *2582020) using your Access

MICRO

Most programs available on Micronet

105	MAILING	Holds 218 addresses. Alpha & Post code sorts. searches. any label format. delete, add and amend	£11.95	B
201	GAMES 1	5 Card, Minefield, Darts, Pontoon & Mr Midon	£5.95	B/E
202	STOCKMARKET	Exciting world of Stocks and shares. 1-4 players	£5.95	B/E
301	HANGMAN	Word game in English, French, German, Italian, Spanish	£7.95	B
302	DISTANCES	Three graphic maps of U.K., EUROPE & the WORLD. Calculate the distance between any 2 places	£4.95	B/E
303	FLAGS	98 full colour flags of the world with questions	£4.95	B/E
304	STATPACK	Statistics package giving over 30 results	£11.95	B
305	GRAPH	Produce varied graphs & charts of functions	£7.95	B
306	FRENCH	A New audio visual computer way to learn a language	£7.95	B
307	SPELL-CHECK	Add to WORDWISE. 15000 words in 12 dictionaries. ideal in education	£17.95	B
504	PROCAID	includes SEARCHBAS to search a BASIC program and alter it. PROCVAR to list variables in a BASIC program & PROCFLUSH to clear resident integers in RAM	£3.45	A/B
505	UTILITY-A	Our best selling tape includes PROCAID, DEFCHAR to design & display graphic characters, SORTM/C a very fast machine code numeric sort, SORTBAS the undisputed fastest BASIC sort routine	£5.95	A/B
520	BANNER	Print giant text and graphics on paper for displays	£3.95	A/B
521	BIGLETR	Print as above on screen/paper with screen dump	£5.95	A/B
600	FORTH	'79 FORTH second language ROM	£34.74	B
601	LOGO-FORTH	Advanced Turtle Graphics Language ROM with FORTH	£57.50	B
602	PASCAL T	Structured language ROM with compiler- interpreter	£57.50	R
603	XCAL	Computer Assisted Learning ROM for presentations	£65.00	B
605	WORDWISE	Super fast & easy to use wordprocessor in ROM	£33.95	B
606	CDUMP	Screen dump. 8 colours, suitable for GP700A	£12.95	B
607	GDUMP	Screen dump ROM. 8 shades, 8 sizes and windows	£17.95	B
608	GRAPHICS	NEW ROM for Sprites, LOGO, circles, etc	£27.50	B
700	BOOKS	Various titles for the BBC Micro from	£6.95	
801	CASSETTES	C15 Computer quality tapes packed in 10's	£4.50	
810	5.25" DISCS	MEMOREX SS/SD 40/80T £19.95 SS/DD 40/80T	£20.95	
901	EPSON RX-80T/F	Superb 100cps with Tractor & Friction feed	£275.00	
902	EPSON FX-80	Magnificent 180cps, 6 fonts, graphics, F/T Roll	£365.00	
910	DISC DRIVES	Slimline 3" or 5 1/4" 100K-800K Japanese Format disc, cable and excellent manual. Plus £50 of FREE Software	£369.00	
915	DISC UPGRADE	Double or Single Density available in one system	£89.00	
920	VDU STAND	Stainless Support protects your micro	£19.95	
930	GREEN VDU	12" Green Monitor, cream sloping front case	£79.95	
931	COLOUR VDU	JVC 14" Colour Monitor 370 x 470 pixels	£179.95	

ADD VAT TO ALL PRICES EXCEPT BOOKS

Add £1.75 for programs on 40 or 80 Track Disc. No post charge in UK. Send for our free brochure for more information before parting with your money.

memo-calc

107 MEMO-CALC £12.95 B C/D
"IT MUST BE AMONG THE LEAST EXPENSIVE PIECES OF USEFUL SOFTWARE YOU WILL EVER BUY" Revue by Practical Computing July 1983.

Database/calcsheet program which allows up to 255 columns. The number of rows is automatically set from 5 to over 1000 depending on the columns declared. Both numeric and alphanumeric data can be stored in any cell and can be of any length up to 255 characters.

There are a multitude of uses for this program from accounts to diaries, club or personnel records etc. and is probably the one program that we all need. MODE7

107a Manual for MEMO-CALC included free otherwise £2.00 (0% VAT)

PAYROLL

Part 1 is a BASIC program running in MODE7 which accepts new data on employees, allows additions, deletions and alterations, listing of P35 & automatic alterations to the codes as required by tax notice P7X. Fully 'user friendly' with colour and graphics to make life simple for the operator.

Part 2 (WEEKLY) or Part 3 (MONTHLY) is designed to handle the calculations of wages and N.I. It allows for standard pay, two overtime rates, optional pension funds (monthly only) other pay, holiday pay, bonuses, post-tax adjustments and no pay.

106b COIN ANALYSIS £4.95 B C/D EXTRA

106c PENSION £4.95 B C/D EXTRA

106d PAYSPLIT FORMS £25.00 per 1000 EXTRA

Buy direct on
Prestel
No. * 25821534.

£27.95 + VAT

**Most Programs
Now Available For
MSX BASIC** Dealer Enquiries
Welcome

ORGANISATION AT YOUR FINGER TIPS!

We are pleased to offer you a wide range of products primarily for the BBC microcomputer software, firmware and hardware for your computer system.

PERSONALISED SOFTWARE

We are happy to quote for writing programs to suit your own specific purpose. Please telephone for details in first instance.



CASHBOOK

102 CASHBOOK £11.95 B C/D

FIRST CHOICE This is a double entry cashbook program showing cash and bank credits and debits, i.e. 4 columns. Any number of individual accounts can be used and analysed or totalled individually or cumulatively by associated group. A friendly but very practical, and reliable program which despite its low cost is used by many people in a range of situations from domestic and clubs to schools and businesses.

MODE7

102d CASHBOOKd £19.95 B D

SECOND CHOICE This version of the above program uses random access disc files and can hold up to 1250 entries on 100K discs and up to 2500 on 200k discs. There is sophisticated protection against unauthorised use built in. MODE 7

102f ACCOUNT £29.95 B D

THIRD CHOICE This version of the above program uses random access disc files and can hold up to 1100 entries on 100K discs, and up to 2250 on 200k discs. Included is a choice of CASH/BANK or VAT/BANK headings. Over 830000 possible accounts combinations. Ledger sheets and summaries can be printed as well as full accounts. The latest balance is available at any time. This program is only available on disc. MODE 7

Special Interest Items

NEW EXTENDED PAYROLL

Disc only version of our very popular PAYROLL with extensions to include three O/T rates, SSP, contracted in and out, pensions, personnel records and many other features - £49.95 + VAT.

ACCOUNT and CASHBOOK d PROGRAM OWNERS

Please note we can now offer monthly analysis feature. Return your disc with £10.00 for upgrade.

Top Spring Program




RANDOM MAILING up to 1850 addresses, names, phone numbers & codes on one disc. Selective printing any number of labels, repeat, stationery or fan fold. Automatic WORDWISE letters produced repeatedly with personalised names many other features such as automatic sorting by company or personal names. By far the best and most comprehensive program of its type for the BBC Micro. Price £29.95 + VAT

Micro-Aid

25 Fore St. Praze, Camborne
Cornwall. TR14 0JX tel: 0209 831274

Before you go mad at Silverstone, let David Hunt drive you round the bends.

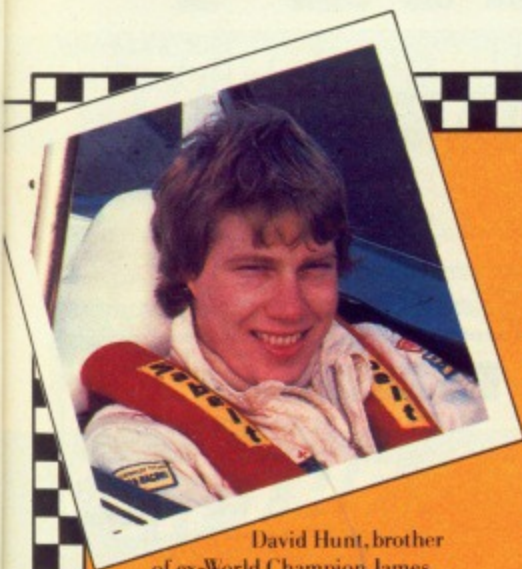

David Hunt, brother of ex-World Champion James, began racing 100cc go-karts at 16. Now aged 24 and with two successful Formula Ford seasons behind him, David is a member of the Eddie Jordan Formula Three team.



7. CHICANE.
Throw out the anchors. Change down to 4th. Flick left then right. Come out, at around 117mph. Get the first bend wrong and you lose a lot of time correcting later on.



1. COPSE CORNER.
Brake and drop into 4th. Turn in, then hit the accelerator. Watch the kerb in wet weather. The painted surface makes it slippery.



2. MAGGOTS.
Easily taken flat-out. That's around 6000rpm in 5th. The power in an F3 car peaks between 5000 and 5,600rpm. If you put your foot down at less, you'll blow your engine up.



3. BECKETTS.
Approach at 5,700rpm in 5th (132mph). Keep left. 60 yards out, hit brake and drop down through 5th and 4th to 3rd.




4. HANGER STRAIGHT.
Drive diagonally across the straight. Clock 5,800rpm in 5th as you approach Stowe Corner. That's around 139mph.



6. CLUB.
Arrive with 5,700rpm up, to get through in 5th gear. Avoid the apex kerb. It'll flick you into the catch-fencing.



5. STOWE.
Supreme test of courage to keep your foot on the loud pedal through this critical bend.

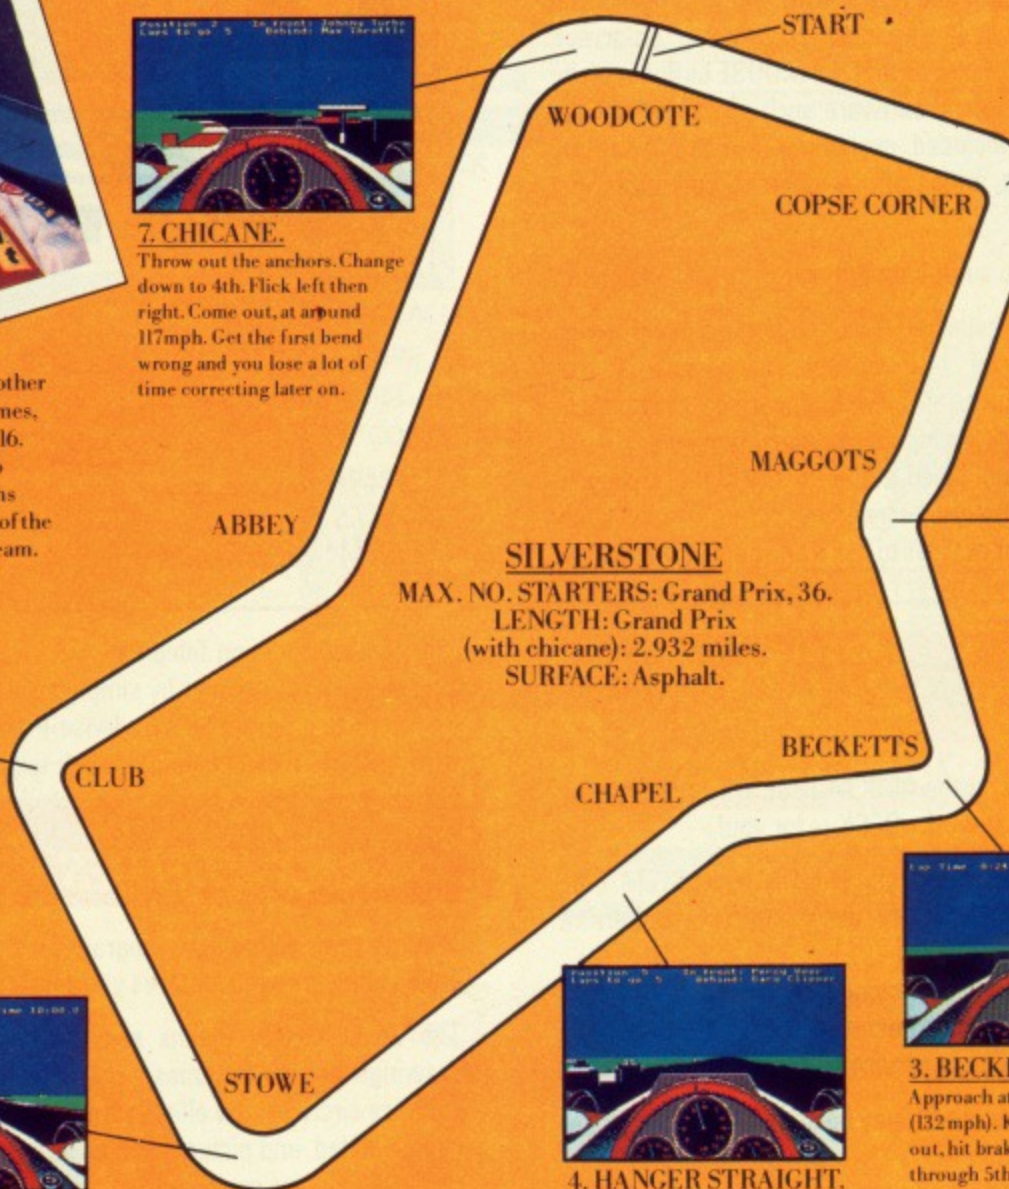

REVS is far and away the most realistic simulation of motor racing ever devised.

Technically, of course, it's a computer game for the BBC Micro. But somewhere in the middle of your first practice lap you'll realise that 'game' has nothing to do with it.

Instead, you'll experience how it feels to drive every bend, straight and gradient of the world's fastest Grand Prix circuit. In a machine that accelerates from 0 to 100mph in just 3.2 seconds.

Gear ratios, engine tuning and handling - they're all accurate in their finest detail and faithfully programmed into REVS.

You can even pre-set the aerodynamic profile of the car to suit your driving style.

So take our advice: before you try for the lap record at Silverstone, study David Hunt's circuit diagram.

After all, when was the last time you had a free driving lesson from a professional?

For the address of your nearest Acornsoft stockist, or to order REVS on credit card, call 0933 79300 during office hours.

Or send the coupon below to: Acornsoft, c/o Vector Marketing, London Road, Wellingborough, Northants NN8 2RL. Please allow 28 days for delivery.

To: Acornsoft, c/o Vector Marketing, London Road, Wellingborough, Northants NN8 2RL.

Please send me REVS for The BBC Microcomputer.

No. of Discs at £17.65 inc VAT _____

No. of Cassettes at £14.95 inc VAT _____

I enclose PO/Cheque payable to Acornsoft Ltd. Or charge my credit card

Card Number: Barclaycard/Access (delete) _____

Name _____

Address _____

_____ Postcode _____

Signature _____

BUS



AMX MOUSE

Catch an incredible AMX MOUSE! The advanced opto-mechanical device that brings to your BBC micro facilities once only available on more expensive computers. Now you can use ICONS, WINDOWS AND POINTERS in your own programs.

AMX PACKAGE


Plug the MOUSE into the user port, and the EPROM into your board. The latter contains fast machine code routines for creating on-screen windows, icons and pointers. And means that the MOUSE buttons can be programmed for use with commercial software such as Wordwise and View. There are two manuals included, explaining how to operate the MOUSE and the ROM routines, which are available in both basic and machine code programs.

Included in the package are two superb programs:

AMX ART has to be seen to be believed! It's a computer-aided drawing program that's just as good for serious applications—such as the preparation of detailed architectural and engineering drawings or teachers' worksheets—as it is for having lots of family fun! And if you're artistically inclined, you'll be astonished at the quality of work you can produce and save. It makes full use of on-screen menus, pull-down menus and icons: the ideal, easy way for novices to learn and gain in confidence.

ICON DESIGNER is an invaluable program for creating and storing icons for use in your OWN programs.

The AMX MOUSE may be used with any BBC Model B fitted with the Operating System 1.2; and it's compatible with the 6502 second processor and disc or tape filing systems.

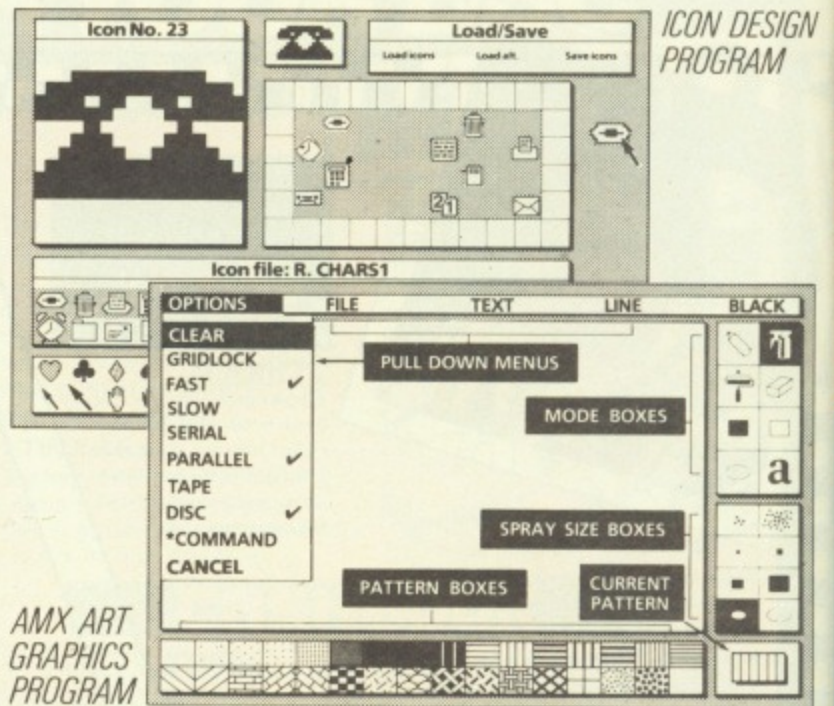

New! AMX DESK


DISC ONLY
£24.95 INC. VAT

A terrific new program designed for the AMX MOUSE. If you want to get properly organised—at home or at work—DESK is for you!

The main screen contains a desktop with header offering SYSTEM, FILE and EDIT menus—plus an additional menu for extra features; and there's a constant time display.

Down the right-hand side are icons displaying Disc Drives, Memo Pad, Telephone Book, Diary, Alarm Clock, Printer and Trash Can. Simply by using your MOUSE you can select any service you require.

- **MEMO PAD**—Up to three pages of text may be stored. With printing at the touch of a button.
- **TELEPHONE/ADDRESS BOOK**—Up to 200 or 400 entries (depending on disc drive capacity) with handy scrolling search.
- **DIARY**—Displays a calendar for three months, centred on the current month, with scrolling backwards and forwards. Dates with entries are highlighted; select a date and view the entries.
- **ALARM**—Sounds at the time you've pre-set, whichever DESK service you're using.
- **CALCULATOR**—A full-function calculator can be brought on-screen at any time, and results can be stored for use in Memo Pad, etc.

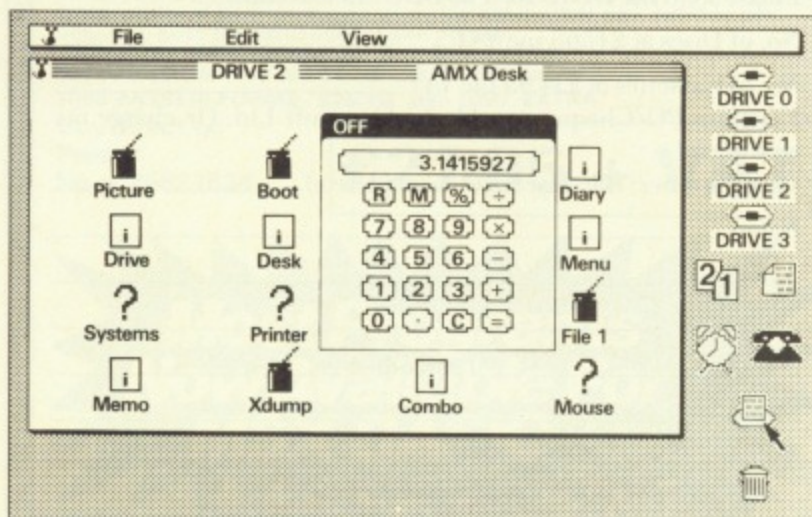

See us on Mouse Links on Viewfax tube link on Prestel: Page No. *258216#

Any window showing Telephone/Address Book, Diary or Memo Pad may be dumped to the printer by simply selecting the printer icon.

An interface program for Wordwise+ and View means pictures created with AMX ART can be merged with text upon printing out.


New! AMX UTILITIES

DISC ONLY
£14.95 INC. VAT

Another remarkable new program for the AMX MOUSE. Now you can enjoy many drawing features you'd never expect to find at this price!

The Zoom facility means easy and accurate amendments to your drawings: one dot becomes a character. You can copy, rotate and reflect; enhance circles; draw ellipses and arcs; and print icons, too. Borders can be added, and pictures can be stripped and centred ready for saving and printing. There's colour sketch, too... Great for budding artists!

All disc software is available on 40 or 80 Track and 3" disc. Please state which you require when ordering.

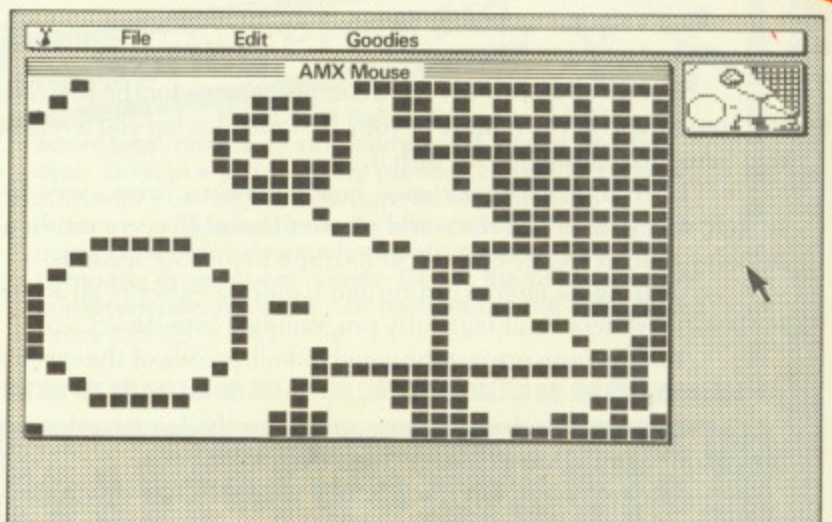


These exciting AMX products are available from top computer dealers. Or you can order direct from us. Send cheque/PO to Advanced Memory Systems Ltd, Green Lane, Appleton, Warrington WA4 5NG. Ring (0925) 62907/602690 for instant ACCESS and VISA orders.

AMX MOUSE

POINTS THE WAY

**FOR THE
BBC MICRO
MODEL B**

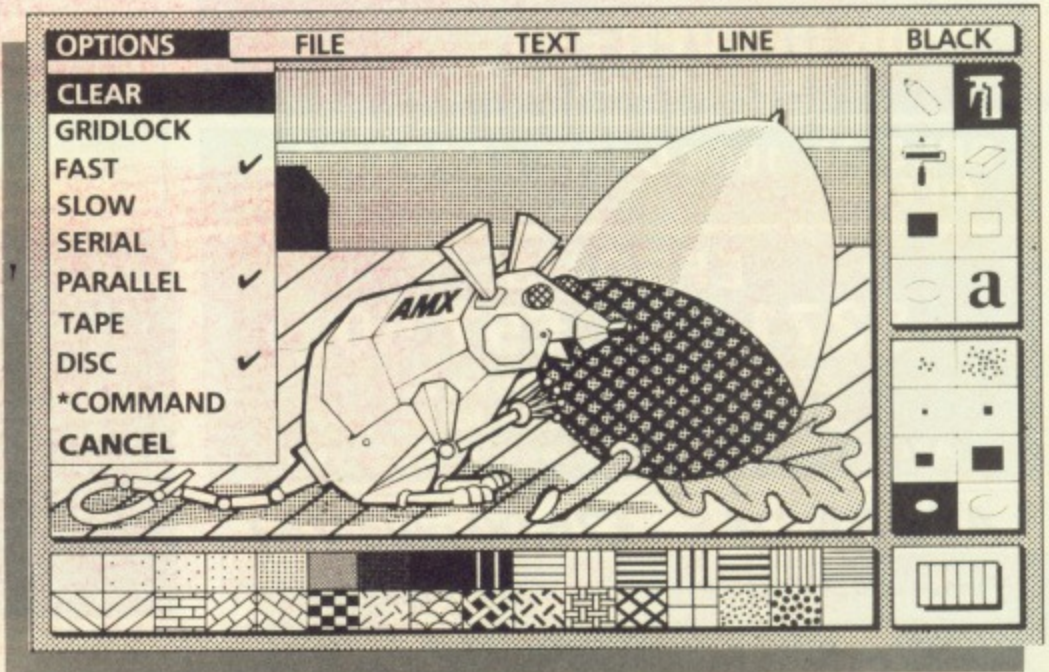

with AMX ART GRAPHICS PROGRAM


EDUCATIONAL QUANTITY DISCOUNTS

ICON SOFTWARE

CREATIVE GRAPHICS

FASTER INTERACTION

£89.95
inc. VAT and P & P

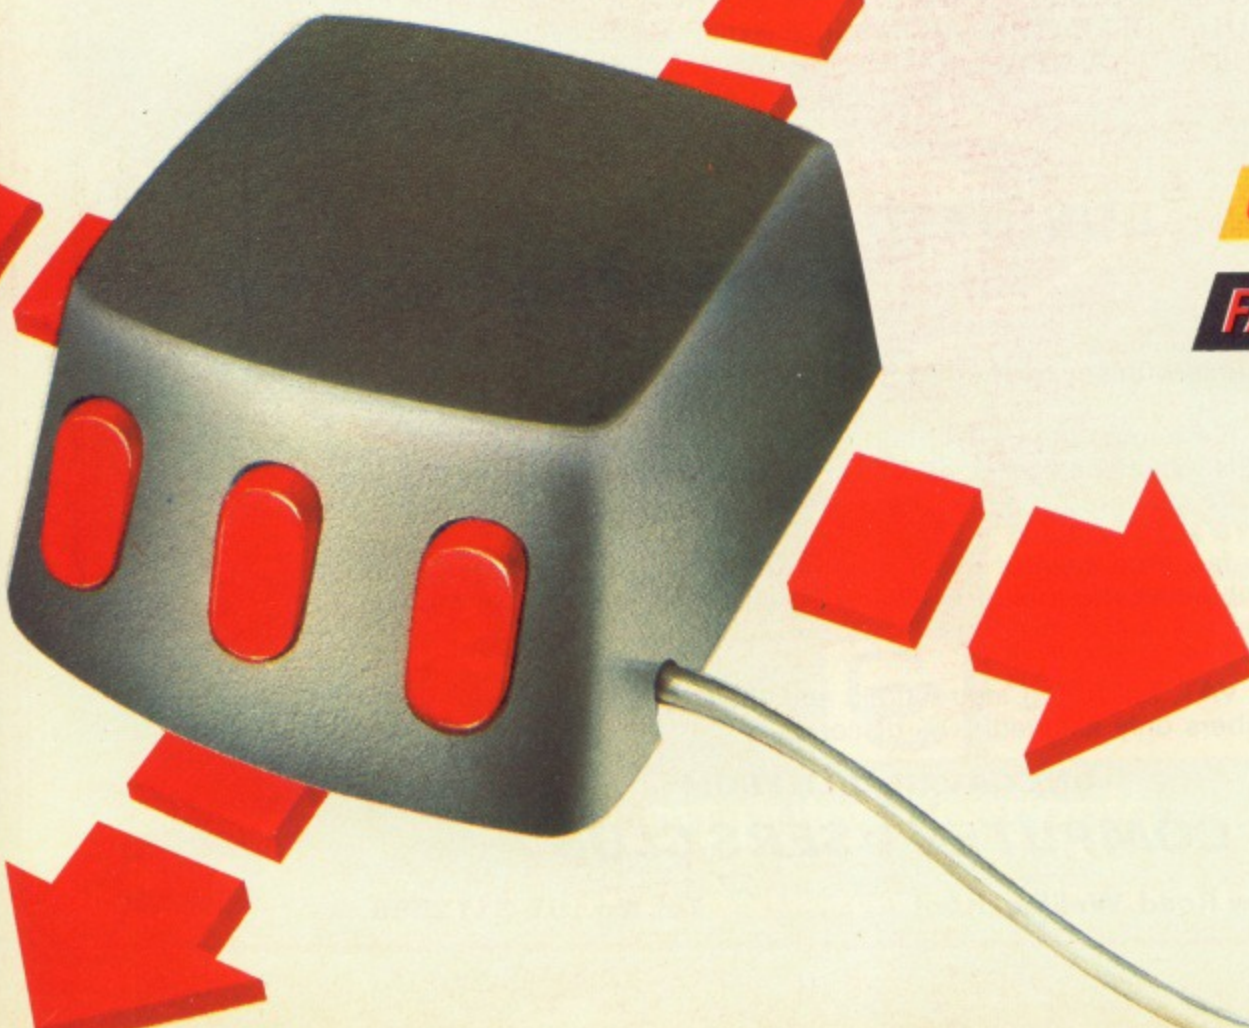

40/80 TRACK SWITCHABLE 400K

(genuine half height)

£156 inc. VAT and carriage.

400K DRIVES £125 inc VAT + carriage
80 tk double sided, full height

200K DRIVES £90 inc VAT + carriage
80t single sided, full height

SPECIAL 100K DRIVE + DFS £196 inc
OFFER VAT + carriage

EPROMS

8271 £57.50

27128 - £8.00 (£23.00 for 3)

2764 - £4.60 (£22.00 for 5)

All prices include VAT. Please add £1.00 for p&p

ACORN DFS - £75.00 plus VAT

Please add £1.00 p&p

(£86.25 inc VAT)



CD

CARSON DEVELOPMENTS (MU)
84 Highfield Road, Romford, Essex, RM5 3RU
Telephone: 0708 27043



SINGLE/DOUBLE DENSITY FILING SYSTEM BY UDM

- Runs Elite, Mini-Office, Scribe, Starbase
- Acorn compatible - runs BASIC, VIEW, WORDWISE, BCPL
- Compatible with 2nd Processors, Teletext, Osword 7F
- Automatic switching between 40 and 80 track mode
- Automatic switching between single and double density
- Disc formatter in ROM
- Complete with manual

2.0
version
now
available

£91 inc VAT and p&p for D.F.S.

2.0
upgrade
£5.75 inc

NEW REPLICA II

Tape to disc utility for UDM DFS - **£12.00** inc VAT and p&p

Slimline Drive Case £13.80 inc VAT
Full Height Drive Case £18.98 inc VAT
Please add £2.00 p&p

Single Drive Data cable £9.77 inc VAT
Single Drive Power Cable £5.17 inc
VAT

Add £1.00 p&p

UDM 100% BOARD

Board only £18.50
Board + Acorn DFS + 8271 £95.00
Board + UDM DDFS £95.00
Board + Acorn DFS + 8271
+ UDM DDFS £150.00
Prices inc. VAT and p&p

DISKETTES

(per box of ten) inc VAT + p&p

	Wabash	Datalife
40 tk ss sd	£14.50	-
40 tk ss dd	-	£18.00
40 tk ds dd	£19.00	£24.00
80 tk ds dd	£24.25	£29.35

40 tk ss dd (10 of) **£14.00**
inc VAT and p&p

40tk ds dd (10 of) **£19.00**
inc VAT and p&p

includes free library case

25 single sided double
density diskettes in a 50
capacity storage box £36.50
inc VAT p&p.

25 double sided double
density diskettes in a 50
capacity storage box £50.00
inc VAT p&p.

Empty 40-50 capacity storage box at £10.00 inc. VAT p&p

BBC Model B

£349 Inc VAT

Monitors and Printers also in stock.

ORDER NOW

THE MOST SOPHISTICATED DISC FILING SYSTEM 16K ROM EVER WRITTEN FOR THE
BBC MICROCOMPUTER OPERATING ALONGSIDE YOUR EXISTING ACORN TYPE DFS
ROM AND OPENING UP A NEW EXCITING PHASE AS A SUPERIOR OPERATING
SYSTEM

THE **DISC**
BUSINESS SYSTEM
DISC **DOS**


- ★ Fully compatible with any existing DFS and Torch CPN/MCP format.
- ★ Allows 255 file names on a CP/N and CP/M type screen format.
CAN'T EXTEND banished for ever, COMPACT redundant as the vacant areas
on the disc are gathered together for economic file use automatically.
- ★ Designed to facilitate ease of use - vital in the area of business programs on
the BBC. Will allow the mix of BBC and Torch CPN programs on the same
disc.
- ★ £39.50 inc. VAT, full fitting instructions and User Guide.
C.U.C. Members only allowed 10% discount.

ONLY AVAILABLE FROM

COMPUTER USERS CLUB

69a Hadlow Road, Welling, Kent.

Tel. No.: 01-311 2555



INTER-SHEET

The electronic spreadsheet program

Spreadsheet programs have become one of the most popular micro-computer applications in recent years. They can be thought of as a totally general purpose numeric tool, of use to anyone who has to handle figures, calculate costings, keep control of running costs, or just simple budgeting.

This package contains the ROM itself, a quick reference card, an introductory manual to spreadsheets and a comprehensive reference manual. Chip fitting instructions and a function key strip are also included.

The program has many quite unique features.

- 1) 40, 80 or 105 column screen display. The special 105 character screen mode displays more than any other spreadsheet.
- 2) Up to 16 spreadsheets may be stored in memory at once.
- 3) Data can be transferred from one spreadsheet to another.
- 4) Spreadsheet data can be transferred to and from popular wordprocessors such as WORDWISE and VIEW.
- 5) This package will integrate directly with other ROM-LINK compatible products, such as INTER-CHART, which can produce charts and graphs of data from the sheet.
- 6) Formulae in boxes are tokenised to save space. This means larger than normal spreadsheets can be accommodated.
- 7) Main menu enables even the inexperienced user to operate the more complex functions. There is no need to remember long command names.

These are in addition to many other powerful features such as: Variable column widths. Flexible replication facilities. Insert and delete rows and columns. Numbers may be printed in three formats. The number of decimal places is variable from 0 (integer) to 9.

Locking/unlocking of boxes. Boxes may be justified left or right for numbers and left, centre or right for labels.

Most of the above features can affect individual boxes, rows, columns or the entire sheet.

INTER-SHEET supports a large range of high precision mathematical functions. These include all the more common functions such as SIN, SQR, TAN etc. but also include special sheet functions like SUM, MAX, MIN, LOOKUP, AVERAGE.

A special form of windowing has been included allowing any row or column to be held on screen as the sheet scrolls underneath.

All in all these features go to make INTER-SHEET the most powerful and flexible ROM based spreadsheet available for the BBC Micro-computer.

£49.00 + VAT (£56.35)



ROM-LINK

INTER-SHEET is the first of a fully integrated suite of ROMs for the BBC MICRO to be known as the ROM-LINK series. Any ROM-LINK compatible product can run in memory with other ROM-LINK programs, and data can be transferred directly from one to another.



Computer Concepts

Gaddesden Place, Hemel Hempstead, Herts. HP2 6EX (0442) 63933

TAKE A TEST DRIVE FROM THE RANGE



So now you have got your home computer, you're ready to take the Ac to Cumana – the best name in memory. Already a market leader throughout Europe for their range of disk drive BC Ba Cumana now have other products on offer, all to micro th same exacting standards that have made their participi disk drives the number one choice in the school and cas home and in education.

The Touch Pad

The Touch Pad is a low-cost graphic plotting aid for the BBC micro. This compact display cursor moving device simplifies programming with the touch of the stylus.

The product comes complete with an instruction booklet, basic software, stylus and connecting cable. Its uses are in graphics, computer aided design, education and games.

£69.95

including VAT.

BE SAFE NOT SORRY

Cumana's CS range of single disk drives have been subjected to the strict safety demands of the BEAB.

They have now been awarded BS415 approval, so if you value safety do not trust it to anything less than Cumana.

Cumana's dual range of disk drives have also been submitted for approval.



Disk Drives

Cumana have spent years on research, development and marketing a range of drives second to none. Their drives are compatible with BBC, Spectrum, Dragon, Oric, Tandy Models III and 4 and Video Genie. They are fully guaranteed for 12 months and approved for electrical

safety by the D.M.E.E. and are extensively used in GLC and ILEA establishments. Cumana were the first independent disk drive supplier and are now Europe's market leader. Their products have been proven in the schools, universities and homes throughout Europe. Let us drive you in the right direction, send now for further details of the Cumana range, or see them at our distributors and at selected branches of W.H. Smith, Lasky's, Greens, Currys, and Spectrum UK.



DRIVE CUMANA

...dy to talk
...market
...sk drives
...all to the
...de their
...n the
...graphic
...This
...device
...ch of the

The Acorn Electron Computer
A microcomputer with a proven track record. Using BBC Basic, the Electron was developed out of the micro that has been chosen for over 80% of schools participating in the Government's current Micros In Schools project. It connects into almost any TV set and cassette player and is supplied with a comprehensive User Guide which runs through, in a simple to follow manner, the basic principles of programming. A wide range of software is available, including games, educational packages and home accounts.

Disk interface now available for the Acorn Electron, Spectrum and Spectrum + and Dragon 32/64. details from Cumana

£149.95
including VAT.

Diskettes

Only when Cumana found a double density diskette up to their stringent quality control requirements, and at a price that made sense to the end user, were Cumana ready to put their name to it.

The result was a top quality diskette, complete with a plastic protective case for the ten-pack (they are also sold in two-packs!) together with index stickers.

Cumana diskettes are available now in both 5¼ inch and 3½ inch as single or double-sided, 40 or 80 track, from your local computer dealer. Don't trust it to chance, go for the best name on record.

Cumana BBC Microcomputer compatible disk drives:
Cumana disk drives supplied with formatting diskette, drive connecting cable and Cumana user guide. Independent power supply, mains lead and moulded plug included.

CS100 40 Track single sided (100K)	£164.95
CS200D 40 Track double sided (200K)	£169.95
CS200 80 Track single sided (200K)	£192.95
CS400 80 Track double sided (400K)	£219.95
CD200 2 x 40 Track single sided (200K)	£294.95
CD400D 2 x 40 Track double sided (400K)	£325.95
CD400/S 2 x 80 Track single sided (400K)	£359.95
CD800/S 2 x 80 Track double sided (800K)	£414.95

Cumana disk drives with independent power supply, mains lead and plug. Excluding other accessories.

CS100E 40 Track single sided (100K)	£149.95
CS200ED 40 Track double sided (200K)	£192.95
CS200E 80 Track single sided (200K)	£180.95
CS400E 80 Track double sided (400K)	£208.95

Cumana disk drives supplied with formatting diskette and Cumana user guide. Power supply taken from BBC Microcomputer, with lead supplied.

CSXL100 40 Track single sided (100K)	£115.95
CSX100 40 Track single sided (100K)	£124.95
CSX200D 40 Track double sided (200K)	£134.95
CSX200 80 Track single sided (200K)	£159.95
CSX400 80 Track Double sided (400K)	£189.95

3½ INCH DRIVES

CSX351 40 Track single sided (100K)	£139.95
CSX354 80 Track double sided (400K)	£199.95
CDX352 2 x 40 Track single sided (200K)	£256.95
CDX358 2 x 80 Double sided (800K)	£383.95

The 'X' range takes its power from your microcomputer.

CS351 40 Track single sided (100K)	£169.95
CS354 80 Track double sided (400K)	£229.95
CD352 Dual 40 Track single sided (200K)	£299.95
CD358 Dual 80 Track double sided (800K)	£429.95

The 'CS' range comes complete with power supply.

DISTRIBUTORS/RETAIL

Available from the following retail outlets:
W.H. Smith, John Lewis Partnership,
Greens Leisure, Laskys, Spectrum UK.

Area distributors:

Addons Ltd (Southampton) 0703 34775/6.
Audio & Computer Centre Ltd (Jersey)
0534 74000. Eltec Home & Business
Computers (Bradford) 0274 722512.
Fairhurst Instruments (Wilmslow) 0625
525694. HCCS Associates (Gateshead)
0632 821924. Hugh-Symons Distribution
Services Ltd (Bournemouth) 0202 26535.
Kingdom Design (Belfast) 0232 643720.
Lightning (Harrow) 01 969 5255. Microage
Distribution Ltd (North London) 01 205
7688. Microworld (Edinburgh) 031 228
1111. National Micro Centre (Stockport) 061
429 8080. Northamber PLC (Chessington).
Silicon Express (Leicester) 0533 374917.
Thompson Cook Distribution Ltd
(Birmingham) 021 328 3895. J. S. Simnett
Computers (Kingston-upon-Thames)
01 541 1495.

+ National Dealer Network




Cumana Limited, Pines Trading Estate,
Broad Street, Guildford, Surrey. GU3 3BH
Telephone: 0483 503121

All Prices Inclusive of VAT.
All 80 Track 5¼" Drives are
Switchable to 40 Track Mode

All prices are subject to change without notice.

WIN A SAFARI TO KENYA

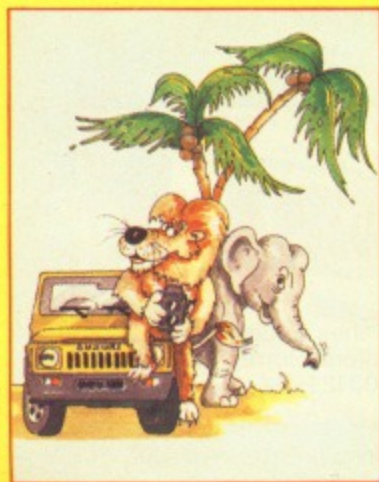

An opportunity to win a super ELEPHANT Safari for two persons – luxury accommodation, travel and all expenses paid – with every purchase of a 10-disk ELEPHANT pack made between 1st April and 30th June 1985! Look for your participating ELEPHANT Dealer's special Competition Display and pick up a simple puzzle card with your purchase. Send it to us with an ELEPHANT 10-pack top to receive, completely free, an ELEPHANT 'T' shirt and an opportunity in this exciting competition. Each subsequent 10-pack purchase and completed puzzle card gives you another opportunity – there's no limit! Should you have difficulty in obtaining ELEPHANT products, phone or write for details of your nearest Dealer.

Dennison

ELEPHANT NEVER FORGETS

Dennison Manufacturing Co. Ltd.


Colonial Way, Watford, Herts WD2 4JY, Tel: Watford (0923) 41244, Telex: 923321

France: Soroclass, 45, rue de l'Est - 92100, Boulogne.

Tel. Réseau de Distribution: 605 98 99, Administration des Ventes: 605 70 78, Telex: EMS 206 436 E

Germany: Marcom Computerzubehör GmbH, Podbielskistr. 321, 3000 Hannover 51, Tel: (0511) 647420, Telex: 923818

Other Countries: Dennison International Company, 4006 Erkrath 1, Matthias-Claudius-Strasse 9, Telex: 858 6600

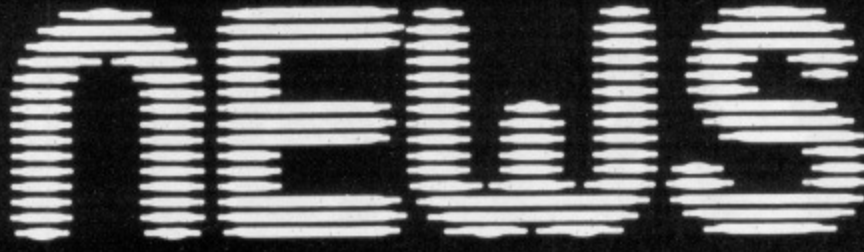

MicroLink's big breakthrough

A UNIQUE announcement in last month's *The Micro User* resulted in a postbag of almost 1,000 letters in less than a week.

The staggering response was due to the launch of MicroLink – a dramatic breakthrough

on behalf of all UK micro users.

Following weeks of secret talks, Database Publications had agreed an exclusive nationwide cost-cutting deal with Telecom Gold.

"It means that this service will no longer be just the domain of the well heeled businessman", says Derek Meakin, head of Database.

"For we have now brought Telecom Gold within the budget of every home computer owner".

As a subscriber to MicroLink, computer buffs pay a one-off registration fee of £5, plus a standing charge of £3 a month. This is compared to Telecom Gold's usual £10 per month minimum charge.

With MicroLink, almost everyone will be able to access Britain's national database via PSS for the cost of a local call.

It will also provide subscribers with a personal electronic mailbox, giant bulletin board without queuing, free telesoftware and free access to MicroSearch, a revolutionary product locator.

And – for a bonus – there will be a regularly updated news service covering all that is happening in the world of the BBC Micro.

"We believe we couldn't have worked out a better deal for micro users with Telecom Gold", says Derek Meakin.

"This will open up a whole new world for our readers".

ACORN ADDS A+ TO THE MODEL B

AFTER months of intense speculation, the enhanced version of the BBC Micro has at last been launched – and the good news is that it's in the shops now.

The Model B+, as it's known, has confounded the pundits by being very different from their predictions.

Tales of 128k paged memory, new ULAs and ADFS as standard have proved to be nonsense.

In fact, as its name implies the new model is more of an intelligent extension to the BBC Micro range rather than a radically different design.

The Model B+ comes supplied with DFS as standard, with Tube software incorporated. The increasingly scarce 8271 floppy disc controller has been replaced with the WD1770.

However, rather than opt for a dual density approach which would provide major compatibility problems for software suppliers, Acorn

has used the chip in single density mode.

Nor does the command set of the new DFS differ radically from the old, save for formatting now being included in ROM.

One major difference in the new machine however is the provision of 32k of banked RAM for screen memory.

Switched on with *SHADOW or by adding 128 to the MODE command, the extra memory frees up to 20k of RAM normally used for screen display for programs.

Again, to ensure compatibility with existing software, the extra RAM can easily be deactivated.

Incorporating these changes has entailed rearranging the board somewhat, and the opportunity has been taken to make some improvements.

The sideways ROM

sockets have increased by one to six, and are now capable of holding 32k ROMs.

Taking advantage of this the OS and Basic ROMs have been combined into one single 32k chip. The OS appears virtually the same as OS1.2, with small changes to support the banked RAM commands.

Other changes include full buffering of the Tube I/O, the cleaning up of the 1MHz bus glitches, and a change to all non-socketed chips, to improve reliability.

One other enhancement is the replacement of the 6502 with the 6512. Transparent to the user, its improved clock circuitry means cleaner timing signals throughout the board.

Said Acorn's John

Turn to Page 24

No price cuts

ACORN'S new baby, the model B+, has bounced onto the scene complete with DFS at a cost of £499.

However the company has no plans for the moment to provide a cassette version of the machine.

"We believe the market is moving away from the cassette option", John Caswell of Acorn told *The Micro User*.

Nor will the arrival of the B+ result in price reductions for the model B itself.

"There will be no special offers", said Caswell, "we are not in the business of discounts."

"Acorn will have rigid pricing policy from here on in. And with the B+ we believe we have the right machine at the right price".

ADVANCE ORDERS FLOOD IN

ADVANCE orders for the model B+ were reported to be heavy even before the new machine hit the streets.

One distributor based in the North of England, Eltec of Bradford, received requests for 250 units in just one week.

And that was almost a fortnight before the official launch date of May 1.

Similar stories came

from all over the country.

"The orders came from dealers who were obviously impressed with the specs Acorn allowed us to give them", said Catherine Tweddle, Eltec's managing director.

All Acorn's distributors and direct dealers had been let into the secrets of the B+ some time before it was unveiled.

This is part of the

revamped Acorn's policy of offering a new deal for wholesalers, retailers – and users.

Opportunity

"We wanted to make sure everyone had the opportunity to get hold of a machine during all the launch publicity", said John Caswell, Acorn's head of marketing, Consumer Division.

"Too often in the past,

machines have arrived in a blaze of publicity – then it's proved impossible to get your hands on them for weeks".

As a distributor for Acorn products for ten years, what does Catherine Tweddle think of the new machine?

"Judging from the reaction so far, it looks as though they are once again on to a winner", she said.

CUT-PRICE SOFTWARE OFFER IS PROBED

LEADING publishers of BBC Micro software, including Acornsoft, are investigating a mail order operation offering top selling games at rock bottom prices.

Famous titles like Elite, Castle Quest, Micro Olympics, Football Manager and Combat Lynx are involved.

The software houses were alerted by readers of *The Micro User* who had received postal offers from A1 Software Services of Hornchurch, Essex.

The mail shot said: "Dear Sir, this is the best software offer you will ever receive. Please note, this is your one and only chance to take this offer".

It then went on to invite

people to choose one from a list of 20 well known games which would be theirs for only the cost of postage and packing - 25p.

The offer continued: "When you have received your free tape you can buy the following" and gave details of three packs, each containing 15 top games. Price for one pack was £20, for two packs £30 and for all three £40.

Another version of the mail shot offers a choice

of 21 packs containing five games each at prices ranging from £5 for one pack to £30 for 10 packs.

The offer states: "All titles are the ones from the well known software houses. All copies are first class quality and we will exchange any non-loaders. Please be very descrete (sic) with this list".

Acornsoft's head of technical services, John Collins, told *The Micro User*: "We are taking this very seriously indeed and have sent off for some of

the software which carries the same titles as our own.

"If there is the slightest evidence of piracy or other unlawful activity by this firm our legal department will take over".

Simon Vout, proprietor of Software Invasion, another publisher whose games are listed on the mail shot, said: "I've sent a copy of the offer to my solicitor and I'll be monitoring the situation very closely".

The Micro User tried to contact A1 Software Ser-

vices by telephone. Directory enquiries could find no listing in Hornchurch for the firm, nor for an "A. Croft" named as proprietor on the mail shot.

A representative of *The Micro User* who called at the Hornchurch address found it to be an accommodation service-cum-escort agency located in a run-down shop.

The woman in charge said a "youngish" man had been picking up mail addressed to A1 Software Services.

ACORN CLINCHES £1 MILLION DEAL

ACORN'S newly-created business division has clinched a deal worth £1 million with Reuters.

It is to provide a low-cost microprocessor capable of adding local processing power to Reuters' 40,000 monitor installations world wide.

Designed to the international news agency's specification, the new machine will convert the monitors into intelligent data and graphics workstations.

They will be used to handle the latest gener-

ation of information services being developed for the foreign exchange and commodity markets.

Reuters had previously acquired 1,300 standard units from Acorn, of which more than 800 have been installed.

Already there are customers in Europe, the Far East and Middle East, Japan and North America.

Now Reuters has commissioned Acorn to design and build an initial quantity of 1,000 units to a significantly improved

specification in the Euro-card format. They will be delivered later this year.

Mike Tweedie, sales director for Acorn's Business Division, said: "This deal is a breakthrough for Acorn, made possible through our considerable technological expertise.

"The OEM market offers immense opportunities to Acorn, and the Reuters contract has given our newly-formed Business Division a firm base from which to win new orders".

Enhanced BBC Micro

From Page 23

Caswell, Head of Marketing, Consumer Division: "We feel that the Model B+ will find a ready market place in home and small business applications.


"Previously disc based models have found wide acceptance in these areas

as word processors, spreadsheets and communications systems.

"There's tremendous potential here, especially for the new Model B+. The increased workspace given by its larger memory makes it ideal for these serious applications".

The new look BBC

Micro has been received enthusiastically by software houses and users alike. Said one leading software house: "Acorn have got it just about right. They've made sensible improvements where needed, and yet have avoided giving us major incompatibility problems".

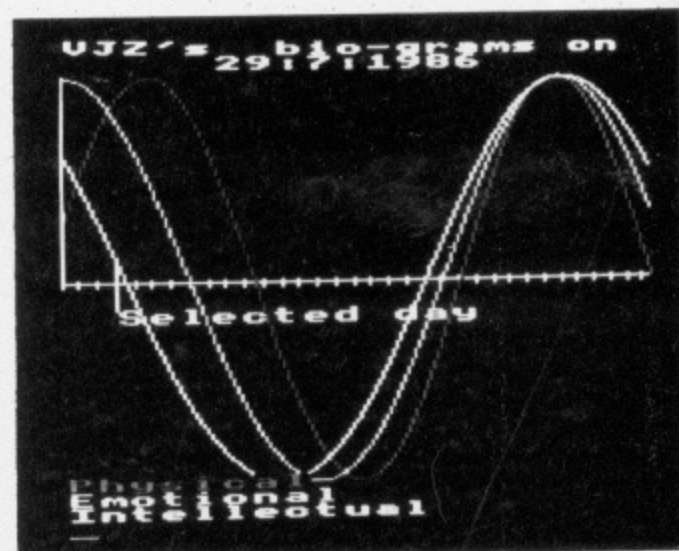

NEED help in choosing a mate? Want to find out what makes the boss tick?

A menu-driven suite of bio-rhythmic analyser programs from Gilvale Software could be the answer.

Super Teams are programs for the BBC Micro that derive and interpret bio-rhythms - measures of human performance capability - preparing compatibility studies covering physical, emotional, intellectual or averaged bio-rhythms for groups of up to 15.

Studies into the effects of bio-rhythms on aspects of family life, sports and work performance can be carried out.

Person-to-person compatibilities can be used to select a suitable mate, boss or job. Genealogists

How do you tick today?

can investigate the bio-rhythms and compatibilities of their ancestors. Historians can unravel the impact of these rhythms on important figures and events back to 1752.

Super Teams are also an aid to recruiting techniques, team-building and accident-prevention.

Sports enthusiasts can use the suite to help them attain optimum performance.

Price is £10 for the 40-track disc and £11 for the 80-track discs.

MORE ROBOTS MOVE INTO EDUCATION



Cyber Robotics' Paul Ritson enjoys a drink with his Model 310 educational robot

Piracy forces firm to stop using tapes

THE tremendous popularity of the BBC Micro in schools could sound the death knell for educational software, warns David Clare, managing director of Clares Micro Supplies.

"Our schools are a hotbed of piracy, often with the active encouragement of teachers and quite often by teachers themselves", he claims.

Clare told *The Micro User* that two major problems prevented software producers profitably establishing themselves in the educational market.

"Firstly, as computer users - particularly teachers - become more experienced and computer literate, they are demanding a far higher standard of software than ever before.

"To produce such software requires higher development costs and longer lead times, all of which is acceptable if the program yields the expected return on investment.

"But the second problem - piracy, leakage or whatever label you wish

to put on it - results in diminished returns for the software producer.

"The ridiculous arguments used by pirates to justify their activities are laughable - such as 'all software should be free', 'why should they be paid for programming, I could do it better?' and 'give them a fixed fee'. It is still stealing", says Clare.

He claims the education sector now has its own form of Mafia in the form of district advisers, county advisers and other officials who evaluate new software.

"This means that before your software is considered you have to issue about 500 free samples which are invariably copied", he said.

The result for Clares Micro Supplies has been to withdraw from educational software, particularly on tape.

"We still supply many of our disc-based programs to schools, colleges and universities, but by their nature these programs are going to

responsible people", says Clare.

"Most teachers are honest, but there are others who will give the profession a bad name, and I'm sure there are many who don't realise that they are committing an offence".

Smiths pick Mini Office

MINI Office, the chart-topping software package for the BBC Micro is being used as a teaching aid by leading UK computer retailers, W.H. Smith.

A finalist for two major categories in the 1985 British Microcomputing Awards, Mini Office has been selected to bring the message home to W.H. Smith staff that computers have a serious application.

The company is using the program in its mobile training classroom, now on a nationwide tour. By the time the vehicle has

ACADEMICS are getting to grips with the world of robotics - thanks to a little help from the BBC Micro.

Two companies which have recently jumped on to the educational bandwagon with products geared to the BBC machine are TecEquipment of Nottingham and Cyber Robotics of Stone.

The Open University wanted an educational robot capable of being programmed for common industrial uses, thereby providing a good training tool.

So TecEquipment launched the MA2000 and OU ordered 150 to use in their two new courses, robotics in manufacturing and in computing.

The MA2000 has six axes - waist, shoulder and elbow being the major three, and pitch, yaw and roll. They allow for greater flexibility and freedom of movement and in turn enable a wider variety of tasks to be performed.

It is fitted with a pneumatic gripper to which a wide range of tools can be attached so various jobs can be carried out including parts handling, paint

spraying and stacking and palletising.

Software available for the BBC Micro allows for up to 100 program steps to be taught and includes a 30-step interactive tutor program.

Taking into account the various discounts available to different users, the average price is £3,000 to £3,500.

In a move to boost its share of the education market, Cyber Robotics is offering £200 worth of free software with its £650 Model 310 robot.

Takeover

Cyber introduced the price cut after their takeover by J. Bibby Science Products and a subsequent injection of new capital.

The 310 has five degrees of movement, plus gripper action, and, unusually for robots in this price range, can rotate its shoulder 300 degrees vertically.

Educational robots usually work by specifying which joint to move and by how much. The free application package simply describes a position in space and the approach angle of the gripper.

completed its circuit thousands of W.H. Smith's computer and related staff will have used the package.

"We have a lot of staff and we want them to know what the goods they are selling are capable of", said a training division spokesman.

"They are not employed just to wrap up goods but to inform the customer of the computer's various applications. The computer is not just a toy".

W.H. Smith chose Mini Office because its four programs - word proces-

sing, database, spreadsheet and graphics - emphasise how easily a computer can be turned into an inexpensive office tool.

"At its revolutionary low price of £5.95 Mini Office is a truly cost effective way of introducing the business concept of computers to our staff", said the man from W.H. Smith.

"Naturally we are delighted that the computer retailing giant has demonstrated its faith in our product in this way", says Derek Meakin, head of Database.

A SPECIAL OFFER TO BBC MICRO OWNERS



APPROVED
for use with
telecommunication systems
run by British
Telecommunications
in accordance with the
conditions in the
instructions for use

FREE
**SUBSCRIPTION TO
PRESTEL & MICRONET**

Purchase a Tandata complete communications package before 31st July, 1985,* and we'll give you a FREE subscription for 3 months to Prestel and Micronet.

You'll be able to enjoy up-to-the-minute news, comment, articles and reviews via Micronet 800 and Viewfax 258. Download computer programmes — many free of charge. Access all the other Prestel public databases. Communicate with other micros. And even carry out electronic messaging and mailing.

Tandata complete communication packages include a smart auto-dial modem and matching micropack with the appropriate software, cable and manual. In short, everything you need to convert your BBC micro into a powerful Viewdata terminal.

TANDATA SMART AUTO-DIAL MODEMS

Features: Multi-baud rate (V21/V23); Auto-dial; Auto-recall; Auto log-on; Storage of up to 8 telephone numbers and IDs/passwords.

Tandata

Tandata Marketing Limited,
Albert Road North, Malvern, Worcs. WR14 2TL
Telephone: 06845 68421

MICROPACKS

Contain software in ROM, disk or cassette. Depending upon the micropack features include: Full Prestel colour emulation; Prestel or message editor; Save to disk or cassette; File transmit; Telesoftware downloader; Print.

To take advantage of this limited offer, complete and return the coupon. We'll send full information and an application form.

Name _____
Address _____

Micro make/model _____

Send to: Tandata Marketing Limited, Albert Road North, Malvern, Worcs WR14 2TL.

MU 6

* Subject to availability.

Prestel is a registered trade mark of British Telecommunications plc. Micronet 800 is the trading style of Telemap Ltd. and British Telecommunications plc.

BBC aids job-hunt disabled

SEVERELY-handicapped and disabled residents of Cheshire Homes are using BBC Micros to entertain, educate and train themselves for jobs. With backing from the Manpower Services Commission, Robin Nixon and Steve Ludlow have set up extensive computer facilities at two Cheshire Homes – Seven Springs and Heatherley.

To "interface" a resident to a BBC Micro may need individual input controls, and these are produced in workshops at each Home.

The computer software may also need to be modified, and this too is done on the premises, with the new versions being made available to other Cheshire Homes.

Experience to date has been highly encouraging, say those involved in the scheme.

Computers have helped people with poor control to write perfect letters and produce geometric computer graphics.

The games that are often the start of computer interest have helped residents develop control and dexterity.

Worthwhile jobs can be performed by residents – helping with the accounts, for example, or organising fund-raising projects.

They are better able to

follow educational courses, both in mathematical subjects and the arts, including languages. Spanish is a favourite course for use on holidays.

There are, of course, some who are not at all interested in computers and are happy to leave new technology to others. This is accepted and respected.

But, for many, computers like the BBC Micro are proving valuable and adaptable communications devices, and a means to pursue other interests.

A programme called COMPAID – Computer Aid for Speech-Impaired and Disabled People – was started by Lorna Ridgway, then chairman of management, at Seven Springs early in 1982.

Robin Nixon told *The Micro User*: "To get the project under way we

converted an old storage room into a computer room and took on eight previously unemployed trainees on a part-time basis under the Opportunities for Volunteering scheme.

"Under the tuition of Stuart McKears, the computer tutor, the trainees' tasks were to learn the basics of programming and computer use, and in turn pass these on to the residents.

Difficulties

"As readers of *The Micro User* may remember from the article 'Alternative Input' in the October, 1984, issue, we were mainly concerned with solving the communication difficulties of some of our more severely disabled residents.

"At first there was only one readily-available program, but the situation eased with the advent of the BBC and Electron micros with their extensive software range.

"One of the first programs we wrote for the BBC Micro was a large-

letter word processor to help visually-impaired people to read.

"After discovering the flexibility of the BBC's graphics, we undertook a switch-operated drawing program called Rainbow.

"Having ascertained that two switches were the maximum that our most severely disabled residents could easily use, we set about writing some games to help with the assessment and improvement of co-ordination.

"One such was Sqwhere, featured in *The Micro User* in August, 1984, in which the player has to manoeuvre a bouncing ball into a box by changing its horizontal and vertical directions of movement, using one of two switches.

"Another, newer program, Space Base, is a fast action "shoot 'em up" game which can be operated via two switches or the keyboard.

"The concentration involved in these games has helped to improve some users' co-ordination to a measurable degree".

This suck or puff device operates a BBC Micro via a Possum scanning keyboard emulator.

Picture: Stuart McKears



Acorn goes Spanish . . . in Mexico

AN Acorn-designed, Spanish version of the BBC Micro has gone on sale in Mexico.

Called the Micro-BBC, it has a Spanish operating system, documentation and software.

The large Spanish-speaking population of the US are also potential customers for the machine.

However, although Acorn International managing director Bob Bayham says the machine "has been enormously well received" in Latin America, company chairman Alex Reid is said to be preaching caution over its potential in the US.

OFFER TO OWNERS

A FREE quarterly subscription to Prestel and Micronet is on offer to any BBC Micro user who buys a Tandata modem and BBC micropack up to July 31.

The free subscription is also available to purchasers of Tandata's viewdata controllers intended for use as modems, together with the appropriate BBC software.

CUMANA DRIVES SIZED DOWN

IN line with miniaturisation trends, Cumana has designed a range of 3½in disc drives for the BBC Micro.

A 40 track drive gives 125k of unformatted single density capacity – 250k in double density recording mode.

Top of the range is a dual drive offering 2 × 80 track drive and a total storage capacity of 2 Mbyte unformatted in

double density recording mode.

The drives are Shugart SA400 compatible and have a fast head positioning time. The direct-drive brushless motor is said to provide maintenance-free operation.

Head positioning, track zero and write protect are controlled by an on-board microprocessor and discs can be write protected by removing a tab.



MICROWORLD

COMPUTER GROUP

stair

The Power behind the Printed Word

COMPUTERS

Acorn Electron Standard ALA01 with 5 Pack	109.00
Acorn Electron Yorkshire TV Pack	189.00
BBC Model B	339.00*
BBC Model B with DFS	399.00*
BBC Model B with DFS/MW 200 drive	529.00
Amstrad CPC 464 with Colour Monitor	339.00
Amstrad CPC 464 with Green Monitor	229.00
Apricot F1 with Free Yangyen Monitor	995.00
Apricot Fle with Free Yangyen Monitor	799.00
Sanyo DR101 Cassette Recorder	39.95
Acorn Electron Business Pack with view/view sheet	239.00

*with trade in

DISK DRIVES

Cumana CSX 100 40T single, no psu.(100k)	109.95
Cumana CSX 200 80T single, no psu.(200k)	149.95
Cumana CSX 400 80T single, no psu.(400k)	179.95
Cumana CS 100 40T single, with psu.(100k)	149.95
Cumana CS 200 80T single, with psu.(200k)	189.00
Cumana CS 400 80T single, with psu.(400k)	199.95
Cumana CD 200 40T dual with psu.(200k)	269.00
Cumana CD 400 80T dual with psu.(400k)	315.00
Cumana CD 400/S 40/80T switched, dual, psu.(400k)	355.00
Cumana CD 800/S 40/80T switched, dual, psu.(800k)	399.00
Disc interface kit, unfitted with DNFS ROM	89.00
Disc interface kit, fitted with DNFS ROM	117.00
Torch 280 disc pack, with perfect software and Z80 second processor	699.00
Pace 40/80 Track switchable 800k dual, only	299.00
AMS 3" Hitachi 100k special offer	109.00
AMS 3" Hitachi dual 200k special offer	199.00
Box 40 Track Parrot discs with plastic box	16.00
Box 80 Track Parrot discs with plastic box	25.95
Sony 3.5" Single sided discs	45.00
Sony 3.5" Double sided discs	58.00

(All disc drives supplied come with manual, format disc and all necessary cables etc.)

ROMs & SUNDRIES

AMX mouse superb plus software	89.95
Wordwise ROM	39.95
Wordwise plus ROM	52.00
View ROM	58.00
View sheet ROM	52.00
Disc Doctor ROM	33.95


NEW SG-10 NLQ

Only **£259** exclusive of VAT

VERY VERSATILE replaces Gemini 10X

Features

- 1) 120cps — bidirectional logic seeking
- 2) Near letter quality mode
- 3) Inexpensive ribbons
- 4) Epson and IBM compatible
- 5) Easily accessible dip-switches
- 6) Friction and Tractor feeds
- 7) Standard parallel Interface-free BBC cable
- 8) 12 months guarantee

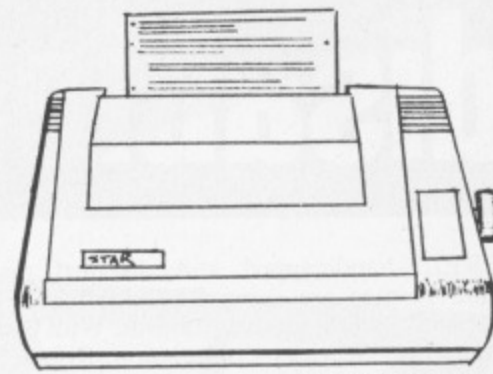

SG-10 NLQ

ACORNSOFT

*** NEW RELEASES ***

	Cass.	Disc (5 1/4")
REVS — Fantastic racing car simulation, most authentic to date	£14.95	£17.65
MAGIC MUSHROOMS — Multi-level arcade game in which you can create your own screens	£12.95	£14.95
CREATIVE SOUND — Realise the full potential of your BBC's sound system	£17.95	£19.95
BASIC EDITOR ROM		£29.90

Dealer Enquiries Welcome

HOW TO ORDER:

ORDERS by post welcomed; please detach coupon and mail with payment. Telephone orders welcome call 031-228 1111 or 031-228 1261.

We also welcome Government and Educational orders. All products supplied include our own 12 months guarantee backed by our own service centre staffed by fully qualified engineers. Order with confidence, 7 days money back guarantee. All charges include VAT and carriage charges by courier. Dealer enquiries welcome.

NEW POWERTYPE DAISYWHEEL

ONLY

£349 inclusive of VAT & delivery

AMAZING VALUE

- 1) Quen compatible
- 2) 18 cps print speed
- 3) 136 column, heavy duty mechanism
- 4) 10, 12, 15 pitch with proportional spacing
- 5) Inexpensive cartridge ribbons
- 6) Serial and parallel interfaces
- 7) 12 months guarantee

Right is reserved to alter prices without prior notice.

BRANCH NETWORK

Glasgow

11 Bath Street
Glasgow 041 332 1116

415/419 Blythswood Court,
Anderston Cross Centre,
Glasgow 041 226 3011

Aberdeen

77 Holburn Street,
Aberdeen 0224 571735

Despatch Dept.
Constable House,
Hopetoun Street,
Edinburgh EH7 4NF
031-556 0191 x240

Edinburgh

12 Leven Street,
Tollcross,
Edinburgh 031 228 1111

4 St. Andrew Square,
Edinburgh 031 557 2087

MAIL ORDER

To: Microworld Distribution,
Dept. MU,
4 St. Andrew Square,
Edinburgh EH2 2DB

Please send me

I enclose a cheque for £.....
My credit card no is

Access/Visa/American Express (delete)

Name

Address

.....Tel. No.

Mouse brings in eight colours

ANOTHER mouse for the BBC Micro is about to be launched by SMC Supplies at £59.95.

It gives eight colours, various brush shapes, air brush, fine point, rubber band straight lines, triangles, circles, box, fill, variable size text, panic button, save and reload to/from either tape or disc, and a fully shaded fast screen dump for most Centronics printers.

A sprite designer and character designer are also included and shapes created via these may, through use of a control utility, be integrated within the user's own programs.

The mouse can be used in Mode 7 and less memory is used in the creation of graphics than in the conventional manner. Most joystick-compatible BBC programs will take advantage of the mouse's capabilities, says SMC.

Think quicker

AN enhanced version of Quick Thinking from Mirrorsoft has been released for the BBC Micro.

Quick Thinking Plus challenges the user's mental arithmetic skills in a two part program.

Multivaders, which puts the player in charge of a robot invasion prevention force, requires quick thinking as addition, subtraction, multiplication and division tasks have to be completed within pre-specified limits.

Robot Tables requires speedy multiplication to make robots good enough to pass inspection by the quality controller.

The program costs £6.95 cassette, £9.95 disc with new for old upgrades costing £2.50.



Five only just miss a Space-shot

FIVE young scientists from Dr Challoner's Grammar School, Amersham, used their BBC Micro to design an experiment which nearly ended up in space.

Their entry was one of the six finalists in the Experiment in Space competition organised by Independent Television News - the first prize being the opportunity to test their theories on a forthcoming flight of the NASA space shuttle.

The five, led by teacher Chris Clare, are 17-year-old Jim McPherson, Ashley Saulsbury, John Cansdale, 15-year-old Rufus Grig and Mike Calviou.

Their idea was to study the behaviour of convection currents in micro-gravity conditions, the results of which could lead to design of more efficient domestic heating systems.

The circulation of warm air currents has

always been difficult to monitor and the boys were hoping their experiment would further theoretical understanding of the convection process.

Such information could influence manufacturing processes for radiators and heat tanks and also provide guidance in locating them in the most efficient positions.

The plan, one of the three non-life experiments to reach the final six of the competition, was to take accurate readings of warm air movement in space with strategically placed temperature sensors.

The experiment was illustrated for the judges with a display of computerised graphics pro-


grammed on the school's BBC Micro.

This compared the accepted behaviour pattern of currents in the atmosphere with the likely behaviour in a low gravity situation.

In the event the experiment was not chosen to be sent into space, but the boys had the consolation

of lunch with science writer Arthur C. Clarke and two of the nominated British astronauts.

They also received a special certificate as a record of their achievement, a scale model of the space shuttle, autographed copies of Clarke's book "2010" and sets of NASA memorabilia.

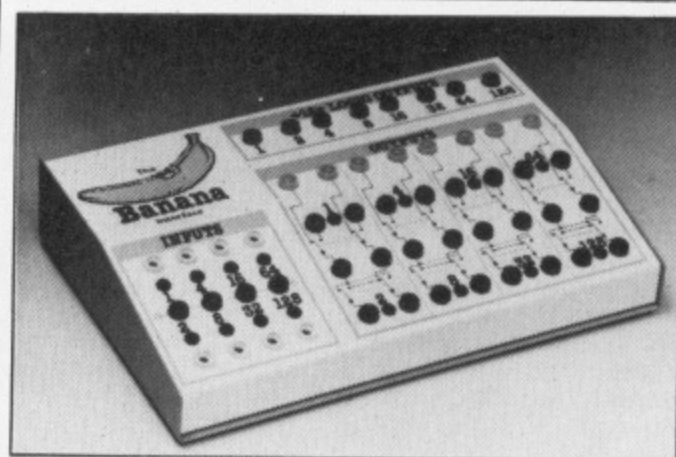

A BBC Micro computer interface for control purposes in educational, industrial and home use has been launched by Castle Associates.

The Banana interface has been developed with the cooperation of craft, design and technology teachers, says the manufacturer, specifically for teaching control technology, modular technology and computer control applications relevant to industrial practices.

It comes with a user handbook containing tried and tested experiments and programs. A full range of specific experiment hardware and software will also be made available, says Castle Associates.

Price is £175.

IT'S DOWN-TO-EARTH RIBBON . . .

SOFTWARE publisher CDS has taken over MRM Software and set up a new company called Blue Ribbon Software to produce a range of budget programs for the BBC Micro selling for £2.50 each.

Giles Hunter, managing director of CDS

said: "We are aware there is a definite market for the budget priced range of programs for the BBC Micro and we are now in a position to offer a number of well established games".

A new Gold standard

TELECOM Gold has extended its telex facility to enable customers to receive incoming telex messages on their mailboxes.

Incoming telexes are sent to a central telex number and routed automatically through to the recipient's Telecom Gold mailbox number.

This gives Telecom Gold subscribers the additional advantage of being able to receive telexes confidentially and without delay, in the office, at home or while travelling.

The telex can be acknowledged or replied to instantly, be forwarded on to another recipient or electronically filed for future reference.

A simple routine is also available which will convert standard telex upper case format into lower case, making text simpler to edit.

Complex text can be prepared, edited and sent to both electronic mail and telex users from a BBC Micro, without re-keying the message.

Directories of familiar names can be organised to simplify addressing of telexes, and the facility to set up distribution lists enables simultaneous transmission to up to 500 different recipients.

SHARING RAM

A NEW sideways RAM/emulator from J.P. Designs has all the advantages of most other RAM units on the market but also allows the RAM to be shared by other external systems, says the manufacturer.

The 16k static RAM is located between 8000-BFFF H in the system memory map and can be written to directly - allowing machine code programs to be placed in the RAM by the assembler.

A slide switch located on top of the unit determines which system has access.

Price: £99.95.



JOYSTICK and interface supplier Kempston Micro Electronics has entered the software market with *Chicane*, first of a series of action games for the BBC Micro, designed to mirror the thrills of Formula Ford 2000 motor racing.

Written by software house Orpheus, it was compiled under the guidance of the Kempston Micro Racing team's drivers and mechanics. There is a choice of six actual

Grand Prix circuits and keyboard or joystick control.

Chicane involves choosing one of six Grand Prix circuits and entering into a qualifying lap, tested against the qualifying times of the real circuits.

Price is £7.95.

● Pictured are Kempston managing director Ab Pandaal (left) and Orpheus director Paul Kaufman with one of the Kempston cars.

Learn music on a micro

A METHOD of learning music perfected with the aid of a BBC Micro has just been made available by Hungarian-born teacher Andras Ranki.

Ranki, a regular reader of *The Micro User*, told us: "The key to learning to read and write music is development of the musical ear."

"Listeners and musicians, whether beginners or accomplished players in classical or pop fields, need to train their ear to relate written music to sounds."

"My teaching method involves a unique

mnemonic system designed to enable students to sing by sight, to identify notes and chords by hearing, and to 'inner hear' written music.

"During my first year as a teacher I noticed students' difficulties in hearing and sight-singing came from the lack of a consistent method of association between sound and notation."

"So I started to develop my system for beginners based on the Kodaly system I had been taught as a child in Hungary."

"Then, in response to the needs of my advanced

pupils, I expanded the system to include chords, modulations and other refinements for which I designed an electronic learning aid.

"My first machine was housed in a tobacco tin, and a progression of similar home made equipment gained me a certain notoriety for turning up in class with part functioning and malfunctioning gadgets."

"However I'm happy to say that the whole system has been gradually polished on my BBC Micro over the past two years until it is now ready for the public".

Ranki recently embarked on saturation courses in his system - called Z*N*K - at the end of which students are able to sing melodies by sight and identify notes and chord sequences by ear.

Practical applications of Z*N*K are being expanded and geared to guitarists, arrangers, choral singers and children.

Says Ranki: "At the moment the software involved in my system is not available to the public, but soon I hope to market it so other teachers and music students with BBC Micros can benefit from my developments".

Time to teach the children...

A SOPHISTICATED learning program which helps children understand the relationship between the 12 hour analogue and the 24 hour digital clock has been released by Applied Systems Knowledge.

Time Trucker is a first time skill program incorporating graphics, music and rewards for achievement.

To ensure children can acquire the learning skills

at their own speed, Time Trucker incorporates three ability levels with separate games called Trainee Trucker, Trucker and Super Trucker.

In each game the player is given a contract which must be assessed in order to collect the required fresh farm produce from the country and return to the depot within a specified time limit. Price is £9.95 on tape and £11.50 on disc.

MAGIC SPELL!

FIVE new additions to the Watford Electronics range of BBC Micro peripherals have been launched at the Electron & BBC Micro Show at the New Horticultural Hall, Westminster.

Romspell is a ROM-based spelling checker for use with both View and Wordwise. The dictionary disc comes with 30,000 words and manual. Price: £25.

Romas is a ROM-based development package for the generation of assembly language programs on a variety of "target" processors with the BBC Micro as the host.

Processors supported by this system include the 6502, 65C02, Z80, and 6809. The package includes a full macro editor and cross referencer. Price: £45.

Transferom is a ROM allowing the user to transfer protected tape files to disc for rapid recall at a later date. The package is fully menu driven and costs £22.

Diagnostics is a menu driven "doctor disc" allowing selection of a range of test functions to diagnose problems with the BBC Micro.

It covers RAMs, ROMs, ULAs, sound, keyboard, disc interface, RS423, ADC, user port, cassette, joystick, speech, disc drives, 6502 and Z80 second processors and costs £15.

Colour Art is an addition to the AMX Mouse package, allowing the user to take any mode 1 or 4 picture and add colours and shading effects from a palette of up to 255 different patterns. Price: £13.

Mouselink

A NEW section on BBC Micro owners' Prestel information service Tubelink is devoted to the AMX Mouse and contains free telesoftware.

The Mouselink team is Benjamin Rietti, John Snelgrove and Ray Hughes and their new Viewfax service includes news, hints and tips, programs and problems relating to the AMX Mouse.

IC
!!

ditions to
electronics
Micro
ve been
Electron
Show at
gricultural
er.

a ROM-
ecker for
View and
ictionary
h 30,000
al. Price:

a ROM-
ent pack-
eration of
age pro-
riety of
sors with
o as the

upported
clude the
Z80, and
ackage
l macro
s referen-

s a ROM
user to
ted tape
pid recall
te. The
ly menu
£22.

s a menu
or disc"
ion of a
ctions to
ems with

RAMs,
sound,
interface,
user port,
x, speech,
and Z80
sors and

an addi-
X Mouse
wing the
y mode 1
and add
shading
palette of
erent pat-
3.

link

on BBC
Prestel
service
ted to the
and con-
ftware.

ink team is
tti, John
nd Ray
their new
e includes
nd tips,
problems
e AMX

QUALITY NEVER LOOKED SO GOOD—

Now everyone with a BBC or IBM PC will want to get their paws on CUB's sleek new D series plastic cabinet — a triumph of ergonomics and up to the minute design. Within it is the CUB 653 MEDIUM RESOLUTION colour monitor — the perfect mate for computer users who wish to combine the advantages of brilliant, low cost colour graphics with 80 column processing software.

CUB 653's remarkable depth of colour is enhanced by minimal screen glare, thanks to a super high contrast CRT. Even in well lit environments the 653 (H) x 585 (V) resolution and 0.43mm dot pitch produces 80 column text which is pin-sharp and easy to read. Owners of SHARP, RML 480Z, APPLE Series, WANG and other leading computers needn't feel left out, because CUB 653's compatibility extends to these models and many more.



PICK ONE UP FOR JUST £299 inc. VAT

**NEW LOW PRICE,
NEW PLASTIC CABINET —
THERE'S NEVER BEEN A
BETTER TIME TO BUY.**

Standard Resolution version also available in new cabinet. Both Standard and Medium resolution models produced in metal cabinets if required.

MICROVITEC 653
CUB
COLOUR DISPLAYS

Microvitec PLC, Futures Way, Bolling Road, Bradford, BD4 7TU, West Yorkshire.
Tel: (0274) 390011 Telex: 517717



Available from High Street Computer Retailers and selected branches of W. H. Smith, Harrods, John Lewis Partnership, John Menzies with selected models available from larger branches of Boots.



AKHTER FOR PRINTERS, MONITORS and CONSUMABLES



DOT MATRIX PRINTERS

All printers have centronics parallel interface unless otherwise stated.
All printers have hi-res dot addressable graphics mode.

EPSON

FX 80 160 CPS 10" Wide friction + pin feed	£324 + VAT £373
FX 100 160 CPS 15" Wide friction + pin feed	£439 + VAT £505
RX 80 F/T 100 CPS 10" Wide friction + pin feed	£225 + VAT £259
RX 80 100 CPS 10" Wide tractor feed	£215 + VAT £247
RX 100 F/T 100 CPS friction and tractor feed	£349 + VAT £401
8143 RS232 Interface for FX and RX printers	£39 + VAT £45
8143 RS232 Interface with 2k buffers; x on, x off	£60 + VAT £69
Ribbon cartridge for RX 80, FX 80 and MX 80	£5 + VAT £6
Ribbon cartridge for FX 100 and MX 100	£7 + VAT £8
MP 165 165CPS 10" Wide friction and tractor feed NLQ Epsom Compatible	£249 + VAT £286

TAXAN KAGA

160 CPS 10" Wide 27 CPS NLQ 24x16 Matrix	£255 + VAT £293
160 CPS 15" Wide 27 CPS NLQ 24x16 Matrix	£359 + VAT £413

CANON

PW 1080A 160 CPS 10" Wide NLQ friction and tractor feed	£269 + VAT £309
PW 1156A 160 CPS 15" Wide friction and tractor feed	£379 + VAT £436

DAISYWHEEL PRINTERS

JUKI 6100

20 CPS Bi-directional, logic seeking 10/12/15 CPI plus PS spacing, 2k buffer... THE BEST SELLING DAISYWHEEL!	£324 + VAT £373
Single sheet feeder	£199 + VAT £229
RS232 Interface	£50 + VAT £58
Tractor Unit	£129 + VAT £148
Spare Daisywheel	£14 + VAT £16

SPECIAL OFFER

Smith Corona Fastex 80: 80CPS, Friction Feed, 80 column, centronics parallel interface. £129 + VAT £149

HURRY.....

OFFER ONLY APPLICABLE WHILE
STOCKS LAST.

All Printers Carry A One Year Warranty

SANYO COLOUR MONITORS

CD 3125 Standard Resolution	£155 + VAT £171
CD 3117 Medium Resolution	£299 + VAT £341
CD 3115 High Resolution	£399 + VAT £455

All Sanyo Colour Monitors come with a free Monitor Stand

SANYO GREEN MONITORS

DM 8112 12" 18 Mhz Hi Res	£86 + VAT £97
DM 9112 12" 18 Mhz Hi Res with tilt stand	£99 + VAT £114

PHILIPS

7001 High Resolution Green Screen with sound input	£69 + VAT £79
--	---------------

MICROVITEC CUB

1431 MS 14" RGB Standard Resolution Colour	£199 + VAT £228
1451 MS 14" RGB Medium Resolution Colour	£249 + VAT £285
1441 MS 14" RGB High Resolution Colour	£399 + VAT £458

CONSUMABLES:

3M Diskettes: 48TPI SS DD Diskettes (Box of 10)	£15 + VAT £17
48TPI DS DD Diskettes (Box of 10)	£18 + VAT £21
96TPI DS DD Diskettes (Box of 10)	£25 + VAT £29
Ribbons: Epson MX/RX/FX 80	£6 + VAT £7
Epson MX/RX/FX 100	£8 + VAT £9
Seikosha GP 100	£4 + VAT £5
Star Gemini 10X	£5 + VAT £6
Shinwa CP 80	£6 + VAT £7
Juki 6100	£2 + VAT £3
Daisy Wheels: Juki	£13 + VAT £15
Brother	£13 + VAT £15
Paper: 200 Sheets Draft Quality	£14 + VAT £16
200 Sheets Letter Quality A4	£15 + VAT £17

ACCESSORIES:

Leads: Phono to Phono	£3 + VAT £3.5
BNC to Phono	£3 + VAT £3.5
7 Pin to 3 Jack	£3 + VAT £3.5
7 Pin to 5 Pin (+ remote)	£3 + VAT £3.5
7 Pin to 7 Pin	£3 + VAT £3.5
Std UHF Lead	£3 + VAT £3.5
Sanyo Monitor Lead RGB	£10 + VAT £11.5
Microvitec Mon Lead RGB	£5 + VAT £5.7
BBC Centronics Print Lead	£10 + VAT £11.5


A large selection of printer and disc drive leads are held in stock and can be quoted for upon request.

AKHTER INSTRUMENTS LTD T/A
AKHTER COMPUTER GROUP
28/29 BURNT MILL
HARLOW
ESSEX
CM20 2HU



RET

DELIVERY: Securicor 'A' Service
£8.00 per parcel
Securicor 'B' Service
£5.00 per parcel
Postal Service £1.50 per parcel



0279/443521 (10 lines)

Telex: 818894 AKHTER G.



Opening Hours: Mon - Fri 9 a.m. - 6.30 p.m.
Sat 10 a.m. - 5 p.m.

CALLERS WELCOME AMPLE PARKING

AKHTER FOR ACORN

Acorn products and fully compatible peripherals

An Official BBC Computer Distributor

An Official Econet Service Centre

DEALER ENQUIRIES WELCOME

ACORN PRODUCTS

BBC MODEL B including £50 of software with disc interface	£299 + VAT	£344
with econet interface	£346 + VAT	£398
with disc + econet interface	£349 + VAT	£402
6502 Second Processor	£365 + VAT	£420
Z80 Second Processor	£173 + VAT	£199
Acorn Electron including £50 of software	£346 + VAT	£398
Acorn Electron Plus 1 Interface	£112 + VAT	£129
Acorn Electron Plus 3 Interface	£52 + VAT	£60
Acorn Electron Data Recorder	£200 + VAT	£230
Me and My Micro Pack	£34 + VAT	£39
Acorn Bitstick	£159 + VAT	£183
Acorn Bitstick Multi-Plotter Driver	£328 + VAT	£377
Acorn IEEE Interface	£69 + VAT	£79
BBC Prestel Receiver	£284 + VAT	£327
BBC Teletext Receiver	£121 + VAT	£139
BBC Cassette Recorder + Lead	£196 + VAT	£225
A to B Upgrade Kit (inc. fitting)	£30 + VAT	£35
Disc Interface (inc. fitting)	£113 + VAT	£130
DNFS Rom	£85 + VAT	£98
Games Paddles	£18 + VAT	£21
Utilities Manual 40 or 80 Track	£17 + VAT	£20
Speech Upgrade	£30	£30
	£48 + VAT	£55

ECONET PARTS

Starter Kit	£86 + VAT	£99
Socket Kit	£26 + VAT	£30
10 Station Lead Set	£25 + VAT	£29
Winchester File Server inc 10 MByte Winchester	£1478 + VAT	£1700
Winchester File Server inc 30 MByte Winchester	£2174 + VAT	£2500
File Server Level 2: 80 Track	£217 + VAT	£250
Printer Server Eprom	£43 + VAT	£50
Econet User Guide	£5	

SOFTWARE

ISO-PASCAL (BBC)	£60 + VAT	£69
Wordwise	£35 + VAT	£41
Wordwise Plus	£51 + VAT	£59
View	£52 + VAT	£60
Viewsheets	£52 + VAT	£60
Electron View	£39 + VAT	£45
Electron Viewsheet	£39 + VAT	£45

ACCESSORIES For The BBC

AMX Mouse	£75 + VAT	£87
Tracker Ball	£52 + VAT	£60
Grafpad	£120 + VAT	£138
Intelligent Printer Sharer/Buffer	£120 + VAT	£282

TORCH PRODUCTS

Z80 Disc Pack	£346 + VAT	£398
ZEP 100 2nd Processor + Software	£299 + VAT	£344



100% ACORN COMPATIBLE 5 1/4" DISC DRIVES

MD100A	Single Drive 100k 40 Track Single Sided
MD100B	Single Drive 100k 40 Track Single Sided + PSU
MD200A	Single Drive 200k 40 Track Double Sided
MD200B	Single Drive 200k 40 Track Double Sided + PSU
MD202C	Dual Drive 200k (2x100k) 40 Track Single Sided
MD202D	Dual Drive 200k (2x100k) 40 T SS + PSU + Monitor Stand
MD202E	Dual Drive 200k (2x100k) 40 T SS + PSU + Metal Case
MD400A	Single Drive 400k 40/80 T switchable Double Sided
MD400B	Single Drive 400k 40/80 T switchable D/Sided + PSU
MD402C	Dual Drive 400k (2x200k) 40 T D/Sided
MD402D	Dual Drive 400k (2x200k) 40 T D/Sided + PSU + Monitor Stand
MD402E	Dual Drive 400k (2x200k) 40 T D/Sided + PSU + Metal Case
MD802C	Dual Drive 800k (2x400k) 40/80 switchable D/Sided
MD802D	Dual Drive 800k (2x400k) 40/80 switchable D/Sided + PSU + Monitor Stand
MD802E	Dual Drive 800k (2x400k) 40/80 switchable D/Sided + PSU + Metal Case

£86 + VAT	£99
£112 + VAT	£129
£112 + VAT	£129
£138 + VAT	£159
£164 + VAT	£189
£216 + VAT	£249
£208 + VAT	£239
£130 + VAT	£149
£156 + VAT	£179
£217 + VAT	£249
£269 + VAT	£309
£260 + VAT	£299
£251 + VAT	£289
£303 + VAT	£349
£295 + VAT	£339

Utilities Included Are:

DISASSEMBLER * DUP * FORMAT * FREE * MDUMP *
MERGE * RELOCATE * SDUMP * VERIFY * MENU *

3M DISKETTES:

48TPI SS DD Diskettes (Box of 10)	£15 + VAT	£17.25
48TPI DS DD Diskettes (Box of 10)	£18 + VAT	£21.00
96TPI DS DD Diskettes (Box of 10)	£25 + VAT	£29.00

The Akhter Gold Standard

Due to the high standard of the Akhter Disc Drives we have taken the unique step of introducing "The Gold Standard" a TWO YEAR warranty on each and every one of our drives sold after April 1st 1985. To qualify for this 24 month guarantee the lucky purchaser merely returns his individual registration card included in every box to Akhter. Buy your drives with confidence BUY AKHTER!

"An all in package then, which should reliably bring you into the rapidly growing fold of BBC disc system users" A+B Computing Feb '85.

AKHTER INSTRUMENTS LTD T/A
AKHTER COMPUTER GROUP
28/29 BURNT MILL
HARLOW
ESSEX
CM20 2HU



DELIVERY: Securicor 'A' Service
£8.00 per parcel
Securicor 'B' Service
£5.00 per parcel
Postal Service £1.50 per parcel



Opening Hours: Mon - Fri 9 a.m. - 6.30 p.m.
Sat 10 a.m. - 5 p.m.

CALLERS WELCOME AMPLE PARKING




0279/443521 (10 lines)

Telex: 818894 AKHTER G.



THE BBC COMMUNICATIONS COLLECTION

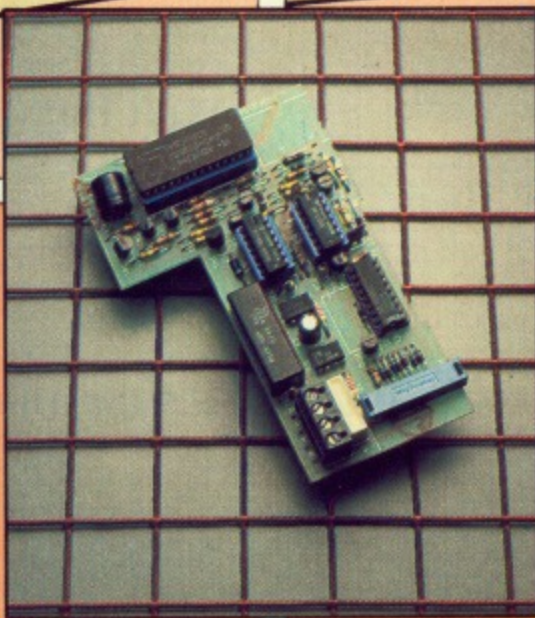

NEWS RELEASE

OBBS Bulletin board software

Now, with OBBS and the Nightingale modem fitted with auto-answer accessory board, you can run your own bulletin board on a BBC micro. The entry level system includes many features normally only found on systems costing ten times as much. Full message searching and XMODEM uploading and downloading of software are provided along with unique colour teletext graphics and text facility. **£21.74 plus VAT**

COMMSTAR Nominated for the 1985 British Microcomputing award, Commstar is an outstanding piece of software. With its powerful combination of Viewdata and ASCII terminal capabilities, Commstar is probably the only communications software you will ever need.

Developed specially for the BBC in an 8K eeprom, Commstar once fitted, is always ready to use. Although it is unusually versatile Commstar is also very easy to use. Full advantage is made of the BBC's function keys and a comprehensive manual describes each of Commstar's features in simple terms. In addition to preprogrammed functions, items such as logon strings and passwords can be placed under the function keys to facilitate automatic access to the vast range of services which are available. When used in conjunction with the Nightingale modem or other multi-standard modems, Commstar opens up a host of possibilities. Did you know that you could access your bank account from your own home or search British Lending Library's records through their on-line system, BLAISE. Accessing Prestel for the latest news or downloading telesoftware from Micronet is just the beginning. . . .

NIGHTINGALE ACCESSORY BOARD This new accessory for Nightingale offers

three new facilities on a single card. The auto-dialler now means that you can dial any number without using the telephone. Software designed for use with Commstar will dial a specified number or sequence of numbers once or more until a connection is established, each call being optionally monitored through a loud speaker. Any number of directories can be created and for each telephone number in a directory you may specify a series of attributes which allow Commstar to configure itself automatically for that particular system. Nothing could be easier. Any baud rate may be configured under software control including two new operating speeds 1200 and 600 half duplex which were not previously available. Finally, if you hope to set up your own database or bulletin board, the accessory board includes auto-answering.

Nightingale and accessory board, a complete solution.


Nightingale modem £119, Accessory board £49, Commstar £29.57,

Commstar dialling software available on disc for £10 plus VAT

Commstar & Nightingale Combination £139

All prices exclude VAT. Payment accepted by Cheque, Visa or Access.

For further details about Pace communications products contact your local dealer or call:
Pace Micro Technology
92 New Cross Street
Bradford BD5 8BS
Telephone 0274 729306
Telex 51564
Overseas orders and dealer enquiries welcome.
International tel. no. +44 274 729306
Prestel is a registered trademark of British Telecommunications Plc. Pace Micro Technology, a division of Pace Software Supplies Ltd.



TECHNOMATIC

BBC Computer & Econet Referral Centre

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

305 Edgware Road, London W2 Tel: 01-723 0233

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and 15% VAT to order value

JUNE '85

24 hour service
01-450 9764

ACORN COMPUTER SYSTEMS

BBC Model B.....	£299(a)
BBC Model B + DFS.....	£346(a)
BBC Model B + Econet.....	£335(a)
BBC Model B + Econet + DFS.....	£399(a)
ACORN 10Mbyte Hard Disc.....	£1300(a)
BBC Dust Cover.....	£4(d)
BBC Carrying Case.....	£12(b)

UPGRADE KITS

A to B.....	£55 (d)	1.2 O/S Rom.....	£7.50 (d)
Acorn DFS Kit.....	£89 (d)	DNFS Rom.....	£17.50 (d)
Econet Kit.....	£55 (d)	4816AP RAM.....	£1.50 (d)
Basic II Rom with User Guide.....	£22.50 (d)		
1.2 O/S Rom.....	£7.50	DNFS Rom.....	£17.50
4816AP Memory upgrade RAM (each).....	£2.00		

ECONET ACCESSORIES

Econet Starter Kit.....	£85 (b)	Printer Server Rom.....	£41 (d)
File Server Level I.....	£75 (d)	10 Station Lead Set.....	£26 (c)
File Server Level II.....	£210 (d)	Adv. Econet User Guide.....	£10 (d)

ACORN BITSTICK

The renowned 'BITSTICK' graphic CAD package. Using the on-screen menu and colour palette, it can draw freehand as well as lines and shapes with great accuracy. Any part of a drawing may be magnified many times, and up to 48 drawings may be saved on a disc. In total, a friendly yet sophisticated CAD system offering tremendous value. **£325(a)**

ACORN's multiplotter driver for Bitstick graphics. **£79(c)**

(All popular plotters included)

Epson FX80 screen dump routine for Bit Stick. **£35 (d)**

ACORN WINCHESTER DRIVES

Acorn Hard Discs are now available in 10 and 30 Mbyte versions. The drive plugs into the 1 MHz bus. The ADFS filing system with its hierarchical filing structure provides excellent file management facilities. Data transfer rate of 1 Mbit/sec and average seek time of 85 ms provides the user very fast access to very large amounts of data. File Server Level III can be installed on the Hard Disc before delivery.

10 Mbyte Winchester Drive **£1300 (a)**

30 Mbyte Winchester Drive **£1999 (a)**

Add **£200** to the cost if File Server Level III is to be installed.

ACORN Z80 2nd Processor

This processor converts your BBC into a CP/M based business micro providing it with computing power a professional would need. The free software package supplied includes three office productivity programs (word processor, spreadsheet and a database), NUCLEUS report generator, a business program ACCOUNTANT plus three programming languages and comprehensive manuals. **£348 (a)**
All for only **£175 (a)**

See our section on CP/M software for other packages available for use with this processor.

ACORN 6502 2nd Processor

This processor is designed for the serious computer user who wants to get even more out of his micro. It increases memory by upto 44K for BASIC programs and upto 60K for assy. lang. programs regardless of the screen mode (Ideal for VIEW and WW+). Programs run upto 50% faster. This combination offers computing power of systems costing twice as much. **£175 (a)**

ACORN P-SYSTEM

The long-awaited-for portable operating system has arrived. Intended for use with the 6502 Second processor, this portable operating system is a complete implementation and comes complete with a Filer, Editor, and compilers for two languages, USCD PASCAL and FORTRAN-77. Widely used in universities and colleges, as well as being popular with business software authors, P-System is user-friendly, offering ease of program development as well as portability. **£263(b)**

TECHNO-LINE
IS NOW
ON-LINE!
Tel: 01-450 9764

The response received on the TECHNOLINE over the past few weeks has been tremendous. We are therefore pleased to announce that the TECHNOLINE service will be available for 24 hours a day, seven days a week from 15th May. The pages available include:

- *New Products *Comment Box
- *Technical Pages *Comments on Stock and availability of Products
- *Placing of Orders and many others. . . .

Techno-Line 01-450 9764
24 hour, 7 days a week.

Technical Information: Automatic V21/V23 for both 300/300 and 1200/75 Baud. Standard Viewdata/Prestel Protocols. Please note that a 'Prestel' type terminal must be used.



TORCH GRADUATE SYSTEM

The ultimate upgrade — converts your BBC into a powerful 16 Bit business computer and makes it disc and hardware compatible with the IBM PC. With 256K RAM and single/dual drives, it simply connects through the 1MHz bus. (The disc drives can be used in both BBC and IBM mode, without requiring a disc interface.) The top-of-the-range Model G800/2 comes complete with the free Xchange range of software, and includes a full-feature word processor, a financial planner, a database and a business graphics package — all 'linkable'.

(This highly acclaimed software is now available for the IBM PC at a cost of over £400!)

G800/2: **£999(a)**

OTHER TORCH PRODUCTS

Z80 Card ZEP100 with PERFECT Software Packages + Z80 Basic..... **£275.(a)**

Z80 Disc Pack ZDP240 with software as above..... **£599 (a)**

20Mb Hard Disc + 1 x 400K Floppy Drive..... **£1,950 (a)**

Unicorn 68000, Unix OS/Z80B/512K, 20MB

Hard Disc, 400K Floppy..... **£3495 (a)**

TECHTEL 'IN-HOUSE' INFORMATION CENTRE

NEW

A unique concept that allows you to provide information in public places. A member of the public is able, without assistance, to view information about your products or services.

Techtel is a complete package allowing you, in conjunction with a BBC and disc drive, to set up an in-house 'Viewdata' type information system. The friendly software package will allow you to set up a 'Prestel' type database of up to 700 pages, (depending on drive) containing both graphics and text. This menu-driven database could hold details of products or services supplied by your company. Typical user would be any company needing to pass information to the public e.g. banks, dept. stores, hotels, travel & estate agents etc. etc.

The package also includes a 'carousel' type display, allowing each frame to be displayed for a specified time, before moving on to the next frame.

A unique facility of Techtel is its 'through-glass' keyboard. Its special numeric keyboard can be placed inside a shop window, yet may be used by customers outside — thus allowing the unit to be left unattended.

The package includes the special keypad, Teletext Loader and Editor, and full instructions. **£175(b)**

PRINTERS

ALL PRINTERS HAVE A 12 MONTH GUARANTEE

DOT MATRIX

KAGA TAXAN:

- * Epson Compatible Control codes
- * 80 or 156 Column
- * NEAR LETTER QUALITY Print using 23 x 18 matrix
- * Text Modes include Normal, Italic, Enlarged, Condensed, Super/Sub Script, Proportional
- * Dot Addressable graphics in various modes
- * 3K buffer which can also hold user defined characters
- * Extra ROM/RAM socket for custom print fonts
- * Friction & Tractor feed with built in paper roll holder

KP810 (80 column) £255 (a) KP910 (156 column) £349 (a)

EPSON:

The industry standard printer offering the quality, reliability and versatility.

RX80T £210 (a) RX80FT £220 (a) RX100 £345 (a)

FX80 £315 (a) FX100 £430 (a)

EPSON JX-80 Full Colour Printer £525(a)

BUFFALO 32K Buffer for EPSON PRINTERS

This compact 32K buffer can be fitted internally on any EPSON printer within a few minutes. It does not require external power or any modification to the printer. It will hold about 15 A4 pages of text freeing your computer for other jobs in a fraction of the time it would normally have to wait for the printer to finish all that printing. Supplied with full fitting instructions. £99(d)

DAISY WHEEL

BROTHER HR15: • 14 cps • 3K Buffer • Two colour printing • Proportional spacing • Underline • Bold • Shadow print • Super/Sub script + many other features.

BROTHER HR15 £325(a)

JUKI 6100: • 15 cps • 2K Buffer • Switchable 10/12/15 cpi • Proportional printing • Linear Motor for max reliability.

JUKI 6100 £325(a)


VIEW & VIEWSHEET PRINTER DRIVER GENERATOR

Gone are the days when you had to buy a dedicated printer driver. This printer driver comes with some predefined drivers and lets you generate a driver for any BBC compatible printer. The screen driver program supplied with it lets you view the text, as it is going to appear on the paper including the bold, italics, underlined characters etc. Supplied on disc. £10(d)

GRAPHICS PLOTTER/WORKSTATION

Equally at home in the artists studio, hobbyists workshop, science lab or a classroom, this system has something to offer for everyone. The 3 colour graphics plotter provides both precision and versatility. The carriage can be moved with an accuracy of 0.025cm over an A4 area — the plotter being able to accept paper and far thicker materials at sizes of up to A3. The basic plotter carries 3 colour pens each of which is software selectable. Additional accessories greatly enhance the versatility of the unit without losing the accuracy. The servo controlled drill/router, and scribe can be used on various materials. A unique Opto Sensor (using a Hewlett Packard device) turns the plotter into a high-res scanning digitiser to read & store whole diagrams and photographs. Workstation comes complete with all accessories.

Workstation Complete £490(a)

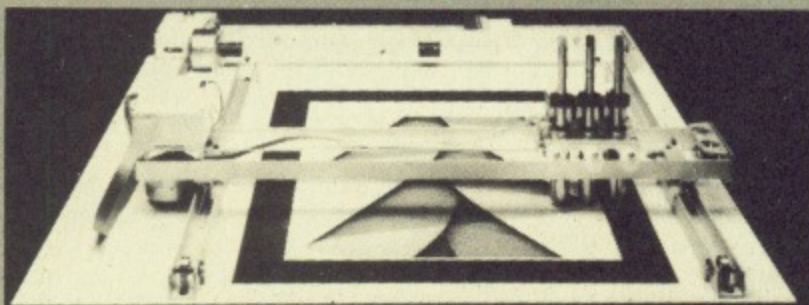

Basic Plotter £270(a)

Opto Sensor £72(c) Drill/Router Attachment £79(c)

Power Supply: PS12V £42(c) PS24V £78(c)

Scandump Utility Disc £14.95 (d)

TECHNOMATIC

All prices exclude VAT

PRINTER ACCESSORIES

EPSON

Paper Roll Holder £17(d) FX80 Tractor Attachment £37(c).

Interfaces: 8143 RS232 £28(c) • 8148 RS232 + 2K £57(c).

8132 Apple II £60(c) • 8165 IEEE + Cable £65(c).

Serial & Parallel Interfaces with larger buffers available.

Ribbons: RX/FX/MX80 £5.00(d) RX/FX/MX 100 £10(d)

FX80 Dustcover £4.50(d)

KAGATAXAN: RS 232 Interface + 2K buffer £78(c); Ribbon KP810/910 £6(d)

JUKI: RS232 Interface £65(c); Spare Daisy Wheel £14(d); Ribbon £2.50(d)

Sheet Feeder £182(a) Tractor Feed Attach £129(a)

BROTHER HR15: Sheet Feeder £189(a) Ribbons Carbon or Nylon £4.50(d)

BBC Printer Lead: Parallel (42") £7(d); Serial £7(d)

Printer Leads can be supplied to any other length.

Plain Fanfold Paper with extra fine perforation (Clean Edge):

2000 sheets 9.5" x 11" £13(b); 2000 sheets 14.5" x 11" £18.50(b)

Labels per 1000s: Single Row 3 1/2" x 1 7/16" £5.25(d)

Triple Row 2-7/16" x 1 7/16" £5.00(d)

EPSON HI-80 PLOTTER

EPSON technology has once again scored a first by introducing a sophisticated A4 size plotter that does not need specialised software or programming skills to operate it and yet keep the cost within the reaches of all computer users. Features include 4 pens at a time — upto 10 colours to choose from, a variety of pen nibs, high speed plotting. Powerful software command codes include single commands to plot circles, ellipses or triangles. Line or bar graphs and pie charts can be plotted in a variety of exciting styles very simply by keying in the data into the computer. Detailed leaflet on request. £399 (a)

PRINTER SHARER/BUFFER

A unique sharer/buffer that provides a simple solution to improve system utilisation. It can be connected to up to three computers and it will automatically switch between the computers to scan for data — no manual switching required. High speed data input rate to the buffer cuts down the normal waiting time for the computers for the printing operation to complete and thus allowing the computers to be used for other uses. The 64K buffer would hold over 30 A4 pages of text.

Facilities include: COPY, PAUSE AND RESET. LED indication for percentage of memory available and data source. Mains powered. Send for detailed specification.

TSB 64 Buffer/Sharer £245(a)

BBC Cable Set £30

PERIPHERAL & COMPUTER SHARERS

We now offer an extended range of peripheral sharers to allow the user to switch between computers, printers and modems. High quality switching mechanisms housed in fully shielded metal cases ensure reliability. No external power input required.

All lines on the sharers are fully switched (36 on parallel and 25 on serial)

	Parallel	Serial
3 Computers to a Printer	36V36-3 £69(c)	25V25-3 £64(c)
4 Computers to a Printer	36V36-4 £85(c)	25V25-4 £74(c)
2 Computers/2 Printers X-over	36V36-X £69(c)	25V25-X £69(c)
BBC Cable Set 3 to 1 (1m ea.)	£32(c)	£34(c)
BBC Cable Set 4 to 1 (1m ea.)	£39(c)	£41(c)

Computer Sharer:

1 computer to 2 printers fitted with Cable for BBC TCS26 £19.50(c)

GRAFPAD

A low cost graphic tablet offering the performance & durability required by industrial and educational users. It is compact, accurate & reliable; working area 240 x 192mm + menu area. Comes complete with a CAD package. £110(b). DDX software £99(b).

01-208 1177

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

MONITORS

All monitors supplied with BBC lead

MICROVITEC

All 14" monitors now available in plastic or metal cases, please specify your requirement.

14" RGB

with PAL & Audio

1431 Std Res	£165(a)	1431 AP Std Res	£205(a)
1451 Med Res	£240(a)	1451 AP Med Res	£280(a)
1441 Hi Res	£389(a)	These monitors can receive TV programs thru a Video Recorder	

20" RGB with PAL & Audio

2030CS Std Res	£380(a)	2040CS Hi Res	£685(a)
----------------	---------	---------------	---------

KAGA TAXAN 12" RGB

VISION II Hi Res	£225 (a)	VISION III Super Hi Res	£325 (a)
------------------	----------	-------------------------	----------

SANYO CD3125NB 14" RGB Std Res	£169 (a)
--------------------------------	----------

MONOCHROME MONITORS:

SANYO DM8112CX Hi Res 12" Green Screen	£90(a)
KAGA KX1201G Hi Res 12" Etched Green Screen	£99(a)
KAGA KX1202A Hi Res 12" Etched Amber Screen	£105(a)
PHILIPS DGD Hi Res Green Screen	£75(a)
ZENITH 122 Hi Res 12" Amber Screen	£68(a)
Swivel Base for Kaga Monochrome fitted with Digital Clock	£21(c)
Monitor Plinth for the BBC	£13.50(b)
Double Tier Plinth for BBC and flat pack dual drive	£19.50(b)
BBC Leads Kaga RGB £5(d) Microvitec £3.50(d) Monochrome £3.50(d)	

RB2 TRACKER BALL




Marconi with its years of experience making tracker balls for use in Military and Air Traffic Control have developed a quality device for the serious hobbyist, for educational uses, and for low cost CAD/CAM applications. RB2 is a compact, ergonomically designed tracker ball that provides precise positional control and rapid direction changing using a freely rotating resin ball in any direction without the limiting stops or the zero point drift of joystick controls. Three switch

buttons enable easy software manipulation to incorporate the use of the tracker ball. Appropriate software will enable the RB2 to take over the functions of cursor keys in word processing, CAD/CAM applications and two dimensional positional controls of robots, drillheads etc. RB2 which plugs into the user port is supplied with utility programme to use it as a joystick with other software, a comprehensive graphics/CAD program and a program demonstrating its editing capabilities. User guide includes instructions on writing your own programs for the RB2. £52(b)

AMX MOUSE

In conjunction with a controlling ROM this sophisticated mouse has many advanced features such as Icons, Windows etc., these can be used in ordinary programs as well as sophisticated CAD Design. The supplied 'AMX ART' is a superb, yet simple-to-use CAD package allowing the creation of amazing graphical designs. A screendump for drawings is included. It can also be used with Wordwise/View to replace the cursor keys. Supplied complete with CAD Package, ROM and full instruction manual. £69(b)

DISC DRIVES

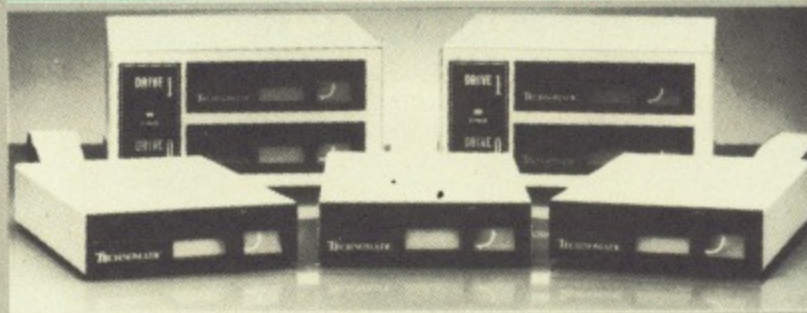

TECHNOMATIC drives are fitted with high quality slimline Mitsubishi mechanisms and represent the state of the art in drive technology. The drives are built to the highest standards and are tested to their full performance capability before packaging.

All drives are available with or without integral mains power supply. The dual drive power supplies are switch mode type and are generously rated to ensure minimum heat generation even over long periods of operation. All drives with integral power supply are fitted with a mains indicator.

The drives are housed in attractively designed metal casings painted in hard wearing BBC matching paint. The dual drives can be supplied in stacked version or with built-in plinths. The plinth version cases are of sturdy construction to carry any monitor and provide a simple method of having a compact computer installation.

The 80T drives are supplied with the 40:80 track switching modules at no extra charge. The 40:80 track switches are conveniently positioned to enable easy switching between the tracks.

All drives are supplied with all the necessary cables, manual and a formatting disc. The mains powered drives are also fitted with a 13A mains plug suitably fused. The drives are ready to be fitted to the computer. All drives are capable of operating in single or double density modes.

Single Drives:

1 x 100K 40T SS	TS100	£85(b)	PS100 with psu	£125(b)
1 x 400K 80/40T DS	TS400	£125(b)	PS400 with psu	£149(b)

Dual Drives:

Stacked Version:				
2 x 100K 40T SS	TD200	£175(a)	PD200 with psu	£200(a)
2 x 400K 80/40 DS	TD800	£250(a)	PD800 with psu	£290(a)
Plinth Version:				
2 x 100K 40T SS	TD200P	£195(a)	PD200P with psu	£220(a)
2 x 400K 80T DS	TD800P	£265(a)	PD800P with psu	£305(a)

DISC DRIVE MULTIPLEXER

A simple device that enables up to four computers to be connected to one single or dual drive. Ideal unit for installing in classrooms where networking is not planned or necessary or the costs have to be kept low or where software information is shared. Several of these units can be installed in series to connect more computers to access the same discs. Units supplied with 5' of cable per outlet as standard. Mains powered.

TDM 4 Quad Unit (upto 4 computers)	£135(a)
TDM 2 Dual Unit (2 computers)	£75(b)

Note: All computers must be fitted with a DFS

3M FLOPPY DISCS

Authorised Distributor
Data Recording Products



Industry standard high quality discs with guaranteed error free performance for life. Discs in packs of 10:

40T SSDD £13(c)	40T DSDD £18(c)
80T SSDD £22(c)	80T DSDD £24(c)

FLOPPICLENE DRIVEHEAD CLEANING KIT

The FLOPPICLENE drive head cleaning kit is an ideal way to ensure the optimum performance of your drives. The use of disposable cleaning discs eliminates the risk of contamination and abrasion of sensitive driveheads. These risks are normally inherent in the reusable drivehead cleaning kits. Floppiclene with 20 disposable cleaning kits. £14.50(b)

DISC ACCESSORIES

Single Disc Cable	£6(d)	Dual Disc Cable	£8.50(d)
10 Disc Library Case	£1.80(d)	30 Disc Case	£6.00(c)
Lockable Storage Boxes 40 Discs	£14(c)	100 Discs	£19(c)

COMMUNICATIONS

MODEMS

ACORN PRESTEL: The official Acorn add-on — an advanced BT Approved. Auto-Dial, Prestel Terminal ideal for British Telecom Gold. Comprehensive software includes 'tagged' frames, downloading of Telesoftware, saving of frames, printing, sophisticated 'Mailbox' handling c/w editor. A built-in speaker allows line monitoring. A simple !BOOT file allows automatic operation £99(b)

BUZZ BOX A full spec, BT approved, pocket size, direct connect modem with both originate & answer modes, full & half duplex, allowing access to many databases, bulletin-boards as well as intercomputer communications. It conforms to CCITT V21 300/300 Baud Standard. Battery/mains powered £62(c) BBC Lead £6 External PSU £9(c)

MINOR MIRACLES WS2000 A world standard modem, having BT approval, covering V21, V23, BELL 103/113/108 and including 75,300,600,1200 Baud ratings. (It even includes 'reverse Prestel!'). This is the modem that will cover 'Prestel' type systems as well as Bulletin Boards both in the UK and abroad. What possibly gives this modem its biggest advantage is its option of computer control. A 25Way RS232



input as well as possible computer controlled auto-dial/auto-answer makes this modem unique. WS2000 £129(c) BBC Serial Cable £7

WS2000 Auto-Dial card: includes an integral loudspeaker for monitoring of the phone line £30(d).

BBC User Port cable (for modem control) £7.

SKI KIT (Allowing total control of the modem by your computer) £10.

DS1 Disc (for Commstar): When used with the Auto-dial card, SK1 Kit, and a user port cable, this software will dial out to Prestel, enter your password etc. and leave you in Commstar. Will also store many bulletin board telephone numbers for autodialling £10.

WS2000 Auto-Answer Card £30(d).

(Please note that the A/D & A/A Cards are still awaiting BABT Approval.)

DEMON A High Performance, yet low-cost Modem. Features include: Auto-dial & auto-answer, Auto baud rate scan, 75,300,1200 Baud rates with V21, V23 and Bell standards. Sophisticated software in ROM allow many features like: Auto-Dial, Redial, Remote facilities etc. An Auto-Dial disc allows storage of commonly dialled numbers. UNICOM £49.95(b) Unicom ROM £20 Unicom Disc £9.95 Unicom Cable £6(d) Not BT approved

COMMSTAR An ideal communications Rom. Extremely easy to use, yet very versatile. It features both a Prestel mode as well as a Terminal mode, thus offering very good value for money. In Prestel mode, all normal Prestel features are available including, downloading of software, saving and retrieving of pages on disc, page tag, revealing of hidden text etc. Its terminal mode is ideal for bulletin boards etc. All input may be copied into a buffer in memory over which full control is available. Controls of protocols are very simple and any type of file, (not just ASCII) may be sent using XModem protocols. Even includes an elapsed time-clock. £29(d)

TERMI-II A good all round package for communicating with notice boards, electronic mail services etc. Termi is a semi-intelligent terminal emulator allowing the BBC to act as a dumb terminal, slave BBC graphics terminal, or VT52 terminal. The rates at which data is sent or received is easily set up with rates of up to 4800 Baud with 40/80 col. selectable. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Termi is not suitable for PRESTEL). £28(d)

COMMUNICATOR This is a full 80 col VT100 terminal emulation program on 16K eprom. It is a more advanced program than TERMI and features easy to follow screen menus. The rate at which data is sent or received is easily set up with rates up to 19200 Baud with 80 column text. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Communicator is not suitable for PRESTEL). £59(d).

SMARTMOUTH

The original 'infinite speech' synthesiser. A ready built, self contained speech synthesiser unit attractively packaged with a built in speaker. Plugs into the user port. £24(c)

TECHNOMATIC

All prices exclude VAT

EPROMER II

A sophisticated eprom programmer that handles the full range of single rail eproms (incl 27256) and allows the user full control of the programming process.



Its powerful menu driven software makes the programming of eproms simple, efficient and eliminates the need to have fiddly switches for selecting eprom types, programming voltage or method. The features include:

- * Integral power supply ensures no power drain from the computer.
- * Interfaces through 1 MHz bus, fully buffered and complies with the Acorn protocols.
- * Eproms upto 16K (27128) programmed in single pass.
- * Selectable programming voltage 25/21/12.5V
- * Selectable programming method — normal or high speed algorithmic. High speed programming enables 27128 to be programmed in just over 2 mins. Normal programming skips addresses FF data to increase programming speed. Automatic verification on completion of programming.
- * User can select any section of the eprom from a single byte to its full address range to Blank Check/Read/Program/Verify enabling program development/changes very simple.
- * Full screen editor with HEX/ASCII input.
- * Full tape/disc filing facility. Data input from keyboard/Tape/Disc/Eprom.
- * Constant display of all options selected.
- * Several BBC BASIC programs can be entered on a single eprom.

EPROMER II with Manual & Cassette £99(b) Software on disc & ROM based software £10

ATPL SIDEWISE ROM EXPANSION BOARD

This is a well constructed expansion board, that does not require soldering in its installation. All buses are buffered. It allows full sideways Rom expansion to a total of 16 ROMs. One socket has been split into two 8 sockets to allow the use of 8K byte CMOS RAM chips, giving a total of 16 sideways RAM. This is ideal for sideways rom development, and will also allow downloading of software from cassette or disc. The battery backup option will allow retention of data in the RAM, when power to the computer is removed. Several link-selectable options include the choice of type of Eprom, and a 'write-protect' for the RAM option. £39(d) Back-up Kit £18.

UV ERASERS

UVT1T Eraser with built-in timer and mains indicator. Built-in safety interlock to avoid accidental exposure to the harmful UV rays. It can handle up to 5 eproms at a time with an average erasing time of about 20 mins. £59(b).

UV1T as above but without the timer. £47(b).

'TIME-WARP' REAL-TIME CLOCK CALENDER

We have broken the price barrier! A low cost unit, allowing the facilities of units costing far more. Built to professional standards, it opens up the total spectrum of Real-Time applications. Possibilities include desk diary/planner, calendar, continuous display of on-screen time and date information, automatic document dating, precise timing and control in scientific applications — its uses are endless. Simply plugs into the user port — battery backup is supplied as standard. A full manual as well as Extensive software on cassette (easily transferred to disc) — no ROMs needed. £29(c)



RAMROM-15

The advanced sideways ROM/RAM expansion system. This is an external unit, using high quality construction, attractively packaged in a BBC coloured metal case, allowing easy access to all the sockets. (Allows other units to be fitted inside the BBC). Absolutely no soldering is required. Allows 11/12 additional sideways ROMs to be fitted with an option of up to 16K sideways RAM. All commonly available RAM can be used including 4801/6116/6264 or xx128. All the hardware to take the RAM is already fitted e.g. battery backup. For development work and further expansion, most of the 6502 processor signals are available. Supplied with utility disc and full instruction manual. £112(b)

01-208 1177

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

TECHNOLINE

TECHNOLINE is a VIEWDATA system we have set up to enable our customers to get up-to-date information and prices on our products at any time of the day or night. It also allows the viewer to send correspondence and orders to us at any convenient time. Needless to say, using this 'latest technology', enables us to yet further improve on our fast response to customer requirements.

THE SCROLL

We are about to launch a revolutionary new concept in Word Processing, that will raise the standard of BBC word processors.

Among its revolutionary features are:

1. A supplied 64K ram card allows a genuine 64K of text storage.
2. 40/80 Column use is easily selectable.
3. A special non-volatile 2K ram, stores (even when the BBC is switched off!) both pre-defined document configurations, and pre-defined printer drivers. This allows you to take full advantage of many and varying printer facilities, such as Italics, Bold, Underline, Shadow etc., with ease and simplicity.
4. A unique facility allows user access to the 64K Ram and 2K Non-volatile RAM.

Not priced for the lower end of the market, this product is aimed primarily at the professional user who spends a considerable period of time using a word processor, and is not satisfied with 'hobby' type products. We feel that we have reached a high standard with this product — that it has achieved the delicate balance between sophisticated features and an elegant ease of use.

Detailed specifications to be released soon.


ACORN IEEE INTERFACE

This interface enables a BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard, at a lower price than other systems, but without sacrificing any aspect of the standard. The interface can link up to 14 IEEE compatible devices. Typical applications are in experimental work in academic and industrial laboratories, with the advantage of speed, accuracy and repeatability. The interface is mains powered and comes with cables, IEEEFS ROM, and user guide. £282(a)

ACORN MUSIC 500

Convert your BBC micro into a sophisticated music composition aid and sound effects generator. Custom made software will provide you with the flexibility to compose, experiment, perform and teach music. Stereo output can be connected to a sound system including your home stereo unit. Full specification on request. £174(a)

DATABASE MANAGEMENT SYSTEM

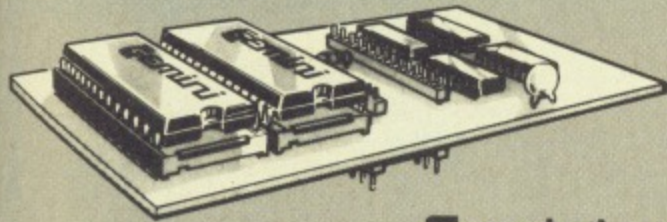

Gemini DATAGEM

The Definitive Random Access, 24K ROM Based DATABASE MANAGEMENT SYSTEM.

Datagem is the first truly flexible database for the BBC Micro that can make your system really useful and efficient, saving you money in the long run. The system includes a carrier board containing two Eproms, demonstration applications disc in both 40/80T, professional documentation with quick reference card, and 'Trans' utility program. Features include: *almost unlimited file size (max 10MByte) *supports up to 4 drives *Max of 5000 records per file *max 6K record size *max of 62 fields *9 level hierarchical search system with facilities to store results of searches. Searches can be any one of the following: Search, Include, Exclude, Combine, Common or Difference *user defined variables *generates form letters from records. Please ask for leaflet. £112(c).

STARdataBASE A fast machine code, true random access database program in a 16K Eprom. Up to 4096 records in a file, up to 69 fields in a record. The record layout is totally user defined. Entirely menu driven — thus very user friendly. Extremely fast searches are possible using the Keysearch facility. Mailmerging from View and Wordwise, and address labelling. Its printer configuration suits any BBC compatible printer. £75(d)

ROMs/SOFTWARE

VIEW Acorn's new version V2.1 word processor rom. Advantages include printing straight from memory and editing in any mode. £48(c)

HI VIEW Disc based version of VIEW word processor for use with the 6502 2nd processor. Allows 47K of user memory. £52(c)

VIEW INDEX Disc based program to create an index from VIEW text files. Ideal for anyone concerned with writing extensive reports or books. £13(d)

WORDWISE One of the most popular word processors for general use £34(d). Wordwise SpellCheck Disc — A must for any serious word processor user. Normal price £16.50(d). If bought with Wordwise: No p&p and only £14.

WORDWISE PLUS The new advanced Wordwise on a 16K eprom, for the more specialised users who require added features and flexibility. New facilities include: 2nd Processor compatible allowing 80 column previewing in all cases, a new Basic-like language, new editing features and embedded commands etc etc. Four new programs are also supplied allowing mail-merging, index generating, two-column text printout and continuous processing. A new 56 page introductory manual and a 180 page reference manual complete this rather special package. Finally, it is able to use existing Wordwise files without any modification. £49(d).

SPELLCHECK II: A rom based fast machine code program that works with both VIEW and WORDWISE. Vocabulary disc supplied with 6000 words can be expanded to well over 17000 words on 100K drive. Fully compatible with 6502 second processor. £26(d)

ISO-PASCAL: Acorn's full implementation of International Standard Pascal on two 16K ROMs. Disc Version for use on 6502 2nd Processor also supplied. Comprehensive manual. £60(c)

ACORN LOGO A full implementation of the Logo language from Acornsoft. Supplied as two ROMs with a tutorial course and technical manual. £60(b)

ULTRACALC 2 This enhanced version of the original BBC Publications popular spreadsheet rom includes many new features including full compatibility with the 6502 2nd processor running as HiCalc allowing 44K of user memory, operate in any mode, greater flexibility in printer control, spooling as ASCII file etc. All these features are in addition to the existing powerful features such as handling of labels and numbers as values. Column width control and features normality found in well designed spreadsheets. £69(d)

VIEWSHEET Acorn's spreadsheet provides 255 columns and 255 rows and will operate in any mode. Windows can be created which can then be rearranged to provide any print format required. Function keys provide for easy entry of commands. Printer control codes can be used using the printer driver. Fully compatible with VIEW and the 6502 2nd Processor. £52(d)

BCPL A full implementation of the BCPL compiler language consisting of the language rom, disc containing the BCPL compiler, a screen editor, a 6502 assembler, other utilities and programming aids and examples of BCPL code and a 450 page manual. BCPL can be used to develop games programs, commercial packages, system software, to write control systems and to produce programs which otherwise would need to be written in assembler. £52(b)

BCPL STAND ALONE GENERATOR Utilities in this package enable the programs developed using the BCPL rom to be converted so that they can be run on any BBC micro whether it has a BCPL rom or not. Stand alone programs for other 6502 based systems can also be developed. £43(d)

BCPL CALCULATIONS PACKAGE: supplied on disc, it supports floating point, fixed point and fast integer calculations. It includes the BCPL calculation files, example files and a comprehensive user guide. £17.30(b)

ACORN LISP Rom £43(d)

ACORN FORTH Rom £43(d)

G:FORTH An advanced implementation of FORTH which follows the 79-Standard specification on a 16K ROM and has a full double number extension set. It incorporates an editor, 6502 assembler, very fast turtle graphics and supports extensive string and file handling. It contains 540 predefined words including those for reading joystick ports, produce sounds, set and read the time and produce random numbers. Fully compatible with disc or tape filing systems and works in any mode. Package comes complete with a USER GUIDE, Introduction to FORTH and 16K GFORTH ROM £43(d)

DISC DOCTOR Computer Concept's popular disc utility rom which adds 20 commands to the DFS system. £27(d)

EPROMs/RAMs

2764-25	£4.00(d)
27128-25	£7.50(d)
6264-15	£7.50(d)
6264LP-15	£8.00(d)

DISCMASTER Beebug's a disc utility which provides additional DFS commands and utilities including disc menu to automatically RUN/*RUN programs, converting 40 track discs to 80 track and enable dual catalog. £16(d)

EXMON II Updated version of the EXMON rom with facilities including dual screen operation and full screen memory editor. £24(d)

TOOLKIT This ROM adds 27 new commands to the BBC BASIC. These include a full screen editor, merge, relocating data in memory, program compactor, listing of variables and memory search. £23(d)

SLEUTH A debugging tool for BASIC programs which includes features like single stepping of dual screen programs, and accelerator to run programs from full speed to freeze frames. £24(d)

GRAPHICS ROM .. * .. £27(d)

PRINTMASTER This ROM features the most versatile screen dump for EPSON MX/RX/FX80 and Kaga 810 printers. It supports three types of dumps. The first allows any graphics on the screen to be dumped. Colours appear as shades of grey. Any part of the screen can be printed at any position on the paper in any one of four orientations. The screen dump may be magnified by any factor x2, x3, x4 etc. A special feature allows true MODE 7 screen dumps with TELETEXT text & graphics. The second dump allows any text to be dumped whilst the third dump will print the contents of a file on disc whilst the computer is doing other things. This is not all. All printer functions can be called up using the *command. *DEFINE allows the printer to define his own characters and store them. *GPRINT allows printing of enlarged text in any position, orientation, size & shade. *WINDOW allows windows to be defined in any size and position on the screen. Can allow you to do printing as background operation while the computer does other jobs. In short this one ROM does it all. £28(d)

DUMPMASTER Disc based program that produces fast machine code routines for a variety of printers incl. EPSON MX/FX, STAR 910, Seikosha, NEC PC8023, INTEGRIX 132A. Dumps in 8 shades in any mode including teletext mode. Snapshot facility allows dumps from games and other programs. £10(d)

MUROM Sound Extension Rom: Helps you create your own tunes and sound sequences either with MUROM's editor and a musical score or using the keyboard to simulate a piano. Edit your creations with the full screen music editor and then switch to envelope editor to tailor the tonal quality and select instrument type. Incorporate the music into other programs or playback with or without MUROM. Instant sound effects can be called from Basic eg *ZAP, *SIREN, *EXPLODE etc. £24(d)

BILLBOARD A useful program that enables your BBC to produce super-large 'Billboard' type characters i.e. a continuous horizontal scrolling of super-large characters. Supplied in ROM. £16.50(d)

HELP Rom based comprehensive on screen HELP facility to aid and speed up programming. £21(d)

MICROGUIDE Keyplate: This keyplate fits neatly over the keyboard and provides ready reference to a comprehensive list of VDU codes, wipe clean pen supplied, it can be used for fn. key identification etc. Spiral bound microguide book contains lots of useful information on keywords, abbreviations, *FX commands and error messages — saves hours thumbing through the manuals and guides. £6.50(d)

MICROTEXT This authoring system developed by the NPL allows production of a wide range of man-computer dialogues. User can draw up a frame made up of text/graphics and combine a series of frames to create modules which are incorporated into a program. An expert in any field can create complete courses of computer based instruction material. Applications include interviewing systems, teaching packages, training courses and interactive demonstrations and simulations. Disc £53(b) Cassette £43(b)

REPLICA II 40 & 80 Track Versions available. £10.35(d)

BROM — the new utility ROM from Clares — a Toolkit ROM that gives you full screen editing. Many extra functions are included. £30(d)

BEEGUG DESIGN £16.50(d)

BEEBUG SUPERPLOT Cass £8.50(d)

CP/M SOFTWARE FOR TORCH Z80 ACORN Z80 PROCESSOR

We can now supply almost any CP/M based software package in a format suitable for the Torch Z80 and Acorn Z80 second processors. The following are generally available from stock.

DBASE II £335(a) WORDSTAR PROFESSIONAL £380(a)

WORDSTAR £275(a) DBASE II Tutorial..... £32(c)

PROPASCAL £220(a) Supercalc 2 £200(c)

Phone for your specific requirements.

Please specify the type of format (TORCH or ACORN) required.

SPELLCHECK I Menu driven spelling checker for Wordwise or VIEW. Dictionary contains 6000 words and is expandable to 1700 on 100K disc. £16.50(d) Disc (80 or 40 Track) Specify whether Wordwise or VIEW.

MASTERFILE II The new version of the popular general purpose file management system. It allows large amounts of information to be stored and processed. It is extremely powerful yet flexible to use. The disc version allows up to 17 fields per record, and the only limitation as to the number of records is the capacity of the disc. Typically, using 5 fields, about 2000 records may be stored on a 100K disc. This latest version features many new facilities including use with WORDWISE/VIEW £16.50(d) Disc (80 or 40T).

HERSHEY CHARACTER font generator: Disc based menu driven package with 1500 new characters made up from 9 different Hershey character fonts. Flexible utility allows choosing of any characters and appending them to users programs. Screen dump routine for Epson printers included. £12.50(d)

When ordering software on disc please specify track format (40/80)

BOOKS

(No VAT p&p £1.50 per book)

CPU/Assembly Language Books	£	Century Computer Prog.....	£ 9.95
6502 Applications.....	£12.50	Drawing your own BBC progs.....	£6.95
6502 Assy Lang Prog.....	£17.50	Discovering BBC M/C.....	£ 6.00
6502 M/C for Beginners.....	£ 5.95	Guide to the BBC ROM.....	£ 9.95
6502 Advanced Programming.....	£11.95	Expert Guide James.....	£ 6.50
6502 Programming.....	£13.95	Exploiting BBC BASIC.....	£ 6.95
6800 Prog Reference Manual.....	£ 9.00	FORTH Acorn.....	£ 7.50
6809 Assy Lang Programming.....	£13.45	Further Programming for BBC.....	£ 5.50
6809 Programming.....	£12.95	LISP Acorn.....	£ 7.50
8086 Book.....	£19.50	Programming the BBC.....	£ 6.50
Prog. the 8086/89.....	£13.50	Structured Programming.....	£ 6.50
68000 Assy Lang Prog.....	£18.95	S-PASCAL Acorn.....	£ 7.50
LANGUAGES		Using BBC BASIC.....	£10.00
CP/M Handbook.....	£13.95	SOUND & GRAPHICS:	
Mastering the CP/M.....	£16.50	Advanced Graphics with BBC.....	£ 7.50
FORTRAN Cookbook.....	£ 8.00	BBC Graphics & Sound.....	£ 7.50
Introduction to PASCAL.....	£16.50	BBC Micro BASIC, Sound & Graphics.....	£ 7.50
Prog the Micro with PASCAL.....	£ 8.50	Creative Graphics Acorn.....	£ 7.50
The UNIX Book.....	£12.50	Graphics on the BBC Micro.....	£ 6.00
BBC Micro Books		Turtle Graphics.....	£ 7.50
Books for Beginners:		EDUCATIONAL:	
Let Your BBC Teach U to Prog.....	£ 2.50	35 Educational Programs.....	£ 6.00
BASIC programming on the BBC — Cryer.....	£ 5.50	BBC Micro in Education.....	£ 6.50
BBC BASIC.....	£ 5.50	Prog for Education (Pri.Sch).....	£ 5.95
BBC BASIC for Beginners.....	£ 6.25	DISC DRIVE SYSTEMS:	
BBC Micro for Beginners.....	£ 6.25	BBC Micro Disc Companion.....	£ 7.95
Easy Prog for the BBC Micro.....	£ 5.00	Disc Book.....	£ 3.50
Friendly Computer Book.....	£ 3.50	Disc Programming Techniques.....	£ 6.95
Gateway to Computing BBC1.....	£ 4.95	Disc Systems.....	£ 6.95
Gateway to Computing BBC2.....	£ 4.95	Using Floppy Discs.....	£ 6.95
Getting More from Your BBC & Electron.....	£ 5.95	APPLICATIONS:	
Introducing the BBC Micro.....	£ 4.50	BBC Filing Systems & Databases.....	£7.95
Step by Step Programming 1.....	£ 5.95	BBC Software Projects.....	£ 6.95
Step by Step Programming 2.....	£ 5.95	Business Programming on BBC.....	£ 7.95
Languages/Programming		Business Applications on BBC.....	£ 7.95
30 Hour BASIC.....	£ 6.75	DIY Robotics & Sensors.....	£ 6.95
Advanced User Guide.....	£12.50	Essential Maths BBC/Electron.....	£ 5.95
Adv BASIC Rom User Guide.....	£ 7.50	Exploring Music with BBC & Electron.....	£ 9.95
Advanced M/C Tech for BBC.....	£ 7.50	Graphs & Charts Acorn.....	£ 7.50
Advanced Prog Tech for BBC.....	£ 8.50	Interfacing Projects for BBC.....	£ 6.95
Assy. Lang. Prog. made easy.....	£5.95	Making Music on the BBC.....	£ 5.50
Assembly Lang Prog for BBC.....	£ 7.95	GAMES:	
Assembly Lang Prog 2nd Ed — Birnbaum.....	£ 8.75	21 Games for the BBC Micro.....	£ 5.00
Applied Assembly Lang on BBC.....	£ 7.95	100 Programs for the BBC.....	£ 6.00
BASIC Rom User Guide.....	£ 9.95	Creating Adventure Programs.....	£ 5.00
BBC Rom Book B. Smith.....	£9.95	Instant Arcade Games.....	£ 2.95
BBC Micro Revealed.....	£ 2.00	BBC User Guide Acorn.....	£15.00
BCPL User Manual Acorn.....	£15.00	MISCELLANEOUS BOOKS:	
Beyond BASIC BBC Publ.....	£10.00	6522 VIA Book.....	£ 4.50
Creative Assembler on BBC.....	£ 5.95	Micronet Handbook.....	£ 6.95

TECHNOMATIC LTD

MAIL ORDERS TO: 17 Burnley Road, London NW10 1ED
(Tel: 01-208 1177 Telex 922800)

SHOPS AT: NW London: 15 Burnley Road, London NW10 1ED
(Dollis Hill 2 mins walk, ample car parking space)

West End: 305 Edgware Road, London W2. Tel: 01-723 0233
(Near Edgware Road)

ORDERS FROM GOVERNMENT ESTABLISHMENTS, UNIVERSITIES, COLLEGES, STATE SCHOOLS, HOSPITALS, WELFARE ORGANISATIONS, AND CHARITIES ARE WELCOME

01-208 1177

All prices exclude VAT. Please add carriage (a) £8

(b) £2.50 (c) £1.50 (d) £1.00

and 15% VAT to order value

Carriage (a) by Datapost.

For fast delivery telephone your order quoting




VISA or Access card or official order number.

(Minimum telephone order £5)

ONLY £79
£2 p&p + VAT

NOVACAD

Computer Aided Draughting for the BBC Micro

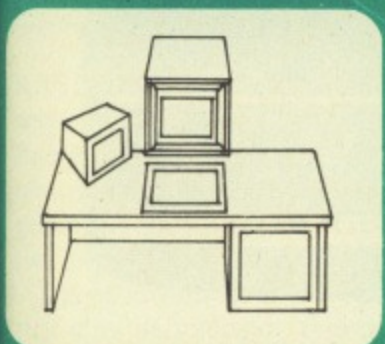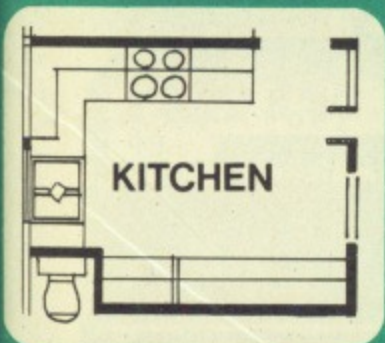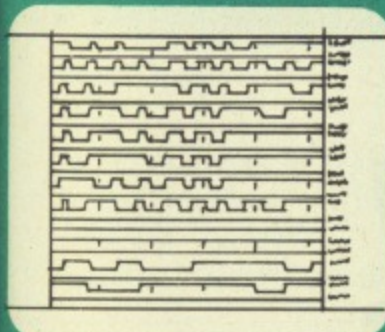

New from Technomatic – a CAD package with facilities which until now were confined to mainframe or mini computers. But at a price everyone can afford. Whether you want to design a complex electronic circuit diagram or plan your new kitchen or simply draw a cube NOVACAD will help you do it better and more easily.

All you need is a BBC Micro Model B fitted with an Acorn DFS system and a disc drive.

If you have a 6502 2nd processor and a dual disc drive system then NOVACAD's capabilities are further enhanced.

MAIN FEATURES

- * Very user friendly with all controls and commands from the keyboard.
- * Special windowing techniques make available to the user almost one million dots allowing a lot more details to be put on the drawing than one would normally expect the BBC to be capable of. (Mode O screen displays only 1/6 the number of dots). The drawing can be 4 screens across and 5 screens up.
- * Libraries of user defined shapes such as electronic symbols can be created easily and edited even in the middle of drawing another diagram. Even whole sections of diagrams can be defined as shapes.
- * Shapes can be called by name from a library into any part of the diagram and can be moved, enlarged, reduced, rotated in 90° steps and have mirror images made before being finally positioned.
- * A zoom facility allows the user to magnify any section of a drawing by upto 50 times to make it easier to insert details.
- * User definable grid helps the user set his own scaling for the drawings.
- * Upto 8 'levels' can be used to produce multi layer drawings, and then user can decide which levels are to be displayed. This can be particularly useful in pcb drawings, architectural drawings with details of the services behind the walls displayed only when required and many other such applications.
- * Text can be added at any position vertically or horizontally.
- * Powerful delete facilities allow deletion of single lines or whole sections with minimum of key presses.
- * Printer dump for Epson compatible printers incorporated in the software which allows a full or a sectional screen dump.
- * An optional plotter utility will allow output to a range of popular plotters for high quality diagrams.

NOVACAD will prove to be an invaluable teaching aid in technical schools and colleges and for anyone involved in draughting it will be an ideal labour saving tool.

The NOVACAD package comes with a 16K ROM, Utility disc and a comprehensive manual. All for only £79 + £2 p&p + VAT.

**DEALER
ENQUIRIES
WELCOME**

TECHNOMATIC LTD

Tel: 01-208 1177 Telex: 922 800

MAIL ORDERS TO: 17 Burnley Road, London NW10 1ED

SHOPS AT: NW London: 15 Burnley Road, London NW10 1ED

(☎ Dollis Hill 2 mins walk, ample car parking space)

West End: 305 Edgware Road, London W2. Tel: 01-723 0233 (Near Edgware Road ☎)

For fast delivery telephone your order quoting VISA or Access card or official order number.

LOOK in any BBC computer magazine at the moment and you'll be bombarded by adverts for various Basic toolkit ROMs which aid in the manipulation of Basic programs.

The two ROMs reviewed here are not just another two toolkits, but "dynamic" programming aids. They control the running of the program

much like a machine code monitor, allowing it to be run one statement at a time (single stepping), to stop when a certain line has been reached or when a variable has a set value (set breakpoints) and to display current variable values. Though they share the same basic idea, they implement it in very different ways.

Sleuth has winning ways with graphics...

Sleuth version 1.05
Beebug

AFTER typing in *SLEUTH a control page is entered (See Figure 1), which looks a little different from that seen accompanying Beebugsoft's advertising. All the programming commands are entered from this page.

As you can see, a number of items of information are displayed across the top of the screen. The first group FR GS RP PROC show the number of FOR/NEXT loops, GOSUBs, REPEAT/UNTILs and PROCedures active at the time.

ACC, the "accelerator", refers to the speed at which a program runs (0 the slowest, 100 the fastest).

In the top right corner of the screen are a number of status flags indicating printer active, trace, breakpoint, single step, control/program screens.

The rest of the screen is divided into five areas. The top one displays the current line. In the single stepping mode each statement is highlighted in a different colour as it is being executed - especially useful with complex conditional statements.

The next section gives the name of the current procedure.

Up to four variables from the current line are then displayed. Below this is an area for showing either the breakpoints or any four variables you want to keep an eye on.

The bottom section is a window where commands are typed in or error messages shown.

The instructions are typed in as one or two letters, which are then "expanded" to give the full name of the command. For example, pressing G results in GOTO being displayed. Once

```

SLEUTH FR GS RP PROC ACC status
      0  0  0  1  100  CP
19
230X%=cmd%:Y%=cmd%DIU256:$cmd%=oscmd$:
CALL OSCLI

PROCEDURE
cmd("SAVE Sleu1 1A00+400 7C00 7C00")
VARIABLES
X% =8108
cmd% =8108
Y% =31
$cmd% ="SAVE Sleu1 1A00+4
SELECTED VARIABLES
I% =11
J% =11
cmd% =8108
$cmd% ="SAVE Sleu1 1A00+4
:
    
```

Figure 1: Sleuth control page

satisfied the command is correctly entered press Return to have it obeyed.

The most impressive feature of Sleuth is the dual screen facility - moving between the control screen and the program screen which may be in any mode. Swapping from one to another is simply by pressing the Tab key.

There is a choice of running the program through at a set speed, single stepping one statement at a time, multisteping through the current loop, through the next loop, or until a breakpoint is reached.

It's also possible to run from a given line rather than from the first line. While running, the program can be stopped at any time by pressing the @ key.

Up to three breakpoints can be set to stop at a given line number or if a given condition is true.

There are however some minor irritations. Having to leave Sleuth to edit program lines is one. It's best to save the

program after editing, then reload it into SLEUTH when the dual screen is activated, so as not to corrupt the program.

Single stepping is not as easy to use as it should be. When you set the single step mode it will go to the first line of the program. If you want to start from any other line, it must be at a breakpoint or at the line which was executing when interrupted by pressing @.

You are able to update the value of a variable, but not to assign a value to an undeclared variable in Sleuth - annoying if debugging a section of long program and you want to assign a value to a global variable.

Documentation is in the form of a 24-page, A5 size pamphlet. It gives a simple and clear account of the commands. Included is a reference section, on memory workspace usage and a command summary.

Mike Maho

*HELP	MEMORY (<address>)	CLEAR
Yorkshire HiTech MICROSCOPE 1.00	OUTPUT (P/<fsp>)	CLS
DEBUG	PAUSE ON/OFF	DATA
SUPPORT	PRINT (<var>)...	ERASE
	ROUTE (L)	ERL
	SHOW ON/OFF	EXPAND (<first>) (<last>)
	TRACE ON/OFF	INSERT
	TRAP ON/OFF	LISTO (<number>)
*HELP DEBUG		RELOCATE (<address>)
Yorkshire HiTech MICROSCOPE 1.00	*HELP SUPPORT	REMOVE (<first>) (<last>)
BREAK (<number>) (<line number>)	Yorkshire HiTech MICROSCOPE 1.00	RESET
DISPLAY (<number>)	BUFFER (<address>)	SPLIT (<first>) (<last>)
LIMITS (<first>) (<last>)		TIDY

Figure II: Microscope *HELP display

...and you'll find Microscope tends to grow on you

Microscope version 1.00
Yorkshire Hi Tech

RATHER than have a separate control screen the commands are entered from Basic like operating system *Commands. They are divided into two groups as shown by the *HELP display (see Figure II).

There are numerous display options that may be selected. You only need to display those that are of interest to you. Figure III gives an idea of how a screen may look if the "line trace" and "show current line" are selected and the

- current values of I% and J% are printed.
- If debug information is not wanted on the screen it can be directed to printer, disc or tape.
- *BREAK:** Lists, sets or clears breakpoints (up to nine at any time).
- *DISPLAY:** Display trace line numbers.
- *LIMITS:** Instructs the debugger only to show the trace of the lines you are interested in.
- *MEMORY:** Displays the values of each byte of a block of memory. This is particularly useful when setting up parameter blocks for machine code calls within Basic.
- *OUTPUT:** As Microscope doesn't

- have dual screens debugging output can be directed to screen, printer, disc or tape.
- *PAUSE:** Switch for single stepping.
- *PRINT:** Displays user-defined variables and their values. Numbers can be printed in hexadecimal by preceding them with a "~".
- *ROUTE:** Displays the line numbers of the last 20 executed lines.
- *SHOW:** Switches to display the current line as it is being executed.
- *TRACE:** Main switch for the trace mode.
- *TRAP:** Displays error message, error line and approximate error position.
- As well as the debugging commands there are a number of toolkit type functions and commands to manipulate the control buffer.
- *BUFFER:** Moves control buffer to any location in memory.
- *CLEAR:** Clears all the resident variables, A%-Z%.
- *CLS:** Clears the screen.
- *DATA:** Gives the addresses of PAGE, TOP, LOMEM, HIMEM and "top" of variables as well as amounts of memory space used and available.
- *ERASE:** Clears the record of the last 20 lines remembered by the trace function.
- *ERL:** Lists the line the error occurred on.
- *EXPAND:** Formats a listing so that


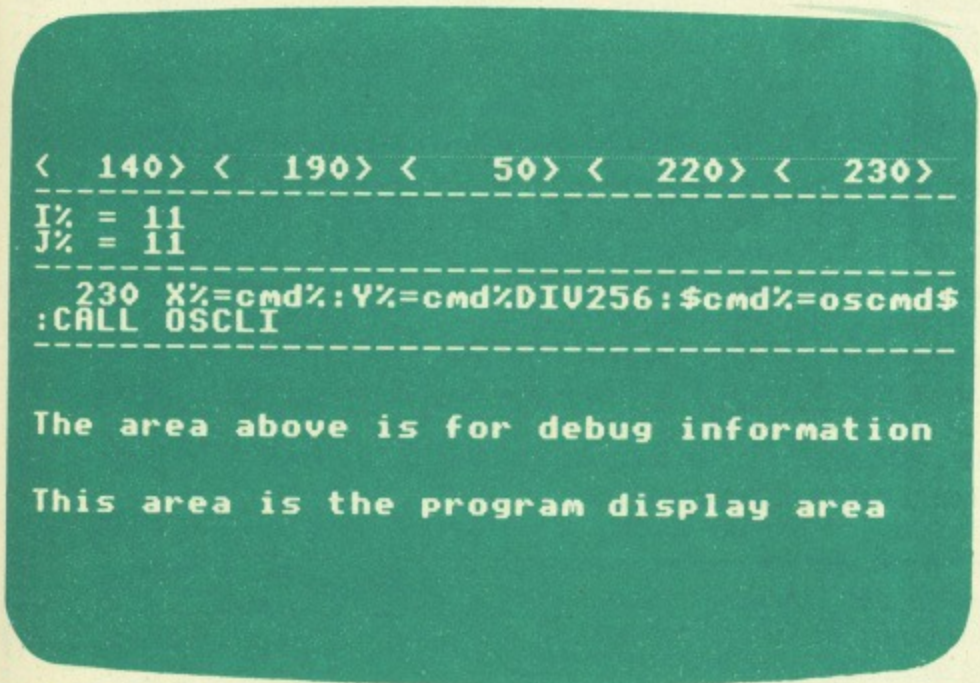


Figure III: Microscope in action

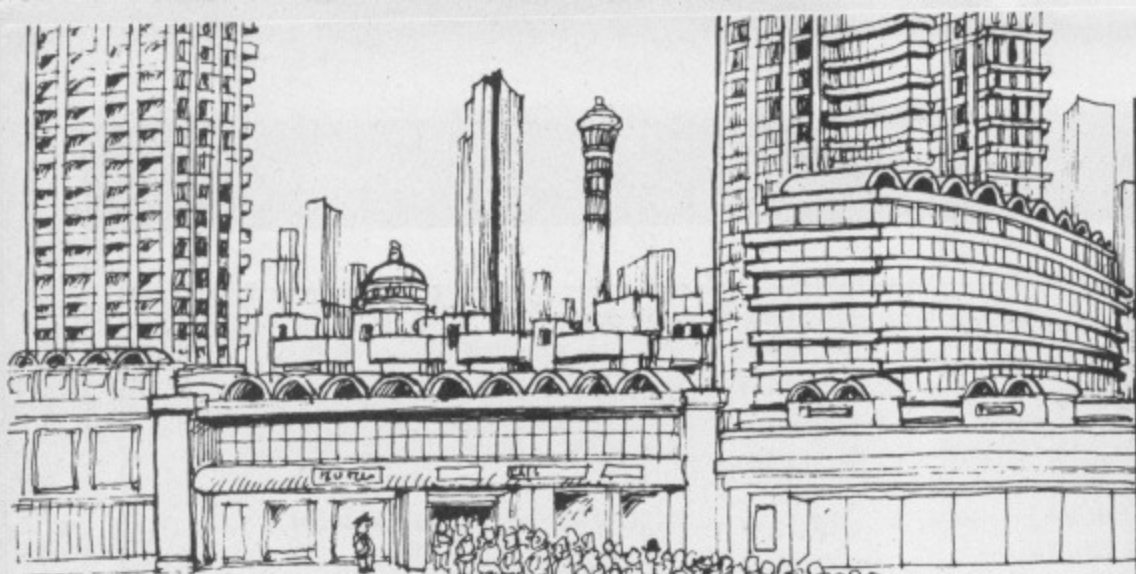

Barbican Centre,
London EC2.
25th-28th July 1985

THE THIRD OFFICIAL ACORN USER EXHIBITION

STILL THE BIGGEST! STILL THE BEST!

Four days of non-stop entertainment and business.

If you're an Acorn owner, user or just thinking of buying a computer you shouldn't miss the Acorn User Exhibition. It's four days of fun, bargains, demonstrations and information.

There are specialist areas for business, education, telecommunications, robotics and home use. Each with special demonstrations, competitions, and brand new products. And there'll be experts to answer your technical questions.

All in all, we're expecting over 120 different companies to be there, as well as Acorn themselves.

And because the Exhibition is at the Barbican there's plenty of restaurants bars and rest areas.

So if you're a businessman, scientist, parent, teacher, computer fanatic or home user. **Don't miss the only OFFICIAL ACORN EXHIBITION.**

For information on stand availability ring
Tim Collins on 01-930 1612
**P.S. Acorn have promised
some very special events
exclusive to the
show!**



NEWS FLASH
Play 'REVS' the
motor racing game
and
ELITE II (6502)
on the Acorn stand

**REDUCED
PRICES
FOR GROUPS**

Entry only £1 per person
for bookings over
10 people. Complete form below.

MISS THE QUEUES - SAVE MONEY

Use the coupon below to save money and miss the queues
Entrance at the door will be £3 for adults, £2 for under sixteen

HOW TO GET THERE

By train: Holborn Viaduct, Cannon Street, Broad Street,
Kings Cross, St Pancras, Liverpool Street.
By Underground: Moorgate, Barbican, St Pauls, Bank, Liverpool St

Computer Marketplace (Exhibitions) Ltd
(A Rushworth Dales Group Company)
20, Orange Street, London WC2H 7ED.

To: Computer Marketplace (Exhibitions) Ltd, 20 Orange St, London WC2H 7ED.

Please send _____ (Qty) Adult Tickets at £2 and
_____ (Qty) Under sixteen tickets at £1 each

I enclose cheque/P.O. for £ _____ or debit my Access/Amex/
Diners card no. _____

Signature _____

Name _____

Address _____

_____ Postcode _____

From Page 43

only one statement appears on each line, to make listing much easier to read.

***INSERT:** Moves the control buffer to the bottom of memory.

***LISTO:** Sets list option settings.

***RELOCATE:** Moves a Basic program down (and up!) in memory.

***REMOVE:** Removes blank lines inserted by ***SPLIT**.

***RESET:** Clears control buffer if corrupted.

***SPLIT:** Divides up multi-statement lines so that each line only has one statement. (Though there is no combiner to put as many statements on one line as logically possible.)

***TIDY:** Like the Watford DFS, it closes

all open files, including any debugging output files.

These commands can also be incorporated into Basic programs. Because of this Microscope has a number of error numbers and messages.

The manual is a 36-page, A5 spiral bound and covers each of the commands simply. There is an index as the commands are grouped according to type of function rather than in alphabetical order.

There is a short but useful section on the types of programming errors that commonly occur.

Conclusions:

Each of these utilities has good points and irritations. In common with most toolkits neither works across the Tube.

With the 6502 second processor on Microscope will ignore any command while Sleuth will cause the system to crash.

And, of course, although debuggers will help you identify the problem, they will not make up for lack of planning or programming skills.

So, even with one of these chips, spaghetti programming will still be difficult (if not impossible!) to debug, whereas a well-structured program is always much easier.

Sleuth is not as glossy in use as its advertised image, but the dual screen function is excellent for debugging graphics. Microscope looks rather plain at first sight, but grows on you.

Jim Notman

Buffer & Backup ROM Watford Electronics

THIS 8k eeprom, sold at a giveaway price of less than £20, has considerably lengthened my potential lifespan. I now spend very little time grinding my teeth with impatience while watching my BBC Micro print out a document.

The ROM's main use is to support a print buffer based on CMOS RAM contained in the sideways ROM sockets (only for Centronics type parallel printers).

It will support up to 16k, either occupying eight sockets and costing over £30 in 2k chips or occupying two sockets and costing over £60 in 8k aliquots.

On some ROM extension boards there is a split socket so that only one of the 16 ROMs is lost when 8k RAM is used. Of course the RAM is also available for ROM software development.

At switch-on the Watford ROM searches the sideways ROMs and announces "Print buffer in page **:**** bytes free". It works in both Watford and ATPL ROM expansion boards, but there should be no reason why it will not work on other boards.

On entering ***FX5,3** all printing is passed via the buffer so freeing the micro for use as quickly as possible. With a nominal 16k buffer 15.5k is available, allowing approximately nine A4 size pages of text to be accepted by the buffer before the rate of filling is

limited by printer speed.

Printing is stopped by holding the Break key down for half a second, and restarted by sending another character to the printer or reselecting printer off and on line. The buffer is emptied by entering ***BUFFER** or pressing Break with any key other than Shift or Ctrl.

In addition other facilities are available on this chip, some making use of the ROM filing system. Typing ***ROM** followed by ***CAT** displays five programs whose information can be expanded by ***OPT1,2**.

Activating the **!BOOT** file by pressing Shift, Space and Break together loads a menu of other routines. The first of these enables the user to look at any ROM and is only spoiled by poor layout and uncontrolled scrolling.

Another facility allows transfer of disc programs to tape so that backups for single sided, single drive users are available. Included within this is a routine for creating menus on discs or tapes.

Two further star commands are supported. ***VAR** displays Basic variables and their values. Arrays are listed with their dimensions but not their contents. ***TCOPY** allows the copying of tape programs onto tape, Hobbit or disc.

In short this Buffer and Backup ROM is almost a giveaway for users who already have CMOS RAM, but the additional cost of such RAM and the ROM space used may deter other potential purchasers.

Ian Whitmore

**Print
buffer
could
let you
live a
little
longer**

REDUCED
PRICES
FOR GROUPS
1 per person

form below.
SAVE MONEY
as the queues.
under sixteens.

et,
Liverpool St

ch
nex/

DATA STAR QUALITY At down to earth prices.

When it comes to printers, whichever way you look at it, we've got the lowest prices, the widest range and the best back-up service in the country. What you won't get from us, are special gifts, or false promises — just honest value and a fully guaranteed after-sales service.



SPECIAL OFFERS

Brother — M1009 £173.86 + VAT = £199.95
50cps ● bi-directional ● logic seeking ● 96 chars plus international and graphics ● 9 x 9 matrix.

Gemini 10X £189.95 + VAT = £218.44

120 cps. ● bi-directional ● logic seeking ● friction, tractor and roll holder standard ● down loadable characters ● ultra high resolution ● 80 cols. ● IBM PC version available.

Canon PW 1080A £265 + VAT = £304.75

Near letter quality ● 160 cps ● bi-directional ● 96 chars. plus graphics ● 5 print sizes ● 11 x 9 matrix ● 23 x 18 NLQ matrix

COMPLETE RANGE

DOT MATRIX

Canon PW 1080A £265 + VAT = £304.75

Epson RX80 £198.95 + VAT = £228.79

Epson RX80 F/T £228.95 + VAT = £263.29

Epson FX80 £319.95 + VAT = £367.94

Canon PW 1156A £359.95 + VAT = £413.94

Star Gemini 10x £189.95 + VAT = £218.44

Star Delta 10 £319.95 + VAT = £367.94

Star Radix 10 £498.95 + VAT = £573.79

DAISYWHEEL PRINTERS

Brother HR15 Ring for prices

3k buffer Subscripts & superscripts
18CPS max Proportional spacing
Text reprinting Two-colour printing
Auto underlining
RS232 or Centronics


Juki 6100 £325 + VAT = £373.75

20 CPS max Bold & shadow printing
Diablo protocols Subscripts & superscripts
Auto underlining
Standard 2k buffer
Wordstar compatible
Comprehensive user-friendly manual
1 year parts & labour warranty

Cables ● Paper ● Ribbons ● Sheet and tractor feeders
● Interfaces

If you have any technical queries or want our latest prices please telephone:

Credit card hot line . . . 01-482 1711

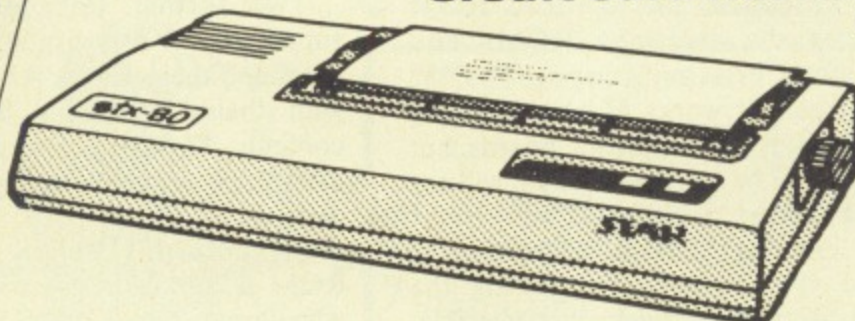

Please add £10 for delivery, we guarantee 48 hour delivery from payment. Personal callers welcome. We're at the junction of Camden Road, near the railway bridge. Anytime 9.00am to 6.00pm Monday to Friday 10.00am to 1.00pm Sunday. Export and dealer enquiries welcome. Post your order with cheque to

Datastar Systems UK

Unicom House, 182 Royal College Street, London NW1 9NN
Telex 295 931 Unicom G Telephone 01-482 1711

*ROM Manager 8k eprom
Watford Electronics*

Keep your house in order with ROM Manager

JUST when your sideways ROM board was filling up and ROM commands were getting in each other's way comes this timely arrival from Watford.

ROM Manager prefers to sit in a high priority socket on the BBC Micro or sideways ROM board (don't they all!) in order to provide more control over the other ROMs. The version tested here was 1.00 which, on entering *H.M.A., the minimum abbreviation to avoid clashes, revealed its 18 commands.

They are concerned either with providing information about ROMs, controlling the passing of star commands to them or examining memory and using RAM to simulate ROM. In addition, with ROM Manager in place, pressing R+Break informs the user that the ROM filing system has been selected.

Most of the common names are self explanatory. ROMs could be accessed either by their name or by their socket number preceded by a % sign. This numerical option saved a lot of key pressing when using the controller commands from the second group.

I found that from the first group (Information), *NAMES was the most useful and used it before calling *EXAMINE to investigate a ROM. The latter facility allowed the user to scroll through ROM memory in either direction at a reasonable speed.

Similarly *MODIFY was a very useful and easy to operate memory editor for RAM, equivalent to Disc Doctor's *MZAP.

With many ROMs installed in the BBC Micro it is common to find at least two using star commands of the same name. Accessing the lower priority ROM (the one nearer to socket 1) is not directly possible as commands will be intercepted by the higher priority one.

Short of running a little machine code routine, the user often has to resort to removing the offending higher priority ROM, thus risking bent or broken legs. ROM Manager avoids these clashes and therefore my alternative name for this chip is shinguard!

The controlling commands allow a particular ROM to be specified as default, so receiving all commands preceded by *DEFAULT. Alternatively the operator may use *DIRECT and send the command directly to the desired ROM.

If these command names clash then an identical alternative is to use

INFORMATION COMMANDS

- *NAMES Lists the names and socket locations of ROMs present and indicates if they are active.
- *STATUS *rom* Displays information on a selected ROM concerning title, location, copyright notice, length and language or service entry.
- *CHECKSUM *rom* Generates a CRC code for a specified ROM.
- *VALUES Provides information on location and priority of ROM Manager, filing system in use and default ROM selected.
- *EXPLAINFX *number* Briefly lists the first 22 *FX calls or gives detailed information on a selected one.

MEMORY MANIPULATION

- *EXAMINE *rom address* Memory dump of named ROM from address or &8000.
- *MODIFY *address* Edit memory from given address or PAGE.
- *FUNCTION *key number* Display contents of one or all function keys.
- *INCLUDE *address* Place user RAM routine name in ROM list.
- *REMOVE Disable RAM-based routine.
- *RAM *command* Pass command to RAM-based routine.

CONTROLLING COMMANDS

- *SPECIFY *rom* Specify the ROM accessed by *DEFAULT.
- *DEFAULT *command* Send command to specified ROM.
- *DIRECT *rom command* Pass command directly to named ROM.
- *VECTOR *rom command* Alternative to *DIRECT.
- *FILE *command* Pass command directly to filing system.
- *STOP *rom* Disable named ROM.
- *START *rom* Enable a disabled ROM or all ROMs.

A GREAT PACKAGE DEAL!

For serious users of the BBC Computer.
A professional trio which can be integrated to produce an information management system of exceptional power.

1 SCRIBE

THE PROFESSIONAL WORD PROCESSOR designed for the serious user ■ All operations fully prompted ■ No special knowledge of the computer system necessary ■ Document size NOT limited by computer memory ■ Automatic disc buffering ensures text is moved between disc and computer memory without user intervention ■ Up to 255 pages in a single document ■ 80 column display ■ on screen underline and right justify ■ See it as it will be printed. SCRIBE comes in a chip with 5 minute fitting instructions, utilities disc and manual. DISC MACHINES ONLY. **£59.95 + 60p p&p**




2 DATABASE

A superb information management system with an incredible operating speed. 96 fields per record ■ One record 2 Kb max ■ One field 900 characters max ■ 4000 records per database ■ 16 level conditional search ■ Find any record in 2 secs ■ Wild card search ■ Record match ■ 8 automatic sub indexes ■ Total flexibility of output via report writer with auto write back to any field ■ Maths pack ■ Semi programming language. Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting. Database is in a chip. DISC MACHINES ONLY. **£49.00 + 60p p&p.** Scribe & Database in one chip **£95.00 + 60p p&p.**



3 DOUBLE-DOS


Double density disc interface for the BBC computer.



A high capacity database or word processor is enhanced even further with this state of the art disc interface. The many features include ■ almost 800 Kb of CONTINUOUS file space on a standard 80 track disc drive ■ Automatically read standard Acorn files ■ Compensate for discs formatted in single density ■ Provide up to 156 files IN ONE DIRECTORY ■ Automatically read, write and format double sided drives to appear as one disc surface ■ Allow maximum use of MERTEC Scribe and Database. Fitting to your computer is made exceptionally safe and reliable by providing connection via a flexible ribbon cable. Full instructions provided. **£109.25 + 90p p&p**

NOW AVAILABLE IN ONE GREAT PACKAGE

DATASCRIBE
IN A SINGLE CHIP!!

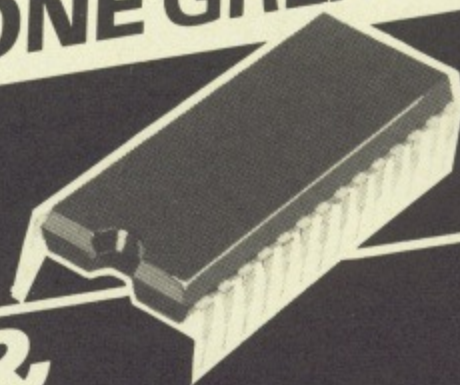

£95 inc VAT

DATASCRIBE & DISK INTERFACE

£195 inc VAT

Purchasers of MCP software are provided with a free update service and an unmatched level of technical support. (Updates subject to postal charge.)

Please supply the following products/information (Delete as applicable).

QTY _____

QTY _____

QTY _____

In enclose £ _____ Inc P&P My Credit Card No. is _____

Visa Access Tick which

Name _____

Address _____

To: **MERLIN COMPUTER PRODUCTS**,
33/36 Singleton Street, Swansea SA1 3QN. Telephone: 0792 467980



MERLIN COMPUTER PRODUCTS

IMPORTANT NOTE:

Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.

From Page 47

*VECTOR. Furthermore, specific ROMs may be disabled (*STOP) to keep them quiet when passing commands around.

I think the programmer of this ROM, Richard Armitage, must be a real pessimist or have previously worked for NASA to have employed so many backup systems!

The disable ROM option was particularly useful when more than one DFS chip, or other filing system, was present in the machine at the same time (for example when testing software compatibility) as the user could switch off individual chips.

The remaining command in this section, *FILE, allowed the user to send star commands directly to the selected filing system without them being intercepted by ROMs. I found these facilities particularly useful when reviewing the seven toolkit chips in the October 1984 issue, as many clashes occurred before I had learnt all the star command names.

Another utility is *EXPLAIN which provided information on commonly used *FX commands – though I would expect most programmers requiring this to already have a copy of the Advanced User Guide at their side.

The space occupied by these details could surely have performed something more useful, for example providing routines to create protocols for ROMming Basic programs.

Finally, *FUNCTION was equivalent to the best any of the toolkit chips could offer, but still leaves room for the addition of a clear function key and function key memory used option in later versions.

The only real problems/bugs I noticed was the mess *NAMES, *STATUS and *EXAMINE made of the title and access to Pace's Toolstar ROM – though I expect this was due to that infernal blinking purple star again.

If you wish to know which ROMs are sitting where in your micro without repeatedly taking the lid off and want to be sure your star commands go where they are supposed to then ROM Manager is for you.

At around £20 it may well pay for itself in saving replacements of "legless" ROMs alone.

If you are an avid ROM collector then your main problem may well be finding room for this chip. Perhaps ROM Manager will reach its heyday on Watford's new 146 ROM extension board.

Mike Mahon

```
OS 1.02   DATE 20/02/85   TIME 19:00
R X Y S P flags PC stack
00 00 00 FF 30 B 0000
```

```
-----
L List memory      @ Set PC
D Disassemble     A Set accumulator
K Disassemble+save X Set X register
W Assemble        Y Set Y register
E Edit (ESC ends, P Set PSM
  space goes back) S Set stack pointer
* ASCII to memory G0 Execute program
FS/FB Find string (space) Simulate
M Move block      / Step on one level
U Verify blocks   Z Trace
I Fill           B Set breakpoint
T Change panel    U Delete breakpoint
C Calculate       W Delete all
OB/DW 0sbyte/word J JSR
! Change paged ROM
R Relocate program ? Help summary
H Print          Q Quit EXMDM
-----
```

?*GIMAGE EPSON R1

Investment in security

Securit Elm Systems

THIS ROM is designed to protect your BBC Micro against unauthorised use. When installed in the most significant or rightmost ROM socket of your system it will prevent anyone without the correct password and the correct matching password file from operating the machine.

On switch on or Ctrl+Break a screen will be displayed listing the name, address and telephone number of the owner and the micro's serial number, all of which have been burned into the ROM on manufacture.

The operator is required to enter a password which is not displayed on the screen while being entered.

At this stage only star commands for examining the catalogue, and changing drive, directory and between disc and tape are allowed.

When Return is pressed after the password is entered, the micro searches the current filing system for a file called PSFILE.

This is checked by the SECURIT ROM against some of the identity information using an encryption technique.

Thus each password file is unique to the combination of the password used and the identity burned on to the ROM.

If the password is incorrect, two more attempts are allowed before the machine

is locked and a message stating password violation is displayed on the screen.

This is accompanied with a violent collection of alarm sounds from the speaker!

I tried every trick I know and I could not get the BBC to run without using the correct password.

It is impossible to auto-boot until the password has been accepted and access granted. Once having acquired access it is possible to switch off the security system by typing *UNLOCK, after which files can be booted. The machine remains unlocked through Break, Escape, Ctrl+Break and Ctrl+Escape+Break until switched off.

*LOCK reactivates the security system, so that the use of Ctrl+Break reactivates the password mechanism, useful if one intends to prevent curious users from getting out of your program.

Syntax information on Basic commands is provided on typing *HELP followed by the command. This supports all the commands I have tried in Basic I but does not extend to Basic II.

Access to other utilities on the ROM is by *SECURIT which presents you with a menu offering password alteration, realtime clock, datestamp and ROM on-off control facilities.

In order to change the password the old password must be re-entered, so

COMPUTER WAREHOUSE

1000's OF BARGAINS FOR CALLERS

THE 'ALADDIN'S' CAVE OF COMPUTER AND ELECTRONIC EQUIPMENT

RECHARGEABLE BATTERIES

Dry Fit Maintenance FREE by Sonnenschein.
A300 07191315 12v 3 AH same as RS 591-770 NEW £13.95 A300 07191202 6-0-6 1.8 AH same as RS 591-382 EX EQUIP £4.99 Miniature PCB mount 3.6v 100 Mah as RS 591-477 NEW £1.00 SAFT VR2C 1.2v "C" size NICADS in 18 cell ex equipment pack. Good condition - easily split to single cells £10.50 + pp £1.90

EX-STOCK INTEGRATED CIRCUITS

2732 ex equip £3.25. 27128 - 250ns NEW £12.00.
6116-200 £4.50. 6116-250 £3.95.
6264LP-150 £22.00. 4164-200 £3.50. 4864-150 £4.00.
4116-300. £1.20. 2114 £1.75. 6800 £2.50. 6821 £1.00.
68A09 £8.00. 68B09 £10.00. 68B09E £14.50.
D8085AH-2 £12.00. D8086 £20.00. Z80A £2.99.

COOLING FANS

Keep your hot parts COOL and RELIABLE with our range of BRAND NEW professional cooling fans.
ETRI 99XUOI Dim. 92 x 92 x 25 mm. Miniature 240 v equipment fan complete with finger guard. £9.95.
GOULD JB-3AR Dim. 3" x 3" x 2.5" compact very quiet running 240 v operation. NEW £6.95
BUHLER 99.11.22. 8-16 v DC micro miniature reversible fan. Uses a brushless servo motor for extremely high air flow, almost silent running and guaranteed 10,000 hr life. Measures only 62 x 62 x 22 mm. Current cost £32.00. OUR PRICE ONLY £12.95 complete with data.
MUFFIN-CENTAUR standard 4" x 4" x 1.25" fan supplied tested EX EQUIPMENT 240 v at £6.25 or 110 v at £4.95 or BRAND NEW 240 v at £10.50. 1000's of other fans Ex Stock. Call for Details. Post & Packing on all fans £1.60

BUDGET RANGE VIDEO MONITORS

At a price YOU can afford, our range of EX EQUIPMENT video monitors defy competition!! All are for 240v working with standard composite video input. Units are pre tested and set for up to 80 col use on BBC micro. Even where MINOR screen burns MAY exist - normal data displays are unaffected.
1000's SOLD TO DATE
12" KGM 320-321. high bandwidth input, will display up to 132 columns x 25 lines. Housed in attractive fully enclosed brushed alloy case. B/W only £32.95
24" KGM large screen black & white monitor fully enclosed in light alloy case. Ideal schools, shops, clubs etc.
ONLY £55.00 Carriage £10.00

DATA MODEMS

Join the communications revolution with our super range of DATA MODEMS with prices and types to suit all applications and budgets!!
Most modems are EX BRITISH TELECOM and are made to the highest standard for continuous use and reliability. RS232 interfaces are standard to all our modems, so will connect to ANY micro etc. with an RS232 serial interface.
DATEL 2B see SPECIAL OFFER centre of this ad.
MODEM 13A, 300 baud. Compact unit only 2" high and same size as telephone base. Standard CCITT tones, CALL mode only. Tested with data. **ONLY £45.00 + PP £4.50.**
MODEM 20-1, 75-1200 baud. Compact unit for use as subscriber end to PRESTEL, MICRONET or TELECOM GOLD. Tested with data. **£39.95 + PP £6.50.**
MODEM 20-2, same as 20-1 but 1200-75 baud **£99.00.**
TRANSDATA 307A, 300 baud acoustic coupler. Brand new with RS232 interface. **ONLY £49.95**
DACOM DSL2123 Multi Standard Modem, switchable CCITT or USA BELL 103 standard. V21 300-300. V23 75-1200. V23 1200-75 or 1200-1200 half duplex.
Auto answer via MODEM or CPU. CALL or ANSWER modes plus LED status indication. Dim 2.5" x 8.5" x 9". BRAND NEW fully guaranteed **ONLY £248.00 + PP £4.50.**
DATEL 2412 Made by SE LABS for BT this two part unit is for synchronous data links at 1200 or 2400 baud using 2780/3780 protocol. Many features include Auto answer, 2 or 4 wire working etc. etc. **COST OVER £800. OUR PRICE £185.00.**
DATEL 4800. RACAL MPS4800 high speed. good condition **£285.00 CARR £10.00**

HOT LINE DATA BASE

DISTEL ©


THE ORIGINAL FREE OF CHARGE dial up data base 1000's of stock items and one off bargains.
ON LINE NOW - 300 baud, full duplex CCITT tones, 8 bit word, no parity.
01-679 1888

MAINS FILTERS

Cure those unnerving hang ups and data glitches caused by mains interference
SD5A As recommended by ZX81 news letter. matchbox size up to 1000 watt load **£3.95**
L2127 compact completely cased unit with 3 pin fitted socket Up to 750 watts **£9.99**


Anderson Jacobson

AJ510 VIDEO DISPLAY TERMINAL



Made by one of the USA's largest peripheral manufacturers the AJ510 Professional VDU terminal has too many features to include in space available - just a few are: internal Z80 cpu control, very readable 15" non glare green screen, 24 lines by 80 characters, 128 ASCII character set with lower case and graphics, standard RS232 interface, Cursor addressing, numeric key pad etc. Supplied in good TESTED second hand condition with full manual **£225.00 + carr £10.00.** Data sheet on request.

A Major company's over production problems, and a special BULK PURCHASE enable TWO outstanding offers. COLOUR MONITOR SPECIALS



'SYSTEM ALPHA' 14" Multi Input Monitor.

Made in the UK by the famous REDIFFUSION Co. for their own professional computer system this monitor has all the features to suit your immediate and future monitor requirements. Two types of video input, RGB and PAL Composite Video, allow direct connection to most makes of micro computers and VCR's. An internal speaker and audio amplifier may be connected to your system's output or direct to a VCR machine, giving superior colour and sound quality. Many other features include PIL tube, Matching BBC case colour, Major controls on front panel, Separate Contrast and Brightness - even in RGB mode, Two types of audio input, Separate Colour and audio controls for Composite Video input, BNC plug for composite input, 15 way 'D' plug for RGB input, modular construction etc. etc.

This must be ONE OF THE YEAR'S BEST BUYS!!!

Supplied BRAND NEW and BOXED, complete with DATA and 90 day guarantee. SUPPLIED BELOW ACTUAL COST - ONLY £149.00 + Carr.

DECCA RGB 80-100 Monitor.

Little or hardly used manufacturer's surplus enables us to offer this special converted DECCA RGB Colour Video TV Monitor at a super low price of only £99.00, a price for a colour monitor as yet unheard of!! Our own interface, safety modification and special 16" high definition PIL tube, combine with the tried and tested DECCA 80/100 series chassis to give 80 column definition and picture quality found only on monitors costing 3 TIMES OUR PRICE. In fact, WE GUARANTEE you will be delighted with this product, the quality for the price has to be seen to be believed. Supplied complete and ready to plug direct to a BBC MICRO computer or any other system with a TTL RGB output. Other features include internal audio amp and speaker, Modular construction, auto degaussing 34 H x 24 D, 90 day guarantee. Supplied in EXCELLENT condition, ONLY £99.00 + Carr. Also available UN-MODIFIED but complete with MOD DATA. Only £75.00.

Carriage and Insurance on monitors £10.00

SPECIAL 300 BAUD MODEM OFFER

Another GIGANTIC purchase of these EX BRITISH TELECOM, BRAND NEW or little used 2B data modems allows US to make the FINAL REDUCTION, and for YOU to join the exciting world of data communications at an UNHEARD OF PRICE OF ONLY £29.95. Made to the highest POST OFFICE APPROVED spec at a cost of hundreds of pounds each, the 2B has all the standard requirements for data base, business or hobby communications. All this and more!!

- 300 baud full duplex
- Full remote control
- CCITT tone standards
- Supplied with full data
- Modular construction
- Direct isolated connection
- CALL, ANSWER and AUTO modes
- Standard RS232 serial interface
- Built in test switching
- 240v Mains operation
- 1 year full guarantee
- Just 2 wires to comms. line

NOW ONLY £29.95

Order now - while stocks last. Carriage and Ins. £10.00

SAVE £250 SUPER PRINTER SCOOP



BRAND NEW CENTRONICS 739-2

ONLY £199

The "Do Everything Printer" at a price that will NEVER be repeated. Standard CENTRONICS parallel interface for direct connection to BBC, ORIC, DRAGON etc. Superb print quality with full pin addressable graphics and 4 type fonts plus HIGH DEFINITION internal PROPORTIONAL SPACED MODE for WORD PROCESSOR applications. 80-132 columns, single sheet, sprocket or roll paper handling plus much more. Available ONLY from DISPLAY ELECTRONICS at the ridiculous price of **ONLY £199.00 + VAT** Complete with full manual etc. Limited quantity - Hurry while stocks last.
Options: interface cable (specify) for BBC, ORIC, DRAGON or CENTRONICS 36 way pig £12.50. Spare ribbon £3.50 each BBC graphics screen dump utility program £8.60
Carriage and Ins. £10.00 + VAT

HUNDREDS OF PRINTERS EX STOCK FROM £49.00. Call Sales Office for Details.

1 only large CALCOMP 1036 AO 3 pen drum plotter and offline 915 magtape controller. Good working order. **ADD VAT TO ALL PRICES £2500.00.**

EX STOCK

DEC CORNER

- PDP 1140 System comprising of CPU, 124K memory + MMU 16 line RS232 interface, RP02 40 MB hard disk drive, TU10 9 track 800 BPI Mag tape drive, dual rack system, VT52 VDU etc. Tested and running **£3750.00**
- BA11-MB 3.5" Box, PSU, LTC **£385.00**
 - DH11-AD 16 x RS232 DMA interface **£2100.00**
 - DLV11-J 4 x EIA interface **£310.00**
 - DLVII-E Serial. Modem support **£200.00**
 - DUP11 Sych. Serial data i/o **£650.00**
 - DQ200 Dialog - multi RK controller **£495.00**
 - DZ11-B 8 line RS232 mux board **£650.00**
 - KDF11-B M8189 PDP 1123+ **£1100.00**
 - LA36 Decwriter EIA or 20 ma loop **£270.00**
 - LAX34-AL LA34 tractor feed **£85.00**
 - MS11-JP Unibus 32 kb Ram **£80.00**
 - MS11-LB Unibus 128 kb Ram **£450.00**
 - MS11-LD Unibus 256 kb Ram **£850.00**
 - MSC4804 Qbus (Equip MSV11-L) 256 kb **£499.00**
 - PDP11/05 Cpu, Ram, i/o, etc. **£450.00**
 - PDP11/40 Cpu, 124k MMU **£1850.00**
 - RT11 ver. 3B documentation kit **£70.00**
 - RK05-J 2.5 Mb disk drives **£650.00**
 - KLBJA PDP 8 async i/o **£175.00**
 - MIB8 PDP 8 Bootstrap option **£75.00**
 - VT50 VDU and Keyboard - current loop **£175.00**
 - VT52 VDU with RS232 interface **£250.00**

1000's of EX STOCK spares for DEC PDP6, PDP8A, PDP11 systems & peripherals. Call for details. All types of Computer equipment and spares wanted for PROMPT CASH PAYMENT.

DISPLAY ELECTRONICS

All prices quoted are for U.K. Mainland, paid cash with order in Pounds Sterling PLUS VAT. Minimum order value £2.00. Minimum Credit Card order £10.00. Minimum BONA FIDE account orders from Government Depts., Schools, Universities and established companies £20.00. Where post and packing not indicated please ADD £1.00 + VAT. Warehouse open Mon-Fri 9.30-5.30. Sat 10.30-5.30. We reserve the right to change prices and specifications without notice. Trade, Bulk and Export
32 Biggin Way, Upper Norwood, London SE19 3XF
Telephone 01-679 4414 Telex 894502 Data 01-679 1888

ROM ROUND UP

From Page 49

preventing another user from creating his own password file when allowed access to the machine by the password holder.

The realtime clock requires resetting with date and time each time the machine is switched on, although it is protected through Escape, Break and Ctrl+Break.

The display, showing operating system number, date and time on the top line in Mode 7 only is activated by *TIME ON and de-activated by *TIME OFF.

The area below this display is used as a text window.

In addition an hourly chime is sounded unless switched off by *CHIME OFF.

The time facility works well, only lacking the hardware to maintain time and date with the micro switched off.

Unfortunately the display interferes with the screen layout of Wordwise, Exmon, Starbase and other ROMs.

In addition, for some reason, the Operating System is displayed as 1.02

```
OS 1.02    DATE 20/02/85    TIME 19:24
```

```
>L.
```

```
0 ++++++
File saved on 20/02/85 at 19:00
+++++
```

```
18 AS="TESTFILE"
20PRINTA$
```

```
>
```

```
>
```

```
>
```

```
>
```

```
>
```

```
>
```

```
>
```

```
>*SAVE SC 7C00+400
```

```
>*GIMAGE EPSON F R1
```

instead of 1.20 at the beginning of the time message.

With the time and date set, selecting *DATESTAMP ON labels all Basic programs when they are saved with the time and date in line 0.

This facility is probably one of the most useful I have encountered as I am always forgetting which version of a program is the most recent.

Selecting the ROM management option enables one to switch on or off ROMs at will. A very helpful routine, which works well even though it is not

able to read the names of all the ROMs to which I have access. Perhaps these do not follow Acorn's standard for sideways ROMs.


SECURIT is not Tube compatible, but should prove a valuable aid to those whose micro needs protection against unauthorised use. Any thief trying to use it without the password will have a hard time.

The other facilities are useful, especially the datestamp, and together they make SECURIT a good investment.

Ian Whitmore

INTERFACING AND ROBOTICS ON THE BBC MICRO

Ray Bradley

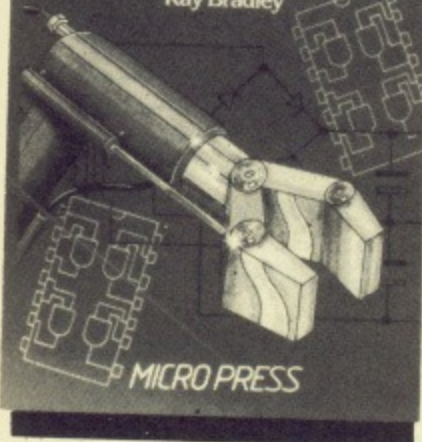

NEW

Interfacing and Robotics on the BBC Micro

by Ray Bradley £15.95

This highly illustrated book is about the hardware and software needed to interface many different devices on the BBC Micro. It covers a wide range of material that is essential to interfacing such as stripboard design, PCB design and manufacture, soldering and general construction techniques. As a result of taking an active approach, practical experience is acquired.


Educational Games for the BBC Micro

by Ian Soutar £6.95

The aim of the programs in this book is to make learning facts, of all sorts, fun. The games cover a wide range of subjects—arithmetic, French, history, chemistry, biology and general knowledge are only some of them.

EDUCATIONAL GAMES FOR THE BBC MICRO

Ian Soutar

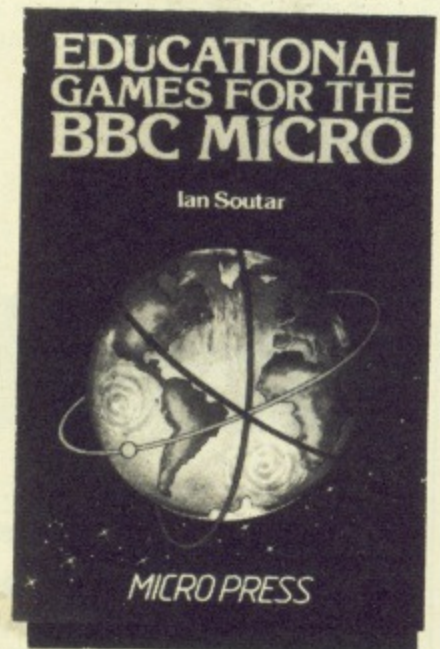

Available from Booksellers or direct from the Publishers.

Orders to: Micro Press, 27 London Road, Tunbridge Wells, Kent TN1 1BX. Tel: 0892 39606

Please send me:

- Interfacing and Robotics on the BBC Micro
 Educational Games for the BBC Micro

I enclose a cheque/PO for £ _____

(UK orders add £1.25 p&p for a single copy and 75p each additional copy. Overseas orders add £1.25 p&p per copy).

6185 MU



Please debit my Access/Barclaycard/American Express/Diners Card No: _____

Name: _____

Address: _____


Signature _____ Date: _____

QUALITY IN PRINT

Low Prices

RING FOR SAMPLE PRINT OUT

Top Service

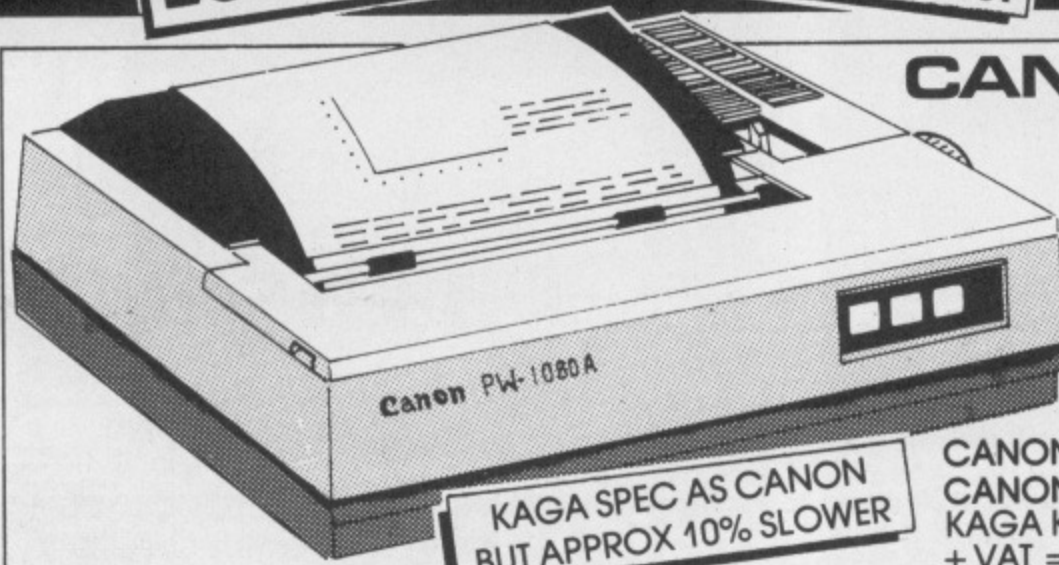

CANON PW-1080A

OR KAGA PAXAN KP810
NEAR LETTER QUALITY PRINTER
NLQ Mode 23 x 18 Matrix: 27 cps
Draft Mode 11 x 9 Matrix: 160 cps
Full range of Epson FX 80 Print Codes
Friction & Tractor Feed
Centronics Interface Standard
CANON PW-1156A Available
(Accepts 17" Paper)

CANON PW-1080A £265.22 + VAT = £305.00
CANON PW-1156A £360.00 + VAT = £414.00
KAGA KP810 £256.52 + VAT = £295.00
See below for Printerpack prices

**KAGA SPEC AS CANON
BUT APPROX 10% SLOWER**

C.J.E. MICRO'S BBC PRINTERPACKS


For Star, Canon & Juki Printers include:

1. The Printer
2. Next Working Day Delivery
3. Cable to the BBC 1.25 Metres
4. Screen Dump Program (M/C Source)
5. Text Dump Program
6. Function Key set up Program. For use with WORDWISE
7. Function Key Label Printing Program. For use with above.
8. VIEW Printer Driver
9. 100 Sheets of Paper
10. Mains Plug with 3 Amp Fuse
11. Booklet giving details of using the printer with a BBC.
12. Character Defining Program for Downloadable-character-set

CANON PW-1080A C.J.E. PRINTER PACK £330 Inc. VAT
CANON PW-1156A C.J.E. PRINTER PACK £439 Inc. VAT
KAGA KP810 C.J.E. PRINTER PACK £320 Inc. VAT
JUKI 6100 C.J.E. PRINTER PACK £400 Inc. VAT
STAR SG10 C.J.E. PRINTER PACK
£295 Inc. VAT

**CJE MICRO'S
BBC PRINTERPACKS**

**PRINTER CABLES/INTERFACES FOR
MOST COMPUTERS STOCKED**

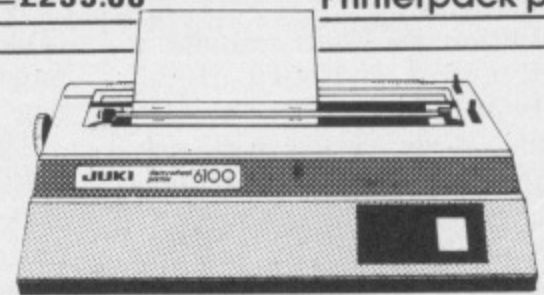


JUKI 6100

One Year Warranty
20 CPS: BiDirectional & Logic Seeking
10, 12, 15 & Proportional Spacing
Wordstar Compatible
2K Buffer: 13 Inch Platen
Underline: Backspace + Lots more
Centronics Interface Standard
RS 232 Interface £54.00 + VAT Extra
Tractor Feed £119 + VAT Extra
Single Sheet Feeder £199 + VAT Extra
JUKI 6100 £330.43 + VAT = £380.00
See left for Printerpack prices

**JUKI 6300: 40CPS.
NOW IN STOCK**

SPECIAL RS 232 PRINTER BARGAIN

STAR DP8480 (8" Printing) £187.00 Inc VAT
Ideal for BBC/Newbrain/HX20 & Spectrum Int. 1
Phone for full specification

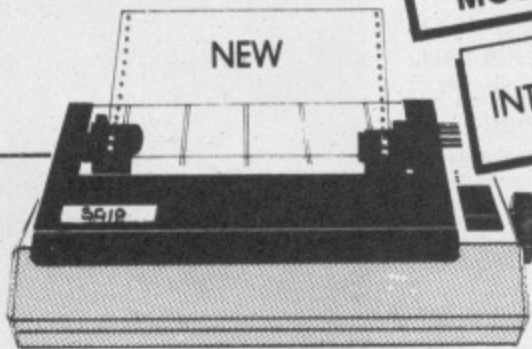

STAR SG10 NEAR LETTER QUALITY

NLQ Mode 17 x 11 Matrix
True Descenders 9 x 9 Matrix
120 CPS Bidirectional & Logic Seeking
40, 48, 68, 80, 96, 136 cpl
Italics, Emphasized, Double strike
Super & Sub Scripts
Downloadable Character Set
Hi-Resolution & Block Graphics
Friction or Tractor Feed
10" Carriage
See above for Printerpack prices

Centronics Interface Standard
RS232 Int. £58.00 + VAT Extra
STAR SG10 £270.00 Inc. VAT

STAR DELTA 10

160CPS: 8K BUFFER
CENTRONICS + RS232 INT'S STD
RING FOR SPECIAL PRICE

OFFICIAL ACORN APPROVED DEALER

PRINTAID

Powerful UTILITY for BBC word processors.
Mail Merging.
Easy entry of printer control codes.

Capability for proportional spacing with right-hand justification on Juki 6100
40 or 80 track. £16.00
Send or ring for details.

EXPORT ORDERS WELCOME

VAT INCLUDED WHERE APPLICABLE
PHONE/CREDIT CARD ORDERS WELCOME
Postage 50p per order or as stated
Next day Delivery for Printers/Disk Drives £8.00
FULL RANGE OF CONNECTORS & CABLES AVAILABLE
PRICE LIST ON REQUEST

**RING FOR SAMPLE PRINTOUT,
FULL SPECIFICATIONS
& LATEST PRICES**

CJEmicro's

Dept MU6, 78 Brighton Road, Worthing
W. Sussex BN11 2EN (0903) 213900

BBC's keyboard is no sluggard

WE have two BBC Bs at work where we are currently installing a computer system.

There is an opportunity to use Torch Graduates to convert the BBCs to IBM-PC compatibility and run professional software on them, and we would very much like to use one of the first-class word processing packages like Multimate.

Never having used a professional word processor, we are not sure whether the BBC keyboard is sufficiently flexible for the job.

There is no keypad or ALT key, which are used extensively in these programs, and I am thinking that the limitations of the keyboard may slow down efficient use of the application.

The only answer I can come up with is to buy another keyboard such as Torch or IBM and connect it to the BBC instead of the built-in keyboard. The 99 dollar question is: Will it work?

Both Acorn and Torch have given me the same opinion – "It should work in theory, but we've never tried it". – *A.T. Roberts, Swan Holidays (Westward), Torquay.*

● I don't think that the BBC's keyboard will slow you down. A keypad is not essential and the ALT key functions can be taken over by Ctrl.

Also the 10 user function keys are quite useful. If you have tried an IBM PC keyboard I think you will be glad you have a BBC

Plump for a monitor

I HAVE been operating my computer on a 14in colour portable. The colour display obtained leaves a lot to be desired.

I had decided to get a monitor, probably medium resolution Microvitec.

With the advent of TV/monitors I have become perplexed. Especially now that I see a Fidelity monitor at about £195 available in a TV/monitor version for £225.

Can you tell me if the version of standard monitor gives a better display than a TV/

Micro. I don't like them very much.

As to fitting one on to the BBC, it is not just as simple as removing the old one and fitting the new. The electronics are totally different, so you would have to make a small interface board.

Then you would need a software patch to make the codes compatible.

If you are thinking of downgrading (whoops – upgrading) to a Graduate then I think you will find the keyboard is the last of your troubles. I would strongly recommend that you try the product before parting with your cash.

If you have a desire to try professional software why not go to a Z80 second processor and try the CP/M software?

In my opinion CP/M and IBM are not all they are cracked up to be.

Thermal fault

I HAVE a single density 8271 based interface with Acorn 0.9 DFS.

In last February's Micromail, John Schofield wrote about disc interface trouble which word for word is exactly what has happened to me.

I have sent my BBC to be repaired after having exhausted all attempts at swapping chips,

monitor – Grundig, Philips, Ferguson type?

As I want the best, should I aim to get a monitor as opposed to a TV/monitor or monitor/TV? – *D.J. Turner, Margate, Kent.*

● If you want the best, get an RGB monitor. The TV/monitors normally accept only a composite video input and this is not as good as an RGB input.

Also the resolution of the tube is normally better in a monitor. I think these are just gimmicks the TV manufacturers have come up with to boost sales.

etc, all of which led to the same "Disc error 18 at ...".

One interesting point is that the disc system would work from cold for about five minutes only to hang up again.

This makes me think that some thermal fault might be responsible, which is why I sent it for repair.

Could you give me your opinion, so that if nothing comes of the repair I might have some idea what's wrong? – *George S. Barr, Stirling, Scotland.*

● Without examination of your computer it is difficult to say what it could be. If it is a thermal fault, you could try tracking it down to a single chip by use of a hairdrier and a can of freeze spray. But if you had no joy chip-swapping I doubt if it is a chip unless it's the big one, the 8271.

It sounds to me like something mechanical, like loose joints or cables, but you have already checked that.

Unfortunately, service personnel are not always as good as they should be and I do not know enough of your area to advise you which to avoid.

Micro flasher

PLEASE could you send me a price list and details of items to fit or add to the BBC B. I would be most pleased if you could send specific details of accessories to control disco lights, using the computer, kits and ready made items. – *Nigel Stone, Cambridge.*

● Well that's a tall order – there are so many things you can add onto the BBC Micro. But as to your specific request for disco lights I think I can help you. The Body Build packs available should be able to do this for you.

Packs 4 and 5 will allow the computer to switch on mains lights. Pack 4 is rated at 2 amps (up to 500 watt lamps) and Pack 5 is rated at 10 amps (up to 2400 watt lamps).

You need to connect these to the computer using a ribbon

cable. The easiest way to do this (but not the cheapest) is to use Packs 1 and 2 – a transition board and ribbon cable. Your computer can then switch the lights on and off.

If you want this to happen in time to the music Pack No. 8 will split sound up into four frequency bands and feed it into the joystick port.

You then need to write a short program to look at each channel in turn and turn the appropriate light on if the sound is loud enough.

Full details of these kits can be found in the back issues of *The Micro User*. See the order form for the dates and prices of each pack.

Putting boot in

I HAVE two disc drives, an AMS 3in minidrive and a Viglen 40/80 track switchable.

I purchased the 3in one first, mainly so that my two children could use it and stand less chance of damaging the surfaces of the discs.

The problem is that if I use the 3in drive as Drive 0, so my children can use the auto boot, the Viglen drive becomes Drive 1.

While this is no problem under some circumstances, some discs will only work when auto booted, for example, Disc Executor, Clares Replica and B-Base.

I also have a feeling that Elite, which is only available on 5¼in discs, will not work using *EXEC !BOOT which I have tried unsuccessfully with the Clares discs.

Is there any method available which will make Drive 1 start up as if it has been auto booted? Perhaps a software fiddle?

I have partially solved the problem by connecting a switch on the rear of the 5¼in to switch it from Drive 1 to Drive 0 and back again.

But that requires me to

From Page 53

remove the ribbon cable from the 3in drive each time – because whereas the Viglen drive uses links to configure the drive number, the AMS uses a DIL switch, which, while possible to wire up, means quite a lot of soldering and wirework.

What I really need is to be able to switch the drives around using a software routine. – *WO2 D.T. Owens, BFPO 38.*

● **Man does not live by *EXEC alone.** Some software needs a *RUN !BOOT to get it going.

The only software fix is *Drive 1. If the software gets round that, it will get round most others.

The best way is to tease out the drive enable 0 and 1 wires from the ribbon cable. These go to pins No. 10 and 12 on the connector.

Snip them off and wire a double-pole changeover switch to swap the connections over. Then bind the switch with masking tape and use epoxy resin to take the mechanical strain.

Model B upgrade

I – AND many others, I suspect – am very interested in up-grading my BBC model "B" Micro.

To this end I read recently of an 8 bit compatible chip the W65SC816 which could address 16 mbytes of memory.

I understand it may be possible to take out the BBC's 6502 chip and drop in the pin-compatible 8-16 bit chip.

However, not being a micro veteran and having only the barest knowledge of electronics, I am in your hands as to what will, or will not work. – *G. Woodcock, Carrick-on-Suir, Eire.*

● **I have been passed the data sheets for the new chips and they make interesting reading.**

It would be possible to fit the W65SC802 in place of the chip in the BBC Micro. Also, with the simple addition of a board, the W65SC816 should be able to be fitted.

That's the good news. The bad is that the only advantage you could take of the new instructions and memory (if fitted) would be from machine code.

Basic simply would not

recognise the new memory and the machine would go on as before.

What is needed is a re-write of the Basic interpreter, which unfortunately is beyond me.

Mute modem

FOLLOWING your Beeb Body Building Course on modems my dad bought me a 300-baud acoustic modem. I typed in the program which operated your modem.

When I finally debugged it and got the modem working, my dad told me that your program was written for a modem which was meant to be connected to a port other than the RS423.

I have tried changing the program around so that I may use it on my modem, which is connected to the RS423 port via a 255 bit port, but as yet I am unsuccessful. – *N. Butler, Horsham, Sussex.*

● **My software should work with your modem.** The program contains extra bits to control the modem chip via the user port, but all data transfer is via the RS423 port.

I can only think that you have not wired it up correctly.

Out of step

WHEN somebody from a shop specialising in BBC computers tried to fit a Solidisk DFS in my BBC Micro, we ran into trouble. The disc started to turn, but the stepper motor did not function.

Another DFS was tried, even a Acorn DFS was put in. None worked properly.

When one of the DFS interfaces was put into another computer everything functioned the right way.

We concluded that the fault was somewhere in my micro. I left the machine with the repairman, who phoned me after a week and told me that he had tested everything and that he could not find anything out of

order.

My BBC-B has Basic II, OS 1.2 and board issue 4.

Could you suggest a solution to this problem? – *Frederik Alons, The Netherlands.*

● **This problem is nothing to do with the DFS chip.** When you say the disc started to turn, had you typed anything in to make it do this? A constantly spinning disc is the hallmark of the disc ribbon cable being plugged in the wrong way round.

Your dealer should have an oscilloscope. Get him to look at pin 36 on IC 78 as this should show the stepping pulses being sent to the head.

If that's OK, look at pin 6 on IC80. This has the same signal on it. If that is OK, then you have a problem with your cable connecting your drive.

If those pulses are not there, then you have a problem with the disc interface circuits. Check that S9 is cut.

Hope this is of some help.

Swinging problem

WE are a sixth-form group studying for the City and Guilds 365 certificate. We recently built the Pendulum project as described in the November, 1983, issue of your magazine.

We were most disappointed when it did not work on our BBC and wonder if you can help us.

The pendulum was tested using an oscilloscope and gave a correct motion of the spot.

We have tested the connections in our D plug using a meter and are sure they are correct.

The program prints up the initial commands and when we press a key to clear the screen it puts a mark at the top left hand of the screen and then does nothing else.

We have tried typing the program in several times, but no luck.

Our machine is disc based, so we have saved copies of the program. If we connect a joystick to the analogue port we can manually draw a trace, so it seems that the program does

work. – *Christopher Birkett, Salesian School, Chertsey, Surrey.*

● **Nobody has reported this problem before.** Do you get a trace when you move the pendulum pot by itself without letting it swing? Perhaps you have the pot on the wrong part of its travel?

Try removing the trigger portion of the program. Whatever is going wrong, it is something very simple.

Torch discs

IN your October issue I was surprised to read the advice given by Mike Cook to a user with the Torch Disc Pack.

Among the problems discussed was the ability to read 40 track discs. The user was advised to try another DFS.

However the Torch Disc Pack comes complete with a utility called COPIER which will format, copy and verify discs in either Torch or Acorn format, in 40 or 80 track configuration.

So although you may not be able to use a 40 track disc, you can certainly copy it to 80 track and use that, which seems perfectly reasonable to me.

The user also had difficulty with PAGE being set rather high for operation as a simple BBC Micro.

For this it was recommended that the ROMs be moved so that Torch's CPN was not the default. Heaven forbid!

This never used to be a problem with the old CPN ROM, but with the newer MCP ROM you have to do a bit more. After getting into the Basic ROM (Type Basic or *B.) type B Break Break, that is, hold B and dab the Break key.

This resets all the pointers needed, but leaves you in tape mode – a security measure to avoid overwriting your CPN discs.

Take your finger off B and dab the Break again and you're ready.


There is now a Torch users' group, Sidelight, 69 The Avenue, Wembley, Middlesex HA9 9PH. – *G.F. Sargent, Loughborough, Leicestershire.*

● **Thanks for the information.** As you suspected, my experience with the Torch system is based on the CPN system.

IF you have a technical query for this page, send it to Mike Cook, *The Micro User*, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Letters on other subjects should be sent, as usual, to Micromail, which this month starts on Page 169.


Buy one of these

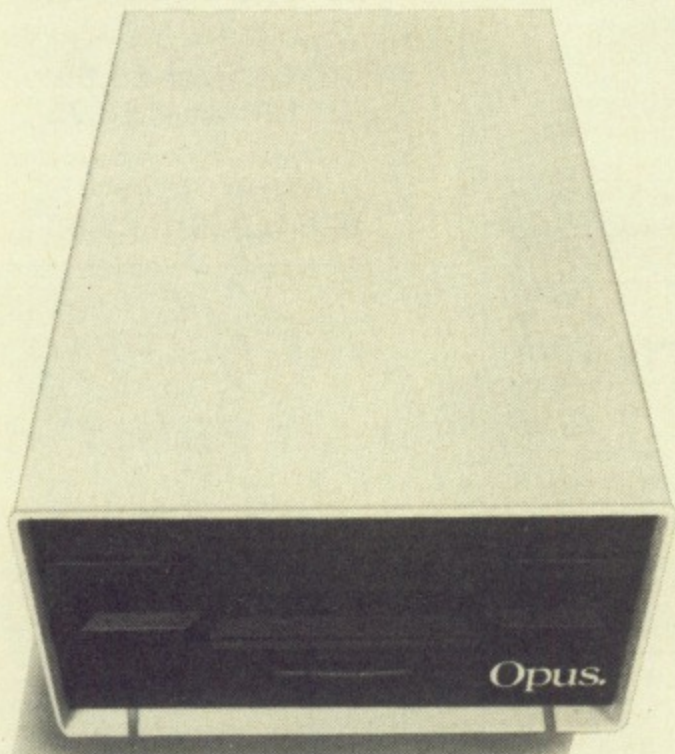

The Opus 3" disc drive
now only

£199.95 (INC. VAT.)

and we'll give you one of these absolutely free.

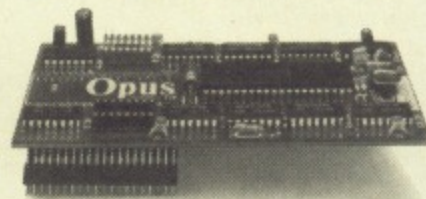

A DOUBLE DENSITY
DISC INTERFACE
(WORTH £100)

This fantastic, 2 for the price of one offer, from Opus Supplies can't last much longer.

We are giving away an Acorn compatible double-density disc interface with every Opus 500K double sided disc drive sold. That's a saving of £100.

All our drives are tested to the limit—8000 hours of constant use without failure.

That's why our drives come with an unbeatable 2 year guarantee.

To avoid disappointment, complete the coupon and send it off today.

**GENEROUS EDUCATION DISCOUNTS GIVEN.
PLEASE PHONE FOR DETAILS.**

**GUARANTEED 48 HOUR
COURIER DELIVERY.
NATIONWIDE.**

Please rush me the following
(ALL PRICES INCLUDE VAT & CARRIAGE)

Quantity	Description	Price
TOTAL		

I enclose a cheque for £ _____
Or please debit my credit card account with

the amount of £ _____

My Access Barclaycard (please tick) No. is _____

Name _____

Address _____

Telephone _____

Opus.
Opus Supplies Ltd.

55 Ormside Way,
Holmethorpe Industrial
Estate, Redhill, Surrey.
TELEPHONE: 0737-65080

MU6



Watford Electronics

Dept. BBC, Jessa House, 250, Lower High Street, WATFORD, ENGLAND



Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC

ACCESS ORDERS Tel: (0923) 50234



BBC Micro 'B' Only: £299

Price includes FREE
5 games software packages

BBC MICRO 32K + 32K

(extra 32K RAM Card already fitted)

Only: **£359**

BBC B with Watford DFS	£342
BBC B with Acorn DFS	£340
BBC B with Watford DDFS	£360
BBC B with ECONET	£335
BBC B + DFS + ECONET	£395
BBC B + DFS + 32K RAM Card	£407
BBC B + 13 ROM Board fitted	£325
BBC B + 32K RAM + 13 ROM Board	£386
BBC B + DFS + 32K RAM + 13 ROM Board all fitted	£439

Complete BBC B ECONET Networking System
now available.

(P.S. ROM based software purchased with any of
the above Micros will be fitted free of charge).

6502 Acorn 2nd Processor	£175
Z80 Acorn 2nd Processor	£339

TORCH Z80 Card + Software	£275
TORCH Z80 Card+Soft. + Disc Pack	£649
TORCH UNICORN Z80 System	£650

Acorn Bitstick	£325
Acorn IEEE Interface Complete	£280
Acorn Teletext + Interface	£195

(Securicor carriage on Micros £7)

Dust Cover for BBC Micro

Protects your expensive Micro from foreign
bodies while not in use. **£3.50**

PRINTERS

● EPSON RX80 Printer	£209
● EPSON RX80 F/T Printer	£219
● EPSON FX80 Printer	£316
● EPSON FX 100 Printer	£429
● Centronics Printer Cable to interface all the above Printers to BBC	£7
(Securicor carriage charge on printers £7)	

RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow
connection using techniques other than Centronics.

RS232	£25	RS232 + 2K Buffer	£55
IEEE 488	£62		

JX-80 FULL COLOUR PRINTER

The new Epson JX-80 DOT MATRIX COLOUR
printer is fully compatible with the popular FX-80.
Using a four colour ribbon, printing can be in 7
colours with speeds of up to 160 CPS. It is
capable of 80 characters per line or 137 in
condensed mode. Its resolution is selectable from
480 to 1920 dots per line. The printer has a
friction and fully adjustable tractor feed
mechanisms as standard.

Introductory offer **£525**

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
MX100/FX100	£10.00	£5.25
FX80/MX80	£4.50	£4.95
RX80	£4.50	£4.50
GP80	£4.50	-
GP100	£4.95	£3.95
GP250	£5.95	£3.95
KAGA KP810	£5.95	£4.75
CANON PW1080	£5.95	£4.75
MICROVITEC MONITORS		£5.50

4 COLOUR PLOTTER PRINTER

SAKATA SCP-800 printer/plotter facilitates
plotting & printing in 4 colours on paper upto A4
size, using easily replaced pens. In text mode it
prints upto 12 CPS. Max 160 Char. per line. In
graphics mode it offers full plotting facilities incl.
drawing, moving, scaling of text, rotation &
drawing of axes. (Write for a sample printout).

Only **£175**

Set of 4 SPARE PENS only **£3.95**

PRINTER SHARER

Allows 3 BBC Micros to be connected to one
Printer.

Only: **£65**

BROTHER HR-15

Brother HR15 is a high-quality daisy-wheel ideal
for a budget printer for serious use. Notable
features of this printer include a 3k buffer, 18cps
(max), bi-directional proportional spacing,
Centronics or RS232 interfaces as standard,
optional Sheet Feeder and Keyboard.

With immediate effect, we are offering at
no extra cost ON-SITE 12 months
Maintenance on all HR15 Printers purchased
from WATFORD on or after March 1985.
W.E. GIVES YOU A GREAT DEAL

ONLY **£325** (carr. £7)

Single Sheet Feeder	£195
Electronic KEYBOARD	£135
TRACTOR FEED Attachment	£90
RIBBON CARTRIDGES:	
Fabric £3.75 ; Carbon £3.75 ;	
Multistrike £6	
DAISYWHEELS (various typefaces)	£18

Listing Paper (Perforated)

1,000 Sheets 9½" Fanfold Paper	£7
2,000 Sheets 9½" Fanfold Paper	£13
1,000 Sheets 15" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90x36mm	£5.00
1,000 90x49mm	£7.75
1,000 102x36mm	£6.25

Carriage on 1,000 Labels £1.00

All prices exclude VAT

SPECIAL OFFER

HITACHI EPROMs for Sideways ROMs

2764-250ns £3.99
27128-250ns £8.75

RAMs (Low power) for ATPL, WATFORD, etc.,
Sideways ROM Boards

6264LP (8K) £8.95

KAGA KP810 NLQ PRINTER

This Dot matrix printer has EPSON FX/RX
compatible control codes and is functionally
equivalent to an FX80 with the added advantage
of its 'Near Letter Quality' mode. It is solidly built
and features include: Normal, Italic, Enlarged,
super/subscript, proportional spacing and
user-defined character set. Extras over the FX80
included in the price are Near Letter Quality
(NLQ) print ideal for correspondence, Proper
adjustable tractor feed, half speed quiet mode
and 3K buffer. The printer is bi-directional and
logic seeking to give a speed of 140CPS for high
throughput in conjunction with the standard 3K
buffer. 8K RAM may be added to give more
user-defined character sets. Centronics parallel
interface + Watford's 12 month NO QUIBBLE
WARRANTY.

Special Offer: ONLY **£252** (£7 carr.)

RS232 interface + 2K buffer to connect to other
micros. **£89**

NLQ FONT DESIGNER

For this NEW ROM (latest in NLQ Technology
from Watford) please see later pages of this
advert.

EPSON HI-80 PLOTTER

The latest addition to the popular range of
EPSON Printers/Plotters. Prints in upto 10
colours. Has many more features. Please write in
for spec sheet.

Price: Only **£399** (£7 carr.)

KAGA KP910 Printer

Similar to the KP810 but with 17" carriage for
wide print. Gives 156 columns of normal print or
256 columns in condensed mode. Ideal for
printing out spreadsheets.

ONLY **£339** (£7 carr.)

PRINTER LEAD

Centronics lead to connect BBC micro to
EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI,
BROTHER, SHINWA etc. printers.

Standard length (4 feet long) **£7**
Extra long (6 feet long) **£9**



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop.

MICROVITEC

- 1431 - Medium resolution as used on the BBC television computer programme **£165**
- 1451 - High resolution, suitable for word processing in mode 0 **£237**
- 1441 - High res, exceeds the capabilities of the BBC micro **£385**
- 1431AP RGB + PAL and AUDIO **£199**
- 1451AP RGB + PAL and AUDIO **£285**
- Dust Cover for Microvitecs **£5.50**

All Microvitec Monitors are 14" RGB in their distinctive right angle sturdy metal case or the new beige plastic case. They are supplied complete with connecting lead to the BBC and a 3pin mains plug.

KAGA

- KAGA KX1201G Hi-res Green Monitor **£90**
- KAGA KX1202G Ultra-Hi-Res Green Monitor ... **£105**
- KAGA KX1203A Ultra-Hi-Res Amber Monitor **£105**
- KAGA Vision 2, Hi-Res, RGB Colour Monitor **£225**
- KAGA Vision 3, Ultra Hi-Res, RGB Monitor **£310**

All KAGA monitors are 12" units housed in a professionally finished beige plastic cabinet. They all have as standard, a genuine etched anti-glare screen.

ZENITH

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. The high resolution makes it good for games too - you can really see the detail that has been put into the graphics **ONLY £66**

LEADS

- BNC Lead for Zenith or Philips £3**
- RGB lead for KAGA £5**
- N.B. Carriage on Monitors £7 (securicor)**

MYSTERIES OF DISC DRIVES & DFS REVEALED

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford Electronic's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

There is even a handy section describing the phrases you are likely to encounter, and how to interpret them. This book must be an essential purchase at £5.95, especially if you own or are thinking of buying a disc system.

£5.95 (Book No VAT)

BBC MICRO WORD-PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in for a demonstration.

EXAMPLE PACKAGE

BBC Model B, Watford Electronics' DFS upgrade, WORDWISE ROM, Twin 400k Epson drives in beige, Zenith 12" Hi-resolution monitor (Green or Amber), Brother HR15 daisywheel printer. Gemini software: BEEBCALC spreadsheet, analysis and DATABASE software on disc. 10 x 3M disc, 500 sheets fan-fold paper, 4 way mains trailing socket, manuals, all leads and BBC carrying case.

NEW LOW PRICE

Only £1,025



ACCESS HOT LINE (0923 50234) 24 Hours

NEW

ROM-SPELL



ROMSPELL is the new fast Spelling Checker ROM from Watford, Packed with excellent features, ROMSPELL is probably the most advanced spelling checker available for the BBC micro.


Features include:

- 30,000 word dictionary
- One pass check
- Two pass check
- Ambiguous word check
- Basic access to ROMSPELL
- Immediate entry check

ROMSPELL is fantastic value at **£25**

(Please specify 40 or 80 tracks when ordering)

LIGHT PEN

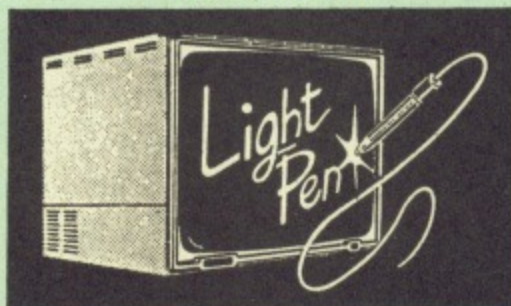


This Light Pen for the BBC micro is packaged in a neat pen shape with built in switch. Supplied complete with our sophisticated Pen-Pal software on cassette (see elsewhere in this ad).

Only £23

(For software on disc please add £2)

DATABASE MANAGEMENT SYSTEMS

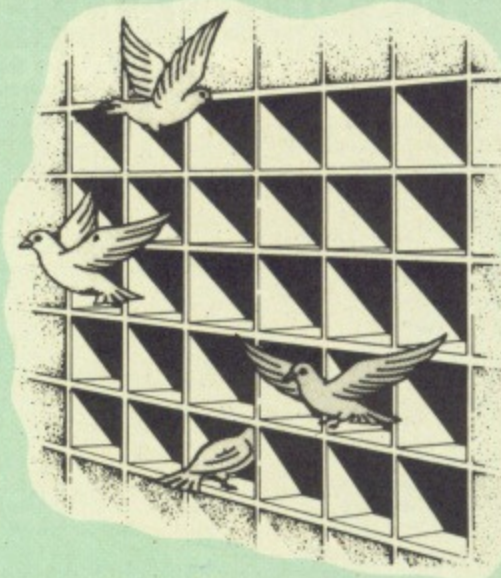

DISCDATA

Discdata is an entirely disc based database handling system. It is extremely easy to use through its comprehensive menu system. The simplicity is such that we do not feel the need to provide explanation on use in the written guidance supplied with the program. The first-time database user will rapidly become familiar with this package designed throughout to be simple and obvious.

On disc at **Only £17**
*(Please specify 40 or 80 track when ordering)
(Please write in for technical specifications)*

FILE-PLUS

The File-Plus package is even more powerful and flexible than Disc-Data. It is also largely menu driven but has its own command language for file searching. The 16K ROM contains all the normally required routines, with lesser used options supplied on the utilities disc. All input and output formatting is controlled through screen forms. A full screen editing system is used to define a form which allows tremendous flexibility in the format in which your data is displayed. It is very easy to change from form to form so that you can type in your data with one form, and examine it with others. You will typically design several forms before starting to access the database so that you can quickly and easily see the fields of each record that you want to appear in the layout you decide on. The form system is also used for output to your printer. File Plus has a unique file linking system that allows the entire on-line storage of your system to be used for one database. This can give around 1.5 Megabyte databases using dual drives and double density. The built in FQL (File-Plus Query Language) can be used for searching the database. Presented in the form of a powerful command language with looping facilities etc. this allows the most flexible access to your data possible. Full arithmetic operations are provided to allow the system to be used for statistical analysis.

Operations supported are -, +, *, /, + - 999999 9999.9999 and compare facilities =, >, <, >>=, >=, <=, &.. Many keywords are supported by the language: assign, compare, display, and, goto, iff, ift, print, read, search, spool and update. Supplied with a very detailed 70 page manual to explain all the facilities with many examples.

Only £43

(Please specify 40 or 80 tracks for the utilities disc)

DATAGEM

Gemini's 24K ROM based DATABASE Management System
Special Offer: £99

Continued

The ULTIMATE DFSs for the BBC MICRO

Adding disc drives to your BBC is probably one of the best ways of improving the power of your microcomputer system. Watford, with their reputation for providing quality products at an affordable price, have available a full range of disc drives and associated products, including:

- Disc Filing Systems
- Disc drives
- Disc covers
- Floppy discs
- Disc boxes
- Disc cases
- DFS Manuals
- Disc drive cleaning kits
- Disc based Software

Watford Electronics supply two highly sophisticated Disc Filing Systems specially designed to be fully entry point compatible with Acorn's standard DFS. As well as this, these two DFSs provide significant and powerful enhancements to allow the user greater ease in accomplishing a given task.

Many people who are about to buy a DFS find themselves wondering which one to opt for: should they buy the standard Acorn one and restrict their available features, or should they buy one of the other DFSs and find themselves running into compatibility problems if they opt for the wrong one? Before you look below to see the vast range of extra features that our DFSs provide, may we just point out that our DFSs are fully Acorn compatible; not just partially, like some of the "competition". We have been supplying DFSs for two years now with many thousands of satisfied users. Also, please note that the Watford DFS is supplied by a reputable firm via proper mail order and shop premises.

Just compare the features:

Features	Acorn 1.20	Watford	
		Single Density	Double Density
Max nos. of files per disc side	31	62	62
Max disc capacity	800k	800k	1440k
Tube compatible	Yes	Yes	Yes
Built-in Editor	No	Yes	Yes
Built-in Formatter	No	Yes	Yes
Built-in Verifier	No	Yes	Yes
MRUN a file	No	Yes	Yes
MLOAD a file	No	Yes	Yes
Extended RENAME	No	Yes	Yes
Selective COPY	No	Yes	Yes
Default file name	No	Yes	Yes
Disc space distribution	No	Yes	Yes
40/80 Software			
Switchable	No	Yes	Yes
Wide catalogue	No	Yes	Yes
Close open files	No	Yes	Yes
Improved OPENOUT	No	Yes	Yes
Copy between densities	N/A	N/A	Yes
OSWORD & 7F	Yes	Yes	Yes
Full entry point compatibility	Yes	Yes	Yes
Retain information over a break	1.20 partial	1.42 Yes	1.52 Yes
Games compatibility	Yes	Yes	Most
Econet file server	Yes	Yes	Yes
Econet station	Yes	Yes	Yes
Full wildcard facilities	No	Yes	Yes

Note that whilst BOTH of our DFSs are compatible with the 6502 and Z80 Second Processors, the Acorn DNFS ROM (supplied by Acorn with the processors) should be present within the machine for the Tube transfer protocol. Our single density DFS is compatible with the Torch Z80 system. With the current versions of our DFS and DDFS, "PAGE" will remain unaltered by the presence of a DNFS ROM; i.e. the normal value of &1900 is retained.

THE WATFORD DFSs

Designed to offer power and flexibility, the two versions of our DFS are packed with features such as:

- Acorn's slightly antiquated DFS allows a maximum of only 31 files per side of a disc. OUR DFSs cater for either 31 or 62 files per side of a disc. In 62 catalogue mode, all these files are available and displayed as one continuous catalogue; not a collection of small catalogues that require extra effort on the part of the user to swap between. We have found that 62 files is adequate in normal use (more would require altering "PAGE", which is undesirable - again this is due to the way in which the BBC micro is organised).
- Built into each Watford DFSs are the disc Formatter, Verifier and Sector Editor that are so useful and essential for the operation of a DFS. We do not

ask you to pay extra for these features with our DFSs - they should always present within a perfect DFS and therefore included in the price.

- One of the excellent features of the BBC is its 80 column mode of operation. Acorn's DFS, unfortunately, only displays in 40 columns even in these 80 column modes; ours displays the catalogue correctly in 4 columns. This feature has now been extended to include the 80 column display of the filing system information at the top of the catalogue as well.

- When working on a program, most "load and save" operations to the disc will use the same filename (ie that of the current program). To save typing, and minimise errors, our DFS has a novel feature whereby a "default" filename can be entered. Once this is done, the usage of a null filename will cause this previously entered filename to be used.

- Catalogues produced on the screen by our "Ultimate" DFS include extra information to say how many files are present within the catalogue, whether the catalogue is 31 or 62 files in size, how many tracks are on the disc, and whether the double stepping mode is active, etc.

- Due to the way that Acorn decided files should be stored, there is occasionally a need to "compact" the available spaces on the disc. As this alters the contents of memory, we decided that it would be useful to implement a command that informs the user whether compaction is necessary, and if it will actually result in any significant gains.

- One standard requirement of a filing system is to be able to rename files. Acorn's simple DFS only allows for one named file to be changed to another named file. Our "Ultimate" DFS allows for groups of files to be renamed. For instance:

*RENAME *BERT* *FRED*

will take all the files that have BERT in their name, and change the BERT to FRED.

- The OPENOUT command on both versions of the Watford DFS has been improved so that it automatically selects the largest available space on the disc; thus minimising the frequency of the Can't extend error messages.

- Both of our DFSs feature, as standard, the ability to make a normal 80 track disc drive read and write 40 track discs. This is normally accomplished by an expensive manual switching unit on the drives; our DFS does this as standard.

- The software switching aspect of our DFS and DDFS is far more flexible than a standard switchable drive. The reason for this is quite simple: a switchable drive means that both sides of the disc are either 40 OR 80; you cannot have 40 track on one side and 80 track on the other side with a standard switchable disc drive. The Watford DFSs are fully independent, and thus far more powerful. With the DDFS, both the density and the 40/80 aspect are independent; thus offering incredible flexibility.

There are many other features of the Watford DFS too numerous to mention, but all well documented in the excellent DFS manual sold separately.

WATFORD'S SINGLE DENSITY DFS

This popular and widely acclaimed DFS has now been available for two years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn's standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for the price of this upgrade.

PRICES

- Complete Disc Interface Kit incl. DFS ROM & fitting instructions **£79**
 - Acorn's DFS Kit complete **£75**
 - DFS Manual (Comprehensive) (no VAT) **£6.95**
- (P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs)
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£14**
 - Watford's DFS is exclusively available from Watford Electronics. Every ROM carries a special label with our LOGO and serial number.

WATFORD'S DOUBLE DENSITY DFS

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantage of a system that gives 80% more storage per disc in double density mode. P.S. - Please note that not all DDFSs are capable of providing either the 80% storage increase, or of allowing a file the full size of the disc - Ours allows both of these!

The Watford Electronics DDFS will operate with discs formatted in either single or double density: the density is automatically sensed on an access to the disc and this is then remembered for future accesses. The built-in formatter prompts for the density when a disc is formatted, allowing the user to select the density of his own discs.

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD & 7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

PRICES

- Complete DDFS Kit incl. fitting instructions **£85**
- DDFS Manual (no VAT) **£6.95**
- We will exchange your existing Single Density for our DDFS Unit at **£40**

Quality Disc Drives from Watford Electronics

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates the single density capacity. The double density storage capacity is second one, (that within the brackets). All disc Drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track and which are 80 track. The 40 track ones are manufactured by EPSON, the world famous Japanese company, (non-tinted boxes). The 80 track drives are famous MITSUBISHI drives (tinted boxes).


With two prices in a box (e.g. £295/£299), the first price is for the standard drive and the second for the same unit in switchable type. Users of either of the two Watford DFSs will not need switchable drives as their DFS will provide software switching for them. Users of Acorn's DFS will find that they need to pay the extra for switchable drives if they wish to use 40 track discs in an 80 track drive.

Both the EPSON and MITSUBISHI drives that we supply are fast (3ms track to track, 15ms settle), quiet and have a low power consumption (average well under 1 amp). Extensive experience of the usage of disc drives suggests that the MITSUBISHI and EPSON drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro. Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packagers" label other manufacturers drives with their own name). We buy the high quality Epson and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

Names you can trust, at prices you can afford!

If you look around the popular BBC micro press, you will find that the prices we quote are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal. STOP PRESS - SEE LATER FOR AN EVEN BETTER DEAL.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate; extensive tests within our workshops have confirmed this. All disc drives advertised here will operate in double density mode with the appropriate interface and software.

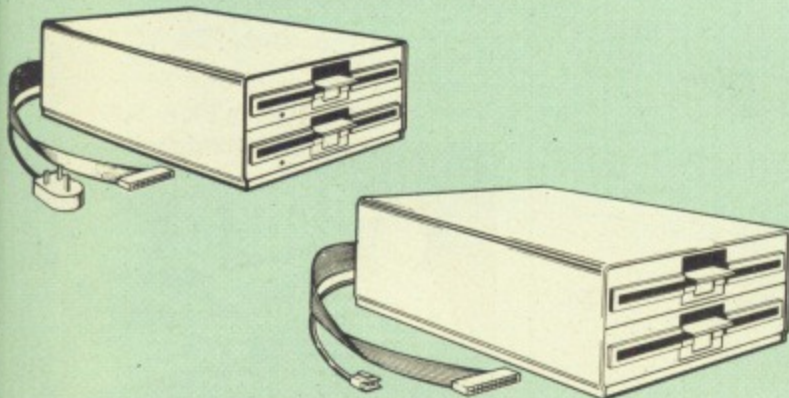

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
100K (180K)	CLS100 £85		CS100 £119	
200K (360K)	CLS 200 £89	CLD200 £165	CS 200 £129	CD200 £194
400K (720K)	CLS 400 £120 £130 CLS400S	CLD 400 £175	£145 CS 400S	CD400 £200
800K (1.44M)		CLD800 £235 £265 CLD 800S		£285 CD 800S

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40/80 Switchable

e.g. CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40/80 track).

FREE FREE FREE FREE

As an added bonus to customers of Watford Electronics who purchase disc drives from us, we are now including a special utilities disc ABSOLUTELY FREE!


This disc contains a disc formatter and verifier (especially for those who own the Acorn DFS), Watford's popular "Centipede" like game called CRAWLER, a fascinating graphics program, a disc/high score data base index program and a special utility for "REMOVING" by software, ROMs from a machine; this feature is operative over a Break, providing that the workspace is not corrupted.

3M - 5 1/4" DISKETTES

Top quality 3M - SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect tabs.

FREE FREE FREE FREE FREE

Watford Electronics are now the biggest single distributor of 3M's 5 1/4" floppy discs throughout the UK. As a gesture of thanks, we are this month giving away absolutely FREE this Disc library case with every box of 10 discs purchased from us. (Offer valid until stocks last!)



DON'T SETTLE FOR LESS, BUY THE BEST

- 10 x S/S D/D 40 Track Diskettes £13
- 10 x D/S D/D 40 Track Diskettes £18
- 10 x S/S D/D 80 Track Diskettes £22
- 10 x D/S D/D 80 Track Diskettes £24


DISC ALBUMS

Attractively finished in beige leather-look vinyl, these conveniently store upto 20 Discs. Each Disc can easily be seen through the clear view pockets.

£4.25

LOCKABLE DISC STORAGE UNITS


Strong plastic case that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.



PLASTIC LIBRARY CASES

FOR 5 1/4" DISC STORAGE
holds 10 Discs.

£1.80



FLOPPY HEAD CLEANER KIT

The heads in floppy disc drives are precision made and very sensitive to dirt. Drive manufacturers recommend that you clean the heads approximately once a week. Unless your home or office is dust free, one of these Kits is a very sensible precaution against losing valuable data. A dirty head can destroy many discs before you realise the trouble. Very simple to use.

£9

DUST COVERS

(For our Disc Drives)

Single (without PSU) £3.20 Twin (without PSU) £3.85
Single (with PSU) £3.25 Twin (with PSU) £3.90

Continued →



Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ1 (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type *NLQ80/100 and a single VDU code to use NLQ print.
- NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
- Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
- Full UK character set; Standard 'pica size'; Proportional spacing; Enlarged; Underlined; Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

Only: £22

VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM. A must for all VIEW and NLQ ROM users.

£7.00

NEW LAUNCH THE NLQ DESIGNER

The Kaga Taxan KP810 and KP910 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of its particularly strong points is the NLQ option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLQ font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on.


A 40/80 track format disc containing plenty of example fonts, etc. is also included in the package.

(P.S. This ROM is not suitable for Epson printers as they don't normally have NLQ ability. Keep reading our adverts though - work is in development!)

SPECIAL INTRODUCTORY PRICES
NLQ DESIGNER & FONT DISC £25
INDIVIDUAL Preprogrammed FONT ROMS £15

(Please write in for further details on both the NLQ DESIGNER and the individual font ROMs available.)

DUMPOUT 3

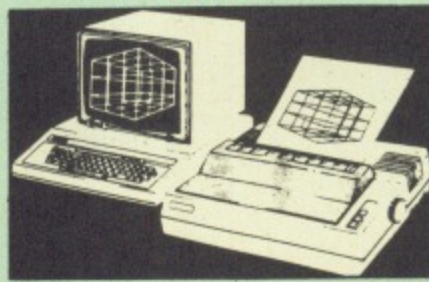

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines:

*GIMAGE - This provides a full graphics dump of any graphics mode, plus modes 7 and '8'. There are many optional parameters but you need only specify the parameters you wish to change.

Features available include:

- Vertical and horizontal scaling through all the graphic modes and mode 7
- Rotation of the image produced through 90, 180 and 270 degrees
- Left hand indentation setting
- Screen dump window definition
- Colour grey scaling
- Two tone fast dump
- Special colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered dumps
- User port switched dumps

What does the independent press say!

Practical Electronics, May 1985

"The Dump Out 3 ROM from Watford Electronics represents one of the most sophisticated types of printer dump utilities available for the BBC Micro . . ."

"an extremely sophisticated and powerful dump utility".

"VERDICT - Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985.

"Well, here is that winner"!

"provide(s) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of *GIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".

"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £24 it must represent excellent value for money and surely cannot be beaten".

Designed for use with the following printers: CP80, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, LPVII, NEC PC8023, DMP100/120/200/400, etc. etc.

Price including comprehensive manual

£24

P.S. Existing owners of Dump Out 2 may now upgrade to Dump Out 3. Please return BOTH original ROM (with its label and serial number) and the manual to our "Upgrades Dept" with your remittance.

For a limited period only £10.00

VIEW

VIEW WORDPROCESSOR

We are supplying the new VIEW version 2.1 allowing printing of memory contents etc. £4

HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers 47K of text memory.

£49

VIEW SHEET (Acornsoft)

£49

Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

Only £9

VIEW DRIVERS FOR JUKI & BROTHER PRINTERS

Only £8

VIEW/VIEW SHEET PRINTER DRIVER for SILVER REED

(Officially approved by Silver Reed)

A range of VIEW Printer drivers to complement the Silver Reed range of printers EXP400/500/550 & 770 EB 50 and converted typewriters EX43/44 & 55.

Only: £8

BEEB PRINTER ROM



"Makes Printing Childs Play"

This utility ROM is designed to simplify using all the facilities of your printer. It has many facilities:


- ★ Selection of printer modes such as underline font and size is by 'Single Key' operations.
 - ★ From Wordwise, a single number following OC will select a mode rather than a long and incomprehensible string of control codes. This makes using your printer with Wordwise much more convenient.
 - ★ When using Basic (or other languages) you can have control over the formatting of the output to the printer in the style of a wordprocessor. You can define page top, bottom and side margins etc. with intelligent page skip for binders an option. All supported printers will now respond to form-feed etc. commands.
 - ★ User defined characters are printed as you see them on the screen so that non-standard characters are automatically printed out correctly.
 - ★ Commands select the options for the following printers: GP100, STAR, NEC, MX/FX, KAGA, LP/VII/DMP100, DMP200.
- Operates with either parallel or serial interfaces. At V
- ★ Supplied with a 50 page manual that is very comprehensive and easy to follow. Please specify your printer type when ordering so that we can send you the correct function key strip.

Price: £10 to be



TRANSFEROM

(Tape to Disc Utility)

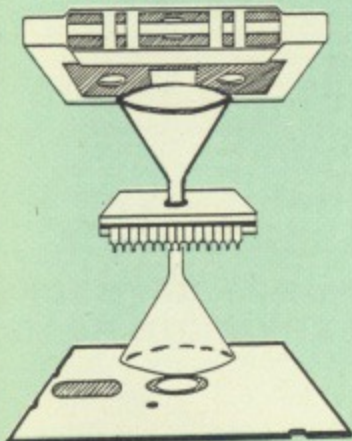

After months of top secret development, we are now able to supply details of this advanced and sophisticated utility ROM for the BBC micro. Just look at the features:


- Fully menu driven for ease of use
- Copes with locked programs
- Copies Elite
- Copies Aviator
- Copies very long adventure games
- Supplied with comprehensive manual

The single density DFS version of TRANSFEROM is available NOW, and the double density version is in preparation as YOU read this very advert.

TRANSFEROM takes your software on tape and saves them onto disc. TRANSFEROM does not stop when one disc is full; you just insert another disc in and carry on with that one! Surely this is the most valuable investment you could make if you have tape software that you wish to transfer to disc!

Introductory Price
£22.00

DIAGNOSTICS DISC

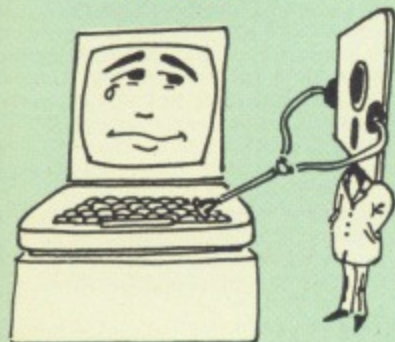

The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is wrong.

At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Trial Price
Only £15.00

ROMAS THE CROSS ASSEMBLE AND MACRO EDITOR FOR SERIOUS PROGRAMMERS!



ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8

ROMAS features a powerful expression analyser, making complex table easy to generate. To aid in documentation, fully formatted assembly listings may be produced, with full symbol table output at the end.

ROMAS is provided with a powerful cross referencer to produce a listing of all the labels in a given "source" program; this makes it easy to check to see if you are about to duplicate a label.

The Macro Editor

Features of this powerful editor provided with the ROMAS package include:

- Works in all 40 and 80 column screen modes
- Fast load and save speeds
- Continuous line and column number displays
- Search, replace and move; all available in macros
- Command repetition

The ROMAS package includes two comprehensive manuals, providing detailed documentation and plenty of examples.

A give away at ...
Only £45

Special Offer

Purchase a copy of ROMAS and our EPROM programmer (retail price £113.00), and we'll give you the very special price of:

£99.00! (£4 p&p)


**Watch this space
DELSYS is COMING**

ADE

'Systems' complete program development package in a 16K ROM. Full assembling and debugging facilities provided. We are now supplying the new 6502 2nd processor compatible version.

SPECIAL OFFER ONLY £43

ROM MANAGER

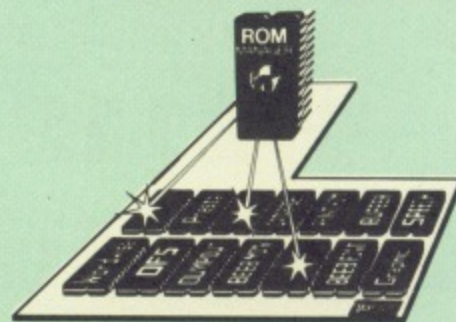

'Provides comprehensive management of all your installed ROMs - BEEBUG Nov. '84'. This ROM is unique in its capabilities. It allows you, the user, full control over the BBC Micro's sideways ROM paging system with simple to use commands. This ROM is essential for those with several ROMs. At a simple level ROM MANAGER can be used to remove the problem of clashing command names and allow full use of all the facilities of your ROMs. This is coupled with facilities to completely enable or disable various ROMs in the machine including ROM manager itself.

ROM MANAGER can also be used to develop sideways ROMs using the machine's standard memory. This is achieved by sending sideways ROM calls to your code in RAM, saving the expense of fitting sideways RAM for ROM development purposes. ROM status reports are also given by the ROM, including ROM lengths, checksums, entry points supported and current filing system title.

The ROM also provides facilities to examine ROMs, list function keys for editing, modify RAM (using a HEX/ASCII editor) and list ROM titles neatly and concisely.

All selection between particular ROMs is by the name of the ROM and this may be abbreviated for convenience. ROM numbers can also be used if required. This ROM is very simple and obvious to use. All the facilities are explained in the clear and detailed manual.

Price £22

DISC EXECUTOR

Disc Executor is a sophisticated disc utility for the transfer of your programs from cassette to disc. It copes with 'locked' files and full length adventures (up to &6E blocks long) and programs that load below &E00. Disc Executor is simple to use and provides menus to prompt the user along the way. Disc Executor will cope with the vast majority of tapes. (Please note that Disc Executor is not compatible with double density disc interfaces - keep reading our adverts though!)

Price only £10

(Please specify whether 40 or 80 track disc when ordering)

ULTRACALC 2

The mark 2 version of the BBC Publications extremely popular electronic spreadsheet ROM. Features include: Simple communication with program, with many prompting messages; Full range of editing commands; Efficient memory usage, allowing large spreadsheets to be constructed; The handling of labels, as well as numbers, as values; Individual variations of the width of columns; Display available in all screen modes; Operates as HICALC on 6502 2nd processor giving 44k of workspace; Flexible printer controls.

Only: £66

Continued →

Nightingale Modem

Now Watford brings you PACE's NIGHTINGALE MODEM PACKAGE including the popular Commstar ROM software for the BBC Micro. Nightingale is considered to be by far the most versatile BT approved modem available at the price for the BBC Micro. It is ideal for home or business use. It offers Prestel/Viewdata baud rates (1200/75 & 75/1200) as well as 300/300 baud full duplex for communication between BBC and other computers, including bulletin boards. A bargain at our


SPECIAL INTRODUCTORY OFFER

(Price includes
COMMSTAR ROM &
comprehensive manuals)

£119

Nightingale Modem without software
Only £99

COMMSTAR ROM package only £29
(P&P on modem £2.00)

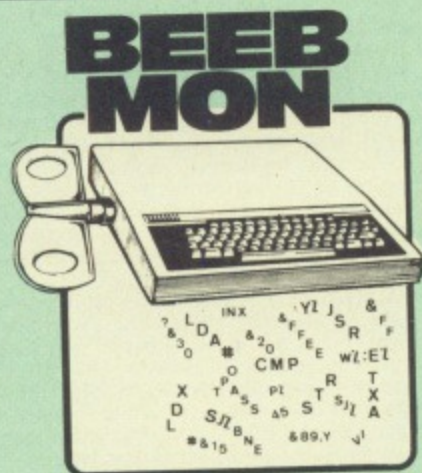

Watford's own Machine code Monitor ROM written by Andrew Bray (Cambridge), co-author of the BBC Micro Advance User Guide.

The most powerful and versatile machine code monitor ROM yet written for BBC Micro. It has all the normal memory editing, moving and relocating facilities, plus all editing is with a full screen editor allowing scrolling up and down memory, entering in Hex, ASCII or standard assembler mnemonics.

In use as a debugging tool, you run code under a total emulation system. Ever felt a desperate urge to set a break point in ROM? No problem - you can even have breakpoint on reading or writing locations in memory and on register contents. The system fully supports debugging of sideways ROMs e.g. BASIC can fully and easily be run from within Beebmon and from there DFS and other sideways ROMs can be used in total emulation mode.

Beebmon can even run itself. In so doing you can nest Beebmon up to a level limited only by the memory size. Beebmon uses 256 bytes of workspace, located anywhere in memory, even on the 1MHz Bus. Beebmon effectively uses no zero page workspace, so your program (e.g. BASIC) can use any or all of the base page. How does it achieve this? By providing a 6502 interpreter all programs running under it exist in a virtual BBC, so special memory locations like the ROM latch are not actually accessed by your programs, instead they alter a location in Beebmon's workspace. Emulation also allows immediate return to Beebmon command level by ctrl-escape no matter what code is being executed at the time. All this exceptional power and flexibility is complemented by a clear and detailed manual included in a value for money price of:

£24


DISASSEMBLER ROM

Discover the hidden secrets of BASIC and the OPERATING SYSTEM with this easy to use programmers tool.

ONLY £18

Please write in for technical details.

32K RAM EXPANSION BOARD

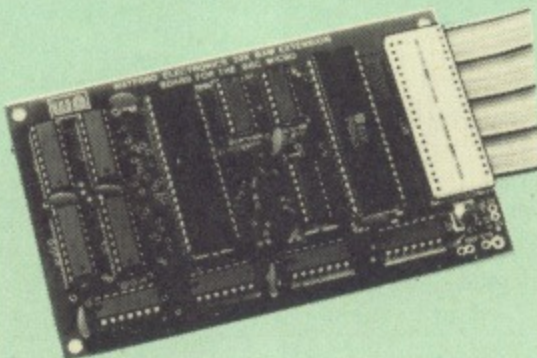

Now Watford Electronics brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. It's ribbon cable simply plugs into your micro's 6502 processor socket. This compact board which fits inside the computer doesn't just give you 16k or even 20k of extra RAM, but a massive 32K!!!

There are many more useful facilities available with this board:

- The top 20K of the expansion RAM can be used as the screen display memory, leaving all the standard BBC RAM free for programs or data storage. This allows good graphics and long programs to be combined. For instance you could have MODE 0/1/2 GRAPHICS AND 28K OF PROGRAM SPACE. The extra memory can be used by virtually any language or utility such as BASIC, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, etc. and NOW COMPATIBLE with Beebug's TOOLKIT.

- The FULL 32K or the bottom 12K of the expansion RAM can be used as a PRINTER buffer for SERIAL PARALLEL printers, sound channels, RS423, keyboard or speech synthesiser. This allows very long text files to be printed while you are using 28K of program and 20K of graphics! THE BUFFER IS UNIQUE because it replaces one of the BBC Micro's buffers so all the buffer options are available on it. eg. *FX15,21, 138, 145, ADVAL(-no.) etc.

- This board is the IDEAL COMPLEMENT to any WORD PROCESSING system, disc or cassette based. There is no need to wait for slow printers as you can type in long text in 80 column display mode while printing is going on - TWO JOBS DONE SIMULTANEOUSLY!!! (an equivalent printer buffer would cost you £120 +).

- Unlike our competitors, the board is compatible with a vast range of software and hardware available for the BBC microcomputer, including our ROM expansion boards, double density DFS units, and the ATPL ROM extension board. This is because our board is connected to the computer by means of a ribbon cable without soldering. It can either be left in the micro or stuck to the lid with the 4 self adhesive feet supplied.

- The board comes with a comprehensive manual and ROM based software with a large range of commands for machine code and BASIC users, including many *HELP messages.

- Now the ROM has had a host of utilities added to the large number already provided and has been made even easier to install.

Only: £65

GRAPH PAD

With this popular British Micro's Graph-pad, you can add new dimensions to your computer enjoyment. It helps you to create your own application programs by the simple use of the Graphpad. Ideal for Educational use. Supplied complete with Cables, Manual and a two program cassette.

SPECIAL OFFER £86

BEEBFONT ROM

BEEBFONT is a remarkable and different concept in BBC software supplied on a 16K ROM. It allows you to display text on the screen in 13 different styles:


It works in modes 0, 1, 2 and 4 using the full colour capabilities of each mode. Characters are printed in the same way as normal. Selection between the various fonts is very easily achieved with Ctrl-V - press this followed by a font number and the output will continue in the new font. Beebfont ROM is particularly useful in display work with the characters produced at twice the normal size.

You can create your own character fonts with the editor supplied. You can also print-out pre-formatted text files using the special characters with Epson FX, RX and NEC printers. The full range of character styles can be used, controlled from within the text. The editor and spooler program are supplied with the package on cassette or disc. The spooler allows word processor (Wordwise & View) output to be printed in the new characters.

A twenty page manual is supplied. Please state printer type and media for the editor & spooler when ordering (cassette, 40 or 80 track disc).

ONLY £32

Mk-2 13 ROM SOCKET EXPANSION BOARD

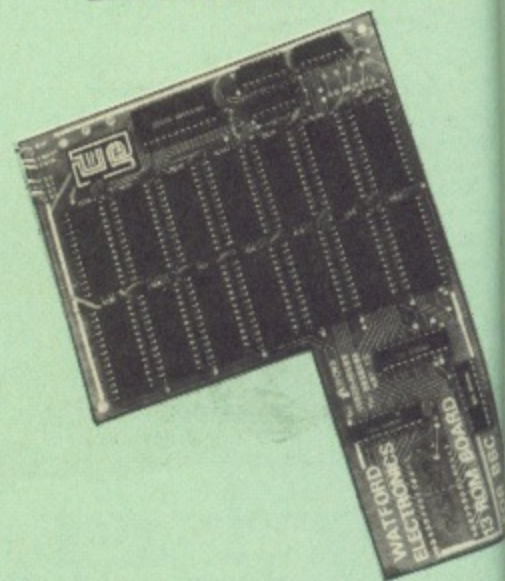

Now all lines fully buffered - On board battery back-up facility - will now accept EPROMS 2716, 2732, 2764 & 27128 and ROMs 6116 & 6264.

Simply plugs into one of the four ROM sockets currently available in BBC Micro. There are only 5 solder connections to be made. Full instructions are supplied. Unlike other ROM Boards, this board has been ergonomically designed to enable the user, easy further expansion inside the Micro, e.g. Double Density Board, Torch Board, RAM Card, etc., without a clash. (At Watford, we think ahead). Our Mk2 13 ROM Socket Board enables the User to increase the sideways ROM capacity from the basic 4 sockets upto full 16 capable of being supported by current operating systems. In addition the board is designed with the facility to hold upto 16K RAM, which when switched into operation is automatically selected by any WR signal to the Sideways ROM area. This gives the User the ability to write a utility or language and upon pressing break have the utility or language up and running (new ROM software can be developed and tested in situ.)

The Board gives the User, plenty of freedom to explore the possibilities of the new paged ROM due in the coming months and offers them the chance to develop their own.

All lines are fully buffered and the board meets or exceeds all timings for operation in the BBC Microcomputer.

Supplied ready-built and tested complete with fitting instructions.

Only £30

PCB NI-CAD Battery for ROM Boards.

£2.75

ROM


different concept
a 16K ROM. It
the screen in 13

using the full
ode. Characters are
ormal. Selection
very easily achieved
ved by a font
ontinue in the new
larly useful in
ers produced at

acter fonts with
also print-out
the special
and NEC printers
can be used,
t. The editor and
with the package,
er allows word
output to be

plied. Please state
editor & spooler
r 80 track disc).

SOCKET BOARD

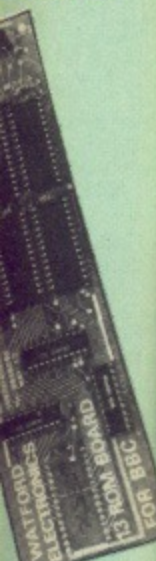

n board
now accept
& 27128 and

r ROM sockets
. There are only
e. Full
other ROM
onomically
y further
Double Density
etc., without any
ad).
enables the
OM capacity
ll 16 capable of
ating systems. In
with the facility to
n switched into
ed by any WRITE
a. This gives the
or language and
ity or language
are can be

of freedom to
w paged ROMs
ffers them the

e board meets
on in the BBC

complete with

boards.

COMPUTER CONCEPT'S ROMS

CARETAKER Basic Utility	£28
Graphics ROM	£28
Disc Doctor ROM	£28
TERMI	£27
COMMUNICATOR	£58

Wordwise

Without doubt a very sophisticated piece of software for the BBC Micro. It has all the features of a professional word processor yet is easy to use.

SPECIAL OFFER THIS MONTH: £32

WORDWISE PLUS

Now available from stock £47

WORDWISE PLUS UPGRADES

Existing users of Wordwise can upgrade to WORDWISE + for £17. Please return the old WORDWISE package complete with Chip and MANUAL with your remittance and we will send you the new WORDWISE + package.

£17

SIDEWAYS ZIF SOCKET



Now Watford Electronics brings you a ROM board for small budgets or for those of you who do not wish to open up your Micro frequently. It allows you to change ROMs quickly and efficiently with the minimum of effort - no screws to loosen or keyboard to remove. The unit consists mainly of a zero insertion force (ZIF) socket on a small circuit board which is located into the position of the 'ROM Cartridge' and is connected to one of the internal ROM sockets via a ribbon cable.

- Very simple to install. NO SOLDERING REQUIRED. The ZIF eliminates the possibility of damage to your ROM pins when inserting and extracting them.

- The low profile of the socket allows unrestricted access to the keyboard, unlike other cartridge systems. In addition, there are no costly extras, such as ROM cartridges for every new ROM.

- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

- This versatile hardware solves the problem of running out of socket space, simply unplug the ROM and plug in a different one. It is a real must for Professionals and Hobbyists alike.

ONLY £18

THE AMX MOUSE

The program is simplicity itself and the user manual is virtually redundant'... Micro User Jan. 85.

Bring into your home or office the last word in user friendly input devices for the Beeb. The AMX MOUSE that won the hearts and the minds of thousands of visitors at the Show has arrived at Watford Electronics at a very special price!

Using simple icons, and small movements of the mouse on a work surface, you can select any one of the functions from the pull down menus. The mouse will operate from within Wordwise, View and many other software packages. The three buttons built in to the mouse are user programmable for many extra functions.

The package consists of the mouse, the advanced controlling software in ROM and a disc containing the Icon designer and the AMX ART software.

To summarise this superb product a comment passed by a very senior authority on BBC micro at the last Micro User Show was, 'My only criticism of the product is that, IT'S TOO CHEAP!'



OUR SPECIAL PRICE

ONLY: £68.50

FREE FREE FREE

This month we are giving away the sophisticated COLOUR ART package absolutely FREE with every purchase of the AMX Mouse from Watford.

COLOUR ART!

As seen at the Micro User Show

Watford Electronics has long been a source of innovation in the BBC field; e.g., we were the first to market a ROM board. Well now We've done it again!

The AMX Mouse is, as we are sure you already know, a very easy to use and powerful drawing package. Throughout the country, there is no single bigger distributor of this excellent package than Watford Electronics. To celebrate this fact, we are, during this month only, including FREE with every AMX Mouse package purchased from us the superb piece of software called COLOUR ART.

This novel program allows you to add COLOUR to any drawing produced with your AMX Mouse package, and really bring those pictures alive. Not with just any colours, mind you, but a full range from up to 255 different shades! It's simplicity itself to use this "painting by numbers" painter to create simple, striking and powerful images to please the eye.

Price £13

NEW

16K DISC RAM

This is the RAM you've been waiting for!! This battery backed up, write protectable 16K sideways RAM board allows you to run from disk every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- All existing ROMs can be stored on disk and used in DISC RAM.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM.

New Low Price: £35

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

Versatile BEEB SPEECH SYNTHESISER Unit



SIMPLY the best! - An unlimited speech synthesis system. Complete with easy-to-follow manual. Controlling software is in ROM so no Cassette Loading problems!

PHONEMES for word synthesis - That means unlimited vocabulary! No extra speech dictionary chips to buy!

BUILT-in Library of approximately 500 words to get you started.

ENGLISH accent - Utilises inflexion techniques to produce highly comprehensible speech.


EASY to use system - Just plug the software ROM into a socket, the Speech unit into the User Port, and away you go! No specialised 'dealer upgrade' required!

COMPACT unit - The whole system is built into a small case - easily tucked behind the computer. Auxillary output socket provided for direct connection to an external amplifier.

HOURS of fun! - Suitable for any application - Games, Educational Programs, Specialised Packages.

We know this all seems so good to be true but DON'T BE LEFT SPEECHLESS! Order your Versatile Speech Unit now!

SPECIAL OFFER £35

Continued 

BOOKS (No VAT on Books)

30 Hour BASIC (BBC Micro)	£6.95
35 Education Programs for BBC	£6.95
40 Educational Programs for BBC	£5.95
100 Programs for BBC Micro	£6.95
6502 Application Book	£12.50
6502 Assembly Language Program	£13.95
6502 Assembly Language Subroutines	£17.50
6502 Machine Code for Beginners	£5.95
6502 Machine code for Humans	£7.95
A young persons guide to BBC Basic	£4.50
Advanced Machine Code Technique for BBC	£7.95
Advanced Programming for the BBC Micro	£6.95
Advanced User Guide for BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming on BBC Micro	£7.95
Advanced Programming Techniques for the BBC Micro	£7.95
BBC BASIC for Beginners	£7.95
BBC BASIC	£5.95
BBC DIY Robotics & Sensors	£6.95
BBC Forth	£7.50
BBC MICRO add on guide	£6.95
BBC Micro An Expert Guide	£6.95
BBC Micro Book BASIC Sound & Graphics	£7.95
BBC Micro Graphics and Sound	£6.95
BBC Micro Programs in Basic	£5.95
BBC Micro ROM PAGING System Explained	£2.00
BBC Micro Revealed	£6.95
BBC Micro Disc Companion	£7.95
BBC Micro in Education	£6.50
Basic Programming on BBC Micro	£5.95
BBC Software Projects	£5.95
Brain teasers for BBC micro	£5.95
CP/M Handbook with MPM	£11.95
CP/M The software BUS	£8.95
Creating Adventure Programs on BBC Micros	£6.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro	£7.50
Complete Programmer for BBC	£5.95
DISC FILING SYSTEM (DFS) Operating Manual for BBC	£6.95
Discover BBC Machine Code	£6.95
Discover FORTH	£13.95
DIY Robotics & Sensors with BBC	£6.95
Easy Programming for the BBC Micro	£5.95
Exploring FORTH	£6.95
Further Prog. for BBC Micro	£5.95
FORTH on the BBC Micro	£7.95
Forth Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games BBC Computer Can Play	£6.95
Getting more from your BBC & Electron	£6.95
Graphs & Charts on BBC Micro	£7.50
Graphic Art for BBC Computer	£5.95
Handbook of Procedure & Functions for the BBC Micro	£6.95
Introducing the BBC Micro	£5.95
Introducing LOGO	£5.95
Introduction to PASCAL	£14.95
Let your BBC teach u to program	£6.45
LISP	£9.25
LISP Cassette	£15.50
Logo Programming	£8.95
Mysteries of DISC DRIVES and DFS REVEALED	£5.95
Mastering CP/M	£13.65
Programming the 6502	£11.95
Programming the BBC micro	£6.95
Programming the Z80	£14.95
Programming with Graphics	£5.95
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
The Complete Programmer	£5.95
The Epson FX/KAGA PRINTER Commands REVEALED	£5.95
Using Floppy Discs with BBC Micro	£5.95
Using BBC Basic	£6.95
Wordstar & CP/M made easy	£6.95

THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX/KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English how to use your printer (Kaga KP810, Canon PW1080A, or any other Epson FX-80 compatible printer) with the BBC micro, both from Basic and your Wordwise wordprocessor.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.


This book is superb value at only **£5.95** (Book - No VAT)

MYSTERIES OF DISC DRIVES AND DFS REVEALED

This excellent informative book on various Disc Drives and DFSs is now available at:

£5.95 (Book - No VAT)


PLINTHS FOR BBC MICRO AND PRINTERS

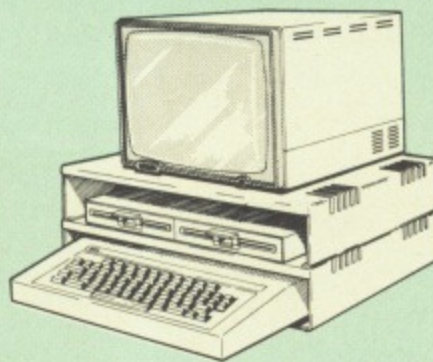

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£19 (carr. £2.00)
PRINTER PLINTH	£10 (carr. £1.50)

EPROM PROGRAMMER

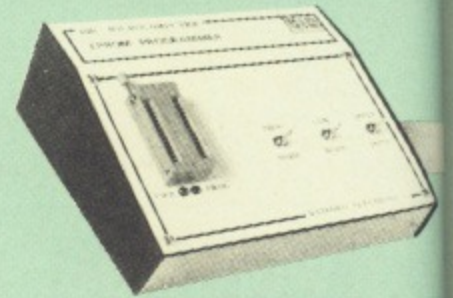

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 1K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connected directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as a Cassette/disc loading). It is a fully purpose designed and integrated package to simplify EPROM development. The system is menu driven with many prompts to avoid any accidents.


Software facilities include:

Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming. Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the *ROM filing system. More than one program may be put in an EPROM. These facilities and more are explained in the comprehensive and clear 15 page manual.

SPECIAL OFFER £69
(£3 carr.)

LOW COST 'DIN' EPROM PROGRAMMER

A high performance, low cost, self contained 'DIN' EPROM PROGRAMMER for the BBC Micro. Plugs into the BBC Micro's user port.

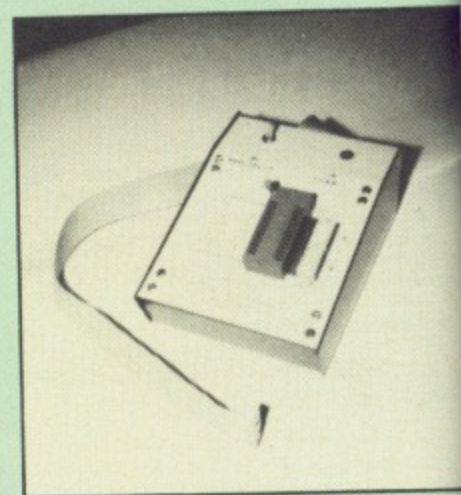


The features are:

- Will program 2716, 2732, 2532, 2764 & 27128 EPROMs.
- Copy EPROM into memory and compute checksum.
- Blank check EPROM.
- Program EPROM from memory.
- Verify programmed EPROM and display checksum.
- All * commands may be used from menu mode.
- High speed programming on 2764 & 27128
- Machine code SOFTWARE supplied in ROM

Only: **£49.50** (carr. £2)

ANTI GLARE MONITOR SAFETY SCREEN



HEADACHES? TIRED EYES? Don't take pills - Use a Watford Electronics anti-glare filter!
 ● Made in Britain by a long established glass maker.
 Available in 12" & 14" versions - please specify the exact monitor type when ordering.

Special Price: **£16.00** (carr. £1)

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. Suitable for computers, Hi-Fi, Fridge Freezers etc. Max Surge current 2KAmp; max. Voltage 250. Essential for serious computer users.

Protection for only **£9.50**

KEYBOARD CONNECTOR

A 'Keyboard to Micro' replacement jumper lead.

£4.95

ATTACHE CARRYING CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front. Locks supplied with two keys. Price **£11** (£2 carr.)

DATA RECORDER AND ACCESSORIES

Top quality slimline portable cassette recorder designed specifically for use with home computers. Mains/Battery operated with tape counter.

£20

DATA CABLE to connect recorder to BBC

£2.50

DATA CASSETTES

Top grade tested C12 Data cassettes supplied in library cases **35p** each; 10 for **£3.20**.

ASSORTED CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug **£2.00**
 to 3 pin DIN Plug + 1 Jack Plug **£2.00**
 to 7 pin DIN Plug **£2.50**
 to 3 Jack Plugs **£2.00**
6 pin DIN to 6 pin DIN Plug (RGB) MONITOR LEADS **£2.50**

KAGA/SANYO Colour Monitor Leads **£5.00**
Monochrome monitor leads BMC to Phono **£3.00**

DISC DRIVE POWER LEADS


Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	110p	215p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-

4 WAY MAINS DISTRIBUTION SOCKET

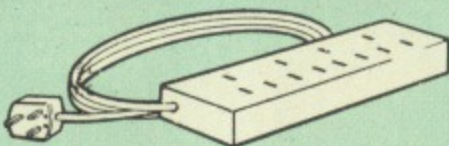

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug. **£9.99**

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only **£20**



ACCESS HOT LINE

0923 50234
24 Hours

ACORN

SPEECH SYNTHESIZER

Speech Chips, manual and full fitting instructions.

Only **£19.50**

ADVENTURE GAMES (level 9)

COLOSSAL ADVENTURE	£8.50
ADVENTURE QUEST	£8.50
DUNGEON ADVENTURE	£8.50
SNOWBALL ADVENTURE	£8.50
LORDS OF TIME	£8.50

Please add £2.50 for Discs

MISCELLANEOUS

28 pin ZIF SOCKET (Textool)	£6.95
28pin DIL PLUG	
SOLDER type	£2.90
IDC CRIMP type	£3

RIBBON CABLE

28way **55p/ft.** 34way **60p/ft.**

8way DIP SWITCH **£0.85**

CHIP SHOP

7438	40p;	74LS00	30p
74LS04	25p;	74LS10	25p
74LS123	£1;	74LS163	70p
74LS244	95p;	74LS245	£1.60
74LS393	£1.20;	4013	60p
4020	£0.90	4816	£1.50
LM324	£0.45	UPD7002	£4.40
6502A CPU	£5.45	65C02 CPU	£9.50
6522	£3.40	6845SP	£7.50
SAA5050	£8.75	SN76489	£5.50
2764-250nS	£4.25	27128-250nS	£9.75
6116LP-2K	£3.25	6264LP-8K	£9.95
8271	£50	ACORN DNFS	£15
ACORN OS 1.2	£6	ACORN BASIC 2	£16
SLEUTH ROM	£25	TOOLKIT ROM	£23
BBC A to B Upgrade Kit	£45		

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- **ERASER EB** - Standard version erases up to 16 chips. **£28**
- **ERASER GT** - Deluxe version erases up to 28 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30**
- Spare UV tubes. **£9**

VOLTMACE DELTA 14 JOYSTICK SYSTEM

The Voltmace system provides full facilities for connecting the Delta 14 handset.

Delta 14 handset - On its own makes a high quality centre sprung analogue joystick with fire buttons **£12.50**
 Adaptor Module allows use of two joysticks and provides hardware to access all the keys on the keypad of the joystick **£12.55**
 Transfer program allows use of the keypad keys and joystick to simulate any key on the keyboard. This works by creating a machine code patch that stays in memory while another program is loaded in. Allows any game to be used with joysticks. Supplied on disc or tape.

Tape **£5.10** Disc **£7.95**

STANDARD JOYSTICKS

These are standard analogue type with a fire button on each joystick. Twin joysticks go to a single moulded plug, long leads provided.

Single Player version **£9.75**

Two Players version **£15.00**

SPECIAL OFFER

Fast EPROMs for Sideways ROMs

2764-250nS **£3.99**
27128-250nS **£8.75**

Low power RAM for ATPL, Watford, etc. Sideways ROM/RAM Boards

6264LP (8K) **£8.95**

NEW

LOGOTRON LOGO

LOGO is a specially developed language carefully designed to teach the basics of both programming and logical, ordered thinking. Until recently, there wasn't a version of LOGO available for the Beeb. Now Watford Electronics are proud to bring the highly acclaimed version of LOGO from LOGOTRON. This version is recommended by most local education authorities.

Supplied on a 16k ROM for easy fitting, the LCS1 LOGO is accompanied by a high quality ring bound manual for easy reference. Please note the LCS1 Logo is not just the well known graphics section of LOGO, but the FULL implementation. Educational establishment making a quantity order? Contact us for a possible discount.

ONLY: £55

Prices subject to change without notice and available on request.

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. CARRIAGE: Unless stated otherwise, please add £1 to all cash orders.

VAT: UK customers please add 15% VAT to the total cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces)



Watford Electronics

Dept. BBC, JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND

Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC



Herbie Briggs has just destroyed the myth that all floppy discs are created equal.

They seem equal. Until you look at the seams.

That's where equality ends.

Most companies seal their discs with a spot here, a spot there. Leaving most of each seam not sealed at all.

Sooner or later, the seams might do what comes naturally: they bulge. Warp. Pucker. Open up.


Pens, pencils, fingernails—even a four-year-old's, like Herbie—can catch and snag in those wide open spaces.

That's sloppy. And dangerous. Because if you put a sloppy floppy into your disc drive, it can jam your drive. Ruin your drive head. Lose your data.

So much for their seams. Ours are different.

THE SLOPPY FLOPPY:

Sealed with a spot here, a spot there. Leaving unsealed seams everywhere.

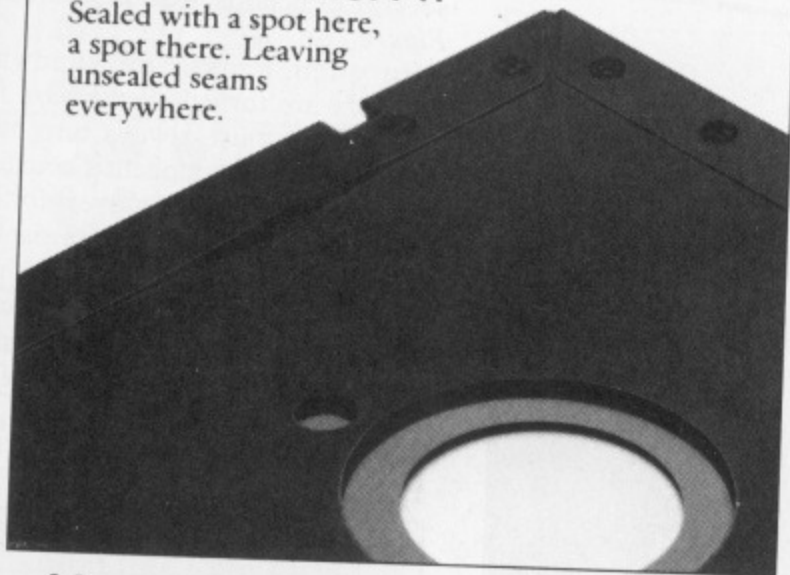

Memorex uses a process we developed, called Solid-Seam Bonding.


Solid-Seam Bonding seals shut every inch of every seam of every Memorex® floppy disc. Tight as a drum. That makes the Memorex

floppy stiffer. Stronger. And your data safer.

To resist bulging, warping, puckering, or opening up.

MEMOREX SOLID-SEAM BONDING:

Every inch of every seam is sealed shut. Tight as a drum.

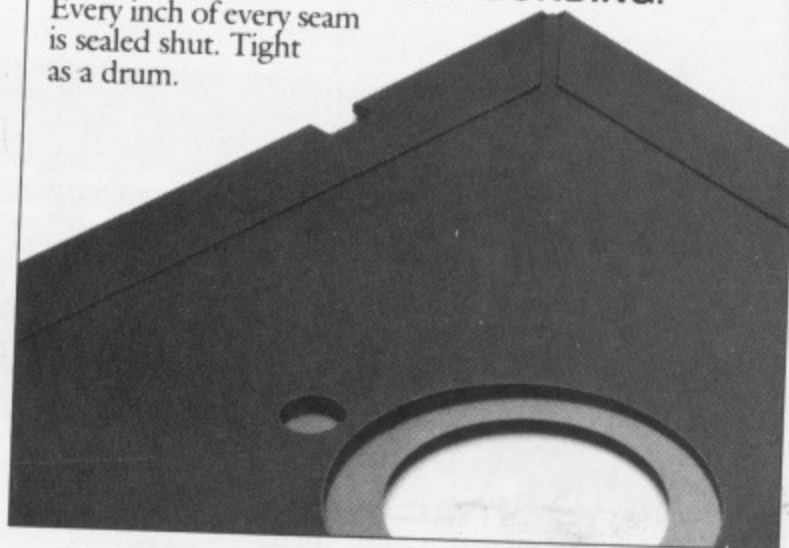

To resist all the things that can jam your drive, ruin your drive head, or lose your data.

Which proves that a Memorex floppy disc isn't equal to all the others. It's better.

Solid-Seam Bonding is just one example of the extra care that goes into every Memorex floppy disc. Be it 8", 5¼" or the new 3½" Extra care that lets us guarantee every Memorex disc to be 100% error-free.

The next time you're buying a floppy disc—or a few hundred of them—just remember this:

It's always better to be safe than sloppy.

For more information on the full line of Memorex quality computer media products, including computer tape, call Memorex U.K. Ltd., 96-104 Church Street, Staines, Middlesex. Tel: 0784 51488




Your Data. When it matters, make it Memorex.™

MEMOREX

OTHELLO

By ROBIN NIXON

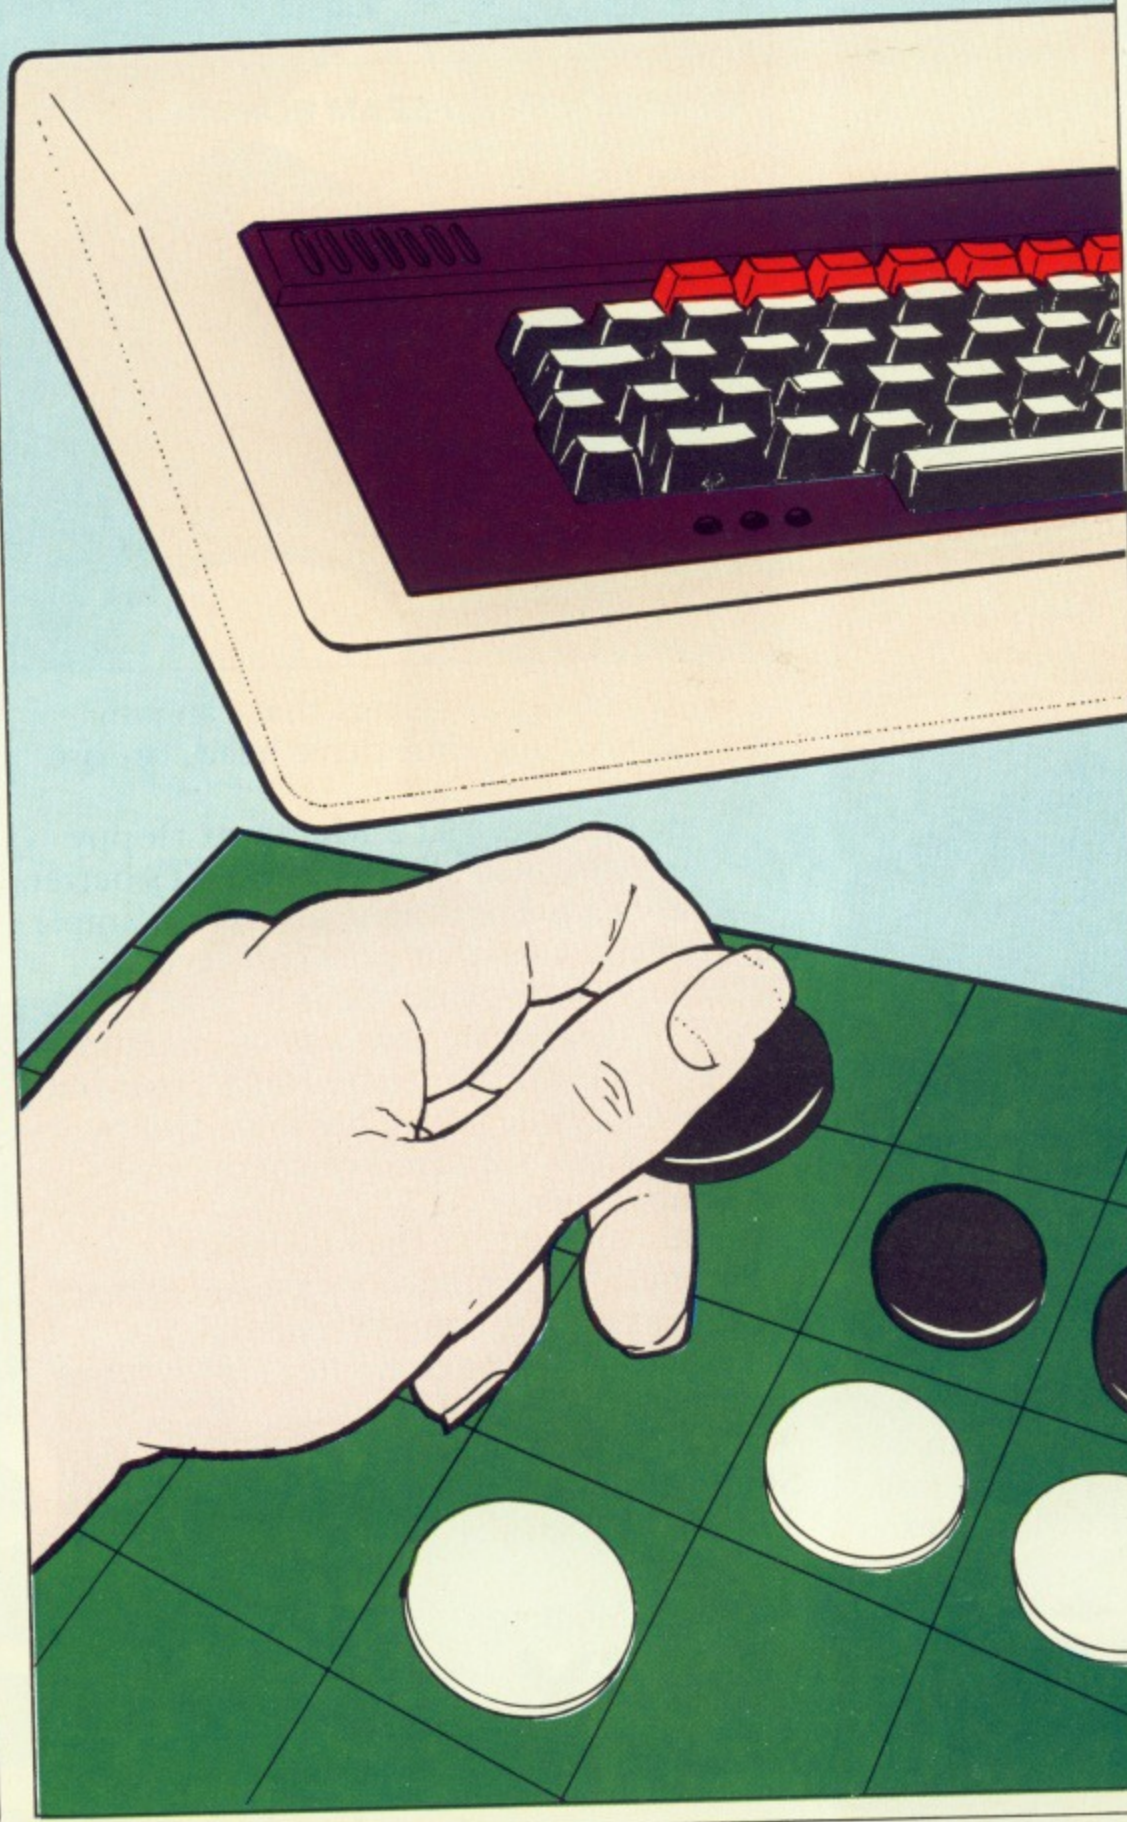

OTHELLO couldn't be simpler — it's with the game with only one rule! Easy to learn, but very hard to play well, the state of the board can change drastically after only one move.

This is, in fact, how Othello got its name. It was invented in England some time during the 19th century and was then forgotten until it was rediscovered in 1971 by Goro Hasegawa from Japan.

His father, who was a scholar of Shakespeare, remarked on how there was a similarity between the sudden reversals of situation in Shakespeare's plays and the game.

As with chess and draughts, Othello is played on an 8 x 8 board with the exception that all the squares are the same colour. The counters are double-sided, usually black on one side and white on the other with each player having a different colour.

At the start of each game the player places four counters at the centre of the board. See Figure 1. Thereafter the players take it in turns to place a counter with their own colour face up on an empty square in such a way that there is at least one counter of the opposite colour sandwiched between it and another of the player's own colour, in either a horizontal, vertical or diagonal direction.

All the opponent's sandwiched counters are then turned over to become the player's colour. It is possible for a player to sandwich the opponent's counters in several directions with one move. See Figure 1a.

In such a case all sandwiched counters are turned. See Figure 1b.

A player must always turn over at least one of the opponent's counters. If this is not possible the move is forfeited.

The game continues until the board has been filled, one or the other player has no counters left on the board or neither player can move. The winner is the one with the most counters of his or her own colour.

As the object of Othello is to end u

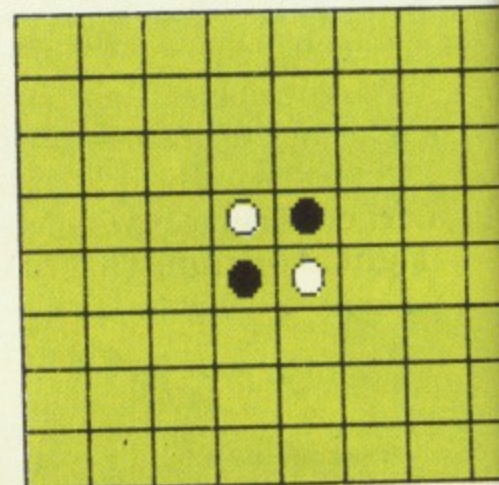


Figure 1: The board at start of play

mples - it's a
Easy to learn
the state of
stically after

hello got its
England some
ury and was
rediscovered
from Japan.
scholar of
how there
the sudden
akespeare's

hts, Othello
ard with the
ures are the
are double
e side and
each player

the players
entre of the
re after the
ce a counter
up on an
hat there is
e opposite
en it and
colour, in
or diagonal

ched coun-
become the
or a player
counters in
move. See

ndwiched
ure IIb.

rn over at
ounters. If
forfeited.
the board
er player
board or
winner is
s of his or

to end up

play

with the greatest number of counters of your own colour, it can be very tempting to try and turn over as many of your opponent's pieces as possible right from the start. However this can be very dangerous because during the opening and middle game the more counters you have and the less your opponent has, the more options are left open to your opponent. See Figure III.

After a few games you soon realise that the state of the board can completely change during the last eight or so moves. It therefore becomes apparent that certain squares have a higher strategic value while others can be very dangerous.

The strongest positions are the corners because once gained a counter on a corner cannot be turned over and neither can counters of the same colour placed either side. See Figure IV. So corners can become a solid base from which to launch an offensive.

The sides are also very strong, as counters placed there can only be turned over in one direction and can be used to turn over counters of the opposite colour in three directions. See Figures Va and Vb.

In implementing Othello on a computer it would be possible to construct an algorithm that searched

several moves ahead. However the time taken to compute each move could be several hours.

One way to overcome this problem is to construct a table of weightings showing which positions are stronger than others. See Figure VI. This table can be updated as play continues and positions that were weak become strong and vice versa.

Another strategy worth adopting is to prevent the computer from turning over too many counters at the beginning of the game, leaving a large number of possible moves available, while during the endgame choosing moves that turn over the largest number of counters.

These two strategies together enable the computer to play a reasonably

advanced game taking only about a minute per move.

If you are an experienced Othello player you might like to try experimenting with altering the table of weights (lines 180-250) or the amount by which the weightings are adjusted when a corner move is made (PROCcorner, lines 1480-1510).

You could also write a procedure to adjust the weighting when a side move is made or, if you do not mind spending several hours on a game, alter PROCdownlevel to look two more moves ahead instead of one.

This version of Othello requires only two keys as the computer works out all

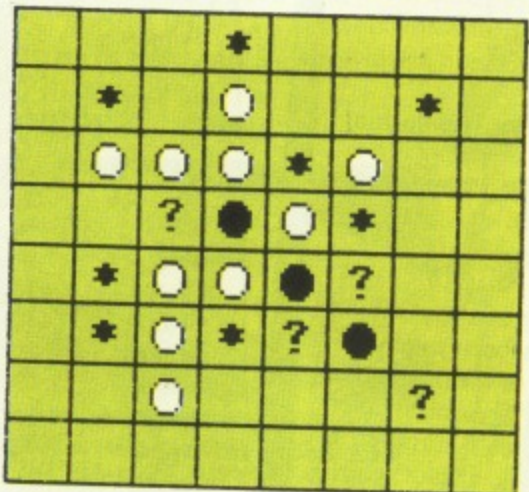



Figure III: Black has eight possible moves (*) whereas white has only four (?)

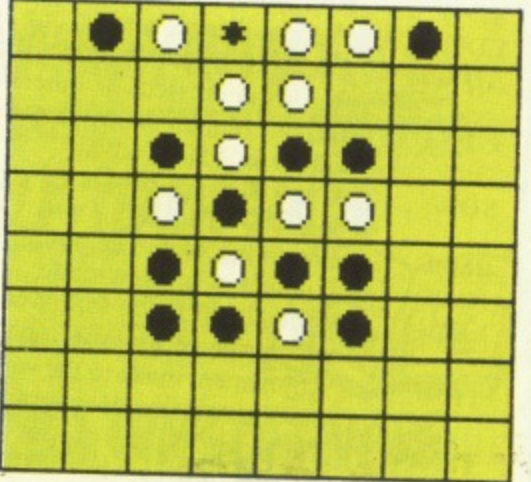


Figure Va: Counters on the side can only be turned in one direction but can turn in three

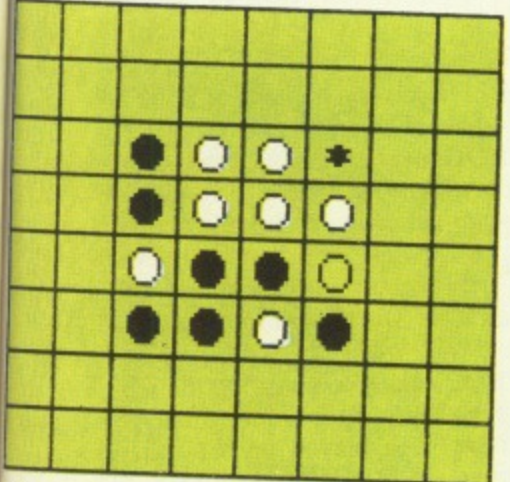


Figure IIa: Black can turn over white's counters in three directions

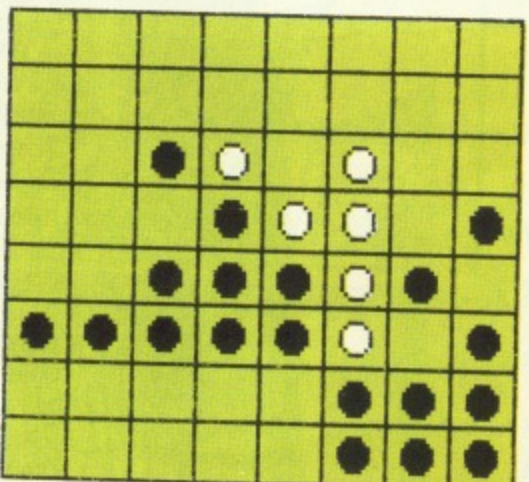


Figure IV: Black's triangle of six counters in the bottom right hand corner cannot be turned over and provides a solid base for attack

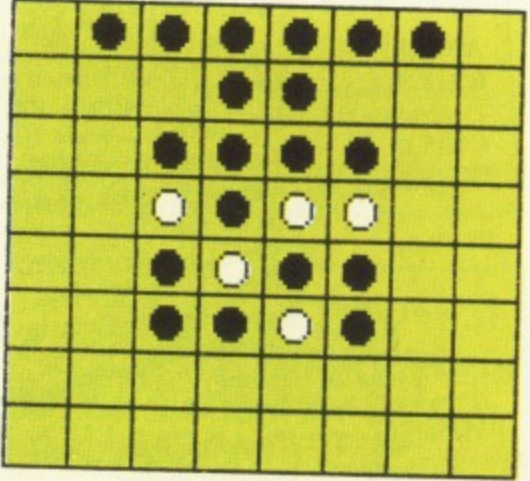


Figure Vb: The board after black's move

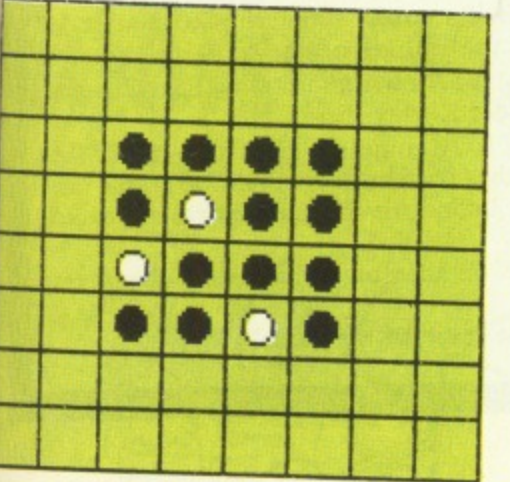


Figure IIb: The board after black's move

1500	-500	120	100	100	120	-500	1500
-500	-1000	20	10	10	20	-1000	-500
120	20	50	30	30	50	20	120
100	10	30	0	0	30	10	100
100	10	30	0	0	30	10	100
120	20	50	30	30	50	20	120
-500	-1000	20	10	10	20	-1000	-500
1500	-500	120	100	100	120	-500	1500

Figure VI: Table of weightings at start of play

From Page 69

your possible moves before asking for an input.

The Space bar is used to scan between possible moves and Return selects or enters a move. This saves having to type in coordinates, helps you not to miss a

move and avoids the need to check for an illegal move.

Disabled users with switches connected to the ADVAL (Analogue to Digital VALue) port can operate this game using switch 1 in place of the space bar and switch 2 in place of Return.

Anyone typing in the listing would be

well advised to insert a REM statement before the ON ERRORS in lines 350 and 1610, until such time as they have removed their typing errors from the program.

Full listing starts on page 162

MAIN VARIABLES

PL%	When PL%=-1 it is the computer's go. When PL%=1 it is the player's.
PM%	Possible number of moves for the present player.
CH%	Teletext graphics colour character for the present player.
DL%	When DL%=1 procedures posplay, findplay, direction, mask and count are being used by downlevel to assess the worth of certain moves.
OK%	Flag which is set to 1 when a possible move has been found so that no further checking is done on that square.
XD%	Horizontal direction of testing for a possible move.
YD%	Vertical direction of testing for a possible move.
AD%	Equals 1 when the space bar is pressed, 2 when Return is pressed, or otherwise 0.
CT%	Delay counter controlling the rate of the flashing cursor in PROCadval.
SD%	When SD%=1 the sound is on. When, SD%=2 the sound is off.
BM%	Weighting of the computer's best move.
NM%	Number of moves made.
FH%	Adjustment made to the weighting of the positions either side of a corner once it has been taken.
TH%	Adjustment made to the weighting of the position on the diagonal next to a corner once, it has been taken.
TPM%	Temporarily stores the computer's number of possible moves while it does a look ahead.
CO%	Number of counters the computer has on the board.
CO2%	Number of counters the player has on the board.

ARRAYS

A%(8,8)	Holds the board.
B%(8,8)	Holds a copy of the board, A%(8,8), while counters are being turned.
C%(8,8)	Contains the weightings for each square.
D%(8,8)	Holds the mask, or squares that do not yet need to be tested.
E%(8,8)	Store for the board, A%(8,8), during look ahead.
F%(8,8)	Store for the mask, D%(8,8), during look ahead.
G%(8,8)	Store for the weightings, C%(8,8), during look ahead.
PM1%(60)	Contains the X coordinates of the player's possible moves.
PM2%(60)	Contains the Y coordinates of the player's possible moves.
TPM1%(60)	Temporarily stores PM1%(60) during look ahead.
TPM2%(60)	Temporarily stores PM2%(60) during look ahead.
RG%(60)	Holds all the weightings for each of the player's possible moves in a random order so that if there is a tie for the best move it will be chosen at random.
HM%(60)	During look ahead HM%(60) contains temporary adjustments to the weightings of possible moves.
AS(15)	Contains the "wait" messages.

PROCEDURES

start	Reads the data for random "wait" messages.
board	Displays the board in its current state.
posplay	Searches for all possible moves for the current player.
findplay	Used by PROCposplay to check an individual square.
direction	Used by PROCfindplay to check each of the eight possible directions.
selplay	The player's input routine. Each possible move shown in turn when the space bar is pressed. The selected move being entered by pressing Return. The fire buttons can be used to replace space and Return.
on	Used by PROCadval to highlight a possible move.
off	As with PROC on but turns the highlight off.
turn	Turns over the opponents pieces after a move has been selected.
swapab	Used by PROCcomplay to swap various arrays as certain moves are played and tested.
swapba	
swapae	
swapea	
swapdf	
swapfd	
swapcg	
swapge	
adval	Used by PROCselplay to flash a cursor at the present possible position of play being scanned.
keys	Used by PROCadval to scan the keyboard and the ADVAL port for a key press.
pass	Is called when either the computer or the player cannot move.
sound	Alternates between turning the sound effects on and off each time S is pressed during the players turn.
mask	Used by PROCselplay to speed up the search for possible moves. Only squares immediately next to ones that have been played on are tested for a possible move as PROCmask masks out the others.
complay	Selects the computer's move.
showplay	Displays the computer's move.
corner	Tests to see if a corner square has been selected and if so the values of the squares directly surrounding it are raised, informing the computer that it is safer to play there.
downlevel	Used by PROCcomplay after the centre 16 squares of the board have been filled to search one level deeper to find possible good moves and avoid bad ones.
count	Counts the number of computers and players pieces.
gameover	Displays the result of the game.

statement
lines 350
they have
from the

starts
2

messages.
ate.
the current
an individual
of the eight
ible move is
pressed. The
ing Return.
e space and

ible move.
ght off.
a move has

arrays as

or at the
canned.
and the
e player

ffects on
players

rch for
next to
d for a
out the

ected
rectly
mputer

re 16
h one
avoid

ayers



IS KEYBOARDING TURNING YOU INTO A 'MICRO MONSTER'?

Let's face it, your BBC Micro is a demanding creature. Powerful it may be, but using the keyboard is probably a lot harder on YOUR system than you expected — and it's all because you're forced to 'hunt and peck' amongst 74 keys, on a keyboard that's a hundred years old!

It's no wonder you feel like the many-headed hydra! With your eyes being torn from document to keyboard, then to the screen for checking, and back again. Errors and bugs are bound to creep in.

Master your BBC Micro overnight with QUINKEY.



QUINKEY REPLACES EVERY CHARACTER, COMMAND AND FUNCTION ON YOUR BBC (EXCEPT BREAK), AND SIMPLY PLUGS INTO THE ANALOGUE PORT AT THE BACK.



YOU CAN TOUCH TYPE IN LESS THAN ONE HOUR WITH QUINKEY'S SIX KEYS, USING THE FAMOUS MICROWRITER TECHNIQUE PROVEN BY THOUSANDS OF USERS.



YOU ONLY NEED ONE HAND TO USE QUINKEY—AND THE LONG LEAD ALLOWS YOU TO SIT BACK, RELAX AND CONCENTRATE ON WHAT'S REALLY IMPORTANT—YOUR WORK.



ACCURACY AND SPEED COME NATURALLY BECAUSE YOU'RE TOUCH TYPING YOU CAN DEVOTE ALL YOUR CONCENTRATION TO READING ACCURATELY FROM THE SCREEN OR DOCUMENT.

Microwriter Ltd.,
2 Wandle Way, Willow Lane,
Mitcham, Surrey CR4 4NA.
Tel: 01-685 0300

microwriter
QUINKEY



AND, FOR THOSE LONG LISTINGS, QUINKEY REALLY IS A MUST. BECAUSE YOU NEED ONLY ONE HAND, THE OTHER IS FREE TO FOLLOW DATA.

WHAT YOU GET FOR £49.95

1 QUINKEY KEYBOARD

Five keys (plus control key) pressed in easily remembered combinations, give all inputs except Break. Can be used in conjunction with BBC keyboard or as entire replacement.



2 QUINKEY INTERFACE

Four-channel connector for up to four Quinkeys.*



3 SELF-TEACH GUIDE

Contains everything you need to know. Instantly learned, simple mnemonics based on widely used technique of Microwriting ensure you're touch-typing in under an hour.



4 PROG & WP SOFTWARE

Supplied on cassette (User Guide shows how to transfer to disk).

PROG merges easily with applications programs. WP enables Quinkey to be used with word processing packages such as Wordwise, View and Edword.



TECH SPEC — When invoked using CHAIN "WP" or CHAIN "PROG", loads at the current PAGE value and moves PAGE up by 768 bytes. No zero-page locations required. Interrupt service vector IRQ2V, correctly chained.

TESTED COMPATIBILITY — BBC model "B" OS E.I BASIC I or BASIC II (except when using INKEY with negative argument), DFS 0.90, View A1.4, Wordwise 1.17, Edword.

PLUS TRY QUINKEY ON OUR MONEY-BACK GUARANTEE

So confident are we of our claims that we offer a 14 day money back guarantee. So act now by sending the coupon below.

To: Microwriter Ltd., 2 Wandle Way, Willow Lane, Mitcham, Surrey CR4 4NA.

I would like to take advantage of your special money-back guarantee and realise that I can return the pack(s) undamaged within two weeks of delivery if I am not fully satisfied for a complete refund.

Please send Quinkey pack(s) @ £59.95 (£49.95 plus VAT and p&p)

*Tick box More information about the educational pack of 4 Quinkeys and software for schools.

I enclose a cheque made payable to "Microwriter Ltd" for £
or debit my Visa/Access credit card No.

Signed

Name

Address

Please allow up to 28 days for delivery. Reg. No. 1374069

MU6

Now you need not pay through the nose for a good face!



TAXAN

Fully PC compatible versions now available!

Because Taxan dot matrix printers combine quality, value for money and proven reliability.

Print Quality

Both the KP810 and KP910 have all the standard features found in dot matrix graphics printers, but when it comes to Near Letter Quality (NLQ) printing both really excel – producing output equalling or exceeding the quality of much higher priced units.

Features

- * 140 cps print performance
- * NLQ double pass printing
- * Downloadable character sets (DRAFT standard, NLQ optional)
- * Wide choice of optional NLQ typefaces available in ROM
- * Unique incremental printing mode
- * Friction and tractor feed
- * Standard Centronics interface (serial option available)
- * Fully compatible with all popular software packages including Lotus 1-2-3, Applewriter, Wordwise etc.

* KP910 prints extra wide – 156 char/line (normal) and 265 char/line (condensed) – ideal for Spreadsheets

Value for money

KP810 (80 column) around £339 (plus VAT)

KP910 (156 column) around £429 (plus VAT)

PC compatible versions

KP810PC (80 column) around £399 (plus VAT)

KP910PC (156 column) around £499 (plus VAT)

Prices correct at time of press

Distributed exclusively to dealers nationwide by DDL. Call us for the address of your nearest stockists.



THE NEW FORCE IN DISTRIBUTION

5 King's Ride Park,
Ascot, Berks. SL5 8BP
Tel: 0990 28921
Telex: 846303 DD LTD

**MIKE COOK shows how to
make your micro into a . . .**

Mini Met Man



ONE of the more interesting aspects of living with a three-year-old is that you tend to notice a lot more about your environment.

Well, actually it's not you that notices it, but it is you that has to explain.

Take, for example, gasometers, a common-enough sight at one time, but they have gone into somewhat of a decline since North Sea gas.

One surviving gasometer is in Clitheroe, Lancashire, and its claim to fame is that it inspired this month's project. Not, you understand, intrinsically, but for what adorns it.

"Dad, what's that whizzy thing?" Just the sort of question you need when trying to back a car into the last available parking space.

Eventually "the whizzy thing" was tracked down to the anemometer on top of the gasometer.

Those of you with children will know how wearing a "favourite word" can be, so there was nothing for it but I had to make an anemometer.

A computer is very good at patiently gathering data for analysis and the British weather is very good at supplying data, so they make a natural team.

While it would not be practical to describe a complete weather station in

THE BEEB BODY BUILDING COURSE

Part 27

one article, nevertheless a single sensor can be covered in the space. So from time to time I will look at the various components that could be made into a weather station.

Apart from the educational applications, there are some people for whom the wind speed is important. For example, radio amateurs with large aerial arrays often want to lower their masts when the wind strikes up.

Hang gliders, model - aircraft enthusiasts and dinghy sailors also have an interest in the wind.

It can be used as a constant source of

excuses: "It's no good me tidying the leaves up in the garden - it's too windy". Or "Gosh look how windy it is, I'd better check if there is any damage to the fabric of the pub".

However, the circuit described here has wider applications for anybody wanting to measure rotation and rotational speed. For example, you could use it to monitor the movement of a motor or the speed of a shaft. You can also perform flow measurements in fluids using similar techniques.

Do you remember as a child all those books entitled "Things to do on a rainy day"? Most of them contained an anemometer.

The disappointment came in how the wind speed was read out. One of the cups was painted a different colour and you had to count the number of revolutions in a minute. Not the easiest thing to do and very "labour intensive".

Commercial anemometers work on one of two different principles: the windmill effect or the hot-wire effect.

With the hot-wire effect, a wire is heated up and the amount of cooling it experiences is proportional (among other things) to the wind speed. With the windmill effect, the wind speed is turned

From Page 73

into rotational energy and that energy is then measured. This is done in many cases with the rotating shaft turning a generator. The output of the generator can then be used directly to drive a pen recorder.

We will take another approach – that of measuring the rotational speed directly by timing each revolution. Figure I shows the general arrangement.

At the heart of the system lies an optical switch. This is a small slot with a light source on one side and a photo-diode and amplifier on the other.

In fact it also contains a power regulator, output stage and Schmitt trigger to give a nice clean pulse. A light beam is sent across the slot and the output changes when there is something obscuring the beam.

Therefore to make our anemometer we arrange for the shaft to obscure the beam once every revolution. The signal thus produced is then timed by the computer and with a few sums we soon have the wind speed.

Mechanical construction often poses the most difficulty for people and so I looked for a simple and reliable method. The problem is that the whole mechanism has to revolve freely.

While looking in a local model shop I found a series of brass tubes and rods under the name of K & S Metal Centre. The interesting aspect was that the rods and tubes were of such dimensions as to slot inside each other very neatly, thus eliminating the need for any precision engineering.

There are many methods of construction, but I will describe how I went about it. First, take two table-tennis balls and perform delicate surgery. Take a sharp hobby knife and carefully slice them in half along the seam. You will find that one half is bigger than the other, which sounds a little strange but there is an overlap on the seam joining the two halves together.

Then I cut some 1/16in tube into two equal lengths, in this case 5.6in. These are to form the cross arms.

The centre of each piece was pinched in a vice, so that they were reasonably flat. This allowed them to be placed at right angles and tacked in place with a soldering iron.

Next a 3in piece of 3/16in diameter solid rod was glued vertically on to the cross.

I used cyanoacrylate (super glue) which held the construction firm while I applied a liberal dollop of epoxy resin. I used the rapid-setting type and constantly rotated and inverted the brass so

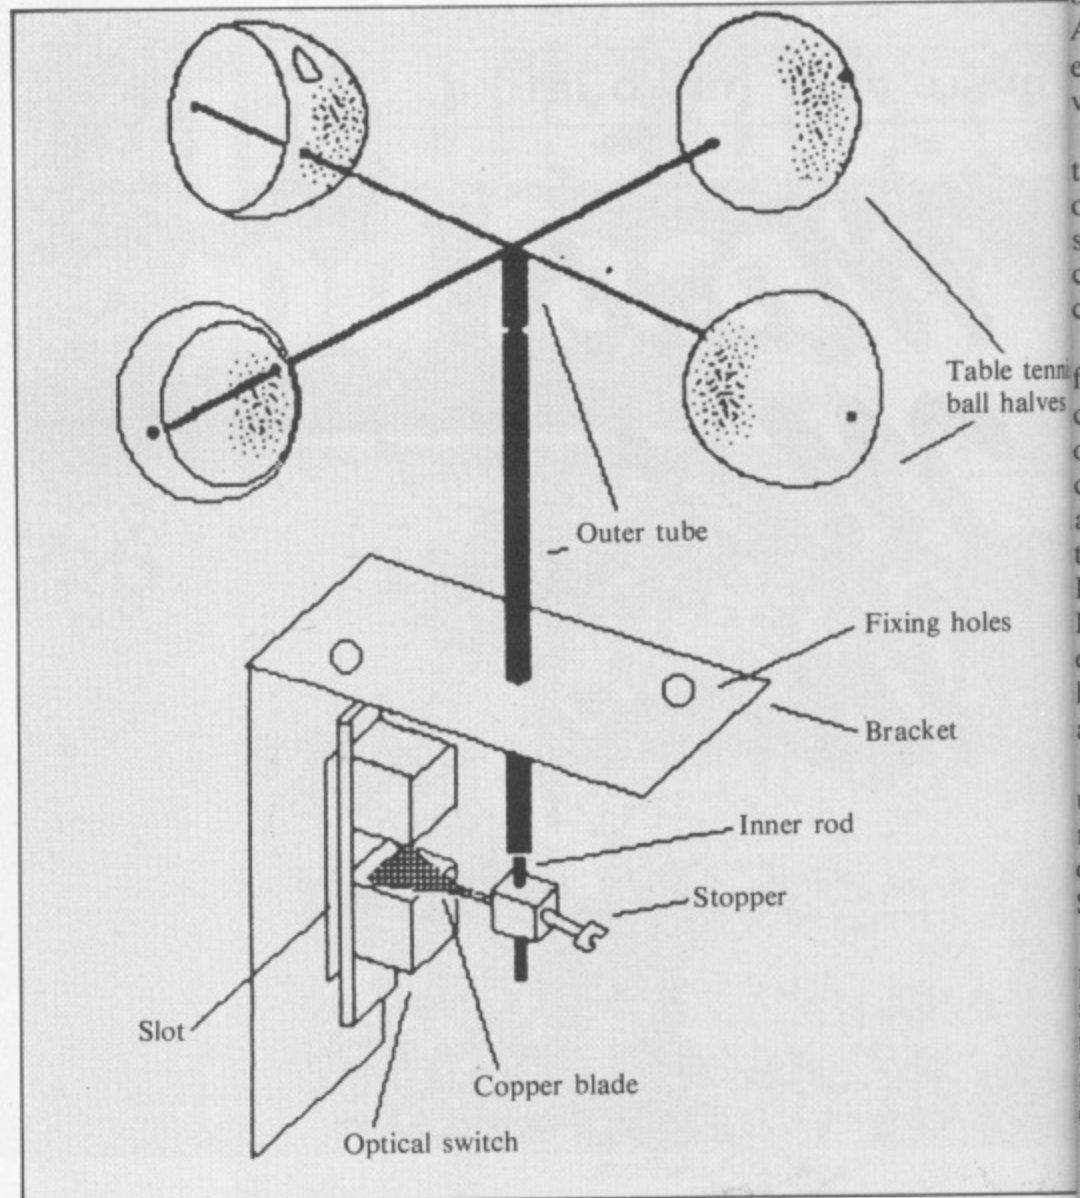


Figure 1: How the anemometer is constructed

that the glue formed a globule around the joint. This makes for a strong encapsulated joint.

Next I took a 2in length of 1/4in diameter tube and cut 1/2in off the end. I made sure that the two surfaces were filed quite smooth as these were to form the main bearing. The small length was slid on to the rod and fixed with a small spot of glue.

Now to prepare the bracket: At one end I cut a slot to take the optical switch and drilled two holes to mount it. Then a further two fixing holes were drilled at the other end and finally a 1/8in hole to take the tube.

The bracket was then bent at right angles by holding it in a vice and hammering it over. If you use a piece of wood to hammer against, you will avoid getting marks on the bracket.

Then the tube was pushed in place and firmly fixed with a fillet of epoxy resin top and bottom. (At this stage you can drill the holes in the lid of the box you are going to mount it in.)

When the resin was firmly set, the rod was threaded in the tube. I then had to find a way to secure it and form a paddle to break the beam of the optical switch. This caused a little head-scratching until

I came up with a solution.

A block with a threaded screw was taken from the screw terminal block used in many past projects. This fitted the rod quite well and prevented it from moving up or down. On the end there is a spike that is meant to be soldered to a printed-circuit board. Instead of soldering a small blade made out of a small piece of copper-foil.

Copper-foil is sold in self-adhesive strips for making stained-glass objects like lampshades and terrariums. I took a small piece and bent it double over the spike and then soldered it all into place.

With a little bending and trimming I sliced neatly through the light beam.

The sliced table-tennis balls were fitted. I found the best way to make a hole for the tube was to take the sharp point of a hobby knife and twist it around. This produced a very good hole of the right dimensions.

When one hole had been made I pushed the rod through until I could feel it through the ball at the other side. This way I could position the second hole precisely. The two heavier half-balls were placed on the same arm to preserve the balance.

The whole unit was then mounted

box an
A spo
ensure
wind c
Just
tubes.
over t
score
cleanly
cloth s
Nov
from
compl
of a r
conne
and pe
this is
Build
Build
econo
length
and se
As
unusu
mech
obtain
See P
As
proble
show
the w
and p
displa
The
to wo
remov
it into
The
winterr
because
interr
favou
the in
or has e
then r
a rea
locati
The

box and sealed with rubber bath-sealer. A spot of oil on the moving parts ensured smooth action and maximum wind capture.

Just a word on cutting the brass tubes. I found it best to roll a sharp knife over the tube until there was a deep score. Then the tube could be snapped cleanly. Finally a little filing with emery cloth smoothed off the ends.

Now to the circuit. As you can see from Figure II, it is not very complicated, needing only the addition of a resistor. The circuit needs to be connected to the computer's User Port and perhaps the simplest way of doing this is to use the transition board (Body Build Pack 1) and ribbon cable (Body Build Pack 2), although a more economical method would be to use a length of ribbon cable with one socket and separate the wires out.

As some of the components are quite unusual, both the electrical and mechanical components can be obtained as Body Build Pack No. 24. See Page 76 for details.

As ever, the hardware is only half the problem. The software to drive it is shown in Listing I. It takes a sample of the wind speed at fixed time intervals and plots a histogram as well as displaying the current speed.

The machine code patch will continue to work when the Basic program is removed, so you can simply incorporate it into your own programs.

The idea is that each time the beam is interrupted by the paddle an interrupt causes the computer to execute the interrupt service routine located at my favourite location of &A00. This reads the interval timer to find out how long has elapsed since the last interrupt and then resets it to zero. In order to tell that a reading has been taken, memory location &8D is also set to zero.

The main Basic program initialises

```

10 PROC_PATCH
20 MODE4
30 PRINT"BEEB BODY BUILDING COURSE

40 PRINT"ANEMOMETER"
50 PRINT"By Mike Cook"
60 DIM REC%(300)
70 CUR=(PI*5.6)/63360
80 EFF=.9
90 PP%=30
100 RECP%=0
110 FOR A%=0 TO 300
120 REC%(A%)=0
130 NEXT
140 FOR A%=&80 TO &8A
150 ?A%=0
160 NEXT
170 REM SET UP VIA
180 ?&FE6C=?&FE6C AND &EF
190 ?&FE6E=&90
200 INPUT"SAMPLE TIME IN SECONDS ",
TS%
210 TS%=TS%*100
220 REPEAT
230 A%=!&80
240 IF A%=0 THEN A%=&FFFFFF
250 SPEED=((CUR/(A%/100))*3600)/EFF
260 IF ?&8C=&FF THEN SPEED=0 ELSE ?
&8C=&FF
270 PRINT TAB(0,10);"SPEED IS ";INT
(SPEED+.5);" MPH";SPC(16)
280 PP%=PP%+1
290 IF PP% > 300 THEN PP%=0


300 RECP%=RECP%+1
310 IF RECP%>300 THEN RECP%=0
320 REC%(RECP%)=INT(SPEED*20)
330 MOVE PP%+4,0
340 PLOT 7,PP%+4,REC%(PP%)
350 MOVE RECP%+4,0
360 PLOT 5,RECP%+4,REC%(RECP%)
370 REPEAT

380 UNTIL TIME >TS%
390 TIME=0
400 UNTIL FALSE
410 DEF PROC_PATCH
420 FOR PASS=0 TO 2 STEP 2
430 VECT=&8D
440 P%=&A00
450 [
460 OPT PASS
470 \ INTERRUPT SERVICE ROUTINE
480 PHA \ SAVE A
490 TXA:PHA \ SAVE X
500 TYA:PHA \ SAVE Y
510 LDA &FE6D \ SEE IF IT IS US
520 AND #&10 \ MASK OUT CB1
530 BEQ BLK
540 LDA &FE60 \ CLEAR IRQ FLAG
550 LDY #0
560 LDX #&80 \ POINT TO PLACE TO WR
ITE
570 LDA #3
580 JSR &FFF1 \ READ INTERVAL TIMER
590 \ CLEAR TIMER
600 LDY #0
610 LDX #&85
620 LDA #4
630 JSR &FFF1 \ WRITE TO TIMER
640 LDA #0
650 STA &8C \ INDICATE NEW VALUE
660 .BLK PLA:TAY \RECOVER Y
670 PLA:TAX \RECOVER X
680 PLA \ RECOVER A
690 JMP (VECT)


700 ]
710 NEXT
720 IF ?&207=&A THEN 770
730 ?VECT=?&206
740 ?(VECT+1)=?&207
750 ?&206=0
760 ?&207=&A
770 ENDPROC

```

Listing I

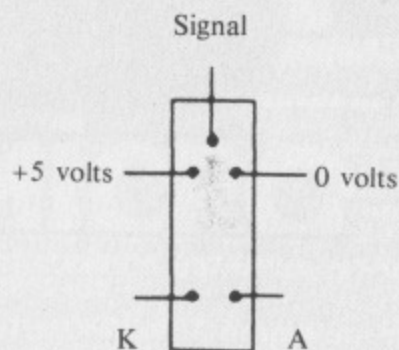

Under side of optical switch
Honeywell HOA 2001

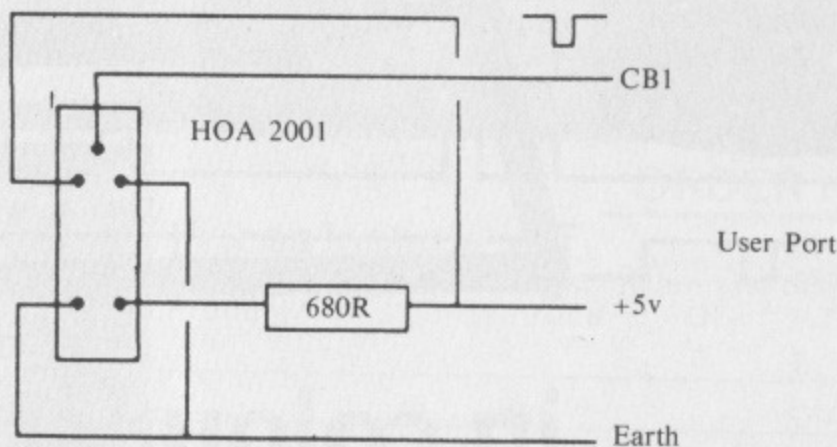

Circuit of the optical switch

Figure II: Circuit diagram

From Page 75

the VIA so that interrupts are enabled on the falling edge of CB1.

Line 230 gets the time of the last revolution. If this was zero, the variable A% is made a large number to prevent a "divide by zero" error.

Line 260 tests to see if a revolution has been recorded since we last looked at it. If it has not, then the speed gets set to zero. Without this, when the anemometer stopped, the reading would continue to be the last one taken.

The speed is then displayed and stored in an array so we can wipe out that section of the histogram later.

The speed is measured by assuming that the wind will move the anemometer at the same speed as it is travelling. This, of course will not be the case, as the efficiency of the windmill will not be perfect.

To compensate for this, we use an efficiency factor set in line 80. The circumference is calculated from the length of the diagonal arms in line 70 – this must be changed if you use any different length than the 5.6in I used.

As we want the reading in miles per

hour, then note the circumference is calculated in miles, or rather a very small part of one mile.

Similarly, in line 250 the time taken in hundredths of a second is scaled up into hours.

Finally, to prevent lots of unnecessary and unwarranted digits in the result, we take the integer for display.

Now, how did I arrive at the efficiency constant set in line 80? Well I cheated and calibrated it against a commercial hot-wire anemometer. If you follow the same constructional methods this figure should be accurate enough.

However, you might like to speculate on how to calibrate it yourself. One way would be to drive along in a car on a windless day and note the speed against your car's speedometer. You would have to have some sort of portable frequency-measuring device, and someone to drive the car. You could calibrate it from observation. Look for the signs described in the Beaufort scale of wind measurement and make sure your anemometer agrees with it. You could always check the wind speed with your local weather station and arrive at the

BODY BUILD Pack 24 contains:

- 12in of 1/16in brass tube.
- 3in of 3/32in brass rod.
- 3in of 1/4in brass tube.
- 2 table-tennis balls.
- 1 screw stopper.
- 2in of copper-foil.
- 1.25in x 3in aluminium for the bracket.

- 1 cable clip.
- 1 680R resistor.
- 1 HOA 2001 optical switch.
- 1 plastic mounting box.
- 4 6BA fixing nuts and bolts.

Total price £8.

Body Build Pack No. 1 Transition board £10.50.

Body Build Pack No. 2 Ribbon cable + 2 sockets £10.50.

All the above prices include VAT and p&p.


– See order form on Page 175.

efficiency rating.

If all else fails, climb up to the top of the gasometer in Clitheroe and see what that pesky anemometer is doing. Next month back to sanity.

DATA TRACE

Here it is in black and white . . .

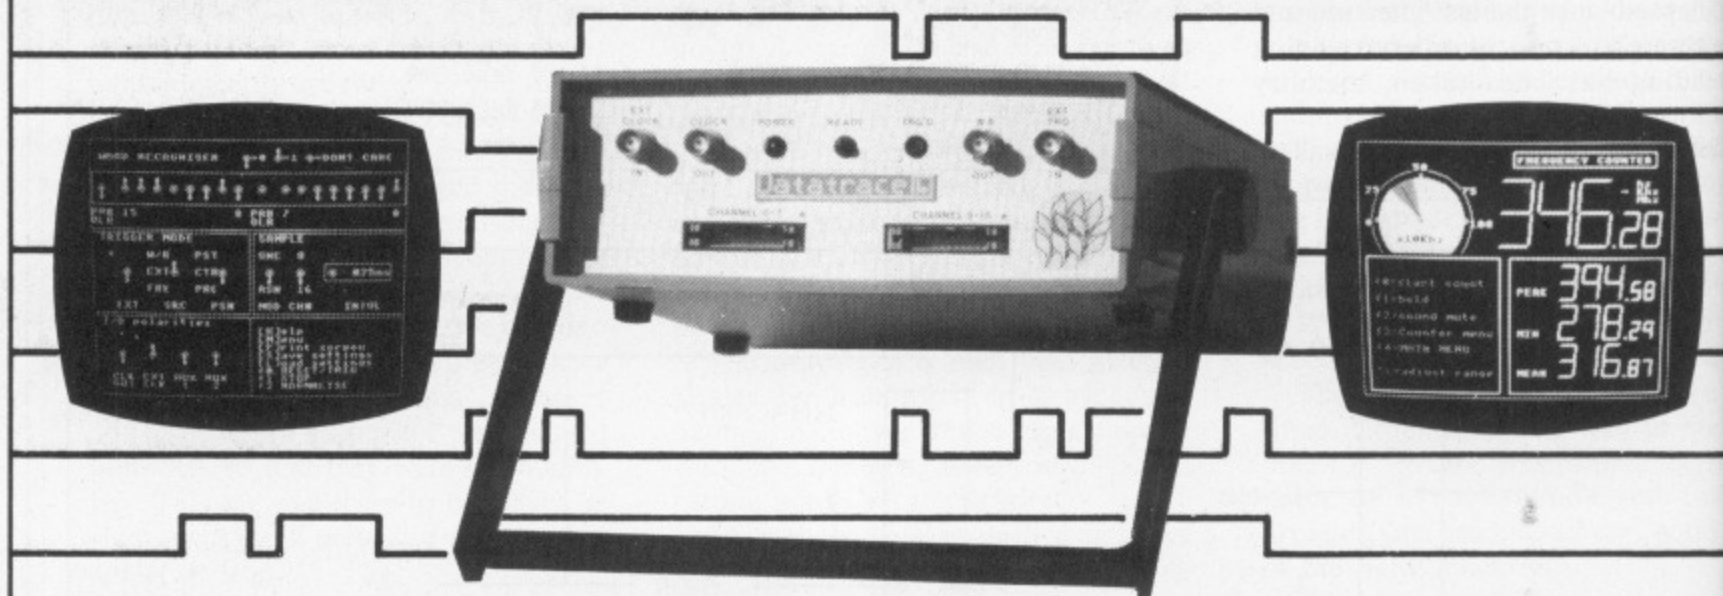

. . . in colour its sensational.


16 channels @ 50 mhz

Phone (0278) 780825

SYSTEMS

View	£58
ViewSheet	£57
WordWise	£32
WordWise Plus	£49
StarBase	£69
Gemini Data	£115
PrintMaster	£29
Termi	£69
Disk Doctor	£29

BBC & DDFS	£379
BBC B	£349
BBC BD	£399

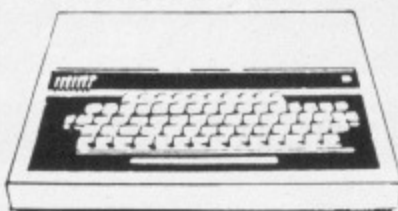

Pace Modem including software £135
Communicator £23


BBC includes 5 games FREE

Sanyo 555 Q 256k Ram £999

IBM compatible
2 x 360 Drives ★


Price includes:

Wordstar
Mailmerge
Info-Star
Calc-Star
Basic+DOS
Mono monitor

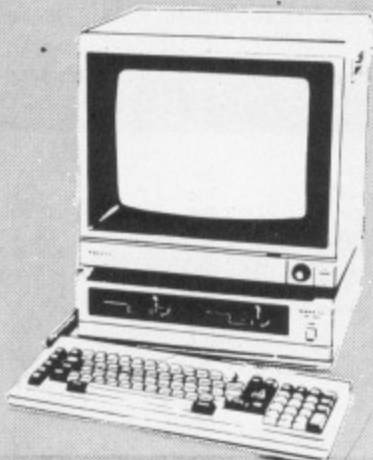


PRINTERS

Brother HR 15	£389
Juki 6100	£379
Juki 2200	£249
Epson RX80 FT	£269
Epson FX80	£379
Canon 80 COL	£299
Canon 156 COL	£399

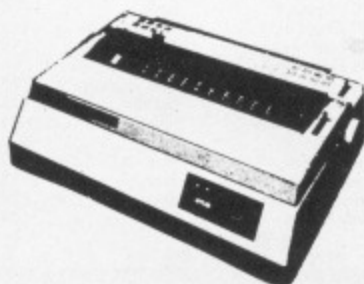

DISKETTES in packs of 10



SS 40tk.....	£ 19.90
DS 40tk.....	£ 20.00
DS 80tk.....	£ 26.00

★ HIGHEST QUALITY ★
YOU CAN BUY


NOW FOR A REAL BARGAIN

Prices include VAT

UDM DRIVES



200K-400K-800K
plus new 3 1/2" range

(including manual & formatter)

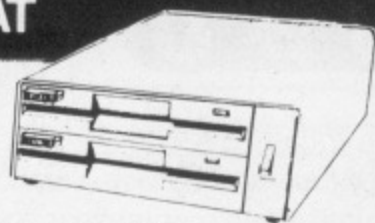

100K single unit	£79
200K dual unit	£150
200K single unit	£125
400K dual unit	£205

400K single unit	£160
800K dual unit	£259
All 80TK drives are switchable 40/80	
PS unit	+£20




UDM DDFS	£95
with Disk Drive	£79 ★

Rom Expansion including FREE software

£55.00

MICROVITEC MONITORS

Medium resolution	£189
High resolution	£249
Extra High resolution	£399
AP= +£25	
Sanyo/BMC 12" HC	£110
Philips 12" Hi.Res.....	£95



ACCESSORIES

BBC Stands	£15.00
Dust covers	£5.60
(for BBC	
Drives and	
Printers)	
Disk storage boxes	£15.00 (takes 35)
Disk storage boxes	£20.00 (takes 80)



MICROWARE

NORTH LONDON 637, Holloway Road, London N19 5SS
01-281 2431

SOUTH LONDON 67, Westow Street, Upper Norward
London SE19 01-771 6373

MIDLANDS 14, Charles Street, Hanley, Stoke-on-Trent
107821 269 883

Name

Address

Signed

ORDER FORM

Prices include VAT

+£10 for delivery. £2.50 software and diskettes

Product	Price	Qty	Total
			£
			£
			£

CREDIT CARD No.
TOTAL SUM ENCLOSED

All products are brand new and are offered
with full manufactures warranty

p

p&h electronics Ltd

5 THE PARADE · YATELEY
TEL: YATELEY 877222

22/24 GUILDFORD ROAD · BAGSHOT
TEL: BAGSHOT 73078

BBC MICRO CENTRES

ALL PRICES
PRICES ARE SUBJECT TO

FAST PHONE/MAIL SERVICE - SAME
SUPPLIERS TO SCIENTIFIC AND

SPECIAL THIS MONTH
1. See new low prices.
2. Free lead with each printer.
3. Free carriage (UK) all disk drives.

COMPUTERS

Electron + 5 Games	£119.00	Amstrad CPC464 colour with disc	£449.00
BBC B + 5 Games	£349.00	Amstrad CPC664 Green with disc	£349.00
BBC B + DNFS	£450.00	Toshiba MSX System + 3 Programs	£199.00
Sinclair Spectrum + 6 Games	£129.00	Sanyo MSX	£275.00
Sinclair QL + Business Software	£389.00	Sony Hit Bit - 3 Programs	£290.00
Amstrad CPC464 Mono + 12 Programs	£239.00	Apricot File System	£925.00
Amstrad CPC464 Colour + 12 Programs	£349.00	Apricot F1 System	£1055.00

COMPUTER BOOKS-

BBC User Guide Binder	£ 3.95
Advanced User Guide BBC	£12.95
Advanced user Guide Binder	£ 3.95
Advanced Basic Rom BBC	£ 7.95
Advanced Graphics for BBC	£ 9.95
Advanced Machine Code on BBC	£ 7.95
Advanced Prog Techniques BBC	£ 8.95
Alp on the BBC Micro	£ 7.95
Basic Prog BB Micro	£ 6.95
Basic Rom User Guide (BBC Electron)	£ 9.95
BBC Basic for Beginners	£ 7.95
BBC Disc Companion	£ 7.95
BBC Micro Assembly Language	£ 7.95
BBC Micro Sound/Graphics	£ 7.95
Business Applications BBC	£ 7.95
Disc Prog Techniques BBC	£ 7.95
Exploring Music (BBC Electron)	£ 9.95
30 Hour Basic for BBC	£ 6.95
Advanced Graphics Electron	£ 6.95
Advanced Prog Techniques	£ 8.95
ALP Electron	£ 7.95
Easy Prog Electron	£ 5.95
6502 Applications	£13.50
6502 Ass Language Prog	£17.50
6502 Sub-Routines	£17.50
Z80 Assy Language Prog	£17.50
Z80 Applications Book	£13.50
CPM Handbook	£12.50
CPM/PLUS Handbook	£12.95
Wordstar and CPM 'Made Easy'	£ 6.95
Wordstar 'Made Easy'	£13.95
The Complete Forth	£ 6.95
Logo Programming	£ 8.95
Program Micro with Pascal	£ 8.50

ACORN SOFTWARE BOOKS-

Creative Graphics	£ 7.50
Graphs and Charts	£ 7.50
Lisp Manual	£ 7.50
Forth Manual	£ 7.50
5-Pascal Manual	£ 7.50
BCPL Manual	£15.00
Creative Assembler	£ 7.50

ACORNSOFT-VIEW

View Rom (Inc Manuals)	£50.00
View Sheet Rom	£50.00
View Guide Book	£2.50
Into View Book	£2.50
View Sheet Manual	£10.00
Printer Driver Generator Cassette	£9.95
Printer Driver Generator Disk	£11.50
Hi-View (for 2nd 6502)	£50.00
View Index Disk	£14.95

ACCESSORIES

Quality Digital Recorder	£29.95
Quickshot II Joystick with BBC Interface	£19.95
Full Proportional return to centre Joystick	£12.95
Full Proportional Joysticks Pair	£20.00
Soft Dust Cover 'B' and Electron	£5.00
Hard (Fibre Glass) Dust Cover	£10.00
Printer Cover (State Type)	£5.00
Light Pen with Software	£45.00
Monitor Plinth Strong Metal	£18.50
Single Computer Desk Metal Frame	£59.95
Double Computer Desk Metal Frame	£69.95
Mains Distribution Block with Plugs	£7.50
Sideways Rom Board	£45.00
Disk Storage Box (50)	£18.00
Disk Storage Box (85)	£23.00
Nightingale Modem with Commstar Rom	£145.00
TV Aerial/Computer Switch	£2.50
BB Key Function Key Mask	£2.00
Flow Chart Template	£1.50
BBC Giant Reference Card	£2.50
Cassette Lead	£3.95
AMX Mouse and Software	£75.00
EMI Tracker Ball and Software	£55.00

MONITORS

Ferguson MM02 High Res Mono Green 12"	£85.00
Ferguson MM06 High Res Mono Amber 12"	£85.00
Sanyo DM8112 High Res Mono Green 12"	£115.00
Microvitec 1431 Std Res Colour 14"	£199.00
Microvitec 1451 Med Res Colour 14"	£290.00
Microvitec 1441 High Res Colour 14"	£485.00
Microvitec 1451 Q3/DL Black Med Res 14"	£280.00
Sanyo 3125 Std Res Colour 14"	£199.00
Ferguson MC01 14" CTV + RGB Monitor	£215.00
Saba 37541 14" CTV + RGB Monitor	£215.00
Hitachi 1444 14" CTV + RGB Monitor	£199.00
Hitachi 1446 As above remote control	£230.00

PRINTERS

Epson RX80T	£240.00
Epson RX80FT Plus	£270.00
Epson FX80	£400.00
Epson P40	£90.00
Epson JX80 Colour Printer 160cps	£600.00
Epson 2K Serial Interface	£25.00
Cannon PW1080A	£340.00
Tally MT80 Plus 100cps	£215.00
Smith Corona Fasttext 80	£170.00
Smith Corona D100 100cps	£220.00
Smith Corona D200 200cps with NLQ	£320.00
Brother HR15 Daisy Wheel	£415.00
Silver Reed EX500 D/wheel	£320.00
Silver Reed EX43 D/wheel with Keyboard and Interface	£399.00
Juki 2200 D/wheel	£299.00
Juki 6100 D/wheel	£385.00
2000 Sheets Fanfold Paper	£14.00
Printer Lead for BBC/Electron Parallel	£12.95
Printer Lead for BBC Serial	£9.95

ROMS/UTILITIES

Wordwise	Rom	£39.00
Wordwise Plus	Rom	£49.00
Disk Doctor	Rom	£28.00
Printmaster	Rom	£28.00
Graphics	Rom	£28.00
Caretaker	Rom	£29.00
Termi	Rom	£29.00
Communicator	Rom	£65.00
Toolkit	Rom	£26.00
Exmon II	Rom	£26.00
Murom (MUSIC)	Rom	£28.00
Masterfile II	Disk	£18.00
Help	Rom	£24.00
Sleuth	Rom	£28.00
Spellcheck II (View + W/W)	Rom	£30.00
Spellcheck (View)	Disk	£18.00
Spellcheck (W-wise)	Disk	£18.00
Hershey Characters	Disk	£14.00
Hershey Characters	Cassette	£9.00
Ade	Rom	£55.00
Logo (LCSI)	Rom	£58.00
BBC Ultracalc II	Rom	£75.00
BBC Beyond Basic	Cassette	£11.50
BBC Typing Tutor	Cassette	£15.00
BBC Typing Tutor	Disk	£18.00
Stardatabase	Rom	£79.00
BBC Record Keeper	Cassette	£13.50
BBC Home Finance	Cassette	£9.95
Clares Replica II	Disk	£12.00
Clares B Base	Disk	£23.00
Gemini Database 24K	Rom	£129.00
Music System 2x	Cassette	£24.00
Music System	Disk	£24.00

DISK DRIVES

CSX100/L 100K S/S 40T no p.s.	£115.00
CSX200/D 200K D/S 40T no p.s.	£130.00
CSX400 400K D/S 40/80T no p.s.	£185.00
CS100 100K S/S 40T with p.s.	£160.00
CS200/D 200K D/S 40T with p.s.	£165.00
CS400 400K D/S 40/80T with p.s.	£215.00
CD200 Dual 100K with p.s.	£290.00
CD400/D Dual 200K D/S with p.s.	£320.00
CD800/S 400K D/S 40/80T with p.s.	£399.00
Cumana QFS Double Density Disc Interface	£100.00
CSX351 3.5" 100K S/S	£134.00
SSX354 3.5" 400K D/S	£193.00
CDX352 3.5" Dual 100K S/S	£245.00
CDX358 3.5" Dual 400K D/S	£366.00
10xDS 96TPI Disks (in case)	£20.00
Electron (Cumana) Disk Interface for any drive above	£125.00

ACORN PERIPHERALS

Z80 2nd Processor + Business Software	£399.00
6502 2nd Processor	£199.00
IEEE Interface	£375.00
Bit Stick	£375.00
Teletext Receiver	£225.00
Prestel Receiver	£139.00
Music synthesiser	£199.00
Acorn DNFS Kit	£110.00
Speech Kit	£45.00
Cassette Recorder	£35.00
Econet Components	PO
Electron Plus One	£57.00
Electron Plus Three	£120.00

ACORNSOFT

EDUCATION	
Algebraic Manipulation	£9.95
Peeko Computer	£9.95
Business Games	£9.95
Word Hunt	£11.90
Word Sequencing	£11.90
Chemical Analysis	£13.80
Chemical Simulations	£13.80
Jars	£11.90
Temperature Control	£9.95
The Examiner	£9.95

LANGUAGES	
Forth Cassette	£16.85
Lisp Cassette	£14.85
Lisp Disk	£16.85
Microtext Cassette	£49.85
Microtext Disk	£59.85
Logo Rom	£62.00
BCPL Rom Disk and Manual	£85.00
Turtle Graphics Cassette	£14.65
S-Pascal Cassette	£18.85
S-Pascal Disk	£19.80
ISO Pascal Rom	£62.00

GRAPHICS ETC	
Creative Graphics	£9.95
Graphs and Charts	£9.95
Picture Maker	£9.95
Shirley Conrans Garden	£9.95
Personal Money Management	£11.95
Collector Catalogue	£9.95
Membership Manager	£9.95
Desk Diary	£9.95
Forecast	£11.95
French (also Electron)	£14.95
Italian (also Electron)	£14.95
Spanish (also Electron)	£14.95
German (also Electron)	£14.95
Database Disk	£15.45

FULL RANGE OF ACORNSOFT GAMES

TOP GAMES

Elite BBC	Cas. £14.95	Disk £16.95
Elite Electron Cassette		£12.95
Aviator BBC	Cas. £14.95	Disk £16.95
Snooker BBC	Cas. £14.95	Disk £16.95
Echelon BBC Disk		£16.95
Castle Quest BBC Cas.	£12.95	Disk £14.95
Frak BBC Cassette		£7.50
3D Grand Prix BBC Cassette		£7.95
Scrabble BBC		£12.95
White Knight 12 Chess		£9.95
White Knight Chess Electron		£9.95

SOFTWARE BY:
MICROPOWER · SUPERIOR · GEMINI
INVASION · VISIONS · BUG BYTE ETC.

MAIL ORDER COUPON

P&H ELECTRONICS LIMITED
22/24 GUILDFORD ROAD · BAGSHOT · SURREY GU19 5JN

Please send me: (or order by letter)

1	4
2	5
3	6

I enclose cheque/PO for _____ P&P see above

Or please debit my Access/Barclaycard/Visa* (delete as applicable)

Card Number

Expiry Date

Name

Address

Telephone

FAST VAT FREE EXPORT SERVICE

CARRIAGE COSTS - Micros - Monitors - Disc Drives

- Printers - Desks - 2nd Processors: £7

Cassette Decks: £3. - Books - Software - Leads £1. per item.

ACCESS/BARCLAYCARD/VISA ORDERS WELCOME

CREDIT FACILITIES Instant credit up to £1,000, deposit 10%

PLEASE STATE; DISK FORMAT 40 OR 80 TRACK



THE BEST ARCADE GAME OF '85?

CASTLE QUEST is the latest game from Micro Power – and what a superb game it is!

It is possibly best described as a strategic arcade game with an adventure theme.

Initially it appears to be another variation of the "ladders-and-levels" type, but the first noticeable difference is that the screen scrolls as you move around. The next difference is in the obstacles you meet!

It isn't very long before you find that a sword would come in

handy but unfortunately two spiders guard the only one available! You have to use two of the objects that are lying around to get it.

Getting across the Troll's bridge also involves having something with you. I don't think I'm giving anything away when I say that any adventure player worth his salt will have no trouble here! You will undoubtedly get put into prison, but there is a way out. You will also find a few very difficult jumps that are

possible if your timing is right.

In addition to the usual left/right, up/down and jump keys, you can also throw objects using the cursor keys and pick up and drop things.

You also carry a back-pack which will hold up to four objects and there are keys for storing and retrieving them. One nice feature is the use of the C and V keys to scroll the screen left and right. Very handy for seeing what's coming.

Micro Power is offering £1 to

anyone who can "crack it" within three months of purchasing the game. For those people who do, there is a competition. The top four scorers get a chance to win £500-worth of computer equipment.

In my opinion this is the first arcade game to successfully incorporate an adventure theme and overall is the best game of 1985 to appear so far.

I am extremely impressed and cannot recommend it too highly.

Paul Gardner

This one is a winner, too

ORPHEUS, a game from those "Chuckie" People, A&F, has a distinctly Olympian air about it.

It is a seven-screen arcade game that involves guiding our man across the raging Styx – a mythological river that has overtones of dying. Heavy stuff!

As I read the inlay, I had dreams of another run-of-the-mill Frogger. In fact, though it is

of a not-too-dissimilar multi-screen format, Orpheus is highly original and entertaining.

Orpheus is in his boat and must steer it across the river to collect five golden harps, which he carries back one at a time.

The current is strong, making headway in certain directions slow. In the middle of the river lurk dangerous rocks that prove rather nasty if you hit them. To

make life harder, Harp Guardians swim around the river. Encounter these and it's KO time.

Things are not as bad as they seem, since you do have a trusty discus which tends to cut things off in their prime if you throw it correctly. This can be used as often as you want and, with each of your three lives, you get a Smart Bomb – killing all deviants at the touch of a key.

In later levels you get an assortment of logs, skulls (particularly troublesome characters) and of course Harp Guards to contend with.

Steering the boat takes practice, but, once mastered, highly-dexterous moves are possible. The instructions are a little shaky and the controls only appear in the program once. There's no screen snap either, which is amazing since it would be quite impressive.


The game really is fun. The graphics are good, even down to the moving oars, ripples in the river and gnashing of teeth courtesy of the Guards.

The sound effects are also excellent, with frequent tunes, bangs and crashes. However, midnight gamers will be pleased to know that they can be silenced.

In short, by original interpretation of an old theme A&F have come up with another winner for young and old alike.

Chris Chan

Phil Tudor

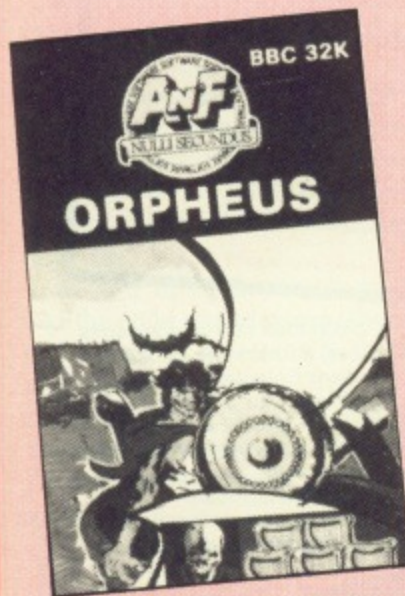

Big deal? Not really

A RECENT offering from Incentive Software is **Millionaire** which runs on both the BBC Micro and the Electron. The game is cassette-based with a caption on the sleeve encouraging punters to 'take on one of life's little challenges and become a millionaire'.

If only it were that easy.

With this unconvincing statement in mind, I proceeded to sample the efforts of authors John Bent and Steve Benfield.

The objective of Millionaire is to run a software publishing house and to make a lot of money from the sale of cassette-based software.

Strategically, your main problems are to ensure that you have an adequate supply of cassette tapes to sell, and a reasonable marketing initiative, though your success in this matter is somewhat random as far as I


can judge from my own experiences.

Depending on your earnings, the game will upgrade or downgrade your residence, displaying an adequate pictorial representation of your abode.

The program is somewhat addictive, but it lacks the intellectual and business challenge to sustain it after a few hours or so. Most of the game relies on Mode 7 text screens, though there are also some sales graphs and pictures to liven it up a little.

There is also an option within the game to deal with a character called Honest Harry who, typically, is anything but honest. You may obtain pirated software from him if you are lucky enough not to be caught out.

Overall, I should think it would not suffer too much from

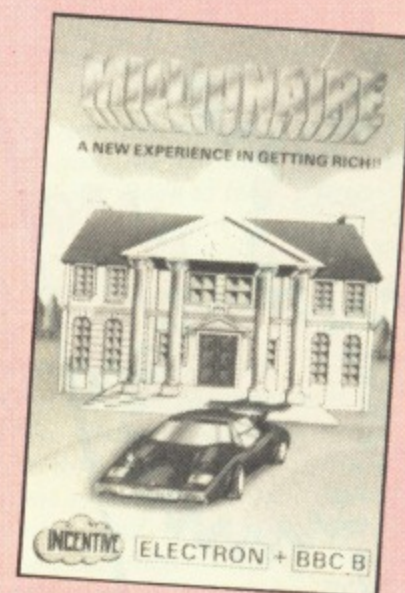


the attentions of software pirates – not even the Honest Harry type. Unless you are really interested in this sort of pseudo wheeling and dealing, it might prove a little uninspiring for those of you expecting another intellectual adventure-type challenge.

GEMINI

Serious Software

BBC MICRO

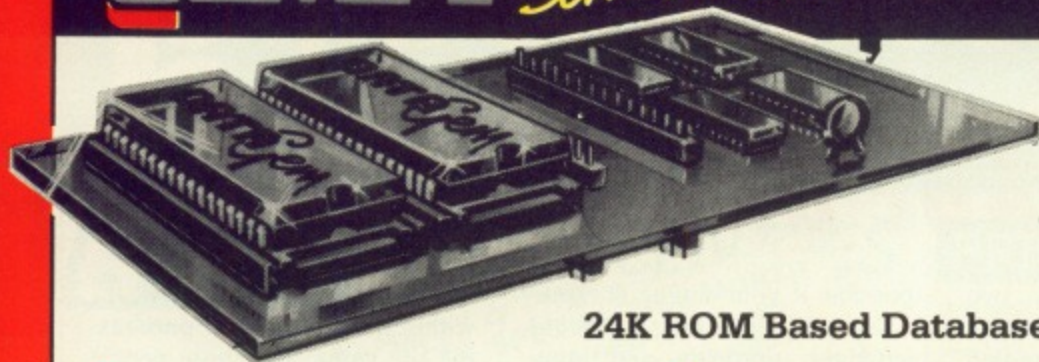

DATA GEM

R.0101
£129.95

24K ROM Based Database Management System for the BBC Micro

- 24K ROM Based Random Access Database with 184 page manual.
- Allows searches on any field or COMBINATION of fields to ANY depth.
- Up to 9 subsets of data INSTANTLY available and saved to disk automatically.
- Sorts alphabetical or Numeric on any field, ascending or descending with NO LIMIT on the depth of sort.
- Interfaces with 'VIEW' and 'WORDWISE'.
- Includes a completely flexible printing format.
- Allows the user to extend the file or add fields after having started to enter data.
- Allows up to 5100 User Definable Records with up to 62 fields per record and a maximum file size of 10 Megabytes.
- Permits just ONE file to exist over FOUR floppy disk drive surfaces.
- Offers a free format painted screen which scrolls 120 x 120, and supports extensive mathematics.
- Provides User defined field relational variables and multiple and single character wildcards.
- Exists self contained on ROM, and does not require additional utilities on disk.
- Finds the occurrence of a string or partial string in ANY field in the database with just one command.

- Price includes 40/80 Track Applications Demonstration Disk
- DFS Compatibility includes: - Acorn 0.9; Acorn 1.2 DNFS; Amcom B; Opus DDOS 3.12, 3.13, 3.14; Watford 1.0, 1.2, 1.4, DDOS; LVL DDOS; Acorn Winchester; S.J. Systems Econet/ Winchester (To Order). All other DFS'S conforming to Acorn System Protocol
- Press Comments:-
"Datagem provides many of the spreadsheet facilities of an item like Lotus 1-2-3..... Combined with a word-processor it forms the basis of a very competent small business system".
- Personal Computer News - July 1984

- "Datagem stands out in terms of both price and performance".
- Acorn User - December 1984.
- "As well as its sheer size, Datagem is also very well enclosed with features which make the setting up, searching and out-putting from a datafile easy and flexible".
- A & B Computing - December 1984



1. Continuous status messages.
2. Clear, informative menus.
3. Instant Calculators e.g. Age calculated from todays date automatic discounts and VAT calculators.....average exam results pupil/class etc.
4. Extensive Options.
5. Powerful search facilities to update any of the flexible subsets.

"Gemini have produced a superb product..... a superb example of the Programmer's Art!"
Integrated Accounting Suite... A & B Computing December 1984

Gemini Business Software BBC MICRO

INTEGRATED ACCOUNTING

Designed for the small to medium sized business user, where speed and efficiency are vital. Gemini Integrated programs are suitable for sole traders, partnerships or limited companies. All require a BBC B 32K microcomputer, and an Acorn printer. A double disk drive with an Acorn compatible DFS is required for integrated accounting purposes. A single disk drive may be sufficient where modules are used independently, although this is not recommended for the Sales Ledger and Invoicing module. The manuals indicate the system capabilities for various disk drive combinations.

Why Integrated Accounting?
Because it will retrieve information stored in one program for use by another and store data in one program which has been generated by another.



PRE-PRINTED...
Continuous Invoices, Statements, Remittance Advice and Paylips available.
Demo Disk (£5.00 refundable on the purchase of any module)

NO SECOND PROCESSOR REQUIRED

£99.95 per module

AVAILABLE FROM: -Most good software dealers... or phone Gemini for prompt despatch quoting your Access, Visa or American Express card number. Telephone (0395) 265165. Alternatively make your cheque or Postal Order payable to Gemini Marketing Ltd., and send to Gemini Marketing Ltd., Unit 21, Dismay Way Trading Estate, Exmouth, Devon EX8 4RS.


Please send urgently CASSETTE(S)/DISK(S) (please delete)

Prices stated include VAT and Post and Packing (UK only).

Name _____
Address _____
Signature _____
Credit Card No. Access/Visa/American Express _____

Gemini Educational Software BBC & ELECTRO MICROS

Written in the style of computer games to attract and hold juniors' attentions and enthusiasms. These entertaining and original programs are produced to the same high standards as other top Gemini Software and brilliantly use the computer to teach basic spelling, arithmetic, and telling the time.

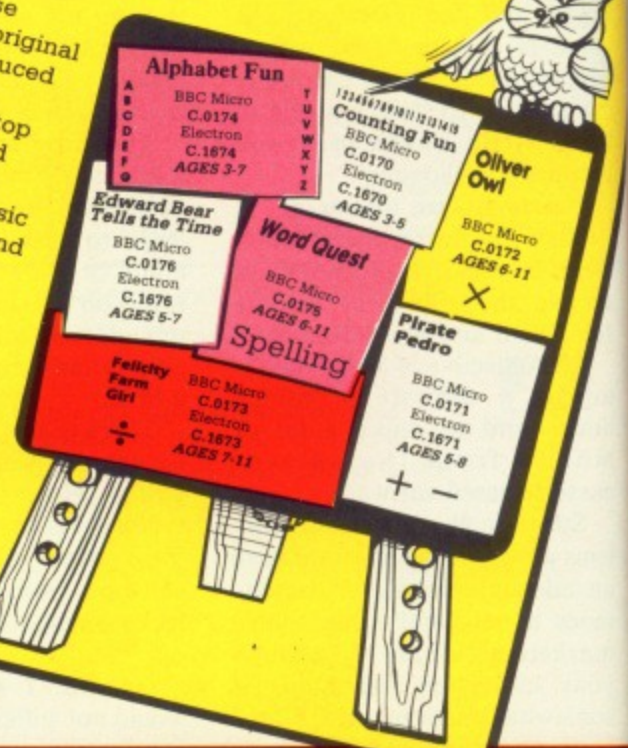

£7.95 each

SEE US ON STANDS 87-89 AT THE MICRO USER SHOW

Cashing in for tots

SOME programs arrive for review at just the right time and **Window Shopping** came just as I needed reinforcement work for some children in money manipulation.

I was doubly delighted to find the tape was also quite a good one with clear simple instructions explaining an equally clear and simple idea.

By "window shopping", a child can gain valuable practice in using money.

Buy Two and Buy Three show a series of nine objects, all drawn rather well with some cute animation. Each object is labelled with a price between 1p and 10p.

A sum of money is shown, and the child has to select which two or three objects will total that exact amount. They are easily selected with the spacebar moving the cursor around, and the Return key used to select an item.



A little tune plays if the items are correctly chosen, while an incorrect choice brings a request to try again.

Choose One appears in two levels with the idea being that the child has to decide which object to choose so that, for instance, three of them cost 24p.

This gives valuable practice in division or multiplication. The different levels have differing parameters, so that all tables from two to nine are practised.

Change One and Change Two deal with the change received from 20p or 50p. The amount of change is given, and the child has to decide which two

objects could then have been bought. This was quite challenging, and well worthwhile.

The same window display theme is shown throughout, although the objects themselves vary. Again, the child selects the items in the same manner so that minimum attention is needed from the teacher.

Another feature I enjoyed was that there was no time limit imposed which allowed a group of children to discuss when necessary, or perhaps to use plastic coins to try out their answers.

Sound can mercifully be turned off, Esc takes the program back to the menu, but unfortunately Break is not dealt with. Surely this should be standard policy in the classroom?

It isn't the best educational program I've seen, but a very creditable attempt from Tynesoft, a new house fronted by a primary school teacher.

It will certainly be used at appropriate times with my children and it could prove an enjoyable and entertaining way to learn at home. Children who learn by enjoying themselves tend to want to return to try again. My children seem to be keen enough.

Phil Tayler

Drawing comes easier

AT last in Paean Systems' **Micro Artist I** have come across a joystick driven drawing package that is simple to use and very versatile.

This program makes good use of Mode 2 and enables one to swiftly draw and save/load lots of items using the rubber banded, dotted/solid lines and the usual filled/unfilled figures – triangle/square/circle.

But this time the circle is a special – the routine supplied is for ellipses!

The cursor expands into a rectangle whose horizontal/vertical sides are related to movements of the joystick. The ellipse is drawn tangentially inside this rectangle. To draw a circle one manipulates the rectangle into a square.

However it is in the other routines that the fun occurs. On chaining the program one is presented with a nicely framed

QUICK RUNS

A first look at some of the latest releases

The Micro At Work (1): A two-program cassette pack aimed at the 9-13 age group coinciding with the ITV schools series. The first simulates the micro used by a travel agent and tour operator, with decisions to be made about planning and costs. *Air Traffic Control* allows the user to face a simulated emergency which necessitates landing a number of aircraft at diversion airports. (Granada TV)

★ ★ ★

The Micro At Work (2): Also aimed at the 9-13 age group, this alternative three-program cassette pack features *Robot*, a suite of four programs which allow the student to move a robot on screen; *Train*, four programs which simulate automated marshalling; and *Routes/Postman*, two closely-related programs introducing the pupil to the concept of simple routeing. (Granada TV)

★ ★ ★

Picture Logic: A logo-type package which, using everyday English commands, creates

a myriad of geometric patterns and pictures. In addition to the software, the package contains a 40-page *Challenge Book* to lead you through problems, and a 16-page *User Manual* to introduce you to the various commands. (Addison Wesley)

★ ★ ★

Quelle Tête or Kopfjäger: Separate French or German equivalents of the same package which are two program educational disc packs aimed at first and second year students. Both programs extend the user's vocabulary by graphic and amusing illustrations. *Quelle tête/Kopfjäger* invite you to choose facial features to practise adjectives, and then draw the result. *Jeu des ménages/Umziehen* allow the user to arrange furniture to practise spelling, gender and prepositions. (Cambridge)

★ ★ ★

Tesselations: A disc package which allows the user to draw tessellating shapes automatically providing symmetry in any of 17 possible symmetry groups. A full colour

palette encourages you to design your own tiles, and the micro will then tessellate the pattern and fit the tiles together. A library disc is also provided showing examples from Chinese, Islamic, Celtic and other cultures. (Cambridge)

★ ★ ★

Combat Lynx: In this battle simulation, you fly a Westland helicopter on a series of sorties in support of your ground forces. Select from a choice of anti-tank, anti-aircraft and strafing missiles, or carry cannon, machine guns, mines or personnel. You may scan the battlefield relief map for reports and then fly to the coordinates over a 3D colour landscape. (Durell)

★ ★ ★

Corpuscle: Journey into the 3D labyrinth of the human arterial system armed with your laser. Take control of your body defences in an attempt to defeat the invading colonies of bacteria. Survival is your objective in a never-ending struggle against disease in this real-time simulation. (Micrograf)

From Page 81

screen whose left and right sides are menus with colours, symbols or initials in boxes indicating the goodies on offer.

You merely place the cursor into the relevant box, pressing Fire to select a colour. After that it is off to the screen, pressing Fire when the right location is reached.

A well written user guide explains these items but they are so easily learned – even by me – that you only need it a couple of times.

There are a given number of pre-defined characters you can select and place around the screen or you can easily define your own, replacing those pre-defined ones not needed.

Text can be quickly and simply inserted and the size and proportions of the letters defined by the changeable rectangle cursor.

Very valuable are the rotate and reflect routines. The command is selected, an area is defined by use of the rectangular cursor and the point about which rotation or reflection takes place is defined.

An appropriate angle is typed in if needed and this area is reasonably faithfully duplicated as required in the same or different colours. The drawback here is the jaggy effect of sloping lines.

The only other drawback is that it comes on tape and uses sufficient memory to make it difficult to use with disc unless I make my Solidisk Sideways RAM supplement the DFS with its STLE00 program.

This means that for most users tape is the only input medium. This is always tedious to reload when a crash occurs – mind you, it is pretty impossible design any program that a five-thumbs like me will not somehow provoke into a fit of the sulks.

Terry Hallard

O level revision

ALGEBRA and Trigonometry are two cassettes from Cheshire Cat containing maths programs covering O Level revision.

Algebra is in three parts and

covers expansions, factorisation, equations, change of subject of formula, variation, indices, surds and fractions.

Each section is split into a number of topics. For instance on choosing equations, the user is given the choice of tuition and questions covering linear, quadratics and fractional equations. In fact a very wide range of topics is covered in each section.

The program is menu driven and one can step backwards or forwards through it – a useful facility when using the tuition sections.

The program first demonstrates how to solve a number of problems covering the chosen topic, then displays a self test to be worked out on paper. This is followed by the answers and if the user finds difficulty understanding how a solution was obtained the working can be displayed.

In the tuition mode, emphasis is given to important teaching points by displaying each new stage of the calculation in a flashing mode.

Trigonometry is designed in a similar way to that of Algebra except that graphics are used to give excellent examples of how various trigonometrical rules can be applied to real problems.

Topics covered by Trigonometry are basic trigonometry, angles of elevation and depression, solution of triangles, bearings, sine and cosine rules.

All the programs give excellent tuition and screen displays are well set out but rather monotonous. No use is made of contrasting background colours to emphasise teaching points and apart from using different background colours for tuition, question and answer modes, very little attempt is made to use the excellent colour facilities available on the BBC Micro.

As far as I could ascertain, answers were accurate and layout of calculations was shown in clear and easily understood stages. The programs contain very useful revision material and would be a boon to any student requiring self programming revision exercises or visual reminders of how particular problems are tackled.

However, my one big reservation is that there is no

provision for any alteration of data within the programs and because of this they may be of limited use in schools. Having said this, the complexity of the programs in respect of the tuition modes make changing data extremely difficult to allow for.

John Daddy

Polished miner



AFTER Ledgeman arrives home from the village auction, he decides to investigate his bargain of the day – a Victorian bureau. Dusting off the cobwebs, he finds a map telling of great treasure in a hidden cave. It also warns of the strange and perilous guardians of the cave.

Gripping his trusty broolly, Ledgie sets off... only to find himself in a Manic Miner variant.

However, as far as variations go, **Ledgeman**, by Software Projects is quite interesting. As the program adopts the usual multi-screen format, our hero has to jump around the screen picking up "precious stones" which are usually positioned in suitably awkward places.

The walkways can be solid or they might disintegrate as you walk on them. So far so good. But the difference is that there are periodic meteor storms that whizz across the screen and smash sections of the walkway.

So if you hang about too long on certain screens you're liable to have goodness knows what lobbed at you.

The graphics are simpler and

more chunky than the original, though this could well increase its appeal to younger "gamers". There are seven entirely different screens, after which the nasties get nastier by shooting at you.

The animation is good with a nice little man! Having said this, surely it's not too much to ask for a bit of leg movement during climbing and possibly jumping. The sound is quite clever – with an optional tune and effects.

As a game, its level is set about right. It's not too tricky – but the barrels, ghosties and meteors certainly keep you on your toes.

The instructions are adequate, though the actual blurb spends most of the time on the scenario.

Joysticks can be used, though the keyboard provides very comprehensive control – freeze, unfreeze, abort and skip to next level are examples.

To summarise, it's a simpler version of Manic Miner with polished graphics and sound effects.

Philip Tudor

Sharp shooters needed

A LOT of thought seems to have gone into the development of **Ultron**, a "shoot-'em-down" arcade game from Viper Software.

As you may guess from the name, someone has obviously decided to try for the ultimate Space Invaders game. A difficult task, but they haven't done too bad a job at all.

The music played while the game is loading is particularly striking. Viper have composed one of those catchy tunes that pound round your brain and won't go away.

The graphics are equally impressive and start as the instructions appear on screen.

Ultron isn't content with just four or five different waves of aliens. There are 12! Some are easy. Others, like the swarm of vibrating purple pods, are as easy to get past as a Liverpool nightclub bouncer with a tooth-

Here's value for musical money

ache.

If that isn't enough, after every fourth wave a swarm of asteroids appears on screen and has to be negotiated, after which you dock your laser base with a mother-ship for a nice points bonus.

Also you can't just sit there blasting away and trusting to luck. Every shot that misses counts as "photon wastage", and is measured on a scale at the bottom of the screen.

If this gets too high it's goodbye laser base, so a bit of sharp-shooting is called for.

The game also has all the extras you could want. Sound is good, and can be switched off if required. You can freeze-frame if you get in a tight corner, or if the phone rings.

The game has a demo mode to show you the type of aliens to expect and can be played by joystick, though the controls are so easy that it is simple to play using the computer keyboard.

My overall opinion? Well, not quite the ultimate, but very good. If you like shooting down swarms of marauding aliens, then buy it. You won't be disappointed.

James Bibby

Speedy 3D Maze

INDUSTRIAL espionage is the name of the game when playing *Maze* from Acornsoft. As a secret agent your mission is to penetrate the security system of a rival company and acquire valuable information.

The security system consists of a series of mazes, each on a different floor of a multi-storey building. The only route between these floors is via a computer-controlled lift.

The lift itself is easy enough to find as this is where you first enter the maze. Unfortunately it's deactivated as you leave – the only way it can be opened again is by using a special electronic security key.

To cut a long story short, the key is inside an indestructible box which can only be opened by placing three coloured security tags into the box – these tags being placed randomly around the maze.

As if this wasn't enough to cope with you will find that the

OF the packages on the market which turn the BBC Micro into a musical instrument, many are inferior to FSoft's *Music Maker*, and none that I know of can compete with it in value for money.

For £9 you get a smart program that gives you many of the facilities found on expensive synthesisers and you don't have to be Mozart or Mike Oldfield to get bags of fun out of it.

The package comes on cassette and is built round two modules: The Sound and The Player.

The Sound allows you to alter the volume and pitch of sound shapes which are displayed as graphs, with active areas highlighted for easy editing.

Using the amplitude graph you can regulate the four phases associated with volume output – attack, sustain, decay and release. The pitch graph shows frequency modulation, and by manipulating various step-

parameters you can produce vibrato, glissando, trills and other more exotic effects. Sixteen envelopes can be held in RAM for instant recall and groups of 16 saved on tape.

The sound shapes can be heard by playing up to three notes simultaneously on the BBC keyboard (it's worth mentioning that many synthesisers can only handle one note at a time).

The range is four octaves and eight keys are set aside for percussive noises. The BBC Micro's audio output gives adequate results, but they can be dramatically improved if your micro is linked to an external amplifier and speaker.

The second module, The Player, is a sequencer – a device for reproducing sequences of pre-set notes.

It offers all the playing and output facilities of The Sound, but also has a user-definable split keyboard, so that two different envelopes can be accessed by separate sets of keys.

Up to three lines of music can be recorded in real time and mistakes corrected if necessary with a Line Editor before saving to tape.

Sequences can be one-shot or repetitive and can be used in conjunction with a fairly versatile percussion generator.

The Player display consists of a status page and a pair of staves on which the notes appear as you play them. They scroll across the screen making fascinating patterns but serve little practical purpose.

Time values are limited to minims and crotchets, there are no flats or naturals and ledger lines are missing. However this shortcoming has to be set against some genuinely useful secondary functions, such as a metronome and a tuning facility.

The whole package is quite friendly. Commands are entered with various combinations of the function keys, labelled on the strip provided.

Error-trapping is efficient and on-screen messages are clear.

The comprehensive documentation takes you step by step through the program and the system tape contains a demonstration sequence and some ready-made envelopes to start you off.

Competition in the field of music software is certainly hotting up. *Music Maker* is on the crest of a new wave of increasingly powerful and well-designed packages which don't cost the earth.

Gabriel Jacobs

Doesn't really shape up

COLOURS and Shapes from 1A Business Computing is described as "an educational program for use as a logic extension activity". Overall the doubts this caused were not altogether misplaced.

The basic aim of it is to help 3 to 8 year olds with both colour and shape recognition and ordering different objects into logical arrangements.

There are five different levels of difficulty, the basic one being *Margin Colours*. On this level a four by four grid is displayed with four coloured squares to the left, corresponding to the row colours.

The micro puts four different coloured objects in correct rows on the grid. The user has to place the next coloured object – displayed at the bottom of the screen – on to the grid by entering the two digit number of the appropriate square.

All the other levels carry on from this. Level 2 is *Margin Colours and Shapes* in which a row of shapes is displayed below a grid so that each coloured shape has only one correct destination square.

In Level 3 – *Random Colours* – the user has to correctly identify the colour of each row to fill in the exterior colour squares.

Level 4 – *Geometric Shapes* – uses geometric shapes instead of the other shapes, and Level 5 – *Words, Colours and shapes* – is

Quality unsurpassed!

When you give your BBC computer a Pace disc drive, you give yourself much more.

**More time
More confidence
More flexibility
and more importantly,
Peace of mind.**

A quality disc drive from Pace will give you the freedom to use your BBC the way you want to use it. Why be dictated to by the speed of a "Data Recorder" when all your programs and data can be loaded and saved in less than a tenth of the time with discs. You will very quickly become dependent on your drive.

At Pace Microtechnology we realise just how important your drives will become so we build them to last. Each unit has a die-cast alloy chassis for rigidity and long-term stability. They use direct-drive brushless DC motors for accurate speed control and LSI technology for high reliability with low power consumption. The heads are long-life ceramic.

But the quality doesn't stop with the mechanism. The cases are functional yet attractive enamelled aluminium. Only the highest quality data cables are used and each drive is individually tested before and after building. Our after sales service is second-to-none.

Quite simply, what more could you want?


For further information call us on (0274) 729306 or write to

PACE

MICROTECHNOLOGY
A division of Pace Software Supplies Ltd

92 New Cross Street
Bradford
West Yorkshire
BD5 8BS
or contact your
local dealer, now

Overseas enquiries welcome
International Telephone +44274729306
Telex 51564

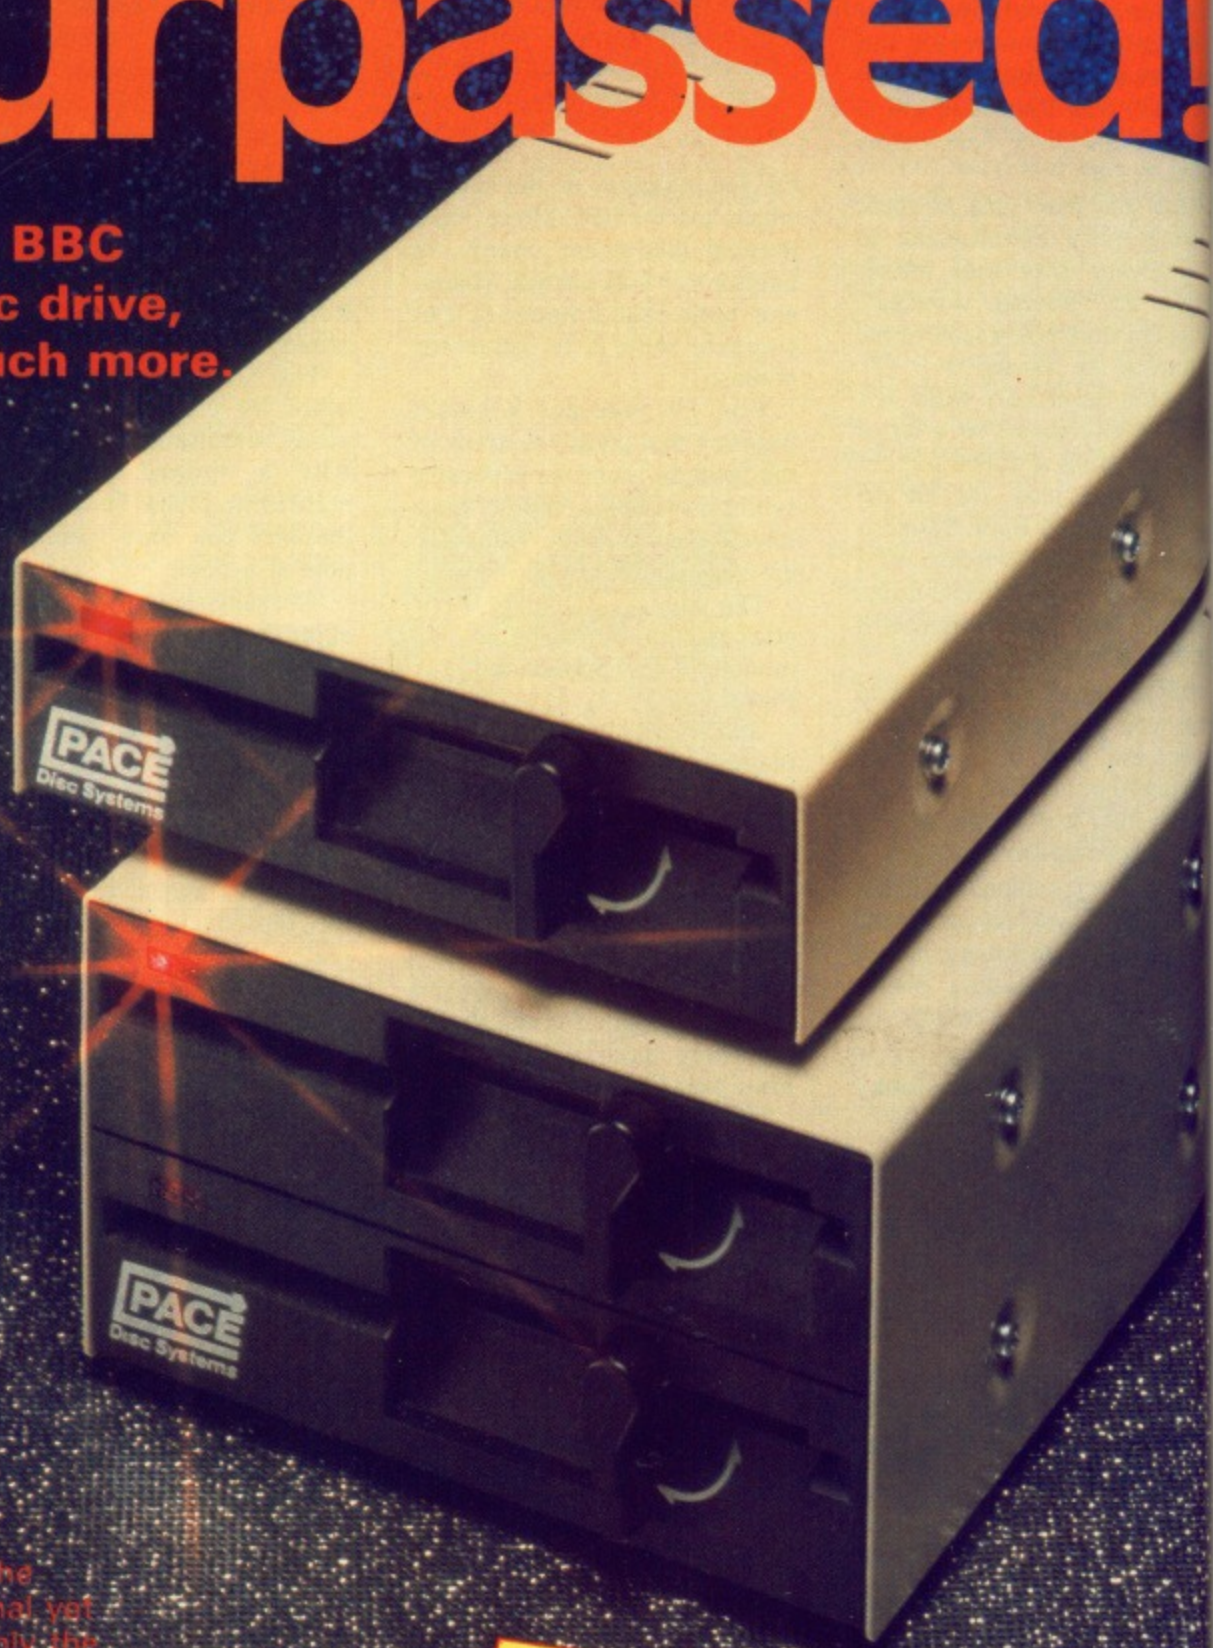

NEW Self-powered Pace drives
With the addition to our range of self-powered drives, we now have the largest range of drives available for the BBC.
Single drives
Dual drives
Single drives in dual cases (for simple upgrading)
Drives with power supplies
Drives which use the BBC auxilliary power socket
40/80 track switchable drives

From Page 83

the most hair-raising of all. The idea is that a question such as 'Which number square does the purple ladder go in?' is displayed, with the words 'purple ladder' or whatever, in the appropriate colour.

But this software writer has blue mixed up with purple, no doubt causing endless confusion to the innocent five-year-olds using the program.

Any child needing practice in this sort of area would probably be better equipped with a tray of plastic shapes and different coloured boxes, than being confronted with this rather unsatisfactory package.

Jane Jackson

Children's delight

BANJAX is an arcade adventure, from Robico Software, that contains some of the best Mode 1 graphics I have ever seen.

You are Banjax the bear and your task is to collect the treasure that lies scattered

around the game's 240 locations.

Along your way you will find various "nasties" who will kill you if they can.

Also you will find gargoyles, who will block but not harm you and guards who will not let you pass until you have found enough treasure.

Some of the nasties can be avoided, but others effectively block your progress. Since all but the positioning of the guards is random, these last can be overcome by moving to another screen and then back again until the way is clear.

You have four lives and pressing the Return key "memorises" locations, so that if you are killed you are reincarnated to these locations rather than back to the beginning of the game.

Your explorations of the game should see you collect all the treasure (remember to find something to put it in!), then head for the temple in the upper screens. Here you will find a key that opens the gates you start the game at.

A definite must for the kids that I recommend highly.

Paul Gardner

Take the hot seat

BBC Mastermind is an excellently packaged set which contains two cassettes and a fairly good booklet, and is compatible with both the Electron and the BBC Micros.

As the title obviously implies, it is an implementation of the BBC TV series which people either seem to love or to hate. Even if you are one of the latter, I've started this review so I'll finish...

The awful theme is there, as are the famous words which introduce each competitor. A specialist subject is asked for, which is fine so long as you are into either sport and games or TV and films!

Otherwise it is necessary to buy another cassette - BBC Mastermind Quizmaster - which will allow a series of questions on another specialist subject to be written and stored for future use.

A problem would appear to be that the question files couldn't



really be considered to be very fair, as they are bound to differ in length, complexity and difficulty. Maybe that wouldn't matter too much if the competitive element wasn't important, such as at a friendly party, but then I would be inclined to use one of the other excellent quizzes produced by Ivan Berg, such as the superb Royal Quiz.

The other option is to wait for the promised question files to be released, which will presumably widen the range of subjects available.

However, returning to the cassettes as they are at present, the implementation is quite superb. It remains very faithful to the original and you can almost imagine Magnus speaking the words that appear on screen.

Phil Taylor

The Micro User Index of software reviews, 1984/5

3 Deep Space (Postern)	Feb 1984	Dbasebeeb (Carrera)	June 1984	Jet Boot Jack (English)	Feb 1985	Printer Monitor (Watford)	Mar 1984
3D Bomb Alley (Software Invasion)	Jan 1984	Delivery (Pagan Systems)	Apr 1984	Jigsaw (ega beva)	May 1984	Reading Music (Childsplay)	June 1984
3D Grand Prix (Software Invasion)	Jan 1985	Denis thro' Drinking Glass		Jump Challenge (Martech)	Feb 1985	Read Right Away (Highlight)	Mar 1985
Acheton (Acornsoft)	Apr 1985	(Applications)	Nov 1984	Key Definer/Char Gen (Gsoft)	Sep 1984	Renegade Robots (Senator)	Nov 1984
Aid (Lincoln)	Jan 1984	Developing Cities (Nelson CAL)	Jan 1985	Know your own Personality		Return to Eden (Level 9)	Mar 1985
Airlift (Superior)	May 1985	Digger (Visions)	Oct 1984	(Mirrorsoft)	May 1985	Rhythm and Pitch (Chalksoft)	Apr 1985
Angle (Chalksoft)	June 1984	Disc Executor (Vision Software)	Jan 1984	Know your own Psi-Q (Mirrorsoft)	May 1985	Round Up (Tynesoft)	May 1985
Answer Back (Kosmos)	July 1984	Duck (Firebird)	Feb 1985	Kon-tiki (Golem)	May 1985	Rubble Trouble (Micropower)	Sep 1984
Arena 3000 (Microdeal)	Jan 1985	Dune Rider (Micro Power)	Mar 1985	Laser Reflex (Talent)	Dec 1984	Ruin (Notts CC)	Jan 1985
Art Designer (Pica)	Jan 1985	Eagle's Wing (Software Invasion)	Oct 1984	Lemming Syndrome (Dynabyte)	June 1984	Sadim Castle (MPI)	Apr 1985
Artist (MRM)	Dec 1984	Easy Crasher (Salamander)	May 1984	Let's Count (Ask)	Jan 1984	SAS Commander (Comsoft)	Apr 1985
Artsystematic (Technation)	May 1985	Elite (Acornsoft)	Nov 1984	Lift off with numbers (Shiva)	Aug 1984	Savage Pond (Starcade)	Nov 1984
Attack on the Somme		English Civil War (Redshift)	Apr 1985	Lines and Angles (4mat)	Aug 1984	Screen Dump (DACC)	Mar 1984
(Tressell Publications)	Jan 1985	Er-Bert (Microbyte)	May 1985	Look Sharp (Mirrorsoft)	Mar 1985	Screwball (MRM)	Nov 1984
Aviator (Acornsoft)	June 1984	Escape from Moonbase Alpha		Love and Marriage		Sea Adventure (Virgin)	Nov 1984
BBC Micro Utilities (Shiva)	Apr 1985	(Program Power)	Apr 1984	(Acornsoft/Ivanberg Software)	May 1984	Sea Cliff Erosion (Cambridge)	Mar 1985
B8type (Furey Enterprises)	Nov 1984	European Knowledge		Lords of Time (Level 9)	May 1984	Sea Lord (Bug-Byte)	Apr 1984
Beebshop (Alpha Computer School)	Nov 1984	(Micropower)	Jan 1985	Lost in Space (Salamander)	July 1984	Share Analyser (Synergy)	Jan 1985
BelBase (Beltech)	Apr 1985	Evil Dead (Palace)	Feb 1985	Lunar Rescue (Alligata)	Dec 1984	Shrinking Professor (A & F Software)	Apr 1984
Beta Base (Clare)	Sep 1984	Eye (Longman)	Aug 1984	Machine Code Tutor		Sinbad (Virgin)	Jan 1985
Biology (Silverlind)	Nov 1984	Facemaker (Ask)	Jan 1984	(New Generation)	Oct 1984	Smash & Grab (Superior)	Dec 1984
Birds of Prey (Romik)	Dec 1984	Fall of Rome (ASP)	Oct 1984	Making Ends Meet (Cambridge)	Apr 1985	Snowball (Level 9)	Feb 1984
Bird Strike (Firebird)	Mar 1985	Felix meets Evil Weevils		Man (Chalksoft)	June 1984	Spaceman Sid (English Software)	Jan 1985
BMX on the Moon (Superior)	Jan 1985	(Micro Power)	Mar 1985	Map Skills (Cambridge)	Dec 1984	Space Pilot (Superior)	Apr 1985
Boris in the Underworld		Five spheres of Goliath (Kansas)	Sep 1984	Marklist (Optima Software)	Apr 1984	Spellcheck (Beebugsoft)	Nov 1984
(Superior Software)	Oct 1984	Fletchers Castle (Fernleaf)	Oct 1984	Mary Rose (Ginn)	Jan 1984	Sphinx Adventure (Acornsoft)	Jan 1984
Bouncing Bill (Dak)	Dec 1984	Flints Gold (Micrograf)	Aug 1984	Mental Arith Tests (Small Schools)	Nov 1984	Spooks and Spiders (Software Inv)	Sep 1984
Bridge to the East (Ixon)	Mar 1984	Fmion (Fsoft)	Dec 1984	Missile Base (Acornsoft)	Apr 1984	Sprites 2 (Simonssoft)	Sep 1984
Bugblaster (Alligata)	Dec 1984	Fortress (Amcom)	June 1984	Mr Ee (Micropower)	May 1985	Starmaze (Software Invasion)	Mar 1985
Business Games (Acornsoft)	Mar 1984	Frak (Aardvark)	Oct 1984	Mr Whiz (Superior)	Nov 1984	Star Warp (Superior)	May 1985
Business Software (Acornsoft)	Apr 1985	Frac Attack (Shards)	Feb 1985	Multibase (G Soft)	Oct 1984	Stock Car (Micropower)	Sep 1984
Cash Book/Final Accounts (Gemini)	Oct 1984	Franklin's Tomb (Salamander)	May 1984	Music Tutor (Garland)	Oct 1984	Superfruit (Simonssoft)	Aug 1984
Castaway (Simonssoft)	Oct 1984	French Revision (Dean Assoc)	May 1985	Mystery of Java Star (Shards)	Nov 1984	Supergolff (Squirrel)	Mar 1984
Castle Assault (MRM)	Sep 1984	Frenzy (Micropower)	Nov 1984	Nightmare Maze (MRM)	Dec 1984	Swag (Micropower)	Jan 1985
Castle of Riddles (Acornsoft)	Jan 1984	Fruity Freddy (Softspot)	July 1984	Number Chaser (Applied Systems)	Nov 1984	Swordmaster (Acorn User)	Nov 1984
Chickaroo (Screenplay)	May 1984	Fun to Learn (Shard's Software)	May 1984	Number Puzzler (Ask)	Jan 1984	Tarzan (Alligata)	Dec 1984
Circus (Digital Fantasia)	Jan 1984	Galaxy Raiders (Visions)	Dec 1984	Oblivion (Bug-Byte)	Apr 1984	Tench (French (Sulis)	Sep 1984
Colossal Cave (Level 9)	Feb 1984	Garden Plant Selector		Old Father Time (Bug Byte)	Jan 1984	Text Editor (G Soft)	Oct 1984
Community (Ixon)	Mar 1984	(Cambridge App. Tech)	Mar 1985	One Disc Home Office (Dr. Soft)	July 1984	The Grange (Dobsoft)	Jan 1984
Comps, Info, and Awareness		Gate Crasher (Quicksilva)	Dec 1984	Omega Probe (Optima Software)	May 1984	The Lair (Utopia)	Nov 1984
(Pitmansoft)	May 1985	Ghouls (Program Power)	May 1984	Osprey (Bourne)	Dec 1984	The Synth (Musicsoft)	Aug 1984
Cosmic Kidnap		Graph Easy (Hama)	Dec 1984	Paintbox (Oakleaf)	Mar 1984	Toolbox (BBC Soft)	Mar 1984
(Superior Software)	June 1984	Heist (Softspot)	Aug 1984	Painting by Numbers (ASK)	Apr 1985	Tourism (Nelson Cal)	Jan 1985
Count with Oliver (Mirrorsoft)	Feb 1985	Hide & Seek (Applied Systems)	Nov 1984	Peeko-Computer (Acornsoft)	Feb 1984	Transistors Revenge (Softspot)	June 1984
County (SM) (Bryants)	Mar 1984	Hide & Seek (Ask)	Jan 1984	Pengo (H Soft)	Feb 1984	Uncle Claude (Alligata)	Nov 1984
Cylon Attack (A & F Software)	Feb 1984	Hobbit (Melbourne House)	June 1984	Philosopher's Quest (Acornsoft)	Jan 1984	Valley of the Kings (MP)	Apr 1985
Dambusters (Alligata)	Oct 1984	Home/Business Pack (Gemini)	June 1984	Pimania (Automata)	Mar 1984	Vampire Castle (Micrograf)	Aug 1984
Das Schloss (Chalksoft)	Feb 1985	Horror Castle (A & F Software)	May 1984	Plutonium Plunder (Micro Power)	Mar 1985	Vectors (Salamander)	Dec 1984
Datagem (Gemini)	May 1985	Horselord (Century)	Feb 1985	Plunder (CCS Strategy)	Nov 1984	Vortex (Software Invasion)	Sep 1984
Data Structure Demo		Hunchback (Superior Software)	May 1984	Pole Position (Atarisoft)	April 1985	Wallaby (Superior)	Dec 1984
(DP Publications)	Jan 1985	Into the Unknown		Practice and Play		Winged Warriors (Superior)	Feb 1985
Datext (Optima)	Jan 1984	(Tressell Publications)	Jan 1985	(Special Business)	Nov 1984	Workshop (Acornsoft)	Apr 1985



an
ab
wi
ac

va
sp
th

Yo
fo
pu
yo
an

m
yo
us
sh
li
W

N
n
S

M

Nice Password. Shame about the Identity.

It's a unique combination.

Your Special Identity Number and Personal Password. The valuable key to huge databases teeming with activity, set on our Mainframes across the nation.

On Micronet 800, you're a valued individual, adding your own special flavour and personality to the database.

Take our exciting new "Gallery" - You control your personal screens for all to see. The intriguing "Chatline" public conversation service gives you freedom to express your views and meet some remarkable people.

All part of a tremendous Communications section that networks you to 50,000 Micronet and Prestel users across the country. Try Tele-shopping, or interview celebrities live on "Celebrity Chatline" every Wednesday night.

And there's FREE (& instant) National Electronic Mail, plus International Telex, and the Contact and SwapShop bulletin boards.

Get computer news first on Micronet's daily (and controversial)

"Newsflashes" and read up on the latest reviews and courses. Feast from our regularly changing menu of programs to download straight into your micro - absolutely free.

You also get access to Educational Computing's "School Link" and Prestel's huge 300,000 page database, including world news, business & share bulletins and optional homebanking. For only £16.50 per quarter, that's less than the price of a daily paper!

Micronet is unique amongst networks and bulletin boards as it keeps your phone costs very low with

special local* rate calls whenever you connect up - that's around 40p for a whole hours entertainment each evening.

The only accessory you need is a Modem, to get the best value for money around in micro communications.

Fill in the coupon for the full facts and send to Micronet 800, 8 Herbal Hill, London EC1R 5EJ. But be warned, Micronet 800 is a 'living' service with ever-expanding features. So maybe you'd be better to call in at your local Micronet 800 Action Station. There are thousands of Micronetters waiting to meet you!



To: MICRONET 800, Durrant House, 8 Herbal Hill,
London EC1R 5EJ. Telephone 01-278 3143.
Please send me the full facts about Micronet 800.

Name _____

Make/Model of Micro _____

Address _____

Telephone _____

MU6

* For 98% of telephone users.
Prestel is a trademark of British Telecommunications plc.
On Prestel

See Micronet 800 in action!

See Micronet at John Lewis, main Boots, Laskys or your local computer store.

AVON
Bath. Boots, 1 Marchants Passage, Southgate. Tel: 0225 64402.
Bristol. Avon Computer Rentals, 16 West Street, Old Market. Tel: 0272 550600.
Bristol. Boots, 59 Broadmead. Tel: 0272 293631.
Bristol. Laskys, 16-20 Penn Street. Tel: 0272 20421.
Clevedon. Computer Centre, 12A Old Street, Clevedon. Tel: 0272 879514.

BEDFORDSHIRE
Bedford. Boots, The Harpur Centre, Harpur Street. Tel: 0234 56231.
Luton. Datasine, Delaport House, 57 Guildford Street. Tel: 0582 455860.

BERKSHIRE
Slough. MV Games, 245 High Street. Tel: 75 21594.

BUCKINGHAMSHIRE
Bletchley. RAMS Computer Centre, 117 Queensway. Tel: 0908 647744.
Chesham. Reed Photo & Computers, 113 High Street. Tel: 0494 783373.

CAMBRIDGESHIRE
Cambridge. Boots, 65-67 Sidney Street and 28 Petty Curry Street. Tel: 0223 350213.
Cambridge. Cambridge Computer Store, 4 Emmanuel Street. Tel: 0223 358264.

Peterborough. Logic Sales, Unit 6, Midgate Parade, Peterborough. Tel: 0733 49696.
Peterborough. Boots, 40-42 Bridge Street, Queensgate. Tel: 0733 65352.

CHEESHIRE
Chester. Boots, 47-55 Foregate Street. Tel: 0244 28421.
Chester. Computer Link, 21 St. Werburgh Street. Tel: 0244 316516.
Crewe. Midshires Computer Centre, 68-78 Nantwich Road. Tel: 0270 211086.

Hyde. C Tech Computers, 184 Market Street. Tel: 061-366 8223.
Macclesfield. Camera Computer Centre, 118 Mill Street. Tel: 0625 27468.

Macclesfield. Computer Centre, 68 Chestergate. Tel: 0625 618827.
Marple. Marple Computer Centre, 106 Church Lane. Tel: 061-447 9933.

CLEVELAND
Darlington. Darlington Computer Shop, 75 Bondgate. Tel: 0325 487478.
Middlesbrough. Boots, 88-90 Linthorpe Road, The Cleveland Centre. Tel: 0642 249616.

CUMBRIA
Kendal. The Kendal Computer Centre, Stramontgate. Tel: 0539 22559.
Penrith. Penrith Communications, 14 Castlegate. Tel: 0768 67146.
Whitehaven. P D Hendren, 15 King Street. Tel: 0946 2063.
Workington. Technology Store, 12 Finkle Street. Tel: 0900 66972.

DERBYSHIRE
Alfreton. Gordon Harwood, 67-71 High Street. Tel: 0733 832078.
Chesterfield. Boots, 35-37 Low Pavement, Market Place. Tel: 0246 203591.
Chesterfield. Computer Stores, 14 Stephenson Place. Tel: 0246 208802.
Derby. Boots, 1 Devonshire Walk. Tel: 0332 45886.

DEVON
Exeter. Boots, 251 High Street. Tel: 0392 32244.
Exeter. Open Channel, Central Station, Queen Street. Tel: 0392 218187.
Paignton. Computer Systems Ltd, 35 Hyde Road. Tel: 0803 524284.
Plymouth. Syntax, 76 Cornwall Street. Tel: 0752 28705.
Seaton. Curtis Computer Services, Seaton Computer Shop, 51c Harbour Road. Tel: 0297 22347.
Tiverton. Actron Microcomputers, 37 Bampton Street. Tel: 0884 252854.

DORSET
Bournemouth. Lansdowne Computer Centre, 1 Lansdowne Crescent, Lansdowne. Tel: 0202 290165.
Dorchester. The Paper Shop, Kings Road. Tel: 0305 64564.
Poole. Lansdowne Computer Centre, 14 Arndale Centre. Tel: 0202 670901.

ESSEX
Basildon. Basildon Software Centre, 78-80 Liberty Shopping Hall, East Square. Tel: 0268 27922.
Braintree. Mirage Microcomputers Ltd, 24 Bank Street. Tel: 0376 48321.
Chelmsford. Maxton Hayman, 5 Bromfield Road. Tel: 0245 354595.
Chelmsford. Way In Computers, 7 Village Square. Tel: 0245 467858.
Colchester. Boots, 5-6 Lion Walk. Tel: 0206 577303.

Colchester. Colchester Computer Centre, 3a Short Wyre Street. Tel: 0206 47242.
Grays. H. Reynolds, 28a Southend Road. Tel: 0375 31641.
Harlow. Harlow Computer Centre, 17 Staple Tye. Tel: 0279 22846.

Hornchurch. Comptel Computer Systems, 112a North Street. Tel: 0402 446741.
Ilford. Boots, 177-185 High Road. Tel: 01-553 2116.
Romford. Software Plus, 72 North Street. Tel: 70 65271.

Southend-on-Sea. Computarama, 88 London Road. Tel: 0702 335443.
Southend-on-Sea. Computer Centre, 336 London Road. Tel: 0702 337161.
Southend-on-Sea. Estuary Personal Computers, 318 Chartwell North, Victoria Circus Shopping Centre. Tel: 0702 614131.

GLOUCESTER
Cheltenham. Laskys, 206 High Street. Tel: 0242 570282.
Cheltenham. Screen Scene, 144 St. Georges Road. Tel: 0242 528979.
Gloucester. Boots, 38-46 Eastgate Street. Tel: 0452 423501.

HAMPSHIRE
Basingstoke. Fishers, 2-3 Market Place. Tel: 0256 22079.
Petersfield. Poly Micros, 45 Chapel Street. Tel: 0730 66841.
Portsmouth. Micro Choice, 159 Havant Road, Drayton. Tel: 0705 327591.

Portsmouth. RDS Electrical, 157-161 Kingston Road. Tel: 0705 812478.
Southampton. Business Electronics, Micromagic At Atkins, 7 Civic Centre Road. Tel: 0703 25903.
Waterloo. GB Microland, 7 Queens Parade, London Road. Tel: 0705 259911.

HERTFORD
Potters Bar. The Computer Shop, 107 High Street. Tel: 0707 44417.
Stevenage. DJ Computers, 11 Town Square. Tel: 0438 65501.
Watford. SRS Microsystems, 94 The Parade, High Street. Tel: 0923 26602.
Welwyn Garden City. DJ Computers, 40 Fretherne Road. Tel: 0707 32844.

HUMBERSIDE
Beverley. Computing World, 10 Swabys Yard, Dyer Lane. Tel: 0482 881831.

KENT
Ashford. DGH, 10 North Street. Tel: 0233 32597.
Ashford. Geerings of Ashford, 80 High Street. Tel: 0233 33366.
Bromley. Boots, 148-154 High Street. Tel: 01-460 6688.
Bromley. Computers Today, 31 Market Square.
Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre. Tel: 0634 405471.
Gravesend. Gravesend Home Computers, 39 The Terrace. Tel: 0474 23871.
Gillingham. Regal Software Supplies, 49 High Street. Tel: 0634 579634.

Maidstone. Boots, 56-62 King Street. Tel: 0622 53912.
Maidstone. Kent Micros, 51 Union Street. Tel: 0622 52784.
Rainham. Microway Computers, 39 High Street. Tel: 0634 376702.
Sevenoaks. Ernest Fielder Computers, Dorset Street. Tel: 0732 456800.
Shortlands. The Village House of Computers, 87 Beckenham Lane. Tel: 01-460 7122.
Sittingbourne. Computer Plus, 65 High Street. Tel: 0795 25677.
Tunbridge Wells. Modata Computer Centre, 28-30 St. Johns Road. Tel: 0892 41555.

LANCASHIRE
Blackpool. Blackpool Computers Store, 179 Church Street. Tel: 0253 20239.
Burnley. IMO Business Systems, 39-43 Standish Street. Tel: 0942 44382.

PRESTON. 4Mat Computing, 67 Friargate. Tel: 0772 561952.
Prieston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 59264.
Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.

LEICESTERSHIRE
Leicester. Boots, 30-36 Gallowtree Gate. Tel: 0533 21641.
Market Harborough. Harborough Home Computers, 7 Church Street. Tel: 0858 63056.

LONDON
W1. Computers of Wignore Street, 104 Wignore Street. Tel: 01-486 0373.
W1. Laskys, 42 Tottenham Court Road. Tel: 01-636 0845.

W1. Lion House, 227 Tottenham Court Road. Tel: 01-637 1601.
W1. Sonic Foto Micro Center, 256 Tottenham Court Road. Tel: 01-580 5826.
W1. Tomorrows World Today, 27 Oxford Street. Tel: 01-439 7799.

W1. Walters Computers, DH Evans, Oxford Street. Tel: 01-629 8800.
WC1. Transam Micro Systems, 59-61 Theobalds Road. Tel: 01-405 5240.
W5. Laskys, 18-19 Faling Broadway Shopping Centre. Tel: 01-567 4717.

W8. Walters Computers, Barkers, Kensington High Street. Tel: 01-937 5432.
SE7. Vic Oddsens Micros, 5 London Bridge Walk. Tel: 01-403 1988.
SE9. Square Deal, 373-375 Footscray Road, New Eltham. Tel: 01-859 1516.

SE15. Castlehurst Ltd, 152 Rye Lane, Peckham. Tel: 01-639 2205.
EC2. Devron Computer Centre, 155 Moorgate. Tel: 01-638 3339.
N14. Logic Sales, 19 The Bourne, The Broadway, Southgate. Tel: 01-882 4942.

N22. Boots, 38-40 High Road, Wood Green. Tel: 01-881 0101.
NW3. Mavcraft Micros, 58 Rosslyn Hill, Hampstead. Tel: 01-431 1300.
NW4. Davinci Computer Store, 112 Brent Street, Hendon. Tel: 01-202 2272.

NW7. Computers Inc, 86 Golders Green. Tel: 01-209 0401.
NW10. Technomatic, 17 Burnley Road, Wembley. Tel: 01-208 1177.

MANCHESTER
Bolton. Computer World UK Ltd, 208 Chorley Old Road. Tel: 0204 494304.
Manchester. Boots, 32 Market Street. Tel: 061-832 6533.

Manchester. Laskys, 12-14 St. Marys Gate. Tel: 061-833 0268.
Manchester. Mighty Micro, Sherwood Centre, 268 Wilmslow Road, Fallowfield. Tel: 061-224 8117.
Manchester. NSC Computer Shops, 29 Hanging Ditch. Tel: 061-832 2269.

Manchester. Walters Computers, Kendal Milne, Deansgate. Tel: 061-832 3414.
Oldham. Home & Business Computers, 54 Yorkshire Street. Tel: 061-633 1608.
Swinton. Mr Micro, 69 Partington Lane. Tel: 061-728 2282.

MERSEYSIDE
Heswall. Thornguard Computer Systems, 46 Pensa Road. Tel: 051-342 7516.
Liverpool. Hargreaves, 31-37 Warbreck Moor, Walton. Tel: 051-525 1782.

St. Helens. Microman Computers, Rainford Industrial Estate, Mill Lane Rainford. Tel: 0744 885242.
Southport. Central Studios, 38 Eastbank Street. Tel: 0704 31881.

MIDDLESEX
Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627.
Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098.
Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156.

Southall. Twillstar Computers Ltd, 7 Regina Road. Tel: 01-574 5271.
Teddington. Andrews, Broad Street. Tel: 01-997 4716.
Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896.

UXBRIDGE. JKL Computers, 7 Windsor Street. Tel: 0895 51815.
NORFOLK
Norwich. Adams, 125-129 King Street. Tel: 0603 22129.
Thetford. Thetford CB & Micros, 21 Guildhall Street. Tel: 0842 61645.

NOTTINGHAMSHIRE
Newark. Jacobs Computers, 13 Middle Gate. Tel: 0636 72594.
Nottingham. Telstar, 280 Huntingdon Street. Tel: 0602 505585.
Sutton in Ashfield. HN & I. Fisher, 87 Outram Street. Tel: 0623 54734.

Worksop. Computer Grafix, 32 Bridge Street. Tel: 0909 472248.

OXFORDSHIRE
Abingdon. Ivor Fields Computers, 21 Stern Street. Tel: 0235 21207.
Banbury. Computer Plus, 2 Church Lane. Tel: 0295 55890.

Oxford. Absolute Sound & Video, 19 Old High Street, Headington. Tel: 0865 65661.
Oxford. Science Studio, 7 Little Clarendon Street. Tel: 0865 54022.

SCOTLAND
Aberdeen. Boots, 133-141 Union Street. Tel: 0224 585349.
Edinburgh. Boots, 101-103 Princes Street. Tel: 031-225 8331.

Glasgow. Boots, 200 Sauchiehall Street. Tel: 041-332 1925.
Glasgow. Boots, Union Street and Argyle Street. Tel: 041-248 7387.
Glasgow. Tom Dixon Cameras, 15-17 Queen Street. Tel: 041-204 0826.

SHROPSHIRE
Shrewsbury. Clairmont Enterprises, Hills Lane. Tel: 3647 52949.
Shrewsbury. Computarama, 13 Castlegate. Tel: 0743 60528.

Telford. Computer Village Ltd, 2 3 Hazeldine House, Central Square. Tel: 0952 506771.
Telford. Telford Electronics, 38 Mall 4. Tel: 0952 504911.

STAFFORDSHIRE
Newcastle-under-Lyme. Computer Cabin, 24 The Parade, Silverdale. Tel: 0782 636911.
Stafford. Computarama, 59 Foregate Street. Tel: 0785 41899.

Stoke-on-Trent. Computarama, 11 Market Square Arcade, Hanley. Tel: 0782 268524.

SUFFOLK
Bury St. Edmunds. Boots, 11-13 Cornhill. Tel: 0284 701516.
Bury St. Edmunds. Suffolk Computer Centre, 1-3 Garland Street. Tel: 0284 705503.

SURREY
Bagshot. P & H Electronics, 22-24 Guildford Road. Tel: 0276 73078.
Croydon. Laskys, 77-81 North End. Tel: 01-681 8443.

Croydon. The Vision Store, 53-59 High Street. Tel: 01-686 6362.
Croydon. The Vision Store, 96-98 North End. Tel: 01-681 7539.
South Croydon. Concise Computer Consultants, 1 Carlton Road. Tel: 01-681 6842.

Epsom. The Micro Workshop, 12 Station Approach. Tel: 0372 721533.
Guildford. Walters Computers, Army & Navy, 105-111 High Street. Tel: 0483 68171.

Wallington. Surrey Micro Systems, 53 Woodcote Road. Tel: 01-647 5636.
Woking. Harpers, 71-73 Commercial Way. Tel: 0486 225657.

SUSSEX
Bexhill-on-Sea. Computerware, 22 St. Leonards Road. Tel: 0424 223340.
Brighton. Boots, 129 North Street. Tel: 0273 27088.

Brighton. Gamer, 71 East Street. Tel: 0273 728681.
Brighton. Laskys, 151-152 Western Road. Tel: 0273 725625.
Crawley. Gatwick Computers, 62 The Boulevard. Tel: 0293 37842.
Crawley. Laskys, 6-8 Queensway. Tel: 0293 544622.

Eastbourne. Boots, 15 Eastbourne Arndale Centre. Tel: 03232 7742.

TYNE & WEAR
Newcastle-upon-Tyne. Boots, Eldon Square. Tel: 0632 329844.
Newcastle-upon-Tyne. Laskys, 6 Northumberland Street. Tel: 0632 617224.
Newcastle-upon-Tyne. RE Computing, 12 Jesmond Road. Tel: 0632 815580.

WALES
Aberdare. Inkey Computer Services, 70 Mill Street, The Square, Trecynon. Tel: 0685 881828.
Aberystwyth. Aberdata at Galloways, 23 Pier Street. Tel: 0970 615522.
Cardiff. Boots, 26 Queens Street & 105 Frederick Street. Tel: 0222 31291.

Cardiff. Randall Cox, 18/22 High Street Arcade. Tel: 0222 397162.
Mold. Clwyd Personal Computers, Unit 19, Daniel Owen Precinct. Tel: 0352 56842.

Newport. Gwent Computers, 92 Chepstow Road. Tel: 0633 841760.
Swansea. Boots, 17 St. Marys Arcade, The Quadrant Shopping Centre. Tel: 0792 43461.
Swansea. The Microstore, 35-36 Singleton Street. Tel: 0792 467980.

WARWICKSHIRE
Coventry. Coventry Micro Centre, 33 Far Gosford Street. Tel: 0203 58942.
Coventry. Impulse Computer World, 60 Hertford Street Precinct. Tel: 0203 553701.

Coventry. JBC Micro Services, 20 Earlsdon Avenue, North Earlsdon. Tel: 0203 73813.
Coventry. Laskys, Lower Precinct. Tel: 0203 27712.

Leamington Spa. IC Computers, 43 Russell Street. Tel: 0926 36244.
Leamington Spa. Leamington Hobby Centre, 121 Regent Street. Tel: 0926 29211.

Nuneaton. Micro City, 1a Queens Road. Tel: 0203 382049.
Rugby. O.E.M., 9-11 Regent Street. Tel: 0788 70522.

WEST MIDLANDS
Birmingham. Boots, City Centre House, 16-17 New Street. Tel: 021-643 7582.
Birmingham. Laskys, 19-21 Corporation Street. Tel: 021-632 6303.

Dudley. Central Computers, 35 Churchill Precinct. Tel: 0384 238169.
Stourbridge. Walters Computer Systems, 12 Hagley Road. Tel: 0384 370811.


Walsall. New Horizon, 1 Goodall Street. Tel: 0922 24821.
West Bromwich. DS Peakman, 7 Queens Square. Tel: 021-525 7910.

YORKSHIRE
Bradford. Boots, 11 Darley Street. Tel: 0274 390891.
Leeds. Boots, 19 Albion Arcade, Bond Street Centre. Tel: 0532 33551.

Sheffield. Laskys, 58 Leopold Street. Tel: 0742 750971.
York. York Computer Centre, 7 Stonegate Arcade. Tel: 0904 641862.

Phone 01-278 3143 for your free information pack now!

Micronet 800, 8 Herbal Hill, London EC1

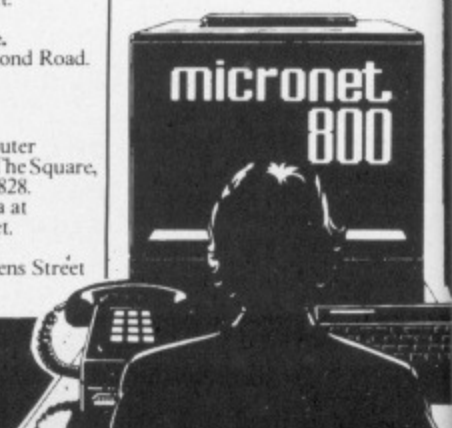

FREE WITH
EVERY DISC DRIVE
A DISC SECTOR EDITOR
PROGRAM WORTH £10

The only £200 disc upgrade which carries a two year promise

A 5 1/4" disc drive and double density disc interface for under £200 sounds remarkable enough, but only Opus Supplies could back such a bargain with a 2 year guarantee.


For just £199.95 you can upgrade your system with the popular Opus 5401 250 K* 5 1/4" disc drive unit and new compact, easy to fit double density disc interface. Bought separately you would pay almost £50 more.

Choose any other 5 1/4" drive from our comprehensive range and you can purchase our disc interface at reduced cost - £79.95 instead of £99.95. Our bargain prices include VAT, all necessary leads and of course our unbeatable two year warranty.

We also give generous education and dealer discounts. For further details ring us on: 0737 65080

5 1/4" SINGLE DISC DRIVES.

- All 1/2 height.
- Low power consumption.

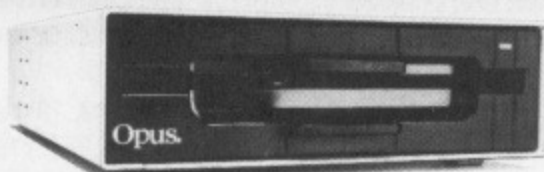

- Comprehensive manual.
 - Free utilities disc.
 - Direct drive mechanism.
 - Fast access time.
- 5400 100K, 200K Single sided 40 Track **£119.95**
 5401 100K, 200K Single sided 40 Track **£149.95**
 5402 200K, 400K Double sided 40 Track **£169.95**
 5802 400K, 800K Double sided hardware switchable 80, 40 Track **£199.95**

We also supply a full range of single drives in a dual case with power supply.

5 1/4" DUAL DISC DRIVES.

- 5401 DB 200K/400K 40 Track **£319.95**
 5402 DB 400K/800K 40 Track **£369.95**
 5802 DB 800K/
 1.6 Megabyte 80/40 Track **£399.95**

5 1/4" DUAL DISC DRIVES WITH POWER SUPPLY

- Metal cased and all necessary leads.
- Separate power supply.
- Utilities disc and manual.



- 5401D 200K/400K on line Single sided 40 Track **£349.95**
 5402D 400K/800K on line Double sided 40 Track **£399.95**
 5802D 800K 1.6 Megabyte on line Double sided hardware switchable 80/40 Track **£429.95**


FLOPPY DISCS.

3" cartridge £5.75 each or £25.95 for 5.
 5 1/4" Discs with lifetime guarantee and free library case. SS/SD £14.95 for 10. SS/DD £17.95 for 10. DS/DD £19.95 for 10. SS/DD 80 Track £22.95 for 10. DS/DD 80 Track £24.95 for 10.

*Unformatted capacity.

DOUBLE DENSITY DISC INTERFACE

The ultimate double density disc interface for your BBC micro



Z80 and 6502 2nd Processor compatible. Compact and easy to fit. Compatible with Clares 'Replica II', 'Mini-Office', 'Elite', 'View', 'Wordwise' and 'Wordwise+'. Also compatible with most sideways ROM cards.

Utilities on ROM including Format and Verify, tape to disc transfer, automatic density selection, unique mass copy routine, powerful machine code operating system giving up to 248 files. 80% faster than single density. Free user manual supplied.

- DDOS Interface only **£99.95**
 When bought with any disc drive **£79.95**

For further details ring us on: 0737 65080 or post the coupon below.

Please rush me the following (ALL PRICES INCLUDE VAT & CARRIAGE)

MU 6

Quantity	Description	Price
	TOTAL	

I enclose a cheque for £ _____
 Or please debit my credit card account with

the amount of £ _____
 My Access Barclaycard (please tick) No. is _____

Name _____

Address _____

Telephone _____

OPUS PRODUCTS ARE AVAILABLE FROM BOOTS, SPECTRUM, JOHN MENZIES, ALLDERS AND OTHER GOOD COMPUTER STORES NATIONWIDE.

Opus.
 Opus Supplies Ltd.

55 Ormside Way,
 Holmethorpe Industrial Estate, Redhill, Surrey.
 TELEPHONE: 0737-65080


```

10 REM Multi-coloured
20 REM Character definer
30 REM By Kevin Edwards
40 ON ERROR GOTO 1440
50 #FX4,1
60 baseX=&B00
70 DIM patt%(1,15)
80 MODE 2
90 VDU 23,255,255,255,255,255,
255,255,255
100 FOR loop1%=0 TO 1
110 FOR loop2%=0 TO 15
120 READ patt%(loop1%,loop2%)
130 NEXT:NEXT
140 PRINT""Load old file (Y/N)"
150 A$=GET$
160 IF A$="Y" OR A$="y" THEN PROCload:GOTO 260
170 CLS:just_loadsav=FALSE:#FX15
180 INPUT""Enter Width 1-8 ",width%
190 IF width%<1 OR width%>8 THEN VDU7:GOTO 180
200 CLS
210 PRINT""Enter height"
220 INPUT"8,16 or 24 ",height%
230 IF height%<>8 AND height%<>16 AND height%<>24 THEN VDU7:GOTO 210
240 FOR LX=0 TO width%-2:height%-1
250 baseX?LX=0:NEXT
260 CLS
270 FOR LX=0 TO 15
280 VDU 31,LX,29:COLOUR LX:VDU 255
290 NEXT
300 FOR LX=0 TO width%-2-1
310 VDU 31,LX+1,1
320 IF (LX MOD 8)=0 COLOUR 1 ELSE COLOUR 7
330 PRINT;CHR$(65+LX)
340 NEXT
350 FOR LX=0 TO height%-1
360 VDU 31,0,LX+2
370 IF (LX MOD 8)=0 COLOUR 1 ELSE COLOUR 7
380 PRINT;CHR$(65+LX)
390 NEXT
400 IF just_loadsav PROCscreen_up:just_loadsav=FALSE
410 COLOUR 7
420 X1%=0:Y1%=0:X2%=1
430 VDU 31,X2%,30,94
440 VDU 31,X1%+1,Y1%+2
450 RX%=0:RY%=0
460 FOR delay%=1 TO 450:NEXT
470 IF INKEY(-119) PROCclear
480 IF INKEY(-115) PROCdisplay
490 IF INKEY(-33) RC%=-1:PROCcolour
500 IF INKEY(-114) RC%=1:PROCcolour
510 IF INKEY(-87) PROCload:GOTO 260
520 IF INKEY(-82) PROCsave:GOTO 260
530 IF INKEY(-23) COLOUR 7:GOTO 170
540 IF INKEY(-26) RX%=-1
550 IF INKEY(-122) RX%=1
560 IF INKEY(-58) RY%=-1
570 IF INKEY(-42) RY%=1
580 IF INKEY(-99) THEN COLOUR X2%:VDU 255,8:PROCchange
590 X1%=(X1%+RX%) MOD (width%-2)
600 IF X1%=-1 THEN X1%=width%-2-1
610 Y1%=(Y1%+RY%) MOD height%
620 IF Y1%=-1 THEN Y1%=height%-1
630 GOTO 440
640 DEFPROCchange
650 old=? (INT(X1%/2)*height%+Y1%+baseX%)
660 IF X1% AND 1 new=(old AND &AA) OR patt%(1,X2%) ELSE new=(old AND &55) OR patt%(0,X2%)
670 ? (INT(X1%/2)*height%+Y1%+baseX%)=new
680 ENDPROC
690 DEFPROCget_col
700 byte%=? (INT(MX%/2)*height%+LX+baseX%)
710 FOR LI%=0 TO 15
720 IF (byte% AND &AA)=patt%(0,LI%) left%=LI%
730 IF (byte% AND &55)=patt%(1,LI%) right%=LI%
740 NEXT
750 ENDPROC
760 DEFPROCcolour
770 COLOUR 7
780 VDU 31,X2%,30,32
790 X2%=X2%+RC%
800 IF X2%=16 THEN X2%=0
810 IF X2%=-1 THEN X2%=15
820 VDU 31,X2%,30,94
830 VDU 31,X1%+1,Y1%+2
840 ENDPROC
850 DEFPROCclear
860 COLOUR X2%
870 FOR y%=2 TO height%+1
880 VDU 31,1,y%
890 PRINTSTRING$(width%+2,CHR$(255))
900 NEXT
910 VDU 31,X1%+1,Y1%+2
920 byte%=patt%(0,X2%)+patt%(1,X2%)
930 FOR loop%=0 TO 2*width%*height%-1
940 loop%?baseX%=byte%
950 NEXT
960 ENDPROC
970 DEFPROCdisplay
980 FOR loop1%=0 TO height%/8-1
990 FOR loop2%=0 TO width%-1
1000 FOR loop3%=0 TO 7
1010 ? (loop1%*&280+&4130+loop3%+(loop2%*8))=? (loop2%*height%+(loop1%*8)+baseX%+loop3%)
1020 NEXT:NEXT:NEXT
1030 ENDPROC
1040 DEFPROCsave
1050 CLS
1060 COLOUR 7
1070 PRINT""Do you want to save"
1080 PRINT""just the graphic"
1090 PRINT""data (Y/N) ? ";
1100 #FX15
1110 A$=GET$
1120 IF A$="Y" OR A$="y" THEN data_only=TRUE:PRINT"Y" ELSE data_only=FALSE:PRINT"N"
1130 INPUT""File name ",file$
1140 IF file$="" OR LEN(file$)>7 THEN VDU7:GOTO 1210
1150 X=OPENOUT(file$)
1160 IF NOT data_only PRINT#X,width%*height%
1170 FOR LX=0 TO height%*width%-1
1180 BPUT#X,baseX?LX
1190 NEXT
1200 CLOSE#X:just_loadsav=TRUE
1210 ENDPROC
1220 DEFPROCload
1230 CLS:#FX15
1240 COLOUR 7
1250 INPUT""File name ",file$
1260 IF file$="" OR LEN(file$)>7 THEN VDU7:GOTO 1330
1270 X=OPENIN(file$)
1280 INPUT#X,width%*height%
1290 FOR LX=0 TO height%*width%-1
1300 baseX?LX=BGET#X
1310 NEXT
1320 CLOSE#X:just_loadsav=TRUE
1330 ENDPROC
1340 DEFPROCscreen_up
1350 FOR LX=0 TO height%-1
1360 FOR MX=0 TO width%-2-1 STEP 2
1370 PROCget_col
1380 COLOUR left%:VDU 31,MX+1,LX+2,255
1390 COLOUR right%:VDU 255
1400 NEXT:NEXT
1410 ENDPROC
1420 DATA0,2,8,10,32,34,40,42,128,130,136,138,160,162,168,170
1430 DATA0,1,4,5,16,17,20,21,64,65,68,69,80,81,84,85
1440 MODE 7
1450 CLOSE#0
1460 PRINT"":REPORT:PRINT" at line"
1470 #FX4
1480 END

```

Program 1

It's a sort of multicoloured swap shop

THIS month we're going to look at two more sprite routines and we'll also see how useful a multicoloured character definer can be.

Program I is the Mode 2 multi-coloured character definer as promised last month. This will allow you to design your own sprite graphics with minimal effort. These sprites can then be displayed on the screen by using the other programs given in this article.

Sprites, for the uninformed, are multicoloured characters that can be freely moved around the screen without destroying any background information.

Until now the only way to design sprites was to use graph paper and coloured pens. The problem is that this technique is very time consuming. So to save time and trouble I have designed a simple sprite definer. Type it in, save it and then RUN.

The first question you'll be asked is "Load old file Y/N?" At this point your reply should be N – you haven't created a data file yet!

If you have saved a data file you can load it back in by pressing Y, after which the file name will be requested. On entering this the file is loaded and the editing mode is entered.

Assuming you have not just loaded a file, you will be asked for the sprite's dimensions. These will be provided by data held at the start of the file. (Skip the next few paragraphs if you've loaded a sprite from a file.)

Now you will be asked for the width of your sprite in paired pixels – between 1 and 8. Remember that each byte of the Mode 2 screen corresponds to two pixels.

Predictably, the next question asks you for the height of the sprite – this time in multiples of eight pixels (the height of one character cell).

The editing mode will be entered as soon as the sprite's height has been typed in. If you've loaded a file from tape or disc, you'll be in the editing mode already.

A grid, directly corresponding to the size of the sprite, will be displayed on the screen. Underneath it is the colour

palette which consists of 16 differently coloured blocks.

Below the red block is the colour pointer. This indicates the colour of the editing pen – that is, the colour you'll be filling the cells of the grid in with. Initially the editing pen is red.

The pointer, and hence the colour, can be changed by pressing the f0 and f1 keys. f0 selects the colour to the left of the colour pointer and f1 selects the colour to its right.

You should have also noticed the cursor flashing at grid reference A,A. This cursor is your means of indicating which pixel of the sprite is being edited.

You can move the cursor anywhere in the grid by pressing the appropriate cursor arrow key. Once you've correctly positioned the cursor you can change the colour of the cell to the selected pen colour by pressing Space. Doing this when the pen is black clears the cell, since black is the background colour.

When being edited the sprite is magnified several times. To view the sprite "life-size" press f2. It will now be displayed to the right of the editing grid. The editing mode will be automatically resumed.

If at any time you want to fill the whole grid with the palette colour you can do so simply by pressing f8. Be very careful though – your previous design will be erased.

If you wish to redefine the sprite's dimensions you press f7 while in the editing mode, which has the effect of

rerunning the program.

When you are satisfied with your creation you can save the sprite to tape or disc by pressing S.

You will then be asked whether or not you wish to save just the sprite data. Entering N indicates to the program that the sprite's dimensions should also be saved. This information is needed if the sprite is to be reloaded at another time for editing.

Pressing Y saves just the sprite data. This means that the sprite dimensions are not saved and that the file cannot be loaded by the definer for editing.

The data is saved in this way so that the sprite routines, introduced in last month's article, can be used to display the data. In other words, the data is saved column by column from the left of the sprite to the right.

After either selection you will be asked for the file name under which the file will be saved. This must be a maximum of seven characters in length so that the program can be used with disc systems.

The final command, L, allows you to load a new sprite into memory.

After pressing L the file name of the sprite should be entered. The sprite will now be loaded – make sure you've saved the previous sprite beforehand or you will lose it forever.

Also remember that the file cannot be loaded if the sprite's dimensions were



Part five HOW TO WRITE MACHINE CODE GAMES

By KEVIN
EDWARDS


```

10 REM Multi-size Sprite routine
20 REM By Kevin Edwards
30 MODE 2
40 HIMEM=&2E00
50 FORL=0TO2STEP2:P%=HIMEM
60 [OPTL
70 .sprite STX&74
80 STY&75:STY&78
90 .user_entry LDX#0
100 .main_part LDA&76:AND#&F8:STA&7
0
110 LDA&77:STA&71
120 LDA&76:AND#7:TAY
130 .column LDA&FFFF,X:EOR(&70),Y
140 .onto_screen STA(&70),Y
150 INX:BEQ inc_data_high
160 .end_checks INY:CPX&78:BEQ end_
of_column
170 CPY#0:BNE column
180 LDA&70:ADC#&7F:STA&70
190 LDA&71:ADC#2:STA&71
200 LDY#0:BEQ column
210 .inc_data_high INC column+2:JMP
end_checks
220 .end_of_column CLC:LDA&76:ADC#8
:STA&76:BCC no_high:INC&77
230 .no_high CLC:LDA&78:ADC&75:STA&
78
240 DEC&74:BNE main_part
250 RTS
260 .calc_loc LDA#&30:STA&81
270 LDA#0:STA&82
280 TYA:EOR#&FF:TAY:AND#7:STA&80
290 TYA:LSRA:LSRA:LSRA:ASLA:TAY
300 TXA:ASLA:ROL&82:ASLA:ROL&82
310 ASLA:ROL&82
320 ADC&80:ADC&C376,Y:STA&76
330 LDA&82:ADC&81:ADC&C375,Y:STA&77
340 RTS
350 INEXT
360 FOR LX=0 TO &5F
370 READ LX?&C00
380 NEXT
390 FOR X1X=0 TO 70
400 PROCsprite_onoff
410 *FX 19
420 PROCsprite_onoff
430 NEXT X1X
440 END
450 DEFPROCsprite_onoff
460 XZ=X1X:YZ=255:CALLcalc_loc
470 column?1=0:column?2=&C
480 XZ=4:YZ=24:CALLsprite
490 ENDPROC
500 DATA 0,0,0,&11,&11,0,&11,&11
510 DATA 0,0,0,0,0,0,3,3
520 DATA 1,1,1,1,0,0,0,0
530 DATA 0,&11,&11,&33,&27,&27,&27,
&33
540 DATA &11,&11,4,4,4,4,3,&2B
550 DATA &2B,&2B,&2B,&2B,&17,&17,&1
7,&17
560 DATA 0,&22,&22,&33,&1B,&1B,&1B,
&33
570 DATA &22,&22,0,0,0,0,3,3
580 DATA 3,3,3,3,3,3,3,3
590 DATA 0,0,0,&22,&22,0,&22,&22
600 DATA 0,0,0,0,0,0,3,3
610 DATA 2,2,2,2,0,0,0,0

```

Program II

From Page 91

not saved when the file was originally created.

Files which contain only sprite data are ready to be used with the sprite display routine without modification. All you need to do is *LOAD the data into page &C (or wherever the data is needed) and change the sprite parameters in the sprite routine accordingly.

The start of your sprite program should look something like this:

```

10 *LOAD SPRITE1 C00
20 width=4
30 height=16
40 data=&C00
50 REM Start of sprite routine

```

All this is quite simple so far. What we need now is a routine that will be capable of displaying sprites of varying sizes after the program has been assembled.

After all, I'm sure you'll be using sprites of different sizes in your own programs. A routine capable of displaying only one size of sprite is rather limiting.

Ideally, what we require is a routine we can call with the dimensions of the sprite held in the 6502 X and Y registers. In fact, only a few changes are

HOW TO WRITE MACHINE CODE GAMES

required to last month's sprite routine to do this.

Program II is the modified sprite routine along with the screen location calculator from last month's article. This is a clever routine that calculates the screen location, for Mode 2, of a specified X and Y coordinate using the bottom left corner as the origin.

Program II shows how easy it is to move a sprite – in this case a flower pot – across the screen using the new routine.

To display a sprite using the new

routine all we need to do is:

- Call the screen location calculator routine (.calc_loc) with the screen X and Y coordinates in the 6502 X and Y registers – line 460 of Program II. The result is automatically stored in zero page, ready for the sprite routine.
- The pointer to the sprite graphic data must be stored into locations (column+1) and (column+2) – low byte then high. See line 470 of Program II.
- The dimensions of the sprite should be loaded into the X and Y registers. Now the main sprite routine can be called (.sprite) – line 480 of Program II. This displays/erases the sprite on/from the screen. Remember, the sprite routine uses EOR!

It's still rather long winded, but there's no simple way of passing so many parameters to the relevant routines.

The effects produced by all the programs so far have relied on a little bit of Basic. The problem with this is that jumping in and out of Basic takes up valuable time.

This is made even worse when sections of a Basic program are executed in between machine code routines – especially when timing is critical such as when using *FX 19 to wait for start of retrace period.

So now we move on to Program III.

Line No.	Description	Line No.	Description	Line No.	Description
40-60	Enter assembler and assembles code at &2E00.	220	with rest of the column. Adds eight to column's start address. This moves start address right by two pixels.	320	result are held in bits 0 to 2 of location &82 the workspace.
70	Stores width of sprite in &74 - in paired pixels.	230	Changes data offset stop pointer so that end of next column will be terminated correctly.		
80	Stores height of sprite in &75 and &78 - in pixels.	240	Checks to see if all of the columns have been displayed. Branches if they haven't.	330	Adds screen low byte to low byte of result of X*8. Then adds low byte of &280 multiplication table to result. The final total is stored in location &76.
90	Data offset register = 0.	250	Exits from sprite routine.		
100-110	Copy column start address into &70, &71, the low byte being the top of the current character column (AND &F8).	260	Stores Mode 2 screen start address high byte in &81.		
120	Loads offset register with screen low byte ANDed with 7 - to get the offset from the top of the character column.	270	Stores 0 in the workspace. This is used to accommodate any overflow that occurs when X is multiplied by 8.	340	Adds high byte of X*8 to screen address high byte. Then adds high byte of &280 multiplication table and stores result in location &77 - any carry which may have occurred from the addition of the low bytes is also included in the result.
130-140	Read data byte, EOR it with screen byte and store it back in video RAM.	280	EORs the Y coordinate with &FF (to change origin from top left corner to bottom left corner) and then ANDs result with 7. This tells us how many whole character rows down the screen the sprite is.	350	Back to Basic.
150	Increments data offset register. If X register is zero, branch so that data pointer high byte can be incremented.	290	Calculates $INT(Y/8)*2$. The result of Y/8 is multiplied by 2 to allow us to make use of ROM multiplication table. This starts at &C375 and consists of 32 entries of an &280 multiplication table. Each entry in table is stored in pairs - high byte then low byte.	360-380	Exits assembler.
160	Increments screen memory address offset register. Checks if end of column has been reached. If it has, the branch is taken.	300-310	Calculates X*8. The three most significant bits of the	360-380	Read and store sprite data - a flower pot.
170	Checks to see if start of next character row column has been reached. Branches if it hasn't.			390	Start of a loop - this defines X coordinate of sprite.
180-200	Add &280 to screen address to move down to next character row. Then change screen offset register, Y, to 0.			400	Displays sprite on screen.
210	Increments data pointer high byte and continues			410	Waits for retrace period.
				420	Erases sprite from screen.
				430	Next X coordinate.
				440	End of program.
				450-490	The sprite display/erase procedure.
				460	Sets X% and Y% to sprite's screen coordinates and calls screen location calculator routine.
				470	Resets sprite data pointer.
				480	Defines sprite's dimensions before CALLing main sprite routine which in turn displays/erases the sprite.
				500-610	Flower pot data.

Description of Program II

which uses only machine code to move the flower pot up the screen.

The procedure PROCsprite_onoff, from Program II, has been replaced by a subroutine (.onoff) - lines 100-120.

Location &83 is used to keep track of the sprite's Y coordinate. Between each movement, 4 is added to Y to move the sprite up 4 pixels - line 90. Try changing line 90 so the sprite moves one pixel at a time. All you need to do is change the ADC#4 to ADC#1.

By using simple programming techniques you'll be able to produce fully animated sprites. This can be achieved by flicking between different sets of sprite data just like flicking through a book which has different sketches on each page.

I'll leave that problem for you to solve - it's not as hard as it sounds.

See you next month when we'll look at some more useful techniques found in machine code games.

```

10 REM Full machine code demo
20 REM By Kevin Edwards
30 MODE 2
40 HIMEM=&2E00
50 FORL=0TO2STEP2:PZ=HIMEM
60 [OPTL
70 .demo LDA#23:STA#83
80 .demo1 JSRonoff:LDA#19:JSR&FFF4
:JSRonoff
90 LDA#83:CLC:ADC#4:STA#83:BCCdemo
1:RTS
100 .onoff LDY#20:LDY#83:JSRcalc_lo
c
110 LDA#0:STAcolum+1:LDA#&C:STAcolum+2
120 LDY#4:LDY#24:JSRsprite:RTS
130 .sprite STX#74
140 STY#75:STY#78
150 .user_entry LDX#0
160 .main_part LDA#76:AND#&FB:STA#7
0
170 LDA#77:STA#71
180 LDA#76:AND#7:TAY
190 .column LDA#FFFF,X:EOR(&70),Y
200 .onto_screen STA(&70),Y
210 INX:BEQ inc_data_high
220 .end_checks INY:CPX#78:BEQ end_
of_column
230 CPY#0:BNE column
240 LDA#70:ADC#&7F:STA#70
250 LDA#71:ADC#2:STA#71
260 LDY#0:BEQ column
270 .inc_data_high INC colum+2:JMP
end_checks
280 .end_of_column CLC:LDA#76:ADC#8
:STA#76:BCC no_high:INC#77

```

Program III

Join the communications revolution

We've found the missing link!

By **DEREK MEAKIN**

Managing Editor
The Micro User

MANY months ago we forecast that 1985 would be the Year of Communications. And so it is turning out.

Sales of modems are soaring. Micro users are joining Prestel in their thousands. Bulletin boards are springing up all over the country.

But until now one thing has been missing.

What has been desperately needed was a national database for microcomputers that would combine a low-cost electronic mail service with a giant bulletin board you could access first time every time, that would allow you to chat freely with other users, that would have no restriction on the length of material you could send or receive – and would also enable you to send telex and telemessages from your own micro.

All this, and much much more, you can do with MicroLink. For this one comprehensive service is the missing link in Britain's communications network.

And the carrier through which all MicroLink's facilities are being

offered is the most respected name of all – Telecom Gold.

Until now Telecom Gold has been the preserve of big business – used by the giants of industry, commerce and finance to link their operations in Britain with the rest of the world. And Telecom Gold's charges reflected its elevated status.

That has now changed. Thanks to MicroLink, every micro user can afford to key into Telecom Gold and make use of its growing range of services. For less than the cost of a first class stamp you can have a message the size of this page delivered to one destination or hundreds . . . all in a fraction of a second. And that's just one example of the time and money you'll be able to save with MicroLink.

All of us at *The Micro User* are very excited about the enthusiastic reception the new service has been given by our readers – and about its unlimited potential for future development.

Come and join us – and explore with us the whole new world that is being opened up by MicroLink.

From Page 93

```
290 .no_high CLC:LDA#78:ADC#75:STA#  
78  
300 DEC#74:BNE main_part  
310 RTS  
320 .calc_loc LDA#30:STA#81  
330 LDA#0:STA#82  
340 TYA:EOR#FF:TAY:AND#7:STA#80  
350 TYA:LSRA:LSRA:LSRA:ASLA:TAY  
360 TXA:ASLA:ROL#82:ASLA:ROL#82  
370 ASLA:ROL#82  
380 ADC#80:ADC#C376,Y:STA#76  
390 LDA#82:ADC#81:ADC#C375,Y:STA#77  
400 RTS  
410 JNEXT  
420 FOR LX=0 TO #5F  
430 READ LX?#C00
```

```
440 NEXT  
450 CALLdemo  
460 END  
470 DATA 0,0,0,&11,&11,0,&11,&11  
480 DATA 0,0,0,0,0,3,3  
490 DATA 1,1,1,1,0,0,0,0  
500 DATA 0,&11,&11,&33,&27,&27,&27,  
&33  
510 DATA &11,&11,4,4,4,4,3,&2B  
520 DATA &2B,&2B,&2B,&2B,&17,&17,&1  
&17,  
530 DATA 0,&22,&22,&33,&1B,&1B,&1B,  
&33  
540 DATA &22,&22,0,0,0,0,3,3  
550 DATA 3,3,3,3,3,3,3,3  
560 DATA 0,0,0,&22,&22,0,&22,&22  
570 DATA 0,0,0,0,0,0,3,3  
580 DATA 2,2,2,2,0,0,0,0
```

The machine code routines in Program III are identical to those in Program II with the following additions.

Line No.

- 70 Stores sprite's Y coordinate in location &83.
- 80 Displays sprite, waits for the

retrace period and then erases sprite. Remember the display and erase routines are the same.

- 90 Adds 4 to sprite's Y coordinate to move it up the screen by 4 pixels. A branch is taken if sprite's Y coordinate hasn't overshot top of screen. This repeats process for a

new position. Otherwise program finishes.

- 100 Calculates screen location for the sprite's X and Y coordinates.
- 110 Resets sprite data pointer so that data starting at &C00 is displayed.
- 120 Defines sprite's dimensions before calling sprite display/erase routine.

HOW TO WRITE MACHINE CODE GAMES


**THE
MICRO
USER**

invites you to join . . .

MicroLink

in association with

TELECOM GOLD*

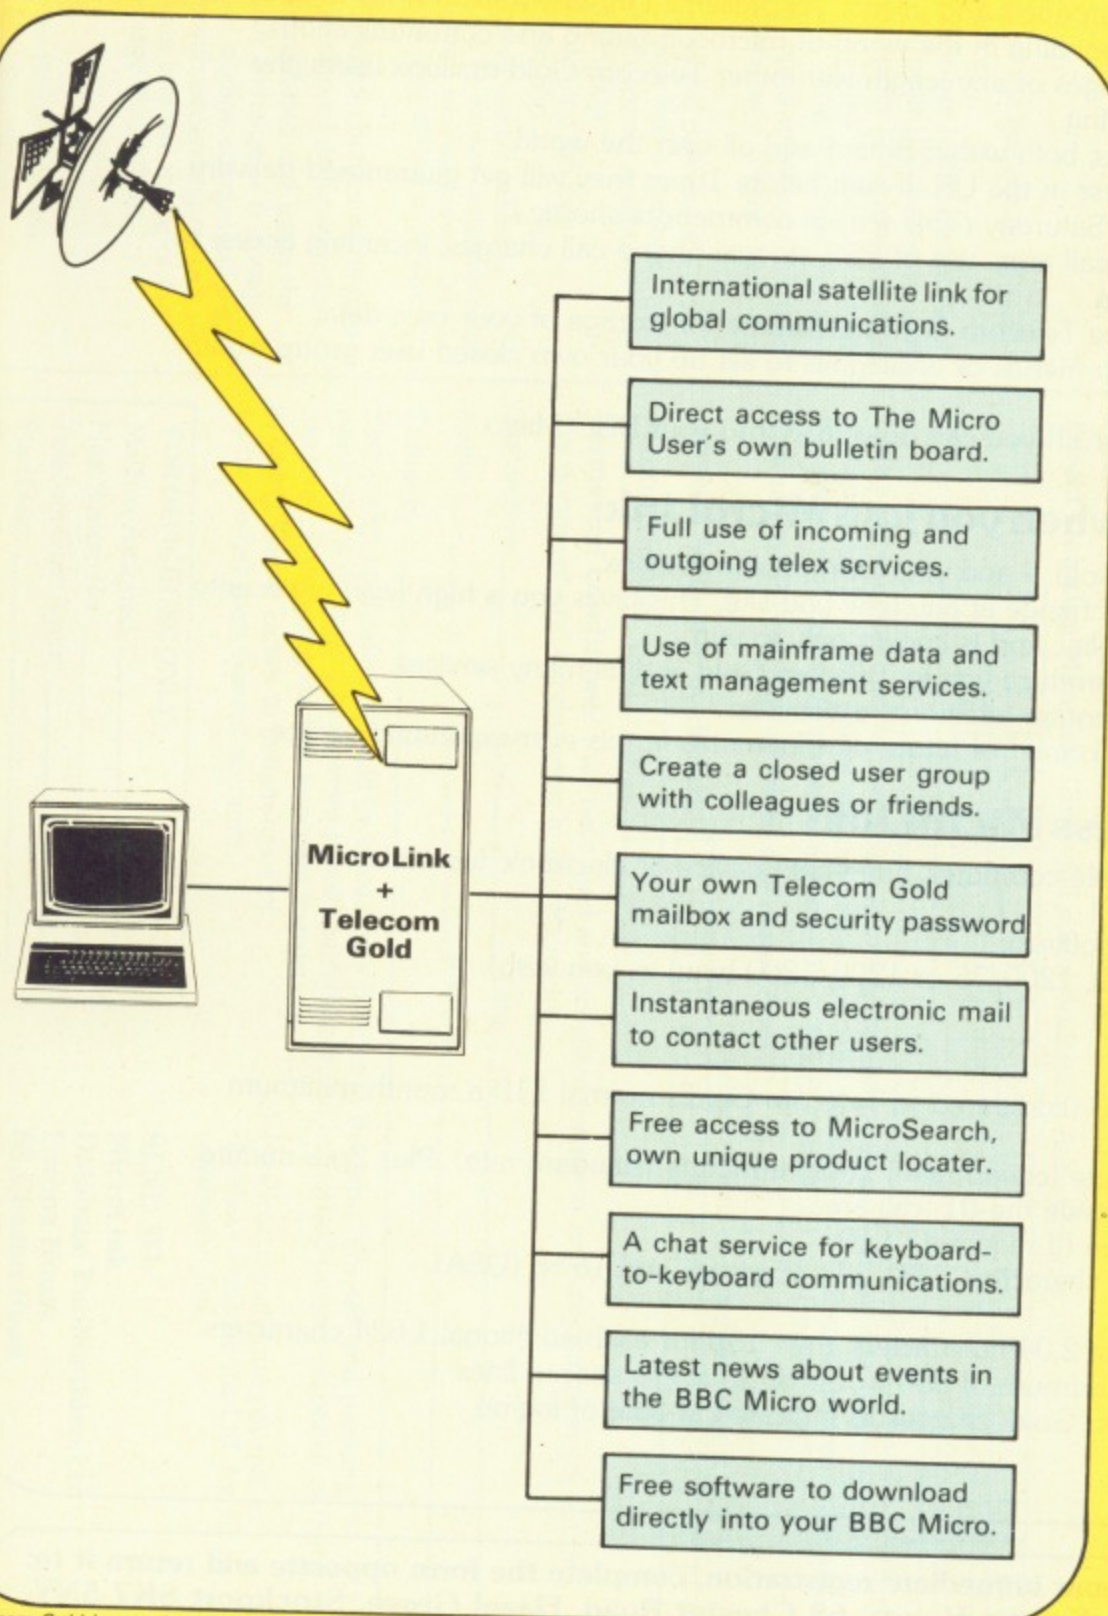

MicroLink is this year's most exciting - as well as most ambitious - development in the rapidly-expanding world of telecomputing.

For the first time, it combines the enthusiasm of many thousands of computer users with the power and versatility of Britain's national database, Telecom Gold.

The result is an international communications link that is your passport to new realms waiting to be explored, new experiences to be shared with kindred spirits who enjoy telecomputing just as much as you do yourself.

Communicating the MicroLink way is ultra-fast - and much cheaper than you might expect. Wherever you live, you get direct access to the Telecom Gold computer at local call rates.

With your own electronic mailbox you can send a message to one destination - or to 500! - for less than you would pay for a first class stamp.

You can send and receive telex messages worldwide, or have a two-way chat with other users in real time.

And the cost of using MicroLink? Just £3 a month. Plus small additional access charges as detailed overleaf.

Join MicroLink now - and let you and your BBC Micro be in the forefront of the new revolution in communications!

* Telecom Gold is a trademark of British Telecommunications plc.

These are some of the innovative features
you'll be able to use when you join . . .

MicroLink

What facilities you can use – directly from your micro:

- Access at any hour of the day or night to Microsearch, our exclusive product locator, which is constantly updated by Britain's major distributors. Powerful, easy-to-use keyword searching means you should find what you want within seconds.
- Direct contact, via electronic mail, with other users throughout the world. And because you're connected via PSS, and not the normal phone links, it's usually much, much cheaper.
- Full use of the closed user group bulletin board – with a special section for BBC Micro users.
- Full service of news about new products and events. All presented in easy-to-read form to keep you right up to date with what is happening in the world of microcomputing and communications.
- Send and receive mailbox messages of any length with other Telecom Gold mailbox users, the number of which is rapidly growing.
- Send and receive telex messages, both within Britain and all over the world.
- Send telemessages to any address in the UK. If sent before 10pm they will get guaranteed delivery the next working day, including Saturday (*This service commences shortly.*)
- If you live outside the 01- local call area, use of PSS at local phone call charges, including access to the international Dialcom system.
- Use, should you require it, of the Telecom Gold mainframe for storage of your own data.
- Encouragement to combine with friends or colleagues to set up your own closed user group within MicroLink.
- Provision of free telesoftware, which you can download into your BBC Micro.

What you will receive when you join MicroLink:

- Free registration on Telecom Gold – and your own private mailbox.
- Free password, which you can change at any time you like. This gives you a high level of security in order to preserve confidentiality, and is known only to you.
- Free instructional manual to introduce you to Telecom Gold and its many services.
- Free Help facility should you require additional assistance.
- Free newsletter to keep you informed of future developments in this ever-expanding service.

What you need to access MicroLink:

- Any personal computer, portable computer, hand-held device or electronic typewriter with communications facilities.
- Appropriate communications software.
- Modem (you can use 300/300, 1200/75 or 1200/1200 baud as you wish).

What will it cost?

- Monthly standing charge of £3 (compared to Telecom Gold's normal £10 a month minimum charge).
- Connect charges: 3.5p a minute (cheap rate); 10.5p a minute (standard rate). Plus 2p a minute PSS charge if calling from outside the 01- call area.
- Once-only telex registration fee (if required): £10.
- Outgoing telex: 5.5p per 100 characters (UK), 11p (Europe) and 16.5p (USA).
- Incoming telex: 50p.
- International mail: 30p for first 2,048 characters, then 15p for each additional 1,024 characters.
- Telemessages: £1.25 for a maximum of 350 words or 35 single spaced lines.
- On-line databases on Telecom Gold: charges as indicated at time of log-on.

To secure your immediate registration, complete the form opposite and return it to:
MicroLink, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Telecommunications plc,
Telecom Gold Ltd, 60-68 St. Thomas Street,
London SE1 3OU.

Radiopager by the Dialcom service.
No charge.

Password

Stockport SK7 5NY.

MicroLink

in association with

TELECOM GOLD*

Application Form

On receipt of this application form you will be sent

- your personal mailbox number and initial password
- a Quick Guide to Mail manual
- customer HELP LINE telephone number
- the name and mailbox number of your Telecom Gold contact

Please allow 28 days to process your application.

Charges

Initial Registration fee: £5.

Standing charge: £3 per calendar month or part.

Connect: charges for duration of connection for any purpose to the Service. Minimum call charge is 1 minute.

Standard Rate
(0800-1900 M-F excluding public holidays)
10.5p per minute or part.

Cheap Rate
(all other times)
3.5p per minute or part.

Filing: charge for storage of information
20p per unit of 2500 characters per month

(Note: The number of units used is an average calculated by reference to a daily sample. Units will be incurred by the use of telex, short codes and mail filing.)

Information Databases

These vary by database and are charged at the rate shown before you obtain access

MicroLink PSS service
300 baud 2p per minute or part.
1200 baud 2.5p per minute or part.

Telemessages
For each message generated £1.25

* Telecom Gold is a trademark of British Telecommunications plc.
Telecom Gold Ltd, 60-68 St. Thomas Street, London SE1 3QU

International Mail
Charges for the transmission of information by the Dialcom service to other Dialcom systems operated outside the UK and the Isle of Man:

	First 2048 chrs (incl. control information)	Each additional 1024 characters
USA, Australia, Canada, Singapore, Hong Kong, Israel	30p	15p
Germany, Denmark	20p	10p

(Note: Multiple copies to addresses on the same system host incur only one transmission of data.)

Billing and Payment

All charges quoted are exclusive of VAT. Currently all bills are rendered monthly and payable on receipt of invoice.

Telex

Telex registration: £10.

Telex outgoing: For the generation of telex by the Dialcom service:

- U.K.** 5.5p per 100 characters sent
- Europe** 11p per 100 characters sent
- N. America** 16.5p per 100 characters sent
- Rest of world** £1.15 per 40 characters sent
- INMARSAT** £2.75 per 40 characters sent

A 10% discount will apply to telex deferred to overnight transmission using "Night" key word.

Telex incoming: For the delivery of a correctly addressed telex into a mailbox. Delivering of telex with correct mailbox reference from sender: 50p. Service charge for obtaining mailbox reference from sender: 50p.

(Note: If a telex is received without a mailbox reference the sender will be advised of non-delivery and requested to provide a mailbox address. It is not possible to deliver a telex without a mailbox reference.)

Contact Telecom Gold for charges relating to other services and additional documentation. Each User Identifier validated and using the Telex facility will incur a charge of 6 storage units/month. Further storage charges will also be incurred each month depending on the size of the telex queue and use made of the short code and message file facilities.

Radiopager

For the activation of the British Telecom Radiopager by the Dialcom service. No charge.

Name

Position

Company

Address

Postcode

Telephone

I wish to use Telex. I authorise you to charge an additional £10 to my initial bill.
 I confirm that I am over 18 years of age.

Signature/s _____ Date _____

Whilst Database Publications Limited is the supplier of all the services to you, the commission and billing thereof will be handled by Telecom Gold as agents for Database Publications Ltd.

Payment

Please complete the billing authorisation form below.

Direct Debiting Mandate (Enter full postal Address of Bank Branch)
To _____

I/We authorise you until further notice in writing to charge to my/our account with you on or immediately after 15th day of each month unspecified amounts which may be debited thereto at the instance of British Telecommunications plc - TELECOM GOLD by Direct Debit.

Date of First Payment on or within one month from 19
 (enter month of commencement)

Name of Account to be debited

Account Number

Terms and conditions: I/we have read and accepted the terms and conditions as set out on this document and hereby apply to join MicroLink.

Signature/s _____ Date _____
 Name _____ Position _____

Company _____
 Partnership applications should be signed by a partner in the firm: "For self and partners". Applications by limited companies should be signed by an authorised person on behalf of the company. Banks may decline to accept instructions to charge Direct Debits to certain types of account other than current accounts.

I enclose my cheque payable to Database Publications Ltd. for £5 as registration fee.

FOR OFFICE USE ONLY:

Mailbox Assigned _____
 Host System No. _____
 Telecom Gold Agent: _____
 Start Date _____
 Password _____

SEND TO:
 MicroLink
 Database Publications Ltd
 Europa House
 68 Chester Road
 Hazel Grove
 Stockport SK7 5NY.

This contract is made between Database Publications Ltd, of Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY (DPL) and the subscriber whose name and address appears overleaf.

Whereas DPL has agreed with British Telecommunications plc (BT) through its agent Telecom Gold Limited to sell and distribute the MicroLink Service (the Service) and BT through Telecom Gold Limited has agreed to supply the Service to customers of DPL.

It is agreed as follows:

1. Access
DPL shall issue to the subscriber such user codes (called mailbox numbers) as it thinks fit in order to allow the Subscriber and persons associated with the subscriber, access to use the Service.
2. The Service
The Service shall be BT's Telecom Gold Dialcom Service, and shall comprise such services and facilities as DPL shall in its discretion from time to time consider appropriate, subject to the supply by BT of such services and facilities.
3. Charges
 - a) The subscriber shall pay for all charges arising under this contract from his subscription to and/or use of the Service, and/or from the issue to him of any mailbox number issued by DPL to the Subscriber. All charges are payable on demand.
 - b) DPL shall give to the Subscriber not less than fourteen days written notice of any alteration in the applicable charges for the Service. The charges applicable at the date of this Subscription are set out overleaf.
 - c) Subject to any provision of this contract, liability for charges for service shall commence, unless BT notifies the customer to the contrary, with effect from the first day of the month in which BT first makes service available to the customer.
4. Limitations on use
 - a) The Subscriber shall not use, or permit any person to use the Service otherwise than according to instructions given by DPL or BT, existing for the time being and in particular, shall not use the Service for the purpose of sending abusive, offensive, indecent or menacing communications, or for sending communications which cause annoyance, inconvenience, or needless anxiety.
 - b) The Subscriber shall not permit any person to use the Service by means of a mailbox number issued by DPL unless the name and relationship of that person to the Subscriber has been disclosed to DPL.
5. Termination
 - a) This contract may be terminated by either party giving not less than one month's written notice, such notice to expire on the last day of any calendar month.
 - b) DPL may terminate this contract forthwith without notice if the Subscriber shall
 - i) fail to pay any sum payable under this contract or payable under any other contract with DPL to which the Subscriber is a party.
 - ii) be adjudicated bankrupt, enter into liquidation or any arrangement or composition with his creditors, or if a receiver is appointed of any part of the Subscriber's assets and not discharged within seven days, or if any judgment against the Subscriber remains unsatisfied for more than seven days.
 - iii) fail to comply with any term of this contract, or any instruction given by DPL or BT under clause 4 of this contract.
 - c) DPL may terminate this contract without notice in the event that BT and/or its agent Telecom Gold shall cease to supply the Service.
 - d) If the customer fails to comply with any provision of this contract he shall nevertheless continue to be liable for all charges due and to become due for service provided during any period of such failure.
6. Assignment
The subscriber shall not, without the written consent of DPL assign this contract, or any rights or obligations arising under this contract.
7. Limitation of liability
 - a) For the avoidance of doubt neither DPL nor BT has an obligation duty or liability in contract, tort, for breach of statutory duty or otherwise beyond that of a duty to exercise reasonable skill and care.
 - b) In any event in no circumstances shall either DPL or BT be liable in contract, tort (including negligence or breach of statutory duty) or otherwise for loss (whether direct or indirect) of profits, business, or anticipated savings or for any indirect consequential loss whatever.
 - c) In any event DPL's liability in contract, tort (including negligence or breach of statutory duty) or otherwise arising by reason of or in connection with this contract or howsoever otherwise shall be limited to £500,000 for any one incident or series of incidents and £1m for any series of incidents related or unrelated in any period of 12 months.
 - d) DPL does not exclude or restrict its liability for death or personal injury, where such arises as a result of the negligence of DPL or its employees.
 - e) The Subscriber shall indemnify DPL against all loss, actions, proceedings, costs, claims and damages arising from
 - i) any breach by the Subscriber of his obligations hereunder;
 - ii) the use of the Service by third parties by means of any mailbox number issued to the Subscriber.
 - f) DPL shall not be liable for any loss or damage occurring through any act or omission of BT or its agent Telecom Gold Limited, in the supply or failure to supply, the Service to DPL. Notwithstanding anything to the contrary contained hereby, the supply of the Dialcom service shall be upon and subject to the standard terms and conditions of BT from time to time and of which the subscriber shall be deemed to be aware.
 - g) Neither party shall be liable for failure to perform its obligations if the failure results from Act of God, Act of Government or other Authority or Statutory undertaking, fire, explosion, accident, power failure, industrial dispute, inability to obtain materials or anything beyond such party's reasonable control.
 - h) DPL accept liability hereunder for direct loss caused to the subscriber where such loss arises solely due to acts or omissions of DPL or its employees in the provision of access to the service up to an aggregate maximum of £1,000 or a sum equal to one month's average service charges to the subscriber over the previous 12 months' period, whichever is smaller. Save as otherwise provided herein, DPL shall be under no liability for any loss suffered by the subscriber or by any other person arising from negligence or otherwise.
8. Any notice, consent or other communication required to be given hereunder by either party to the other, shall be made in writing and may be served by first class post to the address of the other as set out herein, and shall be deemed to have been received 48 hours from the time of posting.
9. This agreement constitutes the entire agreement between the Subscriber and DPL in respect of the Service, and no representation, statement, warranty or condition not expressly contained in this agreement or incorporated herein by reference, shall be binding upon DPL as a warranty or otherwise.
10. This agreement shall be governed and construed in accordance with the laws of England, and the English Courts shall have exclusive jurisdiction to determine any disputes arising hereunder.

Increase your fire power!

More than just a joystick—a system

- ▲ Nylon encased—Steel shafted joystick with ball and socket joint.
- ▲ Fast sprung return to centre.
- ▲ Graphite wiper linear potentiometers.
- ▲ 12 Months Guarantee.
- ▲ 7 day Money back Guarantee (on Hardware).

Complete control at your fingertips

A superb joystick and a keypad for the price of either one. Plus the software to integrate it into the computer's system. One handset will work on it's own in the A/D port as a joystick and two fire buttons. Joystick is immediately compatible with ACORNSOFT and similar software.

The interface joins together the analogue and the user ports to use the full keypads giving a total of 24 user definable keys. The interface can also be used as a splitter for the A/D port to take two items at the same time, e.g. joystick and lightpen.

DELTA DRIVER on cassette or disc: Two programs on each cassette or disc. One converts machine code programs from the keyboard to the joystick or keypad, with adjustable sensitivity on the joystick and will run on any O.S. The second program (needs O.S. 1.0 or later and an interface) duplicates any keyboard keys on the keypads, in the operating system, so that it can become a numeric keypad or will take on the function keys.



Numerous stockists nationwide or direct from us.

SAE for more detailed information.



Made in England

DELTA 14b HANDSET £14.95
DELTA 14b/1 A/D/USER PORT INTERFACE £14.85
DELTA DRIVER CASSETTE £5.95 or DISC £9.95
Prices include VAT and P&P.

Voltmace delta 14b

Callers welcome at the factory—Monday to Friday.

VOLTMACE LTD
PARK DRIVE
BALDOCK
HERTS
SG7 6EV
Tel: (0462) 894410



Across the Eridanus and into the maze

SOME authors complain that reviewers don't read the instructions or background of their games. I do – if I can find them – particularly if they lay claim to realism. However...

Dear Sir,

I almost never write to correct reviews, but Alice has done a hatchet job on the background to Level 9's *Silicon Dream* adventures and I think it's worth correcting.

1. I agree that Eden is not orbiting Eridani A. The correct star is Eridani E. (Red giant, 6 parsecs away, possible G2 companion. Main reason for choice is that almost everyone else goes to Alpha Centauri.)

2. It is perfectly possible for one star of a binary system to have planets. (Scale up our solar system and Jupiter is a "star" with "planets".)

3. Sending colonists by radio is technically feasible but morally repellent. People are sent for PR reasons and to provide a soap opera for the unemployed on Earth, but really to make exploring the ship's 7,000 rooms quite tricky.

4. The Snowball engines are powerful particle accelerators, descended from "star wars" beam weapons. After some fraction of a second the beam would penetrate the atmosphere and reach the ground.

5. The books ("Hothouse", etc) describe lots of amusing plants, with names that allow me some awful puns. Best wishes

The above is a short but, I hope, fair precis of two letters from Pete Austin of Level 9. I apologise to him if I put anyone off the actual games.

The layout of the spaceship was a very neat idea, producing a "gestalt" when the player finally realises how to find his way around – based on the old electrical resistor codes – and Return to

Eden, which I have now got through using the hints, is up to the same high creative level.

Indeed the only problem they present is when I try to review games from elsewhere. Very few can really intrigue me into finishing the course, but I have "solved" all the Level 9 games except Emerald Isle and that, so far, keeps up the excellent value (£6.95), plus you get graphics and text linked for the first time.

When I first looked at Eden – without any hints – I managed to cross the river only to find a maze. I assumed this was the road to Enoch city so I gave up. I hate "drop to map" mazes, but actually you only go there to stop the plundering parrot.

My comment on the "morel" or "fish fungus" always wanting to "do something" was an obscure hint that this game requires patience. WAIT is a vital command to avoid the attention of the helicopter gunships and is also required to reach the entrance to the city.

Here you will find a credit card which you must wheeler-deal correctly in order to become a man of property and eventually mayor of Enoch. At this point you rediscover the visor that puzzled so many in Snowball.

This device actually does exist. It is based on equipment used by helicopter pilots in Vietnam and has also been proposed as a way of playing computer chess with holographic pieces thus:

"We may be able to sit in front of a chess board on which there are (holographic) pieces that the machine can move. We need only look at a piece, blink, look at the square we wish to move to, blink, and the computer makes the move".

The computer detects where you look by shining a beam of light on the eye.

Note that a gun was trained on what the helicopter pilot was looking at.

I can't give clues to Level 9 games since they cover almost everything with hint sheets and the answers are the copyright. But I have scored 6,260 points – out of 6,000 – in *Adventure Quest* and also been amused by dropping almost everything in the hole in the Quest lake – the staff and the jellyfish have particularly interesting results.

However, I still haven't seen the message at the bottom of the well. I tried waving the medallion but the light was too feeble.

Pete Austin suggested that I carry the lamp and rub the jellyfish which bangs you all over your tracks so I gave up after 100 tries. Just unlucky I guess.

On the question of hint sheets, Epic Software have now produced a set for their four games. This is another professional company who take pains to remove the slightest bug from their products. I had actually extracted the messages from the Epic games but they don't help to navigate mazes.

● *Two tips to authors are:* If possible send your review copy on a disc, as this speeds up LOAD, SAVE and RESTORE. And, if you really insist on including a maze, then send the reviewer the path through it. This might improve his temper.

A touch of the Hobbits


Fantasia Diamond
(Hewson Consultants)

TRIED this months ago and got stuck. It's rather like *The Hobbit* – you have to mingle with "intelligent" characters who keep messing about and being shoved into a dungeon with you.

While in pokey the friendly green elf keeps frisking you for keys while the toy robot eats any food you might have rendering you incapable of lifting a fishing rod.

Even if you get out of the cell you are stuck – yuch! – in a complex of dark

Alice through the VDU

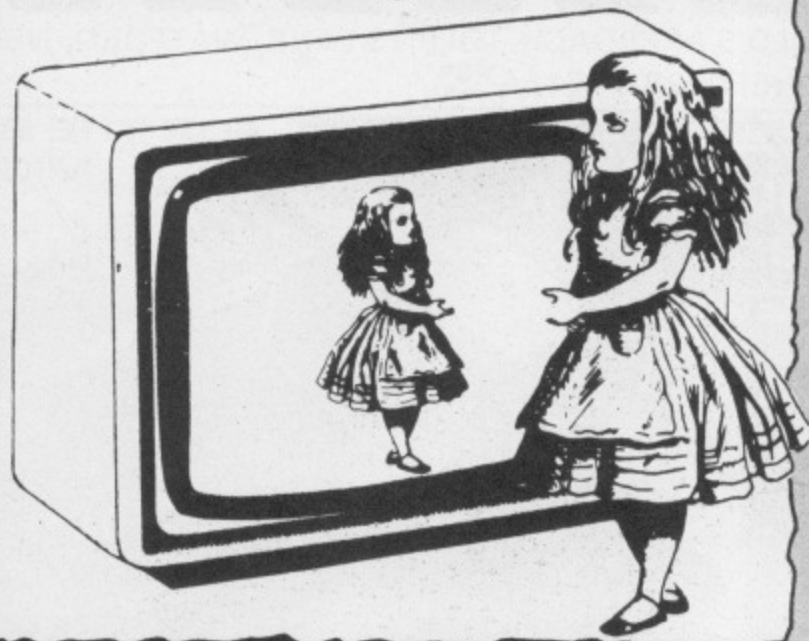

Our monthly foray into Adventure games

there is no way you'll break away from the untidy, longsighted, tone-deaf occupant.

There are only some 70 rooms in the game, but the "intelligent" characters make it quite complex. Give me a table to climb on any day - much more reliable.

I know their behaviour is just a figment from a random number generator but, if you liked *The Hobbit*, you'll probably like this aleatory alexia (a random device that does not understand words).


HERE are the answers to some earlier problems:

● **Ladders Problem:** Two ladders, L1 and L2, cross at height C (Figure 1). How wide is the alley A? If you have done any algebra you should recall that the squaw on the hippopotamus is equal to the sum of the squaws on the other two hides, therefore:

$$1/C = 1/\text{SQR}(L1*L1-A*A) + 1/\text{SQR}(L2*L2-A*A)$$

If you don't follow that, then take Nigel Molesworth's advice in *Down with Skool* - ask your maths teacher.

Now the simplest way to solve nasty equations with one unknown is by Horner's method of approximation. Just enter Program 1 and start guessing away. It's just like playing the old *Moon Lander*. If the answer is positive then



caves with a cunning green pixie who regularly drags you back to the cell for more porridge - if only there were - with the two pests.

Incidentally, why do people think it's my portrait that the three bears use as a dartboard in the *Castle of Riddles*?

Anyway I did nothing (*TIME PASSES...*) and then read a review that liked the game, so I tried again.

The program is supposed to know 300 words, but I still can't SIT in the comfortable chair. Even if I could would the Spanish Inquisition threaten to prod me with a soft cushion?

Nor can I INSERT a battery in the robot who doesn't know how to LIFT anything anyway. I must be missing something.

LOOK SCREEN

The screen says: "You do nothing".

Thinks: "Good job there aren't any rabbits in this game. These characters get up to all sorts of things when I can't see them".

LOOK CASSETTE CASE

You look at the cassette case. In it is a paper insert with a picture.

REMOVE PAPER INSERT

You remove the paper insert. It has lots of cunning but friendly instructions hidden inside.

READ FRIENDLY INSTRUCTIONS

It takes about five minutes to read all the small print. One useful thing you find is that you can repeat a command, of up to 78 characters, by pressing

Escape. Also there are differences between LOOK AT, INTO or THROUGH and it is possible to get HINTS at some places.

However, the victual thing is to immediately eat and drink anything you find. Now, marching on your stomach, you and your Noddy friends can begin to brush the opposition aside with blows from rods, batons, mirrors - indeed anything that you can't eat.

Eventually you break into a music room but, if you haven't found the hints,

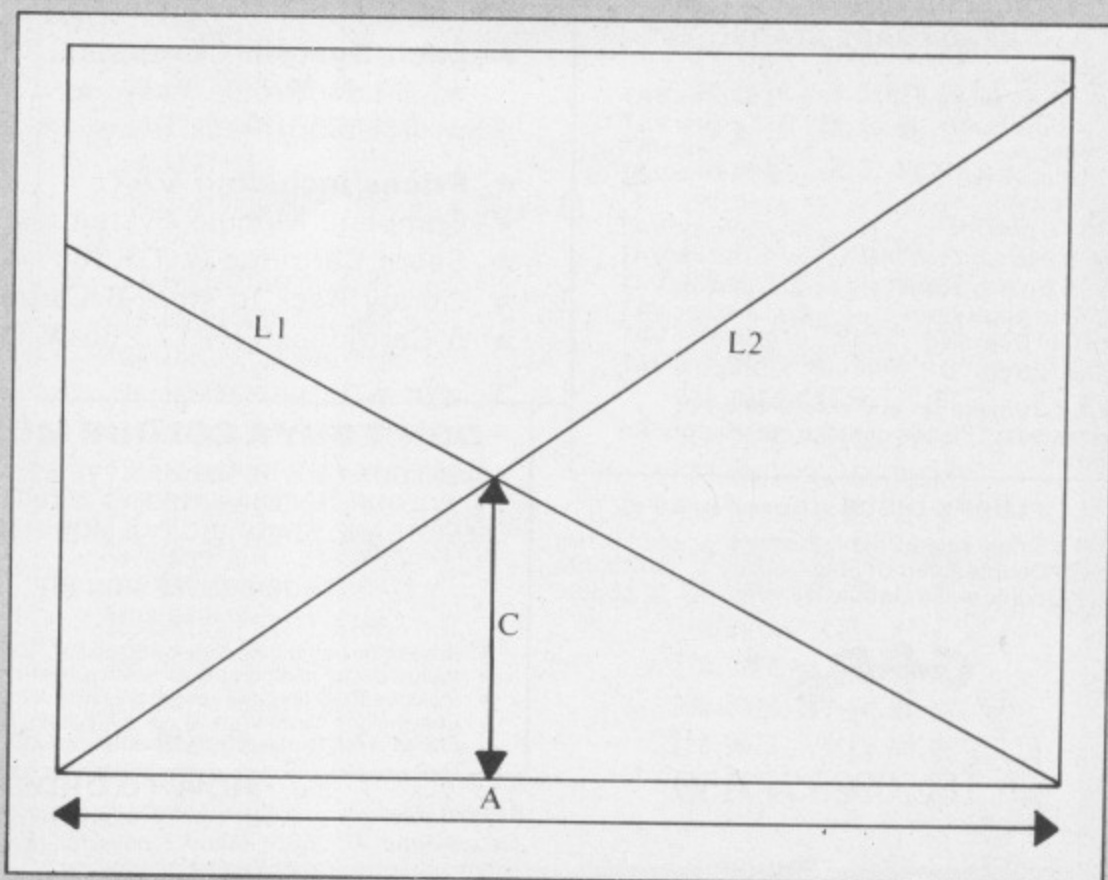


Figure 1: Ladders problem

CARE ELECTRONICS

UNIT 14, PEERGLow INDUSTRIAL ESTATE, OLD'S APPROACH, TOLPITS LANE, WATFORD, HERTS.

TELEPHONE: 0923 777155

DON'T BUY EXTRA DISC DRIVES WHY NOT BUY OUR DISC DRIVE SHARERS

DUAL @ 69.00d Inc VAT

* Two Micros to one Disc Drive

QUAD @ 113.85d Inc VAT

* Four Micros to one Disc Drive

Both units colour finished honey beige

COMPUTER/PRINTER SELECTOR

* 26 pin as BBC * Colour finished to match BBC

* 1 micro to 6 printers * 6 micros to 1 printer

@ 75.90d inc VAT

Dual Power Supply Units for Disc Drives

- ★ Colour finished to match BBC Micro.
- ★ Comes complete with moulded mains lead
- ★ 6 pin BBC outlet or Dual power leads for disc drives. (Please specify when ordering).

POWER RATING

- ★ **Standard version:** Suitable for use with TEAC and TEC drives.
- ★ **High rated version:** Suitable for use with MITSUBISHI, TANDY, CANON, etc. (Please ring factory for other makes).

Price each:

Standard @ 33.35b Inc VAT

High Rated @ 35.65b Inc VAT

MAKE YOUR TEAC AND TEC DRIVES SWITCHABLE (40/80 conversion assembly)

200K and 400K Drives only

Teac version @ 5.75c inc VAT

Tec version @ 7.36c inc VAT

READYMADE LEADS:

RIBBON:	
Disc drive single	@ 6.67c Inc VAT
Disc drive dual	@ 10.12c Inc VAT
Printer	@ 7.82c Inc VAT
Parallel 26 pin	@ 8.74c Inc VAT
OTHERS:	
RGB 6 pin DIN	@ 2.99c Inc VAT
RGB 6 pin to 7 pin DIN	@ 4.14c Inc VAT
RGB 6 pin to SCART	@ 7.82c Inc VAT
BBC to single disc	@ 3.45c Inc VAT
BBC to Dual disc	@ 4.60c Inc VAT
Serial 25 pin "D"	@ 12.88c Inc VAT

We can make up any combination of cable assy. Please contact our Factory for details.

FLOPPY DISCS: (Boxed in 10's)

3M's Single sided Double Density	@ 16.10c
3M's Double sided Double Density	@ 25.99c
Fuji Double sided Double Density	@ 25.99c

**CARE
ELECTRONICS**

TEL: 0923 777155

THE CARE LOW PROFILE ROM MODULE SYSTEM

FOR THE BBC
MICRO



Don't run the risk of damaging your ROMS/EPROMS or your BBC Micro. Whenever you want to remove ROMS/EPROMS from your BBC. Fit our Low Profile Rom Module System and save your collection

of ROMS/EPROMS in our specially designed cartridges. The CARE LOW PROFILE MODULE SYSTEM has been designed not to take any power from your BBC Micro and allows you unlimited ROMS/EPROMS.

- ★ **The Low Profile system** is a sideways mounting flush fitting unit.
- ★ **Unlike other systems:**
 - ★ Won't get in the way when using the Keyboard.
 - ★ Stops damage caused by shortcircuit due to metal objects e.g. paperclips falling inside.
 - ★ Prevents damage caused by dust.
- ★ **Edge Card Socket** which takes all the wear, Gold Plated for extended life.
- ★ **Manufactured entirely in the UK.**
- ★ **Each System Contains:**
 - ★ 1 Low Profile Assy.
 - ★ 1 ROM Cartridge.
 - ★ 1 Library Rack 6 way.
 - ★ 5 Blank Labels.
- ★ **Prices including VAT.**
 - ★ Complete Module System @ £17.25d
 - ★ Spare Cartridge @ £3.68c
 - ★ Library Rack to store 6 Cartridges @ £1.84c
 - ★ 5 Cartridges @ £17.25c ★ 10 Cartridges @ £32.20c

DON'T BUY A COLOUR MONITOR!!

HAVE YOUR 14" & 16" PHILIPS, PYE or FERGUSON TX COLOUR TV CONVERTED TO A TV/MONITOR REMOTE AND STANDARD TV'S MODIFIED IN HOUSE

@ £54.97a

RGB CONVERSION KIT

@ £43.47d

- ★ Resolution better than 585 x 450 pixels.
- ★ Image clarity comparable to leading monitors.
- ★ Includes RGB lead for connecting with BBC.
- ★ Conversions carried out at our workshops within 2/3 days.
- ★ Please write or telephone for other makes.



HOW TO ORDER:

By Post. Enclose your Cheque/P.O. made payable to **CARE Electronics**. Or use your ACCESS. Allow 7 days for delivery. Please add carriage.

OPEN
9am-5pm MON-THUR
9am-4pm FRI/SAT

a) @ 8.00 c) @ 1.00
b) @ 5.00 d) @ 2.00



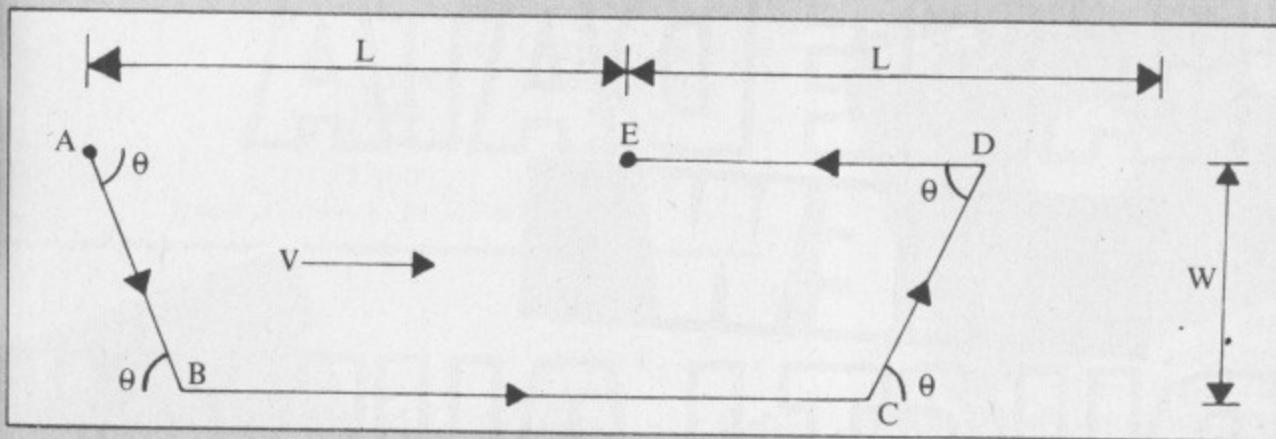


Figure II: TinTin's Run around the carriage

From Page 101

drop your guess and vice versa until you find an input A that results in zero. That's the width of the alley.

```
10 INPUT "L1,L2,C",L1,L2,C
20 INPUT "A",A
30 PRINT C-1/(1/SQR(L1*L1-A*A))+1/SQR(L2*L2-A*A):GOTO20
```

Program I

The particular example I chose was for L1=87, L2=105, C=38 and the answer is A=56.139. This was taken from Page 64 of Martin Gardner's Mathematical Circus (Pelican) except that he gives the answer as A=63. You may like to discover the misprint yourself. Note: All the lengths should be integers.

● **TinTin's Run:** Quite complex if you got involved in a quartic equation. Figure II shows TinTin's path over the ground and again it's simple – just let the computer do the work. We have three knowns:

- V = Velocity of carriage.
- W = Width of carriage.
- L = Length of carriage.

and one unknown:

T = TinTin's speed.

Then, again from Pythagoras, the time taken to run AB (or CD) is:

$$W/\text{SQR}(T^2 - V^2)$$

Time to run BC is:

$$L/(T - V)$$

Time to run DE is:

$$L/(T + V)$$

and we are given that the total time = 10 seconds.

Just another nasty equation with one unknown, so again use simple approximation. Type in Program II and keep guessing T until you get the answer 10. You should find T to be slightly better than a four-minute-mile pace – 22 feet per second – so it's fairly realistic.

```
10 V=8.8:W=12:L=88
20 INPUT "T",T
30 PRINT 2*W/SQR(T^2-V^2)+L/(T-V)+L/(T+V):GOTO20
```

Program II

All this arose from the cubic equation I found in Xanadu Cottage (Alligata) and solved by approximation. *If you haven't found it, go SE and blow.*

If you got stuck in quartic equations and imaginary numbers then that was the idea and you probably learnt something. But as I said, such knowledge is often as useless as knowing how to kill dragons.

The prize goes to A. Mitchell of Ledbury, who was first to answer both problems and used approximation driven by binary guessing – the program does all the work. It reminded me of how to treat the frog in Lords of Time – Keep It Short and Simple. Neat as well.

P.S. To solve TinTin's halfway run,

just replace line 30 with:

```
30 PRINT W/SQR(T^2-V^2)+L/(T-V):GO TO 20
```

to convince those who didn't get 18.31 feet per second.

Again I first saw this problem in Martin Gardner's Scientific American column. He had a dog trotting around a marching square and thought it involved solving a quintic.

● **Bricks:** We all drop bricks, which reminds me that some of you should have managed to stop after 134,466 moves – quite a big adventure.

A tip is DON'T count the bricks as you go – just see how many it left when it halts. *Now for this month's puzzle:*

Mrs THATCHER'S MAZE

SO CALLED because there is no turning back. All you have to do is drive through to the exit.

Problem is that the choice at the 25 crossroads depends on where you came from – just like real life. It can be done in

31 moves, but mainly illustrates, as usual, that having a listing doesn't help to solve the puzzle.

Note that the "." in the DATA are just to be clearer – make them spaces.

Alice

```
10 DIM D$(25)
20 FOR I= 1 TO 25
30 READ D$(I):REM 25 X-ROADS
40 NEXT I
50 P=6:D=10:REM START AT 6 GOING EAST
60 REPEAT:W$=MID$(D$(P),D,3)
70 PRINT"CAN GO ";W$
80 INPUT "CHOOSE ",A$
90 IF INSTR(W$,A$)=0 THEN 80
100 IF A$="N" THEN P=P-5:D=1
110 IF A$="S" THEN P=P+5:D=4
120 IF A$="W" THEN P=P-1:D=7
130 IF A$="E" THEN P=P+1:D=10
140 UNTIL P=21 AND D=10
150 PRINT "EXIT":STOP
160 DATA "E.....S"
170 DATA "EW....S..S"
180 DATA "W.....W"
190 DATA "E.....W..E"
200 DATA "W.....S"
```

```
210 DATA "N..SE.N..NE"
220 DATA "EW.SEWSW.SE"
230 DATA "NW.SE.NW.SE"
240 DATA "NE.S..SW.E"
250 DATA "N..W.....N"
260 DATA "NE.SE.NS"
270 DATA "EW.E..NSWSE"
280 DATA "N..S.....NS"
290 DATA "N..SE.N"
300 DATA "N..S.....S"
310 DATA "NE.SE.NS"
320 DATA "E..EW.NSWNE"
330 DATA "NE.E..N..NE"
340 DATA "EW.EW.NW.NE"
350 DATA "NE.SW....N"
360 DATA "...E..N"
370 DATA "...EW.NW.NE"
380 DATA "...EW.NW.NE"
390 DATA "...EW.NW.NE"
400 DATA "...W.....N"
```

Program III

CHASE DATA

NEW

PRODUCT LAUNCH

SPECIFICALLY
ENHANCED FOR USE
WITH THE
BBC MICRO.



Canon 221A "Super-Slim"
(33.5mm) 80 track double
sided 400K floppy disc drive
(40/80 track switching).

Continuing our policy of securing premium quality products at budget prices we are pleased to announce the new generation Canon 221A drive.

Specifications:
80 track double sided disc drive. 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:- 1/3 standard height, only 33.5mm.

£154 INC

All canon 40/80 switchable disc drives feature an on-board dual-colour LED on the front panel to show track mode selected.

This is coupled with our own unique two-stage illumination. To give a clear operating status, as follows.

40 TRACK MODE:	LED GREEN
80 TRACK MODE:	LED RED
POWER ON:	HALF-ILLUMINATION (GREEN OR RED)
DRIVE SELECTED:	FULL-ILLUMINATION (GREEN OR RED)

SPECIAL OFFER

WHILE STOCKS LAST

Specifications:
40 track double sided disc drive
capacity 200k in single density
Operates in double density
Track to track access time - 6 ms
Full 12 month warranty with optional
extended warranty available



£95 INC

CANON 210 2/3 HEIGHT (57.5mm)
40 TRACK D/SIDED 200K
FLOPPY DISK DRIVE
DIRECT DRIVE

Price Includes:
Drive cased with cables,
manual & utilities disc and
includes VAT, postage &
packing.

FUJI FLOPPY DISCS

	Per box 10	If purchased with disc drive
40 TK SS DD	£17.60	£15.60
40 TK DS DD	£24.50	£22.50
80 TK DS DD	£28.60	£26.60

These prices include VAT & P & P.



DISCUS

Test utility for testing your own disc drive, at regular intervals to avoid the dreaded flop of your floppy. Menu driven, easy to use, 40 or 80 track versions.

Tests: Motor speed, read/write, steptest, alignment test*, step & read/write test, read only test.

£8.00 inc. **£7.00** if purchased with disc drive.

*This test requires an oscilloscope & alignment disc.

NEW SOFTWARE RELEASE FROM CHASE DATA

Vector 1 -

The ultimate tape to disk utility


Vector 1 allows you to transfer almost all your tape software to disk. Unlike others, you only need to buy 1 copy of Vector 1 since it transfers tapes to specially formatted program discs. This is easily the most powerful tape to disk utility available.

Vector 2 - Disk to disk utility

Vector 2 allows you to make backup copies of all your valuable disk software. It is the most advanced utility of its kind available. It is a condition of sale that neither of these products are used for infringement of copyright. Not compatible with double density interface.

Vector 1 **£16** On its own
£15 If purchased with disk drive

Vector 2 **£16** On its own
£15 If purchased with disk drive

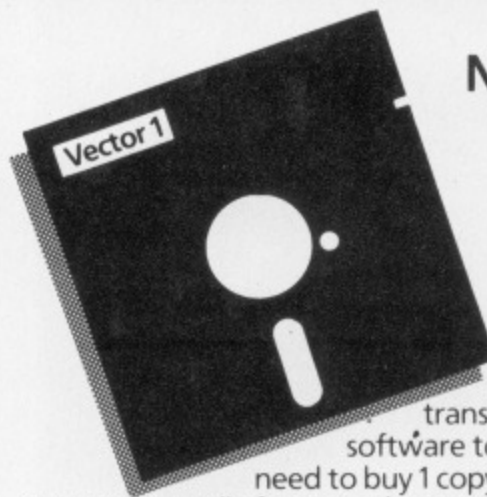


SLIM CANON DISC DRIVES:

MODEL: 110. SPECIFICATION OF EACH DRIVE: S/SIDED 40 TRACK 100K.
MODEL: 210. SPECIFICATION OF EACH DRIVE: D/SIDED 40 TRACK 200K. MODEL: 220. D/SIDED 80 TRACK 400K. (40/80 TRACK SWITCHING)



SLIM SANYO DISC DRIVES:
MODEL: 596D. SPECIFICATION OF EACH DRIVE: D/SIDED 40/80 TRACK 400K. (40/80 TRACK SWITCHING)

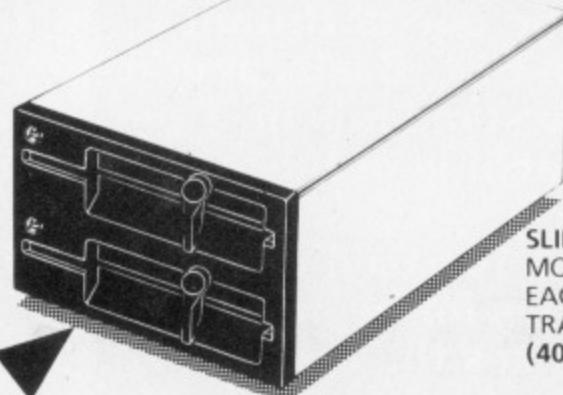

The Sanyo disc drive is a "half-height" 40/80 track switchable unit of standard dimensions, built to Sanyo's usual high standards of quality and reliability.

Inclusive price list: This means: disc drive + case + all power & data cables + UK carriage + utilities disc & manual + VAT.

Model	CANON				SANYO
	110	210	SPECIAL 220	221A	596D
Formatted Capacity per drive on BBC Micro:	100K	200K	400K	400K	400K
Single Drive & Case:	£85	£95	£129	£154	£149
Single Drive & Case PSU:	£110	£120	£154	£179	£174
Dual Drive & Case:	£174	£191	£249	£289	£279
Dual Drive & Case/PSU:	£204	£226	£279	£319	£309

DON'T FORGET YOUR VECTOR 1 & 2 WHEN ORDERING.

Support:

Warranty: All disc drives sold by Chase Data Ltd come with a full one-year warranty on parts & labour with optional extended warranty on all drives.

Extended Warranty

Your insurance of trouble free operation. When ordering your disc drive, ask about our second and third year extended warranty scheme. This covers ALL PARTS AND LABOUR and costs from as little as £15.00 on single drives and £23.00 on dual drives.

Non-Warranty Service: As the experts in our field, we can offer service on most makes of floppy disc drive.

Recalibration & Alignment ... £25 per unit inc. VAT (parts extra).
Phone for details: (Tel: 0784-38487).

Payment:



By Post: Send your remittance (cheques only please) with your order to:

CHASE DATA

Unit 2, Crabtree Road, Thorpe Industrial Estate, Egham, Surrey, TW20 8RN.

By Phone: (Tel: 0784-38487). Allow up to 21 days for delivery.

Never before

has there been such a helpful, easy-to-understand guide to BBC Basic

There has been an enthusiastic welcome from users of the BBC Micro and Electron to "Getting Started on BBC Basic". And with good reason. For its author, Mike Bibby, is acknowledged to be one of Britain's leading experts on BBC Basic, and in it he achieves new standards in simplifying the teaching of Basic programming.

The book, which is based on his highly-praised series for beginners in *The Micro User*, takes the reader step by step through the fundamentals of writing programs.

Its hands-on approach has been specifically designed to teach the

absolute novice not only the formal rules of Basic but also that elusive quality – good programming style.

By working through its many examples, the reader will gain a clear insight into structured programming and will quickly acquire the ability to use structured techniques in creating his own programs.

The chapters include:

- ★ Basic ideas – printing strings and numeric expressions
- ★ RUNNING your first programs
- ★ Strings and simple editing
- ★ Getting data from your keyboard with INPUT
- ★ REPEAT ... UNTIL, the building blocks of loops
- ★ Controlling loops with FOR ... NEXT statements
- ★ Modes and colour
- ★ Introducing procedures – a taste of structured programming
- ★ How to use subscripted variables
- ★ Nested loops
- ★ Into the second dimension with arrays
- ★ String manipulation
- ★ Simple data structures

Please send me a copy of Getting Started in BBC Basic.
2289 £5.95 (including p&p)

Payment: please indicate method (✓)

Access/Mastercard/Eurocard

Card No. _____

Barclaycard/Visa

Card No. _____

Cheque/PO made payable to Database Publications Ltd.

Name _____ Signed _____

Address _____

Send to: Database Publications, Freepost, Europa House,
68 Chester Road, Hazel Grove, Stockport SK7 5NY.
(No stamp needed if posted in UK) Please allow 28 days for delivery

You can also order by phone

061-480 0171

24 hours

Don't forget to quote
your credit card number
and give your full
address

MU6


ORDER TODAY!

Mike
Bibby

Getting started in
BBC Basic
on the BBC Micro & Electron

DATABASE PUBLICATIONS

It's here, the New Issue 2+ Starstick ROM & Quickshot Joystick

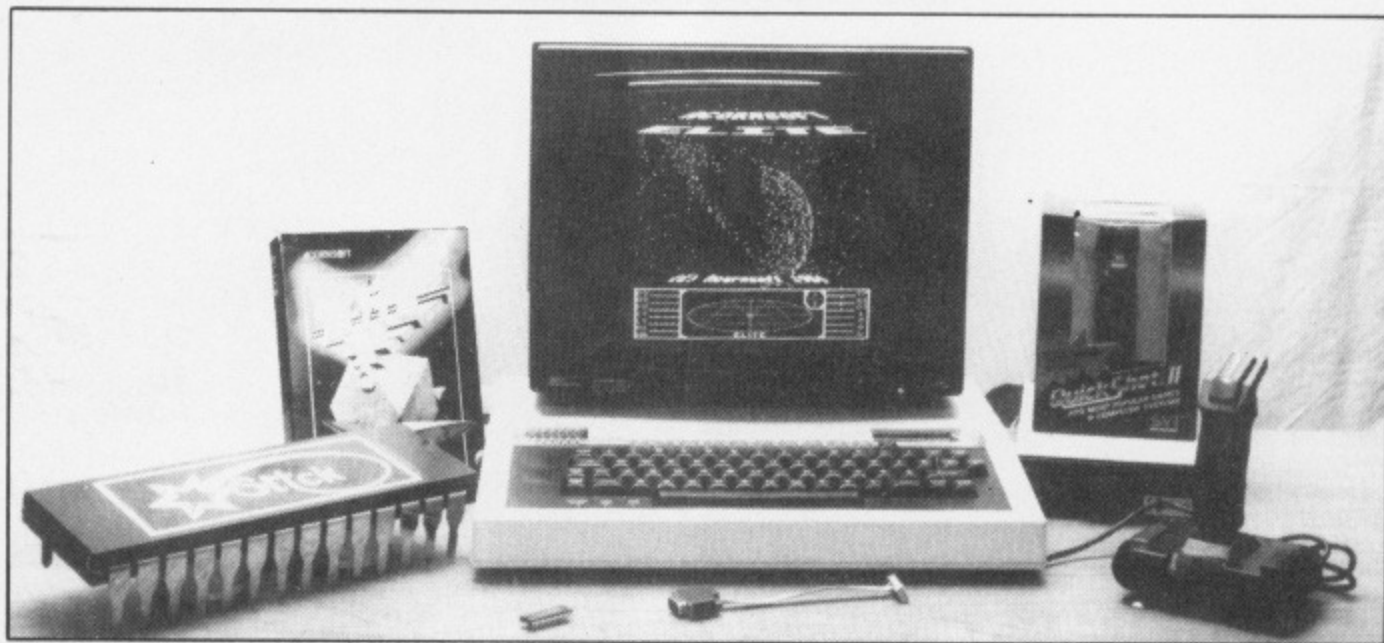

Picture shows Starstick ROM, Patchlead and Quickshot Joystick (along with Acornsoft's Elite Package - by kind permission of Acornsoft)

This new release of the very popular Starstick & Quickshot programmable joystick offers new possibilities. Over 30 extra commands which include:

- | | | |
|---------|----------|---------|
| *Elite | *Replica | *Sneaky |
| *Plonk | *Adval | *Prop |
| *Kill | *Revive | *Reset |
| *Repeat | *Map | *Ksave |
| *Kload | *Cursor | *Stick |

Fully help driven format with 20 page manual including full fitting instructions.

Not only is the package fully programmable, but it's response time is also user variable. Thus giving YOU the ability to tailor the joystick to YOUR requirements, as only YOU can.

The new issue software is fully compatible with Disc versions of Acornsoft's 'Elite', Acornsoft's 'Aviator' and Clares 'Replica'. It features relocatable workspace to enable it to work with many of the few games it would not work with before. As in the previous issue, the Starstick ROM is fully 'TUBE' compatible.

Specifically designed with the Disc user in mind, the software is not affected by any combination of the BREAK, SHIFT, or CONTROL keys.

The self centring, rapid action Joystick plugs into the user port and is managed by the Starstick ROM. The ROM monitors O.S. calls and patches the joystick into games programs. The Starstick functions with most games and even those that are not designed to function with joysticks. IT IS VERY IMPORTANT HOWEVER THAT THE GAMES USE LEGAL OPERATING SYSTEM CALLS AS MOST DO.

THE NEW PRICES ARE:

STARSTICK ROM (version 2+) and QUICKSHOT II	£29.50
STARSTICK ROM (Version 2+) and PATCH LEAD	£25.30
STARSTICK ROM (Version 2+)	£19.55
STARSTICK ROM Reprogramming Charge	£5.50

The Patch lead option allows you to plug any ATARI/SPECTRUM Style joystick into the BBC computer with the STARSTICK ROM.

PLEASE INCLUDE £1.00 for CARRIAGE and packing.

Also included in the package is a powerful ROM Manager to enable you to 'KILL' (temporarily) any ROMs that might cause you problems.

All commands in MICROTEST ROMS can be prefixed by 'M' should any other ROM try to intercept the same command name.

TUBE is a registered trade mark of ACORN COMPUTERS LTD.
Screen shot is 'ELITE' by kind permission of ACORNSOFT LTD.

MICROTEST LIMITED

18 Normandy Way, Bodmin, Cornwall PL31 1EX


Tel: 0208 3812. Bulletin Board (Prestel compatible) 0208 77677
Dealer and Export Enquiries Welcome



PROGRAMMERS' WORKSHOP

This month we're trundling printers in for servicing...

Settle the £'s hash for good

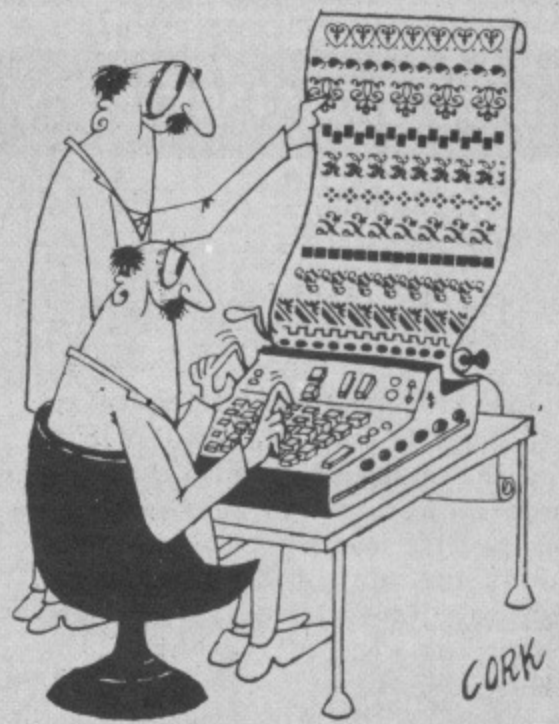

ONE annoying feature of most matrix printers is that you have to change the character set, either via control codes or DIL switches, in order to mix £ and # signs.

One solution to this problem on the Epson FX-80 is to use the downloadable character set, but you then lose the 2k buffer.

A more permanent method is to change the contents of the printer's ROM, replacing the character printed by code 96 by a £ sign.

The FX-80 ROM is an 8k by 8 device, and may be replaced by a 2764 eprom. This modification is performed as follows:

Remove the FX-80 cover. On the main board are four 28-pin sockets, and the rightmost one contains the ROM. If

a serial board is fitted, you may need to remove it to get at the ROM.

Carefully remove the ROM and load a copy of it into the BBC's memory via your eprom programmer, which should be set for 2764s.

Copy the contents of the 11 locations &48 to &53 inclusive into locations &480 to &48B. These addresses are those within the ROM, so add an offset corresponding to where your eprom programmer software stores eprom contents.

For example, if the data is stored starting at &3000 the following Basic line will do the required copying:

```
FOR AX=0 TO 10:AX?&3480=AX?&3040:NEXT
```

This modified code may now be "burnt" into a 2764 eprom, and

replaced in the ROM socket in the FX80.

Another useful modification is to change the message printed when a self-test is performed to, for example, your name and address, and possibly the printer's serial number, thus making your printer uniquely identifiable.

This message is stored at &1DF1 in the ROM and is terminated by a zero byte. The message cannot contain any control codes, and it must not be longer than about 82 characters. If it is longer the print head will just carry on going, bashing into the endstop!

The addresses mentioned only apply to version 1.1 of the ROM. The version number is printed when a self-test is performed.

Mike Harrison

Add LPRINT to your repertoire

THE resident BBC printer driver routine is excellent in many respects, but one badly needed feature is not present, that of LPRINT – a command run on micros such as the Spectrum and Dragon 32 which will print a string of letters to a printer.

It has the following syntax:

```
LPRINT*String,*
```

For the BBC to do a similar job the syntax required is more complicated:

```
VDU2:PRINT*String,*:VDU3
```

This can be a nuisance when printing several lines of text, so a more economic method is desirable. The program LPRINT has been designed to perform such a function by using a small machine code routine.

Type in Program I and check it over. Save it before RUNNING in case

something disastrous happens to it. RUN it and you should see 6502 mnemonics appearing on the screen.

Providing that the program has been correctly entered it is now ready to use. In order to use the LPRINT facility use the following syntax:

```
*LINE String.
```

This will result in the following output to the printer only:

```
String.
```

Note that no inverted commas are required, and remember to insert a space between the *LINE command and the string to be printed.

The program uses the *LINE command which is associated with *CODE. These two commands (which are not documented in the manual) have been written to allow the user to

implement his own machine code based routines addressable from Basic.

*CODEx,y will carry out a machine code routine pointed by the user vector (USERV – &200 and &201). When *CODE is called the operating system will jump to this routine with the A set to 0 and X and Y set to x and y respectively.


*LINE text does the same sort of thing as *CODE, but instead of parameters, the X and Y registers contains the address of the text (lo, hi byte).

Line 60 sets the program counter to &B01 (start of the function key buffer). To re-locate the code change this line only.

Lines 100 and 110 check to see whether or not *LINE was called (A=1)

EPROM PROGRAMMER FOR THE BBC

A very high quality product direct from the manufacturers, contained in attractive sloping box with low insertion force socket and neon indicator for programming fitted as standard, the software adopts the high efficiency method for programming 2764 and 27128. This allows up to 100% faster programming, software in machine code, supplied on cassette and can be placed in eeprom. Very easy to use, menu driven with easy to use instructions. This unit is completely self contained with its own power supply and plugs into the user port.

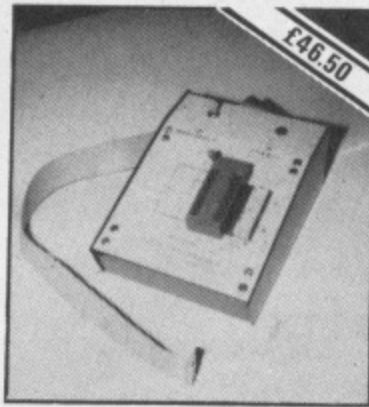

THIS PROFESSIONAL UNIT ALLOWS:

1. Will program: 2716, 2732, 2532, 2764 and 27128 eeproms.
2. Copy eeprom into memory and compute checksum.
3. Blank check eeprom.
4. Program eeprom from memory.
5. Verify byte by byte and compute checksum.
6. allow buffer start area to be changed.
7. All operating system calls may be used when in menu mode.
8. Semi-intelligent programming. Typical time to program a 2764 8k device is approx. 50 sec. depending on the data to be programmed.
9. Additional software supplied to enable your own program (basic or machine code) to be put into eeprom with the necessary leader information to allow calling with a *command. Downshift routine to enable basic programs to be run is also supplied.

COST £46.50 please add 15% VAT £1.00 post and package

Also available: RAM/ROM card 16 socket - details on request.

ORDERS TO:

**H.C.R. ELECTRONICS, Industrial Unit,
Parker Road, Chelmsford, Essex CM2 0ES.**
Access Orders Phone:
Chelmsford (0245) 350188 24 hours



For
BBC

CONTEX

Fast
Delivery

Insurance comparison
Net Present Value at 7% inflation/annum

Year	Company A		Company B	
	Sum	NPV	Sum	NPV
1	50000	50000	50000	50000
2	50000	46729	50000	46729
3	50000	43672	50000	43672
4	65000	53059	50000	40815
5	65000	49589	50000	38145
6	65000	46348	75000	53474
7	84500	56306	75000	49976
8	84500	52622	75000	46706
9	84500	49180	75000	43651

Mk V SPREADSHEET for BBC disc users


- Evaluate financial & statistical models.
- Models up to 1,000 cells in size.
- Very versatile & very friendly.
- Nine digit floating point accuracy.
- Individually variable column widths.
- Text, data or formulae in any cell.
- Word processor interface (input & output).
- Save, restore or merge (disc or tape).
- Modify command for 'what ifs'.
- Column sort (data and text).
- Interactive calculator.
- External variables.
- Extensive online help.
- Colour.
- OS/DFS commands.
- User defined parameters.

- Individual cell control for decimal places and left/right justification.
- NEW! Mode 7 graphics, histograms and lines.
- NEW! Display interrupts for faster operations.
- NEW! Revised & enhanced input and print programming commands.
- NEW! Absolute and relative cell addressing.
- NEW! Enhanced column and row insert/delete facilities.
- NEW! Formulae 'pickup' saves on memory.
- NEW! Revised manual, extended online help, example models supplied.

Mk V Spreadsheet (on disc only) £17.50 inc.
Mk III Spreadsheet on cassette (fewer facilities) £9.99 inc.

TYPING TUTOR for BBC

- Quickly learn to touch type.
- Over 90 smoothly graded lessons.
- Unique word scan line checking.
- Free format option.
- Clock, audio key click, metronome.
- Target WPM and percentage correct, revise target facilities.
- May add own lessons for specialised training (eg. legal, technical).



Disc £11.99 inc.
Cassette £9.99 inc.

CONTEX COMPUTING

15 Woodlands Close, Cople, Bedford MK44 3UE
Tel: Cardington (02303) 347

Enc: £

Please supply SPREADSHEET/TYPING TUTOR

or Access No:

Cassette/Disc 40tk/Disc 80tk


Name

Address

M6

CARE ELECTRONICS

UNIT 14, PEERGLow INDUSTRIAL ESTATE, OLD'S APPROACH, TOLPITS LANE, WATFORD, HERTS.
TELEPHONE: 0923 777155

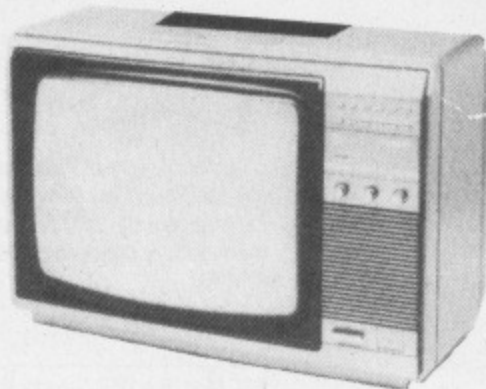


**MONO GREEN
ANTI-GLARE SCREEN
HIGH RESOLUTION
MODEL BM7502 £79.35 Inc VAT**

HOW TO ORDER:

By Post. Enclose your Cheque/P.O. made payable to:
CARE Electronics.
Or use your ACCESS. Allow 7 days for delivery.
Please add carriage £8.00

**PHILIPS
MONO MONITORS
& COLOUR
TV/MONITORS
80 CHARACTERS
PER LINE**

RGB LEAD SUPPLIED
FOR USE WITH BBC

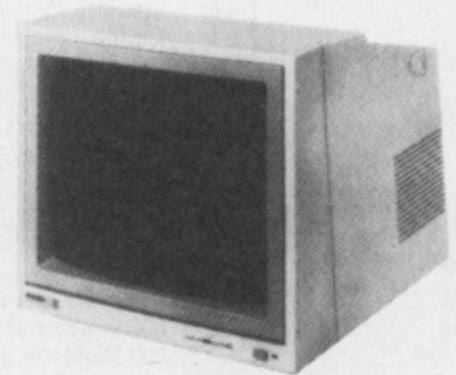

**STANDARD RESOLUTION
14" MODEL 14CT2007 £224.25 Inc. VAT**

**MEDIUM RESOLUTION
14" MODEL 14CT2006 £230.00 Inc. VAT**

**REMOTE CONTROL
14" MODEL 14CT2206 £258.06 Inc. VAT
16" MODEL 16CT2216 £302.45 Inc. VAT**

PROGRAMMERS' WORKSHOP

From Page 109

and if it is not, the OS "Bad command" routine. Try "CALL &E310" to see this.

Line 130 turns on the printer and line 140 stores the registers and sets Y to 0.

Line 160 reads the string, using the post indirected addressing which accesses the memory location pointed to by the sum of Y and the two zero-page bytes specified. The routine is terminated when the CR (Ascii 13) character is found.

Line 170 turns off the printer and line 210 modifies the USERV user vector to the location of the code (lprint).

Graham Walkden

```

10 REM LPRINT
20 REM By Graham D. Walkden.
30 REM (c) The Micro User
40 REM Don't program the
50 REM function keys.
60 PX=&B01
70 FORo=0TO3STEP3
80 [OPTo
90 .lprint
100 CMP#1:BEQeq
110 JMP&E310
120 .eq

130 LDA#2:JSR&FFE3
140 STX&90:STY&91:LDY#0
150 .begin
160 LDA#1:JSR&FFE3:LDA(&90),Y:JSR&F
FE3:INY:CMP#13:BNEbegin
170 LDA#3:JSR&FFE3
180 .end RTS
190 ]
200 NEXT
210 ?&200=lprint MOD 256:??&201=lpri
nt DIV 256
    
```

Program 1

Now ring the type style changes

HERE'S a program originally devised to allow different type styles on an Epson RX-80 printer, but it should work with any Epson compatible machine.

When loaded and run a title page is displayed (lines 10 to 170). This is then replaced by the master menu, which contains the seven basic type styles available and the Help option.

To prevent a false entry the Escape key has been disabled and each menu has been protected.

The user simply selects his basic type style by pressing the appropriate key and on doing so the sub-menu of the user's choice will be displayed.

Each sub-menu consists of type styles

based upon the entry the user typed in at the beginning of the program. To select a style simply press the appropriate key and the computer responds by sending the appropriate code(s) to the printer's buffer.

The flashing cursor is turned back on and the Escape key is enabled. If you accidentally select the wrong sub-menu you have the option of returning to the master menu by pressing M.

The Help mode can be selected at any time by pressing the H key. The mode has two sections. The first deals with the problem of how to find a selected style when it does not appear to exist in the selected menu. The second section displays the VDU codes used to get the

different styles.

You are then given the option of returning to the master menu or ending the program. If you decide to exit the program the screen is not cleared, thus enabling you to make up your own styles using the table.

The program can easily be changed to run on any dot matrix by substituting the appropriate codes in the procedures between lines 1910, 2120.

If you wish to cancel a printing mode you can do so by entering VDU2,1,27,1,64,3 which resets the printer.

Richard Smith

PROCEDURES	
menu	The master menu displayed at the beginning of the program. It can be called up at any time.
pica	Pica setting menu.
elite	Elite setting menu.
enlarged	Enlarged setting menu.
condensed	Condensed setting menu.
emphasized	Emphasized setting menu.
doublestrike	Double Strike setting menu.
alternate	Alternate setting menu.
help	The Help mode, which can be called up by the sub-menus as well as the master menu.
e	Sets Elite type.
en	Sets enlarged type.
c	Sets condensed type.
em	Sets emphasized type.
ds	Sets double strike type.
a	Sets alternate type.
esc	Enables the Escape key.

```

10 REM Epson Type setter
15 REM by R.T.Smith
20 REM (c) The Micro User
25 MODE 7
30 VDU23,1,0;0;0;0
40 *TV255,0
50 VDU7
60 *FX 200,1
70 VDU31,9,11
80 PRINT" _____"
90 VDU31,9,12
100 PRINTCHR$(141)CHR$(146);"EPSON
TYPE SETTER"
110 VDU31,9,13
120 PRINTCHR$(141)CHR$(146);"EPSON
TYPE SETTER"
130 VDU31,9,14
140 PRINT" _____"
150 VDU31,10,16
160 PRINT CHR$(145);"BY RICHARD SMI
    
```

Turn to Page 148

Twillstar reliability for Home

COMPUTERS

BBC

BBC Model B	£345.00
BBC Model B + Disc Interface	£399.00
BBC Model B + Econet Interface	£385.00
BBC Model B + Disc & Econet Interface	£458.00
Z80 Second Processor	£399.00
6502 Second Processor	£199.00
Acorn Bistick	£375.00
Acorn IEE Interface	£325.00
BBC Prestel Receiver	£132.00
BBC Telex Receiver	£225.00
Speech Interface	£54.00
Acorn 10M hard disc	£1495.00
Acorn 30M hard disc	£2299.00
Acorn Fileserver level 3	£345.00
Acorn Music 500	£199.00

ELECTRON

Electron	£129.00
Electron Me + My Micro Pack	£229.00
Plus 1 Interface	£59.95
Plus 3 Interface (DFS/Drivew)	£225.00

TORCH

Torch Z80 Card + Software	£315.00
Torch Z80 Card + Software + Disc Pack	£745.00
Torch UNICORN Z80 system	£745.00

BBC FIRMWARE

View Word Processor	£55.00
Word Wise Word Processor	£37.00
Word Wise + ROM	£49.00
Viewsheets	£55.00
Speech Synthesiser	£54.00
Graphics ROM	£32.00
Disc Doctor	£32.00
Print Master	£32.00
Communicator	£65.00
Acorn 1.2 O/S	£11.50
Acorn Basic II	£25.50
Termi Emulator	£32.00
Gremlin Debug ROM	£32.00
Caretaker	£32.00
Toolstar	£33.00
Commstar	£33.00
BCPL ROM	£99.00
System ADE ROM	£60.00
System SPY ROM	£30.00
Edword User Pack	£44.00
Edword Teacher Pack	£25.00
Merlin Scribe	£59.00
ExMon (Beebug)	£27.00
Toolkit (Beebug)	£27.00
Mu-ROM (Beebug)	£27.00
Gemini Datagem database	£115.00
BBC UltraCalc	£69.00
BBC Toolbox	£20.00
BCPL ROM + Discs + Manuals	£95.00
Logo	£69.00
Iso-Pascal	£69.00
Beebug Help ROM	£25.00
Beebug Sleuth	£29.00
Spellcheck II	£31.00
DNFS ROM	£20.00
B ROM	£32.00

EXPANSION BOARDS

Raven 20 (upgrade BBC to 52K computer)	£69.95
RAM-AMP 6 socket + 16K RAM	£56.00
6 Eprom socket + 32K RAM	£67.00
IX16K RAM Board	£38.00
Eprom Programmer (Blow all your BBC Eproms)	£49.00

BBC UPGRADES

A-B upgrade	£110.00
DFS Interface	£99.00
Econet Interface	£69.00
Speech Interface	£54.00

DISC UTILITIES

View Index	£14.95
View Printer Driver generator	£11.50
Hi-View	£59.00
Acornsoft Database	£15.00
Clares Betabase 40/80	£23.00

Clares Graphdisk 40/80	£12.95
Clares Replica II Disc Copier 40/80	£11.95
Clares The Key 40/80	£12.95
Beebugsoft Masterfile	£19.00
Beebugsoft Design	£19.00
Microtext (cassette) (disc)	£49.80
BCPL Calculation Package	£59.85
Masterfile II	£19.00
	£32.00

MONITORS

Microvitec 1431 Standard Res	£189.00
Microvitec 1451 Medium Res	£289.00
Microvitec 1441 High Res	£399.00
Microvitec 2031 20" Standard Res	£315.00
Microvitec Sinclair QL	£270.00
Philips BM7502 V.H. Res (Green)	£85.00
Normende TV/Monitor + Remote Control	£249.00
Philips CTV + RGB	£229.00
Kaga RGB Vision III 12"	£355.00
Kaga 12" H.R. Green	£118.00
Sanyo SCM 14" VHR	£425.00
Novex 1414 colour Monitor	£215.00
Philips V7001 H.R. (Green) with volume, RGB, Composite Inputs	£75.00

DISC DRIVES

BBC Single 100K Drive	£99.00
BBC Dual 200K	£189.00
BBC Single 200K 40 Track	£159.00
BBC Dual 400K 40 Track	£299.00
BBC Single 400K 80 Track	£159.00
BBC Dual 800K 80 Track	£318.00
BBC Single Power Supply	£20.00
BBC Dual Power Supply	£29.00

Cumana Drives

CSX 100 40T/600K single	£109.00
CSX 200 80T/200K single	£149.00
CSX 400 80T/400K single	£179.00
CS 100 40T/100K single (PSU)	£149.00
CS 200 80T/200K single (PSU)	£189.00
CS 400 80T/400K single (PSU)	£199.00
CD 200 40T/200K dual (PSU)	£269.00
CD 400 80T/400K dual (PSU)	£315.00
CD 400/S 40/80T switched dual (PSU)	£399.00

PRINTERS

Brother EP44	£228.00
Brother HR5	£148.00
Brother M1009	£195.00
Canon PW1080A 160 CPS (NLQ)	£289.00
Canon PW1156A 160 CPS (NLQ)	£399.00
Kaga KP810 (NLQ)	£279.00
Kaga KP910 (NLQ)	£399.00
Kaga RS232 + 2K buffer	£95.00
Ensign 1650 165 CPS	£305.00
Epson RX80T 100 CPS	£212.60
Epson RX80F/T 100 CPS	£240.00
MPO-165 (NLQ)	£299.00
Panasonic KP1091	£325.00
Seikosha GP100A	£189.00
Epson RX100F/T 100 CPS	£396.00
Epson FX80 160 CPS	£365.00
Epson FX100F/T 160 CPS	£494.00
Shinwa CP80A	£199.00
Riteman Compact 120 CPS	£199.00
Star Gemini 10X 120 CPS	£230.00
Star Gemini 15X 120 CPS	£339.00
Epson 8143RS232 Interface for FX & RX	£34.00
Epson 814RS232 Interface with 2K Buffer X On/Off	£65.00

DAISYWHEEL PRINTERS

Brother HR15	£378.00
Brother HR15 Keyboard	£155.00
Brother HR15 Sheet Feeder	£212.00
Brother HR15 Tractor Feed	£95.00
Quen Data 20 CPS	£249.00
Juki 6100 18 CPS	£340.00
Juki 2200 Daisywheel/Typewriter	£280.00
Juki Single Sheet Feeder	£230.00
Juki tractor Unit	£115.00
Juki RS232 Interface	£74.00
Juki Spare Daisywheel	£16.00

COLOUR PRINTERS

Canon PJ1080A 7 Colour 40 CPS Ink Jet	£440.00
Seikosha GP700A 7 Colour 50 CPS	£399.00

Plotters

Penman Plotter	£275.00
PIXY Plotter	£399.00
Epson HF-80	£445.00

Add Ons

AMX Mouse	£79.00
Trackerball	£59.00

DISKS

Very high quality 3M Diskettes, guaranteed for life at only £20.00 per box (Double-sided 80 track)

MODEMS

Pace Nightingale	£135.00
(inc Comstar ROM)	£155.00

WS2000

A world standard modem switchable between 75, 300/300, 600, 1200/75, 75/1200 baud rate. This is the only modem you would ever likely to need to communicate with any computer throughout the world.

Telemod 3

BT approved - switchable between 75, 300/300, 1200/75, 75/1200 and allows you to communicate virtually anywhere in the world. It will allow you to communicate with services like Micronet, Telecom Gold, Prestel One-to-One, Easylink, Microweb. It comes as a standard with built in board for auto-answer.

Modem Lead Software

BBC BUSINESS SOFTWARE

Microsimplex	£270.00
Gemini Integrated Accounts	£99.00
Sage Accounts	£429.00
Please add £4.00 for Disc Version	

ACORNSOFT

Invoicing Order Processing
Mailing List Purchasing
Stock Control Accounts Payable
Accounts Receivable
Price £23.95 each

WORD PROCESSING

BBC 1

BBC Mod. B, View of Wordwise, High Res. Monitor, Quen Data daisywheel printer, Cassette recorder with 10 cassettes and all the necessary cables and printer paper. £750.00

BBC 2

BBC Mod. B + DFS, View or Wordwise, 100K BBC drive, High Res. Monitor, QuenData daisywheel printer, 10 diskettes and all the necessary cables and paper £843.00

BBC 3

Same as BBC 2 but with 400K drive £929.00

BBC 4

BBC Mod. B + DFS, View or Wordwise, 800K Dual Disc Drive, High Res. Monitor, Juki 6100 daisywheel printer, 10 of 80 track Diskettes and all the necessary cables and printer paper £1,244.00


Command Business computer users

ACCESSORIES

BBC Data Recorder	£35.00
DR6 Data Recorder	£25.00
Tornado Joysticks SW self-cen PR	£13.95
Quickshot + I/F for BBC	£19.95
Sureshot Joystick	£18.00
BBC Dust cover	£3.50
RH Light Pen	£44.00
Graph Pad	£99.00
BB Key Function key mask	£1.90
Disc storage box (15)	£6.95
Disc storage box (80)	£14.50
Printer dust cover	£4.95
Monitor dust cover	£4.50
Listing Paper 9.5" x 11" (2,000 sheets)	£15.00
Data Cassette C15	£0.40
Anti glare Monitor Safety Screen	£17.50

LEADS

Cassette leads	£3.00
5 pin DIN to 6 pin DIN (RGB)	£3.00
Monochrome monitor lead	£3.25
Disc Drive power leads to BBC (single)	£4.50
(dual)	£5.00
Disc Drive Ribbon Cable (Single)	£8.00
(dual)	£10.00
6 pin Din to 6 pin Din (RGB) Monitor lead	£3.00
BNC to phono lead for (composite) Monitor	£3.00

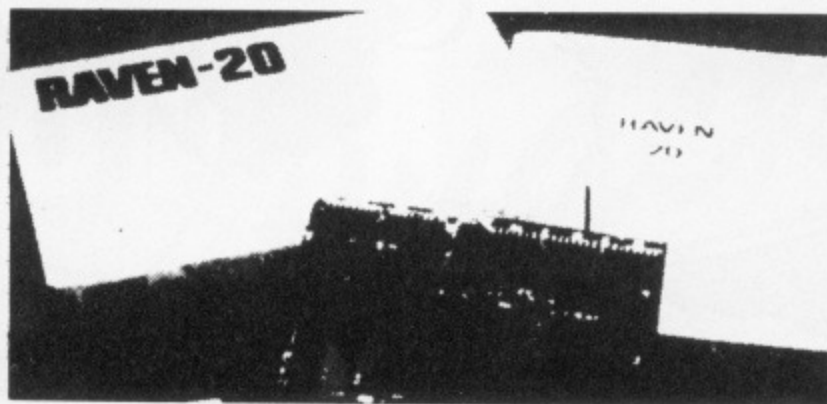

EXPANSION BOARDS

RAVEN-20 BOARD

The RAVEN-20 is a 20K RAM EXPANSION for the BBC Micro, Model B, fitted with O.S. 1.2.

This specially designed product plugs in to the CPU socket of your micro (centre socket of the 3 available) with the minimum of effort. The pins are specially custom made, thus avoiding any possible damage to the circuitry.

The RAVEN board provides the user with an extra 20K of usable RAM in screen modes 0 to 3. This together with the aid of software makes the system completely transparent to both the user and the computer.

The RAVEN-20 software ROM gives much more than just the standard commands, it has been programmed to give more and better commands! Here are some of the commands:

- RON - Enable RAVEN-20 in SLOW Mode
- FRON - Enable RAVEN-20 in FAST Mode
- RVFF - Disable RAVEN-20
- RTEST - TEST RAVEN-20 RAM
- RSTAT - Show status of RAVEN-20
- SSAVE - Save Screen to file
- RAM - Sideways RAM load
- RZAP - Examine/Alter BBC RAM
- RVZAP - Examine/Alter RAVEN-20 RAM
- RPAGE - Set/Show RAVEN-20 work page (fast mode)

Price £69.95 inc of VAT

RIBBONS

MX100/FX100	£11.50
MX/FX80	£5.50
GP80	£5.00
GP100	£5.70
GP250	£6.00
KAGA KP870	£8.50
Canon PW1080	£8.50
Brother HR15 M/S	£5.50
Brother HR15 Carbon	£4.30
Juki 6100	£4.20
Oki 80/82	£2.35
Riteman	£6.50

DISC STORAGE

10 x 5 1/4 library case	£2.00
15 x 5 1/4 flip n file	£6.95
40 x 5 1/4 Lockable	£14.50
80 x 5 1/4 Lockable	£14.50
Disc Albums stores up to 20	£9.95

LISTING PAPER

11" x 9 1/2" 2000	£15.00
Teleprinter Roll	£4.50

PRINTER LABELS

1000 90 x 36mm	£5.70
1000 90 x 49mm	£8.90
1000 102 x 36mm	£7.15

EPROMS

2764 - 250ns	£4.95
27128 - 250ns	£11.50

TOP 10


1 Elite	£14.95 (£16.95)
2 Frak	£7.50
3 Blockbusters	£7.95
4 Sabre Wulf	£9.95
5 3D Grand Prix	£7.95
6 Scrabble	£12.95
7 Pole Position	£9.99
8 Football Manager	£7.95
9 Castle Quest	£12.95 (£14.95)
10 Music System	£24.95

RAM-ROM BOARD

The RAM-ROM extension board gives an extra 6 sockets for extra ROM's and 2 slots of RAM. This RAM is not an extension of BASIC. It is intended that the RAM be used to develop your own ROM based software. There are in fact seven sockets on the board, the 7th replaces the socket on the main board that would otherwise be taken by the ROM board. (The RAM-ROM board can accommodate both 2764 type EPROMS as well as 27128 EPROMS and ROM).

RAMAMP board is a best of its kind on the market Comes complete with either 16K RAM or 32K RAM. Doesn't need any soldering. Anyone can install in matter of a minute. Comes complete with 10 utility programs to make full use of the Board, and it's fully compatible with RAVEN-20 Board.

Are you surprised how we have sold over 2000? (Read Acorn Review March '85).

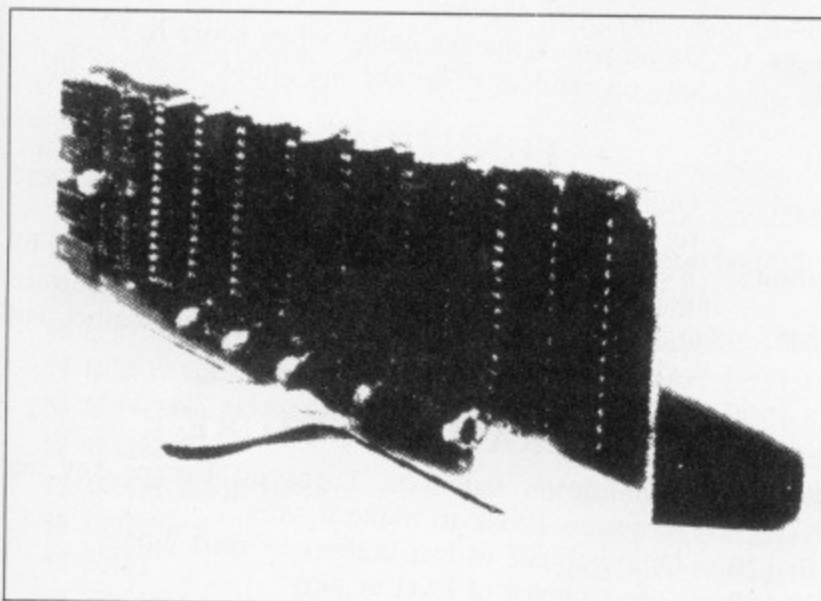

All prices inclusive of VAT. Please add £1.50 for P&P.

HOW TO ORDER

You may purchase any of the items listed by cheque made payable to: Twillstar Computers Ltd. Barclaycard or Access. All you have to do is fill in your requirements on a separate sheet of paper, post to us and we will despatch with 24 hours, subject to availability. All prices inclusive of 15% VAT. ADD £2.50 P&P for orders below £150. Over add £8 P&P. Credit card holders may order by telephone. Give card number, name, address and items required. Please note VAT is not charged on export orders. Export customers please ring for details of P&P.

TCL



TELEPHONE ORDERS
(01) 574 5271


Open
6 days a week
9am to 7pm
Monday to Saturday



Twillstar Computers Limited

17 Regina Road, Southall, MIDDLESEX, UB2 5PL. TEL: (01) 574 5271



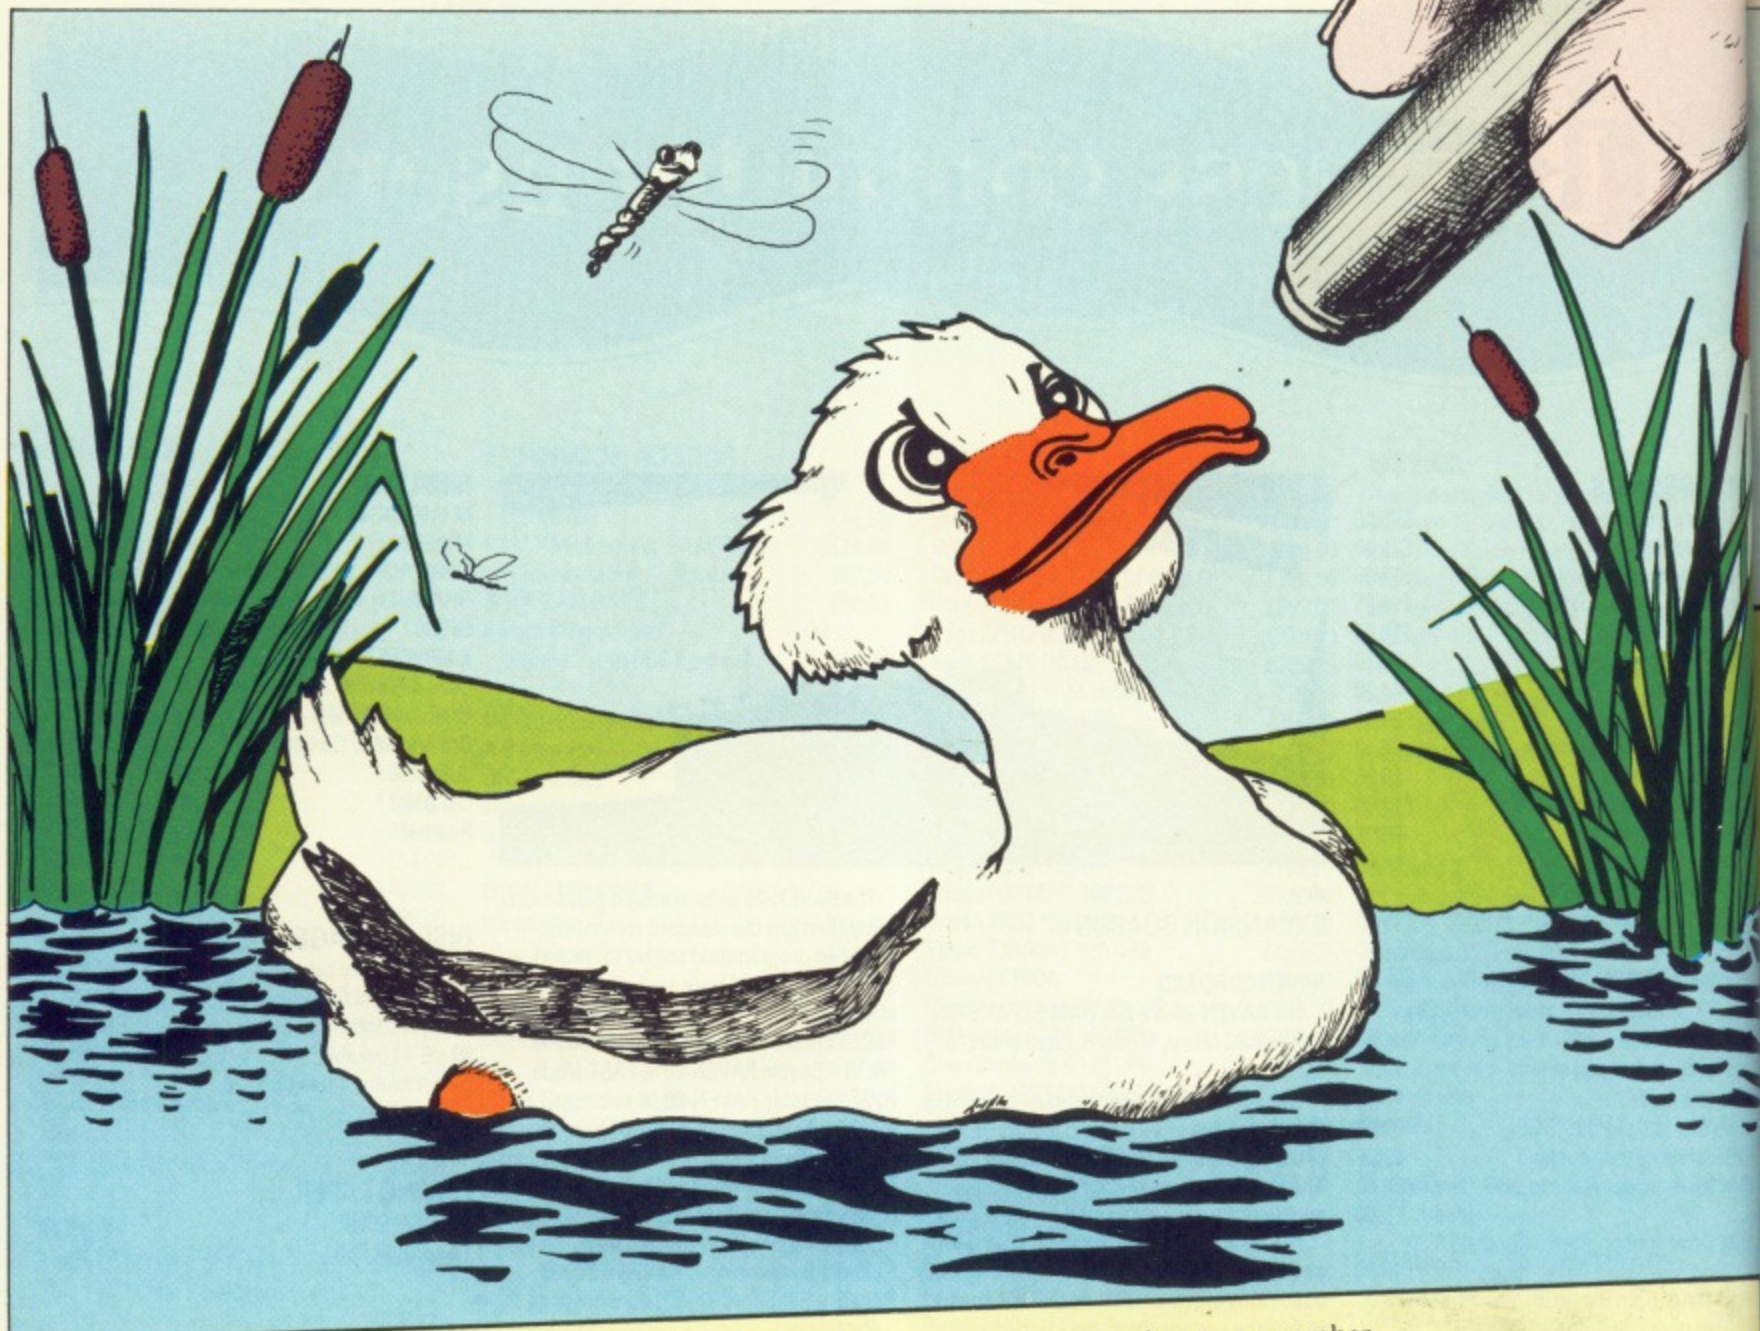

VARIABLES

S%	Score.
H%	Highest score for this session.
put%	A two dimensional array containing the screen coordinates of the ducks.
seq%	One dimensional array containing the randomly generated sequence in which the ducks will quack.
grab%	Space reserved for machine code to read light pen registers.

PROCEDURES

chars	Defines the characters for the ducks.
init	Initialises all variables and gives an example of the ducks quacking on the first pass, when F%=TRUE.
duck	Draws duck number n% at the correct screen position.
quak	Makes duck n% quack by generating sound and overprinting the beak with a different character for an open beak.
river	Plots the river.
veg	Plots the marginal vegetation on the river bank.
setup	Sets up the starting screen for the game.
instr	Displays instructions for the game.
pinit	Assembles the machine code for the light pen and initialises the variables which set the light pen for Mode 2.
lpoint	Returns the light pen position.
lpos	Called to read the light pen registers.
seq	Makes the ducks quack their sequence which the

wait
lost
again
win
rnd

player has to remember.
Utility which causes a delay of n% seconds.
Game lost sequence.
Replay offer sequence.
Game won sequence called when score is 50.
Sets up random order for the ducks to quack in.

FNget

Utility which waits for a key contained in a\$ and returns the key pressed.

FNfind

Returns the number of the duck being pointed to by the light pen. The routine waits if the position returned does not correspond to a duck but to some other part of the screen.

FUNCTIONS

PROGRAM STRUCTURE

10-100	Initialisation sequence. Turns off Escape key and programs Break to make it safe.
110-120	Offers choice of instructions or start game.
130-160	Offers choice of level of play.
170-260	Main program loop.
180-190	Ducks quack and prompt for player to try to repeat sequence.
200-210	Takes light pen input and either increases score or enters game-lost sequence as appropriate.
220-240	Updates highest score and checks for score of 50, which represents a win.
250	Redefines random quacking sequence for the hardest level of play.

Put The Micro User's light pen to work – and play –
in ALAN ROWLEY's unusual adaptation of an old favourite

SIMON Quackers!

THERE are lots of implementations of the sequence-remembering game Simon, but you always have the same problem – how to relate the keyboard to the screen when the player has to respond.

Now that we have an efficient and cheap light pen for the BBC, courtesy of *The Micro User*, the problem can be made to disappear.

I also decided to ginger up the game a bit by replacing the usual boring grid of lights with a stretch of river and some animated ducks which the player can induce to quack by touching them with the light pen.

Since there is no need to relate the ducks to the keyboard they can be arranged in a non-symmetrical way, which adds an extra degree of difficulty.

The game has two levels. In the first on completion of a successful sequence the tune is extended by one note but the



beginning sequence remains the same as before.

In the more difficult level 2 version the tune is completely redefined as well as being extended.

The light pen routines are taken directly from the article in the October 1983 issue of *The Micro User*, except that I have made them specific to Mode 2.

You may need to alter the timings for

your hardware. See the earlier article for details of how to do this.

As lines 60, 70 protect the program from the effects of Break and Escape, you would be well advised to REM them until such time as you have typed in and debugged your program.

To order light pens, please send your cheque/P.O. made payable to Database Publications Ltd.

£11.65 (kit)
£18.35 (assembled)

Send to: Light Pen offer,
The Micro User,
68 Chester Road,
Hazel Grove,
Stockport SK7 5NY.


Please allow 28 days for delivery

```

10 REM*****
20 REM*   SIMON QUACKERS   *
30 REM*   by Alan G. Rowley *
40 REM*   (c) The Micro User *
50 REM*****
60 *FX200,1
70 *KEY10 OLD:IM RUN:IM
80 PROCchars
90 MODE2
100 PROCinit
110 a$=FNget("YyNn")
120 IF INSTR("Yy",a$) MODE1:VDU23,1
,0;0;0;0;PROCinstr:a$=FNget(" ");MOD
E2:PROCsetup ELSE PRINTTAB(0,0);SPC(6
0);
130 COLOUR 128:PRINTTAB(0,31);SPC(1
9);
140 PRINTTAB(3,31);"Level 1 or 2 ?"
;
150 a$=FNget("12");dif%=VAL(a$)
160 PRINTTAB(0,31);SPC(19);
170 REPEAT
180 COLOUR15:COLOUR128:PRINTTAB(3,0
)"GET READY !!!":VDU7,7:PROCwait(2):P
RINTTAB(3,0);SPC(15):PROCseq
190 COLOUR3:COLOUR128:PRINTTAB(3,0)
"NOW YOU TRY !!!":VDU7,7
200 FORi%=0TO5%:IF FNfind(>)seq%(i%)
PROClost:PROCagain
210 NEXT:COLOUR128:COLOUR6:SZ=SZ+1:
PRINTTAB(11,29)"Score ";6%;
220 IF SZ>HZ HZ=SZ
230 IF HZ>0 COLOUR4:PRINTTAB(0,31);
"Top Score "HZ;
240 IF SZ=50 PROCwin:PROCagain ELSE
COLOUR6:PRINTTAB(3,0)" WELL DONE !!
":PROCwait(3):PRINTTAB(0,0);SPC(19)
250 IFdif%=2 PROCrnd
260 UNTIL FALSE
270 DEFPROCinit
280 LOCALi%
290 DIMput%(1,6),seq%(49),grab% 20:
SZ=0
300 PROCpinit
310 PROCrnd
320 FORi%=0TO6:READput%(0,i%),put%(
1,i%):NEXT
330 DATA1,7,10,11,15,8,3,11,8,16,13
,15,3,19,15,19
340 PROCsetup
350 COLOUR128:COLOUR6
360 PRINTTAB(3,0)"SIMON QUACKERS" 'T
AB(9)"by" 'TAB(3)"Alan G. Rowley"
370 IF FX FX=FALSE:FORi%=0TO6:PROCq
uak(i%):PROCwait(1):COLOUR6:NEXT
380 COLOUR128:PRINTTAB(1,31)"INSTRU
CTIONS ? Y/N";
390 ENDPROC

```

Turn to Page 153

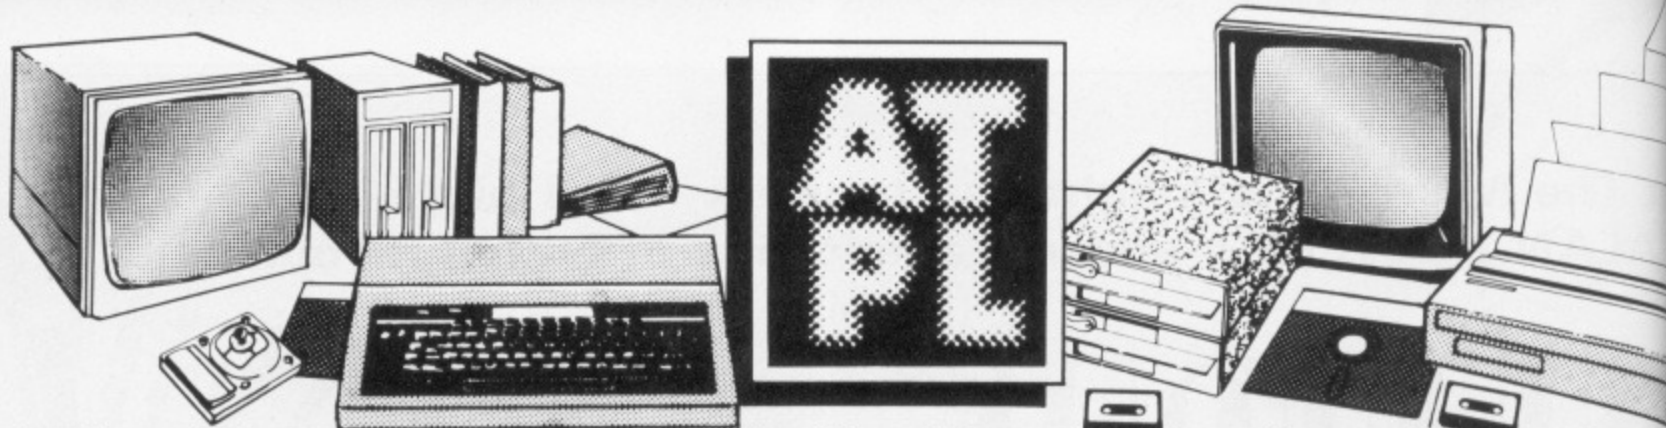

The Professionals in Computing Systems

We offer a design development and manufacturing service for companies wishing to improve their products using Microprocessor Technology.

ATPL SIDEWISE

SIDEWAYS ROM/RAM EXPANSION FOR THE BBC MICRO **£38.00**
+ £1.00p+p + VAT


- ★ FULL SIDEWAYS ROM EXPANSION to total of sixteen ROMs.
- ★ 16K battery backed CMOS RAM option - RAM is treated as ROM number 15 on read.
- ★ Software for SIDEWAYS ROMs may be down loaded and run in RAM under the true SIDEWAYS environment before transfer to EPROM using ATPL's EPROM programmer.
- ★ EXISTING sockets on BBC are usable and all EPROM sockets are accessible without removing SIDEWISE.
- ★ PLUG - IN - AND GO construction. Mounts neatly inside the BBC machine.
- ★ NO SOLDERING required to fit SIDEWISE.
- ★ FULL BUFFERING of address and data busses - prevents data bus loading problems associated with unbuffered boards.

The BBC Computer can run software packages stored on EPROM using the four 'SIDEWAYS ROM' sockets on its printed circuit board. Now that an ever increasing range of software packages for word processing, financial planning and other applications are available in this format, there is a need to expand the facility and take advantage of these developments.

ATPL has designed SIDEWISE which provides you with a further twelve sockets giving a total capability of sixteen SIDEWAYS ROMs, the maximum number capable of being supported by the BBC computer operating system. In addition to the ROM expansion, one of the SIDEWAYS ROM sockets may be defined as RAM, permitting SIDEWAYS ROM software to be loaded into the RAM area of the machine using normal OS commands. Once loaded, the RAM may be used like any other SIDEWAYS ROM and the limitation of having only sixteen sockets is effectively removed.

EVER HIT YOUR 'BREAK' KEY WHEN YOU DIDN'T MEAN TO?

- FOR THE BBC MICRO **£8.53**
+ 50pp+p + VAT
- Fit ATPL 'BREAK-LOCK' to your BBC Micro and avoid disaster where inadvertant use of 'BREAK' will cause loss of data and/or programmes.
- ATPL 'BREAK-LOCK' is a 2 position key-switch that will:
- Prevent accidental or unauthorised use of the 'BREAK' key.
 - Act as a security device to prevent unauthorised use of your system more effectively and cheaper than security ROMs.
 - Easily and neatly fit in the 'Ash-tray'.
 - Render demonstration machines tamper-proof.

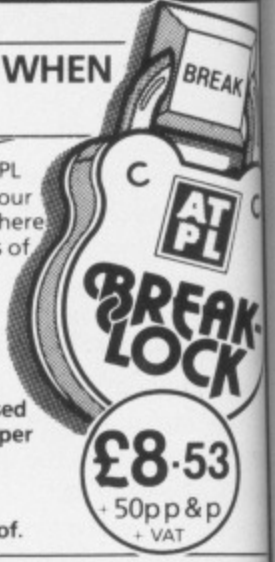

Also available from ATPL: ISLAND LOGIC MUSIC SYSTEM

See ATPL Special Offers for ACORN MUSIC 500

£125 INCLUDING V.A.T. AND DELIVERY

The Electronic Keyboard for the BBC Micro

The 'Symphony' Electronic Keyboard provides simulation of a wide range of musical instruments and sound effects through your BBC micro computer

- FEATURES INCLUDE**
- 4 Octave 49 note C-C keyboard with full size keys
 - Software included for up to 100 different sound effects to be created and modified whilst you are playing.
 - Complete set of 100 effects can be saved or loaded to or from disk or cassette
 - Effects selected by use of function keys
 - Each effect can be given a name for easy reference and an index continuously displayed

- Software includes sound effects simulating musical instruments - piano, organ, violin, banjo, jazz bass, etc.
 - Octave shift, pitch bend and auto repeat functions
 - Optional 'sustain' foot switch for extra control
 - External amplifier or connection to Hi-fi system options available
 - The 'Symphony' Electronic Keyboard pack includes: keyboard and connector cable to BBC micro user port, software (please state disk or cassette) and comprehensive user guide
- SYMKIT** - allows sound output from the BBC to be connected to an external amplifier **£5.89 + 50p p&p + VAT**
- SYMAMP** - wooden cased amplifier with 6 watt output suitable for use with the Symphony keyboard, via SYMKIT. **£39.50 + £2.50p p&p + VAT**
- SYMSWITCH** - sustain foot switch for use with the Symphony keyboard. **£5.75 + £1 p&p + VAT**

ATPL offer you the full range of BBC computers and peripherals. Send an S.A.E. (A4) for full technical data and our latest competitive prices.

SIDEWAYS ROM EXTENSION SOCKET

ONLY **£13.00**
p+p 50p + VAT

INSIDEOUT is designed to make a sideways ROM socket available outside the BBC computer, to allow for easy exchange of sideways ROM's.

CAN BE USED FROM BBC MODEL B OR EXPANSION BOARD SOCKETS • SUPPLIED WITH LOW INSERTION FORCE SOCKET FOR EASE OF USE
NO COSTLY CARTRIDGE PACKING • EPROM PLUG IN AND GO • NOT LIMITED TO ONE DEVICE • SOCKET RATED AT 100'S OF INSERTIONS
MOUNTED OUTSIDE THE BBC. EASILY REMOVED AND REFITTED • CAN BE MOUNTED IN USER DEFINED LOCATION - NOT FITTING IN AN ILLEGAL POSITION

ATPL SPECIAL OFFERS for BBC Computers

- 8K CMOS RAM for ATPL SIDEWISE EXTENSION ROM/RAM BOARD**
1 off **£9.15** only on orders placed 2 off **£18.00** after the 1st June 1985
 - DISC BASED PROGRAMMES TO WORK WITH CMOS RAM ON SIDEWISE SPOOLIT** - 8K or 16K printer buffer **£10**
 - DFS SHIFT** - only works with Acorn -9 DFS allows memory recovery to & OE00 **£10**
 - SIDSWIPE** - save and load Sideways ROM's to disc **£10**
 - ACORN MUSIC 500 SPECIAL SET**
If you buy ATPL Symphony + Acorn Music 500 and you get the ATPL Music 500 Disc/Cassette absolutely FREE.
Special Set Price £281.74. Saving £10.00
 - ATPL Symphony (less VAT) £108.70**
Acorn Music 500 £173.04
ATPL Music 500 Disc/Cassette £10.00
 - NEW PRODUCT INDEX UTILITY ROM** - 28 commands to control the BBC with emphasis on all addons (Sideways ROM/RAM, second processors, and operating system control) **£25.**
 - NEW PRODUCT DISC INDEX PROGRAMME** - allows you to generate a data base of disc directories, can be used in combination with Sideways RAM. **£10.**
- Please Add 50p p&p + VAT

ATPL Advanced Technology Products Limited

B.U.5.
Station Road, Clowne,
Chesterfield, S43 4AB.
☎ (0246) 811585 (4 lines)

CONDITIONS OF SALE & DELIVERY
Cheques made payable to Advanced Technology Products Ltd. please allow 28 days for delivery. Cost of carriage or postage refer to each section. Quantity orders and overseas carriage charged at cost. Condition of sales available on request.

ACCESS AND BARCLAYCARD accepted. Carriage to be added to advertised price, then add VAT to the total.

In accordance with our policy of progressive development, we reserve the right to modify specifications without prior notice.

EVAL

PETER JOHNSON shows machine code programmers how to harness the power of the Basic expression evaluator

ONE of the problems often encountered when writing machine code programs is how to decode numbers, such as addresses, into binary and, conversely, how to print out numbers in decimal or hexadecimal.

You could write all of the conversion routines yourself. Some aren't too hard. For example, hex to binary is quite straightforward.

However, often we want to input or print numbers in decimal, and sometimes we want to deal with floating-point numbers like 1.123. This is far from easy when writing in assembler, especially on the 6502. The solution is to call on our friendly Basic interpreter.

The Basic ROM contains many useful routines which you can call from your own machine code programs — there isn't much advantage in calling them from Basic!

The ones I'm going to discuss are mainly concerned with getting numbers in and out of the computer. One particularly handy routine is that which performs the Basic EVAL function.

This takes a string and evaluates it as an expression. For example EVAL("1+2*3") would return 7. This gives the machine code programmer access to the full power of the Basic expression evaluator.

I give the addresses of routines for Basic II first, followed by the equivalent address for Basic I in brackets. All of the examples use Basic II addresses.

First I'll deal with input. If you are familiar with the BBC's machine operating system you will probably know that you can input a line by calling the OSWORD routine at address &FFF1. This enables you to put the string anywhere you want in memory, and to specify which range of characters will be accepted and how long the string can be.

However since we're interested in Basic here, we will use the routine in the Basic ROM which puts the input string where other Basic routines expect to

find it, that is at address &600 — the Basic string buffer.

The routine to input a string to this address is at &BBFC (&BC17). It accepts up to 238 characters and all characters typed except control codes in the range Ascii &00 to &1F.

On exit, the length of the string is in the Y register, and this must be saved in address &36 so that Basic knows the length.

If the user presses Escape to end the string input, Basic will generate an "Escape" error. To prevent this, disable the Escape key before calling the routine and enable it again afterwards.

It is usual to print a prompt before asking for input. Single character prompts like ">" and "?" which Basic use can be printed by calling OSWRCH:

```
lda #ASC">"
jsr oswrch
```

However another of the useful routines in Basic prints the string which follows the JSR to the routine, then continues execution after the string. The routine is at &BFCF (&BFCB) and the string to be printed must be terminated by a NOP instruction. Program I illustrates the routines mentioned so far.

This may seem like an awful lot of trouble to do what in Basic would be:

```
REPEAT
INPUT LINE "Type a string "a$
PRINT "You typed "a$
UNTIL FALSE
```

but it's a lot shorter than the code which would be required if the Basic routines

hadn't been used.

The next step is obtaining numbers and printing them out.

Once a string has been placed in the string buffer it can be converted into a number by calling the Basic VAL routine. This places the converted number into either the integer accumulator, if the number was a whole one, or the floating point accumulator if it contained a fractional part or was bigger than the maximum integer size.


The integer and floating point accumulators are groups of memory locations in zero page which Basic uses to hold numeric results.

The integer accumulator, IAC, is at locations &2A-&2D (least significant byte first) and the floating point accumulator, FPAC, occupies the locations &2E-&35.

Notice that this comprises eight locations, rather than the five used to store a floating point variable. This is because the accumulator is an expanded version of the number which makes calculations quicker. Routines exist in the Basic ROM to "pack" these eight bytes into a variable.

The routine to convert the string at &600 into a number is at address &AC34 (&AC5A.). It assumes that the strLen at &36 has been set up correctly. When it returns, the VAL of S&600 is in the FPAC if the minus flag is set (and A contains &FF) or the IAC if the minus flag is 0 (and A = &40).

Note that the routine only converts decimal numbers. To convert hex

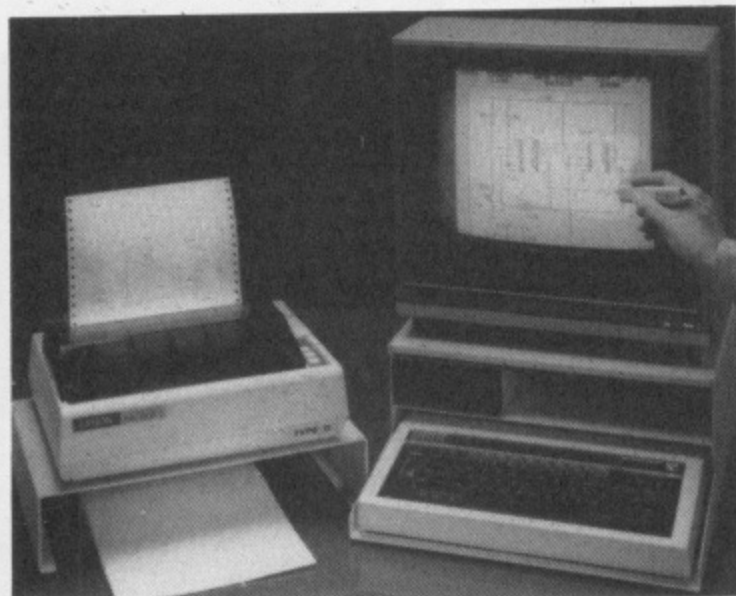

CIRKWICK

CIRKWIK is a lightpen or tracker ball driven CAD package orientated to the production of schematic drawings such as circuit diagrams, flow charts, power systems, pipework diagrams and many similar professional and engineering applications.


Using this program you can turn your BBC micro into a powerful CAD system capable of producing high quality drawings easily and quickly. An ordinary 80 column dot-matrix printer is all that is required for output and a unique graphics routine allows a multiple screen drawing to be printed in one pass.

Drawings up to 2 screens high by 4 screens wide may be produced and new symbolic shapes may be created on an enlarged scale even while the drawing is in progress. Up to 640 symbols may be used at any time and the package is delivered with over 150 symbols pre-programmed, although these are mainly electronic symbols and may be overwritten to be used for any type of schematic drawing. Parts lists of symbols used may be generated and printouts can be obtained of the unlimited symbol libraries.

The package is available in three versions: Datapen Lightpen version; trackerball version and a Grafpad version. Both the latter also include the lightpen version on the same disc, enabling a low-cost introduction into CAD. The drawings produced on any version are completely interchangeable and the difference between versions is one of speed of drawing.

The MARCONI RB2 TRACKER BALL provides precise X-Y cursor control by simple fingertip operation. It plugs into the user port on the BBC micro and comes complete with Micro-Draw, a superb graphics design program and utilities to link the tracker ball software with your own programs.

The ATARI TRAK-BALL and AMX MOUSE are also usable with CIRKWICK provided the correct connections are made to the user port and Datapen provides an interface to suit at only **£13.00**.

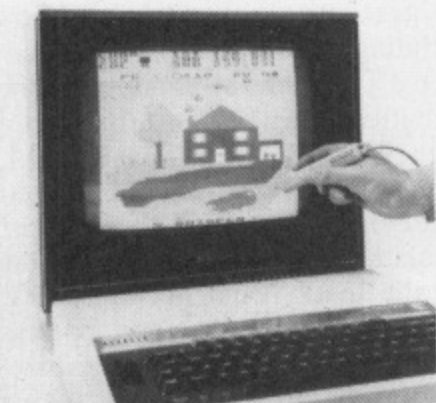

BEEBPEN


BEEBPEN is a comprehensive high resolution drawing program for use with the Datapen lightpen. It enables you to create, edit and save, virtually any picture that could be made using the BBC computer's advanced graphics facilities. In addition it offers freehand painting, use of all plot commands, circles and user defined graphics. A unique two-step action allows single pixel accuracy and the pixel position is also displayed digitally in the menu.

DEFINE is a suite of programs providing all the sprite and animation facilities needed to produce high speed arcade type games using your own multicoloured characters (sprites).

The package is extremely easy to use, every command being made with a lightpen, or analogue joystick, directly from the screen. Real size and enlarged views of your sprites are continuously updated while you define or edit them and you may test animation sequences in the editor package as you go along. New sprites may be created by editing old versions and the number of sprites you may define is unlimited. Sprites may be any size up to 12 x 16 pixels and each pixel may have any of the 16 standard mode 2 colours. The software needed to animate your sprites is provided as a separate program, which you can merge into your own BASIC, or machine code, program, allowing high resolution positioning with fast, simple commands. The number of sprites, or clones, you may have at any one time is unlimited (except by computer memory) and the speed of movement can be very fast if desired - over 400 sprites per second may be printed from BASIC, or 700 per second from machine code. Of course, you may link sprites in your own programs, producing giant sprites, or sub-animation. A 24 page handbook is supplied as well as a BASIC example program.

TELETEXT DISPLAY CREATOR allows the busy program writer to quickly create displays in colour graphics and text using a lightpen directly on the screen. As only 1K of memory is used per picture, a complete program could call up many different screens, thus making animation easily possible and routines are provided that will produce a complete animated program with the addition of only a few lines of BASIC. Full instructions are provided, as is a description of how teletext pictures are generated.

BRITAIN is a simple lightpen operated geographical location program and comes complete with a series of tests for the student concerning the location of places in the British Isles. A feature of the program is that it self adjusts for new test, the lecturer merely adds a series of Data statements to the program.

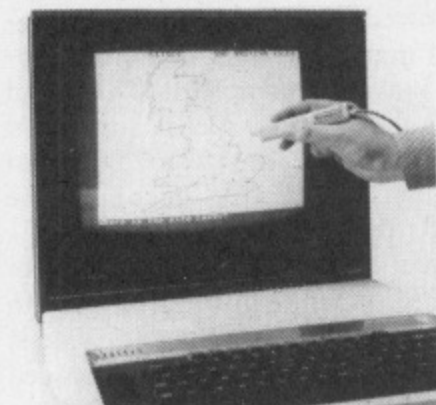

BRITAIN


The DATAPEN LIGHTPEN itself comes complete with software on tape, handbook and a printed listing showing useful routines. Two drawing programs, SKETCH and SHAPE-CREATE are included free with the lightpen and the programs shown above may be ordered additionally or separately as desired.

The Datapen lightpen contains compact electronic circuitry built into the pen body, providing a superior performance and a professional quality product.

Please send your cheque/P.O. to:

**Dept. MU2 Datapen Microtechnology Ltd,
Kingsclere Road, Overton,
Hants. RG25 3JB. Tel: (0256 770488)**

S.A.E. FOR FURTHER DETAILS

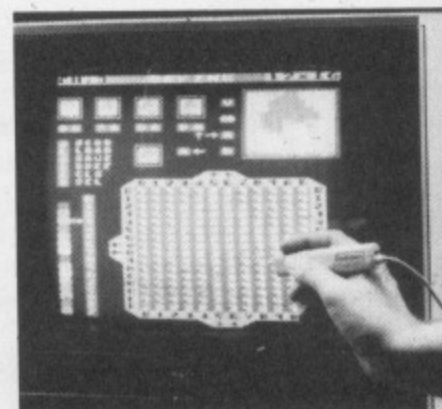

DEFINE



TELETEXT DISPLAY CREATOR

ORDERING INFORMATION

All prices include VAT and postage.

CIRKWIK lightpen only
CIRKWIK trackerball/lightpen
CIRKWIK Grafpad/lightpen
DEFINE Sprite Animator/Editor
DEFINE Sprite Animator/Editor
TELETEXT Display Creator
BEEBPEN Drawing Program
Britain Geography Quiz
DATAPEN Lightpen
MARCONI Tracker Ball (with Micro-Draw)
ATARI Trak-Ball with BBC interface

disc £19.95
disc £24.95
disc £24.95
disc £11.95
cassette £9.95
cassette £9.95
cassette £11.95
cassette £6.95
£25.00
£59.50
£33.00

Please deduct
£1.50 off each
program if more
than 1 ordered.

Program I

```

1000 REM Routine to show BASIC's IO
routines
1010 REM Pete Johnson
1020 DIM code 100
1030 PROCinit
1040 FOR pass=0 TO 2 STEP 2
1050 P%=code
1060 [ opt pass
1070 .entry
1080 jsr vstring Print the pr
ompt
1090 opt FNequs("Type a string ")
1100 nop
1110 jsr input Call BASIC's
input routine
1120 sty strLen Save for pri
nting
1130 jsr vstring Print anothe
r message
1140 opt FNequs("You typed ")
1150 nop
1160 ldx #0 $600,X is th

```

```

e next character
1170 ldy strLen Get count ba
ck again
1180 .loop
1190 dey Do test at t
he top in case of null string
1200 cpy#&FF
1210 beq endLoop
1220 lda strBuff,X Get a charac
ter
1230 jsr oswrch Print it
1240 inx Next charact
er
1250 bne loop Always taken
1260 .endLoop
1270 jsr osnewl Print a blan
k line
1280 jsr osnewl
1290 jmp entry And do it al
l again
1300 ]
1310 NEXT
1320 CALL code
1330 END
1340 DEF PROCinit

```

```

1350 input = &BBFC :REM Input
string to buffer
1360 vstring = &BFCF :REM Print
a message
1370 oswrch = &FFEE :REM Output
a character
1380 osnewl = &FFE7 :REM Print
a new line
1390 strBuff = &600 :REM Addres
s of string buffer
1400 strLen = &36 :REM Length
of string in buffer
1410 ENDPROC
1420 DEFFNequs(string$)
1430 $P%=string$
1440 P%=P%+LEN($P%)-1
1450 =pass

```

Basic I changes

```

1350 input = &BC17 :REM Input
string to buffer
1360 vstring = &BFCB :REM Print
a message

```

From Page 117

constants into binary, another routine at &AE6D (&AE9C) must be used.

The entry conditions for this are that the pointer at &19-&1A contains the address of the string buffer (ie &600) and &1B contains the displacement into the buffer of the first digit of the number.

Thus if &600 were "&AA" then &19-&1A would contain &600 and &1B would contain 1. On exit, the IAC contains the number and A=&40 and the N flag = 0.

To show all of these routines in action, Program II takes input from the user and converts the string into a number. It then prints the contents of the IAC or FPAC, as appropriate, as a sequence of hexadecimal numbers.

By running the program and typing a few numbers you should be able to work out what's going on. Notice that illegal numbers are always converted into the real number 0.

The meanings of the eight FPAC bytes are (left to right):
 sign (&80 means negative)
 exponent overflow
 exponent (128 + actual exponent)
 four bytes of mantissa (MSB first)
 mantissa overflow

Note that the overflow bytes are always zero after a simple number

conversion.

So much for simple numbers. What about expressions? As I mentioned earlier, there is a routine corresponding to EVAL which will take a general Basic expression and convert it to a number or string.

I'll use this to illustrate the use of number to string conversion. Program III reads an expression, evaluates it, then prints the value.

If the expression evaluates to a string, as STRINGS(20,"<>") would, it is printed immediately, otherwise it is converted into a number.

The important routines are:

Eval: This takes the string in StrBuff and evaluates it by running the Basic expression evaluator on it. It returns a result in either the IAC, the FPAC or the StrBuff, depending on the type of expression. The 6502 flags (and the value of A) give the type of the result:

N=1, Z=0, A=&FF => real result
 N=0, Z=0, A=&40 => integer result
 N=0, Z=1, A=&00 => string result

The routine is at address &ABEE (&AC17).

Str: This is roughly equivalent to the STR\$ function. It takes a number in the IAC or FPAC and converts it to a string in strBuff. On entry Y contains the type of the number (&40 or &FF) and

location &15 contains &FF if the conversion is to be into hex, &00 for decimal.

When converting the current value of the @% variable is taken into account (except for field width: there are no leading spaces in the converted string).

On exit, the string buffer contains the string that would be printed by a PRINT statement and strLen contains the length of the string. A contains &00 and the zero flag is set, implying that the result of the operation was a string.

The Str routine is at address &A3E4 (&A3F2).

Program III accepts an expression, evaluates it and then prints the result.

You can type any Basic expression in response to the prompt, and it will be evaluated and printed. Note that all the errors associated with expressions, '-ve root', 'No such variable' and so on, can still occur and will cause the program to return to Basic.

You can also get out of the program by pressing Escape.

In the next article I'll look at getting the values in the three accumulators into variables of the appropriate type (and vice versa). I'll also examine some of the routines that can be used from machine code to perform operations on values such as INT and LOG.

EVAL listing

From Page 119

Program II

```

1000 REM Routine to show BASIC's str
ing conversion routines
1010 REM Pete Johnson
1020 DIM code 100
1030 PROCinit
1040 FOR pass=0 TO 2 STEP 2
1050 P%=code
1060 [ opt pass
1070 .entry
1080 jsr vstring Print the pr
ompt
1090 opt FNequs("Type a number ")
1100 nop
1110 jsr input Call BASIC's
input routine
1120 sty strLen Save for VAL
1130 lda #0 Set up expre

```

```

ssion pointer
1140 sta aeline
1150 sta aecursor
1160 lda #strBuff DIV #100
1170 sta aeline+1
1180 jsr getChar Read a non-s
pace from the line
1190 cap #ASC"&" Hex?
1200 beq convertHex Yes
1210 jsr val Do a decimal
conversion
1220 bne printIt Always taken
1230 .convertHex
1240 jsr hexNum Convert numb
er at (aeline),aecursor
1250 .printIt
1260 bpl fourBytes Integer, so
print four bytes
1270 ldx #8 Real, output
8 bytes
1280 ldy #fpac From the fpa
c


```

```

1290 bne outBytes
1300 .fourBytes
1310 ldx #4 Integer,
put 4 bytes
1320 ldy #iac From the i
1330 .outBytes A in
1340 lda #,Y Get a byte
1350 jsr outHex5 Print it,
en a space
1360 iny
1370 dex Next byte
1380 bne outBytes cha
1390 jsr osnewl 154
1400 jsr osnewl lin
1410 jmp entry Do it again
1420 ]
1430 NEXT s of
1440 CALL code 156
1450 END sion
1460 DEF PROCinit 157
1470 getChar = #8ABC :REM Read int
char from (&19),&1B 158
r re 159
ult 160
160 161
162 163
164 165

```

TD ROM[©]

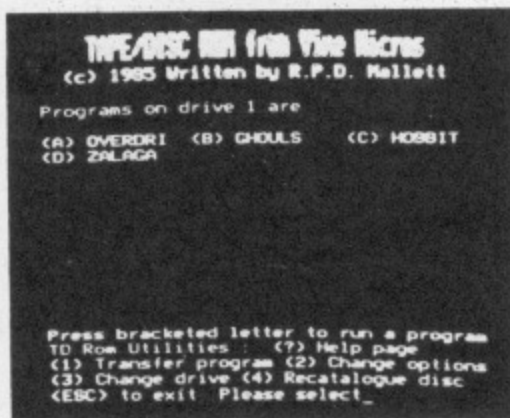

- Instant access.
- Allows use of all available RAM, (&400 to &7FFF).
- Can handle any length of program.
- Can handle any number of programs.
- Can save to any disc.
- Very user-friendly, (menu driven).

N.B. This ROM solely provides convenience in loading, and does not break software protection.

Also: The **ADDCOMM** ROM
40 new commands for the BBC 'B' O.S. 1.20 and Electron computer with ROM board. GRAPHICS, TOOLKIT, LOGO GRAPHICS and GENERAL PURPOSE statements all on one ROM.

£28.00 with 72 page User Guide, (including V.A.T. and post).
Or send stamp for detailed brochure.


Tape to Disc Transfer

Now for Single and Double Density

Price £18.00 (inc VAT and post)

- Contains two transfer routines to ensure effective loading of all but a few currently available software tapes.
- Adventures normally taking six minutes to load will now take about five seconds.
- The system automatically switches to TAPE filing after loading, so that you can still load/save games positions, etc.

BBC 'B'

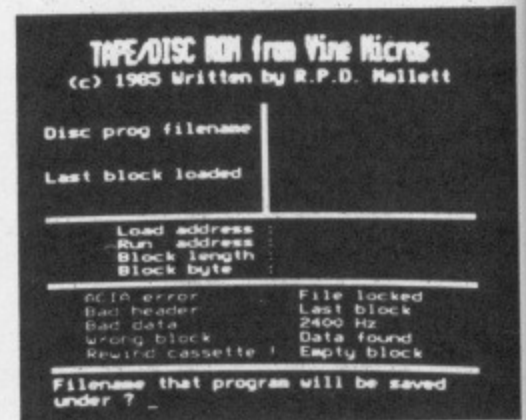

- Available to suit these Disc Filing Systems, (state type when ordering).
Type 8271 - Acorn DFS and DNFS, Amcom S/D and Watford S/D.
- Type 1770 - Opus DDOS 3.45 and Solidisk DDOS, (working in single density).



Available from:

VINE MICROS, MARSHBOROUGH,
NR. SANDWICH, KENT,
CT13 0PG

(Or your local Computer Dealer)




```

1480 val = &AC34 :REM Get VA
L$&600
1490 hexNum = &AE6D :REM Conver
t hex num at (&19),&1B
1500 outHexS = &B562 :REM Print
A in hex
1510 input = &BBFC :REM Read s
tring
1520 vstring = &BFCF :REM Print
string
1530 oswrch = &FFEE :REM Output
char
1540 osnewl = &FFE7 :REM Do new
line
1550 strBuff = &600 :REM Addres
s of string buffer
1560 aeline = &19 :REM Expres
sion pointer
1570 aecursor = &1B :REM Cursor
into line
1580 iac = &2A :REM Intege
r result
1590 fpac = &2E :REM FP res
ult
1600 strLen = &36 :REM LEN$&6
00
1610 ENDPROC
1620 DEFFNequs(string$)
1630 $PZ=string$
1640 PZ=PZ+LEN($PZ)-1
1650 =pass

```

Basic I changes

```

1470 getChar = &8A13 :REM Read a
char from (&19),&1B
1480 val = &AC5A :REM Get VA
L$&600
1490 hexNum = &AE9C :REM Conver
t hex num at (&19),&1B
1500 outHexS = &856A :REM Print
A in hex
1510 input = &BC17 :REM Read s
tring
1520 vstring = &BFCB :REM Print
string

```

Program III

```

1000 REM Routine to show BASIC's EVA
L routine
1010 REM Pete Johnson

```

```

1020 DIM code 100
1030 PROCinit
1040 FOR pass=0 TO 2 STEP 2
1050 PZ=code
1060 [ opt pass
1070 .entry
1080 jsr vstring Print the pr
ompt
1090 opt FNequs("Type an expressio
n ")
1100 nop
1110 jsr input Call BASIC's
input routine
1120 sty strLen Save for pri
nting
1130 jsr eval
1140 tax Save type by
te
1150 jsr vstring Print anothe
r message
1160 opt FNequs("Value was ")
1170 nop
1180 txa Restore type
byte
1190 beq stringResult Already a st
ring
1200 tay Convert numb
er to string
1210 jsr str
1220 lda pwidth Print leadin
g spaces
1230 sec
1240 sbc strLen See how many
spaces to print
1250 bcc endSpaces None
1260 beq endSpaces None
1270 tax Put count in
X
1280 lda #ASC" " and space in
A
1290 .spaceLoop
1300 jsr oswrch
1310 dex
1320 bne spaceLoop
1330 .endSpaces
1340 .stringResult
1350 ldx #0 &600,X is th
e next character
1360 ldy strLen Get count ba
ck again
1370 beq endLoop Null string
1380 .loop
1390 lda strBuff,X Get a charac
ter
1400 jsr oswrch Print it

```

```

1410 inx Next charact
er
1420 dey
1430 bne loop
1440 .endLoop
1450 jsr osnewl Print a blan
k line
1460 jsr osnewl
1470 jmp entry And do it al
l again
1480 ]
1490 NEXT
1500 CALL code
1510 END
1520 DEF PROCinit
1530 str = &9EDF :REM Conver
t number to string
1540 eval = &ABEE :REM Evalua
te expression in strBuff
1550 input = &BBFC :REM Input
string to buffer
1560 vstring = &BFCF :REM Print
a message
1570 oswrch = &FFEE :REM Output
a character
1580 osnewl = &FFE7 :REM Print
a new line
1590 pwidth = &400 :REM LSB of
@% variable
1600 strBuff = &600 :REM Addres
s of string buffer
1610 strLen = &36 :REM Length
of string in buffer
1620 ENDPROC
1630 DEFFNequs(string$)
1640 $PZ=string$
1650 PZ=PZ+LEN($PZ)-1
1660 =pass

```

Basic I changes

```

1530 str = &9ED0 :REM Conver
t number to string
1540 eval = &AC17 :REM Evalua
te expression in strBuff
1550 input = &BC17 :REM Input
string to buffer
1560 vstring = &BFCB :REM Print
a message

```

This listing is included in this month's cassette tape offer. See order form on Page 189.

WHEN using the Basic assembler, do you feel crowded, inconvenienced, and generally bullied around by those stubborn Basic line numbers?

Well now is the time to liberate yourself. Here is a simple, but extremely effective, idea to enable you to get your own back on them.

If you own Wordwise or any other word processor that can produce spooled Ascii text, then read on — otherwise get yourself one and then read on.

The following technique allows you to type in an assembly language program without using a single Basic line number. In this way the full facilities of your word processor can be used to produce the program as if you were typing in normal text.

When it comes to editing, or chopping and changing of any description, this little trick has saved me hours of programming time and added weeks, or months, or even eons, to the life of my nervous system.

The technique could also be used to produce Basic programs by those fanatics who advocate 100 per cent “no GOTO” structured programming.

To type in a new program, enter the word processor and at the top of your “document” put:

**NEW
AUTO**

Now type in your program as before but don't use any line numbers at all. When finished, or when you want to try assembling the program so far, just save the file as a SPOOLED text file (called “name”), go back to Basic and type:

***EXEC name**

Because of the NEW and AUTO commands at the start of your file the EXECing will produce a normal line-numbered Basic program. After the last line of text has appeared press the Escape key in order to leave the AUTO mode.

You can now use the source code as usual, correcting any assembly errors or making any minor amendments in the normal way.

If the line-numbered copy is adjusted then we can't just go straight back to our text copy and continue adding to that because in doing this we would lose the amendments. In order to continue from here the amended copy must be SPOOLED and then stripped of its line numbers, thus producing an amended text copy. This is the function that the Stripper program serves.

The program should also be used to

Tear a strip off Basic line numbers

ROBERT GRIFFITHS shows how a word processor can be used to save time and effort in assembly language programming

convert any existing “line-numbered” code into the text format. Thus any amendments to existing programs, incorporation of those old faithful subroutines in the present masterpiece, or re-arrangements of any description, can all be done with comfort and pleasure on your word processor.

In order to use Stripper it must have been previously assembled and saved. Just type in or load the listing and RUN it. A machine code file called strip will then be saved to disc or cassette.

There are two versions of the program. Either can be used by disc owners, but only the cassette version by cassette owners.

For disc owners the strip file is under two pages long and should be saved to every disc that is likely to need it.

Call it with *STRIP name, where name is the name of the SPOOLED file that is to be stripped. But as an alternative to this disc users could use the cassette version and then only one copy of the file will need to be saved. In this case call it with *STRIP.

Cassette users should SAVE the strip file to a short tape so that it can be quickly found. Call with *RUN STRIP, or if the program is already in memory and has not been corrupted, call with CALL&B00.

When you're ready to do some stripping, your victim (the source code) will be lying around in the micro's memory looking all smug and pleased with itself. Ha ha, a programmer's revenge lurks. Grab it by the ankles and SPOOL it onto disc by typing:

***SPOOL name
LIST
(The text file is now saved)
*SPOOL**

The smug look will turn to one of mild concern at this point: “Hooo, what's

going on here then? I like it when you am!”

Now while it's still unaware, type your devastating message (disc use will be

***STRIP name**

“Ahhrrrr, what's happening to my line numbers? I want to be a Basic program again!”

Just ignore the screams emanating from your micro and wallow in the sweet, sweet, revenge.

The spooled file is now stripped of line numbers and all spaces on either side of the line numbers. If, however, there were any lines which contained nothing but spaces then these are left with one space remaining. This is done so as to keep any gaps which were placed in the listing for the purpose of clarity.

The NEW and AUTO commands have been added to the beginning of the spooled file and any lines which start with > have been removed from the beginning and end of the file.

This last feature removes the >LIST and any other commands from the beginning, and the >*SPOOL and the following lines from the end of the file.

Listing I is the disc version. Replace lines 210 to 280 with listing II and delete line 490 for use with cassettes.

Normally the stripped file is saved with the same name as the spooled file. Listing III is a small addition to the program that changes the first character of the spooled filename with a ! and then saves the stripped file under this new name.

This addition is intended for use with the cassette version in order to avoid any confusion that might arise in having two different files with the same name on the same tape.

The program uses the EQU facility provided by Basic II. To convert for Basic I these must all be replaced

Refer to
03, for de
Altern
ines con
given in
which sh
asing ca
If you
s not a t
strip a sp
SPOOLE
length, d
check wh
s a Basic
On so
Acorns,
490 solv
The p
&B and
defined
the pro
definition
will be l

210-280

210-2
236-2
242-2

300-4

420-4

450-4
500-5


Refer to *The Micro User*, Jan '85 page 13, for details of how to do this.

Alternatively replace the program lines concerned with the conversions given in Listing IV, lines 273-276 of which should only be added if you are using cassettes.

If you keep getting the message "This is not a text ASC file" when you try to strip a spooled Basic program, and your SPOOLED file is over 255 bytes in length, delete line 490. This deletes the check which determines whether the file is a Basic program or a spooled text file.

On some disc systems, other than Acorns, this check will fail. Deleting line 490 solves the problem.

The program assembles into pages &B and &C, the soft key buffer and user defined character area. Therefore when the program is used any soft key definitions or user defined characters will be lost.

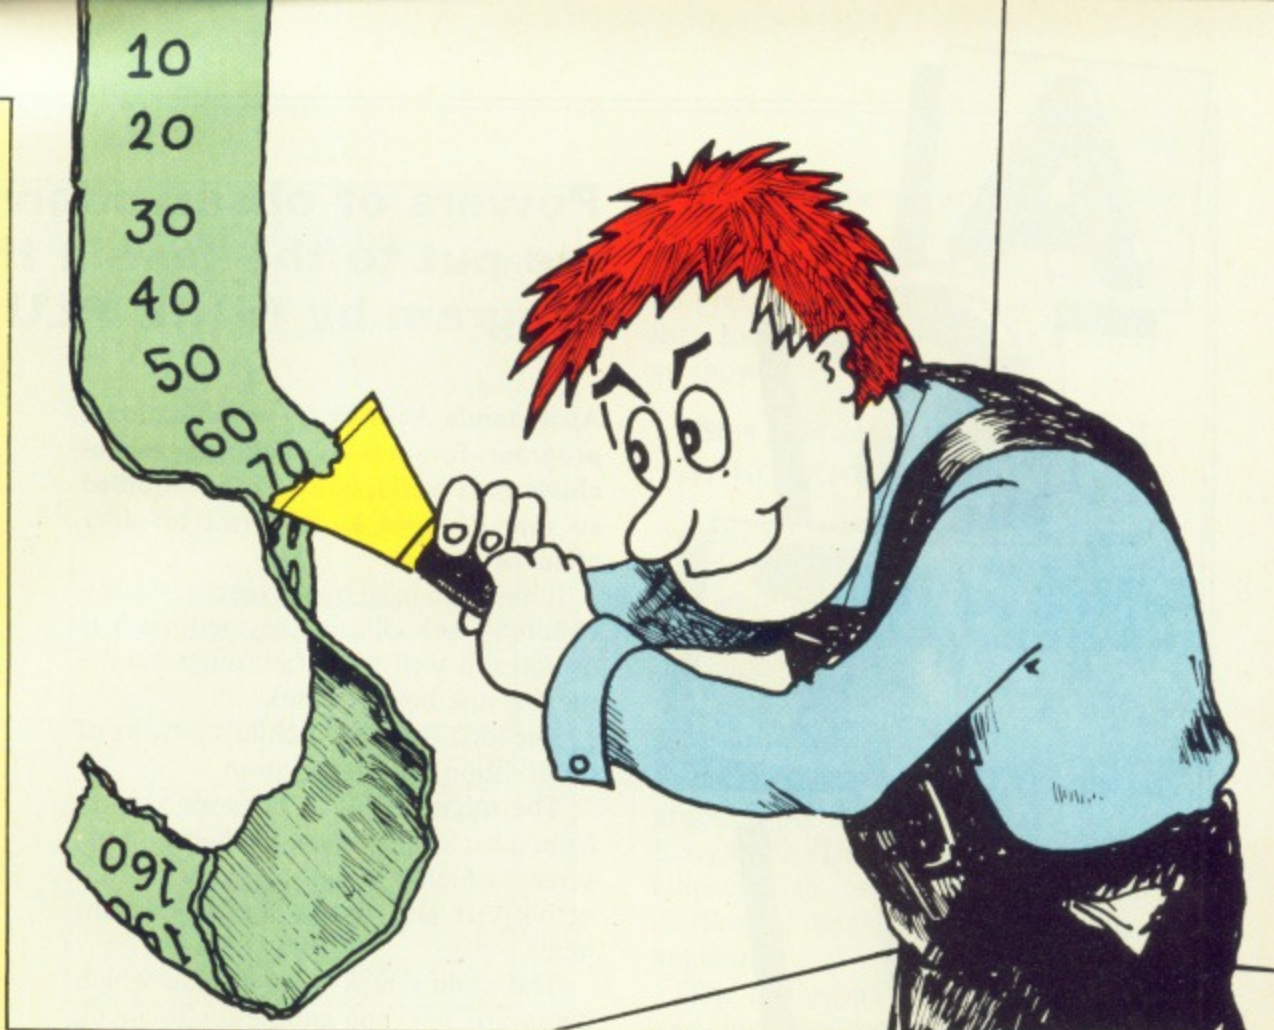

DISC VERSION

210-280 Get address of filename from the operating system (OS). Whenever the OS gets a command that it does not recognise – in our case *STRIP name – it sets up the contents of &F2,&F3 plus an offset held in the Y register to point to the start address in memory where the command is stored. This information is then passed to each paged ROM in turn to see if they can recognise it. If none of these little fellows claims it then it is passed on to the disc filing system for scrutiny.

The DFS will recognise the STRIP part of the command as a filename and will look for this file. In our case the file will be found. The DFS will then increment the Y register past the part of the command that it has recognised and then LOAD and RUN the file (also signalling to the OS that the command has been fully dealt with).

At this point our strip code is entered with (&F2), Y now pointing to the name part of the original command. This gives us the name of the file to be stripped.

CASSETTE VERSION

210-234 Output message specified at line 274.
236-240 Flush keyboard buffer.
242-266 Set up parameter block and use OSWORD &00 call to input filename (User Guide, page 459).

BOTH VERSIONS

300-410 Get the default value of PAGE from the OS and use it to set up the load address of the file to be stripped (file_in is set 11 bytes higher than file_out in order to leave room to add the NEW and AUTO commands).
420-440 Set up the OSFILE parameter block and load the file (User Guide page 455).
450-490 Check that it is not a Basic file.
500-570 Check that the file contains text Ascii values only (only the first page is checked). This section has been included to spot any machine code or data files because if these files are stripped by accident the results could be disastrous.

If, however, you are in the habit of including teletext control characters within quotation marks in

your source code or Basic then these files will be rejected as well. To overcome this change line 560 to:

560 LDA #0


580-640 Output error message and stop (only if the file type is not correct).
650-720 Get length of file from the parameter block (this is placed there by the OSFILE call) and use it to set up the end pointer.
730-780 Place NEW and AUTO at the start of the file.
790-990 Move past any lines beginning with > and set up the "get" pointer.
1000-1080 Set up the "put" pointer and jump into the main loop.
1090-1370 The main program loop.
1100-1130 Increment get.
1140-1170 Increment put.
1180-1220 If get > end then end of file is reached.
1230-1240 Contents of put = contents of get.
1250-1370 If an end of line has been reached then Call delete. If the following line begins with > then end of file is reached. Repeat loop.
1380-1430 Control arrives here when end of file is reached. Save the stripped file and return to Basic.
1450-1870 delete: This subroutine is entered at the start of each line and increments the get pointer past the line number and any surrounding spaces so that these are not transferred down to the put pointer.

This method is an extremely efficient way of selectively weeding out unwanted data, since in the whole process each piece of wanted data is only moved once and no piece of unwanted data is moved at all.

The technique is known as the "no coffee" method because you don't have to get up to make a cup of coffee while the sorting is going on.

1890-2100 set_pblock: This subroutine sets up the parameter block for the OSFILE operations. The block is 18 bytes long and is placed in memory directly following the machine code. Page 455 of the User Guide gives details of the block's contents.

Turn to Page 156

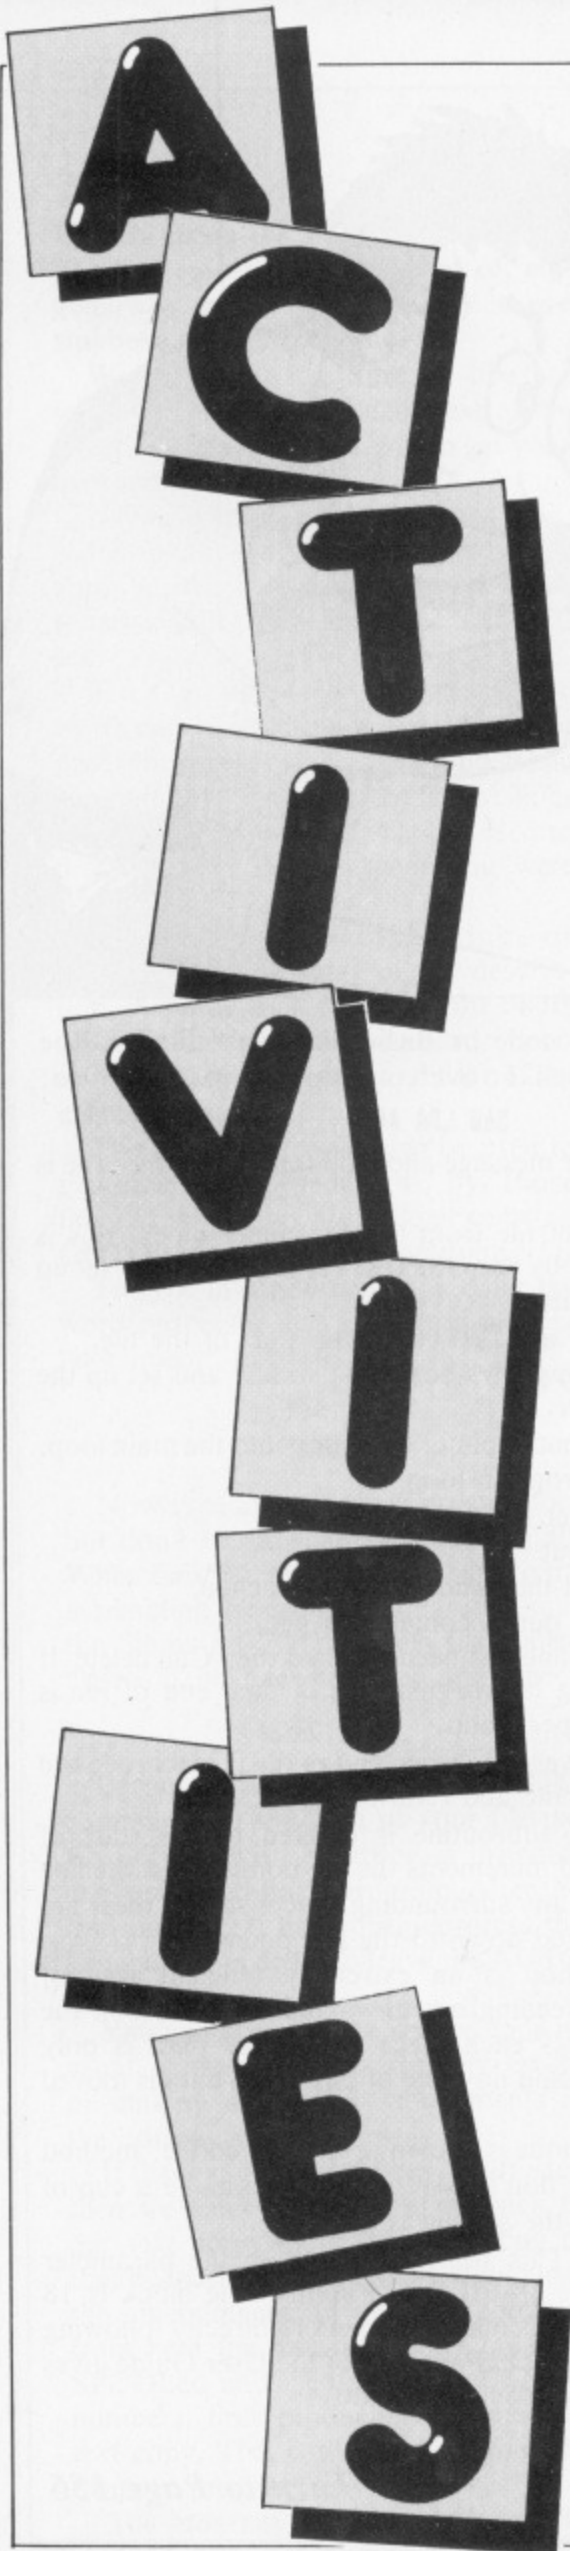

Powers of observation and association are put to the test in this educational program by MIKE PLUMMER

As it stands *Activities* is an educational program for use by younger school children. It could, however, be modified so that it could be an asset to older children as well.

It has been used by the teachers at my children's school and they tell me it is useful and well liked (although maybe they're just being polite).

The idea is to test a child's powers of observation and association.

The micro selects a random activity from a list and draws some items on the screen which are associated with that activity. It also draws some irrelevant items.

The child's task is to decide which items are relevant and select them by pressing number keys 1 to 6.

If the selected item is relevant then it's ticked and the computer plays a chord. Otherwise the drawing is crossed out and the computer makes a rude noise.

When the child thinks that he or she has all of the right items selected then they can press the F key, whereupon the computer will assess how well they have done.

Any drawings which should have been selected but were not are left on the screen, along with a comment. All irrelevant or correctly selected ones are rubbed out.

After 10 activities (none of which are the same), a score sheet is printed and another turn is invited.

The initial instruction page can be

returned to at any time by pressing the Escape key and the sound effects can be turned on or off whenever the computer is expecting a key to be pressed.

Although this all sounds very daunting, in fact most children seem to be able to use the program easily and enjoy doing so.

The program was originally written on an Electron, but will run equally well on the BBC Micro.

Also, because memory is at such a premium in the otherwise superb BBC/Electron computers, the variable and procedure names are rather cryptic.

Because of the way the program works, *it is essential that you do not renumber it*, or at least the DATA statements at lines 10000 onward.

At this juncture it's worth outlining how the program functions.

I have seen many programs of a similar nature which require access to a set of data in a random way – spelling games or Hangman spring to mind.

Most programmers seem to access the data in a random way by READING the data into a string array then generating a random number to be used as an array index.

Doing this means that there are two copies of the data in the aforementioned limited Acorn memory.


Because it is possible in BBC Basic to use the RESTORE statement using a variable or an expression rather than a line number, any DATA statement can


Activities listing


```


10 REM ACTIVITIES
20 REM (C) The Micro User
30 REM by Mike Plummer
40 ON ERROR GOTO 1420
50 MODE 6:PROCSETUP
60 DIM AN%(5),QUX(5):LST$=STRING$(
40,"#"):ITEM$=LST$
70 CLS:PRINT TAB(5,10)"Wait a minu
te, I am thinking":VDU 23,1,0;0;0;0;
80 RESTORE 10000:LC%=-1:REPEAT LC%
=LC%+1
90 REPEAT READ LST$:UNTIL LST$="#"
OR LST$="*":UNTIL LST$="#"
100 RESTORE 20000:IC%=-1:REPEAT IC%
=IC%+1
110 REPEAT READ ITEM$:UNTIL ITEM$="
#" OR ITEM$="*":UNTIL ITEM$="#"
120 REPEAT:RI%=0:WR%=0:TT%=0:MODE4:
VDU19,0,4;0;23,1,0;0;0;0;:FOR TEST=0
TO 9:CLS:PROCASK:PROCANS:NEXT:MODE6:V
DU19,0,4;0;23,1,0;0;0;0;:PROCSC:UNTIL
FALSE
130 :
140 REM -- Get a set of items + soe
e random ones --
150 DEF PROCASK:LOCAL N1%,N2%:FOR N
1%=0 TO 5:QUX(N1%)=-1:AN%(N1%)=-1:NEX
T:H%=TRUE
160 REPEAT TX%=TRUE:N1%=RND(LC%):FOR
IC%=0 TO 9:IF N1%=STX(IC%) TX%=FALSE
170 NEXT:UNTIL TX%
180 STX(TEST)=N1%


```



1. bucket  ✓

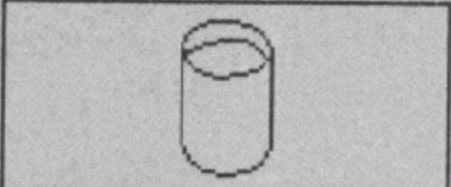2. paint pot 

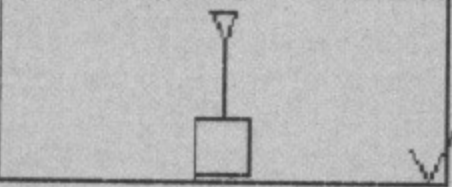3. spade  ✓

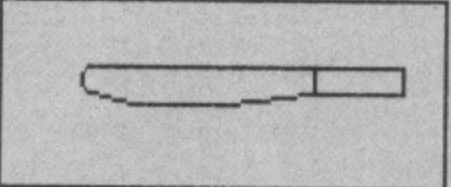4. knife 

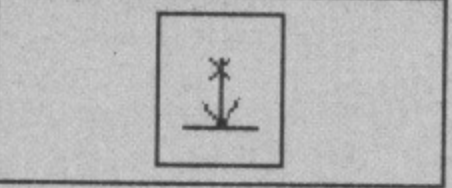5. packet of seeds 

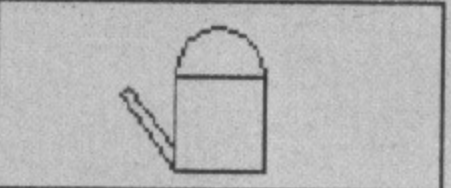6. watering can 

Which of these might I need to build a sandcastle ?

Press 1-6 or F to finish :-

the computer there are no more items in the list.

Line 19999 with the hash sign must be present to show there are no more lists. Each individual drawing is defined as shown:

200nn DATA item name,M,x,y,D,x,y,E,x,y,r1,r2,a1,a2.....,*

where nn is the item number and x and y are the coordinates of a 500 x 200 grid on which the item is drawn. The graphics interpreter reads these codes as follows:

M,x,y: Moves the graphics cursor to x,y without drawing.

D,x,y: Draws a line to x,y from the last graphics point.

E,x,y,r1,r2,a1,a2: Draws part of an ellipse with centre x,y, radii r1,r2 starting at angle a1 and finishing at angle a2.

The angles are measured in radians and increase anti-clockwise with 3 o'clock being zero.

These codes may be in any order, but there is no error trapping, so they must be correct.

The asterisk at the end of the statement is to indicate the end of the drawing. If the codes will not all fit into one DATA statement they may be continued into another one, although the line number for this must be less than 10 more than the initial one (for example, see lines 20100 and 20102).

The final DATA statement with the asterisk indicates no more drawings are present, and it must be there.

If some clever dick of a little Johnnie points out that a so called irrelevant item goes with an activity, just add its number to the activity list.

be READ by setting the value of the variable to the line number of the DATA statement that you want.

It looks tricky, but in fact is very easy. This means that you must be careful how you number the DATA statements.

Finally, to save memory space and speed up the drawing process a bit, the resident integer variables have been used to some degree.

As I have already hinted, it is possible to add extra activities and drawings to

the list or create a completely different one.

To create a new activity you must add a new DATA statement as follows (numbers are counted from 0):

100nn DATA activity name,n1,n2...ni,*

where nn is the number of the activity and n1,n2 etc are the numbers of the associated items.

There can be from one to six items in the list. The asterisk at the end is to tell

```

190 RESTORE (9999+N1%):READ LST$:NA
NGX=0:REPEAT READ ITEM$:IF ITEM$<>"*"
THEN ANX(NANS%)=VAL(ITEM$):NANS%=NAN
SZ+1
200 UNTIL ITEM$="*"
210 FOR N1%=NANS% TO 5:REPEAT:SAME%
=FALSE:QST%=RND(ICX)-1:FOR N2%=0 TO 5
:IF ANX(N2%)=QST% THEN SAME%=TRUE
220 NEXT:UNTIL NOT SAME%:ANX(N1%)=Q
STX:NEXT
230 FOR N1%=0 TO 5:REPEAT QST%=RND(
6)-1:UNTIL QUX(QST%)=-1:QUX(QST%)=ANX
(N1%):NEXT
240 FOR N1%=0 TO 5:PROCDRITEM(N1%):
NEXT:TTX=TTX+NANS%:NANS%=NANS%-1
250 KP$=""

```

```


260 PRINT TAB(1,27);"Which of these
might I need to" " ";LST$+" ?"
270 ENDPROC
280 :
290 REM -- Draw an item (1..6) --
300 DEF PROCDRITEM(NX):QST%=QUX(NX)
:RESTORE (10*QST%+20000):READ ITEM$:P
RINT TAB(1+(NX MOD 2)*20,1+(NX DIV 2)
*9);NX+1;" "+ITEM$
310 UX=(NX MOD 2)*600+50:VX=755-(NX
DIV 2)*290
320 MOVE UX,VX:PLOT 1,0,200:PLOT 1,
500,0:PLOT 1,0,-200:PLOT 1,-500,0
330 D$="":REPEAT PROCINTPRT:UNTIL D
$="*"
340 ENDPROC

```

```

350 REM:
360 REM -- Interpret graphics code
--
370 DEF PROCINTPRT:READ D$:D%=LEFT$(
D$,1)
380 IF D$="E" THEN PROCELL:ENDPROC
390 IF D$<>"*" THEN READ X%,Y% ELSE
ENDPROC
400 IF D$="M" THEN PTX=4 ELSE PTX=5
410 PLOT PTX,UX+X%,VX+Y%
420 ENDPROC
430 :
440 REM -- Read answer from keys --

```



Activities listing

From Page 125

```

450 DEF PROCANS
460 AN$="":REPEAT:REPEAT
470 *FX21,0
480 PRINT TAB(1,30);"Press 1-6 or F
to finish :- "+CHR$(0);:AN$=GET$:IF
AN$="f" THEN AN$="F"
490 IF AN$="q" OR AN$="Q" THEN *FX2
10,1
500 IF AN$="s" OR AN$="S" THEN *FX2
10,0
510 UNTIL (AN$)="1" AND AN$<="6" O
R AN$="F"
520 IF AN$="F" THEN PROCENCH ELSE P
ROCNOCH:IF LEN(KP$)=6 AN$="F":PROCENCH
530 UNTIL AN$="F":ENDPROC
540 :
550 REM -- Number answer handling -
-
560 DEF PROCNOCH:ANS%=VAL(AN$)-1:IF
INSTR(KP$,AN$)=0 KP$=KP$+AN$
570 IF QUZ(ANS%)=-2 THEN SOUND 1,-1
5,192,2:SOUND 1,-15,0,4:ENDPROC
580 F%=FALSE:FOR NZ=0 TO NANS%:IF A
NZ(NZ)=QUZ(ANS%) THEN F%=TRUE:AN$(NZ)
=-2:QUZ(ANS%)=-2
590 NEXT:IF F% THEN PROCHEER:MOVE (
ANS% MOD 2)*600+510,790-(ANS% DIV 2)*
290:PLOT 1,20,-30:PLOT 1,90,160:PROCD
EL:ENDPROC
600 PROCRAASP:MOVE (ANS% MOD 2)*600+
50,755-(ANS% DIV 2)*290:PLOT 1,500,20
0:PLOT 0,-500,0:PLOT 1,500,-200:QUZ(A
NS%)=-1:H%=FALSE:PROCDEL:ENDPROC
610 :
620 REM -- Small delay --
630 DEF PROCDEL
640 TIME=0:REPEAT UNTIL TIME=100
650 ENDPROC
660 :
670 REM -- Blow raspberry --
680 DEF PROCRAASP
690 FOR P%=4 TO 7:SOUND 0,-15,P%,5:
NEXT
700 IF QUZ(ANS%)<>-1 THEN WR%=WR%+1
710 QUZ(ANS%)=-2
720 ENDPROC
730 :
740 REM -- Fanfare --
750 DEF PROCHEER
760 RIX=RIX+1
770 FOR P%=5 TO 20 STEP 15
780 SOUND 1,-15,53,1
790 SOUND 1,-15,69,1
800 SOUND 1,-15,81,P%

```

```

810 TIME=0:REPEAT UNTIL TIME = 25
820 NEXT:ENDPROC
830 :
840 REM -- End of answers handling
--
850 DEF PROCENCH
860 F%=FALSE:FOR NZ=0 TO 5
870 G%=TRUE:FOR P%=0 TO NANS%:IF (Q
UZ(NZ)=AN$(P%)) AND QUZ(NZ)>-1 THEN G
%=FALSE:F%=TRUE
880 NEXT P%:IF G% OR QUZ(NZ)<0 THEN
LET X%=(NZ MOD 2)*20:Y%=(NZ DIV 2)*9
:FOR Z%=Y% TO Y%+8:PRINT TAB(X%,Z%);S
PC(20):NEXT Z%
890 NEXT NZ
900 PRINT TAB(1,27)STRING$(78," ")
910 PRINT TAB(0,28);:IF F% THEN PRI
NT " What about this ?" ELSE IF N
OT H% THEN PRINT "You had some wrong
guesses!" ELSE PRINT " VERY WELL
DONE !"
920 PRINT TAB(0,30)STRING$(38," ")T
AB(15,30)"Press SPACE":REPEAT UNTIL G
ET$=" ":ENDPROC
930 :
940 REM -- Draw an ellipse --
950 DEF PROCELL:READ X%,Y%,R1,R2,A1
,A2:INC=40/(R1+R2):PLOT 4,R1*COS(A1)+
UZ+X%,R2*SIN(A1)+VZ+Y%
960 FOR A=A1 TO A2 STEP INC:PLOT 5,
R1*COS(A)+UZ+X%,R2*SIN(A)+VZ+Y%:NEXT:
ENDPROC
970 :
980 REM -- Display scores --
990 DEF PROCSC:CLS:PRINT TAB(5,2);"
Your final scores are :-"
1000 PRINT " Total number of items w
anted ";TTX
1010 PRINT " Total number of correct
answers ";RIX
1020 PRINT " Total number of wrong a
nswers ";WRX
1030 PRINT " Press SPACE for some on
e else to try"
1040 *FX21,0
1050 REPEAT:KEY$=GET$:IF KEY$="q" OR
KEY$="Q" THEN *FX210,1
1060 IF KEY$="s" OR KEY$="S" THEN *F
X210,0
1070 UNTIL KEY$=" ":ENDPROC
1080 :
1090 REM Print instructions
1100 DEF PROCSETUP
1110 DIM ST$(9)
1120 *FX10,0
1130 *FX11,0
1140 CLS
1150 VDU 19,0,4;0;23,1,0;0;0;0;

```

```


1160 PRINT:PRINT TAB(15)"ACTIVITIES
1170 PRINT " The computer will dec
de that it wants"
1180 PRINT "to do something and will
draw six items"
1190 PRINT "on the screen, along wi
h their name &"
1200 PRINT "a number. Some of the
ems drawn will"
1210 PRINT "be needed to do whatever
the computer"
1220 PRINT "wants to do. You must te
ll it what it"
1230 PRINT "needs by pressing keys
-6.If the item"
1240 PRINT "is needed then a tick
ll be drawn by"
1250 PRINT "the picture, otherwise
t will be"
1260 PRINT "crossed out. You will ha
ve 10 tries"
1270 PRINT "then the computer will
ell you your"
1280 PRINT "score and ask for someo
e else to try."
1290 PRINT " Set the sound effects
on by pressing""the 'S' key and turn
them off with the""'Q' key. This ca
n be done now or at any""time the co
mputer is waiting for a key""to be
ressed. Select now (S/Q) "
1300 REPEAT:*FX21,0
1310 key$=CHR$(GET AND &SF)
1320 UNTIL key$="S" OR key$="Q"
1330 IF key$="S" THEN *FX 210,0
1340 IF key$="Q" THEN *FX 210,1
1350 PRINT "Press SPACE to start, E
SC for this page";
1360 *FX21,0
1370 REPEAT UNTIL GET$=" ":CLS
1380 FOR IC%=0 TO 9:ST$(IC%)=-1:NEXT
1390 ENDPROC
1400 :
1410 REM -- Error trapping --
1420 ON ERROR OFF:IF ERR=17 THEN RUN
ELSE MODE6:REPORT:PRINT " at line ";
ERL:*FX12,0
1430 END
1440 :
10000 DATA plant some seeds,0,1,2,*
10001 DATA paint the house,3,4,5,*
10002 DATA have my dinner,6,7,8,16,*
10003 DATA build a sandcastle,0,9,*
10004 DATA go for a drive,10,11,*
10005 DATA go for a sail,12,13,14,*
10006 DATA have a drink of tea,15,16
,17,*
10007 DATA fly in the sky,18,19,20,*

```


ACTIVITIES*
 will deci
 and will
 along wit
 of the it
 whatever
 must te
 g keys i
 tick wi
 erwise i
 will ha
 r will t
 r someon
 effects
 turn
 This ca
 the co
 to be p
 0"
 ,0
 ,1
 tart, E
 S
 -1:NEXT
 HEN RUN
 line ";
 1,2,*
 0,5,*
 8,16,*
 0,9,*
 1,*
 ,14,*
 ,15,16
 9,20,*

0008 DATA play cricket,21,22,23,*
 0009 DATA tell the time,24,25,26,*
 0010 DATA write a story,27,28,29,*
 0011 DATA wash the windows,9,4,30,*
 0012 DATA do some woodwork,28,31,32
 33,36,*
 0013 DATA do some cooking,6,8,34,35
 *
 0014 DATA mend the car,10,36,37,32,
 38,*
 0015 DATA clean my teeth,39,40,41,*
 0016 DATA wash my face,42,43,44,45,
 *
 0017 DATA walk in the rain,46,47,48
 *
 0018 DATA do my shopping,49,50,51,*
 0019 DATA play a tune,52,53,54,*
 0020 DATA go for a swim,13,43,55,*
 0021 DATA play football,21,56,57,*
 0022 DATA have a party,58,59,60,*
 0023 DATA send a letter,28,29,61,62
 63,*
 0024 DATA make a phone call,64,65,*
 0025 DATA do the washing up,66,67,6
 68,69,*
 0026 DATA go to bed,70,71,72,*
 9999 DATA *
 0000 DATA spade,M,220,10,D,280,10,D
 280,70,D,220,70,D,220,5,M,250,70,D,2
 50,150,D,235,180,D,265,180,D,250,150,
 *
 0010 DATA packet of seeds,M,180,20,
 320,20,D,320,180,D,180,180,D,180,20
 ,M,210,60,D,290,60,M,250,60,D,250,130
 ,M,260,130,D,240,110,M,240,130,D,260,
 110,M,270,90,D,250,60,D,230,85,*
 0020 DATA watering can,M,200,20,D,3
 00,20,D,300,120,D,200,120,D,200,20,D,
 140,180,D,146,186,D,200,42,E,250,120,
 50,50,0,3.34,*
 0030 DATA paint brush,M,240,100,D,2
 40,190,D,260,190,D,260,100,D,280,80,D
 220,80,D,240,100,M,220,73,D,220,63,D
 210,13,D,290,13,D,280,63,D,220,63,D,
 220,73,M,280,73,D,280,63,*
 0040 DATA ladder,M,150,10,D,240,190
 ,M,340,190,D,250,10,M,260,30,D,160,30
 ,M,170,50,D,270,50,M,280,70,D,180,70,
 ,M,190,90,D,290,90,M,300,110,D,200,110
 ,M,210,130,D,310,130,M,320,150,D,220,
 150,M,230,170,D,330,170,*
 0050 DATA paint pot,E,250,150,50,30
 ,0,6.28,E,250,130,50,30,.15,3,E,250,5
 0,50,30,3.14,6.28,D,300,150,M,200,150
 ,D,200,50,*
 0060 DATA fork,M,80,70,D,180,70,D,2
 00,90,D,400,90,D,400,110,D,200,110,D,
 180,130,D,150,130,D,150,70,M,150,90,D

,80,90,M,80,110,D,150,110,M,150,130,D
 ,80,130,*
 20070 DATA plate,E,250,100,120,50,0,
 6.3,E,250,100,100,30,0,6.3,*
 20080 DATA knife,M,350,100,D,450,100
 ,D,450,130,D,100,130,D,90,120,D,90,11
 0,D,100,100,D,150,90,D,250,90,D,350,1
 00,D,350,130,*
 20090 DATA bucket,E,250,125,50,50,0,
 3.14,D,215,50,D,285,50,D,300,125,D,20
 0,125,*
 20100 DATA car,E,150,50,25,25,0,6.43
 3,E,350,50,25,25,0,6.433,E,350,50,30,
 30,0,3.2,E,150,50,30,30,0,3.2,D,120,5
 0,D,100,50,D,120,100,D,200,110,D,225,

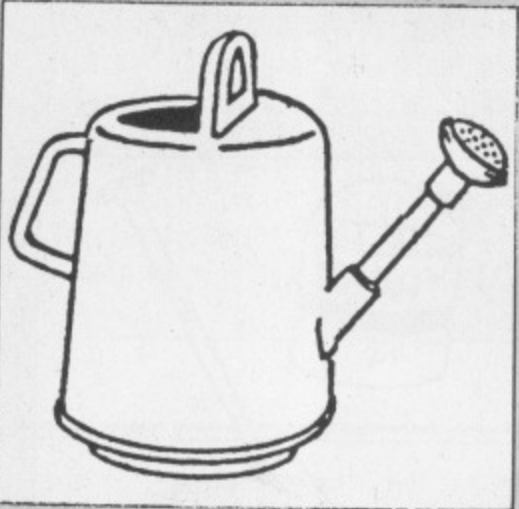

150,D,350,150,D,400,100,D,400,50,D,38
 0,50,M,320,50,D,180,50
 20102 DATA M,300,60,D,210,60,D,210,1
 00,D,370,100,D,350,140,D,300,140,D,30
 0,60,M,300,140,D,225,140,D,210,100,*
 20110 DATA steering wheel,E,250,100,
 75,75,0,6.45,D,250,100,D,200,50,M,250
 ,100,D,200,150,*
 20120 DATA boat,M,150,75,D,175,50,D,
 350,50,D,400,60,D,400,75,D,150,75,D,2
 50,190,D,400,85,D,400,75,M,250,75,D,2
 50,190,M,400,85,D,165,85,*
 20130 DATA lifebelt,E,250,100,50,50,
 0,6.5,E,250,100,75,75,0,6.5,M,325,90,
 D,300,90,M,200,90,D,175,90,M,175,110,
 D,200,110,M,300,110,D,325,110,*
 20140 DATA compass,E,250,100,90,90,0
 ,6.5,M,250,140,D,240,100,D,250,60,D,2
 60,100,D,250,140,M,240,145,D,240,165,
 D,260,145,D,260,165,*
 20150 DATA teapot,E,250,160,10,10,0,
 6.4,E,250,100,50,50,5.5,10.3,M,275,55
 ,D,225,55,D,150,135,D,160,135,D,200,1
 00,M,295,75,D,330,75,D,330,120,D,295,
 120,M,280,135,D,220,135,*
 20160 DATA mug,E,250,150,50,30,0,6.2
 8,E,250,130,50,30,.15,3,E,250,50,50,3
 0,3.14,6.28,D,300,150,M,200,150,D,200

,50,M,300,125,D,333,125,D,333,75,D,30
 0,75,*
 20170 DATA kettle,E,250,100,50,50,0,
 3.25,E,250,110,10,10,0,6.4,M,175,25,D
 ,175,75,D,200,100,D,300,100,D,325,75,
 D,325,25,D,175,25,D,115,100,D,130,100
 ,D,175,55,*
 20180 DATA aeroplane,M,150,60,D,250,
 60,D,250,80,D,200,80,D,200,60,D,300,6
 0,D,400,100,D,150,100,D,150,60,M,135,
 60,D,135,120,M,135,90,D,150,90,M,400,
 100,D,400,140,D,365,140,D,350,100,M,3
 00,100,D,280,125,D,225,125,D,200,100,
 *
 20190 DATA airship,E,250,100,150,50,
 0,6.4,D,350,100,M,350,135,D,380,170,D
 ,400,170,D,400,30,D,380,30,D,350,65,M
 ,300,55,D,285,20,D,220,20,D,200,55,M,
 220,42,D,265,42,D,265,30,D,220,30,D,2
 20,42,*
 20200 DATA balloon,E,250,140,50,50,0
 ,6.4,M,300,140,D,200,140,D,230,50,D,2
 70,50,D,300,140,M,250,140,D,250,50,M,
 230,50,D,230,15,D,270,15,D,270,50,*
 20210 DATA ball,E,250,100,50,50,0,6.
 5,*
 20220 DATA cricket bat,M,230,10,D,27
 0,10,D,270,140,D,255,150,D,255,190,D,
 245,190,D,245,150,D,230,140,D,230,10,
 M,245,150,D,255,150,*
 20230 DATA wicket,M,220,10,D,220,190
 ,D,280,190,D,280,10,M,250,10,D,250,19
 0,*
 20240 DATA sundial,E,250,75,100,25,0
 ,6.4,M,300,75,D,250,115,D,200,75,D,30
 0,150,*
 20250 DATA watch,E,250,100,50,50,0,6
 .5,M,275,100,D,250,100,D,250,140,M,29
 5,75,D,435,75,D,450,100,D,435,125,D,2
 95,125,M,205,75,D,50,75,D,50,125,D,20
 5,125,M,75,125,D,75,75,M,75,100,D,62,
 100,*
 20260 DATA clock,E,250,100,75,75,0,6
 .5,E,250,100,15,15,0,6.8,M,150,15,D,3
 50,15,D,350,185,D,150,185,D,150,15,M,
 260,110,D,280,130,M,260,90,D,300,50,M
 ,250,25,D,250,40,M,175,100,D,200,100,
 M,250,175,D,250,150,M,325,100,D,300,1
 00,*
 20270 DATA writing book,E,200,125,75
 ,35,0.5,2.5,E,300,125,75,35,0.5,2.5,E
 ,200,25,75,35,0.6,2.5,E,300,25,75,25,
 0.6,2.5,M,250,150,D,250,50,M,150,50,D
 ,150,150,M,350,150,D,350,50,M,360,45,
 D,360,147,*
 20280 DATA pencil,M,150,80,D,400,80,

Activities listing

From Page 127

D, 400, 120, D, 150, 120, D, 75, 100, D, 150, 80, D, 150, 120, M, 100, 94, D, 100, 106, M, 150, 100, D, 400, 100, *

20290 DATA rubber, M, 100, 100, D, 125, 75, D, 275, 75, D, 300, 125, D, 275, 150, D, 125, 150, D, 150, 125, D, 300, 125, M, 100, 100, D, 125, 150, M, 150, 125, D, 125, 75, *

20300 DATA washleather, M, 200, 50, D, 300, 50, D, 300, 150, D, 200, 150, D, 200, 50, *

20310 DATA saw, M, 100, 100, D, 100, 50, D, 300, 50, D, 300, 100, D, 100, 100, D, 100, 115, D, 300, 115, D, 325, 135, D, 365, 135, D, 365, 75, D, 325, 75, D, 300, 100, D, 300, 115, M, 310, 115, D, 330, 85, D, 350, 80, D, 350, 125, D, 325, 125, D, 310, 115, *

20320 DATA hammer, M, 200, 85, D, 200, 135, D, 215, 159, D, 200, 150, D, 170, 115, D, 170, 50, D, 200, 50, D, 200, 90, D, 400, 90, D, 400, 110, D, 200, 110, *

20330 DATA nails, M, 150, 50, D, 210, 140, D, 200, 150, D, 220, 130, M, 250, 40, D, 250, 150, D, 240, 150, D, 260, 150, M, 400, 100, D, 275, 100, D, 275, 110, D, 275, 90, M, 400, 10, D, 300, 50, D, 294, 40, D, 306, 60, *

20340 DATA mixing bowl, E, 250, 150, 100, 100, 3.14, 4.2, M, 200, 70, D, 300, 70, M, 150, 150, D, 350, 150, E, 250, 150, 100, 100, 5.3, 6.30, *

20350 DATA cooker, M, 200, 10, D, 300, 10, D, 300, 190, D, 200, 190, D, 200, 10, M, 210, 25, D, 290, 25, D, 290, 80, D, 210, 80, D, 210, 25, M, 270, 70, D, 280, 70, M, 200, 100, D, 300, 100, M, 300, 120, D, 200, 120, M, 200, 170, D, 300, 170, M, 210, 110, D, 215, 110, M, 247, 110, D, 253, 110

20352 DATA M, 290, 110, D, 285, 110, *

20360 DATA screwdriver, M, 150, 90, D, 300, 90, D, 300, 125, D, 400, 125, D, 400, 75, D, 300, 75, D, 300, 110, D, 150, 110, D, 125, 115, D, 100, 110, D, 100, 90, D, 125, 85, D, 150, 90, *

20370 DATA oil can, M, 45, 150, D, 200, 50, D, 200, 150, D, 300, 150, D, 300, 65, D, 350, 65, D, 350, 135, D, 300, 135, D, 300, 50, D, 200, 50, D, 200, 65, D, 55, 150, D, 45, 150, M, 200, 150, D, 200, 170, D, 250, 170, D, 250, 150, M, 250, 170, D, 350, 160, *

20380 DATA spanner, M, 50, 50, D, 100, 50, D, 150, 80, D, 350, 80, D, 400, 50, D, 450, 50, D, 450, 70, D, 400, 70, D, 375, 100, D, 400, 130, D, 450, 130, D, 450, 150, D, 400, 150, D, 350, 120, D, 150, 120, D, 100, 150, D, 50, 150, D, 50, 130, D, 100, 130, D, 125, 100, D, 100, 70, D, 50, 70, D, 50, 50, *

20390 DATA toothpaste, M, 125, 75, D, 50, 75, D, 50, 125, D, 125, 125, D, 150, 150, D, 450, 150, D, 450, 50, D, 150, 50, D, 125, 75, D, 125

, 125, M, 150, 150, D, 150, 50, M, 440, 50, D, 440, 150, *

20400 DATA toothmug, E, 250, 150, 50, 20, 0, 6.33, E, 250, 125, 40, 16, 0, 6.33, E, 250, 50, 25, 10, 0, 6.33, M, 225, 50, D, 200, 150, M, 275, 50, D, 300, 150, *

20410 DATA toothbrush, M, 100, 75, D, 200, 75, D, 250, 100, D, 450, 100, D, 450, 110, D, 250, 110, D, 200, 85, D, 100, 85, D, 100, 75, D, 100, 125, M, 117, 85, D, 117, 125, M, 134, 85, D, 134, 125, M, 150, 85, D, 150, 125, M, 167, 85, D, 167, 125, M, 184, 85, D, 184, 125, M, 200, 85, D, 200, 125, *

20420 DATA face flannel, M, 200, 50, D, 300, 50, D, 300, 150, D, 200, 150, D, 200, 50, *

20430 DATA towel, M, 125, 50, D, 375, 50, D, 375, 150, D, 125, 150, D, 125, 50, *

20440 DATA wash basin, M, 150, 100, D, 350, 100, D, 350, 125, D, 150, 125, D, 150, 100, M



, 175, 125, D, 175, 150, D, 190, 150, D, 190, 125, M, 325, 125, D, 325, 150, D, 305, 150, D, 305, 125, M, 300, 150, D, 330, 150, M, 200, 150, D, 175, 150

20442 DATA E, 200, 100, 50, 59, 3.14, 4.91, E, 300, 100, 50, 59, 4.91, 6.4, M, 200, 41, D, 225, 41, D, 225, 0, M, 300, 41, D, 275, 41, D, 275, 0, *

20450 DATA soap, E, 250, 100, 150, 50, 1.1, 2.2, E, 250, 100, 150, 50, 4.2, 5.3, M, 175, 60, D, 175, 140, M, 325, 60, D, 325, 140, E, 250, 100, 30, 10, 0, 6.4, *

20460 DATA umbrella, M, 150, 150, D, 350, 150, E, 250, 50, 141, 141, .78, 2.4, M, 250, 150, D, 250, 50, E, 225, 50, 25, 25, 3.14, 6.4, *

20470 DATA wellingtons, M, 150, 50, D, 200, 50, D, 200, 150, D, 250, 150, D, 250, 20, D, 220, 20, D, 220, 25, D, 180, 20, D, 120, 20, E, 150, 20, 30, 30, 1.55, 3.14, M, 220, 150, D, 220, 170, D, 270, 170, D, 270, 40, D, 250, 40, M, 200, 70, D, 170, 70, E, 170, 40, 30, 30, 1.55, 3.14, *

20480 DATA raincoat, M, 200, 20, D, 300, 20, D, 300, 125, D, 340, 70, D, 360, 75, D, 300, 170, D, 275, 175, D, 225, 175, D, 200, 170, D, 140, 75, D, 160, 70, D, 200, 125, D, 200, 20, M, 25

0, 20, D, 250, 125, D, 225, 175, D, 210, 175, D, 250, 120, D, 290, 175, D, 275, 175, D, 250, 125, *

20490 DATA money, M, 150, 50, D, 150, 100, D, 250, 100, D, 250, 50, D, 150, 50, E, 300, 100, 25, 25, 0, 6.44, E, 275, 150, 20, 20, 0, 6.33, *

20500 DATA shopping list, M, 200, 10, D, 200, 175, D, 300, 175, D, 300, 10, D, 200, 10, M, 220, 150, D, 280, 150, M, 220, 110, D, 260, 110, M, 220, 80, D, 240, 80, M, 220, 60, D, 275, 60, M, 220, 40, D, 240, 40, M, 220, 20, D, 260, 20, *

20510 DATA shopping bag, M, 150, 25, D, 350, 25, D, 350, 125, D, 150, 125, D, 150, 25, E, 250, 125, 50, 70, 0, 3.2, *

20520 DATA music book, M, 250, 50, D, 250, 150, D, 150, 150, D, 150, 50, D, 350, 50, D, 350, 50, D, 350, 150, D, 250, 150, M, 160, 125, D, 240, 125, M, 160, 100, D, 240, 100, M, 160, 75, D, 240, 75, M, 260, 125, D, 340, 125, M, 260, 100, D, 340, 100, M, 260, 75, D, 340, 75, *

20530 DATA drum, E, 250, 125, 100, 25, 0, 6.33, E, 250, 50, 100, 25, 3.14, 6.33, M, 350, 125, D, 350, 50, D, 300, 105, D, 250, 25, D, 200, 105, D, 150, 50, D, 150, 125, M, 100, 175, D, 225, 160, M, 275, 160, D, 400, 175, *

20540 DATA recorder, E, 480, 70, 30, 30, 1.57, 3.14, D, 400, 70, D, 50, 80, D, 20, 70, D, 20, 130, D, 50, 120, D, 400, 130, D, 480, 130, D, 480, 110, M, 450, 130, D, 450, 115, D, 430, 115, D, 430, 130, *

20550 DATA swimming costume, M, 150, 25, D, 100, 50, D, 100, 75, D, 200, 75, D, 200, 50, D, 150, 25, M, 350, 15, D, 400, 40, D, 380, 75, D, 400, 150, D, 375, 170, D, 350, 130, D, 325, 170, D, 300, 150, D, 320, 75, D, 300, 40, D, 350, 15, *

20560 DATA football boots, M, 150, 50, D, 200, 50, D, 200, 70, D, 250, 70, D, 250, 20, D, 220, 20, D, 220, 25, D, 180, 20, D, 120, 20, E, 150, 20, 30, 30, 1.55, 3.14, M, 220, 70, D, 220, 90, D, 270, 90, D, 270, 40, D, 250, 40, M, 200, 70, D, 170, 70, E, 170, 40, 30, 30, 1.55, 3.14, *

20570 DATA football shorts, M, 175, 50, D, 235, 50, D, 250, 70, D, 260, 50, D, 325, 50, D, 325, 125, D, 175, 125, D, 175, 50, *


20580 DATA glass of squash, E, 250, 150, 50, 20, 0, 6.33, E, 250, 125, 40, 16, 0, 6.33, E, 250, 50, 25, 10, 0, 6.33, M, 225, 50, D, 200, 150, M, 275, 50, D, 300, 150, M, 225, 50, D, 275, 125, D, 325, 160, *

20590 DATA fancy cake, E, 250, 125, 100, 15, 0, 6.33, E, 250, 50, 100, 15, 3.14, 6.33, D, 350, 125, M, 150, 125, D, 150, 50, M, 190, 130, D, 190, 160, M, 250, 140, D, 250, 170, M, 310, 130, D, 310, 160, *

20600 DATA balloons, E, 150, 125, 30, 30,

175, D,
250, 125
50, 100,
300, 100
0, 6.33,
0, 10, D,
00, 10, M
260, 11
275, 60
260, 20,
25, D, 3
0.25, E,
0, D, 250
50, D, 35
125, D,
160, 75,
260, 10
25, 0, 6
1, 350, 1
D, 200,
75, D, 22
0, 30, 1
70, D, 2
130, D,
30, 115
150, 25
00, 50,
0, 75, D
325, 17
350, 1
0, 50, D
20, D,
20, E, 1
D, 220,
200, 7
3, *
75, 50,
5, 50, D
50, 150
6, 33,
D, 200,
D, 275
5, 100,
6, 33, D
90, 130
M, 310,
30, 30,

6.33, M, 150, 95, D, 150, 50, E, 250, 150, 45
5, 0, 6.33, M, 250, 105, D, 250, 50, E, 400, 1
50, 50, 0, 6.53, M, 400, 50, D, 400, 10, *
10 DATA "paper, envelope", M, 100, 40
200, 40, D, 200, 175, D, 100, 175, D, 100, 4
M, 250, 50, D, 400, 50, D, 400, 120, D, 250, 1
D, 250, 50, D, 310, 75, D, 340, 75, D, 400, 5
M, 400, 120, D, 340, 75, D, 310, 75, D, 250, 1
*
20 DATA stamp, M, 200, 50, D, 300, 50, D
10, 150, D, 200, 150, D, 200, 50, M, 250, 55,
250, 70, E, 275, 60, 10, 10, 0, 6.35, M, 225,
D, 275, 85, D, 265, 100, D, 275, 115, D, 275
10, D, 225, 140, D, 225, 100, D, 235, 93, D, 2
86, D, 225, 75, *
30 DATA postbox, M, 200, 10, D, 300, 10
300, 150, D, 200, 150, D, 200, 10, M, 225, 1
D, 275, 120, D, 275, 135, D, 225, 135, D, 22
120, E, 250, 100, 70, 70, 0.8, 2.4, *
40 DATA phone directory, E, 200, 125
75, 35, 0.5, 2.5, E, 300, 125, 75, 35, 0.5, 2.
E, 200, 25, 75, 35, 0.6, 2.5, E, 300, 25, 75,
0.6, 2.5, M, 250, 150, D, 250, 50, M, 150, 5
D, 150, 150, M, 350, 150, D, 350, 50, M, 360,

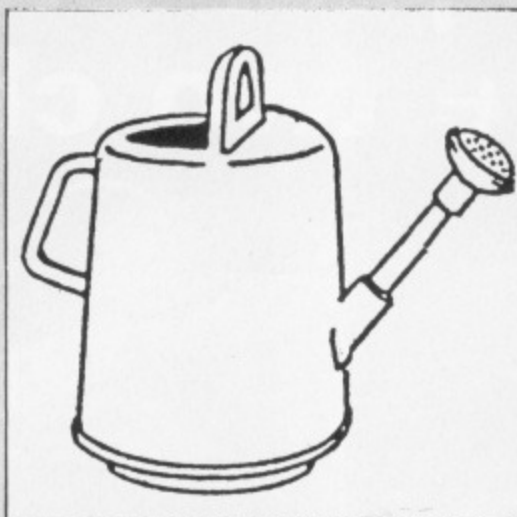

45, D, 360, 147, *
20650 DATA telephone, E, 250, 85, 25, 25,
0, 6.5, M, 150, 50, D, 150, 15, D, 350, 15, D, 35
0, 50, D, 150, 50, D, 200, 125, D, 300, 125, D, 3
50, 50, M, 300, 125, D, 350, 125, D, 350, 100, D
, 400, 100, D, 375, 150, D, 125, 150, D, 100, 10
0, D, 150, 100, D, 150, 125, D, 200, 125, *
20660 DATA dishcloth, M, 200, 50, D, 300,
50, D, 300, 150, D, 200, 150, D, 200, 50, *
20670 DATA washing up bowl, M, 150, 100

, D, 175, 50, D, 325, 50, D, 350, 100, D, 150, 10
0, *
20680 DATA tea towel, M, 125, 50, D, 375,
50, D, 375, 150, D, 125, 150, D, 125, 50, *
20690 DATA washing up liquid, M, 200, 1
0, D, 300, 10, D, 300, 160, D, 275, 175, D, 275,
190, D, 225, 190, D, 225, 175, D, 200, 160, D, 2
00, 10, *
20700 DATA bed, M, 150, 50, D, 150, 120, M,
150, 100, D, 350, 100, D, 350, 75, D, 150, 75, M
, 350, 50, D, 350, 140, *
20710 DATA nightshirt, M, 200, 10, D, 300
, 10, D, 300, 115, D, 325, 80, D, 350, 100, D, 30
0, 150, D, 270, 160, D, 250, 140, D, 230, 160, D
, 200, 150, D, 150, 100, D, 170, 80, D, 200, 115
, D, 200, 10, *
20720 DATA pillow, E, 250, 100, 150, 50, 1
.1, 2.2, E, 250, 100, 150, 50, 4.2, 5.3, M, 175
, 60, D, 175, 140, M, 325, 60, D, 325, 140, *
29999 DATA #

This listing is included in this month's cassette tape offer. See order form on Page 189.



■ VECTOR 1 ▸

TAPE TO DISK UTILITY

- + Once Only Purchase
- + Can Save To Any Disk
- + Very User Friendly, Help Pages On Disk
- + 40/80 Format
- + No Awkward ROMS; Can Be Used On Any Machine
- + Can Load To All Available RAM &400 - &7FFF
- = Simply, The Best Tape To Disk Utility Available

PRICES ARE:

£16.00 for Vector 1 or Vector 2.

£30.00 for both products together.

Compatible only with SINGLE density systems.

Orders to: **CHALICE SOFTWARE**
3 Merlin Way, Covingham,
Swindon SN3 5AN.

Presents...



■ VECTOR 2 ▸

DISK TO DISK UTILITY

- + Can Copy To Any Disk
- + 40/80 Format
- + User Friendly
- + Contains Powerful Modes To Examine Disks
- = The Most Powerful Disk To Disk Utility Available

For Information on the availability of a DOUBLE density version - Ring us at (0793) 615026. Dealer Enquiries Welcome.



when it comes to
upgrading your BBC micro
there are two choices

this....



or this....


there's really
only one choice -



OAK

Whether you are already an owner or thinking of purchasing your first BBC computer - then the OAK is for you. The OAK offers a versatile unit which can house as much or as little as you require - the beauty being that you can upgrade at any time without having to add-on externally to the OAK unit.

The OAK is available in practically any form, from the basic housing kit (for your existing micro and add-ons) through to the complete ready built unit which, as you can see from the specification, is a pretty sophisticated machine - the mighty OAK.



QUALITY
Because of
BBC Micro
worlds lea
derived fr
computers
widely p
and im
enb

ANNOUNCING

...require a
computer
of the sy
The OAK
problem
capable
casing.
The OAK
the mos

The OAK
BASIC
Model
Process
Detach
Plugs, s

Access
85 watt
Power s
cables,
for use
Rom so
2nd pro
Disc dri
Disc dri

Model
Process
Detach
Plugs,
BBC M
BBC M
Disc in
2 x 25
35 wa

Model
Process
Detach
BBC M
BBC M
Disc in
2 x 1
85 wa

Model
Process
Detach
BBC M
BBC M
Disc in
2 x 1
6502
85 wa

Model
Process
Detach
BBC M
BBC M
Disc in
2 x 1
280
85 wa
ALL

All p
and

UN
CO
CO
20
Gr
Br
CA
TE

OF
Univ
of C

OAK

QUALITY PRODUCTS

Because of the outstanding design, the BBC Micro Computer is one of the worlds leading computers. Its popularity is derived from its use as a powerful home computer that can be used as a personal computer widely used in industry, education, commerce and industry. Its flexibility has been enhanced by the vast range of add-ons that are available - unfortunately these add-ons have created the micro's major problem - in many cases they are self-contained units whose cases and cables require a lot of extra space in order to site the computer. This detracts from the overall value of the system.

The OAK computer range overcomes these problems as the vast majority of add-ons are capable of being housed within its own casing.

The OAK has been specially developed to be the most versatile computer system in its field.

The OAK computer BASIC RANGE.

Model 2.

Processor case
Detachable keyboard case
Plugs, sockets and cables £ 149.00

Accessories available for OAK Model 2

85 watt power supply unit £ 99.00
Power supply upgrade kit (includes P.S.U. cables, table, connectors, wiring harness) for use with 2nd processor chassis £ 24.00
Rom socket kit £ 18.00
2nd processor chassis £ 8.00
Disc drive blanking plate (2 drives) £ 8.00
Disc drive blanking plate (1 drive) £ 4.00

Model 4.

Processor case
Detachable keyboard case
Plugs, sockets and cables
BBC Model B keyboard
BBC Model B motherboard
Disc interface
2 x 250K disc drives
35 watt power supply unit £ 849.00

Model 5.

Processor case
Detachable keyboard case
BBC Model B keyboard
BBC Model B motherboard
Disc interface
2 x 1 mb disc drives
85 watt power supply unit £1095.00

Model 6.

Processor case
Detachable keyboard case
BBC Model B keyboard
BBC Model B motherboard
Disc interface
2 x 1 mb disc drives
6502 2nd processor
85 watt power supply unit £1295.00

Model 7.

Processor case
Detachable keyboard case
BBC Model B keyboard
BBC Model B motherboard
Disc interface
2 x 1 mb disc drives
Z80A 2nd processor
85 watt power supply unit £1495.00

ALL OTHER SPECIFICATIONS ARE AVAILABLE

All prices shown above are exclusive of VAT and delivery. Delivery £8

UNIVERSAL COMMUNICATIONS COMPANY


20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR
CALLERS WELCOME
TEL: BRADFORD (0274) 614167



ORDER FORM
Universal Communications Co. is a wholly owned subsidiary of Oak Universal Ltd.

OAK MODEM

PRESTEL, MICRONET, TELECOM, GOLD, DISTEL, MICROWEB, VARIOUS BULLETIN BOARDS PLUS ACCESS TO THE MASSIVE AMERICAN DATA BASES.

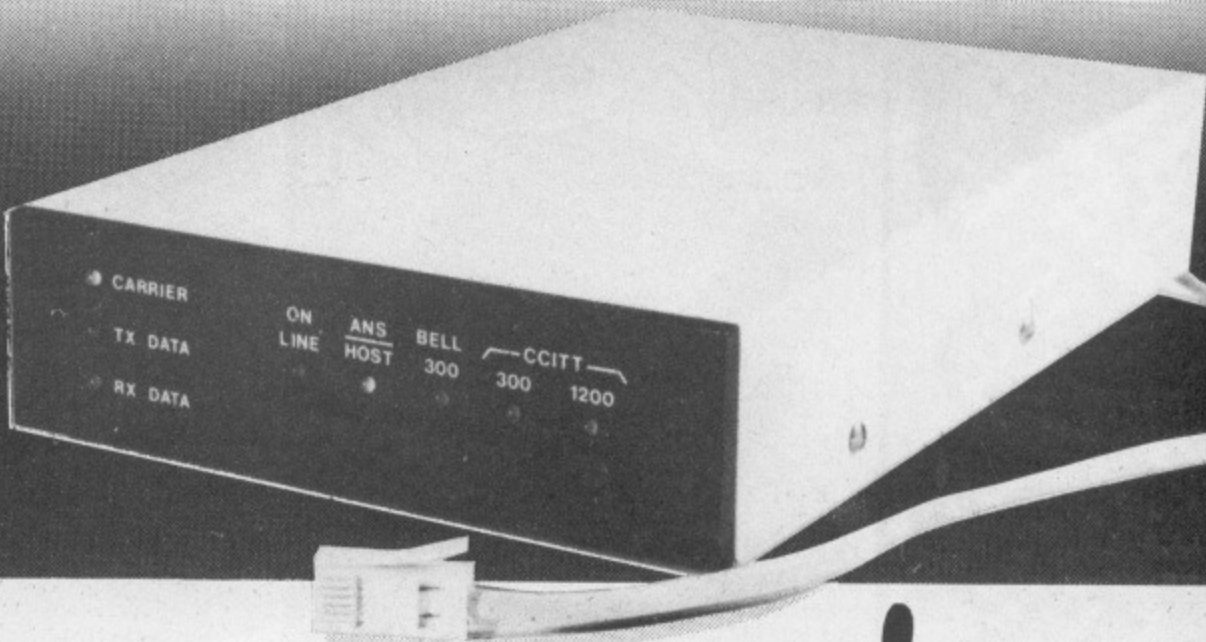

THE LATEST FROM OAK UNIVERSAL

- Single unit with integral power supply.
- Style to match half height disc drive.
- Capable of originating and answering all modes.
- Expandable to auto-answer and auto-dial.
- No connection required to user port - all control being achieved via RS423 port.
- LED indications for valid carrier, transmitted data, received data, plus mode selected, answer or originate and "on line".
- Easy to use.

only
£89.95

(plus P & P £4.00) plus VAT @ 15%

The Oak Modem has been designed specifically for use with the OAK/BBC computer ranges and is the most versatile modem, for either business or home use. The Oak Modem is a multi-function modem compatible with Bell 103 CCITT, V21 and V23 Standards, and is fully compatible with Termi, Communicator, Commstar and other existing software.

The Oak Modem offers Prestel/Viewdata 1200/75 baud rates. It also offers 75/1200 baud rates so that you can communicate with other users who only have a standard 1200/75 baud rate modem., as well as 300/300 baud rates, full duplex mode for communications between OAK/BBC computers and those of other manufacturers. The Oak Modem has on board expansion capability, allowing auto answer and auto dial features. By employing the latest technology

The Oak Modem requires minimal support circuitry, which results in a low power consumption, reliable quality product.

The Oak Modem connects via the RS 423 serial port and comes complete with all cables and having been designed specifically for use with the OAK and BBC computers it is extremely easy to connect.

HOW TO ORDER

BY POST:- To purchase any of the items simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Visa card. Please make cheques payable to Universal Communication Co. and post to the above address. Allow 21 days for delivery and add VAT and Postage and Packing as stated.

BY TELEPHONE:- Ring (0274) 614167. Credit Card holders (Access/Visa only) can purchase by telephone. Please give Card No., Name, Address and the items required.



Post to: **Universal Communications Co., 20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR**
Please send me your dealer price list your educational price list

Please send me the following

I enclose Cheque/P.O. for £ _____

I prefer to pay ACCESS/VISA

Card No. _____

Signature _____

Name _____

Address _____

Please send me details of your Easy Payment Credit Plan

Inc. P&P + VAT.

Cheques payable to Universal Communications Co.

(Delete whichever is not applicable)

Credit cards valid if signed by card holder. Address below must be the same as card holder.

TEL: 0274 614167




we accept

 Tel. 0274 614167

SUMMER


£89.95
 +£3.50 P.P. & VAT @ 15%

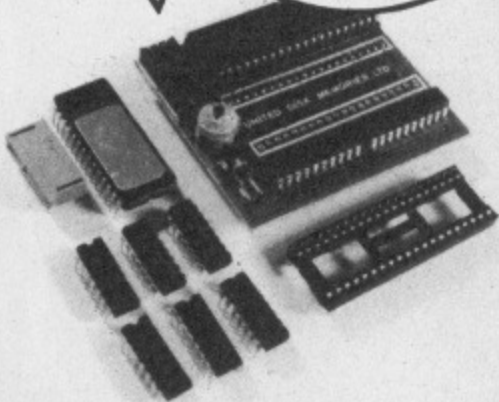

UDM DOUBLE DENSITY DISC INTERFACE FOR BBC MICRO

*Supports single & double density *Supports 40 or 80 tracks *ACORN compatible. Runs ELITE, CLARES REPLICA II, MINI OFFICE, BASIC, FORTH BCLP, VIEW, WORDWISE, GEMINI etc. *Supports single & double sided discs *Firmware Format and Verify *Complete with 80 page manual *Simple to fit.

£137.95
 +£5.00 P.P. & VAT @ 15%

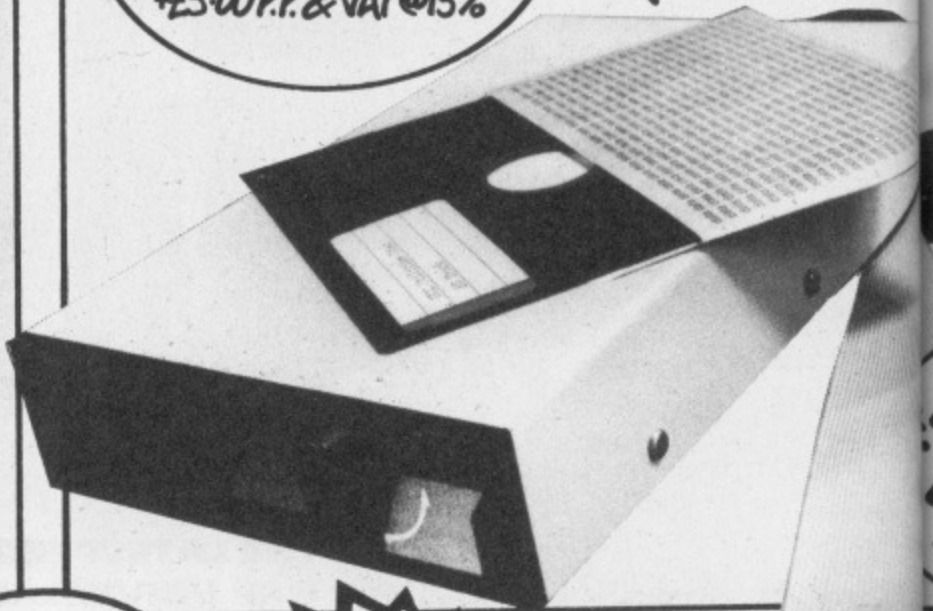

UCL 4080


TEAC 55F 40/80 TRACK SWITCHABLE DISC DRIVE

£61.95
 +£7.00 P.P. & VAT @ 15%

UCC 600C


Strong Metal Construction

STYLED AND COLOUR MATCHED TO BBC. Incorporating separate keyboard housing with connecting ribbon cable, computer housing which can accommodate up to two half height disc drives and a separate power supply unit.

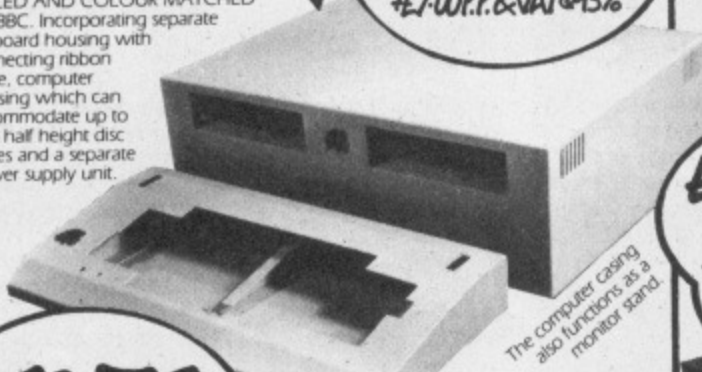

The computer casing also functions as a monitor stand

£51.75
 +£7.00 P.P. & VAT @ 15%

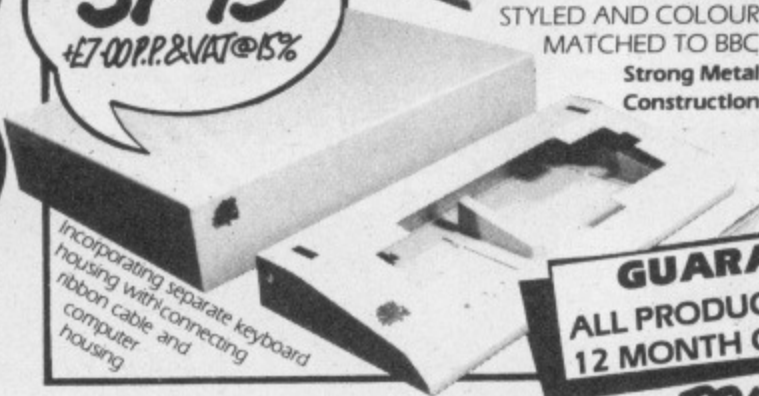

UCC 500C
 STYLED AND COLOUR MATCHED TO BBC
Strong Metal Construction

Incorporating separate keyboard housing with connecting ribbon cable and computer housing


NEW

S.P.Q.R.

NEW TYPESETTING QUALITY PRINT FOR THE CANNON PW 1008A PRINTER

S.P.Q.R. SIMULATED PRINT QUALITY ROMAN. Our disc-based software produces Roman style font which is designed to produce a print out as near as possible to typesetting, using WORDWISE, proportion spacing mod.

£29.95
 +£4.00 P.P. & VAT @ 15%

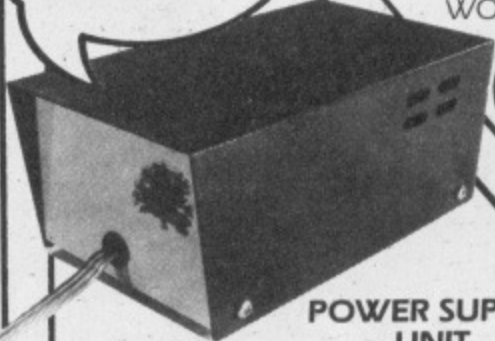

POWER SUPPLY UNIT
STAND ALONE
STRONG METAL CASE

Powers up to two disc drives, includes Dual Disc Drive connecting cable, Mains power lead and plug.

£9.50
 +£1.00 P.P. & VAT @ 15%

GUARANTEE
ALL PRODUCTS CARRY A 12 MONTH GUARANTEE

PRICES SPEAK LOUDER THAN WORDS

PRICES SPEAK LOUDER THAN WORDS!

SIZZLERZ!

TEAC 55F 40/80 TRACK DOUBLE SIDED SWITCHABLE DISC DRIVES

LOW POWER HALF HEIGHT DISC DRIVE UNITS 800K TEAC'S advanced technical features and reliability are the main reasons for TEAC being the most popular disc drives for use with the BBC computer. Disc Drive Units come complete with:- *All metal cases colour matched to BBC *Ribbon cable to connect to BBC micro *Power cable to mains where PSU is fitted *Manual/formating disc *Full 12 months warranty

UCL 4080 DS

DUAL STACKING
TEAC 55F 40/80 TRACK
SWITCHABLE DISC DRIVE

£312.95
+£10.00 P.P. & VAT @ 15%

UCL 4080 BB

DUAL DISC DRIVES
MONITOR STAND
TEAC 55F 40/80
SWITCHABLE
DISC DRIVE

Integral Power
Supply for
UCL 4080DS &
UCL 4080BB
£27.95 extra. +VAT

£278.95
+£6.00 P.P. & VAT @ 15%

UNIVERSAL
COMMUNICATIONS
COMPANY

20 Crofters Green,
Green Lane, Idle,
Bradford BD10 8RR

CALLERS WELCOME

TEL: BRADFORD (0274) 614167



£32.75
+£6.50 P.P. & VAT @ 15%

MONITOR STAND

STYLED AND COLOUR
MATCHED TO BBC
STRONG METAL
CONSTRUCTION.

£9.50
+£1.00 P.P. & VAT @ 15%

MONITOR STAND

WILL TAKE TWO DRIVES
AND POWER SUPPLY
STYLED AND COLOUR MATCHED TO BBC
STRONG METAL CONSTRUCTION.

£17.00
+£4.65 P.P. & VAT @ 15%


MONITOR STAND

WITH SHELF FOR DISC DRIVES
STYLED AND COLOUR MATCHED TO BBC
STRONG METAL CONSTRUCTION.

HOW TO ORDER

BY POST:- To purchase any of the items simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Visa card. Please make cheques payable to Universal Communication Co. and post to the above address. Allow 21 days for delivery and add VAT and Postage and Packing as stated.

BY TELEPHONE:- Ring (0274) 614167. Credit Card holders (Access/Visa only) can purchase by telephone. Please give Card No., Name, Address and the items required.



Summer Sizzlerz is a summer promotion from UCC - All prices are special offer prices and are for a limited period only - offer ends 31st July. Universal Communications Company is a wholly owned subsidiary of Oak Universal Ltd.

Post to: **Universal Communications Co., 20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR** your educational price list Please send me your dealer price list

Please send me the following

I enclose Cheque/P.O. for £ _____ Cheques payable to Universal Communications Co. Inc. P&P + VAT.

I prefer to pay ACCESSVISA (Delete whichever is not applicable)

Card No. _____

Signature _____

Name _____

Address _____

Credit cards valid if signed by card holder. Address below must be the same as card holder.

THIS program should appeal both to the reader who likes to dabble in Artificial Intelligence and also to the younger members of the family who like conversing with computers.


The idea is to teach the program to recognise different objects by drawing simple examples using the cursor keys. No matter how little it knows, the bold, but foolish program will always have a go at naming the object you show it and may come out with some weird suggestions.

Eventually it will surprise your friends when you invite them to draw an object on the screen and (with a bit of luck) it is able to identify it.

I have found that children enjoy teaching the program new objects and testing to see if it can recognise their drawings.

The program has two menus, both toggled using the Escape key.

Menu 1 controls all the commands involved with drawing. The cursor keys move the cursor around a 10 by 10 grid



Umbrella

in the centre of the screen. In default mode this will draw lines.

To move to another part of the screen without drawing press S (Skip) and to erase press E.

To return to normal drawing press D. Pressing W will wipe the grid clear. When the drawing is complete press Return and the program will begin to analyse it.

The second menu is concerned with saving and loading files and more drastic things like re-initialising the program and quitting. Pressing V (View) will list the names of the objects entered so far.

When the program has been taught objects this knowledge can be saved as a file containing the names of the objects supplied by the user and a code number for each one.

How is it possible to store enough information in just *one* number to differentiate between say a ladder, a cross, a giraffe and a fork? The answer lies in the use of bitwise logic.

The code for each object is stored in an integer number. The BBC Micro stores the actual value of an integer in 4 bytes. This gives $4 \times 8 = 32$ bits. Each could be set equal to 0 or 1. That is, if

SEE HOW YOUR MICRO SHAPES UP TO BEING TAUGHT

JOHN TISSANDIER presents

a program to demonstrate

artificial intelligence – and to

provide lots of family fun

you could access each bit separately, in *one* integer could be recorded 32 true or false statements.


To see how this is done study the listing. In fact, the program only makes use of the first 28 bits and hence is capable of expansion and being made more accurate. (Note that in practice only 31 bits are accessible.)

The actual information stored in these 28 bits are organised as follows:

Bits 0-3 are used to store the number of vertical lines that make up the object.

Bits 4-7 hold the number of horizontal lines. Four bits are needed in each case because the maximum possible number of lines is 10.

Bits 8-12 record five true or false statements concerning relationships



Stairway


that exist between the vertical lines making up the object.

This works by first comparing the length of the line on the extreme left with that of the line on the extreme right. If it is the same then bit 8 is made equal to 1, else it is made equal to 0.

Similarly, moving towards the middle of the object the next two lines are compared. This continues until the entire object has been scanned. Empty grid columns are ignored. Figure I

shows this for a chair. Next the horizontal lines are also scanned in pairs starting with the top and bottom and their lengths compared. The results are stored in bits 13-17.

Finally the vertical lines are compared with the horizontal lines and the results stored in bits 18-27. The vertical



Van


line on the extreme left is compared with the horizontal line at the bottom of the object. If their lengths are equal then 1, else 0, is stored in bit 18 of the code.

Then the next vertical line moving right is compared with the next horizontal line moving up, and so on. A potential maximum of 10 bits are needed for these comparisons.

The procedure described above is perhaps a rather arbitrary solution to what is in fact a very complex problem. However it has the advantage of relative simplicity and compactness, because the same loop structure can be used for the horizontal, vertical and horizontal vertical analyses.

Also its power lies in the fact that the object, say the chair in the example above, is reflected to face in the opposite direction (see Figure II) then the vertical code will still be 00010.


It is, of course, to achieve this result

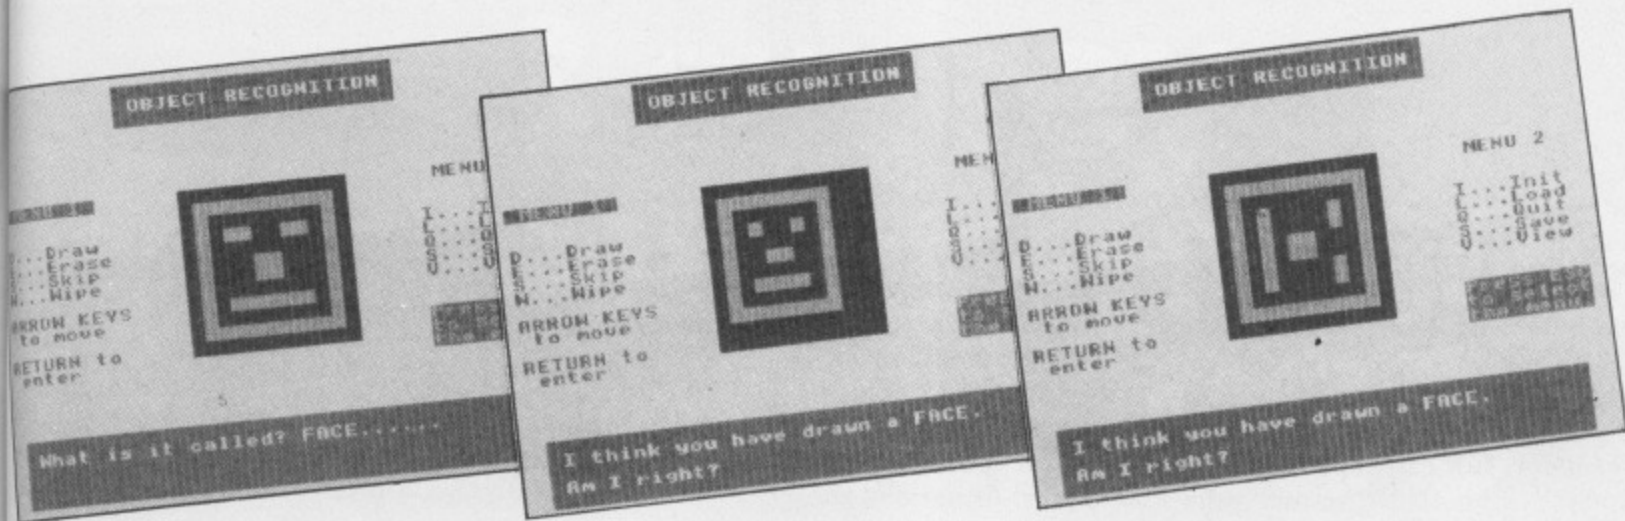

that when scanning the object "a" is compared with "d" and not with "b" and so on, otherwise a different code would result from the reflection.

Similarly, because the method ignores the empty columns and rows of the grid and only looks at the object, moving the latter anywhere on the grid (know as translation in mathematics - see Figure III) will still produce the same code.

Hence it is a far more powerful method of recognition than an




Ladder

apparently more exact one which would check the grid for one to one equivalence between each cell and data held in memory. Such a method would only recognise an object if it was drawn in exactly the same way and in the same position on the grid.

Object recognition does not depend on the position of the object in the grid, and therefore will cope happily with translations and reflections about a vertical axis.

Different sized versions of an object are more of a problem, because in this case different codes will be produced. If the program is taught a large example of object A and a small example of object B, then when asked to recognise a small



Elephant

version of A it may find its code is closer to that of B rather than that of A, merely because their similarity in size will predominate over their difference in shape.

The solution to this is to provide the program with both large and small - and possibly medium sized - versions of every object it is taught. This is discussed further in the section on learning strategies.

Here are some examples of the codes produced by different shapes. Filling the window completely with colour gives this code:

```
bit 27 1111111111-11111-11111-1010-1010 bit 0
```

(Note: 1010=8+2=10). This shows that there are 10 vertical lines, 10 horizontal lines and complete internal symmetry. Here are the codes for one vertical line 10 units long, one horizontal line 10 units long, and a blank screen respectively:

```
0000000000-11111-00000-0000-0001
0000000000-00000-11111-0001-0000
0000000000-00000-00000-0000-0000
```

These codes are shown for interest only. They are calculated by the

program and transparent to the user. Note that a code does not contain the information necessary to reconstitute the object. This is stored temporarily in the array *grid%(20)* and updated when a new object is entered.

How well the program performs is variable and depends on the mix of different objects held in memory. Sometimes it appears very clever at being able to cope with different examples of an object drawn in different areas of the screen, at different orientations and in different sizes.

At other times it appears to make very elementary mistakes. In particular it is confused by size. In any case it is expecting a lot to hope a computer can recognise an object when given only one example of it.

One can employ several strategies to deal with this problem. One way would have been to enter many examples of an

object in different sizes and orientations.

The program would have worked out the codes and averaged out the results, storing those characteristics that seem essential to the nature of the object and disregarding the rest. So one would have ended up with a set of statements that were likely to be true for that particular object.

I disregarded this option because I wanted the program to be suitable for children. They would have been bored by

"a" compared with "d". Unequal therefore store 0 in bit 8. "b" compared with "c". Equal therefore store 1 in bit 9.

Empty columns are ignored so remaining 3 bits are not used and made equal to 0. Code for vertical lines = 00010.




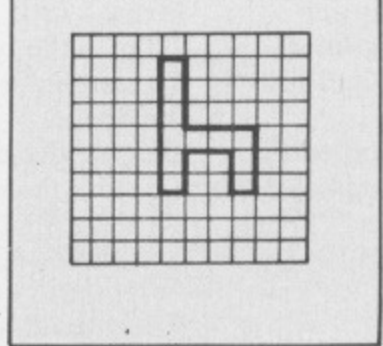


Figure I

Figure II

Figure III

Man

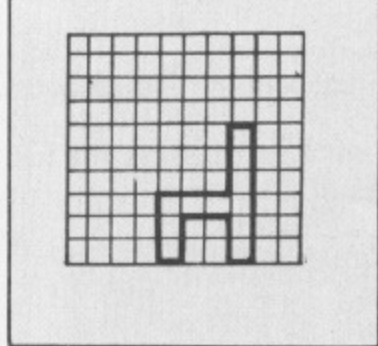

From Page 135

necessarily having to draw each new object many times.

Instead the strategy employed is to teach the program only what it actually needs to know. If it can cope with only one example of an object, so much the better. If it makes a mistake it will say: "I can't make out this object. Do you

want me to learn it?"

So one can teach it that this is a further example of an object it should already know. This is why the list produced by the View option will in general contain the same names repeated at various points.

Turn to Page 159

BECAUSE of memory constraints this has to be a two part program.

Type in Program I and SAVE it with any filename you choose, then type in Program II but SAVE this with the filename "OR2". CHAINing the first program will then run the complete utility.

If you want to choose your own filename for Program II, you must alter line 100 in Program I to:

```
100 CHAIN "your_filename"
```

where "your_filename" is totally different from one chosen for Program I, and, if you are using discs, must contain no more than seven characters.

PROCEDURES

init	Dimension arrays, and so on.
adjust	Adjusts data if Escape pressed in the middle of a procedure or new object rejected.
title	Highlights Menu 1 or Menu 2.
menu1	Calls procedures related to drawing object and recognising it.
menu2	Selects options relating to files and so on.
initdraw	Sets cursor position and colour.
draw	Draws object.
grid	Maps position of object on a 10 by 10 array using POINT command.
findrel	Checks the internal relationships in the object's shape.
lines	Called by PROCfindrel to analyse the horizontal and vertical lines making up the object.
match	Checks current object against all known objects for best fit.
nameobj	Names the object it thinks it has recognised.
new	New object named by user.
load	Loads file.
save	Saves file.
view	Produces list of known objects.
window	Switches between screen windows and redefines cursor.
message	Issues appropriate messages and warnings.

The blank lines before and after each DEFPROC are inserted deliberately to aid program readability.

FUNCTIONS

FNname	Checks length of object name and file names.
FNcheck	Validates user responses.

VARIABLES

fs	Filing system.
M%	Maximum number of objects.
menu	Menu 1 or 2.
grid%(10,10)	To map the object.
line%(20)	To store information about the lines making up the object.
bit%(20)	To store the values of 2 to the power of 8 to 27.
name\$(M%)	To store the names of the objects.
rel%(M%)	To store the code for each object.
n%	Number of objects entered.
f	Foreground colour.
b	Background colour.
j%,k%	Loop counters.

o%	Menu option.
x%,y%	Position of cursor.
d	Flag - if true print block on grid.
r%	If 1 check vertical lines, if 2 horizontal lines, if 3 vertical and horizontal lines.
p%	Exponential power.
f%,l%	First and last lines to be examined in array <i>line%(20)</i> .
mf%	Maximum possible value of <i>f%</i> .
ml%	Minimum possible value of <i>l%</i> .
e%	Counter for elements or blocks of the grid occupied by the object.
s%	Score obtained when trying to match latest object with all known ones.
b%	Best score.
m%	Number of object that gives the best match.
v%	Value of bit in code for known object being compared with <i>vl%</i> .
vl%	Value of bit in code for last object drawn.
ans	User response to questions.
t\$	Text input by user.
t%	Tab position.
ml%	Maximum length of text.
n\$	Name of object or file.
c	Channel.
w%	Window.
z%	Number of message to be printed.
d%	Duration of message on screen.

LOADER PROGRAM

150	Sets up VDU7 to use Envelope 1.
160	Sets the pitch of VDU7.
170	Sets the duration of VDU7.
470	Determines whether tape or disc being used.
480	If tape PAGE set to &E00 and maximum number of objects to 120, else PAGE set to &1300 and M%=80.

MAIN PROGRAM

50	Using the EOR command allows Escape to toggle between Menu 1 and Menu 2.
170	Rather than calculating each time the bit values are stored in an array.
520	ANDing with &DF allows for both lower and upper case.
2050	VDU23 code used to alter the cursor start and end registers (R10,R11) in the 6845 CRTIC, to produce the cursor in the middle of a block.

3 storey computer homes for under £60

Looking for a new home for your computer? Tired of being pushed from room to room with your family of peripherals? Better take a look at the Organiser showhome from Opus Supplies. It's fully mobile and combines practical features with modern design.



3rd storey

– Impressive view and just the place for your monitor and printer

2nd storey

– Lots of floorspace for your computer and disc drive or cassette recorder. Ample storage space for your software.

1st storey

– Parking space for your books, manuals and magazines.

And at only £59.95 you won't even need to take out a mortgage.

The Organiser desk from Opus Supplies comes complete with castors and simple assembly instructions and our price includes VAT and free delivery.

To order your system phone us on: 0737 65080 or post the coupon to Opus Supplies Limited.

To: Opus Supplies Ltd,
55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please rush me the following:
(PRICES INCLUDE VAT AND CARRIAGE)

_____ Organiser Desk(s) at £59.95 each (inc. VAT)

enclose a cheque for £_____ or please debit my

credit card account with the amount of £_____

My Access Barclaycard (please tick) no. is: _____

Name _____

Address _____

Telephone _____

Opus.
Opus Supplies Ltd.

55 Ormside Way,
Holmethorpe Industrial
Estate, Redhill, Surrey.
TELEPHONE: 0737-65080

MU 6

Tiger Software

GAMES OFFER
FOR BBC MICRO
AND ELECTRON

CONVOY SEARCH - A 3 PART GAME

1. From your submarine find the convoy! and that COULD take up to 100 attempts - if luck is against you!
2. When the convoy of 10 ships is found - try to sink it.
3. After the attack - any surviving ships depth-charge you - final score may be 0!

ONLY £3.99

THE BLUE PATH - Simple - Fun - Colourful. Find the hidden blue path - computer chosen! - Can you reach the maximum path score? - Can you do it BEFORE time runs out?

ONLY £2.99

SPECIAL - BUY BOTH FOR £5.99

(All prices fully inclusive)

Send orders to:

TIGER SOFTWARE

58 Shelburne Road, High Wycombe,
Bucks HP12 3NQ. Tel: 0494 28297

BASIC COMPILER

Turns your basic programs into really fast machine code. The compiler is very easy to use, and comes complete with full instructions.

For the BBC model B, or Model A with 32k.

Cassette £26.95
Disk £28.95
(40/80 TRACK)

Cheque/P.O. or SAE for details to

ACK Data

DEPT. MU
21 Salcombe Drive,
Redhill,
Nottingham, NG5 8JF
Tel. (0602) 262498


Now supports
over 100
key words

UP TO 32k SIDEWAYS RAM BD FOR THE BBC PLUS CAPABILITY OF WRITE PROTECTION INCLUDED

This RAM board comes complete with 16k of RAM fitted and sockets available for an additional 16k RAM which can be fitted later by plugging in, this will give a total capability of 32k.

Plugs directly into socket 12 or 15 in BBC or onto one of the H.C.R. ROM boards. No soldering will be required and it has the extra bonus of a write protect switch to be

mounted either in the reset space, rear of case or in spare LED position on right hand front of keyboard. A right protect switch is fitted to prevent corruption of data loaded into RAM.

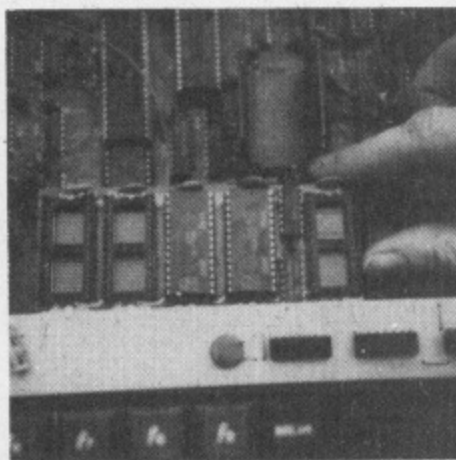

Sideways RAM is intended to run sideways ROM type software of your own either under development or as an alternative to actually committing to expensive eproms.

Sideways software may be kept on disc and loaded into sideways RAM simply by typing *Load<NAME>8000. The RAM can be loaded 16k at a time or by assembling to Hex 8000. A simple program is provided in the manual to transfer software (in RAM or ROM) into user RAM where it can be modified and written back to RAM or saved on disc. With suitable software RAM can be used as a printer buffer or as a data store, etc.

**Supplied complete with 16k of RAM
and easy fitting
instructions**

£31.50 (£36.22 inc VAT)

Further 16k RAM

£20.00 (£23.00 inc VAT)

Please allow £2.00 P&P

Also available: Internal 16 socket ROM/RAM card, External 28 socket ROM/RAM card, Eprom Programmer & eproms

HCR ELECTRONIC SERVICES
THE INDUSTRIAL UNIT, PARKER ROAD
CHELMSFORD, ESSEX CM2 6ES
Tel: Chelmsford (0245) 350188

**HR ELECTRONIC
SERVICES**

Catch the mice and rescue Fido the cat down GRAHAM LENG's well!

I KNOW they say cats have nine lives. But in this action-packed game Fido, an exceedingly oddly named cat, takes it a little too far!


Poor Fido has fallen down a well. She is, however, a little reluctant to come out owing to the abundance of mice down there.

You can only rescue her by going down on the bucket and collecting all the mice. You must then be careful to return to the top before she does or else she will run away.

Fido can climb the rope as well as jump over gaps (both these things you are unable to do yourself). But being a vaguely superstitious cat she will not go under ladders.

Can you tempt Fido out of the well? You must remember not to bump into her on your travels.

And be careful, too, not to fall down the well or run out of time.

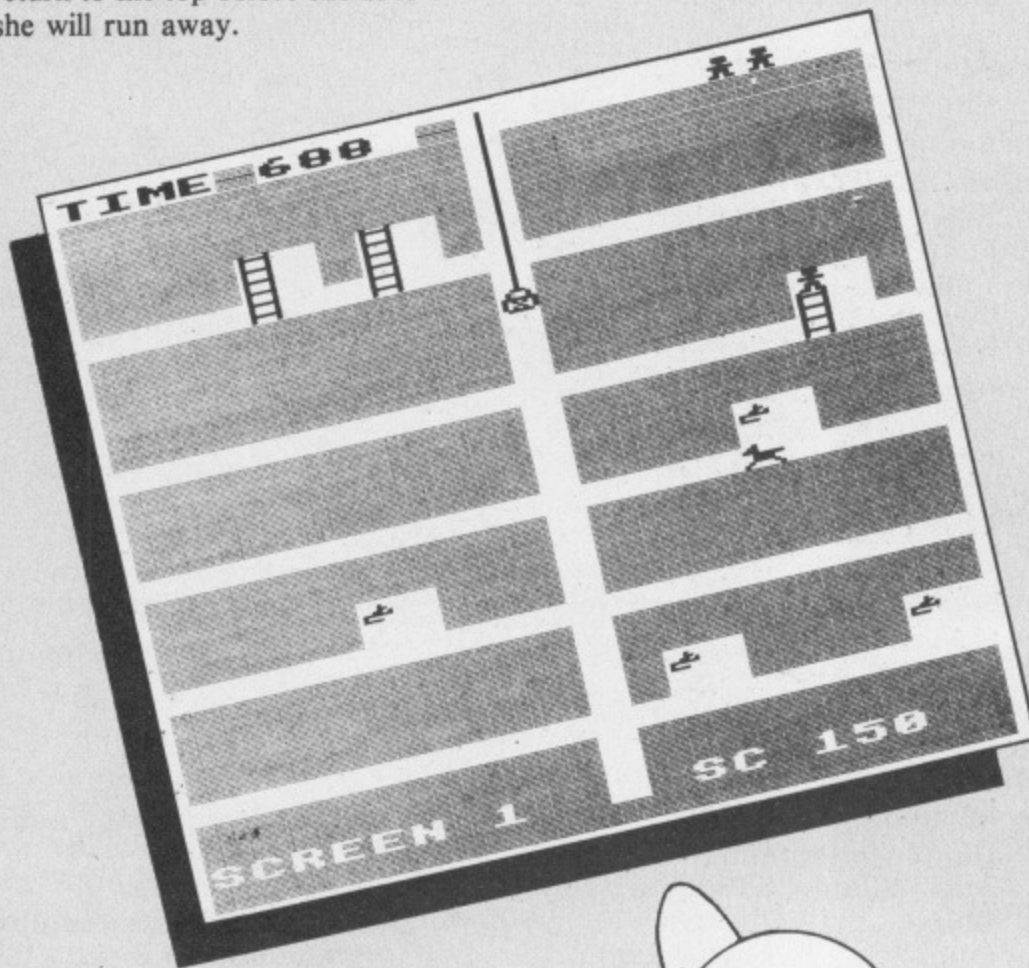

C A T N A P




Catnap listing

From Page 139

```

10 REM *** Cat-napper ***
20 REM *** Micro User 1984 ***
30 VDU 23,224,0,0,8,12,26,&7E
  ,&40,&78
40 VDU 23,225,0,0,0,0,0,0,&7E
  ,&FF
50 VDU 23,226,8,8,8,8,8,8,8,8
60 VDU 23,227,&1C,&1C,8,&3E,8
  ,&1C,&14,&36
70 VDU 23,228,&1C,&1C,8,&1C,8
  ,8,8,&1C
80 VDU 23,229,4,&86,&46,&3C,&3C
  ,&3C,&24,&24
90 VDU 23,230,4,6,7,&FC,&3C,&3C
  ,&42,&81
100 VDU 23,231,&14,&1C,&1C,8,&BE
  ,&BE,&9C,&FC
110 VDU 23,232,255,255,255,255
  ,255,255,255,255
120 VDU 23,233,&20,&61,&E2,&3C
  ,&3C,&3C,&24,&24
130 VDU 23,234,&20,&60,&E0,&3F
  ,&3C,&3C,&42,&81
140 VDU 23,235,&1C,&22,&22,&7F
  ,&55,&49,&55,&3E
150 VDU 23,236,66,126,66,66,66
  ,126,66,66
160 ENVELOPE 1,2,0,0,0,0,0,0,64
  ,-7,0,0,126,0
170 ENVELOPE 2,129,20,-1,-1,5,10
  ,10,20,-2,-4,-4,126,0
180 ENVELOPE 3,4,16,12,20,1,1,1
  ,63,-2,-2,-10,126,0
190 ENVELOPE 4,4,-12,-16,-20,1
  ,1,1,63,-2,-2,-10,126,0
200 MODE 1
210 VDU 19,3,4,0,0,0
220 COLOUR 131
  :COLOUR 2
  :CLS
230 PRINT " ";CHR$ 231;
  CHR$ 231;CHR$ 231;" CAT-NAPPER
  ";CHR$ 231;CHR$ 231;CHR$ 231;
240 C$=CHR$ 231+" "
250 PRINT TAB(5,30)STRING$(16,C$)
260 VDU 28,5,25,35,5
270 COLOUR 129
  :CLS
  :COLOUR 0
280 PRINT TAB(0,20);
290 PRINT " *** CAT-NAPPER
  ***""Poor fido your pet
  cat has fallen down the
  well."
300 PRINT "You can rescue her by
  going down on the bucket,
```

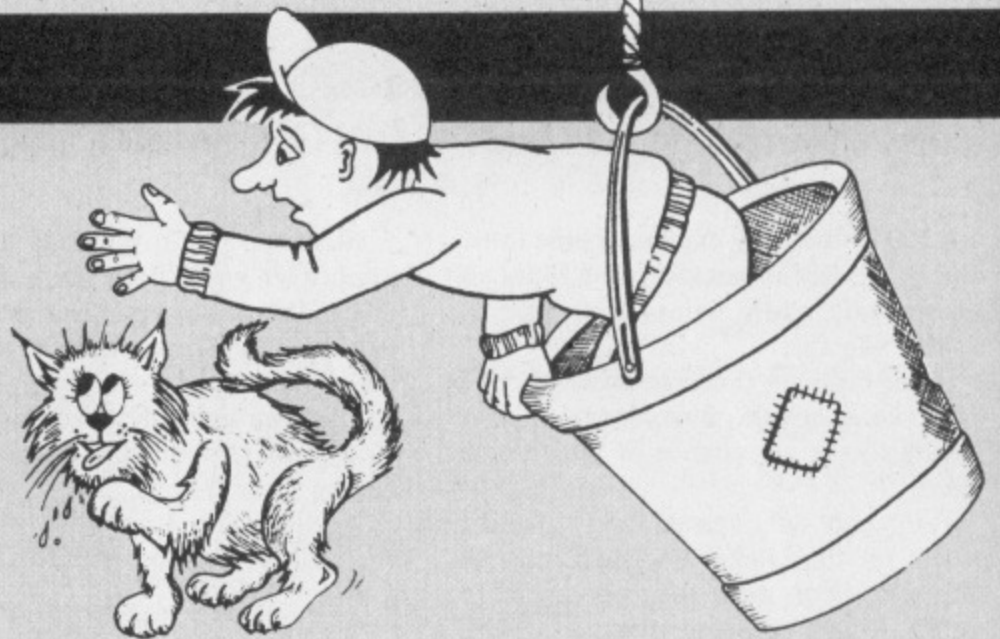

PROCEDURES

PROCINIT	Sets up high score table
PROCScreen, PROCLAYOUT	Sets up screen
PROGAME	Main loop
PROCMOVE, PROCCAT,	
PROCBCT	Moves man, cat, bucket
PROCRT, PROCLT, PROCDN,	
PROCFALL, PROCUP	Moves man
PROCLADDER	Draws ladder and checks for mice
PROCDEAD	Death routine
PROCCHG	Changes direction of cat
PROCFIN, PROCCATUP,	
PROCRIDE	Controls race for home when all mice caught
PROCHIScore	Hall of fame

VARIABLES

SCREEN	Screen in play
DEAD%	1 if dead, 0 if alive
LIV%	Number of lives left
S%	Score
M%, C%	User defined characters in use for man and cat
X%, Y% and CX%, CY%	Coordinates of man and cat
O%, o% and CO%, co%	Stores character and colour moved over
DIR%	Direction of cat
B%	Y coordinate of bucket
UD%	Bucket up (0) or down (1)
M	Number of mice taken
POU%, POD%, POL%, POR%	"Point" values around man
POC%	"Point" value in front of cat
T%	Time
S(10)	Array of high scores
NS(10)	Array of names
NAMES	Your name
ENTRY	Your position in high score table

```

collecting all the mice and
then getting back to the top
before she does"
310 PRINT "Remember fido can climb
the rope and jump over gaps
which you can't - but (being
a sort of superstitious cat)
she will not go under ladders."
320 FOR N=1 TO 8
330 READ P,D
340 SOUND 1,1,P,D
```

```

350 NEXT
360 DATA 101,8,81,8,101,16,117
  ,4,121,4,109,4,117,4,101,16
370 *FX15,1
380 I=INKEY (2000)
390 PRINT ""Be careful to dodge
the cat and try not to fall
down the well or run out
of time. You will get
```


Rock steady vision at a rock bottom price



CALL
0737 65080
FOR
GENEROUS
EDUCATION
DISCOUNTS

The only thing that seems to stand still on some colour monitors is the price. But at Opus we've now made our RGB High Resolution colour monitor even more affordable – it's down to just £199.95, and the picture quality is as rock steady as ever.

What's more we deliver within 48-hours and give you an unrivalled warranty plan to guarantee your peace of mind for the next two years. And if that's not enough our price includes carriage, VAT and connection leads.

Our JVC monitor (580x470 pixels) has received ample praise from the computer press. Acorn User said:

"... gave steadier pictures than the Microvitec Cub, and the colours were rather better."

Personal Computer News added:

" There is no doubt that the JVC range of ECM colour monitors is excellent value for money. . . there is no loss in quality of picture after long periods . . . "

The unit has a 14" screen and is suitable for use with the BBC Micro, Electron, Sinclair QL, Lynx, Oric, Apple, IBM, Amstrad and RML 480Z and most other leading micros.

Simply post the coupon below to: Opus Supplies Limited, or telephone us quoting your credit card number.

To: Opus Supplies Ltd,
55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please rush me the following:
(PRICES INCLUDE VAT AND CARRIAGE)

_____ High Resolution colour monitor(s) at £199.95 each (inc. VAT)

I enclose a cheque for £ _____ or please debit my

credit card account with the amount of £ _____

My Access Barclaycard (please tick) no. is:

My computer is _____

Name _____

Address _____

Telephone _____

Opus.
Opus Supplies Ltd.

55 Ormside Way,
Holmethorpe Industrial
Estate, Redhill, Surrey.
TELEPHONE: 0737-65080

MU6

Catnap listing

From Page 140

```


an extra man after the third
sheet."
400 #FX15,1
410 I=INKEY (2000)
420 PRINT ""Use the following keys:
"
430 PRINT ""  Z - LEFT"" X
- RIGHT"" * - UP"" ?
- DOWN"" Q - SOUND OFF
P - PAUSE"" S - SOUND
ON R - RESTART"
440 PRINT '
450 VDU 28,13,28,28,27
460 COLOUR 131
:COLOUR 2
470 ON ERROR GOTO 520
480 PROCINIT
490 #FX15,1
500 PRINT "PRESS ANY KEY"
:G=BET
510 REPEAT
520 PROCRESET
530 MODE 2
540 REPEAT
550 PROCSCREEN
560 PROCGAME
570 PROCFIN
580 IF (SCREEN=3 OR SCREEN=7)
AND DEADX=0 LIVX=LIVX+1
:SOUND 2,1,140,8
590 IF DEADX=1LIVX=LIVX-1
:DEADX=0
ELSE SCREEN=SCREEN+1
600 IF SCREEN=9 SCREEN=1
:SX=SX+1000
:SOUND &101,3,81,10
:SOUND &102,4,109,10
:SOUND &101,3,101,10
:SOUND &102,4,129,10
:SOUND &101,3,129,10
:SOUND &102,4,157,10
610 UNTIL LIVX=0
620 MODE 7
630 PROCHISCORE
640 UNTIL 0
650 DEF PROCINIT
660 DIM S(5),N$(10)
670 FOR N=1TO 5
680 S(N)=1500-250*N
690 READ N$(N)
700 NEXT
710 DATA CAT-NAPPER ,GRAHAM ,JEDI
KNIGHT ,BOY GEORGE ,(c) G.LENG
(1984)
720 R$=CHR$ 224+" "
730 ENDPROC
740 DEF PROCRESET
750 RESTORE 1900

760 LIVX=3
:SX=0
:SCREEN=1
770 ENDPROC
780 DEF PROCSCREEN
790 IF SCREEN=1 VDU 19,4,2,0,0
,0,19,9,1,0,0,0,19,8,3,0,0
,0,19,15,6,0,0,0
800 IF SCREEN=2 VDU 19,4,4,0,0
,0,19,15,2,0,0,0,19,9,1,0,0
,0
810 IF SCREEN=3 VDU 19,4,5,0,0
,0,19,15,1,0,0,0,19,9,2,0,0
,0
820 IF SCREEN=4 VDU 19,4,1,0,0
,0,19,15,4,0,0,0,19,9,5,0,0
,0
830 IF SCREEN=5 VDU 19,4,3,0,0
,0,19,15,1,0,0,0,19,9,7,0,0
,0
840 IF SCREEN=6 VDU 19,4,1,0,0
,0,19,15,3,0,0,0,19,9,4,0,0
,0
850 IF SCREEN=7 VDU 19,4,7,0,0
,0,19,15,5,0,0,0,19,9,3,0,0
,0
860 IF SCREEN=8 VDU 19,4,4,0,0
,0,19,15,7,0,0,0,19,9,6,0,0
,0
870 MX=227
:YX=15
:YX=0
:OX=32
:OX=0
880 CX=229
:CXX=0
:CYY=22
:COX=32
:COX=6
:DIRX=1
890 UDZ=1
:BX=0
900 DEADX=0
910 M=0
920 CLS
930 COLOUR 132
:CLS
:COLOUR 128
940 PRINT TAB(11,0)" "
950 COLOUR 4
960 PRINT TAB(0,6)SPC (20)
970 PRINT TAB(0,12)SPC (20)
980 PRINT TAB(0,17)SPC (20)
990 PRINT TAB(0,22)SPC (20)
1000 PRINT TAB(0,27)SPC (20)
1010 PROCCLAYOUT
1020 FOR N=0TO 30
:PRINT TAB(10,N)" ";
:NEXT

1030 COLOUR 3
1040 PRINT TAB(15,0);STRING$(LIVX
,CHR$ 227);
1050 COLOUR 0
:COLOUR 132
:PRINT TAB(12,30);"SC ";SX;
TAB(0,30)"SCREEN ";SCREEN
:COLOUR 128
1060 COLOUR 5
:PRINT TAB(0,0)"TIME";
1070 ENDPROC
1080 DEF PROCPT
1090 POUX=POINT (XX*64+32, (31-YY)*32+4
8)
1100 PODX=POINT (XX*64+38, (31-YY)*32-2
4)
1110 POLX=POINT (XX*64-32, (31-YY)*32+8)
1120 PORX=POINT (XX*64+96, (31-YY)*32+8)
1130 ENDPROC
1140 DEF PROCGAME
1150 TIME =1
1160 VDU 23;8202;0;0;0;
1170 REPEAT
1180 TX=999-TIME /5
1190 IF TX<0 TX=0
:PRINT TAB(5,0);"0 ";
:PROCDEAD
1200 PRINT TAB(5,0);TX;" "
1210 PROCMOVE
1220 PROCCAT
1230 PROCBCT
1240 UNTIL DEADX=1 OR M=7
1250 ENDPROC
1260 DEF PROCRT
1270 IF PORX=4 ENDPROC
1280 IF PORX=0 OX=32
1290 IF PORX=8 OX=236
:OX=8
1300 IF PORX=6 OX=226
:OX=6
1310 YX=YX+1
1320 ENDPROC
1330 DEF PROCLT
1340 IF POLX=4 OR POLX=9 ENDPROC
1350 IF POLX=0 OX=32
1360 IF POLX=8 OX=236
:OX=8
1370 IF POLX=6 OX=226
:OX=6
1380 YX=YX-1
1390 ENDPROC
1400 DEF PROCDN
1410 IF PODX=8 OX=236
:OX=8
:YX=YX+1
1420 ENDPROC
1430 DEF PROCFALL

```



DIGITAL THERMO-METER



HEART RATE MONITOR



LIE DETECTOR



INTERFACING KIT

A COMPREHENSIVE INTRODUCTION TO BBC INTERFACING

- ★ No soldering
- ★ Includes cable, software, components etc.
- ★ Suitable for educational purposes
- ★ Simple to build

At last, a superb opportunity to link your micro to the external world. This kit contains a variety of projects for both the analogue and user ports. Construction is by simple plug-in assembly and all components are re-usable.

Start by basic interfacing to Led's and work up to a fully functional heart-rate monitor.

The kit contains the components necessary to build all the projects illustrated and many more.

Complete with easy-to-follow user manual.

ALL THIS FOR JUST **£24.95** INCLUSIVE

LIGHT PEN



BURGLAR ALARM



RAIN DETECTOR



Please send me _____ interfacing kit(s) at **£24.95** each.
I enclose a Cheque/P.O. for £ _____ made payable to EXCALIBER.

Name _____

Address _____

EDUCATIONAL/DEALER ENQUIRIES WELCOME

Send coupon with Cheque/P.O. to:
EXCALIBER
PO BOX 19
FELTHAM
MIDDLESEX
TW14 8DP.


Tomorrows Dream Software proudly presents:

sub strike

Your submarine is being attacked by wave after wave of enemy helicopters armed with bombs, depth charges and ASGROC (Anti-Submarine Guided ROCKets), the only way to survive is to blast them out of the sky before they can get you - but look out for crashing helicopters, drifting mines and Sonar Subs - and even the fish are dangerous ...

A game of skill, speed and sheer nerve against rapidly increasing odds, from Tomorrows Dream Software.

Fast 100% Machine Code action utilising full colour Mode 2 graphics, sound effects & music, joystick option, High Score table and demo mode, only £6.50 direct from TDS.

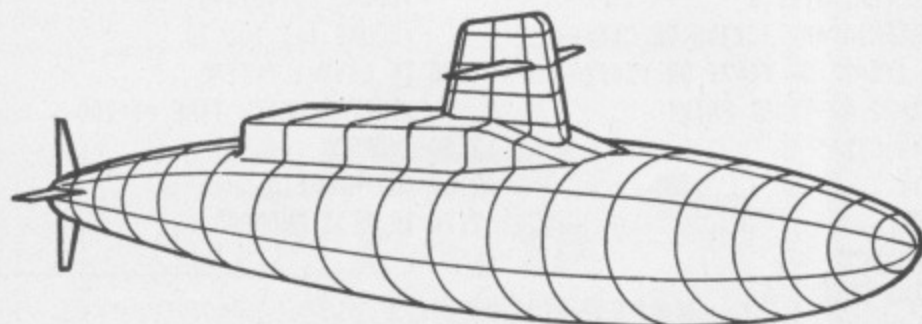

The debugging monitor utility for machine code programs on the BBC B

"Anyone needing a utility of this kind will be unlikely to do better"
- Home Computing Weekly, 19th Feb 1985

".....can't make code easy, but it can certainly help"
- Popular Computing Weekly, 21st March 1985

"I found no problems with using...and have no complaints about its ease of use and facilities" - A & B Computing, May 1985

- Single stepping through RAM and ROM - including operating system
- Intelligent memory mover
- Single step through graphics routines
- Breakpoints in RAM and ROM
- Microsecond timer
- Intelligent masked string search routine

Plus: 'Front Panel' display, OSCLI commands available within debugger, conditional breakpoints at relative branch instructions, display of four memory windows continuously updated during single stepping, arithmetic operators + - x ÷, output to printer, ASCII dump, hex dump, dis-assembly, block fill, plus much more.

With complete instruction manual, only £10 on tape, £12 on disc from TDS

*Written any good Software?
We pay top rates for original programs.*

Please send me Sub Strike on tape (£6.50)/disc (£8.50)
Debugging Monitor Utility on tape (£10)/disc (£12)
Please specify DFS when ordering disc versions

I enclose a cheque/PO for £ _____ payable to
Tomorrows Dream Software.

Name _____

Address (BLOCK LETTERS) _____

Send this coupon with your cheque/PO to: TDS, Richmond House, 1B Sydenham Road, Cotham, Bristol BS6 5SH

Catnap listing

From Page 142



```

1440 IF PODZ=8 ENDPROC
1450 IF PODZ=0 XZ=XXZ
      :YZ=YZ+1
      :OZ=32
1460 IF XZ<>XXZ ENDPROC
1470 IF PODZ=6 YZ=YZ+1
      :OZ=226
      :oZ=6
1480 ENDPROC
1490 DEF PROCUP
1500 IF YZ=BZ-1 YZ=BZ-2
1510 YZ=YZ-1
1520 ENDPROC
1530 DEF PROCMVE
1540 PROCPT
1550 XXZ=XXZ
      :YYZ=YZ
1560 OZ=OZ
      :ooZ=oZ
1570 IF INKEY (-56) T=TIME
      :REPEAT UNTIL INKEY (-52)
      :TIME =T
1580 IF INKEY (-67) PROCRT
      :
      ELSE IF INKEY (-98) PROCLT
      :
      ELSE IF INKEY (-73) AND XZ<>10
      PROCLADDER
      :
      ELSE IF INKEY (-105) PROCDN
1590 IF INKEY (-17)
      THEN *FX210,1
1600 IF INKEY (-82)
      THEN *FX210,0
1610 IF XZ=10 AND (YZ=BZ-1 OR YZ=BZ-2
      ) AND UDX=0 PROCUP
      :
      ELSE PROCFALL
1620 IF XZ>19 XZ=19
      ELSE IF XZ<0 XZ=0
1630 IF YZ<0 YZ=0
1640 IF XZ<>XXZ SOUND 0,-10,6,1
1650 COLOUR ooZ
      :PRINT TAB(XXZ,YYZ)CHR$ OZ;
      :COLOUR 3
      :PRINT TAB(XZ,YZ)CHR$ MZ;
1660 IF XZ=XXZ GOTO 1680
1670 IF MZ=227 MZ=228
      :
      ELSE MZ=227
1680 IF YZ=30 PROCDEAD
1690 ENDPROC
1700 DEF PROCCHG
1710 DIRZ=DIRZ+1
      :IF DIRZ=2 DIRZ=0
1720 CZ=CZ+4
      :IF CZ>234 CZ=229
1730 IF POCZ=8 COZ=236
      :coZ=8
1740 IF POCZ=4 COZ=232
      :coZ=4
1750 ENDPROC
1760 DEF PROCCAT
1770 IF CYZ<BZ AND CXZ=10 COZ=226
      :coZ=6
1780 COLOUR coZ
      :PRINT TAB(CXZ,CYZ)CHR$ COZ
1790 COZ=32
1800 CXXZ=CXZ
1810 IF DIRZ=1 CXZ=CXZ+1
      ELSE CXZ=CXZ-1
1820 POCZ=POINT(CXZ*64+32,(32-CYZ)*32
      -24)
1830 IF POCZ=3
      :PROCDEAD
1840 IF POCZ=8 OR POCZ=4 PROCCHG
1850 IF CXZ>19 DIRZ=0
      :CZ=233
      :CXZ=19
      :PRINT TAB(CXZ,CYZ) " ";
      :READ CYZ
      :GOTO 1890
1860 IF CXZ<0 DIRZ=1
      :CZ=229
      :CXZ=0
      :PRINT TAB(CXZ,CYZ) " ";
      :READ CYZ
      :GOTO 1890
1870 COLOUR 15
      :PRINT TAB(CXZ,CYZ);CHR$ CZ
1880 CZ=CZ+1
      :IF CZ=231 CZ=229
      :
      ELSE IF CZ=235 CZ=233
1890 IF CYZ=6 RESTORE 1900
1900 DATA 17,27,12,22,6
1910 IF SCREEN>4 AND (CXZ=0 OR CXZ=19
      ) AND (YZ=17 OR YZ=27 OR YZ=12
      OR YZ=22 OR YZ=6) PRINT
      TAB(CXZ,CYZ) " "
      :CYZ=YZ
1920 ENDPROC
1930 DEF PROCBCT
1940 IF UDX=1 COLOUR 6
      :PRINT TAB(10,BZ)CHR$ 226
      :
      ELSE PRINT TAB(10,BZ) " ";
1950 IF UDX=1 BZ=BZ+1
      ELSE BZ=BZ-1
1960 IF BZ=0 UDX=1
1970 IF BZ=30 UDX=0
1980 COLOUR 5
      :PRINT TAB(10,BZ)CHR$ 235
1990 ENDPROC
2000 DEF PROCLADDER
2010 IF POUZ=4 OR POUZ=-1 ENDPROC
2020 IF POUZ=9 SOUND 2,2,100,1
      :SZ=SZ+50
      :M=M+1
2030 COLOUR 0
      :COLOUR 132
      :PRINT TAB(15,30);SZ;
      :COLOUR 128
2040 YZ=YZ-1
      :COLOUR 3
      :PRINT TAB(XZ,YZ)CHR$ MZ;
      TAB(XZ,YZ) " ";
2050 COLOUR 8
      :PRINT TAB(XZ,YZ+1)CHR$ 236
2060 OZ=236
      :oZ=8
      :OOZ=236
      :ooZ=8
2070 ENDPROC
2080 DEF PROCDEAD
2090 DEADZ=1
2100 COLOUR 3
      :PRINT TAB(XZ,YZ)CHR$ 225
2110 SOUND 0,1,5,8
2120 FOR N=1 TO 3000
      :NEXT
2130 SOUND 1,1,101,10
      :SOUND 1,1,81,10
      :SOUND 1,1,101,20
2140 IF LIVZ=1 T=TIME
      :REPEAT UNTIL TIME =T+200
2150 ENDPROC
2160 DEF PROCFIN
2170 IF M<>7 ENDPROC

```


LUXURY SOFTWARE AT A LOW PRICE

The **KOPPER SYSTEM** has been developed for such exacting and varied professional requirements as Investment Analysts, Insurance Brokers, Employment Agencies and Riding Centres. We can now offer whole sections of these developments at very competitive prices for the BBC B.

MASTERBASE The System is controlled by a master program which allows immediate access via the 'red keys' in and out of any one of 10 Modes. A Mode indicator card is provided for the BBC keyboard.

STARTUP You use your own password to prevent unwanted access. Diary reminders come up automatically on startup.

TEXT EDITOR The edit commands, though very comprehensive, are easy to use. You see 76 characters per line all the time, just as printed on A4 paper. Any section of the screen text can be printed separately at any time. The **HELP** display is obtainable instantly and summarises all the functions.

FILING SYSTEM The KOPPER filing system offers a flexible means of handling variable information in a readily accessible and easy-to-use form. Two essential ready-made files are provided (Addresses/Tel. numbers and a 'loose data' storer). Full instructions are provided for creating your files quickly and easily. There is virtually no limit to the size of file you can use.

BUSINESS PROGRAMS This Mode offers an economic range of professional programs for the business user. Two programs are provided in this basic package:

- Cash and Bank reconciliation
- VAT, discount and interest calculators

The Book-keeping, taxation and many other business packages will be made available in the near future.

CALCULATOR This Mode converts the system to a multiple sophisticated calculator with 8 visible memories.

USER'S PROGRAMS One Mode key is set aside for the User's own programs to be run with the system, if required.

60 PAGE MANUAL A fully comprehensive guide to every aspect of the system - easy to follow and understand.

Buy the KOPPER Chip and Disk now - and you have the basis for a flexible high-powered system at low cost, which you can enlarge as and when you wish, to match your exact requirements.

The KOPPER Business "Chip" and Disk
(featuring all the above)
ONLY

£35!

(£37 for single sided disk drives - 2 disks provided)

Please state whether disk drive is single/dual, 40/80 track, double or single-sided and state if an Aries RAM is used.

Postage & Packing for the Business chip and disk is £1.00
Please add VAT 15% to the above prices (i.e. £5.40)

We also supply complete BBC systems for this and other applications:

£850

(BBC + DFS, Double-sided 80T Disk Drive, Monitor,
Daisy wheel printer, cable)

KOPPER LTD.

25 PILGRIMS LANE, LONDON NW3 1SX.



GRIFFEN COMPUTERS

TEL 0279 812295

8 RAINSFORD ROAD, STANSTED, ESSEX CM24 8DU
ROM SOFTWARE

SPECIAL OFFERS... SPECIAL OFFERS

HITACHI UV EPROMS - 250nS

27128 - 7.50 inc. VAT (a)
2764 - 3.50 inc. VAT (a)
8271 - 50.00 inc. VAT (a)
Dealer enquiries welcome

The latest releases from Computer Concepts

ACCELERATOR	53.36
INTERSHEET	48.00
SPEECH	27.50

EXMON II B/E	26.25 (b)
TOOLKIT B/E	24.65 (b)
MUROM	26.25 (b)
SPELLCHECK II 40/80	28.60 (b)
SLEUTH	26.25 (b)

WORDWISE-PLUS	48.00 (c)
WORDWISE	36.00 (c)
PRINTMASTER (Epson)	27.50 (b)
PRINTMASTER (Star)	27.50 (b)
CARETAKER	27.50 (b)
GRAPHICS	27.50 (b)
DISC DOCTOR	27.50 (b)

CLARES BROM	31.50 (b)
ISO-PASCAL	62.00 (d)
LOGO	62.00 (d)
VIEW	52.00 (b)
VIEWSHEET	53.36 (b)
ADE 40/80	54.00 (b)
SPY II	27.50 (b)
AID (Lincoln)	27.00 (b)
ADDCOMM	26.75 (b)
ULTRACALC II	71.50 (b)

PROXIMA BEEB-TEXT 40/80	14.00 (b)
SPELLCHECK (Wordwise) 40/80	16.20 (b)
SPELLCHECK (View) 40/80	16.20 (b)
MASTERFILE II 40/80	17.90 (b)
CLARES BETABASE 40/80	23.90 (b)
CLARES REPLICA II 40/80	11.90 (b)
FILEAID (Lincoln)	34.00 (b)

SPECIAL OFFERS... SPECIAL OFFERS

UDM DDFS Version 2	85.00 (b)
100% Board + Switch	17.50 (b)
100% Board, Switch, 8271 + TTL	89.95 (b)
100% Board, Switch + DDFS	89.95 (b)
100% Board, Switch, 8271, TTL + DDFS	142.95 (b)

ACORN DNFS	99.95 (b)
OPUS DDOS	99.95 (c)

40 TR S/S	14.95 (b)
40 TR D/S	17.25 (b)
80 TR S/S	18.90 (b)
80 TR D/S	20.90 (b)

All prices include V.A.T., @ 15% B/E - BBC/Electron
Postage rates - (a) 50p (b) 75p (c) £1.25 (d) £2.00

Catnap listing

From Page 144

```

2180 TX=TX-TXMOD 10
      :PRINT TAB(5,0);TX;" ";
2190 M=0
2200 REPEAT
2210 PROCMVE
2220 PROCCATUP
2230 PROCBCT
2240 UNTIL YX=0 OR CYX=0 OR DEADX=1
2250 IF CYX=0 PROCDEAD
      :ENDPROC
2260 IF DEADX=1 ENDPROC
2270 SX=SX+TX
2280 PRINT TAB(15,30);SX;
2290 SOUND 1,-15,101,8
      :SOUND 1,-15,117,8
      :SOUND 1,-15,129,16
2300 FOR N=1TO 5000
      :NEXT
2310 ENDPROC
2320 DEF PROCCATUP
2330 IF (CXZ=9 OR CXZ=11)AND BX<CYZ
      CX=231
      :ENDPROC
2340 IF CXZ<>10 PROCCAT
      ELSE PROCRIDE
2350 ENDPROC
2360 DEF PROCRIDE
2370 COLOUR 6
      :PRINT TAB(10,CYZ)CHR$ 226
2380 CYZ=CYZ-1
2390 COLOUR 15
      :PRINT TAB(10,CYZ)CHR$ 231
2400 ENDPROC
2410 DEF PROCLAYOUT
2420 IF SCREEN MOD 4=1COLOUR 9
      :PRINT TAB(4,4)R$;TAB(7,4)R$;
      TAB(17,10)R$;TAB(15,15)R$;
      TAB(5,20)R$;TAB(18,25)R$;
      TAB(12,25)R$
2430 IF SCREEN MOD 4=1 PRINT
      TAB(4,5)" ";TAB(7,5)" ";
      TAB(17,11)" ";TAB(15,16)"
      ";TAB(5,21)" ";TAB(18,26)
      " ";TAB(12,26)" ";
2440 IF SCREEN MOD 4=2 COLOUR 9
      :PRINT TAB(14,4)R$;TAB(17,4)R$;
      TAB(7,10)R$;TAB(2,15)R$;
      TAB(15,20)CHR$ 224;TAB(5,25)R$;
      TAB(13,25)R$;
2450 IF SCREEN MOD 4=2 PRINT
      TAB(14,5)" ";TAB(17,5)" ";
      TAB(7,11)" ";TAB(7,13)" ";
      TAB(7,14)" ";TAB(7,15)" ";
      TAB(7,16)" ";TAB(2,16)" ";
      TAB(15,18)" ";TAB(15,19)" ";
      TAB(15,21)" ";TAB(5,26)" ";
      TAB(13,26)" ";
2460 IF SCREEN MOD 4=2 COLOUR 132
      :PRINT TAB(9,17)" ";TAB(11
      ,17)" ";
      :COLOUR 128
2470 IF SCREEN MOD 4=3 COLOUR 9
      :PRINT TAB(2,4)R$;TAB(7,10)R$;
      TAB(12,10)R$;TAB(5,15)R$;
      TAB(13,20)R$;TAB(7,25)R$;
2480 IF SCREEN MOD 4=3 PRINT
      TAB(2,5)" ";TAB(7,11)" ";
      TAB(12,11)" ";TAB(5,16)" ";
      TAB(7,26)" ";TAB(13,21)" ";
      TAB(12,23)" ";TAB(12,24)" ";
      TAB(12,25)" ";TAB(12,26)" ";
2490 IF SCREEN MOD 4=3 FOR N=7
      TO 26
      :PRINT TAB(2,N)" ";
      :NEXT
2500 IF SCREEN MOD 4=3 FOR N=13
      TO 26
      :PRINT TAB(18,N)" ";
      :NEXT
      :PRINT TAB(18,14)CHR$ 224;
2510 IF SCREEN MOD 4=3 COLOUR 132
      :FOR N=12TO 27STEP 5
      :PRINT TAB(9,N)" ";TAB(11,N)
      " ";
      :NEXT
      :COLOUR 128
      :PRINT TAB(11,22)" ";
2520 IF SCREEN MOD 4=0 COLOUR 9
      :PRINT TAB(14,4)R$;TAB(18,4)
      CHR$ 224;TAB(8,15)CHR$ 224;
      TAB(14,15)R$;TAB(4,25)CHR$ 224;
      TAB(8,25)R$;TAB(6,8)CHR$ 224;
2530 IF SCREEN MOD 4=0 PRINT
      TAB(14,5)" ";TAB(18,5)" ";
      TAB(8,16)" ";TAB(14,16)" ";
      TAB(3,26)" ";TAB(8,26)" ";
2540 IF SCREEN MOD 4=0 COLOUR 132
      :PRINT TAB(6,7)" ";TAB(9,17)
      " ";TAB(11,17)" ";TAB(9,22)
      " ";TAB(11,22)" ";TAB(6,27)
      " ";
      :COLOUR 128
2550 IF SCREEN MOD 4=0 PRINT
      TAB(5,17)" ";
      :FOR N=7TO 21
      :PRINT TAB(12,N)" ";TAB(17
      ,N)" ";
      :NEXT
2560 IF SCREEN MOD 4=0 FOR N=9
      TO 12
      :PRINT TAB(6,N)" ";
      :NEXT
      :FOR N=13TO 16
      :PRINT TAB(4,N)" ";
      :NEXT
      :FOR N=23TO 26
      :PRINT TAB(2,N)" ";TAB(6,N)
      " ";
      :NEXT
      :FOR N=18TO 21
      :PRINT TAB(7,N)" ";
      :NEXT
2570 ENDPROC
2580 DEF PROCHISCORE
2590 *FX15,0
2600 IF SX<S(5)PRINT "CHR$ 136;
      CHR$ 134;" GAME OVER."
      :PRINT "CHR$ 129;"You scored";
      CHR$ 131;SX
      :PRINT CHR$ 129;"Another";
      CHR$ 131;S(5)-SX;CHR$ 129;"would
      have"
      :PRINT CHR$ 129;"earned you
      a place in the hall of fame!"
      :G=GET
      :GOTO 2650
2610 PRINT CHR$ 129;"CONGRATULATIONS!
      ! Your score of ";CHR$ 131;SX
      :PRINT CHR$ 129;"Qualifies you
      for the hall of fame!"
2620 SOUND &101,3,101,10
      :SOUND &102,4,129,10
2630 INPUT "ENTER YOUR NAME : "
      NAME$
2640 IF LEN (NAME$)>11 CLS
      :GOTO 2610
2650 CLS
2660 PRINT CHR$ 141;CHR$ 131;
      CHR$ 157;CHR$ 129;" HIGH
      SCORE TABLE"
2670 PRINT CHR$ 141;CHR$ 131;
      CHR$ 157;CHR$ 129;" HIGH
      SCORE TABLE"
2680 ENTRY=0
2690 FOR N=1TO 5
2700 IF ENTRY=0 AND SX>S(N) ENTRY=N
2710 NEXT
2720 IF ENTRY=0 GOTO 2770
2730 FOR N=5 TO ENTRY+1 STEP -1
2740 S(N)=S(N-1)
      :N$(N)=N$(N-1)
2750 NEXT
2760 S(ENTRY)=SX
      :N$(ENTRY)=NAME$
2770 FOR N=1TO 5
2780 PRINT TAB(0,N*3+3)CHR$ 129;
      TAB(2,N*3+3);S(N);TAB(7,N*3+3)
      CHR$ 131;TAB(8,N*3+3)N$(N)
2790 NEXT
2800 G=GET
2810 ENDPROC

```

This listing is included in this month's cassette tape offer. See order form on Page 189.

LARGEST COMPUTER CENTRE

in
MANCHESTER

BBC, COMMODORE, MEMOTECH, SINCLAIR,
SHARP, SANYO, AMSTRAD, QL,
EINSTEIN, ADVANCE 86
DEALERS.

BBC MICRO

BBC B	£339.95
BBC B + DFS	£420
New BBC +	£499
Electron	£129.95
6502 Second Processor	£199
Z80 Second Processor	£359
Bitstick System	£374

MODEMS

Telemode, Miracle, Pace Nightingale.

MONITORS

Sanyo 12H	£125
Philips	£89
Ferguson	P.O.A.
Microvitec	£229
Microvitec Medium	£299
Sanyo Medium	£227
Fidelity	£217
JVC Medium	£199
JVC High	£272
Ferguson MC101 TV/Monitor	P.O.A.

TDK DISKS AT PROMOTIONAL PRICES

COMPUTER STATIONERY, DISKS, PLUGS, SOCKETS, CABLES, ETC.
TELEPHONE ANSWERING MACHINES/CORDLESS PHONES: NOW IN STOCK

Wide range of books, software (educational software specialist).

Showroom, demonstration facility. Prices include VAT, all items

available mail order. Personal Export scheme.

Suppliers to Universities and all leading Schools

OFFICIAL DEALER FOR ACORN MICROS IN THE SCHOOL SCHEME



MIGHTY MICRO



SHERWOOD CENTRE

268 WILMSLOW ROAD FALLOWFIELD, MANCHESTER

TEL: 061-224 8117

PRINTERS

Shinwa CPA80	£219.95
Smith Corona 80	£165
Star Gemini 10X	£239.95
Star Gemini SG10	£259
Juki 6100	£388
Epson RX80 FT	£289
Cannon 1080	£319.95
Cosmos CP80	£214.95
National Panasonic	£319.95
Brother HR15	£385
Brother HR1	£343.95
Taxan KP810	£315.95
Taxan KP910	P.O.A.
Juki 2200	£299

ACCESSORIES

Wordwise	£43.95
VIEW	£59.95
Grafpad	P.O.A.
Sideways ROM	£43.70
Graphics ROM	£33
Disc Doctor	£33
Datagem	£129.95
AMS Mouse	£89.95
Trackerball	£59.95

COMLEX

Unit 7, Fife St., Nuneaton, Warks. CV11 5PR.

Tel: 0203 371371

Mon-Fri 9am-5.30pm.

BBC Model B	£339.00	BBC Model B + DFS	£399.00
OPUS DISC DRIVES		Canon PW1080A	£289.00
(with 2 year guarantee)		Star SC10	£295.00

5400	£99.00
5401	£109.00
5402	£145.00
5802S	£162.50
5401SD	£149.00
5402SD	£185.00
5802SD	£199.00
5401D	£235.00
5402D	£329.00
5802D	£349.00

Drives not listed - 'phone for price	
Acorn DFS	£95.00
Opus DDFS (with Opus Drives)	£55.00
Cumana Discs (in plastic case)	£16.00

EPROMS

2764's	£4.85
27128's	£10.50

DOT MATRIX PRINTERS

Mannesman Tally MT80	£199.00
Epson RX80	£219.00
Epson RX80 F/T	£249.00
Epson FX80	£365.00

DAISYWHEEL PRINTERS

QuenData	£209.00
Juki 6000	£209.00
Juki 6100	£359.00
Silver Reed Typewriter EX43N	£275.00
Computer Interface	£99.00
Silver Reed Daisywheel 400	£316.00
Silver Reed Daisywheel 500	£373.00
Silver Reed Daisywheel 550	£574.00
Silver Reed Daisywheel 770	£834.00
Cut Sheet Feeder for 550 or 770	£240.00
Listing paper (2000 sheets)	£13.00
Free lead and paper with all printers	

MONITORS

Philips 7502 green	£79.00
Philips 7522 amber	£85.00
Philips 7513 IBM	£95.00
Microvitec 1431	£185.00
Microvitec 1451	£259.00

Special Offer

AMX Mouse	£77.00
-----------	--------

All prices include VAT AND Delivery

Get more out of your BBC Micro with the
New Marconi RB2 Tracker Ball

Marconi's new Tracker Ball is superior to either a mouse or joystick and is easier to use.

The RB2 design incorporates Marconi's vast experience in making Tracker Balls for Air Traffic Control and professional equipments which demand maximum performance and reliability. It is drift free and gives more precise positional control - the cursor position on screen relates directly to fingertip movement on the ball. The three push buttons normally control the delete, return and copy functions but you can also assign your own functions to the buttons.



It's perfect, whether your micro is your hobby, an educational tool or a source of low cost CAD/CAM applications. It's ideal for word processing and games too, and unlike a mouse needs no regular cleaning.

Available from most Computer Dealers or from Central Trade Exchange Ltd.

ONLY


£59.50

Inc. VAT



FREE!

Utilities Program.
Graphics Program for tape or disk.
Micro Draw Program on floppy disk.



To: Central Trade Exchange Ltd.,
Ashton Lodge, Ashton Road,
Dunstable, Beds. LU6 1NP.
Tel: 0582 61283.
Please send details of the new
Marconi Tracker Ball.

Name: _____

Address: _____

Tel: _____

Programmers' Workshop listing

From Page 110

```

TH"
170 REPEAT UNTIL INKEY(100)
180 DEF PROCmenu
190 CLS
200 PRINTCHR$(141)CHR$(147);"TYPE S
SETTING FOR THE EPSON PRINTERS"
210 PRINTCHR$(141)CHR$(147);"TYPE S
SETTING FOR THE EPSON PRINTERS"
220 PRINT
230 PRINTCHR$(146);"THE DIFFERENT T
YPE SETTINGS INCLUDE"
240 PRINT
250 PRINT" 1)"CHR$(145);"PICA"
260 PRINT" 2)"CHR$(145);"ELITE"
270 PRINT" 3)"CHR$(145);"ENLARGED"
280 PRINT" 4)"CHR$(145);"CONDENSED"
290 PRINT" 5)"CHR$(145);"EMPHASIZED"
*
300 PRINT" 6)"CHR$(145);"DOUBLE STR
IKE"
310 PRINT" 7)"CHR$(145);"ALTERNATE"
320 PRINT
330 PRINTCHR$(149);"PRESS"CHR$(150)
;"H"CHR$(149);"FOR HELP"
340 PRINT
350 PRINT" Type in setting you requ
ire ":T$=GET$
360 IFT$="1":CLS:PROCPica
370 IFT$="2":CLS:PROCCelite
380 IFT$="3":CLS:PROCCenlarged
390 IFT$="4":CLS:PROCCcondensed
400 IFT$="5":CLS:PROCCemphasized
410 IFT$="6":CLS:PROCCdoublestrike
420 IFT$="7":CLS:PROCCalternate
430 IFT$="H":CLS:PROCHelp
440 GOTO 190
450 DEF PROCPica
460 CLS
470 PRINTCHR$(141)CHR$(147);"PICA S
SETTING"
480 PRINTCHR$(141)CHR$(147);"PICA S
SETTING"
490 PRINT
500 PRINT"1)"CHR$(149);"PICA"
510 PRINT"2)"CHR$(149);"ELITE"
520 PRINT"3)"CHR$(149);"ENLARGED"
530 PRINT"4)"CHR$(149);"CONDENSED"
540 PRINT"5)"CHR$(149);"EMPHASIZED"
550 PRINT"6)"CHR$(149);"DOUBLE STRI
KE"
560 PRINT"7)"CHR$(149);"ALTERNATE"
570 PRINT
580 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
590 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
600 PRINT

```

```

610 PRINT" WHICH NUMBER?":N$=GET$
620 IFN$="1"PRINTCHR$(146);"NO ADJU
STMENT NEEDED COMMENCE PRINTING":PROC
esc:END
630 IFN$="2"PRINTCHR$(146);"NOW IN
ELITE TYPE":VDU2:PROCCe:VDU3:PROCCesc:E
ND
640 IFN$="3"PRINTCHR$(146);"NOW IN
ENLARGED TYPE":VDU2:PROCCen:VDU3:PROCCe
sc:END
650 IFN$="4"PRINTCHR$(146);"NOW IN
CONDENSED TYPE":VDU2:PROCCc:VDU3:PROCCe
sc:END
660 IFN$="5"PRINTCHR$(146);"NOW IN
EMPHASIZED TYPE":VDU2:PROCCem:VDU3:PRO
CCesc:END
670 IFN$="6"PRINTCHR$(146);"NOW IN
DOUBLE STRIKE TYPE":VDU2:PROCCds:VDU3:
PROCCesc:END
680 IFN$="7"PRINTCHR$(146);"NOW IN
ALTERNATE TYPE":VDU2:PROCCa:VDU3:PROCCe
sc:END
690 IFN$="H" PROCmenu
700 IFN$="H" PROCHelp
710 GOTO 460
720 ENDPROC
730 DEF PROCCelite
740 CLS
750 PRINTCHR$(141)CHR$(147);"ELITE
SETTING"
760 PRINTCHR$(141)CHR$(147);"ELITE
SETTING"
770 PRINT
780 PRINT"1)"CHR$(149);"ELITE"
790 PRINT"2)"CHR$(149);"ELITE ENLAR
GED"
800 PRINT"3)"CHR$(149);"ELITE CONDE
NSED"
810 PRINT"4)"CHR$(149);"ELITE EMPHA
SIZED"
820 PRINT"5)"CHR$(149);"ELITE DOUBL
E STRIKE"
830 PRINT"6)"CHR$(149);"ELITE ALTER
NATE"
840 PRINT
850 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
860 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
870 PRINT
880 PRINT" WHICH NUMBER?":N$=GET$
890 IFN$="1"PRINTCHR$(146);"NOW IN
ELITE TYPE":VDU2:PROCCe:VDU3:PROCCesc:E
ND
900 IFN$="2"PRINTCHR$(146);"NOW IN
ELITE ENLARGED TYPE":VDU2:PROCCe:PROCCe
n:VDU3:PROCCesc:END
910 IFN$="3"PRINTCHR$(146);"NOW IN
ELITE CONDENSED TYPE":VDU2:PROCCc:PROCC

```

```

c:VDU3:PROCCesc:END
920 IFN$="4"PRINTCHR$(146);"NOW IN
ELITE EMPHASIZED TYPE":VDU2:PROCCe:PR
OCc:VDU3:PROCCesc:END
930 IFN$="5"PRINTCHR$(146);"NOW IN
ELITE DOUBLE STRIKE TYPE":VDU2:PROCCe
PROCCds:VDU3:PROCCesc:END
940 IFN$="6"PRINTCHR$(146);"NOW IN
ELITE ALTERNATE TYPE":VDU2:PROCCe:PRO
CCa:VDU3:PROCCesc:END
950 IFN$="H" PROCHelp
960 IFN$="H" PROCmenu
970 GOTO 740
980 DEF PROCCenlarged
990 CLS
1000 PRINTCHR$(141)CHR$(147);"ENLAR
GED SETTING"
1010 PRINTCHR$(141)CHR$(147);"ENLAR
GED SETTING"
1020 PRINT
1030 PRINT"1)"CHR$(149);"ENLARGED"
1040 PRINT"2)"CHR$(149);"ENLARGED CO
NDENSED"
1050 PRINT"3)"CHR$(149);"ENLARGED EM
PHASIZED"
1060 PRINT"4)"CHR$(149);"ENLARGED DO
UBLE STRIKE"
1070 PRINT"5)"CHR$(149);"ENLARGED AL
TERNATE"
1080 PRINT
1090 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
1100 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
1110 PRINT
1120 PRINT" WHICH NUMBER?":N$=GET$
1130 IFN$="1"PRINTCHR$(146);"NOW IN
ENLARGED TYPE":VDU2:PROCCen:VDU3:PROCCe
sc:END
1140 IFN$="2"PRINTCHR$(146);"NOW IN
ENLARGED CONDENSED TYPE":VDU2:PROCCen:
PROCCc:VDU3:PROCCesc:END
1150 IFN$="3"PRINTCHR$(146);"NOW IN
ENLARGED EMPHASIZED TYPE":VDU2:PROCCe
:PROCCem:VDU3:PROCCesc:END
1160 IFN$="4"PRINTCHR$(146);"NOW IN
ENLARGED DOUBLE STRIKE TYPE":VDU2:PRO
CCen:PROCCds:VDU3:PROCCesc:END
1170 IFN$="5"PRINTCHR$(146);"NOW IN
ENLARGED ALTERNATE TYPE":VDU2:PROCCen:
PROCCa:VDU3:PROCCesc:END
1180 IFN$="H" PROCHelp
1190 IFN$="H" PROCmenu
1200 GOTO 990
1210 DEF PROCCcondensed
1220 CLS
1230 PRINTCHR$(141)CHR$(147);"CONDEN
SED SETTING"
1240 PRINTCHR$(141)CHR$(147);"CONDEN

```



```


SED SETTING"
1250 PRINT
1260 PRINT"1)"CHR$(149);"CONDENSED"
1270 PRINT"2)"CHR$(149);"CONDENSED D
DOUBLE STRIKE"
1280 PRINT"3)"CHR$(149);"CONDENSED A
LTERNATE"
1290 PRINT
1300 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
1310 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
1320 PRINT
1330 PRINT" WHICH NUMBER?":N$=GET$
1340 IFN$="1"PRINTCHR$(146);"NOW IN
CONDENSED TYPE":VDU2:PROCC:VDU3:PROCCe
sc:END
1350 IFN$="2"PRINTCHR$(146);"NOW IN
CONDENSED DOUBLE STRIKE TYPE":VDU2:PR
OCc:PROCDs:VDU3:PROCCsc:END
1360 IFN$="3"PRINTCHR$(146);"NOW IN
CONDENSED ALTERNATE TYPE":VDU2:PROCC:
PROCa:VDU3:PROCCsc:END
1370 IFN$="H" PROCHELP
1380 IFN$="M" PROCMENU
1390 GOTO 1220
1400 DEF PROCemphasized
1410 CLS
1420 PRINTCHR$(141)CHR$(147);"EMPHAS
IZED SETTING"
1430 PRINTCHR$(141)CHR$(147);"EMPHAS
IZED SETTING"
1440 PRINT
1450 PRINT"1)"CHR$(149);"EMPHASIZED"
1460 PRINT"2)"CHR$(149);"EMPHASIZED
DOUBLE STRIKE"
1470 PRINT"3)"CHR$(149);"EMPHASIZED
ALTERNATE"
1480 PRINT
1490 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
1500 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
1510 PRINT
1520 PRINT" WHICH NUMBER?":N$=GET$
1530 IFN$="1"PRINTCHR$(146);"NOW IN
EMPHASIZED TYPE":VDU2:PROCCem:VDU3:PRO
CCsc:END
1540 IFN$="2"PRINTCHR$(146);"NOW IN
EMPHASIZED DOUBLE STRIKE":VDU2:PROCCem
iPROCDs:VDU3:PROCCsc:END
1550 IFN$="3"PRINTCHR$(146);"NOW IN
EMPHASIZED ALTERNATE TYPE":VDU2:PROCCe
m:PROCa:VDU3:PROCCsc:END
1560 IFN$="H" PROCHELP
1570 IFN$="M" PROCMENU
1580 GOTO 1410
1590 DEF PROCdoublestrike
1600 CLS

```

```

1610 PRINTCHR$(141)CHR$(147);"DOUBLE
STRIKE SETTING"
1620 PRINTCHR$(141)CHR$(147);"DOUBLE
STRIKE SETTING"
1630 PRINT
1640 PRINT"1)"CHR$(149);"DOUBLE STRI
KE"
1650 PRINT"2)"CHR$(149);"DOUBLE STRI
KE ALTERNATE"
1660 PRINT
1670 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
1680 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
1690 PRINT

```

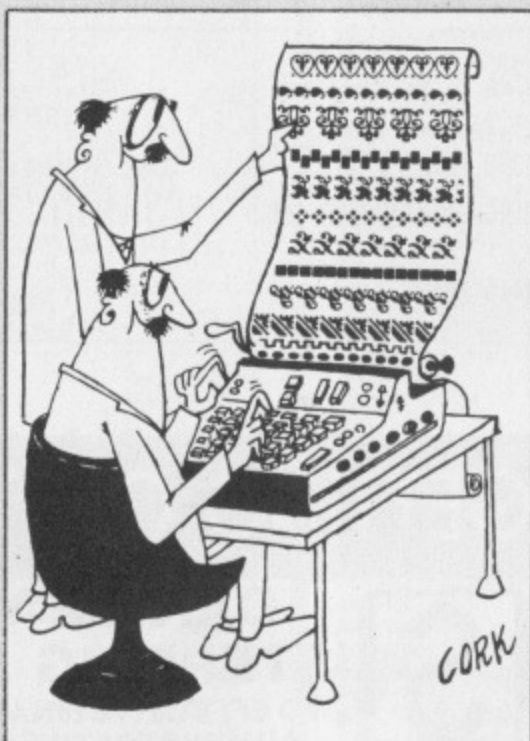

```

1700 PRINT" WHICH NUMBER?":N$=GET$
1710 IFN$="1"PRINTCHR$(146);"NOW IN
DOUBLE STRIKE TYPE":VDU2:PROCDs:VDU3:
PROCCsc:END
1720 IFN$="2"PRINTCHR$(146);"NOW IN
DOUBLE STRIKE ALTERNATE TYPE":VDU2:PR
OCds:PROCa:VDU3:PROCCsc:END
1730 IFN$="H" PROCHELP
1740 IFN$="M" PROCMENU
1750 GOTO 1600
1760 DEF PROCalternate
1770 CLS
1780 PRINTCHR$(141)CHR$(147);"ALTERN
ATE SETTING"
1790 PRINTCHR$(141)CHR$(147);"ALTERN
ATE SETTING"
1800 PRINT
1810 PRINT"1)"CHR$(149);"ALTERNATE"
1820 PRINT

```

```

1830 PRINTCHR$(150);"TYPE"CHR$(145);
"H"CHR$(150);"FOR HELP"
1840 PRINTCHR$(150);"TYPE"CHR$(145);
"M"CHR$(150);"FOR MAIN MENU"
1850 PRINT
1860 PRINT" WHICH NUMBER?":N$=GET$
1870 IFN$="1"PRINTCHR$(146);"NOW IN
ALTERNATE TYPE":VDU2:PROCa:VDU3:PROCCe
sc:END
1880 IFN$="H" PROCHELP
1890 IFN$="M" PROCMENU
1900 GOTO 1770
1910 DEF PROCe
1920 VDU1,27,1,77
1930 ENDPROC
1940 DEF PROCen
1950 VDU1,27,1,215,1,49
1960 ENDPROC
1970 DEF PROCc
1980 VDU1,15
1990 ENDPROC
2000 DEF PROCem
2010 VDU1,27,1,69
2020 ENDPROC
2030 DEF PROCDs
2040 VDU1,27,1,71
2050 ENDPROC
2060 DEF PROCa
2070 VDU1,27,1,52
2080 ENDPROC
2090 DEF PROCsc
2100 #FX200,0
2120 ENDPROC
2130 DEF PROCHELP
2140 CLS
2150 PRINTCHR$(141)CHR$(147);"YOU AR
E NOW IN THE"CHR$(150);"HELP"CHR$(147
);"MODE"
2160 PRINTCHR$(141)CHR$(147);"YOU AR
E NOW IN THE"CHR$(150);"HELP"CHR$(147
);"MODE"
2170 PRINT
2180 PRINT"if you are unable to find
the type":PRINT"setting you want see
if it is in another category eg."
2190 PRINT
2200 PRINTCHR$(145);"IN THE"CHR$(149
);"ALTERNATE"CHR$(145);"SETTING":PRIN
TCHR$(149);"ALTERNATE EMPHASIZED"CHR$(
145);"DOES NOT APPEAR"
2210 PRINT
2220 PRINTCHR$(149);"ALTERNATE EMPHA
SIZED"CHR$(145);"APPEARS AS":PRINTCHR
$(149);"EMPHASIZED ALTERNATE"CHR$(145
);"IN THE"CHR$(149);"EMPHASIZED":PRIN
TCHR$(145);"SETTING"
2230 PRINT

```


Programmers' Workshop listing

From Page 149

2240 PRINT "This program only deals with combinations of two type settings."

2250 PRINT

2260 PRINT "If you require another combination use the following chart to do so."

2270 VDU31,7,23

2280 PRINT "PRESS SPACE TO CONTINUE"

2290 REPEAT UNTIL INKEY(-99)

2300 CLS

2310 PRINTCHR\$(141)CHR\$(147); " P
RINTER FONT CODES"

2320 PRINTCHR\$(141)CHR\$(147); " P
RINTER FONT CODES"


2330 PRINT

2340 PRINT "PICA TYPE" 1 VDU1,2
7,1,80"

2350 PRINT

2360 PRINT "ELITE" 1 VDU1,2
7,1,77"

2370 PRINT

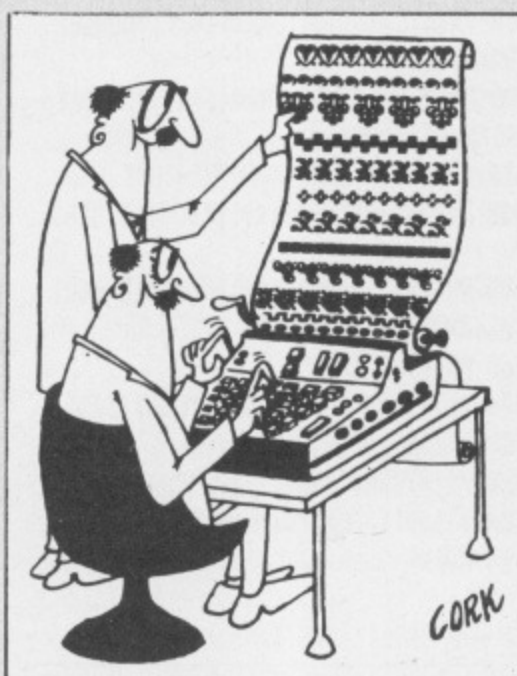

2380 PRINT "ENLARGED" 1 VDU1,2
7,1,215,1,49"

2390 PRINT

2400 PRINT "CONDENSED" 1 VDU1,1
5"

2410 PRINT

2420 PRINT "EMPHASIZED" 1 VDU1,2
7,1,69"

2430 PRINT

2440 PRINT "DOUBLE STRIKE" 1 VDU1,2
7,1,71"

2450 PRINT

2460 PRINT "ALTERNATE" 1 VDU1,2
7,1,52"

2470 PRINT

2480 PRINT "UNDERLINED" 1 VDU1,2
7,1,45,1,49"

2490 PRINT "

2500 PRINTCHR\$(129); "DO YOU WISH TO
RETURN TO THE MAIN MENU?"

2510 REPEAT UNTIL INKEY(-69) OR INKEY(-86)

2520 IF INKEY(-69):PROCmenu ELSE PROC
Cesc:#FX 15

2530 END

This listing is included in this month's cassette tape offer. See order form on Page 189.

IS PAPER WORK GETTING ON TOP OF YOU ?

ABACUS

BUSINESS SYSTEMS

CAN BE YOUR
STEPPING STONE
TO EFFECTIVE FINANCIAL AND
ADMINISTRATIVE CONTROL

- | | | |
|---|-----------------------|--------|
| 1 | PAYROLL | £29.95 |
| 2 | PURCHASE/SALES LEDGER | £29.95 |
| 3 | STOCK CONTROL | £17.95 |
| 4 | NON VAT ACCOUNTS | £17.95 |
| 5 | CASH PLANNER | £12.95 |
| 6 | MAILING LIST | £17.95 |

THE PRICES ABOVE ARE FOR THE CASSETTE VERSION OF THESE PROGRAMS, DISC VERSIONS NOW AVAILABLE FOR THE AMSTRAD, CBM AND BBC.

ALL SOFTWARE PROVIDED BY ABACUS, IS FULLY SUPPORTED BY THE COMPANY.



21 UNION STREET
RAMSBOTTOM, LANCs
PHONE: 070-682 7775



AVAILABLE FROM ALL GOOD COMPUTER SHOPS
AMSTRAD COMPUTERS
BBC MODEL B
COMMODORE 64
DRAGON 32
AND 64

ALL IN STOCK

S.P. ELECTRONICS

BBC SPECIALISTS

Acorn Electron	£199.00
BBC Model B 1.2 O.S.	£399.00
CP80 Printer (inc. cable) ..	£229.00
Disc Operating System	£96.00
Disc Drives	from £175.00
Disc Operating System D-Density	£104.00
G3 WHO RTTY PROGRAM (TAPE)	£7.50
G3 WHO RTTY PROGRAM (EPROM VERSION)	£20.00
Circuit board for RTTY decoder Mk.3 (inc. instructions)	£7.00
Star 10X Printer (inc. cable)	£275.00
CANNON Dot Matrix 160cps NLQ	£350.00
Joysticks (pair) self centering + analogue	from £17.95
Printer Cable (Centronics)	£12.90
Speech Synthesis	£55.00
Disc Doctor	£33.00
WORDWISE Word Processor	£39.00
Slow Scan TV Circuit Board + Program (inc. instructions)	£17.50

Wide selection of software, books, leads, plugs, etc.
SAE for full list. All available Mail Order

All prices apply while stocks last.

48 Linby Road, Hucknall,
Notts. NG15 7TS.
Tel: 0602 640377

(all prices include VAT)

Carriage extra

FAST REPAIRS FOR THE BBC MICRO BY

MICRO FIX

THE ACORN APPROVED SERVICE CENTRE
191 FRESTON ROAD
LONDON W10 6TH
PHONE: 01 968 9214

- SPEEDY REPAIRS ON CUMANA/ACORN DISC DRIVES & MICROVITEC MONITORS
- ALL REPAIRS FULLY GUARANTEED
- EXTENDED WARRANTIES AVAILABLE ON ALL YOUR EQUIPMENT
- ANY UPGRADE OR MODIFICATION CARRIED OUT BY EXPERIENCED ENGINEERS
- BBC COMPATIBLE CUMANA DISC DRIVE DEALERS
- AUTHORISED CONET SYSTEM INSTALLERS AND SUPPLIERS
- VARIOUS ACORN PERIPHERALS ALSO AVAILABLE FROM MICROFIX

RING 01-968 9214 AND ASK FOR MARK DUFFILL OR DEREK MULLINGS

RICKSOFT

The complete Software Service for the BBC Micro

ARCADE, ADVENTURE, EDUCATIONAL SOFTWARE

HIRE with option to buy - £1 - £1.50 per fortnight - up to 75% discount when buying.

BUY ONLY - All the latest software at discount prices + special offers with savings of 75% on retail.

LIFE MEMBERSHIP £10
(special offer this month - write for details)

For all the information on RICKSOFT send name and address to:

RICKSOFT Dept A,
78 WARREN DRIVE, HORNCHURCH
ESSEX RM12 4QX.
Or Ring 04024 47722.

MICROMAN Computers

ACORN SPECIALIST COMPUTER CENTRE

STOP PRESS ... STOP PRESS ... STOP PRESS ... STOP PRESS ... STOP PRESS ...

THE NEW BBC ... BBC+ ... £499.00 ... NOW IN STOCK

STOP PRESS ... STOP PRESS ... STOP PRESS ... STOP PRESS ... STOP PRESS ...

BBC COMPUTERS:

BBC Model B	349.00
BBC Model B + DFS	469.00
BBC Model B + Econet	446.00
BBC Model B + DFS + Econet	516.00
BBC Hard Cover	11.95
Acorn Teletext Receiver	225.00
Acorn Prestel Receiver	113.85
Acorn 6502 2nd Processor	199.00
Acorn Z80 2nd Processor	399.00
Acorn IEEE Interface	325.00
Bitstick	375.00
Acorn Music 500	199.00

PACE 5.25" DISC DRIVES:

PSD1 SS/40T/100K	119.95
PSD3 DS/40T-80T/400K	189.00
PDD3 DS/40-80T/800K	359.00

CUMANA 5.25" DISC DRIVES:

CS100 SS/40T-100K (PSU)	159.95
CS400 DS/40-80T/400K (PSU)	215.95
CD800S DS/40-80T/800K (PSU)	414.95
3.5" Drives	P.O.A.

OPUS DDOS + DRIVES

5401 SS/40T + DDOS	189.95
5802 DS/40/80T + DDOS	279.00

ELECTRON COMPUTER:

Electron	129.00
Plus One Interface (Printer/Joystick)	59.95
Plus Three Interface (DFS/Disc Drive)	229.00
Electron View	29.95
Electron Viewsheet	29.95

TORCH COMPUTERS:

Z80 Disc Pack	750.00
Z80 2nd Processor Card	339.00
Graduate	1,149.99

ECONET SYSTEM:

Full Service Available P.O.A.

BBC FIRMWARE:

View ROM	59.80
Wordwise ROM	44.85
Wordwise Plus ROM	56.35
Viewsheet ROM	59.80
Speech Synthesizer	55.00
Ultracalc Spreadsheet ROM	79.50
Graphics ROM	33.35
Disc Doctor ROM	33.35
Printmaster ROM	33.35
Communicator ROM	69.00
Termi Emulator ROM	33.35
Gremlin Debug ROM	33.35
Caretaker Basic Utility ROM	33.35
Toolstar ROM	34.00
Commstar EPROM	34.00
BCPL ROM	59.80
System ADE ROM	60.00
System SPY ROM	30.00
Edword User Pack	44.79
Edword Teacher Pack (Disc)	25.24
Merlin Scribe	59.95
Beebug Soft Full range available	
Gemini Datag'n Database ROM	129.00
Acorn ISO Pascal	69.00
Acorn Logo ROM	69.00
Slave ROM	49.95
Floppywise Disc Utility ROM	29.95
Comal	49.85

BBC UPGRADES:

A-B Upgrade (Fitted)	95.00
A-B Upgrade (Excluding Fitting)	80.00
Acorn DFS Interface (Fitted)	109.00
Opus DD/DFS Interface	99.95

EXPANSION BOARDS:

APTL Sideways ROM Board	43.70
Aries B20 RAM Expansion Board	89.95
Aries B12 Sideways ROM Board	46.00
Aries B12c Adaptor	5.75

SOLIDISK PRODUCTS:

Solidisk 32K Sideways RAM	57.95
Solidisk 96K Extension	92.00
Solidisk 128K Sideways RAM	149.95
Solidisk DD/DFS Interface	39.95
Solidisk CPU + Keyboard Case	33.00
Eprom Programmer	20.95
Eprom Eraser	20.95

BBC BUSINESS SOFTWARE

Microsimplex	287.50
Gemini Integrated Accounts	99.95
Sage Accounts	431.25

DISC UTILITIES:

View Index	14.95
View Printer Driver Generator	11.50
Hi-View	59.80
Acornsoft Database	15.35
Microtext	59.00
S-Pascal	19.90
Turtle Graphics	19.90
BCPL Calculations	19.90
Acorn P-System	299.00
Beebug Masterfile II	19.00
Beebug Quickcalc	15.00
Beebug Starter Pack	15.00
Beebug Billboard	15.00
Beebug Paintbox	12.00
Beebug Design	19.00
Spellcheck (Wordwise)	19.00
Spellcheck (View)	19.00
Beebug Discmaster	19.00
Beebug Dumpmaster	12.00
Beebug Teletext	12.00
Island Music System	24.95

PRINTERS:

Cannon PW-1080A	330.00
Cannon PW1156A	459.00
Epson RX80FT	275.00
Brother M1009	199.95
Juki 6100 Daisywheel	399.00
Shinwa CP80A	199.00

5 1/4" DISCS (per 10)

Mr Floppy dsi-dd 80 tk	16.50
------------------------	-------

MONITORS:

Microvitec Cub Standard	210.00
Microvitec Cub Medium	299.00
Zenith Amber	99.00
Zenith Green	94.00
Philips Green	89.00
Philips TV/Monitor	229.00

MODEMS:

Pace Nightingale inc Commstar ROM	159.85
Pace Nightingale	136.85
Telemod 2	84.95
Telemod 3	136.85
Telemod Software BBC User/User	19.95

JOYSTICKS:

Sure Shot Joystick	18.95
Voltmace Delta 14b Handset	14.95
Voltmace Delta 3b Dual	19.95

CONTROL/ROBOTICS

AMX Mouse	89.95
Commotion EVI/SS Camera	129.00
Marconi Tracker Ball	59.80

PLOTTERS

Penman Plotter	274.85
Watanabe A3 Plotter	P.O.A.
Acorn Plotter Bitstick Drivers	79.95

ACORN APPROVED SERVICE CENTRE

Our workshops offer a full repair and upgrade service
SHOP OPEN 9-6 Mon-Sat.

EDUCATIONAL & INDUSTRIAL ENQUIRIES WELCOME

Please phone for our price list

All prices include VAT, Post & Packing
£10 (Large items) £1 (Small items ROM's etc)

RAINFORD INDUSTRIAL ESTATE, MILL LANE,
RAINFORD, ST. HELENS, MERSEYSIDE
PHONE 074488 5242

JP Magnetics

specialists in the supply of bulk custom
wound audio/computer cassettes to
Trade and Education

NEW! TURBO LOAD FOR
CBM 64 WITH 'ON
SCREEN DISPLAY'

DUPLICATION FACILITIES FOR
MOST POPULAR HOME COMPUTERS
16 TRACK RECORDING STUDIO

Competitive Rates, Contact us for price list/quotations now.

JP MAGNETICS LTD
UNIT 4, 7 MARY ST, BRADFORD BD4 8SW
TEL: (0274) 731651

Within the BBC Microcomputer

A reference manual for assembly language programmers

by
Roger Cullis

This book contains essential reference material for serious users of the BBC microcomputer. It includes descriptions and explanations of the principal ROM routines, memory maps, tables of RAM usage, ROM routine entry points, zero page locations and JMP/JSR and lookup reference origins. It covers OS 1.2, Basic 1, Basic 2, HiBasic, DFS 0.90, NFS 3.34, 6502 second processor OS 1.1 and DNFS and Econet TUBE communications.

Price £11.95 + £1.50 p&p (UK)

From:
Software Publications Dept.,
LOSCO LTD.,
PO Box 4,
Cranleigh,
Surrey GU6 8BQ.




BCSSP -

the dynamic system simulation language
for BBC computers

- describe systems by block diagrams and simulate their operations interactively
- applicable to differential and difference equations
- high resolution graphical/numerical output
- suitable for engineering, physics, economics, applied mathematics, electronics etc.
- use in education to bring differential equations alive

Example response: Van der Pol Oscillator:

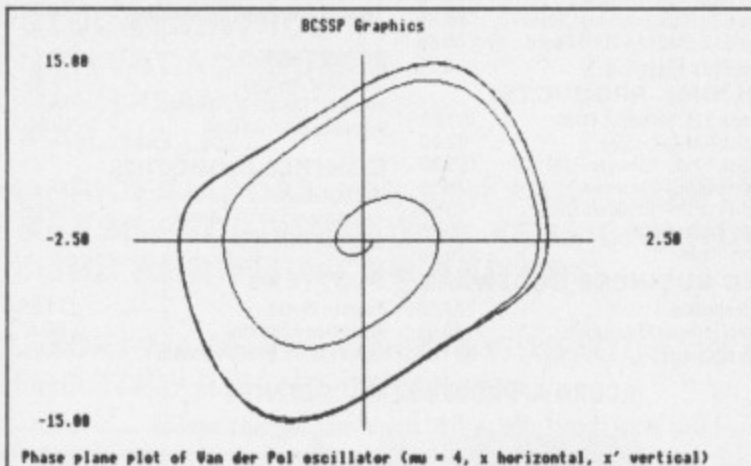

Phase plane plot of Van der Pol oscillator ($\mu = 4$, x horizontal, x' vertical)

Write or phone for detailed brochure.

Demonstration system available at £20 inc. manual and tutorial.

MICROPACS

Engineering Applications Software

Centre for Advanced Technology, Chilworth, Southampton, Hampshire SO9 1XB
Telephone (0703) 768956

A selection of titles to . . .

SOFTEN YOUR HARDWARE

MICRO ARTIST

BBC Model B

A program for creating colour pictures in mode 2. 8 basic colours, 20 fixed commands including reflect, enlarge, rotate, text, triangles, ellipses, fill, rubber bands, x & y co-ordinates, continuous or dotted lines etc., plus 12 user redefinable brushes/characters. Requires an analogue JOYSTICK. "MICRO ARTIST is a real joy to use being fast, flexible and friendly with features rarely found . . . on a home micro. It is certainly the best drawing program I have yet tested on the BBC. Rating: Documentation 100%, Value for money 100%, Overall 100%". (A & B Computing April 1985). £7.50

MORSE TRANSLATOR

BBC Model B By G4MGD

A decoder/Encoder. Program requires either a CW or RTTY interface (a CW interface has been designed for this program by G3LIV). It sounds Morse received in the range 6-22 wpm and converts and displays in plain language and allows messages typed in plain to be displayed, sounded and transmitted in Morse at a choice of speeds. RED keys may be programmed to include the user's callsign and other standard passages. Self test facility. £8.50

RF PREDICTOR

BBC Model B By G4MGD

Based on the MINIMUF method of forecasting radio frequencies for long distance contact. Data inputs are: User's Home position (worldwide and which may be SAVED), Target position, Lat/Long, Month, Year (1985-99) and Sunspot number. Automatic sunspot prediction is included or a sunspot number may be input by the user. Outputs given are: The input data plus Distance, Bearing, Long or Short path, GMT, Max Usable Frequency, Lowest Usable Frequency, Graph of Usable Frequency Range in MHz and Graph of Usable Frequency Range in Bands. Results may be printed using a parallel printer. £8.50

STATION LOCATOR

BBC Model B By G4MGD

A program covering the Universal Locator System (Maidenhead) which converts Lat/Long to Maidenhead, Vice versa, and provides Bearing, Distance and Contest score of any target position. Inputs may be made using either Locator system. Any Home position may be input in Lat/Long and SAVED. £7.50

TO ORDER Please send cheque/PO payable to PAEAN Systems. Orders are normally despatched within 24 hours by 1st class post. All prices are fully inclusive.

OTHER TITLES Please send SAE for our full list.

PROGRAMMERS We are always interested to market original quality programs on specialist subjects for the BBC Micro.

PRACTICAL PROGRAMS from:



PAEAN systems

LITTLE BEALINGS, WOODBRIDGE,
SUFFOLK IP13 6TL
TEL: (0473) 623757

Simon Quackers listing

From Page 115

```

400 DEFPROCduck(n%)
410 COLOUR132
420 PRINTTAB(putZ(0,n%),putZ(1,n%))
;
430 VDU17,7,247,10,8,8,17,1,240,17,
7,246,10,8,245,244,243,10,8,8,8,240,2
41,242
440 ENDPROC
450 DEFPROCquak(n%)
460 COLOUR132
470 #FX19
480 PRINTTAB(putZ(0,n%),putZ(1,n%))
;
490 VDU10,8,17,1,249
500 PRINTTAB(putZ(0,n%),putZ(1,n%))
;
510 SOUND 1,1,0+n%*30,5
520 PROCwait(1):#FX19
530 VDU10,8,17,1,248
540 ENDPROC
550 DEFPROCriver
560 @COL0,4:VDU23,1,0;0;0;
570 MOVE0,100:MOVE1279,100:PLOT85,1
279,800:MOVE0,800:PLOT85,0,100
580 PROCveg(792):PROCveg(100)
590 ENDPROC
600 DEFPROCveg(n%)
610 LOCALi%
620 @COL0,2
630 FORi%=0TO1272STEP8
640 MOVEi%,n%:IFRND(3)<>1PLOT1,0,RN
D(100)
650 NEXT
660 ENDPROC
670 DEFFNget(a%)
680 LOCALb%
690 REPEAT #FX15,1
700 b%=GET$
710 UNTIL INSTR(a%,b%)
720 =b%
730 DEFPROCsetup
740 PROCriver:FORi%=0TO6:PROCduck(i
%):NEXT
750 ENDPROC
760 DEFPROCinstr
770 COLOUR3:VDU19,1,8,0,0,0
780 PRINTTAB(14)"INSTRUCTIONS":CD
LOUR2
790 PRINT"Our friendly ducks will q
uack a song for""you. Listen careful
ly and then try to""conduct them in
the same song.""A duck will quack
for you if you""touch him with the
'light pen'."
800 PRINT"If you conduct a tune co
rrectly you can""then try again, bu
t an extra note will""be added. If

```

```

you are playing at level 2""the tun
e will also be rewritten."
810 PRINT"To win you must remember
a tune of 50""notes."
820 COLOUR1:PRINT""PRESS THE SPACE
BAR TO START THE GAME""TAB(12)"000
D LUCK !!!"
830 ENDPROC
840 DEFPROCpinit
850 PZ=grab%:#FX3,6
860 [
870 OPT2
880 LDX #16
890 LDA #17
900 STX &FE00:LDX &FE01
910 STA &FE00:LDA &FE01
920 RTS
930 ]
940 tlag%=1543:lpc%=4
950 #FX3,8
960 ENDPROC
970 DEFPROCpoint
980 REPEAT AZ=ADVAL(1)DIV64:UNTIL A
Z>100ANDAZ<1000
990 PROCclipos
1000 ENDPROC
1010 DEFPROCclipos
1020 LOCALpval%:#FX19
1030 pval%=(USR(grab%)AND&FFFF)-tlag
%:IF pval%<0pval%=0
1040 pypos%=pval% DIV 80:pxpos%=INT(
(pval%MOD80)/lpc%)
1050 ENDPROC
1060 DEF FNfind
1070 LOCALi%,r%,d%,n%
1080 REPEAT
1090 PROCpoint
1100 FORi%=0TO6
1110 r%=putZ(0,i%):d%=putZ(1,i%)
1120 IF r%>pxpos%-3AND r%<pxpos% T
HEN IF d%>pypos%-3 AND d%<pypos% PR
OCquak(i%):n%=i%:i%=10
1130 NEXT
1140 UNTILi%>7
1150 =n%
1160 DEFPROCseq
1170 LOCALi%
1180 FORi%=0TOS%:PROCwait(1):PROCqua
k(seqZ(i%)):NEXT
1190 ENDPROC
1200 DEFPROCwait(n%)
1210 TIME=0:REPEAT UNTIL TIME>=n%+10
0:ENDPROC
1220 DEFPROClost
1230 COLOUR9:LOCALi%
1240 VDU19,1,4,0,0,0,19,7,4,0,0,0,19
,9,7,0,0,0
1250 FORi%=0TO6:PRINTTAB(putZ(0,i%)+
1,putZ(1,i%)+3)CHR$(250):VDU10,8,251

```

```


:NEXT
1260 VDU20,0,5,19,0:COLOUR133:CLS
1270 PRINTTAB(0,0)"The Ducks aren't
tooimpressed with your Conducting it
seems!"TAB(4)"Hard Luck !!"
1280 PROCwait(8)
1290 ENDPROC
1300 DEFPROCagain
1310 LOCALa%
1320 VDU26:COLOUR120:COLOUR3:CLS
1330 PRINTTAB(0,10)"ANOTHER GAME ?(Y
/N)"
1340 a%=FNget("Yn")
1350 IF INSTR("n",a%)CLS:END
1360 RUN
1370 DEFPROCwin
1380 PROCwait(2)
1390 COLOUR133:COLOUR0
1400 CLS:PRINTTAB(5,10)"WELL DONE""
TAB(2)"YOU ARE A MASTER""
1410 COLOUR10:PRINTTAB(5)"CONDUCTOR
"
1420 PROCwait(10)
1430 ENDPROC
1440 DEFPROCrnd
1450 FORi%=0TO49:seqZ(i%)=RND(7)-1:N
EXT
1460 ENDPROC
1470 DEFPROCchars
1480 VDU23,240,63,63,63,63,31,31,31,
31
1490 VDU23,241,255,255,255,255,255,2
55,255,255
1500 VDU23,242,192,192,192,120,120,1
28,128,0
1510 VDU23,243,12,8,24,48,32,224,224
,192
1520 VDU23,244,0,0,0,0,255,255,255
1530 VDU23,245,56,24,24,24,24,63,63,
63
1540 VDU23,246,188,188,252,252,252,1
24,120,56
1550 VDU23,247,0,0,0,0,32,112,120,24
8
1560 VDU23,248,0,0,1,3,7,4,0,0
1570 VDU23,249,12,2,1,0,1,2,12,0
1580 VDU23,250,120,120,192,64,96,32,
56,62
1590 VDU23,251,62,63,63,63,63,63,0,0
1600 ENVELOPE 1,1,10,30,-20,3,1,1,12
7,0,0,-127,126,0
1610 HZ=0:FX=TRUE
1620 ENDPROC

```

This listing is included in this month's cassette tape offer. See order form on Page 189.

AT LAST... THE AFFORDABLE ROBOT

The Zero 2 Robot has arrived. It's the first truly micro robotic system available and remarkably it costs less than £100.

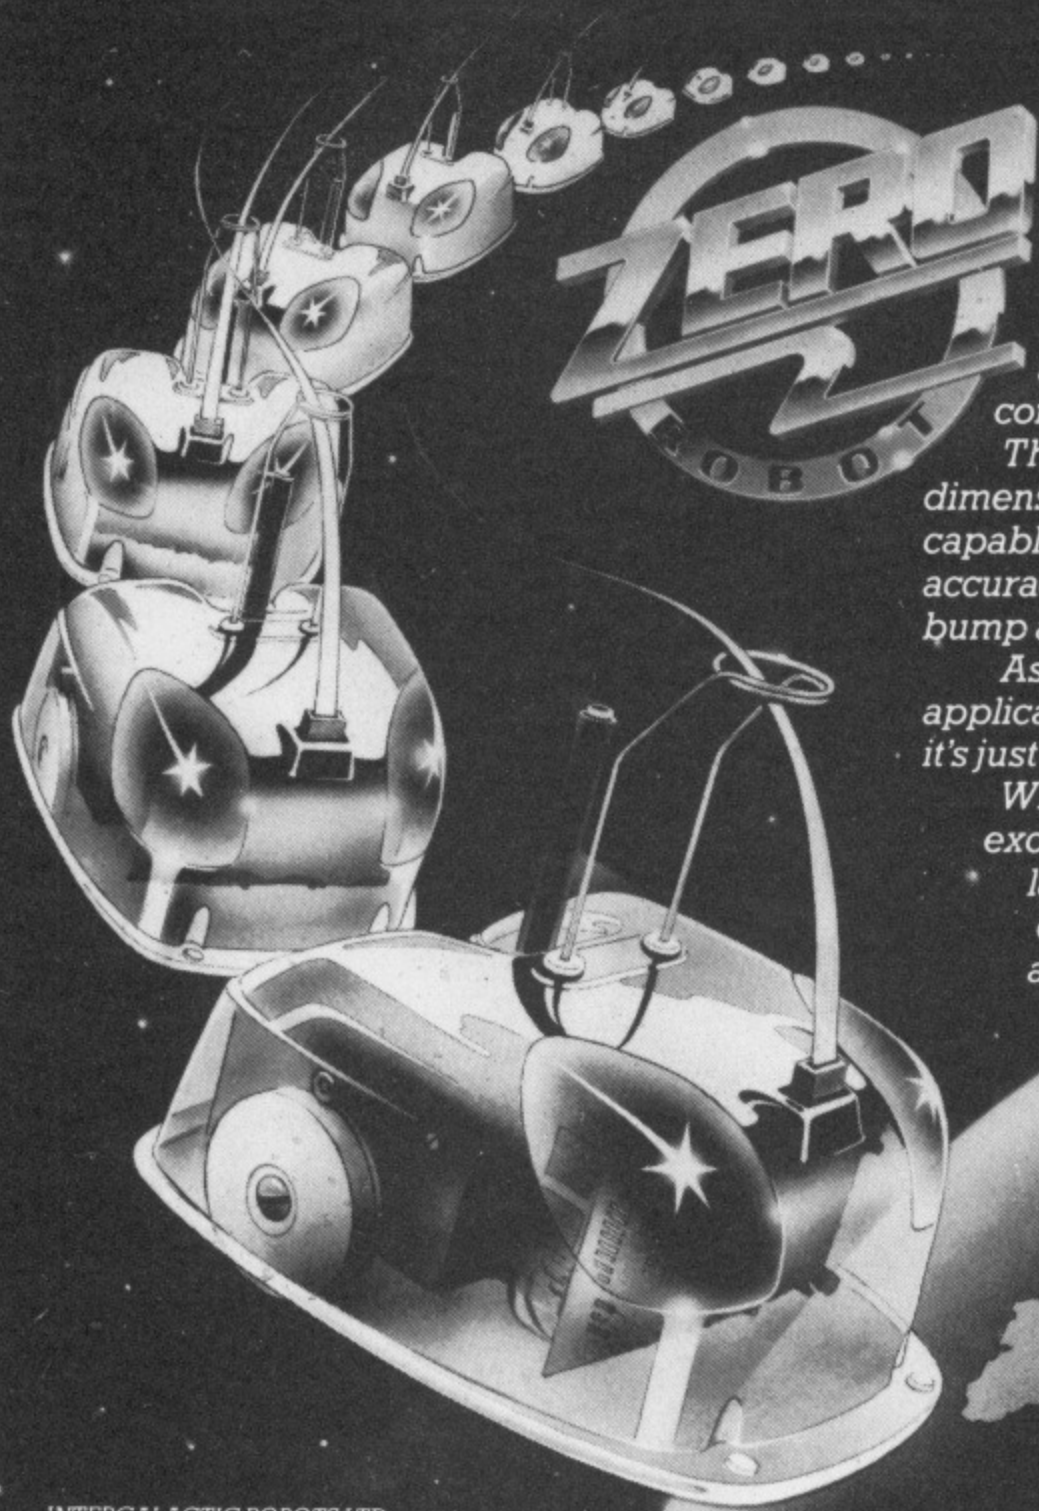

Controlled electronically through a cable from your computer, it is equipped with wheels, pen, line follower and two tone horn. It will connect easily with the Spectrum, BBC B, Acorn, Commodore 64 and all other personal computers with a standard 'D' type RS 232 connector.

The Zero 2 Robot will add a new dimension to your computer. It is capable of precision movement to accuracies of 1mm and can be fitted with bump and hole sensors.

As a teaching aid it has endless applications and for P.C. users at home it's just great fun.

With additional software and some exciting new add-ons planned for later this year, the Zero 2 Robot will open up a whole new area of applications and games.

INTERGALACTIC ROBOTS LTD.,
UNIT 208, Highbury-Workshop,
22 Highbury Grove, London N.5.

I G R

Please send me a free information pack.
INTERGALACTIC ROBOTS LTD., UNIT 208, Highbury Workshop,
22 Highbury Grove, London N.5.

Name _____

Address _____

MU6

Stripper listing

From Page 123

Listing I

```

10 REM "Striper"
20 REM By Robert Griffiths
30 REM 1985
40 REM
50 REM (c) The Micro User
60 OSBYTE=&FFF4
70 OSFILE=&FFDD
80 OSWRCH=&FFEE
90 OSWORD=&FFF1
100 put=&70
110 end=&72
120 get=&74
130 file_out=&76
140 file_in=&78
150 fname=&7A
160 input=&7F
170
180 FORAX=0TD3STEP3:PX=&B00
190 [OPTAX
200
210 \ Disc version
220 TYA
230 CLC
240 ADC &F2
250 STA fname
260 LDA &F3
270 ADC #0
280 STA fname+1
290
300 \ Both versions
310 LDA #131
320 JSR OSBYTE
330 TXA
340 STA file_out
350 CLC
360 ADC #11
370 STA file_in
380 TYA
390 STA file_out+1
400 ADC #0
410 STA file_in+1
420 JSR set_pblock
430 LDA #&FF
440 JSR OSFILE
450 .strip2
460 LDA pblock+4
470 ORA pblock+8
480 CMP #&FF
490 BEQ strip7
500 LDA #0
510 LDY #0
520 .strip7a
530 ORA (file_in),Y
540 INY
550 BNE strip7a
560 CMP #0
570 BPL strip7b
580 .strip7
590 LDA #7
600 JSR OSWRCH
610 BRK
620 BRK
630 EQU$ "This is not a
text ASC file!"
640 BRK
650 .strip7b
660 LDA file_in
670 CLC
680 ADC pblock+&A
690 STA end
700 LDA file_in+1
710 ADC pblock+&B
720 STA end+1
730 LDY #10
740 .strip8
750 LDA header,Y
760 STA (file_out),Y
770 DEY
780 BPL strip8
790 LDY #11
800 .strip1b
810 LDA (file_out),Y
820 CMP #ASC">"
830 BNE strip1a
840 .strip1
850 INY
860 LDA (file_out),Y
870 CMP #&D
880 BNE strip1
890 INY
900 JMP strip1b
910 .strip1a
920 DEY
930 TYA
940 CLC
950 ADC file_out
960 STA get
970 LDA file_out+1
980 ADC #0
990 STA get+1
1000 LDA file_in
1010 SEC
1020 SBC #1
1030 STA put
1040 LDA file_in+1
1050 SBC #0
1060 STA put+1
1070 LDY #0
1080 JMP strip5
1090 .strip3
1100 INC get
1110 BNE strip4
1120 INC get+1
1130 .strip4
1140 INC put
1150 BNE strip5
1160 INC put+1
1170 .strip5
1180 LDA get
1190 CMP end
1200 LDA get+1
1210 SBC end+1
1220 BCS strip9
1230 LDA (get),Y
1240 STA (put),Y
1250 CMP #&D
1260 BNE strip3
1270 JSR delete
1280 .strip11
1290 LDA (get),Y
1300 CMP #ASC">"
1310 BNE strip10
1320 INC put
1330 BNE strip9
1340 INC put+1
1350 JMP strip9
1360 .strip10
1370 JMP strip4
1380 .strip9
1390 \ save file
1400 JSR set_pblock
1410 LDA #0
1420 JSR OSFILE
1430 RTS
1440
1450 .delete
1460 LDX #0
1470 .delete4
1480 INY
1490 LDA (get),Y
1500 CPX #0
1510 BNE delete3
1520 CMP #32
1530 BEQ delete4
1540 INX
1550 .delete3
1560 CMP #48
1570 BCC delete4b
1580 CMP #58
1590 BCC delete4
1600 \passed line num
1610 JMP delete4b
1620 .delete2
1630 INY
1640 LDA (get),Y
1650 .delete4b
1660 CMP #32
1670 BEQ delete2
1680 CMP #&A
1690 BEQ delete6
1700 CMP #&D
1710 BNE delete5
1720 .delete6
1730 DEY
1740 LDA (get),Y
1750 CMP #32
1760 BEQ delete5
1770 INY
1780 .delete5
1790 TYA
1800 CLC
1810 ADC get
1820 STA get
1830 LDA get+1
1840 ADC #0
1850 STA get+1
1860 LDY #0
1870 RTS
1880
1890 .set_pblock
1900 LDA fname
1910 STA pblock
1920 LDA fname+1
1930 STA pblock+1
1940 LDA file_in
1950 STA pblock+2
1960 LDA file_in+1
1970 STA pblock+3
1980 LDA #0
1990 STA pblock+6
2000 LDA file_out
2010 STA pblock+&A
2020 LDA file_out+1
2030 STA pblock+&B
2040 LDA put
2050 STA pblock+&E
2060 LDA put+1
2070 STA pblock+&F
2080 LDX #pblock MOD256
2090 LDY #pblock DIV256
2100 RTS
2110
2120 .header
2130 EQU$ "NEW"
2140 EQU$ &D

```


SPIDER

REAL-TIME CONTROL FOR THE BBC MICRO

Look out for the SPIDER

A breakthrough in ease-of-use for all Control Applications

Here's what you get:

- Additional BASIC commands - which can be safely mixed with existing BASIC keywords.
- Invoke BASIC PROCs from function keys or by external events.
- Run up to 8 independent countdown timers.
- The SPIDER is a powerful combination of RAM and ROM mounted on a butterfly board - it leaves the Beeb's memory intact.
- It's easy to install with no soldering required - and a comprehensive manual is supplied.



SPIDER - stamps out I/O bugs

SEND NOW FOR OUR INFORMATIVE LEAFLET - YOU'LL BE SURPRISED AT HOW POWERFUL A SPIDER CAN BE!

Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

£65.00 including VAT



QUACK!

All the fun of the fair with this highly colourful and entertaining machine code arcade game.

You have gone to the fair for an enjoyable day out, but today is different. Today the sideshows fight back! This is a game for young and less young alike. You'll love

the cuddly bears, the furry rabbits, but those flying ducks, they're the terror of the skies!

The more skilful you become, the faster they attack, your reflexes will be stretched to breaking point - how long can you survive before you are driven out of the fairground?

The graphics and sound effects are an entertainment in themselves, so don't miss out on this excellent game. Send today, don't delay! Still only £5.95 inc.

Orders to: **DUCK SOFTWARE**
14 Elmore Road, Sheffield S10 1BY.
(For BBC 'B' OS1.2. Duck Software is a division of Midnight Technology)

SOFTWARE CLASSICS

presents

3-D DESIGN

for the Acorn Electron and BBC Micro

A unique CAD package allowing creation and manipulation of designs in three dimensions. Drawing is done by keyboard or joysticks in three separate graphics windows, for front, end and plan views, whilst a fourth window creates an isometric view. Full editing facilities are provided and the completed design may be viewed normally or as a STEREO projection. Designs may be displaced or rotated in any plane and perspective selected from a series of 'lenses', from 17mm to 2000mm. Other designs may be appended to the original. The package comes complete with demo. file, 3-D spectacles and full instructions.

Cassette: £7.50

Disc: £10.50

Send cheque/PO for immediate despatch or send large SAE for full catalogue to:

SOFTWARE CLASSICS

2 Connie St., Openshaw, Manchester M11 2JD



Leigh Computer Systems

Authorised Acorn Service Centre. ACT and Ferranti Computer Dealer

OPUS DISC DRIVES

(with 2 year guarantee)

	Inc VAT
5400	99.00
5401	109.00
5402	149.00
5802	173.00
5401SD	159.00
5402SD	189.00
5802SD	215.00
5401D	256.00
5402D	335.00
5802D	369.00
DFS KIT	95.00
OPUS DDFS (with drives)	55.00

MONITORS

	Inc VAT
PHILIPS 20MH GREEN	84.00
PHILIPS 20MH AMBER	89.00
PHILIPS IBM PC GREEN	105.00
DIGIVISION COLOUR (Special)	169.00
MICROVITEC 1431	189.00
MICROVITEC 1451	269.00
MICROVITEC 1441	398.00
MICROVITEC QL	275.00
SABA TV MONITOR (Special)	199.00
SABA TV MONITOR Remote	219.00
KAGA, SANYO, IBM + ACT MONITORS AVAILABLE	

COMPUTERS

	Inc VAT
ACORN ELECTRON	129.00
BBC B	339.00
BBC B + DFS	399.00

SANYO 555
ADVANCE 128K
ADVANCE 256K
ACT MACHINES AVAILABLE
ie. F1 APRICOT

PERIPHERALS

	Inc VAT
HCR PROGRAMMER	57.00
HCR 16K RAM BOARD with write protect (plugs into ROM socket)	36.80
EXTRA RAM	23.00
PAIR OF LVL JOYSTICKS	19.95
PRO-LINK INTERFACE	9.95
C12 BLANK TAPES	.40
SPECTRUM INTERFACE II	19.95
TEAK MONITOR STAND	10.35
AMX Mouse	79.00

PRINTERS

	Inc VAT
DOT MATRIX	
CANON PW1080A	299.00
CANON PW1156A	399.00
EPSON RX80	218.50
EPSON RX80 F/T	245.00
EPSON FX80	373.00
EPSON MX100	420.00
EPSON FX100	487.50
EPSON JX80	516.00
EPSON LQ1500	1019.00
MANNESMANN TALLY MT80	199.00
MANNESMANN TALLY MT180	665.00
STAR SC10	295.00

EPSON SERIAL INTERFACE (8143)	41.00
EPSON SERIAL INTERFACE (8148)	64.00
PAPER (2000 sheets)	12.00

DAISYWHEEL

QUEN DATA	219.00
JUKI 6100	369.00
SILVER REED TYPEWRITER EX43N	275.00
COMPUTER INTERFACE	99.00
SILVER REED DAISYWHEEL 400	316.00
SILVER REED DAISYWHEEL 500	373.00
SILVER REED DAISYWHEEL 550	574.00
SILVER REED DAISYWHEEL 770	834.00
CUT SHEET FEEDER FOR 550 or 770	240.00
RANGE OF RIBBONS FOR ALL PRINTERS	

ROMS

	Inc VAT
WORDWISE PLUS	57.00
WORDWISE	36.80
VIEW	59.95
GRAPHICS ROIM	31.00
DISC DOCTOR	31.00
GEMLIN	31.00
PRINT MASTER	31.00
CARETAKER	31.00
COMMUNICATOR	65.00
BEEBUGSOFT - IN STOCK	
2764 EPROMS	4.85
27128 EPROMS	10.50

EDUCATIONAL ORDERS SUPPLIED

- Price list available on application

P & P

80p

small items

£7

large items

75 CROSS STREET

SALE

MANCHESTER

Telephone: 061-905 2144

7 COVENTRY ROAD

HINCKLEY

LEICS.

Telephone: 0455 612139

ALL
PRICES
INCLUDE
VAT

Stripper listing

From Page 156

```

2150 EQU$ "AUTO"
2160 EQU$ &D
2170 EQU$ &DDDD
2180
2190 .pblock
2200 JNEXT
2210 PRINT "saving the m/c
file 'strip'"
2220 *SAVE strip B00 CFF B00
2230 END
    
```


Listing II

```

210 \ Cassette version
220
222 LDY #&FF
224 LDA #134
226 .cas1
228 JSR OSWRCH
230 INY
    
```

```

232 LDA mes,Y
234 BNE cas1
236 LDX #0
238 LDA #21
240 JSR OSBYTE
242 LDA #input
244 STA fname
246 LDA #13
248 STA fname+2
250 LDA #32
252 STA fname+3
254 LDA #126
256 STA fname+4
258 LDA #0
260 STA fname+1
262 LDX #fname
264 LDY #0
266 JSR OSWORD
268 BCC cas2
270 RTS
272 .mes
274 EQU$ "Which file shall
    
```

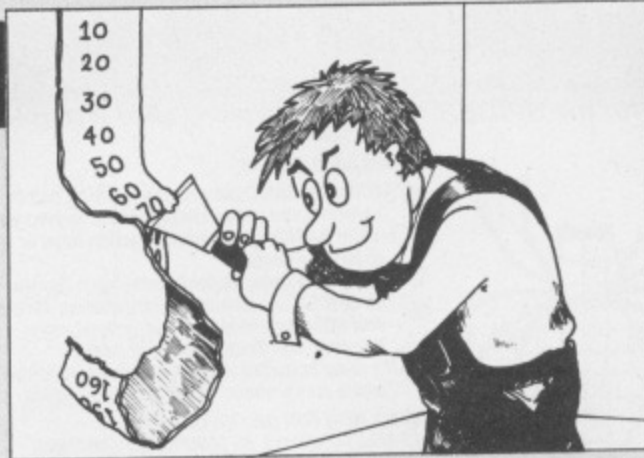

I strip? *

```

276 EQU$ 135
278 BRK
280 .cas2
    
```

Listing III

```

1392 \ cassette addition
1394 LDY #0
1396 LDA #ASC"! "
1398 STA (fname),Y
    
```

Listing IV

```

273 \ Cassette version
274 J$PZ="Which file shall
I strip?"
275 PZ=PZ+LEN($PZ)
    
```

```

276 ?PZ=135:PZ=PZ+1:COPTAZ
624
626 \ Both versions
630 J$PZ="This is not a
text ASC file!"
632 PZ=PZ+LEN($PZ)
634 COPTAZ
2130 J$PZ="NEW"
2140 PZ=PZ+LEN($PZ)+1
2150 $PZ="AUTO"
2160 PZ=PZ+LEN($PZ)+1
2170 !PZ=&DDDD:PZ=PZ+2:COPTAZ
    
```

This listing is included in this month's cassette tape offer. See order form on Page 189.

BIZZELL'S BLOCKBUSTER BARGAINS



HIGH SPEED, HIGH QUALITY, FOUR COLOUR, FLATBED.

PRINTER/PLOTTER Only £399

- Prints horizontally or vertically in text.
- Prints four directions and 255 sizes in graphics.
- Plotting area 298x216 mm.
- Plotting speed 100mm/sec.
- Step size 0.1mm.
- Self test and auto functions.
- Red, Green, Blue and Black.
- Parallel and RS232C interfaces.
- Full guarantee.
- BASIC ASCII command codes and parameters.
- Full manual (cassette and commands for BBC Micro).

Ideal for graphs, drawings, symbols, axes, geometric patterns, charts, diagrams, circuits, computer art, flowcharts, 3-D, contours etc.

RD DIGITAL TRACER

Produce illustrations on your computer simply and easily using the tracer to copy existing material. Simply run the tracer head over anything you want to produce. Complete with full instructions, manual and software. BBC £69.95 SPECTRUM £59.50



MIDWICH DISC DRIVES

400k, Double Sided, 40/80T switchable. Single drive £175 Dual drive £295

UCHIDA DWX 305

Daisywheel printer £295

LEADS

Printer/Plotter £10
I.E.E to Centronic with interface £40
Parallel to Centronic with interface £30

TEACHERS AND PARENTS

Send for FREE educational software catalogue covering all ages from pre-school to 'A' level. All programs listed and described. All prices include VAT and delivery. UK mainland. Access card holders can ring to place order. Write with order and cheque (stating computer) to:

BIZZELL COMPUTERS
WALNUT TREE HOUSE,
FORNCETT ST. PETER,
NORWICH NR16 1HR.

PERSONAL CALLERS WELCOME (10.00-5.00) Phone for appointment (095389-592)

SEE US AT



25th-28th July 1985
Barbican Centre
London EC2

Shape recognition listing

Program I

```

10 REM OBJECT RECOGNITION
20 REM LOADER PROGRAM
30 REM J.M Tissandier
40 REM(c) The Micro User
50
60 MODE1
70 PROCinit
80 PROCscreen
90 PROCfile_system
100 CHAIN"OR2"
110
120 DEFPROCinit
130 ENVELOPE1,1,0,0,0,50,25,25,127,
-1,-1,-1,126,90
140 #FX4,1
150 #FX212,0
160 #FX213,200
170 #FX214,5
180 VDU23,224,255,255,255,255,2
55,255,255
190 VDU19,3,6;0;
200 ENDPROC
210
220 DEFPROCscreen
230 COLOUR2
240 PRINTTAB(0,9);" MENU 1"
250 PRINT""D...Draw""E...Erase""
S...Skip""W...Wipe"
260 PRINT"ARROW KEYS"" to move"
270 PRINT"RETURN to"" enter"
280 VDU28,31,23,39,9
290 PRINT" MENU 2"
300 PRINT""I...Init""L...Load""Q
...Quit""S...Save""V...View"
310 COLOUR1:COLOUR130
320 PRINT""Press ESCto selectthe m
enu."
330 VDU28,10,3,29,1:COLOUR0:CLS
340 PRINT" OBJECT RECOGNITION"
350 VDU28,1,30,38,26:CLS:VDU28,2,30
,38,26
360 PRINT"The idea is to draw an ob
ject and I"
370 PRINT"will try to recognize wha
t it is. I"
380 PRINT"start out totally ignoran
t, but the"
390 PRINT"more you teach me the bet
ter I get!"
400 PRINT"Press the SPACE BAR to co
ntinue...";
410 REPEAT UNTIL GET=32
420 CLS
430 ENDPROC
440

```

```

450 DEFPROCfile_system
460 AX=0:YX=0
470 fs=USR (&FFDA) AND &F
480 IF fs=4 THEN MX=80:PAGE=&1300 E
LSE MX=120:PAGE=&E00
490 ENDPROC

```

Program II

```

10 REM OBJECT RECOGNITION
20 REM MAIN PROGRAM (Save as "OR2"
)
30 REM(c) The Micro User
40 PROCinit
50 ON ERROR VDU7:IF ERR=17 THEN PR
OCadjust:menu=menu EOR 3:PROctitle EL
SE PROCmessage(1)
60 IF menu=1 THEN PROCmenu1 ELSE P
ROCmenu2
70 MODE7:#FX4
80 END
90
100 DEFPROCinit
110 DIM gridX(10,10),lineX(20),bitX
(20),name$(MX),rel$(MX)
120 menu=1:nX=0
130 f=2:b=128
140 FOR kX=1 TO MX
150 name$(kX)=STRING$(10,"*")
160 name$(kX)="*
170 IF kX<21 THEN bitX(kX)=2^(7+kX)
180 NEXT
190 PROctitle
200 ENDPROC
210
220 DEFPROCadjust
230 IF nX AND name$(nX)=" THEN rel
X(nX)=0:nX=nX-1
240 ENDPROC
250
260 DEFPROctitle
270 VDU26
280 FOR kX=1 TO 3
290 f=f EOR 3:b=b EOR 2
300 COLOUR f:COLOUR b
310 IF kX=1 PRINT TAB(0,9)" MENU 1
"
320 IF kX=2 PRINT TAB(31,9)" MENU 2
"
330 NEXT
340 PROCwindow(1)
350 ENDPROC
360
370 DEFPROCmenu1
380 REPEAT
390 PRINT"Please draw an object."
400 PROCinitdraw
410 PROCdraw

```

```

420 PROCgrid
430 PROCfindrel
440 PROCmatch
450 PROCnameobj
460 UNTIL FALSE
470 ENDPROC
480
490 DEFPROCmenu2
500 REPEAT
510 CLS:PRINT"Choice: ";
520 oX=GET AND &DF
530 CLS
540 IF oX=73 THEN PROCmessage(6):RU
N
550 IF oX=76 THEN PROCload
560 IF oX=83 THEN PROCsave
570 IF oX=86 THEN PROCview
580 UNTIL oX=81
590 ENDPROC
600
610 DEFPROCinitdraw
620 PROCwindow(2)
630 xX=1:yX=1:d=TRUE
640 COLOUR1
650 VDU31,1,1
660 ENDPROC
670
680 DEFPROCdraw
690 REPEAT
700 oX=GET AND &DF
710 IF oX=68 THEN COLOUR i:d=TRUE
720 IF oX=69 THEN COLOUR 3:d=TRUE
730 IF oX=83 THEN d=FALSE
740 IF oX=87 THEN PROCinitdraw
750 IF oX=136 AND xX>1 THEN xX=xX-1
760 IF oX=137 AND xX<10 THEN xX=xX+
1
770 IF oX=138 AND yX<10 THEN yX=yX+
1
780 IF oX=139 AND yX>1 THEN yX=yX-1
790 IF d=TRUE AND oX<>87 THEN VDU 3
1,xX,yX,224
800 VDU 31,xX,yX
810 UNTIL oX=13
820 PROCwindow(1)
830 PRINT"Please wait...";
840 nX=nX+1
850 ENDPROC
860
870 DEFPROCgrid
880 LOCAL xX,yX
890 FOR xX=1 TO 10
900 FOR yX=1 TO 10
910 gridX(xX,yX)=POINT(464+32*xX,72
0-32*yX)
920 NEXT:NEXT
930 ENDPROC

```


Shape recognition listing

From Page 159

```

940
950 DEFPROCfindrel
960 FOR r%=1 TO 3
970 IF r%<3 THEN PROClines
980 IF r%=1 THEN p%=0:f%=0:l%=11:m%
z=10:m%=1
990 IF r%=2 THEN p%=5:f%=10:l%=21:m%
f%=20:m%=11
1000 IF r%=3 THEN p%=10:f%=0:l%=21:m%
f%=10:m%=11
1010 REPEAT
1020 p%=p%+1
1030 REPEAT:f%=f%+1:UNTIL line%(f%)
OR f%=m%
1040 REPEAT:l%=l%-1:UNTIL line%(l%)
OR l%=m%
1050 IF line%(f%) AND line%(f%)=line%
z(l%) AND f%>l% THEN rel%(n%)=rel%(n%
z)+bit%(p%)
1060 UNTIL (r%<3 AND l%-f%<3) OR (r%
=3 AND (f%=10 OR l%=11))
1070 NEXT
1080 ENDPROC
1090
1100 DEFPROClines
1110 FOR j%=1 TO 10
1120 e%=0
1130 FOR k%=1 TO 10
1140 IF (r%=1 AND grid%(j%,k%)=1) OR
(r%=2 AND grid%(k%,j%)=1) THEN e%=e%
+1
1150 NEXT
1160 line%(j%+10*(r%-1))=e%
1170 IF e%>2 THEN rel%(n%)=rel%(n%)+
16^(r%-1)
1180 NEXT
1190 ENDPROC
1200
1210 DEFPROCmatch
1220 IF n%=1 THEN ENDPROC
1230 b%=0:m%=0
1240 FOR k%=1 TO (n%-1)
1250 s%=0
1260 FOR p%=1 TO 20
1270 v%=rel%(k%) AND bit%(p%)
1280 vl%=rel%(n%) AND bit%(p%)
1290 IF v%=vl% THEN s%=s%+1
1300 NEXT
1310 IF (rel%(k%) AND &F)=(rel%(n%)
AND &F) THEN s%=s%+1
1320 IF (rel%(k%) AND &F0)=(rel%(n%)
AND &F0) THEN s%=s%+1
1330 IF s%>b% THEN b%=s%:m%=k%
1340 NEXT
1350 ENDPROC
1360
1370 DEFPROCnameobj

```

```

1380 CLS
1390 IF n%=1 THEN PROCnew:ENDPROC
1400 PRINT "I think you have drawn "
;
1410 IF INSTR("AaEeIiOoUu",LEFT$(nam
e$(m%),1)) THEN PRINT"an "; ELSE PRIN
T"a ";
1420 PRINT name$(m%);"."
1430 PRINT "Am I right? ";
1440 IF FNcheck THEN PRINT"Great!";
PROCadjust ELSE PROCnew
1450 ENDPROC
1460
1470 DEFFNcheck
1480 REPEAT
1490 ans=INSTR("YyNn",GET$)
1500 UNTIL ans
1510 CLS
1520 IF ans<3 THEN=TRUE ELSE=FALSE
1530
1540 DEFPROCnew
1550 IF n%=M% THEN PROCmessage(5):PR
OCadjust:ENDPROC
1560 PRINT"I can't make out this obj
ect."
1570 PRINT "Do you want me to learn
it? ";
1580 IF FNcheck THEN name$(n%)=FNnam
e("What is it called? ",19,10):PROCme
ssage(2) ELSE PROCadjust
1590 CLS
1600 PRINT"I'll try and do better th
is time."
1610 ENDPROC
1620
1630 DEFFNname(t$,t%,m%)
1640 REPEAT
1650 CLS:PRINT t$;STRING$(m%,".")
1660 INPUT TAB(t%,0) n$
1670 UNTIL LEN(n$)>0 AND LEN(n$)<=m%
z
1680 =n$
1690
1700 DEFPROCload
1710 c=OPENUP(FNname("LOAD FILE Fi
lename = ",23,7))
1720 IF c=0 THEN PROCmessage(3):ENDP
ROC
1730 IF n% THEN FOR k%=1 TO n%:name$(
k%)="":rel%(k%)=0:NEXT
1740 INPUT#c,n%
1750 FOR k%=1 TO n%
1760 INPUT#c,name$(k%),rel%(k%)
1770 NEXT
1780 CLOSE#c
1790 ENDPROC
1800
1810 DEFPROCsave
1820 IF n%=0 THEN PROCmessage(4):END

```

```

PROC
1830 c=OPENDUT(FNname("SAVE FILE F
ilename = ",23,7))
1840 PRINT#c,n%
1850 FOR k%=1 TO n%
1860 PRINT#c,name$(k%),rel%(k%)
1870 NEXT
1880 CLOSE#c
1890 ENDPROC
1900
1910 DEFPROCview
1920 IF n%=0 THEN PROCmessage(4):END
PROC
1930 VDU14,23,1,0;0;0;0;
1940 PRINT"LIST OF KNOWN OBJECTS"
1950 PRINT "Press SHIFT..."
1960 FOR k%=1 TO n%
1970 PRINT k%;". ";name$(k%)
1980 NEXT
1990 VDU15
2000 PROCmessage(0)
2010 ENDPROC
2020
2030 DEFPROCwindow(w%)
2040 IF w%=1 THEN VDU28,2,30,38,27,2
3,0,10,103,0;0;0;23,0,11,8,0;0;0;:COL
OUR0:COLOUR130
2050 IF w%=2 THEN VDU28,14,20,25,9,2
3,0,10,99,0;0;0;23,0,11,4,0;0;0;:COL
OUR131
2060 CLS
2070 ENDPROC
2080
2090 DEFPROCmessage(z%)
2100 VDU23,1,0;0;0;0;
2110 COLOUR1
2120 IF z%=1 THEN REPORT:PRINT" at l
ine ";ERL;". "
2130 IF z%=2 THEN PRINT"Thank you."
2140 IF z%=3 THEN PRINT"File doesn'
t exist."
2150 IF z%=4 THEN PRINT"No data!"
2160 IF z%=5 THEN PRINT"Sorry, no ro
om for new objects."
2170 IF z%=6 THEN PRINT"Initialising
...";
2180 *FX21,0
2190 IF z%<2 THEN d%=400 ELSE d%=200
2200 wait=INKEY(d%)
2210 VDU23,1,1;0;0;0;
2220 COLOUR0
2230 ENDPROC

```

This listing is included in this month's cassette tape offer. See order form on Page 189.

COMPUTER GARDENING PROGRAMS

Two amazing programs for your BBC Model B computer

GREENFINGER:GARDEN PLANT SELECTOR

Give your BBC Model B access to information on over 400 plants. You tell the computer about growing site conditions - soil type, sunlight, moisture. The computer finds the best plants for you. Plant descriptions, flowering time, growing conditions, propagation methods etc., appear on your TV screen.

GREENFINGER:GARDEN LAYOUT PLANNER

Design your garden layout with your BBC Model B. Build up a computer model of your garden layout. Position buildings, walls, paths, patios, borders, flower beds, greenhouses, trees and shrubs. The computer plots a scaled plan on your TV complete with areas of shade! Add and delete items, pan around the layout, file and retrieve your layout for future use. Save on expensive garden purchases and building work!

Programs supplied on cassette tapes with full instructions. Each program costs £12.95 inc. P & P.

Send cheque with order and name and address (BLOCK CAPITALS) to:

Cambridge Applied Technology, 51 Hinton Road, Fulbourn, Cambridge CB1 5DZ.

FLOPPY-WISE ROM



The most sophisticated disc utility ever!
14 new commands for disc users. Featuring:

AUTOSAVE: For automatic program saving during development.

CLONE: The most sophisticated protected disc copier ever.

CONVERT: 40-80 track conversion on single disc.

MCOPY: Copy any number of selected files in one operation (menu driven).

PROTECT: Make your own discs copy proof.

RCOPY: Rename files on transfer.

ROMS: A sideways ROM management system.

Also includes - Ascii, Compare, Derrors, Dspace, Format, Prepare, Verify.



* FULLY TUBE COMPATIBLE *

SOFTWARE SERVICES, 65 South Mossley Hill Road,
Allerton, Liverpool L19 9BG. Tel: 051-427 7894

AMAZING LIGHT PEN DESIGN PROGRAM



A SCREEN CREATED USING CAR AND HOUSE DESIGNS

Designs can be created, moved, enlarged, reduced reproduced, saved, reloaded.

Designs can include circles and can be moved with pixel accuracy. A colour fill allows superb pictures to be produced. Screens can be saved, reloaded and dumped to an Epson type printer.

Robin DESIGN for any switch operated light pen. PRICE £11.50 inc. (on disc £15). (Please state make of pen eg. Robin, Datapen, RH etc).

INTRODUCTORY OFFERS

1. The Robin touch pen with a music program, an elementary painting program, routines and instructions for using the pen in your own programs. £30 inc. (on disc £33).

2. The Robin touch pen plus Robin DESIGN £30 inc. (on disc £33).

REVIEWER'S COMMENTS ... "OUTSTANDING" D. Fitcher of Educational Computing ... "Recommended as THE pen for schools" M. Jackson of Primary Teaching and Micros ... "I recommend the Robin. It is the one I use" Ron Owen author of PENPAL

BBC LIGHT PEN PROGRAMS FOR MOST LIGHT PENS BUT NOT THE RH.

1. LIGHT PEN MENU - use a light pen to select and RUN your programs. Programs saved to this disk are automatically added to the menu £7.50 inc.
2. PAINTBRUSH - the FAMOUS painting and plotting program described in Educational Computing as "AMAZING and FANTASTIC" £11.50 inc.
3. ROBIN SUPERDRAW ... a light pen super draw facility with 3 brushes, light pen rubber banding and pixel accurate plotting. Works in modes 0, 1 or 2. A fast colour fill allows superb pictures that can be saved, reloaded or used in your own programs. £11.50 inc. (on disc £15.00).

Available from: **The Educational Software Co.,
108 Parthenon Drive, Liverpool L11 7AQ**

Please send SAE for details of other programs

Dealer enquiries welcome

GLENTOP PUBLISHERS

PRESENT

HONEYLOGO

A COMPLETE JUNIOR EDUCATIONAL
PACKAGE FOR THE BBC AND ELECTRON
MICRO.

DESIGNED

BY TEACHERS FOR TEACHERS.
SIMPLE STRAIGHT-FORWARD AND
AFFORDABLE.

Logo is a high level computer language enabling users to communicate with computers in ordinary English. It is therefore a powerful learning tool encouraging experimentation, problem solving and logical thinking. Logo assists the development of communication skills by instigating group discussion.

GASP

AT THE SIMPLICITY OF LOGO'S
COMMANDS. IN ENGLISH.
(LEFT MEANS LEFT!)

DAZZLE

YOUR COLLEAGUES WITH YOUR CONTROL
OVER INTRICATE MANOEUVRES ON THE
SCREEN.

THRILL

TO THE SOPHISTICATED SOUND AND
COLOUR OF PROGRAMS YOUR CLASS WILL
CREATE AS THEY MOVE THROUGH THE
COURSE.

STAGGER

YOURSELF BY CONTEMPLATING THE PRICE
OF THIS HIGH LEVEL TECHNOLOGY GEM.
COMPARED WITH OTHER, LESS SOPHISTICATED COURSES.

YOU WILL BE AMAZED.

A SCHOOLS PACK INCLUDING 'LESSONS IN
LOGO', 'TEACHERS GUIDE' AND 'TURTLE
CARDS' FOR A WHOLE CLASS
ONLY **£28.50.**

HoneyLogo is now showing at a
Teachers Centre near you. Or ask *Your*
local centre to send off for their **FREE**
demonstration pack.

JUST TELEPHONE **01-441 4130** OR WRITE
TO GLENTOP PUBLISHERS, STANDFAST HSE,
BATH PLACE, HIGH STREET, BARNET, HERTS.
FOR FURTHER INFORMATION.

Future productions will include: Logo on Apple, Logo on Amstrad, Logo on Einstein. Book now to avoid disappointment.

Othello listing

From Page 70

```

100 REM *****
110 REM *
120 REM * OTHELLO *
130 REM *
140 REM * (c) The Micro User *
150 REM *
160 REM *****
170 REM
180 DATA 1500,-500,120,100,100,120,
-500,1500
190 DATA -500,-1000,20,10,10,20,-10
00,-500
200 DATA 120,20,50,30,30,50,20,120
210 DATA 100,10,30,0,0,30,10,100
220 DATA 100,10,30,0,0,30,10,100
230 DATA 120,20,50,30,30,50,20,120
240 DATA -500,-1000,20,10,10,20,-10
00,-500
250 DATA 1500,-500,120,100,100,120,
-500,1500
260 DATA 1,1,1,1,1,1,1,1
270 DATA 1,1,1,1,1,1,1,1
280 DATA 1,1,0,0,0,0,1,1
290 DATA 1,1,0,1,1,0,1,1
300 DATA 1,1,0,1,1,0,1,1
310 DATA 1,1,0,0,0,0,1,1
320 DATA 1,1,1,1,1,1,1,1
330 DATA 1,1,1,1,1,1,1,1
340 *TV0
350 MODE7:VDU23;8202;0;0;0;SDX=0:D
LX=0:ONERROR PROCgameover
360 DIMAX(8,8),BX(8,8),CX(8,8),DX(8
,8),EX(8,8),FX(8,8),GX(8,8),PM1X(60),
PM2X(60),TPM1X(60),TPM2X(60),R6X(60),
HM1X(60):AZ(4,4)=1:AZ(5,4)=-1:AZ(4,5)=
-1:AZ(5,5)=1
370 PNTX=0:FORJ1X=1TO8:FORJ2X=1TO8:
READCZ(J1X,J2X):NEXTJ2X,J1X:FORJ1X=1T
O8:FORJ2X=1TO8:READDX(J1X,J2X):NEXTJ2
X,J1X
380 PROCstart
390 PROCboard
400 PLX=-1
410 PLX=-PLX:IFPLX=1 CHX=132 ELSE C
HX=129
420 VDU31,2,5,RND(7)+128:PRINTA$(RN
D(15))CHR$148:VDU31,22,5:PRINTSTRING$(
16,CHR$32)CHR$148;
430 PROCposplay
440 IFPMX=0 GOX=60X+1:IF60X=2 PROCg
ameover
450 IFPMX=0 GOTO410
460 GOX=0
470 IFPLX=-1 PROCcomplay
480 VDU31,2,5:IFPLX=1 VDU131,157,12
9:PRINT" Your go ";CHR$148;CHR$156
; ELSE VDU133,157,135:PRINT" My go
";CHR$148;CHR$156;
490 IFPLX=-1 PROCshowplay:GOTO510
500 PROCselplay
510 NMX=NMX+1:IFNMX=60 PROCgameover
ELSE GOTO410
520 DEFPROCstart:DIMA$(15):FORMX=1T
O15:READA$(NX):NEXT:ENDPROC
530 DATA "Hmmm... "
540 DATA "Hold on... "
550 DATA "Just a sec... "
560 DATA "Won't be long.. "
570 DATA "Thinking... "
580 DATA "Hang on... "
590 DATA "Wait a moment.. "
600 DATA "Err..Umm... "
610 DATA "Just a minute.. "
620 DATA "Eerrrrrrrr... "
630 DATA "Let's see now.. "
640 DATA "Here we go... "
650 DATA "Computing... "
660 DATA "Just a tick... "
670 DATA "Pheewwww... "
680 DEFPROCboard:VDU31,13,0:PRINT;C
HR$141CHR$129CHR$157CHR$131"OTHELLO
"CHR$156'SPC13;CHR$141CHR$129CHR$157C
HR$131"OTHELLO "CHR$156:FORJX=1TO17:
?(&7D1F+40*JX)=133:?(&7D20+40*JX)=157
:?(&7D3A+40*JX)=156:NEXT
690 VDU31,0,4,148,183:PRINTSTRING$(
17,CHR$96);CHR$107CHR$32CHR$183STRING
$(17,CHR$96);CHR$107;VDU31,0,5,148,1
81,31,19,5,234,31,0,6,148,245,31,20,5
,148,181,31,39,5,234,31,20,6,148,245
700 VDU31,2,6:PRINTSTRING$(17,CHR$2
40)CHR$250CHR$32CHR$245STRING$(17,CHR
$240)CHR$250;
710 FORJX=1TO8:SOUND1,-15,JX*20,1:F
ORKX=1TO8:POKEY=&7D1F+JX*3+80*KX:PCEX
=AX(JX,KX):IFPCEX=0 GRAPHX=130 ELSE I
FPCEX=-1 GRAPHX=145 ELSE IFPCEX=1 GRA
PHX=148
720 ?(POKEY-1)=GRAPHX:POKEY=255:NE
XTKX,JX:ENDPROC
730 DEFPROCposplay:PMX=0:FORXX=1TO8
:FORYY=1TO8:IFAX(XX,YY)<>0 OR DX(XX,Y
Y)=1 GOTO750
740 PROCfindplay
750 NEXTYY,XX:IFPMX=0 AND DLX=0 PRO
Cpass
760 ENDPROC
770 DEFPROCfindplay:OKX=0:X1X=XX:Y1
X=YY:CY=0:REPEATCX=CX+1:PROCdirection
:JX=0:REPEATJX=JX+1:IF(X1X+XDZ)<1 OR
(X1X+XDZ)>8 OR (Y1X+YDZ)<1 OR (Y1X+YD
Z)>8 JX=8:GOTO810
780 X1X=X1X+XDZ:Y1X=Y1X+YDZ:IFAX(X1
X,Y1X)<>-PLX JX=8:GOTO810
790 IF(X1X+XDZ)<1 OR (X1X+XDZ)>8 OR
(Y1X+YDZ)<1 OR (Y1X+YDZ)>8 JX=8:GOTO
810
800 IFAX(X1X+XDZ,Y1X+YDZ)=PLX JX=8:
CX=8:OKX=1
810 UNTILJX=8
820 X1X=XX:Y1X=YY:UNTILCX=8
830 IFOKX=1 PMX=PMX+1:PM1X(PMX)=XX:
PM2X(PMX)=YY
840 ENDPROC
850 DEFPROCdirection:ON CX GOTO860,
870,880,890,900,910,920,930
860 XDZ=0:YDZ=-1:ENDPROC
870 XDZ=1:YDZ=-1:ENDPROC
880 XDZ=1:YDZ=0:ENDPROC
890 XDZ=1:YDZ=1:ENDPROC
900 XDZ=0:YDZ=1:ENDPROC
910 XDZ=-1:YDZ=1:ENDPROC
920 XDZ=-1:YDZ=0:ENDPROC
930 XDZ=-1:YDZ=-1:ENDPROC
940 DEFPROCselplay:ZZX=0:SOUND1,-15
,200,1:SOUND1,-15,120,1
950 NX=0:REPEATNX=NX+1
960 PROCOn
970 PROCadval
980 PROCoff:IFADZ=2 GOTO1000
990 PROCadval:IFADZ=0 GOTO960
1000 IFADZ=2 PROCOn:ZZX=NX:NX=PMX
1010 UNTILNX=PMX:IFZZX=0 GOTO950
1020 AX(PM1X(ZZX),PM2X(ZZX))=PLX:PRO
Ccorner(PM1X(ZZX),PM2X(ZZX)):XZ=PM1X(
ZZX):YZ=PM2X(ZZX):PROCmask(XZ,YZ):PRO
Cturn:PROCboard:ADZ=0:PNTX=0:ENDPROC
1030 DEFPROCOn:?(&7D1E+PM1X(NX))*3+80
*PM2X(NX)=CHX:ENDPROC
1040 DEFPROCoff:?(&7D1E+PM1X(NX))*3+8
0*PM2X(NX)=130:ENDPROC
1050 DEFPROCturn:PROCswapab:OKX=0:X1
X=XX:Y1X=YY:CY=0:REPEATCX=CX+1:PROCdi
rection:JX=0:REPEATJX=JX+1:IF(X1X+XDZ
)<1 OR (X1X+XDZ)>8 OR (Y1X+YDZ)<1 OR
(Y1X+YDZ)>8 JX=8:GOTO1090
1060 X1X=X1X+XDZ:Y1X=Y1X+YDZ:IFBX(X1
X,Y1X)<>-PLX JX=8:GOTO1090
1070 BX(X1X,Y1X)=PLX:IF(X1X+XDZ)<1 O
R (X1X+XDZ)>8 OR (Y1X+YDZ)<1 OR (Y1X+
YDZ)>8 JX=8:GOTO1090
1080 IFBX(X1X+XDZ,Y1X+YDZ)=PLX JX=8:
OKX=1
1090 UNTILJX=8
1100 IFOKX=1 PROCswapab:OKX=0 ELSE P
ROCswapab
1110 X1X=XX:Y1X=YY:UNTILCX=8:ENDPROC
1120 DEFPROCswapab:FORJX=1TO8:FORKX=
1TO8:BX(JX,KX)=AX(JX,KX):NEXTKX,JX:EN
DPROC

```


CHUKEE THE UPGRADE

By S.D. Ellington

From BIT TWIDDLERS

If you ALREADY OWN the popular game of Chuckie Egg then CHUKEE will provide:

1. 3 Speeds
2. 8 New Screens
3. Select Start Level (1-41)
4. Variable Extended Jump
5. Design Your Own Screens!!!

YES, after you have mastered the original screens and our screens, you can edit the data statements in the main program (CHUCK1) and design your very own.

Creative and Educational - A & F Approved.

The renowned KILLA and MONSTAS Upgrades still available.

£3.25 each. Two on one cassette £5.00. All three on one cassette £7.00. State BBC or ELECTRON.

BIT TWIDDLERS

Dept. MU5, 158 Church End, Harlow, Essex CM19 5PF.

*Chuckie Egg is the trademark of A & F Software.

27128 EPROM

Hitachi 250nS prime stock. For BBC sideways ROM, etc.

1-2 pcs **£8.95** incl. 3-49 pcs **£7.95** incl.
50-99 pcs **£7.50**. 100 up **£6.95**

MICROL's **THE SPREADSHEET** for the BBC 32K (cassette).

Learn all about spreadsheets with the 44 page manual.

Supplied with 4 free models for immediate application.

RRP £19.95. Our price **ONLY £5.95**

Prices include VAT & post (UK). Delivery normally by return.

Send UK cheques/Money Orders to:

SILICON CITY, Dept. M,

1 Milton Road, Cambridge CB4 1UY.

ACCESS/VISA orders, telephone 0223 312453

MACOB

SYSTEMS

DIRECT TO YOU AT WHOLESALE PRICES

COMPUTERS

BBC-B	£329
BBC-BD	£419
DFS (Acorn)	£90
Z80 2nd Processor	£389
6502 2nd Processor	£189
CBM 64	Available for export
Sinclair	export

MONITORS

Microvitec 1431	£185
Microvitec 1451	£279
Philips BM7502	£83

DISKS

D/S D/D 80T	£20 (box of 10)
(Fully guaranteed)	
box of 10	

PRINTERS

Canon PW1080A	£279
Canon PW1156A	£389
Kaga KP810	£279
Epson RX80F/T	£232
Quendata 20cps	£239
Juki 6100	£332

MODEMS

Pace Nightingale	£130
------------------	------

DISK DRIVES

Cumana CSX100 SS 40T	£103
Cumana CSX400 DS 40/80T	£155
Cumana CD200 SS 40T + PSU	£242
Cumana CD800 DS 40/80T + PSU	£356
PSU	£20

FIRMWARE

View	£48
Wordwise +	£48
Disc Doctor	£29
Printmaster	£29

DATA RECORDERS

Omega	£21
-------	-----

● Price includes VAT at 15% and delivery is **FREE** in the UK.

● To order just send a cheque or postal order to us and the goods reach you fast.

● Trade enquiries welcome.

● Remember, our name is our guarantee.

MACOB SYSTEMS

8 Lister Gardens, London N18 1HZ. Tel: 01-803 1622

Telex: 8954029 att.MACOB

NEW
LOW
PRICES

WHY PAY MORE

NEW
LOW
PRICES

CUMANA DS/DD DISCS IN THEIR OWN LIBRARY BOX

Cumana discs are top quality DS/DD 96 TPI discs in Cumana's own packaging. This includes a Plastic Flip-Top Library Box. These discs are suitable for all makes of disc drive including single sided ones.



PRICES INCLUDE DELIVERY

1-5 BOXES DS/DD 96 TPI	£17.50 + VAT
6-10 BOXES DS/DD 96 TPI	£17.00 + VAT
10- BOXES DS/DD 96 TPI	£16.50 + VAT

48 HOUR DELIVERY SERVICE

VISA

PLEASE SEND PAYMENT OR PHONE TO USE CREDIT CARD
LARGE QUANTITY AND EDUCATION DISCOUNTS GIVEN

Access


Micro Resources Limited

Southfield House, 11 Liverpool Gardens, Worthing, Sussex BN11 1RY

Telephone: Worthing (0903) 213174

Othello listing

From Page 162

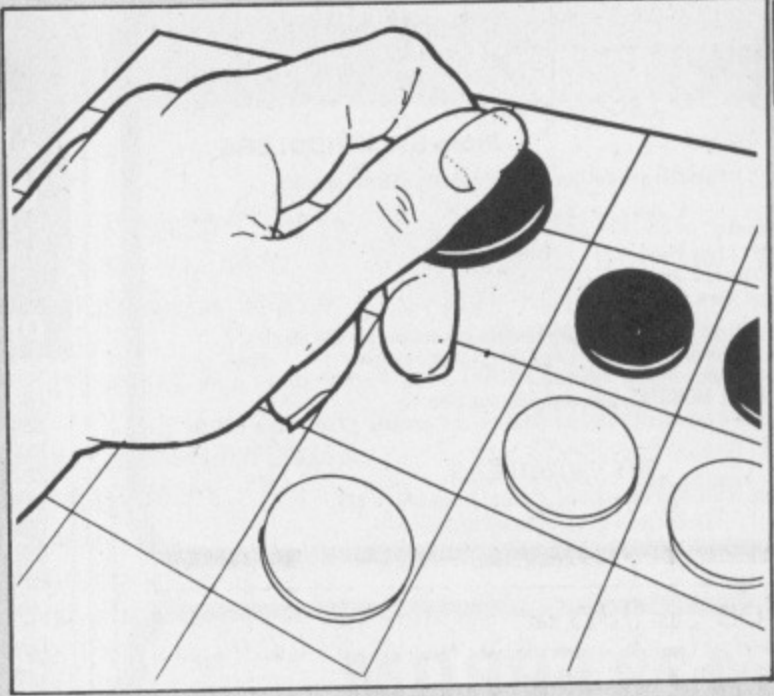

```

1130 DEFPROCswapba:FORJZ=1TO8:FORKZ=
1TO8:AZ(JZ,KZ)=BZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1140 DEFPROCswapea:FORJZ=1TO8:FORKZ=
1TO8:EZ(JZ,KZ)=AZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1150 DEFPROCswapea:FORJZ=1TO8:FORKZ=
1TO8:AZ(JZ,KZ)=EZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1160 DEFPROCswapdf:FORJZ=1TO8:FORKZ=
1TO8:FZ(JZ,KZ)=DZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1170 DEFPROCswapfd:FORJZ=1TO8:FORKZ=
1TO8:DZ(JZ,KZ)=FZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1180 DEFPROCswapcg:FORJZ=1TO8:FORKZ=
1TO8:GZ(JZ,KZ)=CZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1190 DEFPROCswapgc:FORJZ=1TO8:FORKZ=
1TO8:CZ(JZ,KZ)=GZ(JZ,KZ):NEXTKZ,JZ:EN
DPROC
1200 DEFPROCadval
1210 IFPNTZ=1 ADZ=ADZ:CTZ=0:PROCon:
REPEATCTZ=CTZ+1:PROCKEYS:UNTILCTZ=100
OR ADZ=0:PROCOFF:ADZ=ADZ:PNTZ=0:END
PROC
1220 CTZ=0:REPEATCTZ=CTZ+1
1230 ADZ=ADVAL(0)AND3:UNTILCTZ=30 OR
INKEY(-99) OR INKEY(-74) OR INKEY(-8
2) OR ADZ=1 OR ADZ=2
1240 IFINKEY(-99) ADZ=1 ELSE IFINKEY
(-74) ADZ=2 ELSE IFINKEY(-82) PROCsou
nd
1250 IFADZ>0 PNTZ=1:SOUND1,-15,25,1:
SOUND1,-15,10,1 ELSE PNTZ=0
1260 ENDPROC
1270 DEFPROCkeys:ADZ=ADVAL(0)AND3:IF
ADZ=3 ADZ=0
1280 IFINKEY(-99) ADZ=1 ELSE IFINKEY
(-74) ADZ=2
1290 ENDPROC
1300 DEFPROCpass:VDU31,22,5,136,129:
IFPLZ=-1 PRINT"I cannot play":ELSE P
RINT"You cannot go":
1310 PRINTCHR$137CHR$148:FORPSX=1TO
50:SOUND1,-15,200,1:SOUND1,-15,120,1:
NEXT:ENDPROC
1320 DEFPROCsound:SDZ=SDZ+1
1330 ON SDZ GOTO1340,1360
1340 *FX210,0
1350 GOTO1380
1360 *FX210,1
1370 SDZ=0
1380 REPEATUNTILNOTINKEY(-82):ENDPRO
C
1390 DEFPROCmask(XXZ,YYZ):FORCX=1TO8

```

```

:PROCDIRECTION:NXZ=XXZ+XDZ:NYZ=YYZ+YD
Z:IFNXZ<1 OR NXZ>8 OR NYZ<1 OR NYZ>8
GOTO1400 ELSE DZ(NXZ,NYZ)=0
1400 NEXT:ENDPROC
1410 DEFPROCcomplay:IFNMZ>12 PROCdo
wnlevel
1420 BMZ=-3000:FORNZ=1TOPMZ:TCZ=CZ(P
M1Z(NZ),PM2Z(NZ)):IFTCZ>BMZ BMZ=TCZ
1430 NEXT:FORNZ=1TOPMZ:RGZ(NZ)=NZ:NE
XT:FORNZ=1TOPMZ:FFZ=RND(PMZ):GGZ=RND(
PMZ):HHZ=RGZ(FFZ):RGZ(FFZ)=RGZ(GGZ):R
GZ(GGZ)=HHZ:NEXT
1440 NZ=0:REPEATNZ=NZ+1:UNTILCX(PM1Z
(RGZ(NZ)),PM2Z(RGZ(NZ)))=BMZ:AZ(PM1Z
(RGZ(NZ)),PM2Z(RGZ(NZ)))=PLZ:XX=PM1Z(R
GZ(NZ)):YZ=PM2Z(RGZ(NZ))
1450 IFNMZ>12 PROCswapgc
1460 PROCcorner(PM1Z(RGZ(NZ)),PM2Z(R
GZ(NZ))):ENDPROC
1470 DEFPROCshowplay:NZ=0:REPEATNZ=N
Z+1:PROCon:SOUND1,-15,200,1:SOUND1,-1
5,120,1:FORWTZ=1TO2000:NEXT:PROCOFF:U
NTILAZ(PM1Z(NZ),PM2Z(NZ))=PLZ:PROCon:
SOUND1,-15,50,1:SOUND1,-15,35,1:PROCM
ask(XX,YZ):PROCTURN:PROCBORD:ADZ=0:P
NTZ=0:ENDPROC
1480 DEFPROCcorner(XZ,YZ):IFPLZ=-1 F
HZ=800:THZ=500 ELSE FHZ=500:THZ=300
1490 IFXZ=1 AND YZ=1 CZ(2,1)=FHZ:CZ(
1,2)=FHZ:CZ(2,2)=THZ ELSE IFXZ=1 AND
YZ=0 CZ(1,7)=FHZ:CZ(2,8)=FHZ:CZ(2,7)=
THZ ELSE IFXZ=0 AND YZ=1 CZ(7,1)=FHZ:
CZ(8,2)=FHZ:CZ(7,2)=THZ
1500 IFXZ=0 AND YZ=0 CZ(8,7)=FHZ:CZ(
7,8)=FHZ:CZ(7,7)=THZ
1510 ENDPROC
1520 DEFPROCdownlevel:DLZ=1:TPMZ=PMZ
:FORJJZ=1TOPMZ:TPM1Z(JJZ)=PM1Z(JJZ):T
PM2Z(JJZ)=PM2Z(JJZ):NEXT
1530 FORZZZ=1TOTPMZ:PLZ=-1:PROCswape
a:PROCswapdf:PROCCOUNT:CO1Z=CO2Z:AZ(T
PM1Z(ZZZ),TPM2Z(ZZZ))=PLZ:XX=PM1Z(ZZZ
):YZ=PM2Z(ZZZ):PROCmask(XX,YZ):PROCTu
rn:PROCCOUNT:COZ=CO1Z-CO2Z*(NMZ/50):P

```

```

LZ=1
1540 PROCposplay:HMZ(ZZZ)=COZ:FORHMZ
=1TOPMZ:HMZ(ZZZ)=HMZ(ZZZ)+CZ(PM1Z(HMZ
),PM2Z(HMZ)):NEXT:HMZ(ZZZ)=HMZ(ZZZ)/(
PMZ+1):PROCswapea:PROCswapfd:NEXT
1550 PMZ=TPMZ:FORJJZ=1TOPMZ:PM1Z(JJZ
)=TPM1Z(JJZ):PM2Z(JJZ)=TPM2Z(JJZ):NEX
T
1560 PROCswapcg:FORZZZ=1TOPMZ:CZ(PM1Z
(ZZ),PM2Z(ZZ))=CZ(PM1Z(ZZ),PM2Z(ZZ))-
HMZ(ZZ):NEXT:DLZ=0:PLZ=-1:ENDPROC
1570 DEFPROCcount:COZ=0:CO2Z=0:FORCC
Z=1TO8:FORCDZ=1TO8:IFAZ(CCZ,CDZ)=1 CO
2Z=CO2Z+1 ELSE IFAZ(CCZ,CDZ)=-1 COZ=C
OZ+1
1580 NEXTCDZ,CCZ
1590 IFDLZ=0 AND COZ=0 OR DLZ=0 AND
CO2Z=0 PROCgameover ELSE ENDPROC
1600 DEFPROCgameover:VDU31,22,5,136,
129:PRINT"Game over!!":CHR$137CHR$1
48:FORNZ=0TO120:SOUND1,-15,NZ,1:SOUND
2,-15,NZ+96,1:NEXT:CLS:VDU31,13,0:PRI
NT:CHR$141CHR$129CHR$157CHR$131"OTHEL
LO "CHR$156
1610 PRINTSPC13:CHR$141CHR$129CHR$15
7CHR$131"OTHELLO "CHR$156:FORZZZ=250T
O8STEP-50:SOUND1,-15,ZZ,1:NEXT:ONERR
O R MODE7:END
1620 PRINT''':PROCCOUNT:IFCO2Z>COZ
PRINTCHR$133"Congratulations!! You w
in." ELSE IF COZ>CO2Z PRINTCHR$132"
Sorry, you lose!!" ELSE PRINTCHR$13
0"Well played!! We drew this game."
1630 PRINT''':CHR$131"The score was
"CHR$132:CO2Z:CHR$131"- "CHR$129:COZ:P
RINT''
1640 PRINTCHR$132CHR$157CHR$136CHR$1
29:"Press any key for another game
":CHR$156
1650 REPEATPROCKEYS:UNTILADZ>0:RUN

```

This listing is included in this month's cassette tape offer. See order form on Page 189.

BHL SOFTWARE PRESENTS
GEOGRAPHY U.K.

This educational and utility package, as used in schools and colleges, will produce a high resolution map of Great Britain and features:
* "ZOOM-IN on any area * 3 Magnifications * Screen Save & Load * Index of over 170 Towns & Cities, for fast, accurate plotting * Will draw all the Counties of England and Wales quickly and accurately * Full on screen editing. Including BOX, TEXT, LINE, FILL * Screen Dump * Enables you to add your own individual features * Single Key Entry * Comprehensive Manual * Function Key Overlay * For BBC(B) only.

EUROPE 85

This has all of the above features, except Counties, but utilises a high resolution map of Europe, East & West, for its operation. Each package is £8.95 Tape or £11.95 Disc, incl. VAT & P&P. Please state 40/80 track.
SPECIAL OFFER: When ordering 2 or more items DEDUCT £1.00 per item.
Send Cheques/PO to:

BHL SOFTWARE
21 Elmsmere Road, Didsbury, Manchester M20 0AB
(Send SAE for further information)

5 1/4" Floppies Just 99p each (in 10s) excl. VAT

Suitable for use on nearly all 5 1/4" floppy microcomputers including: BBC, IBM, MicroDigital, Sanyo, Apple, Tandy etc. Will run on most 48 TPI and 96 TPI systems.

Manufacturers' over-run of DS/DD floppy disks allows us to make this special offer. Note that these are full specification disks, not sub-standard drop-outs. Prices: 1+ £1.25 each; box of 10 £9.90; 5+ boxes £9.00 per box. Plastic Library boxes £1.75 extra.

Branded disks - including FUJI with a lifetime guarantee.

Prices	each	BASF/3M			FUJI		
		1+	10+	50+	1+	10+	50+
5 1/4"	SS/SD	1.85	1.40	1.20	—	—	—
	SS/DD	2.10	1.80	1.60	2.40	1.99	1.75
	DS/DD	2.40	2.10	1.90	3.30	2.95	2.50
	SS 96tpi	2.55	2.25	2.05	—	—	—
	DS 96tpi	2.90	2.65	2.40	3.95	3.65	3.10
8"	SS/SD	1.90	1.60	1.40	2.95	2.65	2.10
	SS/DD	2.25	2.05	1.85	—	—	—
	DS/SD	—	—	—	3.55	3.20	2.70
	DS/DD	2.50	2.30	2.05	3.65	3.30	2.80

Add 75p P&P + VAT on total amount - Minimum order 4 disks. Gov. Depts. etc may telephone their orders to 0908 310896.

Cheques payable to "IDS" and sent with order to:

IDS (Computer Supplies)
Disk Sales, 5 Castlesteads, Bancroft, Milton Keynes MK13 0PS

GUARDIAN COMPUTER SUPPLIES



PRINTER RIBBONS	Price inc. del.	MAGNETIC MEDIA	
BROTHER H15SC	3.50 each	5 1/4 NASHUA SS 40 per 10	12.50
EPSON RX, MX, FX80	4.25 each	5 1/4 NASHUA OS 40 per 10	17.00
EPSON MX, FX100	4.25 each	5 1/4 NASHUA SS 80 per 10	19.00
JUKI 6100 SS	2.20 each	5 1/4 NASHUA DS 80 per 10	22.00
JUKI 6100 MS	3.44 each	LIBRARY CASE each	1.80
MANNESMAN TALLY 80	5.00 each	LOCKABLE BOX HOLDS	
SEIKOSHA GP80	4.30 each	60 DISCS each	14.50
SEIKOSHA GP100A, 250X	4.75 each		
STAR GEMINI, DELTA	2.20 each		
SHINNA CP80	5.00 each		
		LISTING PAPER	
		60gsm plain m/ruled	
LABELS	Price inc. del.	11 x 9 1/2	14.00 per 2000
		11 x 14 1/2	18.00 per 2000
90 x 24mm	4.50 per 1000	80gsm plain with clean edge perfs.	
90 x 36mm	5.00 per 1000	11 x 9 1/2	8.35 per 1000
90 x 49mm	7.50 per 1000	11.66 x 9 1/2	8.55 per 1000
102 x 36mm	6.00 per 1000	12 x 9 1/2	8.85 per 1000
	BOXED IN 2000's		

Pre Printed Letterheads 12 x 9 1/2 with clean edge perfs. on 100gsm paper.
Paper colours vellum, blue, grey or white.

	Printed Black	Printed Black + One other colour
2,500	60.00 per 1000	76.00 per 1000
5,000	52.50 per 1000	60.00 per 1000
10,000	46.50 per 100	50.00 per 1000

ADD 15% VAT TO ALL PRICES

TO ORDER SEND A CHEQUE/PO WITH YOUR ORDER TO
GUARDIAN COMPUTER SUPPLIES, FREEPOST, SALFORD M6 8NJ

GUARDIAN COMPUTER SUPPLIES IS AN OPERATIONAL DIVISION OF GUARDIAN COMPUTER SERVICES LTD
ST. JAMES'S HOUSE, PENDLETON WAY, SALFORD, MANCHESTER M6 5JA. VAT REG NO 403 3661 85

STOP PRESS STOP PRESS STOP PRESS
STOP PRESS STOP PRESS STOP PRESS

IMPORTANT NOTICE TO READERS

Please note that the prices quoted on pages 20 and 21 of this issue have now been reduced.

Touch Pad - now only **£49.95**

Electron Interface save £35 now only **£114.95**

Cumana Q.S.F. D/D Disc Filing System **£79.95**

Plus many other price reductions on Disc Drives

- e.g. Save £27 on C.S.100 now **£137.95**

CONTACT **CUMANA** FOR FURTHER DETAILS

on

0483 503121

STOP PRESS STOP PRESS STOP PRESS
STOP PRESS STOP PRESS STOP PRESS



PRINTERLAND



UK's LOWEST PRINTER PRICES
ORDERED TODAY - DELIVERED TOMORROW
DOT MATRIX

	EX VAT	INC VAT
BROTHER HR5	£133.00	£152.95
SHINWA CPA80	£185.00	£212.75
EPSON RX80	£185.00	£212.75
EPSON RX80F/T+	£215.00	£247.25
EPSON RX100F/T	£347.00	£399.05
EPSON FX80	£314.00	£361.10
EPSON FX100	£425.00	£488.75

DOT MATRIX PLUS NEAR LETTER QUALITY

KAGA KP-810		£245.00	£281.75
CANON 1080A	SPECIAL OFFER	£245.00	£281.75
KAGA KP-910		£340.00	£391.00
CANON 1156A	SPECIAL OFFER	£340.00	£391.00

DAISY WHEEL

QUENDATA 1120		£225.00	£258.75
JUKI 6100		£325.00	£373.75
EPSON DX100		£356.00	£409.40

COLOUR PRINTERS

EPSON JX-80	SPECIAL OFFER	£450.00	£517.50
-------------	---------------	---------	---------

ACCESSORIES

WORDWISE +		£43.00	£49.45
BBC/PRINTER CABLE		£10.95	£12.59

UTILITIES

REPLICA II • THE TAPE TO DISK COPIER		£9.25	£10.63
--------------------------------------	--	-------	--------

FREE! Users Printer Guide and Screen DUMP

Educational, Government plus Overseas Orders Welcome. Delivery Printers (Securcor) £10.00

Printerland

Unit 27, Estate Buildings, Railway St, Huddersfield HD1 1JP
Showroom open Mon-Fri 9-6pm. Sat morn 9-1pm
Tel: Huddersfield (0484) 514105 or (0484) 687875



IN BROMLEY

**BROMLEYS FIRST
SPECIALIST COMPUTER STORE**

We are official Acorn Dealers with high standards to maintain and take pride in friendly and efficient advice and service.

See our extensive range of printers, monitors, disc drives, software and books.

Data Store

6 Chatterton Road, Bromley, Kent. 460 8991

Modem WS 2000:

Modems aren't just for businessmen.

A Modem WS2000 from Miracle Technology can put you and your home computer in touch with the world. Here's how:

Multi-speed, multi-standard Modem WS2000 not only gives you instant access to Prestel, Micronet, bulletin boards, public and private databases and electronic mail, but also lets you communicate with other computers around the world.

WS2000 is suitable for use with just about any home computer, and we can supply the necessary software for most.

WS2000 offers more add-ons than other modems.

it's got everyone talking

For example, autodial and auto-answer options (now undergoing approval testing with BABT), and direct computer software control of the modem.

Because we appreciate that not everyone's an expert, our Customer Services and Technical Departments are happy to give help and advice.

With BT telephone lead, mains power supply and comprehensive operating manual,

WS2000 costs only £129.95 exc (£154.73 inc VAT & UK delivery). You may also need a computer lead (£10.35 inc). Specify

computer when ordering. Talk to us today: tomorrow you'll be talking to the world.



APPROVED for use with telecommunications systems in accordance with the conditions in the instructions for use



To: Miracle Technology (UK) Ltd, St Peters Street, Ipswich IP1 1XB (Tel 0473 50304)

Please send me WS2000 modem(s) @ £154.73 inc + computer lead(s) @ £10.35 inc for my

..... computer(s). Total

I enclose PO/cheque payable to Miracle Technology. Or charge my Visa/Access card no

Please send me details of Miracle Technology's full data comms range.

Name

Address




Post Code

MIRACLE TECHNOLOGY
we thought of tomorrow, yesterday.

Registered No 1756137. VAT No 368 4535 21

MU6

Y
FIRST
ORE
gh
in
e.
rs,
nd
1
o-
val
ter
hat
s-
rt-
ice.
ly
e
ou
r
us
to
Y
ay.
MU6

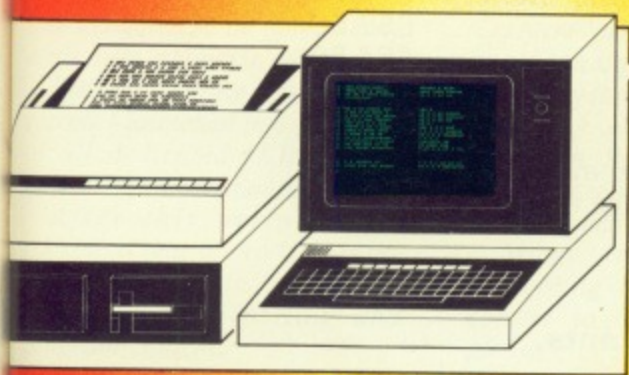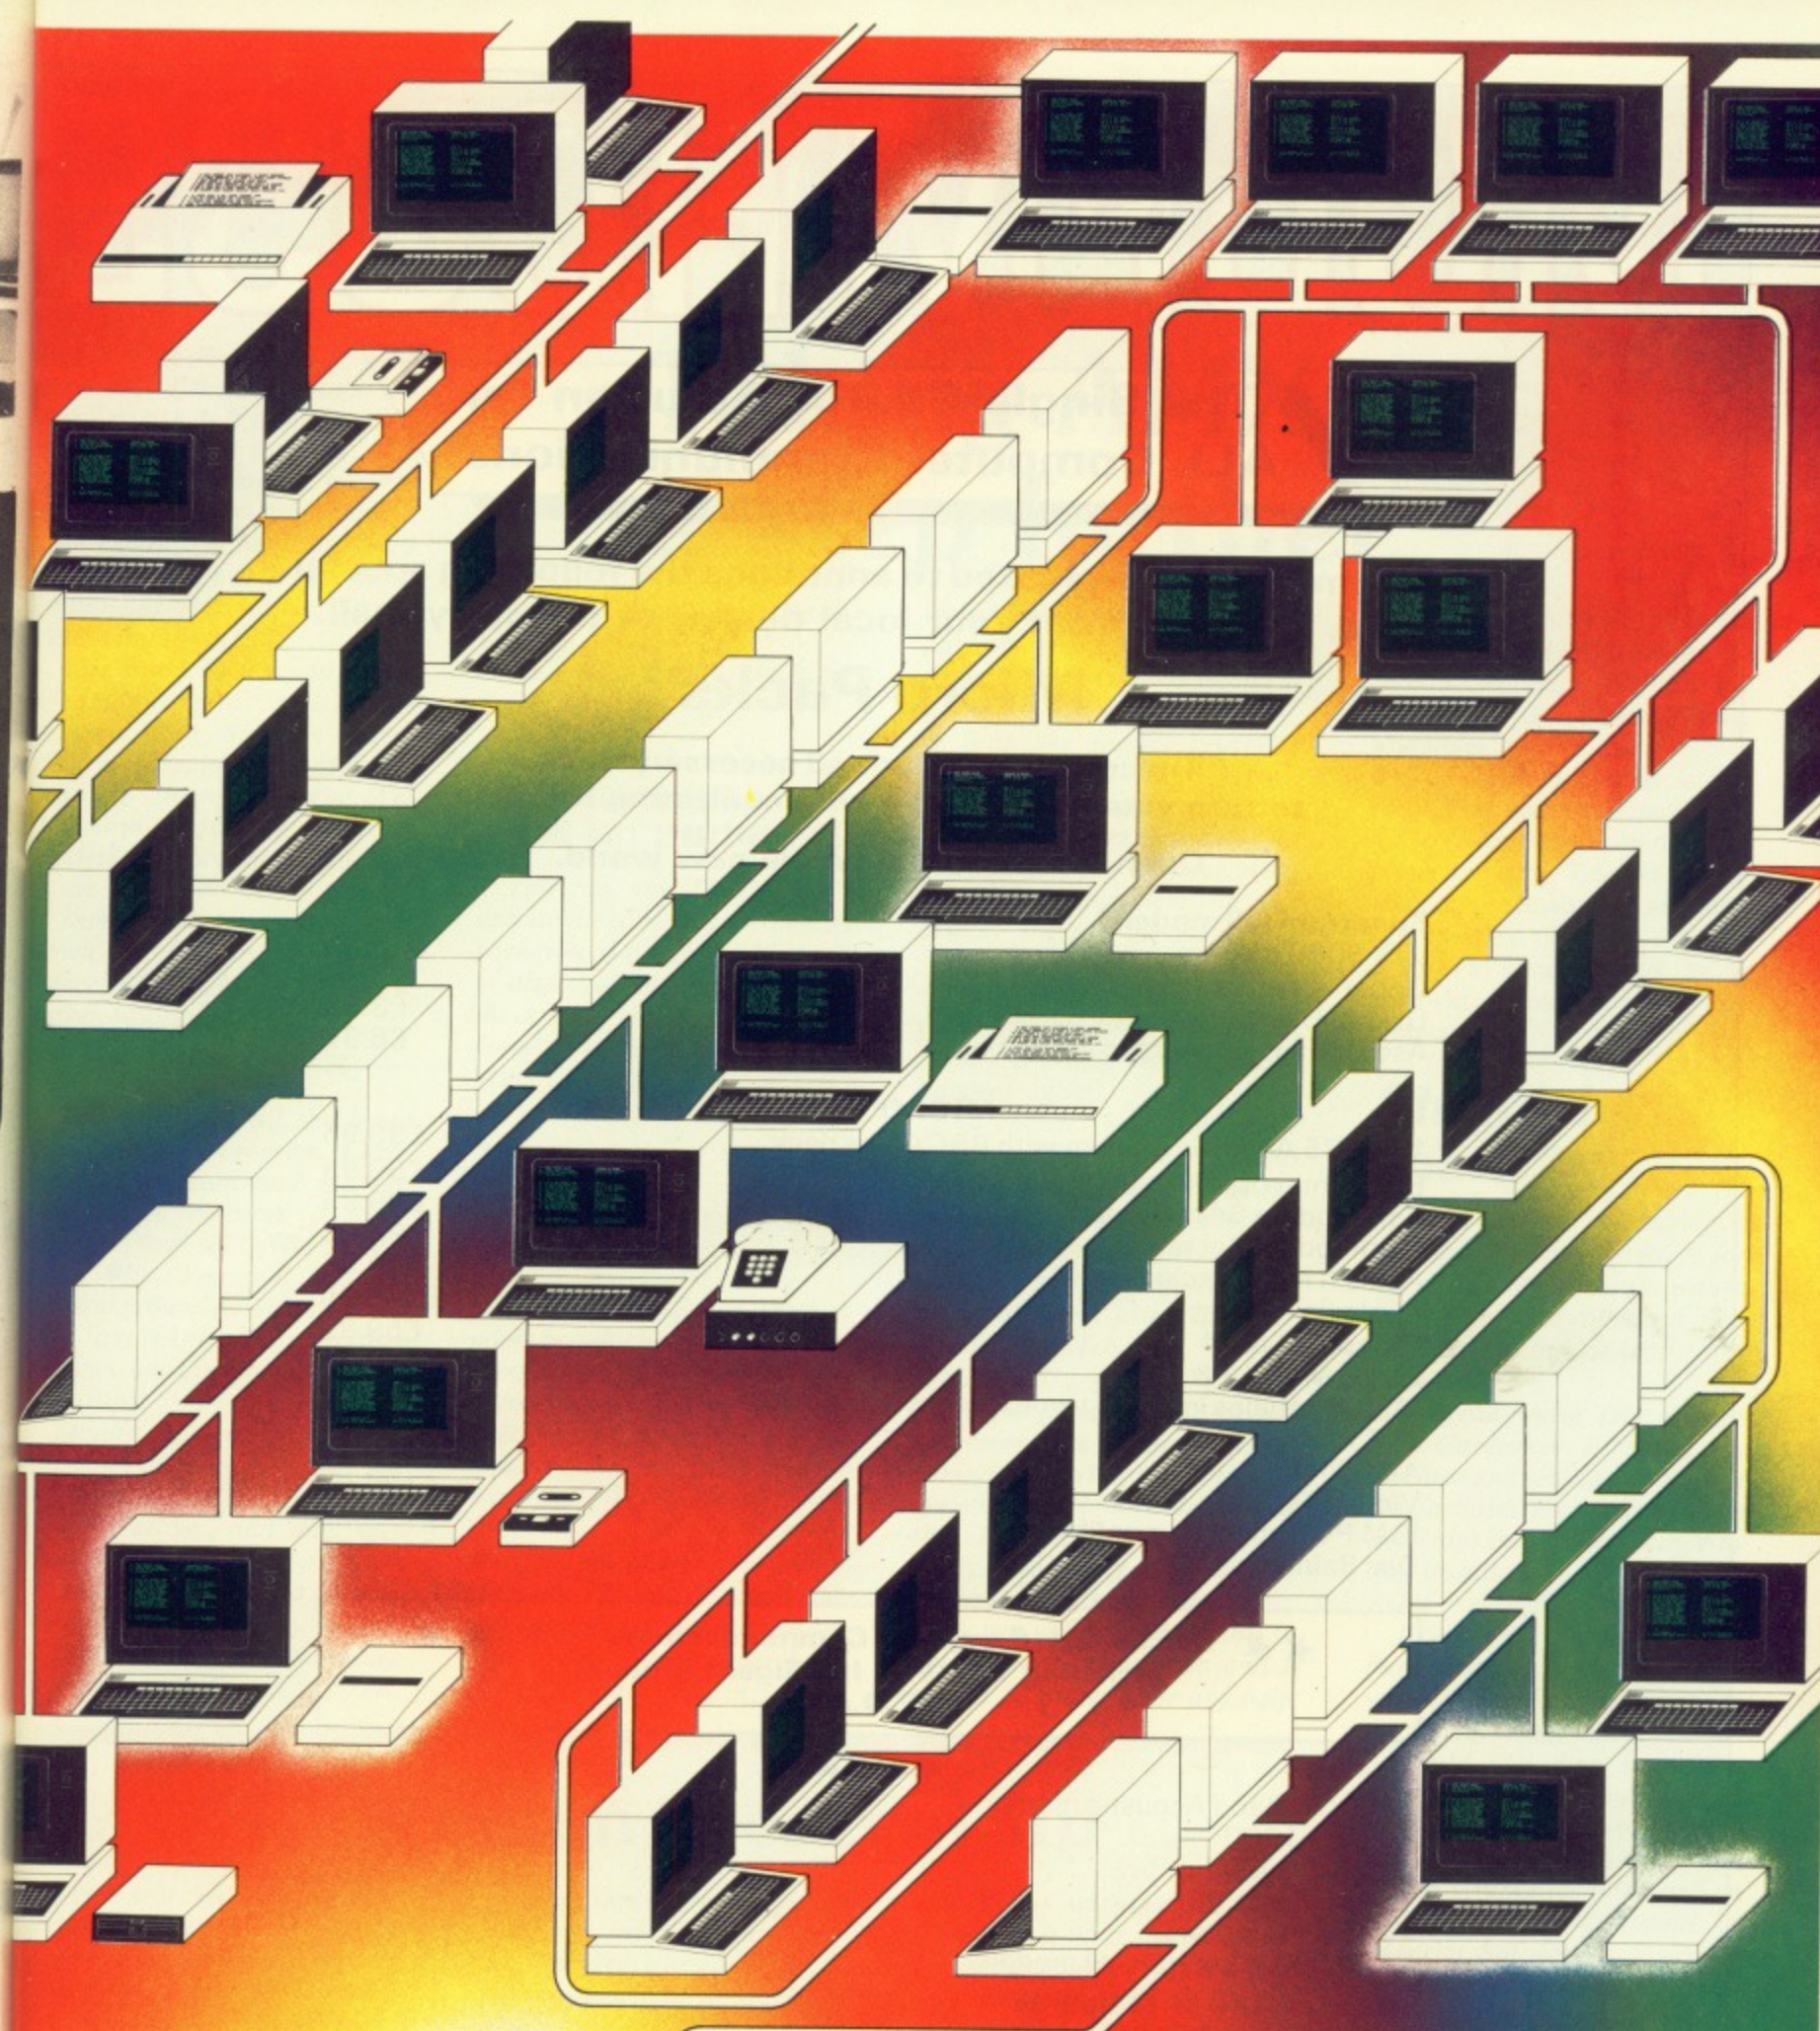

And now we have E-NET series 5, still economic for five BBC's ... or more.

It's a cut above any other educational network available.

Even faster than standard E-NET. Introduces extended fileserver features; "Superclients" control workareas within the system; "Hyperclients" use Acorn Z-80 second processor to run CP/M programs.

These are some of the improvements over standard E-NET. Find out all about this most advanced hard disc network, designed specifically for education.

Contact us for full facility details, educational discounts & hands-on demos.

Amcom

34 Carters Lane
Kiln Farm
Milton Keynes
MK11 3ET
(0908) 569212

MODEM HOUSE

**The Single Source Solution for
ALL Computer Communications.**

Modem House are pleased to announce the following special offers, available from your local dealer, or direct by mail.

Micro Packs

All micro packs include all necessary items
to turn your micro into a communicating machine

Open the door to a whole new world.

Spectrum (all models)

VTX 5000 modem	£49.95
Optional extras for use with VTX 5000	
User to User software (on cassette)	£3.95
Ascii format software to link to bullet	£6.95

MICRO PACKS

1200/75 Acoustic modem with BBC Coms pack	£39.95
BBC B micropack	£59.95
Commodore 64 micropack	£99.95
Commodore Pet range	£99.95
Apple II range excluding IIc	£99.95
Apple IIc	£129.95
Dragon 32 & 64	£59.95
Tandy Model 1 & III	£99.95
MSX machines including word processor and database	£199.95
ACT Apricot	£179.95
ACT Sirius	£179.95
Victor 9000	£179.95
IBM PC & most compatibles	£179.95
Dec Rainbow 100	£179.95

★ ★ **Sinclair QL Complete Communications Pack** ★ ★
including V21/V23 Intelligent Modem
P.O.A.

MODEMS

1200/75 Baud Acoustic modem	£29.95
Modem 1000	£49.95
Modem 2000	£54.95
Telemod 3	£139.95
Teletext Adaptors	
TTX 2000 (Spectrum all models)	£129.95

Optional Extras & Spares

BBC (Micronet) Rom	£15.00
IBM PC Colour Rom	£57.50
IBM PC Monochrome Rom	£57.50
IBM PC Hercules Rom	£57.50
Leads	P.O.A.

A complete range of multi baud rate modems are also available at prices ranging from just over £100 to over £2,000. We think it is the biggest stockholding in Europe. Just ring:

Modem House
Computer Communication Consultants.
Iolanthe Drive,
Exeter.
Tel: 0392 69295

MICROMAIL

I TOOK advantage of your excellent offer and bought an AMX mouse. It is a superb piece of hardware and software.

I was soon drawing pictures with the AMX Art program but, after exhausting Mr Chad etc, I found the range of backgrounds somewhat limiting (I don't design buildings).

However I soon found a way of designing my own backgrounds using the icon design program supplied by AMX and loading them into the Art program. For any of your readers who are interested, this is the way to do it:

Run the Art program. Pull down the Options menu and select the *COMMAND. Now enter:

```
*SAVE ICONS0 4800+480
```

This will save all the icons used by the Art program. Leave the Art program and run the icon Design program.

Load your ICONS0 in the usual way. You will find the 32 background textures are in the last eight icons (four textures, one in each quadrant of each icon).

Modify these as you please, but don't change the upper left quadrant of icon 31 or you won't have an eraser, and then save them using the Design program in the usual way as, say, ICONS1.

You will find that each texture is in fact an 8x8 grid of pixels.

Taking AMX Art a step further

This gives plenty of scope for variety.

Now press Ctrl + Break and enter:

```
*LOAD ART
*LOAD ICONS1 4800
*SAVE ART1 1900+3400 1903
```

You can now *RUN ART1 and it will contain your new 32 background textures which will be displayed and can be used as the bricks, etc, were before. — Gerald L. Fitton, Swindon, Wilts.

Teletext troubles

I HAVE a BBC B and Teletext adapter which have operated completely satisfactorily over a number of months.

Recently I purchased a 6502 Second Processor, since when I have had the following problems:

- It is not possible to get a complete Teletext display if the second processor is switched on. The display consists merely of the channel heading, and

instructions to change channel/page have no effect and vanish from the screen after a second or so.

- With the second processor switched off (but still connected) it is not possible to get a complete Teletext display for more than a few minutes. After this period the system will only display the top portion of the screen (in varying amounts) and then goes completely dead (although pressing Break will restore it briefly until the same happens again).

No changes have been made to the equipment other than to replace the original DFS ROM with the DNFS ROM supplied with the second processor.

So far as I can tell, there are no problems in using Basic or Hi-Basic with the second processor.

On the face of it, the second processor does not appear to be compatible with the Teletext system since I have discovered that Teletext will operate normally if, and only if, the second processor is disconnected.

As you will appreciate, this is not a long-term solution and I should be grateful for any help

you can give which will allow me to operate Teletext with the second processor permanently connected. — J.S. Ridler, Pinner, Middlesex.

- The Teletext system is not second processor compatible.

However there should be no problems with Teletext if the second processor is attached and switched off.

There appears to be a hardware fault causing your problem.

Sluggish snail

I AM interested in buying a machine code monitor ROM for my BBC Micro and would appreciate your comments/suggestions on the devices listed below.

I already have Disc Doctor and Caretaker fitted to my machine and realise that some of the facilities provided by these two chips may be duplicated by the installation of a monitor ROM — memory, display etc.

However I still feel that purchasing a monitor ROM would be beneficial as I intend to master (in time!) machine-code.

Could you also suggest a solution to the following problem? A friend at work has a BBC B (1.2 OS, Basic 2) with speech synthesiser fitted and an original copy of Centipede by Superior Software.

The program seems to run correctly except that the Spider, Snail and Fly never appear on the screen.

The program has been tried on another identical machine (1.2 OS, Basic 2, speech synth) with the same results. However on my machine (no speech synth) it runs perfectly.

Machine-code monitor ROMs: Gremlin by Computer Concepts. Exmon 2 by Beebug-

Mornington Crescent tip

I HAVE searched for something fresh to read and act as a hobby for some 20 years and having been disillusioned by the repetitive articles in DIY magazines I was delighted to be able to take some little interest in computing.

Still considering myself a raw recruit I launched into purchase of all dedicated (BBC) periodicals some 19 months ago.

After this period I am convinced that Micro User is the most consistent in its friendly and balanced reporting and program content.

Its support services are also most commendable.

A magazine that caters for all levels of interest must be recommended.

What a delight to see Mike Cook's program "Mornington Crescent". It must be nearly 36 years ago since I first played the board version of this.

I was then working at Northern Polytechnic, Holloway, where the game became a firm favourite with the staff.

Many hours were spent explaining the rules to newcomers so it was particularly pleasing to see how much more succinctly Mike placed these in his program.

Without wishing to be a spoilsport, a tip to the beginner: When prompted to start, make sure you are on a different line to your opponent. This gives you a greater number of variables to play with.

To keep on the right lines without being sidetracked is the real art of the game. — Tony Lawrance, Wigston, Leicester.

- Thank you so much. It really is nice to be appreciated. A lot of the credit, though, must go to our readers. As you can see from Micromail, we get a lot of valuable feedback from our readers — which we act on.

MICROMAIL

From Page 169

soft. Ade by System Software. — G.A. Smith, Kirkby-in-Ashfield, Notts.

PS: Is there any truth in the rumour that Acorn is going to produce a machine later this year that has 64k RAM fitted as standard?

● As you've already deduced, there is a software/speech processor "clash" with the Superior Software game.

Dealers have known about this problem since shortly after the speech processor was released.

The only way around the problem is to go to the dealer who supplied you with the product.

Monitors need to be able to go through programs one step at a time, or to stop where you want it to stop to examine the register and flags. Beebmon and Exmon are simple and effective. Ade is much more complex but its macro assembler makes it suitable for larger programs.

For first news of the new machine, see Page 23.

Right on track

THE Atari Trak-Ball was well worth waiting for. It is superbly engineered, made in USA, not Taiwan, and I note is a superior model to that originally illustrated.

You obviously went to a lot of trouble and I suspect that readers like myself have now ended up with something worth a lot more money. — George Nicholson, Chelmsford, Essex. ● We're rather pleased with it, too. In fact, we've just launched a magazine called Atari User. How's that for being impressed with a product?

Working Miner

MANY thanks for your prompt response to my problem with the listing of Miner Bill. I was much abashed to discover the very

Recovering lost listings

IN your reply to a letter by John Unsworth in the February 1985 edition of The Micro User you said that there was no way of recovering all of his unfortunately wiped off program.

I agree that you cannot recover every single line, but suggest this method which will hopefully recover as much as possible.

First type in Listing 1 then save the machine code using:

```
*SAVE"Code" C00+49
```

Next position your tape just before the first remaining block on the tape. Then type in:

```
*OPT2,0  
*LOAD**
```

and load in the remaining blocks of your program. It is important that you ignore all "Bad Program" errors as we are working with a chunk of code, not a Basic program for the moment. Then type in:

```
*OPT2,1  
*RUN"Code"
```

and run the machine code program you saved earlier (still ignoring "Bad Program" errors). Next type in:

```
PRINT*!&70 :REM (to get aaaa)  
PRINT*!&74 :REM (to get bbbb)
```

```
*SAVE"Prog" aaaa bbbb
```

Then load in your earlier copy of your program (the one that has not been partially wiped off) and enter:

```
PRINT*(TOP-2): REM  
(to get cccc)
```

```
*LOAD"Prog" cccc  
RENUMBER  
LIST
```

and hey presto, you have the salvaged lines of the later program joined onto the first program.

I hope that this has not been too hard to follow and I wish you luck. — Oilly Stephens, Chelmsford.

10 REM LISTING 1	180 LDA &14	350 STA &75
20 REM	190 STA &71	360 LDY #0
30 REM BEGINNING AND	200 LDY #0	370 .Loop2 LDA (&74),Y
40 REM END FINDER	210 .Loop1 LDA (&70),Y	380 CMP #255
50 REM OLLY STEPHENS	220 CMP #13	390 BEQ Yes2
60 REM	230 BEQ Yes1	400 LDA #1
70 REM	240 LDA #1	410 CLC
80 FOR opt% = 0 TO 3	250 CLC	420 ADC &74
90PX=&C00	260 ADC &70	430 STA &74
100[270 STA &70	440 LDA #0
110 OPT opt%	280 LDA #0	450 ADC &75
120 LDA #0	290 ADC &71	460 STA &75
130 STA &70	300 STA &71	470 JMP Loop2
140 STA &72	310 JMP Loop1	480 .Yes2 RTS
150 STA &73	320 .Yes1 LDA &70	490]
160 STA &76	330 STA &74	500 NEXT
170 STA &77	340 LDA &71	510 END

basic (no pun intended) errors that I overlooked in my listing.

I can only apologise for the trouble I put you to. In mitigation I can say that I wrote to you only after spending many hours myself and under pressure from my young son to solve the dilemma.

However I have taken your advice and run the program correcting each error as it arose, culminating in a fascinating game. — Anonymous.

● We're always glad to help uncover people's typing errors if we can. Of course we can't provide a comprehensive debug-

ging service, but if you enclose an s.a.e. and are patient — we get a lot of mail — we might be able to point you in the right direction.

The listings we publish are correct — if a program won't run, it's odds-on you've slipped up typing it in!

Good service

I WOULD like to express my appreciation at the helpful service given by Aries.

I had purchased a B20 board and already had a sideways RAM from Solidisk. This worked fine until I bought a B12 sideways ROM board. They wouldn't work together.

When I contacted Aries, they were very helpful and over a period of a month exchanged bits and pieces until in the end they had devised a hardware modification which enables a B12 to work with the Solidisk sideways RAM board (SWR 16 & 32 only).

This gives 12 ROMs plus two sideways (if SWR 32 is used) slots at E and F. This is much

● Want to write to Micromail? The address is: Micromail, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

more convenient than external ZIF sockets.

I understand that this modification is now available at a very reasonable cost and details are available from Aries Computers. — Malcolm Jones, Mulbarton, Norwich.

● With the coming shake-up in the micro world, it's becoming apparent which are the firms likely to survive... those who, like Aries, treat their customers as clients — not just sources of cash!

★ ★ ★

UNTIL last week I owned a single Cumana CS100 disc drive and was extremely pleased with its performance. So, when I required to expand my disc system, I had no hesitation in choosing another Cumana disc drive unit.

My choice was a CS400. (I originally wanted a CS400E, but delivery time persuaded me otherwise.)

After resetting the link in the CS100 to Drive 1 and connecting the ribbon cable to both drives, the CS100 failed to LOAD/CHAIN or even BACKUP a program. The time was 5 o'clock on a Friday night and so I hesitantly telephoned Cumana.

A Mr Hodgkiss, who answered, asked me for my telephone number to enable him to call me, therefore keeping down my telephone costs.

After an hour on the telephone, the problem was resolved.

If any other reader is experiencing like problems, the answer is:

● Remove the resistor RA 11 from the CS100. This is situated beside the drive links.

● On the CS400 power supply board there are two solder pads at the opposite end on the PCB from the 40/80 track switch leads. These pads require soldering together.

I would like to say a public thank-you to Cumana for their professionalism and excellent customer relationships. — Bill Simpson, Lytham, Lancs.

● Well done, Cumana. Service of this calibre can only win you more customers.

```

10 REM:*****
*****
20 REM:* Break protection
on *
30 REM:*****
*****
40 REM:.....by P.Lee..
.....
50 REM:A$ should contain
the command
60 REM:you wish executed
on BREAK or
70 REM:CONTROL BREAK. It
can be
80 REM:an Operating syst
em call (*)
90 REM:command, or a str
aightforward
100 REM:OLD !M RUN!M to p
revent
110 REM:unauthorised esca
ping from
120 REM:the program.
130 REM:For BASIC/0.5 com
mands
140 REM:which use quotes,
A$ must be
150 REM:changed to contai
n double

```

```

160 REM:quotes.
170 REM:eg. A$="CHAIN *!M
ENU"!M"
180 REM:If the string doe
s not
190 REM:contain a valid c
ommand an
200 REM:error will be pro
duced.
210 REM:*****
*****
220 A$="*DRIVE !M"
230 B$="*K.0":C$=B$+A$
240 P%=&A00
250 string%=P%+&15
260 $string%=C$
270 FORI%=0TO3STEP3
280 *FX247,76
290 *FX248,0
300 *FX249,10
310 P%=&A00
320 !OPT I%
330 BCC command
340 RTS
350 .command
360 LDX#string% MOD &100
370 LDY#string% DIV &100
380 JSR&FFF7
390 LDA#138

```

```

400 LDX#0
410 LDY#128
420 JSR&FFF4
430 RTS
440 ]
450 NEXT
460 REM:*****
*****
470 REM:The command is in
serted into
480 REM:function key 0. T
his is
490 REM:called up each ti
me BREAK is
500 REM:pressed.
510 REM:As it stands, A$
executes
520 REM:a *DRIVE ! command.
530 REM:Changing A$ allow
s you to
540 REM:execute any comma
nd(s) you
550 REM:want.
560 REM:A good use is to
change to
570 REM:another screen mo
de.
580 REM:*****
*****

```

I WONDER if you would be interested in publishing this small program which I wrote to overcome an annoying feature of having both 3in and 5½in drives.

Some of my programs are on one format, others on the other, and as both drives are connected in tandem (3in is drive 0, larger is drive 1) I was annoyed at forever having to type *DRIVE 1 after each reset to access the larger discs.

So I wrote the following program, which does the job after every Break or Control+Break.

There is no limit to the way the program can be tailored to suit individual requirements. Any legitimate command may be put into A\$, and this will be carried out even after a hard re-set.

An obvious and simple routine would put OLD!M RUN!M into A\$ so that if BREAK were pressed, the program would automatically run, and this,

together with the use of *FX200,1 (which disables Escape) would afford some degree of program protection.

The way it works is, on pressing the Break key, to make the computer jump to the address held in locations &288,&289 — in my case I chose &A00 as relatively safe on both a disc and tape system — and execute the code held there.


The code at &A00 is very short: It firstly points to the address of A\$, and then treats this as a star command by jumping to the Command Line Interpreter at &FFF7. It then puts the value of the function key 0 in the buffer and executes it — carrying out the command held in A\$. And this happens each time Break is pressed.

The reason for the BCC instruction is because on

Break, the computer executes the code twice, once with the carry flag at zero, the other time at 1. So to prevent execution of the command twice in succession it is necessary to check this condition and only act once. — Peter Lee, Mexborough, S. Yorks.

Locating blanks

THOSE of us who have only a cassette filing system seem to be expected to have an inexhaustible supply of blank tapes or to have so organised ourselves that we always have a tape handy which we have previously wound on to a blank section prior to



MICROMAIL

From Page 171

loading a program.

How many of us have been asked, when running a proprietary program, to load a tape ready to record a file and have found that we have no way of locating a blank section.

In my programs I always include the following code which will allow a blank section to be found before recording. I wish more software writers would do the same.

Unfortunately, it cannot be included in a procedure or function, but this is not really a drawback.

```

70 PRINT "Insert cassette
and press PLAY" "Files will
be listed. When you
find" "the place you want
to record" "press Escape."
80 ON ERROR GOTO 100
90 *CAT.
100 ON ERROR REPORT:STOP
110 PRINT "Press REC and
PLAY," "then any key to
continue. Be ready" "to
press RETURN when the
message" "appears."
120 G% = GET
130 PROC write
140 .....etc
....
....
500 DEFPROC write
510 X% = OPENOUT (File%)
520 .....etc

```

- D.G. Coleman, Ilford, Essex.

● This seems to be a very useful routine and we hope many cassette-users gain as much benefit from it as Mr Coleman obviously has done.

Shifting fields

REGARDING the shifting fields problem in April Micromail, there is a simple explanation.

The reason for the shift in field is due to the way the printed bytes are counted.

The zero page location &1E counts the printed bytes per line

but can only count up to 255 then zeros.

As 255 is not a multiple of 10 the field looks as if it had changed - but it has not, it is the byte count that is wrong.

The program below will demonstrate this:

```

10 FOR A=0 TO 20
20 PRINT ?&1E,A;
30 NEXT A

```

When you run this program you will notice that when A=13 count=4 and not 260 which would be required for correct field position.

Add line below to solve problem.

```

15 IF ?&1E<10 THEN ?&1E=0

```

I hope this answers your question. - A. Cook, Renfrew.

● We are grateful to Mr Cook for answering this problem. His was one of many replies and naturally we can't publish them all, but we do thank all the people who responded.

Mini giants

THANK you very much for Mini Office - the best word processor I have, not to mention spreadsheet, database and graphics.

Please, please could you tell me how you got those letters as big as you did? You see I am writing a program to do my dad's telephone numbers on. I intend to start each section with one of those fabulous double height and double width letters then the rest in double height letters.

I will be, as usual, awaiting the arrival of your fabulous magazine hopeful of a reply.

Incidentally, how did you get the REMs in your loader program to stop the listing? - Jamie Gilbert, Truro, Cornwall.

● Thank you for your letter. The techniques you require are quite complex, but here is a listing of a double height routine that may help you. Used in Mode 5 it gives the same results as Mini Office.

A simple way to stop listings is to put the first line of your

program:

```
10 REM ****
```

then type in:

```
? (PAGE+6)=21
```

This puts a code in the first

```

10 REM DOUBLE HEIGHT
20 REM WORKS IN MOST MOD
ES
30 INPUT "TYPE IN WORDS
" W$
40 MODE 5
50 PROCASS
60 PROCDBL (W$,20):REM (W
ORDS,Y POS)
70 END
80 DEFPROCDBL (A$,Y%) PRIN
TTAB ((19-LENA$)/2,Y%);FOR
CHZ=1 TO LEN A$:AZ=ASC MID$
(A$,CHZ,1):CALL dNEXT:ENDPR
OC
100 DEFPROCASS DIM MCX100
110 FOR IX=0 TO 2 STEP 2
120 PX=MCX
130 [OPTI%:d STAB:LDA #1
0
140 LDX #b AND 255:LDY #b
DIV 256
150 JSR &FFF1:LDA #0:STAJ
160 .d1 LDA #23
170 JSR &FEE:LDAj:ORA #2
24:JSR &FEE:LDAj:ASLA:ASLA
:TAX:LDY #4
180 .d2 INX:LDA b,X:JSR &F
FEE:JSR &FEE:DEY:BNE d2:IN
Cj:LDAj
190 CMP #2:BNE d1:LDX #4:
.d3 LDA b,X
200 JSR &FEE:DEX:BPL d3:R
TS
210 .b1]
220 j=b+9:s=j+1
230 $s=CHR$11+CHR$225+CHR
$8+CHR$10+CHR$224:NEXT:ENDP
ROC

```

character in the REM to turn the VDU off.

If...

IF you can keep your head while all about you have sent their missiles homing in on you;

If you can hyperspace before the Thargoids have zapped your

front shields and your rear shields too;

If you can down a Python, Krait or Mamba with any laser - left, right, front or rear;

If you can work the keyboard and the joystick and at the same time sip a can of beer;

If you can trade with anarchies and feudals and treat their hordes of pirates with disdain;

If you can sell them cargoes of computers - bought at a pittance - for enormous gain;

If you can make a heap of all your winnings and risk it at one turn of pitch and toss;

Then fight through to a Coriolis station and save your game before the battle's lost;

If you can search for military lasers, to give your Mark Three Cobra extra clout;

And stick to your resolve and keep on searching - though every planet seems to have sold out;

If you can rise from Harmless up to Deadly before the course of seven days is run;

Yours is the galaxy and all that's in it;

And, which is more, you'll be Elite, my son!

Commander Kipling
(Harmless).

But I do make an exceedingly good cake!

- Tim Kik, Hazel Grove, Stockport.

Shinwa pleases

HAVING read three interesting letters (one in January, two in April) concerning (knocking?) the Shinwa CP80 printer, I must write in its defence.

I have a Model B 1.2 OS, Acorn DFS, disc drives, and a board full of ROMs, plus a CP80 printer.

The odd bits of "corrupted" English in the user manual are no more than that in amateur radio manuals, car manuals, hi-fi and the like, and don't put me off at all.

The programming examples are for something like the TRS 80 but there is no problem on the BBC by intelligent application of

our rear
 a Python,
 any laser
 rear;
 keyboard
 the same
 de with
 and treat
 tes with
 argoes of
 a pittance
 ap of all
 it at one
 gh to a
 ave your
 s lost;
 military
 rk Three
 olve and
 though
 ave sold
 harmless
 ource of
 and all
 ou'll be
 Kipling
 rmless).
 edingly
 Grove,

the printer control codes.

I set the DIP switches correct (for me) the first time including the slashed zeros.

All the control codes are listed in the user manual and all work well.

The prime difference between the CP80 and the Epson is the pound sign, which is no problem, and the price.

The bit-image mode is handled well by D&A Computers GDUMP including tones, and DESIGN.

The large size plot tends to be elongated as it does with other printers except the Epson. I believe that Watford's DUMP-OUT has even corrected this.

As well as domestic use, I have used the printer, together with Wordwise and now Wordwise Plus, extensively with my work in the pilot training side of civil aviation and have had no problems at all with either reliability or quality of printout.

I hope that Mr Jupp and Mr Hawthorne have overcome their teething troubles and are now enjoying and using this versatile workhorse which I can recommend to anyone. — **Captain B. Armstrong, Horsham, W. Sussex.**

Changing channels

HAVING tried out the machine code "Interrupt" routine featured last December in your Carol program in one of my own programs, I wished to investigate further.

Could you tell me how to get the music to play on a different channel other than Channel One, or even on more than one channel, so as to get harmony?

Also, if the machine code were to be assembled at a location other than at &900 (Page 9), would it be possible to load and save programs — even machine code programs — while the music plays on, as featured in a lot of commercial games that play music as they load the main program?

Thanks for a super magazine — it's a great help, even for relative experts like myself, as well as complete novices, like my

dad! — **Mark Aguera, Hampton, Middlesex.**

● Line 480 sets the sound channel to 1 and line 500 sets the volume to maximum. You can easily alter these if you wish but to produce two or three-part harmony would be quite difficult unless you are an expert machine code programmer.

Programs can be loaded and saved provided that the memory used by the machine code or data does not clash with the incoming or outgoing program.

Faster circles

I READ with interest the plea for increased speed in the letter by S.J. Stewart in the February 1985 issue of *The Micro User*. It is possible that I may be able to help here.

For some time now I have been developing a new approach which, among other things, calculates sines, cos, tans etc without invoking the Basic subroutines.

As the fundamental algorithm is very simple, considerable increase of speed may be obtained.

I include a listing for a fast circle generator as a demonstration.

It will be noticed that, although sines and cosines are involved, no calls have been made to the Basic subroutines.


This program prompts for a scale — which is an integer in the range 1-6 — which determines the number of points plotted.

A circle is drawn and also the time taken is printed. Typing C for continue returns to the prompt so that another scale may be tried.

Incidentally, scale 7 gives chaos because it breaks down the twos complement sign convention.

I noticed Mike Cook did an article on circle generation in the December issue. He might be interested in trying this for size.

However this is only a very simple example of the technique. It is possible by setting up suitable configurations of the



... the magazine that tells you everything you want to know about plugging your BBC Micro into the exciting world of telecomputing!

Britain's pioneering communications magazine is full of helpful advice about all the fascinating things you can do when you link your BBC Micro to your telephone.

In the latest issue, now on sale, are special features on...

- How to cut down your phone bill: Taking the mystery out of the phone charging system.
- Start of a guided tour of the massive American database, Knowledge Index.
- Telecom Gold: What it is, what it does, and how much it can cost.
- Round-up of all the latest advances in the development of databases for schools.
- Facts and phone numbers of all the latest UK bulletin boards.
- Why PSS is the most economical way of accessing systems all over the world.
- Communicating with a portable: a detailed survey of all the latest lap-held micros.
- Guide to the latest telesoftware you can download from Prestel.
- Pages of up-to-the-minute news of happenings in the teletext and viewdata industries.
- Setting up a viewdata system: a first-hand report of how it's done.
- Communications in the City: a look at what can happen when financiers go on-line.

TeleLink deliberately steers away from technicalities to present the facts in vivid detail — to help you play YOUR part in the communications revolution that is going to change all our lives.

I would like to subscribe to TeleLink.

- | | | |
|---|------|-----|
| <input type="checkbox"/> UK | 5001 | £12 |
| <input type="checkbox"/> Eire | 5002 | £13 |
| <input type="checkbox"/> Overseas surface | 5003 | £20 |
| <input type="checkbox"/> Airmail | 5004 | £40 |

I wish to pay by

- Cheque payable to Database Publication Ltd.
 Access. Card no. _____
 Barclaycard/Visa. Card no. _____
 BLOCK CAPITALS PLEASE

Name _____ Signed _____

Address _____

You can also subscribe via Prestel — key Page *2582011

POST TO: TeleLink, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

or order by telephone quoting credit card details.

061-480 0171
(24 hours)

MU6

MICROMAIL

```

10 REM CIRCLE GENERATOR
20 REM P.L OWEN
30 OSWRCH=&FFEE
40 DIM PROG &200
50 FOR optX=@T02 STEP 2
60 PX=PROG
70 [OPT optX
80 .START LDA XL
90 STA I1
100 LDA XH
110 STA I2
120 BPL L6
130 LDA @&FF
140 JMP L7
150 .L6 LDA @0
160 .L7 STA I3
170 LDX N
180 .L8 BEQ L9
190 ASL I1
200 ROL I2
210 ROL I3
220 DEX
230 JMP L8
240 .L9 LDA YL
250 CLC
260 ADC I2
270 STA YL
280 LDA YH
290 ADC I3
300 STA YH
310 LDA YL
320 STA I1
330 LDA YH
340 STA I2
350 BPL L10
360 LDA @&FF
370 JMP L11
380 .L10 LDA @0
390 .L11 STA I3
400 LDX N
410 .L12 BEQ L13
420 ASL I1
430 ROL I2
440 ROL I3
450 DEX
460 JMP L12
470 .L13 LDA XL
480 SEC
490 SBC I2
500 STA XL
510 LDA XH
520 STA XH1
530 SBC I3
540 STA XH
541 CLC
542 ADC XH1
543 STA XH2
550 ROR XH2
551 LDA XH
552 EOR XH1
553 AND @&00
554 EOR XH2
555 STA XH2
660 .C1 LDA X0
670 CLC
680 ADC XH2
690 STA X
700 LDA X0+1
710 ADC @0
720 STA X+1
730 LDA XH2
740 BPL L1
750 DEC X+1
760 .L1 LDA Y0
770 CLC
780 ADC YH
790 STA Y
800 LDA Y0+1
810 ADC @0
820 STA Y+1
830 LDA YH
840 BPL L2
850 DEC Y+1
860 .L2 LDX @0
870 .L3 CPX @6
880 BEQ L4
890 LDA DRW,X
900 JSR OSWRCH
910 INX
920 JMP L3
930 .L4 LDA SL
940 SEC
950 SBC @1
960 STA SL
970 LDA SH
980 SBC @0
990 STA SH
1000 LDA SL
1010 BNE L5
1020 LDA SH
1030 BEQ EXIT
1040 .L5 JMP START
1050 .EXIT RTS
1060 ]
1070 XL=PX
1080 XH=PX+1
1090 YL=PX+2
1100 YH=PX+3
1110 XH1=PX+20
1120 XH2=PX+21
1130 I1=PX+4
1140 I2=PX+5
1150 I3=PX+6
1160 N=PX+7
1170 X0=PX+8
1180 Y0=PX+10
1190 DRW=PX+12
1200 X=PX+14
1210 Y=PX+16
1220 SL=PX+18
1230 SH=PX+19
1240 XH1=PX+20
1250 XH2=PX+21
1260 PX=PX+22
1270 NEXT
1280 MODE 4
1290 VDU 26
1300 CLS
1310 ?XL=@: ?XH=127:
?XH1=127
1320 ?YL=@: ?YH=@
1330 ?DRW=25
1340 DRW?1=5
1350 ?X0=244
1360 X0?1=1
1370 ?Y0=244
1380 Y0?1=1
1390 MOVE 500+?XH,
500+?YH
1400 INPUT "SCALE "SCALE
1410 ?N=SCALE
1420 SCL=2^SCALE
1430 steps=1600 DIV SCL
1440 ?SL=steps MOD 256
1450 ?SH=steps DIV 256
1460 TIME=@
1470 CALL PROG
1480 PRINT "TIME TAKEN",TI
ME?"POINTS",steps
1490 IF GET$="C" THEN
1300
1500 END

```

From Page 173

basic algorithm to solve a very wide range of problems.

I have, for instance, a working program which simulates a second order servo system. This, compared with a conventional Basic program, gives an increase in speed of about 40 to 1. — P.L. Owen, Malvern, Worcs.

Fiddling

I HAVE translated some music from script to my BBC B that is a solo concertino for a violin. The trouble is the sound does not

sound like a violin. So does anyone know of an ENVELOPE statement that sounds like a violin? — Anthony Stewart, Harrogate, N. Yorks.

● This is another for our readers. Have we a "micro-Menhuin" out there with the answer?

ROM selection

IN February's Micro User, you have an Ultimate Disassembler, with which, you say, "the

contents of the paged ROMs can be examined". Also: "R allows any of the paged ROMs to be selected for disassembling or dumping".

But how exactly is this done?

I can see no way of either disassembling the ROMs or dumping them to disc.

I am curious about how the ROMs do the things they do and your program seemed an excellent way to find out. However I am in no better position to find out than when I started typing in your program.

It is an excellent program as it stands, but please could you let

me know how to go about disassembling sideways ROMs or dumping them to disc. — A.K. Sowter, Epping, Essex.

● Look at the titles of the ROMs with option W — this will list the titles with the socket number.

Select the ROM to look at with option R followed by the socket number.

Then memory dump (option M) or Disassemble (option D) from address &8000 — up to &9FFF if an 8k eprom (it will repeat itself from &A000 to &BFFF) or up to &BFFF if it is 16k long.

3D COMPUTERS



ACORN SPECIALISTS FOR OVER 4 YEARS

EXTENSIVE RANGE OF BBC MICRO HARDWARE & SOFTWARE FOR LEISURE & BUSINESS AT ALL BRANCHES

DISC DRIVES by Cumana, Midwich, AMS
MONITORS by Microvitec, Philips, Fidelity, Tatung, Sanyo
PRINTERS by Epson, Juki, Canon, Shinwa, Seikosha, Star
ADD-ONS Joystick, AMX Mouse, Tracker Ball, Grafpad, Light Pen, ROM/RAM PCB, Modem etc.
ROM SOFTWARE by Computer Concepts, Beebugsoft, Vine Micros, Acorn, Gemini
CONSUMABLES Printer Paper, Ribbons, Diskettes, Cassettes etc.
£1,000 INSTANT CREDIT

TOLWORTH
230 Tolworth Rise South
01-337 4317

SUTTON
30 Station Road, Belmont
01-642 2534

EALING
114 Gunnersbury Ave.
01-992 5855

NEWBURY
26 Stanley Road
0635 30047

BEEB BODY BUILDING PACKS ORDER FORM

Pack 24 contents

- 12in of 1/16in brass tube.
- 3in of 3/32in brass rod.
- 3in of 1/4in brass tube.
- 2 table-tennis balls.
- 1 screw stopper.
- 2in of copper-foil.
- 1.25in x 3in aluminium for the bracket.
- 1 cable clip.
- 1 680R resistor.
- 1 HOA 2001 optical switch.
- 1 plastic mounting box.
- 4 6BA fixing nuts and bolts.

Please send me: (✓) £
 Pack 24 @ £8.00 _____
 Pack 1 transition board @ £10.50 _____
 Pack 2 ribbon cable + 2 sockets @ £10.50 _____

TOTAL _____

Overseas orders please add £4 for airmail delivery.
 Prices include VAT and P&P

Please make cheques payable to Musbury Consultants and send to
 Musbury Consultants, 8 Fairhill, Helmshore, Rossendale, Lancs BB4 4JX.

Name _____

Address _____

The order forms for Packs 19 and 20 may be found on page 189.
 Prices for other packs may be obtained from earlier issues of The
 Micro User or from Musbury Consultants. (Please send SAE).

We're a soft touch- for BBC micro ROM and DISC software

BBC MICRO ROM SOFTWARE

PRODUCT CODE		ROM PRICE INC VAT	£
1000	View Word Processor - Acorn	58.00	<input type="checkbox"/>
1001	Viewsheets Spreadsheet - Acorn	58.00	<input type="checkbox"/>
1002	1.2 Operating System - Acorn	10.00	<input type="checkbox"/>
1003	Basic 2 for BBC Micro - Acorn	34.00	<input type="checkbox"/>
1004	DNFS Chip (DFS 1.20-NFS 3.60) - Acorn	28.75	<input type="checkbox"/>
1010	Wordwise - Computer Concepts	42.00	<input type="checkbox"/>
1011	Disc Doctor - Computer Concepts	32.00	<input type="checkbox"/>
1012	Termi - Computer Concepts	32.00	<input type="checkbox"/>
1113	Graphics - Computer Concepts	32.00	<input type="checkbox"/>
1114	Gremlin - Computer Concepts	32.00	<input type="checkbox"/>
1115	Printmaster - Computer Concepts	32.00	<input type="checkbox"/>
1116	Caretaker - Computer Concepts	32.00	<input type="checkbox"/>
1117	Communicator - Computer Concepts	65.00	<input type="checkbox"/>
1125	Toolkit - Beebugsoft	26.00	<input type="checkbox"/>
1126	Exmon - Beebugsoft	26.00	<input type="checkbox"/>
1130	Datagem Database - Gemini	125.00	<input type="checkbox"/>
1131	Starbase Database - GCC	86.00	<input type="checkbox"/>

BBC MICRO DISC SOFTWARE

PRODUCT CODE		DISC PRICE INC VAT	£
1170	Spellcheck - View 40T Beebugsoft	18.00	<input type="checkbox"/>
1171	Spellcheck - Wordwise 40T Beebugsoft	18.00	<input type="checkbox"/>
1174	Masterfile - Beebugsoft 40T	18.00	<input type="checkbox"/>
1175	Masterfile - Beebugsoft 80T	18.00	<input type="checkbox"/>
1176	Design - Beebugsoft 40T	18.00	<input type="checkbox"/>
1178	Teletext - Beebugsoft 40T	12.00	<input type="checkbox"/>
1185	Inv & Sales Ledger Accounts - Gemini	98.00	<input type="checkbox"/>
1190	B-Base - Clares	24.00	<input type="checkbox"/>
1192	Replica II - Clares	12.00	<input type="checkbox"/>
1194	The Key - Clares	12.00	<input type="checkbox"/>
1200	Bel Base + Mailshot - Bel Tech	18.00	<input type="checkbox"/>
1210	Mini Office - Database Pub 40T	7.95	<input type="checkbox"/>
1211	Mini Office - Database Pub 80T	7.95	<input type="checkbox"/>

Please tick (✓) each item required. If more than one required, state number.

I enclose Cheque/P.O. for £
 Add Postage & Packing up to 3 items £1.00 for UK, £3.00 for Overseas. For 3 to 6 items,
 add £2.00 for UK, £6.00 for overseas. Personal callers always welcome.

I prefer to pay ACCESS/BARCLAYCARD (Delete as necessary)

Card Number:

Name:

Address:

Open from 9 - 5 weekdays, 9 - 5 Saturdays

Prices subject to change without notice and subject to availability.

Viglen

Post to VIGLEN COMPUTER SUPPLIES SOFTWARE DEPARTMENT
 UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA

Put an end to inefficient, slow cassette tape storage





Speed your data access with a TEAC disk drive from Viglen

COMPUTER SUPPLIES

MITSUBISHI and CANON 400K and 800K 40/80 DRIVES also available at even more competitive prices - PLEASE RING.

Comprehensive, fact-filled, 53 page manual including techniques of loading from cassette Not available elsewhere

ACORN DNFS KIT also available £98 inc VAT (only with purchase of drive)

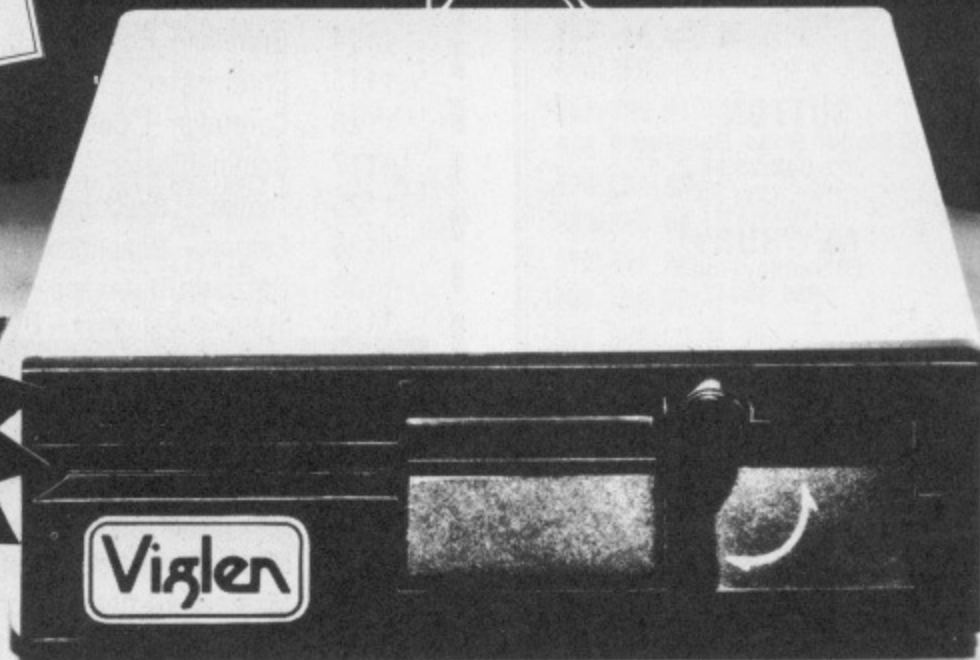

Replacing your cassette with a disk drive means data access in seconds! Prices include VAT, Formatting Disk, User Manual, Case and Leads.

All disk drives are supplied complete with Ribbon Cable to connect to BBC Micro - Power Cable to connect to BBC Micro - Comprehensive Manual - Formatting and utilities disc which includes 13 useful utilities including • formatting • verifying • screen dump • disassembler • generating 62 files, etc.

	Incl VAT	Excl VAT		Incl VAT	Excl VAT
SINGLE DRIVES			DUAL DRIVES		
40 TRACK 100K	£119.00	£103.45	40 TRACK 200K	£238.00	£206.96
SINGLE SIDED 40/80 TRACK 200K	£129.00	£121.17	SINGLE SIDED 40/80 TRACK 400K	£258.00	£224.35
SINGLE SIDED SWITCHABLE 40/80 TRACK 400K	£169.00	£146.95	SINGLE SIDED SWITCHABLE 40/80 TRACK 800K	£338.00	£293.91
DOUBLE SIDED SWITCHABLE INTEGRAL POWER SUPPLY FOR SINGLE DRIVE	£25.00	£21.74	DOUBLE SIDED SWITCHABLE INTEGRAL POWER SUPPLY	£40.00	£34.79
SUPPLEMENT FOR SINGLE DRIVE IN DUAL CASE WITH DUAL DRIVE POWER SUPPLY	£49.00	£42.61	FOR DUAL DRIVE EXTERNAL CASED POWER SUPPLY capable of driving Dual Slimline Drives	£49.00	£42.61

Viglen

COMPUTER SUPPLIES
UNIT 7 Trumpers Way,
Hanwell W7 2QA.
Tel 01-843 9903.

All prices correct at time of going to press and all offers subject to availability.



Full Twelve Months Guarantee

• Orders welcomed from Educational Establishments and Government Departments. Disc Drives: Test Bureau recommended for educational use.

How to order

By post: To purchase any of the items simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to: VIGLEN COMPUTER SUPPLIES and post to above address. Please add £12 for carriage. Credit Card orders usually despatched within next day.

By telephone: Ring (01) 843 9903. Credit Card Holders (Access/Barclaycard only) can purchase by telephone. Please give Card No., Name, Address and the items required.

EASY ON-THE-SPOT PARKING. AND IT'S FREE! OPEN 9.30 am-6.0 pm Mon-Fri 9.30 am-4.0 pm Sat

Post to: VIGLEN COMPUTER SUPPLIES UNIT 7, TRUMPERS WAY, HANWELL, W7 2QA. 01-843 9903

Please send me the following items:

I enclose Cheque/P.O. for £ _____

I prefer to pay by ACCESS/BARCLAYCARD. *Delete as necessary

Signature _____

Name _____


Address _____

Card No: _____

MU6/1

LOW PROFILE
SIDEWAYS ENTRY
VERSION ALSO
AVAILABLE AT
NO EXTRA COST

The only ROM

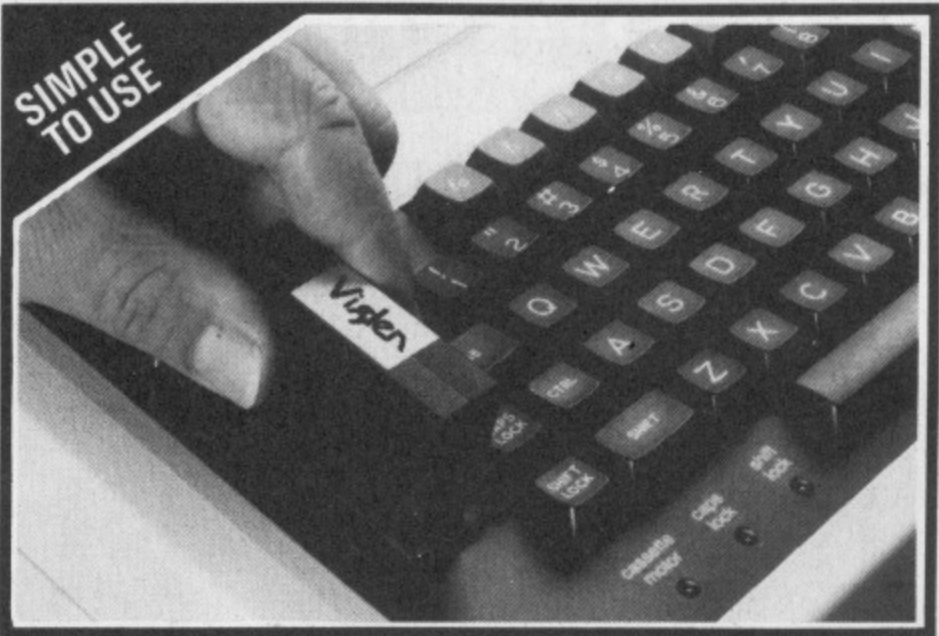


Cartridge System that does not overload your pocket or your BBC Micro



Why risk damage to your BBC micro every time you want to change ROM's? Instead, store your growing collection of ROM's in professionally-made protective cartridges!

- All cartridges are gold-plated for durability and reliability, (unlike others which are only silver-plated).
- No need to switch machine off between cartridge changes.
- Insert and remove 'Wordwise' 'View' 'Disc Doctor', etc., at will, from your micro in absolute safety.
- Low, low power consumption unlike other systems.
- Save on memory.
- Price for complete kit, including cartridge only £15.95.
- Cartridges at £2.95 each.
- Four for £11.00 (ie £2.75 each).
- Ten for £26.50 (ie £2.65 each).
- Kit comes with 1 ROM cartridge, 1 Cable Assembly, 1 Blanking Off Plate (used if system is removed).
- 1 Socket Cover (used when no cartridges are resident to protect against dust).
- 1 Cartridge Rack (stores cartridges safely when not in use, also expands to a Library System).
- All prices inc. VAT.

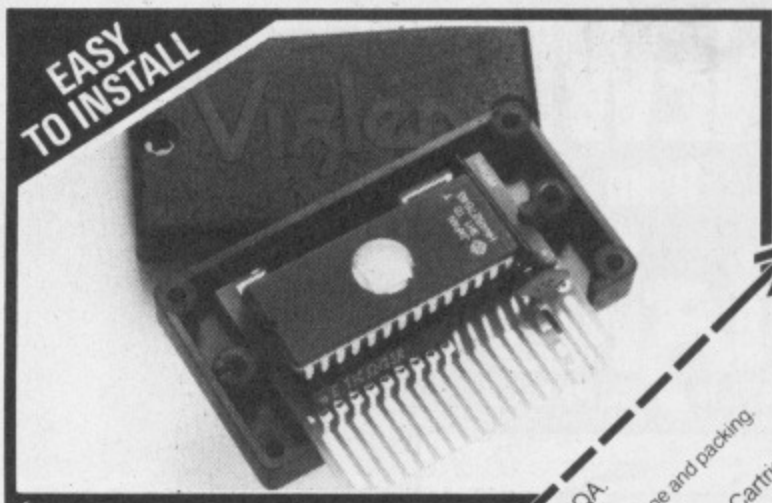

Viglen

COMPUTER SUPPLIES
UNIT 7 Trumplers Way,
Hanwell W7 2QA.
Tel 01-843 9903.

Post to VIGLEN COMPUTER SUPPLIES UNIT 7, TRUMPERS WAY, HANWELL W7 2QA.
Telephone: 01-843 9903. Personal Callers Welcome
I enclose Cheque/P.O. for £
I prefer to pay ACCESS/BARCLAYCARD (Delete whichever is not applicable)

Card No. _____

Signature _____

Name _____

Address _____

Please add £2.50 for postage and packing
(50p only for single cartridge)
Kits
Cartridges

Credit Cards valid if signed by Cardholder. Address before must be the same as card holders.

Cheques payable to
Viglen Computer Supplies
MUG/2


SPECIAL OFFER FROM VIGLEN

* Scoop Viglen price **£99.00 inc. VAT**
£86.10 ex. VAT

(carriage and insurance £8.00)

* Normally sold at **£143.75**

* **Special purchase**

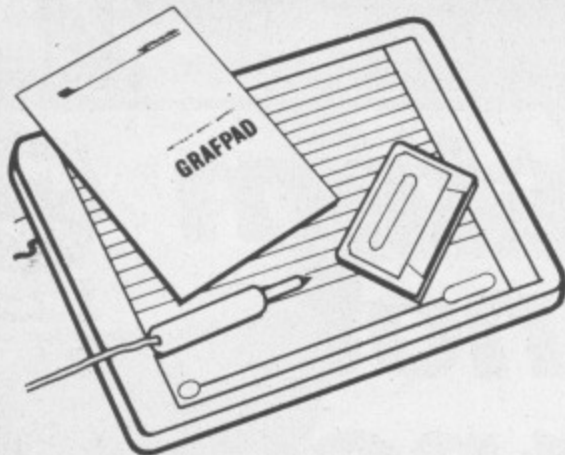

This remarkable Grafpad from British Micro allows you to input information into your computer – very accurate and high resolution, not to be confused with other models which are both more expensive and less accurate. Supplied with all necessary cables, manual and sample programs, to allow you to develop your own application programmes.

● Orders welcomed from Educational Establishments and Government Departments

Computer aided design programme. Drawing programme etc.


SEE OTHER VIGLEN ADVERTS ON HOW TO ORDER

NEW!

from

Viglen

COMPUTER SUPPLIES

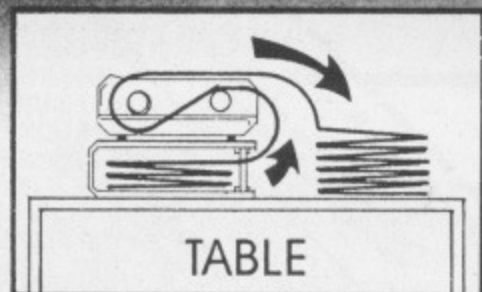


TABLE

Printer Stand

£14.95 INC. VAT

Carriage & Packing £3.00

A PRINTER STAND

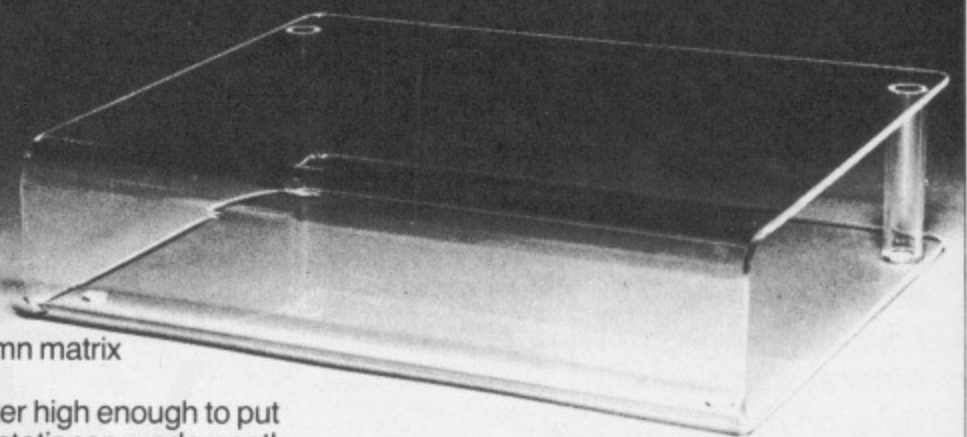

- For 80 column matrix printers
 - Raises printer high enough to put continuous stationery underneath
 - Beautifully finished in clear perspex ● Viglen quality every time
 - Will accept paper up to 12½" wide ● Non slip rubber pads
- Dimensions: 15" (380mm) wide (320mm) deep 4" (90mm) high
 Also available 136 column stand @ £27 inc. VAT.

COME TO VIGLEN FOR A FAST, FRIENDLY, PERSONAL SERVICE

DEALER ENQUIRIES WELCOME

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.

Prices subject to change without notice

MU6/3

Please send me _____ (qty) PRINTER STANDS at £17.95 each. I enclose Cheque/P.O. for £ _____ made out to

VIGLEN COMPUTER SUPPLIES or debit my ACCESS/BARCLAYCARD No. _____

Name _____




VISA

Signature _____

Address _____

PURE EXCELLENCE

Best Design, Best Value, Best Service.

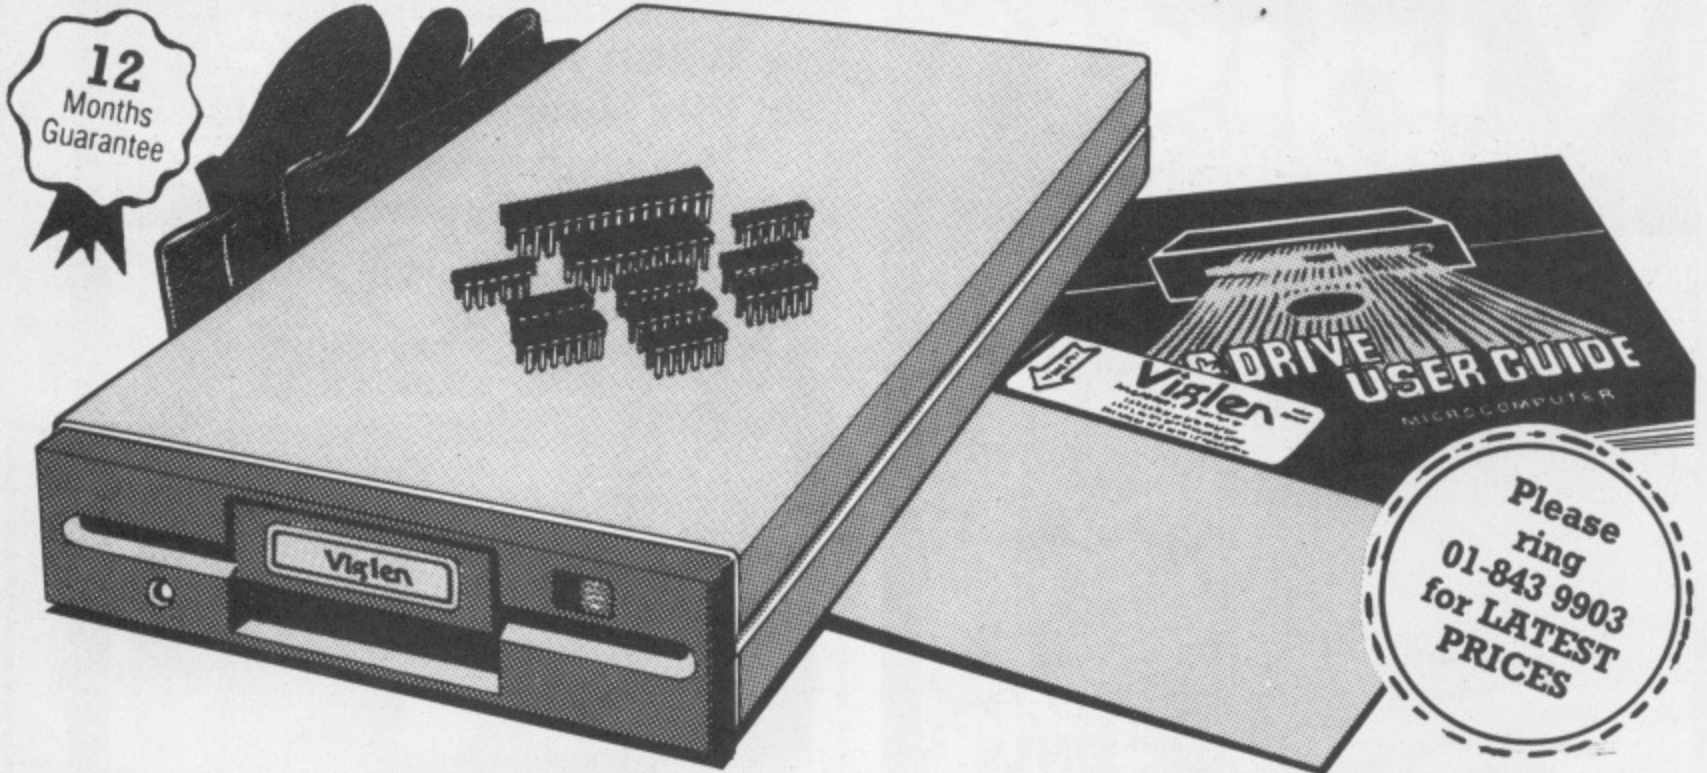

COMPLETE 400K 40/80 TRACK SWITCHABLE PACKAGE FROM VIGLEN

This offer includes the latest 1.2 version of Acorn Interface DNFS.

● Package assumes you own a BBC Model B with 1.2 operating system with power outlet

OFFER INCLUDES THE FOLLOWING:-

- **Disk Interface** (call in at our showroom for free fitting while you wait) or supplied with easy-to-follow instructions.
- **400K 40/80 track double-sided disc drive** including case and all leads.
- **Comprehensive Manual** a fact-filled, 56 page document includes techniques of loading from cassette to disk. *Not available elsewhere.*
- **Utilities Disk** includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others.

Dual drive models with integral power supply also available.

Complete Disk System for the BBC Model B



DISC DRIVE
+
DOUBLE DENSITY
INTERFACE
£199 inc VAT

Viglen

COMPUTER SUPPLIES

Unit 7, Trumplers Way,
Hanwell W7 2QA.
Telephone: 01-843 9903
Open 9.30am-6.00pm Mon-Fri
9.30am-4.00pm Sat.
AMPLE ON-THE-SPOT
CAR PARKING - AND IT'S FREE!

DISK DRIVE
& ACORN
INTERFACE
£229
INC.
VAT

Disc Drive
on its own
£129
inc VAT

Prices correct at time of going to press - offer subject to availability
Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, W7 2QA.
Please send me _____
I enclose Cheque/P.O. for £ _____
I prefer to pay by ACCESS/BARCLAYCARD
(Delete whichever is not applicable) Card No. _____
Name _____
Address _____
made out to VIGLEN COMPUTER SUPPLIES.
Add £12 carriage, usually despatched next day

MU6/4
Credit Cards will be accepted by
card holders. Address above must
be the same as card holder.

PHILIPS COMPUTER MONITORS

From
Viglen
COMPUTER SUPPLIES

DON'T BUY

just a colour monitor
when you can have
this New Philips TV
+ Monitor for only

£225

INC. VAT



ONLY
£85
INC. VAT

PHILIPS BM 7502 GREEN SCREEN MONO

From the highly successful 'Philips 80 Range', here is a monitor specially designed to display graphics and alphanumeric data with perfect clarity.

- > 12" high resolution, 20MHz band width, anti-glare screen
- > Composite Video (CVBS) and Audio Input
- > 2000 character (80 x 25) display
- > Swivel base available £13.95 incl. VAT
- > Suitable for the following computers:
BBC B (free leads supplied for the Beeb); Apple II, IIE, II plus Apple III; Atari 600XL, 800, 800XL, 1450XL; Coleco Adam; Commodore Vic20, Vic64; IBM-PC with interface; Texas Instruments T199/4A; Timex Sinclair; Einstein; QL


Test
Bureau
Recommended



PHILIPS CT 2007 COLOUR TELEVISION + MONITOR

This very popular unit is not only an excellent Colour Television Receiver, but also a sophisticated computer monitor. Featuring:

- > Free lead supplied for BBC Micro
- > Headphone socket and speaker mute switch
- > RGB, (TTL and can be modified for linear), Composite Video Input (CVBS), Audio Input plus this model has an AV/TV switch
- > 14" picture tube with 0.65mm resolution
- > Maximum 80 characters per line 20MHz band width
- > 12 pre-select buttons
- > Aerial supplied
- > Swivel base extra £13.95 inc. VAT

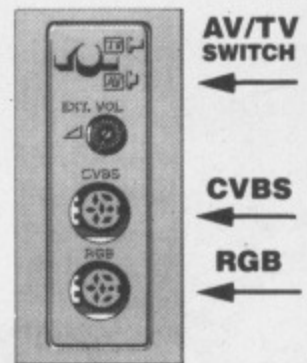

Open 9.30 - 6 weekdays,
9.30 - 4 Saturdays



Full Twelve
Months Guarantee

HOW TO ORDER

BY POST: To purchase either of the items in this advertisement simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address on the coupon. Add £8.00 for Postage, Packing and Insurance for each item. Prices subject to change without notice.

BY TELEPHONE: Ring (01) 843 9903. Credit Card holders Access/Barclaycard can purchase by telephone. Please give Card No., Name, Address and the items required.

Orders welcomed from Educational Establishments and Government Departments.

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY,
HANWELL W7 2QA Telephone 01-843 9903. Personal callers always welcome.

Please send me
I enclose Cheque/P.O. for £..... incl. £8 carriage. Payable to Viglen Computer Supplies.
I prefer to pay by ACCESS/BARCLAYCARD (Delete whichever is unapplicable).
Card No:
Signature:
Name:
Address:


The BBC Model B

All the peripherals from Viglen


The best service - The best value

Disk Storage No.1

This diskette storage holds 70 diskettes
Our **Super Low price**
£14.95 including VAT

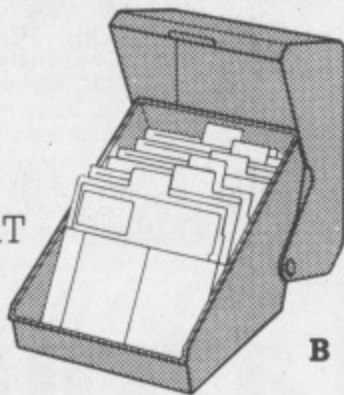

B

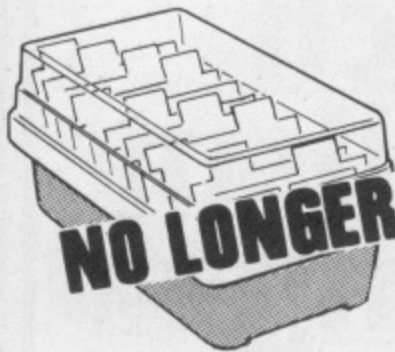

NO LONGER AVAILABLE

Disk Storage No.2

This lockable diskette box holds 90 diskettes
Super Low price
£14.85 inc. VAT

B

3M Scotch Disc


5 1/4" diskettes single sided

	1-2 boxes	3-9 boxes	10+ boxes
SS 40 TRACK	£15.00	£13.50	£13.00
DS 40 TRACK	£20.00	£18.40	£17.70
SS 80 TRACK	£23.00	£20.70	£20.00
DS 80 TRACK	£26.70	£24.00	£23.00



A

10 DISCS PER BOX

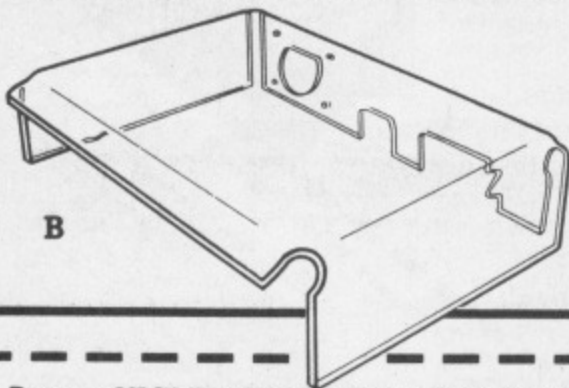

B


Monitor Stand

Our **Super Low price**
£14.95
inc. VAT

Monitors

Microvitec Monitors

Standard **£209**
Medium **£259**
Med & Pal **£295**
High **£389**



C

TORCH GRADUATE including FREE
PSION Exchange Software
£1,145 inc VAT

COMPLETE WORD-PROCESSING PACKAGE
FROM £900 inc. VAT

Dot Matrix Printers

Taxan Kaga KP810 **£279**
Canon PW1080A **£279**
Epson RX80/FT **£269**
Epson FX80 **£389**
Shinwa CPA80 (100cps) **£219**
Mannesmann Tally
MT80 **£209**

C

Daisy Wheel Printers

Juki 6100 **£339**
Quen Data **£239**

C

Please add £8 for 1 1/2 metre length printer lead for the BBC micro.

All prices inc. VAT.

Please add for carriage:

A-£2. B-£3. C-£8.

Minimum carriage charge of £6 for all orders

totalling £40 or more. These will be sent by private carrier and are insured.

BBC Model B
£349

C

BBC Model B + DNFS
(latest 1.2 DFS)
£379

Post to: VIGLEN COMPUTER SUPPLIES. UNIT 7, TRUMPERS WAY, HANWELL W7 2QA Telephone: 01-843 9903.

Please send me _____

I enclose Cheque/P.O. for £ _____ Incl. carriage.
Cheques payable to Viglen Computer Supplies.

Name _____

Address _____

Credit cards valid only if signed by card holder. Address must be the same as card holder.



I prefer to pay by ACCESS/BARCLAYCARD
(Delete whichever is not applicable)

Card No. _____


Signature _____

Best Service - Best Value from Viglen

BBC Micro Remote Keyboard

The Viglen keyboard extension frees you from the confines of your computer, with a long 1 1/2 metre lead which enables you to place your keyboard anywhere on your desk, even on your lap, away from your computer hardware. It consists of a high quality ABS plastic case, colour matched to the BBC, which encloses your BBC keyboard.

A monitor support is then fitted to the computer in the space vacated by the keyboard. This then enables you to use the computer as a monitor stand. The keyboard extension comes complete with comprehensive fitting instructions.

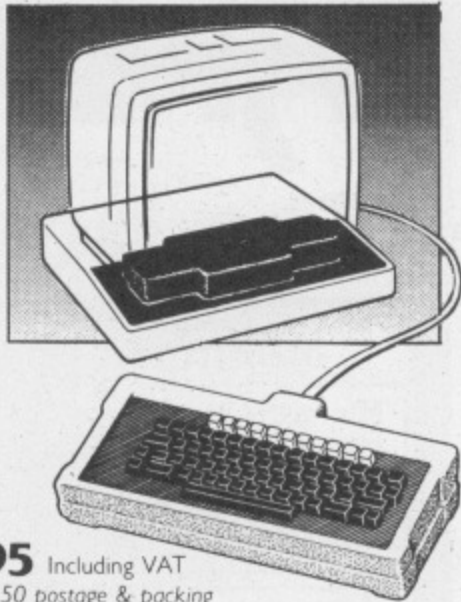

Price: £29.95 Including VAT
Please add £3.50 postage & packing

The Viglen Keypad

Ideal for business use, word processing, programming etc. High quality construction with unrivalled specification. Uses 1MHz Bus unlike other systems.


Full travel Keys.

Each key fully programmable with a simple command. Giving total flexibility.

Built in RAM chip - uses none of the BBC's memory.

Fully compatible with other peripherals.

Compatible with BBC keyboard i.e. 2 key rollover, same auto repeat rate.

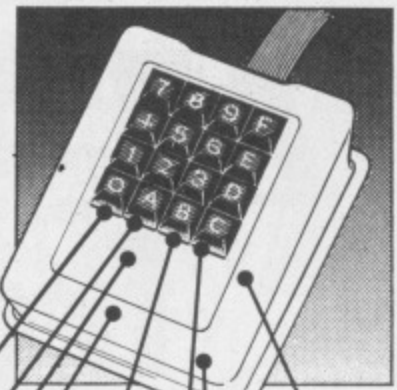

Key definitions can be saved on disc or tape.

Plug in Eprom contains operating software.


Fully reprogrammable version, just £10 extra.

Price: £69.95 Including VAT
Please add £8.00 carriage

Viglen add a touch more professionalism to your computing

The Viglen Eprom Programmer

At last - an Eprom Programmer that anyone can use. Comes with very powerful and yet very easy to use software allowing effortless copying and programming of all Eprom types useable in the BBC. Also copies ROMs. Just look at all these features:

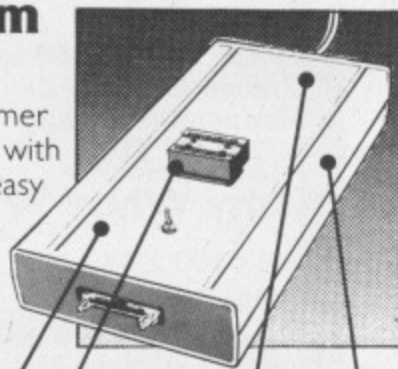

High speed programming routine programs eproms in seconds.

Zero insertion force socket - avoids damage to Eproms.

Built in power supply avoids overloading the BBC.

Ideal for both the first time and the more advanced user.

Special offer: each programmer comes with two FREE programs, that help you put your own programs onto eprom.

Price: £79.95 Including VAT add £8 carriage

Also available Eproms 8K @ £4.95 16K @ £9.95 P. & P. £1

Send for FREE Information Sheets

Specification sheets are available on the Eprom Programmer, Keypad and Keyboard Extension. Also available a free guide to programming Eproms. Please send a S.A.E. when requesting any of these information sheets.

Ring Caroline on the Hotline 01-843 9903

Please call for latest prices, product details and to place credit card orders.

Government and Educational Establishments enquiries welcome on this number



Showroom open

9.30 - 6.00

Sat. 9.30 - 4.00

Orders usually dispatched within 24 hrs.



Post to: Viglen Computer Supplies, Unit 7, Trummers Way, Hanwell W7 2QA.

Please send me _____

I enclose Cheque/P.O. for £ _____
Cheques payable to Viglen Computer Supplies.

Name _____

Address _____


I prefer to pay by ACCESS/BARCLAY CARD
(Delete whichever is not applicable)

Card No. _____

Signature _____

Credit Cards valid only if signed by card holder. Address must be the same as card holder.

NEW! More packages to add extra programming power to the AMX mouse

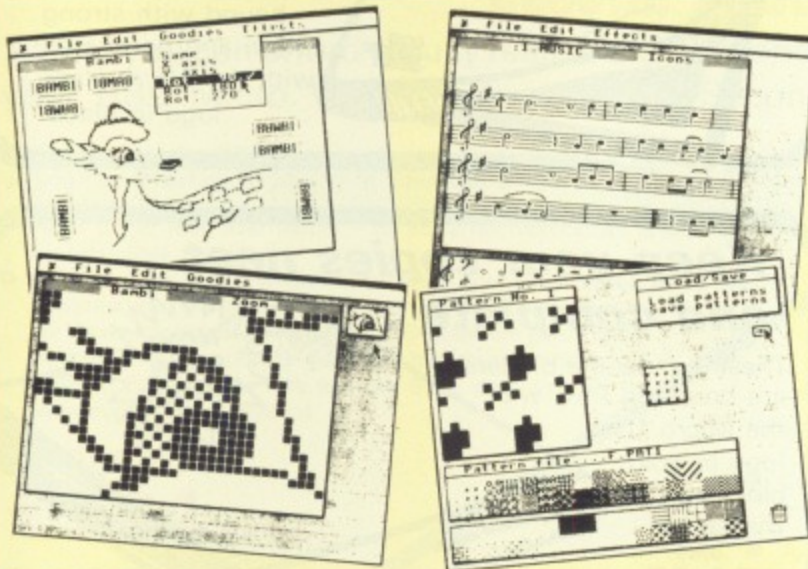

AMX UTILITIES

£13.45 (or £32.90 with AMX Desk)

Exploit the graphics potential of your mouse to the full with this incredible package. Among its many exciting new features is the Zoom facility which gives you amazing editing precision: each dot of your drawing becomes a full character, allowing exact control of detail. In addition AMX Utilities support copy, move, rotate, reflect, enhanced circles, ellipses – and many more powerful functions, including colour sketch.

Only available on 5¼" or 3" disc.




AMX DESK

£21.95 (or £32.90 with AMX Utilities)

There's no excuse for being disorganised now! AMX DESK contains the complete desktop organiser: Memo Pad, Telephone Book, Diary, Alarm Clock, Calculator, Constant Time Display and Trash Can – everything you need to maximise your efficiency is available in this amazing, value for money package.

The SYSTEM, FILE and EDIT menus are simplicity itself to handle. And of course, the whole package is Icon driven: just choose the relevant picture with your mouse and away you go!

Only available on 5¼" or 3" disc.

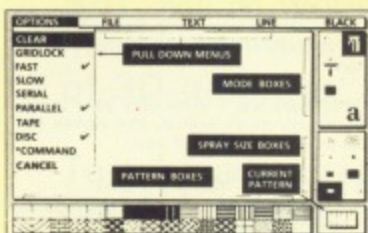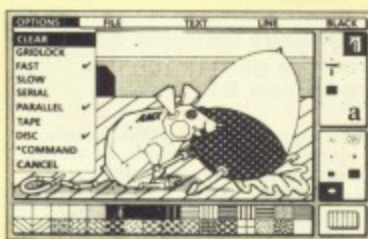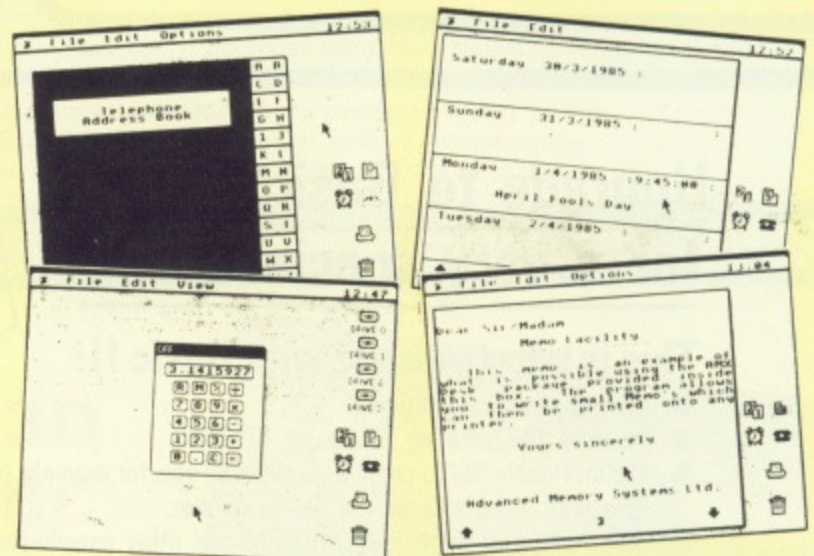

It's no wonder the AMX mouse has been nominated for the Peripheral of the Year award. For the first time it gives the BBC Micro advanced facilities until now only available on far more expensive machines such as the Apple Macintosh. For beginners it's an ideal introduction to such sophisticated techniques as icons, windows, pull-down menus, spray cans and other devices for creating your own on-screen pictures. And with this special offer from *The Micro User* comes a package of software that opens up a wide range of other uses. **This is a limited offer – so don't delay in placing your order.**

Basic package consists of:
AMX Mouse
AMX Rom
AMX Art
Icon Designer

Purchasers will receive software on cassette and either 3in or 5¼in 40 track disc. Please state preference on order form.

**ONLY
£79.95**
Including VAT and P&P.

Please send me

- Basic package @ £79.95
- AMX Utilities @ £13.45
- AMX Desk @ £21.95
- AMX Desk & Utilities @ £32.90
- Basic package, Desk and Utilities @ £109.85

Please state: cassette 40T 5¼" disc or 3" disc

- I enclose a cheque/PO for £ _____ made payable to Database Publications Ltd.
- I wish to pay by Access Visa

Save up to **£20** on normal prices

No. _____

Signed _____

Name _____

Address _____

Post to: Mouse Offer, Database Publications Ltd, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Please allow 28 days for delivery.

Give your micro the power of **SPEECH!**

You've heard of computer feedback, now try computer talkback with our low cost offer on the official Acorn speech extension.

- ★ 164 words and word parts from which you can construct your own new sounds with ease.
- ★ Simple to use from Basic – each word is called via its own unique reference number used with the SOUND -1 command.
- ★ Quick and easy to install. For full speech capability simply insert two chips. (Also included is a socket for plug in cartridges. This will require a little skill at soldering, but is not necessary for the basic speech function.)
- ★ Suitable for all BBC Micros with Version 4 boards or later. (Pack includes technical details on how to modify earlier versions.)
- ★ Easy-to-understand instruction manuals included.
- ★ A decent British accent – Kenneth Kendal at his best.

**SAVE
£25**
off the
recommended
retail price
of £55

At only £29.95 it's an offer you really shouldn't miss. Make sure of yours today.

Your BBC Micro needs protecting!



Our luxury dust cover is made of soft pliable water-resistant transparent vinyl, bound with strong cotton and decorated with the *Micro User* logo in black.

Keep your copies neat and complete

These handsome binders are bound in PVC with the *Micro User* logo in gold blocking on the spine.

only
£4.25
(UK)



Upgrade to Basic II for a very special price!

This is what you get with Basic II:

- More accurate calculations.
- An extra file handling command, OPENUP.
- The invaluable OSCLI command, allowing you, for example, to *LOAD files with a variable as the file parameter.
- EVAL will work with PAGE, HIMEM and other pseudo-variables.
- The INSTRing bug has been corrected.
- More efficient handling of string memory.
- EQUB, EQUQ and EQUW – invaluable in assembler.
- 0% combined with extra values of OPT to enable offset assembly.

Big saving!

**ONLY
£23.50**

Don't miss this exceptional offer

BARGAIN OFFER! FOUR classic games for only £1.50 each

COMPENDIUM OF CLASSIC ARCADE GAMES

This package contains four rip-roaring games for the Electron and BBC Micro

Three of this high-powered collection are top-rate machine-code versions of arcade classics and the fourth is a thrilling real-time adventure game. There's hours of enjoyment and something to suit everyone in this unique value for money collection.

SNAPMAN – Guide your man through the maze as he munches energy pellets and avoids hostile aliens.

ALIEN INTRUDERS – With only your laser for protection you must destroy the waves of aliens who threaten to engulf you.

PANZER ATTACK – You are a tank commander engaged in vicious combat against encircling enemy forces.

MAYDAY – A futuristic adventure! As captain of an interstellar cruiser you must guide the sole survivor of a stricken space freighter through the wreckage of his craft. If you fail to recover those vital medical supplies a whole planet is doomed!

Electron tape £5.95
BBC tape £5.95
BBC disc 5 1/4" £7.95
BBC disc 3" £9.95



The Advanced User Guide is the essential companion for the BBC Micro... with 512 information-packed pages

Featured in its 512 pages are:

- ★ the BASIC Assembler
- ★ 6502 machine code reference section
- ★ complete descriptions of all FX calls
- ★ BBC memory usage and vectors explained
- ★ full interfacing details for the user port, tube, analogue port, 1 MHz bus
- ★ paged ROMs explained ★ and lots, lots more.

With many examples to illustrate the text, this guide is the indispensable reference work for the serious BBC Micro programmer.

£11.50




Assembly Programming Made Easy puts the magic world of machine code at your finger-tips

Here is a really easy guide for the enthusiastic beginner to assembly language for the BBC Micro. Using easy examples, cartoons and short, very simple programs you will quickly learn how to put graphics on the screen, use the BBC operating system and bring the machine to life.

To make learning assembly language even easier send for the combined book and tape cassette containing all the programs.

£6.95

**It's never
been cheaper!**

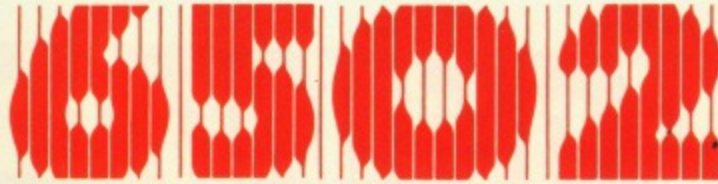

SECOND PROCESSOR

At last you can afford to fully realise the tremendous potential of your BBC Micro. With the Acorn 6502 Second Processor.

- Overcomes the BBC Micro's memory limitations. The additional 64k of RAM means you can forget about having to download programs or having to restrict yourself to Mode 7.
- Runs faster than ever before – its 6502 microprocessor is clocked at an incredible 3MHz.
- Gains access to the wealth of software specifically designed to take advantage of the second processor's phenomenal power. Hi-View, Pascal, Bitstik and the P-System are just a few of the exciting packages available. It comes complete with Hi Basic – over 44k for your Basic programs, whatever mode you're in!

... at only
£184 inc VAT

*You can't afford to miss out.
After all, as the saying
has it, two 6502s are
better than one!*

**Free yourself from
the constraints of
Basic programming.
ISO-Pascal is only**

£64 inc VAT

Pascal

**– the language everyone's
been waiting for**

Considered by computer professionals, educationalists and hobbyists alike to be the language of choice for effective programming, Acornsoft's ISO-Pascal sets new standards in the field of microcomputer languages. And it's easy to see why. The package features:

- Complete implementation of ISO-Pascal. The BBC Micro is the only micro on which this has been achieved!
- A fully compiled language – faster and more efficient than Basic.
- An incredibly powerful screen editor, and comprehensive error reporting facility.
- Tube compatibility. It becomes even more powerful when used with the second processor.

This incredible value for money package consists of two 16k ROMs, a 5½" disc, comprehensive manual and a superb tutorial guide for newcomers to the language.

NEW!

**Britain's first scrolling 3D
arcade game for the BBC
Micro is yours FREE with
every new Micro User
subscription or renewal.**

This is the classic game that took the BBC Micro world by storm when it introduced a completely new generation of 3D graphics. And it's still a best seller!

To take advantage of this unbeatable offer, complete the subscription/renewal section of the order form on Page 189 and post today.

(If your subscription does not expire for several months you can renew early in order to benefit from this offer.)



Only available
on cassette.

**Worth
£7.97
It can be
yours
FREE**

Are YOU getting the most from your BBC Micro?

You can – with this book from The Micro User!

THIS spring sees the launch of a new publishing venture – a series of books that will form a comprehensive library covering all the best programming techniques for the BBC Micro.

The first in the series, "Getting Started in Sounds & Graphics", is now available.

In this compilation of their highly praised series of articles in *The Micro User*, Michael Noels, Paul Jones and Nigel Peters explore the BBC Micro's outstanding sound and graphics capabilities.


Step by step, with clear explanations and lots of examples, they show you how to harness the power of your micro to create dazzling displays and superb sound.

Assuming only a rudimentary knowledge of Basic, the authors thoroughly explain all the programming methods involved, ranging from the simplest to the most complex.

Lots of books describe the BBC Micro's graphics and sound capabilities – this one shows you how to exploit their tremendous potential to the full.


The chapters include:

- ★ Exploring the screen modes and the use of colour
- ★ Using the text and graphics screens – MOVE and DRAW
- ★ Filling areas of colour with PLOT 85
- ★ Exploiting text and graphics windows
- ★ Creating new coordinate systems for your graphics
- ★ Drawing circles, a general procedure
- ★ Building your own user-defined characters
- ★ Combining colours logically, multiplane images
- ★ Using Exclusive OR and Invert
- ★ Rubber-banding revealed
- ★ Finding out about Teletext
- ★ Mastering Teletext graphics
- ★ Starting sound – the basic ideas
- ★ Making music – the first steps!
- ★ Queuing – the ins and outs of channels
- ★ Synchronising sound with the U parameter
- ★ Creating special effects with channel 0
- ★ Addressing the envelope, giving sound some shape
- ★ Louder still and louder – envelopes licked!

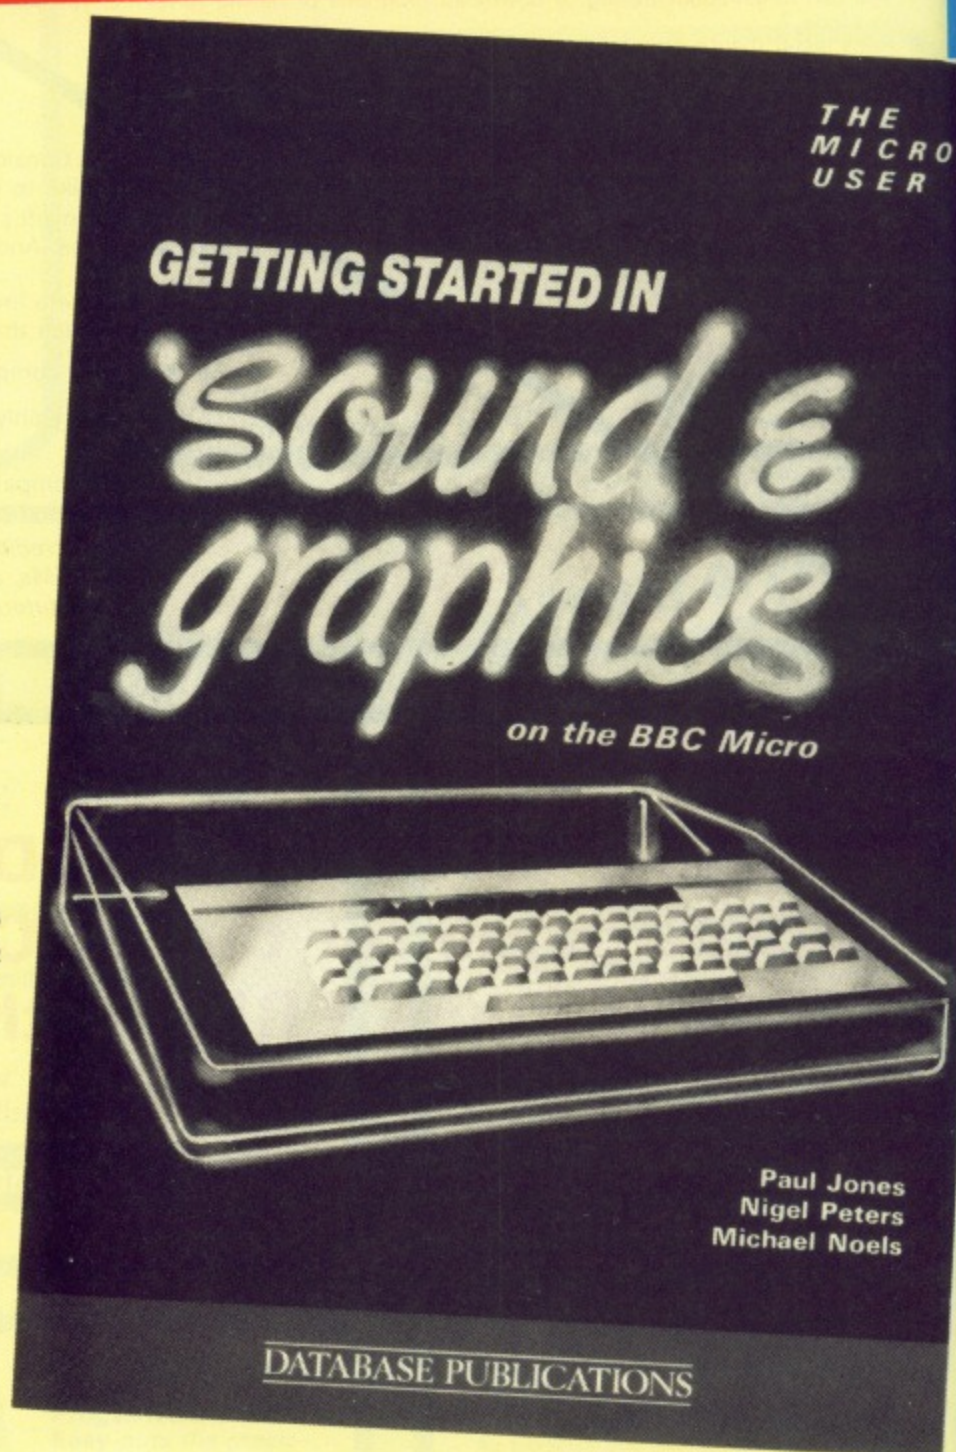

If you want to start doing more with your micro than just playing games, this package is your ideal introduction to the four most popular applications for professional computers. All the programs have been designed for simplicity, so even a child can use them. Yet they include advanced features not yet available on programs costing many times as much!

*Finalist for the Home Software
of the Year Award*

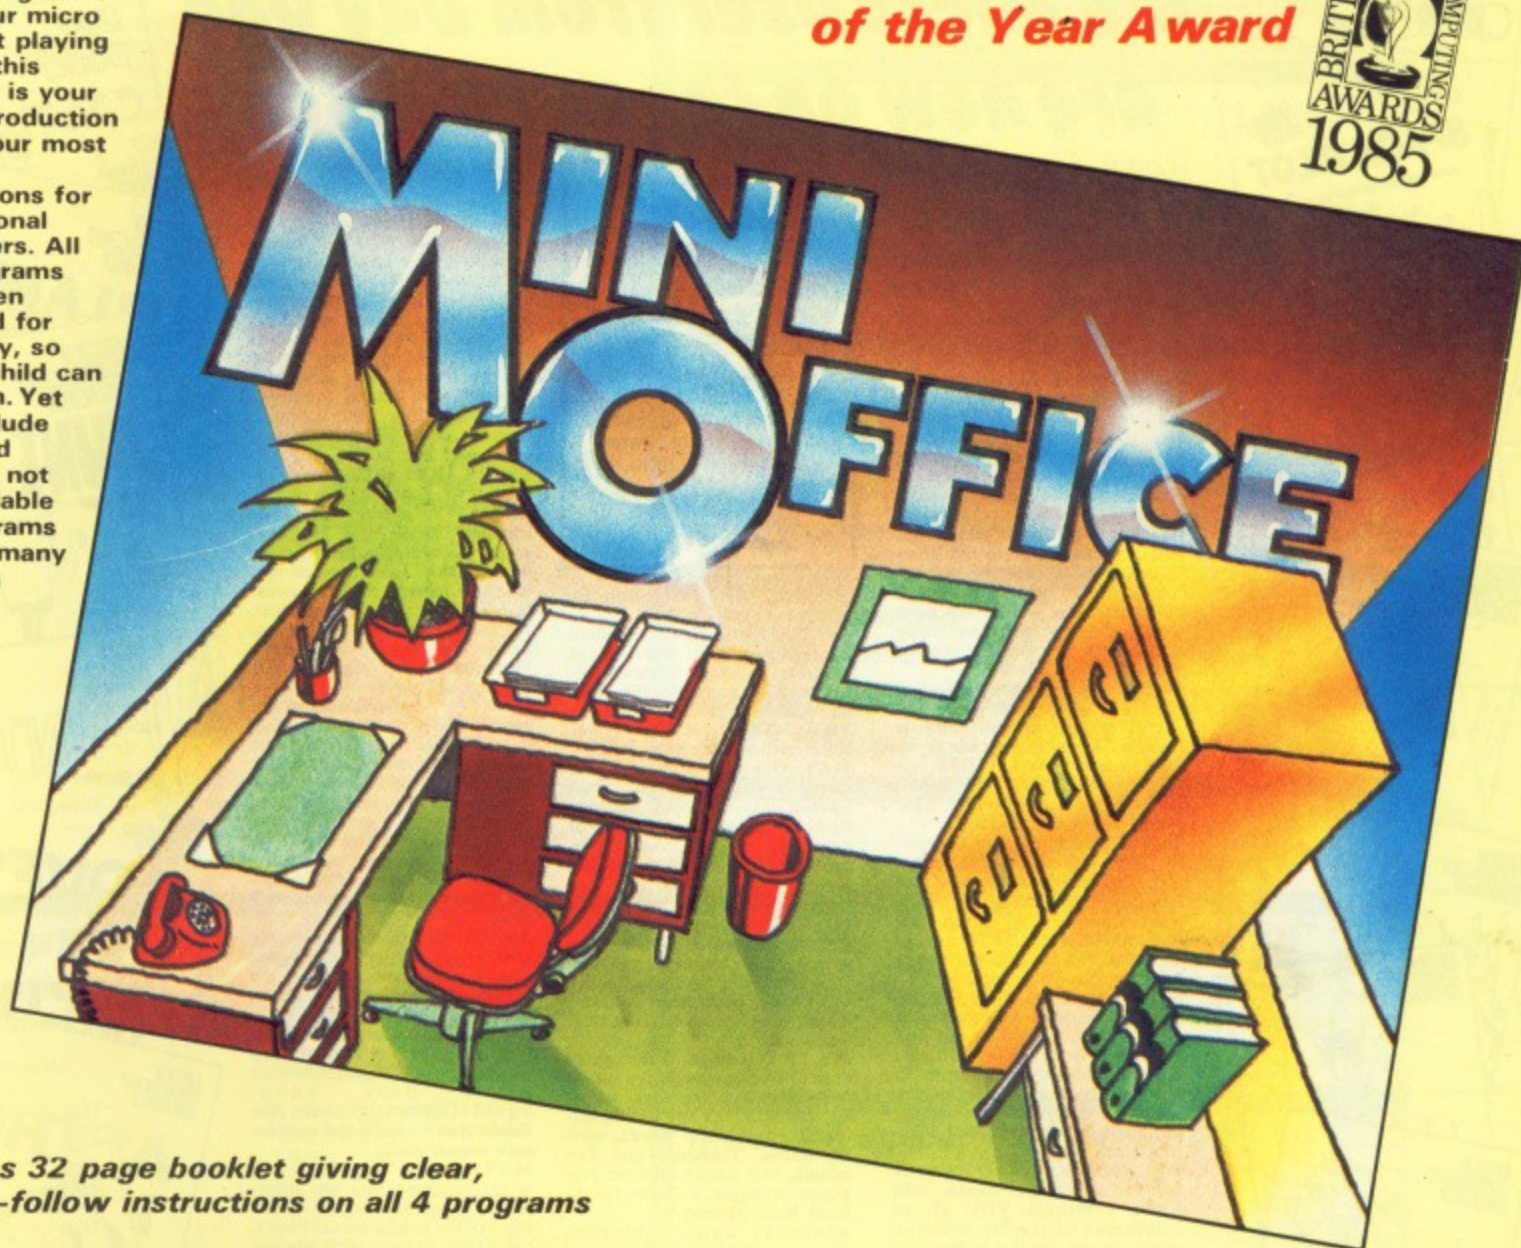

*Contains 32 page booklet giving clear,
easy-to-follow instructions on all 4 programs*

Word Processor: Ideal for writing letters and reports. There is a constant display of both time and word count, plus a words-per-minute display to encourage the budding typist! A unique feature is the double-size text option in both edit and printer mode – perfect for young children and people with poor vision.

Database: You use this for storing information, just like an office filing cabinet. Facts you have entered can be quickly retrieved by just keying in a word or part of a word. They can be sorted, replaced, saved for future use or printed out.

Spreadsheet: Enables you to use your micro for home accounts or pocket money records. It creates a display of numbers in rows and columns. Continuous updating is possible, and a changed figure can be instantly reflected throughout the rest of the spreadsheet. Your results can be saved, to be used for future updates, or can be fed into its associated program . . .

Graphics: Part of the spreadsheet section, it lets you draw bar charts, pie charts and histograms to give a graphic presentation of your statistics. Helps to give life and colour to the duller figures!

☆ Word Processor ☆ Spreadsheet
☆ Database ☆ Graphics

**Now they're
all together -
in ONE simple
package**



Four full-scale
programs for
an incredible
low, low price!

£5.95
cassette

£7.95
5 1/4" disc

£9.95
3" disc

Also available from:

BOOTS COMET Currys Dixons WHSMITH

Greens John Manziels RUMBLELOWS spectrum and other computer stores

Use the special order form on Page 7 – No stamp needed!

ALL the programs from The Micro User from Day One are now on tape and disc!



MARCH 1983: Deathwatch, Bingo and other programs from Vol. 1, No. 1.
APRIL: King Kong, Nim, and other programs from Vol. 1, No. 2.
MAY: Air Strike, Pelmanism, Anagrams, and other programs from Vol. 1, No. 3.
JUNE: Space Pilot, Nomism, and other programs from Vol. 1, No. 4.
JULY: Tenpin, a simulation of Tenpin Bowling. Spacepods, beat the alien hordes. Cup, exciting 3D graphics techniques; Test and Steady, programs to accompany the Beeb Body Building Course. Breakfix, don't let Break destroy your precious variables!
AUGUST: Fruities, driven by strange urges you climb the ladders of adventure to risk all in the gardens of unearthly frights. Animation, a suite of programs that really bring your screen alive. Casdisc, the machine code downloader for your disc system. Mode 7, colour routines.
SEPTEMBER: Robin & Marian, rescue Maid Marian from the Sheriff of Nottingham. Galactic Invaders, an exciting arcade game. DFS Benchmarks, 14 DFS test programs. Animation, new techniques. Terminal, connect a BBC Micro to a mainframe.
OCTOBER: Fishing, a compulsive day's angling. Joykey, convert programs to joystick. Pentest and Bellringer, for Micro User lightpens. Contours, an educational program. Link BBC Micros to each other. Plus all the listings from the first Electron User.
NOVEMBER: Gobins, an enchanted journey. Blackjack, the casino favourite. Charge and Pendulum, Body Building Course part 9. Sideways, program in ROMs. Pendraw, a light pen sketching program. Plus all the programs from the second Electron User.
DECEMBER: Tower, rescue London's treasure. Santa, help Father Christmas. VDU 23, an invaluable character defining utility. Paged, graphic techniques. Plus all the listings from the third issue of Electron User.
JANUARY 1984: Barrels, an all-action arcade game. Noteplay, an entertaining musical utility. Dump1 and Dump2, multitone screen dumps. All the programs from our Sound, Beginners' and Graphics articles. Plus 12 programs from the fourth Electron User.
FEBRUARY: Invasion, the classic arcade game. Frogs, fun for all the family. Engvgen, a logic game. Balance, a number learning program. Key, single key entry for the BBC Micro. Plus nine other programs from The Micro User.
MARCH: Mazemunch, block-busting arcade action. Birthday, family fun for our anniversary. Derrick, number fun for infants.

All our discs incorporate an automatic downloader. Just boot up the disc, make a choice from the menu - and away you go!

Save wear on your fingers and ensure all your programs are error-free by using our monthly tapes or discs. They are only:

£4.25 cassette
£6.25 5 1/4" disc
£8.25 3" disc

You can also take out a year's subscription and have them posted to you each month.

Cassette £40
5 1/4" disc £60
3" disc £80

Pixelpen, high resolution for lightpens.
APRIL: Microgolf, the simulation. Eastermaze and April Fool, seasonal games. Seawall and Magic Square, maths fun. Filer and Album, a database of sounds. TRX1, TRX2, RS423 driver. Heartrate, monitor your fitness.
MAY: Dug Dig, asteroid adventures. Damraider, naval action. Enavid, easy envelopes. Steppers, Body Building motor control. Spiro, graphics windows. Adventure, a trapdoor maze. Renumber, program utility. Bigletter, large type. Memory, RAM efficiency.
JUNE: Roadracer, 3D driving action. Quadline, four-in-a-line logic game. Monitor, machine code debugging routines. Toolkit, 8271 disc controller explored. Areas, easy maths. Spell, spelling education.
JULY: Doomrun, deep space drama. Backgammon, the classic board game. Keys, user defined key editor. Save? and Tidisk, disc utilities. Alice1 and Alice2, mini-adventures. Terminal1 and Terminal2, two communication programs. Acoustic, software for the Body Build Modem.
AUGUST: Castle, enthralling adventure. Gridman, a high speed strategy. Tedit, superb Teletext editor. Dsquare, number fun. Dedit, disc editor. Input, the ultimate input routine. Bells, Alice's mini-adventure.
SEPTEMBER: Villains, save your crystals from the evil onslaught. Rollerball, an intriguing game of strategy and agility. Microterm, comms terminal. T/Textdump, Mode 7 screen dump. Numbersign, simple number skills.
OCTOBER: Wampus, explore the labyrinth. Balloon, escape the Goulogs. Splits, split screen utility. Pageram, paged RAM programs. Input1/2, inputs for the disabled. Morecol, extended colours. D/A, waveform generator. Integer, direct addressing speed.
NOVEMBER: Buster, line up the diamond blocks. Duel, two player action. Seaside, picture fun for the young. M7letters, teletext large letters. Dsload, loading disc files to &E00. 6502, second processor programs. Synth, musical Body Building programs.
DECEMBER: Painter, paint the precipitous pyramid. Miner, delve into the deadly depths. Snowvad and Carol, seasonal programs.

Garden, shape-matching for infants. Medit, memory editor. Catalog and Save, disc utilities. Ladders, mini-adventure. Plus Omega Probe - a full length machine code arcade game.
JANUARY 1985: Rover, guide our retriever. Backgammon, two player version. Matchwood, shape recognition. Messages, machine code printing. Speedtext, display text at different rates. Search, a powerful tool. Second processor, Body Building and graphics routines. Plus Galactic Tycoon, our superb free game.
FEBRUARY: Helicopter Dogfight, two player action. Craal, dungeon adventure. Pilot, the language. Riddle, first Pilot program. Dismump, the ultimate disassembler. Talker, speech chip utility. Change, program tidier. In/out - output from assembler. All the programs from Alice and Body Building. Plus Atomic Protector - a full length machine code arcade game.
MARCH: Astromines, space action. Castle, two player catapult battle. Data Maker, take the tedium out of entering Data. Disc Search, string search utility. Command, give your BBC and Epson printer the same character set. Break Key, disable Break. All the programs from Alice and Machine code games. Plus Flex - a full length machine code arcade game.
APRIL: X15, sideways-scrolling arcade spectacular. Mornington Crescent, fun and games on the London underground. Calculator, AMX mouse mathematics. Dithering, useful colour mixer. Chatterbox, powerful speech chip procedures. All the programs from Alice, Body Building and Machine Code games. Plus Rabbit Run - a full length machine code arcade game.
MAY: Stellar Rescue, arcade action requiring skill and judgement. Dominoes, superb simulation of the pub favourite. Plot69, fast Mode 2 plot routine. Musical Events, a music interrupt utility. Pound and Hash, an Epson printer routine to get both characters at the same time. Sheila, let your micro run your slide show. All the programs from Body Building and Machine Code Games.
JUNE: Othello, clever simulation of the popular board game. Activities, word association fun. Catnap, action packed arcade enjoyment. Simon Quackers, superb lightpen game based on the family favourite. Shape recognition, teach your micro to identify objects. Stripper, a useful routine for removing line numbers. Epson, a clever type-setting utility. Lprint, simplifies string output to printers. Eval, using the Basic command from machine code. All the programs from Alice, Body Building and Machine code games.

Special Offers!

- Any five of our monthly tapes for only £15.
- All 10 tapes from the 1983 issues for only £25.



Disc Upgrade Service

Send your tape complete with inlay card and instructions as supplied and your cheque for £3 (tape to 5 1/4") or £5 (tape to 3") (not credit card number) with a covering letter stating what is required.

Unless otherwise indicated all prices include postage/packing and VAT and are valid until July 31.

All items subject to availability. Please allow 28 days for delivery.

Please tick items required in box below £ p

**Micro User
back issues**

March 1983 £1	2009	<input type="checkbox"/>
April 1983 £1	2010	<input type="checkbox"/>
May 1983 £1	2011	<input type="checkbox"/>
June 1983 £1	2012	<input type="checkbox"/>
July 1983 £1	2013	<input type="checkbox"/>
Aug 1983 £1	2014	<input type="checkbox"/>
Sept 1983 £1	2015	<input type="checkbox"/>
Oct 1983 £1	2016	<input type="checkbox"/>
Nov 1983 £1	2017	<input type="checkbox"/>
Dec 1983 £1	2018	<input type="checkbox"/>

Jan 1984 £1	2019	<input type="checkbox"/>
Feb 1984 £1	2020	<input type="checkbox"/>
Mar 1984 £1	2021	<input type="checkbox"/>
April 1984 £1	2022	<input type="checkbox"/>
May 1984 £1	2023	<input type="checkbox"/>
June 1984 £1	2024	<input type="checkbox"/>
July 1984 £1	2025	<input type="checkbox"/>
Aug 1984 £1.25	2026	<input type="checkbox"/>
Sept 1984 £1.25	2027	<input type="checkbox"/>
Oct 1984 £1.25	2028	<input type="checkbox"/>
Nov 1984 £1.25	2029	<input type="checkbox"/>
Dec 1984 £1.25	2030	<input type="checkbox"/>

Jan 1985 £1.25	2031	<input type="checkbox"/>
Feb 1985 £1.25	2032	<input type="checkbox"/>
Mar 1985 £1.25	2033	<input type="checkbox"/>
April 1985 £1.25	2034	<input type="checkbox"/>
May 1985 £1.25	2035	<input type="checkbox"/>

UK. Add postage 80p per copy (5 or more £3.20)
 Overseas (surface mail). Add postage
 £1.50 per copy (5 or more £6).....
 Airmail prices on application. Please advise issues required

Annual subscription

UK £15	2001	<input type="checkbox"/>	
EIRE £15 (Sterling)	2002	<input type="checkbox"/>	
Surface mail - Rest of world	£20	2003	<input type="checkbox"/>
Air mail - Rest of world	£65	2004	<input type="checkbox"/>
Free Fortress game	2293	<input type="checkbox"/>	

Tick box if renewal Commence with issue **TOTAL** _____

Annual subscription for cassettes and discs

BBC 'B' cassette	£40	2005	<input type="checkbox"/>
5 1/2" disc 40T	£60	2006	<input type="checkbox"/>
5 1/4" disc 80T	£60	2007	<input type="checkbox"/>
3" disc	£80	2008	<input type="checkbox"/>

Commence with (state month) **TOTAL** _____

Dust Covers

£3.95	2220	<input type="checkbox"/>
(UK & Overseas)		TOTAL _____

Binders

UK - £4.25	2221	<input type="checkbox"/>
Overseas - £5.25	2222	<input type="checkbox"/>
		TOTAL _____

Getting Started in Sound and Graphics Book

£5.95	2223	<input type="checkbox"/>
		TOTAL _____

Getting Started in BBC Basic

£5.95	2289	<input type="checkbox"/>
		TOTAL _____

AMX Mouse

See order form on Page 1.



TOTAL _____

The Micro User Specials

GAMES SPECIAL

Magazine	£1.95	2189	<input type="checkbox"/>
Cassette	£7.95	2190	<input type="checkbox"/>
Disc A 40T	£7.95	2191	<input type="checkbox"/>
80T	£7.95	2192	<input type="checkbox"/>
3"	£9.95	2193	<input type="checkbox"/>
Disc B 40T	£7.95	2194	<input type="checkbox"/>
80T	£7.95	2195	<input type="checkbox"/>
3"	£9.95	2196	<input type="checkbox"/>
Disc A & B 40T	£14.00	2197	<input type="checkbox"/>
80T	£14.00	2198	<input type="checkbox"/>
3"	£18.00	2199	<input type="checkbox"/>
Cassette and Magazine	£9.00	2200	<input type="checkbox"/>
Disc A and magazine 40T	£9.00	2201	<input type="checkbox"/>
80T	£9.00	2202	<input type="checkbox"/>
3"	£11.00	2203	<input type="checkbox"/>
Disc B and magazine 40T	£9.00	2204	<input type="checkbox"/>
80T	£9.00	2205	<input type="checkbox"/>
3"	£11.00	2206	<input type="checkbox"/>
Disc A & B and mag 40T	£15.00	2207	<input type="checkbox"/>
80T	£15.00	2208	<input type="checkbox"/>
3"	£19.00	2209	<input type="checkbox"/>

EDUCATION SPECIAL

Magazine	£1.95	2210	<input type="checkbox"/>
Cassette	£5.95	2211	<input type="checkbox"/>
Cassette and Magazine	£7.00	2212	<input type="checkbox"/>
Disc 40T	£7.95	2213	<input type="checkbox"/>
80T	£7.95	2214	<input type="checkbox"/>
3"	£9.95	2215	<input type="checkbox"/>

Mini Office

BBC 'B' cassette	£5.95	2231	<input type="checkbox"/>
Electron cassette	£5.95	3062	<input type="checkbox"/>
5 1/2" 40T disc	£7.95	2232	<input type="checkbox"/>
5 1/4" 80T disc	£7.95	2233	<input type="checkbox"/>
3" disc	£9.95	2234	<input type="checkbox"/>

TOTAL _____

Micro Olympics

BBC 'B' cassette	£5.95	2235	<input type="checkbox"/>
Electron cassette	£5.95	3061	<input type="checkbox"/>
5 1/2" 40T disc	£7.95	2236	<input type="checkbox"/>
5 1/4" 80T disc	£7.95	2237	<input type="checkbox"/>
3" disc	£9.95	2238	<input type="checkbox"/>

TOTAL _____

The Advanced User Guide

£11.50	2245	<input type="checkbox"/>
		TOTAL _____

Acorn Speech Extension

£29.95	2224	<input type="checkbox"/>
		TOTAL _____

Trak-ball

With pack 19 kit	£37.94	2256	<input type="checkbox"/>
With assembled pack 19	£43.94	2258	<input type="checkbox"/>
(Plus Body Build interface packs) With pack 20 kit	£39.95	2259	<input type="checkbox"/>
With assembled pack 20	£45.95	2260	<input type="checkbox"/>
Trak-ball also available separately	£19.99	2254	<input type="checkbox"/>

TOTAL _____

Assembly Programming

Book and cassette	£6.95	2262	<input type="checkbox"/>
			TOTAL _____

Basic II Rom

£23.50	2219	<input type="checkbox"/>
		TOTAL _____



TOTAL _____

Don't forget to fill in your address overleaf!

TOTAL CARRIED FORWARD OVERLEAF _____



ORDER FORM

**THE
MICRO
USER**

MAIL ORDER OFFERS

**TOTAL CARRIED FORWARD FROM
PREVIOUS PAGE**

£ p

**Single copies of
cassettes/discs**

			5 1/4" disc	5 1/4" disc	
			Tape	40 track	80 track 3" disc
			£4.25	£6.25	£8.25
Deathwatch	Mar 1983	2045/48			
King Kong	April 1983	2049/52			
Air Strike	May 1983	2053/56			
Space Pilot	Jun 1983	2057/60			
Tenpin	Jul 1983	2061/64			
Fruities	Aug 1983	2065/68			
Robin & Marian	Sep 1983	2069/72			
Gone Fishin'	Oct 1983	2073/76			
Blackjack/Goblins	Nov 1983	2077/80			
Tower Bridge	Dec 1983	2081/84			
Barrel Battle	Jan 1984	2085/88			
Alien Invasion	Feb 1984	2089/92			
Mazemunch	Mar 1984	2093/96			
Microgolf	April 1984	2097/100			
Damraiders	May 1984	2101/04			
Road Racer	June 1984	2105/08			
Doomrun/Backgammon	July 1984	2109/12			
Castles of Fear	Aug 1984	2113/16			
Villains	Set 1984	2117/20			
Hunt the Wampus	Oct 1984	2121/24			
Blockbuster/Duel	Nov 1984	2125/28			
Painter/Miner	Dec 1984	2129/32			
+ Omega Probe					
Rover	Jan 1985	2133/36			
+ Galactic Tycoon					
Copter Dogfight	Feb 1985	2137/40			
+ Atomic Protector					
Astro Mines	Mar 1985	2141/44			
+ Flex					
X-15	April 1985	2145/48			
+ Run Rabbit					
Stella Rescue	May 1985	2149/52			
Othello	June 1985	2153/56			

- Any 5 tapes for £15
- All 10 1983 tapes £25

Prices are for UK
and overseas.

TOTAL _____

**Classic
Arcade
Games**

			5 1/4" disc	5 1/4" disc	
			Tape	40 track	80 track 3" disc
			£5.95	£7.95	£9.95
BBC 'B'	2246/49				
Electron	3064				

TOTAL _____

Magic Sword

			5 1/4" disc	
			Tape*	40/80 Track
			£8.95	£9.95 3" disc
2228/30				

*BBC 'B' and Electron

TOTAL _____

Action Replay

BBC 'B' cassette £3.75	No. 1 = 2239	
	2 = 2240	
	3 = 2241	
	4 = 2242	
	5 = 2243	
	6 = 2244	

TOTAL _____

6502 Second Processor

£184 2290

TOTAL _____

ISO-Pascal

£64 2291

TOTAL _____

Don't forget to fill in your name and address opposite. **TOTAL** _____

**You can also order
by phone or Prestel**

- Any of the goods listed here can be ordered by telephone.
- Micronet subscribers and other users of Prestel can also use the Prestel Mailbox.

061-480 0171

(24 hours)

Prestel Mailbox

Key Page 89, then send your order to:

614568383

24 hours

*Don't forget to quote your
credit card number AND
your full address.*

Payment: please indicate method (✓)

- Access/Mastercharge/Eurocard
Card no. _____
- Barclaycard/Visa
Card no. _____
- Cheque/PO made payable
to Database Publications Ltd.

BLOCK CAPITALS PLEASE

Name _____


Address _____

_____ Post Code _____

Signed _____

**Post to: The Micro User,
FREEPOST, Europa House,
Hazel Grove, Stockport
SK7 5NY**

*No stamp needed if posted in UK.
Please allow 28 days for delivery*



FOR CONNOISSEURS OF ACTION, LEISURE OR LEARNING

BBC Electron

ANSWER BACK Sports Game £9.95
(ages 14 and over)
Challenge the KOSMOS team at football or tennis. But be warned, we don't lose easily...
- NEW RELEASE
Whatever your sport, this program probably knows a lot more than you do!

ANSWER BACK Junior £9.95
(ages 6 to 11)
Defeat the dragon and save the princess of KOSMOS Castle...
- a superb program with vast potential... (A & B Computing November 1984)



ANSWER BACK Senior £9.95
(ages 12 and over)
Outwit the KOSMOS robot and destroy the alien invaders...
- superb program... (Personal Computing Today, October 1984)
IDENTIFY EUROPE £7.95
(for all ages)
Solve the European jigsaw puzzle by land or sea...
- NEW RELEASE Discover Europe without leaving your home!

The IDENTIFY EUROPE program provides a fascinating way of discovering and learning the geography of Europe. The program will provide hours of amusement for all the family and everyone is sure to benefit from it.

The ANSWER BACK series needs little introduction. Each program combines a massive wealth of information with a fascinating and compelling game. The Senior and Junior quizzes each contain 750 questions and 3000 optional answers on General Knowledge. The Sports program is even larger containing a mind-bending 800 questions on Sport and two high-speed machine code games - Football and Tennis. But that's not all. For quiz fans, full facilities are provided for creating and saving new quizzes or modifying those supplied - and you don't need to be a programmer!

KOSMOS SOFTWARE LTD
1 Pilgrims Close, Harlington, DUNSTABLE, Beds. LU5 6LX
Tel. (05255) 3942



Dealers, contact Lightning, Microdeal, Proteus or Tiger.

Please supply the following programs for the BBC/Electron computer

ANSWER BACK Sport @ £9.95 ANSWER BACK Junior @ £9.95
IDENTIFY EUROPE @ £7.95 ANSWER BACK Senior @ £9.95

Mr/Mrs/Miss
Address
Postcode

Orders are normally despatched within 48 hours

KOSMOS SOFTWARE LTD. 1 Pilgrims Close, Harlington, DUNSTABLE, Beds. LU5 6LX Tel. (05255) 3942

GAMEMAKER

animation made simple

DESIGN multi-coloured shapes and figures in varying sizes from 2 x 1 pixels up to 16 x 24 pixels using our superb menu-driven image designer program. It includes an animation tester and a file library system for disc and/or tape management of your image files. Each image can be named for ease of use during programming.

This designer program is one of the best on the market and outperforms some ROM utilities and graphics tablet or lightpen style devices but is only the start of GAMEMAKER's powerful facilities.

CONTROL your images from your Basic game or animation program with 11 new simple 'BASIC' like commands: (*Gmp — paint image; *GMr — move image right etc). All you have to do is *RUN your image file at the start of your program and these simple commands are available through hidden machine code routines that the designer program places in each image file. They provide High-Speed Movement, Automatic Animation, Collision Detection and many other features.

LEARN quickly how to use GAMEMAKER whatever your skill level. The 44 page User Guide clearly describes the facilities with examples and technical advice, but as an extra aid we provide with each copy a FREE teaching program that shows examples of various animation and image effects to enable you to learn 'hands-on'.

USE GAMEMAKER on either a BBC Micro B or Acorn Electron. It is fully compatible and portable, (programs written for one run on the other). All you need to transfer between machines is your program and its image file. If you wish you can sell your results without royalties to us. Supplied on tape GAMEMAKER will self-load to disc if fitted — it is a 'smart package'.

GAMEMAKER 2 — the Mode 2 version with all 16 colours available in each of the 48 images.
GAMEMAKER 5 — the Mode 5 version with 4 colours available in each of the 48 images.

PRICE £12.00 for each version inclusive of VAT and postage (Overseas — postage only included)
** Special offer of both versions for only £17.50 if ordered together **

HOLLY Computers Limited
PO Box 17
Bingley
West Yorkshire BD16 3JQ

In use now by experts and beginners including schools and colleges. Send for FREE product data sheet and our software and hardware catalogue.

TWO WAYS TO ENSURE YOU GET

THE MICRO USER

EVERY MONTH

1. Complete and mail subscription form on Page 189.
2. Hand this form to your newsagent.

Please reserve me a copy of The Micro User magazine every month until further notice.

- I will collect
 I would like it delivered to my home.

Name _____

Address _____

Note to newsagent: The Micro User should be obtainable from your local wholesaler, or contact Steve Fletcher, Circulation Manager on 061-480 4153.

WALL NO MOUSE

Now you can use the superb **AMX ART** software without the mouse or its ROM.

NORTHSOFT MOUSETRAP patches **AMX ART** to use either: (1) RB2 Tracker Ball (2) Joystick (3) Grafpad or (4) Keyboard.

NOTE: AMX ART plus MOUSETRAP runs WITHOUT the MOUSE driver ROM.

NORTHSOFT MOUSETRAP is available from:

Northside Computing

14 Cedarwood Road,
Dublin 11, Ireland

£5.95 cassette

£6.95 disk
incl. P&P

Turn your Model B into a quality

SPECTRUM ANALYSER!

Our machine-coded Fast Fourier Transform gives speed, accuracy and efficient memory usage.

ROM chip £60

Full details from:

STRUCTURED SOFTWARE
23 Redcar Drive, Eastham, Wirral,
Merseyside L62 8HE

BOBBY CHARLTON SOCCER

Available now for the BBC Model/B.

'Play *Bobby Charlton Soccer* in your own home. Build and manage a Championship side, see them match their skills and fitness with opposing teams to create the kind of exciting games I played in for Manchester United and England.'

'With the realism of this DACC Soccer Game your team win or lose by the way you instruct them to play. You will be shown a bird's eye view of your half of the pitch. Select and vary the skills of each of your players and then move them individually to whatever position in the field you know will create the best team formation.'

'Each player is shown with three digits below him relating to skill, accuracy and stamina in the range 1-5. To start off with each man has 3-3-3, giving him a total of 9. So the total for your team is 11x9.99. This total of 99 cannot be exceeded, but the object is for you, the manager, to formulate your winning team using the best possible combinations of positions and skills.'

'Of course, as a professional footballer, injuries sustained by myself and team-mates often had a great influence on the outcome of the game. So, to create even more realism, you may add optional 'injuries' to the game, which are allocated randomly to each team by computer...hold your breath as your star forward swivels to shoot or goes in for a hard tackle!'

'Once your team is formulated, you are ready to move on from the *Management Module* to *Module II—Match Play*.'

'With realistic 3D view of the pitch from the 'TV Camera' position the game really comes to life. From the kick off every moment of the match unfolds realistically, with throw-ins, goal kicks, corner kicks, passing and shooting.'

'The game can be played by 2 people, 1 person v the computer or computer v computer. If the game is player controlled your joystick will control one man at once. Pressing the fire button enables

you to change player...or, if the opposition are attacking your goal, to the goalkeeper.'

'If a player is in possession of the ball the fire button initiates a pass or a shot. Control the accuracy and strength of the pass or shot by the extent of joystick movement and the height of the kick by the length of time that the fire button is depressed... from a Bobby Charlton cannonball shot, to a carefully flighted Bryan Robson through-ball! Although you have set the skill, accuracy and stamina levels of your players during the *Manager Module*, the more a player is involved in the game, the more energy he uses...his stamina level falls and he runs more slowly! Then, when the player is not under joystick control, his stamina slowly builds up again.'

'If the game is under computer control, one or both teams are played entirely by computer. Under joystick control the player controls one man at a time, whilst the computer provides intelligent action for the other 10.'

'The skill level you have chosen affects the success of tackles, the accuracy level and the direction of the ball when kicked...what could be more realistic than the Bobby Charlton Soccer Game from DACC?'

The Cassette contains a voice introduction and play hints by Bobby Charlton and the *Bobby Charlton Soccer Game* package contains details on the *Bobby Charlton Computer Soccer Club*, with mail order products, services and special offers for members.

BBC Model/B package with *Manager* and *Match Play* Modules **£11.95** inc. VAT (also including p&p for direct orders).

Bobby Charlton Soccer Game from DACC—the Simulation Specialists.

Soon to be available for Commodore 64 and Sinclair 48k Spectrum. Available through all computer specialists or direct from DACC.

From DACC



Name (BLOCK LETTERS) _____

Address _____

County _____

Postcode _____

Please send me _____ copies of the Bobby Charlton

Soccer Game from DACC at _____

I enclose cheque/Postal Order for the total of _____



You may order with Access or Barclaycard, either by post or 24hr. telephone (0942) 522002.

Please debit my account no. _____

Despatch within 48 hours.

dacc
LIMITED

To: DACC Ltd. (Dept. MU 685),
23 Waverley Road, Hindley,
Wigan, Lancashire
WN2 3BN.

EXTRA MODULES AVAILABLE SOON!
The **World Cup Module** and
Canon League Module will be
created by Bobby Charlton's
knowledge of individual
players and teams.

SOFTWARE AT EXPLOSIVE PRICES!



SAVE UP TO 50% OFF MANUFACTURERS' RECOMMENDED RETAIL PRICES! Many of the top cassette based titles for all popular makes of computers are on offer—with a full money back guarantee if not highly delighted.

Please rush me your FREE descriptive software catalogue.

Make of Computer _____

Name _____

Address _____

PHILIPS & PHILIPS CO LTD
 Scriptomatic House, Torrington Park, Finchley,
 London N12 9QU Telephone 01 446 5648

SEND FOR FREE DESCRIPTIVE SOFTWARE CATALOGUE

NUMERIC KEYPAD

FOR THE BBC MODEL B

- Hooks into keyboard
- Not software driven
- Compatible with all commercial software
- Leaves all ports free
- Full travel key switches



■ Includes RETURN key

CBM64
£29.95

ONLY £44.95

Cheques/PO to: **COMMERCIAL PRODUCTS**
 11 Hylands Close, Furnace Green, Crawley, Sussex RH10 6RX (0293) 30174

Inc. P&P & VAT

Suzysoft

DISC-IT
A superb utility that allows you to make copies of all your precious (and fragile) disc based programs

Supplied on a dual format 40/80 track disc that will quickly backup 40 track, 80 track or dual format BBC discs.

Please note that this program is designed to work with twin drives and Acorn DFS, although single drive operation is possible. It is intended for personal use only and not for infringement of copyright laws.

Price £19.95 (inclusive of VAT, postage and packing).

Cheques/P.O.s payable to:
 Suzysoft
 38 Fairways Drive
 Little Sutton
 South Wirral
 Tel: 051-339 0840

ADVERTISERS INDEX

3D Computers	175	Leigh Computer Systems	157
A&F Software	6	Macob Systems	163
Abacus	150	Marconi	147
Ack Data	138	Memorex	66, 67
Acornsoft	15	Merlin Computer Products	48
Acorn User Show	42	Micro Press	51
Advanced Technology Products	116	Micro Resources	163
Akhter Instruments	32, 33	Micro-Aid	14
Amcom	169	Microfix	151
Beebugsoft	2, 3	Microlink	94
Betasoft	194	Micronet 800	88
BHL Software	165	Micropacs	152
Bit Twiddlers	163	Microtest	108
Bizzell Computers	158	Microvitec	31
Cambridge Applied Technology	161	Microware	77
Care Electronics	102, 111	Microworld Distribution	28
Carson Developments	18	Microwriter	71
Chalice Software	129	Mighty Micro	147
Chase Data	104, 105	Miracle Technology	166
CJE Micro's	52	Modem House	168
Clares Micro Supplies	12, 13	Northside Computing	192
Complex	147	Opus	55, 89, 137, 141
Commercial Products	193	P&H Electronics	78
Computer Users Club	18	Pace	84, 196
Contex	111	Paeon Systems	152
Crossware Products	193	Paul Fray	157
Cumana	20, 21	Philips & Philips	193
DACC	192	Printerland	166
Data Store	166	Rainford Industrial	151
Datapen Microtechnology	118	Ricksoft	151
Dastar Systems UK	46	S.P. Electronics	151
DDL	72	Silicon City	163
Dennison Manufacturing	22	Software Classics	157
Display Electronics	50	Software Publications	152
Duck Software	157	Software Services	161
Ephagy	138	Solidisk	7-11
Excaliber	143	Speedysoft	155
Gemini Marketing	80	Structured Software	192
Glentop Publishers	161	Suzysoft	193
Griffin Computers	145	Tandata Marketing	26
Guardian Computer Supplies	165	Technomatic	35-41
HCR Electronics	111, 138	The Educational Software Co.	161
Holly Computers	191	Tomorrows Dream Software	143
IDS (Computer Supplies)	165	Tiger Software	138
Intergalactic Robots	154	Twillstar Computers	113
J.P. Magnetics	152	UCC	130-133
Kempston Micro Electronics	195	Viglen	175-182
Kopper	145	Vine Micros	120
Kosmos	191	Voltmace	99
		Watford Electronics	56-65

CROSSWARE CROSS-ASSEMBLERS

OPERATING DISC-TO-DISC
ON THE STAND-ALONE BBC MICRO

Available on disc and ex-stock
for the following processors:
6800/6801/6802/6301..6303X, 6805/6305/146805
6809, Z80, 8080A/8085
68000/68008 phone for availability

Phone or write for full details
CROSSWARE PRODUCTS
 Melbourn, Royston, Herts SG8 6BA
 Tel: 0763 60838

BATTLE OF BRITAIN

for 32K BBC Model B
- any operating system

Features Include:

- Mode 2 full colour graphics
- Realistic sound effects
- 3D visual effects
- Choice of skill levels
- Authentic settings and aircraft
- Full briefing
- Total mission score/high score
- Tips to improve your game
- Fuel; Oxygen; Ammunition
- Pilot's log (disc version)



Now you can fly with the Few!

Scramble your Spitfire and climb through the clouds to intercept the enemy raiders. Ground Control will guide you, but accurate flying is a must, and will score you extra points.


"Tally-ho!" The sky is suddenly full of planes. You get a Heinkel 111 in your sights and have to use all your skill to hold him there as he jinks and weaves to avoid the devastating fire power of your eight Brownings machine guns. Your aim is good, and he explodes in flames, strewing wreckage in your path.

Watch out! Your mirror tells you there's an Me109 on your tail. You see the flashes and hear the chatter of his guns. You dive steeply away, and manage to shake him off. A Hurricane fills your sights and you almost open fire on him. That could have cost you a lot of points! Planes zoom towards you and climb and dive around you as you seek out your next target. A slow-moving Stuka falls easy prey to your guns and with your low ammo warning light flashing, you carefully aim your last few rounds at a fleeing Junkers 88.

You throttle back to conserve your dwindling fuel supply and set a course for home. From time to time, clouds blot out your view of the horizon and you are dependent on your instruments. With the airfield in sight you lower your flaps and gear and side-slip gently to line up with the runway. Although you have survived another mission, you cannot afford to relax yet, and the quality of your landing can win or lose you points.

If all this sounds too much in one go, you can opt to concentrate on just one phase of the game - interception, combat, approaches and landings - or just enjoy some stomach-churning aerobatics!

SEA WARFARE GAMES

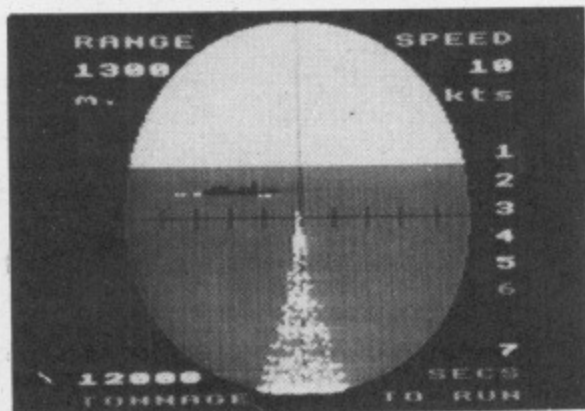

BLOCKADE

Realistic submarine warfare game. Use your torpedoes to prevent the enemy ships reaching port with their valuable cargo. Have you the skill and judgement to sink them all and maintain the Blockade?

SUBHUNT

Aboard a destroyer in the Atlantic, protecting our convoys from the U-boats. Seek the enemy with your ASDIC, then destroy him with your depth charges - before he gets you!

★ 24 hour despatch ★ Full guarantee ★ Retail/Distributor enquiries welcome

SPECIAL OFFERS!

- A. Both Sea Warfare games - 2 tapes for only **£9.95**.
- B. All three games on one disc for only **£22.50**.
- C. Both Sea Warfare games on one tape for Electron - only **£9.95**.

Unbeatable value from BETASOFT

ORDER FORM: Please print clearly and send to:
BETASOFT, 5A St. Stephens Road, Cold Norton, Chelmsford, Essex CM3 6JE

Please send me:	Tape				5 1/4" Disc				40T <input type="checkbox"/> 80T <input type="checkbox"/>
	Qty	Price	P&P	Total	Qty	Price	P&P	Total	Name and Address
Battle of Britain		£9.95	30p			£14.95	35p		
Blockade		£6.95	30p		/	/	/		
Subhunt		£5.95	30p		/	/	/		
Offer A		£9.95	40p		/	/	/		
Offer B		/	/			£22.50	35p		
Offer C		£9.95	30p		/	/	/		
I enclose cheque/PO for: £					£				

...Let your BBC play the game...



KEMPSTON BBC PRO JOYSTICK

This new joystick has been designed to complement the BBC Computer in both style and performance.

Based on the best selling Competition Pro 5000 series, the BBC Pro Joystick contains micro switches allowing movement in a total of eight directions together with twin fire buttons for left and right handed play.

The joystick is moulded in cream and brown and plugs directly into the analogue port ensuring compatibility with a wide range of existing BBC software without the need for expensive interfaces.

ALSO AVAILABLE PRINTER CABLE

Available directly from Kempston Micro Electronics Ltd · Singer Way · Woburn Road Industrial Estate ·
Kempston · MK42 7AF · Tel (0234) 856633 · Telex 826078 KEMPMI G · Please send me:—

BBC Pro Joystick £17.95

Printer Cable £13.50

I enclose a cheque/P.O. for £

Name/Address

Signature


P/code

All prices include VAT P&P Overseas add £4.00 P&P

PACE

Micro Technology

NIGHTINGALE - THE MODEM

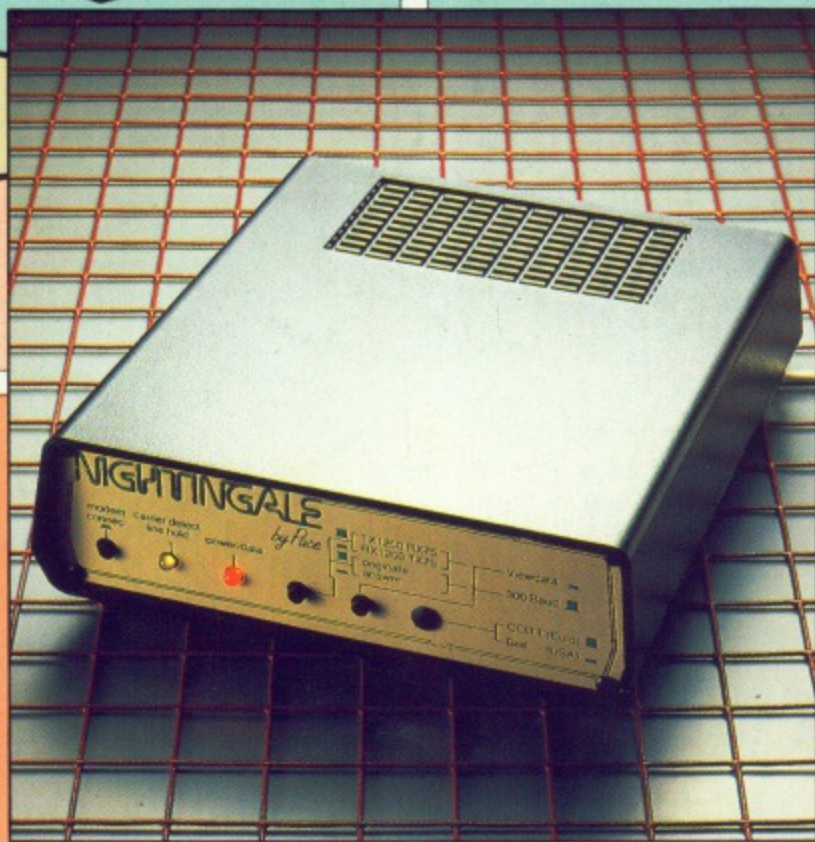

The Nightingale modem is now established as the most popular multi-baud rate modem in its class. Nightingale lets you get on with the job. Whether you need to extract information from Prestel[®], send telexes via Telecom Gold, download telesoftware or simply swap files with a colleague. Did you know that you can search British Library records through their on-line system BLAISE, or access your bank account through homebanking services. The possibilities are endless.

Nightingale operates at the two most popular baud rates, 1200/75 as used by both private and public viewdata systems, and 300/300 baud for communication with remote mainframe, mini or micro systems. Also included is 'reverse viewdata mode', 75/1200 and an optional auto-answer/auto-dial board.

Approved for use in the UK and several other countries, Nightingale can be supplied with quality software for a variety of the most popular micros. If you own or use any micro with a standard RS232 interface, including the BBC micro, IBM PC, Apricot, Sirius or an Apple //e, //c or Macintosh, etc, then we may be able to help you.

With the increasing number of valuable information systems coming on-line, how much longer can you afford to be incommunicado?

Nightingale modem £119 plus VAT

Payment accepted by Cheque, Access or Visa.

Prestel is registered trademark of British Telecommunications Plc. Pace Micro Technology, a division of Pace Software Supplies Ltd.

SPECIAL OFFER

For a limited period we are offering **FREE** subscription to the **ONE** to **ONE** telex service and **25% OFF** the subscription to Knowledge Index with every Nightingale modem.

APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use.

S/2592/3 E/500065

MODEM



most gale contract Gold, E, or services. rates, a dded is auto- ries, r a any e BBC ford ns Plc. s Ltd.

THE MICRO USER

Independent guide to the BBC MICRO!

THE MICRO USER

Volume 3
Number 4
June 1985
£1.25

Othello
Board game strategy on your micro

June 1985



Build wind s

Three vital print routines
Rescue Fido from the well
Create machine code sprites
Use EVAL in Assembler

Vol. 3 No. 4

SPECIAL OFFER

For a limited period we are offering **FREE** subscription to the ONE to ONE telex service and 25% OFF the subscription to Knowledge Index with every Nightingale modem.