

A Database Publication

THE MICRO USER

Volume 4
Number 1
March 1986
£1.25

THE NEW MICRO'S
SECRETS REVEALED



Expert hands-on
evaluation of
the BBC Master

Top-selling guide to the BBC Micro!

How to beat the best at Silverstone

Pull-out guide inside



Two spelling checkers compared

Quicksorting made easy

Business graphics on your micro

Create your own character sets

Listings for two full-length games


Special 3rd
birthday
issue

ICON MASTER — Icon Control System

GIVE YOUR PROGRAMS THAT PROFESSIONAL TOUCH

This pack automates the creation of an icon-driven user interface. It is supplied on a 16K Rom and allows you to design a screen containing icons and then use it in your own programs, in place of a normal menu.

It is easy to use and may optionally be controlled with the AMX mouse. Icons (sample sets provided) are designed on a special Icon screen editor and are compatible with AMX icons.

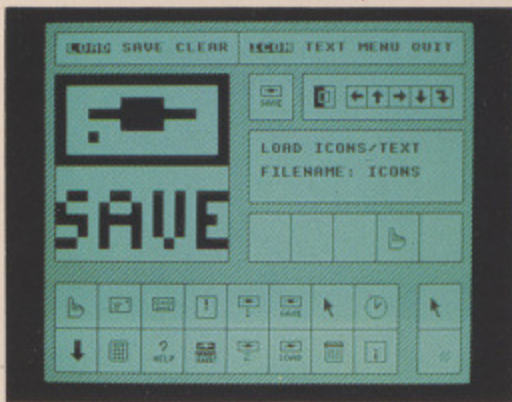

Having designed the icons, the next step is to select the Menu editor and design your final screen. You may position your icons and text wherever you choose on the screen. Icon Master then generates the code to append to your Basic program which will reproduce your icon screen and handle user input.


Your own icon-driven programs may be used with or without the Icon Master Rom in your machine.

ROMIT — Put your own Basic programs into Rom

CREATE YOUR OWN SILICON DISC

RomIt is a 16K Rom which adds a new feature to your BBC Micro — A Ram Filing System. This provides over 20 new commands which enable you to:

1. Create a silicon disc with its own filing system commands. Type ***RAM**, then you can catalogue the "disc", save and load files to it, storing as many files as memory will allow. You will need sideways Ram to use this facility.
2. Put your own Basic or assembler programs (or any file) into Ram and then make them into Eproms. Whether it's your favourite game, your function key definitions or any program that you use frequently, you can now put it into Eprom so that it's always instantly available.

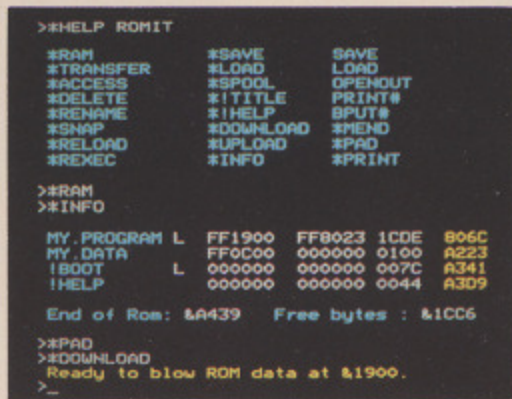

Your Eproms will work with or without the RomIt chip in your machine, and so you may pass on copies of your programs to other people.

Getting your own Basic program into Rom couldn't be simpler. Just load your program into memory and type: ***RAM *TRANSFER "prog" *DOWNLOAD** and either connect it to a blower, or send the disc (or tape) to us, together with your RomIt registration number, and we will Rom it for you. (There is a small charge for this service).

3. Use your sideways Ram as a printer buffer so that you can continue to use your computer for other work at the same time as printing long documents.

Over 20 new *****commands are provided by RomIt

To get the most from RomIt you will need sideways Ram fitted to your computer, eg just a single Ram chip plugged into your ATPL (or other) Rom board.

ICONMASTER £34.00 ROMIT £34.00 inc. VAT

Available from your local dealer. Supplied on 16K Rom.

For further information: Tel St. Albans (0727) 40303

24 hour Access & Barclaycard hotline
Tel Penn (049481) 6666

Mail order to
**Beebugsoft, P.O. Box 109, St. Johns Road,
High Wycombe, Bucks, HP10 8NP**



BEEBUG SOFT

EE SS EE BB EE BB

We thought it was about time we put you in the picture.

AMX Mouse is compatible with all six modules of **Mini II Office**
Word Processor • Database • Spreadsheet • Label Printer
Graphics • Communications

When we introduced our AMX Mouse to BBC Micro users, the response was phenomenal.

And no wonder!

It was regarded as 'pushing the BBC to its limits' and hailed by the press as 'probably the best input device that has appeared recently'. The AMX Mouse brought to BBC Micro users the same sophisticated, positive control that had, until then, been the province of the more expensive computers, like the Macintosh.

Now we announce a new enhanced software package which, can be used with a traditional keyboard or joystick but truly comes into its own when used with the AMX Mouse.

AMX Super ROM and Super Art adds colour to the features of the original AMX ROM, on a new 16K ROM.

It dramatically extends the original AMX ROM facilities to include Pull Down Menus, overlapping colour windows, colour patterns and an extended Icon set in all graphic modes.

Specially written to be usable with the vast majority of BBC Systems including 2nd processors, the Aries RAM Board, the BBC + Shadow mode, tape, DFS and ADFS.

The kernel of the Super Art program is included in the 16K ROM, providing tape and disc users with a Mode-1 colour drawing program.

But Super Art really comes into its own when used on a disc based system; a host of additional facilities can be selected direct from the screen.

Colour pictures can be created in dot resolution up to A4 size by scrolling the screen window, over the picture.

Other facilities include colour pattern editing – use of icons, additional text styles, various copy facilities and a superb colour Zoom.



Pictures can be printed out in colour (Integrex) or shades of black and grey on Epson compatible printers.

The results can be astonishing! – you can even store your finished 'masterpieces'.

The AMX Icon Designer facility gives you further freedom to design and store your own custom icons for use in your own programs.

This fabulous new package costs only £89.95 – a price as remarkable as the package itself – and includes a fully illustrated operating manual.

If, however, you are afraid of mice, you can purchase just the software package plus the 16K Super ROM for just £49.95.

You will still achieve some pretty remarkable results using your keyboard or joystick – not nearly as good as with the Mouse of course – but you can always add one later on for just £40.

Then you'll really be 'in the picture'.

AMX MOUSE

IMAGINATION AT YOUR FINGERTIPS.

BOTH THESE EXCITING PACKAGES ALONG WITH OUR SUPERB RANGE OF AMX ROM AND SUPER ROM COMPATIBLE SOFTWARE ARE AVAILABLE FROM ALL GOOD COMPUTER DEALERS OR BY SENDING CHEQUE OR P.O. TO FREEPOST ADVANCED MEMORY SYSTEMS LTD., 166-170 WILDERSPOOL CAUSEWAY, WARRINGTON, WA4 6QA. FOR INSTANT ACCESS OR VISA ORDERS, RING (0925) 413501



Vol. 4 No. 1 March 1986

Managing Editor
Derek Meakin

Features Editor
Mike Bibby

Production Editor
Peter Glover

Art Editor
Heather Sheldrick

Associate Editor
Alan McLachlan

News Editor
Mike Cowley

Technical Editor
Mike Cook

Advertisement Manager
John Riding

Advertising Sales
Mike Hayes
Peter Babbage

Editor in Chief,
Database Publications
Peter Brameld

Tel: 061-456 8835 (Editorial)
061-456 8383 (Administration)
061-456 8500 (Advertising)
061-480 0171 (Subscriptions)

Telecom Gold: 72:MAG001.
Telex: 265871 MONREF G.
Quoting Ref. MAG001.
Prestel Mailbox: 614568383.

Published by:
Database Publications Ltd,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

Subscription rates for
12 issues, post free:

£15 - UK & Eire (Sterling only)
£40 - Europe
£52 - Rest of world
(airmail)

ABC 64,956
January-June 1985

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1986 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution:
Europress Sales and Distribution Limited,
11 Brighton Road, Crawley, West Sussex
RH10 6AF. Circulation 0293 27053.

NEWS

Read all about it. All the latest events in the ever changing world of your BBC Micro.

23

REVS GUIDE

Is Acornsoft's latest mega-simulation driving you round the bend? Here's all the help you need.

31

ROM ROUNDUP

The latest spelling checkers from Watford and Beebugsoft are given a very thorough testing.

49

HARDWARE SCENE

An external ROM box from HCR and Epson's LX80 printer are put through their paces.

55

MORRIS MINER

Have you the skill to collect all the keys and escape from the mine before your time runs out?

60

MACHINE CODE

Our machine code series for beginners looks at hexadecimal and we write our first program.

65

THE MASTER

Mike Cook provides an in depth evaluation of Acorn's newest arrival on the micro scene.

71

BEGIN HERE

We look closer at numeric and string variables and put them to use in some simple programs.

79

SOFTWARE SCENE

Our fearless reviewers present their detailed evaluation of some of the recent releases.

87

3

**This month's
reviews at
a glance**

<i>Adventurous English</i>	90
<i>BBC Master</i>	71
<i>Car Cure</i>	90
<i>Citadel</i>	87
<i>Epson LX80 Printer</i>	55
<i>HCR external ROMbox</i>	57
<i>Inter-Chart</i>	101
<i>Lift and Floater</i>	87
<i>Moon Buggy</i>	88
<i>MPSS Database</i>	100
<i>Romspell</i>	49
<i>Small Business Accounts</i>	98
<i>Spellcheck III</i>	50
<i>Stairway to Hell</i>	87
<i>Phantom Combat</i>	90
<i>Tell the Time</i>	89
<i>Terrormolinos</i>	120
<i>The Worm in Paradise</i>	120
<i>White Knight</i>	89
<i>Woodbury End</i>	119
<i>Yes Chancellor</i>	88

**Our 3rd
birthday
offers**

Don't miss our bargain bundles of tapes and discs at throwaway prices – plus a really incredible offer of an ink-jet printer for £49 and the BBC Micro Teletext System for £69.95.

They're all in our Special Offers section starting on Page 167.

7

98 BUSINESS

Our experts scan the BBC Micro's business world and review some of the products on the market.

104 OSWORD 8271

The last of the series looks at bad tracks and deleted data, and completes the 8271 command list.

110 CHARACTER SETS

We take a look at creating your own character sets and provide you with the programs to do it.

112 POSTER PUZZLER

Are sliding block puzzles your weakness? This micro version will keep you amused for hours.

119 ADVENTURES

Our adventurer treks from Woodbury End to Terrormolinos and finally meets the Worm in Paradise.

124 QUICKSORT

Need a fast sort routine? Here's one that uses and teaches recursion to achieve its results.

129 BODY BUILDING

Using January's sound sampler we massage and manipulate noise and even play a tune with it.

153 MICROMAIL

The part of the magazine you write yourselves – your news, views, brainwaves and moans.


167 ORDER FORM

From back issues to binders, cassettes to cases, discs to dust covers – they're all here.

PACE

Micro Technology

PEAK OF PERFECTION

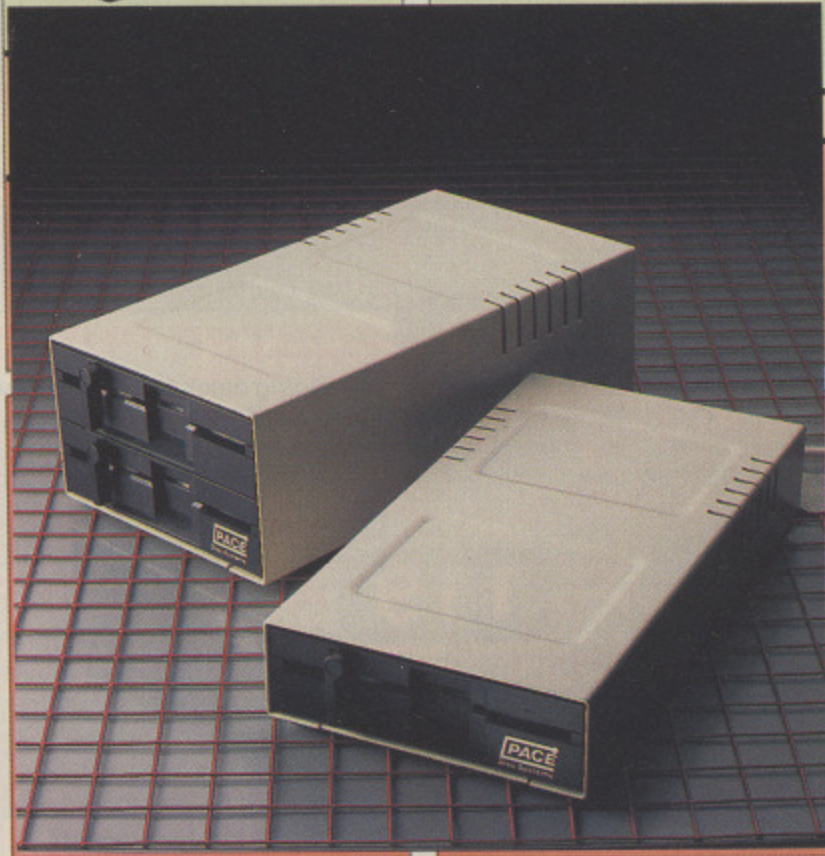

When you give your BBC computer a Pace disc drive, you give yourself much more.

More time, More confidence, More flexibility, and more importantly, Peace of mind.

A quality disc drive from Pace will give you the freedom to use your BBC the way you want to use it. Why be dictated to by the speed of a "Data Recorder" when all your programs and data can be loaded and saved in less than a tenth of the time with discs. You will very quickly become dependent on your drive.

At Pace Microtechnology we realise just how important your drives will become so we build them to last. Each unit has a die-cast alloy chassis for rigidity and long-term stability. They use direct drive brushless DC motors for accurate speed control and LSI technology for high reliability with low power consumption. The heads are long-life ceramic.

But the quality doesn't stop with the mechanism. The cases are functional yet attractive enamelled aluminium. Only the highest quality data cables are used and each drive is individually tested before and after building. Our after-sales service is second-to-none.

Quite simply, what more could you want?

For further information call us on 0274 729306 or write to the address below.

NEW Self-powered Pace drives

With the addition to our range of self-powered drives, we now have the largest range of drives available for the BBC.

Single drives. Dual drives. Single drives in dual cases (for simple upgrading). Drives with power supplies. Drives which use the BBC auxiliary power socket. 40/80 track switchable drives.

For further details contact:

Pace Micro Technology
Juniper View
Allerton Road
Bradford BD15 7AG
Telephone 0274 488211
Telex 51564
International tel. no.
+44 274 4488211

Pace Micro Technology, a division of
Pace Software Supplies Ltd.

When the press use such words as 'Phenomenal', 'Outstanding', 'Ideal' and 'Worth Every Penny', they've obviously discovered something rather special.

But when that something turns out to be a product in which they are already expert, then it must be something very special indeed. The object of their enthusiasm is AMX Pagemaker – a revolutionary software program that will produce newspapers, posters, leaflets, notices and hand-outs – in fact anything where text and graphics are required, to an extraordinary professional standard.

It's a complete graphics design system and word processor rolled into one.

AMX Pagemaker consists of two Roms and two discs therefore it will work on a standard BBC or B+ micro without a Rom board.



AMX Pagemaker is fully compatible with either the AMX Mouse – joystick or keyboard and requires the minimum of a single 40 track disc drive. It has real time graphics with fast continuous scrolling up and down an A4 page and uses Mode O, the highest graphics resolution on the BBC.



The program that's making front page news.

READ ALL ABOUT IT.

You can type directly on to the screen, with any of the 16 typefaces supplied or design your own, alternatively, you can load in wordwise and view files with fully automatic on screen text formatting as they load. Either way centering, ragged right and literal justification are all available. There is full pixel resolution control over character size and spacing: Also included is a Micro justification facility.

EXTRA, EXTRA.

There are outstanding facilities for drawing, spraying and painting, using either the patterns supplied, or your own pattern designs, enabling you to achieve some incredible graphic results. A complete Mode conversion program is included allowing you to load in drawings and digitised pictures from all BBC graphic modes. The cut and paste facilities include: copying, moving, rotating, stretching and a fantastic zoom is also available.

The previewer allows you to view three A4 pages at any time, before work is output to a wide range of dot matrix printers including: Epson FX/RX/LX/LQ, Canon PW-1080, Kaga KP810, Mannesman Tally MT-80+, Seikosha SP-1000A, Star Delta, Star SG10. And any that are compatible with the above.

AMX Pagemaker is your opportunity to join the publishing revolution, it comes complete with a comprehensive manual which the press describes as 'Superb'.

At only £49.95 the cost of the Pagemaker is as amazing as the program itself.

Let's leave the last word to the press.

"Pagemaker" is phenomenal – it lends itself to creating anything where text and graphics are involved – notices, posters, leaflets, hand-outs, newsheets. Packages like this have been the province of the 16 – bit micros until now, this product is worth every penny of £49.95."

* 'Educational Computing', January 1986.

This superb package is available from all good computer dealers or direct using the Freepost order form below.

PLEASE RUSH ME POST FREE _____ (Quantity)
 AMX PAGEMAKER PACKAGE/S AT £49.95 EACH
 INCLUDING VAT AND P & P.
 I ENCLOSE CHEQUE/POSTAL ORDER FOR
 £ _____ OR DEBIT MY
 ACCESS OR VISA
 CARD NO. _____
 EXPIRY DATE _____
 SIGNATURE _____
 NAME _____
 ADDRESS _____
 POSTCODE _____

AMX PAGEMAKER
 IMAGINATION AT YOUR FINGERTIPS
 SEND TO: ADVANCED MEMORY SYSTEMS LTD.,
 FREEPOST, WARRINGTON WA4 1BR.
 TELEX 628672 AMS G.

FOR INSTANT ACCESS OR VISA ORDERS RING 0925-413501/2/3

SOLIDISK FOUR MEG BOARDS MAKE THE BBC MICRO ONE OF THE FASTEST MACHINES YOU CAN BUY

Fit your BBC micro with a Solidisk Four Meg board, and run the PCW BASIC benchmarks in 7.13 seconds, and the PCW Spreadsheet benchmark (with Inter-Sheet) at 312 cells/second.

If you are serious about your business throughput or your "Elite" status, check the effect of Solidisk Four Meg boards. They use a totally new concept for expanding your BBC micro, both in RAM/ROM capacity and in speed.

The newer ROMs have more capacity, 32k as used in the BBC Plus and 64k as in the Communicator. They are also faster and consume far less power than the older 16k and 8k ROMs.

There are four high-capacity Sideways ROM sockets on a Solidisk Four Meg board. You can use a 64k chip in one of them and 32k chips in the other three. Together with the four ROM sockets on the BBC motherboard, you can then fit up to 224k of Sideways ROM into your BBC computer.

Sideways RAM and Shadow RAM haven't been forgotten. The Solidisk Four Meg board can have them too. You can choose either zero or 32k of RAM. The latter can be used either as Shadow RAM or as two banks of Sideways RAM.

Thus, the Solidisk Four Meg boards offer more capacity and yet occupy less space than other boards offering only Sideways ROM/RAM expansion.

In addition, the new Solidisk 256k board offers the Four Meg feature, together with up to eight banks of Shadow RAM and eight banks of Sideways RAM.

But the real plus feature is speed. The Solidisk Four Meg boards make the BBC micro outstandingly fast.

They have a switchable 2 or 4 MegaHertz superfast CMOS 6502 processor. At 4 MHz, the machine can produce up to twice the throughput of a standard BBC B, BBC Plus 64k or BBC Plus 128k. Witness the PCW BASIC and Spreadsheet benchmarks.

Compared with a standard IBM-PC (17.6 sec) and a standard BBC micro (14.6 sec), a Solidisk Four Meg board enables the BBC to run the BASIC benchmark in just 7.13 seconds, putting it amongst the fastest micros that you can buy today.

It is comfortably ahead of a BBC with the Acorn 6502 Second Processor (9.58 sec), and only marginally slower than an IBM-PC AT (TM) (7.11 sec) and a BBC with the Acorn 32016 Cambridge Co-Processor (6.88 sec).

Using Computer Concepts Intersheet to run the Spreadsheet benchmark for speed of recalculation, the Solidisk Four Meg boards enable the BBC to achieve the highest published score amongst microcomputers: it can recalculate more than 24 rows x 13 columns per second (312 cells/sec) by comparison with LOTUS 1-2-3 (89 cells/sec.) or even SYMPHONY (TM) on the IBM-PC (97 cells/sec).

Besides serious applications, the Solidisk Four Meg boards are simply great for computer games. You should just see the stunning graphics and response at 4MHz to realise how good your BBC Micro is. If you don't believe us,

Just try Acornsoft's Elite or Revs with it!

IBM-PC AT is registered trademark of IBM Corp.
1-2-3 and Symphony are registered trademarks of Lotus Development Corp.
SOLIDISK TECHNOLOGY LIMITED, 17 SWEYNE AVE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ. TEL SOUTHEND-ON-SEA (0702) 354674.

The S

The basic Four Meg board costs £30.00 inclusive of VAT.

The 32k version comes with software in ROM and on 5 diskettes, and costs £69.00 inclusive of VAT.


The Solidisk Four Meg boards are intended for the BBC Model B only and can be used with existing Solidisk Sideways RAM boards. However, they are not compatible with any other Sideways RAM/ROM board or Shadow RAM boards — which they can replace.

The Solidisk Four Meg boards are securely mounted on the original processor socket, and the additional connections may be made either by spruing clips or by soldering.

The sideways ROMs and RAMs built onto the BBC motherboard are not switchable to 4 MHz.

Larg
BB
RAM
6502
sock
of th
It co
from
ROM
RAM
for h
can

Th
The
can
Sha
enla
doc
Sid
am
occ

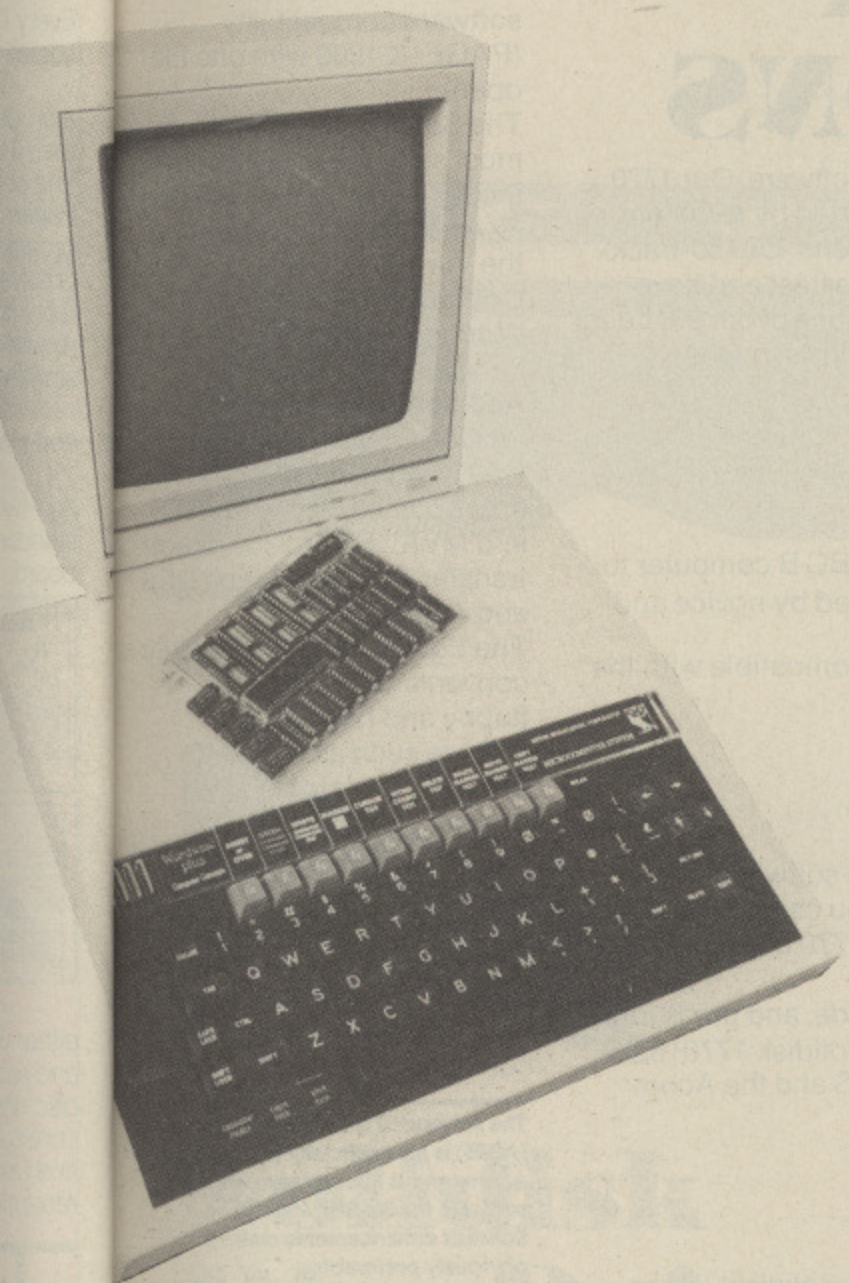

The Solidisk 256K Board

Largest and fastest in the range of memory upgrades for the BBC computer is the Solidisk 256k board. This has 256k of RAM, four high-capacity ROM sockets and a superfast 4 MHz 6502 processor. Both the 256k of RAM and the four ROM sockets can run either at 2, or at 4 MHz — twice the speed of the standard BBC B or the B Plus.

It comes with Wordwise Plus, the best-selling wordprocessor from Computer Concepts, and the Solidisk 32k Manager ROM. This latter can allocate the RAM between Shadow RAM, which acts like that on the BBC Plus, Sideways RAM, for holding images of ROM software, and a RAM disc, which can be of up to 200k.

The Hardware

The 256k RAM is divided into eight banks of 32k bytes, which can each be used as Sideways RAM or as Shadow RAM. Shadow RAM is usually 20k, but may be increased to 30k, to enlarge the RAM available to the user — eg to hold a bigger document or worksheet.

Sideways RAM is usually 16k, but can be 31k to increase the amount of code held in a single bank. Software which occupies two ROM slots in a standard machine may now be

re-written into a single ROM slot, thus becoming shorter in size and faster in operation.

If need be, each bank can be shared between the two, i.e. the bottom as Shadow and the top as Sideways RAM, the border line being controlled by the application software.

The four high-capacity ROM sockets on the 256k board can accept chips of any size from 8 to 64k. 32k chips can be configured either as 31k of continuous code or two independent levels of 16k; "resident" and "backup" (this latter being compatible with the BBC Plus). 64k chips can be divided similarly; one resident — again of either 16 or 31k — and the rest as backups.

The processor is switchable between 2 and 4 MHz. At 4 MHz, the machine can produce up to twice the throughput of a standard BBC B, or B Plus, 64 or 128k.

The Manager ROM

This enables the 256k RAM board to be used for VDU screen record/playback, printer/sound buffer, Basic variable storage, or as a RAM disk.

The Manager ROM also contains a toolkit of programming utilities to list variables, edit, find and exchange strings, check, move, salvage, expand, join and renumber programs, load, save and set function keys, report program status, turn cursor and sound on/off, set sound volume etc.

Shadow RAM may be selected by *SHADOW, followed by a mode change, or by FX114, 128 to FX114, 255, exactly as on the BBC B Plus. However on the latter, arguments 128 to 255 all select the same, single Shadow RAM bank, while on the Solidisk 256k board, they can select between up to 128 Shadow RAM banks (if they exist).

As with the earlier Solidisk SWR32, 64 and 128, a group of Sideways RAM banks can be used as a RAM DISC — now of up to 200k. RAM disc is set up by *RAMDISK <drive>. This stimulates a disc drive, now under not only the Solidisk 2.0 DFS but also — for the first time — ADFS. This operates faster than even the Solidisk Winchester.

The Manager ROM makes the 256k board even more versatile. RCAT displays both "resident" and "backup" firmware. Resident firmware includes all ROMs installed in the BBC motherboard, plus all Sideways RAM banks containing ROM images. The command SELECT causes code to be copied from a backup to a Sideways RAM bank, thus making it "resident".

These features provide potential for further developments in software for the BBC Micro — including integrated suites of business applications, such as Computer Concepts' "Inter-" family.

With the most useful RAM capacity, and the doubled speed, the Solidisk 256k board is perfect for the present, while having huge potential for the future.

Prices, inclusive of VAT

The 256k board comes with the Wordwise Plus ROM and manuals, and Solidisk Manager ROM and manual.

Outright	£175.00
Upgrade from SWR 32	£123.00
Upgrade from SWR 64	£89.00
Upgrade from SWR128	£75.00

The 256k boards are securely mounted on the original processor socket, and the additional connections may be made either by sprung clips or by soldering.

THE SOLIDISK - DISC SOLUTIONS

Solidisk can offer you the widest possible choice in hardware and in software. Our 1770 and 1770+8271 disc interfaces are of the finest design, and supported by excellent software. Solidisk DFS and ADFS are highly acclaimed by BBC experts. Our 80-track double-sided floppy disc and high-capacity Winchester drives are the fastest and have the lowest power consumption. The quality of support and the competence of our 90+ Local Experts and technicians are unquestionable. So when you shop around, insist on the Solidisk label.

The Solidisk 1770 Disk Interface

The Solidisk 1770 Double Density Disk Interface enables the standard BBC B computer to use floppy disc drives. It has only four components, which are easily fitted by novice and expert alike.

The Solidisk 1770 Double-Density Disc Upgrade (Issue 2) is now fully compatible with the Acorn 1770 DNFS and the Acorn ADFS ROMs.

The Solidisk 1770+8271 Disc Interface

In order to enjoy double density operation, as well as retaining maximum software compatibility with older disc software (which only runs with the 8271), you can now fit the Solidisk 1770+8271 Disc Interface. You can select either the 8271 or the 1770 at a flick of a switch.

It is intended for the BBC Model B already fitted with an 8271 Disc Upgrade, and plugs into the 8271 socket, with the 8271 being transferred to the new board. The Solidisk 1770+8271 Disc Interface (Issue 2) is now fully compatible with the Acorn 1770 DNFS and the Acorn ADFS ROMs.

The Solidisk 2.0 Disc Filing System ROM

This ROM can be used with either 8271 or 1770 Disc Interfaces (Acorn or Solidisk). It has every facility that you would expect, such as disc formatter and verifier, automatic 40/80 track switching, single/double density sensing and programmable track stepping (to suit almost any type of disc drive).

Additional features and utilities include unlimited file catalogue, Read-After-Write (for higher reliability), text editor, memory editor, disc sector editor, whole disc copier, tape-to-disc, download, read and write a track and recover and restore sectors (for recovering corrupted discs).

Even when working with the 1770, it can run all Acornsoft games (such as Aviator, Elite, Revs, Magic Mushroom etc), and most other protected disks (such as Castle Quest, Island's Music System etc.).

It also has several advantages over the Acorn 1770 DNFS ROM including:

- 1) The option of double-density operation, which gives 60% more storage capacity, i.e. 640k on a double-sided 80-track diskette, as opposed to only 400k.
- 2) A better emulation of the older 8271 floppy disk controller: some protected disks (such as the early versions of Acornsoft's Elite game will not run with the Acorn 1770 DFS.

These features make the Solidisk 2.0 ROM the most versatile DFS software you can buy.

The Solidisk Advanced Disc Filing System ROM

This ROM-set can be used on the BBC Plus and the BBC Model B fitted with a 1770 Disc Interface (Acorn or Solidisk). It is available as an upgrade for your existing DFS ROM in one 32k or two 16k ROMs.

The Solidisk ADFS was reviewed in A & B Computing, October 1985. Whilst comparable to

the Acorn ADFS, it is designed for maximum DFS software compatibility (PAGE=& 1900 with one file open).

The Solidisk ADFS will run most software available for the BBC computer, including all Acornsoft languages and the View family and Computer Concepts Wordwise and the Inter-family.

Additional commands include OPEN <number of files > to reset PAGE appropriately, while MVDFS and MVADFS provide direct transfer of files between DFS and ADFS discs.



The Solidisk ADFS is equally convenient for use with floppy and hard discs.

Utilities such as FORM40, FORM80 (for single-sided drives), FORM160 (for double-sided, 80-track drives), VERIFY are provided for floppy discs, whilst BYE used on a hard disc makes a copy of the root directory, to assist recovery in the event of corruption.

The Advanced Disk Filing System (ADFS) is now officially launched by Acorn, and is already revolutionizing software for the BBC Micro. The Solidisk enhancements make it obviously preferable.

Prices, inclusive of VAT

2.0 DFS ROM and manual	£10.00
ADFS+DFS ROM set and manual	£20.00
Upgrade from 2.0 DFS to ADFS	£10.00
1770 Disc Interface, 2.0 DFS ROM and manual	£45.00
1770 Disc Interface, ADFS, DFS ROMs and manual	£55.00
1770+8271 Disc Interface, 2.0 DFS ROM and manual	£50.00
1770+8271 Disc Interface, ADFS, DFS ROMs and manual	£60.00

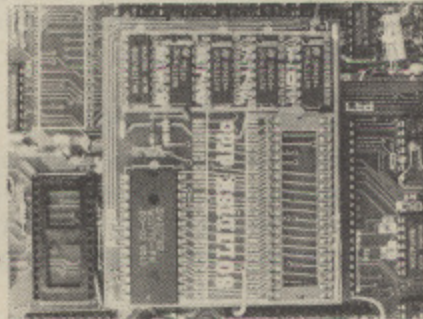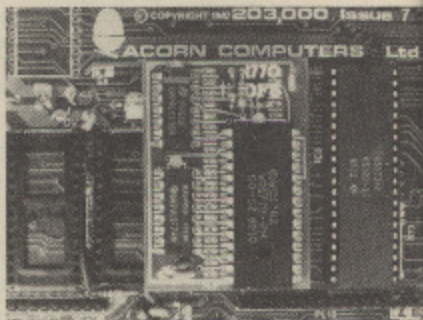

m DFS
y
one file
ill run
le for
cluding
es and
er-
S
ber of
VDFS
direct
en DFS
equally
h
M40,
ded
k
provided
BYE
akes a
ory, to
event of



Solidisk Disc Drives

Solidisk 5.25 inch disc drives are of the latest half-height design, with 80 tracks and double-sided, giving a capacity of 1 Megabyte (unformatted). Features such as automatic spin-up, steel band positioning and a new head mounting system ensure correct centering, consistent tracking performance and long service life of the disc.

The use of a direct-drive motor and the latest VLSI circuitry results in exceptionally low operating noise and power consumption. Therefore two such drives can be powered reliably by the BBC micro.

They are enclosed in strong steel casings, coloured in elegant beige, to protect the high-precision mechanism. The power and data leads are fitted with appropriate connectors, to suit the BBC computer.

With each disk drive purchase, Solidisk provide five volumes of useful software, each on a separate diskette, and a User Manual.

Volume 1

Solidisk Word Processor and Spelling Checker, with English dictionary. You enter by *WP <filename>, and then start typing. Wordstar-like commands make it easier to use than Wordwise, View or Scribe. What you see on the screen is what will be printed. The most

useful commands are displayed at the top of the 80 column screen. It provides on-screen justification, automatic margin, insert/overwrite, search and replace, word count, word frequency count, free space, *commands and page numbering. Block operations include move, delete, copy, print, load to cursor. The Solidisk Word Processor has the unusual ability to spellcheck your document without leaving it, simply by typing Control-U.

Volume 2

This contains the Solidisk Database. It uses an 80-column display, is completely menu-driven, can be easily customised and allows datafiles as large as the filing system permits.

You enter the database with Shift-Break, and select one of the 15 options, each leading to a sub-menu. Datafiles can have an unlimited number of records, each with up to 15 fields of up to 60 characters. You can search, sort, view, print using tabulation, print labels, print forms, edit and delete, calculate on fields, merge databases, mailmerge etc.

Volume 3

This contains the Solidisk spreadsheet. Also using 80-column display and menu-driven, it has options to create, edit, recalculate, and print etc. Spreadsheets can have unlimited numbers of rows and columns. Each column can be from 2 to 70 characters wide. All the BBC Basic maths functions are available.

Volume 4

This contains the Solidisk MACRO language. It is Control, TAPE to DISC. DZAP, MZAP and SILEXIGEN, a dictionary generator for the Solidisk Spelling Checker together with a sample French dictionary.

Volume 5

This contains the Solidisk MACRO language. It is capable of generating a Basic program using PROCEDURES, FUNCTIONS, MACROS and machine code routines contained in other programs. Using the Solidisk MACRO language, you can extract useful parts of existing programs to set up your own MACRO libraries, then use them later on as building blocks for new programs.

The Solidisk computer case

This compact steel case is coloured in beige and especially designed to hold the BBC micro and two Solidisk disc drives. It will support even a heavy-weight monitor, while providing good cooling for the power supply and concealing many connecting cables. The keyboard is housed in a separate case, connected by a 24 inch flexible data cable. It is 1/2 inch lower than the original case, does not skid about on the desk and makes a lot of difference to typists (even two-fingered ones!).

Prices, inclusive of VAT

Solidisk 80-track, double-sided disc drive unit with software and manual	£109.00
Dual 80-track, double-sided disc drive unit with computer and separate keyboard cases, software and manual	£230.00
Computer and keyboard case alone	£ 30.00

We reserve the right to change prices and specifications without prior notice.

ystem
ched by
ionizing
he
e it
of VAT
£10.00
£20.00
£10.00
£45.00
OMs
£55.00
ROM
£50.00
FS
£60.00
Issue 7
ERS Ltd

A COMPLETE SOLUTION TO BUSINESS COMPUTING

Suitably equipped, your BBC Micro is an excellent computer for the office. It can run wordprocessor, database, spreadsheet etc better than many other business machines. It can also communicate with other micros and mainframe computers, either directly or via a MODEM.

Solidisk has selected the best in business software, disc drives and printers to form the Solidisk Office System, based upon the BBC Model B or the B Plus. With the Model B, a Four Meg board or a 256k expansion may be fitted along with a 1770 or a 1770+8271 disc interface. Both models can have a Winchester hard disc connected.

The Solidisk Wordprocessor, Disc Drive and Printer Package

The Wordprocessor is the famous WORDWISE PLUS — the best selling wordprocessor from Computer Concepts. Various reviewers speak of WORDWISE PLUS as very user friendly, flexible, straightforward or simply excellent (1). With it, you can write letters and longer documents, and change them to your satisfaction before printing. If you need many similar letters or standard forms, you need only write them once. Wordwise Plus can search and replace any word or phrase, and also mailmerge.

The 5.25 inch disc drive is of the latest half-height design, with 80-track double-sided, giving a net capacity of 640k bytes per disk (in double density). The diskettes are industry standard, readily available and low in cost. The power and data leads are fitted with appropriate connectors, to suit the BBC computer.


The printer is a 9-needle dot-matrix, with a speed of 160 characters per second in normal mode and 32 characters per second in Near Letter Quality mode. Features include multiple pitch settings, italics, boldface, underline, super and subscript, bit image graphics etc. It uses the same ribbon and control codes as the Epson FX85(2).

All manuals and accessories like printer ribbon, printer cable and paper, and a blank diskette are included, so that you can start right away. The package also contains a list of other selected software and hardware available from Solidisk.

Other possible applications

The Solidisk Office System can do more than just wordprocessing. To complement WORDWISE Plus, five volumes of useful software are provided, each on a separate diskette, including Spelling Checker, Database and Spreadsheet programs. You can use the database for mailing lists, customer records, stock inventories etc and the spreadsheet for cheque book balancing, budgeting and forecasting. The database is powerful enough to do important work such as processing all the Solidisk customer records (over 50,000).

However, you need not be limited to the bundled software, but can easily increase the power of the system with, eg a spreadsheet such as Inter-Sheet, a business graphics such as Inter-Chart, or a database such as Viewstore, for more demanding applications. With this last you can, for example, set up a datafile of 30,000 membership records of a video club and have any or even all fields indexed. You can then display them in sorted order, retrieve any record instantly with a few keystrokes, and have a report printed on most popular titles, age groups, takings etc. Such a large database requires a disc drive of very high capacity which in practice is a Winchester disc. Even if your present needs are not as large as this, it is nice to know that this system can grow with you.

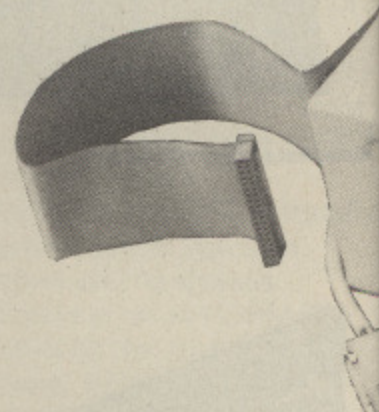

Prices

The Wordprocessor, disc drive and printer package available for the BBC model B Plus or the Model B fitted with disk interface. This includes:


- WORDWISE PLUS ROM keystrip and manuals.
- one double-sided 80-track disc drive.
- one 160 cps printer.
- five software diskettes and manuals.
- all leads, blank diskette and 100 sheets of fanfold paper.
- one year guarantee.

The complete package costs £269.00 plus VAT.

Owners of BBC Model B's can purchase a Solidisk 1770 disc interface and a 2 DFS ROM, together with the above package, at a special price of only £299.00 plus VAT (saving £10.00).

(1) See reviews in E & CM, CEEFAX, Acorn User.

(2) Solidisk own direct imports from Japan, subject to change without notice for improvements.

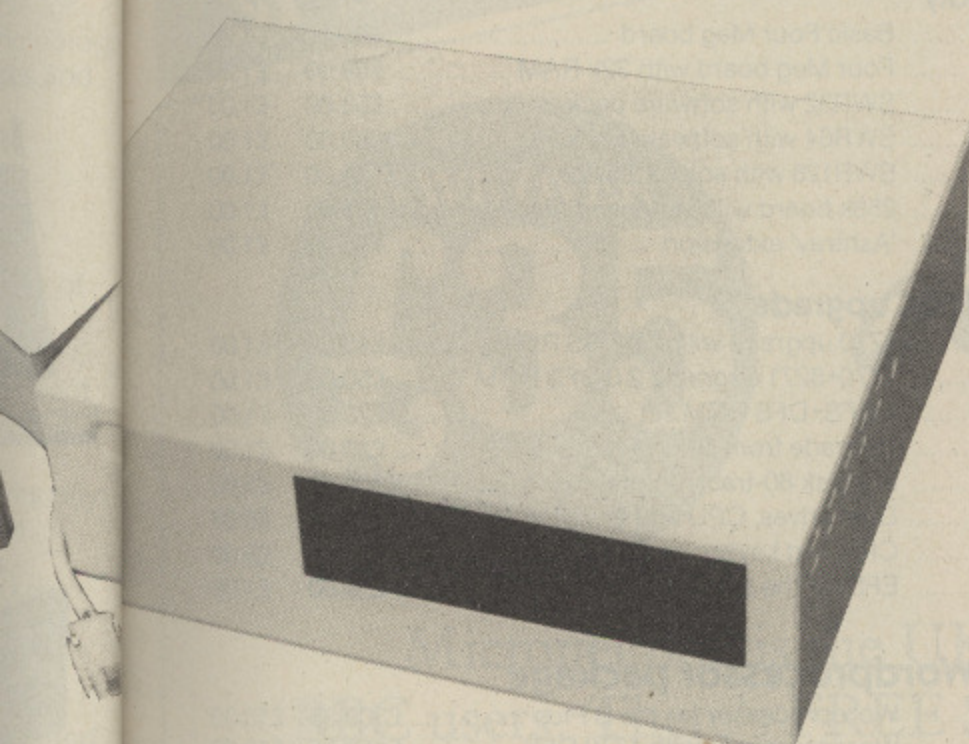

THE SOLIDISK WINCHESTER DISC DRIVE

The drive has a capacity of 20 Megabytes formatted. Both single- and dual-drive models are available.

Two key advantages of Winchester drives over floppy discs are higher capacity and faster transfer rate.

Unlike floppy disc drives, Winchester drives are enclosed in sealed casings, allowing very high track density, up to 600 compared with 40 or 80.

Their discs are non-removeable, rotating continuously at high speed (3600 rpm), enabling data to be transferred 20 times faster than single-density floppy discs.

The Solidisk Winchester drive has a further advantage over some competitors. It has "buffered seek", hence stepping pulses can be as short as 2 microseconds. This results in an average access time of 80 milliseconds — less than one-hundredth of some other drives. This is especially important as the Winchester fills up, for example when used with a large database.

Hardware requirements

To use a Solidisk Winchester, you will need either a BBC Plus or a BBC model B, fitted with a 1770 Disc Interface (Acorn or Solidisk). The Winchester drive is connected to the 1MHz bus socket.

Software compatibility

The Solidisk Winchester drive is normally used under the Solidisk ADFS, which allows file sizes up to 512 Megabytes and provides a hierarchical directory, permitting an essentially unlimited number of files.

The Solidisk ADFS will run most software available for the BBC computer including all Acornsoft languages and the View family, and Computer Concept Wordwise and the Inter-family. In particular, ViewStore is well suited for databases on Solidisk Winchesters.

All the Acorn Second Processors (6502, 32016 and Z80) are largely compatible with Solidisk Winchesters. Applications such as System ADE running on the 6502, PANOS on the 32016, BBC Basic (Z80) and CP/M (with new HD ROM and HD BIOS) on the Z80 are compatible.

However, software that is not compatible with ADFS will not run.

Prices

The Solidisk Winchester packages consist of:

- One or two Winchester drives, enclosed in a steel casing. The drives come already formatted and loaded with the Solidisk "Initial Software" package, containing a collection of useful programs, such as CATALL, EXALL, ARCHIVE etc.
- A utility disc containing the SAFE program which allows recovery of a corrupted disc.
- A Solidisk ADFS+DFS ROM-set.
- A set of manuals.

Three models are available:

- 1) 20 Megabytes without its own power supply, but uses that of the BBC Micro£575.00+VAT
- 2) 20 Megabytes with its own power supply£650.00+VAT
- 3) Dual 20 Megabytes with its own power supply .£999.00+VAT

The minimum model is only suitable for use with BBC computers fitted with the current, switched-mode power supply and one Solidisk low power floppy disc drive.

The Linemaster ROM and Modems

The Solidisk Linemaster ROM allows the BBC Micro to communicate with other computers. In addition to the standard Terminal and Prestel modes, it has Viewdata Host Mode and the ability to autodial and autoanswer, all controlled by software.

In Terminal mode, your BBC micro acts as a terminal to other computers, either locally by a serial cable link or remotely, via a modem and telephone line, eg bulletin boards. It supports various BAUD rates and protocols, and has elapsed time clock, 40/80 column screen display etc.

The Prestel mode is designed for accessing the British Telecom Viewdata service. The facilities include tagging, searching and displaying pages, sending and receiving text and downloading software from and to disc.

A special feature of the Solidisk Linemaster ROM allows you to set up your BBC Micro as a Viewdata host. In this mode, other users can communicate with your computer exactly as with Prestel. You can edit pages, make up routing instructions, collect responses etc.

The Solidisk Linemaster Communication ROM works well with all BABT approved MODEMS such as the WS2000, the Nightingale etc but many MODEMS do not support all the features of the Linemaster ROMs. The Telemod 1 for example offers only 1200/75 baud, and is therefore only suitable for communicating with Prestel (or other Viewdata hosts).

Solidisk local experts

Solidisk has a nationwide network of more than 90 local experts and a growing number of experts overseas.

They do not sell our equipment but can generally fit it for you free of charge. If you would like to take advantage of this unparalleled service, ring Solidisk Sales Office.

If you wish to call at our office, please make an appointment.

Tel Southend (0702) 354674
(16 lines)

ORDER BY MAIL: Please complete (or copy) this coupon and send it to:

Solidisk Technology Ltd, 17 Swayne Avenue, Southend SS2 6JQ

Prices, inclusive of VAT

RAM/ROM expansion

Qty		Price	P&P
.....	Basic Four Meg board	£30.00	£1.00
.....	Four Meg board with 32k RAM	£69.00	£1.00
.....	SWR32 with software pack 1	£53.00	£1.00
.....	SWR64 with software pack 1	£80.00	£1.00
.....	SWR128 with software pack 1	£125.00	£1.00
.....	256k board with WW+ and Manager	£175.00	£1.00
.....	'Ashtray' extension	£15.00	£1.00

DISC upgrade

.....	1770 upgrade with 2.0 DFS ROM	£45.00	£1.00
.....	1770+8271 upgrade, 2.0 DFS ROM	£50.00	£1.00
.....	ADFS+DFS ROM set	£20.00	£1.00
.....	Upgrade from DFS to ADFS+DFS	£10.00	£1.00
.....	Solidisk 80-track double-sided	£109.00	£3.00
.....	Dual drives, CPU and keyboard case	£230.00	£6.00
.....	CPU and keyboard case alone	£30.00	£6.00
.....	EFS for the Electron	£59.00	£1.00

Wordprocessor package

.....	Wordprocessor for the B Plus	£309.35	£10.00
.....	Wordprocessor with 1770 DFS	£458.85	£10.00

Winchesters

.....	20MB without PSU	£661.25	£10.00
.....	20MB with PSU	£747.50	£10.00
.....	40MB with PSU	£1148.85	£10.00

Modems

.....	Linemaster ROM and manual	£10.00	£1.00
.....	Telemod 1 (BABT approved) MODEM, with Linemaster ROM	£50.00	£3.00
.....	Other MODEMS	POA	

Datalife Diskettes

.....	MD525 box of 10	£16.00	£1.00
.....	MD557 (2S/4D)	£25.00	£1.00

Eproms

.....	2764-25 to clear 20 pcs	£25.00	£1.00
.....	27128-25 (or better) pack of 5	£25.00	£1.00
.....	27256-25 (or better) pack of 3	£25.00	£1.00
.....	UVIPROM Eprom programmer	£19.00	£1.00
.....	UVIPROM32 for our 27256's	£21.00	£1.00
.....	UVIPAC Eprom eraser	£20.00	£1.00
.....	Solidisk Toolkit ROM	£10.00	£1.00

Total

Name:

Address:

BARCLAY

ACCESS

We reserve the right to change prices and specifications without notice. If you wish to call at our office (Mondays to Fridays 9.30am to 5.30pm), please ring for an appointment.

MU3




BEEBUG SHOWROOM AND MAIL ORDER

The products in this price list are available in our showroom in St. Albans and by mail order. Telephone your order on 0727 40303 or send the order form to the address below. Alternatively come along and see us. We are open 9 - 5.30 Mon - Sat, and there is ample parking at the rear of our premises.

We take both Access and Visa credit cards. Simply telephone us on our multi-line telephone number 0727 40303 quoting: Cardholder's Name, Cardholders Address, Cardholder's Telephone number, Credit Card number, expiry date, order details.

PLEASE NOTE: that the mail order despatch address must be the same as the cardholder's address.

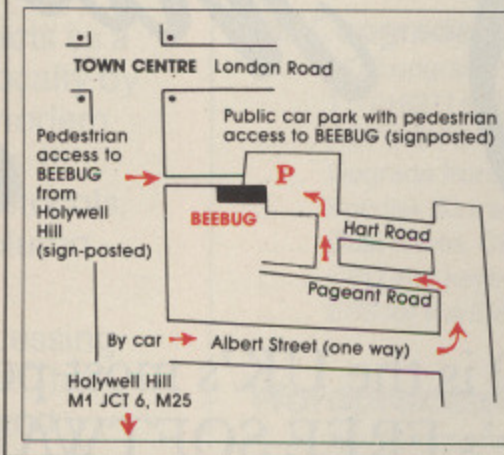

BEEBUG MAIL ORDER
Dolphin Place, Holywell Hill,
St. Albans, Herts. AL1 1EX
Tel: 0727 40303 - Multi-lines

- Computers
- Printers
- Monitors
- Disc Drives
- Budget Discs
- Software

COMPUTERS

BBC B Plus. There are two versions of this machine, the standard 64K with shadow screen memory at £459, and a 128K model at £489 with a special Basic and 64K user ram available for programs!

Second Processors. At £189 the 6502 second processor remains the best way of adding memory, invaluable for word processing and spreadsheet users.

Disc Interface Offer. Our special Disk system starter pack offer has come to an end. However, we can now offer a free box of 10 Discs with ANY order for an Interface kit, and any drive ordered together. This allows you complete flexibility in your choice of drive. We will send you appropriate discs.

Code Description	Price inc. VAT
0202 BBC B Plus Computer	459.00
0220 BBC B+ with Econet	499.00
0221 BBC B+ 128K	489.00
0203 '6502' 2nd Processor	189.00
0204 'Z80' 2nd Processor	389.00
0205 Acorn Prestel Adaptor	129.00
0206 Acorn Teletext Adaptor	139.00
0210 A to B Upgrade Kit	69.00
0212 Acorn Speech Upgrade	46.00
0209 1.2 DNFS Rom	19.50
0217 1770 Disc Controller Upgrade Kit	49.00
0218 ADFS Rom for 1770 DFS	29.00
0213 Waford DFS Rom and Manual	26.50
0214 Waford DDFS Rom + Manual	98.00
0216 Waford DFS Manual	6.95
0219 Waford DFS Kit	85.00
0223 Acorn 1.2 DNFS upgrade	89.00

DISC DRIVES AND DISCS


Beebug continue to use and to recommend the Cumana range of disc drives. These have been used extensively in our offices and have proved very robust and reliable.

Code Description	Price inc. VAT
0600 Cumana 100K CSX100 40T	97.00
0610 Cumana 100K CS100 40T	127.00
0601 Cumana 200K CDX200 40T	187.00
0602 Cumana 400K CSX400 40/80T	113.00
0603 Cumana 400K CS400 40/80T	133.00
0604 Cumana 800K CD800S 40/80T	252.00
0605 Waford 200K CLS200 40T	88.00
0606 Waford 400K CLS400S 40/80T	91.00
0607 Waford 400K CS400S 40/80T	114.00
0608 Waford 800K CD800S 40/80T	206.00
0650 Memorex Discs S/S D/D 48TPI 3481	15.50
0651 Memorex Discs D/S D/D 96TPI 3501	25.50
0652 Memorex Disc Head Cleaning Kit	9.65
0653 Library Case - 10 discs	2.25
0654 Disc Storage box - 50 discs	9.00
0655 Lockable Disc Box (35)	13.80
0656 Lockable Disc Box (80)	17.25

BEEBUG DYNAMIC DISCS

Code Description	Price inc. VAT
0657 10x 48TPI SS DD Discs + Free Box	14.40
0658 10x 48TPI DS DD Discs + Free Box	20.00
0659 10x 96TPI SS DD Discs + Free Box	20.00
0660 10x 96TPI DS DD Discs + Free Box	21.40
0661 25x 48TPI SS DD Discs + Free Box	33.90
0662 25x 48TPI DS DD Discs + Free Box	45.19
0663 25x 96TPI SS DD Discs + Free Box	45.19
0664 25x 96TPI DS DD Discs + Free Box	48.90
0665 50x 48TPI SS DD Discs + Free Box	58.30
0666 50x 48TPI DS DD Discs + Free Box	81.40
0667 50x 96TPI SS DD Discs + Free Box	81.40
0668 50x 96TPI DS DD Discs + Free Box	92.49

The new BBC microcomputer series will be seen in all areas.

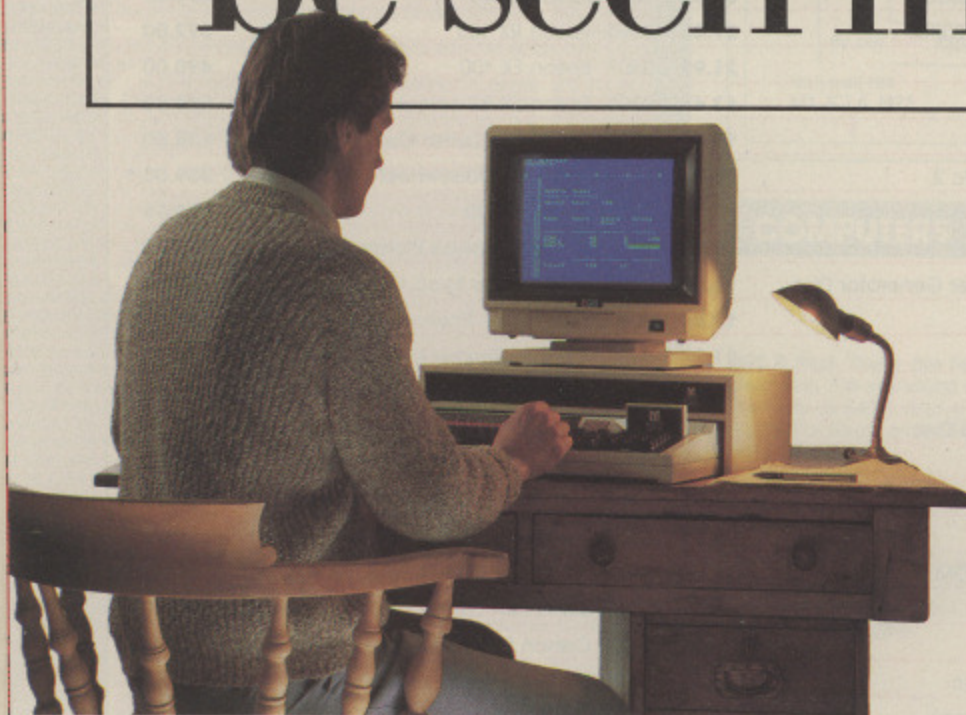

The BBC Master Series is a continuation and development of the highly popular BBC Micro. As such, the series retains all of the BBC Micro's traditional virtues including BBC BASIC and a superior choice of software and peripherals.

Though never before has one microcomputer encompassed such a wide range of applications or offered so much potential.

THE HOME.

BBC Micros have gained a reputation as powerful, versatile home computers.

The Master 128 will prove an even more useful addition to the household.

Your child is probably already familiar with it from school. In which case, our educational programs will ensure that learning continues

at home.

By using a Teletext adaptor, up-to-the-minute information can be called up instantly.

And via a Modem, you can control all the money in your bank account, paying bills and standing orders from the comfort of your own home. You can even write and send letters on screen by Electronic Mail.

Yet despite these advances, the price remains the same at £499 inc. VAT.

To speed up other tasks, there is the Master TURBO. For an extra £125 inc. VAT, it improves the Master 128's benchmark from 9.2 seconds to a record-breaking 4.67 seconds using BBC BASIC.

THE SCHOOL.

The BBC Micro is already to be seen in 75% of our schools. New features on the Master 128 make it particularly useful in the schools



THE MASTER 128. 128K RAM 2 x 256K ROM CAPACITY CARTRIDGE SOCKETS. REAL TIME CLOCK/CALENDAR. VIEW, VIEWSHEET, EDITOR AND TERMINANCE. THE MASTER ET. 128K RAM AND 64K ROM. ADVANCED NETWORK FILING SYSTEM. 32K BYTES OPERATING SYSTEM. 16K BYTES BBC BASIC. *THE MASTER TURBO 64K RAM. HARDWARE FLOATING POINT. SEND FOR FULL DETAILS FROM BOB COATES, ACORN COMPUTERS.

area. The word processing package makes it ideal for creative writing.

While its sophisticated spreadsheet will prove invaluable in any Maths Class.

As an upgrade of the 128, the Master 512 gives higher levels of education access to MS-DOS compatible applications. For under £500.

Or for only £348.26 exc.VAT you have the Master ET – a powerful, custom-built networking terminal.



Our ECONET networking facility is probably the world's best selling, low cost network.

Combined with the Master ET, it affords considerable cost saving without limiting your expansion options, ensuring the BBC Micro's place throughout our education system.

PROFESSIONAL.

Business dictates that a microcomputer is both efficient and easy to operate.

The Master 512 puts all the power of 16-bit computing under your control, for under £1,000.

This control comes courtesy of the GEM Collection which provides an icon-driven, simple and easy to use environment, as well as a word processor and painting package. Not only does this allow you to write documents easily, but also to insert charts and graphs into them. Thereby improving your business presentations.

Though business is only one of the areas in which the Master 512 will be taking control.

In the Medical field, it could be taking the drudgery out of repeat prescriptions. At the same time monitoring dosage for optimum patient care.

Existing BBC Micros are capable of running an entire factory. The more sophisticated Master 512 could check every stage in a manufacturing process from beginning to end.

Of course, your immediate needs may not be on quite this scale. So you could buy the Master 128 now and easily upgrade to the Master 512 at a later stage.

THE LABORATORY.


As a simple upgrade to the Master 128, the Master Sc. provides a powerful scientific computer for under £1,500. A tenth of the price of its nearest mainframe equivalent.

The Master Sc. forms a natural and compatible link with the first in the extremely powerful Acorn Cambridge Work Station range.

Naturally it uses all the important scientific languages – ISO PASCAL, FORTRAN 77, C and 32016 ASSEMBLER as well as BBC BASIC.

For anyone who is teaching languages, the Master Sc. is a particular asset. You can now afford to teach more by practice rather than theory.

After purchase, you can rely on our technical support for advice on any part of the series. The BBC Master Series. Which-ever area it appears in, it will be assured a good reception.

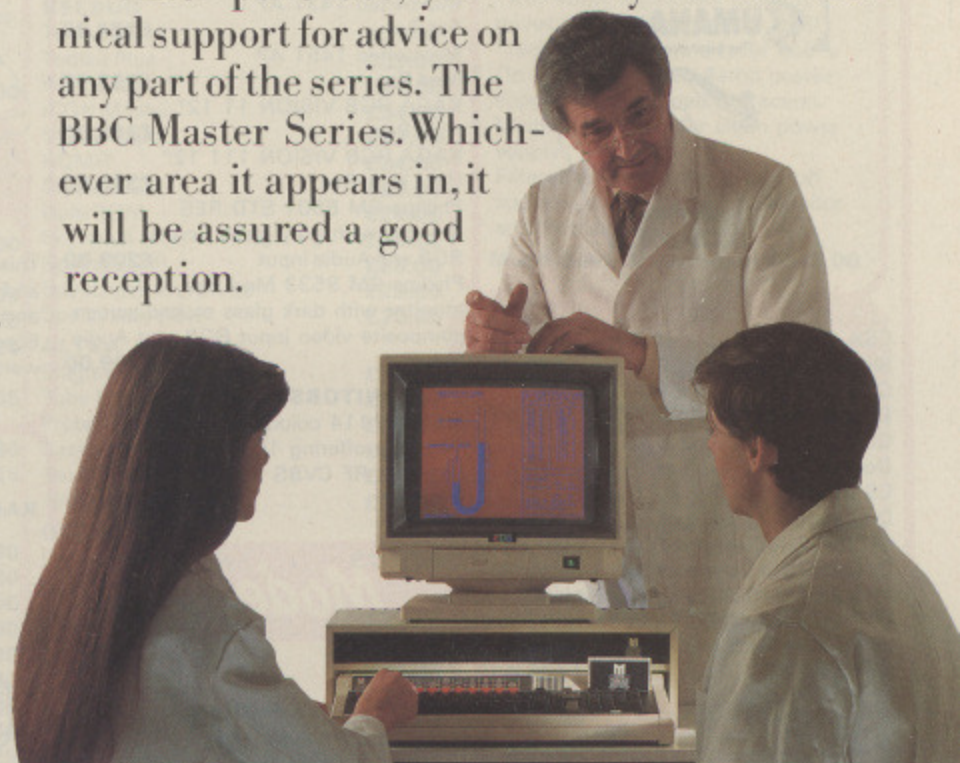

BRITISH BROADCASTING CORPORATION
MASTER SERIES MICROCOMPUTER

The BBC Master Series.

Acorn 
The choice of experience.

BRING Twillstar INTO YOUR HOME

ALL PRICES INCLUDE VAT

Computers



Master 128 Complete With Internal Software	£454.25
Master Turbo Upgrade	£113.85
Master Econet Module	£46.00
Master ET	£373.75
Master 512 Upgrade	T.B.A.
Master 5c Upgrade	T.B.A.
Eprom Cartridge (2EF)	£14.95
BBC Model B + 64K	£396.00
BBC Model B + 64K with Econet	£425.50
BBC Model B + 128K	£414.00
BBC Model B + 128K with Econet	£448.50

BBC Upgrades

A-B Upgrade	£110.40
Acorn DFS Interface	£89.00
Econet Interface	£48.99
Speech Interface	£25.00
64K Upgrade Kit	£39.95
17/70 Upgrade Kit	£49.94
DFS ROM	£29.95
NFS ROM	£19.55


Printers

NEW

NOW AVAILABLE
Juki 5510 - Gives you 180 CPS & NLQ Standards
£269.00 Inc. VAT

... and that's not all! The Juki 5510 also has full graphics mode, two position 'dip-switch' (providing instant compatibility with both the Epson and the IBM Graphic Printer). Standard 2K memory (expandable to 14K) built-in Parallel Centronics interface and 8-switch international character sets. If you need Colour too, the optional Juki 5510 Colour Kit gives you seven colour printing for ... **£112.00**

EPSON LX80

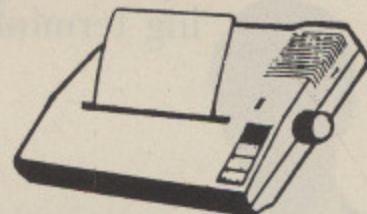

with 100CPS draft and 16CPS NLQ and optional tractor adaptor and sheet feeder. This printer has a standard parallel connection and accepts all other Epson serial and parallel boards with external dip switches for easy access and internal 1K buffer. It offers a high specification at a low price

£229.00
ALSO AVAILABLE
Epson FX 80 **£365.00**
Epson FX 100F/T **£495.00**

Monitors

MONOCHROME MONITORS

Phillips BM 7502 Green Screen	£79.00
Phillips BM 7522 Amber Screen	£95.00
Kaga KX 1201G Hi-Res Green	£103.00
Kaga KX 1203G Ultra Hi-Res Amber	£120.00

COLOUR MONITORS

Microvitec 1431 Std-Res	£201.25
Microvitec 1451 Med-Res	£270.25
Microvitec 1441 Hi-Res	£391.00
Microvitec 2030 CS 20 Std Res	£425.50
Microvitec 1431 AP Std Res	£224.25
Microvitec 1451 AP Med Res	£293.25
KAGA RGB VISION 11 12" High Res	£258.00
KAGA RGB VISION 111 12" Ultra High Res	£365.00
Phillips CM 8501 STD RES Monitor with grey glass Screen RGB and Audio input	£209.00
Phillips CM 8533 Med Res monitor with dark glass etched screen composite video input RGB and Audio Input	£289.00

TV MONITORS

Phillips 1114 colour TV/monitor with 14" tube offering 10 Preselect channels RF CVBS and RGB inputs	£199.00
--	----------------

Modems


NIGHTINGALE MODEM

Including Commstar and Comprehensive Manual	£130.00
Auto Dial/Auto Answer Board	£55.00
Auto Dial Utilities Disc	£11.00
OBBS Bulletin Software	£23.00

DEMON MODEM


With its Devilishly Clever Features. Auto Dial, Auto Redial, Auto Answer Full and Half Duplex European and USA Standards Complete with Power Supply Leads and Manuals Full Baud Rates	
Demon with BBC ROM Dial Disc	£81.00 £4.95

CITIZEN 120 D

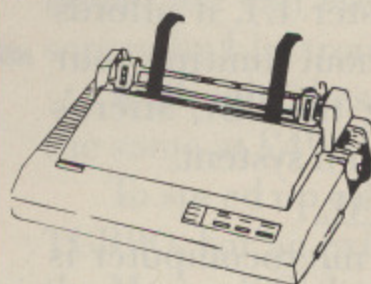

This new Citizen 120D with 120 CPS and 25 CPS NLQ comes with tractor and friction feed as standard. IBM and Epson compatible with TWO years warranty **£175.00**

KAGA KP 810



The 80 column printer with 140 CPS Draft and NLQ with friction and Tractor feed offering 9 INT character sets, long life cartridge ribbon and standard centronics interface **195.50**
Also available KAGA KP 910 (wide carriage printer) **£379.00**

Seikosha GP 50A (Parallel)	£69.00
Seikosha GP50S inc. Printer I/F + Cables	£69.00
Seikosha 1000A (NLQ)	£199.00
Canon PW 1080A (NLQ)	£269.00
Canon PW 1156 A	£379.00
Star SG 10	£249.00
Star SG 15	£389.00
Brother EP 44	£228.00
Shinwa CP 80A	£189.00
MP 165	£240.00
Juki 5100	£269.00

DAISYWHEEL PRINTERS



QUENDATA DWP 1120
with optional tractor/sheet feeder and 13" paper width facility. This Daisywheel printer with 20 CPS has 96 character printwheel compatible with the QUME. Standard centronics interface (optional RS232 C) **£199.00**

Brother HR 15	£349.00
Juki 6100	£319.00
Juki 2200	£275.00
Juki 6300	£799.00

COLOUR PRINTERS

Canon PJ1080A	£440.00
Juki 5500	£286.00


TRACTOR ADAPTERS

FX 80	£33.00
LX 80	£23.00
Juki 6100	£129.00
Juki 6300	£129.00
Quendata DWP 1120	£114.00
Brother HR 15	£95.00

SHEET FEEDER

Juki 6100	£173.00
Juki 6300	£173.00
Quendata DWP 1120	£165.00
Brother HR 15	£212.00

Disc Drives



CSX 100 (100K) 1 x 40 Track Single Sided Drive Excl. PSU	£79.35
CSX 400 (400K) 1 x 80 Track Double Sided Drive Excl. PSU	£97.75
CDX 800S (800K) 2 x 80 Track Double Sided Drive Excl. PSU	£179.40
CS 400 (400K) 1 x 80 Track Double Sided Drive Incl. PSU	£125.35
CD 800S (800K) 2 x 80 Track Double Sided Drive Incl. PSU	£212.75
Mitsubishi (400K) Single Disk Drives Cased 40/80 Track Switchable with two years warranty	£95.00

TCL Special Package

The TCL All In One Word Processing

Package contains a Master 128, High Res Green Monitor, 800K Dual Drives with PSU, Quendata Daisy Wheel Printer together with a box of Discs, Paper, and all the Cables. **£914.25**

Printers

PRINTER RIBBONS	
Brother HR 5	£3.45
Brother EP 44	£2.65
Brother M1009	£4.60
Brother HR15/25	£5.45
Multi-strike	
Brother HR15/25 fabric	£4.85
Canon PW1156A/1080	£6.85
Daisystep 2000 multi-strike	£4.00
Daisystep 2000 fabric	£6.30
Epson FX/MX/RX80	£4.50
Epson LX80	£4.90
Epson MX 100	£5.80
Epson LQ 1500	£6.60
Epson DX multi-strike	£5.40
Epson DX 100 fabric	£4.85
Juki 6100 multi-strike	£3.20
Juki 6100 single-strike	£1.95
Juki 6300 multi-strike	£3.05
Juki 6300 fabric	£4.10
Juki 2200 single strike	£2.95
Juki 2200 correctable	£2.88
Kaga KP 810/910	£6.85
MP 165	£4.50
OK1 microline 80/82/83	£2.07
Quendata 2000 multi-strike	£3.97
Quendata 2000 fabric	£6.30
Riteman 80	£6.30
Seikosha GP80	£4.00
Seikosha GP100/250	£4.30
Seikosha GP 500	£4.95
Shinwa CP80 multi-strike	£5.50
CP80 fabric	£5.46
Walters WM80 multi-strike	£5.30
Walters WM80 fabric	£5.46
WM 2000	£5.90

Accessories

EPROMS	
2764	£2.20
27128	£3.95
RAMS	
6264 LP15	£3.95
Teletext Receiver	£149.00
Prestel Receiver	£139.00
Bitstick	£344.00
Bitstick Multi Plotter Driver	£75.00
IEEE I/F	£293.00
Music 500	£178.00
POSEIDON	
The flexible videotex System with the BeebTel Terminal	
Poseidon Floppy System	£229.00
Poseidon Hard System	£253.00
BeebTel Terminal Software	£46.00
BeebTel & Terminal Software	£79.00
Poseidon AES	T.B.A.
Poseidon Multiuser Floppy Disc	T.B.A.
Poseidon Multiuser Hard Disc	T.B.A.


CREDIT FACILITIES

Full credit facilities now available nationwide.

- * LOW DEPOSITS
- * FAST FRIENDLY SERVICE
- * UP TO 3 YEARS TO PAY

We have negotiated with a leading Finance Company to provide this additional service for our clients.

Call for further details



Disc double sided density 96 TPI uses 3m Media.
Guaranteed for life. Free library Box included £17.00

Disc Utilities

View Index	£14.90
View Printer Driver	
Generator	£10.90
Hi View	£55.20
Acorn Soft Database	£14.25
Clares Betabase	
40/80 Track	£21.85
Clares Graphdisc	
40/60 Track	£12.30
Clares Replica III Disc	£14.25
Copier 40/80 Track	
Clares the key	
40/80 Track	£12.30
Micro Text Disc	£55.20
Beebugsoft design	£18.00
Beebugsoft masterfile II	£18.00
Beebugsoft Teletext disc	£10.90
Beebugsoft sprites disc	£10.90
Beebugsoft disc master	£18.00
Beebug billboard disc	£18.00
Beebug quickcalc disc	£14.25
Beebug 'Hershey'	
Font Disc	£14.25
Beebug paintbox II disc	£12.30
Gemini DDD Base	£26.45
Gemini DDD Calc	£26.45
Gemini DDD Plot	£26.45

Services

SERVICES	
Fast Repair Service for the BBC	
Computer average charge from	£23.00
Printer repairs from	£20.00
Disc Drive repairs from	£15.00

Services

BBC COMPUTER SPARE PARTS AND COMPONENTS	
PSU	£22.00
Keyswitch	£2.00
Complete Keyboard	£59.00
Keyboard Connector	£5.18
JHF Modulator	£5.18
Video ULA	£20.00
Serial ULA	£16.00
6522 VIA	£4.10
6502 2 MHZ CPU	£7.50
UPD 7002	£17.25
6845SP CRT CON	£7.50
SAA 550 Teletext	£10.35
LM 324	£0.50
6522A 2 MHZ VIA	£6.33
8271	£52.00
74 LS 123	£0.46
74 LS00	£0.28
74 LS04	£0.28
74 LS10	£0.28
7438	£0.46
74 LS 163	£0.86
74 LS 244	£0.92
74 LS 245	£1.27
74 LS 375	£1.04

BBC Firmware

FIRMWARE	
Acorn View Word Processor	£55.00
Acorn View Sheet	£55.00
Acorn Logo ROM	£65.00
Acorn ISO Pascal	£65.00
Acorn BCPL	£65.00
COMCONCEPT	
Wordwise	£36.00
Wordwise Plus	£46.00
Intersheet	£55.00
Disc Doctor	£27.00
Printmaster (Epson)	£27.00
Printmaster (Star)	£27.00
Caretaker	£27.00
Graphics ROM	£27.00
Communicator	£59.00
Accelerator	£55.00
Gramlin Debug ROM	£27.00
Interchart	£33.00
BEEBUG	
Toolkit ROM	£26.45
Toolkit Plus	£39.00
Wordease	£29.00
ICON Master	£34.00
Studio Eight	£22.00
ROMIT	£34.00
Sleuth ROM	£28.00
Help ROM	£24.00
Exmom II	£28.00
Spellcheck II	£29.00
Spellcheck Wordwise	£29.00
Spellcheck View	£29.00
ALTRA	
Enigma Disc Imager	£42.00
Tube Editor	£42.00
Probe I	£34.00
Basic Editor 2	£34.00
Basic Editor 1	£25.00
First Aid II	£19.00
GEMINI	
Datagem Database	£115.00
PACE	
Toolstar	£33.00
Commstar	£33.00
System ADE ROM	£60.00
System SPY ROM	£30.00
Edward User Pack	£44.00
Edward Teacher Pack	£25.00
BBC Ultracalc	£69.00
Clares B ROM	£32.00

BBC Firmware

AMX MOUSE AND SOFTWARE	
AMX Mouse with Super	
Art ROM	£89.00
AMX Pagemaker	£49.95
AMX 3D Zicon	£24.95
AMX Database	£24.95
AMX XAM	£24.95
THE ORIGINAL AMX ART	
Plus Utilities	£14.95
AMX Paintpot	£14.95
AMX Desk	£24.95
SYSTEM SOFTWARE	
THE MUSIC SYSTEM	
Disc Pack	£29.95
Cassette 1	£14.95
Cassette 2	£14.95

TCL Special Workstation



Once again TCL has answered a special need of all BBC Computer users with the new mushroom workstation. No more untidy wiring or pulled plugs. Transforms your system into a Handsome Console Unit.

- FEATURES INCLUDE:**
- * Advanced cable management.
 - * Twin 400K Mitsubishi Slimline drives switchable from 40 to 80 Track with status indicator LED's.
 - * On board regulated 4amp power supply with overload protection.
 - * Mains input filter for clean power supply.
 - * Filtered power to the 3 take off sockets at rear for Micro, Monitor and Printer.
- Mushroom Workstation £349.00**

How to Order

You may purchase any of the items listed by cheque made payable to TWILLSTAR COMPUTERS LTD.

All you have to do is to list your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below £10.00	add £1.50
Items below £50.00	add £2.50
Items below £100.00	add £3.50
Items over £100.00	add £8.00

All prices include VAT at 15% 'No Hidden Extras'

Access/Visa Card Holders: Call us on our new Special Line

01-571 5938



TELEPHONE ORDERS
(01) 574 5271

Telex Number 25247 attn TII

Twillstar Computers Limited

Apex House, Blandford Road,
Norwood Green, Southall, Middx. UB2 4HD

ROCKFORT

SPECIAL OFFERS

For limited period only.

COMPUTERS

MODEL Price Inc. VAT
 BBC Model B Plus. 64k **£405.00**
 BBC Model B Plus. 128k **£445.00**
 Please add £8.00
 towards post & packing.


TRY US FOR QUALITY, SERVICE AND PRICES

PRINTERS

**NEW CENTRONICS DOT MATRIX PRINTER
 TWICE AS FAST AS THE OLD GL**

Price:
£182.00

Plus VAT &
 carriage

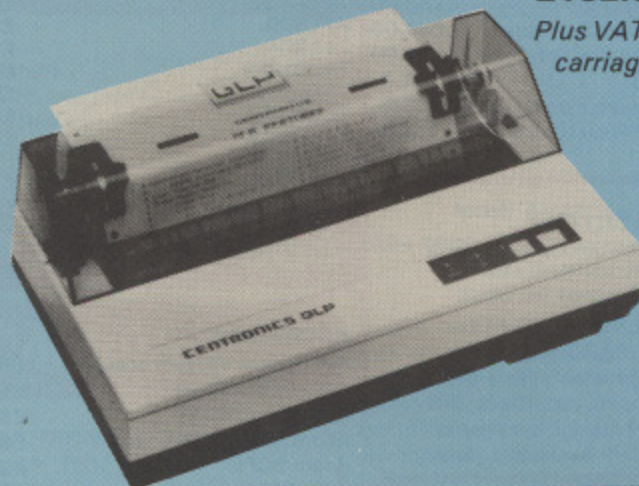

- 100 cps 10 cpi draft printing
- 25 cps near letter quality
- Cut sheet and fanfold (roll paper and tractors are optional)
- Original plus 2 copies
- Bidirectional logic seeking
- 48 international characters
- Subscripts, superscripts and underlining
- IBM PC block and high resolution pin-addressable graphics

DISK STORAGE




**M.F. 10
 Floppy
 Disk Box**
 Holds 10 -
 5 1/4" Disks
£2.75
 Incl. VAT, Post
 & Packing

REG. DESIGN



**M.F. 50
 Floppy
 Disk Box**
 Holds 50 -
 5 1/4" Disks
£9.50
 Incl. VAT, Post
 & Packing



**M.D. 12/30
 Micro
 Disk Box**
 Holds 12 to 30 -
 3 1/2" Disc
 according to
 thickness
£7.85
 Incl. VAT, Post
 & Packing

BROTHER PRINTERS

MODEL	DESCRIPTION	PRICE INC VAT
M-1009	Dual Interface	£155.25
M-1009	Centronic Parallel	£152.95
M-1009	Dual Prestel	£175.95
M-1109	Dual Interface with T/F	£225.40
M-1109	Dual Prestel	£247.25
EP-44	Teleprinter	£227.70
TC-600	Teleprocessor	£414.45

Please add £5.50 towards Post & Packaging

BLANK LABEL 5 1/4" FLOPPY DISKS

	PRICE INC. VAT & P&P
10-SS/DD 48tpi in MF10 box	£12.30
10-DS/DD 48 tpi in MF10 box	£13.90
10-SS/DD 96tpi in MF10 box	£19.65
10-DS/DD 96tpi in MF10 box	£19.65
25-SS/DD 48tpi in MF50 box	£22.50
25-DS/DD 48tpi in MF50 box	£26.00
25-SS/DD 96tpi in MF50 box	£38.60
25-DS/DD 96tpi in MF50 box	£38.60
50-SS/DD 48tpi in MF50 box	£35.95
50-DS/DD 48tpi in MF50 box	£42.00
50-SS/DD 96tpi in MF50 box	£63.55
50-DS/DD 96tpi in MF50 box	£63.55

Rockfort blank label disks feature:

- Write protect notch
- Hub rings
- Individual sleeves
- Full set of labels

and are fully GUARANTEED. We are confident that you will be delighted with our disks, but in the event you are not we will exchange the disks or refund your money - the choice is yours!

LISTING PAPER

	PRICE INC VAT & P&P
60 grams micro perf 11" x 9 1/2" 1000	£9.00
2000	£15.00

PRINTER RIBBONS

TYPE	PRICE INC VAT & P&P
Epson MX100/FX100	£8.50
Epson MX80/FX80	£5.20
Seikosha GP80	£5.20
Seikosha GP100	£5.70
Seikosha GP250	£6.85
Brother HR15 M/S	£6.90
Brother HR15 Carbon	£4.80
Juki 6100	£3.45
IBM 82 (High yield)	£3.80
OKI 80/82	£3.80

HOW TO ORDER

We accept orders from all HMG, schools, universities, libraries, etc when accompanied by an official purchase order.

All other orders must be sent with a cheque or PO for the appropriate amount.

If you wish to use Access/Visa card then call us on 01-203 0191.

You can save on P&P by calling in at our showroom in Hendon.


ROCKFORT PRODUCTS

81 Church Road, Hendon, London NW4 4DP

TEL 01-203 0191

**YOU ARE WELCOME TO VISIT
 OUR SHOWROOM**

TRADE ENQUIRIES INVITED

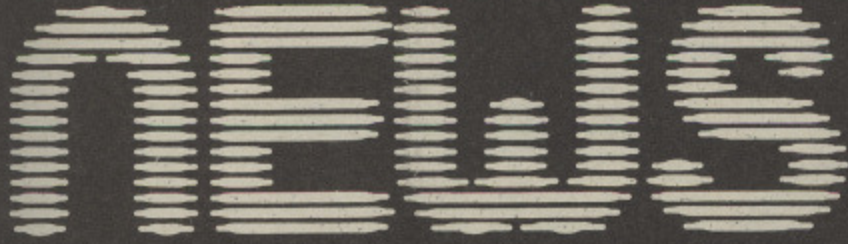

SUPER SHOWS ON THE WAY

DATABASE Publications has lined up another great trio of shows for BBC Micro owners this year. Dates and venues have been decided, hardware and software suppliers are rushing to book their stands, and developers are working non-stop to provide a wide range of exciting new products.

The first of the shows is only two months away, and particulars of how you can save money by obtaining your tickets early are given on page 77.

Details for your diary of these not-to-be-missed Electron & BBC Micro User Shows are:

- May 16, 17 and 18 Royal Horticultural Hall, London.
- September 26, 27 and 28 UMIST, Manchester.
- November 7, 8 and 9 Royal Horticultural Hall, London.

MicroLink subscribers can see a full listing of micro shows both here and abroad.

PRODUCTION BOOST FOR MASTER SERIES

ACORN has ramped up production of its new Master Series which has been so successful since its launch that sales have exceeded targets by 30 per cent.

Now officials are having to raise the original forecast that total sales would reach 100,000 by the end of the year – and the new figure is likely to be considerably higher.

Acorn's product manager, Bob Coates, admits they have been caught on the hop by the heavy initial demand.

"As a result we have had to up production", he told *The Micro User*.

Meanwhile the company's main dealers

reported that they soon found themselves running out of stock following the launch.

John Taylor of 3SL, Cheshire, was unsurprised by the demand. "The product has been properly designed to meet market requirements and therefore response was always going to be tremendous.

"We have a lot on order and I just wish the machine was more freely available".

"The Master has given the Acorn series a new lease of life", says Viglen's managing director Vig Boyd. "The response we have had to it has been very impressive. It will be the advanced


research machine".

Also reporting a heavy demand is Nazir Jessa, of Watford Electronics. "I expect our sales to reach thousands in the first quarter", he said.

He believes that the Master Series could be even more popular. "I think if Acorn lowered its prices the machine will have no competition – it will sweep the floor with its rivals".

● Acorn's talks with the Department of Trade and Industry have resulted in the Master Series firmware being included in the Software for Schools Scheme.

The DOI has said that £105 worth of firmware contained in the machines

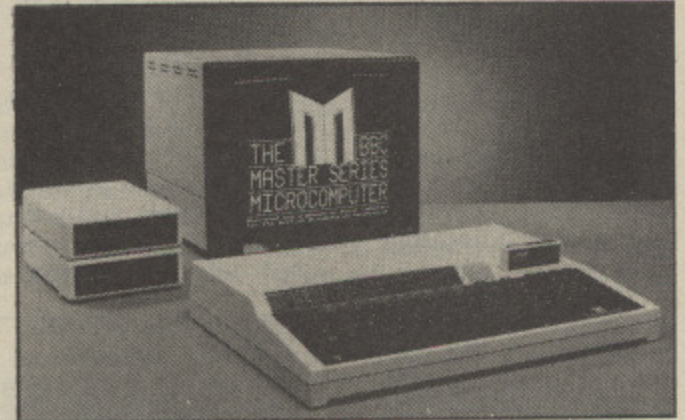

is directly relevant to education and as such is eligible for funding under the scheme.

Support available for local education authorities in the financial year 1985-6 is 100 per cent, and for 1986-88, 50 per cent.

Micro range listed

A SERIES of catalogues has been produced by Acorn bringing together details of the devices, programs, books and services now available to users of the BBC Micro range.

They cover seven main areas – general interest, education, science and industry, peripherals, business, medicine and communication and information retrieval.

Each catalogue has a contents page, price index, list of producers and an easy to use key detailing the products format, compatibility and any need for additional equipment.

Acorn shares shoot up

MYSTERY surrounds a sudden and dramatic rise in the value of Acorn Computer shares. As this issue of *The Micro User* went to press the shares – which at one time last year were worth only 4p each – were hovering above 100p.

This is three times what they were valued at only two weeks previously.

Spokesmen for Acorn and its brokers Phillips and Drew confessed that the sharp upward

valuation in such a short period of time had them baffled.

A rumour circulating in the City that Olivetti – holder of more than 80 per cent of Acorn's shares – was bidding for the lot was dismissed by the Phillips and Drew spokesman.

"The most likely reason for the sudden activity is that Acorn products have been receiving a lot of good notices in the media recently", he said.

"Added to which the well

respected firm of stockbrokers and researchers Wood-MacKenzie recently published a bullish circular on the home computer industry.

"I would point out that the increase in share values would not appear so dramatic if calculated on the units involved before last September's refinancing package was implemented.

"Only time will tell whether this current surge in Acorn share prices is sustainable".

NOW YOU CAN LOG ON TO THE WEATHER...

A DRAMATIC breakthrough on the home computer front will allow BBC Micro users around the world to discover what the weather holds in store every day of their lives.

Whether they live in Turkey or Torquay, they will now be able to predict sunshine or showers with all the accuracy of the men from the Met Office.

The reason for this is WeatherLink, a revolutionary service which offers the facility to download the satellite weather maps used by professional forecasters.

Exclusive to subscribers to MicroLink, the UK's fastest growing international electronic mail organisation, WeatherLink seems to transform weather forecasting for people at home.

"It means that BBC Micro users can now have all the latest information from the satellite literally at their fingertips", says Derek Meakin, head of MicroLink.

"From now WeatherLink will keep them in constant touch with what is being monitored from outer space".

To achieve this MicroLink has joined forces with an ongoing project run by a Kent

schoolmaster and his pupils.

Swadelands School in Lenham, Kent, now finds itself at the forefront of satellite monitoring with its Swafax project.

Using a crossed dipole - an X-shaped aerial on top of a pole - it has been regularly picking up startlingly clear signals from NOAA 9, the main weather satellite.

The school's aerial uses circular polarisation to follow NOAA 9 every time it appears on the horizon, faithfully picking up its signals until it disappears from view again some 15 minutes later.

And the same sequence is followed four times a day.

Live pictures produced by the weather satellite - it takes two at a time, one in visible light, the other infra red - clearly shows that part of the world from North Africa, through Europe and Great Britain up to Iceland.

All are faithfully recorded on the BBC Micro in



Clear skies over Britain in this printout of a satellite picture from space

Swadelands School ready for transmission to the main MicroLink computer.

The next stage involves a converter which takes the image and readies it for transmission via a modem over a standard telephone line.

Once a BBC Micro user who subscribes to MicroLink logs on all he needs to do is to pull down the information file in its expanded format, compress it using specially written software also on the menu, then display it on his monitor.

BBC Micro users who use the communications module of Mini Office II will find that this software will automatically compress the picture for them.

WeatherLink users will also be able to access general information about the weather satellites.

For although NOAA 9 is the principal source of information for weathermen, there are other similar satellites, including a Russian one.

In fact some time in the future WeatherLink will also take information from Metosat, a geostationary satellite in synchronised orbit, so making it seem to be always in the same position.

The reason for this was explained by Victor Young, the science master in charge of the Swadelands School tracking project.

"At certain times of the

year the sun is in the wrong position to allow NOAA 9 to provide precise weather images. So then we'll use Metosat as a back up".

Some 12 students aged 11 and 12 are constantly involved in the Swafax project under Victor Young's direction.

As it is treated as an extra curricula activity, they come in early each morning, give up their breaks and stay after school to collate data.

"But it is all so exciting they are glad to do it", says Victor Young. "And what has really thrilled them is the thought of the service they are now providing for BBC Micro users all around the world".

Satellites' big impact on education

SIGNALS from space are permeating Britain's classrooms to such an extent that a national body has been set up to develop the use of satellite data by teachers.

The UK Coordinating Committee on Satellites in Education says many schools and colleges are already receiving and processing data from orbiting satellites.

And it forecasts that the use of this data will have an increasingly sig-

nificant impact on the secondary school curriculum.

Opportunities for technological projects such as constructing detecting apparatus and creating computer systems are waiting to be tapped, says the committee.

Large scale research involving the collection, processing and interpretation of considerable amounts of live data is another suggested application.

And an abundance of cross-curricular activities linking maths, science and technology with the humanities, particularly geography, are made possible by satellite data.

Direct broadcasting satellites can even be used as an aid in modern language teaching, says the committee.

Its first task will be to identify the roles of satellites and satellite data in education, and ascertain what information and

equipment teachers need in order to use and develop the resource.

It will also assess what software is needed and try to ensure its development, and identify how funds can be used to promote the use of satellites in education.

The committee has published a 40 page booklet called Satellites in Education as a guide to teachers.

It deals with educational possibilities,

satellite orbits and tracking procedures, apparatus requirements, sources and aerial prices.

The booklet costs £3.50 from AMSTAT, 94 Herongate Road, Wandstead Park, London E12 5EQ.

A strategy paper giving further information can be obtained free of charge from Dr John Gilbert, Department of Educational Studies (AA), University of Surrey, Guildford GU2 5XH.



A word for your holiday

FOR BBC Micro users who would like their conversations abroad to extend to more than a Bonjour or Guten Tag, Chalksoft has produced two French and one German vocabulary building programs.

Centre Ville is a three-part program, price £17.50 on disc. The first part features a town centre through which a French traveller must be guided using the correct phrases.

Coleurs contains a series of games designed to help in the correct naming – including gender – of colours and animals.

And the third part, Notre Dame, tests the user's ability to tell the time in French.

In Eiffel Tower the user must correctly translate words in order to construct the famous Parisian attraction.

Das Schloss, intended for those learning German, is similar in style to Eiffel Tower, but this time the user must build a fairy tale castle.

Both programs cost £9.25 on cassette, £14.25 on disc and have facilities for the user to extend the vocabulary.



Of chips and Chippendale

CHIPPENDALE might well turn in his grave, but a Norfolk furniture maker has opted for the BBC Micro to help produce his designs. According to Cy Woodrow, computer aided design provides the perfect blend of modern technology

and traditional craftsmanship.

It certainly seems to work as orders are currently flooding in from all over Britain for his chairs priced at £160 and tables from £450. Cy Woodrow has linked a Robo Bitstik to the BBC Micro to

get the best results.

"Producing designs on the computer screen allows my customers to see exactly what the finished article will be like", said Cy.

Above, Emma Woodrow designs a piece of furniture for her husband.

Simulation program extended

MICROPACS has extended its dynamic simulation program for the BBC Micro, the BCSSP.

The program already allows users to draw blocks from equations to see what effect different variables have on them.

Its main market is engineering, mathematics, chemistry and physics departments of colleges and universities.

But following approaches from many quarters the company has decided to release an extension, the BSETR.

This enables the user to dispense with the time consuming task of translating equations into the block orientated input language of the system. Equations are typed in and the new program automatically translates them.

Facts on discs

TWO new releases from BBC Publications get to grips with the basics of the disc drive system and mathematics.

They are Mastering the Disc Drive, by Christopher Snee, and Number Games, a software suite – both for the BBC Micro.

The book is divided into three main sections: an introduction to the use of the disc system, how to care for it and an explanation of DFS commands and OS calls, a

detailed description of how the disc controller chip works and how to program it and an explanation of random access filing. Price is £7.95.

Number Games is the BBC's latest computer software aimed at primary school children learning maths. Six programs cover the basics – Boxes, Number Knight, Ladder, Little Blokes, Nimble Knight and Light Up.

It was developed by Ismec, the Independent



Schools Microelectronics Program. Priced at £9.95, the programs are easily transferred to disc.

Snooker version released

THE game BBC Micro-owning snooker fans have been waiting for has been released by software house CDS.

Steve Davis Snooker comes with computer play options giving demonstration games and has two particularly novel features. It is the only

snooker game which gives the user the option of making a player go again if he plays a foul shot resulting in a snooker.

And clearly visible on the screen is the score in the current break and the colour selected by the player at table, allowing the game to be left for a

period and resumed when convenient.

There are a number of skill levels, three table speeds, and a large range of power settings help to make for precise cue control.

Steve Davis Snooker costs £8.95 on cassette and £12.95 on disc.

Micro cuts cost of stock

WITH help from a BBC Micro two engineers have come up with an idea that could save their employer more than £100,000.

Brian Levy and Paul Eaton plan to streamline the stocking and handling of millions of valves and semi-conductors used each year by the British Broadcasting Corporation.

The savings would result from reductions in the size of stocks that have to be kept readily available for broadcast engineers.

A former British Telecom engineer, Brian Levy shared his computer knowledge and enthusiasm with Paul Eaton on earlier projects that have benefited their own and other departments of the Corporation.

Now they are working on a system to keep track of the stocks using a BBC Micro that will tell them where, for example, the nearest replacement for a particular transmitter valve can be obtained.

It will also monitor how long particular valves have been in use and so indicate when replacements are likely to be required.

Much of the work on the program has been a spare time job carried out at the Corporation's Motspur Park establishment under senior engineer Geoff Morgan.

"We grab odd moments to do the work", said Brian Levy. "We are improving our efficiency all the time, and keeping up with what other people are doing".

Previous successes include programming BBC Micros to act as terminals for the larger computer that looks after the specifications and ordering of 6,000 stock items.

The saving on that, says Levy, was more than £1,000 a terminal, and it enabled other departments in the Corporation to place orders directly with the computer.



Brian Levy and Paul Eaton... keeping tabs on transmitting valves

MINI OFFICE TOPS BUSINESS POLL

MINI Office II, the blockbuster suite of business programs for the BBC Micro range, is not the only package currently to have its praises sung.

Its predecessor, the original Mini Office which transformed the face of low cost serious computing in the UK, is still receiving plaudits.

A reader's poll in Popular Computing Weekly has just named Mini Office from Database Software as the Business Program of the Year for 1985.

Last year also saw it reach the finals of not one

but two categories of the industry's Oscars - the British Microcomputing Awards.

"Naturally we are very pleased that Mini Office has won yet another bouquet", said Derek Meakin, head of Database.

Improved

"It just proves once again what a difficult act it was to follow".

In fact a total of 26 man years of programming were needed to come up with Mini Office II.

Some of Britain's top

software developers were called in not only to improve the four existing modules - word processor, database, spreadsheet and graphics - but also to add another two, label printing and communications.

Already it is being hailed as a potential hit in the same mould as Mini Office, the only non-game to reach No 1 in a Top Ten chart.

"Every indication is that Mini Office II will end up being more successful than even the original version", says Derek Meakin.

SOS trains children

SEARCH and Rescue, which involves BBC Micro users in the coordination of emergency services, is the latest simulation program from Storm Software.

Intended for children from nine to 15 years old, it involves problem solving, decision making and a large amount of work away from the computer.

It is aimed at developing language, writing, history, mathematics,

science, geography, nature and environmental skills.

Once an incident is reported the user is given the boat's position, either as ordinance survey coordinates or grid square references. Extra information is then provided, including shipping forecasts, a sea area map, sea and weather conditions and drift.

The user must decide how to proceed, whether

to alert lifeboats or helicopters, and from which base.

The package includes booklet, extensive flow chart, Beaufort scale, coastguard's map, background information on the RNLI and HM Coastguard and other information resources.

Price for a 40 track 5.25in disc is £17.65 or £18.65 for the 80 track version £35.30 for BBC Econet.

Teach by Touch Pad

FLOPPY disc drive manufacturer Cumana has introduced a School Series software suite for Touch Pad, the colour graphics plotting aid for the BBC Micro.

Five programs currently available are England and Wales, Scotland, Europe, Heart and Lungs, and The Human Eye. More are under development.

Each test comprises a screen picture and a set of questions. Editing facilities allow the question and location tags to be altered or re-written, with a choice of five sets.

A detailed record of each pupil's achievements and results is kept and can be printed out. The difficulty of the questions can be varied to suit the ability of pupils and up to 200 pupil results can be stored and recalled on one test disc.

The Microdraw-developed programs cost £10.95 each.

More tracks for Revs

FOUR of Britain's most famous motor racing circuits can now be added to Acornsoft's top selling simulation Revs.

The BBC Micro program is already supplied with the Silverstone circuit.

The new tracks, Brands Hatch, Donington Park, Oulton Park and Snetterton, were programmed by author Geoff Crammond with the help of detailed maps, and in some cases videos, of the circuits.

They were tested for accuracy by co-author and Formula 3 driver David Hunt. The pack costs £9.95 on cassette, £12.95 on disc.

Health Data

LAST month's issue of *The Micro User* contained an article on page 25 about Dr Christopher Dobbing, the man behind the Health-Data experimental viewdata service-cum-bulletin board.

The telephone number for the Health-Data service was incorrectly listed. The correct number is 01-986 4360.

by
Pad

drive manu-
hana has
a School
e suite for
he colour
ng aid for
.
ams cur-
able are
ales, Scot-
Heart and
e Human
re under

mpries a
nd a set of
Editing
the ques-
on tags to
re-written,
f five sets.
record of
ievements
ot and can
The dif-
questions
o suit the
and up to
ts can be
led on one

odraw-
rams cost

acks
vs

in's most
acing cir-
added to
p selling

icro pro-
supplied
tone cir-

s, Brands
on Park,
nd Snet-
grammed
ff Cram-
help of
and in
os, of the

ested for
o-author
3 driver
he pack
cassette,

Data

issue of
er con-
on page
ristopher
n behind
experi-
service-
rd.

number
Data ser-
orrectly
orrect
6 4360.



ELECTRONIC instru-
mentation firm Lawrie
T&M has produced a
rugged and compact port-
able BBC Micro suited for
use in hostile environ-
ments such as industrial
sites.

"We recognised the
need for such a machine
after watching our own
sales reps", said sales
manager Ashley Short.

"Our new logic ana-
lyser system works with a
micro. So when our reps
went to see prospective
clients they had to juggle,
not only the product, but
micro, monitor and disc
drive.

"As it stands the BBC
Micro is a very spread out
machine, really only
suited to a desktop. We
wanted to dispense with

Micro slips on some armour

all that - and the need for
makeshift protective
screens when taking it on
to the shop floor".

LTM's standard port-
able consists of a 64k
micro, integral 9in green
screen monitor and 40/80
disc drives housed in
industrial quality steel.
The housing also has
room for a four slot
Eurocard.

Its keyboard is set in a
flip down lid which locks
into place during trans-
portation and protects
both screen and drives. A

carrying handle doubles
as an adjustable tilt stand.

The rear panel carries
all input and output ports,
main fuse, IEC mains
input and monitor con-
trols. I/O ports can also
be blanked off to stop dirt
getting in.

Prices range from
£1,200 for the standard
model, £1,850 for high
resolution colour and
upwards depending on
specifications.

A self assembly hous-
ing unit and a 12 volt
model are available.

PROGRAMS GALORE FOR MASTER 512

THANKS to Acorn's
selection of the Digital
Research DOS Plus
operating system and
Gem graphics user
environment, its new 16
bit Master 512 is fully
DOS 2.1 compatible.

This means that users
of the machine, partic-
ularly those in educa-
tion, will be able to
choose software from a
vast library of existing
professional and business
programs.

Software choice is
further broadened by the
ability of DOS Plus to
support all CP/M appli-
cations.

The Master 512 has
been bundled with Digital
Research's Gem collec-
tion, comprising Gem
Desktop, Write and Paint.

Desktop is an icon-
based system for manag-
ing files and communicat-
ing with the operating
system, replacing
unfriendly DOS com-
mands.

Write is a word
processing package offer-
ing full text editing
facilities.

Paint is a freehand
painting package for the
creation of simple line
drawings, cartoons,
stylised illustrations or

"oil" paintings.

The Master 512
includes an Intel 80186
co-processor, has 500k
memory and the option of
dual floppies or hard disc,
and comes with a mouse
and two colour, high
resolution monitor.

Paul Bailey, Digital
Research vice-president,
told *The Micro User*:
"Acorn's decision to use
DOS Plus on the Master
512 brings our newest
operating system into
centre stage in an impor-
tant market sector.

"Acorn was looking for
a compact, DOS com-
patible operating system

After Pagemaker, Magazine Maker

ADVANCED Memory
Systems of Warrington
and Watford Electronics
have combined the AMX
Pagemaker and Wat-
ford's Beeb Video Digi-
tiser to create Magazine
Maker.

Using any video that
provides a composite
signal and the digitiser,
images from a camera or
TV can be converted into
a graphics screen on the
BBC Micro.

They can then be used
with AMX Pagemaker to
illustrate magazines or
newsletters, in fact any-
thing that needs to be
created on A4 size paper.

With Pagemaker's cut
and paste, stretch, shrink,
flip and zoom features, a
variety of pictures can be
composed, the only limit
being imagination.

Pictures can be doc-
tored using Pagemaker's
graphics option to

produce any number of
effects.

Text can be formatted
around the digitised
photograph on the screen
using the range of
facilities available.

These include 16 type-
faces, character and pat-
tern definer, text format-
ting and the ability to load
in Wordwise and View-
files, plus a host of other
features.

Once created the pic-
ture can be printed out.

Magazine Maker is
suitable for any home,
business or school use
that requires illustrated
documents.

"This is just the thing
for every budding or
established publisher",
said Nazir Jessa, manag-
ing director of Watford
Electronics.

Magazine Maker costs
£105 from Watford
Electronics.


Bank Manager on disc

ANOTHER company
enhancing existing pack-
ages is Contex Comput-
ing. It has produced
version 1.4 of its Bank
Manager program for the
BBC Micro with disc
drive.

The program is used to

record personal banking
transactions, aids state-
ment reconciliation and
analyses expenditure and
income.

The new version costs
£17.50, but existing users
can upgrade for £3.50 on
return of their disc.

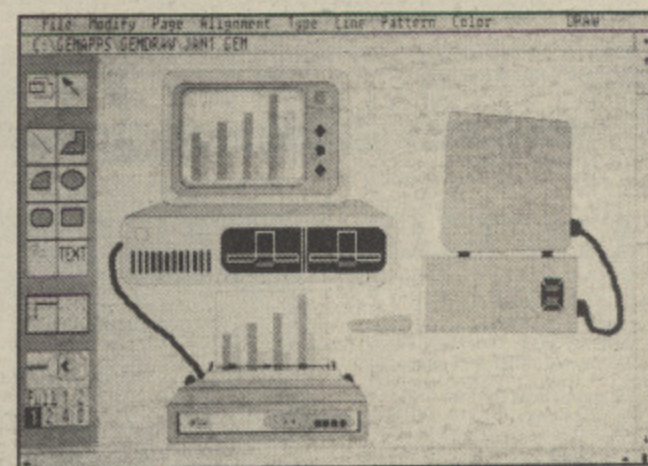

Gem Draw, from Digital Research, can be used to create
plans, layouts, diagrams and flow charts

and a user-friendly inter-
face. The combination of
DOS Plus and Gem more
than fits the bill".

Acorn managing direc-
tor Brian Long said: "We
wanted to capture the
enormous range of DOS-
based applications in the
market with the Master
512.

"The Digital Research
solution DOS Plus offers

the right combination of
features for the market we
are aiming at, and could
also be put into ROM,
which is a very attractive
option for the future.

"We felt it was impor-
tant to give our machine a
graphics interface in order
to maximise its user
appeal, and Gem is
already well established in
the marketplace".

COMPUTER WAREHOUSE

1000's OF BARGAINS FOR CALLERS

THE "ALLADINS' CAVE OF COMPUTER AND ELECTRONIC EQUIPMENT

... HOT LINE DATA BASE ...

DISTEL

The ORIGINAL FREE OF CHARGE dial up data base. Buy, browse or place YOUR OWN AD for goods or services to sell. 1000's of stock items, spares and one off bargains. Updated daily. ON LINE NOW. CCITT, 8 bit word, no parity. For 300 baud modems call 01-679 1888 For 1200-75 baud modems call 01-679 6183

PRINTER / TERMINAL SCOOP

A MASSIVE purchase of these attractive stand alone terminal units enables a SUPER BARGAIN offer. Made by the US GENERAL ELECTRIC CORPORATION the GE MODEL 30 features a standard QWERTY 80 key electronic keyboard coupled to a quality built matrix printer with variable 3" to 9.5" forms tractor. The printer is capable of continuous duty printing with up to 120 characters per line. Standard RS232 interface accepts ASCII data at 110, 150 or 300 baud. Ideal for Terminals, Data loggers, local label printing, or just as a printer! Sold TESTED with data ONLY £95.00. Also available with TWIN MAGTAPE CASSETTE unit for data capture, data preparation etc. £150.00 Carriage £10.00



DON'T MISS THE CPM Deal OF THE CENTURY

The FABULOUS CPM TATUNG PC2000 Professional Business System

A cancelled export order and months of negotiation enables us to offer this professional PC, CPM system, recently on sale at OVER £1400, at a SCOOP price just over the cost of the two internal disk drives!! Or less than the price of a dumb terminal!!

Not a toy, the BIG BROTHER of the EINSTIEN computer, the DUAL PROCESSOR PC2000 comprises a modern stylish three piece system with ALL the necessities for the SMALL BUSINESS, INDUSTRIAL, EDUCATIONAL or HOBBYIST USER. Used with the THOUSANDS of proven, tested and available CPM software packages such as WORDSTAR, FAST, DBASE2 etc, the PC2000 specification, at our prices, CANNOT BE BEATEN!!

The central processor plinth contains the 64K, Z80A processor, DUAL TEAC 55F Double sided 40/80 track disk drives (1Mb per drive), PSU, 2K of memory mapped screen RAM, disk controller, RS232, CENTRONICS and system expansion ports, and if that's not enough a ready to plug into STANDARD B DRIVE port for up to FOUR 8" disk drives, either in double density or IBM format. The ultra slim 92 key, detachable keyboard features 32 user definable keys, numeric keypad and text editing keys, even its own integral microprocessor which allows the main Z80A to devote ALL its time to USER programs, eliminating "lost character" problems found on other machines. The attractive, detachable 12" monitor combines a green, anti-glare etched screen, with full swivel and tilt movement for maximum user comfort. Supplied BRAND NEW with CPM 2.2, user manuals and full 90 day guarantee. Full data sheet and info on request.

PC2000 System with CPM Etc. COST OVER £1400

PC2000 Business System with CPM and 'Ready to Run' FAST Sales and Purchase ledger, supports up to 9000 Accounts, VAT etc. COST OVER £1700

PC2000 Wordprocessor System with CPM and TEC FP25 daisywheel printer

NOW only £399

NOW only £499 Carriage & Insurance £12.00

NOW only £799

MODEMS

Join the communications revolution with our super range of DATA MODEMS, prices and specifications to suit all applications and budgets

BRAND NEW State of the art products.
DACOM DSL2123 Multi standard 300-300, 1200-75 Auto answer etc. £268.00
DACOM DSL123AQ Auto dial, smart modem with multi standard AUTO SPEED detect, and data buffer with flow control etc. £365.00
DACOM DSL2123GT The CREAM of the intelligent modems, auto dial, auto call, index, buffer etc. £498.00
Steebeck SB1212 V22 1200 baud FULL DUPLEX, sync or async, optional auto dial £465.00
TRANSDATA 301A Acoustic coupler 300 baud full duplex, originate only, RS232 £49.00

Ex BRITISH TELECOM full spec, CCITT, ruggedised, bargain offers. Sold TESTED with data. Will work on any MICRO or system with RS232 interface.
MODEM 13A 300 baud unit, only 2" high fits under phone. CALL mode only £45.00
MODEM 20-1. 75-1200 baud, Compact unit for use as subscriber end to PRESTEL, TELECOM GOLD, MICRONET etc. £39.95 +pp £6.50
MODEM 20-2 1200-75 baud. Same as 20-1 but for computer end £65.00 +pp £6.50
DATEL 2412. Made by SE Labs for BT this two part unit is for synchronous data links at 1200 or 2400 baud using 2780/3780 protocol etc. Many features include 2 or 4 wire working, self test, auto answer etc. COST OVER £800. Our price ONLY £199 +pp £8.00
DATEL 4800, RACAL MPS4800 baud modem, EX BT good working order, ONLY £295.00 +pp £8.00

SPECIAL OFFER
MODEM TG2393. Ex BT, up to 1200 baud, full duplex 4 wire or half duplex over 2 wire line. ONLY £85.00 PER PAIR +pp £10.00

For more information contact our Sales Office.

MATRIX PRINTERS

SPECIAL BULK PURCHASE of these compact, high speed matrix printers. Built in Japan for the Hazeltine Corporation this unit features quality construction giving 100cps bidirectional, full pin addressable graphics, 6 type fonts, up to 9.5" single sheet or tractor paper handling, RS232 and CENTRONICS parallel interface. Many other features. BRAND NEW and BOXED. COST £420. Our price Only £199.00

RECHARGEABLE BATTERIES

Dry Fit MAINTENANCE FREE by Sonnenschein & Yuasa
A300 07191315 12v 3Ah NEW £13.95
A300 07191312 6v 3Ah NEW £9.95
A300 07191202 6-0-6v 1.8Ah TESTED Ex Equip £5.99

VDU TERMINALS

Standard VDU data entry terminals at give away prices!!
QUME QVT108. Current product, state of the art terminal with detachable keyboard, 12" Green screen, 2 page RAM, TVI 925. Hazeltine, ADMSA emulations, software setup, 25 x 80. Clock, Swivel and tilt base. Printer port. Function keys etc. BRAND NEW and BOXED AT ALMOST HALF PRICE ONLY £425.00
AJ510 - EX RENTAL, Z80 controlled, 15" green screen 24 x 80 display, graphics, cursor addressing, printer port etc. Very good condition TESTED complete with manual only £225.00
ADDS 520 - Dumb terminal, used, 12" b/w screen RS232 interface and printer port. TESTED. ONLY £125.00. Carriage on terminals £10.00
100's of other terminals in stock, CALL for more details.

COLOUR & MONOCHROME MONITOR SPECIALS

'SYSTEM ALPHA' 14" COLOUR MULTI INPUT MONITOR
Made in the UK by the famous REDIFFUSION Co. for their own professional computer system this monitor has all the features to suit your immediate and future monitor requirements. Two video inputs: RGB and PAL Composite Video, allow direct connection to BBC/IBM and most other makes of micro computers and VCR's. An internal speaker and audio amplifier may be connected to computer or VCR recorder for superior sound quality. Many other features include PIL tube, Matching BBC case colour. Major controls on front panel. Separate Contrast and Brightness - even in RGB mode. Two types of audio input. Separate Colour and audio controls for Composite Video input, BNC plug for composite input, 15 way 'D' plug for RGB input, modular construction etc.
This Must Be ONE OF THE YEAR'S BEST BUYS.
Supplied BRAND NEW and BOXED, complete with DATA and 90 day guarantee. SUPPLIED BELOW ACTUAL COST - ONLY £149.00 as above OR IBM PC Version £165.00

DECCA 80 16" COLOUR monitor, RGB input.
Little or hardly used manufacturer's surplus enables us to offer this special converted DECCA RGB Colour Video TV Monitor at a super low price of only £99.00, a price for a colour monitor as yet unheard of!! Our own interface, safety modification and special 16" high definition PIL tube, coupled with well known DECCA 80 series TV chassis give 80 column definition and quality found only on monitors costing 3 TIMES OUR PRICE. In fact, WE GUARANTEE you will be delighted with this product, the quality for the price, has to be seen to be believed!! Supplied complete and ready to plug direct to a BBC MICRO computer or any other system with a TTL RGB output. Other features are: internal speaker, modular construction, auto degaussing circuit, attractive TEAK CASE, compact dimensions only 52cm W x 34 H x 24 D, 90 day guarantee. Although used, units are supplied in EXCELLENT condition. ONLY £99.00 + Carriage.

DECCA 80, 16" COLOUR monitor, Composite video input. Same as above model but fitted with Composite Video input and audio amp for COMPUTER, VCR or AUDIO VISUAL use. ONLY £99.00 + Carr.

REDIFFUSION MARK 3, 20" COLOUR monitor. Fitted with standard 75 ohm composite video input and sound amp. This large screen colour display is ideal for shops, discos, school clubs and other AUDIO VISUAL applications. Supplied in AS NEW or little used condition ONLY £145.00 + Carr.

BUDGET RANGE EX EQUIPMENT MONOCHROME video monitors.
All units are fully cased and set for 240v standard working with composite video inputs. Units are pre tested and set up for up to 80 column use. Even when MINOR screen burns exist - normal data displays are unaffected.
12" KGM 320-1 B/W bandwidth input, will display up to 132 x 25 lines. £32.95
12" GREEN SCREEN version of KGM 320-1. Only £39.95
9" KGM 324 GREEN SCREEN fully cased very compact unit. Only £49.00

Carriage and insurance on all monitors £10.00

DC POWER SUPPLY SPECIALS

GOULD OF443 enclosed, compact switch mode supply with DC regulated outputs of +5v @ 5.5a, +12v @ 0.5a, -12v @ 0.1a and -23v @ 0.02a. Dim 18 x 11 x 6 cm. 110 or 240v input. BRAND NEW only £18.95

GOULD G6-40A 5v 40 amp switch mode supply NEW £130.00
GREENDALE 19A-BOE Switch mode 60 watt open PCB with a fully regulated DC output of 5v @ 6 amps, and three semi regulated outputs of +12v, -12v, +15v @ up to 1 amp. Dim only 11 x 20 x 5.5 cm. 110 or 240v AC input. TESTED ex equipment. Only £24.95

AC-DC Linear PSU for DISK drive and SYSTEM applications. Constructed on a rugged ALLOY chassis to continuously supply fully regulated DC outputs of +5v @ 3 amps, -5v @ 0.6 amps and +24v @ 5 amps. Short circuit and overvoltage protected. 100 or 240v AC input. Dim 28 x 12.5 x 7 cm NEW £49.94
Carriage on all PSU's £3.00

KEYBOARDS

Manufacturer's BRAND NEW surplus. DEC LA34 Uncoded keyboard with 67 quality gold plated switches on X-Y matrix - Ideal micro conversions etc. £24.95

AMKEY MPNK-114 Superb word processor chassis keyboard on single PCB with 116 keys. Many features such as On board Micro, Single 5v rail, full ASCII coded character set

with 31 function keys, numeric keypad, cursor pad and 9600 baud SERIAL TTL ASCII OUTPUT!! Less than half price ONLY £69.00 with data.
Carriage on Keyboards £3.50

SURPLUS SPECIALS ON PRESTEL - VIEWDATA - TELEX

PLESSEY VUTEL, ultra compact unit, slightly larger than a telephone features A STANDARD DTMF TELEPHONE (tone dial) with 5" CRT monitor and integral modem etc. for direct connection to PRESTEL, VIEWDATA etc. Designed to sell to the EXECUTIVE at over £600!! Our price BRAND NEW AND BOXED at only £99.00

DECCAFAX VP1 complete Professional PRESTEL system in slimline desk top unit containing Modem, Numeric keypad, CPU, PSU etc. Connects direct to standard RGB colour monitor. Many other features include: Printer output, Full keyboard input, Cassette port etc. BRAND NEW with DATA. A FRACTION OF COST only £55.00

ALPHATELNET, Very compact unit with integral FULL ALPHA NUMERIC keyboard. Just add a domestic TV receiver and you have a superb PRESTEL system and via PRESTEL the cheapest TELEX service to be found!! Many features: CENTRONICS Printer output, Memory dialling etc. Supplied complete with data and DIY mod for RGB or Composite video outputs. AS NEW only £125.00
Post and packing on all PRESTEL units £8.50

EX-STOCK INTEGRATED CIRCUITS

4164 200 ns D RAMS 9 for £11 4116 ns £1.50 2112 £10.00 2114 £2.50 2102 £2.00 6116 £2.50 EPROMS 2716 £4.50 2732 £3.00 2764 £4.95 27128 £5.50 6800 £2.50 6821 £1 68A09 £8 68B09 £10 80B5A £5.50 80B6 £15 80B8 £8 NEC765 £8 WD2793 £28 8202A £22 8251 £7 8748 £15 Z80A DART £6.50 Z80A CPU £2.00

Thousands of IC's EX STOCK send SAE for list.

DISK DRIVES

Japanese half height, 80 track double sided disk drives by TEAC, CANON, TOSHIBA etc.

Sold as NEW with 90 day guarantee ONLY £85.00
SUGART SA400 SS FH 35 TRK £55.00
SIEMENS FDD100 SS FH 40 TRK £65.00

carriage on 5 1/4" drives £5.50

Brand NEW metal 4 DISK CASES with internal PSU.

DSKC1 for 2 HH or 1 FH drive £29.95 +pp £4.00

DSKC2 for 1 HH drive £22.95 +pp £3.50

DKSC3 As DSK1 LESS PSU £12.95 +pp £2.50

DKSC4 As DSK2 LESS PSU £10.95 +pp £2.00

8" IBM format TESTED EX EQUIPMENT.

SHUGART 800/801 SS £175.00 +pp £8.50

SHUGART 851 DS £250.00 +pp £8.50

TWIN SHUGART 851's 2 Mb total capacity in smart case, complete with PSU etc. £595.00

MITSUBISHI M2894-63 8" DS 1 Mb capacity equiv. to SHUGART SA850R. BRAND NEW at £275.00 +pp £8.50

£125.00

DRE 7100 SS condition as seen

Various PSU's Ex Stock SEE PSU section.

HARD DISK DRIVES

DRE/DIABLO Series 30 2.5 Mb front load £525.00

Exchangeable version £295.00. ME3029 PSU £95.00

DIABLO 44/DRE4000A, B 5+5 Mb from £750.00

CDC HAWK 5+5 Mb £795.00. CDC 9782 80 Mb RM03 etc. £2500.00.

PERTEC D3422 5+5 Mb £495.00

RODIME 5 1/4" Winchester ex-stock from £150 CALL

BABF 6172 23Mb Winchester, as seen £199.00

Unless stated all drives are refurbished with 90 day guarantee. Many other drives and spares in stock - call sales office for details.

All prices quoted are for U.K. Mainland, paid cash with order in Pounds Sterling PLUS VAT. Minimum order value £2.00. Minimum Credit Card order £10.00. Minimum BONA FIDE account orders from Government Depts., Schools, Universities and established companies £20.00. Where post and packing not indicated please ADD £1.00 + VAT. Warehouse open Mon-Fri 9.30-5.30, Sat 10.30-5.30. We reserve the right to change prices and specifications without notice. Trade, Bulk and Export

32 Biggin Way, Upper Norwood, London SE19 3XF

Telephone 01-679 4414 Telex 894502 Data 01-679 1888

Datastar modem deal

DATASTAR Systems has signed an OEM agreement with modem manufacturer Kirk Automation giving it exclusive rights to the technology marketed by DataStar under the name Magic Modem for the BBC Micro.

DataStar has linked the multi-standard Magic Modem with the latest terminal software, Companion, which has been nominated as Best Communications Software of the Year in the British Microcomputing Awards. It costs £115.

Repton 2 tops poll

STRATEGIC treasure hunt-cum-jigsaw puzzle Repton 2 from Superior Software has won the title Best BBC Game of the Year for 1985.

The award was decided by a poll of readers of Computer Gamer magazine.

Repton 2, which features in a special subscription offer in this month's issue of *The Micro User*, beat Revs, from Acornsoft, into second place in a close-run race.

Third was Knight Lore, from Ultimate.

Box for education

THE Box of Treasures, a new release from 4Mation Educational Resources for the BBC with disc drive, is intended to be just that.

It contains an adventure of the same name, a word processor for creating stories, a processor for creating forms, a graphics design program, Make-A-Box, a 60 minute story tape, six booklets of information, poems and examples and help cards.

The company says the material can be used as the core for a lengthy project on the theme of boxes, or the individual items for all manner of curriculum related activities.

Price £23, or £30 for the 3in disc version.

BBC Micros are working flat out - for the BBC

HUNDREDS of BBC Micros are in use throughout the British Broadcasting Corporation, and they are so easy to adapt that a cornucopia of specialist software has been devised for them.

The problem is nobody knows exactly how much. There is no record of the programs written by and for the broadcasters.

Jim Day, design engineer responsible for the BBC Micro, says: "We have no idea what people are up to."

"So many employees of the Corporation are computer literate now, and the BBC Micro is so simple to use, that they just get on with it without telling us what they are doing".

One of the BBC Micro's greatest champions at the Corporation is John Radcliffe, head of the Open University Production Centre, who was involved in the development of the first machines when he was executive producer in the computer literacy project.

He now has two BBC Micros - one at home and one at work - and uses them constantly, saving



The logos illustrating this article were produced on a BBC Micro by the Information Design Unit of the BBC. All the peripherals are standard off the shelf add-ons building the micro into a flexible graphic aid.

It is mainly used at the ideas stage of a project. After inputting data or drawings the screen image can be manipulated in an infinite number of ways - changing colours, texture, size and distortion.

vast amounts of work for his secretary, Claire Sibley.

She explained: "John uses the micro to prepare everything he writes. He will come into the office with a disc with all his work from the night before, and I just get it printed up."

"Without the micro as a word processor I would need the help of another typist".

At the Open University Production Centre micros are being installed and

programmed as terminals for the main computer.

The idea is that they will give managers simple access to administrative data, in the way that other BBC Micros are already used to gain access to the vast stores of information on the Open University computer system.

A similar scheme at Glasgow will give BBC Scotland low-cost terminals to the BBC's central computers.

One of the main uses of the BBC Micro at the

Corporation is putting captions, maps and graphics on the television screen.

The technique was developed by engineering investigations under John Mitchell, and involved developing a device that "gen-locks" the micro signal with the TV signal.

Other members of staff have written their own programs to store such information as special lettering for use in captions.

Peter Armstrong, now working on the Domesday Project, wrote a program called Prompt which enabled him to cost his programme-making, calculate expenses and keep track of spending on particular projects.

The production team of the TV computer show Micro Live use the BBC Micro behind the scenes and in front of camera. They have programmed micros to transfer word processed material through electronic mail.

"It means we can work from home", says Steve Lowry of Micro Live. "We can write the script and send it to each other via electronic mail and compare notes".

OFFICE SYSTEM BASED ON BBC



A NEW office system based on the BBC Micro has been released by Solidisk.

Called Wordchic, its entry system consists of a 160 character a second dot matrix printer with near letter quality and graphic capability, 640k Mitsubishi disc drive and, from Computer Concepts, a double density disc filing system and Wordwise Plus.

Also included in the package are spelling checker, database, spreadsheet and games.

The system provides a RAM/ROM add-on and will hold up to 500k of ROM and four megabytes of RAM, and a suite of professional integrated software. Price: £355.



MICROMAN Computers

ACORN SPECIALIST COMPUTER CENTRE

All our prices include VAT.

THE NEW BBC MASTER SERIES

MASTER 128	499.00
MASTER Turbo Upgrade	125.00
MASTER ET	399.00
MASTER 512 Upgrade	T.B.A.
MASTER SC Upgrade	T.B.A.

For technical information and specification please phone or call into our shop.

ACORN PERIPHERALS & UPGRADES

Teletext Receiver	149.00
Prestel Receiver	139.00
6502 2nd Processor	199.00
Z80 2nd Processor	399.00
IEEE Interface	325.00
Acorn 10MB Hard Disc + Level 3	1699.00
Acorn 30MB Hard Disc + Level 3	2499.00
BBC B Plus Upgrade 64-128K	39.95
ADFS Upgrade	30.00
1770 Upgrade	49.95
Acorn DNFS Disc Upgrade	99.00

RAM/ROM EXPANSION BOARDS

A-B Upgrade	95.00
ATPL Sidewise ROM Board	43.70
ATPL Sidewise ROM Board/B Plus	29.95
Aries B32 RAM Expansion Board	92.00
Aries B12 ROM Board	46.00
Aries B12c	5.75
Computer Village ROM Board	49.00
RAMROM 15	99.99
ROMEX 13	40.25

SOLIDISK PRODUCTS

Solidisk 32K Sideways RAM	53.00
Solidisk 64K Sideways RAM	80.00
Solidisk 128K Sideways RAM	125.00
Solidisk 256K Board	175.00
Solidisk DDFS 2.2 Interface	45.00
Solidisk ADFS 2.1 Interface	55.00
Solidisk CPU Case + Keyboard	33.00

EPROM PROGRAMMERS-ERASERS-I/CS

Control Telemetry Eprom Prog.	109.25
Eprom Programmer	20.95
Eprom Programmer + ZIF Socket	25.95
Eprom Eraser	20.95
Eprom Eraser with Timer	25.95
Eproms 2764 8K Hitachi	2.75
Eproms 27128 16K Hitachi	2.95
27128 per 5 Eproms	12.50
RAM 6264LP-15 8K	3.95
27256 (21v)	5.95

MONITORS (including cable)

Microvitec 1431 Standard	229.00
Microvitec 1451 Medium	279.00
Philips 1114 TV/Monitor/CV	209.00
Philips CMB8533 Med/RGB/CV	299.00
Philips Green 7502	85.00
Philips Amber 7522	89.00

MODEMS/COMMUNICATIONS

Pace Nightingale + Commstar	132.25
-----------------------------	--------

Bulletin Board service for full details of Microman Computers latest prices, special offers, news and message service contact:
MORECAMBE BULLETIN BOARD
 1200/75 (Commstar users: Filter off)
 TELEPHONE 0524 426133

Pace AutoDial/AutoAnswer Board	56.35
Pace Auto Dial Utilities Disc	11.50
Pace OBBS Bulletin B Software	25.00

DISC DRIVES

Pace PSD1 SS/40T/100K	99.00
Pace PSDIB (above in dual case)	121.90

Pace PSD3 DS/40T-80T/400K	114.95
Pace PSD3B (above in dual case)	134.55
Pace PDD3 DS/40T-80T/800K	209.95
Cumana CSX100 SS/40T/100K	99.00
Cumana CSX400 DS/40T-80T/400K	114.95
Cumana CSX800 DS/40T-80T/800K	209.95
Pace PSD1P SS/40T/100K	129.95
Pace PSD3P DS/40T-80T/400K	135.95
Pace PSD3PB (above in dual case)	156.40
Pace PDD3P DS/40T-80T/800K	255.95
Cumana CS100 SS/40T/100K	129.95
Cumana CS400 DS/40T-80T/400K	135.95
Cumana CD800S DS/40T-80T/800K	255.95
Pace Power Supply	44.85
Opus Challenger	249.95
RAM Disc Upgrade to 512K	49.95
Mr Floppy 5.25" DS/DD/80T (10)	16.50
WABASH 5.25" DS/DD/80T (10)	16.50

AMX MOUSE

AMX Mouse inc SUPER ART	89.95
AMX Desk	24.95
AMX Utilities	14.95
AMX Paintpot	14.95
AMX Super Art ROM	49.95
AMX Pagemaker	49.95
AMX 3D Zicon	24.95
AMX Database	24.95
AMX Xam	24.95

PRINTERS

Canon PW1080A + BBC Cable	289.00
Taxan Kaga KP810 + BBC Cable	249.00
Canon PW-1156A	459.00
Canon P11080A Colour	573.85
Star SG10	259.00
Star SG15	389.00
Shinwa CPA80 Parallel	159.00
Shinwa CPA80 Serial	239.00
Epson LX80 NLQ	258.75

JOYSTICKS

Voltmace 14b Handset	14.95
Voltmace 3b Singlet	12.95
Voltmace 3b Dualset	19.95
Voltmace 14b Interface	14.95
Voltmace Driver Cassette	5.95
Voltmace Datapad Keyboard	39.95

WORD-PROCESSORS

View 2.1 ROM	52.00
View 3.0 ROM	79.00
View Printer Driver Generator	11.50
View Index	14.95
Wordwise ROM	44.85
Wordwise Plus ROM	49.00
HI-WORDWISE (DISC)	6.00
Wordbase ROM (Wordwise + Utls)	21.00
Spellcheck III ROM (View & WW)	35.99
Merlin Scribe ROM	59.95
Edword 2 ROM	52.84

DATABASES

Viewstore ROM	52.00
Acorn Database (Disc)	15.35
Gemini Datagem ROM	79.95
Merlin Database ROM	49.00
Star Database ROM	75.00
Masterfile II (Disc)	22.00
Betabase	25.00
Betabase Utilities	12.00

SPREADSHEETS/CHARTS

Viewsheet ROM	52.00
Ultracalc ROM	79.50
Intersheet ROM	49.95
Hi-Intersheet (Disc)	6.00
Interchart ROM	33.95

LANGUAGES

BCPL ROM	59.80
BCPL Calculations (Disc)	34.50
BCPL Stand Alone Gen. (Disc)	49.90
ISO Pascal ROM	59.95
ISO Pascal Stand Alone Gen.	34.50
Comal ROM	49.85

Acorn LOGO ROM	69.00
Open LOGO ROM	69.95
Logotron LOGO ROM	69.00
Micro-Prolong ROM	79.95
Microtext (Disc)	59.80
Acorn Forth ROM	49.85
6502 Development System (Disc)	49.85
Acorn Turtle Graphics (Disc)	19.89
Acorn Lisp ROM	49.85

UTILITIES

Acorn Basic Editor	29.90
Acorn Termulator ROM	34.50
Acorn Graphics Ext. ROM	29.90
Disc Doctor ROM	33.35
Printmaster ROM	33.35
Termi II ROM	33.35
Accelerator ROM	64.40
Graphics ROM	33.35
System ADE ROM	60.00
System SPY ROM	30.00
Romit ROM	34.00
Iconmaster ROM	34.01
Sleuth ROM	32.00
Toolkit Plus ROM	39.00
Exmon II ROM	32.00
Help II ROM	31.00
Murmon ROM	32.00
Discmaster (Disc)	21.00
Dumpmaster II ROM	31.00
Slave Plus ROM	39.95
Floppywise Plus ROM	29.95
Vine Replay ROM	34.99
Hershey Font (Disc)	21.00
Fontwise (Disc)	12.00
Fontaid ROM	30.00
Fontaid Utilities (Disc)	15.00
Jukit (6100) ROM	25.00
Acorn Speech Synthesizer	55.00
Acorn Creative Sound (Disc)	19.95
Computer Concepts Speech ROM	33.35
Superior Soft Speech (Disc)	11.95
Beebug Studio 8 (Disc)	22.00
Island Music System (Disc)	29.95

CAD SYSTEMS & PLOTTERS

Microman have opened a new CAD centre offering full demonstration facilities for the ROBOCOM BITSTICK I & II SYSTEM for the BBC Computer and ROBOCAD & PCB DESIGNER for the FERRANTI PC Computer. We stock a comprehensive range of plotters, including WATANABE, HITACHI, EPSON, PLOTMATE, PENMAN and are main dealers for the ROLAND range of plotters.

Bitstik 1	375.00
Bitstik Multi-plotter Driver	79.00
Bitstik 2	914.25
Bitstik 2 Upgrade	517.50
Roland DXY-800 A3 Plotter	483.00
Roland DXY-880 A3 Plotter	943.00
Roland DXY-980 A3 Plotter	1380.00
Roland DPX-2000 A2 Plotter	4370.00
Watanabe A3 Plotter (6 pen)	1148.85
Epson H180 Plotter (4 pen)	458.85
Hitachi A3 Plotter (4 pen)	569.25
Linear Graphics Plotmate	343.85
Penman Plotter	228.85
Penman Micad Special Pack	249.00
Penman Utilities Special Pack	249.00

ELECTRON COMPUTER/PERIPHERALS

Electron + Five Pack	79.00
Plus One Interface	59.95
Electron View	29.95
Electron Viewsheet	29.95
Electron Database 3.5" Disc	19.95
Electron Logo	59.80
Electron ISO Pascal	59.80
Cumana Disc Interface	74.95
Pace Modem + Commstar	159.85
Slogger ROM Box	44.95

MAIL ORDER SALES

PHONE **074488 5295**

We accept both Access & Visa credit cards. Simply telephone your order, giving card number, address and expiry date, or send your order with cheque or postal order to our above address.


Carriage/Postage Charges: Computers/Printers/Disc Drives: Next day delivery, £8.00; ROMS/Exp. Boards/Software: First class post, £1.00; Books: First class post, £1.50.

All our prices include VAT.

SHOP

Open 9-6 Monday to Saturday.
 All our prices include VAT.
 Educational, Industrial & Government orders accepted.
 Export enquiries welcome.

**Rainford Industrial Estate,
 Mill Lane, Rainford,
 St. Helens, Merseyside.
 Phone 074488 5242**

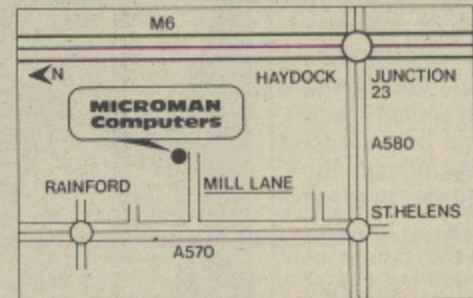



THE MICRO USER

Guide to playing...

By
Revmasters Lee Varga
and Clive Packer

but manage to control the spin it is quicker in real terms to crash the car than to mess around trying to get back on the track.

If you come off simply depress one of the gear change keys, hold in the clutch and hit the accelerator before releasing the clutch. The car should leap forward and crash.

After crashing many people frantically hammer the Tab key to change down to neutral for the restart. This is time-wasting and unnecessary. The fastest way to get moving again is to press Tab, S and T together, releasing Tab when the rev counter reaches 5000 and then change down to first gear.

When you move up to the amateur level this technique goes out of the window since crashing terminates your race. So if you're planning to become a professional driver you will need to learn to control a crashing car.

If you come off the track on to a high curb the car will leave the ground completely and you will crash. There is very little you can do to rectify the situation except not to do it in the first place.

If you leave the track on a straight or while overtaking or through being pushed off, just make slow gentle moves to get back on to the track. You will notice very clearly here the difference in grip between the grass and the track. If you panic and turn sharply you will simply spin the car.

If you come off over a low curb change up to fifth gear and release the accelerator. Now find that brake key, A, and repeatedly tap it until the rev counter comes down to 2500.

When this happens drive slowly back on to the track. Do not ever hold the brake down - you will only succeed in skidding the car beyond control.

If you do spin release the throttle and change into fifth immediately. Tap the brake as above and hope. It was said earlier that sustained braking causes skidding, but when in a spin if all else fails there's nothing to lose, so lean on the brake.

One thing to note is that sometimes the flaps are damaged in a crash, so after a crash or bump move the car from side to side and if the steering seems a bit sloppy press Shift + f0. This will take you into the pits where you can reset the flaps.


But don't worry. As soon as you enter the pit everyone else stops until you are back on the track.

Finer Points

ALTHOUGH you will be busy just trying to drive a good race, it is worth looking out for some of the finer points and added touches which give Revs its realism.

For example, when you hit the throttle inertia lifts the front of the car and on braking the nose goes down just as a real car would. It is this which makes Revs the best racing car simulation ever produced for the BBC Micro.

Keep Revvin' 'cos practice makes perfect!

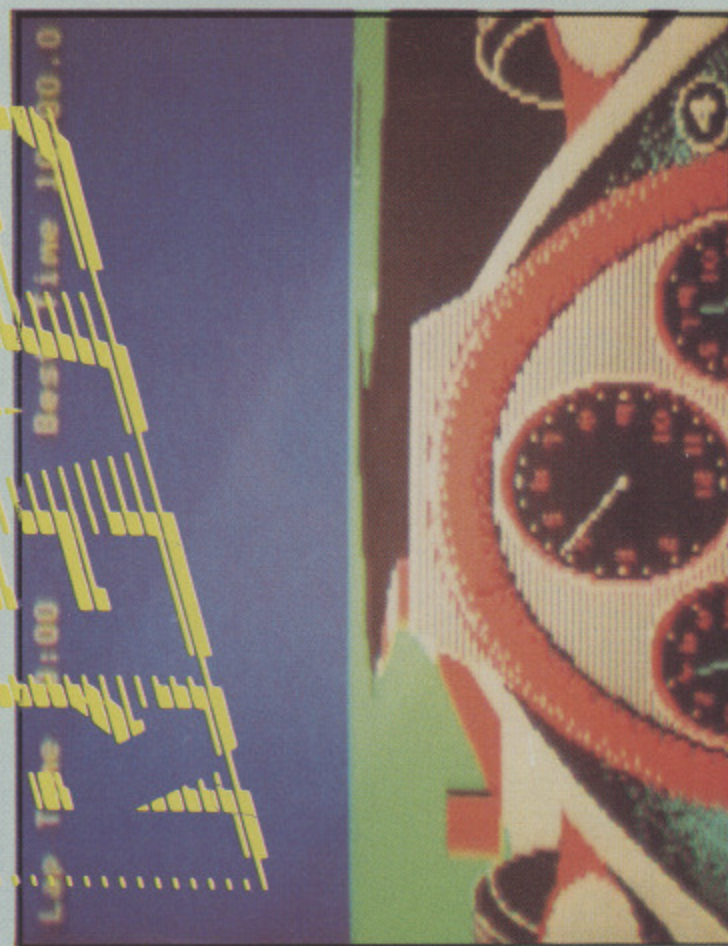

The Silverstone circuit awaits...

FOR all those drivers who dream of winning a race here's how to beat Max Throttle at his own game without really trying. Let's start by loading in the game.

Revs can be played with the keyboard (Shift + f1) or joystick (Shift + 2). Beginners may have found that the game is easier to play with the joystick. This is true to start with, but once you gain experience a keyboard gives better results. In this guide we are going to concentrate mainly on the use of the keyboard.

So settle back into your seat and grasp the steering wheel or, to put it another way, position your hands on the keyboard as shown in Figure 1.

As a clever and attentive reader you will have spotted at once that there is no finger on the brake key, A. (What do you want to slow down for, you're trying to win the race?) The reason for this is that braking is only needed in emergencies. For those joystickoholics who still insist on playing with a joystick, grasp it as you would normally and read on.

The Ralt 3 racer is controlled like this: car

The controls

left is L or stick left, car right is + or stick right. Accelerate is S or stick forward and brake is A or stick backwards. Change up a gear is Q or stick fully forward and push the fire button while change down a gear is Tab or centralise the stick and push the fire button. In either mode the spacebar amplifies the steering and T starts the engine. In joystick mode the fire button acts as the clutch.

When using a joystick you must slide the stick gradually in the desired direction. If you yank the stick over you will skid and spin all over the place. If you are moving fast and brake rapidly by jerking back the stick you will also skid, spin and crash. Try it.

Okay, so you're ready to go. Well not quite, there are still the pit adjustments to make to your car. Start by selecting the practice option (1) then set the rear flaps to 25 and the front to 16. These are the best settings for handling and performance.

You will now find yourself alone on the

where you started. Having come out of the previous corner on the left hand side of the track move over to the right. When you pass the red marker of the next corner simply move in to the left – no need to change down or brake here – and whoosh round the corner at full speed, moving out to the centre of the track before exiting.

Now move back to the left hand side because folks it's back to the chicane situation, so start again at the beginning of the text.

That concludes the step-by-step guide to the Silverstone circuit, but make sure you have memorised the map thoroughly.

The race is on!

WHEN you have mastered the circuit you will want to try your luck in an actual race. It is imperative that you start by entering a novice race.

The qualifying laps are just like driving in practice mode but watch out for other cars. The thing that must be stressed here is that all the other drivers are blind. This is because they are simply trying to get the fastest lap time and will not let a small thing like another car get in their way.

They drive the same path around the curves every time and if you're in the way – well you won't be much longer. After qualifying, with luck you should be fairly well up the grid with not too many cars in front of you.

When you are given the signal from the

lights spin the wheels and go!

Carefully weave in and out of the other cars, gradually moving over to the right of the track. The other cars will bunch into groups on the left, with gaps in between. Move into one of these gaps as you near the chicane and hang on the tail of the guy in front.

If you hang back too much you will be rammed from behind and crash.

As the manual states, in novice racing even the worst pile ups are catered for. This means, in effect, that there is always a crane ready to lift your car back on to the track after you've ripped the catch fencing to pieces.

It is worth noting here that in the higher racing levels the crane operators go off for a tea break the moment you set wheels on the grid, so if you crash it's the end of the race for you.

In the novice race if you slide off the track

Wings

THE best wing settings are 25 and 16. These settings were found after much time, energy and above all, crashing. When you are used to them and can drive a mean lap try changing them to 20 and 14.

This tends to be a bit on the spongy side around corners, so freewheel into all curves from the second marker to the red marker, but on the straight sections the car will fly.

pull over to the left when you see the red marker. You will glide through the bend on to a short straight.

The next thing is the hairpin so SLOW DOWN. Move to the left of the track and at the second white marker take your finger off the throttle, change into fourth gear and start the right turn. As you pass the red marker cut in hard right. You will move to the right curbing and you should now change down to third gear.

Momentarily release the steering then move right again with amplification if you are too far to the left and press the throttle again. You should brush the left curb but release the steering a few moments before this as the wheel takes a while to centralise and this should be sufficient to keep you on the track.

Continue to accelerate as you move into the straight and build up to fifth gear again. The last part of the hairpin section is another gentle left which you can glide through in top gear at top speed.

We now come to the long straight. This is the chance to really put the car through its paces so floor the accelerator and see what it can do. Move gradually over to the left of the track ready for the next curve, which is a right.

As you pass the red marker turn into the corner across the inner curbing and give the steering a touch of amplification. Release the steering slightly before hitting the outer curb to allow it to centralise and you should slide out of the curve facing down a short straight.

Nearly round the track now, so don't blow

Qualifying and Timing

IN the novice race it is best to get a qualifying lap time of between 1:30.0 and 1:30.5. If you take longer than 1:30.9 it isn't really worth racing because you start off in the middle of the grid and get squashed and rammed when the pack goes round the first bend.

If you get a lap time faster than 1:30.0 everyone moves up a league and — yes you guessed it — you're back in the middle of the pack.

As a beginner it's pointless trying to enter the professional race to see what it's like, because if you don't get 1:26.0 or faster you will be dumped back into the novice race.

track at Silverstone. Before you get all excited and zoom off in a cloud of black evil-smelling smoke it might be a good idea to start the engine. To do this hold down Q, S and T simultaneously. These keys hold in the clutch, depress the accelerator and operate the starter in that order.

When you do this you will find that the car leaps into life, the rev counter starts to move and the engine sound fills your ears. When the rev counter reaches the 5000 mark release the clutch by letting go of the Q key. You should hear the squeal of a wheelspin start. This is not strictly necessary but it gives you a good feeling and can be useful when it comes to starting a real race. Now you are moving!

Keep the car in first gear and drive SLOWLY round the track. Take a good


Facts and Figures

THE engine of your Ralt 3 car has only one power band. This gives the engine its maximum power between 5000 and 5600 rpm. It is therefore vitally important to keep the rev counter between these values by being in the correct gear for the speed you are doing.

look at the circuit as you go and learn the shape of the curves.

On the Silverstone track there are four corners, a chicane and a hairpin. Have a close look at all of them now because you won't be able to drive and read this at the same time unless you happen to be Zaphod Beeblebrox. You might find it a good idea to

Figure 1: Hand positions on keyboard

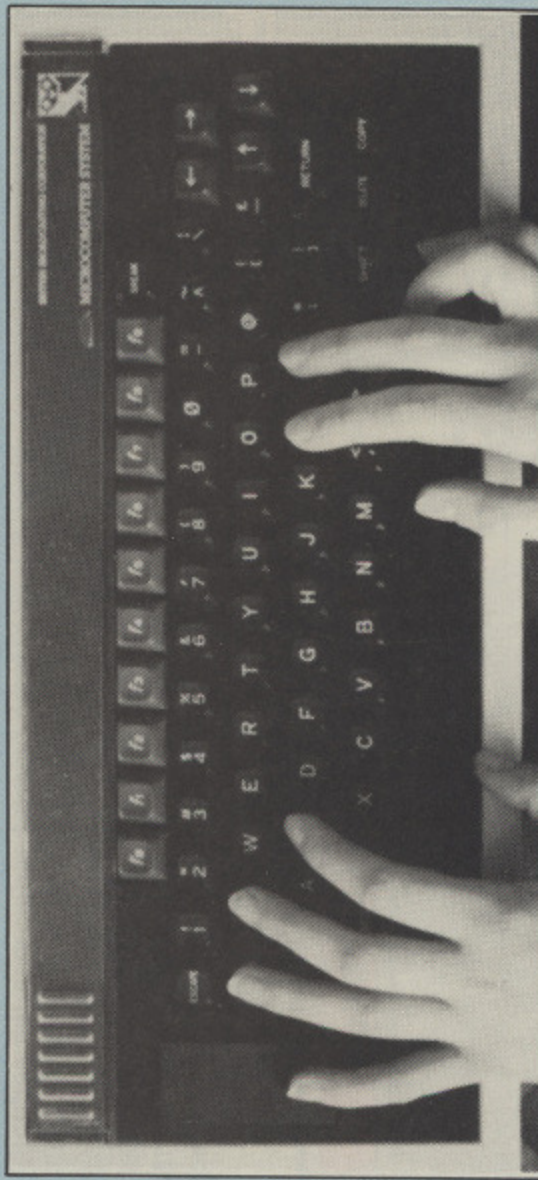

have the map (Figure II or from the Revs manual) handy as well.

During the qualifying lap, and in practice mode, you start from point X. This gives you plenty of time to build up speed before passing the start line, which is where your lap timings are taken from.

The position of the start (Y) means that

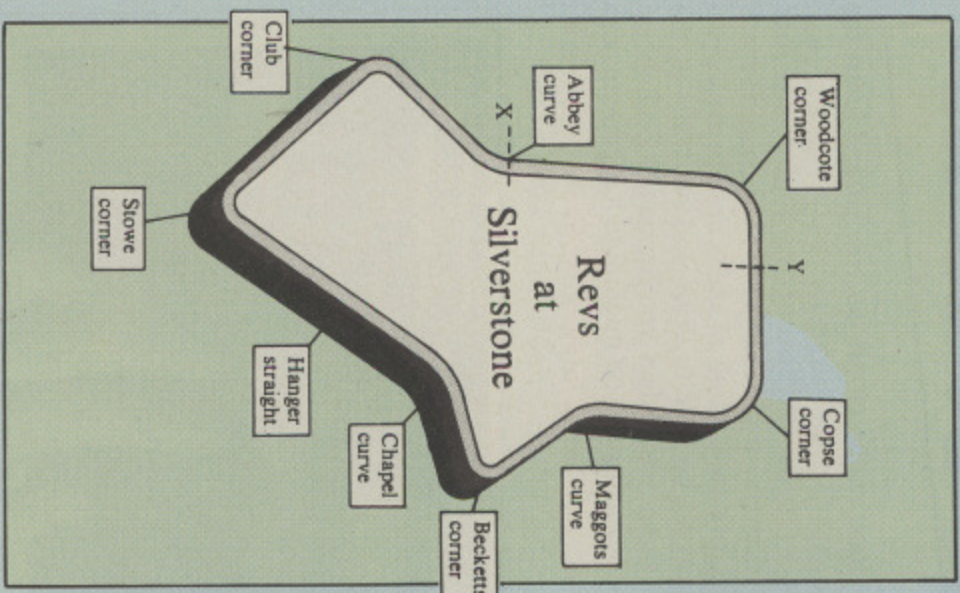


Figure II: Silverstone map

you will need to exit the chicane as fast as possible. With practice this can be done in fifth gear with revs around 5300 (smug smile). By the time you have finished what you're reading now you will probably have crashed at least once.

In practice mode when you crash your car it is deposited back on the track at point X. So when you crash just begin again by starting the engine, holding down Q, S and T...

Keep practising in first gear, getting the feel of how the steering responds to the keys, until you can make it round the whole circuit every time without going off the track. You might get a trifle frustrated, but this really is the only way to become a good driver, so be patient.

When you can handle the car accurately at a slow speed it is fairly straightforward to build up the speed without too many mishaps. Simply remember that you will have to respond earlier with the controls.

Now start again from point X and move up a gear (Q). Remember your engine has maximum pulling power in the range 5000-57000 rpm. By the time you approach the chicane you should be in fifth gear.

The Chicane

You will next see the sign warning of the chicane which is followed by two white markers on the left hand side of the track.

After the two white markers there is a red one. When you pass this move over to the left hand side of the track while releasing the throttle and changing down to fourth gear.

Cut in to the right. The car will move across on to red and white curbing on the right hand side. As you approach this curb release the steering momentarily, which maintains the steering at a level which will stop you going into a spin.

Although you can cut across the curbing in the chicane and at all the other corners, don't use the curb too much, otherwise your car will tend to take off which does not encourage responsive steering. As you pass the curbing on the right, turn to the left until you pass another red marker on your left, when you should steer right again.

You should steer across more curbing to the right before exiting the chicane on the left side of the track. You probably find this hard to visualise, so look at the plan view (Figure III), which might help to clarify things a little for you.

If you don't make it through the chicane the first time you try it, and you probably won't, don't panic. Just count to ten and do it again - in a lower gear if you like.

As in most things, practice makes perfect. The chicane is one of the most difficult things to master on Revs so stick at it until you can get through at a good speed without crashing. When you do you will find yourself on a short straight. Halfway down here is a flag on the left side of the track. This is the starting line.

The first corner after the start is a pain, being a fairly sharp right. Approach on the


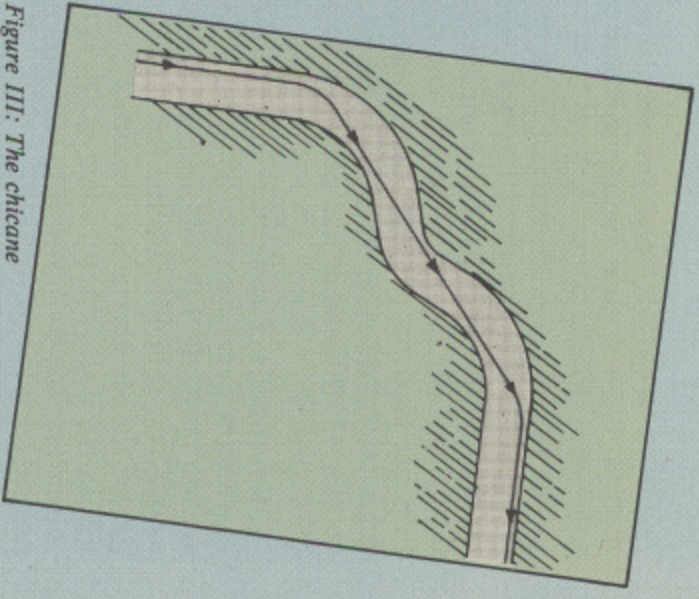


Figure III: The chicane

left side of the track and watch for a red marker. As you pass the marker change down a gear, release the accelerator, turn right holding the + key down until you cut across the curbing on the right.

Now release the + key. The car will slide over to the left of the track, and you will need to press the + key again together with the steering amplification (spacebar), to stop the car sliding off the track on to the left hand curbing. When you are through the bend move quickly to the right.

You now enter the hairpin section. This consists of a gentle left turn followed by the hairpin, which is a right then a gentle left again. The first curve is easy to handle in fifth gear with the pedal on the floor. Simply

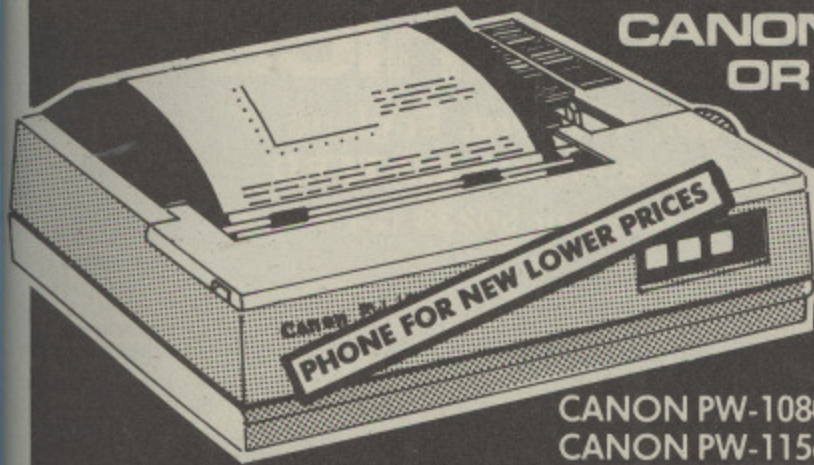

CANON PW-1080A OR KAGA TAXAN KP810


NEAR LETTER QUALITY PRINTER
NLQ Mode 23 x 18 Matrix: 27 cps
Draft Mode 11 x 9 Matrix: 160 cps
Full range of Epson FX 80 Print Codes
Friction & Tractor Feed
Centronics Interface Standard
CANON PW-1156A Available
(Accepts 17" Paper)

JUKI SPECIAL NOW FROM £329 inc. VAT.
RING FOR DETAILS.

CANON PW-1080A ~~£450.00~~ + VAT
CANON PW-1156A ~~£300.00~~ + VAT

PHONE FOR NEW LOWER PRICES

See below for Printerpack prices

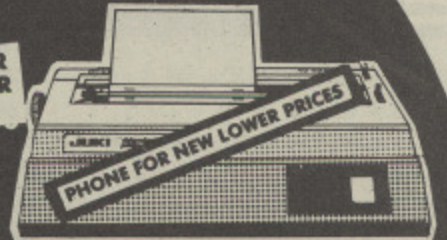

C.J.E. MICRO'S BBC PRINTERPACKS

For Star, Canon & Juki Printers include:

1. The Printer
2. Next Working Day Delivery
3. Cable to the BBC 1.25 Metres
4. Screen Dump Program (M/C Source)
5. Text Dump Program
6. Function Key set up Program.
7. Function Key Label Printing Program.
8. VIEW Printer Driver
9. 100 Sheets of Paper
10. Mains Plug with 3 Amp Fuse
11. Booklet giving details of using the printer with a BBC
12. Character Defining Program for Downloadable-character-set (draft mode)

CANON PW-1080A BBC PRINTER PACK ~~£450.00~~ + VAT
 CANON PW-1156A BBC PRINTER PACK ~~£300.00~~ + VAT
 JUKI 6100 BBC PRINTER PACK ~~£330.43~~ + VAT
 STAR SG10 BBC PRINTER PACK ~~£295.00~~ + VAT

Low Prices

OFFICIAL ACORN APPROVED DEALER

JUKI 6100

One Year Warranty
20 CPS, BiDirectional & Logic Seeking
10, 12, 15 & Proportional Spacing
Wordstar Compatible
2K Buffer, 13 Inch Platen
Underline, Backspace + Lots more
Centronics Interface Standard
RS 232 Interface £54.00 + VAT Extra
Tractor Feed £1.19 + VAT Extra
Single Sheet Feeder £19.9 + VAT Extra


JUKI 6100 £330.43 + VAT = ~~£380.00~~
See left for Printerpack prices

RING FOR SAMPLE PRINTOUT, FULL SPECIFICATIONS & LATEST PRICES

Top Service

STAR SG10 NEAR LETTER QUALITY

NLQ Mode 17 x 11 Matrix
True Descenders 9 x 9 Matrix
120 CPS Bidirectional & Logic Seeking
40, 48, 68, 80, 96, 136 cpl
Italics, Emphasized, Double strike
Super & Sub Scripts
Downloadable Character Set
Hi-Resolution & Block Graphics
Friction or Tractor Feed
10" Carriage
Centronics Interface Standard
RS232 Int. £58.00 + Vat Extra

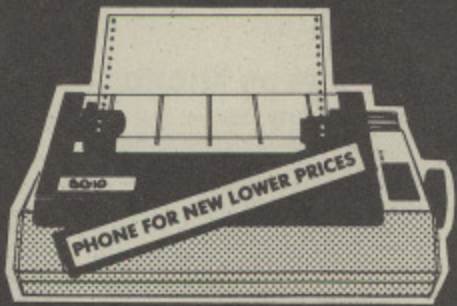

STAR SG10 ~~£250.00~~ inc. VAT

See above for Printerpack prices

WIN A PORSCHE 924S when you buy a STAR SG10 from CJE
Written details on request.

FONTAID

NLQ Designer for Canon and Taxan Kaga NLQ Printers.

Design your own NLQ fonts or 'download' one of our 20+ predefined fonts. The FONTAID disk includes the following type styles:
Square, Outline, Gothic, Computer Type Style, Bold, Shadow, and Broadway.

Additional Disk 'A' includes:
Greek/Maths, Script, Proportional Spacing, Plain, Handwriting and 2 styles of (Elite, Condensed, Super Condensed).

FONTAID requires 6264 RAM Chip in printer.

FONTAID (BBC)	£30.00
FONTAID (BBC) with 6264 RAM	£36.00
FONTAID Additional Disk 'A'	£15.00

Remove state 40 or 80 track when ordering.
ROMS of individual fonts are available and can be used with any computer.

FONT ROMS	£18.00 each
P & P on FONTAID	£1.00

Please phone for FONTAID leaflet and demonstration print out.

Coming Soon MULT-FONT NLQ printing for Epson MX/RX/FX/LX and Epson compatibles.
Design your own font or use supplied predefined font.

Please phone for latest details.

EXPORT ORDERS WELCOME
VAT INCLUDED WHERE APPLICABLE
PHONE/CREDIT CARD ORDERS WELCOME
Postage 50p per order or as stated
Next day Delivery for Printers/Disk Drives £8.00
FULL RANGE OF CONNECTORS & CABLES AVAILABLE
PRICE LIST ON REQUEST

CJEmicros

Dept MU3, 78 Brighton Road, Worthing W. Sussex BN11 2EN (0903) 213900

NEW COLOUR JUKI NLQ PRINTER NOW IN STOCK £450.00 inc VAT
Please phone for details

PRINT QUALITY

Watford Electronics

Jessa House, 250 Lower High Street, Watford, England
 Tel: Watford (0923) 37774/40588 Telex: 8956095 WATFRD
 Credit Card Orders (ACCESS & VISA) Tel: (0923) 33383 or 50234 (24 Hours)



Watford Electronics' overseas Distributors:

Absolute Electronics, 483 Centre Road, Bentleigh, Victoria, Australia 3204. Tel: (03) 557 3971
 First Ludonics International, 2400 AJ Alphen aan den Rijn, Netherlands. Tel: 01720 72580.



BBC B + Micro 64K + DFS	£365
BBC B + Micro 128K + DFS	£389
BBC B + 64K + Econet No DFS	£359
BBC B + 64K + DFS + Econet	£389
64K Upgrade Kit for B+	£32
BBC MASTER 128K Micro	£433
BBC MASTER TURBO 4MHz	£544
ECONET UPGRADES Available	

Scientex PVBA, Willem Ogieerplaats 2
 B-2000 Antwerpen Belgium.
 Tel: (03) 233 59 06
 Viking Tenco, Kirkegade 4C, Tvaerflojen
 DK9550 Mariager, Denmark.
 Tel: (08) 5421 11



Official ACORN Distributor

CENTRONICS GLP (NLQ) Printer

A major price break-through in NLQ Printers from Watford

At last, a full feature Epson compatible NLQ printer at a price that everyone can afford. Due to Watford's bulk purchasing power and low margins we can now offer this incredible printer deal direct from the manufacturers to our customers.

The Centronics GLP features a near letter quality (NLQ) mode using a 23 by 18 dot matrix for each NLQ character (this is the same as is used by the very popular Kaga Taxan printers). The NLQ Font Rom supplied is Watford's own Professional NLQ ROM for the GLP.

Single, double and quadruple density graphics modes as well as four character widths and super/sub script printing are also supported, along with many other facilities normally found on printers costing twice as much.

Although the GLP is a very compact printer, it can handle paper up to 10 inches wide. Friction feed is supplied as standard with a low cost tractor feed available as an optional extra.

GLP is bidirectional logic seeking. Has a 9 needle print head. Now available in Serial, Parallel or QL compatible. Please specify.

Send an SAE for further details of the GLP NLQ Designer and extra font ROMs.

Special Offer £107 (carr £5)

Tractor Feed Attachment £9
 NLQ Designer ROM £20
 Individual FONT ROM £15

BROTHER HR-15

Brother HR15 is a high-quality daisy-wheel ideal for a budget printer for serious use. Notable features of this printer include a 3k buffer, 18cps (max), bi-directional proportional spacing, Centronics interface standard, (RS232 optional), optional Sheet Feeder and Keyboard.

ONLY £305 (carr. £7)

Single Sheet Feeder £185
 Electronic KEYBOARD £135
 TRACTOR FEED Attachment £84
Ribbon Cartridges:
 Fabric £3; Carbon £3;
 Multistrike £5
 DAISYWHEELS (various typefaces) £18

PRINTER SHARERS

Connect 3 BBC Micros to 1 Printer £65
 Connect 6 BBC Micros to 1 Printer £129

KAGA KP810 NLQ PRINTER

This rugged printer is made by Canon of Japan and is the same as Canon PW1080. It is fully Epson FX80 compatible and offers superb NLQ printing.

Our Price: ONLY £195 (£7 carr.)

Kaga RS232 Interface	£49
Kaga RS232 Interface + 2K Buffer	£69
Kaga RS232 Interface + 16K Buffer	£95

KAGA KP910 Printer

Similar to the KP810 but has 17" wide carriage for wide print. Gives 156 columns of normal print or 256 columns in condensed mode. Ideal for printing out spreadsheets.

ONLY £339 (£7 carr.)

PRINTER LEAD

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8

We can supply leads to any required length.

RS232 Cables available in any length and any combination. Please telephone for your requirement.

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
FX100	£10.00	£5.25
FX80/MX80	£4.50	£4.95
RX80	£4.50	£4.50
LX80	£4.00	£4.50
GP80/GP100	£4.50	£4.00
GP250	£5.95	£3.95
Centronics GLP	£4.00	£3.75
KAGA KP810	£5.25	£4.75
CANON PW1080	£5.25	£4.75
Microvitec Metal Monitors	-	-

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

1,000 Sheets 9 1/2" Fanfold Paper	£7
2,000 Sheets 9 1/2" Fanfold Paper	£13
1,000 Sheets 15" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90x36mm (Single Row)	£5.00
1,000 90x36mm (Twin Row)	£4.90
1,000 90x49mm (Twin Row)	£7.50
1,000 102x36mm (Twin Row)	£6.25

Carriage on 1,000 Labels £1.00

This Month's SPECIAL OFFER

Gemini's popular OFFICE MATE & OFFICE MASTER Software

Packages consisting of:

Database, Spreadsheet, Beebplot Graphics, Wordprocessor, Accounts Packs: (Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements, Stock Control on DISC.

FREE

with every BBC B PLUS MICRO purchased from us.

6502 Acorn 2nd Processor package	£165
Z80 Acorn 2nd Processor package	£319
TORCH Z80 Card + Perfect Software	£215
TORCH Z80 Card+Soft. + Disc Pack	£475
Acorn IEEE Interface Complete	£280
Acorn Teletext + Interface	£195
Acorn Bitstick I	£299
Robocom Bitstick II	£759
Upgrade for B1 to B2	£450
Bitstick Multiplexer Driver	£65

(Securicor carriage on Micros £7)

Dust Cover for BBC Micro

£3.50

EPSON LX-80 PRINTER

Low cost, High performance printer. Print speed 100 cps, NLQ mode 22 cps. Full FX80 compatible. Friction feed supplied as standard. Tractor Feed & Auto Single Sheet Feeder, optional extras.

Price: £205 (carr £6)

Tractor Feed Attachment £20
 Single Sheet Feeder £49

VARIOUS PRINTERS

● EPSON GX80	£187
● EPSON RX100	£342
● EPSON FX80 Printer	£259
● EPSON JX-80 Colour Printer	£450
● EPSON Hi-80 Printer Plotter	£319
● EPSON Paper Roll Holder	£17
● FX80 tractor attachment	£37
● SEIKOSHA GP50A & GP50S	£69
● Centronics Printer Cable to interface all the above Printers to BBC	£6

RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232	£25	RS232 + 2K Buffer	£55
IEEE 488	£62		



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

MICROVITEC 14"

- 1431 - Medium resolution as used on the BBC television computer programme **£179**
- 1451 - High resolution, suitable for word processing in mode 0 **£225**
- 1441 - High res, exceeds the capabilities of the BBC micro **£385**
- 1431AP RGB + PAL and AUDIO **£199**
- 1451AP RGB + PAL and AUDIO **£269**
- Dust Cover for Microvitecs **£5.50**

KAGA/TAXAN 12"

- KAGA KX1201G Hi-res Green Monitor **£90**
- KAGA KX1202G Ultra-Hi-Res Green Monitor **£105**
- KAGA KX1203A Ultra-Hi-Res Amber Monitor **£105**
- KAGA Vision 2, Hi-Res, RGB Colour Monitor **£210**
- KAGA Vision 3, Ultra Hi-res, RGB Colour; Text mode switch allows monochrome text display in either Green/Amber or White reverse **£330**
- PHILIPS 12" Hi-Res Amber Monitor **£73**

FIDELITY COLOUR MONITOR

- Medium Resolution, attractively finished, 14" RGB and Composite VIDEO/AUDIO Input. Has a detachable anti-glare screen. **£169**

ZENITH

"Test Bureau Recommended for use in Education".

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality monitors as used in the larger Zenith Micro Systems.)

- Green (New Design) Hi-res **£72**
- Amber (New Design) Hi-res **£76**

LEADS

- BNC Lead for Zenith or Philips **£3**
- RGB lead for KAGA **£3**
- N.B. Carriage on Monitors **£7** (securicor)

CREDIT CARD Orders (ACCESS or VISA)

Simply phone
(0923) 33383/50234
24 Hour Service

SWIVEL BASES

for Video Monitors



Adjust your Monitor/VDU, Up, Down, Right or Left to provide utmost in operator flexibility & Viewing comfort. It improves your sight lines & reduces stress & eye, neck and back strain. Available in 2 sizes:

- for 12" Monitors **£14**
- for 14" Monitors **£16**
- (carr. £2.50)

WATFORD'S WINTER SALE

Many customers have asked why Watford doesn't have a Winter Sale. We asked why Watford doesn't have a Winter Sale. As we could see no reason why we shouldn't, for ONCE, we're having a truly spectacular sale with some of the lowest prices you've probably ever seen!

HARDWARE

- AMSTRAD PCN8256 Micro **£375**
- BBC B PLUS 64K Micro **£359**
- Acorn 6502 2nd Processor **£155**
- Acorn Z80 2nd Processor **£297**
- TORCH Z80 Card **£199**
- Acorn Bitstick **£299**

PRINTERS

- Epson LX80 **£195**
- Hi80 Plotter **£299**
- Centronix GLP **£105**
- KAGA KP810 **£189**
- Epson FX80 **£245**
- JX80 Colour **£420**
- Brother HR15 **£285**
- Sakata Plotter **£139**

SOFTWARE (ROMs)

- Watford DFS Kit **£48**
- Acorn DFS Kit **£47**
- Watford DDFS Kit **£45**
- Watford DDFS + **£22**

ACORN's ROMs Packages

- BCPL **£44**
- ISO PASCAL **£42**
- LISP **£34**
- VIEW 2.1 **£39**
- VIEWSTORE **£39**
- FORTH **£32**
- LOGO **£42**
- TERMULATOR **£24**
- VIEWSHEET **£39**

Miscellaneous ROMs

- ACCELERATOR (CC) **£42**
- ADE (SY) **£38**
- BEEBFONT (WE) **£23**
- BEEBMON (WE) **£22**
- BUFFER/BACKUP (WE) **£17**
- COMMSTAR (P) **£24**
- COMMUNICATOR (CC) **£47**
- DATAGEM (G) **£49**
- DISASSEMBLER (WE) **£15**
- Dumpout 3 (WE) **£22**
- Epson NLQ (WE) **£22**
- FILE-PLUS (WE) **£28**
- GRAPHICS Rom (CC) **£23**
- INTERSHEET (CC) **£39**
- INTERCHART (CC) **£26**
- LOGOTRON LOGO (L) **£55**
- MUROM (BB) **£23**
- SLEUTH (WE) **£22**
- NLQ DESIGNER (WE) **£22**
- ROM-SPELL (WE) **£22**
- ROMAS (WE) **£42**
- ROM MANAGER (WE) **£18**
- TOOLKIT + (BB) **£29**
- TRANSFER ROM (WE) **£22**
- ULTRACALC (BC) **£48**
- WORDWISE (CC) **£28**
- WORDWISE + (CC) **£39**
- WORD-AID (WE) **£17**

DISC SOFTWARE

- AMX DESK **£18**
- AMX UTILITY **£11**
- AMX Educational **£20**
- DIAGNOSTIC DISC (WE) **£17**
- DISC EXECUTOR (WE) **£9**
- INVESTIGATOR (WE) **£17**
- Office Master (G) **£19**
- OFFICE MATE (G) **£10**

5 1/4" DISCS

Lifetime warranty on Discs

(In Plastic Library Cases)

- 20 x S/S D/Density 48TPI **£18**
- 20 x D/S D/Density 48TPI **£23**
- 20 x D/S D/Density 96 TPI **£30**

(In Lockable Storage Units)

- 50 x S/S D/Density 48TPI **£48**
- 50 x D/S D/Density 48TPI **£66**
- 50 x D/S D/Density 96TPI **£74**

PERIPHERALS (incl. Software)

- 16K Disc RAM **£28**
- 16K Sideways RAM Module **£27**
- 32K Shadow Ram Board **£54**
- Sideways ZIF Socket **£14**
- Solid State 16K Sideways RAM **£26**
- Solderless Sideways ROM Board **£30**
- Watford ROM/RAM Card 32K **£42**
- Watford ROM/RAM Card 64K **£64**
- Watford ROM/RAM Card 128K **£99**

EPROMs for BBC's Sideways ROMs.

2764-250ns **£1.85**

27128-250ns **£2.55**

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6264LP (8K) **£3.50**

2 x 6264LP (16K) **£6.70**

BBC MICRO WORD-PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in at our retail shop to discuss your particular requirement and a demonstration.

EXAMPLE PACKAGE

BBC B Plus (64K) Micro; Wordwise Wordprocessor, Twin 800K Double Sided Mitsubishi Disc Drives, Zenith Hi-Res Green Monitor, Brother HR15 professional quality Daisy Wheel Printer, Gemini Database, Spreadsheet, Beebplot Graphics, Accounts Pack: (Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements and Stock Control) Software packages on Disc with Manuals.

NEW LOW PRICE

Only **£999**

THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, Canon PW1080A or any Epson FX80 compatible Printer with the BBC Micro, both from Basic and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

Superb Value at **£5.95** (No VAT)

MARK II LIGHT PEN

You no longer have to fiddle with the brilliance control or work in the shade as this NEW Mark II Light Pen is totally insensitive to local lighting conditions. It only operates on high frequency light from the TV or Monitor.

The red LED Indicator on the Mk II pen, lights up when valid video data is available. Your program can have access to this signal allowing computer verification of target for high res drawing. The conveniently located switch on the pen body allows the computer to ignore any stray signals. Supplied complete with the sophisticated PEN-PAL Software on Cassette or Disc. Please specify.

Mark II Light Pen **£25**

Continued

The ULTIMATE DFSs for the BBC MICRO

WATFORD TOPS THE DFS CHART

Watford's Ultimate DFS has scored highest points in ACORN USER'S unbiased DFS's Review of July 1985. In concluding, the reviewer writes "It must be said that Watford's DFS certainly offers a comprehensive range of facilities at a very attractive price". (Please write in for comprehensive details.)

Just compare the features:

Features	Acorn	Watford	
	1.20	Single Density	Double Density
Max nos. of files per disc side	31	62	62
Max disc capacity	800k	800k	1440k
Tube compatible	Yes	Yes	Yes
Built-in Editor	No	Yes	Yes
Built-in Formatter	No	Yes	Yes
Built-in Verifier	No	Yes	Yes
MRUN a file	No	Yes	Yes
MLOAD a file	No	Yes	Yes
Extended RENAME	No	Yes	Yes
Selective COPY	No	Yes	Yes
Default file name	No	Yes	Yes
Disc space distribution	No	Yes	Yes
40/80 Software Switchable	No	Yes	Yes
Wide catalogue	No	Yes	Yes
Close open files	No	Yes	Yes
Improved OPENOUT	No	Yes	Yes
Copy between densities	N/A	N/A	Yes
OSWORD & 7F	Yes	Yes	Yes
Full entry point compatibility	Yes	Yes	Yes
Retain information over a break	1.20 partial	1.43	1.53
Games compatibility	Yes	Yes	Most
Econet file server	Yes	Yes	Yes
Econet station	Yes	Yes	Yes
Full wildcard facilities	No	Yes	Yes

WATFORD'S & ACORN'S SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for three years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DFS).

PRICES

- Complete Disc Interface Kit incl. DFS ROM & fitting instructions **£59**
- Acorn's DFS Kit complete **£59**
- DFS Manual (Comprehensive) (no VAT) **£6.95**
(P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs)
- Watford's sophisticated DFS ROM only **£16**
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
- DNFS ROM only **£16** ● ADFS ROM only **£25**
- Watford's DFS is exclusively available from Watford Electronics. Every ROM carries a special label with our LOGO and serial number.

WATFORD'S DOUBLE DENSITY DFS INTERFACE

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantages of a system that gives 80% more storage per disc in double density mode. P.S. - Please note that not all DDFSs are capable of providing either the full 80% storage increase, or of allowing a file the full size of the disc - Ours allows both of these!

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD & 7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

PRICES

- Complete DDFS Kit incl. fitting instructions **£58**
- DDFS Manual (no VAT) **£6.95**
- We will exchange your existing Single Density DFS Kit for our DDFS Unit at **£35**

Watford Electronics DDFS PLUS for the BBC B Plus

Watford Electronics was the first company to produce a serious alternative Disc Filing System (DFS) for the standard BBC micro. Since then, we have been refining and advancing this sophisticated product right up to today.

Now WE'VE DONE IT AGAIN; Watford proudly presents the Double Density Disc filing system for the BBC B+, with all the advantages of the advanced Watford DDFS available on the new BBC B+ DDFS.

Acting as a powerful alternative DFS to Acorn's '1770 DFS' supplied with the BBC+, this superb addition to any BBC+ greatly enhances it's performance with a simple fitting operation.

DDFS PLUS incorporates all the features of the Watford's popular DFS & DDFS for the BBC B, (at the same time retaining full compatibility with Acorn DFSs), plus it has the following extra features:

Automatic density selection - Full single and double density operations - Extremely powerful and comprehensive OSWORD & 7F emulation - Any file can be full size of disc - Density of last access assumed for speed - Automatic 40/80 stepping swapped on error - All Acorn's extra disc commands implemented.

As you can see from the above information, Watford's DDFS for the BBC+ is far more sophisticated and well thought out than the standard. Take any disc produced by any Watford DFS from the standard BBC and catalogue straight off with no problems.


Unlike the Acorn 'ADFS', our DDFS+ system is just as easy to use as the standard DFSs, with no new complex concepts to have to learn. The features within our DFSs have been constantly enhanced over a period of three years during the time that they have been released; significant attention has been paid to feedback from our customers so that the features offered are carefully honed to the requirements of hobbyists and serious programmers alike.

The Watford DDFS+ is supplied with a comprehensive DDFS manual that explains the basics of disc drives, DFSs, etc. Priced at only £30 including the manual, the Watford DDFS+ is surely one of THE best buys you could make for your BBC B+!

Join the leaders in BBC peripherals; join Watford Electronics - committed to supporting the BBC micro.

DDFS PLUS (for BBC Plus) £30
(Price includes comprehensive manual)

COPY HOLDERS

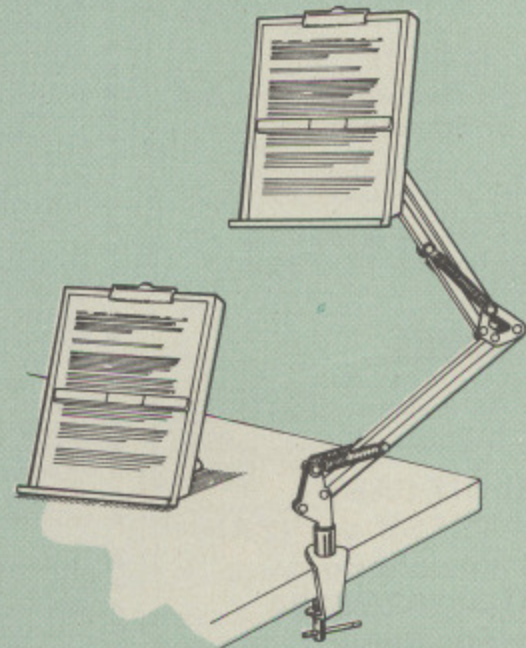

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in desk resting and shelf clamping versions, these two units hold your paper firmly by means of a magnetic ruler and a clip grip.

Mounting to a convenient flat surface, the two joint anglepoise Manuscript Holder allows the paper to be positioned at virtually any convenient angle whilst only taking up a fraction of the surface area that the paper being held does.

The smaller desk resting Manuscript Holder is useful for the more organised desk where the problem is simply holding the paper at the right angle.

Whatever desk arrangement you use, surely you deserve a Watford Manuscript Holder!

Amazing value at only
Desk Top **£10** (carr. £2)
Angle poise **£17** (carr. £3)

To help yo
pocket!), v
The first c
capacity. T
brackets).
The tinting
track and
the world
are famou
With two
drive and
the two
provide
All our D
and Dou
drives sug
about the
for the BB
Various o
accurately
name). W
directly fr
prices dir
If you look
we quote
exception
one of th
deal.
Unless yo
long peri
"CL" disc
adequate
are suppl
Drives w
(Ideal for
CS100, C
for later
tomorrow
When us
space. Th
of this sp
vertical f
offer disc
think. W
leaving a
spare dis
Watford

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates the single density capacity. The double density storage capacity is second one, (that within the brackets). All disc Drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track and which are 80 track. The 40 track ones are manufactured by EPSON, the world famous Japanese company, (non-tinted boxes). The 80 track drives are famous MITSUBISHI drives (tinted boxes).

With two prices in a box (e.g. £295/£299), the first price is for the standard drive and the second for the same unit in switchable type. Users of either of the two Watford DFSs will not need switchable drives as their DFS will provide software switching for them.


All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the MITSUBISHI and EPSON drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.

Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packagers" label other manufacturers drives with their own name). We buy the high quality Epson and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate: extensive tests within our workshops have confirmed this. All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. (Ideal for Schools & Colleges. All single disc drives with power supply, (i.e. CS100, CS200 & CS400S) are supplied in a twin case with twin data cable for later inclusion of a second drive). At Watford we anticipate your needs of tomorrow not just today!

When using a BBC Micro, most people find themselves preciously short of space. The Watford's BBC Micro Plinths form an ideal way of recovering some of this space; your BBC, disc drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. Some of our competitors offer disc drives built into plinths, but these aren't as sensible as you might think. With a Watford Plinth, your disc drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen and paper, reference manuals, etc. Follow the trend with Watford Plinth.

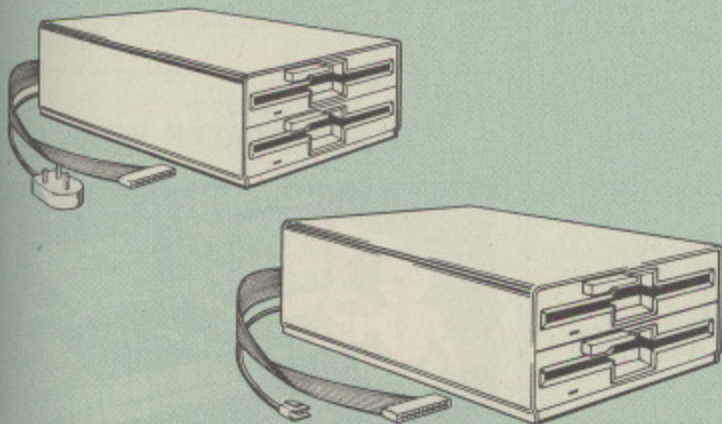

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
100K (180K)	CLS100 £76		CS100 £89	
200K (360K)	CLS 200 £76	CLD200 £140	CS 200 £89	CD200 £145
400K (720K)	CLS 400 £80	CLD 400 £140	CS 400 £100	CD400 £145
			CS 400S £103	
800K (1.44M)		CLD800 £162		CD 800 £179
		CLD 800S £165		CD 800S £186

● TWIN Disc Drive Case, complete with Power Supply & Cables **£35**
Securicor carriage on Disc Drives **£5**

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40/80 Switchable

e.g. CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40/80 track).

MYSTERIES OF DISC DRIVES & DFS REVEALED

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

£5.95 (Book No VAT)

3M - DISKETTES

Top quality 3M - SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect tabs.

- 10 x 5 1/4" S/S D/D 40 Track Diskettes **£12**
- 10 x 5 1/4" D/S D/D 40 Track Diskettes **£15**
- 10 x 5 1/4" S/S D/D 80 Track Diskettes **£22**
- 10 x 5 1/4" D/S D/D 80 Track Diskettes **£22**

- 10 x 3 1/2" S/S D/D 40/80 track Discs **£25**
- 10 x 3 1/2" D/D D/D 40/80 track Discs **£35**

TOP QUALITY 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

- 10 x M4 S-S D/D 40 Track Discs **£11**
- 10 x M5 D/S D/D 40 Track Discs **£14**
- 10 x M7 D/S D/D 80 Track Discs **£19**
- 3" Double Sided Discs **£4 each**



DISC ALBUMS

Attractively finished in Antique Brown, leather look vinyl. Stores upto 20 Discs. Each Disc can be seen through the clear view pockets. **£4**

LOCKABLE DISC STORAGE UNITS

Strong plastic case that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 - holds upto 40 discs **£9**
- M85 - holds upto 95 discs **£12**



PLASTIC LIBRARY CASES

FOR 5 1/4" DISC STORAGE
holds 10 Discs.

£1.80

FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use.

£8

DUST COVERS (For our Disc Drives)

- Single (without PSU) **£3.20** Twin (without PSU) **£3.85**
- Single (with PSU) **£3.95** Twin (with PSU) **£3.90**

EPSON NLQ ROM

for the BBC Micro



Harness the full potentials of your Epson RX & FX Printers. Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type *NLQ80/100 and a single VDU code to use NLQ print.
- NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
- Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
- Full UK character set; Standard 'pica size'; Proportional spacing; Enlarged; Underlined; Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

Only: £25

VIEW PRINTER DRIVER

for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM. A must for all VIEW and NLQ ROM users.

£7.00

THE NLQ DESIGNER

KAGA KP819/910 and Canon PW1080 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of it's particularly strong points is the NLQ option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLQ font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! For the BBC Micro. This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on. Downloadable Fonts require 6264 RAM chip fitted.

A 40/80 track format disc containing 3 example fonts is included in the package.

(P.S. This ROM is not suitable for Epson printers as they don't normally have NLQ ability. Keep reading our adverts though - work is in development!)


- NLQ Designer ROM & FONT Disc £25
- Kaga Individual FONT ROMs £15

Now available:

- Centronics GLP Printer NLQ Designer ROM £20
- GLP Individual FONT ROMs £14

(Write in for further details on both).

DUMPOUT 3

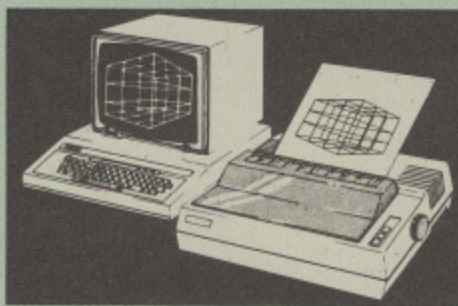

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know! The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines:
*GIMAGE - This provides a full graphics dump of any graphics mode, plus modes 7 and '8'. There are many optional parameters but you need only specify the parameters you wish to change.

Features available include:

- Vertical and horizontal scaling through all the graphic modes and mode 7
- Rotation of the image produced through 90, 180 and 270 degrees
- Left hand indentation setting
- Screen dump window definition
- Colour grey scaling
- Two tone fast dump
- Special colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered dumps
- User port switched dumps

What does the independent press say!

Practical Electronics, May 1985

"The Dump Out 3 ROM from Watford Electronics represents one of the most sophisticated types of printer dump utilities available for the BBC Micro..."

"an extremely sophisticated and powerful dump utility".

"VERDICT - Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985.

"Well, here is that winner!"

"provide(s) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of *GIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".


"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £25 it must represent excellent value for money and surely cannot be beaten".

Designed for use with the following printers:

CP80, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, LPVII, NEC PC8023, DMP100/200/400, Mannesman Tally etc. Price including comprehensive manual

£25

ROM MANAGER

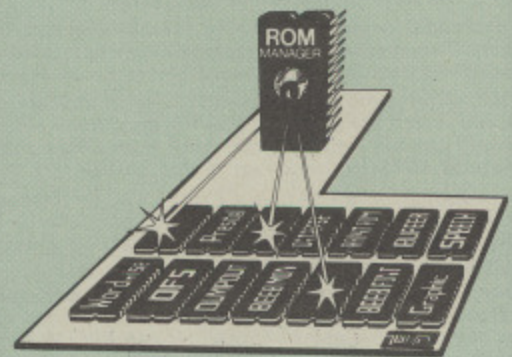

Probably the most powerful way of expanding the BBC micro is from the use of Sideways ROMs. One problem faced by the avid ROM collector is that of ROM command clashes. The solution is very simple in the form of the ROM that "Provides comprehensive management of all your installed ROMs". (Quote from BEEBUG November '84.)

Basically, ROM Manager offers you the ability to turn off any installed ROM, or to send any * command to any specific installed ROM. It is said that imitation is the sincerest form of flattery - Acorn's BBC Plus features many of the abilities of this powerful ROM.

Many more facilities available.

SPECIAL OFFER £18

BEEBFONT ROM

BEEBFONT is a remarkable and different concept in BBC software. It allows you to display text on the screen in 13 different styles. It is supplied complete with a Spooler and Editor on 40 or 80 track disc.

(Please write in for technical details).

ONLY £25

BEEB PRINTER ROM



"Makes Printing Childs Play"


This utility ROM is designed to simplify using all the facilities of your printer. It has many facilities:

- ★ Selection of printer modes such as underline, font and size is by 'Single Key' operations.
- ★ From Wordwise, a single number following OC will select a mode rather than a long and incomprehensible string of control codes. This makes using your printer with Wordwise much more convenient.
- ★ When using Basic (or other languages) you can have control over the formatting of the output to the printer in the style of a wordprocessor. You can define page top, bottom and side margins etc. with intelligent page skip for binders an option. All supported printers will now respond to form-feed etc. commands.
- ★ User defined characters are printed as you see them on the screen so that non-standard characters are automatically printed out correctly.
- ★ Commands select the options for the following printers:
GP100, STAR, NEC, MX/FX, KAGA, LP/VII/DMP100, DMP200.
- Operates with either parallel or serial interfaces.
- ★ Supplied with a 50 page manual that is very comprehensive and easy to follow. Please specify printer type when ordering so that we can send the correct function key strip.

Price: £25

TRANSFEROM

(Tape to Disc Utility)

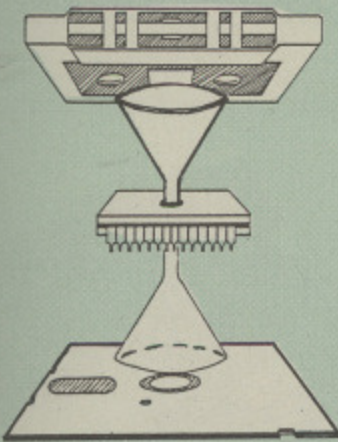

The only TAPE to DISC Utility ROM that works with our Double Density Disc Interface.

After months of top secret development, we are now able to supply details of this advanced and sophisticated utility ROM for the BBC micro. Just look at the features:


- Fully menu driven for ease of use
- Copes with locked programs
- A very comprehensive built in copying features
- Copies very long adventure games
- Supplied with comprehensive manual

TRANSFEROM is now available in BOTH single and double density versions. The single density version works with both the Acorn and Watford single density DFSs. The double density version works with the Watford DDFS system only.

TRANSFEROM takes your software on tape and saves them onto disc. TRANSFEROM does not stop when one disc is full; you just insert another disc in and carry on with that one! Surely this is the most valuable investment you could make if you have tape software that you wish to transfer to disc! Please specify version required - Single or Double Density.

£25.00

DIAGNOSTICS DISC

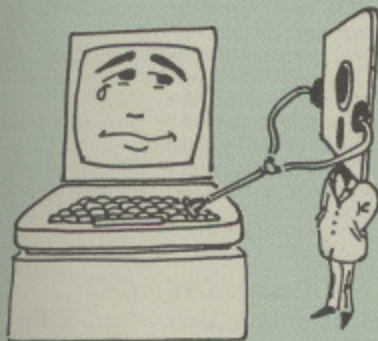

The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is wrong.

At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.


Continued

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

ROMAS

THE CROSS ASSEMBLER AND
MACRO EDITOR
FOR SERIOUS PROGRAMMERS!

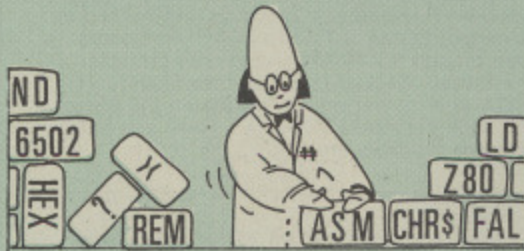

ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8 P.S. This includes the Acorn 6502 & Z80.

ROMAS features a powerful expression analyser, making complex table easy to generate. To aid in documentation, fully formatted assembly listings may be produced, with full symbol table output at the end.

ROMAS is provided with a powerful cross referencer to produce a listing of all the labels in a given "source" program; this makes it easy to check to see if you are about to duplicate a label.

The Macro Editor

Features of this powerful editor provided with the ROMAS package include:

- Works in all 40 and 80 column screen modes
- Fast load and save speeds
- Continuous line and column number displays
- Search, replace and move; all available in macros
- Command repetition

The ROMAS package includes a comprehensive manual, providing detailed documentation and plenty of examples.

A give away at... **Only £45**

Please specify 40 or 80 track disc when ordering.

ADE

'Systems' complete program development package in a 16K ROM. We are now supplying the new 6502 2nd processor compatible version.

SPECIAL OFFER ONLY £34

ULTRACALC 2

The mark 2 version of the BBC Publications' extremely popular electronic spreadsheet ROM.

Only: £66

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only £20

ROM-SPELL

"way ahead of any competition"



ROM-SPELL is probably THE most advanced and fastest spelling checker available for the BBC Micro. Printed below are some extracts from a recent independent review (A&B Computing Nov. '85), which we feel sure will convince you that this is THE only spelling checker worth considering.

"The editing system is very neat and simple, instead of replying to queries and beeps all of the time..."

"The other feature which places ROM-SPELL way in front of any competition is the ability to examine the user dictionary, so any spelling mistakes that have found themselves on the disc can be examined and taken out if necessary".

"... that it is compatible with many of the popular word processors on the market is a good indication that ROM-SPELL is going to be a very popular product indeed".

"... ROM-SPELL is by far the best spelling checker for the unexpanded BBC B (with or without word processor). It boasts features which are hard to find on conventional spellcheckers on CP/M and MSDOS, namely Spellstar and has a speed/performance ratio of roughly the same as its CP/M cousin. The difference is that the CP/M version would cost the best part of £500".

"... and with such vital house keeping features as an ambiguous word checker, the ability to edit the user dictionary, a comprehensive manual that is both easy to read and actually ENJOYABLE to learn from, ... I feel confident that ROM-SPELL will woo the word processing public with no problems at all".

Don't settle for less, Buy the best.

ROM-SPELL costs only **£25**

(Please state 40 or 80 track disc)

DISC EXECUTOR

Disc Executor is a sophisticated disc utility for the transfer of your programs from cassette to disc. It copes with 'locked' files and full length adventures (up to &6E blocks long) and programs that load below &E00. Disc Executor is simple to use and provides menus to prompt the user along the way. Disc Executor will cope with the vast majority of tapes. (Please note that Disc Executor is not compatible with double density disc interfaces - keep reading our adverts though!)

Price only **£10** (40 or 80 track)

BEEBMON

BEEBMON is the most powerful and versatile machine code monitor from Watford Electronics. BEEBMON offers some superb features specially designed to make the task of understanding and debugging machine code easier; indeed BEEBMON is probably the only product with sufficient power to aid in the debugging of such complex pieces of software as a DFS.

Offering a total emulation mode, BEEBMON can be used to single step through code anywhere in memory. All breakpoints are emulated and the workspace is totally relocatable, allowing for the simulation of all those "av.kward" pieces of code.

(Write in for technical details.)

£24

DISASSEMBLER ROM


Discover the hidden secrets of BASIC and the OPERATING SYSTEM with this easy to use programmers tool.

Please write in for technical details.

ONLY **£16**

Continued

SIDEWAYS ZIF SOCKET

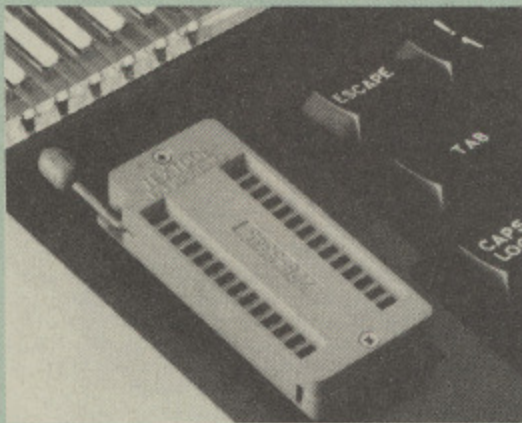

Now Watford Electronics brings you a ROM board for small budgets or for those of you who do not wish to open up your Micro frequently. It allows you to change ROMs quickly and efficiently with the minimum of effort - no screws to loosen or keyboard to remove. The unit consists mainly of a zero insertion force (ZIF) socket on a small circuit board which is located into the position of the 'ROM Cartridge' and is connected to one of the internal ROM sockets via a ribbon cable.

- Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.
- The low profile of the socket allows unrestricted access to the keyboard, unlike other cartridge systems. In addition, there are no costly extras, such as ROM cartridges for every new ROM.
- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.
- This versatile hardware solves the problem of running out of socket space, simply unplug the ROM and plug in a different one. It is a real must for Professionals and Hobbyists alike.

ONLY £15

16K Sideways RAM Modules

This is it! The revolutionary design RAM Module you've been waiting for. Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector.


Key points to note about this new addition to the Watford range of products are:

- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Works with any ROM.
- Ideal for professional software development.
- Supplied with utilities software disc.

Introductory offer: **£29**

Optional extras

READ and WRITE protect Switches **£2** each
Battery for Battery Backup **£3**

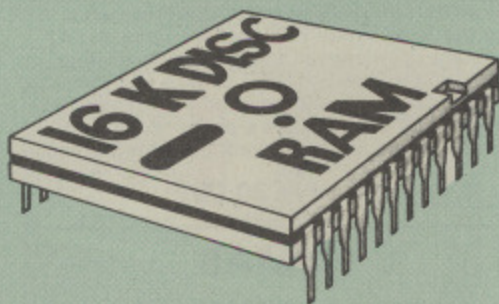



This is the RAM you've been waiting for!! This battery backed up, write protectable 16K sideways RAM board allows you to run from disk every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- All existing ROMs can be stored on disk and used in DISC RAM.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM in conjunction with our Buffer & Backup ROM.

New Low Price: £30

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

SOLID STATE 16K SIDEWAYS RAM

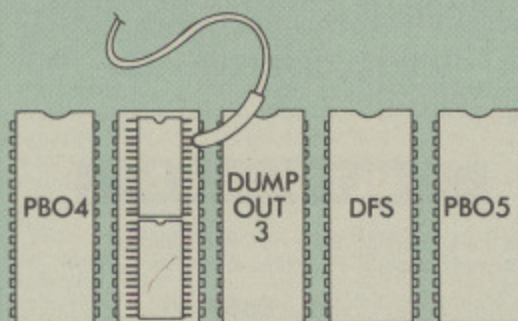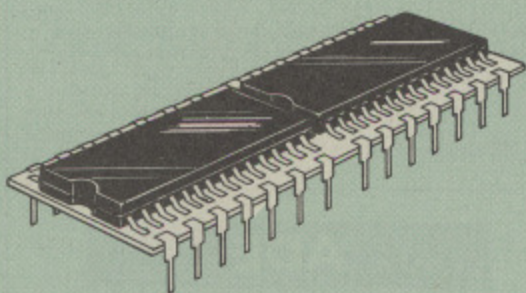


This new unit from Watford, which utilises the latest in Static RAM technology, offers 16k of easy-fit sideways RAM in a very compact unit with a footprint no larger than a standard 28pin EPROM. With only a single flying lead to fit, (no soldering required) this compact unit works with any BBC Micro with or without a ROM board. Compatible with BBC B Plus. Like our other 16K RAM Modules, this unit is very simple to fit.

Only **£28**

Supplied complete with comprehensive software on Disc, Operating and fitting instructions.

SOLDERLESS SIDEWAYS ROM SOCKET BOARD

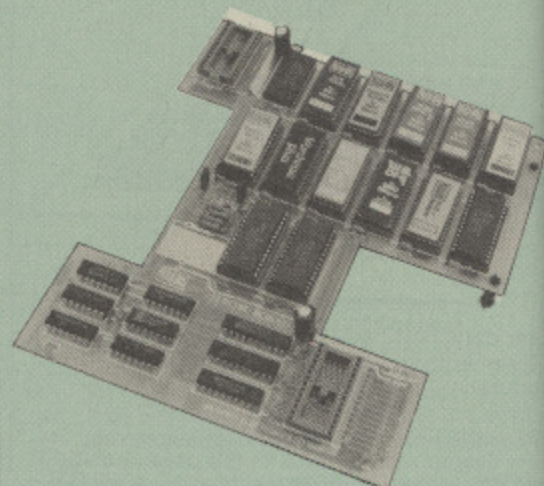

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16. Also permissible, are various configurations of RAM (up to 16k) and different sized EPROMs (see below).

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)

- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- **No soldering required.**
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 can take the following chips: 2716, 2732, 2764, 27128, 6116, 6264.
- Auto write protect for RAM chips.
- Read protect to make RAM "Vanish"; allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: Only **£32**
Battery backup fitted **£35**

EXTERNAL Sideways ROM BOARD


This extremely versatile 12 ROM Socket Board is supplied with power supply, boxed in an attractively finished BBC beige. A second board can be fitted at a later stage to give a total capability of 28 ROMs.

- No soldering required.
- Easy access to ROMs.
- Does not physically interfere with other internal add on boards.
- Built in power supply.
- Write protect for RAM.
- Allows upto 32K Static RAM and 24 ROM Sockets in varied combination.

Price: **£75** (carr **£3**)
(2nd Add-on Board **£30**)

Watford ROM/RAM CARD

A must for all serious users

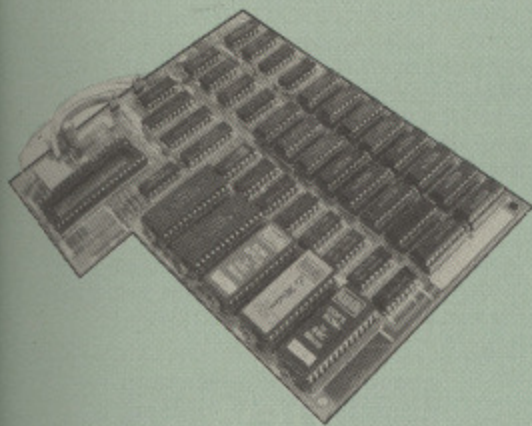

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with ALL BBC micros (not BBC Plus).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Write protect for ALL RAM.
- Master write protect for all sockets.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Can run ANY BBC ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD & 7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM/RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM/RAM Board.

The ROM/RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, should the user wish to upgrade in the future. Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM **£45**
- ROM/RAM card with 64k dynamic RAM **£69**
- ROM/RAM card with a massive 128k dynamic RAM **£109**

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit **£9**
- Battery backup **£2**
- Read and Write protect switches **£2**
- Complete ROM/RAM board (all options installed) **£125**

Le Modem



PROHIBITED from direct or indirect connection to any telecommunication system run by British Telecommunications. Action may be taken against anyone so connecting this apparatus.

The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World/wide data transfer system.
- Auto Dials, Auto Answers, Auto Baud selects and is completely controlled by your Micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELESOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple *COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON/OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.

- BT Approval applied for.

Price: **£89** (carr £3)

(Price includes Software ROM, Cables and Manual)

Nightingale Modem

SPECIAL PRICE to our Customers

£119

(Price includes COMMSTAR ROM & comprehensive manuals)

- Nightingale Modem without software **Only £99**
- COMMSTAR ROM package only **£29**
(P&P on modem £2.00)
- Auto Dial/Auto Answer Board **£48**
- Auto Dial Utilities Disc **£9.50**
- OBBS Bulletin Software **£20.00**


LOGOTRON LOGO

The popular Logotron Logo in ROM. Recommended by most Education authorities.

Only: **£55**

THE AMX MOUSE

The AMX Mouse needs no introduction. It is simply the best.

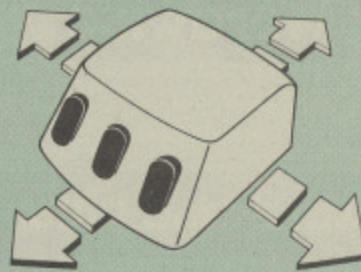

Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

ONLY: £66.95

We are giving away the sophisticated COLOUR ART Software package **ABSOLUTELY FREE** with every purchase of the AMX Mouse from us.

AMX DESK Package	£19.00
AMX UTILITY Package	£11.50
AMX SUPERART Package	£43
AMX PAGE-MAKER Pack	£43
AMX 3D ZICON Disc	£21
AMX Database Disc	£21
AMX XAM Educational	£21

COLOUR ART

This novel program allows you to add COLOUR to any drawing produced with your AMX Mouse package, and really brings those pictures alive. Not with just any colours, mind you, but a full range from up to 255 different shades! It's simplicity itself to use this "painting by numbers" painter to create simple, striking and powerful images to please the eye.

Price **£10**

(please specify 40 or 80 track disc when ordering)

Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32

Continued

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£52
CARETAKER Basic Utility	£27
Graphics ROM	£26
Disc Doctor ROM	£26
TERMI	£27
COMMUNICATOR	£58
SPEECH ROM	£26

Wordwise

The most popular Wordprocessor for the BBC Micro.

Special Offer: **£32**

Wordwise plus

£45

FREE FREE FREE

This month we are giving away absolutely FREE, the superb Word-Aid ROM worth £20, with every WORDWISE PLUS package bought from us.

Word-Aid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text/segment area.

Only **£20**

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS

Supplied on disc. This version requires a WORDWISE-PLUS ROM to be present in the machine. It gives up to 44k of text space on the 6502 2nd processor.

£5

Inter SHEET

The most powerful spreadsheet package available for the BBC Micro. Ultra-fast replication and calculation times help make this the easiest to use. It has received very favourable reviews. Unique 105 column screen mode. Supplied in 2 ROMs.

£45

INTER-CHART

This unique program is the only one of its sort on the market. Accepts data from a variety of sources and plots line graphs, bar charts or pie charts. Up to 16 separate charts may be stored in memory. Built in screen dump for EPSON compatible printers, but can use other printer dump routines.


ONLY: **£30**

These ROMs form part of the first and only truly integrated range of programs for the BBC. Up to 16 sets of data can be stored in memory at once and data can be transferred directly and simply between programs, e.g. from sheet to sheet, or sheet to chart, or word processor to sheet etc., etc.

INTER-WORD and INTER-BASE will follow shortly to complete this suite of programs.

P.S. The Watford 32k shadow RAM board is an ideal complement to these programs, allowing them to operate in the 80 column screen modes with NO reduction in memory.

32K SHADOW RAM- Printer Buffer Expansion Board

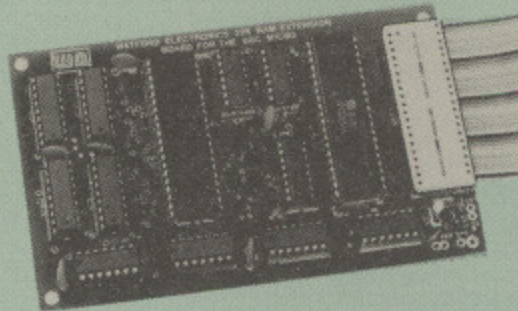

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.
- "VIEW" Wordprocessor users can now type in text in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.
- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This superb product is recommended by Computer Concepts for use with both Wordwise and Wordwise Plus. We wholeheartedly agree with this commendation.

● Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

● Use 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Only a 12K printer buffer can be used in Wordwise or Wordwise Plus due to the way in which they are written. Print large text files while running long graphics programs and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Only 12K Buffer can be used in Wordwise or Wordwise + because of the way these softwares are written.

● Ensure COMPATIBILITY with a vast range of hardware (including Watford & ATPL ROM boards, double density boards, second processors), and software (including BASIC, TOOLKIT, VIEW, WORDWISE (1.20+), WORDWISE-PLUS). This is because our board, unlike those of our competitors, is connected to the computer by a ribbon cable.

● Achieve EASY OPERATION with ROM based software. A large range of commands is available for machine code and BASIC users, including some useful *HELP messages.

Only: **£59**

(Price includes a comprehensive manual and the ROM)

INCREDIBLE WORD PROCESSING DEAL !!!

Watford Electronics, already renowned for quality products at discount prices, are offering, for a limited period only, the truly spectacular BARGAIN OF THE YEAR!

A Watford's 32K RAM Card (offering printer buffering and shadow screen RAM facilities) with the well known WORDWISE PLUS Word processor.

32K Shadow RAM Card/Printer Buffer and Wordwise Plus (a very powerful package) for the absolutely astounding price of:

Only **£69**

(P.S. For an extra £14, we will include Word-Aid ROM package for the Wordwise Plus, if bought at the same time.)

VIEW

VIEW WORDPROCESSOR 2.1 **£46**

VIEW 3.0 ROM

This latest version features automatic relocation with a 6502 second processor and takes full advantage of any shadow memory fitted. BBC B Plus compatible. Supplied complete with Printer Driver Generator tape.

Price: Only **£60**

HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers 47K of text memory.

£49

VIEW SHEET (Acornsoft) **£49**

VIEWSTORE **£49**

Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

Only **£10**

VIEW DRIVERS FOR JUKI & BROTHER PRINTERS

Only **£10**

VIEW/VIEW SHEET PRINTER DRIVER for SILVER REED (Officially approved by Silver Reed)

Only: **£10**

ISLAND LOGIC MUSIC SYSTEM

£25

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro with the Viglen console unit.

£42

GLENTOP'S 3D GRAPHICS


Development System **£22**

BOOKS (No VAT on Books)

21 Games for the BBC Micro	£5.95
30 Hour BASIC (BBC Micro)	£6.95
35 Education Programs for BBC	£6.95
40 Educational Games for the BBC Micro	£5.95
6502 Assembly Language Program	£13.95
6502 Application	£11.95
6502 Assembly Language Subroutines	£19.95
6502 Machine code for Humans	£7.95
6502 Development System	£7.50
68000 Assembly Lang. Programming	£19
A young persons guide to BBC Basic	£4.50
Advanced Disc User Guide	£14.95
Advanced ROM User Guide	£14.95
Advanced Machine Code Technique for BBC	£7.95
Advanced Programming for the BBC Micro	£6.95
Advanced User Guide for BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming on BBC Micro	£7.95
Advanced Programming Techniques for the BBC Micro	£7.95
Applied Assembly Lang. for BBC	£7.95
Assembler Routines for the 6502	£XXX
Assembly Language Programming FOR the BBC Micro	£8.95
Assembly Programming made Easy	£5.95
Basic ROM User Guide	£9.95
Basic User Guide for BBC Micro	£10.00
BBC BASIC for Beginners	£7.95
BBC BASIC	£5.95
BBC Forth	£7.50
BBC Hardware Projects	£8.95
BBC Machine Code Portfolio	£7.95
BBC Micro add on guide	£5.95
BBC Micro An Expert Guide	£6.95
BBC Micro Assembly Language	£7.95
BBC Micro Book BASIC Sound & Graphics	£7.95
BBC Micro Graphics and Sound	£6.95
BBC Micro ROM Book	£9.95
BBC Micro ROM PAGING System Explained	£2.00
BBC Micro Disc Companion	£7.95
BBC User Guide	£10.00
BBC Wargaming	£8.95
Basic Programming on BBC Micro	£5.95
BCPL User Guide	£14
Brain teasers for BBC micro	£5.95
Business Applications on BBC	£7.95
Computing for All the Family	£6.45
CP/M Bible	£16.00
CP/M Handbook with MPM	£13.95
CP/M Soul of	£14.95
CP/M The software BUS	£8.95
Creating Adventure Programs on the BBC Micro	£4.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro	£7.50
Creative Sound	£9.95
DISC FILING SYSTEM (DFS) Operating Manual for BBC	£6.95
Disc Programming Techniques	£7.95
Discovering BBC Micro Machine Code	£6.95
Discover FORTH	£13.95
Easy Programming for the BBC Micro	£5.95
Electron Machine Code for Beginners	£6.95
Exploiting BBC Basic	£6.95
Exploring FORTH	£6.95
Filing System & Databases for the BBC Micro	£7.95
Further Prog. for BBC Micro	£6.95
FORTH on the BBC Micro	£6.95
Forth Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games BBC Computer Play	£6.95
Getting more from your BBC & Electron	£6.95
Graphics for Children	£7.95
Graphs & Charts on BBC Micro	£7.50
Graphic Art for BBC Computer	£5.95
Hackers Handbook	£4.95
Handbook of Procedure & Functions for the BBC Micro	£6.95
Into View	£4.50
Introduction to COMAL	£9.50

Introduction to LOGO	£6.95
Introducing CP/M on the BBC Micro Z80 2nd Processor	£9.95
Interfacing Projects for the BBC	£6.95
Introducing the BBC Micro	£5.95
Introducing LOGO	£5.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£16.50
ISO -PASCAL Reference Manual	£9.50
Let your BBC teach u to program	£6.45
LISP	£9.25
LISP, A Beginners Guide to	£10.95
LISP Cassette	£15.50
LISP on the BBC Micro	£7.50
Logo Programming	£8.95
Mysteries of DISC DRIVES and DFS REVEALED	£5.95
Mastering CP/M	£16.50
Micronet Handbook	£6.95
Practical Programs for the BBC Micro	£6.95
Programming the 6502	£13.95
Programming the BBC micro	£6.95
Programming the Z80	£16.95
Programming with Graphics	£5.95
S-PASCAL on BBC Micro	£7.25
Sensing & Control Projects for the BBC Micro	£5.95
Structured Prog. with BBC BASIC	£6.50
Terminator Manual	£4.95
The Complete FORTH	£6.95
The Complete Programmer	£5.95
The Epson FX/KAGA PRINTER Commands REVEALED	£5.95
Turtle Graphics on BBC Micro	£7.50
Using Floppy Discs with BBC Micro	£5.95
View Guide	£4.50
Viewsheet User Guide	£9
Using BBC Basic	£6.95
Wordstar & CP/M made easy	£7.45

EPROM PROGRAMMER

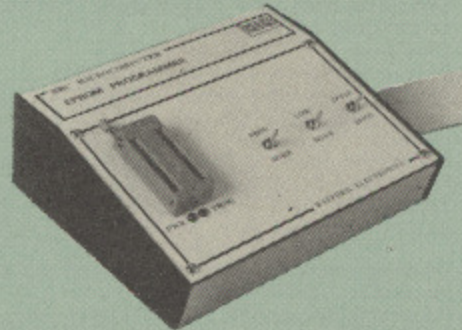

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette/disc loading). It is a fully purpose designed and integrated package to simplify ROM development. The system is menu driven with many prompts to avoid any accidents.

Software facilities include:

Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming. Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the *ROM filing system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

SPECIAL OFFER £69
(£3 carr.)

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers

specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- **ERASER EB** - Standard version erases up to 16 chips. **£28**
- **ERASER GT** - Deluxe version erases up to 28 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30**
- Spare UV tubes. **£9**

BEEB

VIDEO DIGITISER

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro. This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Features offered by this package include:

- The adding of pictures or written text to typed documents.
- Unattended recording of scientific data.
- Entry of real images into graphics programs.
- Generation of computer images.
- Slow scan television; sending images via a modem or radio.
- Security.
- Input from any video 1v video source.
- Full resolution in Modes 0,1 or 2.
- 1.6 seconds scan time.
- Up to 8 grey levels
- Manual or Auto level control
- Connects to user port

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£95 (Carr. £3)

(Price includes: Digitiser Unit, ROM & a comprehensive Manual.)

MAGAZINE MAKER

A combination of the AMX Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within AMX Pagemaker to illustrate magazines or newsletters - in fact anything that needs to be created on A4 size paper.

With Pagemaker's many features, a variety of pictures can be composed - the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out.

The Magazine Maker is suitable for any use that requires illustrated documents.

Magazine Maker £105.00

Continued

DATAGEM

The Definitive Random Access, 24K ROM based Database Management System for the BBC B and BBC B+.

Now compatible with Watford DFS's

Long hailed as the most comprehensive and powerful database for the BBC, and now becoming a legend in its own right, DataGem has been significantly reduced in price now that development costs have been recovered by Gemini. Whether you have a single 40 track drive or a Winchester hard disk, this system will make use of ALL your disk space, treating up to 4 drive surfaces as ONE CONTINUOUS FILE. Much has been made and exploited of DataGem's superb selective searching capability, and together with its unmatched mathematical powers, the system provides a really professional database for use in the home, office or school that will harness the full power and potential of the BBC micro.

AMATEURS & PROFESSIONALS

For newcomers to databases as well as seasoned users, DataGem represents an ideal starting point. Structuring your file and layout couldn't be simpler using DataGem's on-screen 'painting' format. You can have up to 62 fields or data items wherever you want them on a scrolling 120 x 120 card. Colours are all definable, and field data and field titles may be separated if required. Data entered may be stored in up to 8 tiers or 'levels', as well as within the whole database file. Scan one level or the whole database for records that match your search parameters, and place them in another data level for later manipulation. DataGem also boasts limited facilities for producing data merged letters, and may be configured as a 62 cell spreadsheet.

£67

L.B.O.

Life & Business Organiser

— the ULTIMATE BBC utility!
A NEW & EXCITING ROM RELEASE
FROM GEMINI

This is a comprehensive life and business organiser package in 100% machine code which has been very carefully designed to provide a wide range of useful facilities for the busy person at home or in the office, and is simplicity itself to use. Once you start using LBO, you'll ALWAYS use it — not like one of those ROMs you only occasionally call on. LBO will put an end to forgetfulness and ensure that your time is organised, you know what you have to do and when, you don't forget bills or birthdays, and you are reminded constantly of urgent matters.

LBO was written by two graduates in Computer Science from Exeter University in consultation with a lecturer in Cognitive Psychology. It has been very cleverly researched and programmed and is confidently recommended by Gemini as a very superior program for the very superior BBC micro.

Features include:

- Automatic reminder of entries overdue for attention.
- One week's advance notice of forthcoming events.
- Urgent notice board.
- Creation of categories of entries; e.g. bills, birthdays, letters to be written, notepad etc.
- Sorting of appointments by date and time of day.
- Month AND week's summary at a glance, indicating time booked and free.
- Single entry of a RANGE of events and updating of regular happenings.
- Super search facility to call any event by any related word or part word.
- Month by month preview of all forthcoming events.
- Built-in intelligent calendar.
- All data saved to disk.
- Full printer support.
- Easy to follow documentation.

Use LBO to organise your life from today until 1999! It can handle literally hundreds of multi-line messages, as many as you are ever likely to need. Despite the very wide range of facilities offered, this professional program is VERY easy to use and requires absolutely NO knowledge of computers. A vital aid to your everyday life, LBO is GREAT FUN TO USE!

L.B.O. only £17

Also available on DISK for those with a cluttered ROM board.

DDD Suite

The Revolutionary 'Triple-D' BBC Disk Integrated Software System

-BASE £26

- Up to 2000 records, 1 search level subset, 26 fields/record, 2 drives, 79 chars/field.
- Scrolling screen, 79 x 26. Interrupt driven real-time clock.
- Layout painted on-screen to your design, including background text/graphics.
- Fully menu driven, with powerful line editor and access to *OS commands.
- Default entry capability, no need for tedious re-typing of repetitive data.
- Lightning search using advanced 'hashing' techniques.
- Powerful maths, allowing all BASIC functions, on any field.
- 10 user-defined variables to simplify complex calculations.
- Multiple level 'intelligent' sort — program only sorts 'out-of-order' data.
- Printed reports in record or summary format. Data spool option for transfer to other files.
- FULL DATA COMPATIBILITY WITH 'DDD-CALC' AND 'DDD-PLOT'

-CALC £26

- True disk-based spreadsheet, 2000 rows, 26 columns, 52000 cells. Powerful line editor.
- Fast, smooth machine code screen scroll with pop-down menu.
- Individually adjustable column widths with text overflow.
- Full relative and absolute replication.
- Find and move to a row by name.
- User defined variables, delete/insert rows, SORT rows with 'DDD-Base'.
- Send data from all or part of sheet to printer, or just print cell formulae.
- Data over 1 or 2 drive surfaces.
- Fast recalculation, even over large files.
- All BASIC functions allowed, plus 'SUM', 'MAX', and 'MIN'. *OS calls, and real time clock.
- Data spool option for merging with other files.
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-PLOT'

-PLOT £26

- Stunning menu driven colour graphics using the BBC's capability to the full.
- Pie charts, histograms, scatter graphs, line graphs and function plotting.
- Disk save of screen for instant recall within your own programs.
- Superb data entry editor with up to 255 plottable data entries for text and x/y coordinates.
- Automatic scaling with user override.
- Screen customisation allowable after plotting for background text etc., with up to 64 columns in Mode 1.
- Disk save of ALL data.
- Statistics facilities include mean, max, min, standard deviation, line of best fit, correlation coefficient etc.
- Colours re-definable for any plot.
- Epson m/c fully SHADED screen dump with interface for other dumps on request.
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' and 'DDD-CALC'

Combo Pack — All 3 modules
£60

Money Management

This program is designed for disk users. It allows individual transactions to be stored and retrieved in respect of up to 5 separate Bank/Building Society/Investment accounts AND up to 5 Credit card/loan/Mortgage accounts.

The transactions are also analysed — and may be (screen) listed — under 3 separate Income and 15 separate Expenditure headings.

Each transaction consists of:

- (1) Date
 - (2) Description — up to 16 characters.
 - (3) Amount
 - (4) Last 4 digits of cheque no. or a credit card transaction reference. (Payments only)
- Account and income/expenditure headings may be personalised.

Budget amounts can be stored for each of the 15 expenditure heads and a report shows how expenditure to date compares with the budget. It also shows the balance remaining. This report is also produced in percentage terms and a third report forecasts annual expenditure based on expenditure to date at any particular time.

A further report gives balances for each Bank/Loan account at the beginning of the year, balances for each income/expenditure account to date and the resultant Bank/loan account balances. This report represents, therefore, the changes in liquid assets and liabilities over the period, both in terms of totals and of distribution between accounts.

The main menu contains a print option for this report.

Lists of outstanding cheques or credit transactions may be produced for each account and when statements are received, input of the cheque reference no. (last 4 digits) and the amount causes verification to occur (on screen), whereafter these cheques are removed from the cheque no. file, the remaining list of unpresented cheques allowing simple reconciliation of each Bank a/c. Similar reconciliation of credit card a/c's can be achieved.

The program caters for transfers between accounts (e.g. from Bank to Building Society a/c or from Bank to Credit card a/c etc) the relevant details being input only once.

The program also allows for standing orders to be set up on any single account or between any two accounts. These are paid simply by inputting a date up to which the payment of all orders should be recorded. The necessary debits and credits are then created and the date of each order is reset. Orders can be for any multiple of calendar months.

The program is fully menu driven and all areas of input are 'range protected'. As much guidance as possible is included in all screen displays and the user is always given the opportunity to abort a transaction.

Full amendment and deletion routines are provided; for individual transactions, for Standing orders and for budgets.

The main file can hold between 800 (all full length descriptions) and 1800 (no descriptions) transactions. The former should be sufficient for most people for at least one year and the index file size is set on this basis. A warning is flashed on the main menu when the main file reaches 750 transactions. Account balances may be carried forward to a new set of accounts.


All you will ever need in a home finance package and beautifully presented.

£11

VALUE!

With over four years experience of providing practical software solutions for business and home applications, Gemini have put together a selected range of famous titles for the BBC and BBC Plus in TWO special packs, at VERY SPECIAL prices. These super value packs contain all the serious application software you're ever likely to need for your BBC, from spreadsheet and database management to a complete professional business accounting system. Gemini's 'OFFICE MATE' and 'OFFICE MASTER' packs are here — put that computer to WORK!

- Database
- Beebcalc Spreadsheet
- Beebplot Graphics
- Word Processor
- Full Documentation



Cassette or Disk £10

- Cashbook
- Final Accounts
- Mailist
- Easiledger
- Invoices & Statements
- Stock Control
- Full Documentation



Cassette or Disk £20

Watford are pleased to announce that they are now stocking almost the entire range of Gemini's BBC software. Fuller descriptions of items may be found in Gemini's own advertising within this publication.

VOLTMACE JOYSTICKS

Delta 3B Single Joystick	£10
Delta 3B Twin Joysticks	£16
Delta 14B Single Joystick	£12
Delta 14B/1 Adaptor Module	£12
Transfer Software Disc/Tape	£7

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

Price: £2

Acorn's GRAPHICS ROM £25

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only £9.50

Replacement FLEXIBLE KEYBOARD CONNECTOR

A 'Keyboard to Micro' replacement jumper lead.

£4

ATTACHE CARRYING CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front. Locks supplied with two keys. Price £13 (£2 carr.)

DATA RECORDER

Top quality slimline portable cassette recorder designed specifically for use with home computers. Mains/Battery operated with tape counter.

£20

DATA CABLE to connect recorder to BBC £2.00

DATA CASSETTES

Top grade tested C12 Data cassettes supplied in library cases 35p each; 10 for £3.20.

CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug	
to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.
Single £3.00 Dual £3.75

DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable
Single £4 Twin £6

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	110p	215p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-

ACORN MUSIC 500

The Acorn Music 500 System is probably the most powerful piece of music generating hardware available for the BBC Micro.

£72 (carr £4)

النور ARABIC ROM for the BBC Micro

The ALNOOR ARABIC ROM converts your BBC into a bilingual computer. New keytops provide both English and Arabic symbols. Two sets of Arabic symbols are provided for use in either context sensitive or insensitive operation.


20, 40 and 80 column operation. Compatible with ASMO (449). English/Arabic printer interface software. Numeric entry from either left or right of number. Communications software to send or receive 7 or 8 bit data.

Different shapes of Vowels (e.g. Shadda, Fatha, etc). Different shapes of Hamza. Full English and Arabic character sets with all special characters.

£85

(Price includes Alnoor ROM, Operating Manuals & a full set of Arabic/English Keytops)


PLINTHS FOR BBC MICRO AND PRINTERS



Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£20 (carr. £2.00)
PRINTER PLINTH	£10 (carr. £1.50)

4 WAY MAINS DISTRIBUTION SOCKET

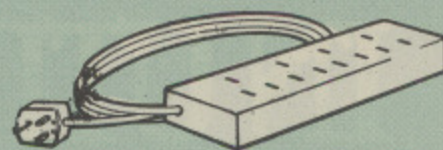

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug.

£9.99



CREDIT CARDS 24 HOUR HOT LINES
ACCESS 0923 50234
VISA 0923 33383

SPARES for BBC Micro

Keyboard	£46;	Keystrip	£2
Power Supply	£45;	Case	£25
UHF Modulator	£4;	Speaker	£2
Speaker Grill	£1;	Keyswitch	£2

28 pin ZIF SOCKET (Textool) £6.95

28pin DIL HEADER PLUG
SOLDER type £1.50
IDC CRIMP type £1.95

RIBBON CABLE

28way 55p/ft; 34way 60p/ft.

8way DIP SWITCH £0.85

CHIP SHOP

7438	40p	UPD7002	£4.40
74LS04	25p	SN76489	£5.50
74LS123	80p	27128-250nS	£3.00
74LS244	80p	6264LP-8K	£4.00
74LS393	£1.20		

74LS00	25p	ASSORTED ROMS	
74LS10	25p	ACORN DNFS	£15
74LS163	70p	ACORN BASIC 2	£16
74LS245	£1		
4013	60p		

4020	£0.90	Serial ULA	£13
DS3691	£3.50	Acorn BCPL	£46
LM324	£0.45	Acorn FORTH	£36
6502A CPU	£5	ICON Master	£29
6522	£3.40	ROMIT	£29
SAA5050	£8.75	TERMULATOR	£28
2764-250nS	£2.00	Video ULA	£15
6116LP-2K	£2.75	Acorn COMAL	£39
8271	£45	Acorn LOGO	£60
ACORN OS 1.2	£6	ISO Pascal	£60
4816	£1.00	MUROM	£17
DS88LS120	£3.00	SLEUTH ROM	£24
		ToolKit Plus	£33

ACORN'S GRAPHICS EXTENSION ROM
GXR-B £21.00 GXR-B+ £22.00

Prices subject to change without notice and available on request.

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME.

GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED.

CARRIAGE: Minimum £1 on all cash orders. On bulky items, Securicor charge applies.

VAT: UK customers please add 15% VAT to cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces)

Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND

Credit Card Orders ACCESS or VISA Telephone: (0923) 50234/33383

Telephone: (0923) 37774; Telex: 8956095 WATFRD

CLARES NO1 IN UTILITY SOFTWARE!

FONTWISE PLUS £20.00



Now compatible with WORDWISE, WORDWISE+ and VIEW plus additional format commands and extra fonts. Now you can have PROPORTIONAL and JUSTIFIED text by using FONTWISE to print text prepared on the above word processors. Not only that but you can have it in 12 different fonts, all within the same document if required.

- * PROPORTIONAL & JUSTIFIED TEXT
- * NOW WITH ADDITIONAL COMMANDS & FONTS
- * 12 FONTS - inc. italic, serif, Broadway, script etc. with more to follow
- * CONDENSED, NORMAL or DRAFT
- * PAGINATION
- * DOCUMENT SIZE CAN BE UPTO DISC SIZE
- * Plus many more features

Ask for a sample printout and you will be amazed at the quality that your printer can produce, (requires an EPSON compatible printer capable of single, double and quad density graphics). The quality achieved by FONTWISE is incredible for such a low cost program but the speed is about the same as NLQ printing on most printers! You have got to see this to believe it.

WHEN ORDERING
STATE WORDPROCESSOR USED.
RING FOR A SAMPLE PRINTOUT TODAY.

BROM



£34.50



£27.50

THE NUMBER ONE TOOLKIT ROM FROM CLARES

*EDIT is a FULL SCREEN EDITOR, which means that you can scroll your program up and down just like WORDWISE does with text, do not confuse this powerful editor with the line editor used in other toolkit ROMs. The EDITOR allows insertion and deletion of lines and insert and overwrite within a line. This is the editor that the BBC micro should have had.

*ERROR ON will trap errors in a program and enter the EDITOR at the statement generating the error, no more wading through multi statement lines trying to identify the error.

Commands pioneered by BROM are:

*ROMON & ROMOFF which enable you to turn on/off sideways ROMs so that they stay off even after CTRL/BREAK. This also allows the DFS to be switched off and PAGE reverts to &E00 automatically.

*CASE which forces input into upper or lower case irrespective of caps/shift lock.

*FLIST which lists a program one statement to a line but more importantly it will even list 'BAD PROGRAMS'.

*ONEKEY is a single key entry option but you can also define your own strings to any ASCII key, just like an extra 48 function keys.

*FIND, *CHANGE & *SCHANG provide selective or global SEARCH and REPLACE facilities. These commands work with strings and keywords or a mixture of both e.g. *FIND PROChelp T, will list the full line containing PROChelp, the 'T' simply tokenizes any keywords.

Yet another group of commands allow lines to be moved or copied to a new location.

The other commands provide function key editor, 'BAD PROGRAM' cure, variable lister, integer variable flush, program compacter etc.

This is a genuine useful ROM that no user should be without. Be warned, once used you will not be able to live without it!

"This is the best BASIC screen editor I have so far used." MICRO USER August 85.

"...this is the best On-Screen BASIC Editor I have ever used; it is far superior to BEEBUGSOFTS TOOLKIT." Viewfax Tubelink



DISC

40 _____ 40 TRACK

80 _____ 80 TRACK

3 _____ 3" DISC - ADD £3

EPROM

Send for detailed newsletter.

All prices inclusive of VAT & Carriage - NO EXTRAS! Please state 40 or 80 track disc and state D.F.S. you use.

FUN HOUSE £10.00



FUN HOUSE is a highly original suite of educational programs suitable for ages 3 to 13. The program is designed to encourage children to spell words which relate to objects found around the home. Animation and music are used to good effect and some highly original ideas are incorporated. Each room exercise is terminated with a warning item e.g. the lounge finishes with 'FIRE' which goes on to engulf the whole lounge. Tests with a newly hired 4 year old resulted in us having to prise him away from the keyboard after 2 hours. In that time he had gone from never having used a keyboard to finding the location of all the keys very quickly and entering the correct answer. He had thus started on the path to learning spelling and familiarised himself with the keyboard including the use of DELETE to correct his mistakes. Can you afford not to give your children the same start?

"there is nothing of the quality of this suite of programs" EDUCATIONAL COMPUTING

New! PROFILE £12.00



A PROCEDURE LIBRARY MANAGEMENT SYSTEM

Now you can start the procedure library that you always promised yourself. PROFILE allows you to store, list, merge and grab procedures without any of the headaches. Automatic alteration of LINE NUMBERS and resident variables such as TOP, LOMEM etc. release you from the tedious chore of setting and resetting, checking and rechecking. PROFILE leaves you free to create your programs without disturbing your chain of thoughts.

- *100 Procedures can be stored on each disc (disc space allowing)
- *NO LIMIT to the number of procedure discs used
- *MERGE Procedures into your programs easily
- *LIST Procedures from disc to check suitability etc.
- *RENAME Procedures on disc
- *GRAB new Procedures from existing programs
- *NESTED Procedures can also be grabbed automatically

A Procedure can be a FUNCTION, a BASIC program or part of it or a PROCEDURE.

With PROFILE you will quickly amass a wealth of procedures which will enable you to write programs quickly and easily. Simply write the controlling program containing the procedure calls and PROFILE will merge the procedure for you.

PROFILE in effect provides you with a MACRO BASIC in which you only have to define the procedure once and it can be re-used automatically thereafter.

Make life easier for yourself and order PROFILE today.

clares
MICRO SUPPLIES

98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9—5pm Monday—Friday
LUNCH 12.30—1.30

ONE of the major uses of the BBC Micro, and for that matter many other micros, is in the production of text files either for printouts or, more recently, for electronic mail.

Although current word processors for the BBC Micro enable the easy production and correction of text, they do not take account of the innate poor spelling ability of many writers, nor of the ubiquitous typographical errors introduced from accidental presses of the wrong key when typing at speed.

I also still find it more difficult to spot such errors on the screen than on a draft printout, and therefore get through more paper than I should.

Some of the expensive CP/M word processors have built-in spellchecking facilities. However the majority of BBC Micro users would find a good cheap non-word processor specific spelling checker program just as useful.

The major features I am looking

for in such a utility are ease of use, compatibility with different text formats, a large inbuilt dictionary with English spelling, user definable dictionaries, an incorrect case identifier, speedy text checking, portability and finally hardware compatibility (memory upgrade).

It would also be an advantage if parts of the main dictionary and user definable dictionaries could be edited, merged or deleted and could include characters other than the letters A to Z.

Remember, however, the current spelling checkers can only inform you if a word is not recognised in their dictionaries – they cannot correct the spelling automatically, nor spot correctly spelt words used in the wrong context, such as singular and plurals.

Perhaps a useful addition to such a utility would be a context/grammar checker to take account of the incorrect use of “was” and “were”,

“to” and “too” and so on, but that is probably asking just a little too much of the old 2MHz 8 bit machine, and anyway it would leave our editor with nothing to do.

A few disc-based spelling checkers for the BBC Micro have been available for some time, like Beebugsoft's original Spellcheck (see my review in the November 1984 issue of *The Micro User*) and Dataware's Spellwise.

Currently three ROM-based checkers are generally available for the BBC Micro – Watford Electronics' Romspell, Beebugsoft's Spellcheck III and Merlin's Scribecheck.

Now let's see what two of these state of the art BBC Micro spelling checkers have to offer in the main role of looking for and correcting spelling mistakes.

Both were put through their paces on a BBC B fitted with an Acorn DNFS 1.2.

Romspell v.1.00 Watford Electronics

THIS is an extremely versatile spelling checker first released in the spring of 1985. It is capable of checking almost any spooled Ascii file and straight View, Wordwise or Mini Office files.

The package includes a 16k eprom, 80 track or 40 track single sided dictionary disc and a 24 page spiral bound A5 format manual.

The latter was very clear and covered all aspects of the utility very well, though a command and option summary page would have been helpful.

The Romspell dictionary disc contains a specially compacted 80k file !SYSTEM which holds the main system dictionary of 30,000 words – only a little short of the number of main headwords contained in the Concise Oxford Dictionary.

It also holds a user-definable dictionary !USER capable of taking about 600 words, and an example text (a Biblical passage) thus leaving about 115k free on an 80 track single density disc.

The disc may, and should, be readily backed up for security, thus providing a workdisc for everyday use.

The chip was not fussy as to which socket it occupied, did not alter PAGE, nor did it clash with any of the

How to make your micro spel welle...

MIKE MAHON compares two spelling checkers for the BBC Micro

numerous other ROMs tested alongside.

Romspell acts as a language and is called by keying *RS which produces a menu screen with 10 options (see Figure 1).

Star commands may be entered from the menu. It can also be entered direct from View, Wordwise or Mini Office using *RS, whereupon the text is automatically saved for security, Romspell entered, and the file reloaded ready to check. That's what I call ease of use!

Once a file has been loaded option 2 or 4 is usually selected. The interactive check is best used for shorter files, as the scanned text is stopped on each occurrence of an unrecognised word, which can then be edited, skipped,

added to the user dictionary, or escaped in order to select option 6 – the ambiguous word check.

Embedded control characters from the word processors are ignored in the checking routine.

In the two pass file check the whole text is scanned, all the unrecognised words marked and the file saved. On the second pass the marked words are then more quickly found ready for editing and so on.

Romspell is extremely fast. It took two minutes and three seconds to check my own example Wordwise file – the first 1000 words of my Basic Editor article from the November *Micro User*. You just try looking up eight words a

Romspell Menu Options

- 1 Save text file
 - 2 Load text file
 - 3 Interactive file check
 - 4 Two pass file check
 - 5 Resume file check
 - 6 Ambiguous word check
 - 7 Display dictionary
 - 8 Add to dictionary
 - 9 Delete from dictionary
 - 0 Exit to previous task
- Escape returns to this menu

Figure 1

From Page 49

second in a dictionary.

What was most amazing was its large system dictionary evidenced by the fact that it moved through great chunks of text without pausing. Indeed only six words were not recognised.

Editing of a misspelt word is easy using the cursor and Delete keys. Saving a new (correctly spelt!) word to the user dictionary simply involves pressing the Copy key. Alternatively a word not wanted in the user dictionary, such as a personal name or abbreviation, may be skipped using the cursor right key.

All this editing is quite straightforward and doesn't involve numerous annoying beeps.

Once the user dictionary is built up with your own personal, jargon and technical words it is surprising how much quicker the whole process becomes.

Also the user dictionary may be displayed in whole or part, added to or deleted from using menu options 7, 8 and 9.

Unfortunately for the curious, because of the data compaction techniques employed, the system dictionary cannot be viewed.

Menu option 0 once more stresses the ease of use of Romspell, in that following a spelling check the word processor can be re-entered if that was the previous task.

The last, but not least, of the menu options I tried was the ambiguous word check. This is a unique and amazing feature of Romspell in that upon locating a misspelt word you may escape to the menu, select option 6 and type the word with a question mark at

the dubious part, for example "microcomput?r".

Romspell then hunts through its dictionary and displays all valid options from which you can select the correct one and amend the text.

This utility is quite fast, ranging from less than one second to about 15 seconds depending upon the length of the word in question. This option could be very useful in a teaching situation.

Another unique feature of Romspell is the check-as-you-type option. Following the command *RSON anything typed at the keyboard directly, or from a word processor, is checked on a word for word basis and a beep is sounded if the word is not recognised.

This slows down word processing a little, but would be a boon for schoolchildren learning to spell.

It is also useful as a part syntax checker for Basic keywords while programming. The option is ended with *RSOFF. Furthermore a single string may be checked at any time with *RS string.

For the latter facilities, as with menu options 3 to 6 of course, the dictionary disc must be present in the disc drive.

The program has a number of limitations.

A minor one is that Romspell can only check against the system and a single user dictionary at once. It would be more useful if alternative user dictionaries could be merged or easily selected at the menu, especially when the writer uses a lot of specialist words.

Secondly, I was rather disappointed that it could not distinguish the incorrect use of case as between "the" and "tHe", a rather common typographical error for poor typists like myself. This facility was available on Dataware's disc-based checker released almost two years ago.

It would be useful to include case specific technical words such as STARdataBASE or ATPase in the user dictionary.

Thirdly, it would also be useful if non-alphabetic characters such as apostrophes, hyphens, brackets and numerics could be included within words, again with the technically oriented text in mind. For example, chemical terms such as 8-hydroxy-1,4-naphthoquinone in a user-defined dictionary would be an enormous help to some writers.

Fourthly, the reviewed version was not second processor compatible (it asks for it to be switched off) which is a

pity when entering the checker directly from the word processor. It does, however, work on a BBC Micro fitted with the Watford shadow screen RAM board and on the BBC Plus.

Last, and most unfortunately, there is one major bug in Romspell. The whole program crashes with loss of data if a word longer than 16 characters is met, making it virtually useless for most professional and technical work like my own requiring such nasties as phosphofructokinase and facioscapulohumeral.

This limitation was first pointed out to me by fellow reviewer Rory McCloy, who regularly crashes his system with the inadvertent use of choledochoduodenostomy or gastroenteroanastomosis, but I suppose that serves him right for being so clever!

CONCLUSIONS: The major plus features of Romspell are its compatibility with View, Wordwise and Mini Office files, as well as pure Ascii text, its enormous dictionary, speed, ease of use, ambiguous word check, and its direct checking ability. Romspell is therefore excellent value for under £30 as a spelling checker for most domestic BBC Micro users.

However if some of the limitations listed above, particularly the word length limit, inclusion of non-alphabetic characters, wrong case check, and second processor compatibility were removed then I would have no hesitation in recommending it as the first choice for all writers using the BBC Micro. A great innovative product - I cannot wait for the mark 2 version.

Spellcheck III v3.00
Beebugsoft

THE major advancement in this latest implementation of Spellcheck, released at the November 1985 Electron & BBC Micro User Show, is its vastly increased speed.

The checker comes on a 16k eprom supplied in one of Beebugsoft's splendid new silver livery video boxes. This includes a 40 or 80 track dictionary disc containing a 5982 word dictionary in the file WORDS. The accompanying booklet is the 12 page A5 format Spellcheck II manual.

Spellcheck III also contains a 2000

word store on the ROM itself which explains much of its increased speed. It is also compatible with either of the three major BBC Micro word processors, View, Mini Office and Wordwise (including the Plus variety).

Like Romspell, it is a language ROM and is invoked with the command *SPELL which prompts you to select either the View or Wordwise option. (The Wordwise option is also suitable for Mini Office files.)

The main menu then appears giving

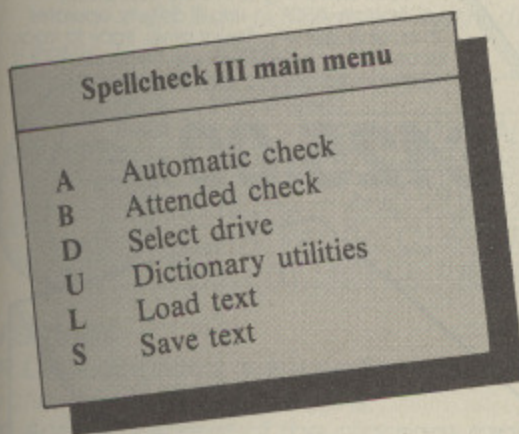


Figure II

the options shown in Figure II, as well as the use of star commands. This selection is similar to the Romspell choices except for the ambiguous wordcheck facility.

Selecting U for dictionary utilities offers a second menu, see Figure III, which allows for the initialisation of a new dictionary disc, erasure of words, or searching for words in the dictionary.

This option was extremely fast, one or two seconds, no matter how long the word seemed to be or what letter it

started with. Interestingly, the "word" BBC was not present though APPLE, PET and APRICOT were.

Like Romspell, there was the facility to add words to the dictionary directly from the dictionary utility menu during the Search option.

Spellcheck III was fairly user friendly. Normally the checker is initialised, a word processed file loaded and the attended or automatic check selected.

In the attended check unrecognised words are marked with a yellow ? and can be filed in the main dictionary (F), stored temporarily (T), bypassed (B) or have their spelling changed (C). These four options are displayed at the bottom of the screen as a reminder.

If the automatic check is used the complete text is checked in the first pass and each unrecognised word immediately jumped to for editing in the second pass.

Spellcheck III is the fastest checker I have seen for the BBC Micro. My 1000 word test file was dealt with in a mere one minute 25 seconds on the standard micro and in 65 seconds with the 6502 second processor switched on.

This latter is more than twice as fast as Watford's Romspell (15 words a second) though only around half that claimed in the advertisements.

The disappointment was that 79 words were unrecognised due to the much-reduced dictionary as compared with Romspell, thus the time gained was spent adding new words to the dictionary disc.

A 40 track dictionary disc, however, may eventually contain up to about

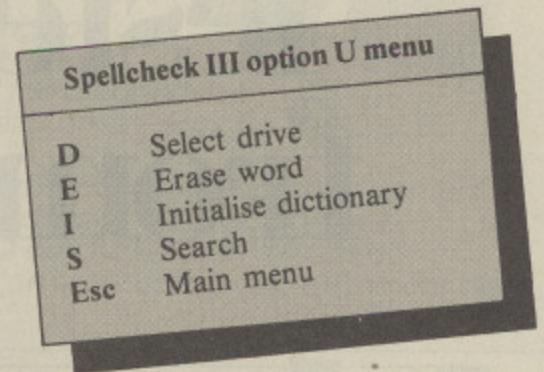


Figure III

17,000 words although I have no idea how this might affect performance.

Unlike Romspell the added words cannot be directly viewed at a later date so misspelt words may be entered. They may, of course, be searched for and erased.

As with Romspell, the Spellcheck dictionary can be backed up readily, though separate user-created dictionaries cannot be merged.

Editing a word to change its spelling involved the cursor keys, and was only slightly more fiddly than on Romspell. Spellcheck III was able to take account of apostrophes and hyphens (but not numerics) within words and did not even shudder with words as long as 40 characters. It still, however, omitted to notice "tHe" and similar errors as a mistake.

Spellcheck III can take advantage of the 6502 second processor and works on the BBC Plus. It is also compatible with dictionaries created by Spellcheck II and may be upgraded, at cost, from its predecessors.

CONCLUSIONS: Spellcheck III is slightly more expensive than Romspell at around £35 but still provides good value for money. Its advantages over Romspell include speed, second processor compatibility and it deals with non-alphabetic characters and long words.

It does not, however, have the superb inbuilt dictionary or extra versatility - Ascii text check, ambiguous wordcheck, and spell as you go features - of Romspell.

So which one would I buy? At the moment it would have to be Spellcheck III, but only while I am waiting for Watford to, hopefully, bring out a new "professional" version of the excellent Romspell, which can handle long words - thatsallfornowfolksbyeeee!

Mike Mahon

PROBLEM

I WISH to build a teletext adapter for use on my BBC Micro. Can you advise me of any available circuit designs? - M.W. Hudson, Wetherby, West Yorks.

SOLVED


I know of no circuits for a teletext adapter for the BBC Micro. However, if you want to write your own software you can take a

standard teletext circuit and place data select ICs in the address lines of memory. Then you can switch between computer access and teletext access of the memory. You will also need to parallel up the memories data output lines with some inputs to your computer. Suitable circuits for modification are in Mullard Technical Information No. 72 - try libraries.

Mike Cook

Today's Technology at Yesterday's Prices from Chase Data.

1 **CANON SINGLE MDD 221A NO PSU**
CANON 221A "SUPER SLIM" (33.5mm)
80 TRACK DOUBLE SIDED 400K
FLOPPY DISC DRIVE
(40/80 TRACK SWITCHING).

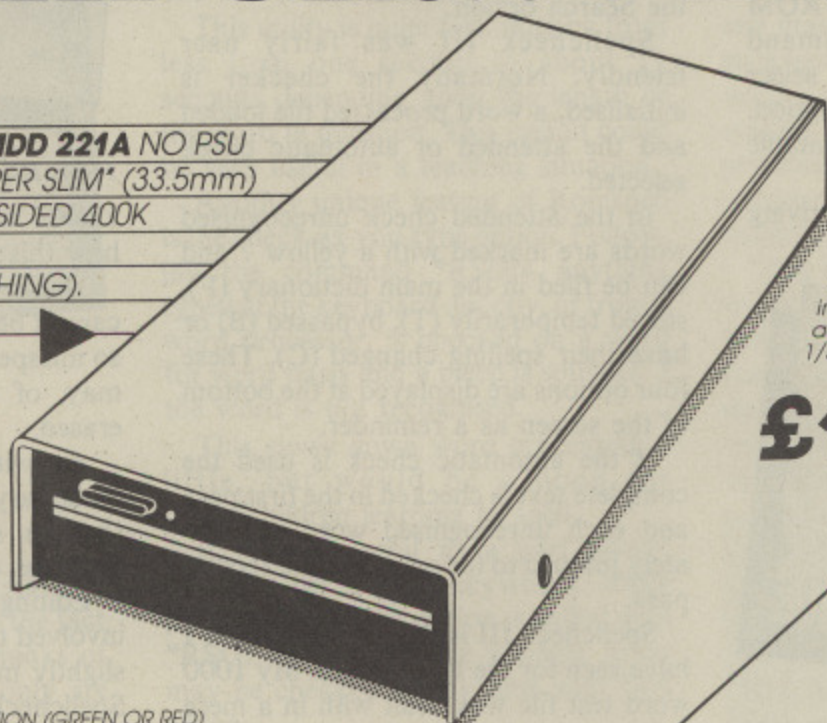


SPECIFICATIONS:
 80 track double sided disc drive. 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:- 1/3 standard height, only 33.5mm.

£125.00 INC

All Canon 40/80 switchable disc drives feature an on-board dual-colour LED on the front panel to show track mode selected. This is coupled with our own unique two-stage illumination. To give a clear operating status, as follows.

40 TRACK MODE: _____ LED GREEN
 80 TRACK MODE: _____ LED RED
 POWER ON: _____ HALF-ILLUMINATION (GREEN OR RED)
 DRIVE SELECTED: _____ FULL-ILLUMINATION (GREEN OR RED)

2 **CANON DUAL MDD 221A**
WITH PSU

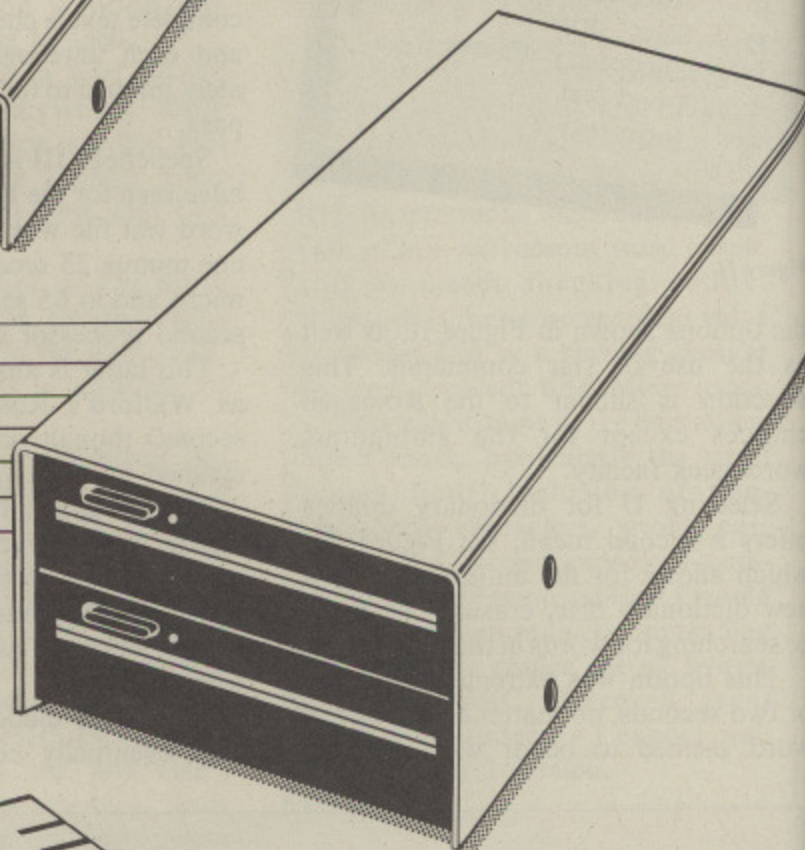


SPECIFICATIONS:
 80 track double sided disc drive. 40/80 track switching with dual colour LED. Capacity 800K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:- 1/3 standard height, only 33.5mm.

£279.00 INC

SPECIAL OFFER

WHILE STOCKS LAST

3 **CANON SINGLE MDD 220**
80 TRACK DOUBLE SIDED 400K
FLOPPY DISC DRIVE
(40/80 TRACK SWITCHING)

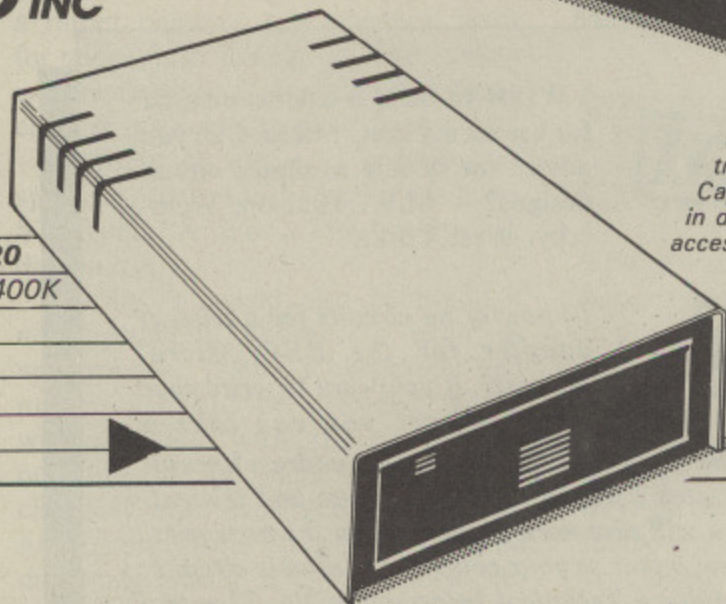

SPECIFICATIONS:
 80 track double sided disc drive. 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode.

£95 INC

CHASE DATA LTD THE DISC DRIVE COMPANY WITH DIRECT PURCHASE FROM JAPAN AND A PROFESSIONAL AFTER SALES SERVICE.

4

CHASE DATA SOFTWARE
NOW COMPATIBLE WITH
UDM & OPUS DFS
PLEASE STATE
WHEN ORDERING



VECTOR 1 The ultimate tape to disc utility. Vector 1 allows you to transfer almost all your tape software to disc. Unlike others, you only need to buy 1 copy of Vector 1 since it transfers tapes to specially formatted program discs. This is easily the most powerful tape to disc utility available.

Vector 2 New 1.2 VER. Disc to disc utility. Vector 2 allows you to make backup copies of all your valuable disc software. It is the most advanced utility of its kind available. **It is a condition of sale that neither of these products are used for infringement of copyright.**

- Vector 1 **£12** On its own
£11 If purchased with disc drive
- Vector 2 **£12** On its own
£11 If purchased with disc drive
- Vector 1 & 2 **£23**

6

DIAGRAM


A PROGRAM WHICH ALLOWS YOU TO STORE VERY LARGE DIAGRAMS — UP TO 39 MODE 0 SCREENS — AND VIEW OR EDIT THEM BY SCROLLING THE COMPUTER SCREEN AROUND OVER ANY PART OF THE DIAGRAM

FEATURES

- Draw diagrams, schematics, plans etc., in any aspect ratio, e.g. 10*3, 2*12 screens.
- Access any part of the diagram rapidly by entering an index name, e.g. TR6, R5 etc., to display a specific section of the diagram, and then scroll around to any other part of the diagram using the cursor keys.
- Up to 128 Icons may be predefined for each diagram,

5

DISCUS

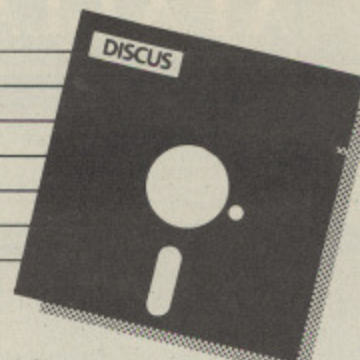

Test utility for testing your own disc drive, at regular intervals to avoid the dreaded flop of your floppy. Menu driven, easy to use, 40 or 80 track versions.

TESTS: Motor speed, read/write, steptest, alignment test,* step and read/write test, read only test.
£8.00 inc. £7.00 if purchased with disc drive.
*This test requires an oscilloscope and alignment disc.

EPROMS

QUALITY EPROMS BY 'HITACHI'

- 2764-250 NS **£2.50**
- 27128-250 NS **£4.00**

INCLUSIVE OF P&P & VAT

- e.g. Transistors, resistors etc., in full mode 0 definition, up to 32 pixels horizontally by 24 vertically.
- Hard copy printouts in varying print sizes up to 9 mode 0 screens on an A4 size sheet, compatible with most dot matrix printers.
- Many other features including, selectable display colours, comprehensive line drawing facilities, TAB settings, etc.
- Disc contains sample diagrams and two versions of the program, one of which will work from a 16K sideways RAM.
- Comprehensive instruction manual.

£28.75 Including P&P & VAT Supplied only on disc 40T/80T compatible.

DON'T FORGET YOUR VECTOR 1 & 2 WHEN ORDERING.

All inclusive price list: This means: disc drive + case + all power & data cables + UK carriage + utilities disc & manual + VAT.

Model	CANON	210	220	221A	596D
Formatted Capacity per drive on BBC Micro:		200K	400K	400K	SANYO 400K
Single Drive & Case:		£75	£95	£125	£149
Single Drive & Case/PSU: *u/c — UPGRADEABLE		—	£124	£173*u/c	£174
Dual Drive & Case		—	£209	—	£279
Dual Drive & Case/PSU:		£185	£224	£279	£309

FUJI FLOPPY DISCS

	Per box 10	If purchased with disc drive
40 TK SS DD	£17.60	£15.60
40 TK DS DD	£24.50	£22.50
80 TK DS DD	£28.60	£26.60

These prices include VAT & P&P.

Support:

Warranty: All disc drives sold by Chase Data Ltd come with a full one-year warranty on parts & labour with optional extended warranty on all drives.

Extended Warranty

Your Insurance of trouble free operation. When ordering your disc drive, ask about our second and third year extended warranty scheme. This covers ALL PARTS AND LABOUR and costs from as little as £15.00 on single drives and £23.00 on dual drives.

Payment:

By Post:



Send your remittance (cheques only please) with your order to: Chase Data Limited, Unit 2, Crabtree Road, Thorpe Industrial Estate, Egham, Surrey TW20 8RN.
By Phone: **(Tel: 0784-38487)**. Allow up to 21 days for delivery.



AT A GLANCE GUIDE TO PRODUCTS & PRICES

BBC MASTER SERIES

AMB15	BBC MASTER Foundation computer 128K	£435 (a)
AMB12	BBC MASTER Econet computer 128K (only ANFS)	£348 (a)
AMC06	Turbo (65C102) Expansion Module	£87 (b)
AMC03	32016 Expansion Module with 0.5Mb RAM	£POA (b)
ADF13	Rom Cartridge	£13 (d)

BBC PLUS COMPUTER RANGE

BBC B PLUS with DFS	£369 (a)
BBC B PLUS with 128K	£389 (a)
BBC B PLUS Econet (No DFS)	£360 (a)
BBC B PLUS Econet & DFS	£399 (a)
BBC Dust Cover	£4.50 (d)

UPGRADE KITS

Acorn DFS Kit	£80 (d)	1.2 OS ROM	£7.50 (d)
Econet Kit	£55 (d)	DNFS ROM	£17.50 (d)
BASIC II ROM with User Guide	£22.50 (d)		
1770 DFS Upgrade for Model B	£43.50 (d)		
ADFS ROM (for B with 1770 DFS & B plus)	£26 (d)		
64K Upgrade Kit for B plus	£35 (d)		

ECONET ACCESSORIES

Econet Starter Kit	£85 (b)	Econet Socket Set	£34 (c)
File Server Level I	£75 (d)	File Server Level II	£210 (d)
Printer Server Rom	£41 (d)	10 Station Lead set	£26 (c)
Adv. Econet User Guide	£10 (d)		

EPROMS - RAMS

2764-25	£2.00 (d)	271281-25	£2.75 (d)	6264LP-15	£3.75 (d)
---------	-----------	-----------	-----------	-----------	-----------

ACORN Cambridge Workstation

ACW100 supplied with 12" mono monitor and 1Mb of RAM	£3550 (a)
ACW121 as ACW100 + dual 640K floppy drives	£4350 (a)
ACW143 supplied with 12" RGB monitor, dual 640K floppies and 20Mb Winchester and 1Mb RAM	£5800 (a)
ACW443 as ACW143 but with 4Mb RAM	£7800 (a)

ACORN 2nd PROCESSORS

32016 CO PROCESSOR (Currently available from stock)	£1399 (a)		
ACORN Z80 2nd Processor	£329 (a)		
ACORN 6502 2nd Processor	£169 (b)		
MULTIFORM Z80 2nd Processor	£299 (b)		
TORCH Z80 2nd Processor	£299 (b)		
ZEP 100	£199 (a)	ZDP240	£429 (a)

ACORN WINCHESTER DRIVES

10 Mbyte Winchester Drive with File Server Level III	£1350 (a)
30 Mbyte Winchester Drive with File Server Level III	£1999 (a)
ACORN TELETEXT ADAPTOR	£125 (b)
ACORN IEEE INTERFACE	£278 (a)

ROBOCOM BITSTICK

BITSTICK I	£305 (a)
ROBOCOM BITSTICK II	£775 (a)
Upgrade for Bitstick I to II	£450 (b)
Bitstick Multiplexer Driver (most popular plotters included)	£79 (b)
Epson FX80 Screen dump routine for Bitstick I	£35 (d)
Epson FX80 dump for Bitstick II	£39 (d)

REAL-TIME CLOCK CALENDAR	£29 (c)
--------------------------	---------

ROM / RAM EXPANSION SYSTEMS

ARIES B32 RAM BOARD	£79 (d)
ARIES B12 ROM BOARD	£40 (d)
ARIES B12C Adaptor Board for B12	£7.50 (d)
ATPL SIDEWISE ROM EXPANSION BOARD FOR MODEL B	£37 (d)
Battery Backup Kit	£18 (d)
ATPL Board for BBC PLUS 10 x 16K ROMS	£38 (d)
COMPUTER VILLAGE CV-16 Rom Board	£79 (b)
RAMROM-15	£79 (b)

PRINTERS

EPSON LX-80 NLQ	£195 (a)	Optional Tractor Feed	£20 (c)
EPSON FX Range:			
FX85 (80 col)	£315 (a)	FX105 (136 col)	£449 (a)
EPSON JX80 4 colour printer	£435 (a)		
EPSON LQ Range:			
LQ800 (80 col)	£595 (a)	LQ1500 (136 col) 2K buffer	£875 (a)
32K buffer	£950 (a)		
TAXAN KAGA:			
KP810 (80 col)	£195 (a)	KP910 (156 col)	£339 (a)
DAISY WHEEL:			
BROTHER HR15	£285 (a)	JUKI 6100	£279 (a)
DOTPRINT + NLQ Rom for Epson	£28 (d)		

PRINTER ACCESSORIES

EPSON ACCESSORIES:			
Interfaces:			
8143 RS232	£28 (d)	8132 Apple II	£60 (d)
8148 RS232 + 2K	£57 (d)	8165 IEEE + Cable	£65 (d)
8177P NLQ for FX80 + /FX100 +	£99 (d)		
8190S NLQ for FX80 + /FX100 +	£64 (d)		
Parallel & Serial Buffers of various size also available.			
FX80/80 + /85 Tractor Attachment	£37 (c)		
FX80/80 + Paper Roll Holder	£17 (c)		
LX80 Tractor Feed	£20 (c)		
SHEET FEEDERS:			
8038 LX80	£49 (b)	8033 FX100 + /105	£169 (a)
8033 FX100 + /105	£169 (a)		
Ribbons:			
RN/FX80/80 +, FX85	£5 (d)	LX80	£6 (d)
RN/FX100/100 +, FX105	£10 (d)	H180 Pen Set (Aqueous/Ball point)	£7.50 (d)
Dust Covers:			
FX80	£5.50 (d)	FX100	£7.50 (d)
TAXAN/Canon KP810	£6 (d)	KP910	£7 (d)
TAXAN KAGA/CANON Accessories:			
RS232 + 2K buffer	£78 (d)	Ribbon	£6 (d)
JUKI 6100			
RS232 Interface	£65 (d)	Sheet Feeder	£182 (a)
Spare Daisy Wheel	£14 (d)	Tractor Feed	£129 (a)
Ribbon (Carbon)	£2.50 (d)		
BROTHER HR15			
Ribbon (Carbon/Nylon)	£4.50 (d)	Sheet Feeder	£189 (a)
Red Correction Ribbon	£2.50 (d)	Tractor Feed	£99 (a)
Daisy Wheel	£18 (d)		
Printer Leads:			
BBC Parallel Lead (1.2m)	£7 (d)	BBC Serial Lead (1.2m)	£7 (d)
Other lengths can be supplied on order.			
IBM Parallel Lead (2m)	£12 (d)		

PAPER & LABELS

Plain Fanfold paper with micro perforations:
2000 sheets 9" x 11".....£13 (b) 12000 sheets 14" x 11".....£18.50 (£4.50)

Labels/1000:
Single Row 3 1/2" x 1 7/16".....£5.25 (d) Triple Row 2 7/16" x 1 7/16".....£5 (d)

PLOTTERS

EPSON HI-80 PLOTTER	£345 (a)
HITACHI 672 PLOTTER	£465 (a)

PRINTER BUFFER & SHARERS

BUFFALO 32K Buffer for EPSON PRINTERS	£75 (d)		
PRINTER SHARER BUFFER:			
TSB 64 Buffer/Sharer	£199 (a)	BBC Cable Set	£30 (d)
PERIPHERAL & COMPUTER SHARERS:			

3 Computers to a Printer	36V36-3 £69 (c)	25V25-3 £64 (c)
4 Computers to a Printer	36V36-4 £85 (c)	25V25-4 £74 (c)
2 Computers/2 Printers x-over	36V36-X £69 (c)	25V25-X £69 (c)
BBC Cable Set 3 to 1 (1m ea.)	£32 (c)	£34 (c)
BBC Cable Set 4 to 1 (1m ea.)	£39 (c)	£41 (c)

BBC Computer Sharer:	
1 computer to 2 printers fitted with Cable for BBC TCS26	£19.50 (c)

COLOUR MONITORS

RGB MONITORS (all monitors supplied with a BBC lead)	
1431 14" RGB Std Res 452 x 585 pixels	£185 (a)
1451 14" RGB Med Res 653 x 585 pixels	£240 (a)
1441 14" RGB Hi Res 895 x 585 pixels	£375 (a)

MICROVITEC 14" RGB/PAL/Audio	
1431AP 14" Std Res 452 x 585 pixels	£205 (a)
1451AP 14" Std Res 653 x 585 pixels	£275 (a)
The above monitors are available in plastic or metal case.	

MICROVITEC 20" RGB/PAL/Audio	
2030CS 20" Std Res	£380 (a)
2040CS 20" Hi Res	£685 (a)

TAXAN KAGA 12" RGB:	
Super Vision III + with amber/green option	£345 (a)

MITSUBISHI 14" RGB:	
XC1401CB 14" Med Res BBC/IBM compatible	£229 (a)

MONOCHROME MONITORS

KAGA	
KX12016 12" HI-RES green etched screen	£99 (a)
KX1203A 12" HI-RES amber etched screen	£105 (a)

SANYO	
DM8112CX 12" HI-RES green screen	£95 (a)

PHILIPS	
BM7502 12" HI-RES green screen	£75 (a)
BM7522 12" HI-RES amber screen	£79 (a)
Touchtec 501	£260 (b)

TECHNOLINE

TECHNOLINE offers you 24 hour, 7 days a week ordering/information

- *New Products *Comment Box
- *Technical Pages *Comments on Stock and availability of Products
- *Placing of Orders and many others...

Techno-Line 01-450 9764
24 hour, 7 days a week.

Technical Information:
1200/75 Baud. Standard Viewdata/Prestel Protocols.
Please note that a 'Prestel' type terminal must be used.

Now available for use.
01-452 1500
(Week days 7pm-9am, 24 hours Weekends) ● TELEREF 101

MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)	£20 (c)		
Kaga Swivel Base for mono monitors with integral clock	£22 (c)		
Philips Swivel Base	£14 (c)	Monitor Plinth	£9.75 (c)
Double Tier Plinth for flat drive, computer and monitor	£19.50 (c)	Kaga RGB Cable	£5 (d)
Microvitec RGB Cable	£3.50 (d)		
Monochrome BNC/PHONO Cable	£3.50 (d)		

DISC DRIVES

PDR00P (2 x 400K/2 x 640K 40/80T DS) with built in monitor stand	£254 (a)
PDR00 (2 x 400K/2 x 640K 40/80T DS)	£224 (a)
TS400 1 x 400K/1 x 640K 40/80T DS	£99 (b)
PS400 with psu 1 x 400K/1 x 640K 40/80T DS	£120 (b)

SPECIAL OFFER
ACORN'S Single Drive 1 x 100K/1 x 160K 40T SS £49 (b)

3.5" DRIVES			
1 x 400K/1 x 640K 80T DS	£99 (b)		
TS35 1	£99 (b)	PS35 1 with psu	£119 (b)
2 x 400K/1 x 640K 80T DS	£174 (b)	PS35 2 with psu	£189 (b)

DISC DRIVE MULTIPLER

TDM4 Quad Unit (up to 4 computers)	£135 (a)
TDM2 Dual Unit (2 computers)	£75 (b)

3M FLOPPY DISCS

in packs of ten

5 1/4" DISCS

40 T SS DD £12 (d)	40 T DS DD £16 (d)
80 T SS DD £21 (d)	80 T DS DD £22 (d)
£1 extra pack for library case packing	

3 1/2" DISCS

80 T SS DD £30 (d)	80 T DS DD £38 (d)
--------------------	--------------------

COMMUNICATIONS

MODEMS:			
WS3000 V21/23	£295 (d)		
WS3000 V22	£495 (d)		
WS3000 V22bis	£650 (d)		
BBC Data Cable for WS3000	£6 (d)		
WS2000	£125 (d)		
Data Cable	£7 (d)		
WS2000 Auto-Dial Card	£30 (d)		
BBC User Port cable (for modem control)	£10 (d)		
SKI KIT	£10 (d)	DS1 Disc	£10 (d)
WS2000 Auto-Answer Card	£30 (d)		
GEC DATACHAT 1223	£86 (d)		

COMMUNICATIONS SOFTWARE

CONNECT-3000 40/80 Disc	£16.50 (d)
TERMINATOR	£25 (d)
COMMUNICATOR	£49 (d)
RS232 Solution (Book)	£15.95 (d)
DATA-BEEP	£22 (d)
COMMSTAR	£28 (d)
DS1 Disc (for WS2000)	£10 (d)

AMX MOUSE with SUPERART

AMX Mouse with Super Art	£67 (d)
Super Art Package	£43 (d)
AMX PAGERMAKER	£47 (d)
AMX 3D ZICON	£21 (d)
AMX DATABASE	£21 (d)
AMXXAM	£21 (d)
AMX Original ART + Utilities package	£11.50 (d)
AMX DESK	£21 (d)

RB2 TRACKERBALL

RB-21 (with 'icon artmaster')	£52 (d)
-------------------------------	---------

CP/M SOFTWARE FOR TORCH & ACORN Z80 PROCESSORS

WORDSTAR PROFESSIONAL	£310 (d)		
WORDSTAR	£275 (d)		
WORDSTAR Upgrade to W/S Prof	£195 (d)		
DBASE-II	£315 (d)		
SuperCalc-II	£299 (d)		
SAGE ACCOUNTS	£375 (d)		
Sage Plus	£695 (a)	Sage Payroll	£299 (d)
Pro-Pascal	£299 (d)		
BSTAM	£149 (b)		
A.T.L. Trainers for most packages	£75 (b)		

EPROMER II

EPROMER II	£99 (b)	Software on Rom	£10 (d)
------------	---------	-----------------	---------

UV ERASERS

UVIT	£59 (b)	UV140	£61 (d)
UVIB	£47 (b)	UV141	£79 (d)

NOVACAD CAD PACKAGE

NOVACAD package with 16K ROM, Utility disc and a comprehensive manual	£79 (d)
Novacad compatible with Tracker Ball/AMX Mouse	£99 (d)
Stand Alone Mouse for use with NOVACAD	£34 (d)
Upgrading of existing ROMS and DISCS	£20 (d)
Plotter Utility Program	£28.5 (d)

FIRMWARE AND SOFTWARE

DATABASE MANAGEMENT SYSTEMS

VIEWSTORE	£44 (d)
STARdataBASE	£49 (d)
MASTERFILE II	£17 (d)

WORD-PROCESSORS

VIEW	£44 (d)
VIEW VERSION V3.0	£69 (d)
HI VIEW	£36 (d)
VIEW INDEX	£10 (d)
VIEW PRINTER DRIVER GENERATOR	£10 (d)
VIEWSPELL	£52 (d)
WORDWISE	£28 (d)
WORDWISE PLUS	£47 (d)
WORDEASE	£24.50 (d)
SPELLCHECK III	£31 (d)


SPREADSHEETS:

VIEW SHEET	£44 (d)
VIEWPLOT	£25 (d)
INTERSHEET	£52 (d)
INTERCHART	£32 (d)
ULTRACALC	£49 (d)
QUICKCALC	£14.50 (d)

LANGUAGES

META-ASSEMBLER	£126 (d)
ACORN P-SYSTEM	£259 (d)
6502 DEVELOPMENT PACKAGE	£39 (d)
ACORN MICRO-PROLOG	£69 (d)
ISO-PASCAL	

Epson's latest is smaller, neater lighter, reports IAN WHITMORE

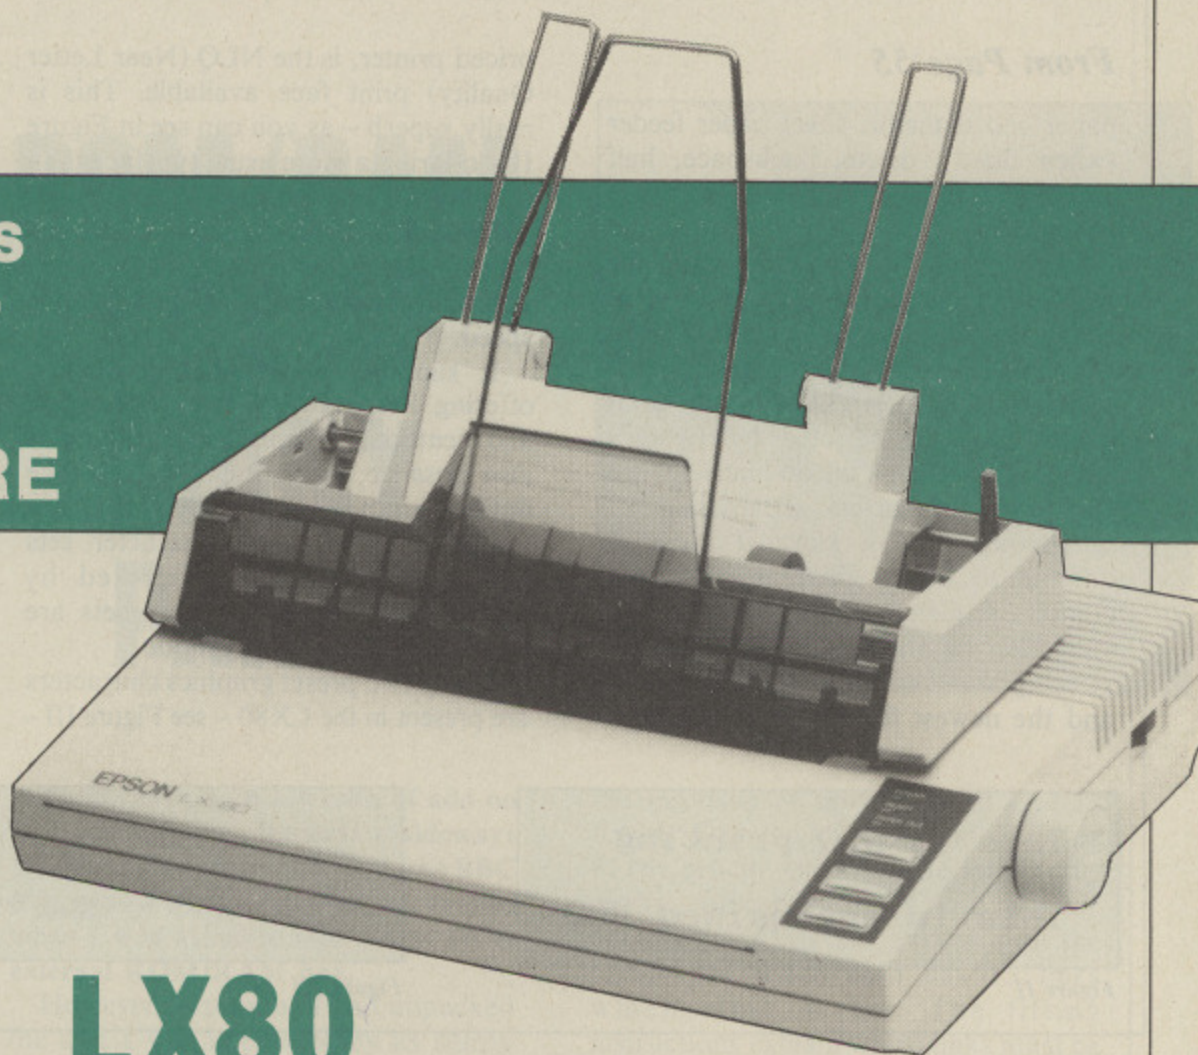

LX80 – the neat machine

THE LX80 is Epson's newest low cost dot matrix printer which, in addition to the usual facilities, has near letter quality printing.

It is smaller, neater and lighter than its worthy predecessors. The all important dip switches are accessible from the outside of the case and will set start up options for international character set, paper out indication, form length, NLQ or draft mode, character width, beeper on/off, carriage return with or without linefeed, printer active/deactive and open or slashed zero.

In its basic form the LX80 only possesses friction feed, but a neat tractor unit that sits on top of the printer and takes only a few seconds to fit is available as an extra at low cost. This tractor unit accepts paper from four to ten inches in width and has one particularly nice feature – the friction feed must be set to "free" in order to install the tractor unit, so that you cannot get paper torn because both drives are active.

However there is no protection at the rear of the tractor unit, so that paper

already printed can get caught up in the rear of the mechanism. Loading paper is easy, with or without the tractor feed.

Epson also offers a very low priced single sheet feeder which I have not had the opportunity to try. Paper tear off facilities do not exist, so that the continuous roll user will have to get used to using scissors.

Epson have departed from the long ribbon cartridge that was characteristic

of MX, RX and FX printers, the LX80 having a four inch square cartridge which clips on to, and moves with, the print head.

Although it doesn't last as long as the traditional type, the replacement cost at the moment – only Epson make the cartridges – is the same. When second sources become available no doubt the price will fall.

One great advantage of the new system is the ribbon guide, which prevents the ribbon touching the paper during paper loading or paper feed. No more messy black smudges.

All the usual print facilities are supported, such as enlarged, emphasised, condensed, double-strike, underlined, italic, unidirectional, superscript and subscript, the majority being available in pica and elite sizes (see Figure 1).

Although proportional spacing and reverse paper feed are not present (only on the FX80), five line spacings, both margin settings, vertical and horizontal tabulation, perforation skip, and form length setting are all supported. Buzzer,

This is draft mode

This is emphasised

This is enlarged

This is condensed

This is double strike mode

This is underlined italic

this is superscript and subscript

This is elite size

Figure 1

to change
ation with
d so on. In
e contigu-
ing needs
successive

program-
ed but only
ese can be
Q modes.
present in
supported
s dumps I
ding Mini

only small,
e A4 page
racters are
d with the

RX80 and FX80 on a speed test the LX80 took only 58 seconds in draft mode against the RX80's 75 and the FX80's 53 seconds.

When compared with the Star printers using Mike Mahon's test, the LX took 45 seconds, indicating a comparative speed of 100-120cps against the FX80 and Star SG at 100-120cps and the Star SD at 150-160cps.

The manual is a great improvement on its predecessors, being written in English! Many examples of the various facilities are given after careful explanation of their function.

A number of appendices contain a detailed breakdown of the codes, in Ascii, decimal (for Wordwise), hexadecimal and control formats. The Ascii codes and character fonts are listed and the software commands are shown in numerical and function order.

The dip switches, technical specifications, parallel interface protocols and tractor unit are all detailed, and an especially helpful section on troubleshooting and matching different computer systems is also present.

The pull out reference card with all commands and the Ascii character sets is let down by the absence of decimal codes, which would have been of value to the Wordwise user.

All in all Epson have produced a great new little printer, but I wish they had designed a tractor mechanism into which the paper could not re-enter. A tear off facility would also help. Still - highly recommended.

PROBLEM

COULD you tell me why Music System by Island Logic will not work on my BBC with a UDM DDFS disc interface 1.1? It will load and run the first title page but then the computer freezes - D. Cunningham, Barnsley.

SOLVED

The protection method used on the Island Logic system is complex but basically it talks to the 8271 disc control chip directly. As you do not have this chip in your computer the program will not run.

ROM/RAM BOX OF MANY PARTS

THERE have been a wealth of add-on expansions to accommodate sideways ROMs and sideways RAM for the BBC Micro, so I was not particularly excited when I was asked to look at the HCR external ROM/RAM box.

However as soon as I had unpacked the unit I was impressed by its sturdy manufacture. There are two units: the external ROM box itself, and a small printed circuit board possessing 28way pins underneath and a 28way socket and several chips above.

This board also has a 40way socket and three small sockets attached by flyleads. The pins are all small diameter and will not damage the sockets in the BBC Micro.


Fitting is easy, requiring no soldering. The internal board is fitted into the right hand ROM socket of the BBC Micro with the displaced ROM carried in the socket on top of the new board.

The 6502A CPU chip is removed and the 40 pin socket inserted with the 6502A remounted piggyback. Finally the two twin sockets are attached to the links at S21.

The ribbon cable is then routed backwards out through the ventilation slot at the rear of the micro, being long enough to allow the external ROM box to be placed on either side. The other connection required is a mains supply to the box.

The main unit is of steel with a hinged lid and contains the power supply and one or two expansion cards. Each card will support 12 16k ROMs or their equivalent.

The wealth of options supported includes the substitution of four 8k ROMs for two of the 16k positions, and

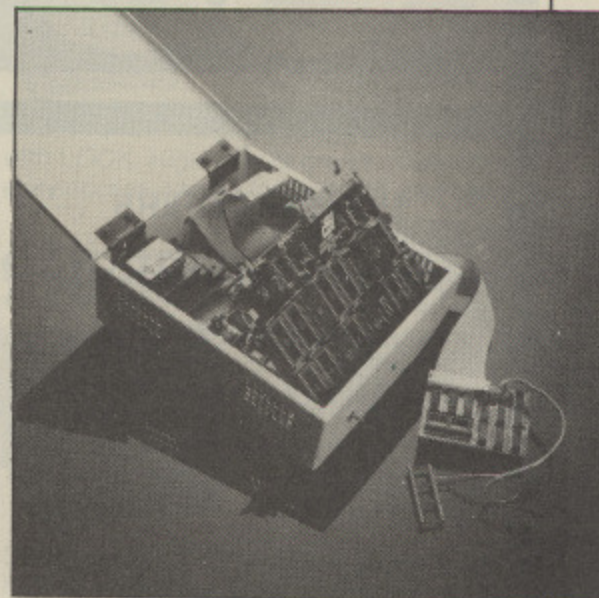

the insertion of up to 16k of CMOS RAM. This RAM can be in 6264 or 6116 format, although the latter uses eight sockets so that only four additional ROMs are available on the same card. Each card has 13 links which must be set. The fitting instructions explain which links must be set for the various options, the text concerned occupying a side of A4 typing.

One disappointment encountered was the lack of space for mounting zero insertion force sockets on the cards. A write protect switch is mounted on the front of the box.

In use the HCR box is delightful, being almost completely transparent to the micro. Switching between upper and lower cards is achieved by poking &D000 or &C000 with 0 followed by Break.

Unfortunately the ROMLink series of ROMs from Computer Concepts appear to poke these locations when importing data from one chip to another, thereby providing a hang-up.

One experiment I was determined to try was to switch on the micro without the ROMbox mains supply on.

Contrary to expectations this does not result in a hang-up, the micro only recognising the ROMs physically sited within its own case, including the one piggybacked on the internal part of the expansion system.

Although priced at over £100 in the two-board configuration, I think the HCR external ROMbox is the most versatile I have yet seen, supporting the equivalent of 28 16k ROMs although 24 are in two banks of 12.

Ian Whitmore



GRIFFEN COMPUTERS

CASTLE WALK, LOWER STREET,
STANSTED, ESSEX CM24 8LP

TEL. 0279 812295



SPECIAL OFFERS

HITACHI 27128 16K EPROM £2.95 (a)

HITACHI 2764 8K EPROM £2.30 (a)

HITACHI 6264LP-15 RAM £3.75 (a)

INTEL 8271 CONTROLLER £43.95 (a)

ACORN DNFS KIT £68.95 (b)

ACORN 8271 DFS0.9 £48.95 (b)

Unlabelled discs - box of 10
80tr d/s 96tpi £11.95 (b)

ACORN 1770 DFS UPGRADE KIT

Kit comes complete with daughter board, chip set and software. Enables ADFS to be fitted. Includes many new commands e.g. *FORM *ROMS *FREE *MAP etc.

£48.95(b)

ACORN ADFS UPGRADE

A rom upgrade allowing unlimited file names and hierarchical directory structure. Treats each drive as one side increasing capacity to 1.28 Mbytes on dual 80tr d/s drives.

£28.95 (a)

VIEW - Version 2.1 of Acorns word-processor. Allows 80 column editing, printing direct from memory etc. £47.95 (b)

VIEW PRINTER DRIVER GENERATOR - Allows you to tailor a printer driver to your own printer. Comes with drivers for FX80, Juki 6100, Olivetti JP101 and others.

Disc - £11.00 (a)
Cassette - £9.50 (a)

VIEW 3.0 - A version of View suitable for the BBC+. Comes with a cassette version of the Printer Driver Generator. £73.95 (c)

HI-VIEW - A disc based version of this popular word processor for the 6502 second processor giving 47k of user memory. £44.95 (b)

VIEWSHEET - Acorns spreadsheet rom giving 255 rows by 255 columns, multiple windows, works in any mode, wide use of function keys, fully compatible with View. £47.95 (b)

VIEWSTORE - Acorns new database new database rom. Works in any screen mode, many powerful sorting facilities, can be spreadsheet or user defined card layout. Max record size is 60k. Output can be sent to View and Viewsheets. Comes with comprehensive manual, utilities disc etc. £50.95 (b)

GRAPHICS ROM - Acorns new 16k graphics rom giving many new commands for extensive graphics. Circles, ellipses, arcs, rectangles, parallelograms, segments and sectors etc are all

available. Comes with manual and utility cassette.

State B or B+ version. £25.95 (b)

BASIC EDITOR - Acorns new editor rom allowing all the normal wordprocessor facilities to be used on basic programs. Features include block copy, block move and use of labels. £28.95 (b)

TERMULATOR - A terminal emulation rom. Emulations provided are VT100, VT52, 4010, teletype, hardcopy and a special BBC terminal. Comes with user guide and a set of function key strips. £31.95 (b)

ISO-PASCAL - A full implementation of the ISO standard supplied on two roms with two comprehensive guides. 6502 disc version also supplied. £52.95 (d)

ISO-PASCAL STAND ALONE GENERATOR - For use with the Acornsoft ISO Pascal Language. Allows stand alone programs to be generated for use with the BBC and Electron computer. £31.95 (b)

LOGO - A full implementation of the Logo language supplied on two roms. Comes with manuals, user guide, examples disc and reference card. £52.95 (d)

COMAL - A full implementation of the International Standard for Comal. Comes with comprehensive manual. £44.95 (d)

MICRO PROLOG - Logic programming language on the BBC Micro. £69.95 (c)

BBC MASTER SERIES 128 NOW AVAILABLE - £489 £6 SECURICOR DELIVERY

INTERSHEET - The first of the ROM-LINK integrated rom packages from Computer Concepts. Menu driven, 40/80/105 column display, very fast, can be used with View or Wordwise, up to 16 spreadsheet in memory at one time. Supplied on two roms with reference manual, function key strip and quick reference card. £47.95 (b)

INTERCHART - The second ROM-LINK package and designed for Inter-sheet giving Bar, Pie and Line graphs. £30.95 (b)

ACCELERATOR - The most comprehensive compiler yet for the BBC micro. Compiles nearly all Basic, including floating point arithmetic. Compiles to intermediate G-code or to machine code. Comes on two roms with manual, disc and quick reference card. £57.95 (b)

WORDWISE - The standard BBC word processor still very popular allowing all normal features for low cost. £35.45 (b)

WORDWISE-PLUS - The new 16k version of Wordwise giving added commands for better use. Using its own language mail merging, indexing, continuous processing and multi column text can be utilised. £44.95 (c)

SPEECH ROM - Using the Phoneme system this allows infinite speech. Both pitch and emphasis can be changed and if wanted it can also sing. Requires the Acorn Speech Processor. £27.95 (b)

PRINTMASTER - This rom allows Epson or Star printers to be fully utilised easily. Includes a versatile screen dump, enlarged text, various text manipulation commands. £27.50 (b)

DISC DOCTOR - Still a very popular disc utility rom giving many extra commands to any DFS. £27.50 (b)

GRAPHICS ROM - Computer Concepts graphics rom giving many new graphics commands including Sprites and Turtle graphics. £25.00 (b)

BROM - A basic utility rom which includes one of the best basic editors available giving true screen scrolling. Extended error handling which uses the editor, rom management, many useful features. A very good toolkit rom. £26.95 (b)

BETABASE - A very useful database program allowing up to 65000 records to be held. Many features include versatile printing, powerful sorting routines, outputs can be compatible with wordwise or View. £21.95 (b)

BETABASE UTILITIES - Adds many more features to Betabase including full disc sort, mail merging and many more. £11.00 (b)

REPLICA III - Now enhanced to transfer even more of your tapes to disc. Now uses a data disc so you need only buy one! Even works on the BBC Plus. £13.95 (b)

BETA-ACCOUNTS - The first of this integrated suite of programs allows Invoices and Delivery notes to be issue. 80 Column editing, sales ledger sheet automatically generated, multiple VAT rates. Can be used with Betabase. £21.95 (b)

PROFILE - A procedure library allowing up to 100 procedures on a disc, easy merging of procedures with basic programs. £11.00 (b)

FONTWISE - A new font program allowing up to ten different fonts to be used with Wordwise or ascii text using an Epson compatible printer. £11.00 (b)

WORDEASE - A utility disc for Wordwise-plus giving many new features to this best-selling wordprocessor. Includes label printing, disc menus, versatile copy routines etc.

ROM £27.50 (b) DICS £18.95 (b)

SLEUTH - A comprehensive basic debugging rom. It allows single stepping of basic programs, dual screen facility, breakpoints etc. £26.25 (b)

EXMON II - A very advanced machine code monitor which now includes dual screen facility and a full screen memory editor. Also includes single stepping and breakpoints. B/E £26.25 (b)

HELP II - Now extended to 16k, contains ALL Basic keywords, ALL VDU codes, ALL FX codes. £29.95 (b)

SPELLCHECK III - Now even better. 2000 words held in rom, dictionary can contain up to 17000 words on a 100k disc. Much faster than before. Test timings give 2000 wpm. £34.95 (b)

ICON MASTER - Easy to use Icon design utility. Icons can be used from within your own programs and are compatible with AMX mouse and AMX Icons. £31.95 (b)

DUMPMASTER - A new extended printer dump rom, now supporting more printers than ever. Extra rom utilities include windows and vertical dumps. Rom £28.95 (b)
Disc £13.95 (b)

STUDIO 8 - A music program giving a 4 voice synthesiser, an 8 track digital recorder also rhythm and drum facilities. £19.95 (b)

TOOLKIT PLUS - An updated version of the popular Toolkit rom including a syntax checker and a full screen editor comparable to any other available. £36.95 (b)

ADVANCED DISC TOOLKIT - Probably the most compatible toolkit rom available. It works with the Electron, BBC B, BBC B+, BBC Master Series, 6502, Z80, DFS, DNFS, 1770 DFS, ADFS. It adds more than 30 extra commands to the BBC. £33.00 (b)

MASTERFILE II £17.50 (b)

ADCOMM £24.95 (b)

FLOPPY WISE PLUS £28.95 (b)

A.T.P.L. ROM EXPANSION BOARD £37.95 (b)

MLC MINI ROM BOARD £13.95 (b)

ALL PRICES INCLUDE V.A.T. at 15%

Dealer enquiries welcome

Educational orders welcome


All orders are despatched within 24 hours, stock allowing by 1st-class letter post.

Postage rates - (a) 50p (b) 75p (c) £1.25 (d) £2.00



B/E=BBC/Electron

See us on Prestel - Page 60043754



MICRO MEDIA Computer Supplies

0707 52698 or 0707 50913 Rydal Mount, Baker Street, Potters Bar, Herts EN6 2BP

UNBRANDED 5 1/4" DISCS

Lifetime warranty - hub rings - envelopes
- labels - write protect tabs.

PRICES PER BOX OF 10	1 Box	2 Bxs	3 Bxs
TPI Tracks			
SS/DD 48 40	8.40	8.00	7.70
DS/DD 48 40	9.60	9.30	9.00
DS/DD 96 80	13.50	13.10	12.70

3M LIFETIME GUARANTEE

SS/DD 48 40	13.96	13.48	12.30
DS/DD 48 40	18.96	18.22	16.57
SS/DD 96 80	21.65	20.78	18.57
DS/DD 96 80	24.87	24.00	21.43

VERBATIM DATALIFE

SS/DD 48 40	14.28	13.75	12.85
DS/DD 48 40	19.10	18.45	17.30
SS/DD 96 80	20.30	19.41	18.50
DS/DD 96 80	25.30	24.00	21.58

NASHUA 5 YEAR GUARANTEE

SS/DD 48 40	11.85	11.40	11.00
DS/DD 48 40	14.75	14.50	14.15
SS/DD 96 80	17.50	16.45	15.00
DS/DD 96 80	19.20	18.05	17.00

CUMANA

DS/DD 96 80	19.40	18.20	16.90
-------------	-------	-------	-------

Packed in SEE 10 library box.

DISC CARE

5 1/4" Head Cleaning Disk with 15ml cleaning solution	5.88	5.57	5.25
---	------	------	------

DISC MAILERS

	Price each	10	50	100
Rigid Cardboard				
Holds up to 3 discs	40p	30p	20p	

COMPUTER LISTING PAPER

All paper plain, fanfold with micro perf edges (except *)

Size	Weight gsm	Boxed Sheets	Price per box		
			1 Box	2 Bxs	3 Bxs
11 x 8 1/2"	60	2000	13.50	11.82	11.00
11 x 9 1/2"	60	2000	14.40	12.85	11.90
	60	1000	8.55	7.70	6.90
	80	2000	17.90	14.90	14.10
	80	1000	10.30	8.90	8.00
12 x 9 1/4"	60	2000	15.30	13.40	12.60
	60	1000	8.90	8.10	7.20
	80	2000	18.50	15.90	15.00
	80	1000	10.75	9.30	8.40
EXACT A4	70	2000	21.50	19.00	17.70
1 1/2 x 9 1/4"	90	1000	13.70	12.00	11.00
EXACT A4 suitable for Fixed Tractor Feed					
1 1/2 x 9 1/2"	80	1000	16.75	14.90	13.50
	100	1000	25.50	23.20	21.30

COMPUTER LABELS

Continuous fanfold sprocket fed labels	Price per 1000		
	1,000	2,000	3,000
70 x 36	5.20	4.70	4.25
89 x 36	5.80	5.30	4.80
89 x 49	7.80	7.10	6.40
102 x 36	6.10	5.50	5.00

Please state no of labels across sheets (1 2 or 3)

LABELS ON 9 1/2" BACKING SHEET FOR FIXED TRACTOR

89 x 36	6.60
89 x 49	8.60
102 x 36	6.70

Also suitable 70 x 36 3 across

PRINTER RIBBONS

Price each per ribbon	1	3+	6+
ACORN AP 80	3.65	3.35	3.10
AP100	3.65	3.35	3.10
BROTHER HR 5	3.00	2.80	2.50
EP 44	2.40	2.20	2.00
M 1009	4.00	3.70	3.40
HR 15 M/S	3.90	3.60	3.30
HR Fabric	3.90	3.60	3.30
CANON PW 1156A/1080	5.40	4.90	4.50
CANON Red Brown Blue	6.40	5.80	5.30
CENTRONICS G.L.P.	4.00	3.70	3.40
C. ITOH 8510/8510A	4.00	3.65	3.35
DAISYSTEP 2000 M/S	3.45	3.10	2.80
2000 Fabric	4.90	4.50	4.10
EPSON FX/MX/RX 80	3.50	3.25	3.00
Red Blue Brown	4.60	4.25	3.85
LX 80	3.80	3.45	3.10
LQ 1500	4.75	4.40	4.00
JUKI 6100 Multi-Strike	2.85	2.65	2.45
6100 Single Strike	1.70	1.55	1.40
2200 Fabric	3.50	3.35	3.10
2200 Single Strike	3.00	2.75	2.65
2200 Correctable	3.30	3.05	2.80
KAGA KP810/910	5.40	4.90	4.50
Red Blue Brown	6.40	5.80	5.30
M/TALLY MT 80	4.55	4.20	3.85
MT 85	6.30	5.90	5.50
100/110/120/160	5.25	4.85	4.40
130/140/180	5.30	4.95	4.60
NEC PC 8023	4.00	3.65	3.35
OKI MICROLINE 80/82/83	1.70	1.60	1.45
182	9.65	9.00	8.40
PANASONIC KPX 110	10.60	9.90	9.35
QUENDATA 2000 MS	3.45	3.10	2.80
2000 Fabric	4.90	4.50	4.10
SEIKOSHA GP 80	3.65	3.35	3.10
GP 100/250	3.65	3.35	3.10
GP 500	4.40	4.10	3.80
SHINWA CP 80 M/S	4.55	4.20	3.85
SILVER REED EXP500 MS	4.50	4.25	3.95
Fabric	4.10	3.80	3.50
SMITH CORONA			
EL 1000/2000 M/S	9.10	8.00	7.50
Fabric	3.50	3.25	3.00
EL1000/2000 Correctable	5.10	4.75	4.40
STAR GEMINI 10x / 15x	1.70	1.60	1.45
RADIX 10	5.95	5.50	5.10
WALTERS WM 80 M/S	4.55	4.20	3.85
WM 80 Fabric	4.60	4.30	3.95


If the ribbon you require is not listed ring 0707 52698 and let us quote

PRINTER LEAD

Centronics lead to connect BBC Micro to Epson Kaga	
Canon etc	1 mtr - 6.50
	2 mtr - 8.50


- Large stocks of all products.
- Educational and HMG orders accepted.
- 24-hour despatch.
- Trade enquiries.
- Quantity discounts available.
- Personal callers welcome.

£12.50 MM 100N
5 1/4 x 100

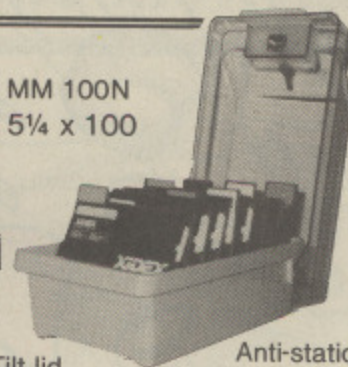

Brown smoked Tilt lid with LOCK. High impact cream plastic base, easy access handle for opening and carrying. Anti-static.

£10.00 MM 70L
5 1/4 x 70



Black smoked plastic Tilt lid with LOCK. High impact black plastic base. Anti-static.

£8.50


MM50L
5 1/4 x 50



Brown smoked Tilt lid with LOCK. High impact cream plastic base, easy access handle for opening and carrying. Anti-static.

£8.00

MM40L
3 1/2 x 40




Black smoked plastic Tilt lid with LOCK. High impact black plastic base. Anti-static.

Rexel
Mini
Disc
Box
30.



£5.60

5 1/4 x 30
Brown smoked Tilt lid.
Cream plastic base



Plastic Library Case
5 1/4 x 10

£1.60



ALL PRICES INCLUSIVE OF POSTAGE & PACKING


Please add VAT at 15%



24-Hour
Credit Card
Orders

0707 52698

MICROMEDIA-MICROMEDIA-MICROMEDIA-MICROMEDIA-

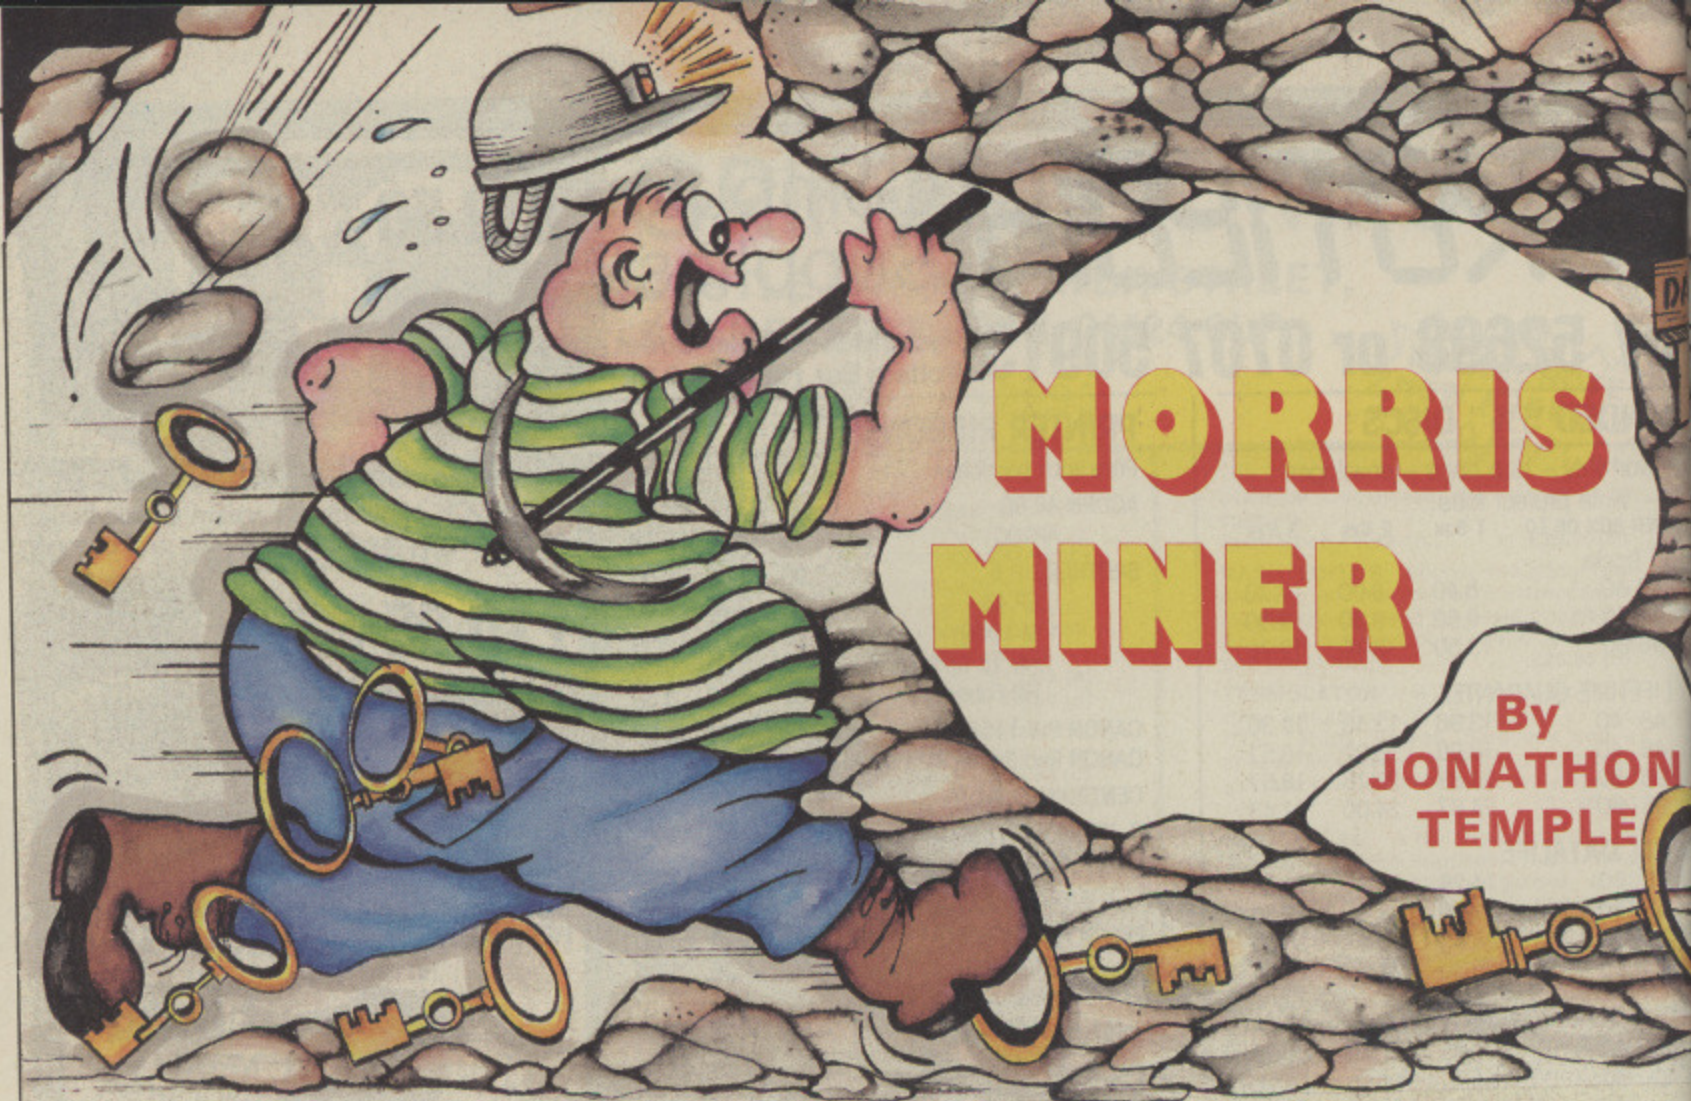

MORRIS MINER

By
**JONATHON
TEMPLE**

TRAPPED inside the deserted uranium mine workings, Morris the Miner must try to collect the 14 keys which will allow him to escape to the outside world.

You can control him using the A, Z, < and > keys, and he can be moved between the seven interlocking screens which make up the mines. However, you must be careful not to let him fall too far – if he does he will die.

On his travels Morris can use the ladders and lifts, but he must avoid the debris which falls from the unstable roof of the mine workings.

The roof is gradually caving in and Morris must escape through the exit before the time limit, shown in bar form at the top of the screen, runs out.

Points are awarded for collecting a key and escaping from the mines successfully – the latter depends on the

amount of time left, the skill level and the number of lives remaining.

Morris can also increase his score by collecting the flashing letters which form the word BONUS – collect them all and a large bonus is given. Points are awarded throughout the game in proportion to the skill level.

There are several skill levels ranging from 1 (difficult) to 5 (easy), which affect the amount of falling debris and the time limit. The skill level can be changed by pressing a key from 1 to 5 while the hi-score is being displayed.

Although written entirely in Basic, the game is fairly fast and requires a lot of careful forethought to complete within the time limit. The integer variables A%-Z% are used extensively to speed the program up and save memory.

The program also makes use of (0,0), v, indirection operators ? and ! to access the data for the interlocking screens at (4,3). the key and bonus letter position. Anyo which are held in a byte array and two-byte arrays respectively. bonus le


Data for the seven screens – line and the 2330 to 2730 – is contained in the Each format number of walls, number number ladders, lift's X and Y positions, lift's X posit and Y directions, followed by blocks must nee three hex numbers which contain the. When positions of the individual walls are add any the line

The first hex digit is the X position the pro the second the Y position and the thi error w the length. The top bit of the length dig is set if the wall is to be vertical rather than horizontal.

So 00009A would be a vertical wall 10 (&A) bricks long at TAB position

VARIABLES

A%,B%	Old X and Y position of man.	Z%	Current number of lives.
C%,D%	Old characters for man.	SCR%	Position in memory of interlocking screen data.
E%	End of game flag.	KS%	Position in memory of key data.
F%	Man falling counter.	BS%	Position in memory of bonus letter data.
G%	Current skill level.	N1%	Number of walls.
H%	Current high score.	N2%	Number of ladders.
J%	Direction man walked off screen.	LS%	Last score.
K%	Number of keys collected.	L1%,L3%	X and Y data position of lift.
L%,M%,N%	General variables.	L2%,L4%	Two horizontal/vertical limits for lift.
P%	Current screen.	IX%,IY%	X and Y directions for lift.
Q%,R%	X and Y position of lift.	T	Time left on time bar.
S%	Current score.	AS,CS,DS	General string variables.
T%,U%	X and Y position of debris.	BS	Current state of BONUS letters.
V%,W%	Characters for man used in animation.	HS	Name of high scorer.
X%,Y%	X and Y position of man.		

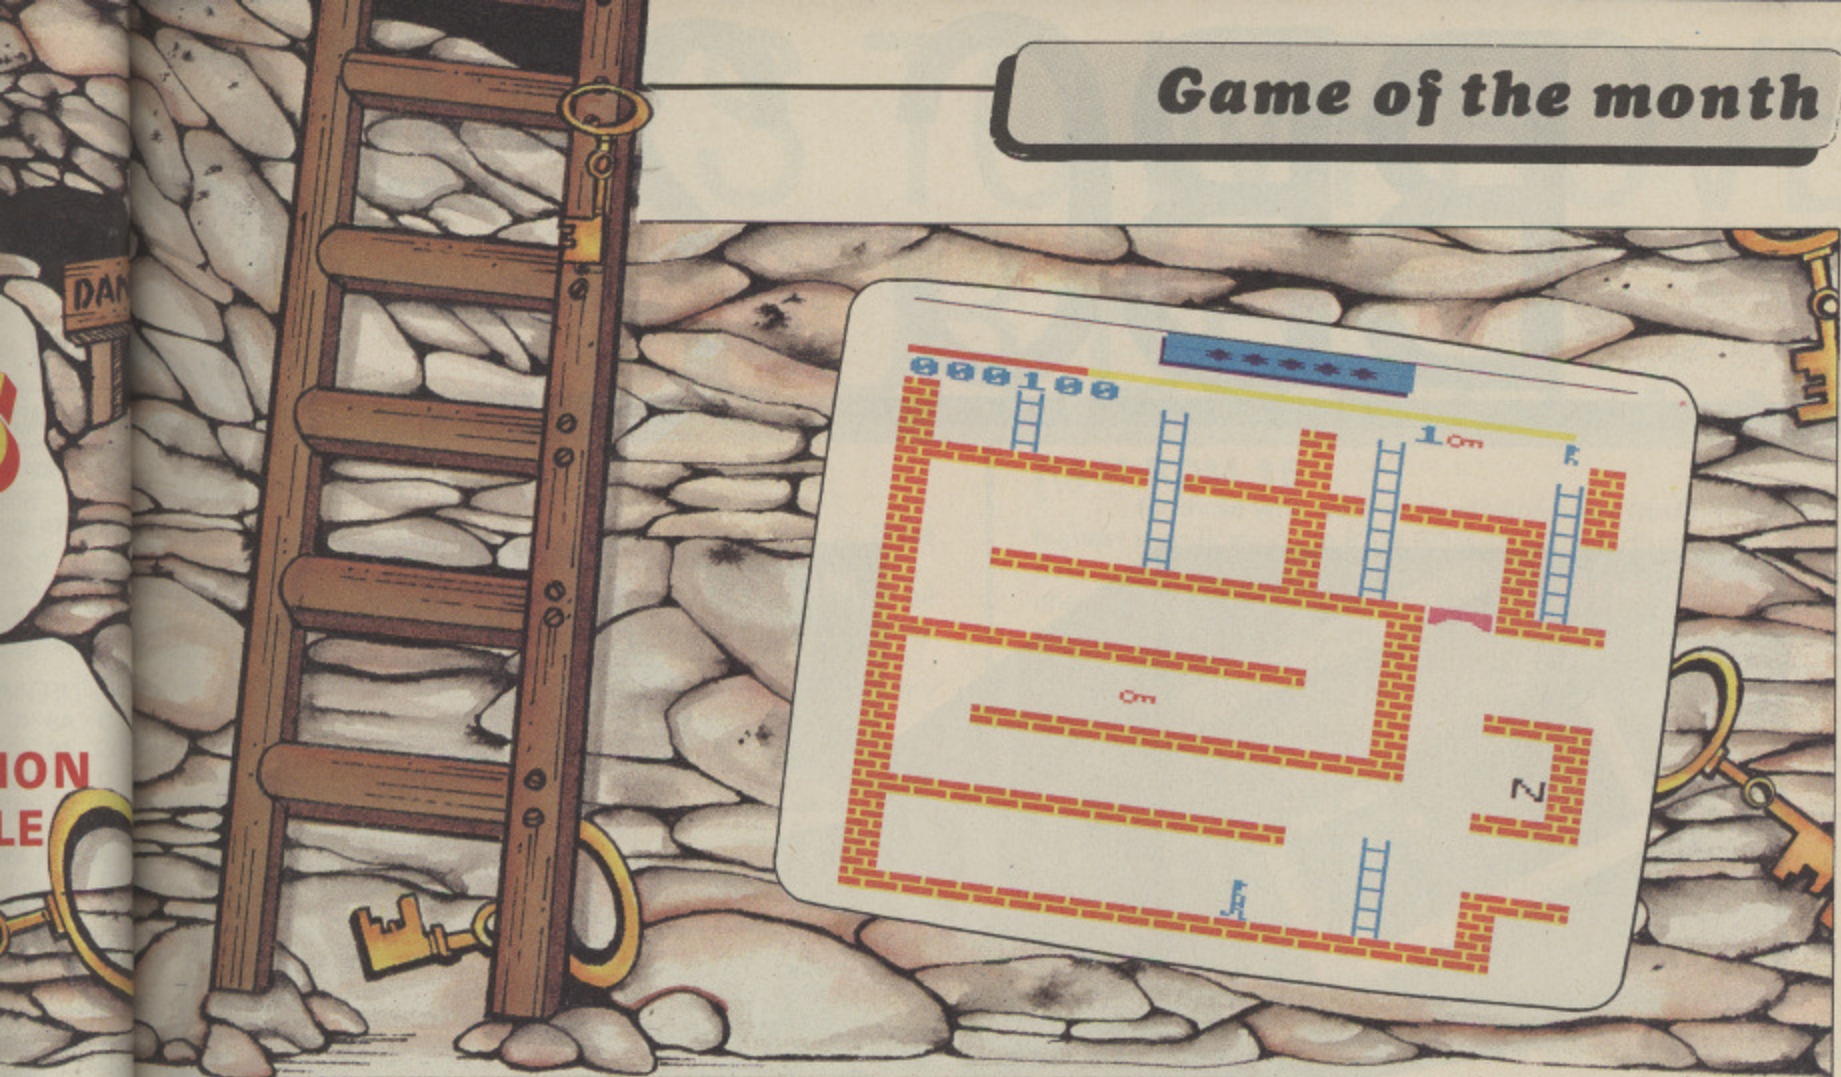

use of the (0,0), while 04030C would be a horizontal wall 12 (&0C) bricks long at (4,3).

Anyone wishing to design their own screens will also have to change the bonus letter data, lines 1650 to 1670, and the keys data, lines 1680 to 1720.

Each bonus letter takes up four number of data in the format *O*, screen, *X* position, *Y* position while each key just needs its *X* and *Y* position.

When entering the program, don't add any extra spaces, nor type any after the line number, otherwise you may find the program ends with a "No room" error when run.

Once you have typed in the program save it! You can test that you have entered all the DATA correctly by adding these lines and running the program:

```
1 RESTORE: CX=0: FOR NX=1 TO 282
2 READ N$: IF ASC N$=45 N$=MID$(N$,
,2)
3 CX=CX+EVAL("&"+N$): NEXT
4 IF CX(>&3FD1F86 PRINT"Typing er
ror somewhere in DATA""Please check
and try again":VDU7
5 END
```

Although not infallible, this routine should inform you of most mistakes. Once this has been done lines 1 to 5 should be deleted.

Disc users must download the program before running it.

Full listing starts on Page 140

FUNCTIONS

ser Returns byte of screen interlocking data.
bs Returns high and low byte of bonus letter data.
ks Returns high and low byte of key data.
dec Returns decimal version of hex number using EVAL.

PROGRAM STRUCTURE

10-50 General initialisation.
60-90 Set up UDG characters, display status screen.
100 Main loop starts.
110 Play loop starts.
120-130 Reset various variables.
140-220 Keep playing until all lives lost.
150 Draws current screen.
160-200 Keep playing until life lost/Morris escaped.
210 Morris dead.
240 Gives appropriate message.
260 Displays status screen.

PROCEDURES

init Initialises variables.
chars Sets up user-defined characters.
envs Sets up sound envelopes.
status Displays high score, skill level and so on.
setvars Sets various variables.
reset Resets various variables.
screen Draws current screen.
man Moves man, decreases time limit.
key Erases key, increases score.
letter Erases letter and adds to B\$, increases score.
new Moves man onto new screen.
debris Moves falling debris.
lift Moves lift.
scores Displays scores.
bonus Prints B\$ inside box.
exit Draws exit if necessary.
killed Decreases lives, then pauses.
message Displays appropriate message.
congrats Plays tune and awards bonus.
high Prompts for input of player's name.
read Reads data up to current screen's.

5 WAYS TO IMPROVE YOUR BBC

3" SINGLE DISC DRIVE

One of the most compact disc drives available today, the 3" Drive features the ingenious dual-sided cartridge style protected disc. The twin sided discs, 100K both sides, are physically protected at all times. The whole unit is very quiet and fast in operation and comes complete with all necessary cables, manual and formatting disc. In its sturdy, BBC colour coded metal case this drive is ideal for many varied uses especially within the educational field.

£86.00 + VAT = £98.90 inc. P. & P.

5 1/4" SINGLE DISC DRIVE

This highly reliable, high performance half height single 5 1/4" disc drive is fully BBC compatible 400K 40/80 Track switchable drive. The drives come complete with all necessary cables, formatting disc and disc drive manual, one year warranty and are supplied in a BBC colour coded metal case. Equally at home alongside or on top of your BBC Micro at £167.85 + VAT = £193.03 inc. P. & P.

5 1/4" DUAL DISC DRIVE

Finished in a metal case the same colour as the BBC, this slim compact dual disc drive, fully BBC compatible, is at home on top of the BBC Micro and is angled to allow easy access to the drive doors. Featuring twin 400K 80 Track drives the unit is also 40/80 Track switchable, the switch being mounted on the front of the unit with LED illumination.

Complete with all necessary cables, formatting disc and disc drive manual and a one year warranty, the complete unit is available at £358.00 + VAT = £411.70 inc. P. & P.

RAM ROM 15

" for those who want an expansion board (RAM/ROM) of the highest specification the RAM ROM 15 will not disappoint". (Acorn User April 1985). The RAM ROM 15 is an external board which allows the use of a maximum 16 sideways ROM sockets plus the necessary hardware for up to 16K of battery backed sideways RAM. With "No Solder" installation, the fully buffered RAM ROM 15 can be optionally powered by an external PSU, thereby virtually eliminating power drain and overheating problems.

RAM ROM 15 is "of the highest specification" but ONLY £89.99 + VAT = £100.79 inc. P. & P.

MONITOR STANDS

These robust metal monitor stands are finished in the same colour as the BBC Micro. They are available in two heights:

The High Stand: Which enables the stand to be used in conjunction with the BBC Micro and disc drive.

The Low Stand: Fits neatly over the BBC Micro on its own.

To tidy up your BBC, Disc Drives and Monitor, these drives are available at:

High Stand £18.00 + VAT = £20.70 inc. P. & P.

Low Stand £16.00 + VAT = £18.40 inc. P. & P.

ALSO AVAILABLE:

ROMEX 13

STARdataBASE

THE CRACKER

COMPONENTS

COMING SOON - NEW PRINTER SHARER/

BUFFER

FOR FURTHER TECHNICAL SPECIFICATIONS RING GCC ON

GCC (Cambridge) Ltd



BBC PRODUCTS AND COMPATIBLE PERIPHERALS

BBC MICROCOMPUTER SYSTEM

BBC MODEL B PLUS	£409.13 + VAT = £469.00
BBC DISC INTERFACE KIT	£82.61 + VAT = £95.00
BBC DISC INTERFACE KIT	
1.2 ROM	£91.30 + VAT = £105.00
BBC A TO B UPGRADE KIT	£60.87 + VAT = £70.00
BBC MEMORY UPGRADE KIT	
(8 x 4816-100NS)	£17.39 + VAT = £20.00

MONOCHROME MONITORS

KAGA AMBER SCREEN	£119.00 + VAT = £136.85
KAGA GREEN SCREEN	£109.00 + VAT = £125.35
B.M.C. GREEN SCREEN	£109.00 + VAT = £125.35

COLOUR MONITORS

KAGA VISION 2	
HIGH RESOLUTION	£285.00 + VAT = £327.85
KAGA VISION 3 SUPER	
HIGH RESOLUTION	£399.00 + VAT = £458.85

DAISY WHEEL PRINTERS

JUKI 6100	£346.95 + VAT = £399.00
JUKI 8300	P.O.A.

DOT MATRIX PRINTERS

EPSON LX80	£220.00 + VAT = £253.00
EPSON FX80	P.O.A.
EPSON FX100	P.O.A.
EPSON LQ1500	£890.00 + VAT = £1,023.50
KAGA KP10 (NLD)	£245.00 + VAT = £281.75
KAGA KP910 (NLD)	£375.00 + VAT = £431.25
STAR SG10	£240.00 + VAT = £276.00
STAR SD10	£326.00 + VAT = £374.90
STAR SG15	£326.00 + VAT = £374.90
STAR SD15	£411.00 + VAT = £472.85
STAR SR15	£495.00 + VAT = £569.25
STAR SG10C	£190.00 + VAT = £218.50
CITIZEN MSP10	£355.50 + VAT = £408.83
CITIZEN MSP15	£450.00 + VAT = £517.50
CITIZEN MSP20	£499.50 + VAT = £574.43
CITIZEN MSP25	£630.00 + VAT = £724.50

BBC FIRMWARE

GRAPHICS ROM	£29.00 + VAT = £33.35
DISC DOCTOR	£29.00 + VAT = £33.35
GREMLIN	£29.00 + VAT = £33.35
TERMI	£29.00 + VAT = £33.35
PRINT MASTER	£29.00 + VAT = £33.35
PASCAL	£59.00 + VAT = £67.85
FORTH	£34.72 + VAT = £39.93
VIEW	£52.00 + VAT = £59.80
WORDWISE PLUS	£49.00 + VAT = £56.35
BEEBASE	£35.00 + VAT = £40.25

BBC ACCESSORIES

STARdataBASE	£65.22 + VAT = £75.00
CRACKER	£62.50 + VAT = £71.88

SINGLE 400K 5 1/4" DISK DRIVE

40/80T SWITCHABLE	£170.00 + VAT = £195.50
DUAL 800K 5 1/4" DISC DRIVE 40/80T SWITCHABLE	
+ P.S.U.	£350.00 + VAT = £402.50
SINGLE 3" DISC DRIVE	£55.00 + VAT = £63.25
LOW MONITOR STAND	£14.00 + VAT = £16.10
HIGH MONITOR STAND	£16.00 + VAT = £18.40
6116 (2K)	P.O.A.
6264 (8K)	P.O.A.
TEXTTOOL	£6.00 + VAT = £6.90
G.C.C. NIF	£4.00 + VAT = £4.60
ULTRACALC	£69.13 + VAT = £79.50
R.G.B. MONITOR LEADS	£6.04 + VAT = £6.95
MONO MONITOR LEADS	£3.48 + VAT = £4.00
BBC PRINTER CABLES	£8.33 + VAT = £9.57
BOX LISTING PAPER	£18.00 + VAT = £18.40
ALL IC'S AVAILABLE FOR BBC	P.O.A.



TRADE ENQUIRIES WELCOME



GCC (Cambridge) Limited
66 High Street, Sawston,
Cambridge CB2 4BG
Telex: 81594 SAWCOM


0223-835330/834641

New from Pace

Nightingale Accessory Board

This new accessory for Nightingale offers three new facilities on a single card. The auto-dialler now means that you can dial any number without using the telephone. Software designed for use with Commstar will dial a specified number or sequence of numbers once or more until a connection is established, each call being optionally monitored through a loud speaker. Any number of directories can be created and for each telephone number in a directory you may specify a series of attributes which allow Commstar to configure itself automatically for that particular system. Nothing could be easier. Any baud rate may be configured under software control including two new operating speeds 1200 and 600 half duplex which were not previously available. Finally, if you hope to set up your own database or bulletin board, the accessory board includes auto-answering, Nightingale and accessory board, a complete solution.

Accessory Board £49 plus VAT
Dialing Software £10 plus VAT

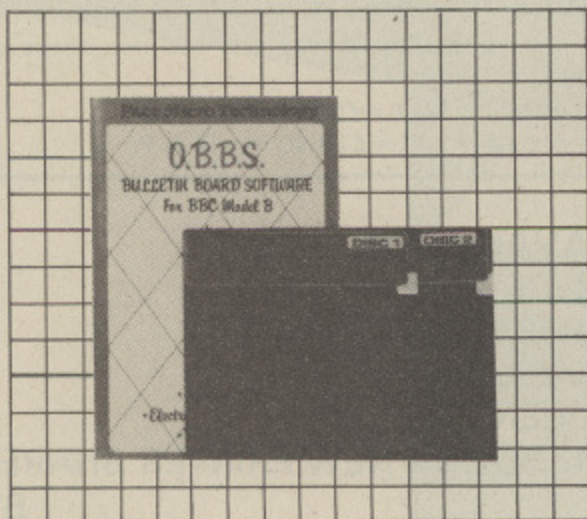

OBBS Colour Bulletin Board Software

Transform your BBC Micro into a unique bulletin board, be your own sysop. If you already own a Nightingale modem fitted with the accessory board or indeed if you intend buying this combination, with OBBS coloured Bulletin Board Software, you can run your own bulletin board. The entry level system includes many features normally only found on systems costing ten times as much. Full message searching and XMODEM uploading and downloading of software are provided along with unique colour teletext graphics and text facility.

£21 plus VAT


Independent Power Supply

We have designed this Independent Power Supply for those of you who use disc drives powered from the BBC power supply and are concerned that with the addition of Sideways ROM boards etc., the psu is being overloaded. The Pace independent power supply unit plugs directly into the mains and has four power output sockets of the type used on the BBC. This means that you can plug your unpowered disc drives, buggies etc., directly into this unit thus removing the strain from the BBC power supply.

Technically speaking, the Pace Independent PSU takes 240V AC mains and gives out regulated +5V & +12V DC ($\pm 2\%$) and 0V power through 4 parallel sockets. These sockets are of the same type as provided at the Auxilliary power output socket of the BBC microcomputer. Push connectors are also provided for all three voltage levels.

The unit is capable of supplying two single disc drives or one dual disc drive plus one or two other devices, such as Eprom programmers, which draw less current. The maximum current available is approximately 1.5A @ +5V and 1.2A @ +12V.

£39 plus VAT

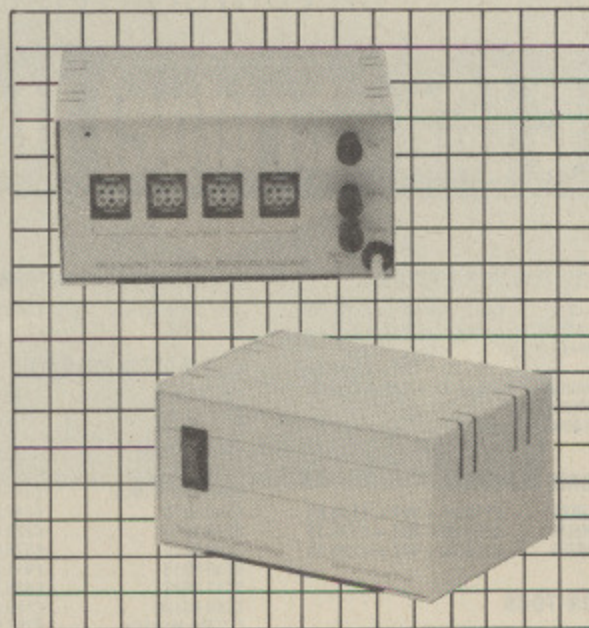

All the above are available from good quality dealers throughout the country or direct from Pace. Payment accepted by cheque, Access or Visa.

Pace Micro Technology Ltd.

Juniper View, Allerton Road, Bradford BD15 7AG.
Tel. 0274 488211 Telex 51564

Telecom Gold mailbox No. PCE 001 Prestel Mailbox No. 274729306



SO far we have had a look at binary numbers, the sort the micro uses. As we saw, a binary number consists of a lot of 0s and 1s together, each 1 or 0 being known as a bit.

These bits normally come in groups of eight at a time, called bytes. %10101100 is a typical binary number. Notice the % sign at the front - to distinguish it from our normal numbers.

After all, we don't want anyone mistaking it for ten million, one hundred and one thousand or one hundred, do we?

But how do we interpret it? Well, the values meant by the 1s and 0s depend on the column they're in. We're used to this from the old htu (hundreds, tens and units) days of primary school. A 1 in the tens' column meant "one ten", whereas a one in the hundreds' column meant "one hundred". So:

h t u
1 0 0

was very different from:

h t u
1 0

It's much the same in binary. Every column has its value. Figure I shows these values for each column of a byte. Notice how the first column is column 0 - micros start counting at 0.

To arrive at the value of a binary number, you just add together the values of the columns containing ones. Figure II shows how the %10101100 above translates into 172.

Once you get the knack, binary numbers are quite easy to handle. However one drawback to using binary from a human's point of view is that it's extremely easy to make mistakes with it. All those 1s and 0s can be very confusing, and you can end up writing:

%10110101

when you mean:

%10101101

It can be very difficult to spot where

Column number	7	6	5	4	3	2	1	0
Value	128	64	32	16	8	4	2	1

Figure I: Binary column values

Value	128	64	32	16	8	4	2	1
Bit	1	0	1	0	1	1	0	0
=	128	+	32	+	8	+	4	
=	172							

Figure II: Translating binary

A spell with hex, then let's get that first machine code program running

MIKE BIBBY
helps make sense
of machine code

you've gone wrong.

When I deal with binary I always split the bits up into groups of four by putting a wiggly line down the middle. For example, I would write %10110101 as:

%1011|0101

It's far easier for my eyes to see the pattern of the two sets of four than the whole eight at once.

These sets of four are called nybbles. The left hand nybble, which contains the larger column values, is called the most significant nybble (MSN). The right hand one is called, not surprisingly, the least significant nybble (LSN).

Figure III shows what goes on with the least significant nybble:

Column	3	2	1	0
Value	8	4	2	1

Figure III: LSN values

I think that you'll immediately see

that the biggest number it can hold is 15, when all the bits are 1. And, of course, the smallest number is 0. Figure IV shows all the patterns.

nybble pattern	value
0000	0
0001	1
0010	2
0011	3
0100	4
0101	5
0110	6
0111	7
1000	8
1001	9
1010	10
1011	11
1100	12
1101	13
1110	14
1111	15

Figure IV: Nybble patterns plus values

You've probably thought to yourself, "So what? Why should I write %1111 when it's easier to write 15?"

And you've got a point. In fact we're going to make it easier than that - we're going to give each of our nybble patterns a code, consisting of a single character.

- The code for %0000 will be 0
- The code for %0001 will be 1
- The code for %0010 will be 2

Yes, you've guessed it, the code is the value of the pattern! So the code for %1001 will be 9.

But what about when we come to %1010? This has the value 10, but we

From Page 65

can't use that for the code, since we can only use one digit.

All right then, it's our code, so let's decree that we use A as the code for %1010. Okay, I know it's really 10, and you know it's really 10, but our rule says only one character in the code, so A it is.

You won't be surprised to learn that %1011, which has value 11, will have code B, %1100, which has value 12, has code C, and so on up to %1111, value 15, which has code F.


Figure V shows all the nybble patterns, this time with their code and values.

What we've really done is to invent a rule that says, instead of counting 1, 2, 3... 9, 10, 11, 12, 13, 14, 15 we count 1, 2, 3... 9, A, B, C, D, E, F.

For the moment, ignore what happens when we get to 16.


Of course the micro deals in bytes, but we can use our new code for these, too. After all, the most significant nybble is a pattern of four bytes, just like the least significant nybble, so all we do is code each nybble separately, but in the same manner.

Here's how:



If you look back to Figure II you'll see that %10101100 is 172, so AC is really another way of coding 172. To show that AC is really a number coded in our new way, we'd better prefix it with &, as we did with % for binary coding.

Here's another example:



Here %10000011 is 131, and coded in our new way this is &83. Notice how vital the & is. If we didn't have it we would mean 83 in our ordinary system of numbering (called denary) - that is, 8 tens and 3 units - and not 131 as we had intended.

So, with this new method of coding you can code any byte in two characters, one for each nybble. For example, 255 would be &FF. See if you can work out why.

This form of coding is called

hexadecimal - hex for short. You'll understand why in a minute.

Just as each column has a value in binary coding, so each has a value in hexadecimal. let's see what they are.

The binary for 15 is:

%00001111 → hexadecimal &0F

The binary for 16 is:

%00010000 → hexadecimal &10

What's going on? Well, to obtain 16

nybble pattern	code	value
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	8
1001	9	9
1010	A	10
1011	B	11
1100	C	12
1101	D	13
1110	E	14
1111	F	15

Figure V: Nybble patterns plus codes

from 15, we have to add one, so our hex sum is

$$\begin{array}{r} \text{\&0F} + \\ \text{\&01} \\ \hline \text{\&10} \end{array}$$

What's happening is that we "put 0 down, carry one" when we get to 16. In normal sums we do this when we get to 10 - and the 1 goes in the tens column.

In hexadecimal we carry when we get to 16 - each unit in the second column is worth 16.

That's why I said don't worry about what happens when we get to 16. When we get there, we carry.

This, incidentally, is why it's called hexadecimal - the hex is for six, the decimal for ten - hexadecimal, the number code based on sixteen.

This means that:

&10 is 1 sixteen + 0 units = 16
 &17 is 1 sixteen + 7 units = 23
 &1B is 1 sixteen + 11 units = 27
 &20 is 2 sixteens + 0 units = 32
 &3C is 3 sixteens + 12 units = 60
 &A3 is 10 sixteens + 3 units = 163
 and so on...

That 16s column can present you

Hex Digit	Value in 16's column	Value in 1's column
0	0	0
1	16	1
2	32	2
3	48	3
4	64	4
5	80	5
6	96	6
7	112	7
8	128	8
9	144	9
A	160	10
B	176	11
C	192	12
D	208	13
E	224	14
F	240	15

Figure VI: Hexadecimal Ready Reckoner

with some hard sums, so Figure provides a sort of ready reckoner you, telling you the value of a hex for each column.

Fine, we can now write the value byte as a two digit hexadecimal number. This, however, is limited to a maximum of &FF, or 255.

As we saw last time we need larger numbers than this to specify the memory locations the 6502 address.

What we did was to specify a memory address with two bytes, two digits to a byte, so we can specify any address with 4 digits instead of cumbersome 16 bits we used last time.

Figure VII shows how it works.

Just as in binary, we kept doubling our column values, so in hex we kept multiplying by 16. Hence the following values apply:

Column 1	1 = 1
Column 2	1 × 16 = 16
Column 3	16 × 16 = 256
Column 4	256 × 16 = 4096

This is quite sensible when you think about it. If the low byte were &FF (255) that is, as big as a single byte can be and we added one, we'd have to somehow that we'd arrived at 256.

We can do this by adding a one to the first column of the high byte (which

Column	high byte	low byte
Number	3 2	1
Value	4096 256	16

Figure VII: Four digit hex column values

Value in
1's column
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

worth 256) and setting the low byte to &00 – in other words, put 0 down and carry 1.

The sums might get a bit hard if your mental arithmetic's a bit rusty, but you can translate from four digit hex addresses quite straightforwardly.

For instance:

$&0202 = 2 \times 256 + 2$	$= 514$
$&1A10 = 1 \times 4096 + 10 \times 256 + 1 \times 16$	$= 6672$
$&FFFF = 15 \times 4096 + 15 \times 256 + 15 \times 16 + 15 \times 1$	$= 65535$

If you want to translate from our normal numbering system, denary, to and from hex, the BBC Micro makes it easy for you. To see the hex equivalent of the denary 6672, enter:

```
PRINT *6672
```

and you'll see displayed 1A10 (regrettably without the &). The special character ~ (a tilde) indicates that the result should be given in hex.

To convert back to decimal we enter:

```
PRINT &1A10
```

and you'll see:

```
6672
```

The ampersand, &, tells the BBC Micro that the number following it is in hex. If you omit the & the micro assumes the number is in denary. See what happens when the & is missed from the previous example.

```
PRINT 1A10
```

The error is produced because A is not a valid decimal digit.

What do you think will happen if you enter the line below?

```
PRINT *&1C45
```

Surprised? You shouldn't be. All you've done is asked the micro to print the hex value of the hex number &1C45.

Unfortunately, the BBC Micro isn't as useful at translating to and from binary. But don't worry, most of the time you'll be working in hex and denary.

Anyway, enough of this number theory. Let's do some machine code.

We have already discovered that machine code is a sequence of bytes in memory that gives the micro certain tasks. All you do is point the micro at the first byte of the machine code and say go.

That gives us three problems.

First of all, we have to decide where in memory to put our machine code.

Secondly, we have to actually put the correct sequence of bytes into those memory locations.

Thirdly, we have to tell the micro to go and do the machine code instructions.

Finding a safe place to store our program is rather tricky. Several free areas exist below PAGE, but using them can produce side effects.

For example, pages &B (&B00-&BFF) and &C (&C00-&CFF) contain the soft key and character definitions. If we use either of these areas at all we run the risk of destroying the definitions held there.

For the moment we will store our programs starting at &900. This is a fairly safe position for simple programs.

Now that we've found a convenient place for our program we must solve problem two – how to enter the correct series of bytes into memory.

One way is to poke the bytes directly into memory using the query operator, ?. But before we can do this we must find out the instruction bytes for the task we wish to perform. Let's suppose we're going to enter and execute the following simple program which displays a letter A on the screen:

mnemonics	instruction bytes
LDA #&41	A9 41
STA &7D00	8D 00 7D
RTS	60

The left hand side shows the mnemonics for the program instructions we're using. These make it easier to understand the "flow" of the program. To the right are the instruction bytes which consist of the opcode followed by relevant data bytes – the 6502s actual code for the mnemonics.

Let's look at what our program does by examining each of the instructions in turn.

LDA #&41: Loads the Accumulator with the hex number &41 – the Ascii code of A. In Basic this is something like:

```
LET A=&41
```

STA &7D00: Stores the Accumulator in location &7D00. If you don't know already location &7D00 is part of the Mode 7 screen. When a number is poked into the screen memory the corresponding Ascii character appears on the screen. This is not the case in Modes 0 to 6, however.

The Basic query operator does the same thing as instructions such as STA. Thus in Basic we would use:

```
?&7D00=A
```

Notice that the data bytes representing the low and high bytes of the

PROBLEM

I HAVE a BBC Micro with Solidisk 1.9 DDFS and a Mitsubishi 4853 80 track drive. I wish to replace the Solidisk DDFS with an Acorn DFS, but wish to retain the Mitsubishi drive.

At present the Solidisk DDFS senses automatically whether the disc in the drive is 40 or 80 track and acts accordingly. Would it be possible to incorporate a switch on the disc drive to change from 40 to 80 track when used with the Acorn DFS?

If so, could you please indicate how to wire it. I have tested the disc drive on another BBC B fitted with Acorn DFS and it works OK with a 40 track disc. – E.L. Firth, Pickering.

SOLVED

I assume your drives are 80 track and the DDFS was double stepped. There is no reason why the drives will not work with the Acorn system.

However if you want to read 40 track discs you will need either the Watford DFS which will allow you to switch in software or else my disc drive switcher (Body Build, October 1985) which will do the same in hardware allowing you to use the Acorn DFS.

Mike Cook

low byte
1 0
16 1

mn values

From Page 67

location being "poked" (&7D00) are in reverse order. This is why &7D00 is stored as &00 followed by &7D. You'll find that all low and high bytes are stored in this way.

RTS: Causes the 6502 to return from whence it came. It's just like the Basic instruction RETURN or ENDPROC which cause the program to continue executing from the place it was called from.

The final Basic version of the machine code routine is:

```
10 LET A=&41
20 ?&7D00=A
30 RETURN
```

Since both the machine code program and it's Basic equivalent are subroutines they must be executed as subroutines. Thus we use GOSUB 10 to RUN our Basic version.

The next program demonstrates how

our machine code program can be poked into memory:

```
10 MODE 7
20 mcode=&900
30 ?(mcode+0)=&A9
40 ?(mcode+1)=&41
50 ?(mcode+2)=&8D
60 ?(mcode+3)=&00
70 ?(mcode+4)=&7D
80 ?(mcode+5)=&60
```

RUNning the program appears to have no effect at all. However, a six byte machine code program has been stored in locations &900 to &905.

As you can see from the listing, working with just hexadecimal numbers makes it almost impossible to understand what's going on. Fortunately we can do away with massive lists of hexadecimal numbers by using the BBC Micro's assembler which allows us to type programs in as mnemonics.

To get the BBC Micro to run a machine code program held in memory we use the CALL command. Such as

```
CALL &3000
```

This, if you like, is a sort of "GOSUB from Basic to the machine code routine that starts at &3000". So to call the machine code program we poked into memory earlier we would enter:

```
CALL &900
```

and if all is well the letter A will appear in the top section of the screen.

The micro GOSUBs to our routine and does what the program there tells it. In this case it merely displays an A, and you end up back in Basic.


All right, nothing spectacular has happened - but it worked, so congratulations! You've just run your first machine code program.

● *Well that's all for this month. Next time we'll be looking at the BBC Micro's built-in assembler.*

STOCK
CLEARANCE!

£29.95

- Full Specification Control Data StorageMaster!
- Lifetime Guarantee!
- 48 tpi, Single Sided!
- Bulk packed disks identical to branded product but without manufacturers label!
- Complete with labels and w/p tabs!
- Individually certified by CDC to 30% above ANSI Specification!

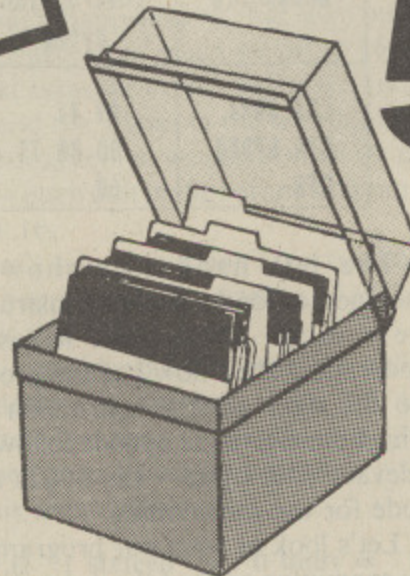

50 DISKS
SS/DD

PLUS
STORAGE BOX

Telephone Orders accepted
with VISA/BARCLAYCARD

* excl. delivery and VAT

Send cheque for £36.74 (includes £2.00 delivery and VAT)
to **IDS Computer Supplies Dept SBC2**

Ring for complete list.
0908 569655

■ Unit 15 Darin Court ■ Crownhill ■ Milton Keynes ■ MK8 0AD ■

CLARES NO.1 IN UTILITY SOFTWARE!


REPLICA III £15.00



The originators of TAPE to DISC utilities on the BBC Micro now bring you the new improved REPLICA III and it's better than ever. REPLICA III is the most powerful disc based TAPE to DISC utility available and will now transfer more programs than ever before. Just look at the features below and place your order now by ACCESS or cheque.

- * DISC BASED - No ROM sockets required
- * ONE TIME PURCHASE ONLY
- * AS MANY DATA DISCS AS YOU LIKE
- * COMPATIBLE WITH MOST DFS & DDFS
- * COMPATIBLE WITH BOTH 8271 & 1770 DFS
- * B+ COMPATIBLE
- * SIDEWAYS RAM COMPATIBLE - uses sideways RAM, including that in the B+, if it is there and so enables the transfer of many more programs including some very long adventures.

REPLICA III will not work with all programs but neither will anything else and anybody who claims differently is making false claims. Although REPLICA does not appear in any charts over 30,000 REPLICA users cannot be wrong - they have voted with their wallets!

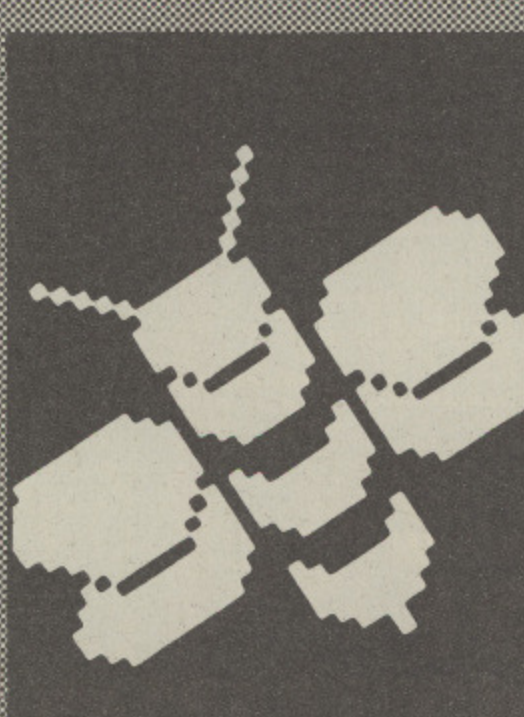

BETA-BASE UTILITIES £12.00



Extend the power of Beta-Base with the extra facilities provided on this disc.

- * MAIL MERGE
- * LABEL PRINTER
- * DISC SORT
- * EXTENDED SEARCH
- * FREE FORMAT TRANSFER
- * FAST PACK
- * STATUS

The MAIL MERGE alone is worth £12 so you get a real bargain with this disc. The features are so numerous that we cannot mention them all here.

Ask for our UTILITIES DATA SHEET if you want more information.

Enhanced BETA-BASE £25



WHAT IS DATABASE?

It is a FILE containing RECORDS, each record consists of a number of FIELDS containing the information - an analogy can be drawn with a card index in which a box of cards is the file, each card is a record and each line on the card is a field.

SPECIFICATION

- 1) Random Access - disc based, single or dual drives
- 2) File Size - max 65,000 records
- 3) Record Size - up to 2048 characters and 200 fields
- 4) Field Size - up to 254 characters
- 5) Holds - approx 1200 ADDRESS records per 100k
- 6) Search - 5 search fields using powerful options
- 7) Sort - 500 records on 3 fields in 60 seconds.

SYSTEM FEATURES

- * CALCULATE - using any valid expression
 - * PRINTOUT - Powerful options
 - * REDEFINE - Titles, fields etc.
 - * TRANSFER - From one file to another
 - * GLOBAL ENTRY - of repetitive data
 - * SEARCH LISTS - Allow creation of sub Databases within main Database
 - * SPOOLER - enables you to create spooled files that are compatible with Wordwise, View etc.
 - * INPUT - is a routine included on the disc which will allow you to write your own utilities for accessing your data. Many of the programs on the utilities disc were written using this procedure
 - * TUBE - compatible with the 6502 second processor
 - * Comprehensive manual and tutorial!
 - "We use Beta-Base ourselves"
 - Mike Bibby Editor of MICRO USER
 - "Beta-base is a joy to use" BEEBUG March 85
 - "Excellent value for money"
 - A & B Computing OCT 84
 - "Rated best value for money"
 - ACORN USER Dec 84
- Ask for our data sheet if you need to know more.



- _____ DISC
- 40 _____ 40 TRACK
- 80 _____ 80 TRACK
- 3 _____ 3" DISC - ADD £3
- _____ EPROM

Send for detailed newsletter.
All prices inclusive of VAT & Carnage -
NO EXTRAS! Please state 40 or 80 track disc
and state D.F.S. you use.

New! BETA-ACCOUNTS INVOICE & DELIVERY NOTE MODULE £25.00



- * INTEGRATED ACCOUNTS and DATABASE
- * MULTIPLE VAT rates
- * SCREEN EDITING with insert and overwrite
- * AUTOMATIC DELIVERY NOTES
- * INVOICE COMMENTS
- * ACCOUNT HOLDERS details inserted automatically
- * MAILING LIST generated automatically
- * LEDGER SHEET printed automatically
- * VAT sales returns prepared
- * TRANSACTION FILE generated
- * Beta-Base compatible

This is the first module in an integrated accounting suite of programs written to be used and not simply to please an accountant. This module contains an INVOICE and DELIVERY NOTE program with 80 column input and screen editing, you see what will be printed before committing yourself. Customer details can be automatically placed in a Beta-Base compatible file for use as a mailing list. VAT details are generated at the end of the VAT period and the YEAR TO DATE figures can be viewed at any time. Provision is made for multiple VAT rates including standard, zero, export and exempt.

A transaction file is generated for account customers for use with the STATEMENT and ACCOUNTS RECEIVABLE module. Future modules will be STATEMENT and ACCOUNTS RECEIVABLE, STOCK CONTROL, ACCOUNTS PAYABLE and NOMINAL LEDGER. All relative files are compatible with CLARES Beta-Base which can be used to manipulate the files as required. The Beta-Base Utilities Disc provides Mail-Merge facilities using the customer list. This program was written for our own use and is used to prepare hundreds of invoices per week. We have made life as easy as possible for ourselves, so why not take advantage of our efforts.

Requires double sided single drive for minimum configuration - no stock control or customer database. Double sided twin drives will enable a full integrated system to be used.

clares
MICRO SUPPLIES

98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9-5pm Monday-Friday
LUNCH 12.30-1.30

A COMBAT READY PHANTOM II WILL COST YOU £14M

"Well produced and technically good futuristic combat flight simulation featuring some of the best and smoothest 3D graphics I've come across on the Beeb." - Computer Trade Weekly

RATED 8 OUT OF 10 FOR QUALITY, GRAPHICS, PLAYABILITY & VALUE



RAF PHANTOM PILOT
FLT. LT. PAUL COURTNAGE
'PHANTOM COMBAT!'
HIS VERDICT:
'MARVELLOUS... QUITE EXCELLENT... BEST MICRO FLIGHT SIMULATION I'VE EVER SEEN... TOTALLY CAPTIVATING!!'
In-depth review to follow

More than 'just' a very fast full-flight Simulator 'Phantom Combat' offers the excitement and energy of 1500 mph air to air combat in high resolution 3D colour graphics. This 100% machine code package has been written by a military flight simulator software engineer together with the B.A. captain who wrote the best selling '747' simulator for Doctor Soft.

A SIMULATOR INSIDE A SIMULATOR

In one of the training modes (formation mode: FORM) it is actually possible to fly the Phantom AND control the Enemy aircraft which can be clearly seen flying in 3D outside your fully equipped cockpit. Alternatively, a friend can pilot the armet (on separate keys) while you attack.

THE ADVERSARY

Now, at last, enemy aircraft are NOT shown as arcade 'sprites', they are computer drawn, navigated and 'flown' at a smooth 15 Frames per second. The delta outlines reflect Soviet Mig 21 (Fishbed) Su 15 (Flagon) performance. In combat mode (CBAT) they fight back, intelligent and dangerous.

INSIDE

Instrumentation is comprehensive with a wealth of clear and precise displays, featuring both analogue and digital readouts, eg speed in knots as shown on a dial AND digitally, with a separate Mach number display; radar computed target range altitude and bearing shown; target pointer and gunsight; military 'Tacan' navigation (Tactical air navigation) etc.

'OUTSIDE'

External views includes Horizon, other aircraft, a networked detail points, separate landing runways, animated 'strobe' approach lighting, NO 'chunky' pixel objects are drawn in fine, high resolution coloured. The view is recomputed and redrawn 15 times a second.

AIR TO AIR COMBAT

Warning! There are no 'lives' but your single one, yours is zeroed and the program restarted if you are shot down or crash. This motivates you to try and 'bring home' damaged aircraft. Many different forms of damage can occur. Most are survivable, eg a gear up runway landing if seen enough. If you can't land, use the EJECTION seat to survive.

THE BEST ALTERNATIVE?..

£9.95

PHANTOM COMBAT
Flight Simulator
3rd generation flight software
by Nick Brown and Roger Selby



DOCTOR SOFT
simulations
Doctor Soft Advanced Software

P.O. Box 66 - East Preston - Littlehampton
West Sussex - BN14 2TX

Telephone: (0903) 770044
Accounts: (0903) 776000
Telex: DocSoft 878152 (WCTC)

Available at your Local Dealer, distributed by Microdealer, Leisuresoft, & Centresoft. Also direct from Doctor Soft:

MAIL ORDER FIRST CLASS BY RETURN, POST FREE

BBC ELECTRON BBC DISK*

*Add £3 for disk version. Cheques/PO payable to "Doctor Soft Ltd" or state Access No. Overseas: add Airmail at cost.

Name

Address



BBC 32K ELECTRON version

Last month *The Micro User* presented the first hands-on evaluation of the BBC Master. We called it "the most exciting new product from a British computer manufacturer since the original BBC Micro".

This month our technical editor takes the story a stage further with a look inside the wonder machine . . .



The Master revealed

It is always exciting getting your hands on a new computer, and the BBC Master is no exception. On first impressions it looks much wider than the Model B, but in fact proves to be only two inches more.

Nevertheless this means that it would no longer slip under my monitor plinth and my disc cable was only just long enough.

The main keyboard has been pushed to one side as the "ash tray" speech extension socket has gone, along with the speech synthesiser.

At the right hand end is a new numeric keypad. The Break key is set slightly apart from the other keys and there is a small plastic screw that can be used to mechanically prevent it from being pressed.

The Master also seems to have a thicker plastic moulding, giving it a more sturdy feel. Needless to say it is coloured in the obligatory almost, but not quite, matching shade of beige that so many manufacturers are struck on.

What I want to know is how many pieces of equipment do I need to buy before two actually match?

The Master has a slightly different switch-on tone from the Model B and a better sound quality. To double check this I ran some music programs and found the sound to be much richer than on the earlier model.

I reached for the manual and started

flicking through it in my customary direction – back to front. At first the appendices looked encouraging, but the further I looked into the body the less impressive it became. It is without doubt one of the worst manuals that Acorn has produced.

When you consider that Brian Long, the managing director of Acorn, said on television that the machine was targeted at scientists, schools, colleges and

By MIKE COOK

serious home users, why could he not have told that to his manual writers?

It is aimed at the first time "Let's not put you off computing" user and is afraid to tell you anything that you might need to read more than once to understand.

An example of this is the chapter that tells you not to feel a Wally if you don't want to learn to program. It then makes it difficult by only listing one line as a description of each Basic command. It does not even give an example of syntax.

On the first page you are informed that if you want to know about what you have bought you should buy the two volume Reference Manual and the View and ViewSheet guides. Consequently we are left to guess the

improvements incorporated in this computer.


What the designers of the Master seem to have done is to look at the system people ended up with after upgrading the Model B, and have presented it all in one package, and quite a good job they make of it – apart from the manual.

So the Master consists of a computer with built-in sideways and shadow RAM, along with a disc interface. There is also ROM-based software comprising a word processor, spreadsheet, terminal emulator, editor, Basic language and two disc filing systems.

While it is true that most of the Master's features could be obtained as an addition to the Model B, nevertheless it is quite a package.

While shadow RAM can give you extra space for programs on either machine, what can't be done on the good old Model B is that either the shadow RAM or the main RAM can act as the display memory.

In addition to that you can access either area with the PLOT commands independently. What that means is that you can display a picture in the main RAM while you are constructing another in the shadow RAM. When it is complete you can quickly switch over and display the new picture. This allows



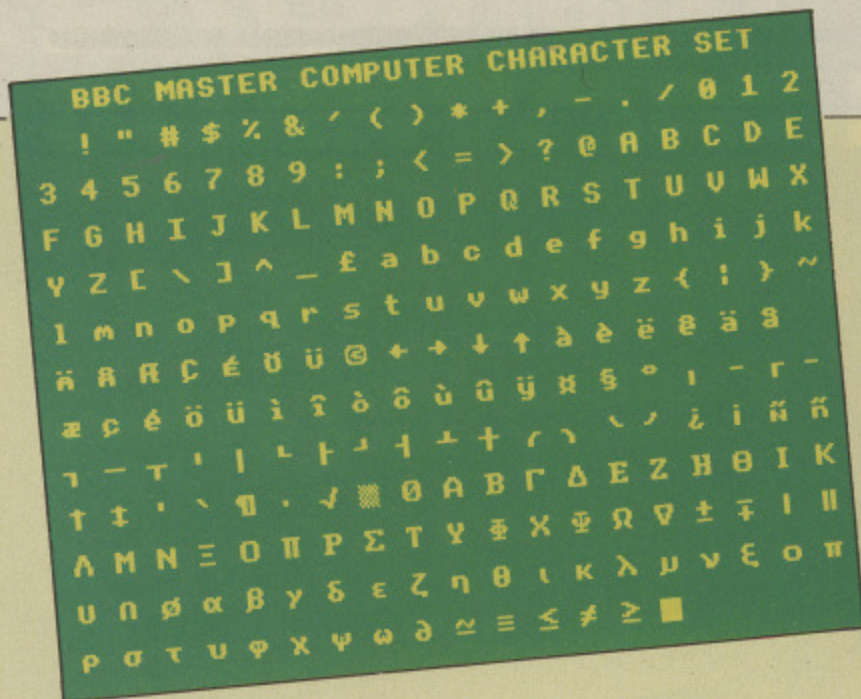


Figure I: The normal character set



Figure II: The italic character set

From Page 71

you to do some pretty nifty animation.

The Master has an improved character set (see Figure I) which includes Greek and some mathematical symbols. What is more, each character can be software defined so that you can construct your own fonts. Figure II shows the italic character set that is in a disc file.

On the hardware side there is a battery backed up real time clock and RAM. This enables the time and date to be always available, as well as allowing some options to be automatically selected on power up.

The Basic runs faster than the Model B due to the extra instructions in the 6512 CPU. However page 40 of the manual suggested that it also included syntax checking of typed-in program lines. Unfortunately this proved to be an error. The Basic also includes a number of extensions in the graphics area.

There is a Welcome disc and tape giving some good demo programs and useful utilities. I gave the machine a good work out with software I already had. The only part I did not try was the Terminal emulator. This was because all the manual had to say about it was that you got in by typing *TERMINAL and it was far too complex to describe in this manual. It took half a page to say this. The other half could have given some hints on how to set the baud rate!

When I can lay my hands on the reference manuals perhaps I will be able to get down to some serious work with the Master. It is a machine that deserves serious study. I am sure that it can out-perform many so-called 16 bit machines. I am especially looking forward to the second processor options. It should prove to be a solid

computer for some considerable time yet, and ensure that the BBC Micro goes marching on.

BASIC

THE Master comes with two types of Basic, one ROM based and the other disc based. The former, Basic IV, operates faster than on the Model B and contains several enhancements over Basic II.

Perhaps the most useful for developing programs is the LIST IF command. This allows you to specify a string and the line will only be listed if it contains that string.

For example, how many times have you searched through a long listing looking for a procedure definition? Well, by typing LIST IF DEF, all line numbers containing DEF will be listed.

This could also be useful if you want to change the name of some variable — this function can quickly and easily point you to the lines where you have used it. It would even be a help in tracking down errors when you are typing in listings.

The real time clock is accessed by a Basic variable *TIMES*, and gives the day, date, year and time. As I am looking at it now it is displaying Sun, 19 Jan 1986. 19:08:58. By using the appropriate string statements you can extract the element of the time you want. As it is a system with battery backup you don't need to reset it when you first switch on.

The other major improvement is the area of the graphics commands. A lot more graphics primitives have been added. These allow you to specify a single command to draw rectangles, circles, parallelograms, ellipses and arcs. These shapes may be drawn in

outline, solid or pattern form.

As these shapes are defined in machine code they work a lot faster than the equivalent Basic program.

You can use four different patterns straight off, but can define your own using the VDU23 command. The size of the pattern grid depends upon the mode. It is always 8 units high and 2, 4 or 8 wide, so the pattern occupies one byte of memory. These patterns can even be used by the other commands to draw circles or lines in a dotted pattern.

There are two variants on the flood fill routine: fill until non-background and fill until non-foreground. As well as flood filling in a solid colour you can also flood fill in a pattern. Unfortunately there must be some bug in the software or algorithm as some patterns caused the flood fill to stop prematurely. This happens using two of the default patterns in the two colour Modes 0 and 4.


The most useful improvement to the graphics is the rectangle copy and move



START UP OPTIONS

ON the Model B every time you powered up you had to set options to suit your needs, such as if you wanted to use a serial printer instead of a parallel one.

The Master remembers these choices once made in the battery backed up RAM. These choices can be set from the operating system's *CONFIGURE command or the disc-based utility control panel.

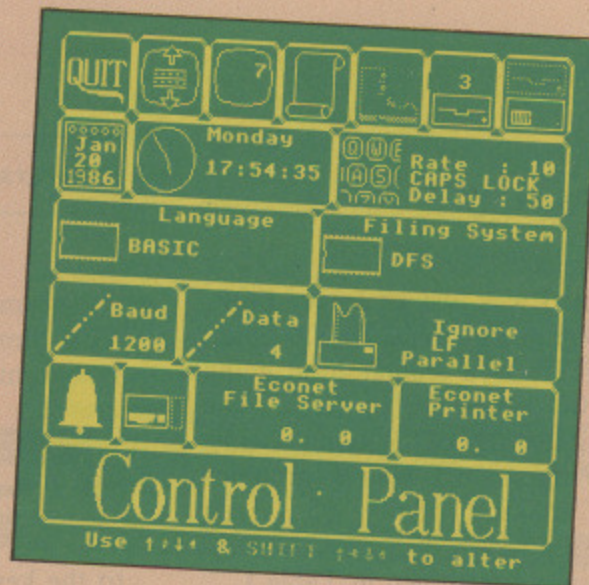

- Vertical screen alignment** *The display can be moved up and down to centre on your screen.*
- Mode select** *Power up screen mode.*
- Scroll protect** *To stop the screen scrolling when you type on the last position on a line.*
- Boot option** *The conditions when the system accesses a !BOOT file.*
- Drive control** *Delay times used in your disc drive.*
- Disc type** *5.25in, 3.5in, 3in or Winchester.*
- Date** *Day, month and year.*
- Day and time** *Day of the week and time.*
- Keyboard** *Auto repeat delay and repeat rate along with whether the caps lock is on.*
- Language** *Computer language first entered.*
- Filing system** *Power up filing system.*
- Baud rate** *Speed of the RS423 serial interface.*
- Data** *RS423 data format.*

- Printer** *Defines the character a printer ignores and whether to use a serial or parallel printer.*
- Sound** *Mutes the start up sound and reduces the level of standard beeps.*
- Co-processor** *Defines an internal, external or no second processor.*
- File server** *For network users defines the file server to use first.*
- Printer server** *For network users defines the printer server to use first.*

instructions. As their names imply, you can define a rectangular area and make a copy of that area anywhere on the screen.

When you move a rectangle the defined area is first erased before being copied to the new screen position. Using this command it is quite easy to achieve animation from a Basic program that previously required machine code.

Using these commands you can in

effect program your own sprites.

There are eight new graphics modes, but don't get too excited because they are the same as the old ones with 128 added. For example, you can type in Mode 2 or Mode 130, the difference being that using the higher numbers you automatically switch on the shadow RAM and so HIMEM is set at &8000, giving you more program space.

The graphics extensions are similar to the Acorn graphics extension ROM for the Model B. However the extension ROM is in some ways more powerful, as it allowed the defining of several sprites.

BAS128 is a version of Basic found on the tape or the 80 track version of the disc. What it does is to load into memory where your program would normally be and configures the sideways RAM into 64k of contiguous memory for your Basic program. This gives a lot of space for you to write programs.

You might be alarmed when you print the variable PAGE, which is set at & 10000. But don't worry, HIMEM is set at &20000. This means when using indirect operators in the Basic storage space you will be dealing with a 17 bit pointer.

Because of this the assembler

variables P% and O% are also defined to 17 bits, which means that when they are between the values of &00000 and &0FFFF everything is the same as before.

However when these variables are between &10000 and &1FFFF they will actually be addressing sideways RAM, so the assembler has to convert this into the appropriate 16 bit value. Therefore you cannot jump from one sideways RAM bank to another in machine code. Any attempt to direct the assembler to do this will give a BANK error.

Similarly, if your code is assembled over a bank boundary it will not run, so the error WRAP is produced. BAS128 does not have the TIME\$ variable available nor the LIST IF command. Also you cannot enter the editor with an EDIT or EDIT IF command.

All the shuffling about between sideways RAM banks slows the Basic down and it is slower than the Model B Basic.

In order to put these versions of Basic to the test I tried some simple programs. I ran each on the Model B, Master BASIC IV and BAS128.



Character set

defined in a lot faster program. ent patterns e your own l. The size of on the mode. and 2, 4 or 8 s one byte of an even be nds to draw pattern.

on the flood background d. As well as ur you can unfortunately he software erns caused turely. This he default Modes 0 and ment to the y and move



From Page 73

Program I was just an empty FOR, NEXT loop going round 20,000 times. Program II was a similar loop going round 200 times only, each time calculating the SIN of the loop variable. Finally Program III was a graphics program making plenty of screen accesses.

The results are shown in Table I.

A TRIP AROUND THE CHIPS

IT has been said that "manners maketh man", but "chips maketh the machine". So let's take a quick trip around the inside of the Master to see what changes have been wrought.

You can squeeze a lot more power out of a computer if you manipulate the hardware directly. This means that to be compatible a new machine must have not only the same hardware but it must be positioned in the same place in the memory map.

Well most of the major chips used in the Model B are there in the Master. Despite what other magazines say, the Video and Serial ULA are still there, along with the 6845 CRT controller. The same sound, ACIA and teletext chips are there as well, and in the same place.

The user port and printer port are reproduced, as is the analogue to digital converter. What is different is the system VIA. It is still there talking to the sound chip, but it is no longer connected

Program	Time in seconds		
	Model B	BASIC IV	BAS128
Program I	10.62	9.70	20.01
Program II	4.81	2.74	5.53
Program III	88.46	64.48	116.93

In all cases the old Model B is between BASIC IV and BAS128. I am not suggesting that these are definitive speed comparisons but should give a rough guide to operating speed.

Table I: Basic time comparisons

to the keyboard. From the look of the circuit it appears to be connected to the disc controller chip, which is a 1770 and not the 8271 of the Model B.

The most numerous new additions are custom chips labelled TAHC06. There are five of these scattered about the board, and one is definitely in charge of the keyboard. Therefore it must be assumed that these are some form of input/output chip. Perhaps some of them deal with the needs of future internal second processors.

The newest large chip is the HD 146818 real time clock and CMOS RAM. Being battery backed up it allows continuous updating of the time and the storage of default start up parameters. There is also a custom chip TAHC03 next to it but as yet I don't know what that does.

Those are the chips that matter to the software. Some changes have been made that have no direct effect. One area lies in the memory. In the Model B it took 16 chips to hold 32k of memory, in the Master there are just four chips holding 128k.

The firmware is on one massive ROM chip: It is a 128k byte, or a 1

mega bit, chip. It is mounted on a smou must header with an address decoding late dog w soldered underneath it as the sockets of onder is designed for 32k or 16k ROMs. is done

The Tube is now buffered with Theref 74LS373 and the serial port drive ave gon have been changed to VA9637 an ew Ma AM26LS30. Infortu ncompa

OPERATING SYSTEM 3.20

THE Master has a new version of the machine operating system containing some sol number of new commands to contr his the the new features. As with all the pe directly. operating system commands, the disc cor should be prefixed by an asterisk. program

There is a CONFIGURE comman run. Thi to alter the state of the computer's sta o other up options and a STATUS command The Mu show you what they are. One useful s It is of commands allow you to UNPLU oring ou or INSERT a sideways ROM to sto n your them fighting each other. You ce Howev display what ROMs are in what socke softwa and whether you have disabled them busines You can also access the strings insid position the red function keys with the SHOW you are command. Som


There are commands to contro softwa shadow RAM and also to move data the ne and out of sideways RAM. You can als favouri move files from one filing system the ope another and change their names in the large process. tunatel

A couple of useful commands fo somew those of you with second processors ar but ins GO and GOIO. These execute blocks machine code program in the secon most o processor or input/output processor. Micro

All in all, the new operating system Des manu calls represent perhaps the biggest ne on the software element in the BBC Master try to computer. the co

COMPATIBILITY

WHEN viewing the question of compatibility of different computers

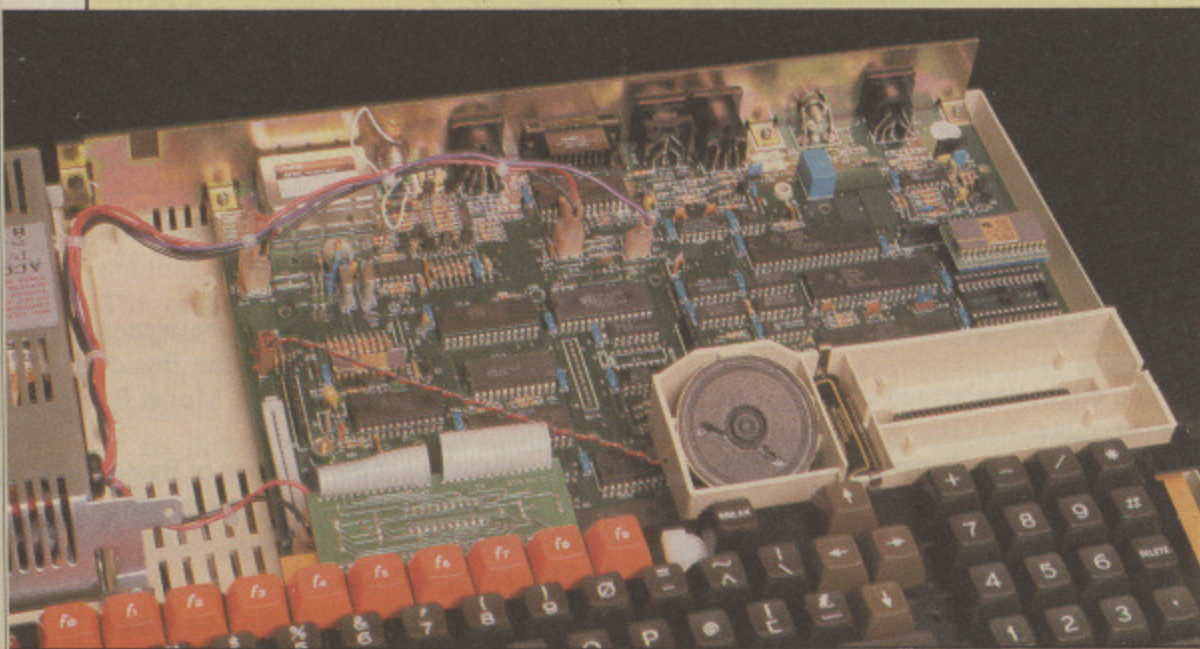

ROM BASED SOFTWARE

- MOS** *Machine operating system version 3.20.*
- BASIC IV** *The Master's version of Basic running about 40 per cent faster than a Model B.*
- View** *A word processor of considerable sophistication either loved or hated by users. (I hate it).*
- Viewsheet** *A spreadsheet for organisation and calculation of related data. It is especially useful in allowing you to see the effect that changing one item has on the whole structure.*
- Editor** *A simple text editor that can be used for creating source files for language compilers*

or interpreters. It does not have the text formatting capabilities of View and is much easier to use.

- Terminal** *A terminal emulator which enables you to communicate with a remote computer directly or by telephone via a modem.*
- DFS** *Disc filing system. This allows saving and loading of programs and data to disc using the same format as the Model B.*
- ADFS** *Advanced disc filing system. A double density system using both sides of the disc, operating a hierarchical directory structure.*

Model B
IV and
sugges-
definitive
ns but
guide to

ed on a small you must always remember that it is like a dog walking on its hind legs; the wonder is not that it is done well but that it is done at all.

Therefore it follows that the designers have gone to a lot of trouble to make the new Master look like the Model B. Unfortunately it only takes one incompatible feature to make a program not run properly.

EM 3.20



Perhaps the most common cause of incompatibility is the attempt to protect some software from being copied. To do this the disc controller chip is addressed directly. As the Master has a different disc controller chip than the Model B, programs protected in this way will not run. This applies not only to games but to other packages like Island Logic's The Music System.

It is possible for software houses to bring out new versions and let you trade in your own version for a nominal fee. However in the cases where the software houses have gone out of business or you are in the unfortunate position of having lost the original disc you are stuck.

Some incompatibility is caused by software tricks not being appropriate to the new system. For example, a favourite ploy is to use the font area of the operating system in order to create large letters on the screen. Unfortunately in the new system they are somewhere else, so the program runs but instead of large characters random blocks are produced. This happens on most of the programs on the excellent Micro User Fun School packages.

Despite having a mention in the manual, my version of Elite will not run on the new machine. In fact when you try to run it the game informs you that the computer is not a BBC Micro!

There is, however, a utility on the

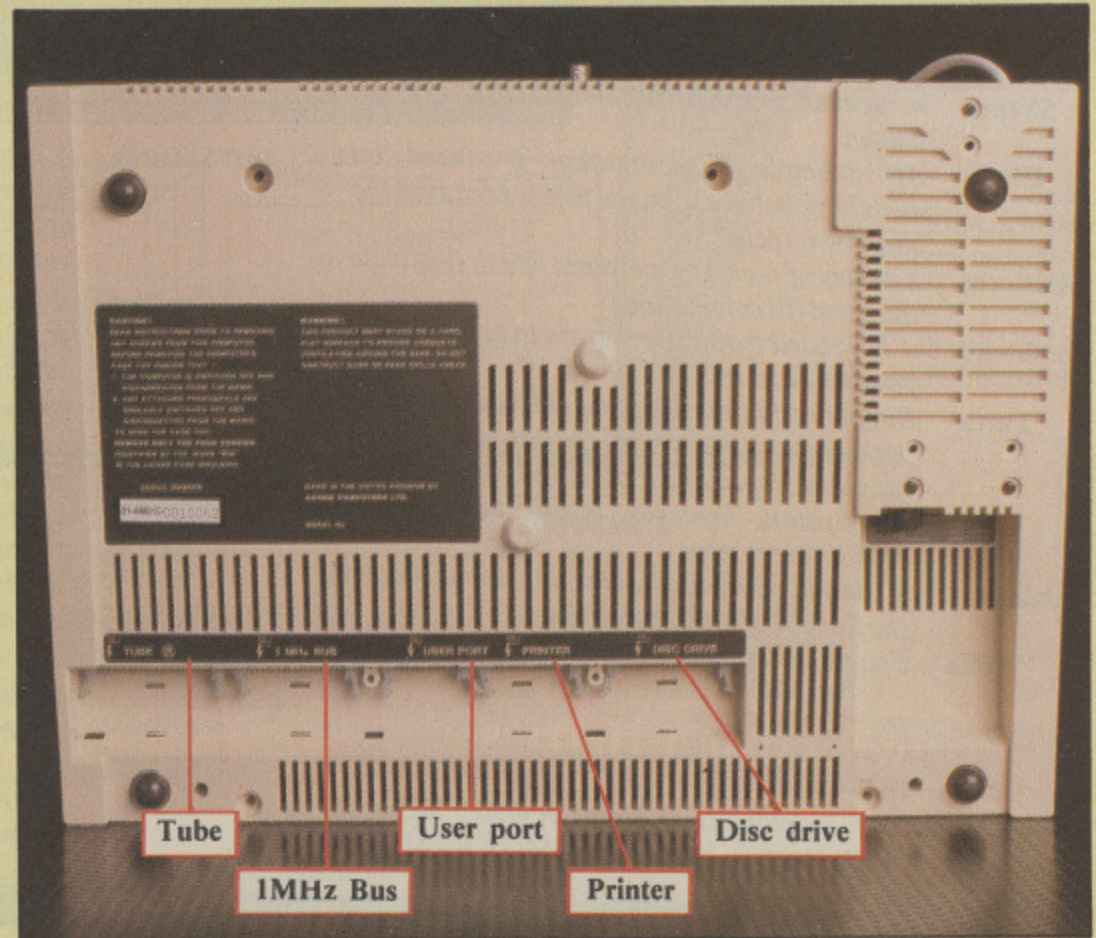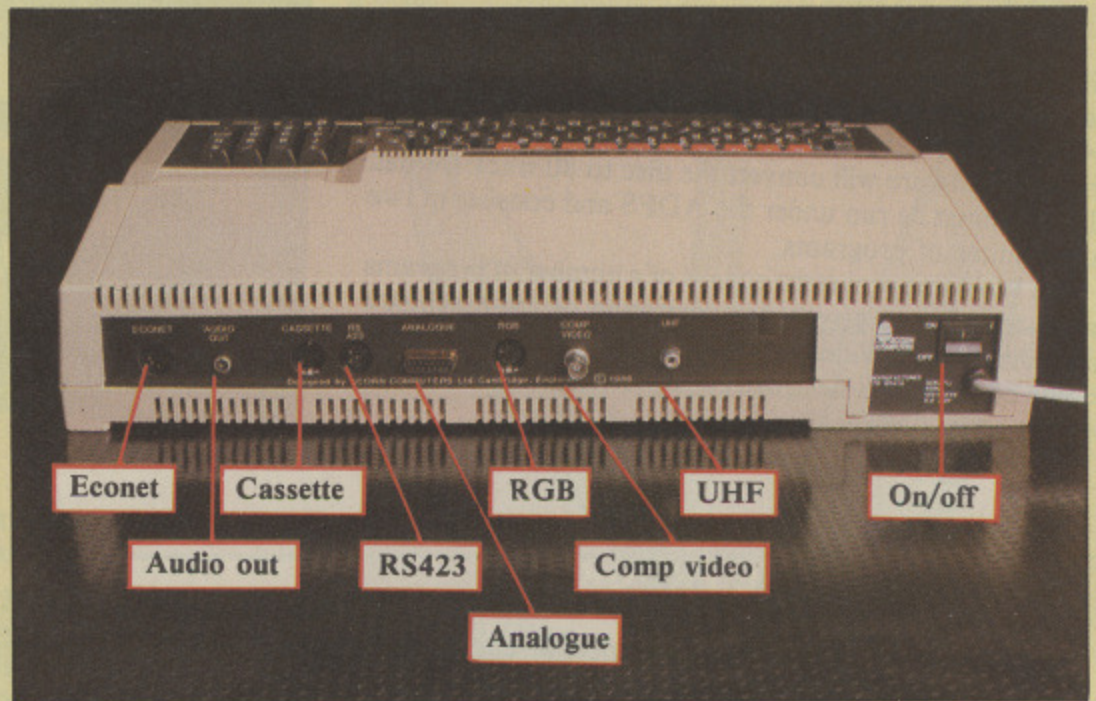

to control software tricks not being appropriate to the new system. For example, a favourite ploy is to use the font area of the operating system in order to create large letters on the screen. Unfortunately in the new system they are somewhere else, so the program runs but instead of large characters random blocks are produced. This happens on most of the programs on the excellent Micro User Fun School packages.

Despite having a mention in the manual, my version of Elite will not run on the new machine. In fact when you try to run it the game informs you that the computer is not a BBC Micro!

There is, however, a utility on the

question of computers

From Page 75

Welcome disc that claims to "convert" some software. When trying this on my version of Elite the program conceded that it was a BBC Micro but then sent the disc read head on a never ending quest for some sector.

The utility changes the way

INKEY(255) works, but despite that I have not found a program that this utility will convert. The popular Micro Olympics will load in, but crashes as the event is about to start.

Another reason for incompatibility comes from the way some programs are transferred from tape to disc. I found some programs being downloaded

without even checking to see where PAGE was. By removing this downloading step the programs could be made to run.

Some commercial software worked perfectly, like Acorn's Music 500 language, Ample. I think the maxim must be: "Don't expect it to work, but be surprised when it does".

WELCOME SOFTWARE

THE Welcome programs are supplied on tape and disc. The disc is a 40/80 track configurable disc. In its raw mode it is a 40 track disc. However in order to run it on an 80 track drive the software will convert the disc to 80 track format. The disc must be run under the ADFS and consists of two major suites of programs.

The Welcome programs consist of a number of programs linked together to give a demonstration of the machine's capabilities. The Welcome utilities give a menu selectable choice of programs designed to exploit the features of the Master series.

WELCOME PROGRAMS

- Modes** *This gives a demonstration of each screen mode, its colours and resolution.*
- Castle** *Draws a castle in high speed demonstrating the new graphic shapes available in Basic.*
- Clown** *As above only a clown's face is drawn.*
- Shapes** *A sequence of filled shapes are rapidly drawn.*
- Cloud** *An example of animation produced by switching between the normal screen and the shadow screen.*
- Patterns** *A series of recursive patterns which illustrate the flood fill commands.*
- Keyboard** *A keyboard training program to help you find your way around.*
- Turtle** *Simple commands may be entered to trace a path around the screen similar to the turtle graphics commands of Logo. The correct description, however, is a body-centred coordinate system.*
- Adventure** *A simple adventure written in Basic to give the flavour of adventure games.*
- Aqua** *Space Invaders set underwater.*

WELCOME UTILITIES

- Panel** *A machine code program giving access to the battery backed up CMOS RAM. This*



- sets a switch-on, default configuration for the computer. See previous page.**
- Timpaint** *A program allowing you to create pictures utilising the extra graphic commands. Rubber banding with cursor keys or joystick complements the icon style mode select menu.*
- Dbase** *A very simple database program consisting of four records for up to 100 people. This program is not available on the tape.*
- ADFS-Tutor** *A tutorial for the Advanced Disc Filing System, showing graphics of a hierarchical directory structure and inviting you to type in path and file names.*
- Chardes** *A program allowing you to create and save your own fonts. This allows special symbols to be created.*
- Envel** *An envelope editor for use with the SOUND command. The value of each parameter is shown in a box which can be altered when selected by the cursor. Some keys will play the sounds so you can tailor them to your needs. The function keys have preset envelopes in them to give you a start.*
- Pfill** *An editor allowing you to define the pattern used for flood fill and solid graphic shapes.*
- ADFS Utils** *All the utilities they couldn't fit in the ADFS ROM along with a help file on each.*

With more than 100,000 new Electron users, and sales of the much talked-about BBC Master beating all its targets, you just cannot afford to miss the great Spring Show that marks the dramatic re-birth of Acorn Computers!

Friday to Sunday, May 16 to 18

Royal Horticultural Hall
Westminster, London SW1

All the hardware and software houses whose faith in the future of Acorn has now been fully justified will be at the Show to present all their latest products.

See the BBC Master 128 and Master Turbo Upgrade – first of the exciting new generation of BBC Micros



Show opens 10am each day. Closes 6pm Friday & Saturday; 4pm Sunday

Organised by Database Publications

Save £1 a head – and miss the queues! – by sending for your tickets now!

Please supply:

- Adult tickets at £2 (save £1) £ _____
- Under-16s tickets at £1 (save £1) £ _____
- Total £ _____
- Cheque enclosed made payable to Database Publications Ltd.
- Please debit my credit card account:

Access _____

Visa _____

Admission at door:
£3 (adults), £2 (under 16s)

Advance ticket order

Post to: Electron & BBC Micro User Show Tickets, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Name

Address

..... Signed

PHONE ORDERS: RING SHOW HOTLINE: 061-429 7931
Please quote credit card number and full address + Ref. MU 3





We've put our finger on a nagging little problem.

Instead of having to fumble behind your disc drive to change from 40 to 80 tracks, UFD drives have the switch conveniently located on the front panel.

A feature which reflects UFD's attention to detail and the care taken to ensure that the designs are based on the consumers needs.

Quality, too, is of paramount importance and UFD are proud of their high standard of design and quality control.

All of this may lead you to expect a premium price - not so. In spite of the care taken to

ensure that UFD's complete range of single and twin disc drives meet the most demanding standards (manufactured to BS 415 - approval pending); UFD drives are competitively priced - ask your dealer for details.



AKHTER COMPUTER GROUP
AKHTER HOUSE,
PERRY ROAD, HARLOW,
ESSEX CM18 7PN
TEL (0279) 443521
TELEX: 818894 AKHTER G
Dealer Enquiries
Welcome

Gold Standard
2 Year Warranty
on all Products



LAST
varia
numb
We
keywo
variab
or:
and t
show
store
yet w
Le
m
La
varia
Micr
are t
them
micro
meet
In
coup
varia
the p
don't
thou
easi
prob
TI
in va
bette
than
T
first
dist
capi
mak
Also
betw
nam
as o
T
vari
area

**Part 3 of
PETE
BIBBY's
series for
the micro
novice**

As we were saying ...

LAST month we covered the use of variable names, labels that stand for a number.

We saw how we could use the Basic keyword LET to store a value in a variable such as:

```
LET price=5
```

or:

```
LET bought=10
```

and then use them in calculations as:

```
PRINT price*bought
```

shows. We also learnt how the values stored in variables can vary, although as yet we haven't made much use of this.

Let the names make sense

Last month we looked at the rules for variable names and saw what the BBC Micro accepts and what it rejects. These are the formal rules. If you don't obey them the program won't work as the micro will grind to a halt whenever it meets a name that breaks the rules.

In addition to these rules there are a couple of useful rules of thumb for variable names. They're not mandatory, the program will still run if your labels don't obey them. Having said that though, obeying them does make life easier when you get on to longer problems.

The first tip is to use lowercase letters in variable names. In other words it's better to use:

```
LET bill=100
```

than:

```
LET BILL=100
```

There are two reasons for this. The first is that it allows you to easily distinguish between keywords (in capitals) and variable names. This makes the reading of listings simpler. Also it avoids the possibility of a clash between a keyword and a variable name. To get the idea try:

```
LET PRINT=5
```

as opposed to:

```
LET print=5
```

The second point is to use meaningful variable names. If you want to find the area of a rectangle of length 20 and

width 10 you can use:

```
LET x=20  
LET y=10  
PRINT x*y
```

to calculate the result. However, it's not very informative is it? The names *x* and *y* are fairly anonymous.

A better version of the lines is:

```
LET length=20  
LET width=10  
PRINT length*width
```

and even better is:

```
LET length=20  
LET width=10  
LET area=length*width  
PRINT area
```

I admit that the last two versions need more typing but they're much easier to follow, reading almost like English. Take my advice and use meaningful variable names. It makes life a lot simpler when you come to writing long, complicated programs.

Yet more on names

Having waxed eloquent on meaningful variable names and exhorted the use of lowercase letters I'll now go on to ask you to use capitals in them.

This is because as you use meaningful names you'll find that they tend to get longer and you end up with lines like:

```
LET costofmicrouser=1.25  
LET costofelectronuser=1.00
```

These are allegedly meaningful variable names but to me they're fairly incomprehensible. It would be much better if the words that made them up were split somehow. Usually the underline sign is used for the job resulting in:

```
LET cost_of_micro_user=1.25  
LET cost_of_electron_user=1.00
```

The trouble with this is that people tend to get the underline, which is allowed in a variable name, confused with the hyphen, which isn't. And it means even more typing. A better alternative is to use the odd capital letter to make things clearer as in:


```
LET costOfMicroUser=1.25  
LET costOfElectronUser=1.00
```

String variables

By now the use of LET to store numbers in variables should be familiar. In fact all the variables we've dealt with so far have been these numeric variables, as they are known. We can also use variable names to stand for strings of characters.

These string variables follow the same rules as the numeric variables we're used to. The difference is that the name of a string variable must end in the dollar sign, \$, and the string of characters must be enclosed between two quotation marks.

So if we have a string of characters



m.

disc
ctured to
tively



From Page 79

such as *Any characters* we can store them in a variable with a line like:

```
LET example$="Any characters"
```

and recall them with:

```
PRINT example$
```

Notice that the variable name *example\$* ends in the dollar sign to show the micro that it's a string of characters that we're storing, not a number. And the string *Any characters* is enclosed between quotation marks. Try:

```
LET example="Any character"
```

or:

```
10 LET example$="Any character"
```

and see what happens.

Although it may not be immediately obvious, string variables are important beasts. One trivial, though nevertheless helpful, use is as a sort of shorthand. Imagine a case where a program had the line:

```
PRINT "Press Return to carry on"
```

several times. It would save a lot of time, trouble and typing if you used a string variable to store the message, as in:

```
LET message$="Press Return to carry on"
```

and then call it up with a:

```
PRINT message$
```

whenever it's needed.

And now to program

We've only had one program in this series, the wonderful:

```
10 PRINT "anything"
```

Once we'd typed this in we could clear the screen with CLS and then refresh our memory as to the program in the micro's memory with a quick LIST. And, for real excitement, we could run the program with a RUN command. The result is:

```
anything
```

appearing on screen. With what we

know about string variables we can no like this
alter this program a little. Try typing in when, un

```
10 message$="anything"  
20 PRINT message$
```

and RUN it. The result is the same. A right, the program takes two lines instead of one, so it's not as efficient, but it does have some interesting features.

Notice that we now have a program consisting of two lines 10 and 10. All notice that when we typed in:

```
10 message$="anything"
```

our old line 10:

```
10 PRINT "anything"
```

disappeared. So if you want to replace program line with a new version just type the new line in and it will supersede the old one.

Another point to examine is that we have a two line program. When the BBC Micro receives a RUN from the keyboard it takes the line with the lower line number, in this case 10, and obeys it. It then goes on to the next line number, 20, and obeys that. It carries on

PINEAPPLE SOFTWARE

Programs for the BBC model 'B' with disc drive with FREE updating service on all software

ARE YOU GETTING THE MOST FROM YOUR DOT MATRIX PRINTER AND DISC DRIVE?

DIAGRAM is a new program which really exploits the full potential of the BBC micro and will enable you to obtain printouts of a size and quality previously unobtainable from your system.



£25 supplied only on disc 40/80T. Please specify printer type when ordering +VAT p&p free

MARCONI TRACKER BALL **£51.50** +VAT p&p £1.75

(includes ICON ARTMASTER software). All orders sent by return of post

Originally designed for producing large circuit diagrams, DIAGRAM has now been improved to the point where it is invaluable for anyone who wishes to produce large areas of mixed graphics and text, and has many of the features normally found only in very expensive text/graphics processors. DIAGRAM utilises a unique method of storing information on disc which allows not only very large diagrams to be created, but also allows rapid 'scrolling' of the screen both horizontally and vertically over the full area of the diagram.

The hard copy printout options available with DIAGRAM are second to none, and use is again made of the unique disc storage techniques to produce both horizontal and vertical printouts in various sizes down to probably the smallest high definition printing you have ever seen from your printer - a full 3x6 (18 mode 0 screen) diagram printed in a single print run onto an A4 sheet!

FEATURES

- Diagrams may consist of up to 39 mode 0 screens, defined in any aspect ratio, e.g. 3 screens across by 13 screens down, 10 screens x 3 screens etc.
- Up to 128 icons may be used by any one diagram, and may be predefined in full mode 0 definition with a maximum size of 32 x 24 pixels. An unlimited size library of icons may be built up allowing rapid transfer of icons from the library to a new diagram.
- Editing of diagrams can be achieved at any time during 'scrolling' around the screen, and edit features include:- Comprehensive horizontal and vertical line drawing routines with automatic 'perfect joins' at corners and T junctions. Entry of text characters and icons at any time by a single key press. Also, any size rectangular area of the screen may be predefined, and this area may then be deleted, moved anywhere on the screen, or copied to a different point on the screen.
- Other features include selectable display colours, TAB settings, Index names, and many more.
- Diagram is compatible with most dot matrix printers (specify type when ordering), and printouts can be obtained of any specified section of the diagram, in varying sizes and in either horizontal or vertical print mode. With an FX80 type printer up to three screens may be printed across the width of the carriage, and there is no limitation (apart from the diagram size) to the number of screens that can be printed in the vertical direction - up to six mode 0 screens will fit vertically on an A4 sheet.
- The latest version of DIAGRAM is now fully compatible with Marconi Tracker Ball, which allows 'scrolling' of the screen and many of the editing features to be carried out using the tracker ball.
- DIAGRAM is supplied in an attractive hard backed disc wallet with keystrip and comprehensive instruction manual.

Many of our customers have said they think that DIAGRAM is worth twice the price, so order now before we put the price up!

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL. ☎ Tel: 01-599 1476.

we can now
y typing in:

like this until it runs out of line numbers
when, understandably, it stops.

The last thing to notice is that line 10
of our program has no LET in it. We
have:

```
10 message$="anything"
```

instead of:

```
10 LET message$="anything"
```

which you might have expected.

As you'll have guessed from this, you
don't have to use LET when you store a
value or a string in a variable. I've only
used it because at first it helps to make
clear what's happening. I'll let you off
using it in future.

Order, order

Keen, observant and intelligent
readers like you will have been struck by
the fact that the line numbers of our
second program go up in tens. They
might well ask themselves: "Could they
go up in ones?"

The answer is yes. We could have:

```
10 message$="anything"
20 PRINT message$
```

rewritten as:

```
1 message$="anything"
2 PRINT message$
```

and it would still work. The micro would
look for the lowest line number, in this
case 1, and obey that. It would then take
the next line number, 2, and process
that.

But although this works, I wouldn't
advise you to do it. The convention is
that line numbers go up in tens and it's a
good convention. Suppose, for reasons
best known to yourself you suddenly
wanted to add a line to the program to
print *something* before *anything*. With
lines numbered in tens as in:

```
10 message$="anything"
20 PRINT message$
```

this is easy. You can just type in:

```
15 PRINT "something"
```

and you're away. The micro auto-
matically places the line in the right
position. You'll see this if you use LIST
to list the program giving:

```
10 message$="anything"
15 PRINT "something"
20 PRINT message$
```

With the line numbers going up in
ones as in:

```
1 message$="anything"
2 PRINT message$
```

you're stuck. The line numbers have to
be positive integers (whole numbers) so:

```
1.5 PRINT "something"
```

won't work. So stick to the convention
of numbering in tens, it allows room for
afterthoughts.

The third program

Dazzled with the success of our
previous efforts, let's go on to another
program. This one will calculate the
area of a rectangle of sides 20 and 10
units. One version of doing this is:

```
10 REM Program III
20 length=20
30 width=10
40 area=length*width
50 PRINT "The area is ";area
```

When RUN it gives you the answer
200 square units. Lines 20 to 50 should
give you no problem. They're just what
we typed into the micro in immediate
mode. All the program does is to store
these operations in the micro's memory
until a RUN gives them the go-ahead.

What we haven't seen before is the
keyword REM. This is short for
REMark. This, unsurprisingly, allows
you to annotate your programs with
remarks. Anything on a line after a
REM is ignored by the micro, so
anything you put there is just for the
benefit of humans reading the listing.
The micro doesn't want to know. As
soon as it meets a REM it looks for the
next line number.

So you could have:

```
10 REM this is ignored
```

or:

```
10 REM Hello num
```

instead of:

```
10 REM Program III
```

in the above program. All my choice of
REM does is to label the program so
that when I refer to Program III you
know which one I'm talking about.

Strangely enough, although REMs
don't really do anything they are
important. Wise use of REMs and
meaningful variable names can make a

program easy to follow and so to correct
and modify. Use them!

Another program

Program III is a bit limited. After all,
it just works for one rectangle of length
20, width 10. If I now wanted to find the
area of a rectangle of length 15, width 5,
I would have to use another program,
Program IV.

```
10 REM Program IV
20 length=15
30 width=5
40 area=length*width
50 PRINT "The area is ";area
```

However this isn't as bad as it might
seem as it's really the same as Program
III. Provided you've still got that one in
your micro's memory all you have to do
is type in:

```
20 length=15
30 width=5
```

and the program will do the job.

In fact there are even easier ways of
altering Program III using the cursor
keys (the ones with arrows on them).
You'll find a full discussion of these
editing techniques, as they are known, in
Nigel Peter's excellent articles in the
May and June 1983 issues of *The Micro
User*.

So we've got a program that we can
use to calculate the area of a rectangle.
In fact we can use it to figure out the
area of any rectangle provided we alter
the values of *length* and *width*. The
trouble is that it's a bit of a bind having
to alter lines 20 and 30 all the time.
Program V shows a much more flexible
method.

```
10 REM Program V
20 PRINT "Enter length"
30 INPUT length
40 PRINT "Enter width"
50 INPUT width
60 area=length*width
70 REM Look no LET
80 PRINT "The area is ";area
```

When you run this program you'll
find that all you have to do is to give it
the figures it requests (not forgetting to
press Return) and it will give you the
area you require. *But how does it work?*
*What does INPUT do? We'll find out
next time.*

E

ftware

RIVE?

tem.

to the point
t, and has

very large
vertically

n made of
ous sizes
a full 3x6

index names, and

ndify type when
f the diagram, in
h an FX80 type
rriage, and there
ens that can be
rtically on an A4

Marconi Tracker
g features to be

with keystrip and

he price,

1476.

MICROWORLD

COMPUTER GROUP

EDUCATIONAL SPECIALIST

Microworld are Scotland's sole Scottish based distributor with vast experience of Econet and can offer installation, service, advice and supply throughout the U.K. Our London office is now open to service the entire country. Please call for our latest Educational Prices or phone for our list of dealers nationwide. Remember we are never ever undersold.

BRANCH NETWORK THROUGHOUT THE U.K.

LONDON

Park House
140 Battersea Park Road
London SW11 4NB
01 627 4840

GLASGOW

11 Bath Street
Glasgow
041 332 1116
Anderson Cross Centre
Blytheswood Court
Glasgow
041 226 3011

EDINBURGH

4 St. Andrew Square
Edinburgh EH2 2BD
031 557 4196
12 Leven Street
Tollcross, Edinburgh
031 228 1111

ABERDEEN

77 Holburn Street
Aberdeen
0224 571735

Computers

BBC B PLUS (64K RAM)	£399.00
BBC B PLUS 128K	£429.00
BBC B PLUS (64K RAM)	£479.95
(with Cumana or Pace 100K Disc Drive)	
BBC PLUS (128K RAM)	£499.95
(with Cumana or Pace 100K Disc Drive)	
Amstrad CPC 464 mono	£199.00
Amstrad CPC 464 colour	£299.00
Amstrad CPC6128 mono	£299.00
Amstrad CPC6128 colour	£399.00
Sanyo MBC555 with SG-10 Printer	
Zenith monitor + Software	£899.00
Atari 520ST computer with	
3.5" Disc Drive, monitor, mouse and	
software	£749.00
Atari System as above, with	
Star SG-10 printer	£899.00
RML Nimbus PC1	P.O.A.
RML Nimbus PC2	P.O.A.
RML Nimbus X10	P.O.A.

Disk Drives for BBC

Cumana CSX531, 3½" Disk	£59.95
Cumana CSX100 40T, single, no psu	£89.95
Cumana CSX400 80T, single, no psu	£99.95
Cumana CSL100 40T, single, with psu ..	£109.95
Cumana CS400 80T, single, with psu ...	£129.95
Cumana CD200 40T, dual, with psu	£199.95
Cumana CD800/S 80T, dual, with psu ...	£239.95
Winchester 10mb Hard Disc	£1,499.00
Winchester 30mb Hard Disc	£2,099.00
Level III Software	£139.00
Disk Interface with DNFS Rom	£69.00
Torch Z80 Disk Pack	£599.00
Pace PS01-40 Track 100K No PSU	£79.95
Pace PSD3-40 T, 400K No PSU	£99.95
Pace PSD3P-40/80T, 400K with PSU	£129.95
Pace PDD3P-40/80T, Dual 800K PSU ...	£239.95
All Cumana Drives come with cables, manuals	
formatter disc.	
We also stock various other brands of disc drives.	

**NEW BBC
IN STOCK
NOW!
FROM ONLY
£499**
(incl of VAT)

FEATURES

- 1 16-Bit Super powerful compatible processor
- 2 80186 processor board also available (Multi tasking).
- 3 Turbo board available (second processor).

Please call for further details.

IN THE MARKET?

We at Microworld believe that our price to end user and education cannot be beaten and accordingly we give you our

PRICE PROMISE


Phone now for details.

(Subject to conditions)



FEATURES

- 1 MS-DOS operating system
 - 2 16-Bit 80186 Chip, 8MHz clock speed
 - 3 Used by Educational Establishments
 - 4 Low cost networking
 - 5 MS-NET networking available
 - 6 MS-Windows available
 - 7 Fastest 16-bit professional micro
 - 8 As used by Pegasus training school
 - 9 Winchester Hard Disc versions available
- * Price to Education (only in Scotland)

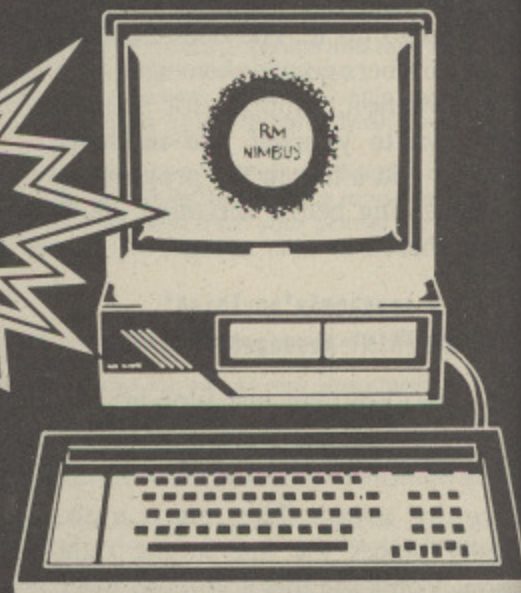

RESEARCH MACHINES
MICROCOMPUTER SYSTEMS

RM NIMBUS

Microworld find all the companies any 5 This m £1.99 blank from v

- 1 C
- 2 M
- 3 S
- 4 P
- 5 S
- 6 M
- 7 A
- 8 P

Ho

Orders with pay Telephone (London 041-333 We also orders. All prod guarant staffed Order w guarant All char courier. welcom through nationw The righ prior no E&OE.

MICROWORLD

COMPUTER GROUP

10

ACORNSOFT

DISC GAMES WORTH £120.00

FOR



£19.99

INCL V.A.T.
N.B. CARRIAGE £2 EXTRA

Make no mistake this offer is yet another Microworld exclusive. No where else will you find all this quality disc software for so little. All the games discs are both 40 and 80 track compatible and therefore suitable for use with any 5 1/4" disc drive and your BBC B Computer. This means that each disc costs you only £1.99 each, we doubt you could buy quality blank discs at that price. Here are the titles from which we will send you ten:

- | | | |
|---------------|----------------------|-------------------|
| 1 QUEST | 9 SUPER INVADERS | 17 DROGNA |
| 2 MONSTERS | 10 FIREBUG | 18 FREEFALL |
| 3 SNAPPER | 11 COUNTDOWN TO DOOM | 19 METEOR MISSION |
| 4 ROCKET RAID | 12 STARSHIP COMMAND | 20 BOXER |
| 5 SPHINX | 13 HOPPER | 21 TETRAPOD |
| 6 METEORS | 14 CAROUSEL | 22 VOLCANO |
| 7 ARCADIANs | 15 KINGDOM OF HAMIL | 23 BLACK BOX |
| 8 PLANETOID | 16 CRAZY TRACER | |

How to Order

Orders by post welcomed: please mail coupon with payment.
 Telephone orders welcome: call 01-627 4840 (London) or 031-228 1111 (Edinburgh) or 041-332 1116 (Glasgow).
 We also welcome Government and Educational orders.
 All products supplied include our own 12 months guarantee backed by our own service centre staffed by fully qualified engineers.
 Order with confidence. 7 days money back guarantee.
 All charges include VAT and carriage charges by courier. Dealer enquiries and personal callers welcome. All offers stated here are available through any of Microworld's 50 dealers nationwide.
 The right is reserved to alter prices without prior notice.
 E&OE.

MAIL ORDER SOFTWARE

To: Microworld Distribution, Dept. MU, Park House, 140 Battersea Park Road, London SW11 01-627 4840

Please send me _____ software packs @ £21.99 each incl. VAT and Carriage £2.

I enclose a cheque for £ payable to Microworld Computer Systems Ltd.

Please debit my Access/Visa/American Express Account

No _____ Signed _____

Name _____ Address _____


MICROWORLD

· CALL 01-627 4840 ·

stair

FEATURES

- 1 120cps — bidirectional logic seeking
- 2 Near letter quality mode
- 3 Inexpensive ribbons
- 4 Epson and IBM compatible
- 5 Easily accessible dip-switches
- 6 Friction and Tractor feeds
- 7 Standard parallel Interface-free BBC cable
- 8 12 months guarantee and our 7 day Money Back Guarantee
- 9 Free Printmaster ROM worth £34.95
- 10 Free Carriage by Securicor Courier Service.

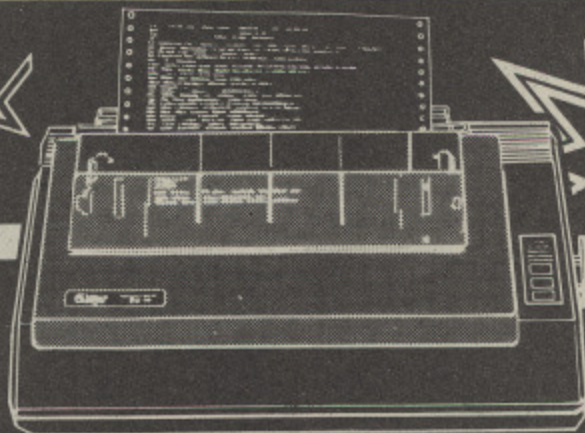

NEW SG-10 NLQ

ONLY £259

With FREE PRINTMASTER ROM

RRP £297


VERY VERSATILE

Also SG-15 NLQ Wide carriage 132 column version. Only £369.00

KAGA TAXAN KP810

FEATURES

- 1 140 c.p.s. and 27 c.p.s. NLQ mode
- 2 Friction and Tractor Feed
- 3 Parallel as standard
- 4 Epson compatible control codes

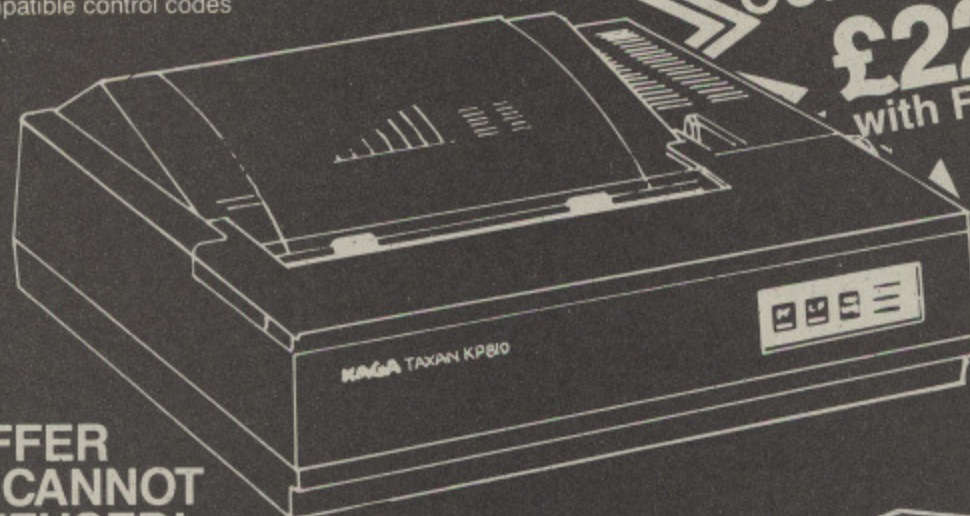

AN OFFER THAT CANNOT BE REFUSED!


R.R.P. £329
OUR SPECIAL OFFER

£229 inc. VAT
with FREE BBC Cable

ATARI 520ST

FEATURES

- 1 512K Ram
 - 2 68000 Processor with networking
 - 3 Professional Software free
 - 4 512 Colours on screen
 - 5 8MHz clock speed
- Gem operating system
Complete system CPU, Disk Drive, Monitor and Mouse included
Free software includes Basic, Logo, Gemwrite, Gempaint.

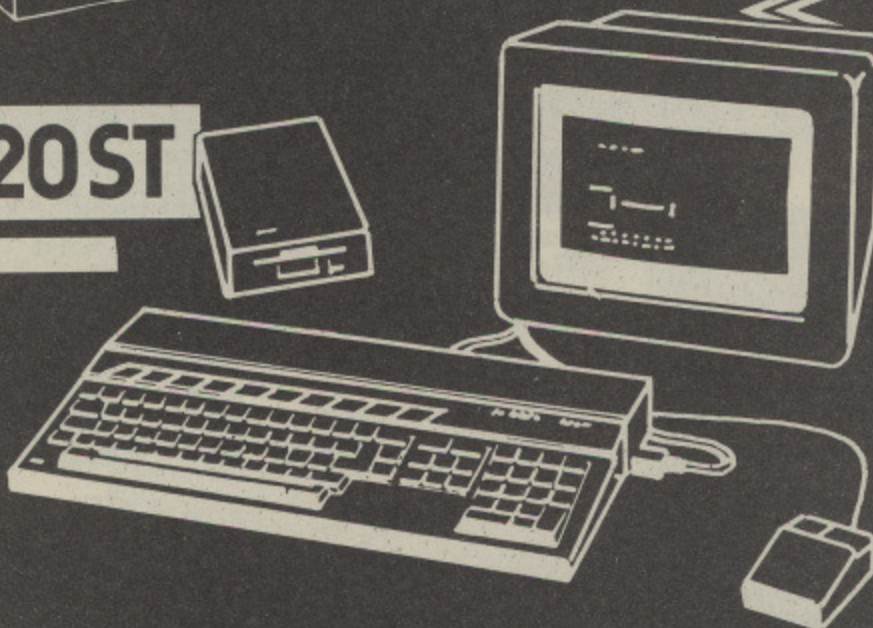

ONLY £749
Inclusive of VAT

Special Offer: FREE Olivetti JP101 SPARKJET PRINTER WORTH £299 WITH EVERY 520ST

Order with Tele (Lor 041- (Abe We orde All p mon cent Orde gua All c by c calle avai dea The noti All i

MICROWORLD

LONDON CALL 01-627 4840

Cumana CSX400
80 Track 400K Drive, 40/80
switched, complete
only
£99.95*
incl. VAT & Carriage

Cumana CSX531
3.5" Disk Drive, 40T, 100K,
including power lead, cable
formatter and Acorn DFS
Kit with DNFS ROM
£99.95*
incl. VAT & Carriage

Cumana CD800/S
40/80 track switched Dual
Drive with PSU £349.95
Sale Price
£229.95*
incl. VAT & Carriage
or with DFS
£295.95*
incl. VAT & Carriage

CUMANA DISK DRIVE OFFERS

Cumana CSX 400
Disk Drive & DFS Kit
only
£154.95*
incl. VAT & Carriage

Cumana CS400
40/80 Track Switchable
Single Drive Double Sided
with PSU and Acorn DFS
Kit was £219.95
NOW £189.95*
incl. VAT & Carriage

**24
Hours
Service**

* Add £14.95 to
prices above for
our 10 pack of
Acornsoft Games
discs worth
£120.00

VERY LIMITED OFFER
ACORN DFS KIT
A complete kit of parts with
DNFS ROM
Mail Order Only
£69.00*
incl. VAT & Carriage
(Fitting cost £15).

How to Order

Orders by post welcomed: please mail coupon with payment.
Telephone orders welcome: call 01-627 4840 (London) or 031-228 1111 (Edinburgh) or 041-332 1116 (Glasgow) or 0224 571735 (Aberdeen).
We also welcome Government and Educational orders.
All products supplied include our own 12 months guarantee backed by our own service centre staffed by fully qualified engineers.
Order with confidence. 7 days money back guarantee.
All charges include VAT and carriage charges by courier. Dealer enquiries and personal callers welcome. All offers stated here are available through any of Microworld's 50 dealers nationwide.
The right is reserved to alter prices without prior notice.
All items subject to availability. E&OE.

MAIL ORDER

To: Microworld Distribution, Dept.MU, Park House, 140 Battersea Park Road, London SW11 01-627 4840

Please send me _____

I enclose a cheque for £ payable to Microworld Computer Systems Ltd.

Please debit my Access/Visa/American Express Account

No _____ Signed _____

Name _____ Address _____

ALL SOFTWARE
AVAILABLE
ON 3" DISKS



ASK ABOUT B+
COMPATIBILIT

■ VECTOR 1 ▽

TAPE TO DISK UTILITY

Features

- + Once only purchase
- + Can save to any disk
- + Very user friendly, help pages on disk
- + 40/80 Format
- + No awkward ROMs, can be used on any machine
- + Can load to all available RAM &400-&7FFF
- = Simply the best tape to disk utility available

Vector 1 versions compatible with Acorn, Opus, UDM, Cumana, BBC+ & Watford (Not 1-42, 1-43) DFS's.

■ VECTOR 2 ▽

DISK UTILITY

Features:

- + 40/80 Format
- + User friendly, menu driven
- + Contains powerful features such as a disk sector editor, Disk Compare, format, verify and track repair
- = The most powerful disk utility available

Prices: £12.00 each for Vector 1 or Vector 2
£23 for both.

HIGHWAY COL

A program to teach traffic

- High resolution colour
- Concept keyboard op
- Learning mode to allow student to learn at lei
- Examination mode

Disk only £11.9

MUST NOT BE USED TO INFRINGE COPYRIGHT

Please specify DFS when ordering

NEW



RELEASE



MEGA-ROM

The latest release from Chalice software, over 60 commands on a 16K ROM. The range of commands available means that there is something for every BBC user. For the disc user the ROM provides a skewed formatter to speed up disc access, a disc sector editor, disc search, verify and repair utilities, a useful free space command, plus many other handy commands. For the BASIC programmer, commands include search and replace on a global or selective basis, list active variable values, append BASIC program, move and copy lines, bad program repair, a highly effective routine to shrink BASIC programs down to a far smaller size etc. Other commands include disassembly, memory edit, graphics compilation, comprehensive file transfer utility, function key lister, envelope lister, rom lister, rom save, full rom status, switches roms off through <CTRL><BREAK>, send commands straight to a ROM, KEEP command, inverse video command, a command to send codes direct to your printer, memory search, base conversion, display character definitions, close open files and many others. All commands have been chosen on the basis that they are useful and not as space fillers.

Introductory price £34.95

OVER

**60
C
O
M
M
A
N
D
S**

the SCYTHE

The Scythe toolkit contains a version of the VECTOR 1 tape to disc system, which will transfer most protected tapes, but we have not stopped there. The Scythe has been packed with a host of other commands: MDIS, SDIS, MEDIT, KLIST, BASE, ROMLIST, ROMSAVE, NROM, FLUSH, FORMAT, VERIFY, FREE, SFIND, BFIND, XLIST, BAD, MRELOC, SLOW, TDISK, VECTOR, ROFF, RON, SECTLOAD, SECTSAVE, MSHIFT & MSWAP. These commands cover everything from ROM management, utilities for the disc user, aid for the machine code or BASIC programmer, and a set of general utilities of use to all BBC users. The commands will accept input in HEX, DECIMAL, BINARY and the resident INTEGER variables making the Scythe very easy to use. The Scythe comes complete with a comprehensive manual and a free utilities disk.

PRICE £24 INCLUSIVE

ROM MASTER

ROM Master is a budget utility ROM designed for people with several ROMs on their BBC computer. ROM master has several utilities to help prevent the interference which can occur between different ROMs, any ROMs that cause problems can be switched off even through <CTRL> <BREAK>. Using ROM master has been designed to be as easy as possible. Most commands will accept lists, so you can, for example, switch several ROMs with just one command. ROMs can be specified by their socket numbers or their title or even abbreviations of their title. 20 commands are available, please send for full details.

As a bonus feature for anyone who has files they want to protect from prying eyes, ROM master contains the commands SCRAMBLE & UNSCRAMBLE which will encrypt or de-encrypt files based on an entered password. The encryption used is sophisticated so unless you know the correct password the files cannot be read.

PRICE £14.95

Orders to:
CHALICE SOFTWARE, Dept.MU
3 Merlin Way,
Covingham,
Swindon SN3 5AN.



All Enquiries Please Ring:
0793-615026
Dealer Enquiries are
Welcome

All prices shown include VAT and p&p. Please add £3.00 per disk if you require 3" disks and specify when ordering.

Stairway to Hell is paved with good graphics

It all began as a run of the mill journey to the centre of the earth. But unbeknown to Sir Charles Frobisher the path he was following was to become a **Stairway to Hell**. Software Invasion use his story as the basis of this new arcade game.

On paper **Stairway to Hell** appears similar to every other ladders and levels game. It has multiple screens, tortuous pathways to be negotiated, and lots of baddies.

Yet it scores over the competition by virtue of the quality of each of these aspects.

There are 15 screens, stored

as four separate files on disc or tape. As you complete each section you must load the new data before you can continue.

This is fine for disc users but a bit of a chore for the less affluent.

Mode 1 graphics have been used throughout, allowing the programmer to pack as much detail as possible on to each screen.

Having seen every screen I have come to the conclusion that it probably took the programmers longer to create them than it did to write the program. Their use of colour and shading is

excellent.

Good graphics are welcome in a game of this nature, but tricky problems to solve are a must.

On each level your task is to make your way to the bottom of the screen, and you quickly realise that there is only one safe route to your goal.

To successfully complete a screen you require agility, timing and cunning. One particularly devious screen involved Sir Charles being sealed off in a small section of the scene.

As he walked along he kept vanishing and reappearing



somewhere else in that small area. That particular puzzle took some solving but your intrepid reviewer passed with flying colours.

The ladders and levels section of the games market is congested with many mediocre programs. To succeed a program has to have something special. I believe **Stairway to Hell** has got what it takes.

Carol Barrow

Superb Citadel

THERE are now so many games available for the BBC Micro that we are becoming rather spoiled for choice. Just occasionally, however, a real beauty comes along, and for me **Citadel**, from Superior Software, is one of these.

Citadel is a role-playing quest game. A particularly evil dictator has made his base in an old castle and built a teleport system there.

It will be used to transport his invasion force of aliens, and your job is to destroy it. To do this you have to find five crystals hidden in various locations in the castle and its surrounding lands.

Sounds very like a traditional adventure — but now for the arcade bit. One room at a time is shown on screen, complete with your hero. You have to guide him round, up ladders, down ropes, leaping over fires by using conventional control keys Z/X for left/right, and so on.

Move out of the room in any direction and the next room flashes up instantly. Useful objects lying around can be picked up, and a lot of extremely nasty creatures have to be avoided or zapped with a spell.



You need to be pretty quick with the control keys here.

Citadel is great fun, and you have to play the game to appreciate it. I've spent four weeks playing nothing else, and still only solved half the puzzles. Not only is it very enjoyable, it's also very difficult.

For me, it's almost the perfect game. You need arcade skill to move your hero around the castle safely. You need logic to work out the purpose of the various objects.

The game is well programmed, with excellent graphics and sound. In fact, while loading it even tells you what its name is — yes, a little speech synthesis. Scared the life out of me the first time it did that.

James Bibby

Two for the physics and maths students

LIFT and **Floater** are two further titles in Cambridge Micro Software's 80 track disc educational series. These are aimed directly at the schools market, and in this case at students of physics and maths from CSE to first-year sixth form.

Lift provides a computer model of some aspects of gravitational mechanics by simulating the change in the apparent weight of a mass on a moving spring balance.

The mass, called Mabel, and the spring balance, drawn as kitchen scales, are set in a lift shaft.

With a joystick, the user controls the direction, velocity and acceleration of the scales, pushing Mabel up the shaft, meeting her as she falls, descending with her and so on.

She can leave a trail of dots behind her, the distance between the dots being proportional to her velocity, and these can be seen against a grid dividing the lift shaft into equally-spaced sections.

All in all, this is a fascinating and amusing way of demonstrating Newton's Second Law (force = mass X acceleration)

and other principles of motion.

Apart from the use of the joystick, which gives fine control over the movement of the scales, all user-selection is by a friendly system of highlighting.

Floater, built around the same basic design and control structure as **Lift** but concerned with weightlessness rather than weight, is less amusing than its companion.

The exciting front cover of the manual shows an astronaut in free fall, with Saturn and its moons in the background.

But the cover-designers have here pandered to a fashion for games-style hype, since the program itself displays only a square two-dimensional box and a particle, unimpeded by friction, floating freely within it.

The particle conserves linear momentum, rebounding off the walls with perfect elasticity at an angle proportional to the direction of its approach.

Left to its own devices, it will continue indefinitely in its uniform motion, but, as with **Lift**, changes in momentum and direction are controlled by a joystick. Again, the particle can

From Page 87

leave a stroboscopic trail of dots behind it, and the box can be marked with a grid for the purposes of measurement.

Displacement, velocity and acceleration are continuously monitored and can be displayed numerically, as graphs, or with vectors (this time Cartesian or polar).

The motion can be frozen at any time.

The educational possibilities of Floater are certainly as wide as those of Lift, but it is likely to have a narrower appeal.

A young pupil can have fun – and learn something into the bargain – just shunting Mabel up and down her lift shaft and watching her weight change.

But apart from drawing pictures with the particle's trailing dots, these programs offer little entertainment value.

Having said that, I should add that to my mind the designer of these packages, who has taken into account educational value, flexibility and entertainment in that order, has got the balance just about right.

Rather, it is the programming which leaves something to be desired.

The fact that the program is unstructured, and that the code is full of GOTOs and GOSUBs is of course something which is transparent to the general user.

But in this case it is also symptomatic of the end result.

For example, when all options are implemented, user-selection in the menus slows down considerably.

The manuals for both Floater and Lift are clear, well-organised, and comprehensive without insulting the intelligence of the user.

Most impressively, each includes a long section for teachers which will be invaluable in the classroom.

A "system" program for adjusting the monitor and setting up a range of common printers for screen dumps is provided with both. And the function keys can be pre-set to recall combination of display options.

At £16.50 each, you can hardly say that they are good value for money, but they should provide teachers with some good material.

Katherine Cranford

Less of a simulation — more of a game

YES Chancellor, by Chalksoft, is a game with a difference, a simulation of the British economy.

And as author Tom Tuite was a senior official in the Inland Revenue you can assume that it may have just that extra hint of authenticity.

Certainly it is all too easy to let inflation get out of hand. You are playing as the Chancellor of the Exchequer and besides directly affecting the economy, your actions affect public opinion.

Be too extreme and the government falls directly, otherwise your actions are judged every five years in a general election.

You'll feel a tremor of apprehension as the results are tabulated on the screen, complete with a form of "swingometer".

The program comes as a suite of files, only available on disc. The initial graphics won't appear if you are using shadow RAM or a second processor, but otherwise there don't seem to be any incompatibilities.

After the graphics display there is the chance to view correspondence between 10 Downing Street and the house next door, the Chancellor's home.

The letters appear as if typed on screen. It is a clever but irritating manner of providing the instructions.

There are four levels of



difficulty, ranging from the easiest, "Testing the water", to the hardest, "Can you walk on water?"

As far as I can tell the unions become more unreasonable in their pay claims as difficulty increases. Certainly their demands become progressively more excessive, and while taking a firm line sometimes pays off, at others (blast that random number function) the cost of provoking a strike is horrendous.

As a part of the package you receive a rather grubby photocopied information booklet and a hints sheet (for teacher). As everything comes in a smart shiny wallet and at a fairly severe price (£17.50) there is no excuse for the untidy documentation. This accurately mirrors

the quality of the contents. For the first game with pretensions towards the educational market, the hints for teachers are, at the very least, condescending.

In fact, the documentation doesn't do justice to the quality of the software.

The instruction booklet doesn't explain the processes you, as Chancellor, must go through to produce your budget. Then, after the unions have had their say, your balance sheet is displayed.

More to the point for the politically-minded Chancellor, your party's rating in the opinion polls is also displayed.

If you can survive five years, your competence is judged by the public in a general election. It should be possible to win the electorate by repeating policies in the fifth year, just like the real politicians. However, the BBC Micro seems to be very rational in its voting.

Yes Chancellor does provide an interesting challenge, as a game.

Had it a facility to retrace a couple of steps in your financial planning to try out "What-if" factors, it would make it more of a simulation and less of a game.

For those who don't want to be economists it costs too much.

Robert Elwell

Onslaught on the Moon

IF anyone has ever wondered what it would be like to zip across the surface of the moon in a buggy, they can now find out with Kansas City's **Moon Buggy**.

The idea is to get as far as possible over the smoothly scrolling moon landscape using four keys to move left and right, jump and fire.

To make life difficult there are plenty of obstacles in the form of craters and large rocks. There

are also rockets that shoot up out of the ground and tanks which fire at you.

Your moon buggy's weapon consists of two lasers, one for blasting objects in your path and one for shooting down the space saucers that make regular sorties above your head.

The background changes with each sector you travel through.

There appear to be 26 sectors each labelled with a letter of the alphabet. The further you ven-

ture the more difficult life gets and the fiercer becomes the onslaught from tanks, missiles and rocks.

Later sectors include broken bridges which have to be skipped across, and flashing black and white mines scattered generously across the landscape.

The game is very playable but the novelty soon wore off, probably because it didn't offer anything particularly new.

Andy Mac

White Knight canters home a clear winner

I FIRST tested BBC Soft's **White Knight** some two years ago (see *The Micro User* December 1983). It was then obviously the best available chess program on the BBC Micro, but it had a couple of shortcomings.

The first was that, although it could solve most two mate problems in about two seconds on average – which is very fast – it did not appreciate underpromotion.

The second quibble was that there was no facility to SAVE and RESTORE a game.

The latest **White Knight** version, Mk 12, is now available on disc and is claimed to be four times as powerful as its predecessor, Mk 11.

Author Michael Bryant has incorporated additional features, such as saving the state of the game, suggested by reviewers and now also claims "it has a perfect understanding of all the rules of chess, including stalemate, underpromotion, the 50 move rule and all draws by repetition" and "its estimated rating is 1850+ELO".

Now these are ambitious claims because I have never seen any program with "perfect understanding of ... all draws by repetition" because, thanks to en passant and castling possibilities, the position may look the same but the available moves differ.

However such subtleties do not matter in a real game, but claiming 1850+ does matter and is remarkable since this is about the level of a county player in England and 100 points better than any chess program some 10 years ago.

To test this I gave it the K,R v K ending, which Mk 11 could not do. Mk 12 did it easily in about one minute total play time.

Next the K,B,B v K ending – the program can do this but needs, and had to be told, to take about 10 minutes. It can't do the K,B,N v K ending, but neither can some county players even if they know that they have to drive the Black King into a corner of the Bishop's colour.

The **SAVEEDRA** position, Figure I, is a good test of anyone or anything's appreciation of repetition of position plus stalemate and underpromotion.

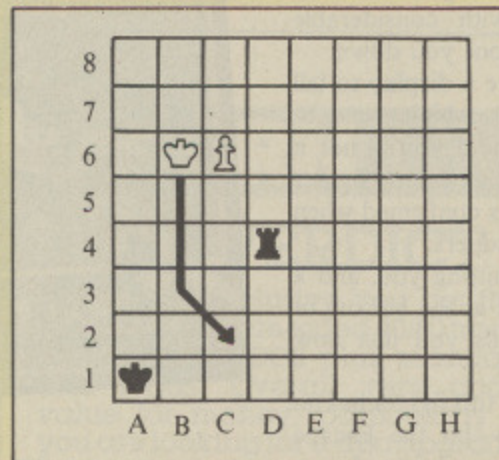


Figure I: **SAVEEDRA**. White to play and win. The arrow shows the King's path.

White King played this puzzle flawlessly: P-B7 then, because of continuous checks by the Rook plus the need to avoid repetition, it played its King down the board to C2 (which at last prevents the threat of a Rook skewer in C1).

I therefore played the Rook back to its starting position in D4, which threatens stalemate if the pawn is queened.

White Knight correctly underpromoted to a Rook and quickly won the game – it was all very fast and very impressive. I

also tried the old Blackburne opening trap, based on the *Giouco Piano*:

White Knight	Black
1. P-K4	P-K4
2. N-KB3	N-QB3
3. B-B4	N-Q5?

which offers a pawn. All chess programs not protected by a book fall for this trap thus:

4. N*P	Q-N4!
5. B*P+	K-K2

but very few appreciate the

dangers and recover correctly at this point by giving up the Knight for a King side castling – White Knight does.

The mate solving mode is, if anything, faster than ever and the program comes with a booklet describing literally dozens of other options.

They include stepping forward and backwards through 120 moves, clock and speed of play settings, displaying "Best line" (or not if this is distracting) plus improvements like it "thinks" in your time hence often anticipating your move and replying instantly and so on.

This time it has every option I can think of, and more.

The booklet states that "White Knight is by far the best computer chess program available on the (BBC) computer". Having tested it – it passed every one – and played it – it's certainly above 1750 – I can only say that this claim is too modest.

White Knight is probably the best chess program on any micro. Highly recommended.

Alex Bell

Time can drag

I HAVE seen several excellent programs dealing with aspects of time, so it was with interest that I loaded **Tell the Time** from Duckworth Educational Computing.

The tape consists of three separate but linked and complementary programs, each dealing with an aspect of time as it relates to both analogue and digital display.

Together they would certainly cover most aspects of this work, with each having a variety of options concerning display, difficulty and purpose.

The first section, **Tell the Time**, has the child either setting the clock to the words supplied, or supplying the answer for the displayed time.

Clockset displays a clock,


digital or traditional, and allows the child to move the hours or minutes by pressing H or M.

Pressing T will reveal in words the current time displayed.

24 Hour Time Translator is the rather unwieldy name given to the final program, dealing specifically with the links between 12 and 24 hour times.

Again there is a wide range of options to be selected, thus increasing the program's potential. This seemed to be the most educationally sound of the three, containing more helpful information for the children when problems arose.

The first and third program share an annoying aspect – after every single question you return to the score screen, with the option to have another question.

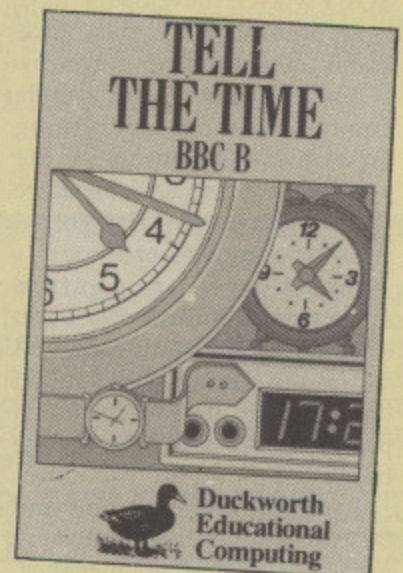

Duckworth call this constant monitoring, but in a busy classroom it becomes a constant nuisance when children require an explanation of its function.

This is only a small niggle, but it spoils a competent program.

Phil Tayler

Phantom flies fine

IT quickly becomes apparent, when playing **Phantom Combat**, Dr Soft's latest flight simulator, why it cost the Royal Air Force more than £2,000,000 to train each of its fighter pilots.

At least, in this simulation of the F4 Phantom, a crash in the practice mode isn't fatal. You can hit the ground at over 700 knots and bounce off, although the noise of scraping metal suggests that repairs will be necessary.

Landing isn't very easy. It is possible, occasionally, after numerous attempts, and so it's very realistic. However in the alternative mode for this simulator, Operations, there is no bouncing along the ground. Crash and that is it - you have only the one life to lose.

More to the point, in the practice mode you can either fly in formation with, or practice shooting down, another aeroplane.

When operational, the other

plane tries, with considerable success, to shoot you down.

You do have a display to tell you where it is, which seems to be mostly behind you - not a good place for an enemy fighter to get, which is confirmed when the screen shudders.

Gunfire is hitting you, and a damage report at the bottom of the display tells you just how bad things are.

Fortunately this fighter has an ejection seat - hit the Escape key. You can save some of your score and go on.

Crash the Phantom and the game restarts. Or at least that is what the instructions tell you.

My micro, with Acorn's DNFS 1.2, went into Mode 3, the disc drives started spinning and the screen locked up. Crash and you'll really crash!

Response to the controls is fabulous. If you have double joysticks, one can be made to act as the throttle, giving increased realism. The cockpit view moves



smoothly, but is alas constructed from very simple wire graphics, with almost no ground detail.

The instrumentation is adequate, but a pilot would really need extra pitch information on the artificial horizon.

If you like flying, this game is for you. The simulation is responsive and great fun. In fact, after Aviator, it is the best flight simulation I've seen on the BBC Micro.

Robert Elwell

It's the drive - in database

SOFTWARE developers have long been juggling with ideas about computerised diagnosis.

The logistics are simple enough. Almost everything depends on the quality of the knowledge base, and therefore on the experts who have pooled their experience to produce it.

Car Cure from Simtron applies this system to the world of motor vehicles with, as far as I can make out as an interested but inexperienced car mechanic, a pretty impressive knowledge base.

It covers 300 symptoms and 900 faults concerned with every aspect of vehicle maintenance, from starting the engine to body vibration.

And it comes up with sensible answers.

You enter the database either by a Symptoms "gate" or, if you have a good idea what the offending part may be, a Parts "gate". From then on, you

proceed down the text-only tree using the cursor keys, making a choice from a menu of items at each node.

When the program has enough information to explain the fault it suggests a course of action, together with an associated level of difficulty.

Built-in Help screens can be called up at any time, but they are hardly necessary since there are few commands to remember.

And all you need, in any case, is in the manual, which contains diagrams of engine parts, worked examples, and lots of safety advice on not following the program slavishly, especially when dealing with things like brakes and steering.

Car Cure is available in two versions, one for private use, the other for colleges.

The college version can be upgraded to run on Econet, and also includes two extra functions, an adjustable time delay,

intended to allow group discussion before the program moves to the next screen, and a screen dump. Why this print option should not be there on the private use version, beats me.

According to Simtron the package is now being used in more than 100 colleges by motor vehicle students, and I can certainly see its potential as a teaching aid.

But I have my doubts about its real usefulness for do-it-yourselfers. Those who know about cars will hardly need it, and those who don't are not likely to begin tinkering simply as a result of having used it.

I hope I am wrong. Apart from the fact that the program hangs if a screen dump is attempted with no printer attached - I wish developers would knock that one on the head, it's easy - the program deserves to succeed.

Gabriel Jacobs

Locked up too tight?

SOME months ago I reviewed the Read-Right-Away series from Highlight and was struck as were the children in my class by the super graphics.

Now Highlight has released a new series of language programs on cassette and disc.

Adventurous English introduces a cute little character called Ben who, laden down with a large knapsack, goes hiking off through a variety of locations.

These include a factory, a camp site, a house, woods and at each location the child is asked to enter a suitable adverb for his journey.

Thus he might go *over* a bridge, or *through* the hospital. The movement of the little hiker is smooth, perhaps aided by a curious tendency that Ben has to move three legs at once.

Once the child has had the necessary reinforcement at this first level, he may continue on to the far more interesting second level, where the locations can be visited in any order.

At certain places he comes across items which might be valuable elsewhere, such as a tent pole or a mask.

These come into their own at certain points, for danger now lurks to be overcome by the earlier acquisition of the necessary object.

For example, a mask is used in the plague-ridden hospital and the dog frightens away the troll.

The objects appear to be always at the same points, but at the age range with which this program is concerned - 7 to 12 years - this is valuable as it can develop strategy and planning.

Again Highlight has produced a top quality program, and one which will prove to be very useful in the classroom.

It is a pity that the protection is so tight that few teachers will be capable of altering the words used so as to make the program even more valuable.

Phil Taylor

WE OFFERED THEM A CHALLENGER THEY GAVE US BACK A CHAMPION

After testing the new 3 in 1 Challenger disc drive system from Opus Supplies, Britain's three leading BBC micro magazines were clearly impressed. After all Challenger is the fastest disc link-up ever with no complicated

interface connections, soldering or track cutting. No wonder this remarkable plug-in disc drive, double-density disc interface and super fast 256K RAM disc combination is currently taking the market by storm.

A&B COMPUTING

THE VERDICT

"Opus have got a winner on their hands. If you are looking for a disc upgrade you can't go far wrong by buying a Challenger, even if you already have a single drive this would certainly be a sensible upgrade path. This certainly gets my vote as best buy of the year."

A & B COMPUTING - JANUARY 1986

RAM DISC PERFORMANCE

"Here is the pièce de résistance of the whole system - a 256 K RAM disc. I honestly don't know how Opus can do it for the price.

Using the RAM disc is a real dream with disc based applications. Getting back to the actual performance of Spellcheck II, with the dictionary disc set up in the RAM disc, the result is amazing. When in automatic checking mode the text scrolls past so fast it is difficult to read. To put some figures on the improvement in speed, I checked a document just over 21 K long, which took 5 minutes 56 seconds on floppy and only 1 minute 7 seconds using the RAM disc."

A & B COMPUTING

ACORN USER

THE VERDICT

"At £249.95 inclusive you get the RAM disc, double-sided 40/80 track drive, Opus DDOS plus manuals and leads. Overall very good value for money, particularly if you are looking for a disc upgrade from scratch."

ACORN USER - FEBRUARY 1986

RAM DISC PERFORMANCE

"The big deal comes in the speed. Being a purely electronic device, actions such as reading and writing are performed in fractions of the time a mechanically engineered disc drive takes.

To prove the point, I ran three programs on the RAM disc and the same three on the standard Opus drive with the following results (timings in seconds):

	RAM DISC	NORMAL
1 Save 32 K memory	0.34	13.69
2 BPUT 1 to 1000	1.14	4.71
3 PRINT/1000 strings	4.64	10.17

You don't need me to point out the huge speed increases."

ACORN USER

THE MICRO USER

THE VERDICT

"For the serious user Challenger could make file handling far easier and a good sight faster to use than a standard DFS as well as bringing a permanent end to 'is it 40 or 80 track, single or double density?' problems. In addition all the workspace used by a standard DFS is reclaimed and made available to the user by Challenger."

THE MICRO USER - FEBRUARY 1986

RAM DISC PERFORMANCE

"Of course it's not just a versatile disc drive, Opus also provides you with 256 K of RAM to play with. This RAM thinks it is a disc and the DDOS treats it as drive 4. If you have the 512 K version you get a drive 5 too. The RAM disc allocates sectors to files so that errors such as 'can't extend' are eliminated. In other words, it is a simple matter to use the RAM disc for most of your random access files then copy completed files from the RAM disc to a floppy disc."

THE MICRO USER



Challenger's price of £249.95 includes our unbeatable two-year warranty, a full operating manual, VAT and free delivery. We can even supply a simple RAM disc upgrade for just £49.95. Call us now on 0737-65080 for details of our nationwide dealer network or simply post the coupon. Generous education and dealer discounts available

CHALLENGER - STILL SIMPLY LIGHT YEARS AHEAD OF THE OPPOSITION

To: Opus Supplies Limited, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey. MU3
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

_____ Challenger Unit(s) £249.95 each
_____ RAM DISC upgrade(s) to 512K at £49.95 each

I enclose a cheque for £ _____ or please debit my credit card
account with the amount of £ _____

My Access Visa no. is:

NAME _____
ADDRESS _____
TELEPHONE _____



MIRROSOFT

FLEET STREET

CITY OF LONDON EC4

Editor

Welcome to the world of personal publishing on your BBC Micro!

FLEET STREET EDITOR gives you everything you need to produce professional-looking printed materials – in one package!

The different stages in newspaper and other types of print production processes are represented by the six different 'departments' in the program. By following these stages through the program and comprehensive manual, you can blend text and graphics to produce printed materials for a wide range of applications.

Whatever information you want to communicate, **FLEET STREET EDITOR** will make your task easier and more enjoyable... and save you money!

That's right – **FLEET STREET EDITOR** not only provides you with a complete publishing package. As part of the package, you also receive valuable money-off coupons for Cumana disk drives and Touch-Pads and for Mannesmann-Tally dot-matrix printers.


"**FLEET STREET EDITOR** is THE package for anyone with access to a BBC Micro who wants to produce printed materials that include graphics... The Graphics Library is a marvellous idea... The Studio is a really creative area with all the tools you need... Without a doubt, this is a wonderfully powerful and flexible package... **FLEET STREET EDITOR** has been cleverly conceived and brilliantly executed."

– Dave Futcher, *Educational Computing*


Just £39.95
including VAT!

A QUICK TOUR ROUND THE DEPARTMENTS

Each Fleet Street Editor page is constructed as a series of panels, with up to 8 panels per A4 page. Here's where you construct those panels:

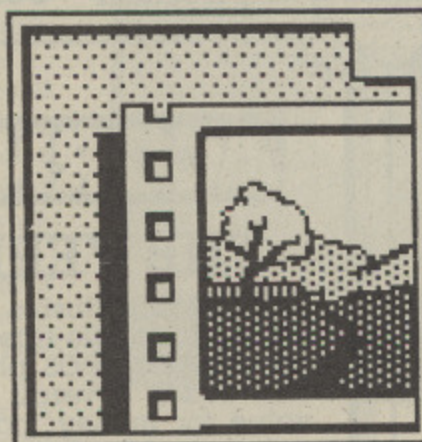


GRAPHICS LIBRARY
200K (about 400 pieces) of ready-to-use art – illustrations, symbols, and display typefaces which can be incorporated into your own work.

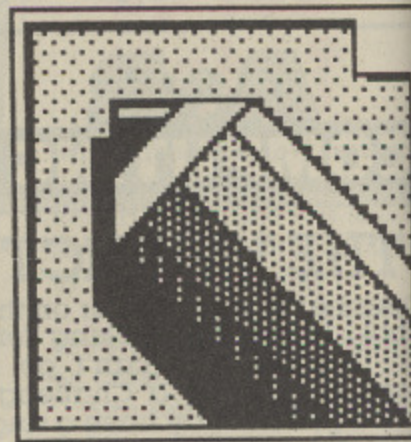


STUDIO
Where you modify existing art from the Library or your own collection, or create your own. All the graphics in the Library were created here.




COPYDESK
Input your text here, using either the program's word processor or existing View or Wordwise files, and watch it wrap automatically round your graphics. Use different fonts, too.

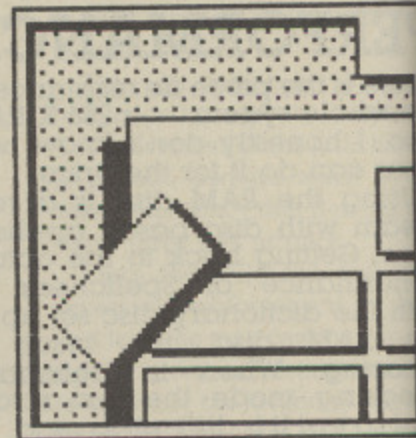

PAGE MAKE-UP
Define the format for your page and construct it from the catalogue of panels you've built up. Some panels are provided ready-made for you to experiment with.

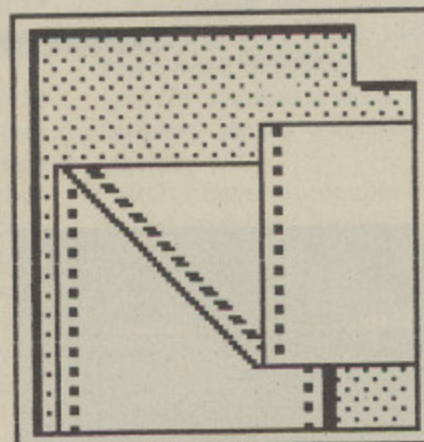

PREVIEW AND PRINT
Preview a reduced representation of your completed page on screen, approve it, and send it to your printer using one of the built-in printer-drivers – you can write your own, too.

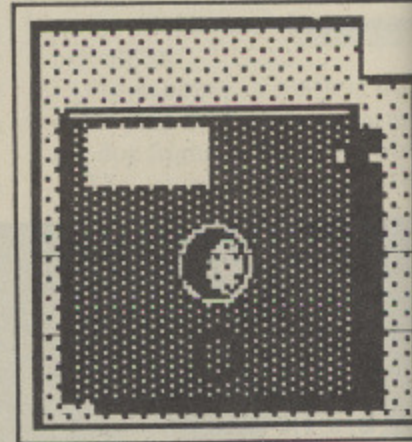

ADMINISTRATION
Set up the program to suit your system configuration, format disks, integrate graphics from most Mode-7 programs, and further manipulate Fleet Street Editor files.

LONDON'S LARGEST DISPLAY OF PRINTERS MONITORS COMPUTERS AND PERIPHERALS

DON'T TAKE A CHANCE

—COMPARE BEFORE YOU BUY



OVER 40
PRINTERS ON
DISPLAY — MOST ON
DEMONSTRATION

HI-VOLTAGE UK's Best Printer Prices

OPEN MONDAY-SATURDAY 9 AM-6 PM

KAGA TAXAN KP810
NLQ Dot Matrix Printer
160 c.p.s.

£199.95 + VAT
IBM version £239.95 + VAT

STAR GEMINI 10X
Dot Matrix Printer
120 c.p.s. + Friction &
Tractor, Epson
Compatible.

£129.95 + VAT

UCHIDA DWX305
Daisywheel Printer
18 c.p.s. With FREE:
Printer Cable,* Extra
Ribbon, 500 Sheets of
Paper and Tractor Feed
(worth £69)

£199.95 + VAT

AMX MOUSE
With Superart
£66.95 + VAT

AMX DESK
£19.00 + VAT

All other AMX products
at superdiscounts —
Phone for details.

DOT MATRIX PRINTERS

Brother HR5	£78.21 + VAT =	£89.95
Brother M1009 (P+S)	£130.40 + VAT =	£149.45
Brother EP44 typewriter	£189.90 + VAT =	£218.39
Epson P40 Thermal AC/DC	£49.90 + VAT =	£57.39
Epson FX85/FX105/RX100	POA	
Epson LX80/GX80 NLQ	£199.90 + VAT =	£229.88
Epson JX80 Colour	£449.90 + VAT =	£517.39
Canon PW1080A NLQ	£289.90 + VAT =	£333.39
Canon PW1156A NLQ	£365.90 + VAT =	£420.79
Panasonic KP1091 NLQ	£255.90 + VAT =	£294.29
Oki-Mate 20 Colour	£199.90 + VAT =	£229.89
Shinwa CPAB0 NLQ	£179.90 + VAT =	£206.88
Micro P. 165 NLQ	£260.78 + VAT =	£299.90
Seikosha GP50S (Sinclair)	£69.90 + VAT =	£80.39
Seikosha GP500A	£89.90 + VAT =	£103.38
Seikosha SP1000 NLQ	£199.90 + VAT =	£229.88
Smith Corona Fastext 80	£110.90 + VAT =	£127.53
Star SG10 (IBM) NLQ	£199.00 + VAT =	£228.85
Star SG/SD/SR range in stock	POA	
Kaga Taxan KP910 NLQ	£379.90 + VAT =	£436.89

DAISYWHEEL PRINTERS

Brother HR10	£249.90 + VAT =	£287.39
Brother HR15 (P)	£315.00 + VAT =	£362.25
Brother HR25	£609.00 + VAT =	£700.35
Brother HR35 + sheet feed	£819.90 + VAT =	£942.89
Daisystep 2000	£219.90 + VAT =	£252.89
Juki 6000	£199.90 + VAT =	£229.89
Juki 6100	£324.90 + VAT =	£373.64
Juki 2200 typewriter P or S	£257.30 + VAT =	£295.90
Commodore DPS1101	£165.17 + VAT =	£189.95

All popular interfaces, cables, etc. available from stock.
Custom cables made to order.

Let our experts match your computer to the printer of your
choice.

Printers — All models parallel-centronics interface Serial
RS232C available at same or slightly higher prices.

MONITORS

Microvitec Colour
Microvitec 1436MS STD

RES RGB	£139.95 + VAT =	£160.94
1431 DS STD RES RGB	£182.53 + VAT =	£209.90
1431 MZ STD RES Spectrum	£199.90 + VAT =	£229.89
1451 DS MED RES RGB	£229.90 + VAT =	£264.39
1451 DQ MED RES QL	£229.90 + VAT =	£264.39
1451 APDS MED RES	£289.90 + VAT =	£333.39
1441 DS High RES RGB	£389.90 + VAT =	£448.39

Philips Monitors (Monochrome)

BM 7502 Green	£73.82 + VAT =	£84.90
BM 7522 Amber	£78.17 + VAT =	£89.90

Philips Monitors (Colour)

CM 8501 RGB STD RES	£181.65 + VAT =	£208.90
CM 8524 Comp/STD	£225.13 + VAT =	£258.90
CM 8533 RGB/IBM/MED	£251.22 + VAT =	£288.90
1114 Monitor/TV	£173.82 + VAT =	£199.90

BBC COMPUTERS + SOFTWARE

NEW BBC Master 128K
BBC Turbo Master
BBC Master 512K

Call for
Price and
Delivery

ROMS

View	£45.90 + VAT =	£52.79
Graphics	£27.90 + VAT =	£32.09
Disc Doctor	£27.90 + VAT =	£32.09
Wordwise Plus	£46.90 + VAT =	£53.94
Communicator	£57.90 + VAT =	£66.59
Printmaster	£27.90 + VAT =	£32.09
Caretaker	£27.90 + VAT =	£32.09
Logo	£59.90 + VAT =	£68.89
AMX Mouse	£68.50 + VAT =	£78.78
Hard tinted perspex dust cover	£11.90 + VAT =	£13.69
Acorn DFS	£86.91 + VAT =	£99.95
Opus Double Density DFS	£78.22 + VAT =	£89.95

Cumana and Opus Disk Drives

1 x 100K	£74.90 + VAT =	£86.14
1 x 400K Switchable	£95.90 + VAT =	£110.29
2 x 100K	£159.90 + VAT =	£183.89
2 x 400K Switchable	£179.90 + VAT =	£206.89

Opus Disk Drives now with 2 Year Guarantee
Torch 2 x 400K D. Drive £159.90 + VAT = **£183.89**

SUPERDISKS Prices per box of ten ex VAT

	SSDD 40TR	DSDD 40TR	SS96TP1 80TR	DS96TP1 80TR
BASF 5 1/4"	£10.00	£15.80	£17.50	£19.20
3M 5 1/4"	£13.50	£19.50	£19.90	£23.90
VERBATIM 5 1/4"	£12.20	£15.20	£15.20	£19.90
DYSAN 5 1/4"	£13.75	£18.00	£18.00	£23.90
TDK 5 1/4"	£15.90	£14.50	—	£29.50
SONY DS/DD 3 1/2"	—	£32.90	MAXELL 3"	£38.90

Add 70p for P&P per order of Disks

PRINTER RIBBONS

We stock the widest range for Brother • Canon • CBM •
Daisy Step • Epson • Juki • Kaga • Mannesman • Seikosha
and Shinwa • PHONE FOR OUR LOW, LOW PRICES!

All equipment fully guaranteed — Credit terms available

Mail Order + Export + Trade
Hot Line Phone 01-686 6362



Delivery by Securicor (3 day) please add £5.00 + VAT per item.
Delivery by T.N.T. (overnight) please add £9.50 + VAT per item.

Send off or order by 'phone quoting your Access,
Barclaycard No. 'phone 01-686 6362. Immediate
despatch on receipt of order or cheque clearance.



Or you can Telex your order on: 946240 Attn 19001335

ALSO VAST RANGE OF DISK DRIVES, JOYSTICKS, DISK BOXES, INTERFACES, SHEETFEEDERS,

HI-VOLTAGE 53-59 High Street, Croydon, Surrey CR0 1BD.

Prices correct at copy date. Subject to change without notice due to currency fluctuations etc. E. & O.E.


HIGH-BES GRAPHICS AT LOW-BES PRICE

OPEN MONDAY - SATURDAY 9 AM - 6 PM

HIGH-RES GRAPHICS AT LOW-RES PRICE




FREE-HAND DRAWING
ICON SOFTWARE

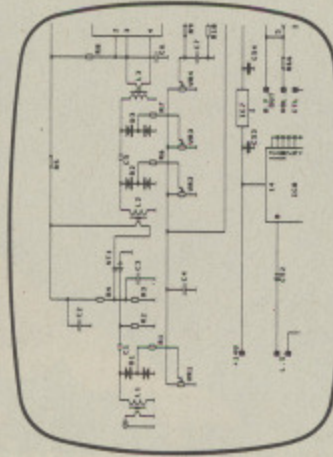

ELECTRONIC CIRCUIT
DESIGN



USING GRAFPAD
FOR TRACING

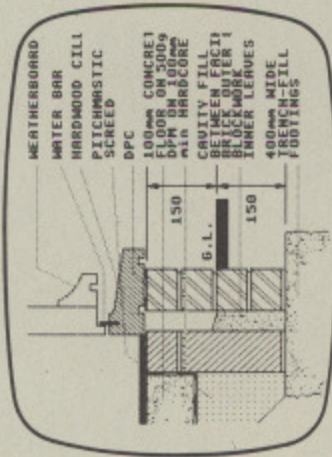

ARCHITECTURAL DESIGN
WITH DDX SOFTWARE

- A4 SIZE DRAWING AREA
- HIGH RESOLUTION COLOUR
- HOME AND BUSINESS USE
- VARIETY OF OPTIONAL PROGRAMMES
- FREE HAND DRAWING
- CIRCUIT DIAGRAMS

- C.A.D.
- PCB LAYOUTS
- EASY TO USE

GRAFPAD II - THE ULTIMATE IN GRAPHIC INPUT DEVICES FOR THE BBC MICRO

The first low-cost graphic tablet to offer the performance and durability required for business, industrial, home and educational applications. It's small, accurate and reliable. Needs no adjustment or preventive maintenance. **GRAFPAD II** is a unique product that brings the power of modern technology under the control of the user.

GRAFPAD II:

- A brilliant British invention manufactured in Gt. Britain, unequalled in the world of graphics input.
- Ferranti's space age technology makes the Grafpad II unique in its digitising technique.
- The culmination of 3 years of advanced research to create a final graphical solution for the world computer market.

IT COMBINES IN ONE DEVICE ALL THE FACILITIES OF PREVIOUS ATTEMPTS AT INPUT DEVICES. THE APPLICATIONS ARE AS NUMEROUS AS THAT OTHER COMMONLY HELD DEVICE - A PEN! - AND INCLUDE:

- Option Selection ● Form Input ● Data Collection ● Logic Design ● Circuit Design
- Picture creation ● Picture storage
- Picture retrieval ● Construction design
- C.A.D. ● Text Illustration ● Games
- Pattern Design ● Education ● PCB Design

MUS

TO: GRAFSALES LTD.

Unit 8, Derby Works, Carey Place, Watford, Herts, WD1 2LR. Tel: (0923)48222 Telex: 946024

Please supply GRAFPAD(S) II at £59.50 plus £2.50 p&p (or £8 insured delivery)

NAME: _____

ADDRESS: _____

Cheque enclosed value £ _____

You can pay by credit card or telephone your order (24 hour ordering service)

Visa

Access

SPECIFICATION

Resolution:
1280 x 1024 pixels

Repeatability:
1 pixel

Output rate:
2000 co-ordinate pairs per sec.

Interface:
parallel

Origin:
LH corner or selectable

Dimensions:
350 x 260 x 12 mms.

EXPORT AND DEALER ENQUIRIES WELCOMED

FREE ICON DRAWING SOFTWARE WITH EACH GRAFPAD II

£59.50 inc. VAT

Available from most Computer dealers or direct from Grafsales Ltd. Unit 8, Derby Works, Carey Place, Watford, Herts, WD1 2LR. Tel: (0923) 43942. Telex: 946024 Open: Mon-Fri 9-5. Sat 9-12.30.



Some of the features of the new Mini Office II

With the word processor you can...

- ★ Select most features by menu or embedded commands. ★ Transfer records from database for personalised circulars. ★ Choose from three methods of display: 20 column (double size characters), 40 column, 80 column (20 and 80 columns only on 'B' Plus and 6502 Second Processor).
- ★ Centre, indent, tab, justify and merge text. ★ Insert, copy, move or delete blocks of text.
- ★ Select two editing modes: insert or overwrite. ★ Search and replace globally or selectively. ★ Check typing speed in words per minute. ★ See on-screen real-time clock, plus word and character count.

With the database you can...

- ★ Select five field types (Alpha, Decimal, Date, Integer, Formula).
- ★ Perform all arithmetic functions.
- ★ Search over multiple fields.
- ★ Mark individual records. ★ Use flexible printout routine. ★ Pass records to the word processor. ★ Carry out powerful multi-field record sorting.

With the spreadsheet you can...

- ★ Total rows and columns, with easy selection of criteria. ★ Copy formulae either absolutely or relatively. ★ Print out all or part of the spreadsheet.
- ★ Move directly to a specific location.
- ★ Select movement of cursor.
- ★ Recalculate automatically or manually.

With the label printer you can...

- ★ Design any style of label with the versatile editor. ★ Select label size and sheet format. ★ Read directly from database files.

With the graphics pack you can...

- ★ Enter data directly or take from spreadsheet. ★ Use icon type menus.
- ★ Choose pie chart, bar chart or line graph. ★ Display up to three line graphs simultaneously. ★ Display up to three bar charts side by side or stacked.
- ★ Choose bar charts in either 2D or 3D. ★ Draw compacted or emphasised pie charts. ★ Define your own style of shading. ★ Dump graphs directly to Epson or Seikosha compatible printer.

With the comms pack you can...

- ★ Access MicroLink or Telecom Gold with only two key presses. ★ Select protocols as required. ★ Change modes while on-line. ★ Store text directly to memory or disc. ★ Use one-key 'Stop' command.

With all the modules you can...

- ★ Use the AMX Mouse. ★ Choose foreground and background colour in most modes. ★ Make more efficient use of memory and faster response time thanks to machine code content.
- ★ Take advantage of the extra memory of the BBC B Plus and 6502 Second Processor.

- ★ Features that were not in the original Mini Office.

Databases proudly presents.

When it was launched in October, 1984, Mini Office was acclaimed as the most innovative software of the decade, creating new standards in serious programming and at a price everyone could afford.

Since then it has become far and away one of the best-selling packages ever created for the BBC Micro, frequently displacing games from their position in the Top Ten. And, unlike most software releases, it is still as much in demand now as was 15 months ago.

Which is why there has been so much speculation throughout the industry about what the much-rumoured Mini Office II would be like. After all, how do you beat a best-seller?

The answer is – by making it even better! And the new Mini Office II is certainly that... in every respect.

While still retaining upward compatibility with the original Mini Office, it is packed with a host of new features that have been made possible by the tremendous strides made in programming techniques in the last 12 months.

The result is the most comprehensive suite of business programs ever produced for the BBC Micro – and still the best value ever.

And it comes with a no-nonsense easy-to-follow guide to business computing that will take you step by step through all the many features, showing you how to use their huge potential to the full.

It's a word processor...

Mini Office II Word Processor

Word Processor menu

- Edit text
- Preview text
- Print text
- Clear text
- Search & Replace
- Catalogue
- Select Mouse
- 40 character mode
- Merge text
- Save text
- Load text
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

It's a database...

Mini Office II Database

Database menu

- Edit data
- Load/Save/Print
- Search data
- Sort data
- Calculate
- Edit structure
- Select Mouse
- Clear data
- Clear all markers
- Toggle markers
- Hardware options
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

It's a spreadsheet... it's a...

Mini Office II Spreadsheet

Spreadsheet menu

- Edit spreadsheet
- Load spreadsheet
- Save spreadsheet
- Save graphics data
- Print spreadsheet
- List formulae
- New spreadsheet
- Alter screen display
- Catalogue
- Select Mouse
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

It's MINI OFFICE II on the BBC Micro!

All 6 modules

eSoftware

ORDER FORM
ON PAGE 175



... It's a graphics pack ...

... It's a comms pack ...

... It's a label printer ...

Mini Office II Graphics

Graphics menu

- Bar chart
- Line graph
- Pie chart
- Load data
- Save data
- Edit data
- Clear data
- Select Mouse
- Review data
- Catalogue
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

Mini Office II Communications

Communications menu

- MicroLink/I.Gold (1200/75)
- MicroLink/T.Gold (300/300)
- MicroLink/I.Gold (1200/1200)
- Customised protocols
- Select Mouse
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

Mini Office II Label Printer

Label Printer menu

- Load file
- Append file
- Catalogue
- Edit format
- Load format
- Save format
- Print labels
- Storage media.....Disc
- Select Mouse
- Mini Office II Menu

Use cursor keys to choose then press RETURN

(c) Database Software 1986

Module or £14.95 (cassette), £16.95 (5¼" disc), £19.95 (3" disc)

JO STORK
begins a new
series on the
BBC Micro's
place in
business

Finding a safe path through the commercial micro minefield

READERS will be well aware of the commercial carnage that has occurred over the last few years among micro suppliers.

Some computers never even left the drawing board, or on reaching the market place became bankrupt stock after only a few months. Others are still widely available at greatly reduced prices but their manufacturers are still with us by virtue of a succession of well publicised buy-outs, bale-outs and sundry boardroom back-stabbings.

The list of unsuccessful entrants into micro manufacturing is not limited to unknowns, but includes extremely profitable groups specialising in domestic electronics.

Much less well documented is the vastly greater number of failures among software suppliers. Software production generally lags behind that of hardware by between four to nine months, hence many micros either never had any software at all or had a limited range before the programmers painfully realised that the only wise choice was to cut their losses.

The dropouts

Still more software producers decided to wait until a model had a reasonable market share before trying to cash in. Unfortunately this delay, when added to the time factor of creating a suitable product and setting up a distribution operation, was such that by the time the program was eventually released it made no commercial impact at all.

I make no apology if all this seems a bleak start to my regular column. That was precisely the intention, and just in case the point has not come across forcefully enough, here is another fact.

And it should be remembered the next time you feel tempted to sign a cheque for any computer-related product.

This fact is that a recent independent survey has shown that of all the micro products vendors who were in business five years ago less than 20 per cent are still trading. Most of these dropouts were software suppliers.

Now that we fully understand why caution must be my by-word I can turn to the more positive topics which will feature in this column. Having shown you the minefield I can begin to lead you through it.

Fewer options

Remember that selecting the computer itself is less of a problem for an entrepreneur than choosing its software. This is partly because the range of options is much smaller, but is also due

to the nature of the beast. After all, unless it has any software the micro is no more than a very expensive desk ornament. Whether it becomes a worthwhile investment is ultimately the responsibility of the software.

Selecting business software therefore requires all your critical and analytic faculties. If you choose a game which quickly bores or disappoints you, then all you have lost is a few pounds. Giving it away after a couple of weeks is relatively unimportant. Choosing the wrong commercial software can prove a major financial disaster.

You should adopt the principle that unless your organisation is enjoying unusual rates of growth, any software will be used for at least three years. It now becomes obvious why the source of supply becomes critical. This life expectancy is needed to justify the conversion costs, familiarisation time and so on.

Having weeded out the vendor who is unlikely to be around to help you when you most need him, you can turn to the variety of tasks which computers are put to in business.

Guidelines

The multiplicity of offerings to tackle these tasks means that I cannot even begin to scratch the surface of software which might catch your eye. I will therefore use my reviews to illustrate principles by which any commercial software must be judged rather than just give a bald list of file sizes, menu options and so on.

With the ground rules now explained let us look at Small Business Accounts & VAT Made Simple from Micro Simplex and see how it fares.

Small Business
Accounts & V.A.T.
made Simple.



If my normal hourly rate for consultancy services was the same as I will receive for this review, my family would have entered the poor house years ago.

This does not imply a criticism of either the editor or of this package, but is a simple statement expressing the length of time it takes to review a sophisticated business package even when the concepts on which it is founded are thoroughly understood.

This same sophistication leads me to my first concern about this package. It totally meets the objective of providing a comprehensive invoicing, book-keeping and VAT system for the small businessman. However, because of the wide range of facilities it contains, I have severe doubts as to the ability of many of its targeted users to make the most of these features.

My estimate is that an average organisation will require a minimum of 25 man/hours to convert from a manual system to this one, and since this will be frequently required of one person my concern is whether this time will be committed to the change-over.

Simple as this package is, few first time users will expect such a hefty time investment. This estimate of 25 hours is made up of:

- Reading the 100+ pages in the extremely good manual, at least twice, before even sitting down at the keyboard. (3 hours)
- Preparing blank discs, setting up printer options, organising back-up

procedures and obtaining the registration code (anti-piracy code), without which the program will run for only one week. (3 hours)

- Deciding under which of up to 99 headings the receipts will be analysed – a DIY shop may use tools, timber, plumbing and so on. This selection must be thorough and complete, since you will have to live with this choice for a long time. (5 hours)

- Deciding under which of up to 10 headings for purchases (items bought for resale or for re-working into finished products) will be analysed – a cafe may use vegetables, meats, drink and so on. Again this must be thorough and complete. (2 hours)

- Deciding under which of up to 40 headings for expenses, 23 of which are pre-created in the package, will be analysed, such as wages, vehicles, interest, and VAT payments. Of these three sets of headings this must be the most thorough and complete, since control of costs is as important to profit as the increase in sales revenue. (2 hours)

- Practising the package's operations and checking on the format of the reports. (4 hours)

- Planning and practice for invoicing routines. A 40 track disc can store details of approximately 150 customers and 550 invoices before another disc is required. (3 hours)

- Only once these 22 hours have been spent can one even consider transferring the current manual data onto the system

prior to "going live". The time this will take is utterly dependant upon the state of the books at the time, but merely finding this data and apportioning it against the headings chosen above let alone entering it into the system, will require several hours.

This is a fairly forbidding list, and it is invariably due to the lack of this preparation that most people are forced to make do with less than satisfactory systems. If you are prepared to invest this time and effort this system will provide excellent service.

Simplicity

I can therefore strongly recommend it on several counts.

Firstly because it is simple to use and does not add further layers of complexity to the task of keeping the books. Since it is primarily menu driven with clear, logical question and response sequences for the transaction details, anyone who has ever entered a three-line Basic program will have no problems with its operation.

Secondly a copious series of reports are available:

The fundamental, such as profit and loss, VAT return preparation.

The detailed, such as a listing of any single heading's transaction, cheque reconciliation.

The helpful, such as audit trails.

Providing you make regular and frequent entry of the transactions there is no excuse for you not to have an extremely clear knowledge of the financial state of your organisation at all times.

Thirdly there is a User Club with a telephone help desk, program enhancement service and free update facilities if the legislation – for example the rate of income tax changes. Even at £50 a year this can prove invaluable.

I would say this is a thoroughly professional approach to an age old problem. Many small businesses are equally professional, and they will do well to place it at the top of any short list of book-keeping packages they are drawing up.

Any potential users must however truthfully ask themselves: "Will I do the preparatory spadework?" If they have any doubts at all, they need to develop a far more organised approach to their commercial thinking before entertaining any idea of using computerised systems.

COMPANY NAME	BLOGG'S SOFTWARE
1ST ADDRESS LINE	12 THE HIGH STREET
2ND ADDRESS LINE	NEWARK
3RD ADDRESS LINE	NOTTINGHAM
4TH ADDRESS LINE	
TELEPHONE NO	012 345 6789
V A T NUMBER	123456789012
V A T QUARTER	2
START WEEK NO	■ ■

A sample screen from the generator program

MPSS, powerful package aimed at institutions

MPSS, from Management Data Systems is a specialised database for the BBC Micro which allows large amounts of data to be analysed quickly and efficiently. Grandly christened in full the Monitoring Package for Social Systems, the package can nevertheless be said to be just that, and more.

It grew out of the need for fast information feedback in the social services. In certain cases, previous methods of data analysis, via a centralised computer system and a liberal helping of red tape were taking two years to provide results. A number of local authorities are now using MPSS on the BBC Micro instead.

A ready-tailored version is available for the social services, but the standard package can be put to a range of uses, lending itself particularly to applications

where analysis of data is the principal requirement. Unlike its powerful big brother, a mainframe giant called SPSS developed for large research projects in the social sciences, MPSS does not incorporate any statistical procedures as such. However it will provide the raw analyses to which statistical formulae can later be applied – and without the delays.

Cross-tabulation

An obvious application in the field of education, say, would be exam records. These could be analysed for cross-tabulation of degree results with A level results, though the coming into force of the Data Protection Act has to be borne in mind. MPSS will probably be of most



use in areas which are exempt from the Act (such as medical records), those of a non-personal nature (wildlife data), and those where free access to personal details can be allowed.

A dongle protects the software from being copied, but unfortunately not the data from being tampered with, if someone knew how.

Though it comes on disc rather than on a ROM, operation and style are similar to the better kind of database package for the BBC Micro. The main menu allows you to set up a new file structure, add and delete data, generate reports, compact a file, and so on. Figure 1 contains a summary of the features.

One of its strengths is its Search facility. This is fast, and particularly so where you make use of a look-up table field – possible wherever data is known in advance to fall within a pre-defined range, for example a pupil age field of 11 to 18.

Boolean-type data such as male/female would also be appropriate.

The look-up field allows cross-tabulations to be performed on all or selected records. Tabulations can be produced using up to three look-up fields, and any single look-up field can produce a frequency table.

Instring and wild card searches are allowed – or, as the manual has it, “wild character searches”, conjuring up images of escaped lunatics, and maybe reflecting the social services origins of the package!

Any number of fields can be contained in a search operation, so long as the total number of characters in the whole instruction does not exceed a maximum of 250.

MPSS is capable of handling datafiles as large as your disc drives permit, with the four sides of a dual double-drive system being able to be treated as one logical file for the purposes of analysis. In such a case you could have an 800k

Basics	
Maximum no. of files open	4.
Maximum fields per record	250.
Maximum characters per field	250.
Field types	String, numeric, date, look-up.
Search options	Instring, wild cards.
Number of search fields	Limited only by maximum search string length.
Maximum search string length	250 characters.
Relational operators (=, >, etc)	All.
Logical operators (AND/OR)	AND only.
Sort facilities	None.
User-definable printer output	Yes.
User-definable screen masks	Yes, but not for data entry.
Modifiable file structure	Yes.
Spooled data output	Only as a mail merge facility.
Special features	
Up to five different sub-structures possible within record structure. Look-up table field gives tabulations, frequency table, percentages. Command file facility for repetitive operations.	

Figure 1: MPSS features at a glance

Useful adjunct to Inter Sheet

file of 14 thousand 50-character records.

Most unusual is the facility for creating sub-records, attached as off-shoots to the main record – rather in the style of the ‘transaction’ files of Compssoft’s Delta running under CP/M and MS-DOS. In MPSS these are called front sheet and auxiliary records. A front sheet can have up to four auxiliaries, each with a distinct structure, if required. The auxiliaries can in turn hold up to 10 levels of records. This makes for exceptional flexibility in data management.

The flexibility is carried over into screen output. Text templates for displaying records can be created with a word processor such as Wordwise or View. Any combination of fields from across the whole of the record, including its sub-structures, can be inserted into the template. By the same process, a rudimentary mail merge output can be achieved.

Specialised

There is a powerful option for creating batch-executable files – that is, a set of commands issued in one go for repeatedly required operations, say weekly or monthly reports.

MPSS has no sort facilities – records are simply stored in alphabetical order. However, the package was not designed as a standard database, and for its intended purposes of analysis, a selection of sorts is not crucial.

An “idiot user guide” and reference manual would certainly have been handy for a package of the complexity of MPSS, and an index I would have thought essential. Unfortunately, the 151 page manual does not cater for a “normal” user. It is also quite unstructured, and though it contains worked examples, it is hard to distinguish text from example, and to fathom out how the worked examples work.


MPSS has not been specifically designed for business, or, for that matter, for pleasure. It is a specialised database, with some very powerful features. Some people may find the price off-putting – £100 for the standard package – but it is aimed at institutions rather than individuals. For the right kind of application, it can be highly recommended. **Katherine Cranford**

INTER-CHART is Computer Concepts’ second step on the road towards a sophisticated set of integrated ROM-based packages. The first of the series, Inter-Sheet, has already established itself as a rival to the best spreadsheets available for the BBC Micro, and its communications facilities are second to none – see the November 1985 issue of *The Micro User*.

The Inter-Chart package allows line graphs, bar graphs and pie charts to be produced quickly and easily from data taken from a variety of sources. So, for example, the package can use any data created with a word processor, as long as you format the text in the right way.

It can also be used interactively – data can either be entered directly, or pulled in from other sources and modified, using the built-in editor. Finally you can, of course, import directly from Inter-Chart’s sibling package, Inter-Sheet, if you have this.

To view your graphs you select an option from the main menu, from which, using a function key, you can switch between the three types of display – pie charts, bar graphs or detailed line graphs. In this mode numerous parameters can be specified, including

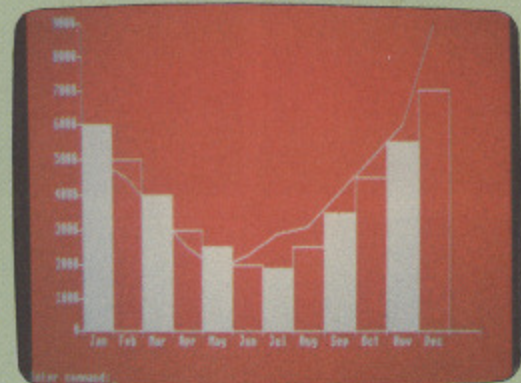

graph.

Colours can be changed from the default black and white, and bar graphs can be set up to display striped varieties. Colour parameters, along with graph type, mode, and other bits-and-pieces such as the titles, are saved along with the graph data.

You can have up to 16 sets of graph data in memory at any one time. This is particularly useful for comparisons, since line graphs and bar graphs can be overlaid. Any differences in scaling are automatically adjusted to fit.

Modes 0, 1, 2, 4 and 5 can all be used, within the usual memory constraints. Inter-Chart will in any case select the best mode for the amount of data being handled.


For users of the BBC B+, or those with shadow RAM (compatible boards include the Watford 32k and the Aries B20) the RAM can be used to take care of the graphics screen, leaving the standard memory free for larger amounts of data.

For printing out, a screen dump is included, which works with Epson or compatible printers. Generalised instructions, or at any rate hints, are given for users of other printers.

The documentation is sensible and clear, consisting of a spiral-bound manual divided into two parts, a practical bit with worked examples and illustrations and a reference section. There is also a quick reference card and a function key strip.

On the whole Inter-Chart is well designed and easy to use. It will be useful in its own right, but will be a particularly convenient adjunct for those who have Inter-Sheet.

Katherine Cranford

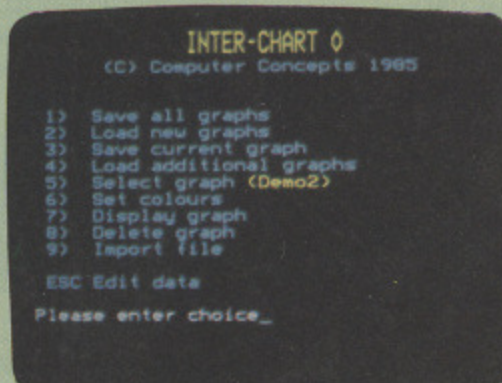

ones for prettying up the displays, such as titles, number format, and a percentage toggle for use with the pie chart.

There are two types of display for editing the graphs. The first is for labelled graphs – say figures given over a period of a year, where the months of the year are the labels. Here a bar graph type of display is used. The second type, scaled graphs, is for data consisting of x, y values and uses a simplified line











M

A

G

I

C

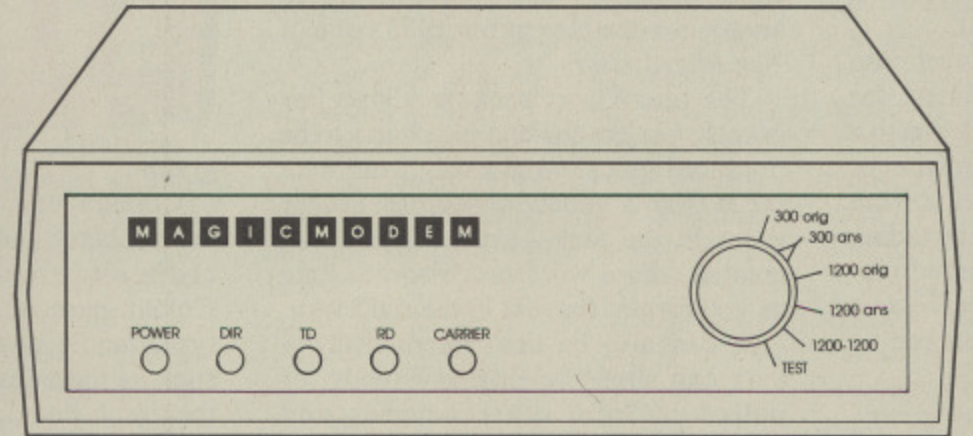

Datastar Systems

182 Royal College St., London NW1 9NN
Hotline 01-482 1711

MAGIC MODEM SPECIFICATION

- 300/300 Full Duplex — 1200/75 Viewdata 75/1200 Reverse Viewdata — 1200/1200 Half Duplex Bell Standards (Export version only).
- Auto dialling.
- Auto Answer Option (plug in Module £15 plus VAT).
- Auto Baud Rate Generator.
- Proper RS232 levels.
- 5 LED's: Transmit Data — Receive Data — Carrier — Power — Data Direction (useful for fault finding in half duplex mode).

COMPANION SOFTWARE

- Menu Driven System.
- 16K with Spool Exec. Printing, Xon/Xoff, Baud rate selection.
- Unique directory system allows single key access to many databases with terminal configuration as required.
- Includes Xmodem file transfer for user to user sessions and downloading files.
- On or off line editing with professional features.
- Full feature Videotex Terminal Emulator.

PROHIBITED from direct or indirect connection to any telecommunication system run by British Telecommunications. Action may be taken against anyone so contravening the Act.

- All common Prestel functions on single keys.
- Tagging feature for backtracking to large number of pages.
- Save and Load frames from current file system.
- Full specification CET telesoftware downloader, frames can be printed to local Econet printer.
- Econet compatible, except remote.
- Text terminal provides a scrolling host for use with non-video databases.

MAGIC MODEM + COMPANION SOFTWARE

Launch Offer (rrp £114.95 inc. VAT) **£99.95 inc. VAT**
MAGIC MODEM (£91.95 inc. VAT) **£79.95 inc. VAT**

LAUNCH OFFER ORDER FORM — FREE DELIVERY

I enclose £

Or debit my Access/Visa card no:

Name

Signature

Address

MU3

M

O

D

E

M

Choosing now a little cost makes a compatible and reliable

At Opus advanced education

THE
Over the most new development drive by leading hospitals



5 1/4"
All our half height low power consumables to track and are to BS41

SING
Opus single 40 Trac double Megab. All our format with pe date. F

DUA
The Op drives single and fe supply In sing drives of cap storage manu

NO ONE MAKES A BAD DISC DRIVE

**BUT WHO
MAKES
THE BEST?**

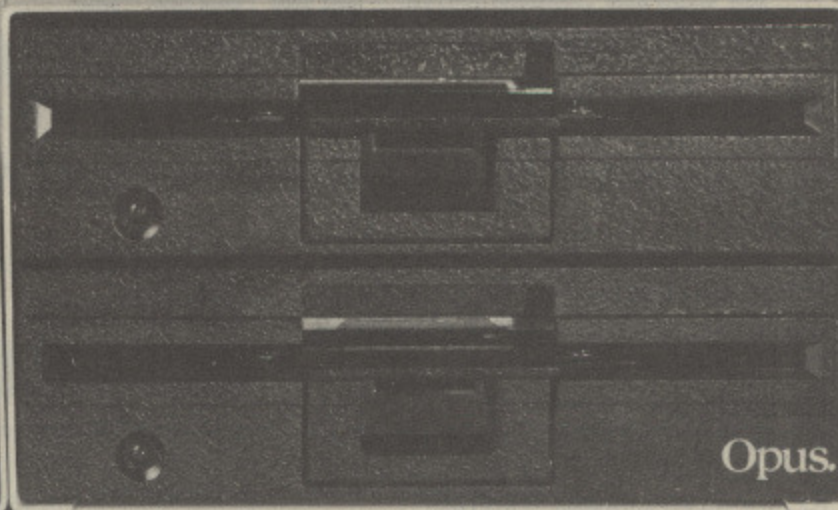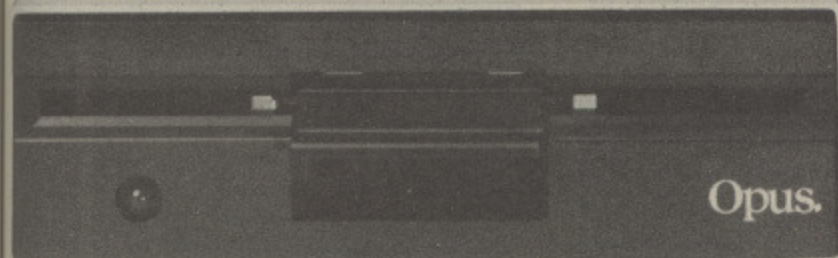

Choosing between the many different disc drives now available for your BBC computer can seem a little confusing at first. After all any disc drive makes a tape-based system seem crude by comparison and the advantages of speed, capacity and reliability are overwhelming.

At Opus we've built our reputation on providing advanced disc drives for both the home and educational user and in our innovative approach to

fast storage systems. All our disc drives use the very latest in Japanese disc drive technology and our drive mechanisms are carefully chosen for their reliability and performance. Opus drives are assembled and rigorously tested in our U.K. plants and our attention to quality control enables us to confidently offer the longest warranty of any disc drive supplier in Britain – a full two years. Just some of the reasons why you'll find Opus disc drives in all good computer stores across the country.

THE OPUS DISC DRIVE RANGE

Over the years we've extended our range of drives to provide one of the most comprehensive selections available and we constantly study new developments to ensure we stay ahead of the competition on disc drive design and engineering. As a result our products are now chosen by leading universities, colleges, and schools, research institutions, hospitals and businesses and by thousands of home computer users.

5 1/4" DISC DRIVES

All our 5 1/4" disc drives are half height and feature low power consumption, fast track to track access times and are manufactured to BS415 standards.



SINGLE DRIVES

Opus single drives are extremely quiet in operation and single-sided 40 Track models provide up to 250 K of unformatted capacity and double-sided, 80 Track hardware switchable drives a powerful 1 Megabyte.

All our single drives are suitable for use in single or double density format. We also provide a full range of single drives in a dual case with power supply should you wish to add a second drive at a later date. Prices from just £79.95.

DUAL DRIVES

The Opus range of dual disc drives are also available in single or double-sided form and feature their own power supply which is separately fused. In single density, Opus dual drives provide 200,400 and 800K of capacity with up to 1.6 Megabytes of storage available in double density. A utilities disc and comprehensive manual is supplied with all drives. Prices from just £179.95.




OPUS DDOS

The Opus range of disc drives for the BBC micro are backed by one of the most advanced and highly praised double density disc interfaces on the market. Voted fastest system by 'Acorn User' and favourite choice by 'A & B Computing', the Opus DDOS will help you get the most from your disc drive. It features utilities on ROM including Format and Verify, will handle tape to disc transfers and is compatible with an extensive range of leading software including 'Elite', Clares 'Replica II', 'Mini Office', 'View', 'Wordwise' and 'Wordwise +' together with most sideways ROM cards. Our interface offers automatic 40/80 Track selection, automatic density selection, has a unique mass copy routine and powerful machine code operating system giving up to 248 files. It's also 80% faster than single density systems.

WHO MAKES THE BEST DISC DRIVE?

Choosing the best disc drive might seem confusing at first but when you consider quality, performance, reliability, extended warranty and value for money, the choice is a lot simpler than you might imagine.

The first step is to call the Opus Hotline. We'll give you details of your nearest dealer, a rundown on our very latest price list and information on some really unbeatable Opus offers. Call the Hotline now.

 **OPUS HOTLINE 0737-65080**

**OPUS BRITAIN'S LEADERS IN
DISC DRIVE INNOVATION**

Opus Supplies Ltd,
55 Ormside Way,
Holmethorpe Industrial Estate,
Redhill,
Surrey RH1 2LW.

Opus.

bad Making tracks

Final part of the series by KEVIN EDWARDS on the 8271 floppy disc controller

IN last month's article I described the 8271's formatting process, error meanings and part of its command set. Now we'll complete the command list and, hopefully, give you enough confidence to handle OSWORD &7F on your own.

First of all we'll look at some of the 8271's more unusual features.

A disc can be programmed with what are known as "bad tracks". Two bad track registers exist for each disc surface and specify tracks which are to be totally ignored by the 8271.

For instance, if you indicate that tracks 1 and 2 are "bad" the 8271 will move to track 3 when a command involving track 1 is executed.

As far as the 8271 is concerned physical track 3 is now track 1, physical track 4 is track 2 and so on.

If you ever use bad tracks you must ensure that the track number in the sector ID fields for all tracks after the bad ones correspond to their logical track position. Remember, the bad tracks don't exist in the eyes of the 8271, so the IDs must be offset correctly.

Figure 1 lists the first six physical and logical track numbers if tracks 1 and 2 are bad.

Physical track	Logical track
0	0
1	bad
2	bad
3	1
4	2
5	3

Figure 1—The good and bad tracks

When bad tracks are used their track IDs should be set to &FF (255). This is done when the disc is being formatted.

The DFS sets the bad track registers to 255, indicating that no bad tracks exist. Track 0 should not be declared as bad because this confuses the 8271.

While on the subject, here's a list of the command and parameter bytes

required to program the bad track registers:

LOAD BAD TRACKS	
No data transfer.	
Command	&75
Parameters (n)	4
Param 1 — Surface select	
surface 0 or	&10
surface 1	&18
Param 2 — Bad track 0	&—
Param 3 — Bad track 1	&—
Param 4 — Current track	&—

Since the current track, parameter 4, may be unknown, the write special register command should be used to change the bad tracks as well.

Whenever a sector cannot be located on the specified track the FDC will check the next two tracks for it. If the sector is found on one of the following tracks it is accessed as if nothing unusual has happened. Whether this is a good or bad thing is another question.

Last month I briefly mentioned deleted data. So here's a bit more about this unusual data type. The data address mark (DAM) just before the sector data field is changed by the 8271 when either normal or deleted data sectors are written. The DAM is normally &FB, but when deleted data is saved it is changed to &F8.

Once a deleted data sector has been saved only a read deleted data command can be used to transfer the sector data to memory. You see the DAM is examined each time a sector is read from the disc. Executing a normal sector read command will fail to access the sector if the DAM is &F8.

Deleted data sectors are very useful for hiding information from prying eyes. Note that bit 5 of the result byte will be set when deleted data is read.

Now to complete the 8271 command set which I started in last month's article.

The read ID field command extracts a defined number of sector IDs from the

READ ID FIELDS	
Data transfer does occur.	
Command	&5B
Parameters (n)	3
Param 1 — Track address	&—
Param 2 — Must be 0	&00
Param 3 — Number of ID fields to be read	&—

selected track and transfers them to memory.

Each sector ID consists of four bytes — C, H, R and N, where C is the track address, H the head address, R the sector number and N the sector size. The IDs are read in exactly the same

```

10 REM ID Field reader
20 REM By Kevin Edwards
30 REM
40 MODE7:VDU23;B202;0;0;0;
50 maxtracks%=40
60 osword%=&FFF1
70 IDbuffer%=&FFF0C20
80 oswordblock%=&FFF0C00
90 REM *****
100 REM Seek read/write head to
110 REM track 0.
120 REM *****
130 ?oswordblock%=0
140 !(oswordblock%+1)=&FFFFFFF
150 oswordblock%?75=1
160 oswordblock%?76=&69
170 oswordblock%?77=0
180 AX=&7F
190 X%=oswordblock% MOD 256
200 Y%=oswordblock% DIV 256
210 CALL osword%
220 IF oswordblock%?8<>0 THEN PRINT
"Disc error ";*oswordblock%?8:END
230 REM *****
240 REM Now set up the OSWORD block
250 REM for read ID fields

```

Program 1

order as originally

If you sectors the first one you are of sector

An at an unfor error sec is becau IDs from

The r useful fe track. I number present. reading

The comma register

RE

No da

Comr

Param

Param

Param

260 RE

270 RE

280 ?o

290 RE

300 !

310 RE

320 RE

330 RE

340

350 RE

360 os

370 RE

380 R

390 R

400 a

410 R

420 a

430 R

440 F

450 a

460

470

480

490

500

510

order as they were when the track was originally formatted.

If you read more IDs than there are sectors the ID bytes will repeat from the first one – you'll need to check for this if you are trying to calculate the number of sectors on a track.

An attempt to read sector IDs from an unformatted track will result in the error *sector not found* – error &18. This is because there are no sectors to read IDs from.

The read sector ID command is very useful for finding out the contents of a track. It can be used to calculate the number and size of all the sectors present. Program I demonstrates this by reading the ID fields of any disc.

The read and write special register commands allow the 8271's internal registers to be accessed. The 8271 has

WRITE SPECIAL REGISTERS

No data transferred.	
Command	&3A
Parameters (n)	2
Param 1 – Register address (see Figure II)	&—
Param 2 – New value	&—

12 different internal registers which are listed in Figure II.

The read special register command returns the current value of the selected register in the result byte of the OSWORD block. Program II shows the commands used to read surface 0's current track register.

The write special register command allows the internal registers to be altered. The second parameter in the control block is the byte written to the selected register. Program III writes to surface 0's bad track register.

Registers in Figure II with an asterisk next to them are not available on the BBC Micro but have been included for completeness.

The special registers are quite complicated so we'll look at each one

Description	Register Address
Scan sector number	&06 *
Scan MSB of count	&14 *
Scan LSB of count	&13 *
Surface 0 current track	&12
Surface 1 current track	&1A
Mode register	&17
Drive control output port	&23
Drive control input port	&22
Surface 0 bad track 1	&10
Surface 0 bad track 2	&11
Surface 1 bad track 1	&18
Surface 1 bad track 2	&19

Figure II – The special registers

briefly. The current track registers (&12,&1A) contain the track address of the read/write head of the selected drive. Writing different numbers to these registers can fool the 8271 into thinking it's at a different track address.

For example, if the read/write head is at track 4, and 6 is written to the current

READ SPECIAL REGISTERS

No data transfer.	
Command	&3D
Parameters (n)	1
Param 1 – Register address (see Figure II)	&—

```

260 REM *****
270 REM Select Drive 0
280 ?oswordblock%=0
290 REM buffer address =IDbuffer%
300 !(oswordblock%+1)=IDbuffer%
310 REM Number of additional
320 REM parameters needed for the
330 REM ID read command.
340 oswordblock%?5=3
350 REM ID Read command byte
360 oswordblock%?6=&5B
370 REM The track number. This is
380 REM incremented after each
390 REM track's IDs are read.
400 oswordblock%?7=0
410 REM Parameter 2 is always 0
420 oswordblock%?8=0
430 REM Number of ID fields
440 REM to be read
450 oswordblock%?9=18
460 REM *****
470 REM Now begin reading the IDs
480 REM *****
490 FOR track%=0 TO maxtracks%-1
500 REM Change track number in the
510 REM OSWORD block.

```

```

520 oswordblock%?7=track%
530 CLS
540 REM Execute the OSWORD.
550 CALLosword%
560 REM Test for error.
570 PRINT"Track ";track%'
580 IF oswordblock%?10<>0 THEN PRIN
T""Disc error ";oswordblock%?10:GOT
O 660
590 PRINT" Track(C) Header(H) Secto
r(R) Size(N)"
600 FOR ids=0 TO (17*4) STEP 4
610 FOR ids2=0 TO 3
620 PRINT;SPC(7);?(ids2+IDbuffer%+i
ds);
630 NEXT ids2
640 PRINT
650 NEXT ids
660 PRINT"TAB(7)"Press SPACE to con
tinue"
670 *FX 15
680 REPEAT UNTIL GET=32
690 NEXT track%
700 PRINT""All IDs read !!!"
710 END

```

```

10 REM Read special registers
20 REM By Kevin Edwards
30 REM
40 MODE7
50 osword%=&FFF1
60 oswordblock%=&FFF0C00
70 REM *****
80 REM Read special register
90 REM *****
100 REM Select drive 0
110 ?oswordblock%=0
120 REM Buffer address
130 !(oswordblock%+1)=&FFFFFFF
140 REM Number of parameters
150 oswordblock%?5=1
160 REM Read special register
170 REM command byte
180 oswordblock%?6=&3D
190 REM Register address
200 oswordblock%?7=&12
210 AX=&7F
220 X%=oswordblock% MOD 256
230 Y%=oswordblock% DIV 256
240 CALLosword%
250 PRINT""Current track = &";oswo
rdblock%?8

```

Program II


```

10 REM Write special register
20 REM By Kevin Edwards
30 REM
40 MODE7
50 osword%=&FFF1
60 oswordblock%=&FFFF0C00
70 newvalue%=30
80 REM *****
90 REM Write special register
100 REM *****
110 REM Select drive 0
120 ?oswordblock%=0
130 REM Buffer address
140 !(oswordblock%+1)=&FFFFFFF
150 REM Number of parameters

160 oswordblock%?5=2
170 REM Write special register
180 REM command byte
190 oswordblock%?6=&3A
200 REM Register address
210 oswordblock%?7=&10
220 REM Register's new value
230 oswordblock%?8=newvalue%
240 AX=&7F
250 X%=oswordblock% MOD 256
260 Y%=oswordblock% DIV 256
270 CALLosword%
280 PRINT"Result = ";oswordblock%
?9

```

Program III

From Page 105

track register, a seek to track 7 would move the head to the next track not three tracks as would be expected.

The mode register (&17) defines the following information:

- Bit 0 – DMA mode
 - 1=Non DMA (default)
 - 0=DMA enabled
- Bit 1 – Actuator mode
 - 1=Single (default)
 - 0=Double
- Bits 2-5 All zeros
- Bits 6-7 All ones

This register should be left alone as altering it can upset the operation of the FDC.

The drive control output port (&23) is used to send signals to certain chip pins of the 8271. Unless you're driving the 8271 yourself you'll never need to touch this register. For example, bit 5 turns the drive on or off – OSWORD &7F does this for you automatically.

The drive control input port (&22) allows the state of various chip pins to be examined. Again, this register has no use from OSWORD &7F.

The bad track registers contain the redundant track numbers for each disc surface – two for each. A point worth noting is that bad track registers must be set to 255 when a disc is being formatted, otherwise, any bad tracks will be skipped and their IDs will be missed.

READ DRIVE STATUS

No data transfer.

Command	&6C
Parameters (n)	0

This command returns the drive status in the OSWORD control block result byte.

The bit meanings of the result are as follows:

- Bit 0 – Unused
- Bit 1 – Head at track 0
 - 1=TRUE
 - 0=FALSE
- Bit 2 – Drive 0 ready
 - 1=TRUE
 - 0=FALSE
- Bit 3 – Disc write protected
 - 1=TRUE
 - 0=FALSE
- Bit 4 – Index
- Bit 5 – Write fault
 - 1=TRUE
 - 0=FALSE
- Bit 6 – Drive 1 ready
 - 1=TRUE
 - 0=FALSE
- Bit 7 – Unused

The only useful bit of the result is 3 – disc write protected. By reading this bit we can check if a disc has a write protect tab on it without issuing a write sector command to see if it causes a disc write protected error.

The remainder of the bits have no real use when using OSWORD &7F.

SINGLE 128 BYTE SECTOR READ/WRITE

Data transfer does occur.

Commands:

Read data	&52
Read data/deleted data	&56
Write data	&4A
Write deleted data	&4E
Verify data/deleted data	&5E

Parameters (n) 2

Param 1 – Track address	&—
Param 2 – Sector address	&—

These commands are used to access single 128 byte sectors. The two write sector commands allow either normal or deleted data sectors to be written to the disc. The buffer address of the OSWORD block points to the 128 bytes which are to be stored in the sector.

The read sector commands allow normal and deleted data sectors to be transferred to memory. Only the read deleted data command can be used to read a deleted data sector. Again, the OSWORD buffer address points to an area of memory where the sector data will be transferred to.

Last but not least is the verify command. When this is executed the CRC bytes for the sector are re-calculated and compared with the CRCs on the disc.

If the two don't match a data CRC error will be generated. No data is transferred during a verify operation.

The multi-sector commands allow

MULTI-LENGTH, MULTI-SECTOR FORMAT

Data transfer does occur.

Commands

Read data	&53
Read data/deleted data	&57
Write data	&4B
Write deleted data	&4F
Verify data/deleted data	&5F

Parameters (n) 3

Param 1 – Track address	&—
Param 2 – Sector address	&—
Param 3 – Sector length and number	&—

one or more from/to disc sector for varied. The sectors of read or write command.

The size accessed parameter – more of

With m sector address rest of the four sectors is 5, sectors memory.

be located the "Sector generated

Therefore the be number

Although commands a capable of sectors from words, if track wh 8271 will for the la locate th will obvie not found

Therefore several tr must be You sho comman read/wri specified

The size an accessed format c

The t the secto

Bits 0 of secto example the thiro

7
512
sec

The Program and As standar

one or more sectors to be read or written from/to disc. Unlike the single 128 byte sector format the sector size can be varied. This means that three 512 bytes sectors or seven 128 byte sectors can be read or written by issuing only one command.

The size and number of sectors being accessed is specified in the third parameter byte of the OSWORD block – more of this later.

With multiple sector commands the sector address is used as a base for the rest of the sectors being read. Thus, if four sectors are read and the base sector is 5, sectors 5 to 8 will be transferred to memory. If, however, sector 6 couldn't be located, the operation is aborted and the "Sector not found" error is generated.

Therefore with multiple sector operations the sectors being accessed must be numbered sequentially.

Although the multiple-sector commands are powerful they are only capable of reading a defined number of sectors from the current track. In other words, if you read 12 sectors from a track which has only 10 sectors, the 8271 will not move on to the next track for the last two sectors but will try to locate them on the current track. This will obviously result in the error *sector not found* (&18).

Therefore when reading or writing several tracks of data a new command must be issued for each track accessed. You should note that the multi-sector commands automatically move the read/write head to the track address specified in the OSWORD block.

The last parameter byte defines the size and number of sectors being accessed – in the same way as the format command.

The top three bits define the size of the sector – see Figure III.

Bits 0 to 4 correspond to the number of sectors being read or written. For example, to read three 512 byte sectors the third parameter would be:

0 1 0 0 0 0 1 1 = &43

512 byte 3 sectors
sectors

The final program in the series, Program IV, produces a hexadecimal and Ascii dump of every sector on a standard Acorn format disc. Change

Bit 7	Bit 6	Bit 5	Sector size
0	0	0	128
0	0	1	256
0	1	0	512
0	1	1	1024
1	0	0	2048
1	0	1	4096
1	1	0	8192
1	1	1	16384

Figure III – Bit patterns for each sector size

the variable *max_track%* at the start of the program to 80 if you have 80 track drives.

And that completes the 8271 command list. As you can see, there's plenty of things you can do using

OSWORD &7F.

A word of advice, though. When you're dabbling with your own special disc formats don't use a disc which has valuable data on it – you have been warned!

```

10 REM Read all sectors
20 REM By Kevin Edwards
30 REM
40 MODE7:VDU23;8202;0;0;0;
50 max_track%=40
60 drv%=0
70 osword%=&FFF1
80 buffer%=&FFFF0C00
90 oswordblock%=&FFFF0900
100 REM *****
110 REM Seek read/write head to
120 REM track 0.
130 REM *****
140 ?oswordblock%=drv%
150 !(oswordblock%+1)=&FFFFFFF
160 oswordblock%75=1
170 oswordblock%76=&69
180 oswordblock%77=0
190 AZ=&7F
200 X%=oswordblock% MOD 256
210 Y%=oswordblock% DIV 256
220 CALLOsword%
230 IF oswordblock%78<>0 THEN PRINT
"Disc error ";oswordblock%78:END
240 REM *****
250 REM Now set up the OSWORD block
260 REM for read multi-sector
270 REM *****
280 REM Select Drive 0
290 ?oswordblock%=drv%
300 REM buffer address =buffer%
310 !(oswordblock%+1)=buffer%
320 REM Number of additional
330 REM parameters needed for the
340 REM read sector command.
350 oswordblock%75=3
360 REM Multi-sector read command
370 oswordblock%76=&53
380 REM The track number
390 oswordblock%77=0
400 REM The start sector
410 oswordblock%78=0
420 REM Size/number of sectors
430 oswordblock%79=&21
440 REM *****
450 REM Now begin reading sectors
460 REM *****
470 FOR track%=0 TO max_track%-1
480 oswordblock%77=track%
490 FOR sector%=0 TO 9
500 PRINT:PRINT" Track =";track%;
sector ="sector%"
510 oswordblock%78=sector%
520 CALLOsword%
530 IF oswordblock%710<>0 THEN PRINT
"Disc error ";oswordblock%710:END
540 FOR row%=0 TO 31
550 PRINTRIGHT$("000"+STR$(row%*8)
,4) " ";
560 FOR byte%=0 TO 7
570 PRINTRIGHT$("0"+STR$(8*row%+b
yte%+buffer%),2) " ";
580 NEXT byte%
590 FOR byte%=0 TO 7
600 val%=(8*row%+byte%+buffer%)
610 IF val%>ASC" " AND val%<ASC""
THEN VDUval% ELSE VDUASC"."
620 NEXT
630 PRINT
640 NEXT row%
650 NEXT sector%
660 NEXT track%
670 PRINT""Complete!"

```

Program IV

OPUS WILL MAKE YOU A BETTER ORGANISER FOR ONLY £60

If your micro system is starting to get out of hand a smart organiser could be the solution to your problems.

At just £59.95 the Organiser desk from Opus Supplies will help to organise your system beautifully. It's purpose built to provide plenty of storage space and because it's produced alongside our range of executive computer desking it offers a level of quality you'll appreciate.

Shelving accommodates your monitor, printer, computer, disc drive or cassette recorder and software, and the teak-finished unit is fitted with castors to make it fully mobile. The Organiser's assembled dimensions are: H. 31", W. 40¼" and D. 26".

And our price includes VAT and FREE DELIVERY.

The Organiser desk is suitable for use with all leading home micros including the BBC, Amstrad, Commodore and Sinclair computers.

Getting organised couldn't be easier. Phone us on 0737 65080 or simply post the coupon below.



To: Opus Supplies Ltd,
55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please rush me the following:
(PRICES INCLUDE VAT AND CARRIAGE)

_____ Organiser Desk(s) at £59.95 each (inc. VAT)

I enclose a cheque for £ _____ or please debit my

credit card account with the amount of £ _____

My Access Barclaycard (please tick) no. is: _____

Name _____

Address _____

Telephone _____

MUR

Opus.
Opus Supplies Ltd.

CUSTOM Characters is a utility that enables you to quickly and simply define and use complete character sets without having to type a single VDU 23 statement.

As you may know, to obtain more than 32 user-defined characters it is necessary to "explode" the character set by issuing a *FX20 command.

This can be slightly fiddly and results in the loss of 256 bytes (one page) per set of 32 characters. However since we need 96 characters for a complete set, we need to find three spare pages of memory.

If you look at the part of the memory map in Figure I you'll find that we can just squeeze our character definitions in pages &9, &A and &C.

So as long as we don't try to BPUT or BGET using the cassette filing system, access the speech chip, try to send or receive using RS423 or define more than four envelopes we'll be all right!

This may sound like a long list of negatives but, in practice, most programs will leave these pages free for our purposes.

Now that we've found somewhere to put our character sets, we need to tell the computer where to find them. This is achieved by altering the locations in page 3 as shown in Figure II.

However we need only be interested in the following three fonts:

- 32-63 Numbers & punctuation.
- 64-95 Upper case letters.
- 96-127 Lower case letters.

Numbers and punctuation can go in page &9, upper case letters in page &A and lower case letters in page &C. You may notice that I have left out page &B. This is because it is used as the soft key buffer for the function keys.

So to set up the extra user-defined

The way of the exploding character set

First of a three-part series on how to design customised characters

By ROBIN NIXON

characters we have to change four bytes like this:

?&367 = &70 (bits 4, 5 & 6 - &10+&20+&40)

?&368 = &9
?&369 = &A
?&36A = &C

Fine, but we still have one problem - no user-defined characters. Well, this bit's up to you. Using Program I, define your three fonts and save each with a different filename, such as:

FONT-N
FONT-U
FONT-L

where N=numerical, U=upper case and

L=lower case.

Then type in Program II, changing the filenames in lines 210-230 accordingly. You could then attach this listing to your programs in the form of a procedure and load in your character sets when required.

Of course, if you are designing a program with user-defined characters, you could design them using Program I and then simply load them in at &C00 without having to do any poking in memory - making sure you access them as characters 224-255.

● Next time I'll show you how you can print your character sets out on an Epson compatible printer. In the meantime, happy designing.

PROCEDURES

getinfo(PC%)	Reads the definition of character PC%.
grid	Draws the designing grid.
cursor	Moves the cursor to the correct position on the screen.
showcharacter	Places a character in the grid.
showall	Displays all characters next to the grid.
set(P%,Q%)	Sets a square within the grid.
yn	Waits for Y or N to be pressed.
select	Selects the character to be edited or defined.

MAJOR VARIABLES

CH% 8	Holds the character definitions.
A%(8,8)	The grid.
OS% 100	Holds the string to be acted on by star commands.
CCS	Character being printed.
PC%	Character being defined.
X%,Y%	Position within the grid.
G%	Your input.
P%,Q%	Temporary loop variables.
J%,K%	

! " # \$ % & ' () * + , - . /
 0 1 2 3 4 5 6 7 8 9 : ; < = > ?
 @ A B C D E F G H I J K L M N O
 P Q R S T U V W X Y Z [\] ^ _
 £ a b c d e f g h i j k l m n o
 p q r s t u v w x y z { | } ~

Computerised ...

! " # \$ % & ' () * + , - . /
 0 1 2 3 4 5 6 7 8 9 : ; < = > ?
 @ A B C D E F G H I J K L M N O
 P Q R S T U V W X Y Z [\] ^ _
 £ a b c d e f g h i j k l m n o
 p q r s t u v w x y z { | } ~

reduced ...

! " # \$ % & ' () * + , - . /
 0 1 2 3 4 5 6 7 8 9 : ; < = > ?
 А Б В Г Д Е Ж З И Й К Л М Н О
 П Р С Т У В Ш Ж Ъ Э Ц Щ Ъ Э
 а б в г д е ф г х и й к л м н о
 п р с т у в ш ж ъ э ц щ ъ э я

... and Russian character sets

**Full listing starts
on Page 144**

&900-&9FF Extra envelope storage area, envelopes 5-16.
 Speech buffer.
 RS423 output buffer.
 Cassette output buffer.
&A00-&AFF Cassette input buffer.
 RS423 input buffer.
&C00-&CFF User-defined characters 224-255.

Figure I

&367 The font flag: This byte marks whether a particular set of 32 characters (font) is being taken from ROM or RAM. If a bit is set the corresponding font is located in RAM.
 bit 6 characters 32-63
 bit 5 characters 64-95
 bit 4 characters 96-127
 bit 3 characters 128-159
 bit 2 characters 160-191
 bit 1 characters 192-223
 bit 0 characters 224-255
&368-&36E The font location bytes. These contain the high bytes for the location of each font. A font can only start at the beginning of a page so the low bytes are always 0.

Figure II

PROBLEM

HAVING bought a BBC B+ 64k, I was very happy with it until I decided to buy some software. I now find that all modern software such as Elite or Castle Quest will not work.

Is there anything I can do to convert my BBC Micro into a 32k version? I was told in the shop I bought it in that all software would be compatible. — Darren Pollard, York.

SOLVED

Sorry there is nothing you can do to convert these games. Your dealer was not accurate when he said that the B+ was fully compatible. Only programs written in Basic are guaranteed to work.

As the software was not written for the B+ and is probably in machine code it is not surprising they will not work. Try writing to the manufacturers asking if they have B+ versions of their programs.

If you have a technical query that you just can't solve, send it to: "Problems", Mike Cook, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Letters on other subjects should be sent, as usual, to Micromail.



By ALAN PRATT

PETE the poster paster has got his letters in a twist and you have the job of sorting out the messages so that they make sense. Fortunately you can use your micro.

The posters appear on screen in the form of a sliding block puzzle, and just like the real thing, you have to move the letters around the grid in order to rearrange them.

If you can achieve the correct result and use fewer than 301 moves to beat the current lowest score, you will join the list of Wizz Kids.

There are in fact nine different problems within the program and each has its own unique solution. And if those aren't enough, you can create your own.

Full instructions on which keys to use and how to move the letters are given in the game. The program will ask each new player's name, which must contain at least one letter and will be truncated to eight, if this is necessary.

The first three puzzles are shown in their correct form before jumbling takes place. Puzzles 4 to 9 are not and part of the test is to identify the four words which make up the puzzle. This is made easier by the use of two colours. To complete a puzzle the blank square must occupy the bottom right position.


The individual letters in each puzzle have been specially chosen to obey the following rules:

- There are two identical letters in the first two words (they may both be in one of the words or one in each word).
- All the other letters in these words are different from each other and also from the two identical letters.
- All the letters in the third and fourth words are different from each other.
- The first two words are on one background colour and the last two words are on a different colour.

The use of two identical red letters means it is not clear which belongs where in the poster. You may not think it matters. However you will find that if they are in the wrong place, even though the first two words read correctly, it will

be impossible. The best letters in the locations. Obviously you must now the two identical. It is this since a 50 per cent poster in a re. You will see puzzle letters numbers in the end. This means typing in the correct words puzzles.



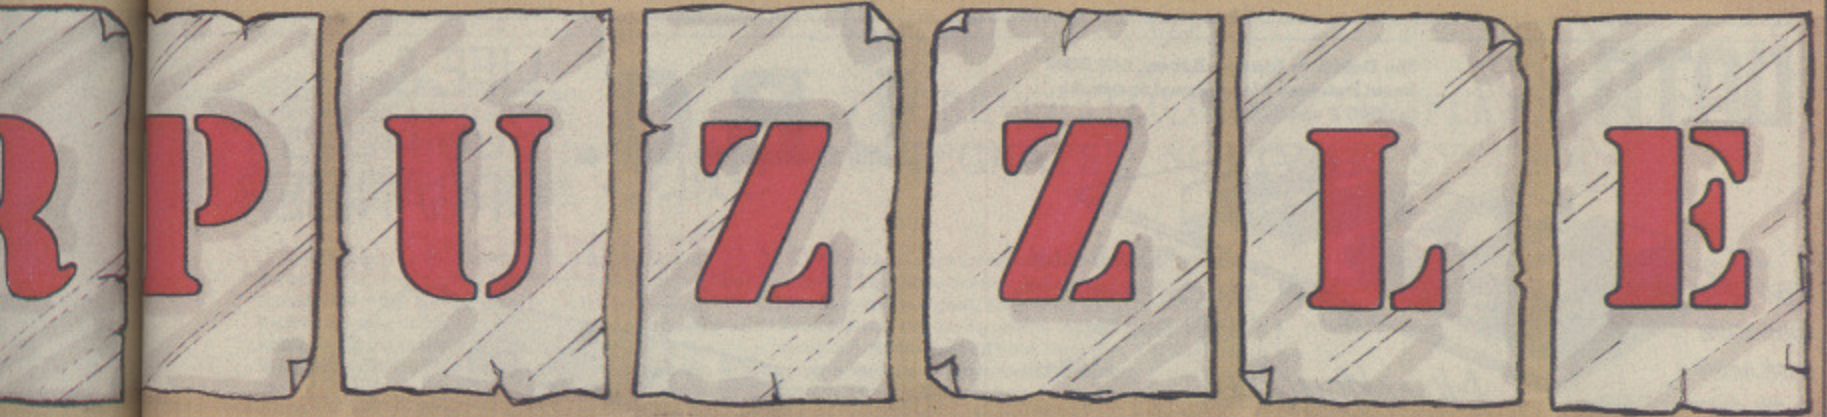

got his impossible to sort out the last word. The best you will achieve is two letters in the last word in the wrong positions. Obviously to solve the poster you must now exchange the positions of the two identical letters.

It is this single factor which gives you a 50 per cent chance of sorting out the poster in a relatively few moves or not.

You will see from the listing that the puzzle letters are disguised as a string of numbers in the DATA statements at the end. This makes it difficult for someone typing in the program to work out the correct words in the fourth to ninth puzzles.

Full listing starts on Page 137



How to use the word coding section

THE additional program segment from line 4000 onwards provides a means of encoding words which you may then incorporate in place of one of the existing DATA statement – lines 1910 to 1990 – in the original program.

These lines should be added to the existing listing and a new copy of the resulting program SAVED on cassette or disc.

To use this word coding segment type GOTO 4000 and press Return. You are prompted for 15 letters comprising the three 4-letter words and the one 3-letter word as read from left to right and top to bottom in the correct form of the poster.

A string of numbers is printed on the screen followed by the letters obtained by decoding these numbers. This serves to check your

input. Any lower case letters will have been converted to upper case letters.

To incorporate the newly generated numbers in the Puzzler program select a DATA statement line between 1910 and 1990 (in units of 10). Type in the line number, 1920, followed by the word DATA.

Using the Copy and cursor keys copy the whole string of the numbers and finally press Return to incorporate this new version of the line.

This coding segment may be used up to nine times to replace some or all of the existing DATA statements.

To keep a permanent copy of your new version of the program SAVE it on cassette or disc under a different name such as PUZZLE2.

VARIABLES

solved	Solution is reached flag.
valid	Valid direction key flag.
time	Delay timer.
key	Ascii value of key pressed.
count	Number of moves made.
min	Minimum number of moves so far.
old,new	Position of the + symbol.
P%	Current puzzle number.
J%	Current position of Wizz Kids list.
name\$	Current player's name.
A\$()	Letters in squares.
D\$()	Numeric data for puzzles.
R%()	Numbers for squares in correct order.
N%()	Numbers for present state.
C%	Square colour.
S%()	Holds Wizz Kids' scores.
list\$()	Holds Wizz Kids' names.


PROCEDURES

initialise	Reads in the Data.
introduction	Title page. Asks for the player's name.
choose	Returns choice of puzzle as P%.
story	Shows correct puzzle with letters or * depending on P%.
jumble	Randomises data.
instruct	Instructions
fillposter	Fills the poster in correct order if P% < 4.
convert	Converts data to appropriate letter; stored in A\$().
newlist	Adds the old player's name to the list of Wizz Kids.
board	Fills squares with appropriate colour. R%=1, correct board. R%=2, jumbled board.
pieces	Prints letters in squares.
box	Fills square box S% by S% with colour C%.
test	Tests for solution.
wait	Delay routine to optimise program.

DATA Gem

The Definitive Random Access, 24K ROM based Database Management System for the BBC B and BBC B+.

Now compatible with most double density DFS's

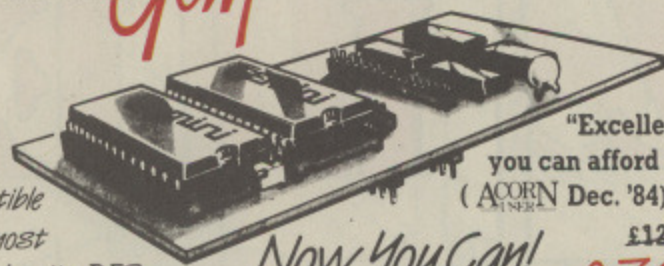

"Excellent if you can afford it..." (ACORN Dec. '84)

Now You Can! £129.95 £79.95

DATAGEM

Long hailed as the most comprehensive and powerful database for the BBC, and now becoming a legend in its own right, DataGem has been significantly reduced in price now that development costs have been recovered by Gemini. Whether you have a single 40 track drive or a Winchester hard disk, this system will make use of ALL your disk space, treating up to 4 drive surfaces as ONE CONTINUOUS FILE. Much has been made and exploited of DataGem's superb selective searching capability and together with its unmatched mathematical powers, the system provides a really professional database for use in the home, office or school that will harness the full power and potential of the BBC micro.

AMATEURS & PROFESSIONALS

For newcomers to databases as well as seasoned users, DataGem represents an ideal starting point. Structuring your file and layout couldn't be simpler using DataGem's on-screen 'painting' format. You can have up to 62 fields or data items wherever you want them on a scrolling 120 x 120 card. Colours are all definable, and field data and field titles may be separated if required. Data entered may be stored in up to 8 tiers or 'levels', as well as within the whole database file. Scan one level or the whole database for records that match your search parameters, and place them in another data level for later manipulation. DataGem also boasts limited facilities for producing data merged letters, and may be configured as a 62 cell spreadsheet.

TECHNICALLY SPEAKING

The System Comprises:-

- 2 EPROMs mounted on carrier board containing 24K of 6502 optimised machine language. Carrier board may be inserted in either of two positions under keyboard or in sideways ROM board.
- Demonstration applications disk in both 80 and 40 track format with documented examples of DataGem files. Disk contains no DataGem program code.
- Full colour packaging consisting of A5 ring binder with professional documentation, user registration card and quick reference card.
- Utility program named 'Trans' also supplied to allow transference of data files from all other Gemini databases.

The System Features:-

- Permits just ONE file to exist over FOUR floppy disk drive surfaces with a maximum file size of at least 10 Megabytes.
- Allows up to 5100 User Definable Records.
- Maximum number of 62 fields per record, which may be any combination of the following types:
 - STRING - Up to 120 characters long
 - DATE - Either two or four digit year dates may be selected.
 - TEXT - A field with no data, allowing background text to be placed anywhere on the record. This may then be altered/moved/deleted, even after the database is in use. Up to 3000 characters of background text may be placed on the record in this way, enough for limited word processing and mail-merge.
 - NUMERIC
- Allows searches on any field or COMBINATION of fields to ANY depth.
- Up to 9 subsets of data INSTANTLY available and saved to disk automatically.
- Sorts alphabetical or numeric on any field, ascending or descending with NO LIMIT on the depth of sort.
- Interfaces with 'VIEW' and 'WORDWISE'.
- Includes a free format report generator for a completely flexible printing format.
- Allows the user to extend the file or add fields after having started to enter data.
- Offers a free format painted screen which scrolls 120 x 120, and supports extensive mathematics.
- Provides User defined field relational variables and multiple and single character wildcards.
- Exists self contained on ROM, and does not require additional utilities on disk.
- Finds the occurrence of a string or partial string in ANY field in the database with just one command.
- Mathematical Operators
 - +, -, *, /, multilevel parentheses (up to 50 levels), unary negation.
- Logical Operators
 - >, <, >=, <=, <>, =, *(AND), +(OR).

WHAT OTHERS SAY

DataGem provides many of the Spreadsheet facilities of an item like Lotus 1-2-3... Combined with a Word Processor, it forms the basis of a very competent small business system. Personal Computer News - July 1984.

DataGem stands out in terms of both price and performance. Excellent if you can afford it. Acorn User - December 1984.

NEW DATAGEM GUIDE

Available separately to existing owners of DataGem (see below), this new and comprehensive manual has just been completely re-written by Simon Williams, a veteran press reviewer and writer. The new guide takes you step by step through all the facilities of the program with worked examples, and without any requirement for a previous knowledge of databases. It contains over 40,000 words and is fully indexed.

MONEY-BACK GUARANTEE

The power and facilities of DataGem are just too great to detail in this advertisement. As the product is protected against unauthorised copying, we are able to offer our no-quibble money-back guarantee to customers purchasing DataGem direct from Gemini. If you don't agree that it's worth the price, send it back to us undamaged within 7 days of purchase for ANY reason and we'll refund your money - immediately.




STOP PRESS!!

New DataGem owner's manual (see above) available separately at **£12.95** inclusive. Price refundable against purchase!

L.B.O. LIFE & BUSINESS ORGANISER

- the ULTIMATE BBC utility!

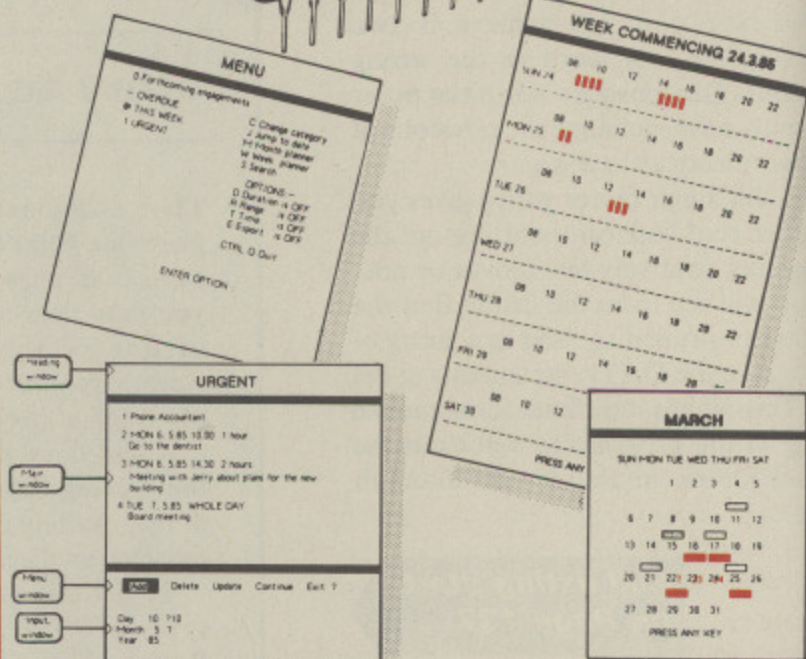


A NEW & EXCITING ROM RELEASE FROM GEMINI

This is a comprehensive life and business organiser package in 100% machine code which has been very carefully designed to provide a wide range of useful facilities for the busy person at home or in the office, and is simplicity itself to use. Once you start using LBO, you'll ALWAYS use it - not like one of those ROMs you only occasionally call on. LBO will put an end to forgetfulness and ensure that your time is organised, you know what you have to do and when, you don't forget bills or birthdays, and you are reminded constantly of urgent matters.

LBO was written by two graduates in Computer Science from Exeter University in consultation with a lecturer in Cognitive Psychology. It has been very cleverly researched and programmed and is confidently recommended by Gemini as a very superior program for the very superior BBC micro.

Features include:-

- Automatic reminder of entries overdue for attention
 - One week's advance notice of forthcoming events
 - Urgent notice board
 - Creation of categories of entries; e.g. bills, birthdays, letters to be written, notepad etc.
 - Sorting of appointments by date and time of day
 - Month AND week's summary at a glance, indicating time booked and free
 - Single entry of a RANGE of events and updating of regular happenings
 - Super search facility to call any event by any related word or part word
 - Month by month preview of all forthcoming events
 - Built-in intelligent calendar
 - All data saved to disk
 - Full printer support
 - Easy to follow documentation
- Use LBO to organise your life from today until 1999! It can handle literally hundreds of multi-line messages, as many as you are very likely to need. Despite the very wide range of facilities offered, this professional program is VERY easy to use and requires absolutely NO knowledge of computers. A vital aid to your everyday life, LBO is GREAT FUN TO USE!

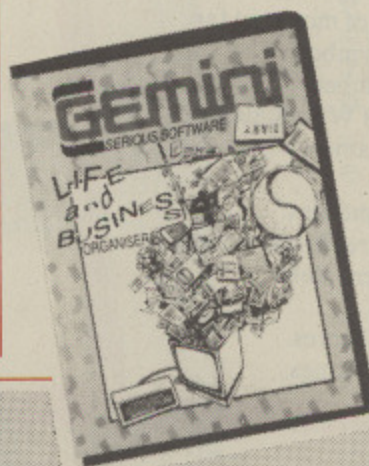

L.B.O. only **£19.95**

Also available on DISK for those with a cluttered ROM board - £19.95. QL version also available now, MS-DOS version early 1986.



Suite

THE REVOLUTIONARY 'TRIPLE-D' BBC DISK INTEGRATED SOFTWARE SYSTEM

Of great significance to businessmen, educationalists and hobbyists alike, these programs are certainly the most powerful and sophisticated of their breed, and may be used 'stand-alone' or together as a suite. Gemini have probably the most experience in writing serious software for the BBC micro, with classics such as BEEBCALC and BEEBLOT achieving sales of tens of thousands of units. We have drawn on almost four years of experience and user feedback to produce what we are confident will be hailed as the ultimate in functional software for the BBC micro: the 'TRIPLE-D' Integrated Suite. We've also brought it in at a price that should make it accessible to more of you, and most importantly, we're giving you REAL value for money.

The modules, which are formatted for both 40 and 80 track systems, are available separately, or as an economical combination pack. Each module is clearly documented with a comprehensive, indexed manual, with training sections that refer to demonstration applications provided with each disk. Remember, 'TRIPLE-D' uses proper random-access files that will take advantage of your true disk capacity, even over TWO drive surfaces. Have you ever heard of a true disk-based spreadsheet before? Well it's here now in the form of the 'TRIPLE-D' suite and can handle up to 52,000 FILLED cells! If you already have our 'DataGem' ROM database, you'll be pleased to know we've even included some special utilities for you!

I confidently recommend the 'TRIPLE-D' suite to you. If you purchase the product from us and don't share my enthusiasm, return it to us in new condition within seven days of purchase and we'll refund your money - immediately and without quibble.

Dale Hubbard
Chairman & Managing Director
Gemini Marketing Limited



-BASE £29.95

- Up to 2000 records, 1 search level subset, 26 fields/record, 2 drives, 79 chars./field
- Scrolling screen, 79 x 26. Interrupt driven real-time clock
- Layout painted on-screen to your design, including background text/graphics
- Fully menu driven, with powerful line editor and access to 'OS' commands
- Default entry capability, no need for tedious re-typing of repetitive data
- Lightning search using advanced 'hashing' techniques
- Powerful maths, allowing all BASIC functions, on any field
- 10 user-defined variables to simplify complex calculations
- Multiple level 'intelligent' sort - program only sorts 'out-of-order' data
- Printed reports in record or summary format. Data spool option for transfer to other files
- FULL DATA COMPATIBILITY WITH 'DDD-CALC' AND 'DDD-PLOT'



-CALC £29.95

- True disk-based spreadsheet, 2000 rows, 26 columns, 52000 cells. Powerful line editor
- Fast, smooth machine code screen scroll with pop-down menu
- Individually adjustable column widths with text overflow
- Full relative and absolute replication
- Find and move to a row by name
- User defined variables, delete/insert rows, SORT rows with 'DDD-Base'
- Send data from all or part of sheet to printer, or just print cell formulae
- Data over 1 or 2 drive surfaces
- Fast recalculation, even over large files
- All BASIC functions allowed, plus 'SUM', 'MAX', and 'MIN'. 'OS' calls, and real time clock
- Data spool option for merging with other files
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-PLOT'




-PLOT £29.95

- Stunning menu driven colour graphics using the BBC's capability to the full
- Pie charts, histograms, scatter graphs, line graphs and function plotting
- Disk save of screen for instant recall within your own programs
- Superb data entry editor with up to 255 plottable data entries for text and x/y coordinates
- Automatic scaling with user override
- Screen customisation allowable after plotting for background text etc., with up to 64 columns in Mode 1
- Disk save of ALL data
- Statistics facilities include mean, max, min, standard deviation, line of best fit, correlation coefficient etc.
- Colours re-definable for any plot
- Epson m/c fully SHADED screen dump with interface for other dumps on request
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-CALC'

Combo Pack - All 3 modules £69.95

NEW!

MONEY MANAGEMENT

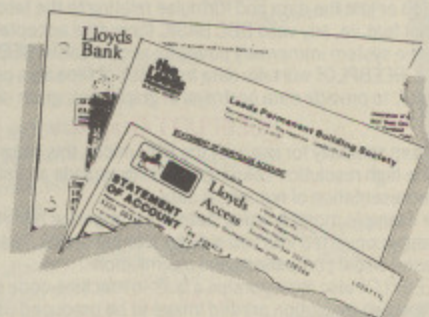

This program is designed for disk users. It allows individual transactions to be stored and retrieved in respect of up to 5 separate Bank/Building Society/Investment accounts AND up to 5 Credit card/loan/Mortgage accounts.

The transactions are also analysed - and may be (screen) listed - under 3 separate Income and 15 separate Expenditure headings.

Each transaction consists of:

- (1) Date
- (2) Description - up to 16 characters
- (3) Amount
- (4) Last 4 digits of cheque no. or a credit card transaction reference. (Payments only)

Account and income/expenditure headings may be personalised. Budget amounts can be stored for each of the 15 expenditure heads and a report shows how expenditure to date compares with the budget. It also shows the balance remaining. This report is also produced in percentage terms and a third report forecasts annual expenditure based on expenditure to date at any particular time.

A further report gives balances for each Bank/Loan account at the beginning of the year, balances for each income/expenditure account to date and the resultant Bank/loan account balances. This report represents, therefore, the changes in liquid assets and liabilities over the period, both in terms of totals and of distribution between accounts.

The main menu contains a print option for this report.

Lists of outstanding cheques or credit transactions may be produced for each account and when statements are received, input of the cheque reference no. (last 4 digits) and the amount causes verification to occur (on screen), whereafter these cheques are removed from the cheque no. file, the remaining list of unpresented cheques allowing simple reconciliation of each Bank a/c. Similar reconciliation of credit card a/cs can be achieved.

The program caters for transfers between accounts (e.g. from Bank to Building Society a/c or from Bank to Credit card a/c etc) the relevant details being input only once.

The program also allows for standing orders to be set up on any single account or between any two accounts. These are paid simply by inputting a date up to which the payment of all orders should be recorded. The necessary debits and credits are then created and the date of each order is reset. Orders can be for any multiple of calendar months.

The program is fully menu driven and all areas of input are 'range protected'. As much guidance as possible is included in all screen displays and the user is always given the opportunity to abort a transaction.

Full amendment and deletion routines are provided; for individual transactions, for Standing orders and for budgets.

The main file can hold between 800 (all full length descriptions) and 1800 (no descriptions) transactions. The former should be sufficient for most people for at least one year and the index file size is set on this basis. A warning is flashed on the main menu when the main file reaches 750 transactions. Account balances may be carried forward to a new set of accounts.

All you will ever need in a home finance package and beautifully printed.

**ONLY
£12.95**
Highly
Recommended

With over four years experience of providing practical software solutions for business and home applications, Gemini have put together a selected range of famous titles for the BBC and BBC Plus in TWO special packs, at VERY SPECIAL prices. These super value packs contain all the serious application software you're ever likely to need for your BBC, from spreadsheet and database management to a complete professional business accounting system. Gemini's 'OFFICE MATE' and 'OFFICE MASTER' packs are here - put that computer to WORK!



- DATABASE • BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS • WORD PROCESSOR
- FULL DOCUMENTATION

DATABASE

Use this program for storing all types of information just the way YOU want to store it. You set up a computerised 'card index' system and add records and data to the file in the format that you choose.

Advanced features include sorting and searching for specific records, mathematical calculations, printer routines, data summaries etc. If you don't have a database, you certainly should!

BEEBCALC SPREADSHEET

Perhaps the most commercially successful item of business software yet written, the Gemini Spread Sheet processor offers a very wide range of invaluable calculation and editing features.

Consider, for example, a Cash Flow forecast containing rows and columns of figures, combined with text and numbers. If say, the cash receipts for January need to be changed, it would normally be necessary to delete and recalculate several figures for each successive month.

With BEEBCALC, however, an 'on screen' amendment to the January figure is made, and the corrected figures for each successive month automatically appear upon touching the 're-calculate' key.

Formulae cells in the table may be specified which relate to each other and then copied RELATIVELY or ABSOLUTELY to other parts of the program, which in itself is modular, and directly linkable to other Gemini programs. BEEBCALC has a complete range of inbuilt data entry and formatting techniques, and the structure of the table may be amended at any stage. Of course, full printer facilities are included which allow for either the table to be printed or just the data and formulae relating to the table. Another important feature, any valid BBC BASIC formula is acceptable as data entry making the system immensely powerful and versatile. BEEBCALC's sister program, BEEBLOT will take data from disk or tape files created by BEEBCALC to provide data portrayal in graph, histogram or pie chart format.

BEEBLOT Graphics

Written specially for use with the BBC micro, this program makes full use of the high resolution colour graphics to provide an easily assimilated visual representation of numerical data.

For example monthly sales statistics comparing two year's results may be instantly converted into two side by side pie charts, histograms or graphs ... for easier visual comparison and assimilation.

BEEBLOT also incorporates a built-in machine code screen dump, enabling a high resolution printed image to be produced using an Epson or similar bit image compatible printer. It also interfaces with other Gemini programs such as Beebcalc and Cash Book and is particularly recommended where any kind of mathematical plotting facility is required.

WORD PROCESSOR

This program provides many routines found in large and more expensive packages. With a typical word length of 5-6 letters it allows for up to 1000 words in memory at one time and is ideal for the user who wishes to write any kind of business letter on a home computer.

Features include: block delete, block insert, search and replace, edit text, display text, and many more.

Step up to Office Mate and save money!
(Price if purchased individually - £79.80
- save £67.80 with this pack)

Electron version available,
pack contains Database, Beebplot,
Beebcalc, Home Accounts,
Cassette only.

OFFICE MATE
£12
Cassette
or Disk



- CASH BOOK • FINAL ACCOUNTS • MAILIST
- EASILEDGER • INVOICES & STATEMENTS • STOCK CONTROL
- FULL DOCUMENTATION

CASHBOOK

Gemini's CASHBOOK is a complete 'stand-alone' accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cash book system and will provide you with a computerised system complete to trial balance.

Simple to use, this program will replace your manual cash and bank records and provide vital management information at any time. It will take you from sheaves of invoices and cheque book stubs to trial balance, and may, if desired, be used in conjunction with the Final Account program.

Typical information from CASHBOOK is as follows: 1. Summary of VAT information to enable completion of VAT returns. 2. Cumulative receipts and payments report analysed over the standard profit and loss and balance sheet headings. 3. Option for departmental analysis of sales and purchases. 4. Printout of all transactions, nominal account balances etc. 5. Journal routine for entering transfers between accounts and year end adjustment for debtors, creditors, etc. 6. Trial balance. 7. Full audit trail facility.

This program is recommended not only for businessmen, but also for practising Accountants for use in the preparation of Accounts from incomplete records; a printer is essential.

FINAL ACCOUNTS

Requires Gemini 'CASHBOOK' module (except Commodore 64 version)

This program will take data prepared by your Gemini Cashbook module and produce a complete set of accounts for you in the following format: 1. Trial Balance with inbuilt rounding routine. 2. Notes to the Accounts. 3. VAT summary. 4. Profit and Loss Account with comparatives facility. 5. Balance Sheet with comparatives.

All reports may be produced at any time interval comparing actual to budget if required.

MAIL LIST

Gemini's Mailist program will enable you to keep a record of names and addresses and then print, examine, sort and find them, all with special selection techniques. All our mailists contain our exclusive 'SEARCHKEY' system, giving you the option of creating your own dedicated coding system for each name on file. For example, on most mailing list systems, you are only given the standard heading such as name, street, town, country, postcode etc. With the Gemini searchkey system, you could find, say, all names on the file that are companies having a turnover in excess of '50,000' or all names that are subscribers who are behind in their subscriptions or all names that are eligible for a Christmas card this year!

A full and useful range of routines is included in the menu, and the program allows you to set up your own format for printing labels, i.e. the tab settings you require and spaces between labels, etc. Multiple copies can also be printed.

EASILEDGER

Contains routines to enable the small business man to keep a record of one of the most important aspects of his business - cash flow.

EASILEDGER is essentially a debit/credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information. Its flexibility lies in its ability to produce account balances instantly for debtors and creditors, together with a record of all transactions, dates and references. A year-to-date summary of sales, purchases, receipts and payments over the twelve month period is also provided, as is a complete INTERACTIVE bank account database.

EASILEDGER is a management aid software tool and is designed to run alongside an existing accounting system. If you operate a cash based business and require a complete accounting package to produce the accounts to trial balance and beyond then we recommend you consider using both Easiledger and Cashbook programs together.

INVOICES & STATEMENTS

The Gemini INVSTAT program greatly reduces the time and cost of preparing Invoices and Statements by storing essential information such as customer names, addresses and account numbers, VAT routines and footer messages such as 'Please remit by return', 'Overdue and outstanding', etc.

Not only are Invoices and Statements produced more quickly and accurately, but pre-printed forms for them are eliminated since the INVSTAT program produces professionally formatted documents using your own printer.

STOCK CONTROL

You have a stock of products. With the Gemini program you may enter details of each product on to a record card on the computer with details of your own existing part number (if any), a description of the product, the unit quantity (i.e. one, a gross, a pair, etc.), the cost price per unit, the selling price per unit, a specified minimum satisfactory stock level, units in stock ordering quantity and supplier details.

The program will allow you to enter stock received, stock out, and will also give you a summary of stock items and current holding, together with details of total cost of stock, total sales value of stock, current gross margin on stock, cost of bringing stock up to minimum level, understocked items, etc.

Each stock item has its own computerised record and you may browse through the file as a whole, or just a specified number of records. An extremely powerful program, highly recommended for inventory control in small and medium sized businesses.

OFFICE MASTER
£25
Cassette
or Disk

WHY?
Because
program for
program w
This m
error is virt
an invoic
instead of
an error
invoice ge
to be ente
are taken
program, a
Likew
system, co
posting fro
the Stock
book stock
to be re-or
this could
the quantit
from stock
Stock Cont

John
Accounting
This
access and
would exp
the single
superb ex

The Gemini
enable a ti
keeping cu

The n
modules, a
customer
Gemini No
notes. ● R
Audit trail
accounting
● Examini
settlement
customers
Comprehe

Used inde
each supp
payment c
● Autom
unlimited
close dow
● Full inte
● Supplie
● Manage
track disk

This
Cash Book
main featu
and Purch
and Loss
for whatve
down rou
accounts
code listi
notes. Bal
over the p
● Accoun
user-defin

This
tax and
offers th
status, Na
employe
pay cycle,
details. ●
Name, ad
analysis o
date both
rates of g
pay. Hour
list, Payro
Revenue
track disk

A pro
which car
module in
details of
location o
activity an
receipts a
include: P
stocks list
report. St
sequence
minimum
generation
● Maximu

Gemini's
Ce
Unit 10,
B7 4LY

GEMINI INTEGRATED ACCOUNTS & HARDWARE

WHY INTEGRATED ACCOUNTING?

Because it will retrieve information stored in one program for use by another, and store data in one program which has been generated by another. This means that the scope for human transposition error is virtually eliminated... for example, when typing an invoice manually, the typist could type £14.25 instead of £41.25, and undercharge the customer. Such an error cannot occur with integrated, computerised invoice generation, since only the part number needs to be entered and the price (and product description), are taken AUTOMATICALLY from the Stock Control program, and printed AUTOMATICALLY onto the Invoice. Likewise a Stock Controller, operating a manual system, could transpose the quantity sold, when posting from a copy invoice, and deduct 93 pcs from the Stock card, instead of 39. This would understate the book stock by 54 pcs, and possibly cause the product to be re-ordered, and consequently overstocked. Again, this could not happen with an integrated system, since the quantity invoiced is AUTOMATICALLY deducted from stock, due to integration of the Invoicing and Stock Control programs.

WHY THE BBC MICRO?

Because, although originally designed as an educational computer, it has the facilities needed for serious business use. In particular, speed of operation... although only an 8 bit machine, it has a faster operating speed than many 16 bit micros. By gearing a suite of Integrated Accounting programs to the BBC Micro, Gemini have produced a combination of excellence which will eclipse any other computerised business system in its price bracket... and many other systems in much higher price ranges.

WHY GEMINI?

Because our business software for the BBC Micro is based upon the solid foundation of experience. We have successfully written business software for the BBC Micro since it was first launched. Your choice of software for a computerised business system is critical... badly written programs could bring your business nearer to ruin, more quickly than almost any other investment. The fine reputation of Gemini, evidenced by the Independent press comments listed below, are your guarantee of confidence in the professional experience which back this major investment in the efficiency of your business.

INDEPENDENT PRESS COMMENTS

John Vogler reporting in December 1984 edition of 'A & B Computing' said of Gemini Integrated Accounting when comparing to Peartree, Micro Aid, Software for All, Acornsoft Mirle and Sage:— "This is the newest and most exciting. To have achieved a substantial degree of integration, very rapid file access and respectably large file sizes, without the use of a second processor, is a fine achievement. As one would expect from GEMINI, the individual modules are eminently professional and for the first time present the single processor BBC as a viable small business computer... GEMINI have produced a superb product... superb examples of the programmer's art."

INVOICING & SALES LEDGER

The Gemini Sales Ledger and Invoicing program will produce invoices and statements for customers and enable a tight control over credit procedures to be maintained by producing aged debtors reports, and by keeping current information concerning customer accounts. The module can be used independently or interfaced with the Gemini Nominal Ledger and Stock Control modules, and offers the following advantages: • Maintains open-item sales ledger. • Comprehensive customer Master File maintained in memory. • Choice of fixed and free format invoices. • Integrates with Gemini Nominal Ledger and Stock Control modules. • Prints invoices, invoice copies, statements and credit notes. • Reports include: Aged Debtors, Sales Daybook Sales analysis by user defined code, VAT analysis, Audit trail giving copy details of all transactions. • Automatic updating of sales ledger. • Comprehensive accounting controls including period end close down routines and full audit trail for all transactions. • Examine customer status by file enquiry to screen or printer showing year to date activity. • Trade and settlement discount terms definable for each customer. • Caters for up to 5 rates of VAT. • Can hold up to 135 customers on 40 track disk system and up to 610 customers on a 80 track disc per Sales Ledger file. • Comprehensive analysis of invoices over unlimited, user definable sales codes. **Price £69.95.**

PURCHASE LEDGER

Used independently or interfaced with the Gemini Nominal Ledger, the program maintains a complete file for each supplier, records amounts outstanding at any time, helps to determine which invoices are payable, and payment dates for the claiming of discounts. Among this module's many features are the following: • Automatic posting of suppliers' invoices to Purchase Ledger. • Comprehensive analysis of invoices over unlimited, user definable expense headings. • Comprehensive accounting controls including period end close down routines with posting reports, and full audit trail facilities at appropriate stages of processing. • Full integration with Gemini Nominal Ledger module. • Purchase invoices and credit notes easily processed. • Supplier file held in memory, with full details of each supplier. • Maintains open item purchase Ledger. • Management of invoices due for payment within cash restraints. • Maximum number of suppliers on 40 track disk system of 135 and maximum of 610 suppliers on 80 track disk system per Purchase Ledger file. **Price £69.96**

NOMINAL LEDGER

This is the central module of the Integrated Accounting system and may also be used independently as a Cash Book or interfaced with the Sales and Purchase Ledgers and payroll programs. It includes the following main features: • 143 Nominal accounts all of which are user-definable. • Posting of transactions from Sales and Purchase Ledgers and Payroll modules. • Full Cash Book facilities. • Print out of full Trading and Profit and Loss Account and Balance Sheet together with notes to the accounts. • Full accounts may be produced for whatever period chosen by the user. • Comprehensive accounting controls including period end close down routines and complete audit trail for all transactions. • Journal feature for adjustments between accounts and correction of book-keeping errors. • Reports include: Account Master File showing complete code listing, Cash Book entry details, Journal printouts, Trial Balance, Trading and Profit and Loss Account with notes, Balance Sheet with notes, Audit Trail Enquiry for all accounts. • Account enquiry showing movements over the period under review including opening balance, period end adjustments and closing balance. • Account posting masks allow conversion of analysis codes set up in other modules into selected user-defined Nominal Ledger codes. **Price £69.95**

PAYROLL

This program provides a full range of controls over the different aspects of Payroll Accounting including tax and other deductions. It can be used independently, or interfaced with the Gemini Nominal Ledger, and offers the following facilities: • Employee file maintained in memory, containing: Name, address, sex, marital status, National Insurance Number and contribution type, date of birth, personnel number, department, date employment commenced, all applicable tax codes, whether week 1 or month 1 applicable, hourly or salaried, pay cycle, payment type (cash, cheque or direct transfer), PAYE reference number, previous name, bank details. • Supports weekly, fortnightly, four weekly or monthly employees. • Company master file containing: Name, address, bank account number and name, bank name and branch, PAYE reference. • Produces cash analysis of note and coinage to suit requirements. • Employee pay details include: Gross pay and tax paid to date both current and previous employer, National Insurance contribution for employer and employee, Five rates of overtime per employee. Up to 12 standard and 5 non-standard pay elements per employee. Basic pay Hourly rate. • Reports include: Payroll reconciliation, Payslips, Coinage analysis, Cheque and bank giro list, Payroll masterfile, Departmental analysis. • Relevant data to complete Inland Revenue forms including: P11, P35, P45, P14/P60. • Maximum 98 employees on 40 track disk system and 198 employees on 80 track system per Payroll file. **Price £69.95**

STOCK CONTROL

A program providing full control over every aspect of stockholding operations which can be interfaced with the Gemini Sales Ledger and Invoicing program, this module includes the following features and routines: • Inventory Master File holding details of part number, selling and cost price, sales and product code, current stock, location of stock, allocated items, re-order level, quantity on order, current period activity and supplier code. • Permits four types of transactions - sales, returns, receipts and adjustments. • Part enquiry routines for any stock item. • Reports include: Part catalogue, giving stock sales and cost values. Re-order report. Evaluation stocks list, giving stock sales and cost values. Dormant parts report. Delete parts report. Stock usage report. Stocktaking sheet. Stock audit report sorted into part sequence and transaction type and date. • Screen prompt when item falls below the minimum re-order level. • Directly interfaces with Sales Ledger to enable automatic generation of product details for invoice production and adjustment of stock records. • Maximum 980 part numbers on 40 track disk and 1980 on 80 track disk per stock file. **Price £69.96**

Gemini's Office Mate and Office Master, sole distributors to the trade

CentreSoft Ltd

Unit 10, 1 The Parkway Industrial Centre, Heneage Street, Birmingham, B7 4LY. Tel: 021 359 3020. (Mail order to Gemini).

INTRODUCTION

Designed for the small to medium sized business user, where speed and efficiency are vital, Gemini Integrated programs are suitable for sole traders, partnerships, or limited companies. All require a BBC B 32K microcomputer, and an 80 column printer. A double disk drive with an Acorn compatible DFS is required for integrated accounting purposes. A single disk drive may be sufficient where modules are used independently, although this is not recommended for the Sales Ledger and Invoicing module. The manuals indicate the system capacities for various disk drive combinations.

The programs have been devised by H.C.C.S Ltd in the light of substantial mainframe computing experience, and share many of the features normally found only in very large installations. Used in a typical business environment where invoicing, sales ledger posting, stock control adjustment and nominal ledger posting is simultaneously made, the software will convert the BBC micro into a business computer of enormous power, directly comparable with hardware/software combinations costing many times its price.

Each program is supported by a comprehensive, easily followed manual, and 'user friendly' screen prompts with error trapping routines, which make a specialised knowledge of accountancy unnecessary for the average user. All the programs, however, have many sophisticated features which make the programs revolutionary for the home micro market.

Gemini Marketing Limited confidently recommend the programs to serious commercial owners of the BBC B micro as software capable of making an enormous contribution to business efficiency and profitability at minimal cost, since it requires no expensive second processor in order to achieve the advantages of integrated accounting.

NEW LOW PRICE

Price **£69.95** per Module



Includes 1 year software support

Special Hardware/Software OFFERS

Having arranged bulk hardware purchasing discounts, Gemini is now able to offer complete systems of hardware and software offering unequalled value for money. We offer a choice of hardware only or hardware with software as follows:—

DEAL 1

- BBC SYSTEM comprising:—
- BBC 32K with DFS
 - 40/80 switchable 800K double disk drive
 - 80 column printer
 - 12" screen monitor (for colour add £150 to system price)
 - All connecting cables
- OUR PRICE INC. VAT £999.95**

MS-DOS version soon.

DEAL 2

- DEAL 1 with the addition of the following:—
- 'DDD' integrated database, spreadsheet and graphics
 - DataGem database ROM
 - Integrated Accounts - ALL 5 MODULES
 - Mail Merge utility for Integrated Accounts
 - 'Video Classroom' programming educational video (VHS only)
 - 'Life & Business Organiser' ROM
 - 'Office Master' software pack
 - 1 pack each pre-printed stationery: payslips, statements, remittance advice, invoices for use with integrated suite, plus one box 2000 sheets listing paper.
- USUAL PRICE £1650 - OUR PRICE INC. VAT £1395**

Please enquire by telephone for prices of individual hardware items.

If not ordering by telephone, please use this order form to order any item on this page, or three preceding pages. Please state your requirements clearly, and whether you require 40 or 80 track format when ordering disks. Please allow 7 days for delivery.

24 hour CREDIT CARD HOTLINE - AMEX/ACCESS only - 0395-265165

All stated prices include VAT and post/packing.

To: Gemini Marketing Ltd., Gemini House, EXMOUTH EX8 4RS

Please supply _____

Name _____

Address _____

Cheque/POs value £ _____ enclosed, or please debit my Access/Amex no. _____

Signature _____

Export/Trade enquiries and Local Authority POs welcome.





The Punk is Dead Long Live The Music System

That notorious supporter of The Music System, The Punk, has passed on. His short life was spent in bringing your attention to the most advanced micro based music program for the BBC microcomputer. His last wish was that you should not miss out on the amazing facilities provided in The Music System for creating, editing, playing and printing tunes. He tried to indicate how simple the program is to operate despite its unrivalled versatility and performance. The Music System has editing facilities akin to a word processor and the sound designer module is quite out of this life. So bring life to your ears. Buy The Music System today.



DISC PACK: EDITOR · SYNTHESISER · KEYBOARD · LINKER · PRINTOUT · SONG AND SOUND LIBRARY · £29.95 INC VAT. CASSETTE 1: KEYBOARD · SYNTHESISER · SOUND LIBRARY · £14.95 INC VAT. CASSETTE 2: EDITOR · PRINTOUT · SONG AND SOUND LIBRARY · £14.95 INC VAT. PLEASE ADD £1.25 P&P PER ORDER.

ADDITIONAL SONG LIBRARY DISC: 2 TOCCATA AND CAROLS · 3 400 YEARS OF MUSIC · 4 MAINLY BACH · 5 IAN WAUGH ORIGINALS · 6 OLD FAVOURITES · £4 EACH INC VAT · POSTAGE FREE

NEW UTILITIES DISC: KEYBOARD — MUSIC FILE CONVERTER · PLAY FROM BASIC UTILITY · TMS MUSIC FILE CONVERTER · MUSIC EDITOR FILE CONVERTER · £6 INC VAT · POSTAGE FREE

ORDERS TO: SYSTEM, DEPT. B, 12 COLLEGIATE CRESCENT, SHEFFIELD S10 2BA.



(0742) 682321



DEALER ENQUIRIES WELCOME.

i. ISLAND · LOGIC

**SYSTEM
SOFTWARE**

BY c
tures
yet c
The
Softw
unus
often
W
villag
to un
conf
some
TH
intro
of th
impr
alon
Mid
alien
take
ever
the f
fair
A
disa
gam

sho
pict
the
gam
T
dar
suff
inst
bec
disc
are
mo
I

A taste of village life


More tales of adventure by Alice

BY coincidence I received two adventures that take place in English villages yet contrast in almost every other way. The first is *Woodbury End* by Shards Software, a company that tends to offer unusual "off the beaten track" puzzles, often using graphics as clues.

Woodbury End is a quiet, sleepy village and you have 20 "real time" days to unravel its sinister secret and obtain a confession from someone – or is it something?

The insert gives a long, detailed introduction to the strange happenings of the previous 25 years and the overall impression is that in 1953 something along the lines of John Wyndham's *Midwich Cuckoos* took place. That is, aliens landed nearby and have gradually taken over the village by brainwashing everyone, particularly the children, in the funhouse of a peculiar, permanent fair called the *Paradisnia*.

After all this intriguing detail it was disappointing to find that the actual game is a simple VERB NOUN with

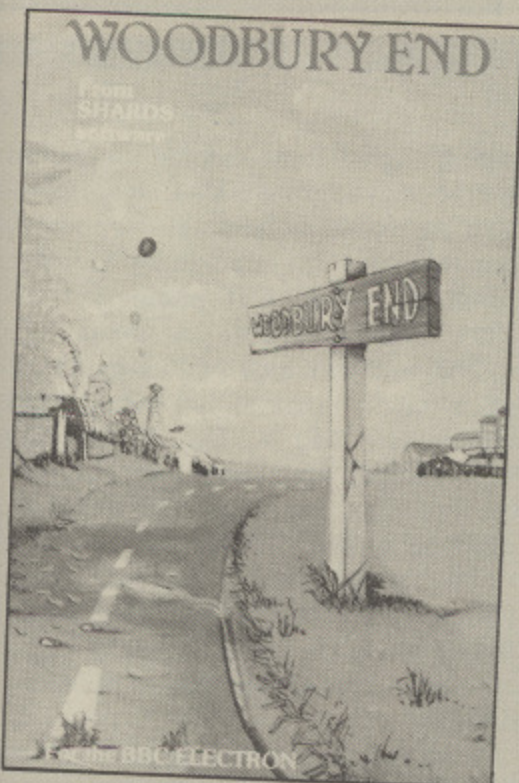

short descriptions and very crude pictures. You always have to grope in the dark for the exact two words in such games, and this is no exception.

The insert says that "you start in a darkened room, bound with rope and suffering amnesia". Following the instructions I used I for Status – because S means South – and discovered that it is dark because you are blindfolded and also you cannot move in any direction.

I therefore tried H for Help, but all I

got was a perplexing set of about 15 cryptic clues, such as "leave the beast but look at least", "be wise with wise eyes" and "digital doitall".

Eventually I tried OPEN DOOR and got "you roll over and cut your hand on glass" so CUT ROPE followed by CUT BLIND (it does not understand UNTIE, you get "try another word") and "you are in an old empty hut, the window is barred".

EXAM GLASS gave a crude picture of some yellow triangles so S for South through the door (now I can see I can also move) and down to the village for a pint in the pub.

Actually I'd spent so long working up a thirst escaping that everything was shut and/or empty – school, market place, the green, even the police station only contained a chained-up bicycle, so the local copper was probably walking his beat.

There are 14 interactive characters, but you have to wait a while to meet them.

After a "couple of days" I was still in the dark as to what was going on so I decided to try some "break and enter".

Unusually for Shards, this game is in machine code and I didn't have my "jemmy" with me.

A real classic

Intending to return to *Woodbury End* better prepared I next loaded in *Village of Lost Souls* by Magus, a new company to me. I did not bother to read the blurb this time, partly because the tape label and the insert are both rather crude if not unprepossessing, so I was totally unprepared for the quality of the game. It is, in a word, classic.

Again the setting is a quiet English village, but this one is in the 14th century and the reason it's quiet is because everyone appears to have been brutally murdered.

Unlike *Woodbury End*, you have no

difficulty in wandering around the village. Almost every home you enter is splattered with blood and bodies, usually described in such minute and gruesome detail it makes you want to hurriedly move on before the rot sets in.

Wearing the right boots is no help to avoiding this shambles either. If you try to leave you always get sent back to sniff around again.

The text is prolific, 34k apparently, even more than the ghost of *Adrian Mole* could write in an evening. But it is also very cleverly interlaced with sub-plot puzzles so a new location plus updates can fill the screen. Here's an example:

"You are outside the rectory, behind it you can just see some fine buildings and to the southeast, the church, Exits lead north, east, southeast, west, northwest and southwest.

"A bird appears and circles overhead looking at you . . .

"The smell of burning dies away . . . a dying whisper is carried by the breeze . . . too late. There is an unkempt pack of curs here snapping and fighting amongst themselves. Woof . . . bark . . . snarl".

The sub-plots are the bird, the pack of dogs and the smell of smoke. You quickly realise that the bird is a magpie and will regularly steal one of your possessions until you are empty handed – it then flies off with a caw of disgust.

The pack of curs is a similar nuisance because once they find you they dog your steps unless you enter a house, and run off with all objects before you can pick them up.

The smell of smoke is a hut that you must locate and enter before its vital contents are destroyed.

None of this actually stops you exploring the village, but you soon realise that the game is BIG. Reviewers

From Page 119

are told that there are well over 200 "rooms" and 140 objects.

Although logically laid out, the locations often have many exits, so a map is vital for finding out how to avoid the bird, the dogs, get to the hut quickly and so on.

This is only the beginning because, despite finding dozens of objects including a jade necklace I still had yet to score anything out of 1200. However I eventually found a staff in a twisty maze (actually a featureless fallow field) that not only rattles but also emits a blue white flame from the tip. Unfortunately its only a one-shot staff, unlike the six-shooter in Twin Kingdom Valley that sees off everything including dragons.

After a few more hours I was finally making some progress by being repeatedly sucked dry by a vampire that seems immune to all the regular remedies – garlic and salt just whets his appetite – and he, indeed the whole game, is a real challenge for the seasoned adventurer.

Apart from all the detail, sub-plots and superb black magic atmosphere, there are some dreadful puns that you are almost guaranteed to make it regurgitate.

For example you find that you are

SOLUTIONS

I have only received partial solutions to Dudeney's 7*7 puzzle from the November 1985 issue of *The Micro User*. One reader, Ian Pain of Fareham, has got the date right – JULY THE TWENTY-SECOND – but his tour goes outside the 7*7 array and this is not necessary. There will be a full solution next month, but in the meantime the place is near THE White Horse.

Two people have managed to "overwhelm" the Pellian program in the December 1985 issue, namely Steven Chmiel and David Vickers, but neither has managed to correctly decode the number of the editor's deposit box in Zurich.

Hint: The Pellian(61) really does "overwhelm" the BBC Micro. You will have to use modulo arithmetic.

wearing a "dirty habit" so who can resist DROP HABIT?

Another anticipates that you will EXAMINE all objects so you find a paddle and are told that it is "made of ROWAN because that's what it's good for".

If all this is too puzzling you can always ask for Help – but all you get is: "Write to the Magus and we majus help you".

Actually you will have to write once because the game is only available by mail order – price £9.95.

I recommend that you do because, if you want a game that compares with Level 9 at their best, then this is it.

Holiday horror

If you missed the summer of '85 (I was having a shower at the time) and are planning a sunny holiday "extranjero" this year then Terrormolinos from Melbourne House might make you think again.

Written by the authors of Hampstead, reviewed in the December 1985 issue of *The Micro User*, it is just as funny but this time they revel in revealing all the drawbacks and disasters of the petit bourgeois Britanique en vacance.

You start almost totally unprepared in Slough with the taxi, hired by your wife Beryl, due to arrive in 35 moves, so your first tasks are to locate your tickets, passport and other paraphernalia, round up the wife and two kids and quickly pack a suitcase before the taxi leaves in disgust without you.

Actually my biggest problem was how to get into the taxi without getting run over.

But eventually we made it to the airport, through customs first time (this was because I'd missed the taxi so many times that I knew the house from top to bottom and had found everything), got packed on to the plane and checked into the Hotel Excrucio (pronounced Excruthio) where you can really start to enjoy your holiday.

By this time you will have discovered that – just as in real life – the kids are always hanging around until you want them.

The instant you unpack they wander off as do some of your fellow pain-in-the-neck passengers particularly the appalling wino Mr Snargsby, who seems to think this is an 18-50 Club

PUZZLE

THIS month's puzzle is based on the card game Eleusis (pronounced ee-loo-sis). The simplest version is for three players, one of whom plays God by writing down a simple rule – such as play alternate red then black cards – and then the other two players, each with 26 cards, try to induce the rule by laying down a card or cards from their hand.

If God says "Right" then the player can continue to experiment

```
10 DIM A(14)
20 FOR C=1 TO 4
30 READ T
40 DATA 19,22,23,26
50 GOTO 70
60 PRINT"WRONG - START AGAIN"
70 FOR N=1 TO 14
80 A(N)=0:REM Clear array
```

outing. Apart from keeping an eye on everyone you must also avoid sunstroke, food poisoning, vagrancy, drowning and being gored by a colour blind bull plus take 10 photographs to show what a good time you are having.

The neat gimmick of this game on other micros is that if you take a good photograph then a "Donald McGill" type picture appears on the screen. Sadly this revealing feature isn't available on the BBC version.

The whole game involves clever variations on the disasters of a dumb family on holiday in Spain. Very funny but fairly predictable, hence not very difficult.

I scored 67 per cent in about three hours and finally left Mr Snargsby wandering the catacombs of the monastery because I only had my trunks left to drop in order to map this maze and the guardia civil arrest you for indecent exposure wherever you are – that is unless you are being eaten by a shark.

Reign of the robots

A far more sober society is to be found in The Worm in Paradise, the

with more cards. If, however, God says "Wrong" this can also be useful information, but the other player can then test his theories.

The game is won by a player either getting rid of all his cards (such luck is unlikely) or guessing the rule.

The difficulty of making this game into a program is that you can see the listing, so my rule is fairly complex. However to compensate for those who cannot read a listing, I have given in Table I a "Right" sequence for the first 45 cards (N.B. 14 means

1	13	5	12	2	11	6	10	3	9	7	0	4	14
1	12	9	10	3	0	11	6	5	4	13	2	7	14
14	3	6	5	12	7	4	9	10	11	2	13	8	1
14	2	10	?	?	?	?	?	?	?	?	?	?	?

Table I: Sequence for the first 45 cards

one of the four jokers in the pack).

Hopefully you do not need to be "computerate" in order to work out how to play the last 11 cards and then tell me what the rule is.

The prize goes to the simplest explanation of how to play your cards "Right".

```

90 NEXT N
100 INPUT "Put down 1 card (1=Ace t
(4=Joker) ",F
110 A(F)=1
120 L=F
130 FOR K=1 TO 6
140 INPUT"Put down two more ",M,N
150 IF A(M)=0 THEN A(M)=1 ELSE 60
160 IF A(N)=0 THEN A(N)=1 ELSE 60
170 IF L+M+N=T THEN L=N ELSE 60
180 NEXT K
190 INPUT "Put down one more ",M
200 IF L+M+F=T THEN PRINT"OK so far
" ELSE 60
210 NEXT C
220 PRINT"All done"
    
```

back where you started.

On top of that I find the roundabouts are "trapdoors" that you can get on to them but cannot easily go back, so they are difficult to visualise or map and I think many players will give up at this stage.

To help such players, enter SAY HOME whenever you are lost and you can, at least, explore your habihome (and avoid the curfew) although SAY BED AND LIE ON IT has a peculiar response. SAY ON is also very useful.

Although the parser is greatly improved, I am frustrated that INSERT is not the opposite of REMOVE – you have to PUT THE x IN THE y – and note that on meeting a CUSTODIAN early on, EXAM CUST gets a little confused.

With the help of the hint sheet I have explored most of the game and it's big with plenty of puzzles, but I find it a slight disappointment.

Let me hasten to add that it is far

The Worm in Paradise



superior to 90 per cent of the other games on the market, but the Austins have always set high standards of wit and originality and I was hoping that they, like Jonathan Swift in Gulliver's Travels, could introduce a genuine satirical commentary into the adventure art form.

I am sure this is possible, but for the time being we shall have to be content with the rather unsubtle humour of Adrian Mole and Terrormolinos.

Sorry to be so serious, but I'm sure Level 9 can do better than this. If not then the magic begins to go away.

third and final episode of the Silicon Dream series by Level 9.

The time is the future and the place is Eridani E, a planet run by robots. What seems to worry Pete Austin is that humans are hedonists and, given free comfort and entertainment, will simply opt for a life of pointless leisure provided by machines.

Such a theme has been dealt with, together with possible solutions to the boredom, in books such as Erewhon by Samuel Butler and The City and the Stars by Arthur C. Clarke, and it is interesting to see if such themes could be dealt with in an adventure.

According to the insert introduction, you will wake up in an alien world which is closely supervised by robots whose aim is the greatest good for the greatest number, which means a 1984 type police state where you can be fined for almost anything.

The idea of the game is for you to work out the rules of this society and then complete various tasks to score a maximum of 1000 points.

Each task scores 40 points, but not all are critical – for example I completely missed the opening "adventure within an adventure" and just waited for the

Reveline dream to finish.

Maybe some "On with the motley/tradclads" muzak (from I Pagliacci which, also has a plot within a plot) would have made me more suspicious.

The main problem is how to explore the city of Enoch without breaking too many laws and getting too heavily fined. Like Terrormolinos, public nudity is a crime outside the privacy of your own home, but finding home is a major puzzle because you have to decode an extremely confusing zipcode.

Players of Snowball will remember the clever colour code on the starship, but re-working that green means 5 and grey means 8 or black means 0 and blue means 5 just gets tedious this time around – much better to have just given us a six digit number because then it is much clearer what is happening as you move around the 3,000,000 "rooms" in the transport system.

I think Pete Austin was aware that asking us to find our colour coded way to five different locations is somewhat repetitive, so the hint sheet actually provides a program to do this for you.

Even then I still find the system confusing, particularly when going north 13 times always seems to get you

21st. Software

(ELECTRON VERSIONS AVAILABLE)

PRESENTS A SELECTION OF HARDWARE, UTILITIES & SOFTWARE FOR THE BBC MICRO

ACORNSOFT'S VIEW ROM OUR PRICE £52.80 VIEWSHEET ROM OUR PRICE £52.80	SLOGGER SOFTWARE ROMS <table border="0"> <tr> <td>STARWORD</td> <td>R.R.P. £34.50</td> <td>OUR PRICE £31.50</td> </tr> <tr> <td>BEBMAN</td> <td>£17.50</td> <td>£16.00</td> </tr> <tr> <td>STARMON</td> <td>£24.95</td> <td>£22.50</td> </tr> </table>	STARWORD	R.R.P. £34.50	OUR PRICE £31.50	BEBMAN	£17.50	£16.00	STARMON	£24.95	£22.50	SUPERIOR SOFTWARE SUPER 3 PACK (BBC) 3 CASSETTES MOON MISSION BMX ON THE MOON SPITFIRE COMMAND GREAT VALUE ALL 3 FOR JUST £6.95	VINE MICROS ROM SOFTWARE ADDCOM R.R.P. £28.00 OUR PRICE 26.00 REPLAY R.R.P. £35.00 OUR PRICE £31.50	NEW ALLIGATA'S R.R.P. OUR PRICE DECATHLON (disc) £9.95 £8.95 WHO DARES WINS II (cass) £9.95 £8.95 QUIZ QUEST (disc) £9.95 £8.95
STARWORD	R.R.P. £34.50	OUR PRICE £31.50											
BEBMAN	£17.50	£16.00											
STARMON	£24.95	£22.50											

ACORNSOFT'S <table border="0"> <tr> <td>VIEWSPELL</td> <td>R.R.P. £39.95</td> <td>OUR PRICE £35.55</td> </tr> <tr> <td>VIEWSTORE</td> <td>£59.80</td> <td>53.00</td> </tr> <tr> <td>VIEW 3.0</td> <td>£89.70</td> <td>79.70</td> </tr> </table>	VIEWSPELL	R.R.P. £39.95	OUR PRICE £35.55	VIEWSTORE	£59.80	53.00	VIEW 3.0	£89.70	79.70	NEW MELBOURNE'S WAY OF THE EXPLODING FIST Disc R.R.P. £14.95 OUR PRICE £13.45 Cass. R.R.P. £9.95 OUR PRICE £8.95 GYROSCOPE Cass. R.R.P. £8.95 OUR PRICE £7.95	GEMINI'S OFFICE MATE Cass. or Disc £12.00 OUR PRICE £11.00 OFFICE MASTER Cass. or Disc £25.00 OUR PRICE £22.50 MONEY MANAGEMENT Disc R.R.P. £12.95 OUR PRICE £11.65	NEW MACSEN SOFTWARE'S FOLLOW UP TO BLOCKBUSTERS GOLD RUN (1 player) R.R.P. £9.95 OUR PRICE £8.95
VIEWSPELL	R.R.P. £39.95	OUR PRICE £35.55										
VIEWSTORE	£59.80	53.00										
VIEW 3.0	£89.70	79.70										

	R.R.P.	OUR PRICE	R.R.P.	OUR PRICE	R.R.P.	OUR PRICE	R.R.P.	OUR PRICE
AARDVAAK SOFTWARE								
Zalaga	7.95	6.95						
Frak	8.95	7.95						
ACORNSOFT								
Elite (cas.)	14.95	12.95						
Elite (disc)	17.95	15.75						
Revs (cas.)	14.95	12.95						
Revs (disc)	17.95	15.85						
Revs 4 tracks (cass)	9.95	8.95						
Revs 4 tracks (disc)	12.95	11.85						
Majic Mushrooms (cas.)	12.95	11.85						
Majic Mushrooms (disc)	14.95	13.45						
Aviator (cas.)	14.95	13.25						
Aviator (disc)	17.65	15.25						
Maze (cas.)	9.95	8.95						
Maze (disc)	11.50	10.45						
Acheton (disc)	17.65	15.95						
Chess (cas.)	9.95	8.95						
Firebug (cas.)	9.95	8.95						
Firebug (disc)	11.50	10.45						
Snooker (cas.)	9.95	8.95						
Snooker (disc)	11.50	10.50						
Labyrinth (cas.)	9.95	8.95						
Labyrinth (disc)	11.50	10.45						
Workshop (cas.)	9.95	8.95						
Workshop (disc)	11.50	10.45						
ACORNSOFT/BES								
Happy Letters	8.95	7.95						
Timeman One	8.95	7.95						
Happy Numbers	8.95	7.95						
Wordhang	8.95	7.95						
Osorev	9.95	8.95						
ACORN/LINKWORD								
German	14.95	12.95						
French	14.95	12.95						
Italian	14.95	12.95						
Spanish	14.95	12.95						
ADDICTIVE GAMES								
Football Manager	8.95	7.95						
Boffin	9.95	8.95						
ADVENTURE INT:								
Gremlins	7.95	6.95						
The Hulk	7.95	6.95						
Spiderman	7.95	6.95						
Adventureland	7.95	6.95						
The Count	7.95	6.95						
Mystery Funhouse	7.95	6.95						
Robin of Sherwood	7.95	6.95						
ALLIGATA								
Son of Blagga	7.95	6.95						
Contract Bridge	9.95	8.95						
Nightworld	7.95	6.95						
Fistful of Fun (cas.)	9.95	8.95						
Fistful of Fun (disc)	11.95	10.95						
ANIROG (Discs 40T add £2)								
Jup Jet	9.95	8.95						
ATARI SOFT								
Pole Position	9.95	8.95						
BEEBUGSOFT								
Toolkit Plus (ROM)	39.00	35.25						
Romit (ROM)	34.00	31.50						
Studio Eight (cass)	17.00	15.25						
Studio Eight (disc)	22.00	20.00						
C.D.S.								
Birdie Barrage	7.95	6.95						
Steve Davis Snooker	7.95	6.95						
C.R.L.								
Test Match	7.95	6.95						
CLARES								
Profile (disc)	12.00	11.00						
Fontwise (disc)	12.00	11.00						
Brom ROM	34.50	31.50						
Brom (disc)	27.50	25.00						
Replica III (disc)	15.00	13.50						
Enhanced Beta Base (disc)	25.00	22.00						
Beta Base Utilities (disc)	12.00	10.85						
COMSOFT								
Serpents Lair	4.95	3.95						
Playbox	4.95	3.95						
S.A.S. Commando	4.95	3.95						
DR. SOFT (* Disc 40T add £2)								
747 Flight Sim.	7.95	6.95						
Phantom Combat*	9.95	8.95						
D.A.C.C.								
Flight Sim 747 (DACC)	9.95	8.95						
Bobby Charlton Soccer	11.95	10.95						
DATABASE (Discs add £3)								
Red Arrows	8.95	7.95						
DURELL MARTECH								
Mineshaft	6.95	5.95						
Brian Jacks Superstars	7.95	6.95						
Combat Lynx	8.95	7.95						
Eddie Kidd Jump	7.95	6.95						
Gisburne's Castle	7.95	6.95						
Geoff Capes	8.95	7.95						
EDGE COMPUTERS								
Microgo	9.95	8.95						
EPIC SOFTWARE (Disc versions add £2)								
The Wheel of Fortune cas.	9.95	8.45						
Castle Frankenstein cas.	7.95	6.55						
The Quest of the Holy Grail cas.	7.95	6.55						
Kingdom of Klein cas.	7.95	6.55						
GLOBAL								
Op. Caretaker (Cleaning kit cas.)	10.95	9.95						
GOLEM LTD (For disc version add £2)								
Education I	8.00	7.00						
Education II	8.00	7.00						
Fun with Words	8.00	7.00						
Fun with Numbers	8.00	7.00						
Jigsaw	8.00	7.00						
HEWSON								
Heathrow A.T.C.	7.95	6.95						
Fantasia Diamond	7.95	6.95						
HOLLY COMPUTERS								
Gamemaker Mode 2	12.99	10.65						
Gamemaker Mode 5	12.99	10.65						
Jukit ROM	25.00	22.00						
ROM H	15.00	13.00						
HONEYFOLD								
Basic Programming	10.50	9.50						
Advanced Programming	14.95	12.95						
Assembly Language	12.50	11.50						
ICON SOFTWARE								
Caveman Capers	7.95	6.95						
Contraption	8.95	7.95						
Flip	7.95	6.95						
IMAGINE								
Wizardore	7.95	6.95						
Yie Ar Kung Fu	9.95	8.95						
Hypersports (disc only)	11.95	10.95						
KOSMOS SOFTWARE (Disc version add £1)								
French Mistress A or B*	8.95	7.95						
German Master A or B*	8.95	7.95						
Spanish Tutor A or B*	8.95	7.95						
Answer Back Jun. or Sen.	9.95	8.95						
Answer Back Sport	9.95	8.95						
Identify Europe	7.95	6.95						
L.C.L. (Disc version same price)								
Micro Maths (24 progs 'O' Level)	24.50	21.50						
Micro English (24 progs 'O' Level)	24.50	21.50						
Mega Maths ('A' Level)	24.50	21.50						
LONGMAN'S SOFTWARE								
First Moves (Chess 8+)	9.95	8.95						
Master Key (Typing Tutor)	9.95	8.95						
LEISURE GENIUS (Disc add £2)								
Scrabble	12.95	11.65						
Monopoly	12.95	11.65						
LEVEL 9								
Adventure Quest	9.95	8.95						
Colossal Adventure	9.95	8.95						
Dungeon Adventure	9.95	8.95						
Emerald Isle	6.95	5.95						
Lords of Time	9.95	8.95						
Return to Edan	9.95	8.95						
Snowball	9.95	8.95						
The Worm of Paradise	9.95	8.95						
Red Moon	6.95	5.95						
MACSEN SOFT								
Block Busters	7.95	6.95						
MELBOURNE HOUSE								
Classic Adventure	6.95	5.95						
Hampstead	6.95	5.95						
Terramolinos	6.95	5.95						
Hobbit (cas.)	14.95	13.45						
Hobbit (disc)	17.95	16.25						
MP SOFTWARE								
Sadim Castle	7.50	6.50						

Now you can . . .

EXPAND your Electron

. . . for much less than the price you'd normally pay!

How the Plus 1 helps make the most of your Electron

With the Plus 1, you and your Electron enter a whole new computing dimension. The Plus 1 turns your Electron into a fully fledged micro capable of using printers, joysticks and cartridge ROMs - the software that comes on a chip. In addition, the Plus 1's analogue to digital port gives access to the outside world - while the slots for the ROM cartridges allow the Electron to take advantage of the latest, most exciting hardware developments yet to be released. *If you want to use your Electron to the full, then it's essential you get a Plus 1.*

Normal price
£59.90
Special Electron User Price
£39.95
Inc FREE game ROM cartridge

EXPAND - with the Electron Workstation!

Now you can transform your Electron into a serious micro with the Electron Workstation. This package consists of a Plus 1 and the acclaimed View wordprocessor and Viewsheet spreadsheet, both on cartridge ROMs. The Workstation makes the Electron a hard-working yet inexpensive tool for home and office. From business letters to your first novel, from home economics to cash flow crises, it can take them all in its stride.

Normal price £119.80 **Electron User price £69.95**

EXPAND - with the Electron Data Manager!

Bring the speed of discs and the organised memory of a powerful database to your Electron with the Electron Data Manager. It consists of the Plus 3 disc interface and Acorn's official disc-based Database - a trio that allows you to keep track of things quickly, reliably and efficiently. Sophisticated, accurate and fast, the Data Manager is a must for all serious Electron applications.

Normal price £248.95 **Electron User price £149.95**

EXPAND - with the Electron Language Lab

Dramatically extend your programming horizons! This unique offer comes complete with the Plus 1 interface and the Pascal and Logo cartridge ROMs. The Language Lab frees you from the limitations of Basic by giving you the two most educationally favoured high level programming languages - Logo and Pascal. With these exciting languages available instantly on ROM, the Language Lab gives your Electron two new, exciting and very different personalities. It's the best package for the Electron yet. No programmer will want to be without it. And it comes to you at LESS THAN HALF the usual price!

Normal price £197.90 **Electron User price £89.95**

ORDER FORM

Please allow up to 28 days for delivery.

Please send me:

Electron Plus 1	£39.95	3084	<input type="checkbox"/>
Electron Workstation Package	£69.95	3085	<input type="checkbox"/>
Electron Language Lab	£89.95	3087	<input type="checkbox"/>
Electron Data Manager Package	£149.95	3086	<input type="checkbox"/>

UK only.

Payment: Please indicate method (✓)

- Access/Mastercharge/Eurocard
Card No. _____
- Barclaycard/Visa
Card No. _____
- Cheque/PO made payable to Database Publications Ltd.

Expiry date
/

Name _____
Address _____
Post Code _____

Send to: **Database Publications Ltd.**
FREEPOST, Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

Order at any time of the day or night

MU3

Telephone Orders:
061-429 7931

Orders by Prestel:
key *89, then **614568383**

ENQUIRIES
061-480 0171

Don't forget to give your name, address and credit card number

QUICKSORT

—KEN CRAIG—

bursts the bubblesort myth that any other sort is too complicated

WITH articles on sorting appearing almost every month in one or other of the computer magazines, the reader may well ask what remains to be said on the subject.

Unfortunately, there is very little information available on sorting techniques other than the bubblesort. This appears to stem from the impression – mistaken, as I hope to show – that more-efficient sorting algorithms are either too difficult to understand or more difficult to implement.

In this article the quicksort is explained and shown to be no more complex than the bubblesort. This is made possible because of the powerful recursive procedure definitions available in BBC Basic.

Before describing the quicksort, it is worthwhile saying why we would want to use an alternative to the bubblesort.

It is well known that the computational time required to sort a list of N items using a bubblesort algorithm is proportional to N^2 . The explanation of this will not be repeated here, but a short bubblesort routine is given in Program I for comparison with the quicksort routine.

What is perhaps less well known is that there is a class of sorting algorithms whose computational time is proportional to $N \log(N)$ – the quicksort is of this type.

Since for large N, $\log(N)$ is very much smaller than N, these algorithms can be impressively faster than the bubblesort. Further, the larger the list to be sorted, the greater is the gain.

To quote from Donald E. Knuth's book *The Art of Computer Programming* – recommended for information on all aspects of numerical computation – “the bubblesort has no apparent redeeming features, since there is always a better way to do what it does”, while the “quicksort is probably the most useful general purpose technique for

internal sorting”.

How then does the quicksort work? Consider the list of integers on the first line of Figure 1.

The leftmost integer (34) is ringed and is referred to as the “key” item. The key is compared with each number in turn, working in from the right-hand side until an item is found that is smaller than the key. Thus we pass over 40 and 51 to reach 12, which is smaller than 34.

These items are swapped over, as shown in the second line. The key – still 34 – is now compared with each item in turn, this time working in from the left-hand side, until an item is found that is larger than the key, and these are then swapped. The third line shows the result after swapping 34 and 58.

We continue in this manner alternately looking for items smaller than the key to the right and larger than the key to the left – each time starting from where we last left off – until we have compared the key with all the items. The final result is shown on the bottom line.

The important thing to notice about this method is that the key has now divided the items in the list into two sets: all the items to the right of the key are larger than it and all the items to the left of the key are smaller than it.

The key is thus in its final sorted position and need be considered no further. Also, the two sets of integers on either side of the key can now be sorted independently of each other.

This is a very substantial gain, as is easily shown. Let us assume that the original set of N items took, say, 20 seconds to sort using the bubblesort. After the above procedure, the problem has been broken down into two half-sized problems.

However, because of the N^2 time dependence of the bubblesort, each of these problems will take not 10 but five seconds to solve. So, at the minor expense of an initial partitioning

34	23	18	58	27	63	36	12	51	40
12	23	18	58	27	63	36	34	51	40
12	23	18	34	27	63	36	58	51	40
12	23	18	27	34	63	36	58	51	40

Figure 1


```

10 REM Basic Bubble & quick sort
15 REM (c) The Micro User
20 MODE7: @% = 12: DIM A%(5000)
30 REPEAT
40 INPUT "Number of items to sort (1-5000)", N: IF N > 5000 GOTO 40
50 SEED = ABS(RND)
60 FOR TYPE = 1 TO 2
70 X = RND(-SEED)
80 FOR I = 1 TO N: A%(I) = RND: NEXT
90 T = TIME
100 IF TYPE = 1 THEN PROCquickSort(1, N) ELSE PROCbubbleSort(1, N)
110 T = (TIME - T) / 100
120 FOR I = 1 TO N: PRINT A%(I): NEXT
130 PRINT "TIME FOR ";
140 IF TYPE = 1 THEN PRINT "QUICK "; ELSE PRINT "BUBBLE ";
150 PRINT "SORT WAS "; T; " SECS"
160 NEXT TYPE
170 UNTIL FALSE
180 END
1000 DEF PROCbubbleSort(ILX, IHX)
1010 IF IHX <= ILX THEN ENDPROC
1020 FOR JX = IHX - 1 TO ILX STEP -1
1030 FOR IX = ILX TO JX
1040 IF A%(IX) > A%(IX + 1) THEN TX = A%(IX): A%(IX) = A%(IX + 1): A%(IX + 1) = TX
1050 NEXT IX: NEXT JX
1060 ENDPROC
3000 DEF PROCquickSort(ILX, IHX)
3010 LOCAL LX, HX
3020 IF IHX <= ILX THEN ENDPROC
3030 IF IHX > (ILX + 1) THEN XX = RND(1 + IHX - ILX) + ILX - 1: TX = A%(XX): A%(XX) = A%(ILX): A%(ILX) = TX
3040 KX = A%(ILX): LX = ILX: HX = IHX
3050 IF LX = HX THEN GOTO 3090
3060 IF KX <= A%(HX) THEN HX = HX - 1: GOTO 3050 ELSE A%(LX) = A%(HX): A%(HX) = KX: LX = LX + 1
3070 IF LX = HX THEN GOTO 3090
3080 IF KX >= A%(LX) THEN LX = LX + 1: GOTO 3070 ELSE A%(HX) = A%(LX): A%(LX) = KX: HX = HX - 1: GOTO 3050
3090 PROCquickSort(ILX, LX - 1)
3100 PROCquickSort(HX + 1, IHX)
3110 ENDPROC

```

Program I

process, the sorting time has been halved.

The next thing to realise is that if the partitioning process is so successful, then we should use the same method on the two half-sized problems, reducing them to four quarter-sized problems.

Continuing in this way, the whole set of items will end up in ascending sorted order by this iterative process alone – this is the quicksort algorithm.

This "divide and conquer" philosophy crops up in several areas of computing and it is easy to show that it reduces the computational time of an N^2 process to be proportional to $N \log(N)$. The Fast Fourier Transform is another example in which a partitioning technique is used to reduce an N^2 algorithm to an $N \log(N)$ one.

In Program I PROCquickSort is a Basic procedure to implement the quicksort algorithm. For simplicity, the items to be sorted are integers in the array $A\%(N)$. The two parameters passed to the procedure are the first and last elements of the array to be sorted.

Ignoring for the moment the strange-looking line 3030, the procedure is straightforward. In line 3040, $K\%$ is given the value of the "key", while $L\%$ and $H\%$ act as pointers in the array to the left and right-hand ends, respectively.

Line 3060 works in from the right, comparing the key and swapping if necessary, while line 3080 does the

same for items on the left.

When $L\% = H\%$, the array has been partitioned into two pieces and all that remains is to call PROCquickSort recursively on these two pieces with the appropriate parameters. This is done in lines 3090 for the left-hand piece and 3100 for the right-hand piece.

Two points about the recursive call should be noted. Firstly, line 3020 is required to terminate the recursion when we get down to a single item.

Secondly, line 3010 declares the variables $L\%$ and $H\%$ as LOCAL variables. This is necessary as these variables must retain their values across the recursive function calls to be passed as parameters in lines 3090 and 3100. A LOCAL declaration instructs the Basic interpreter to do just this.

The test routine in lines 10-180 allows a comparison of bubblesort and quicksort times.

Each time round the REPEAT . . . UNTIL loop a random set of integers is generated in the array $A\%(N)$.

In order to compare the two sorts on the same set of data, a random seed is generated in line 50 and used to initialise the random number generator to the same pseudo random sequence in line 70.

If the program is run for various values of N , a table can be drawn up showing the comparative speeds of the two methods. This has been done in Table I.

As an example, the bubblesort takes half an hour to sort 1000 integers while the quicksort takes under a minute.

One criticism sometimes aimed at the quicksort is that it is very inefficient for small N . Table I shows that the quicksort is indeed marginally slower for $N = 10$ – but is still pretty fast – but for $N > 20$ it wins over the bubblesort.

Now for that mysterious line 3030. Why do we need a RND function in the middle of the sort routine? To illustrate why, delete line 3030 and change line 80 to:

```
80 FOR I = 1 TO N: A%(I) = I: NEXT
```

This sets up the array $A\%(N)$ so that it is already sorted correctly before we call the sort routines.

If the program is now run for $N = 100$, say, we find that the quicksort takes almost as long as the bubblesort. This shows up a rather curious fact about the quicksort – although the execution time is proportional to $N \log(N)$ for an initially random array, the time taken to sort an already sorted array is proportional to N^2 .





This worst case performance of the quicksort would be a serious drawback in practice if there were no solution to the problem. This is because most lists to be sorted in practical situations are far from random.

A typical situation would be where a

Number of items	Basic Bubble	Basic Quick	Assembler Bubble	Assembler Quick
10	0.19	0.25	0.0	0.01
20	0.75	0.57	0.03	0.01
50	4.7	1.7	0.12	0.04
100	19	4.0	0.49	0.08
200	74	8.8	2.0	0.18
500	8 mins	25	12	0.48
1000	31 mins	56	49	1.1
2000	2 hrs	2.1 mins	3.3 mins	2.3
5000	13 hrs	5.8 mins	20 mins	6.3

Table I – Time in seconds unless stated otherwise

MORLEY ELECTRONICS

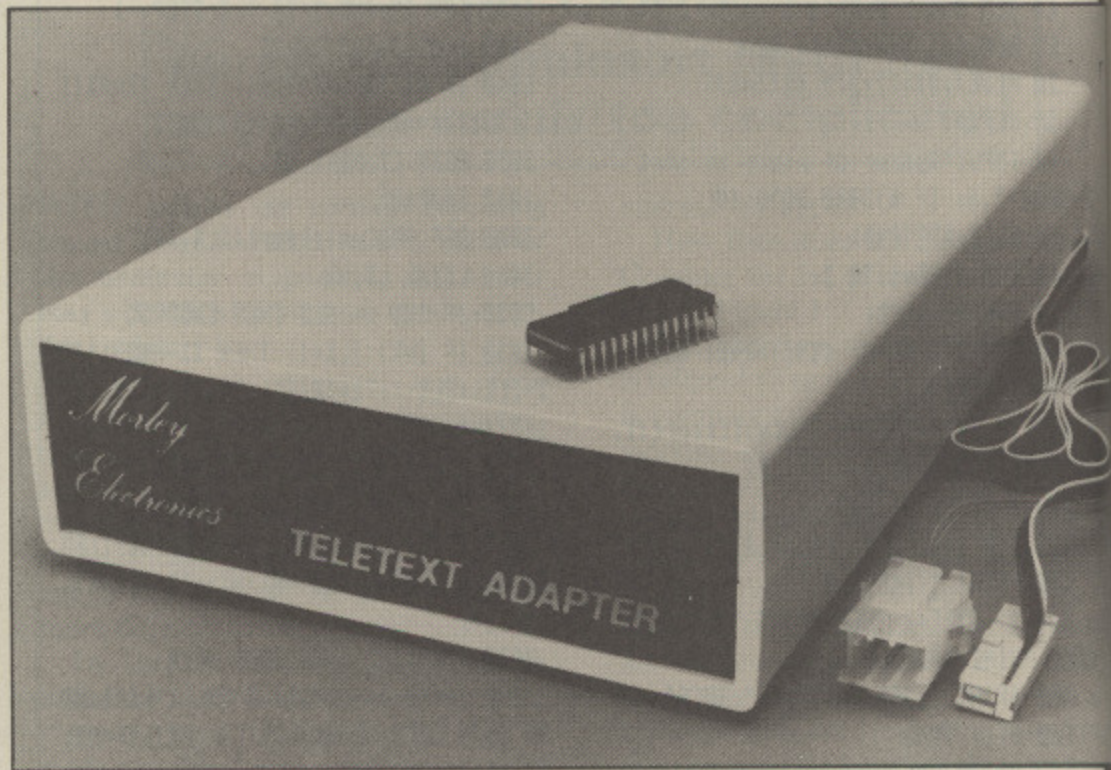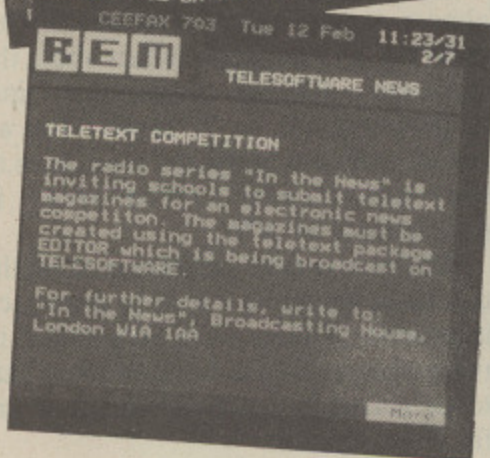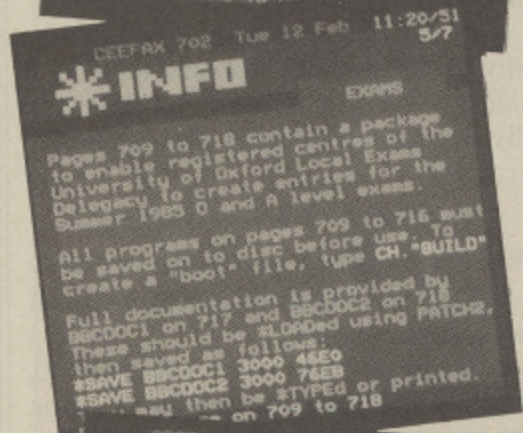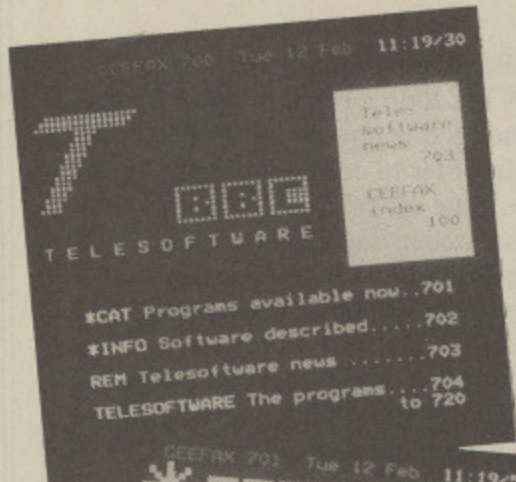

FEATURES

- Advanced design uses the latest technology will handle ANY future enhancements to the Teletext system eg: full field: 8 bit data transfer: 2k pages etc.
- Simply plugs into user port and power output.
- Low power consumption, less than 200ma. Optional power supply available.
- User friendly menu driven software including extended OSCLI and Osword commands for access from BASIC programs.
- No user-RAM required (PAGE remains at default value).
- FREE Telesoftware, no access charges. (at present updated weekly.)
- Save selected pages to disc/tape for later retrieval.
- Full access to all Teletext services and channels eg: CEEFAX, ORACLE, 4-TEL.
- Software available on ROM or sideways RAM format disc.
- Basic 1 & OS1.0 compatible.
- Gives you a real-time clock at your disposal (*TIME).
- Free software upgrades to allow for any enhancements to the teletext service. Eg: extra channels, full field data on cable & satellite systems etc.
- Easy to follow comprehensive user guide.

- No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- Works with Solidisc SWR.
- Utils disc available including printer drivers allows pages to be selected and dumped direct to a printer (no more TV or Radio Times to buy).

ELECTRON TELETEXT ADAPTER

Electron adapter now available, including emulated Mode 7 allowing you to run long Adventure type programs. Please ring for Details.

M/B software DESIGN 7

Easily the best value Mode 7 screen designer on the market today. Design any mode 7 screen, from simple MENU pages to full CEEFAX standard. This program is an invaluable aid. Designs can be saved to disc as automatically numbered files or the program will convert the screen into a BASIC Proc.

INTERFACES DIRECTLY WITH ADAPTER allowing CEEFAX-ORACLE pages to be selected and dropped into editor screen for alteration, saving, or conversion to BASIC. Allows channel change from within program.

The Morley Teletext adapter introduces you to the world of Teletext at a price that wont break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than eight years ago, will be fully compatible with any future advances in the Teletext system.

With the Morley adapter you will get a unit that automatically tunes itself in to the required station (no more messing around with

screwdrivers in the back of the case), a user friendly menu driven program available on rom or disc, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

For technical details please ring Morley Electronics on Tyneside (091) 251 3883.

To order please fill in and send order form to: **MORLEY ELECTRONICS, 1 MORLEY PLACE, SHIREMOOR, TYNESIDE NE27 0QS.**

Please send me.

- Qty. Morley Teletext adapters
 Qty. Teletext software on Rom
 Qty. Teletext software on Disc
 Qty. M/B DESIGN7 screen designer
 Qty. Teletext utilities on Disc
 Qty. Optional PSU

- @ £74.45 inc. VAT & P&P.
 @ £24.95 inc. VAT & P&P.
 @ £23.95 inc. VAT & P&P.
 @ £8.95 inc. VAT & P&P.
 @ £5.95 inc. VAT & P&P.
 @ £9.95 inc. VAT & P&P.



Please delete 40/80

Total £

NAME: _____ PHONE No. _____ CHEQUE No. _____

ADDRESS _____

POSTCODE _____

From Page 125

list of 100 previously-sorted names had 10 new names added to it. Using the quicksort to reorder the names would be slow for the above reason.

Fortunately there is a simple solution to this problem. Rather than making the left-hand item the "key", we choose an item at random and swap this with the left-hand one before we start. Line 3030 does this. Running the program with line 3030 reinstated will now produce a fast sort.

This leads to the rather paradoxical result that in order to sort an already ordered set of items it is faster to jumble them up first.

It is important to realise that there is still some particular ordering that will give the worst case performance.

What we have done is to change that particular ordering from one that we are likely to encounter in practice to one that is extremely unlikely – and since there is a random element involved, that particular ordering will be different each time we run the procedure.

Finally in Program II I give an assembly language version of the quicksort for integer arrays. The calling sequence is more general than for the Basic procedure, being:

```
CALL QUICKSORT,array%(i%),n%
```

where *array%* is any integer array and the routine will sort *n%* elements starting at *i%*.

One complication is the necessary saving and restoring of pointers for the recursive procedure calls which are hidden from us in Basic. Although the hardware stack could have been used for this, I have employed a software stack for generality.

Also, instead of using a random "shuffle" to avoid the worst case performance, I have employed a simpler procedure that is sufficient for most applications.

The operation of the procedure is outlined below. *OLP* and *OHP* are pointers to the left and right-hand limits of the current sort partition, while *LP* and *HP* point to the current left and right-hand items being compared with the key.

The final column of Table I shows what happens when Program II is run. The sort is now so fast that most of the time is taken up generating the random numbers and printing out the sorted

‘ In order to sort an already ordered set of items it is faster to jumble them up first ’

array. Line 120 should be deleted once the reader is convinced that the routine works. 5,000 integers are sorted in about six seconds.

In Table I, I have also included times for an assembly language bubblesort – given in Ian Birnbaum's book *Assembly Language Programming for the BBC Microcomputer*. It is interesting to note that for large lists, even the Basic

quicksort is faster than the machine code bubblesort.

I have tried to show that there is nothing difficult in using more efficient sorting methods than the bubblesort. The programs given here could be extended to cover string or real arrays without much difficulty. So the next time you need to do a bit of sorting, make it a quick sort with a quicksort.

PROGRAM STRUCTURE

270-370	Check parameters for number and type.
380-550	Initialise OLP and OHP.
560-660	Initialise LP and HP and check for equality, in which case pop the stack.
670	Calls the "shuffle" routine.
680-710	Save the "key" value.
720-890	Compare the key with items to the right and swap if greater.
900-1070	Compare the key with items to the left and swap if smaller.
1080-1120	Store back the key.
1130-1220	It turns out that the most effective use of the stack occurs if, once the data has been partitioned, we operate next on the smaller partition and store pointers to the larger partition on the stack; these lines accomplish this.
1230-1390	Push pointers on to stack.
1400-1550	Pop pointers off the stack.
1560-1700	Do the simple shuffle – the left hand and middle items are swapped.

Program II

```

10 REM Machine code Quicksort
15 REM (c) The Micro User
20 MODE7:@%=12:DIM AX(5000)
30 PROCinit
40 REPEAT
50 INPUT"Number of items to sort "
,NNX: IF NNX>5000 GOTO 50
60 FOR IX=1 TO NNX: AX(IX)=RND: NE
XT
70 PRINT "Beginning sort ..."
80 timeX=TIME
90 CALL QUICKSORT,AX(1),NNX
100 timeX=TIME-timeX
110 PRINT "Sort complete. Time take
n = ";timeX/100;" secs"
120 FOR IX=1 TO NNX: PRINT AX(IX):
NEXT

```

Turn to Page 136

AT PL Advanced Technology Products Limited

B.U.5.
Station Road, Clowne,
Chesterfield, S43 4AB.
 ☎ (0246) 811585 (4 lines)

AT PL SIDEWISE



SIDEWISE, ROM/RAM EXPANSION FOR THE BBC MICRO

- ★ Full Sideways ROM Expansion to a total of 16 ROMS.
- ★ 16K Battery Backed CMOS RAM Option - Ram is treated as ROM no 15 on read.
- ★ Software for Sideways ROMS may be down loaded and run in RAM under true Sideways environment. See below for details of software packages available.
- ★ An ideal tool for Sideways ROM program development with the addition of RAM.
- ★ Plug-in-and go construction mounts neatly inside the BBC.
- ★ No soldering required to fit Sidewise.

★ Full buffering of address and data busses - prevents data bus loading problems associated with unbuffered boards.

Join the 10's of thousands of happy users.

£38.00 + £1.00 P&P + VAT

OPTIONS FOR SIDEWISE

Battery back up kit
£17.00 + 50p P&P + VAT

CMOS RAM 8K Bytes
£5.00 + 50p P&P + VAT

Buy 2 for £8.00 + 50p P&P + VAT

AT PL SIDEWISE PLUS

The Sideways ROM Board for the new BBC B+ Computer

- ★ Full Sideways expansion to a total of 10 x 16K ROMS.
- ★ Mounts neatly over the Sideways area inside BBC+ Micro.
- ★ No soldering required to fit Sidewise Plus.
- ★ Fully buffered board.

£29.95 + £1.00 P&P + VAT

AT PL SOFTWARE PACKAGES

A range of software specifically designed to enhance and extend the use of Sideways RAM on ATPL Sidewise and other products.

- ★ **SPOOLIT** Allows the Sideways RAM to be used as a 8K or 16K printer buffer.
£10.00 + 50p P&P + VAT
- ★ **DFS SHIFT** Moves the user RAM workspace required by the DFS into Sideways RAM. Allows memory recovery to & 0E00. Works with Acorn 9DFS only.
£10.00 + 50p P&P + VAT
- ★ **SIDEWIPE** Allows you to save Sideways ROM onto disc and load Sideways ROMS from disc into RAM.
£10.00 + 50p P&P + VAT
- ★ **TURBOPROM - 1-2** Uses a fast programming algorithm to greatly reduce programming time of EPROMS (14 mins = 2 mins). Used with Autoprom available on disc or Sideways ROM.
£15.00 + 50p P&P + VAT

NEW CUSTOM RAM/ROM WRITER
 Utility to produce a ROM image for AUTOPROM or SIDEWISE RAM to automatically download and run a BASIC programme, and/or your utilities on power up. Several utilities supplied with this package. Please specify 40T, 80T, disk or cassette.
£14.95 + 50p P&P + VAT

- ★ **DISC INDEX PROGRAM** Allows you to generate a data base of disc directories stored on Sideways CMOS RAM (Compatible with Acorn DFS only).
£10.00 + 50p P&P + VAT
- ★ **INDEX UTILITY ROM** Index Utility has been written to help utilize the ATPL SIDEWISE board to its fullest extent.
Features supported include:
 - ★ Paged ROM/RAM control.
 - ★ Memory eraser.
 - ★ Disc utilities. Plus many more, including features to make the use of a 6502 Second Processor less tiresome.

Command examples are:

- ★ Disc free space per drive.
- ★ Dump text window to printer.
- ★ Erase; Memory in specified area, ROM control switch and tube memory.
- ★ Display low memory areas.
- ★ Load menu.
- ★ Switch NFS off.
- ★ Manipulate read/write on ROM 15.
- ★ ROM display.
- ★ ROM switch on/off copy.
- ★ Search facilities.

As can be seen from just a few of the many commands this ROM is a useful addition to the SIDEWISE ROM board.

FOR ONLY £24.95 + 50p P&P + VAT

AT PL INSIDEOUT

INSIDEOUT is designed to make a sideways ROM socket available outside the BBC computer, to allow for easy exchange of sideways ROM's.

- ★ Can be used from BBC model B or expansion board sockets
- ★ Supplied with low insertion force socket for ease of use no costly cartridge packing.
- ★ EPROM plug in and go.
- ★ Not limited to one device.
- ★ Socket rated at 100's of insertions mounted outside the BBC. Easily removed and refitted.
- ★ Can be mounted in user defined location — not fitting in an illegal position.

ONLY £13.00 + 50p P&P + VAT

DEALERS ENQUIRIES WELCOME ON ALL OUR PRODUCTS - PLEASE CALL

WE OFFER A DESIGN DEVELOPMENT AND MANUFACTURING SERVICE

AT PL SYMPHONY

The Acorn Music 500 Compatible Electronic Keyboard. The Symphony Electronic Keyboard provides simulation of a wide range of musical instruments and sound effects through the BBC Micro or the Acorn Music 500.

£105.70 + £3.50 P&P + VAT

OPTIONAL EXTRAS

SYMKIT-Allows sound output from the BBC to be connected to an external amplifier.
£5.89 + 50p P&P + VAT

SYMAMP-Wooden cased amplifier with 6 Watt output suitable for use with the Symphony keyboard or Acorn Music 500.
£39.50 + £2.50 P&P + VAT

SYMSWITCH-Sustain foot switch for use with the Symphony keyboard.
£6.95 + £1.00 P&P + VAT

SYM 500-Software to allow music to be played through Acorn Music 500 via the Symphony keyboard - Now includes sequencing.
£14.95 + 50p P&P + VAT

Demonstrations of Symphony can now be seen at the following places
 Technomatic, 15-17 Burnley Road, London NW10 1ED.
 Electronequip, 59 West Street, Fareham, Hampshire CO16 0JW.
 The Data Store, Chatterton Road, Bromley, Kent.
 Cardiff Micro, 46 Charles Street, Cardiff CF1 1EE.

AT PL COLOUR-STICK

An advanced light pen package for the BBC Computer, with disc based art program, Icon driven.

- ★ Comprehensive manual and software including two games, Solitaire and Pontoon.
- ★ Drawing facilities include; Multi point rubber banding, 4 colour shapes for circles, squares, rectangles, ellipses, arcs, and sectors at any angle and size.
- ★ Drag drawing, and air brush facilities with unique area washing.
- ★ Colour fill in any of 4 solid colours and a choice from 120 textured colours.
- ★ Screen printer dumps to Epson printer.
- ★ Utilities to provide users with light pen routines.
- ★ Fits to analogue port and needs 40 or 80 track disc drive.
- ★ Text can be entered in various sizes, fonts and colours.
- ★ Save and load screens to and from disc.
- ★ Please state 40 or 80 track disc.

£39.50 + £1.00 P&P + VAT

AT PL CAD SYSTEM

Robo systems professional CAD for Apple, BBC, and IBM computers

- ★ 10,000 users worldwide, rapidly becoming the standard CAD System at a realistic price.
- ★ Auto dimensioning adjustable curves, precision grids and angle locks, powerful zoom and pan, scale drawing and text, and graphics library index.
- ★ Supports a wide variety of plotters from A4 to A0.
- ★ Ideal tool for - Electrical/electronic engineers, chemical engineers, planning engineers, architects, education establishments, and PCB design.

ATPL have been appointed distributors for Robo products. We are currently looking for dealers, very attractive discounts available, please apply.

CAD systems start at **£795.00**
 Please contact sales office for demonstration or quotation.

AT PL BREAK LOCK

EVER HIT YOUR 'BREAK' KEY WHEN YOU DIDN'T MEAN TO? FOR THE BBC MICRO

Fit ATPL 'BREAK LOCK' to your BBC Micro and avoid disaster where inadvertent use of 'BREAK' will cause loss of data and/or programmes. ATPL 'BREAK LOCK' is a 2 position key-switch that will:

- ★ Prevent accidental or unauthorised use of the 'BREAK' key.
- ★ Act as a security device to prevent unauthorised use of your system more effectively and cheaper than security ROMs.
- ★ Easily and neatly fit in the 'Ash-tray'.
- ★ Render demonstration machines tamper-proof.

£8.53 + 50p P&P + VAT

AT PL AUTOPROM

Professional EPROM Programmer for the BBC computer and Acorn type Systems.

- ★ Capable of programming all 27 series EPROMS up to 27256 and most 25 series EPROMS.
- ★ Tape or disc based software, including fast program algorithm
- ★ (27128 in 2 mins) and comprehensive manual.
- ★ Unique facility to run users own basic or machine code programs at Switch on or Reset.

£98.00 + £2.00 P&P + VAT

CONDITIONS OF SALE & DELIVERY
 Cheques made payable to Advanced Technology Products Ltd. please allow 28 days for delivery. Cost of carriage or postage refer to each section. Quantity orders and overseas carriage charged at cost. Condition of sales available on request.

ACCESS/VISA accepted. Carriage to be added to advertised price, then add VAT to the total. In accordance with our policy of progressive development, we reserve the right to modify specifications without prior notice.

After processing sound in real time, MIKE COOK goes one step further in Part 36 of his course and advises...

Mash a waveform and play a tune

LAST month we considered how to manipulate sounds in real time. This month, using the Body Building sound sampler (described in the January 1985 issue of *The Micro User*), we will see how we can massage and manipulate a sound sample and even play a tune with it.

Have you seen the advertisement where the crunching of breakfast cereal is manipulated in rhythm and pitch to sound like a train pulling out of the station? Well, that is done using the same sort of techniques I will describe in this article. Bear in mind, however, that the sound sampler used on the advertisement would cheerfully pay off most people's mortgages.

Having sampled a sound what can we do with it? Well, first of all we can be a little selective. It is difficult to press the sample at exactly the right time, so if we sample for longer than necessary we can select the area of sound to use.

The display of the sound we have been using to date resulted from simply letting the bits which represent the sound control the colour on a Mode 1 screen. For a better view of a sound waveform we need to plot it as a graph.

Unfortunately, the average TV screen is not wide enough to show this in sufficient detail so we need to split the waveform up into sections and stack them one above the other in a sort of pseudo 3D effect.

Now we can use a pointer to select the area of waveform we wish to manipulate. Simple, but effective, manipulation can be achieved by scaling the amplitude of the waveform to get a softer attack or decay to the sound. Much of a sound's quality is determined by attack and decay.

Having massaged the sound sample it would be useful if we could save it to disc for later treatment. Finally, we can merge two sound samples together to produce complex waveforms. Imagine a sound that starts off like a cat purring and ends up like breaking glass.

To play your sound sample at different pitches you need to vary the rate of playback while keeping the

whole time to output it. The sound sample can then be played from a keyboard or as a tune from data statements.


While there are many ways to achieve these ends I have started you off on the road to sound experimentation with some software, which is this month's offering. You will find it in Programs I and II or, perhaps in a less taxing form, on this month's cassette and disc (see page 175 for the order form).

The BBC Micro is notoriously short of memory so the program has to be split into two parts. This is mainly due to the amount of machine code used. Machine code itself takes up very little space but the assembler source code needed to produce it takes up quite a bit. In fact, if you include comments, it takes about 10 bytes of assembler code to produce one byte of machine code.

As we need the assembler code only until the machine code is generated it makes sense to place all the machine code assembler instructions in one program, and the working gubbins in the other.

In fact that is what I have done here. Program I contains the source for the machine code and the instructions. This is run first and it automatically CHAINS the main program, Program II.

Those of you courageous enough to

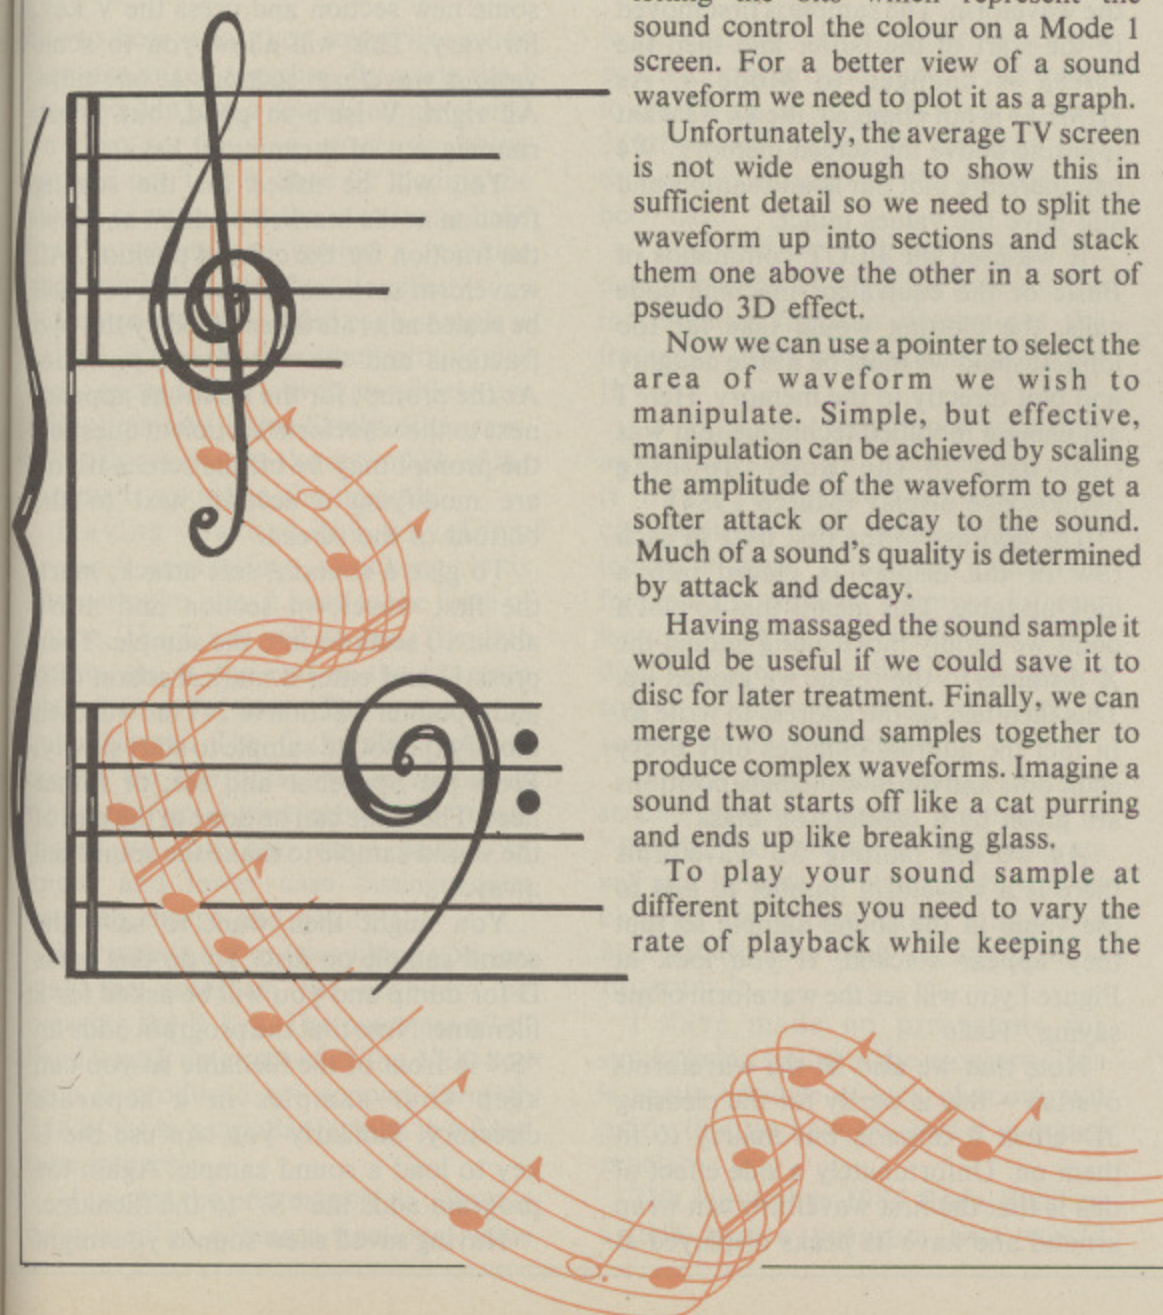

From Page 129

type in these programs must call Program II B_MAP, or alternatively change the filename in line 130 of Program I to suit yours.

The machine code is left behind in the serial buffer at &A00 and the user-definable character buffer at &C00 – neither area can be touched by the main program.

In addition, the first program generates a look-up table, places it in memory and adjusts HIMEM so that it is left untouched. Note that when doing this trick all screen mode changes must be done using the VDU22,X method as this will not reset HIMEM.

The program is quite involved but followers of past Body Building articles will recognise some techniques we have used before. For example, the sample acquisition and simple playback is very similar to the system we used for the stutter effect in the January article. Let's go through a sample session and see where the various parts of the software are used.

Assume the program is running and we are faced with the first prompt. If we press the S key we will start to digitise a sample. You will see the screen fill up with dots in the same way as the stutter program, only this time it stops a little short of the bottom of the screen.

We now have 16k of sample but we are only going to use 8k of it. If you look carefully you will see the flashing cursor at the top left hand corner of the screen. You can play the whole 16k back by pressing the Spacebar but if you press the 8 key you will hear 8k of the sample from the point of the flashing cursor.

By using the up and down cursor

PROBLEM

COULD you please tell me what undocumented 6502 op-codes are?
– Mark Briggs, Loughborough.

SOLVED

They are code values not listed as doing anything. Try them and see what they do on your processor. They are likely to do part operations like setting flags under certain conditions – nothing very exciting.

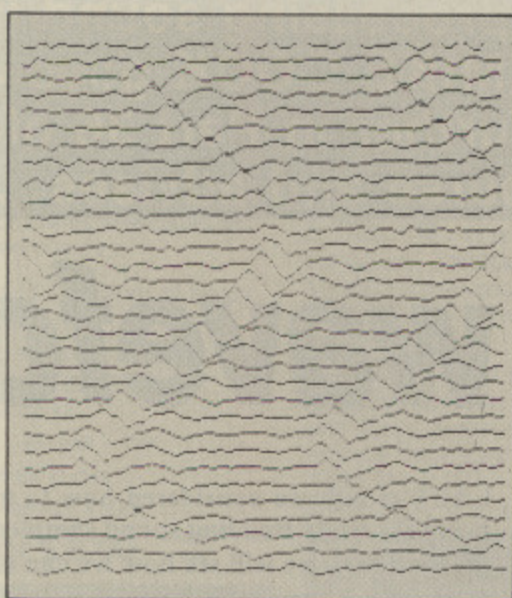


Figure 1: Graphical waveform produced by the word HELLO

keys you can move the starting point to anywhere in the first 8k of the sample. In this way you can sneak up on the start of the sound and capture it exactly. Note that the cursor moves in increments of 256 bytes for simplicity.

When you have the 8k of sample you want, you can press the P key to plot out the waveform. The sample is first moved to the start of the buffer and then the screen is changed to Mode 4. As HIMEM is not changed, the 8k we want is sitting above the screen memory. We can therefore plot our sound sample and still have the values intact.

If we used the PLOT commands of Basic or the equivalent machine code calls, the plotting would take far too long. Instead we must be a little naughty and plot directly to the memory. Here I am using a modified technique that was first used in the Body Building oscilloscope display (March 1984).

The address of the first byte in each row of the display is placed into a look-up table. This means that to plot a point we simply move along adding the X distance to the result we looked up. This then tells us the address to write to. In fact the address changes only every eight dots and the intermediate positions are given by a rotating bit mask.

As we are plotting 32 waveforms there is a waveform number to add to the value in the sound sample so that they appear stacked. If you look at Figure I you will see the waveform of me saying "Hello".

Note that we also let the waveforms overlap – this is partly for the pleasing 3D effect it imparts but mainly to fit them on. Unfortunately a side effect of this is that the first waveform can wrap around and have its peaks displayed at

the bottom.

When the waveform is plotted there will be an arrow pointing at the first section. This pointer indicates the section we are going to work on and it can be moved by using the cursor keys. Pressing the C key will clear this section of the waveform and it will be redrawn to show its new state.

By pressing the F key we can take a fraction of the waveform. By entering a number less than one we will reduce the overall amplitude of the waveform section. If a number greater than one is used the waveform will be scaled up.

But beware. If the new amplitude exceeds the size that can be held in a byte it gets pegged at the maximum level. If you attempt to scale up too much you will turn all your sine waves into square waves. Remember you can hear the results of your manipulation at any time by pressing the Spacebar or 8 key.

If you press the M key you will mark a section of the waveform. This is shown by an M being placed against that section. Now move the pointer on to some new section and press the V key, for vary. This will allow you to scale various waveform sections at one time. All right, V isn't so good, but I was running out of meaningful keys.

You will be asked for the scaling fraction at the marked position and also the fraction for the current position. All waveform sections between the two will be scaled at a rate determined by the two fractions and the waveforms position. As the prompt for the fractions appears next to the waveform section in question the prompt may be off the screen if you are modifying a section next to the bottom of the screen.

To give a sound a soft attack, mark the first waveform section and move about 10 sections into the sample. Then press U and enter a mark fraction of 0 and a pointer fraction of 1. This will then modify the sound sample to start slowly. Press the Spacebar and see, or rather hear. The same can be done at the end of the sound sample to make the sound tail away.

You might then want to save the sound sample on disc. To do this press D for dump and you will be asked for a filename. Note that the program adds an "S." in front of the filename so you can keep your samples in a separate directory. Similarly you can use the L key to load a sound sample. Again the program adds the "S." to the filename.

Having saved a few sounds you might

Figure II:

like to h
they are
key you
on disc
worked
stored s
for the
code pr
Before
halved s
is not ex
this cor
pling, in
sample.

Have
around
interest
a tune.
stateme
play F
quite s
octave
while t
sented
upper
between

If a t
play th
pressin
fixed le
each is
256 by
time in
How
calcula

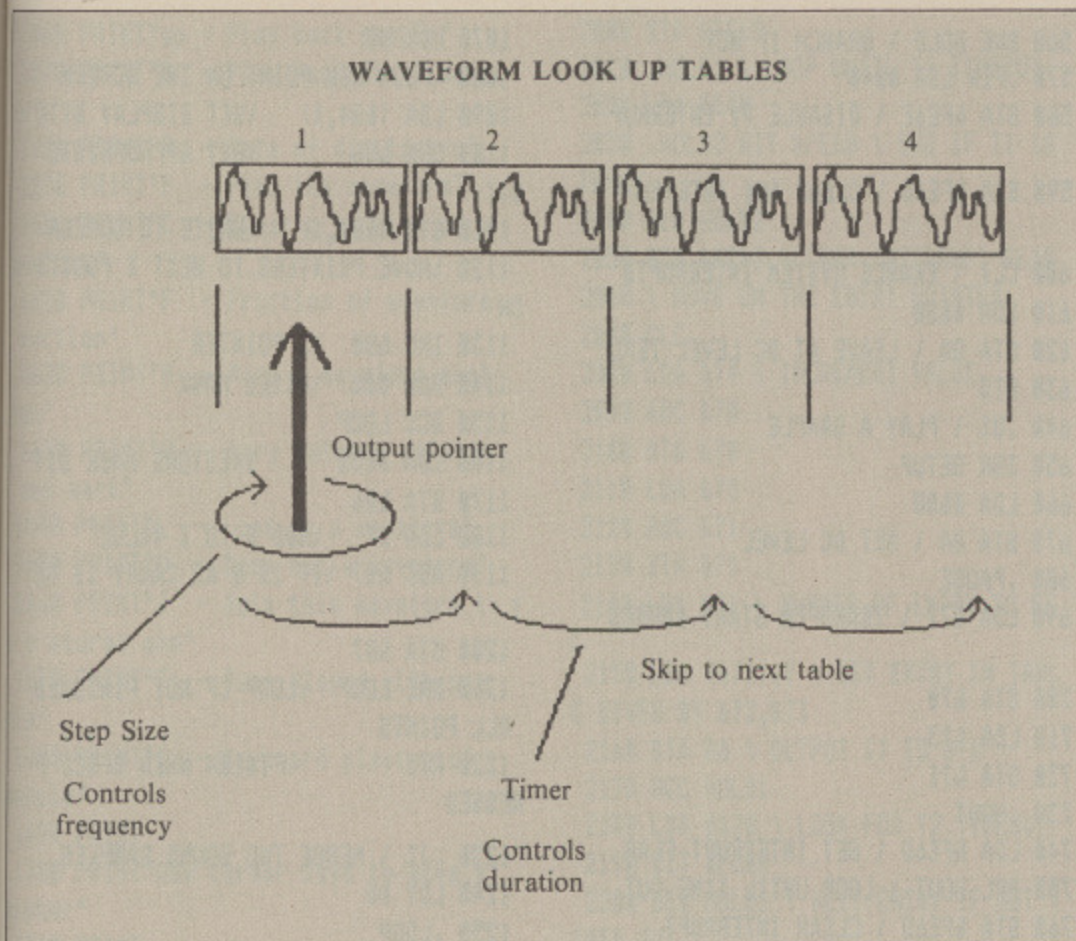


Figure II: Production of note

like to hear what they sound like when they are mixed together. By using the J key you can join a sound sample stored on disc to the one currently being worked on. This is done by loading the stored sample over the area being used for the screen and having a machine code program add them together.

Before they are added each sample is halved so that the maximum sample size is not exceeded. It is even possible to use this command immediately after sampling, in which case the second 8k of the sample is added to the first 8k.

Having mashed the waveform around something shocking it is interesting to play it back in the form of a tune. The T key will do this. The data statements at the end of the program play Frère Jacques. The notation is quite simple. The O number sets an octave for the notes which follow it, while the notes themselves are represented by note and value pairs with upper and lower case distinguishing between sharps and naturals.

If a tune is not to your liking you can play the notes on the keyboard by pressing the K key. The notes are all of fixed length determined in line 1700 and each is produced by stepping through 256 bytes in a circular fashion at a fixed time interval.

However the next sample to output is calculated by adding a fractional value

to the current output pointer. When the pointer loops around, timer T2 is tested to see if it has timed out. If it has the next 256 bytes of the sample are used, and this continues until all the sample has been used.

Thus the setting of timer T2 determines the length of the note and the incremental fraction determines the frequency. This is summed up in Figure II.

As T2 is only tested once each time around the loop, if it times out just after it has been tested it will be a comparatively long while before it is looked at again. This results in different frequencies having slightly different lengths, but in practice it is not a disadvantage. Note that if you push a sound a long way from its origin it sounds totally different.

When typing in the listings save the second program under the name of "B_MAP" otherwise the first program will not be able to chain it. If you do change its name then make the appropriate alteration to line 130 in Program I.

I have made no provisions for synthesising sound in the program. This is partly because of lack of room and partly that we have covered it in a past article.

The November 1984 Body Building article had a program that would

synthesise a waveform from the envelopes of harmonics. The data files produced by that program can be used with this one. First you have to rename them as they will all have a "T." prefix and this program requires them to have a "S." prefix.

Load them in like any other sound sample. You will find that the first waveform section is a mess so use the clear command on it. This is because the program saved some other data as well as the waveform data. A plot of a scraped string type sound is shown in Figure III. You can even mix these synthesised sounds with your sampled ones, the possibilities are limited only by how much you can stand.

Another processing technique you might like to try to implement is that of filtering. As we are not doing this in real

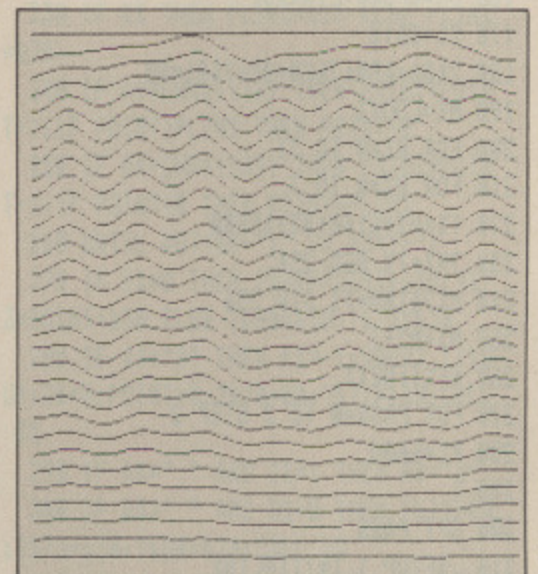


Figure III: Graphical waveform produced by a scraped string

time the speed is unimportant. A low pass filter can be approximated by making each sample the average value of that on either side of it. For a lower frequency filter try using several samples on either side. Finally try weighting the samples depending upon how far away they are from the target sample.

To achieve a high pass filter make the difference between the sample and the average of the samples on each side double what it already is. That is, change the sample so that it is more different from its neighbours - if you will pardon the expression.

● Well that wraps up the subject of sound sampling, so warm up your soldering irons for next month's constructional project.

Full listing starts on Page 131

From Page 131

Program 1: File C_MAP

```

10 MODE1
20 PRINT"BEEB BODY BUILDING COURSE
30 PRINT"SOUND SAMPLER"
40 PRINT"MACHINE CODE INITIALISER"
50 PRINT"FOR SOUND MANIPULATOR"
60 PRINT"By Mike Cook"
70 PRINT
80 HIMEM=&2E00
90 LOOKX=&2E00
100 PROC_INT
110 PROC_INT2
120 PROC_INSTRUCTIONS
130 CHAIN"B_MAP"
140 DEF PROC_INT
150 LINK=1
160 BA=&FC00+LINK*32
170 SC=BA+8
180 ?&86=&80:??&80=00:??&81=00
190 MX=LOOKX
200 FOR AZ=0 TO 31
210 FOR BX=0 TO 7
220 TX=AZ*&140+BX*&5800
230 ?MX=TX MOD 256
240 MX?&100=TX DIV 256
250 MX=MX+1
260 NEXT:NEXT
270 FOR PASS=0 TO 2 STEP 2
280 PX=&A00
290 [
300 OPT PASS
310 .SETUP \ INITIALISE
320 SEI \ DISABLE INTERRUPTS
330 STA SC
340 LDA #&40
350 LDY #0
360 STA &FE6B \ ENABLE TIMER 1
370 LDA #&C0
380 STA &FE6E \ ENABLE INTERRUPT
390 LDA #0
400 STA &FE65 \ START IT OFF
410 RTS
420 .GX \ GET SAMPLE INTO MEMORY
430 JSR SETUP
440 .HOLD
450 LDA &FE6D \ GET INTERRUPT FLAG
460 BPL HOLD \ LOOP UNTIL TIME OUT
470 STA &FE6D \ CLEAR INTERRUPT
480 LDA BA \ GET SAMPLE
490 STA SC \ START GETTING NEXT ONE
500 STA (&70),Y
510 INY
520 BNE HOLD \ GET ANOTHER
530 INC &71 \ INCREASE NS POINTER
540 LDA #&70
550 CMP &71 \ REACHED LIMIT ?

```

```

560 BNE HOLD \ BRANCH IF NOT
570 .FIN LDA #&40
580 STA &FE6E \ DISABLE T1 INTERRUPT
T
590 STA &FE6D \ CLEAR ANY INTERRUPT
S
600 CLI \ ENABLE SYSTEM INTERRUPTS
610 LDA #&80
620 STA BA \ LEAVE AT DC LEVEL ZERO
630 RTS
640 .UX \ PLAY A SAMPLE
650 JSR SETUP
660 LDA #&80
670 STA BA \ SET DC LEVEL
680 .PAUSE
690 LDA &72 \ TRANSFER START ADDRESS
S
700 STA &70
710 LDA &73
720 STA &71
730 .HOUT
740 LDA &FE6D \ GET INTERRUPT FLAG
750 BPL HOUT \ LOOP UNTIL TIME OUT
760 STA &FE6D \ CLEAR INTERRUPT
770 LDA (&70),Y \ GET A SAMPLE
780 STA BA \ OUTPUT IT
790 INY
800 BNE HOUT \ GET ANOTHER
810 INC &71 \ INCREASE NS POINTER
820 LDA #0
830 CMP &71 \ REACHED LIMIT ?
840 BNE HOUT \ BRANCH IF NOT
850 JMP FIN
860 \DISPLAY SAMPLES
870 .LX LDX #0
880 STX &87
890 STX &80
900 .LOOP LDY &80
910 LDA (&70),Y \GET VALUE TO PLOT
920 ROR A \ SCALE IT
930 ROR A
940 ROR A
950 ROR A
960 AND #&F
970 CLC
980 ADC &74 \ POSITION IT
990 TAY
1000 LDA LOOKX,Y \LOOK UP LSB OF FI
RST COLUMN
1010 CLC
1020 ADC &87 \ADD X VALUE
1030 STA &84 \STORE MSB OF PLOT
ADDRESS
1040 LDA LOOKX+&100,Y \LOOK UP MSB
OF FIRST COLUMN
1050 ADC #0 \ADD X VALUE
1060 STA &85 \STORE MSB OF PLOT AD
DRESS

```

```

1070 LDX #0
1080 \PLOT NEW POINT ON THE SCREEN
1090 LDA (&84,X) \GET DISPLAY BYTE
1100 ORA &86 \SET APPROPRIATE
BIT
1110 STA (&84,X) \WRITE TO SCREEN
1120 \MOVE POINTERS TO NEXT X POSITI
ON
1130 INC &80 \X POINTER
1140 ROR &86 \PIXEL MASK
1150 BCC LOOP
1160 LDA #&80 \RESTORE MASK BIT
1170 STA &86
1180 LDA #7 \ADD 8 TO X VALUE
1190 ADC &87 \IT IS 8 AS CARRY IS SE
T
1200 STA &87
1210 BNE LOOP \LOOP IF NOT FINISHED
ALL POINTS
1220 RTS \FINISH WHEN SPACE P
RESSED
1230 .JX \ MERGE TWO SOUND SAMPLES
1240 LDY #0
1250 .LOOP
1260 LDA (&70),Y \ GET SAMPLE OF ONE
SOUND
1270 CLC
1280 ROR A
1290 STA &74 \ TEMP STORE
1300 LDA (&72),Y \ GET SAMPLE OF OTH
ER SOUND
1310 CLC
1320 ROR A
1330 ADC &74 \ ADD THE TWO
1340 STA (&70),Y \ PUT IT BACK
1350 INY
1360 BNE LOOP \ DO NEXT SAMPLE
1370 INC &71 \ MOVE ON MOST SIG BITS
1380 INC &73 \ OF POINTERS
1390 LDA #&50
1400 CMP &71 \ SEE IF WE HAVE DONE A
LL
1410 BNE LOOP \ BRANCH IF NOT
1420 RTS
1430 ]
1440 NEXT
1450 ENDPROC
1460 DEF PROC_INSTRUCTIONS
1470 CLS
1480 PRINT
1490 PRINT"BEEB BODY BUILDING COURSE
"
1500 PRINT"SOUND SAMPLE MANIPULATOR"
1510 PRINT"MARCH 1986"
1520 PRINT"By Mike Cook"
1530 PRINT
1540 PRINT"Options are:-"
1550 PRINT"S - Sample input"

```



```

1560 PRINT"sp - Play back sample"
1570 PRINT"B - Play back 8k of samp
le"
1580 PRINT"R - Rate of digitising"
1590 PRINT"P - Plot the waveform"
1600 PRINT"C - Clear a section of w
aveform"
1610 PRINT"F - Fraction of waveform
section"
1620 PRINT"M - Mark a waveform sect
ion"
1630 PRINT"V - Vary between pointer
and mark"
1640 PRINT"L - Load in a waveform"
1650 PRINT"D - Dump out a waveform"
1660 PRINT"J - Join this waveform t
o a stored one"
1670 PRINT"T - Tune played with sam
ple"
1680 PRINT"K - Keyboard playing of
sample"
1690 PRINT
1700 PRINT"Use cursor keys to move p
ointer"
1710 PRINT
1720 PRINT"Press any key to load the
main file"
1730 A$=GET$
1740 ENDPROC
1750 DEF PROC_INT2
1760 ?&78=30
1770 FOR AZ=0 TO 2 STEP 2
1780 PZ=&C00
1790 [
1800 OPT AZ
1810 .QZ \ SYNTHESISE A NOTE
1820 LDX &78 \ SET UP NUMBER OF TABL
ES TO USE
1830 LDA &79 \ SET UP ADDRESS OF
1840 STA &72 \ START OF WAVEFORM TAB
LES
1850 LDA &7A
1860 STA &73
1870 SEI \ DISABLE INTERRUPTS FROM T
HE SYSTEM
1880 LDA &E0 \ ENABLE THE TWO TIMER
S
1890 STA &FE6E
1900 LDA &70 \ INITIALISE T1
1910 STA &FE64 \ LOW ORDER COUNT
1920 STA &FE66 \ LOW ORDER LATCH
1930 LDA #0
1940 STA &FE67 \ HIGH ORDER LATCH
1950 STA &FE65 \ START T1 RUNNING
1960 .ST2 \ START T2
1970 LDA &FF
1980 STA &FE68
1990 LDA &76 \ VALUE FROM MEMORY

```

```

2000 STA &FE69
2010 .HOLD1 \ LOOP UNTIL T1 TIMEOUT
2020 LDA &40
2030 .HOLD2 BIT &FE6D \ SEE IF T1 IS
READY
2040 BEQ HOLD2
2050 STA &FE6D \CLEAR INTERRUPT FLAG
2060 \ MOVE ON THE ENTRY POINTER
2070 CLC
2080 LDA &74 \ INCREMENT VALUE
2090 ADC &70
2100 STA &70
2110 LDA &75
2120 ADC &71
2130 STA &71
2140 LDY &71 \ NUMBER OF ENTRY TO GE
T
2150 LDA (&72),Y \ GET ENTRY IN TABL
E GIVEN BY &72,&73
2160 STA BA \ OUTPUT IT TO D/A
2170 BCC HOLD1
2180 LDA &20 \ LOOK FOR T2 TIMEOUT
2190 BIT &FE6D
2200 BEQ HOLD1 \ NEXT ENTRY IF NOT T
IMED OUT
2210 STA &FE6D \ RESET INTERRUPT FLA
G
2220 INC &73 \ MOVE TABLE ONTO THE N
EXT ONE
2230 DEX \ TABLES TO GO VALUE
2240 BNE ST2 \ BACK TO START T2 AGAI
N
2250 LDA &60 \ DISABLE THE TWO TIME
RS
2260 STA &FE6E
2270 LDA #128 \ SET OUTPUT TO MID PO
INT
2280 STA BA
2290 CLI \ ENABLE SYSTEM INTERRUPTS
2300 RTS
2310 J
2320 NEXT
2330 ?&79=&00
2340 ?&7A=&30
2350 ENDPROC

```

Program II: File B_MAP

```

10 CLS
20 PRINT"BEEB BODY BUILDING COURSE
"
30 PRINT"SOUND SAMPLE MANIPULATOR"
40 PRINT"MAIN PROGRAM"
50 PRINT"By Mike Cook"
60 PRINT
70 *FX4,1
80 DIM CLX &20,ANOTEX 96
90 octave$="cCdDefGgAaBb":REM CAPS

```

```

=# (C=c sharp)
100 PROC_NINT
110 POINT=0
120 CD%=40
130 ?&FE67=0
140 ?&FE66=CD%
150 DX=0 :REM DISPLAY MODE
160 REPEAT
170 IF DX=0 THEN PRINTTAB(0,30);SPC
(30);
180 IF DX=0 THEN PRINTTAB(0,30);"(S
sp 8 R P)";
190 REPEAT
200 P1%=POINT*16
210 IF DX=0 THEN PRINT TAB(P1% MOD
40,P1% DIV 40); ELSE PLOT0,-32,0:PRIN
T"<";:MOVE 1024,1032-(POINT*32):PRINT
"<";
220 A$=GET$
230 IF DX THEN PLIMX=&1F ELSE PLIMX
=&20
240 IF A$=CHR$(138) THEN POINT=POIN
T+1:IF POINT>PLIMX THEN POINT=0
250 IF A$=CHR$(139) THEN POINT=POIN
T-1:IF POINT<0 THEN POINT=PLIMX
260 UNTIL NOT(A$=";" OR A$="-")
270 IF DX=0 THEN ?&80=POINT+&50: ?&7
3=POINT+&30 ELSE ?&80=&50: ?&73=&30
280 IF A$="S" THEN M%=-1:VDU22,1:VD
U4:DX=0:POINT=0: ?&78=00: ?&71=&30:CALL
6%
290 IF A$=" " AND DX=1 THEN A$="8"
300 IF A$=" " AND DX=0 THEN ?&72=00
: ?&73=&30: ?&80=&70:CALL U%
310 IF A$="8" THEN ?&72=00:CALL U%
320 IF A$="R" THEN PROC_RATE
330 IF A$="P" AND DX=0 THEN PROC_AD
JUST:VDU22,4:VDU5:PROC_PLOT
340 IF A$="C" AND DX=1 THEN PROC_SC
ALE(0,POINT):PROC_PLOT
350 IF A$="F" AND DX=1 THEN PROC_FR
ACTION:PROC_SCALE(F,POINT):PROC_PLOT
360 IF A$="M" AND DX=1 THEN PRINT"M
":PLOT 0,-32,0:M%=POINT
370 IF A$="V" AND DX=1 THEN PROC_FA
DE:PROC_PLOT
380 IF A$="D" AND DX=1 THEN PROC_FD
UMP:PROC_PLOT
390 IF A$="L" THEN VDU22,4:VDU5:DX=
1:PROC_FLOAD:PROC_PLOT
400 IF A$="J" AND DX=1 THEN PROC_ME
RGE:PROC_PLOT
410 IF A$="J" AND DX=0 THEN PROC_JO
IN
420 IF A$="T" AND DX=1 THEN PROC_TU
NE: ?&FE66=CD%:PROC_PLOT

```


From Page 133

```

430 IF A$="K" AND DZ=1 THEN PROC_PL
AY: ?&FE66=CDZ:PROC_PLOT
440 UNTIL FALSE
450 DEF PROC_FLOAD
460 PROC_GNAME("LOADING SOUND")
470 PROC_CLI("LOAD ", " 3000")
480 ENDPROC
490 DEF PROC_MERGE
500 PROC_GNAME("JOINING SOUND")
510 PROC_CLI("LOAD ", " 5000")
520 PROC_JOIN
530 ENDPROC
540 DEF PROC_JOIN
550 ?&70=0
560 ?&71=&30
570 ?&72=0
580 ?&73=&50
590 CALL JX
600 ENDPROC
610 DEF PROC_FDUMP
620 PROC_GNAME("SAVING SOUND")
630 PROC_CLI("SAVE ", " 3000 5000")
640 ENDPROC
650 DEF PROC_GNAME(P$)
660 CLG
670 MOVE 0,1000
680 PRINTP$;" FILE NAME ";
690 INPUT F$
700 ENDPROC
710 DEF PROC_CLI(P1$,P2$)
720 $CLX=P1$+"S."+F$+P2$
730 XZ=CLZ MOD 256
740 YZ=CLZ DIV 256

```

```

750 CALL &FFF7
760 ENDPROC
770 DEF PROC_FADE
780 IF MZ<0 OR POINT=MZ THEN ENDPROC
C
790 MOVE 1100,1032-(MZ*32)
800 PRINT"Mark";
810 PLOT 0,-120,-64
820 INPUT MF
830 MOVE 1040,1032-(POINT*32)
840 PRINT"Pointer";
850 PLOT 0,-224,-64
860 INPUT F
870 IF MZ>POINT THEN FZ=POINT:TZ=MZ
:EF=MF:SF=F ELSE TZ=POINT:FZ=MZ:EF=F:
SF=MF
880 F=(SF-EF)/(TZ-FZ)
890 IF SF>EF THEN F=-F
900 CLG
910 MOVE 0,1000
920 PRINT"CALCULATING ";TZ-FZ;" NEW
LINES "
930 PRINTFZ;" TO ";TZ
940 PRINT"WORKED OUT LINE :- ";
950 FOR EX=FZ TO TZ
960 PROC_SCALE(SF,EX)
970 PRINTEZ;" ";
980 SF=SF+F
990 NEXT
1000 ENDPROC
1010 DEF PROC_FRACTION
1020 MOVE 1024,836
1030 PRINT"FRACTION"
1040 MOVE 1030,772
1050 INPUT F
1060 ENDPROC

```

```

1070 DEF PROC_SCALE(S,POINT)
1080 FOR AZ=POINT*256+&3000 TO (POIN
T+1)*256+&3000
1090 BZ=(?AZ-&80)*S+&80
1100 IF BZ>&100 THEN BZ=&FF
1110 IF BZ<0 THEN BZ=0
1120 ?AZ=BZ
1130 NEXT
1140 ENDPROC
1150 DEF PROC_ADJUST
1160 IF POINT=0 THEN ENDPROC
1170 OSZ=POINT*256
1180 FOR AZ=&3000 TO &5000 STEP 4
1190 !AZ=!(AZ+OSZ)
1200 NEXT
1210 POINT=0
1220 ENDPROC
1230 DEF PROC_RATE
1240 IF DZ=0 THEN PRINT TAB(0,30); E
LSE MOVE 0,500
1250 PRINT"DELAY ";CDZ;" INPUT NEW V
ALUE ";
1260 INPUT CDZ
1270 ?&FE66=CDZ
1280 IF DZ=1 THEN PROC_PLOT
1290 ENDPROC
1300 DEF PROC_PLOT
1310 CLG
1320 DX=1
1330 ?&70=&80: ?&71=&2F
1340 FOR A=0 TO 31
1350 ?&74=(A-1)*8
1360 ?&71=?&71+1
1370 CALL LX
1380 NEXT
1390 GCOL 3,1
1400 PLOT 0,-32,0
1410 PRINT"<";
1420 ENDPROC
1430 DEF PROC_NINT
1440 LOCAL F,FI,R
1450 FOR CX=1 TO 4
1460 RESTORE 1600
1470 FOR AZ=ANOTEX+(CX-1)*24 TO ANOT
EX+(CX-1)*24+22 STEP 2
1480 READ F
1490 IF CX<>2 THEN F=F*2^(CX-2)
1500 FI=F*256*50E-6
1510 ?AZ=INT(FI)
1520 TZ=0
1530 R=FI-INT(FI)
1540 FOR BZ=1 TO 8
1550 IF R>2^-BZ THEN R=R-2^-BZ:TZ=TZ
+2^(8-BZ)
1560 NEXT
1570 AZ?1=TZ
1580 NEXT
1590 NEXT

```

```

1600 D
11.13
1610 D
91.995A
1620
8833
1630 E
1640 D
1650 C
1660 F
rd"
1670 F
1680 F
end"
1690 L
1700
1710 F
1720
1730
1740
1750
1760
1770
1780

```

PROBLEM

I BOUGHT a Microware DDFS and after installing it could not get it to work. When I boot the drive, the drive comes on, the prompt disappears from the screen and the cursor continues to flash.

After a few seconds, the drive switches off, but control is not returned to the keyboard. The same symptom is evident when I try to format a disc. Originally I thought the DDFS was faulty and returned it to Microware. They sent me another one, but I still get the same fault symptom. — R. Banham, JS5S, HQ BFHK, BFPO 1.

SOLVED

This problem sounds as though the non-maskable interrupt is not being generated. This could happen if link S9 has not been cut. This is located half way up the left-hand side of the board.

There are also lots of other possible causes, like bad connections and faulty sockets. I am afraid that without examination of your computer with test equipment it is impossible to narrow it down further.


```

1600 DATA 261.6256,277.18,293.6648,3
11.13
1610 DATA 329.6276,349.2282,369.99,3
91.9954
1620 DATA 415.31,440.000,456.16,493.
8833
1630 ENDPROC
1640 DEF PROC_PLAY
1650 CLS
1660 PRINT TAB(0,8);"Play the keyboa
rd"
1670 PRINT"SPACE changes the octave"
1680 PRINT TAB(0,12);"RETURN key to
end"
1690 L$="AWSDFYHJKLP;:[]"
1700 ?&76=&30
1710 PX=0
1720 REPEAT
1730 X$=GET$
1740 AZ=INSTR(L$,X$)
1750 IF AZ=0 THEN 1800
1760 AZ=(AZ-1+PX)*2
1770 ?&74=ANOTEX?(AZ+1)
1780 ?&75=ANOTEX?AZ

```

```

1790 CALL &C00
1800 IF X$=" " THEN PX=PX+12: PRINT
TAB(0,10);"OCTIVE ";(PX/12)+1
1810 IF PX=48 THEN PX=-12:GOTO 1800
1820 UNTIL X$=CHR#13
1830 ENDPROC
1840 DEF PROC_SOUND(FX,LX)
1850 KX=2*((FX-1)/DIV4)-2
1860 IF KX>193 THEN ENDPROC
1870 ?&74=ANOTEX?(KX+1)
1880 ?&75=ANOTEX?KX
1890 ?&76=LX*16
1900 CALL &C00
1910 ENDPROC
1920 DEFPROC_TUNE
1930 RESTORE 2090
1940 QX=0
1950 READ N$
1960 IF N$="END" THEN ENDPROC
1970 IF N$="P" THEN PROC_PAUSE:GOTO
1950
1980 IF LEFT$(N$,1)="O" THEN QX=VAL(
RIGHT$(N$,1)):GOTO1950
1990 TX=VAL(RIGHT$(N$,1))

```

```

2000 A$=LEFT$(N$,1)
2010 FX=INSTR(octave$,A$)*4+1+48*(QX
-1)
2020 PROC_SOUND(FX,TX)
2030 GOTO1950
2040 DEF PROC_PAUSE
2050 TIME=0
2060 REPEAT:UNTIL TIME>5
2070 ENDPROC
2080 REM * FRERE JACQUES *
2090 DATA 01,f2,g2,a2,f2,P,f2,g2,a2,
f2,P
2100 DATA a2,A2,D2,c6,P,01,a2,A2,D2,
c6,P,P
2110 DATA c1,d1,c1,01,A1,a3,f3,P,P
2120 DATA 02,c1,d1,c1,01,A1,a3,f3,P,
P
2130 DATA f2,c2,f4,P,f2,c2,f4
2140 DATA END

```

This listing is included in this month's cassette tape offer. See order form on Page 175.

In the field of TAPE to DISC transfer we don't need to blow our own trumpet!

These comments from some of our customers will be enough to convince BBC 'B' disc users that the REPLAY System is worth more than a second look.

"Congratulations on REPLAY, it works magnificently"

B.B. Southampton.

"an excellent product at a reasonable price".

D.K.A., Cheshire.

"I am very, very impressed by the power of the ROM, and the ease of use it gives".

"I find the REPLAY ROM to be a must for anybody who takes computer games seriously".

D.R., Hereford.

"the REPLAY ROM is a remarkable facility".

A.J.P., London.

"I was pleased with the T.D. ROM but REPLAY is terrific".

V.M. Kent.

"All my tapes have been effortlessly transferred to disc and work well; the pause and update facilities are excellent".

T.G.B., Cheshire.

"Congratulations on a superb product. For my book it's the best utility I've seen for the 'Beeb'".

C.E., Liverpool.

"we have transferred over 60 cassettes with no problem at all even though we were completely new to disc-drive methods".

W.B., Bolton.

"a marvellous addition to my system".

P.B., Ashford, Kent.

- and to anyone wondering about our service, may we add the following:

"If only other firms were so efficient!"

Lt. Cdr. M.W., Middlesex.

"Your service will not be forgotten".

D.H.C., Derby.

REPLAY FACT FILE

REPLAY is a Hardware/ROM-based system, the unit can be easily installed without soldering, though if you have a ROM expansion board Make sure that the REPLAY ROM can be fitted into one of the computer's own sideways ROM sockets.

With REPLAY installed games can be stopped and saved directly to disc at any time.

REPLAY can load back a stopped screen from disc ready for printing out with a suitable 'printer dump' routine.

Liven up your games with REPLAY: Different background colours: Infinite lives: Hyperspeed: Extra gears: Edit the improvements working from the data sheet supplied.

REPLAY can 'pause' games which do not have this facility built-in, and is also able to offer most disc to disc transfer.

The REPLAY System is intended to provide a facility for individual users, resulting discs are not recognised by a different computer.

Further details and copies of reviews can be supplied on request.

REPLAY is available for the BBC 'B' with O.S.1.20 and fitted with the following DFSs (State type when ordering).

R8271 Acorn and 8271 S/D.	R8272 U.D.M. DFS
R8877 Cumana QFS.	R2791 Opus 3.15
R2793 Opus 3.35	R1770C Opus Challenger 3.
R1770 Opus 3.45 and Solidisk (not latest 2.2 version).	

Versions for the Acorn 1770 DFS, the BBC 'B+' and Solidisk 2.2 are in preparation, further versions will follow.

Available by post from:

VINE MICROS,

MARSHBOROUGH, NR. SANDWICH, KENT CT13 0PG.

Telephone: 0304 812276

or through your local dealer.



REPLAY

by

Vine Micros

From Page 127

```

130 UNTIL FALSE
140 END
200 DEF PROCinit
210 DIM PROG% 500,STACK 63,KEY 3,TE
MP1 1,TEMP2 1
220 PARS=&600: REM Parameter blo
ck
230 OLP=&70:OHP=&72:LP=&74:HP=&76:S
P=&78:MID=&7A
240 FOR C=0 TO 2 STEP 2
250 P%=PROG%
260 [OPT C
270 .QUICKSORT LDA PARS
280 CMP #2: BEQ PARCHK
290 .PARERR BRK
300 ]
310 ?P%=45
320 $(P%+1)="Bad parameters"
330 P%=P%+15
340 [OPT C: BRK
350 .PARCHK LDA #4
360 CMP PARS+3: BNE PARERR
370 CMP PARS+6: BNE PARERR
380 LDA #STACK MOD 256: STA SP
390 LDA #STACK DIV 256: STA SP+1
400 LDA PARS+4: STA OLP
410 LDA PARS+5: STA OLP+1
420 LDY #1
430 .INIT1
440 LDA (OLP),Y: STA LP,Y
450 DEY: BPL INIT1
460 LDY #2
470 .INIT2
480 ASL LP: ROL LP+1
490 DEY: BNE INIT2
500 CLC
510 LDA PARS+1: ADC LP: STA OHP
520 LDA PARS+2: ADC LP+1: STA OHP+1
530 SEC
540 LDA PARS+1: SBC #4: STA OLP
550 LDA PARS+2: SBC #0: STA OLP+1
560 .SAVKEY
570 CLC
580 LDA OLP: ADC #4: STA LP
590 LDA OLP+1: ADC #0: STA LP+1
600 SEC
610 LDA OHP: STA HP
620 SBC LP: BNE SAVK1
630 LDA OHP+1: SBC LP+1: BNE SAVK1
640 JMP POP
650 .SAVK1
660 LDA OHP+1: STA HP+1
670 JSR SHUFFLE
680 LDY #3
690 .SAVK2

```

```

700 LDA (LP),Y: STA KEY,Y
710 DEY: BPL SAVK2
720 .CMPHI
730 SEC
740 LDA HP: SBC #4: STA HP
750 BCS CMPHI0: DEC HP+1
760 .CMPHI0
770 LDA LP+1: CMP HP+1: BCC CMPHI1
780 LDA LP: CMP HP: BEQ STORE
790 .CMPHI1
800 LDY #4: LDY #0: SEC
810 .CMPHI2
820 LDA (HP),Y: SBC KEY,Y: INY
830 DEX: BNE CMPHI2
840 BVC NOOVHI: EOR #&80
850 .NOOVHI
860 AND #&FF: BPL CMPHI: DEY
870 .SWAPHI
880 LDA (HP),Y: STA (LP),Y
890 DEY: BPL SWAPHI
900 .CMPLO
910 CLC
920 LDA LP: ADC #4: STA LP
930 BCC CMPLO0: INC LP+1
940 .CMPLO0
950 LDA LP+1: CMP HP+1: BCC CMPLO1
960 LDA LP: CMP HP: BEQ STORE
970 .CMPLO1
980 LDY #4: LDY #0: SEC
990 .CMPLO2
1000 LDA KEY,Y: SBC (LP),Y: INY
1010 DEX: BNE CMPLO2
1020 BVC NOOVLO: EOR #&80
1030 .NOOVLO
1040 AND #&FF: BPL CMPLO: DEY
1050 .SWAPLO
1060 LDA (LP),Y: STA (HP),Y
1070 DEY: BPL SWAPLO: BMI CMPHI
1080 .STORE
1090 LDY #3
1100 .STORE1
1110 LDA KEY,Y: STA (LP),Y
1120 DEY: BPL STORE1
1130 SEC
1140 LDA LP: SBC OLP: STA TEMP1
1150 LDA LP+1: SBC OLP+1: STA TEMP1+
1
1160 SEC
1170 LDA OHP: SBC LP: STA TEMP2
1180 LDA OHP+1: SBC LP+1: STA TEMP2+
1
1190 SEC
1200 LDA TEMP1: SBC TEMP2
1210 LDA TEMP1+1: SBC TEMP2+1
1220 BCC PUSHHI
1230 .PUSHLO
1240 LDY #0: LDA OLP: STA (SP),Y
1250 INY: LDA OLP+1: STA (SP),Y

```

```

1260 INY: LDA LP: STA (SP),Y: STA OL
P
1270 INY: LDA LP+1: STA (SP),Y: STA
OLP+1
1280 CLC: BCC SPINC
1290 .PUSHHI
1300 LDY #2: LDA OHP: STA (SP),Y
1310 INY: LDA OHP+1: STA (SP),Y
1320 LDY #0: LDA LP: STA (SP),Y: STA
OHP
1330 INY: LDA LP+1: STA (SP),Y: STA
OHP+1
1340 CLC
1350 .SPINC
1360 LDA SP: ADC #4: STA SP
1370 BCC SPINC1: INC SP+1
1380 .SPINC1
1390 JMP SAVKEY
1400 .POP
1410 SEC: LDA SP
1420 SBC #STACK MOD 256: BNE POP1
1430 LDA SP+1
1440 SBC #STACK DIV 256: BNE POP1
1450 RTS
1460 .POP1
1470 SEC
1480 LDA SP: SBC #4: STA SP
1490 BCS POP2: DEC SP+1
1500 .POP2
1510 LDY #3
1520 .POP3
1530 LDA (SP),Y: STA OLP,Y
1540 DEY: BPL POP3
1550 JMP SAVKEY
1560 .SHUFFLE
1570 SEC
1580 LDA HP: SBC LP: AND #&F8: STA M
ID
1590 LDA HP+1: SBC LP+1: STA MID+1
1600 LSR MID+1: ROR MID
1610 CLC
1620 LDA LP: ADC MID: STA MID
1630 LDA LP+1: ADC MID+1: STA MID+1
1640 LDY #3
1650 .SHUFLP
1660 LDA (LP),Y: STA TEMP1
1670 LDA (MID),Y: STA (LP),Y
1680 LDA TEMP1: STA (MID),Y
1690 DEY: BPL SHUFLP
1700 RTS
1710 ] NEXT
1720 ENDPROC

```


This listing is included in this month's cassette tape offer. See order form on Page 175.

From Page 113

```

100REM PUZZLER by A. Pratt
110REM (c) The Micro User
120MODE4
130DIM A$(15),D$(9),list$(5)
140DIM RX(15),NX(15),CX(16),SX(5)
150PROCinitialise
160PROCintroduction
170PROCchoose
180MODE5
190FOR I%=0 TO 14:A$(I%)="*":NEXT
200A$(15)=" "
210IF P%<4 PROCfillposter
220VDU23;8202;0;0;0;
230VDU19,1,0;0;19,2,0;0;19,3,0;0;
240MOVE 16,336:PROCbox(3,672)
250PROCboard(1):VDU19,3,7;0;:PROCst
ory
260VDU28,0,31,19,22:CLS:VDU26
270PROCboard(1):PROCjumble:time=TIM
E
280REPEAT
290VDU19,1,4;0;19,2,1;0;
300VDU19,1,1;0;19,2,4;0;
310UNTIL TIME=time+200
320VDU19,1,0;0;19,2,0;0;
330PROCboard(2)
340VDU19,1,1;0;19,2,4;0;
350PROCpieces
360old%=12:new%=old%:count=0:solved
=FALSE
370COLOUR2:PRINTTAB(13,14)"MOVES:"
COLOUR3:PRINTTAB(15,16);count
380VDU28,0,31,19,23:PROCinstruct
390REPEAT:VDU5
400MOVE (old% MOD 4)*160+80,888-(ol
d% DIV 4)*160:GCOL 3,3:PRINT"+"
410REPEAT:*FX15,1
420valid=FALSE:key=GET
430MOVE (old% MOD 4)*160+80,888-(ol
d% DIV 4)*160:GCOL 3,3:PRINT"+"
440IF (key=90 OR key=122) AND (old%
MOD 4)<>0 THEN new%=old%-1:valid=TRU
E
450IF (key=88 OR key=120) AND (old%
MOD 4)<>3 THEN new%=old%+1:valid=TRU
E
460IF (key=42 OR key=58) AND (old%
DIV 4)<>0 THEN new%=old%-4:valid=TRUE
470IF (key=47 OR key=63) AND (old%
DIV 4)<>3 THEN new%=old%+4:valid=TRUE
480MOVE (new% MOD 4)*160+80,888-(ne
w% DIV 4)*160:GCOL 3,3:PRINT"+"
490UNTIL valid
500PROCwait(15)
510count=count+1

```

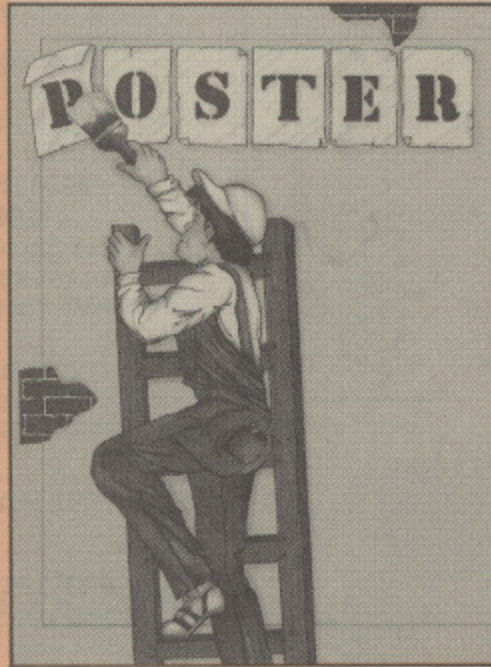

```

520MOVE (new% MOD 4)*160+40,840-(ne
w% DIV 4)*160:PROCbox(0,150)
530PROCwait(15)
540MOVE (old% MOD 4)*160+40,840-(ol
d% DIV 4)*160:PROCbox((NX(new%) AND 2
4)/8,150)
550A$(old%)=A$(new%):TX=NX(old%):NX
(old%)=NX(new%):NX(new%)=TX
560MOVE (old% MOD 4)*160+80,928-(ol
d% DIV 4)*160:PRINT A$(old%)
570PROCwait(15)
580MOVE 965,335:PROCbox(0,176)
590MOVE 965,511:PRINT;count
600VDU4
610old%=new%:PROCTest
620UNTIL solved
630CLS:VDU19,1,9;0;19,2,12;0;19,3,1
1;0;
640VDU5
650MOVE 832,447:GCOL0,2:PRINT"SOLVE
D"
660VDU4:PROCwait(20)
670PRINT"PETE WISHES TO THANK"" YO
U VERY MUCH"
680PROCwait(400)
690MODE4
700VDU19,0,4;0;
710PRINTTAB(14,1)"WIZZ KIDS""TAB(8
)"Name"TAB(19)"Minimum Moves"
720IF count>=min GOTO 760
730min=count:J%=0
740FOR I%=5 TO 1 STEP-1:IF min<=S%(
I%) J%=I%
750NEXT
760FOR I%=1 TO 5
770IF I%=J% PRINT'TAB(7)name$TAB(27
);min
780PRINT'TAB(7)list$(I%)TAB(27);S%(
I%)
790NEXT:COLOUR3
800IF J%=0 PRINT'TAB(7)name$TAB(27)
;min

```

```

810PRINT""1 Try to improve your
score ";name$;" ?"
820PRINT""2 Try another puzzle ?"
830PRINT""3 Do you think you can d
o better ?"
840REPEAT:VDU28,0,31,39,28:CLS:*FX1
5,1
850INPUT"What is your choice (1 to
3) ? " Q%
860UNTIL Q%>0 AND Q%<4
870IF Q%=3 AND J% PROCnewlist
880ON Q% GOTO 180,170,160
890END
900DEFPROCinitialise
910FOR I%=1 TO 9:READ D$(I%)
920NEXT
930FOR I%=1 TO 5:READ list$(I%):REA
D S%(I%)
940NEXT
950FOR I%=0 TO 15:READ R:R%(I%)=R+7
960NEXT
970ENDPROC
980DEFPROCintroduction
990VDU26:CLS:VDU19,0,4;0;
1000PRINT""Welcome to Pete and his
collection of""puzzling posters. Tr
y and help him sort""out the letter
s into the correct order""and earn
yourself a place on the list of"
1010PRINT TAB(14)"WIZZ KIDS""Only
puzzles 1 to 3 are shown sorted""o
ut before being randomly jumbled just
""like the other six."
1020name$=""
1030REPEAT:VDU28,0,31,39,28:CLS:*FX1
5,1
1040INPUT"Enter your Name ? " name$
1050IF LEN(name$)>8 name$=LEFT$(name
$,8)
1060UNTIL name$<>""
1070min=9999
1080ENDPROC
1090DEFPROCchoose
1100REPEAT:VDU28,0,31,39,28:CLS:*FX1
5,1
1110INPUT"Choose your puzzle (Enter
1 to 9) ? " P%
1120UNTIL P%>0 AND P%<10
1130ENDPROC
1140DEFPROCstory
1150PRINTTAB(14,2)"POOR"TAB(13,4)"PE
TE'S"TAB(12,6)"PUZZLING"TAB(13,8)"POS
TER"TAB(14,10)"No. ";P%
1160PROCwait(10):VDU19,1,1;0;19,2,4;
0;:PROCpieces

```



EPROMS, 8271

(Phone for quantity discounts)

	Ex VAT	Inc VAT
1-9 27128 Hitachi 250nS Eprom	2.56	2.95
10+ 27128 Hitachi 250nS Eprom	2.30	2.65
1-9 2764 Hitachi 250nS Eprom	2.00	2.30
10+ 2764 Hitachi 250nS Eprom	1.70	1.95
1-9 6264LP-15 8K x 8bit Ram	3.26	3.75
10+ 6264LP-15 8K x 8bit RAM	2.83	3.25
8271 Floppy Controller	36.48	41.95
Disc CMOS/TTL Chips	4.77	5.49
Acorn 8271 Disc Interface	51.30	59.00
Acorn 1770 Disc Interface	42.61	49.00
View Wordprocessor Rom	40.87	47.00
Wordwise Plus Rom	38.70	44.50
Printmaster Rom	23.91	27.50
Inter-Sheet Rom	40.87	47.00
Printer Control/Screen Dump Rom WeServe	13.00	14.95

TAXAN KP810

with BBC cable & paper
£219.00 (£190.43 + VAT)
 (Phone to check price)



	Ex VAT	Inc VAT
KP910 17" width printer	328.70	378.00
KP810 Paper roll	3.43	3.95
KP810 Dust Cover	4.00	4.60
KP810 Print ribbon	5.00	5.75

LX-80 (EPSON) with BBC cable & paper

£227.00 (£197.39 + VAT)

	Ex VAT	Inc VAT
LX-80 Tractor Unit	18.22	20.95
LX-80 Sheet Feeder	47.83	55.00
LX-80 Dust Cover	4.00	4.60
LX-80 Print Ribbon	3.90	4.49
FX85 Epson 160cps NLQ Printer	343.48	395.00
FX105 Epson 160cps NLQ 15" Printer	447.83	515.00
SG-10 Star 100cps NLQ Printer	216.52	249.00
Juki 6100 Daisy Wheel Printer	260.00	299.00
SP-1000 Seikosha	173.04	199.00

BBC MASTER

	Exc VAT	Inc VAT
BBC B Plus 64K	346.96	399.00
BBC B Plus 128K	389.57	448.00
BBC Master 128K		Phone for prices
Second hand BBC B's & B Plus's bought and sold.		

Monitors/Disc Drives

	Exc VAT	Inc VAT
Philips CF1114 TV/Monitor	173.04	199.00
Philips BM7502 Green Monitor	63.70	79.00
Philips BM7522 Amber Monitor	72.61	83.50
Taxan KX1201G Green Monitor	88.70	102.00
Taxan KX1203G Amber Monitor	103.48	119.00
Taxan Tilt/Swivel Stand & clock	26.00	29.90
Taxan Vision 3 Plus Colour Monitor	320.87	369.00
Microvitec 1451MS Medium Colour Monitor	223.48	257.00
Microvitec 1441MS High Colour Monitor	378.26	435.00

Cumana Disc Drives

CD800S 800K dual + PSU 40/80	198.26	228.00
CDSX800 800K dual No PSU 40/80	173.87	199.95
CS400 400K single + PSU 40/80	112.17	129.00
CSX400 400K single No PUS 40/80	93.91	108.00
Akhter MD802d Dual 800K + Plinth	259.09	297.95
SPECIAL OFFER CSX400 & Acorn DFS	130.39	149.95

Monitors, Printers etc. BBC Cable supplied FOC.

Phone for our best price before placing your order
 EDUCATIONAL & GOVERNMENT ORDERS WELCOME
 All products have a 12 month no quibble guarantee
 Prices subject to variation without prior notification
 Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

WeServe

Micro Dept.
 128 West Street,
 Portchester,
 Hants.
 PO16 9XE.
 Tel: 0705 325354



Next day delivery
 by Securicor



EPROMS + RAMS

Hitachi 250nS – the reliable ones – BBC compatible.
 Prices INCLUDE VAT and UK post – normally by return.

2764 1-2 pcs £2.35, 3-9 pcs £2.25, 10+ pcs £2.15
 27128 1-2 pcs £3.35, 3-9 pcs £2.95, 10+ pcs £2.65
 27256 1-2 pcs £6.00, 3-9 pcs £5.75, 10+ pcs £5.50
 27C256 1-2 pcs £8.00, 3-9 pcs £7.75, 10+ pcs £7.50
 6264 LP 15 RAM 2-9 pcs £3.50, 10+ pcs £3.00
 41254/41464 RAM Prices on application.

BB-PROM Programmer £33.95 inclusive. DFS required.
 ERASERS:- D1 £21.95, D2 (15 min. timer) £26.50
 Send UK cheques/Money Orders/LA or Gov't Orders to:

SILICON CITY,
 1 Milton Road, Cambridge CB4 1UY.

ACCESS/VISA orders, telephone 0223 312453

FAST REPAIRS FOR THE BBC MICRO BY

MICRO

FIX

THE ACORN
 APPROVED
 SERVICE CENTRE
 191 FRESTON ROAD
 LONDON W10 6TH
 PHONE: 01 968 9214

- Repair centre for BBC micros, disc drives, monitors, printers etc.
- BBC Micro repairs: Average cost £12-£20.
- Complete disc drive calibration: £15/drive.
- Upgrades: Disc – £85 + £10 installation.
 Econet – £50 + £15 installation. Discount for 5 or more upgrades.
- Other upgrades carried out as required.
- All repairs fully guaranteed.
- Extended warranties available on all your equipment.
- Computer equipment: Lowest prices for Cumana disc drives, Acorn computers and peripherals.
- Acorn authorised Econet support centre. Expert installations and trouble shooting.

RING 01-968 9214 AND ASK FOR
 MARK DUFFILL OR DEREK MULLINGS

Compumart

Mega Deals

Best Prices for
BLANK DISKS
 in the UK.

Top Quality 5 1/4" Bulk Packed Disks
 (Hub-Ringed and in White Envelopes with a Lifetime Warranty)

FREE!!! Plastic Library Case worth £2
 when you buy 10 Disks

FREE!!! Perspex Disk Storage Box worth
£10 when you buy 50 Disks

10 – 5 1/4" SINGLE SIDED/DOUBLE DENSITY BLANK DISKS (with FREE case)	£9.95	+ £1 p&p
10 – 5 1/4" DOUBLE SIDED/DOUBLE DENSITY BLANK DISKS (with FREE case)	£13.95	+ £1 p&p
50 – 5 1/4" SINGLE SIDED/DOUBLE DENSITY BLANK DISKS (with FREE Storage Box)	£49.95	+ £2 p&p
50 – 5 1/4" DOUBLE SIDED/DOUBLE DENSITY BLANK DISKS (with FREE Storage Box)	£69.95	+ £2 p&p

GOODS DESPATCHED: Same day 1st Class Post
MONEY BACK GUARANTEE: If you are not completely
 satisfied with your purchase we will either exchange
 your disks or give a FULL REFUND – that's the
 Compumart Guarantee.



Please send cheques/postal orders to:
 Compumart, (Dept AR)
 71 Gracedieu Road, Loughborough
 Leics. LE11 0GF Tel (0509) 968259


See Our Great Deals on
 Atari's in this issue

From Page 137

```

1170COLOUR1:PRINTTAB(0,22)"THIS IS
WHAT IT""SHOULD LOOK LIKE""HOWE
VER SOME NAUGHTYBOYS HAVE JUMBLED""
"ALL THE LETTERS"
1180COLOUR2:PRINT"CAN YOU TRY AND SO
RTIT OUT FOR POOR PETE":COLOUR3
1190PROCwait(30)
1200PRINT"Press the SPACE bar"
1210REPEAT:UNTIL INKEY(-99)
1220ENDPROC
1230DEFPROCinstruct
1240COLOUR2:PRINT"Use""to move the
";:COLOUR3:PRINT;"+";:COLOUR2:PRINT;
" symbolonto the piece youwish to
move and sort out the Poster with
all the ";:COLOUR1:PRINT"red";:COLO
UR2:PRINT" squares at the top":COLOU
R3
1250PRINTTAB(4,0)"Up= *, Down= ?
Left= Z, Right= X"
1260ENDPROC
1270DEFPROCnewlist
1280IF J%=5 GOTO 1320
1290FOR IX=4 TO J% STEP-1
1300S%(IX+1)=S%(IX):list$(IX+1)=list
$(IX)
1310NEXT
1320S%(J%)=min:list$(J%)=name$
1330ENDPROC
1340DEFPROCboard(R%):T%=0
1350FOR Y%=840 TO 360 STEP -160
1360FOR X%=40 TO 520 STEP 160
1370MOVE X%,Y%
1380IF R%=1 C%=1+(T% DIV 8)-2*(T%=15
1390IF R%=2 C%=1+((T%+T% DIV 4 MOD 2
)MOD 2)-2*(T%=12)
1400PROCbox(C%,150)
1410T%=T%+1
1420NEXT
1430NEXT
1440ENDPROC
1450DEFPROCpieces
1460VDU5
1470FOR IX=0 TO 15
1480MOVE (IX MOD 4)*160+80,920-(IX D
IV 4)*160:PRINT A$(IX)
1490NEXT
1500VDU4:PROCwait(20)
1510ENDPROC
1520DEFPROCbox(C%,S%)
1530BCOL 0,C%:PLOT 1,S%,0:PLOT 81,0,
S%:PLOT 1,-S%,0:PLOT 81,0,-S%:6COL 0,
3
1540ENDPROC

```

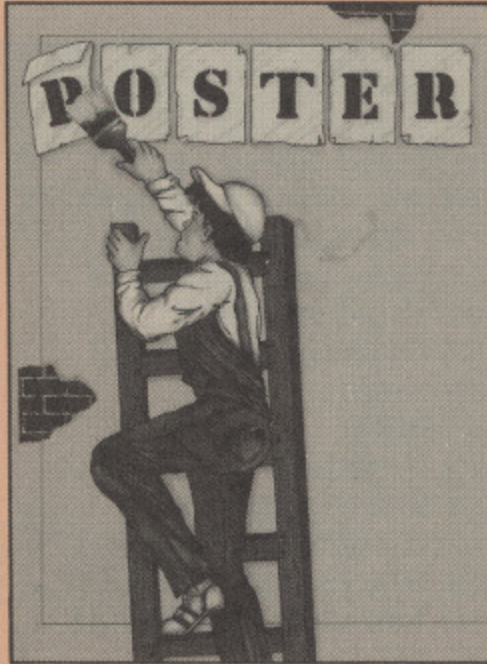

```

1550DEFPROCfillposter
1560K%=VAL(RIGHT$(D$(P%),1))
1570FOR IX=0 TO 14:R%=IX+1
1580PROCconvert
1590NEXT
1600A$(15)=" "
1610ENDPROC
1620DEFPROCjumble
1630FOR IX=0 TO 16:C%(IX)=0:NEXT
1640K%=VAL(RIGHT$(D$(P%),1))
1650FOR LX=0 TO 14:I%=LX-(LX>11)
1660R%=RND(8)+8*(IX DIV 4 MOD 2 EOR
IX MOD 2)
1670IF R%=16 OR C%(R%) GOTO 1660
1680PROCconvert:C%(R%)=-1
1690NEXT
1700A$(12)=" ":N%(12)=R%(15)
1710ENDPROC
1720DEFPROCconvert
1730B%=VAL(MID$(D$(P%),R%*2,1)):A$(I
%)=CHR$(55+VAL(MID$(D$(P%),R%*2-1,1))
*K%+B%*((B%<7)-(B%>7)))
1740N%(IX)=R%(R%-1)
1750ENDPROC
1760DEFPROCtest
1770failed=FALSE:F%=0:T$=""
1780FOR IX=0 TO 15
1790IF N%(IX)=R%(IX) THEN F%=F%+1 EL
SE T$=T$+A$(IX)
1800NEXT
1810IF F%<16 failed=TRUE
1820IF F%=14 AND LEFT$(T$,1)=RIGHT$(
T$,1) failed=FALSE
1830IF N%(15)<>25 failed=TRUE
1840IF NOT failed THEN solved=TRUE
1850ENDPROC
1860DEFPROCwait(W%)
1870time=TIME
1880REPEAT:UNTIL TIME>time+W%
1890ENDPROC
1900REM puzzle data
1910DATA 224437212327274722244556363

```

```

7517
1920DATA 945263434374548463748142418
2614
1930DATA 325152616331353261434262715
1755
1940DATA 473644222537564423373143244
5568
1950DATA 532246414222443432465343643
4516
1960DATA 433154657335624361434262333
5635
1970DATA 243733234442314427333747452
2238
1980DATA 428142614474948453328142418
2614
1990DATA 533422434246363431226534336
6536
2000DATA WIZARD,100,BRAINS,150,SMART
Y,200,PETE,250,GRANDPA,300
2010DATA 1,3,5,7,8,6,4,2,9,11,13,15,
16,14,12,18
4000 REM Wordcoder
4010 REM Assemble the codes for all
the alphabet
4020 MODE6
4030 DIM A%(26,5),B%(26,5),K%(26,5)
4035 PRINT TAB(15)"WORD CODER""Ent
er your 15 letters"
4040 D$=""
":D$=""
4050 FOR LX=1 TO 4
4060 FOR SZ=10 TO 35:Z%=CHR$(SZ+55):
K%=LX+3
4070 A%=INT(SZ/K%):B%=SZ-A%*K%
4080 IF B%<8 A%=A%+1:B%=B%-K%
4090 IF B%<-6 A%=A%-1:B%=B%+K%
4100 IF A%>9 K%=K%+1:GOTO 4070
4110 IF A%<0 K%=K%-1:GOTO 4070
4120 A%(SZ-9,LX)=A%:B%(SZ-9,LX)=B%:K
%(SZ-9,LX)=K%
4130 NEXT
4140 NEXT
4150 REM Assemble code for the words
4160 X%=RND(4)
4170 FOR SZ=1 TO 15
4180 PRINT"Letter ";SZ;" ?";:INPUT "
"A%:I%=ASC(A%)-64+32*(A%>="a")
4190 D%=D%+STR$(A%(IX,X%))
4200 IF B%(IX,X%)<0 D%=D%+STR$(-1*B%
(IX,X%)) ELSE D%=D%+"7"
4210 NEXT
4220 D%=D%+STR$(X%+3):PRINT 'D$'

```

This listing is included in this month's cassette tape offer. See order form on Page 175.

From Page 61

```

10 REM MORRIS MINER
20 REM By Jonathan Temple
30 REM (c) The Micro User
40 ON ERROR GOTO 3070
50 MODE 2
60 PROCinit
70 PROCchars
80 PROCenvs
90 PROCstatus
100 REPEAT
110 REPEAT
120 PROCsetvars
130 PROCreset
140 REPEAT
150 PROCscreen
160 REPEAT
170 PROCman
180 PROCdebris
190 PROClift
200 UNTIL EX
210 IFEX=1 PROCKilled
220 UNTIL ZX=0 OR EX
230 IFZX=0 EX=1
240 PROCmessage
250 UNTIL EX<>3
260 PROCstatus
270 UNTIL FALSE
280 DEFPROCman
290 AX=XX:BX=YZ:CX=VZ:DX=WZ
300 IFPOINT(XZ+8,YZ-68)<1 IFPOINT(XZ+48,YZ-68)<1 YZ=YZ-32:WZ=WZ EOR 1:FX=FX+1:GOTO370
310 IFFX SOUND 17,1,1,1:SOUND 18,0,0,0:IFFX>9 EX=1 ELSE IFFX FX=FALSE
320 IFINKEY-1 REPEAT UNTIL INKEY-2
330 IFINKEY-103 IFPOINT(XZ-8,YZ-32)<>1 XZ=XZ-32:WZ=WZ EOR 1:SOUND 18,-10,50,1:IFVZ<>233 VZ=233:WZ=236
340 IFINKEY-104 IFPOINT(XZ+72,YZ-32)<>1 XZ=XZ+32:WZ=WZ EOR 1:SOUND 18,-10,50,1:IFVZ<>232 VZ=232:WZ=234
350 IFINKEY-66 IFPOINT(XZ+8,YZ+4)=6 YZ=YZ+32:VZ=VZ EOR 1:WZ=WZ EOR 1:IFCX<>238 VZ=238:WZ=240
360 IFINKEY-98 IFPOINT(XZ+8,YZ-68)=6 YZ=YZ-32:VZ=VZ EOR 1:WZ=WZ EOR 1:IFCX<>238 VZ=238:WZ=240
370 IFDX<>WZ GCOL3,14:MOVE AX,BZ:VDUCZ,10,8,DZ:MOVE XZ,YZ:VDUVZ,10,8,WZ
380 IFPOINT(XZ,YZ-16)=9 IFXZMOD64=0 PROCkey
390 IFXZMOD64=0 NZ=POINT(XZ+48,YZ-28):IFNZ=1 OR NZ=15 PROCletter
400 IFXZ>1216 OR XZ<0 OR YZ>860 OR YZ<64 PROCnew
410 T=T-.8:IF(T MOD32)=0 MOVE T,956:GCOL0,0:VDU248:IFT<=0 EX=2

```

```

420 ENDPROC
430 DEFPROCkey
440 SOUND 17,4,100,1
450 LX=PX*2-2:REPEAT LX=LX+1
460 UNTIL FNks(LX,1)=PX AND FNks(LX,2)=XZ AND FNks(LX,3)=YZ
470 ?(KSZ+LX*8-8)=TRUE:GCOL3,9
480 MOVE XZ,YZ:VDU242
490 PROCscores(75+(6-8Z)*25,1)
500 PROCexit
510 ENDPROC
520 DEFPROCletter
530 SOUND 17,2,100,1
540 LZ=0:REPEAT LZ=LZ+1
550 UNTIL FNbs(LZ,1)=PX
560 ?(BSZ+LX*8-8)=TRUE:GCOL3,15
570 MOVE XZ,YZ:VDU242+LX
580 B$=LEFT$(B$,LZ-1)+CHR$(242+LX)+MID$(B$,LZ+1)
590 PROCscores(40+(6-8Z)*10,0)
600 IFINSTR(B$,"*")=0 PROCscores(40+(6-8Z)*100,0)
610 PROCbonus
620 ENDPROC
630 DEFPROCnew
640 JZ=-(XZ>1216)-(XZ<0)*2-(YZ>860)*3-(YZ<64)*4
650 PX=FNscr(PX,JZ)
660 IFJZ=1 XZ=0 ELSE IFJZ=2 XZ=1216
670 IFJZ=3 YZ=156 ELSE IFJZ=4 YZ=860
680 IFPX<8 UZ=0:PROCscreen ELSE EX=3
690 ENDPROC
700 DEFPROCdebris
710 IFUZ<=0 GOTO700
720 IFABS(UZ-YZ)<33 IFABS(TZ-XZ)<33 EX=1
730 GCOL3,13:MOVE TZ,UZ:VDU228
740 UZ=UZ-32:IFUZ=60 UZ=0
750 MOVE TZ,UZ:VDU228
760 IFABS(UZ-YZ)<33 IFABS(TZ-XZ)<33 EX=1
770 ENDPROC
780 IFYZ<750 IFRND(8Z*5)=1 TZ=XZ+RND(2)*64-RND(2)*64:UZ=892:SOUND 17,3,100,55:GCOL3,13:MOVE TZ,UZ:VDU228
790 ENDPROC
800 DEFPROClift
810 NZ=FALSE:IFPOINT(XZ+8,YZ-68)=5 IFPOINT(XZ+48,YZ-68)=5 NZ=TRUE
820 GCOL3,5:MOVE QZ,RZ:VDU226,227
830 QZ=QZ+IXZ:RZ=RZ+IYZ
840 MOVE QZ,RZ:VDU226,227
850 IFMZ GCOL3,14:MOVE XZ,YZ:VDUVZ,10,8,WZ:IXZ=IXZ+IYZ:YZ=YZ+IYZ:MOVE XZ,YZ:VDUVZ,10,8,WZ
860 IFIXZ IFQZ=L1X OR QZ=L2X IXZ=-1 XZ


```

```

870 IFIYZ IFRZ=L3X OR RZ=L4X IYZ=-1 YZ
880 ENDPROC
890 DEFPROCscores(ISZ,IKZ)
900 SZ=SZ+ISZ:VDU4,17,14,31,0,3
910 PRINT LEFT$("000000",6-LEN(STR$(SZ)))+STR$(SZ)
920 KZ=KZ+IKZ:VDU17,14,31,14,3
930 PRINT ;KZ;:VDU17,9,242,5
940 ENDPROC
950 DEFPROCbonus
960 VDU24,440;968;872;1012;18,0,132,16,24,448;976;888;1020;18,0,134,16,18,0,4,25,4,512;1008;
970 PRINT B$:VDU26
980 ENDPROC
990 DEFPROCexit
1000 IFKZ=14 IFPX=1 VDU4,17,6,17,128,31,11,4,225,10,8,225,10,8,225,31,12,5,231,229,230,5
1010 ENDPROC
1020 DEFPROCKilled
1030 ZX=ZX-1:SOUND 0,1,100,2
1040 PROCreset:TIME=0
1050 REPEATUNTILTIME>100
1060 ENDPROC
1070 DEFPROCmessage
1080 NZ=((T DIV16)*25+ZX*250)*(6-8Z)
1090 IFEX=3 PROCscores(NZ,0)
1100 VDU4,28,1,20+(EX<3)*5,18,10,12,17,1,31,4,1
1110 IFEX<3 PRINT"GAME OVER" ELSE PRINT"WELL DONE"
1120 COLOUR6:IFEX=3 PROCcongrats
1130 COLOUR3:PRINT"TAB(5)"<8SPACE>"
1140 VDU5:REPEAT UNTIL BET=32
1150 VDU4,26,12,5
1160 ENDPROC
1170 DEFPROCcongrats
1180 PRINT" BONUS: ";NZ"" Now try again!"
1190 8Z=8Z-1:IF8Z=0 8Z=1
1200 RESTORE 1250:NZ=81:*FX 15,0
1210 FOR LX=1 TO 10:READ AX,DZ:NZ=NZ+AX
1220 SOUND 1,-15,NZ,DZ
1230 SOUND 2,-10,NZ+48,DZ:NEXT
1240 ENDPROC
1250 DATA 0,4,8,4,8,4,4,4,8,8,-12,8
1260 DATA 4,8,-12,8,8,8,-16,8
1270 DEFPROCstatus
1280 LSZ=SZ:PROCreset
1290 PROCsetvars:PROCscreen
1300 VDU4,28,1,22,18,8,12,17,1
1310 PRINT"TAB(3)"MORRIS MINER"
1320 IFLSZ>HZ PROChigh60TO1300
1330 COLOUR6:PRINT"" HI SCORE: ";HZ;" BY: ";H$"" SKILL LEVEL: ";8Z
1340 COLOUR3:PRINT"TAB(6)"<8SPACE>"

```

1350 V
1360 M
1370 I
+48,516
1380 I
1390 E
1400 I
1410 I
ONS !"
1420 I
our na
1430
1440
1450
1460
1470
1480
1490
1500
1510
1520
1530
1540
1550
1560
1570
1580
1590
1600
1610
1620
1630
1640
1650
1660
1670
1680
1690
1700
1710
1720
1730
1740

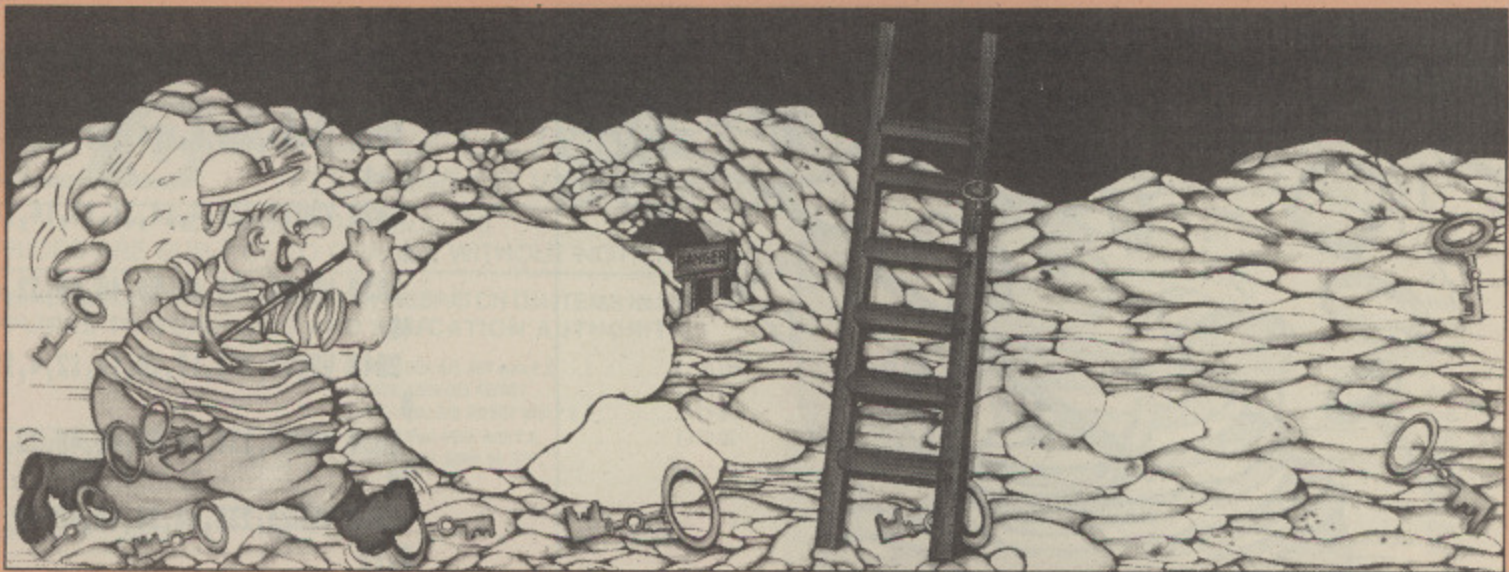

```

1350 VDU5:REPEAT
1360 NX=(GET OR &10)-48
1370 IFNX>0 AND NX<6 VDU4,31,14,9,NX
+48,5:BX=NX
1380 UNTIL NX=0:VDU4,26,12,5
1390 ENDPROC
1400 DEFPROChigh
1410 CLS:PRINT"TAB(1);"CONGRATULATI
ONS!"
1420 COLOUR6:PRINT"" Please enter y
our names:"""";
1430 !&900=&200C0905:7&904=&7F
1440 AX=0:YX=0:YZ=9:CALL &FFF1
1450 H$=#&905:HZ=LSZ
1460 ENDPROC
1470 DEFPROCreset
1480 PX=5:EX=FALSE:FY=FALSE
1490 TX=0:UX=0:YX=320:YZ=412
1500 VX=232:WX=234
1510 ENDPROC
1520 DEFPROCsetvars
1530 IFEX<>3 ZX=3:SZ=0
1540 KX=0:T=1280-(5-8X)+64
1550 B$="****":RESTORE 1650
1560 FOR LX=0 TO 19:READ NX
1570 ?(BSX+LX*2)=NX
1580 ?(BSX+LX*2+1)=NX DIV256:NEXT
1590 FOR LX=0 TO 13:MX=KSX+LX*8
1600 !MX=0:MX?2=(LX+2)DIV 2
1610 READ NX:MX?4=NX:MX?5=NX DIV256
1620 READ NX:MX?6=NX:MX?7=NX DIV256
1630 NEXT
1640 ENDPROC
1650 DATA 0,2,64,476,0,3,832,156
1660 DATA 0,4,1152,380,0,6,896,796
1670 DATA 0,7,704,444
1680 DATA 1152,796,128,316,1216,444
1690 DATA 640,156,192,828,1152,444
1700 DATA 448,444,1152,252,64,700
1710 DATA 64,540,448,604,896,604
1720 DATA 320,860,128,476
1730 DEFPROCinit
1740 SCRZ=&A00:BSX=SCRZ+28:KSX=BSX+4

```

```

0
1750 RESTORE 1810
1760 FOR LX=0 TO 27:READ SCRZ?LX:NEX
T
1770 VDU19,7,3;0;19,8,7;0;19,9,3;0;1
9,12,2;0;19,14,7;0;
1780 HX=1000:H$="J. Temple"
1790 SX=5:SZ=0
1800 ENDPROC
1810 DATA 2,0,8,4,3,1,0,5,0,2,0,6
1820 DATA 5,0,1,0,6,4,2,7,0,5,3,0
1830 DATA 0,0,5,0
1840 DEFPROCscreen
1850 VDU4,12,5
1860 PROCbonus:PROCscores(0,0)
1870 VDU4,17,14,31,18,3
1880 PRINT STRING$(ZX-1,CHR$232)
1890 COLOUR1:PRINTTAB(0,2)STRING$(5,
CHR$(240))
1900 COLOUR3:PRINTTAB(5,2)STRING$(15
,CHR$(240))
1910 IFT<1279 VDU24,T;932;1279;960;1
0,0,128,16,26
1920 VDU28,0,31,19,4
1930 RESTORE 2330:IFPX>1 PROCread
1940 READ N1X,N2X,L1X,L3X,L2X,L4X,IX
X,IYX
1950 VDU17,1,17,131
1960 FOR LX=1 TO N1X:READ A$
1970 D$="":IFASC(MID$(A$,5,1))>55 D$
=CHR$(10)+CHR$(0)
1980 PRINTTAB(FNdec,FNdec) STRING$(
FNdec AND &7F)-1,CHR$(224)+D$)+CHR$(2
24)
1990 NEXT
2000 VDU17,6,17,128
2010 FOR LX=1 TO N2X:READ A$
2020 PRINTTAB(FNdec,FNdec) STRING$(F
Ndec,CHR$(225)+CHR$(10)+CHR$(0))
2030 NEXT
2040 QX=L1X:RX=L3X:VDU26
2050 PROCexit:VDU5:BCOL3,14
2060 MOVE XZ,YZ:VDUVX,10,0,WX

```

```

2070 BCOL3,5:MOVE QX,RX:VDU226,227
2080 BCOL3,15:FOR LX=1 TO 5
2090 IFFNbs(LX,0)=0 IFFNbs(LX,1)=PX
MOVE FNbs(LX,2),FNbs(LX,3):VDU242+LX
2100 NEXT
2110 BCOL3,9:FOR LX=PX*2-1 TO PX*2
2120 IFFNks(LX,0)=0 MOVE FNks(LX,2),
FNks(LX,3):VDU242
2130 NEXT
2140 ENDPROC
2150 DEFPROCread
2160 FOR LX=1 TO PX-1
2170 READ N1X,N2X
2180 FOR NX=1 TO 6:READ AX:NEXT
2190 FOR NX=1 TO N1X:READ A$:NEXT
2200 FOR NX=1 TO N2X:READ A$:NEXT:NE
XT
2210 ENDPROC
2220 DEFFNscr(NX,JX)
2230 =?(8CRX+NX*4+JX-5)
2240 DEFFNbs(NX,BX)
2250 MX=BSX+NX*8+BX*2-8
2260 =?MX+MX?1+256
2270 DEFFNks(NX,BX)
2280 MX=KSX+NX*8+BX*2-8
2290 =?MX+MX?1+256
2300 DEFFNdec
2310 C$=LEFT$(A$,2):A$=MID$(A$,3)
2320 =EVAL("&"+C$)
2330 DATA 13,3,576,412,832,412,32,0
2340 DATA 00009A,100086,04030C,04040
2
2350 DATA 110503,00080C,04090C,050F0
4
2360 DATA 0F0F05,001405,0B1809,0B190
1
2370 DATA 131901,070119,031200,0D160
4
2380 DATA 15,4,960,636,960,156,0,-32
2390 DATA 000507,0F0504,02060A,080A0
7

```


Game of the month



From Page 141

```

2400 DATA 000F03,041080,051003,0C100
3
2410 DATA 111003,071405,0C1483,0C170
3
2420 DATA 00180A,001901,000014,07030
D
2430 DATA 0E0307,0C0000,0D1505
2440 DATA 15,3,64,252,640,252,32,0
2450 DATA 000014,000104,050190,13019
9
2460 DATA 020402,060506,0C0505,0C090
6
2470 DATA 001003,061009,121002,00110
9
2480 DATA 0C1404,011904,07190D,01021
8
2490 DATA 00030D,0F0E06
2500 DATA 17,5,960,660,960,156,0,-32
2510 DATA 00009A,000314,130003,00000
8
2520 DATA 110305,0E0907,03000C,11000
3
2530 DATA 010C0B,110003,130E04,03100
C
2540 DATA 111203,011400,011911,11160
3
2550 DATA 121602,030003,070000,00000
8
2560 DATA 120107,0E1405
2570 DATA 16,4,640,300,096,300,32,0
2580 DATA 000004,010310,030006,00000
3
2590 DATA 000D03,0A0705,110300,11000

```

```

3
2600 DATA 031107,031200,001603,06160
A
2610 DATA 091703,101004,131109,00190
1
2620 DATA 070F0B,0E1406,0D0007,09050
C
2630 DATA 14,2,640,764,640,284,0,-32
2640 DATA 03000B,13009A,040506,0C050
7
2650 DATA 000B04,050B05,0C0B05,070C0
9
2660 DATA 0E0C09,001005,00100A,04140
3
2670 DATA 0A1402,011912,01000B,12031
6
2680 DATA 14,5,512,660,512,156,0,-32
2690 DATA 00009A,030003,090003,13009
A
2700 DATA 010312,010007,0A0006,0F0C0
9
2710 DATA 030E05,0A1009,011203,03130
2
2720 DATA 041404,011912,070003,0E000
3
2730 DATA 00010A,110110,050600
2740 DEFPROCchars
2750 VDU23,224,223,223,223,0,-5,-5,-
5,0
2760 VDU23,225,66,66,66,66,126,66,66
,66
2770 VDU23,226,127,127,127,127,120,1
12,96,0
2780 VDU23,227,-2,-2,-2,-2,30,14,6,0
2790 VDU23,228,0,44,50,110,36,90,52,
0
2800 VDU23,229,0,58,34,49,34,50,0,12
7
2810 VDU23,230,0,174,164,36,164,164,
0,-1
2820 VDU23,231,4,14,31,14,14,14,14,1
4
2830 VDU23,232,40,56,40,40,32,40,40,
40
2840 VDU23,233,12,20,12,12,4,12,20,2
0
2850 VDU23,234,40,56,40,40,32,32,32,
40
2860 VDU23,235,40,56,40,40,40,160,20
0,12
2870 VDU23,236,20,20,20,12,4,4,4,12
2880 VDU23,237,20,20,20,12,20,21,19,
40
2890 VDU23,238,24,26,26,126,88,88,24
,30
2900 VDU23,239,24,88,88,126,26,26,24
,120
2910 VDU23,240,20,20,20,22,16,16,16,
40
2920 VDU23,241,40,40,40,104,8,8,8,12
2930 VDU23,242,0,0,96,159,149,149,96
,0
2940 VDU23,243,-4,66,66,124,66,66,66
,-4
2950 VDU23,244,124,130,130,130,130,1
30,130,124
2960 VDU23,245,194,194,162,146,146,1
30,134,134
2970 VDU23,246,130,130,130,130,130,1
30,130,124
2980 VDU23,247,124,130,120,124,2,2,1
30,124
2990 VDU23,248,0,0,0,-1,-1,-1,0,0
3000 ENDPROC
3010 DEFPROCenvs
3020 ENVELOPE 1,1,0,0,0,0,0,0,90,-1,
-2,-3,97,97
3030 ENVELOPE 2,130,1,0,2,5,2,6,126,
-3,-1,-3,120,80
3040 ENVELOPE 3,3,-1,-1,-1,70,50,1,1
00,-1,-1,-10,101,5
3050 ENVELOPE 4,133,8,4,8,3,1,1,126,
0,0,-10,126,0
3060 ENDPROC
3070 IFERR=17 THEN RUN
3080 MODE7:REPORT:PRINT" at line ";E
RL
3090 END

```

This listing is included in this month's cassette tape offer. See order form on Page 175.



p&h electronics Ltd

5 THE PARADE · YATELEY
HANTS
TEL: 0252 877222

22/24 GUILDFORD ROAD
BAGSHOT · SURREY
TEL: BAGSHOT 0276 72928

BBC MICRO CENTRES

TELEPHONE OR VISIT

ALL PRICES INCLUDE VAT
PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

FAST PHONE/MAIL SERVICE - SAME DAY DESPATCH ON ITEMS IN STOCK
SUPPLIERS TO SCIENTIFIC AND EDUCATION AUTHORITIES

ACORN

BBC B Plus 128K Special Offer
with Acorn 100K Disc Drive £485.00

BBC B Master 128 £475.00
BBC B Master Turbo, 512, Scientific POA

280 2nd Processor + Business Software	£399.00
6502 2nd Processor	£199.00
Bit Stick (CAD High Res Joystick)	£375.00
Teletext Receiver	£149.00
Prestel Receiver	£139.00
Music Synthesiser - 500	£195.00
Acorn DNFS Kit	£100.00
Electron Plus 1	£59.00

MONITORS

MONO	
Philips BM7502 Green High Res	£79.00
Philips BM7522 Amber High Res	£85.00
COLOUR	
Microvitec 1431 Standard Res	£215.00
Microvitec 1451 Medium Res	£285.00
Microvitec 1441 High Res	£485.00
Sony KX 14CPI Multi-Standard (NEW)	£390.00
Philips 8501 RGB Std Res + Sound	£199.00
Philips 8533 RGB Med Res + Comp Vid + Sound	£259.00
TELEVISION/MONITORS	
Hitachi 1444 14in CTV + RGB	£199.00
Ferguson MC05 14in CTV + RGB (new)	£215.00
Philips 1114 14in CTV + RGB (new Super!)	£199.00
BBC - Monitor leads to suit	£4.50

PRINTERS

DOT MATRIX	
Tally MT80 + 100cps	£199.00
Tally MT85 with NLO	£350.00
Epson LX80 with NLO	£250.00
Epson LX80 Tractor Unit	£22.00
Epson LX80 Sheet Feeder	£55.00
Kaga Taxan 810 with NLO	£20.00
Kaga Taxan 910 with NLO	£439.00
Cannon PW1080A with NLO	£270.00
Citizen 120D 120/25 cps NLO (NEW)	£219.00
DAISYWHEEL	
Juki 2200 with Keyboard	£299.00
Juki 6100	£399.00
Brother HR15	£395.00
BBC - Printer leads to suit	£12.00

DISK DRIVES

CUMANA	
CSX100M 100k S/S 40T	£95.00

CS100 100K S/S 40T with P.S.	£125.00
CSX400 400k D/S 40/80T	£114.00
CS400 400k D/S 40/80T with P.S.	£129.00
CD800S Dual 400k with P.S.	£250.00
OPUS RANGE NOW IN STOCK	

ACCESSORIES

Data Recorder	£29.00
Data Recorder - BBC Lead	£4.00
Full Proportional Joy Stick	£12.50
Full Proportional Joy Stick Pair	£20.00
Voltmace 14b Joystick	£14.50
AMX Mouse - with Super Art	£75.00
AMX Utilities Software	£13.50
AMX Desk *	£22.00
AMX Paintbox	£13.50
AMX 3D Zicon	£22.00
AMX Page Maker	£47.00
AMX Data Base	£22.00
AMX Xam	£22.00
AMX Super Art	£47.00
Modem Nightingale with Commstar	£149.00
Modem Auto Answer Board + Software	£75.00
Sideways ROM Board (ATPL)	£43.00
Computer Desk Double Width	£69.00
Disc Storage Box (50)	£19.00
Disc Storage Box (80)	£23.00
5 1/2 in Discs 10 in Library Case DS/DD	£18.00
TV Aerial/Computer Switch	£2.50
BBC Key Function Key Mask	£2.50
Giant Reference Card for BBC	£3.00
Computer Covers Soft	£5.00
Computer Covers Hard	£10.00
Printer Covers - State Type	£5.50
Disc Drive Covers - State Type	£5.00

ACORN SOFTWARE

View - Wordprocessor ROM	£49.00
View 3 inc. Printer Drivers	£79.00
Hi-View - For 2nd 6502 Processor	£50.00
Viewsheets - Spreadsheet ROM	£50.00
View Index Disc	£15.00
View Store - Database ROM	£49.00
Viewspell	£35.00
Viewplot	£35.00
Printer Driver Generator - Cassette	£10.00
Printer Driver Generator - Disc	£11.50

ACORN SOFTWARE BOOKS

Creative Graphics	£7.50
Graphs and Charts	£7.50
Lisp Manual	£7.50
Forth manual	£7.50

S. Pascal Manual	£7.50
Comal Manual	£11.50
BCPL Manual	£15.00
ISO Pascal Manual	£15.00
Micro-Prolog Manual	£11.50

Interbase to be released	POA
Interchart Rom	£34.00
Disc Doctor Rom	£29.00
Printmaster Rom	£29.00
Graphics Rom	£29.00
Speech Rom	£29.00
Termi II Rom	£32.00
Communicator Rom	£65.00
Toolkit Plus Rom	£36.00
Exmon II Rom	£26.00
Murom (Music) Rom	£28.00
Master File II Disc	£18.00
Help II Rom	£29.00
Sleuth Rom	£28.00
Spellcheck III (View + W/W) Rom	£33.00
Spellcheck (View) Disc	£18.00
Spellcheck (Wordwise) Disc	£18.00
Hershey Characters Disc	£14.00
Hershey Characters Cassette	£9.00
Logo (LCSI) Rom	£59.00
BBC Ultracalc II Rom	£50.00
Replica II 40/80 Disc	£12.00
Beta Base 40/80 Disc	£23.00
Vine Replay Disc Utility Rom	£33.00
Vine Tape to Disc Rom	£18.00
Island Logic Music Cassette 1	£13.50
Island Logic Music Cassette 2	£13.50
Island Logic Music Disc	£27.00
Wordsease 2 Roms	£27.00
Program Builder Cas.	£14.50 Disc £19.00
Studio Eight Cass	£15.50 Disc £20.00
Icon Master Rom	£31.00

ACORN SOFTWARE

Forth Cassette	£16.50
Forth Disc	£19.50
Forth ROM	£47.00
Lisp Cassette	£16.50
Lisp Disc	£19.50
Lisp ROM	£47.00
S-Pascal Cassette	£16.50
S-Pascal Disc	£19.50
ISO - Pascal ROM	£62.00
BCPL ROM	£95.00
Comal ROM	£47.00
Logo ROM	£65.00
Turtle Graphics Cassette	£16.50
Graphics Extension ROM	£28.00
Graphics Extension ROM for B Plus	£28.00
Microtext Cassette	£47.00
Microtext Disc	£55.00
Creative Graphics Cassette	£9.50
Graphs and Charts Cassette	£9.50
French for Electron Also	£14.50
Italian for Electron Also	£14.50
Spanish for Electron also	£14.50
German for Electron also	£14.50
Basic Editor	£28.00
Database Disc	£16.50
Micro Prolog (new)	£76.00
ISO Pascal Stand Alone Generator	£34.00

COMPUTER BOOKS

BBC User Guide Binder	£3.95
Advanced User Guide	£12.95
Advanced User Guide Binder	£3.95
Advanced Basic ROM BBC	£7.95
Advanced Graphics with the BBC	£9.95
Applied Assembly Language BBC	£7.95
30 Hour Basic	£6.95
Basic ROM User Guide	£9.95
BBC Micro Disc Companion	£7.95
Disc Programming Techniques for BBC	£7.95
The BBC Micro ROM Book	£9.95
Word Processing on the BBC Micro	£5.25
Logo Programming	£8.95
6502 Applications	£7.95
6502 Assembly Language Programming	£19.95
6502 Assembly Language Subroutines	£19.95
Z80 Applications	£14.50
Z80 Assembly Language Programming	£19.95
Z80 Assembly Language Subroutines	£19.95
Get More from Epson Printer	£7.95
Word Processing Book	£4.95
Word Star and CPM Made Easy	£8.95
Word Star Made Easy	£16.95
Word Star Fast Reference Guide	£4.35
Introduction CPM Z80 2nd Proc (new)	£9.95
Wordwise Plus (new)	£9.95
Making Most of your BBC Disc System	£5.95
Creating Adventures on BBC	£5.95
Step by Step Programming BBC Book I	£5.95
The Hackers Handbook for BBC	£4.95
Micronet Handbook	£6.95

TOP GAMES

Doctor Who Cass + ROM	£17.00
Doctor Who Disc + ROM	£18.00
Elite	Cas. £13.50 Disc £16.50
Revs	Cas. £13.50 Disc £16.50
Revs II	(4 Track) Disc £11.50
Aviator	Cas. £13.50 Disc £16.50
Castle Quest	Cas. £11.00 Disc £13.00
Scrabble	Cas. £12.50 Disc £17.00
Whiteknight 12 Chess	Cas. £9.50 Disc £17.50
Snooper	Cas. £9.50 Disc £11.00
Acheton	Disc £16.50
Combat Lynx BBC and Electron	Cas. £8.50
Repton	Cas. £9.50 Disc £11.50
Repton II	Cas. £8.50 Disc £10.50
Monopoly	Cas. £12.50 Disc £17.00
Red Arrows	Cas. £8.00 Disc £10.50
Jump Jet	Cas. £9.00 Disc £10.50
Lord of the Rings Part I	£14.50
Citadel	Cas. £8.50 Disc £9.50
Exploding Fist	Cas. £8.50 Disc £13.50

ROMS/UTILITIES

Wordwise Plus Rom	£49.00
Intersheet Rom	£50.00
Interword to be released	POA

MAIL ORDER COUPON

P&H ELECTRONICS LIMITED

22/24 GUILDFORD ROAD · BAGSHOT · SURREY GU19 5JN

Please send me: (or order by letter)

1	at £	P&P
2	at £	P&P
3	at £	P&P

I enclose cheque/PO for £

Or please debit my Access/Barclaycard/Visa* (delete as applicable)

Card Number

Expiry Date

Telephone

Name

Address

FAST VAT FREE EXPORT SERVICE ON ORDERS OVER £15 NETT
PLEASE ALLOW FOR CARRIAGE COSTS OR REQUEST CARRIAGE QUOTATION

CARRIAGE COSTS - Micros - Monitors - Disc Drives

- Printers - Desks - 2nd Processors: £7

Cassette Decks: £3. - Books: £2. - Software - Leads £1. per item.

ACCESS/BARCLAYCARD/VISA ORDERS WELCOME

CREDIT FACILITIES Instant credit up to £1,000, deposit 10%

PLEASE STATE; DISK FORMAT 40 OR 80 TRACK



MU3

Character Sets

From Page 111

Program I

```

100 REM *****
110 REM *
120 REM * Character Definer *
130 REM *
140 REM * By Robin Nixon *
150 REM * (c) The Micro User *
160 REM *
170 REM *****
180 REM
190 DIM CHZ 8, AZ(8,8), OSZ 100: CC$="
"
200 MODE2:VDU23;B202;0;0;0;RRZ=12:
SSZ=5
210 ON ERROR GOTO600
220 *FX4,1
230 *FX11,15
240 *FX12,15
250 *FX20
260 PROCgrid
270 *FX20
280 PROCshowall
290 VDU31,0,18:COLOUR3:PRINT"To sav
e or load a""file, press ESCAPE.
"":COLOUR7:PRINT"To edit a chara
cter""Select it using the""cursor k
eys.""Then press RETURN.";STRING$(80
," "):COLOUR5
300 PRINT"Which character?";*FX15
310 PROCselect
320 PCZ=RRZ-12+((SSZ-5)/2)*8+224
330 PROCgetinfo(PCZ)
340 CLS:PROCgrid:PROCshowall:PROCsh
owcharacter
350 XZ=1:YZ=1:VDU31,3,16:PRINT;PCZ;
360 VDU31,0,19:COLOUR2:PRINT"Use th
e cursor keys""to move."':COLOUR1:PR
INT"The space bar sets""and resets a
point."':COLOUR4:PRINT"C clears the
grid.""
370 COLOUR7:PRINT"Press RETURN when
""you have finished."
380 REPEATPROCcursor:*FX15
390 REPEAT6Z=GET:UNTIL6Z=13 OR 6Z=3
2 OR 6Z>135 AND 6Z<140 OR 6Z=67:PROCc
ursor
400 IF6Z=136 XZ=XZ-1:IFXZ=0 XZ=8
410 IF6Z=137 XZ=XZ+1:IFXZ=9 XZ=1
420 IF6Z=138 YZ=YZ+1:IFYZ=9 YZ=1
430 IF6Z=139 YZ=YZ-1:IFYZ=0 YZ=8
440 IF6Z=32:AZ(YZ,XZ)=AZ(YZ,XZ)EOR1
:PROCset(YZ,XZ)
450 IF6Z=67:VDU23,PCZ,0,0,0,0,0,0,0
,0::X1Z=XZ:Y1Z=YZ:PROCgetinfo(PCZ):XZ

```

```

=X1Z:Y1Z=YZ:PROCshowcharacter:PROCsho
wall
460 UNTIL6Z=13
470 VDU23,PCZ:FORPZ=1TO8:QQZ=0:FORQ
Z=1TO8:QQZ=QQZ+AZ(PZ,QZ)*2^(8-QZ):NEX
T:VDUQQZ:NEXT
480 GOTO260
490 DEFPROCgetinfo(PCZ):XZ=CHZ MOD
&100:YZ=CHZ DIV &100:AZ=10:PCZ=PCZ:C
ALL&FFF1:ENDPROC
500 DEFPROCgrid:VDU31,2,0:COLOUR2:P
RINT"Character Definer":COLOUR4:VDU31
,4,1:PRINT"R.Nixon 1985":BCOLO,7
510 FOR JZ=1 TO 9
520 MOVEJZ*72,896:DRAWJZ*72,608
530 MOVE72,(JZ+16)*36-4:DRAW648,(JZ
+16)*36-4
540 NEXT
550 ENDPROC
560 DEFPROCcursor:BCOL3,6:MOVEXZ*72
,(10-YZ+16)*36-4:DRAW(XZ+1)*72,(10-YZ
+16)*36-4:DRAW(XZ+1)*72,(9-YZ+16)*36-
4:DRAWXZ*72,(9-YZ+16)*36-4:DRAWXZ*72,
(10-YZ+16)*36-4:ENDPROC
570 DEFPROCshowcharacter
580 FORJZ=1 TO 8
590 FORKZ=1 TO 8
600 IF(CHZ*JZ) AND (2^(8-KZ)) AZ(JZ
,KZ)=1 ELSE AZ(JZ,KZ)=0
610 PROCset(JZ,KZ)
620 NEXT
630 NEXT
640 ENDPROC
650 DEFPROCshowall:VDU28,12,13,19,5
:CLS:COLOUR6:FORJZ=224 TO 255:VDUJZ:I
FJZMOD8=7 PRINT
660 NEXT:VDU26,31,12,14:COLOUR7:COL
OUR129:PRINTCC$:COLOUR128:ENDPROC
670 DEFPROCset(PZ,QZ):BCOLO,AX(PZ,Q
Z)*4:PLOT4,QZ*72+8,(10-PZ+16)*36-8:PL
OT4,(QZ+1)*72-8,(10-PZ+16)*36-8:PLOT8
5,QZ*72+8,(10-(PZ+1)+16)*36:PLOT85,(Q
Z+1)*72-8,(10-(PZ+1)+16)*36:PLOT69,46
8+QZ*8,476+(9-PZ)*4:ENDPROC
680 *FX4
690 *FX11,20
700 *FX12,2
710 ONERROR CLS:REPORT:PRINT" at li
ne ";ERL:END
720 MODE6:VDU31,0,18:PRINT"Do you w
ant to save this character set";:PROC
yn:IF 6$="N" OR 6$="n" GOTO750
730 PRINT':*
740 INPUT'"Enter file name ? C."$0
SZ:CC$=$OSZ:$OSZ="$SAVE C."+$OSZ+" C0
0 D00":XZ=OSZ MOD &100:YZ=OSZ DIV &10
0:CALL&FFF7:GOTO200

```

```

750 PRINT'"Do you want to load a c
haracter set";:PROCyn:IF 6$="N" OR 6$
="n" PRINT'"BYE":END
760 PRINT':*
770 INPUT'"Enter file name ? C."$0
SZ:CC$=$OSZ:$OSZ="$LOAD C."+$OSZ:XZ=0
SZ MOD &100:YZ=OSZ DIV &100:CALL&FFF7
:GOTO200
780 DEFPROCyn:REPEAT6Z=GET:UNTIL6Z
="Y" OR 6Z="y" OR 6Z="N" OR 6Z="n":EN
DPROC
790 DEFPROCselect
800 COLOUR4:COLOUR129:VDU31,RRZ,SSZ
,RRZ-12+((SSZ-5)/2)*8+224
810 REPEAT:66Z=GET:COLOUR6:COLOUR12
8:VDU31,RRZ,SSZ,RRZ-12+((SSZ-5)/2)*8+
224
820 IF66Z=136 RRZ=RRZ-1:IFRRZ=11 RR
X=19:SSZ=SSZ-2:IFSSZ=3 SSZ=11
830 IF66Z=137 RRZ=RRZ+1:IFRRZ=20 RR
X=12:SSZ=SSZ+2:IFSSZ=13 SSZ=5
840 IF66Z=138 SSZ=SSZ+2:IFSSZ=13 SS
Z=5
850 IF66Z=139 SSZ=SSZ-2:IFSSZ=3 SSZ
=11
860 COLOUR4:COLOUR129:VDU31,RRZ,SSZ
,RRZ-12+((SSZ-5)/2)*8+224
870 UNTIL66Z=13:COLOUR128:ENDPROC

```

Program II

```

100 REM *****
110 REM *
120 REM * Custom Characters *
130 REM * By Robin Nixon *
140 REM *
150 REM * (c) The Micro User *
160 REM *
170 REM *****
180
190 MODE4
200
210 *LOAD C.FONT-N 900
220 *LOAD C.FONT-U A00
230 *LOAD C.FONT-L C00
240
250 ?&367=&70
260 ?&368=&9
270 ?&369=&A
280 ?&36A=&C
290
300 END

```

This listing is included in this month's cassette tape offer. See order form on Page 175.

What is ADD COMM?

- DEFINITION:** ADD — Join, as increase or supplement. COMM (Abrev. for command) — Have at disposal, or within reach.
- DESCRIPTION:** 8K sideways ROM holding machine code program.
- CONTENTS:** Useful mixture of 40 extra BASIC statements.
- ORIGINAL:** Very! First, and only utility to offer TOOLKIT and GRAPHIC commands.
- MERIT:** Excellent. Read the reviews in our 16 page brochure.
- MANUAL:** Easy to use, 72 page, ring-bound User Guide.

Whichever way you look at it, and whether you use the BBC 'B', BBC 'B+' computers, or the Electron with add-on ROM facility, **ADD COMM** offers the very best value for money.

Price: £28.00 incl. VAT and post

Available from: **Vine Micros, Marshborough, Nr. SANDWICH, Kent CT13 0PG.**
Tel: 0304 812276
Or through your local Dealer.



CONTRACT BRIDGE BRIDGE-MENTOR II "The Disc Version"



We are pleased to announce the NEW disc version of this internationally acclaimed software for the BBC/ELECTRON. Rewritten for disc with many NEW features!

Practice your bidding: Perfect your card-play: Create your own archive of interesting hands

With high resolution colour graphics and sound, BRIDGE-MENTOR II guides you, step-by-step, through expertly analysed hands. A host of features including the spectacular "AUTOPLAY" option. The package now includes the famous "Challenge" hands archive... in total-over 60 testing hands to improve your game... with unlimited scope for more !!!



Original
Cassette
version
£9.50

"The Challenge"
£6.50

For Individual Practice, Analysis and Archiving

£17.50 (includes "The Challenge" archive)
(State 40/80 track disc)

**Cheques to:- MINIC BUSINESS SERVICES,
12 WOBURN CLOSE,
BUSHEY, HERTS WD2 3XA.**

THE AMAZING GRAFPAD II

AVAILABLE FOR IMMEDIATE DESPATCH
FROM **Viglen**

THE ULTIMATE IN GRAPHIC INPUT DEVICES
FOR THE BBC MICRO.

GRAFPAD II: ● A brilliant British invention manufactured in Gt. Britain, unequalled in the world of graphics input.


SPECIFICATION
Resolution: 1280 x 1024 pixels
Repeatability: 1 pixel
Output rate: 2000 co-ordinate pairs per sec.
Interface: parallel
Origin: LH corner or selectable
Dimensions: 350 x 260 x 12 mms.

IT COMBINES IN ONE DEVICE ALL THE FACILITIES OF PREVIOUS ATTEMPTS AT INPUT DEVICES. THE APPLICATIONS ARE AS NUMEROUS AS THAT OTHER COMMONLY HELD DEVICE — A PEN! — AND INCLUDE: ● Option Selection ● Form Input ● Data Collection ● Logic Design ● Circuit Design ● Picture creation ● Picture storage ● Picture retrieval ● Construction design ● C.A.D. ● Text Illustration ● Games ● Pattern Design ● Education ● PCB Design

● A4 SIZE DRAWING AREA ● HIGH RESOLUTION COLOUR
● HOME AND BUSINESS USE ● VARIETY OF OPTIONAL PROGRAMMES ● FREE HAND DRAWING ● CIRCUIT DIAGRAMS ● C.A.D. ● PCB LAYOUTS ● EASY TO USE



Using Grafpad for tracing



Architectural design with DDX Software



Free-hand drawing Icon Software



FREE ICON DRAWING SOFTWARE WITH EACH GRAFPAD II ON DISC

£59.50 inc. VAT

EDUCATION & DEALER ENQUIRIES WELCOMED

Post to: Viglen Computer Supplies, Unit 7, Trummers Way, Hanwell W7 2QA. Phone: 01-843 9903.
Please Send me (specify items) _____ I enclose Cheque/P.O. for £ _____ Add £2 p&p or £8 for courier insured delivery.
Cheques payable to Viglen Computer Supplies or debit my ACCESS/BARCLAYCARD No. _____
NAME: _____ ADDRESS _____

You can pay by credit card or telephone your order.

Signature _____

MU3

The Great Little 80 column Printer from Viglen at a price everyone can afford


ONLY

£149

(INCLUDING VAT)

with interface cable

- All printers come standard with both serial and parallel interface
- 12cps near letter quality mode
- Normal 50cps draft printing
- Tractor and friction feed as standard
- Uses normal A4 sheet paper or continuous stationery
- Original plus 2 copies
- Bidirectional logic seeking
- 48 International characters
- Subscripts, superscripts and underlining.
- Also available for IBM.

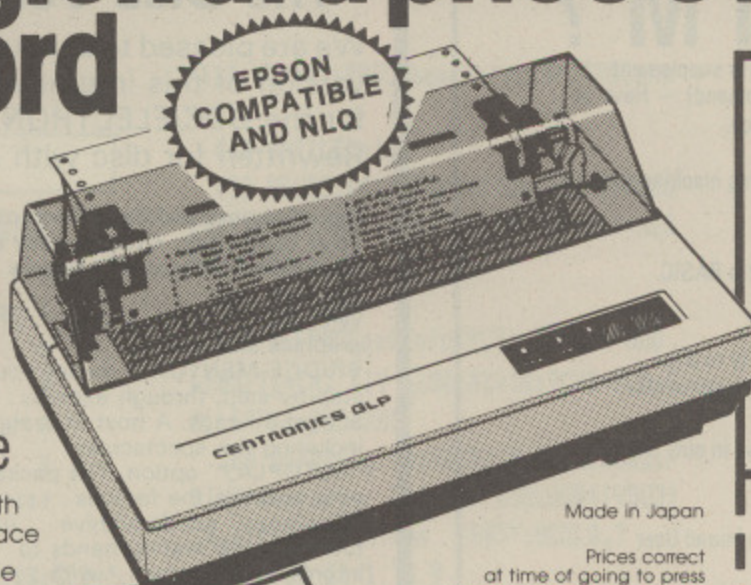

Made in Japan

Prices correct at time of going to press - offers subject to availability



Post to:
Viglen Computer Supplies
 Unit 7, Trumbers Way
 Hanwell, W7 2QA
 Tel: 01-843 9903


Showroom/factory open
 Monday - Friday 9.30-5.30
 Saturday 9.30 - 4.00

THE BEST PARTNERS FOR YOUR COMPUTERS

How to order by post - Simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address shown left. Allow seven days for delivery, add £8.00 carriage, packing and ins. on all items.

By telephone - Ring (01) 843 9903. Credit Card holders (Access/Barclaycard only) can purchase by telephone. Please give Card No., Name, Address and items required.

Credit cards valid if signed by card holder. Address on coupon must be same as card holder.



Please send me (state quantity) **MU3**

_____ GLP printer(s)

I enclose Cheque/P.O. for £
 add £8.00 carriage

State whether BBC, QL or IBM

Name

Address

I prefer to pay by ACCESS/BARCLAYCARD
 (delete whichever is not applicable)

Card No

Signature


TYPE-BBC

NEW!

from

Viglen

COMPUTER SUPPLIES

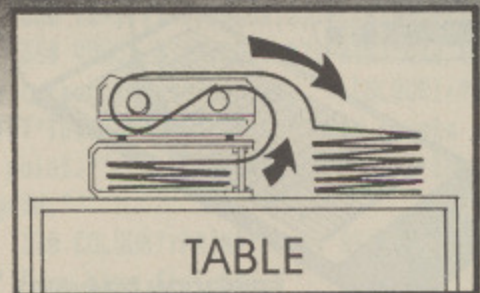

TABLE


Printer Stand

£16.95

INC. VAT

Carriage & Packing £3.00

A PRINTER STAND

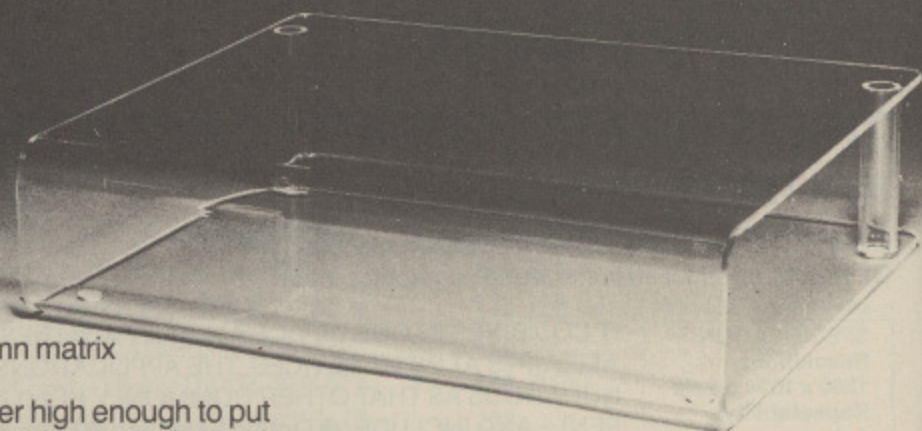

- For 80 column matrix printers
 - Raises printer high enough to put continuous stationery underneath
 - Beautifully finished in clear perspex ● Viglen quality every time
 - Will accept paper up to 12½" wide ● Non slip rubber pads
- Dimensions: 15" (380mm) wide (320mm) deep 4" (90mm) high
 Also available 136 column stand @ £27 inc. VAT.

COME TO VIGLEN FOR A FAST, FRIENDLY, PERSONAL SERVICE

DEALER ENQUIRIES WELCOME

Prices subject to change without notice

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.

MU3

Please send me _____ (qty) PRINTER STANDS at £19.95 each. enclose Cheque/P.O. for £ made out to

VIGLEN COMPUTER SUPPLIES or debit my ACCESS/BARCLAYCARD No. _____

Name _____ Signature _____


Address _____

DUAL DRIVES FOR LESS THAN £17?

Convert your single disc drives into duals for only £16.95 inc. VAT

● Specially designed circuitry eliminates the need for any tools

● No soldering

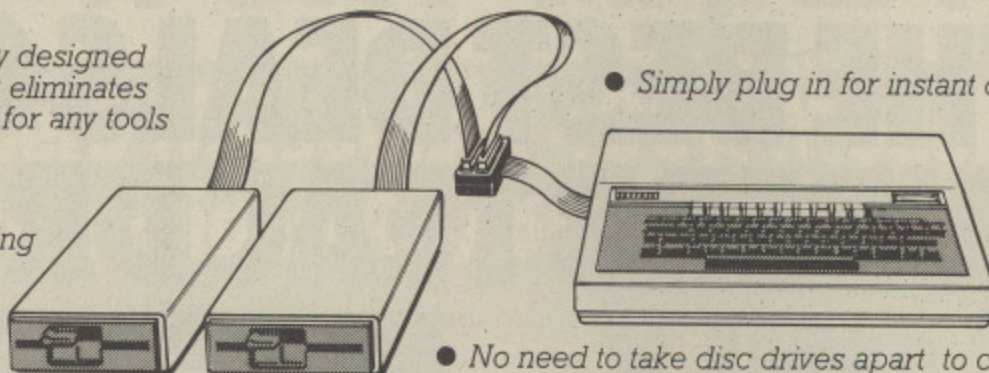

● Simply plug in for instant dualling

● No Mess
● New improved longer cable reaching back of computer

● No need to take disc drives apart to change links

The Viglen DUCK (Dualling Up Connector Kit) can convert single drives to duals, instantly!

Just plug the **Viglen Duck** into the BBC micro and any two single disc drives to create a dual disc drive. Drives will be configured Drive 0 and Drive 1 automatically.

● Fast Back-Up ● Fast Copying of Files

The **Viglen Duck** will dual-up any make or type of single disc drives with PSU (power supply unit). Will work on a mixture of drives, single and/or double sided combined. If you have disc drives without built-in PSU, then you will require a dual power connector for the BBC micro - available from Viglen for only £8.00 inc VAT.

● Postage and packing £2.50 inc. VAT.
● Official Orders from Government and Educational Establishment welcomed.



Orders to: Viglen Computer Supplies
Unit 7, Trumpers Way, Hanwell W7

Credit Card holders may order by telephone: **01-843 9903**

All prices correct at time of going to press

YOUR ROMS WOULD BE HAPPIER IN A VIGLEN ROM CARTRIDGE SYSTEM

Tel: 01-843 9903
ACCESS/BARCLAYCARD
Credit Card holders can purchase by telephone. Please give Card No., Name, Address, and items required.

The safest way to look after your growing collection of ROMs is to store them in Viglen's specially designed cartridge systems, this not only keeps them happy, but also removes the risk of damage to your BBC micro.

There are two systems - the 'Standard' and the 'Low Profile'. Viglen is the leading producer of both.

ADVANTAGES OF VIGLEN ROM CARTRIDGE SYSTEM

● All cartridges are gold-plated for durability and reliability, unlike others which are only silver plated.
● No need to switch machine off between cartridge changes. ● Insert and remove 'Wordwise' 'View' 'Disc Doctor', etc., at will, from your micro in absolute safety. ● Low, low power consumption unlike other systems. ● Save on memory.

THE STANDARD SYSTEM



Over 40,000 sold

The Standard System used extensively in education is preferred, due to its robust construction and ease of use.

LOW PROFILE SYSTEM



With the sideways entry on the low profile system access to the escape and tab keys are slightly restricted. However Viglen betters its rivals in this respect by being 3mm lower.

Personal Callers
Mon - Fri 9.30-5.30pm Sat 9.30-4pm

Post to: **VIGLEN Unit 7 Trumpers Way Hanwell W7 2QA**

Please send me (state type and quantity) _____ Kit(s) _____ Cartridges

I enclose Cheque/P.O. for £ _____ Please add £2.50 for postage and packing (50p only for single cartridge)

I prefer to pay by ACCESS/BARCLAYCARD * (Delete whichever is not applicable).


Card No. _____ Signature _____

Name _____ Address _____

PRICE FOR COMPLETE KIT, including 1 cartridge, 1 Cable Assembly, 1 Blanking Off Plate (used if system is removed), 1 Socket Cover (used when no cartridges are resident), 1 Cartridge Storage Rack.

£15.95

Extra Cartridges: £2.95 each, four for £11.00, ten for £26.50. Kit comes with 1 ROM Cartridge. All prices inc. VAT.



Credit Cards valid if signed by Cardholder. Address must be the same as card holder's.

MU3

The only way you might
get a cheaper deal
on your TEAC disc drive...



BUT THE BEST DEALS ON THE SUPERB TEAC DRIVES COME ONLY FROM VIGLEN

VIGLEN and the outstanding TEAC range of disc drives make the ideal team mates for your computer, giving you fast responsive data access in seconds.

Our highly competitive prices

SINGLE DRIVES 40/80 400K		DUAL DRIVES 40/80 800K	
Single Drive	£139	Dual Drives	£278
Drive + Acorn DFS	£198	Dual Drives + Acorn DFS	£337
Integral PSU for single drive	£22	Integral PSU for dual drive	£28



Latest Acorn 1.2 DFS(DNFS). Call at factory for free fitting **£59** (with disc drive only)



All Offers include:

Utilities Disc includes formatting, verifying BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others. All drives supplied with case, ribbon and power cables and comprehensive 56 page manual.

How to order: by post - To purchase any of these items, simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address above. Allow seven days for delivery, add £12.00 carriage, packing and insurance on all items.

By telephone: Ring (01) 843 9903. Credit Card holders (Access/Barclaycard only) can purchase by telephone. Please give Card No., Name, Address and items required.

Viglen are also major suppliers to educational and government establishments and welcome further enquiries and orders.

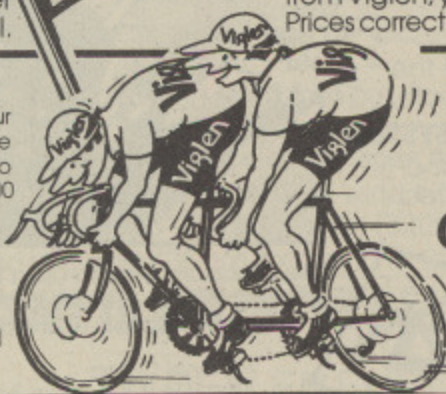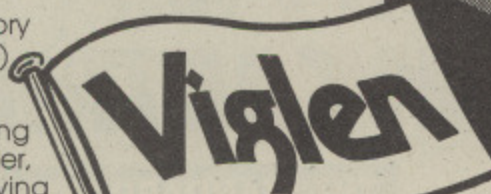

Remember, whichever make of drive you purchase from Viglen, you can be assured of an excellent back-up service. Prices correct at time of going to press - offers subject to availability.

THE BEST PARTNERS FOR YOUR COMPUTERS

Showroom/factory open
Monday - Friday 9.30-5.30
Saturday 9.30 - 4.00
Tel: 01-843 9903



free parking

Post to:
Viglen Computer Supplies
Unit 7, Trumpers Way
Hanwell, W7 2QA

Credit cards valid if signed by card holder. Address on coupon must be same as card holder.



Please send me (state item number, type and quantity)

I enclose Cheque/P.O. for £..... add £12.00 carriage

Name

Address

I prefer to pay by ACCESS/ BARCLAYCARD (delete whichever is not applicable)

Card No.

Signature

A VERY SPECIAL OFFER from Viglen

The Superb Mitsubishi 400K Model M4853 Double-sided 40/80 Track Disc Drive

LATEST



Cased
with leads

At Viglen's rock bottom prices, everyone can afford to replace inefficient cassette tape units and obtain all the advantages of changing up to discs.

12 MONTH
WARRANTY
(EXTENDED 2
YEAR
WARRANTY
AVAILABLE)

£119

(400K 40/80 TRACK)
INC. VAT

Latest Acorn 1.2 DFS (DNFS) Call at factory for free fitting. **£59**

(with disc drive only)

Single Drives 40/80 400K

Single Drive	£119.00
Drive + Acorn DFS	£178.00
Integral PSU for Single Drive	£22.00

Dual Drives 40/80 800K


Dual Drives	£238.00
Dual drive + Acorn DFS	£297.00
Integral PSU for Dual Drive	£28.00

All offers include

Utilities Disk includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others.

Comprehensive Manual

a fact-filled, 56 page document, includes techniques of loading from cassette to disk. Not available elsewhere



Carriage. Add £12 in each case. Usually despatched next day. Price covers courier-delivery and insurance. Prices include VAT. Prices correct at time of going to press - Offer subject to availability.

Sales Hotline 01-843 9903

Please call for latest prices, product details and to place credit card orders. Government & Educational Establishments enquiries welcome on this number.



After Sales Line 01-571 6313

For dispatch enquiries, invoice queries, service and all other enquiries.

Call in at our Showroom

Weekdays:
9.30-5.30
Saturdays:
9.30-4

Post to: Viglen Computer Supplies, Unit 7, Trummers Way, Hanwell W7 2QA.

Please send me (specify all items)
I enclose Cheque/P.O. for £
Cheques payable to Viglen Computer Supplies

Name _____
Address _____

I prefer to pay by ACCESS/BARCLAY CARD
(Delete whichever is not applicable)

Card No. _____

Signature
MU3

Add £12 carriage




the best partners for your computer

All the peripherals for your BBC Model B

the best service – the best value


Monitors
NEW

PHILIPS Colour TV/ Monitor Model 1114

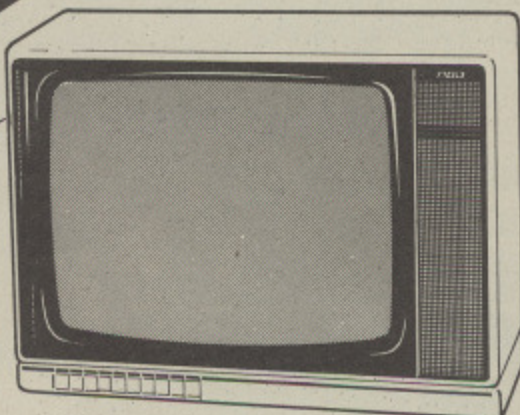


14" Tube (V34cm) Receiver/Monitor

- Light and compact finished in white with dark picture surround.
- In-line 14" picture tube provides a sparkling picture in seconds.
- Designed to give exceptional reliability and performance.
- 10 pre-select channel buttons.
- Headphone/tape recorder socket with separate loudspeaker mute switch.
- Loop aerial and main aerial connection.
- RF, CVBS and RGB inputs.

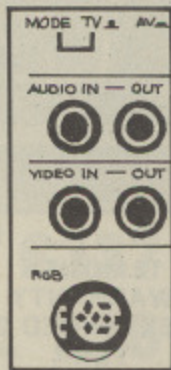

Price **£199** inc. VAT

PHILIPS Model BM7502 Green Screen Mono

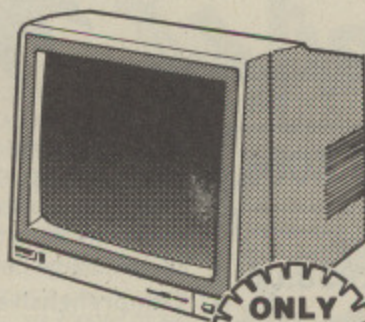

From the highly successful 'Philips 80 Range', here is a monitor specially designed to display graphics and alphanumeric data with perfect clarity.

- 12" high resolution, 20MHz band width, anti-glare screen.
- Composite Video (CVBS) and Audio Input.
- 2000 character (80 x 25) display.
- Amber screen – £5 extra.
- Ideal low price for your BBC B.

**ONLY
£85
INC. VAT**


PLEASE ENQUIRE ABOUT OUR EXTENSION
KEYBOARDS, KEY PADS & EPROM PROGRAMMER

Discs

3M Scotch Discs
5 1/4" single-sided diskettes
Double density – Lifetime guarantee

	Per box
SS 40 TRACK	£12.00
DS 40 TRACK	£15.00
SS 80 TRACK	£19.50
DS 80 TRACK	£19.50

Prices include VAT




10 DISCS
PER BOX

Please add £2 carriage

PHILIPS **NEW** Colour Monitors Model CM8501

- Std resolution.
- Grey glass screen.
- RGB – linear/TTL – inputs (SCART/8 Pin DIN).
- Audio input.
- Bandwidth 8 MHz.
- Adjustable foot.

Price **£209** INC. VAT

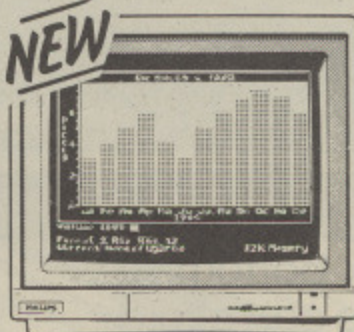

Model CM8533

- Med. resolution.
- Dark glass etched screen.
- Composite video input (phono).
- RGB – linear input (SCART).
- RGB/RGBI – TTL input (8 Pin DIN).
- Audio input.
- Green (Mono) switch.
- Bandwidth 12 MHz.
- Adjustable foot.

Price **£299** INC. VAT


Microvitec Monitors

Standard
£209

Med
£269

High
£395

Med & Pal
£295



Printers



Dot Matrix

Taxan Kaga KP810 £229
Canon PW1080A £279
GLP inc Tractor Feed and printer lead £149

Daisy Wheel

Juki 6100 £299
Quen Data £199
Epson DX100 £359

Please add £8 for 1 1/2 metre length printer lead for the BBC micro.


BBC Model B+ 64k £399
BBC Model B+ 128k £449



Visit our
showroom:
Open
9.30 – 5.30
Mon to Sat.
9.30-4.00
Saturdays

Sales Hotline 01-843 9903

Please call for latest prices, product details and to place credit card orders. Government and Educational Establishments enquiries welcome.



Post to: **VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL W7 2SA. Telephone: 01-843 9903.**

Please send me _____
I prefer to pay by ACCESS/BARCLAYCARD* (Delete whichever is not applicable).
Card No _____
Signature _____
Name _____
Address _____



GIVE YOUR BBC THE PC LOOK

WITH THE **Viglen** PROFESSIONAL CONSOLE UNIT (P.C.U.)

ONLY £49
(INCLUDING VAT)
PRICE INCLUDES
COILED CABLE



Give your BBC Micro System the professional PC-look by replacing your existing lid with this smartly styled package. House your computer, monitor, disk drives & ROM cartridge system neatly in this strongly constructed, high impact ABS unit, colour matched to the BBC micro, and give yourself an outfit to impress all who see it.

This unit will support monitors including 14" television sets.

Capable of accepting most internal expansion boards such as Solidisk, ATPL Sidewise, Midwich 16, RAMAMP 16+32k Exprom, Computer Village CVX16, HCR Sideways, 6502 2nd processor boards. Fully ventilated. Full fitting instructions.

DEALER ENQUIRIES WELCOME.




Package includes:

- Keyboard case
- Screened main unit casing including internal fittings
- 2.0 metre coiled cable to connect main unit to keyboard
- Blanking plates included to blank out disk drive aperture
- Keyboard label

Optional Extras: (prices inc. VAT)

1. 2.0 metre coiled cable on its own £15
2. Dual-drive data cable £9
3. Dual-drive power cables £5
4. Special internal switch mode power supply kit capable of running two half-height drives cool running £35
5. Fan kit, only necessary in extreme cases £35
6. Fitting available from £15
7. Extension keyboard on its own £29
8. Also available with single or dual drives ready fitted *Price on Application*

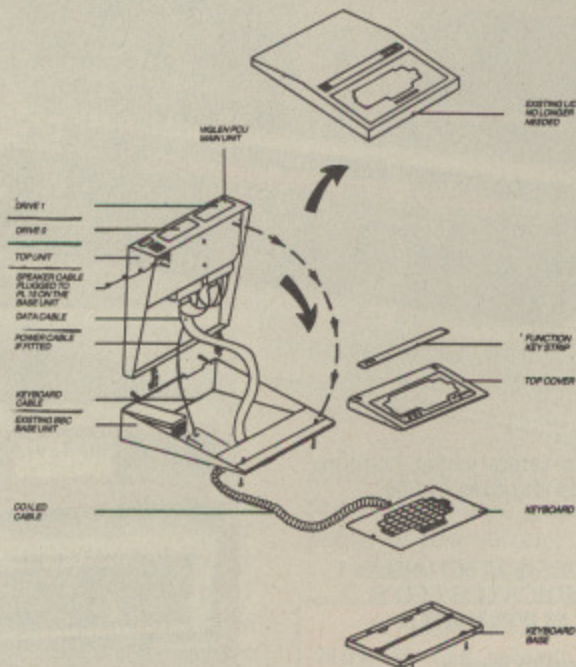

How to order:

By post - Simply fill in the coupon. Enclose your Cheque, P.O. or use your Access, Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address stated.

Allow seven days for delivery. Add £6.00 carriage, packing and insurance.

Or telephone: 01-843 9903
Credit card holders (Access, Barclaycard only) can purchase by telephone. Please give Card No. name, address and items required. Viglen are also major suppliers to educational and government establishments and welcome further enquiries and orders.

Unit 7, Trumpers Way,
Hanwell W7 2QA
Tel: 01-843 9903
Personal callers:
Monday-Friday 9.30-5.30pm
Saturday 9.30-4pm



Free parking available

Post to: **VIGLEN LTD., UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.**

Telephone: **01-843 9903**

Please send me _____ (Qty) VIGLEN PC Unit(s) Plus Optional Extra(s) _____ State ref numbers

I enclose Cheque/P.O. for _____ Please add £6 for postage, packing and insurance.

I prefer to pay by ACCESS/BARCLAYCARD* Delete whichever is not applicable

Card No. _____ Signature _____


Name _____

Address _____

Postcode _____

Tel. No. _____

Credit Cards valid if signed by Cardholder.
Address below must be the same as card holders.



MU3

If you think the front looks good — you should see the back.

NEW LOW PRICE
£299 + VAT
ALSO AVAILABLE WITH 3½" DRIVES

Once again Mushroom has answered a special need of all BBC computer users with their new WORKSTATION — no more untidy wiring, no more pulled plugs, transforms your system into a handsome console unit.

Features include:—

- * ADVANCED CABLE MANAGEMENT
- * TWIN 400K MITSUBISHI SLIM LINE DRIVES SWITCHABLE FROM 40 TO 80 TRACK WITH STATUS INDICATOR LED'S
- * ON BOARD REGULATED 4 AMP POWER SUPPLY WITH OVERLOAD PROTECTION
- * MAINS INPUT FILTER FOR CLEAN POWER SUPPLY
- * FILTERED POWER TO THE 3 TAKE-OFF SOCKETS AT REAR FOR MICRO, MONITOR AND PRINTER

The WORKSTATION is manufactured to the highest safety specifications from lightweight aluminium attractively finished in oatmeal with orange trim. When not in use the computer is stored underneath, affording useful protection from accidental knocks or spillage.



Mushroom
 COMPUTERS LIMITED



The WORKSTATION, complete with twin disc drives, is suitable for all Areas of use — Domestic, Schools, Local Authorities, Commercial and Industrial.

This is a must for every user at only £299 Excl. VAT.

Those people already owning disc drives can have them fitted into the WORKSTATION. Prices on request.

Available direct from:
 Mushroom Electronics, 55 Tavistock Street, Bedford, MK40 2RF
 Telephone: (0234) 58303. Telex: 826112 MUSCOM G, and selected computer dealers nationwide.

IN the November issue of The Micro User Jim Notman reviewed the Acorn ADFS and I wonder if his experience in doing so will help me.

I want to change to the B+ 128k with ADFS keeping my Viewstore and View 2.1 ROMs, but am assured by the dealer that neither will work with the B+.

Viewstore accesses the DFS directly and is incompatible. The 1770 does not emulate the 8271 as it should.

I find this hard to believe, but cannot resolve the uncertainty on my own. Could it be that Mr Notman had the B+ in use with Viewstore and could help? I would very much appreciate his comments.

I am aware that only 25k could be used by these ROMs and have no protected discs to worry about. — Peter Hammett, Blackheath

● I cannot understand why your dealer should have given you such a story. Possibly he was confusing it with another piece of software.

Viewstore was written for the standard Acorn DFS (both 8271 and 1770 controllers) as well as Acorn's Advanced Disc Filing system which needs a 1770 controller.

Although I haven't yet had the opportunity to try it out on a 128k B+, it will work perfectly happily with the 64k B+.

At the moment I'm using Viewstore on a non-Acorn Winchester hard disc, with a dramatic improvement in speed.

Jim Notman

80 column text display

CONGRATULATIONS on your Mini Office software, it's excellent value for money. I use it on a BBC Micro, and I've been sufficiently impressed to buy another version for my son's Spectrum.

I use a monitor with the BBC machine however, and it would be useful with the word processor if I could display text in 80 rather than 40 columns on screen — and better still if I could specify the number of columns to be displayed on each line of the

Viewstore's quite at home with the B+

screen.

That way the document would look the same on the screen as it will on the paper when I print it.

Can you advise on a way to modify the program? Please understand I want to use the program strictly for my own use only.

As my printer is not an Epson it would also be helpful if I could change some of the output codes for double height characters, page feeds and so on. — John Reynolds, Colchester.

● There is no way you can modify the program but you'll find that Mini Office II will solve all your problems. This new version has facilities that were missing in the original program.

Error in the squash

I HAVE finally got round to typing in the program Astromines from the March 1985 issue of The Micro User.

On trying to run the program all I get is Syntax error at line 50.

The book says that line 50 is either:

```
50 VDU23;8202;0;0;0;
```

or:

```
50 VDU23;8202;0;0;0;
```

I can't really make out which, but in any case I get the same result. As you will tell from my query I am a rank novice, but I have spent a lot of time typing in the program and I would be very grateful if you would let me know what is wrong. — H. Haiksworth, Sudbury.

● The line you're referring to is responsible for turning off the cursor. The character which is causing the problem is the number 8 in 8202.

The listings we produce are done on the Epson FX80 in condensed print. Unfortunately this squashes characters up and could make it difficult to dis-

tinguish between certain ones.

In the example you can see the problem. The line with the B (the second one) is incorrect and will cause an error. However, the top one shouldn't have given an error, as this is fine.

Setting the format

LAST year, at the age of 62, I decided to take a large leap into the modern era by purchasing the following computer equipment: BBC B with DFS and Wordwise, Midwich disc drive, Philips green screen monitor and Juki 6100 daisywheel printer.

I must say it has all been very satisfactory except in one way. One lad uses it for all his games, though he moans a bit because I haven't got a colour monitor.

I do all the estimates for another lad, and this seems to give him a lot of pecuniary pleasure.

We keep track of the housekeeping bills via Database Software's Mini Office disc.

My wife saves all the notes needed for her university course, which means that she can now read them.

I, on the other hand, still cannot achieve what I bought it for, which was to facilitate my hobby of playwriting.

I can get the following format:

RICHARD

Now is the winter of our discontent made summer and so on...

But I don't want that. What I want to do is to follow the normal format:

RICHARD: Now is the winter of our discontent made summer and so on...

allowing the text to be tabled beside the name in justified

blocks.

It's all very irritating. Is it possible to achieve with the above equipment, please, or what else do I need? — Peter R. Drake, Haywards Heath.

● We have achieved the result you see here by entering the following embedded commands before the start of text

LL27 Sets line length.

IN6 Sets indent for main text.

Then for any line that you wish to start in the margin, the example here are the commands LL27, IN6 and T10. You use the embedded command:

T10 to cancel the indent on each individual line you require. Obviously you can set the line length to suit your own needs. Here we have set to a length compatible with the magazine page.

We would like to thank Paul Beverley of Norwich Computers for his help in this matter. His books The Wordwise Applications Guide and its follow up Using Wordwise Plus contain lots of useful hints and tips like this, although the one shown here does not appear in the first.

On ROMs and RAMs

IN the December issue of your magazine there is a letter from Roger King asking about using Watford Electronics' RAM and ROM boards alongside the Solidisk DDFS disc interface with version 2.0 ROM.

I have recently added both the 32k printer buffer/expansion board and the solderless sideways ROM socket board from

From Page 153

Watford Electronics, having had the Solidisk disc interface fitted for some time.

This set-up seems to work perfectly, although, as you said in your reply to the letter, any program which directly accesses the screen memory will not work without first switching the RAM board off with the supplied *RAMOFF command - with one exception.

I added a pair of 6264 RAM chips to the ROM board (to act as sideways RAM) and can only write to this memory with the *RAMEDIT utility which is supplied on the RAM board's control ROM.

I have written to Watford Electronics about this fault, and am waiting for their reply.

Please accept my apologies for this rather complex description - having a RAM board with a control ROM and a ROM board containing RAM is useful but confusing!

I hope that this letter may put Mr King's mind at rest concerning the advisability of purchasing the Watford Electronics RAM and ROM boards for his machine. - C.S.R. Bailey, Birmingham.

Othello and the Tube

I AM having problems with your Othello game from the June 1985 issue of The Micro User. I have checked my listing again several times, but I am still unable to find my mistake, so I would like to ask your help.

The problem is that the program does not display the playing board. The title and the two boxes in the upper part of the screen seem to appear OK, but there is nothing else. The sound effects are, as far as I can tell, normal.

My equipment is a BBC B with OS 1.20, DNFS 1.20, 6502 second processor and Hibasic. I also have Viewsheet ROM (1.0) and Beebugsoft's Spellcheck II ROM (v1.20) fitted.

I use twin Canon slim disc drives and a Yanjen Model GM-1211 high resolution green

monitor.

My congratulations for an excellent magazine. - John Stares, Den Haag, The Netherlands.

● The problem is caused by the fact that Othello pokes the screen directly and this will not work across the Tube.

All lines that poked the screen can be replaced with VDU statements. If you replace the following lines in your listing, Othello should work fine on a standard BBC Micro with or without a second processor.

```
680 DEF PROCboard:VDU31,1
3,0:PRINT;CHR$141CHR$129CHR
$157CHR$131"OTHELLO "CHR$1
56'SPC13;CHR$141CHR$129CHR$
157CHR$131"OTHELLO "CHR$15
6:FORJZ=1TO17:VDU 31,7,7+JZ
,133,157,31,34,7+JZ,156:NEX
T
710FORJZ=1TO8:SOUND1,-15,
JZ*20,1:FORKZ=1TO8:XXZ=7+JZ
*3:YYZ=7+KZ*2:PCEZ=AZ(JZ,KZ
):IFPCEZ=0 GRAPHZ=130 ELSE
IFPCEZ=-1 GRAPHZ=145 ELSE I
FPCEZ=1 GRAPHZ=148
720VDU31,XXZ-1,YYZ,GRAPHZ
,255:NEXTKZ,JZ:ENDPROC
1030DEF PROCcon:VDU31,6+PM1
X(NZ)*3,7+PM2X(NZ)*2,CHZ:EN
DPROC
1040DEF PROCcon:VDU31,6+PM1
X(NZ)*3,7+PM2X(NZ)*2,255:EN
DPROC
```

Speedy service

WHEN a fault developed in the disc drives I had bought from Akhter Computer Group it was with an element of trepidation that I returned them for repair under the two year guarantee.

Having heard and read so many horror stories regarding levels of after sales service in the industry and extended repair times, I couldn't believe Akhter would fulfil their promise to have my drives returned in a week.

They were handed in to Securicor in Aberdeen on Tuesday December 3 at 1030 hours and were delivered back to my

office on Tuesday December 10 after a round trip of 1000 miles. How's that for service? Thank you Akhter! - T.J.D. Erskine, Aberdeen.

Big problem

WHY does Program I below produce:

THE MICRO USER

but Program II produces only:

MICRO

instead of:

THE MICRO USER

as I would expect, and how can the expected result be obtained?

- P. Sargent, Sheffield.

```
10 MODE 7
20 PRINT TAB(0,4)"THE"CHR
R$141"MICRO"CHR$140"USER"
30 PRINT TAB(3,5)CHR$141
"MICRO"
```

Program I:

```
10 MODE 7
20 PRINT TAB(3,4)CHR$141
"MICRO"
30 PRINT TAB(0,5)"THE"CHR
R$141"MICRO"CHR$140"USER"
```

Program II:

● The problem you are encountering is because of a "feature" provided by the chip responsible for producing teletext.

The line following the first CHR\$141 will only be displayed if it contains a CHR\$141. All other text before the CHR\$141 and after the CHR\$140 (end of double height text) is not displayed.

This occurs with all line pairs which are intended to produce double height text/graphics.

Unfortunately there is no way of producing the double and single height text in the way you require.

Dr Who v the Vine

THE Micropower game Dr Who clashes with the Vine Replay System and will not load with it

present. Micropower says desolder a wire on the Replay ROM but Vine has a software fix which is better.

Insert disc in drive *LOAD the !BOOT file then type ?&210E=0 followed by CALL &2000.

This works and is better than messing about desoldering the ROM. - I.R. Horner.

Handling Basic

A VERY useful feature that BBC Basic does not possess is the ability to execute a Basic line that is created using a string, say lines\$, while the program is running.

```
10 PROCexecute_line
20 REM This must be the
30 REM 1st PROC call
40 REM
50 INPUT"Basic line ?"li
ne$
60 PROCperform(line$)
70 END
80 REM
90 DEF PROCperform(line$
)
100 $&780=line$+"":ENDPROC
.
110 CALLtokenise_line
120 PROCexecute_line
130 ENDPROC
140 REM
150 DEF PROCexecute_line
160 DIM QZ 20
170 PZ=QZ
180 LOPT 0
190 .tokenise_line
200 LDA#0
210 STA&37
220 LDA#7
230 STA&38
240 JMP&88D3
250 ]
260 pointer=?&4F7+256+?&4
F6
270 ?(pointer+15)=0
280 ?(pointer+16)=7
290 ENDPROC
```

This has many applications, for example, in a menu-driven program, instead of a whole list

Unfair to the Elite!

I HAVE always been a great fan of The Micro User and have never missed an issue, despite the increase in pirate attacks on tradeships from the outer galaxy, but I was appalled, enraged and disgusted (all at once!) by your article on becoming Elite.

I set out from Lave a year ago now, fully equipped my ship and was hot on the Constrictor's tail in a week.

Then came a brief respite as I continued my studies, but come the holidays I was back, and soon achieved Elite status, helping Agent Blake on the way.

I was the first of my friends to achieve Elite status, and I am fiercely proud of that fact. And by publishing an Elite cheat you have insulted me and all other fellow Elites.

The dictionary defines elite as "a group set apart due to certain talents". We do not want our ranks swelled by Harmless pilots who cannot even dock yet.

And by Braben and Bell, L. Varga and C. Packer, may your lasers overheat and your missiles jam, you treacherous pair of Maesinoids! — Commander Antaeus (Elite), Wellington.

P.S.: For those of you who prefer Thargoid bashing to Krait bashing, here's a how to get a hyperspace ambush:

- Launch from space station (f0).
- Set hyperspace controls. (f5 then position using cursor keys).
- Freeze game (Copy).
- Press Ctrl + X until you hear the beep.
- Unfreeze the game (Delete).
- Hyperspace but keep your

finger on Ctrl for the countdown. It works every other time, so happy hunting!

I WOULD question some of the tactical advice on Elite given by Messrs Varga and Packer, though the insert as a whole should help strugglers a lot.

You need a combination of profitable trade and combat — repairs can be costly.

Personally, I look for a stable high tech (Level 12 or above) planet that is rich industrial — so that computers are at their cheapest — not too far away from a poor agricultural multi-government or feudal one, (anarchy systems are too hairy for beginners).

I then trade the computers (you can get to the safe zone without too much hassle) and see what price furs are — under 60cr and you'll make a profit back at the rich industrial place.

I then go out bounty hunting — simply fly away from the planet flat out until the S vanishes and head for the sun — and only hyperspace out when things get really bad.

Profit on the furs usually pays for damage repairs.

If the furs are too expensive, then provided you have the disc version, scoop up the free floating alloys — easy to tell, they're two-dimensional and there's a 40cr profit on each one.

Look at the price of platinum too. I always buy if under 70 and sell at over 70 — the price fluctuates between about 65 and 80.

One trick not mentioned helps

the batteries to recover more quickly. Fly towards a planet by all means, but use a screen that shows neither it nor the sun — usually I use left or right — and the batteries will recharge a lot more quickly.

The worst experience I ever had was due to absent-mindedness. I was on my way to a system when I was beset by police, and only got to the safe zone after destroying about 30 of them.

The reason? I had a full hold of narcotics instead of computers. It took a number of hyperspace jumps and clean living to lose the fugitive status.

Finally, has anyone done more than two missions? I've roamed around all eight galaxies looking for more, but no luck so far. — Bob Redrup, Kea, Truro.

WHILE patrolling the galaxy last night, ridding humanity of a few miserable bandits, I was experimenting with the controls of my Cobra MkIII when I discovered a new, extremely fast method of interplanetary travel — namely the Escape Capsule.

It seems that, on my model, at least, you may locate any planet you desire anywhere in the galaxy, launch from the space station, press Escape, and the capsule will then be tracked to the chosen planet, immediately.

The only disadvantages are that no goods may be transported with you, and it will cost you 1000 Cr for a new capsule.

I believe the time saving alone far outweighs the disadvantages



for those who wish to cross the galaxy and still be back in time for tea.

I hope this hitherto undocumented information will be of use to my fellow guardians of our skies. — Stephen Parkin, Wakefield.

I MUST inform you how helpful your guide to playing Elite was.

I have progressed gradually through from Harmless to Dangerous. Now here are some hints for Superior Software's new game, Citadel.

To appease the wolf guardians in the temple you must get the chicken from the freezer, cook it in the kitchen and go to the temple.

To get in to the witches' house, take the trampoline from the temple and drop it outside. Bounce on it to the roof and go down the chimney.

Take your time on the screens and plan your moves. If you collect an energy flask this will boost your energy up 30 units.

You can fill the bucket (which is green) with water at the ocean. This will put out flames. Try it at the East Fireplace and go up the chimney. — David C. Footlitt, Retford.

of IF user_option\$="so_&_so" THEN PROCso_&_so, you can substitute line\$="PROC"+user_option\$ and then execute line\$ directly.

Other applications include new languages which use Basic as a building block.

In the Basic I listing line\$ is INPUT by the user, line 50, at run time and PROCperform(line\$), line 60, performs the execution. The only condi-

tion is that the first procedure call must be PROCexecute_line, line 10.

PROCexecute_line first loads a small tokenising assembler routine and then changes its own procedure call pointer so that subsequent calls of PROCexecute_line will be redirected to location &700.

At line 100 line\$ + ":END-PROC" is stored from location &700 (free during run time). It is

then tokenised or compacted (line 110) using a Basic I ROM routine at &88D3. The Basic II routine can be found at memory location &8951.

Next a call to PROCexecute_line is redirected to &700 where line\$ + ":END-PROC" is executed.

The method is a bit messy and would be better incorporated into BBC Basic. — J. Middlemas, Felmersham, Bedford.

Poor old Bob

I AM worried about Bob. He seems to be suffering so many traumas these days that I hope he doesn't seize and have to press Break on our sharing his

From Page 155

experiences.

However I can understand his feeling aggrieved because Trev never replies, and this must be very frustrating.

Of course most of us will have

some idea of how he must feel when we correspond with hardware suppliers or software houses about their products.

My own experiences in this way would fill a book, but they would be nowhere near as entertaining as Bob's.

"I agree", says my wife, who is just as tolerant as Andrea and definitely one of Bob's fans but equally not a computer buff.

Keep going Bob - you may get a reply one day - and a big vote in the current survey. - Tony Lawrance, Wigston.

Repton rapture

WHAT a marvellously entertaining game Repton 2 is, beginning as it does with a cunning ploy enticing you into

And finally, with tongue firmly in cheek . . .

Please burn before reading

Dear Trev,

At last I can tell all! It all began just before Christmas when I got a phone call from the Beeb team.

"Is that you, Wally? Great. Now listen, carefully. Acorn are bringing out a new machine and me and the lads have been invited down to the Dream Factory for a preview. So pick us up tomorrow and don't forget to bring Andrea".

With that the phone crashed down and I was left wondering what Acorn's new machine was. Considering they'd followed the Beeb with an Electron I expected something like the ZX81. And I also wondered why they wanted me. And A.

I won't describe the journey down, though I must admit that I never knew there were so many real ale pubs just off the A1. And Andrea exhibited a previously unseen talent for opening cans of beer without the explosions of spray that greeted the Beeb team's efforts.

Anyway, I had no difficulty finding the route back, I just followed the empties. I dread to think what effect this had on A.'s nephew Nigel, who had come with us as it was A.'s turn to Nigel sit.

Actually I wonder what effect Nigel had on the Beeb team. He's got a bad case of adolescence, spots and all. And he's gone punk. With his hair set in green, yellow and violet spikes he sat on the back seat wearing his "Electron users do it slowly" tee shirt looking like nothing so much as a peacock that's just had a very nasty shock.

So it was a fairly motley crew that arrived at the Dream Factory to be greeted by the PR man. He looked like something out of a NEXT window and the Beeb team had a lot of fun on the way back trying to decide exactly what PR stood for in his case.

"", he breathed, "my name's Eugene, but you can't tell anybody that until we say you can and even then we might sue you, so there".

Having said that Eugene ("Call me Euge, everybody does") thrust a bundle of documents in our hands. "Sign these".

"What are they?" asked A. who won't sign anything until she's read it. You'll probably remember how she read the

register at the wedding before she signed.

"They're non-disclosure agreements. We can't let you read them until you've signed, otherwise you might tell. We don't like people who tell", he said looking straight at me.

The document went something like this: You can't tell anyone anything you learn about anything here until we tell you you can which we probably won't. And you can't tell anyone about having signed this. So there. Eat this after signing.

Surprisingly enough everyone signed. Of course Nigel had to do it in blood, which had Eugene out for the count.

"The old red ink trick never fails. Pity I didn't bring my pet rat".

"It's a pity you brought yours", seethed Eugene to me as we made our way to the holy of holies.

We entered a darkened room (it was noticeable how everyone shied away from Nigel) and there on a spotlighted table was a spanking brand new first-one-off-the-production-line BBC Master.

"Ladies and gentlemen", Eugene proclaimed, quivering with pride, "our latest product".

"You're going into furniture", squealed A., "It's lovely but that nasty micro clashes with it".

"The micro is our new product, the basis of a series of five upwardly compatible micros. It's our Master piece".

"Does the table come with it?" A. persisted.

"It's got a hump", yelled Nigel, who really shouldn't be casting stones. "Do you call it Casimodo?"

"The hump is for all the electrical gubbins. You know, chips and that sort of thing. I think it's quite fetching". I wonder if NEXT will be flogging the Master series.

"Can we have hands on experience?"

"Yes but only if you wash them and wear gloves".

"What about a mask?" I asked sarcastically.

"I thought you were already wearing one", came the retort.

A. decided to change the subject. "It's got a hole next to its hump".

"That hole as you call it is two cartridge slots allowing you to add ROMs".

"Just like I've got on my Electron", exclaimed Nigel.

"Why should you want to add ROMs, have you left some out?" A. added.

"No we haven't", screamed Eugene, who by this time was looking a bit desperate. "In fact we've put in all sorts of bundled software. It's got View and Viewsheets. That should screw up your Mini-Office". This last was said with a nasty glance at the Beeb team, who were gathered round the Master, laughing.

"Have you used View?" they asked, which answer seemed to quieten Eugene for a while. After that they kept referring to the bungled software.

"What's the filing system?" I asked, more to break the silence than anything else.

"It's got two, the 1770 DFS and the ADFS".

"Just like my Electron", Nigel got in just before Andrea's "Why two? Is it in case one doesn't work?"

I'll draw a veil over the rest of the proceedings. They mostly consisted of the Beeb team asking technical questions like: "Is the off/on switch still in the most awkward place?" and "Can we play Elite on it?"

And it still hurts to think of why they brought me. Eugene had just got to the point where he said that putting in the expansion cards was foolproof.

"Go on then Bob, prove him wrong", they said shoving me forward.

What puzzled me most was why they had specifically asked for Andrea. As we left to the accompaniment of Eugene's "Don't forget that you haven't been here and you haven't seen anything and if you did it wasn't me who told you", I asked one of the team why they'd wanted A.

"Because of her bellringing expertise".

"What's that got to do with the new Beeb?"

"Well you heard Eugene, didn't you? It goes like the clappers".

Cheers,

Bob

PS: I did not write this letter.

the game with splendid advertising and rapturous reviews.

Once hooked, you must wend your way to the nearest stockist, dig deep, and come up with the readies.

The plot then moves into B+ territory where the monster on emerging from a fallen egg, crashes out of the program! — Chris Bell, Ripon.

● Superior Software tell us that this problem has been solved and all new batches of Repton 2 are compatible with the model B+.

If you return your copy to them they will replace it by return of post.

Volex leads

CONCERNING the article by Robin Nixon on the Volex 2000B teletext adapter in the January issue of The Micro User. Could you tell me whether or not it requires input leads

other than the 1MHz bus?

D.A. Shepherd, Halversham, Milton Keynes.

● The Volex 2000B comes with its own external mains power supply which plugs into the back. No other leads are required.

No Revs

I WOULD like to point out to your readers the fact that four track Revs will not work with Basic I BBC Micros.

As soon as the game has requested the track choice the micro returns Syntax error. I hope this warning is useful to other Basic I micro owners. — P. Ashcroft, Cambridge.

● Thanks for your warning. We've contacted Acornsoft and they say if you return the original disc they will upgrade (downgrade) it so that it will work with Basic I.

I ENCLOSE a poem which my 13 year old son Tim wrote for a local Sunday School competition. Incidentally, he came second in the competition. — Mrs C.J. Mason, Newcastle, Staffs.

MY COMPUTER

*Flashing lights, audio sounds,
Often costing pounds and pounds.
Some are big, some are small,
Some are even six feet tall!*

*Spectrum, Amstrad, Apple Three,
But best of all's my BBC
Qwerty keyboard, disc drive too,
Together with a VDU
Give many happy hours of fun
Not just for me, but for my mum!*

*We play Horse Racing, and Roulette,
And Fruit Machine on which you bet.
French verbs and Maths get pushed to last
While Arcade games take up time fast.*

*Sometimes I sit and play all day,
Until my eyes grow dim,
But when my Dad returns from work,
My computer belongs to him!*

Ed:

*Playing games is fun we know
And later when to bed you go
Father needs to play them more
Dads are lads but that bit slower!*

Use your micro to speed up your mail . . .



and next-day delivery is guaranteed!

Everyone knows that "first class" mail is far from perfect. The Consumers' Association reported in June that two out of every five first class letters fail to be delivered the day after they are posted.

So if you have an urgent letter that just HAS to be delivered tomorrow, what do you do?

If you have a home or business computer the answer is at your fingertips.

You compose the letter on your computer. Then, in a simple operation that takes only a few seconds, you send it down the telephone line to MicroLink, the electronic mail service operated in association with Telecom Gold.

That's the end of your part in the story. From now on electronics take over. Your letter is fed automatically into the national British Telecom Telemessage service. It's switched to the delivery office nearest the recipient's address, where it's printed out on a letter-quality printer and put into a distinctive yellow envelope. And providing it was sent any time up to 8pm, it is delivered by the local postman by breakfast time the next day. Exactly as you'd typed it out the day before.

And how much does this ultra-fast service cost? From just £1.25 to send a letter of up to 350 words to any address in the UK (and an extra £1.70 to any address in the USA). You can also have it accompanied by a colourful greetings card (choose from 16 different varieties) for another 65p.

Telemessages is just one of many services offered by MicroLink that are designed to speed up communications. Find out more by returning the coupon below.

Please send me more information about your speedy Telemessage service and other aspects of MicroLink.


Name _____

Address _____

MicroLink
in association with
TELECOM GOLD

Send to: MicroLink,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

SOLID STATE DESK TOP SWITCHING DEVICES (FULL TWELVE MONTHS GUARANTEE)




No Problems with Cable Lengths or Data Loss/Errors
Having Separate Ports, Avoids Over-loading Computer
Metal case with built-in power supply and fitted plug

THE PRINTERSHARERS

(SEVERAL MICROS TO 1 PRINTER)

- PARALLEL - 26 PIN (as BBC)**
 3 WAY (without cables) £60 (b)
 3 WAY - with 3x2mt computer cables £75 (c)
 6 WAY (without cables) £110 (c)
 6 WAY - with 6x2mt computer cables £140 (c)
- SERIAL RS232 3 WAY - £65 (b)**
RS423 3 WAY - £40 (b)
 5-Din (as BBC)



THE PRINTERCHANGERS

(1 MICRO TO SEVERAL PRINTERS)

- PARALLEL - 26 PIN**
 3 WAY - £60 (b)
SERIAL RS232 3 WAY - £40 (b)
RS423 3 WAY - £40 (b)



THE PRINTERCROSSOVERS

(2 MICROS TO 2 PRINTERS)

- PARALLEL - 26 PIN £70 (c)**
SERIAL RS232 £70 (b)
RS423 £45 (b)





PRICES ARE EXCLUDING VAT. Postage: (b) E2-(c) E2.50

CENTRONICS (36 PIN) PRINTERSHARERS, PRINTERCHANGER & PRINTERCROSSOVERS AND FOR IBM, SIRIUS, APRICOT, MACINTOSH, COMMODORE, 26 PIN APPLE II+, IIe & IIc AVAILABLE.

FOR PRICES AND LEAFLETS PLEASE CONTACT:

KEYZONE LTD

U 14, REGENERATION HOUSE, SCHOC'. ROAD,
 PARK ROYAL, LONDON NW10 6TD.
 Telephone: 01-965 1684/1804 Telex: 8813271

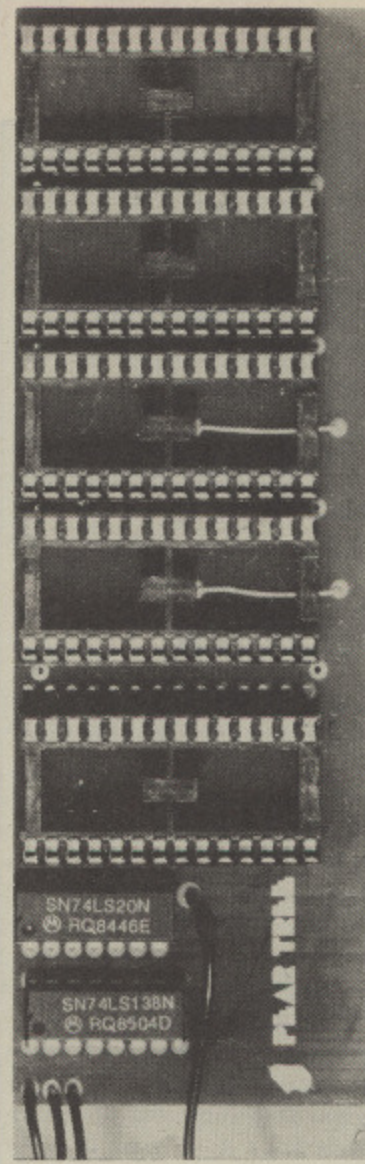

MR 2000 MINI ROM BOARD

GIVES 4 EXTRA ROM
 SOCKETS ON BBC 'B'

PLUGIN - SWITCH ON

MEASURES 128 x 44 mm

FULL INSTRUCTIONS
 ENCLOSED

ONLY **£14.95**
 inc VAT/P&P

CHEQUE/P.O. PAYABLE TO

PEAR TREE COMPUTERS LTD
 PEAR TREE MEADOW
 ELLINGTON THORPE
 HUNTINGDON CAMBS
 PE18 0AW

Orders by ACCESS
 welcome

At last - A system which you can tailor to your own needs

(makes other databases for the BBC micro look
 silly by comparison.)

MICRONET800 dec 85



SYSTEM DELTA

For the first time, data handling programs can easily be written using simple commands. Now your application can be tailored to look as you wish, and do what you want, without any knowledge of how the data is stored. System Delta also contains screen presentation, menu selection etc. e.g. one command to scroll around card.

Supplied with CARD INDEX APPLICATION for non-programmers, which uses most System Delta facilities. Other System Delta applications available early 1986 include Stock Management, Accounts and Estate Agents etc.

POWER

5 files open at once, 8 subsets, 8000 cards per file, 255 fields per card, 200 characters per field. FULLY RELATIONAL e.g. copy customer/product details onto an invoice from different files.



SPEED

Search and access a card in typically 2 seconds. System Delta extensions giving machine code speed to BASIC applications.

Card Index Application 54.95
 (Includes card index support, System Delta ROM)

System Delta Advanced Reference Guide 19.95
 (Includes System Delta support)



M · I · N · E · R · V · A



MINERVA SYSTEMS, 69 SIDWELL STREET EXETER DEVON EX4 6PH TELEPHONE 0392 37756

Electronequip

(Authorised BBC Micro Dealer, and Econet service centre)

Introducing




BRITISH BROADCASTING CORPORATION
MASTER SERIES MICROCOMPUTER

Introducing



MASTER 128	AMB15	499.00
MASTER ET	ADB12	399.00
MASTER Turbo upgrade	ADC06	125.00
Econet Module	ADF10	49.99
MASTER 512 upgrade	ADC08	TBA
MASTER Sc upgrade	ADC03	TBA

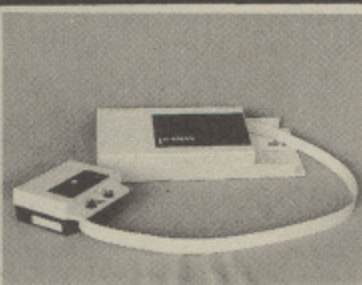

3 COLOUR PLOTTER
with
utilities **£299.50**



AMX
MOUSE
89.99

VOLTMACE JOYSTICKS
* 10% off list prices



Voltmace Delta 14B Joysticks	13.46
Voltmace 14B/1 Adaptor Box	13.36
Voltmace Delta 3B Twin Joysticks	17.99
Voltmace Delta 3B Single Joystick	11.95

Acorn
The choice of experience.

EPROMS

2764	2.49
27128	3.85

ROMS

1.2 MOS Rom	8.05
BASIC II Rom	29.90
Caretaker	32.20
Communicator	67.85
Termi	32.20
Disc Doctor	32.20
DNFS Rom	20.60
Exmon II	32.00
Graphics Rom	32.20
Gremlin Rom	32.20
Help Rom II	31.00
Printmaster	32.20
Screen Dump Rom	11.50
Sleuth	32.00
Spellcheck III	36.00
Toolkit Plus	39.00
View Rom	59.80
View Sheet	59.80
Wordwise Plus	56.35
Plus many others.	

LISTING PAPER
11 x 9.5" with micro
perf's £8.05 per 1000
£1.15 P&P per 1000

PRINTERS



M1009 (Brother)	169.00
HR15 (Brother)	359.10
DMP2000 (Amstrad)	159.95
RX100 (Epson)	419.00
FX80+ (Epson)	379.00
FX100 (Epson)	524.00
KP810 (Kaga)	230.00
KP910 (Kaga)	429.00
6100 (Juki)	399.00

DISC BOXES
30 Disc Box


DUST COVERS
RX80 F/T

Printer price **includes** paper
and BBC interface cable.
Screen dump rom available
for **£11.50 inc VAT**

SIDEWISE

SIDEWISE FITTED

A
T
P
L



A
T
P
L

"SIDEWAYS" rom board for BBC Micro.
No soldering required **£39.33 inc VAT**

40/80 TRACK DRIVE SWITCH

Plugs into disc interface, converts most 80 track drives
into 40/80 track units. No more disc errors for wrong
discs.

Price **19.95 inc VAT**

BBC MICRO SPARES

Keyboard	49.95	Keystrip	1.99	Speaker	2.99
Power Supply	49.95	Case	19.99	Keyswitch	2.30

All inc VAT

ALL PRICES INCLUSIVE OF VAT.

Prices subject to variation without prior notification

All Offers subject to availability

TRADE, EDUCATIONAL & HMG ORDERS

(Phone for discounts)

Large Stocks - 24 Hour Despatch

Securicor £6.00 (per parcel) inc VAT.

Postage 62p (per item) inc VAT.

Phone for comprehensive catalogue

100% BBC COMPATIBLE

HIGH QUALITY, HALF-HEIGHT DISK DRIVES

Double sided 800k (2 x 400k)	
40/80 track switchable (inc P.S.U.)	£299 inc
Double sided 400k (single)	
40/80 track switchable (No P.S.U.)	£114 inc
Single sided 100k (40 track) (No P.S.U.)	£99 inc
1 Box DS/DD 96 TPI	£19.95 inc
1 Box SS/SD 48 TPI	£15.95 inc
5 1/4" Disk cleaning kit	£5.99 inc

Branches

MAIL ORDER: 36-38 WEST STREET
FAREHAM, HANTS. (0329) 230670

SHOP/TECHNICAL: 59 WEST STREET
FAREHAM, HANTS. (0329) 230671

KINGS LYNN: 17 TENNYSON AVE. (0553) 773782

MAIL ORDER ENQUIRIES TO BELOW OFFICE



Electronequip

36-38 West Street, Fareham, Hants (0329) 230670



TORCH
BBC



Village of Lost Souls

You are an Inquisitor sent to Dinham to put the Lord-Talent to the Question. You arrive to find the village abandoned, death and devastation everywhere and all that can be heard is mocking laughter...

Puzzle your way through this machine-code adventure for the BBC B comprising of well over 200 atmospheric locations, 140 intriguing objects and enough challenges to make your brain itch!

Send a cheque or postal order for £9.95 (inc. post and packing) to:

MAGUS

4 Toronto Close, Durrington, Worthing,
West Sussex BN13 2TD


Dealer enquiries welcome.

S P I D E R

REAL-TIME CONTROL FOR THE BBC MICRO

Look out for the SPIDER A breakthrough in ease-of-use for all Control Applications

SPIDER - stamps out I/O bugs



Here's what you get:

- Additional BASIC commands - which can be safely mixed with existing BASIC keywords.
- Invoke BASIC PROCs from function keys or by external events.
- Run up to 8 independent countdown timers.
- The SPIDER is a powerful combination of RAM and ROM mounted on a butterfly board - it leaves the Beeb's memory intact.
- It's easy to install with no soldering required - and a comprehensive manual is supplied.

SEND NOW FOR OUR INFORMATIVE LEAFLET - YOU'LL BE SURPRISED AT HOW POWERFUL A SPIDER CAN BE!

Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

£65.00 including VAT

HIGH TECH-HIGH RISK!



Fittings, Locks and Alarm Systems

For Computers, Disk Drives, Key Boards, Processors, Monitors, Video Recorders, Printers & Plotters, etc.

The REMEDIAN SECURIBAR (International Patents Pending) - versatile and proven - LOCKS, BLOCKS, INTERLOCKS & HINGES. Housings & Fittings allow normal operation yet security when unattended. Optional REMEDIAN Detectors & Alarms, locked in, complement other Security measures. REMEDIAN SPECIALISE and this is OUR BUSINESS! All British Design & Manufacture.



remedian
INSTRUMENTS LIMITED

Remedian Instruments Ltd.
3 Overlinks Drive,
Poole, Dorset,
BH14 9QU
Tel. (0202) 708404
Telex 418297



ARIES-B32 £80 + VAT



Now ATPL Sidewise compatible! *

* Special adaptor required

ARIES-B32 gives your BBC Model B the enhanced RAM capacity of the Model B+ and more! Simple commands allow you to configure its 32K of RAM as:

- 20K of shadow screen RAM and 12K of sideways RAM (like the B+), or
- 16K of shadow RAM and 16K of sideways RAM, or
- 32K of sideways RAM

Unlike the B+, **ARIES-B32** allows you to use sideways RAM for many purposes such as loading sideways ROM images from disc and as a printer buffer.

ARIES-B32 is just one member of a range of products for the BBC Micro: please call us for a special information pack on the complete system.

Aries Computers

Cambridge Science Park, Milton Park, Cambridge CB4 4GD. Telephone 0223 862614

SELECTED BBC PROGRAMS

TITLE	RRP	OUR PRICE
NIGHTSHADE	9.95	7.25
FELIX & THE FRUIT MONSTERS	7.50	2.50
ATIC ATAC	7.95	5.95
FELIX & THE EVIL WEEVILS	6.95	2.50
ALIEN-8	9.95	7.25
RUBBLE TROUBLE	7.95	2.50
KILLER GORILLA	7.95	2.50
BUMBLE BEE	7.95	2.50
WORM IN PARADISE	9.95	7.25
RED MOON	6.95	5.50
SWOOP	7.95	2.50
KNIGHT LORE	9.95	7.25
GHOULS	7.95	2.50
SABRE WOLF	9.95	7.25
MOONRAIDER	7.95	2.95
BOFFIN	9.95	7.25
COMBAT LYNX	8.95	6.75
CYBERTRON MISSION	7.95	2.50
BLUE RIBBON		
GAMES DISK 1 (40TR.)	9.95	7.50
GAMES DISK 2 (40TR.)	9.95	7.50
CLASSIC ARCADE GAMES	5.95	4.95
CROAKER	7.95	2.95
CASTLE FRANKENSTEIN	7.95	6.50
WHEEL OF FORTUNE	9.95	7.50
ENTHAR 7 (D)	16.95	14.95
ISLAND OF XAAN	7.95	6.95
ISLAND OF XAAN (D)	9.95	8.45
BEELINE	7.95	6.95
BEELINE (D)	9.95	8.45
RICK HANSON	9.95	8.45
RICK HANSON (D)	11.95	10.95
BANJAX	9.95	8.45
BANJAX (D)	11.95	10.95

Disc Software (D) - Please state 40 or 80 Track
ALL PRICES INCLUDE VAT AND POSTAGE & PACKING
(Overseas orders please add £1.00 per item)

Cheques/PO payable to:

C & F ASSOCIATES

and send to:

C & F ASSOCIATES (MU) PO BOX 2 BIDEFORD EX39 3RE

DISC DRIVES FOR BBC

D80SMP	dual drive (2 x 400k) 40/80 switchable double sided + monitor stand + PSU	£299 (b)
S80SP	single drive (400k) 40/80 switchable double sided + PSU	£120 (b)
S80S	single drive (400k) 40/80 switchable double sided	£99 (b)
D35	dual 3½" drives (2 x 400k) 80 track double sided	£200 (b)
S35	single 3½" drive (400k) 80 track double sided	£115 (b)
	Bare Half-height 80 track double sided	£80 (b)
	ACORN INTERFACE	£55 (c)
	ACORN DNFS	£69 (c)
	1770 UPGRADE	£49 (a)
	ADFS UPGRADE	£29 (a)
8271	£46 (a)	27128 £3.95 (a)
2764	£2.95 (a)	6264LP £5 (a)



Quantity discounts available

SINGLE TO DUAL DRIVE CONVERSION SETS

Allows two single Drives 0 to be automatically configured as DRV0 and DRV1	£15 (a)
Single/Dual power lead converter	£9 (a)

DISKETTES

All discs guaranteed and have lifetime warranty.

	10 of	25 of	3½" SSDD	£32.00
40tk SSDD	£12.00	£27.00	3½" DSDD	£38.00
80tk DSQuad	£14.50	£35.00	3" DSDD	£35.00

DATALIFE

40tk SSDD	£15.25
40tk DSDD	£19.50
80tk Quad	£25.50

Add £9 for a 50 capacity storage box with smoked perspex lid dividers and non-slip rubber feet.

Carriage & VAT included. No more to pay

DUAL DFS SWITCH

Allows the use of any two of the following DFS's:

ACORN 0.90, DNFS

UDM

OPUS

1770 UPGRADE

- Allows you to have two resident DFS's in your machine. - No need to unplug one when using the other.
- Eliminates DFS compatibility problems.
- Easy to install, no soldering, simply plugs in.
- Includes DUAL CONTROLLER BOARD and switching software.
- Please specify the combination of DFS's you intend to use as the kit varies depending on the combination.
- DUAL CONTROLLER BOARD available separately at £20 (c)

DUAL DFS SWITCH £28.75 (c)

SYSTEMS UTILITY FOR UDM

Sector edit Acorn and UDM, enable/disable multiple ROMs, even across Break, list ROMs, etc

Only £20 (a)


Case - slimline	£13.80 (c)	full height	£18.98 (c)
Cable - single data	£7.00 (a)	dual data	£10.50 (a)
single power	£3.50 (a)	dual power	£4.75 (a)

UDM DDFS 3.1 single and double density DFS	£65.00 (a)
UDM 3.1 upgrade (Return old UDM DFS chip)	£5.75 (a)

Carriage charges - (a): £1 (b): £10 (c): £2
All prices include VAT



CARSON DEVELOPMENTS (MU)
84 Highfield Road, Romford, Essex RM5 3RU
Telephone: 0708 27043



The ANSWER BACK QUIZ Series (BBC and Electron)

ANSWER BACK - JUNIOR (£9.95 cassette, £10.95 disc)

An enormous collection of general knowledge quizzes and a superb fairy-tale game for the 6-11 year olds.

ANSWER BACK - SENIOR (£9.95 Cassette, £10.95 disc)

A space game and a gigantic collection of general knowledge quizzes. Ages 12-Adult.

ANSWER BACK - SPORT (£9.95 Cassette, £10.95 disc)

Two sports games and a massive series of quizzes on all the popular sports. Ages 14-Adult.

ANSWER BACK Program Features:

- Unlimited quiz creation, editing and saving facilities. (No knowledge of programming required).
- Multiple choice, True-False? and complete-the-answer modes.
- Immediate display of mistakes; performance summary and optional re-run of questions incorrectly answered.
- Correct answers gain further turns in the compelling games.

The FACTFILE 500 Series (BBC and Electron)

Each pack contains a supplementary database of 500 questions and 2000 multiple choice answers for use with the above ANSWER BACK programs. The modules have been compiled by teachers, experts and specialists.

NATURAL HISTORY (Ages 10+)	£3.95 Cassette, £5.45 disc
ARITHMETIC (Ages 6-11)	£3.95 Cassette, £5.45 disc
SPELLING (Ages 8-12)	£3.95 Cassette, £5.45 disc
ENGLISH WORDS (Ages 12+)	£3.95 Cassette, £5.45 disc
KNOW ENGLAND (Ages 12+)	£3.95 Cassette, £5.45 disc
KNOW SCOTLAND (Ages 12+)	£3.95 Cassette, £5.45 disc
FIRST AID (Ages 13+)	£3.95 Cassette, £5.45 disc
GENERAL SCIENCE (Ages 14+)	£3.95 Cassette, £5.45 disc
SUPER SPORTS (Ages 14+)	£3.95 Cassette, £5.45 disc

All prices include VAT, P&P and 24-hour despatch.
Send cheque, PO, ACCESS number or an official order.
Detailed catalogue available on request.

KOSMOS SOFTWARE LIMITED
FREEPOST, DUNSTABLE, BEDS LU5 6BR. Tel: 05255 3942

FLOPPY-WISE PLUS

THE SUPER-ROM TO ECLIPSE ALL OTHERS

NEW

40 COMMANDS ON A 16K CHIP

ZAP/SEARCH any area of memory including 2nd PROC and S/W ROM/RAM

P
L
U
S

EDIT any disc (sector or ID) including non-standard formats

Full ROM/RAM manipulation system (Save, Load, Edit, Enable, Disable)

All FLOPPY WISE commands are here (Inc. improved CLONE to back-up your valuable discs, AUTOSAVE, MCOPY and PROTECT).

P
L
U
S

Must not be used to infringe copyright laws.

"Thoroughly Recommended" Micro User Nov. '85

COMMAND LIST: Ascii, Autosave, Bad, Bmove, Clear, Clm, Clone, Convert, Crom, Derrors, Download, Dsearch, Dspace, Dtape, Dts, Dzap, Edit, Fcompare, Find, Format, Free, Idzap, Mcopy, Menu, Move, Msearch, Mzap, Prepare, Protect, Ramload, Rcopy, Recover, Restore, Roms, Rsearch, Rzap, Tdisk, Tds, Tokens, Verify.

STILL ONLY

£29.95 + £1p&p

* FULLY TUBE COMPATIBLE *



SOFTWARE SERVICES
65 South Mossley Hill Road, Allerton,
Liverpool L19 9BG.
Tel: 051-427 7894.



POOLSWINNER

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years. The database updates automatically as results come in.
- **PREDICTS** Not just SCOREDRAWS, but AWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **DISC/MICRODRIVE COMPATIBLE** Tapes supplied with conversion instructions.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.

Boxed, with detailed instruction booklet

AVAILABLE FOR Spectrum (48K), Commodore 64, VIC 20 (+16K), AMSTRAD, BBC B, Atari (48K), ZX81 (16K), Dragon, Apple II, ELECTRON

PRICE £15.00 (all inclusive)

NOW AVAILABLE

FIXGEN 85/6

AT LAST! No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish fixtures for 1985/6. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner.

POOLSWINNER with FIXGEN £16.50 (all inclusive)



COURSEWINNER v3

THE PUNTERS COMPUTER PROGRAM

You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. etc. It outputs most likely winners, good long odds bets, forecasts, tricasts etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date.

AVAILABLE FOR Spectrum (48K), Commodore 64, BBC (B), AMSTRAD, Atari (48K), Apple II

PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.

Send Cheques/POs for return of post service to...



phone 24 hrs

selec

SOFTWARE



phone 24 hrs

37 COUNCILLOR LANE, CHEADLE, CHESHIRE. ☎ 061-428 7425

(Send for full list of our software)

FREE COMPUTER PROGRAMS · INSTANT SPORTS RESULTS · CONSTANT T.V. UPDATE

THE VOLEX TELETEXT-TELESOFTWARE ADAPTOR

A WORLD OF INFORMATION AT YOUR FINGERTIPS

TELETEXT

is extra information available day or night whilst television transmitters are on air and without any charge and can now be enjoyed without the need of having a special Teletext T.V. set. All you need is to plug in your VOLEX TTX2000B Adaptor to receive 4-Tel from Channel 4, CEEFAX or ORACLE services.

TELESOFTWARE

is the name for computer programs which are broadcast as Teletext. Thus they may be loaded "OFF-AIR" into your Model B instead of being loaded from, say, tape or disc. Both Channel 4 and BBC are broadcasting telesoftware. Because of the special nature of teletext these programs are frequently updated - so you will not see the same thing each time you run the program.

STORING PAGES

With the Volex Adaptor it is possible to send received pages to your printer or to disc or cassette for storage and later recovery.

EASY TO SET UP AND USE

A simple procedure tunes the VOLEX Adaptor to your local teletext channels. All loading of Telesoftware is via an index page on 4-Tel which the Adaptor will automatically find and display for you. Absolutely no modification is necessary to T.V. or computer. A comprehensive manual being supplied.

- * User friendly - built in disc and printer routines.
- * Comprehensive User Guide included.
- * Receive latest BBC Education Newsletter.
- * 2nd Processor compatible.
- * Incorporates Custom gate array and Crystal controlled data slicer.
- * Free power supply included.



Simply write out your order and post to
VOLEX ELECTRONICS, STOWELL TECHNICAL PARK,
ECCLES NEW ROAD, SALFORD, M5 2XH. TEL. 061-736 5822.

I enclose cheque/PO, payable to VOLEX ELECTRONICS
OR charge my ACCESS/BARCLAYCARD/VISA number:

NAME _____
ADDRESS _____

_____ BBC3

VOLEX TTX2000B

VOLEX
ELECTRONICS
A DIVISION OF VOLEX GROUP p.l.c.



IN BROMLEY

**BROMLEYS FIRST
SPECIALIST COMPUTER STORE**

We are official Acorn Dealers with high standards to maintain and take pride in friendly and efficient advice and service.

See our extensive range of printers, monitors, disc drives, software and books.

Data Store

6 Chatterton Road, Bromley, Kent. 460 8991

LARGEST COMPUTER CENTRE in MANCHESTER

COMPUTERS

Apricot F1S + Monitor	£598
Apricot F2 + Monitor	£1280
Apricot F10 + Monitor + Printer	£1680
Ferranti 860	Superdealer Price
Ferranti 860XT	Superdealer Price
BBC Master 128	£433.20
BBC Plus 128 (with 100k drive)	£433.20
Atari 520ST Complete	£607.80
Memotech 512	£113.05
Commodore C128	£217.40
Sperry PC	Promotional Price
Commodore Amiga	POA
NEC Lap Held	£299
Amstrad Full Range	POA
Toshiba Portable T1100	£1,475

BBC DISK DRIVES

Cumana, Opus, Pace, Shugart
(Free fitting)

BBC DEALERSHIP

Beebug, Computer Concepts,
Gemini, Akhter, Vine, Modem House,
Opus, AMX, Voltmace

PRINTERS

Canon PW1080/Taxan 810	£226
Epson LX80	£217.40
Epson FX85/FX105	POA
Juki 6100/Petal	£278.25
Brother	Masterdealer Prices
Star	Main Dealer
Seikosha	Full Range
Okimate 20 Colour	£226
Shinwa CPA80	£156.50

THIS MONTH'S BARGAINS

Advance 86B 256K	£800 + VAT
Apricot	See above
IBM + compatible 20Mbyte Winchester complete with controller	£525 + VAT
Canon/Taxan Printer	£226

SOFTWARE

All leading home computers
MSDOS - IBM + Compatibles
CP/M Based
Accounting Packages £20 to £1000

WHAT ELSE DO WE DO?

Books Over 500
RAMs/ROMs Of course
BBC Spares Certainly
Computer Repairs Yes
Monitors All leading makes
Joysticks Switched + Analogue
Listing Paper 80gm/70gm/80gm/100gm
Printer Hire By the week
Floppy Discs Single or Bulk
Calculators Our speciality

Personal Exporters to over 50 countries.
Large Showroom. All items exclude VAT. Now FREE delivery
mainland UK orders over £100. Personal Export Scheme.
No VAT on Export. No Orders too Small

M MIGHTY MICRO M

268 Wilmslow Road
Fallowfield, Manchester M14 6WL
Tel: 061-224 8117
Easy access M56, M61, M62, M63

Microdis

FREE CABLE AND PAPER

SPECIAL OFFERS

Queen Data Daisywheel Printer	156.48	179.95
Kaga Taxan KP810, 180cps (nlq)	199.95	233.90
Challenger 256K	189.79	219.95
Challenger 256K to 512K Upgrade	33.94	39.95

DOT MATRIX PRINTERS

	Ex VAT	Inc VAT & Carriage
Canon PW1080A (nlq)	235.95	274.95
Canon PW1156	331.61	384.95
Epson LX80 (new) 100cps Normal, 22cps NLQ Friction	200.26	233.90
Epson LX80 Tractor Attachment	18.11	21.75
Epson LX80 Sheet Feeder	47.45	55.95
Epson FX80 (180cps)	344.65	399.95
Epson LQ1500 (200cps, professional)	825.22	949.80
Epson P40 (Thermal, 80 col)	74.53	86.95
Juki 5510 186cps/nlq (colour option)	248.83	289.95
Juki 5510 Multicolour upgrade	95.00	111.78

DAISYWHEEL PRINTERS

Daisystep 2000	196.99	229.95
Juki 6100	262.74	305.95
Juki 2200 printer/typewriter	240.61	279.25

COLOUR PRINTERS

Juki 5520 (Full colour printer)	361.87	419.95
---------------------------------	--------	--------

FREE! FREE! FREE!
WITH EVERY PRINTER
- LISTING PAPER + BBC LEAD
(£6 extra for Amstrad lead - phone for other leads)

LISTING PAPER

60 GSM (listing) 9.5" x 11" 2000 sheets	10.50	17.25
80 GSM (letter grade) 9.25" x 12" 2000 sheets	13.40	20.58
Labels - Box of 8000 (2 abreast on 9.5" backing with central perf.)	34.51	44.86

MONITORS - Green

Philips 7502 (Green)	75.08	85.95
Philips 7522 (Amber)	79.43	94.95
Colour 14" Screen		
Philips TV/Monitor	205.52	239.95

MICROVITEC RGB MONITORS (BBC)

1431 (472 x 585 dots)	180.08	209.95
-----------------------	--------	--------

1431 APMS4 (with audio & PAL)	195.50	229.95
1451 (653 x 582 dots)	232.25	269.95
1451 APMS4	294.95	343.95

FAST SERVICE



24 HOUR HOTLINE
0783 872430

NOTE: ALL PRICES INCLUDE VAT + CARRIAGE

INCREDIBLE DISC DRIVE PRICES

HIGH QUALITY DISC DRIVES BY OPUS with free 2 year warranty		
	Ex VAT	Inc VAT & Carriage
BBC SX (Uses BBC's Power Supply)		
SX100L 40 track single side Low cost	59.51	69.95
SX100 40 track single side (100K)	88.20	79.95
SX200D 40 track double side (200K)	76.90	89.95
SX400S 80 track double side (400K) 40/80	82.98	96.95
Dual Ex PSU		
DX200 Dual 40 track single side	129.67	149.95
DX400 Dual 40 track double side	155.16	179.95
DX800S Dual 80 track double side 40/80	159.51	184.95
With Built In Power Supply		
IS100 40 track single side (100K)	81.25	94.95
IS200D 40 track double side (200K)	107.33	124.95
S400S 80 track double side (400K) 40/80	98.64	114.95
Dual Drives (with Power Supply)		
D200 2 x 40 track single side (200K)	155.16	179.95
D400S 2 x 80 track single side (400K) 40/80	198.64	229.95
D400D 2 x 40 track double side (400K)	203.85	235.95
D800S 2 x 80 track double side (800K) 40/80	181.10	209.95
NOTE - All 80 track drives have a 40/80 switch!		
Challenger 256k (upgradeable to 512K RAM) with 80 track double sided drive and disc interface	189.79	219.95
Challenger 256K to 512K Upgrade	33.94	39.95

MEDIA - ARCHIVE DATA - EX DYSAN FACTORY! (Fully guaranteed)

High quality diskettes 5.25" boxed in 10's with plastic library case		
	FREE	
40 Track SSSD	8.65	10.50
40 Track DSDD	19.04	10.95
80 Track SSSD	12.35	14.75
80 Track DSDD	11.26	13.50
3" Disc (10)	36.87	42.95
HEAD CLEANING KITS		
3M Standard	12.50	15.95
Rexel Drive/KBD/VDU Cleaning Kit	19.11	22.95

Dept. MU386, 46 Middle Street,
Blackhall, Hartlepool, Cleveland
TS27 4EA. Tel: 0783 872430

Sorry, office only - No callers without appointment

BBC ROM UTILITY SOFTWARE

Wordwise (Word-processor)	30.54	35.95
Wordwise Plus (Word-processor)	39.95	46.75
View (Word-processor)	40.54	47.45
View III (Word Processor)	56.63	70.15
Ultracalc II (Spreadsheet)	56.63	65.95
Printmaster (Printer graphics)	23.58	27.50
Graphics ROM (Computer Concepts extensions to Basic)	23.58	27.50
Help (on Basic keywords etc)	23.10	26.95
Sleuth (Basic debugging tool)	26.08	30.45
Communicator RS432 & terminal)	47.76	55.39
Disc Doctor (Disc utility)	23.51	27.50
Replica 2 (Backup tape to disk utility)	10.04	12.00
Betabase (Database Disk)	19.60	23.00

COMPUTERS

BBC B+ 64K	380.47	439.95
BBC B+ 128K	415.75	479.95


OTHER BBC PERIPHERALS

Penman plotter/turtle/mouse	213.35	249.95
Teletext Receiver	187.83	217.29
6502 Second Processor	176.18	204.13
Z80A Second Processor	311.83	359.89
ATPL ROM Board	37.95	44.95

Softlite Eprom Programmer Programs 2764/2764A/27128/27128A.
The 27128 programs in 46 seconds. Plugs into user port off
BBC, no other cables at all required. Complete with ZIF socket
and intelligent software

QFS 2.0 BBC DISC INTERFACE

£69.95



- Automatic single/double density sensing.
- Single Density (10 sectors per track).
- Double Density (18 sectors per track).
- Runs protected software (Elite, Microtext, etc).
- 16K ROM includes FORMAT.
- Manual and simple fitting instructions.

FRINTERLAND

ORDERED TODAY - DELIVERED TOMORROW



Free WITH ALL PRINTERS: BBC USERS PRINTERS GUIDE. Getting the best from your printer is not easy.

We supply a free booklet with all printers which explains how to obtain all the features available on your printer. Without this you could waste many hours. Buy elsewhere and you'll pay far more and get far less.

Government, overseas and official orders welcome

KAGA TAXAN KP810 - Ring for Unbeatable Price!

	EX VAT	INC VAT
CANON 1080A - ex demo	£125.00	£143.75
■ DOT MATRIX		
EPSON LX80	£190.00	£218.15
JUKI 5510 (colour option)	£249.00	£286.35
CANON 1156	£335.00	£385.25
EPSON FX80 F/T+	£314.00	£361.10
EPSON FX100 F/T+	£425.00	£488.75
■ DAISY WHEEL		
QUENDATA 1120	£225.00	£258.75
EPSON DX100 SPECIAL OFFER	£356.00	£409.40
■ ACCESSORIES		
WORDWISE +	£43.00	£49.45
BBC PRINTER CABLE	£8.00	£9.25
■ MONITORS		
PHILIPS 7502 GREEN	£75.00	£86.25

NOW ONLY 3 MINUTES FROM JUNCTION 23 M62 (MANCHESTER 25 MINUTES/LEEDS 20 MINUTES)
NB: FROM EAST USE JUNCTION 24

156 LONGWOOD GATE, LONGWOOD
HUDDERSFIELD
Tel 0484 646048/9

As seen on "MICRO LIVE"

SLOMO

PROGRAM SPEED CONTROLLER

UK Patented

SLOW MOTION & FREEZE FRAME FOR SPECTRUM, CBM64 & BBC



Fully variable control from normal speed down to virtual standstill + instant freeze at the touch of a button.

- ★ Higher games scores and improved skills.
- ★ Invaluable programming aid for de-bugging, pin pointing problem areas etc.
- ★ Unique computing aid for education, occupational therapy, robotics, machine tool control applications, etc.
- ★ Easy to use either on its own or with other peripherals - no operational software required.

With cable and connector for easy fitting directly into the computer. (state which model)

£14.95 incl. VAT and P. & P.

To order send cheque or P.O. payable to Nidd Valley Micro Products Ltd., to the address shown below (no stamp needed). Please allow 14 days for delivery - we do not bank your cheque until day of despatch.

MONEY BACK GUARANTEE IF NOT COMPLETELY SATISFIED

NIDD VALLEY MICRO PRODUCTS LTD
Dept. MU386, FREEPOST, KNARESBOROUGH, N. YORKS. HG5 8YZ
Telephone: Harrogate (0423) 864488

THOUGHTWARE

QUAL-SOFT Sports simulations

"A real challenge to the thinking football fan... Bobby Robson could do worse than have a crack at this in his preparation for the World Cup"

QUAL-SOFT COMMENT: At last an INTELLIGENT management game for the knowledgeable soccer enthusiast!

In 1966 Alf Ramsey proved that English club soccer players, with intelligent management, could not only dominate European club football, but could take on, and beat the rest of the world at International level. Could you do the same in...

MEXICO '86*
A WORLD CUP MANAGEMENT SIMULATION

Summer 1984 and English International football is at its lowest ebb. We have failed to qualify for the European Nations Cup, and had a string of very poor International results. In a few months we will set out on the '86 World Cup qualifying trail. You have been given the most important job of restoring English pride in their football. You have a match in Paris, the USSR at Wembley, and a South American tour, to assemble a team, first to qualify, and then to beat the world's best in Mexico.

TAPE 1 (Qualifiers)

- ★ Current squad of 16 players + 20 user defined players.
- ★ Friendlies in Paris, at Wembley + South American tour.
- ★ ANY team formation you choose. 2 from 5 substitutes.
- ★ In match tactics: any no. of individual player adjustments.
- ★ Your qualification group: full results and table.

TAPE 2 (Finals)

- ★ Choose a 20 man squad to take to the finals.
- ★ Group of 4 prelims. 16 to final knockout comp.
- ★ Extra Time, PENALTY SHOOT-OUTS, where relevant.
- ★ Formation and strength information on opposition.
- ★ 2 from 9 substitutes (the FA tells us so).

ENGLAND'S GAMES: FULL PITCH, 22 MAN, 3D GRAPHICS & SOUND EFFECTS

QUAL-SOFT comments: With 5 levels of play, 12 depths of sophistication, and "fun" graphics, this game can be enjoyed by an 8 year old youngster as a "fun" game, and by the most sophisticated as a tactical/strategy challenge of the highest order.

QUALSOFT GUARANTEE: We will send your package by 1st class letter post on the day we receive your order with PO, cheque or ACCESS card authorisation. Programs are IN STOCK because we manufacture them!

* The use of the name MEXICO '86 does not imply any association with FIFA

AMSTRAD ACTION REVIEW Jan '86

DISC
Qualifiers + Finals
+ 20 Page Booklet
£12.95

QUAL-SOFT, Dept. MU
18 Hazelmere Rd.,
Stevenage, Herts SG2 8RX.
Tel: 0438 721936

Please supply:
MEXICO '86
Electron
BBC 'B'
T 40 80

Name:
Address:
Access No. (if applicable)

Save £20 on the MT80 + printer


QUALITY PRINTING FOR AROUND £199



From Europe's leading matrix printer manufacturer

- 80 column, 100 cps optimised bi-directional print
- Expanded, compressed and bold print plus italics
- Dot addressable and line graphics
- Friction and tractor feed
- Quick tear facility
- Easy change cassette ribbon

Now the MT80+ from Mannesmann Tally is even better value-for-money! Simply cut the voucher and hand to your nearest dealer upon purchase to claim your £20 discount (inc. VAT). Full information on the amazing MT80+, plus the name of your nearest stockist is available by ringing the number below.

 (0734)
791533/791619

 **MANNESMANN
TALLY**

£20 THIS VOUCHER
ENTITLES THE BEARER
TO £20 OFF THE MT80 +


Please complete all sections below in block capitals.
One voucher per printer. Offer ends March 31st 1986.

Name _____ Address _____

Printer Serial No. _____ Signature _____

Date _____ Computer used _____

Dealer conditions: Mannesmann Tally guarantee £20 (inc. VAT) refund upon receipt of voucher and copy of proof of sale. Send to MT Direct, Mannesmann Tally Ltd, Molly Millars Lane, Wokingham, Berks RG11 2QT. Vouchers must be received at Mannesmann Tally by April 30th 1986. Don't forget your own name and address. Further information available from MT Direct on (0734) 791533/791619. VAT NO. 899-6679-73

 24 HOUR PERSONALLY ANSWERED FREEPHONE 0800 400 402.

Star Value

5 1/4" disks

79p

- * Unbranded, full specification disks
- * Well known manufacturers
- * Hub rings
- * Envelopes, labels, w/p tabs
- * Full no-quibble guarantee

Prices per box of 10 (excl VAT)	1-4	5-9	10-24	25-49
SS/DD 48 tpi	7.90	7.40	7.20	7.05
DS/DD 48 tpi	9.90	9.20	8.90	8.60
DS/QD 96 tpi	13.90	13.10	12.80	12.60

Add £7.95 for Economy 50 Storage Case

3 1/2" disks SS **£2.20**
DS **£2.99**

Prices per box of 10 (excl VAT)	1-4	5-9	10-24	25-49
Single sided 135 tpi	22.90	21.50	20.80	19.90
Double sided 135 tpi	29.90	27.90	26.80	25.80

Add £1.99 per box if See10 Library Case is required

- * Recommended for BBC, IBM, Commodore, Apple etc
- * Double Density, suitable for single density use

Free Delivery

Storage

3 1/2" See10 Library case	2.30
Econ 30 Stg case	5.95
60disk Stg Case, lock	15.95
5 1/4" See10 Library case	2.30
Exec. 50 Stge case, lock	15.95
Exec. 100 Stge case, lock	21.95

3" disks **£2.99**

Prices per box of 10 (excl VAT)	1-4	5-9	10-24	25-49
CF2	29.90	28.90	27.90	26.90
Single disks	£3.50 each 5 off £3.20 each			

1. All prices include 2nd Class delivery (U.K. mainland) but exclude VAT. For urgent deliveries please telephone for delivery charges. Overseas add £5 per 100 disks or part thereof for air freight.
2. Telephone orders can be accepted from Government bodies, schools, etc. or with a VISA card.
3. Send cheque made payable to "IDS Computer Supplies", with order to the address below. Don't forget the V.A.T.



IDS Computer Supplies

Dept S0 15 Darin Court Crownhill Milton Keynes MK8 0AD Telephone (0908) 569655

Leigh Computer Systems

Authorised Acorn Service Centre. ACT and Ferranti Computer Dealer

COMPUTERS

BBC B + 64k	£450.00
BBC B + 128k	£475.00
Plus Amstrad, Atari ST, Advance, Ferranti, ACT, Olivetti, Sperry, North Star.	

DISC DRIVES

OPUS 5802	119.00
5802SD	£149.00
5802D	£249.00
Challenger	£249.00
Plus many others	

PRINTERS

MT80	£199.00
Epson LX80 + Tractor	£249.00
Epson GX80	£245.00
Epson FX85	POA
Epson FX105	POA
Plus rest of Epson range	
Canon 1080A	£279.00
Canon 1156A	£379.00

Special Offer

Kaga Taxan £225.00

DAISYWHEEL PRINTERS

Epson DX100	£379.00
Juki 6000	£209.00
Juki 6100	£369.00
Juki 6300	£899.00
Plus Silver Reed range	

MONITORS

Microvitec 1431	£189.00
Microvitec 1451	£269.00
Microvitec 1441	£399.00
Philips 7502 green	£84.00
Philips 7522 amber	£89.00

EPROMS

27128	£3.50
2764	£2.25
8271	£42.95

Plus Full Range of Add-Ons, ROM software etc.

EDUCATIONAL ORDERS SUPPLIED

- Price list available on application -


P&P 80p small items. £7 large items

All Prices include VAT

75 CROSS STREET
SALE
MANCHESTER
Telephone: 061-905 2144

7 COVENTRY ROAD
HINCKLEY
LEICS.
Telephone: 0455 612139

The best printer bargain you'll ever find!

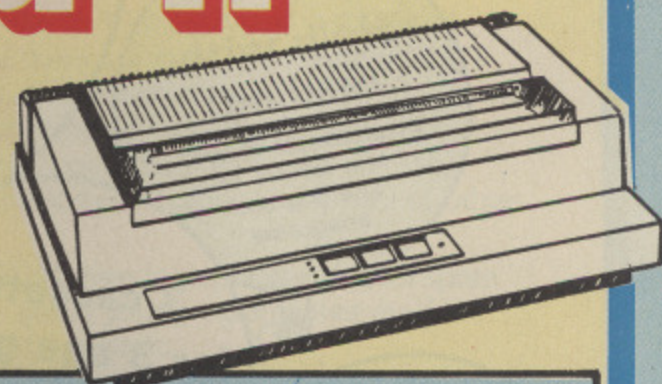

There's never been an offer like this - the Olivetti dry ink-jet printer at an incredibly low price

TEST DOUBLE HEIGHT SINGLE WIDTH
 TEST DOUBLE HEIGHT DOUBLE WIDTH
 TEST DOUBLE WIDTH SINGLE HEIGHT
 TEST SINGLE WIDTH SINGLE HEIGHT

When it was launched two years ago this Olivetti printer broke new ground by introducing spark ink-jet technology. One big advantage was that it reduced the number of moving parts. The ink - a compressed solid, not liquid - is fired at the paper by an electrical discharge. Printing is bi-directional, and characters can be normal size, double height, double width or underlined. Images can be revised (to give a negative picture), or you can use a zoom effect to double the size of the picture. Maximum speed is 120 characters a second, or 50 full lines a minute. While its performance cannot be compared to more modern NLQ dot-matrix printers, it is ideal for listings and personal correspondence, and it produces superb graphics dumps.

The package includes the printer, BBC Micro interface, replacement ink cartridges and detailed operating manual.

ONLY AVAILABLE WHILE STOCKS LAST

ONLY £59!
 incl. VAT, p&p

Acorn User had this to say about the Olivetti dry ink-jet printer in May, 1983:

Its big advantage is that the dots are very small which means superb graphics printing - I doubt whether any other printer can rival the resolution. It prints 110 dots per inch in the horizontal direction, and an amazing 220 vertically. The picture of the film star's face (Marilyn Monroe or Jean Harlow?) beloved of printer adverts can be reproduced in amazing detail on a rectangle less than two and a half by two inches.

When that review was written the printer was selling for £360. Now, with this Micro User offer, you can get it for ONE-SEVENTH of its original price!

Use the special order form on Page 9 - No stamp needed!

Learning can be fun

FUN SCHOOL!

10 programs on each cassette or disc

Help with reading:

From simple shapes and letters to spelling and anagrams

Early learning - the easy way on the BBC Micro and Electron

All programs classroom tested and educationally approved

3 cassettes for 3 age groups

- Under-5's
- Ages 5-8
- Ages 8-12

Help with maths: From number recognition and counting to simple sums and games of logic

Only £4.95 cassette

5 1/4" Disc £6.95
3" Disc £8.95

Use the special order form on Page 9. No stamp needed.

Educational Computing on the BBC Micro

9 FULL LENGTH programs designed to stimulate, educate and entertain - both in school and at home



The Micro User Education Special Volume 1 has now sold out But Volume 2 is still available


It contains nine full length programs written to the highest standards and each picked to combine educational worth with sheer enjoyment. The nine programs cover topics from early reading and simple sums to the rules of punctuation and angle estimation - and there's an excellent introductory database.

The magazine contains the complete listings of all the programs together with advice on how they can be adapted to cater for individual needs.

Fun Factors: Arcade style factor learning. **Windmill:** Word, number and colour recognition. **Angler:** Angle estimation fun. **Spelldroid:** Learn to spell with our friendly robot. **Tortal:** Teach and test the rules of simple addition. **Discovery:** A strategy based phrase identification game. **Punctuation:** Test and teach the rules of punctuation. **Junior Database:** A comprehensive database for the young learner. **Chinese Takeaway:** Teach and test the rules of simple subtraction.

Education Special Volume 2	
Magazine	£1.50
Cassette	£4.95
Cassette and Magazine	£6.00
5 1/4" Disc	£6.95
5 1/4" Disc and Magazine	£7.95
3" Disc	£8.95
3" Disc and Magazine	£9.95

The ultimate in graphics for the BBC Micro ...

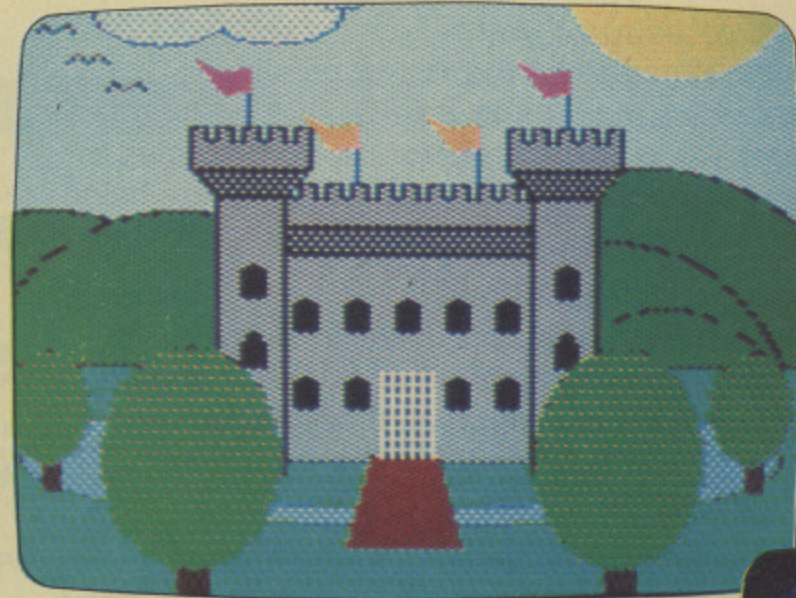

Acornsoft's Graphics Extension ROM sets new standards in graphics power and flexibility.

An official product, totally integrated with the operating system, GXR gives the BBC Micro the graphics capability it was designed for.

The 16k ROM provides a wide range of geometric shapes: rectangles, parallelograms, circles, ellipses, arcs, sectors and segments.

In fact there are over 100 different PLOT codes to enhance your micro's displays. As well as superb flood-fill routines – including user-defined patterns – there are dot, dash lines, copy screen sections and a host of other options.

The ROM even incorporates its own sprite routines, giving your programs that machine code feel from Basic.

Powerful, yet easy to implement, GXR makes the BBC Micro the leader in the field of microcomputer graphics.

"If you're wondering what your next upgrade for your BBC Micro should be, look no further".

Micro User, September 1985

Now in the shops at: **£29.95**

Micro User special price: **£26.95**


incl. VAT, p&p



Keep your copies neat and complete

These handsome binders are bound in PVC with the Micro User logo in gold blocking on the spine.


£4.25

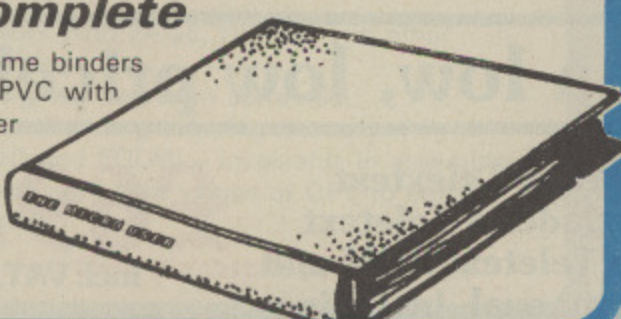

Your BBC Micro needs protecting!

ONLY **£3.95**

Our luxury dust cover is made of soft pliable water-resistant transparent vinyl, bound with strong cotton and decorated with the Micro User logo in black.

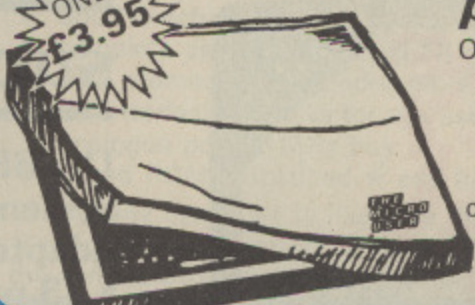

Use the special order form on Page 9 – No stamp needed!

Tune your BBC Micro to receive BBC Ceefax and ITV Oracle pages with the BBC Micro Teletext System



Teletext is claimed to be the fastest growing communications medium in Britain. And no wonder! From share prices to football results, from recipes to free telesoftware, many thousands of pages are being continuously broadcast and updated by the BBC and ITV.

There are 3 million teletext TV sets in Britain, and the number is growing by another 50,000 a month. But if you have a BBC Micro all these pages are available to you without going to the expense of buying an expensive TV set.

All you need is the BBC Micro Teletext System, which decodes the broadcast signal and feeds teletext pages into your normal TV set or monitor.

But your BBC Micro can do more than just display the pages. You can store them in memory, transfer them to tape or disc and display them again in any order you like.

When this package was first reviewed in The Micro User in February 1984 we described it as being "nice and easy" to operate, but added: "At £225 it's a bit expensive for the home user, especially as there doesn't seem to be much telesoftware available..."

TODAY there's plenty of telesoftware - games, utilities and educational programs - and it's all free. And what's even more impressive is that the price has dropped - **DRAMATICALLY!**


Never before offered at such a low, low price!

The BBC Micro Teletext System includes a Teletext Adapter, a Teletext ROM and a 73 page manual, including a detailed 24 page guide to how teletext works.

£69.95
incl. VAT, p&p

ONLY AVAILABLE
WHILE STOCKS LAST

MUSICALLY INCLINED?

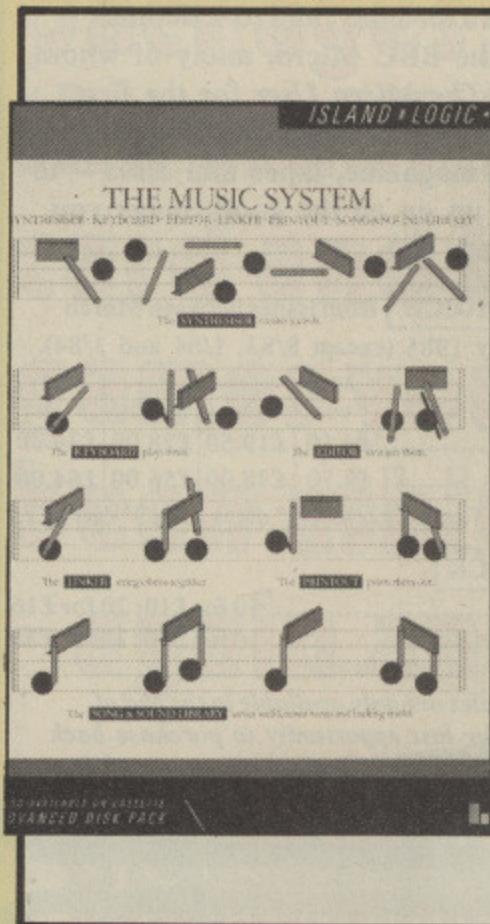

If you're used to musical notation, or simply typing in from manuscript, **The Music System** is the one for you. Its superb screen presentation – the note sequencer taking the form of a four-track tape recorder – makes it a joy to use. And the ability it gives you to interactively edit the matched pitch and amplitude graphs takes all the difficulty out of the ENVELOPE command.

2 cassette pack **£25.45**

Disc **£25.45**

inc. VAT P&P



Give your Acorn Speech Processor the company it's been longing for – the amazing **SpeechRom** from Computer Concepts.

This power-packed ROM will allow you to fully exploit the tremendous potential of the Acorn speech processor chip. It allows you to:

- Create any word or part word.
- Emphasise syllables and words to give realistic intonation.
- Add pitch to sounds.
- Use it from both Basic and machine code.

In fact once you've fitted it, SpeechRom will shout and sing its own praises.

And if you haven't got a speech processor yet, you've still got chance to take advantage of our low cost offer on the official Acorn speech processor upgrade. This features:

- 164 words and word parts from which you can construct your own new sounds with ease. (No such limitations with SpeechRom fitted.)
- Simple to use from Basic using the SOUND command.
- Two chips – quick and easy to install.
- Suitable for all BBC Micros, with version 4 boards or later.
- A decent British accent.

SpeechRom £29.35 **Speech Processor** £29.95

Buy both for £55.45
(save an extra £3.85)

Upgrade to Basic II for a very special price!

Big saving!
– only **£23.50**

This is what you get with Basic II:

- More accurate calculations.
- An extra file handling command, OPENUP.
- The invaluable OSCLI command, allowing you, for example, to *LOAD files with a variable as the file parameter.
- EVAL will work with PAGE, HIMEM and other pseudo-variables.
- The INSTRing bug has been corrected.
- More efficient handling of string memory.
- EQUW, EQUW and EQUW – invaluable in assembler.
- 0% combined with extra values of OPT to enable offset assembly.

Don't miss this exceptional offer

The Advanced User Guide is the essential companion for the BBC Micro... with 512 information-packed pages



Featured are:

- ★ the BASIC Assembler
- ★ 6502 machine code reference section
- ★ complete descriptions of all FX calls
- ★ BBC memory usage and vectors explained
- ★ full interfacing details for the user port, tube, analogue port, 1 MHz bus
- ★ paged ROMs explained ★ and lots, lots more.

With many examples to illustrate the text, this guide is the indispensable reference work for the serious BBC Micro programmer.

£11.50

Use the special order form on Page 9 – No stamp needed!



To celebrate our third birthday we're offering back numbers, tapes and discs at really ridiculous prices!



You can choose from these issues

MARCH 1983: Deathwatch, Bingo and other programs.
APRIL: King Kong, Nim, and other programs.
MAY: Air Strike, Pelmanism, Anagrams, and other programs.
JUNE: Space Pilot, Nomism, and other programs.
JULY: Teapin, Spacepods, and other programs.
AUGUST: Fruities, Animation, and other programs.
SEPTEMBER: Robin & Marian, Galactic Invaders and other programs.
OCTOBER: Fishing, Joykey and other programs.
NOVEMBER: Goblins, Blackjack and other programs.
DECEMBER: Tower, Santa, and other programs.
JANUARY 1984: Barrels, Note-play and other programs.
FEBRUARY: Invasion, Frogs and other programs.
MARCH: Mazemunch, Birthday and other programs.
APRIL: Microgolf, and other programs.
MAY: Dug Dig, and other programs.
JUNE: Roadracer, 3D action. Quadline, four-in-a-line. Monitor, debugging routines. Toolkit, 8271

explored. Areas, easy maths. Spell, spelling education.
JULY: Doomrun, deep space drama. Backgammon, the board game. Keys, user defined key editor. Save? and Tidisk, disc utilities. Alice1 and Alice2, mini-adventures. Terminal1 and Terminal2, communication programs. Acoustic, software and Body Build Modem.
AUGUST: Castle, enthralling adventure. Gridman, a high speed strategy. Tedit, Teletext editor. Dsquare, number fun. Dedit, disc editor. Input, the ultimate input routine. Bells, Alice's mini-adventure.
SEPTEMBER: Villains, save your crystals. Rollerball, game of strategy. Microterm, comms terminal. T/Textdump, Mode 7 screen dump. Numbersign, number skills.
OCTOBER: Wampus, explore the labyrinth. Balloon, escape the Goulogs. Splits, split screen utility. Pageram, paged RAM programs. Input1/2, inputs for the disabled. Morecol, extended colours. D/A, waveform generator. Integer, direct addressing speed.
NOVEMBER: Buster, line up the diamond blocks. Duel, two player

action. Seaside, picture fun for the young. M7letters, teletext large letters. Dsload, loading disc files to &E00. 6502, second processor programs. Synth, musical Body Building programs.
DECEMBER: Painter, paint the pyramid. Miner, delve into the depths. Snowvad and Carol, seasonal programs. Garden, shape-matching. Medit, memory editor. Catalog and Save, disc utilities. Ladders, mini-adventure. *Plus Omega Probe - a machine code game.*
JANUARY 1985: Rover, guide our retriever. Backgammon, two player version. Matchwood, shape recognition. Messages, machine code printing. Speedtext, display text at different rates. Search, a powerful tool. Second processor, Body Building and graphics routines. *Plus Galactic Tycoon, our superb free game.*
FEBRUARY: Helicopter Dogfight, two player action. Craal, dungeon adventure. Pilot, the language. Riddle, first Pilot program. Dsdump, the ultimate disassembler. Talker, speech chip utility. Change, program tidier. In/out - output from assembler. *Plus Atomic Protector - a machine code game.*

To mark our third birthday, and to welcome newcomers of the BBC Micro, many of whom will be reading *The Micro User* for the first time, we have some extra-special offers - back numbers of the magazine, tapes and discs - to help you catch up on all the good things you may have missed.

TAKE YOUR CHOICE from issues between March 1983 and February 1985 (except 8/83, 1/84 and 3/84).

	Mag only	Mag+ tape	Mag+ 5 1/4" disc	Mag+ 3" disc
Any 6	£4.50	£19.50	£28.00	£34.00
Any 12	£8.70	£38.00	£56.00	£64.00
Any 5	Tapes £12.50; 5 1/4" discs £20; 3" discs £25			

TAKE POT LUCK

Assorted tapes: 10 for £10; 20 for £16
Assorted discs: 10 for £20; 20 for £35

At these low prices tapes/discs cannot be replaced

These bargain bundles are only available to the end of March! This is your last opportunity to purchase back issues, tapes and discs from the first two years of The Micro User.

All the programs from the last 12 months of The Micro User are available on tape and disc!

MARCH: Astromines, space action. Castle, two player catapult battle. Data Maker, take the tedium out of entering Data. Disc Search, string search utility. Command, give your BBC and Epson printer the same character set. Break Key, disable Break. *Plus Flex - a machine code game.*
APRIL: X15, sideways-scrolling spectacular. Mornington Crescent, fun on the London underground. Calculator, AMX mouse mathematics. Dithering, colour mixer. Chatterbox, speech chip procedures. *Plus Rabbit Run - a machine code game.*
MAY: Stellar Rescue, arcade action. Dominoes, simulation. Plot69, fast Mode 2 plot routine. Musical Events, a music interrupt utility. Pound and Hash, an Epson printer routine. Sheila, micro slide show.
JUNE: Othello, simulation. Activities, word association. Catnap, arcade enjoyment. Simon Quackers, lightpen game. Shape recognition, teach your micro to identify. Stripper, a routine for removing line numbers. Epson, a type-setting utility. Lprint, sim-

plifies string output. Eval, the Basic command from machine code.
JULY: Fly, an arcade spectacular. Draughts, a superb version. Compx, 3D noughts and crosses. Double Height, large characters in Modes 0-6. Clock, alarm utility. Compacter, compress Mode 2. Inside Basic, basic routines in machine code. RAMpage and RAMsave, sideways RAM utilities. Video, graphics to music.
AUGUST: Harbour Command, protect a Cornish town. Fruit Machine, a gambler's favourite. Mouse Organ, AMX mouse music utility. Flash, alternative flashing colours. String Formatter, prevent end of line word splitting. M/C Games, random number and key detection routines.
SEPTEMBER: Ball Lightning, tame the lightning. Quarters, game of skill. 6502 Games, a simple arcade game. Variable Lister, track your variables. Smiley Hunt, AI's game. Error handling, the vital routines.
OCTOBER: Karate, superb martial art action. Solitaire, all-time favourite. Scroller, text scroll

utility. Case, an ON PROC command. Disc Scan, search for disc files. Adventure, avoid the vampire.
NOVEMBER: Whodunnit, solve the murder. Gloop Gulp, zany arcade action. Basic Analyser, take the drudgery of debugging. Wordwise F/keys, get the most from your word processor. Sideways, sideways screen clear. New Modes, Modes 8, 9 and 10. Disabler, prevent star command clashes.
DECEMBER: Wizard's Castle, recover a diamond from the necromancer's lair. Squares, 'join the dots' strategy. McBase, powerful database. Alphabet Train, early spelling. Basic Analyser, the vital cross reference tables. Wordsquare Creator, to create your own puzzles. Dumper, how your programs affect memory. Subhunt, the final listing. *Plus the listings from Body Building and Adventures.*
JANUARY 1986: Megaroids, exciting space action. Claustrophobia, alone in a maze. Can you get out of the maze in one piece? Fives, mind bending

noughts and crosses. Music Editor, translate musical notation. Wordsquare Solver, the program to help you solve them. Find and replace, find and replace any item of text in a Basic listing. Discopy, copy and/or rename files. S-sound, sounds into electronic effects. Alice, another baffling problem.
FEBRUARY: Tipaka, can you escape the Logan King's castle in one piece? USS Endeavour, fast and exciting space invader action, and it's in machine code. Ploy, hours of enjoyment with this brain teasing strategy game. Up-and-downloader, an invaluable programming aid for loading and saving. Fast Verify, a superb utility for verifying saved disc files. Disc Assembler, assemble multi-part source files to disc. Shift and Echo, more electronic effects from the Body Building course. 8271, using OSWORD to format a disc is a special way.
MARCH: Morris Miner, collect the keys and escape the mine before your time runs out in this levels and ladders spectacular. Poster Puzzler, a sliding block simulation to provide hours of fun

for the whole family. Quicksort, a fast machine code sort routine that uses and teaches recursion. Character Sets, a program to create and display your own fonts. 8271, four programs to complement the last article in the series. Sound Sampler, two programs from the Body Building course. Eleusis, another mind bending puzzle from Alice.


Save wear on your fingers and ensure all your programs are error-free by using our monthly tapes or discs. They are only:

£4.25 cassette
£6.25 5 1/4" disc
£8.25 3" disc

You can also take out a year's subscription and have them posted to you each month.

Cassette £40
5 1/4" disc £60
3" disc £80

Now combined in two fun-filled packages... all the traditional card and board games you've been asking for - again and again!

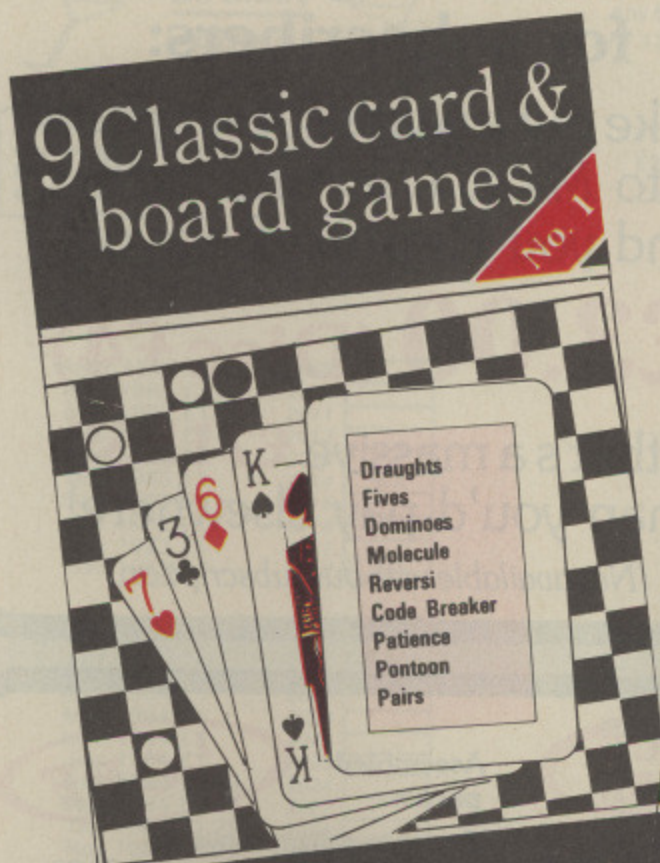

BBC cassette can also be used on the Electron

For the BBC Micro and Electron

For the BBC Micro and Electron

BBC Micro cassette
 £5.95 each
 5 1/4" disc
 £6.95 each
 3" disc
 £7.95 each

SCOOP!

REPTON 2



ELECTRON

SUPERIOR SOFTWARE
£9.95

SAVE
£7
or more

Repton on the BBC Micro was a sensation. But wait till you've played Repton 2!

Repton 2 has been given rave reviews. And no wonder!

It's massive scenario, with 16 different levels – and each one 16 times the size of your TV screen! You've more than 1,000 diamonds to find, apart from facing the hostile elements, fighting even more hostile monsters and solving a fiendish jigsaw puzzle. It's the biggest challenge ever!

If you already have a subscription which does not expire for several months you can re-order early to benefit from this exceptional offer.

Here's a bargain offer for subscribers:

Take out a year's subscription to *Micro User* and we'll send you **Repton 2** for only

£3.00 (Disc £4)

– that's a massive **£7 LESS** than you'd pay elsewhere!

(Not available without subscription)

Selected sale items from

THE BEEB BODY BUILDING COURSE

50% OFF MANY ITEMS!

Kit Packs

No. 3	Dual cassette system	£4.99
No. 4	4 amp mains control	£4.99
No. 7	Pendulum behaviour/capacitor discharge	£7.75
No. 8	Sound to pattern converter	£8.25
No. 9	Real time clock	£14.25
No. 14	Acoustic coupler	£29.99
No. 20	Trak-ball interface	£9.95

1 PRICE 2 OFFER

Assembled packs:

Sound to pattern converter only (half price)	£9.99
Light pen	£11.99
Real time clock	£19.99
Pulsemonitor	£17.99

Add p&p per item £1 UK. £3 overseas

Whilst stocks last!

Overseas orders:
ALL GOODS NOW SENT AIRMAIL!

Valid to March 31, 1986

Please tick items required in box below £ p

Mini Office

BBC 'B' cassette	£5.95	2231	<input type="checkbox"/>
Electron cassette	£5.95	3062	<input type="checkbox"/>
5 1/4" 40T disc	£7.95	2232	<input type="checkbox"/>
5 1/4" 80T disc	£7.95	2233	<input type="checkbox"/>
3" disc	£9.95	2234	<input type="checkbox"/>

Mini Office II

BBC 'B' cassette	£14.95	2368	<input type="checkbox"/>
5 1/4" disc 40T	£16.95	2369	<input type="checkbox"/>
5 1/4" disc 80T	£16.95	2370	<input type="checkbox"/>
3" disc	£19.95	2371	<input type="checkbox"/>

Binders

UK	£4.25	2221	<input type="checkbox"/>
Europe	£7.25		<input type="checkbox"/>
Overseas	£9.25		<input type="checkbox"/>

Dust Covers

	£3.95	2220	<input type="checkbox"/>
--	-------	------	--------------------------

The Music System

2 Tape Pack	£25.45	2373	<input type="checkbox"/>
5 1/4" disc 40T	£25.45	2374	<input type="checkbox"/>
5 1/4" disc 80T	£25.45	2375	<input type="checkbox"/>

Basic II Rom

UK	- £23.50	2219	<input type="checkbox"/>
Europe	- £24.50		<input type="checkbox"/>
Overseas	- £25.50		<input type="checkbox"/>

Annual subscription

UK & Eire (Sterling only)	£15	2001	<input type="checkbox"/>
Europe: Surface	£25	2365	<input type="checkbox"/>
Overseas: Surface	£25	2366	<input type="checkbox"/>
Speedy	£40	2003	<input type="checkbox"/>
Air	£52	2004	<input type="checkbox"/>
Tick box if renewal			<input type="checkbox"/>
Commence with	issue		
Repton 2*	Tape	£3	2382 <input type="checkbox"/>
	Disc (40T)	£4	2383 <input type="checkbox"/>
	Disc (80T)	£4	2384 <input type="checkbox"/>

*Only available if accompanied by subscription order.

Annual subscription for cassettes and discs

		Europe/UK	Overseas		
BBC 'B' cassette	£35	£45	2005	<input type="checkbox"/>	
5 1/4" disc 40T	£50	£60	2006	<input type="checkbox"/>	
5 1/4" disc 80T	£50	£60	2007	<input type="checkbox"/>	
3" disc	£65	£75	2008	<input type="checkbox"/>	


Commence with (state month)

Olivetti Ink Jet Printer

UK only	£59	2393	<input type="checkbox"/>
---------	-----	------	--------------------------

BBC Micro Teletext System

	£69.95	2392	<input type="checkbox"/>
--	--------	------	--------------------------



Birthday offers (UK only)

Any 6	Magazines only	£5.50	<input type="checkbox"/>	Magazines + tapes	£19.50	<input type="checkbox"/>	Magazines + 5 1/4" discs	£28.00	<input type="checkbox"/>	Magazines + 3" discs	£34.00	<input type="checkbox"/>
Any 12		£9.70	<input type="checkbox"/>		£38.00	<input type="checkbox"/>		£56.00	<input type="checkbox"/>		£64.00	<input type="checkbox"/>

When you have selected your choice of offer, please indicate below which magazines, tapes and/or discs you require.

Any 5 tapes	£12.50	<input type="checkbox"/>
Any 5 discs (5 1/4")	£20.00	<input type="checkbox"/>
Any 5 discs (3")	£25.00	<input type="checkbox"/>

Take pot luck bargain bundles

10 assorted tapes	£10.00	<input type="checkbox"/>
20 assorted tapes	£16.00	<input type="checkbox"/>
10 assorted discs (5 1/4")	20.00	<input type="checkbox"/>
20 assorted discs (5 1/4")	35.00	<input type="checkbox"/>

(3" discs not offered as part of the Pot Luck offers)

March 1983	£1	2009	<input type="checkbox"/>	Deathwatch	Mar 1983	2045/48			
April 1983	£1	2010	<input type="checkbox"/>	King Kong	April 1983	2049/52			
May 1983	£1	2011	<input type="checkbox"/>	Air Strike	May 1983	2053/56			
June 1983	£1	2012	<input type="checkbox"/>	Space Pilot	Jun 1983	2057/60			
July 1983	£1	2013	<input type="checkbox"/>	Tenpin	Jul 1983	2061/64			
Aug 1983	£1	2014	N/A	Fruities	Aug 1983	2065/68			
Sept 1983	£1	2015	<input type="checkbox"/>	Robin & Marian	Sep 1983	2069/72			
Oct 1983	£1	2016	<input type="checkbox"/>	Gone Fishin'	Oct 1983	2073/76			
Nov 1983	£1	2017	<input type="checkbox"/>	Blackjack/Goblins	Nov 1983	2077/80			
Dec 1983	£1	2018	<input type="checkbox"/>	Tower Bridge	Dec 1983	2081/84			
Jan 1984	£1	2019	N/A	Barrel Battle	Jan 1984	2085/88			
Feb 1984	£1	2020	<input type="checkbox"/>	Alien Invasion	Feb 1984	2089/92			
Mar 1984	£1	2021	N/A	Mazemunch	Mar 1984	2093/96			
April 1984	£1	2022	<input type="checkbox"/>	Microgolf	April 1984	2097/100			
May 1984	£1	2023	<input type="checkbox"/>	Damraiders	May 1984	2101/04			
June 1984	£1	2024	<input type="checkbox"/>	Road Racer	June 1984	2105/08			
July 1984	£1	2025	<input type="checkbox"/>	Doomrun/Backgammon	July 1984	2109/12			
Aug 1984	£1.25	2026	<input type="checkbox"/>	Castles of Fear	Aug 1984	2113/16			
Sept 1984	£1.25	2027	<input type="checkbox"/>	Villains	Set 1984	2117/20			
Oct 1984	£1.25	2028	<input type="checkbox"/>	Hunt the Wampus	Oct 1984	2121/24			
Nov 1984	£1.25	2029	<input type="checkbox"/>	Blockbuster/Duel	Nov 1984	2125/28			
Dec 1984	£1.25	2030	<input type="checkbox"/>	Painter/Miner	Dec 1984	2129/32			
Jan 1985	£1.25	2031	<input type="checkbox"/>	+ Omega Probe					
Feb 1985	£1.25	2032	<input type="checkbox"/>	+ Galactic Tycoon	Jan 1985	2133/36			
				+ Atomic Protector	Feb 1985	2137/40			

Don't forget to fill in your address overleaf!
All prices include postage, packing and VAT unless otherwise stated.

TOTAL CARRIED FORWARD OVERLEAF

ORDER FORM

**THE
MICRO
USER**

MAIL ORDER OFFERS

Total carried forward £ p
from previous page _____

Single copies of cassettes/discs

Any 5 tapes for £15

	1985	Tape £4.25	5 1/4" disc		3" disc £8.25
			40 track £6.25	80 track £6.25	
Astro Mines + Flex X-15	Mar	2141/44			
+ Run Rabbit	April	2145/48			
Stella Rescue	May	2149/52			
Othello	June	2153/56			
Mutant Fly	July	2157/60			
Harbour Command	Aug	2161/64			
Ball Lightning	Sept	2165/68			
Karate	Oct	2169/72			
Whodunnit	Nov	2173/76			
Wizard's Castle	Dec	2177/80			
1986					
Megaroids	Jan	2181/84			
Tipaka	Feb	2185/88			
Morris Miner	Mar	2412/15			

Micro User back issues

Mar 1985	£1.25	2033		Oct 1985	£1.25	2040	
April 1985	£1.25	2034		Nov 1985	£1.25	2041	
May 1985	£1.25	2035		Dec 1985	£1.25	2042	
June 1985	£1.25	2036		Jan 1986	£1.25	2043	
July 1985	£1.25	2037		Feb 1986	£1.25	2044	
Aug 1985	£1.25	2038					
Sept 1985	£1.25	2039					

UK. Add p&p 80p per copy (5 or more £3.20)
Europe (surface mail). Add p&p £1.50 per copy
Overseas (air mail). Add p&p £2.00 per copy

Classic Card and Board Games

	No.	1985	5 1/4" disc	
			Tape £5.95	3" disc £7.95
	No. 1	2460/3		
	No. 2	2464/7		

Fun School

	1985	5 1/4" disc	
		Tape £4.95	3" disc £8.95
Under 5's	2338/41		
Age 5-8	2342/45		
Age 8-12	2346/49		

Graphic extension ROM £26.95 2380

Speech offers

Computer Concepts Speech ROM	£29.35	2377	<input type="checkbox"/>
Acorn Speech Extension UK	£29.95	2224	<input type="checkbox"/>
Computer Concepts/Acorn Speech Extension ROMs bundle	£55.45	2378	<input type="checkbox"/>

The Advanced User Guide

UK	£11.50	2245	<input type="checkbox"/>
Europe	£15.00		<input type="checkbox"/>
Overseas	£17.50		<input type="checkbox"/>

Educational Special No. 2

Magazine only	£1.50	2320	<input type="checkbox"/>
Cassette only	£4.95	2321	<input type="checkbox"/>
Cassette + Magazine	£6.00	2322	<input type="checkbox"/>
Disc (40T) only	£6.95	2323	<input type="checkbox"/>
Disc (40T) + magazine	£7.95	2328	<input type="checkbox"/>
Disc (80T) only	£6.95	2324	<input type="checkbox"/>
Disc (80T) + magazine	£7.95	2315	<input type="checkbox"/>
Disc (3") only	£8.95	2325	<input type="checkbox"/>
Disc (3") + magazine	£9.95	2316	<input type="checkbox"/>

OVERSEAS READERS Please add £1 postage per item unless otherwise stated. All overseas items now sent Air mail.

Don't forget to fill in your name and address. **TOTAL** _____

You can also order by phone, Prestel or MicroLink/Telecom Gold

● Any of the goods listed here can be ordered by telephone.

● Micronet subscribers and other users of Prestel can also use the Prestel mailbox.

● MicroLink subscribers and other users of Telecom Gold can also use the MicroLink mailbox.

Orders: 061-429 7931

24 hours

Enquiries: 061-480 0171

9am-5pm.

Prestel

Key Page 89, then send your order to:

614568383

24 hours

MicroLink/Telecom Gold

72:MAG001

24 hours

Don't forget to quote your credit card number AND your full address.

Payment: please indicate method (✓)

Access/Mastercharge/Eurocard

Barclaycard/Visa

Cheque/PO made payable to Database Publications Ltd.

Expiry Date

BLOCK CAPITALS PLEASE

Name _____

Address _____

Post Code _____

Signed _____

Post to: The Micro User, FREEPOST, Europa House, Hazel Grove, Stockport SK7 5NY

No stamp needed if posted in UK.

Please allow 28 days for delivery.

RAMWISE

16K Sideways RAM MODULE

£24.95

+ £1 post & package

- ★ More than one module can be fitted.
- ★ No soldering required.
- ★ Small module plugs directly into any spare ROM socket.
- ★ Write Protect-switch included.
- ★ Free Utilities Disc supplied to load and save ROMs.
- ★ Runs all existing ROMs.
- ★ Already used in schools on Network Systems.
- ★ Compatible with ATPL Board

(The above software can also be purchased separately for £6.95 + 50p post and package)

CYGNET ELECTRONICS

PO Box 27, Bordon, Hants. GU35 0HH
Phone (04203) 89220 (04203) 5229

Softlife

LOW COST – HIGH QUALITY –
PRODUCTS FOR THE BBC MICRO

EPROM PROGRAMMER: programs 2764, 27128, 2764A and 27128A eproms. Operating software supplied on eprom. ROM formatting facility £69

NUMERIC KEYPAD: facilitates rapid entry of numeric data. Fully programmable. Hand-held or free-standing £60.25

LOGIC ANALYSER: multiple functions include: test and repair, development of logic circuits, and education. 8 MHz 8 channel £250



All products complete with comprehensive documentation and 1 year guarantee. All prices excl. VAT inc. P&P

For further information contact: Gary Daltrey
Softlife Limited 87 Silvertown Way
London E16 4AH Tel: 01 474 0330

NEW

PROC-KIT

THE Procedures Management System from the makers of FLOPPY-WISE

Up to **255 Files** on any disk with automatic saving and loading of files from disk or program (embedded procedures and GOTO's all catered for). List, Rename or Merge any file.

PLUS: 40 Procedures to start you off – including a special **OVERLAY** Routine for program extension allowing effective lengths up to 400K with single disk drive.

40/80 Track Disk

£10.95
+ 50p P&P



SOFTWARE SERVICES
65 South Mossley Hill Road,
Allerton, Liverpool L19 9BG.
Tel: 051-427 7894




16K & 32K RAM modules

- For use with the standard BBC Model 'B' with tape or disc filing system.
- Plugs into any one of the BBC's four sideways ROM sockets.
- Write/protect switch that fits neatly to the back of the BBC case.
- Easy to fit. Step by step instructions.
- No soldering required.
- Module uses low power static c-mos RAM.
- Runs all known sideways ROMs.
- Menu driven software which includes: LOAD/SAVE/PROTECT RAM SAVE ROMs... VIEW ROMs OS COMMANDS

16K £22
32K £35

Please state: disc/cass.



Note: The 32k version consists of two 16k modules sharing the same write switch. This obviously requires two spare sideways ROM sockets.

ATPL SIDEWISE vers, 3-pos SW:module/15a,15b/protect (2 solder connections)

FREE P&P – Send cheques/PO to: C.F. Terrell, 7B Essex Gardens, Hornchurch, Essex RM11 3EH. Tel: (04024) 71426

ATTENTION ALL CIRCUIT DESIGNERS!!

LOW COST ELECTRONICS C.A.D.

IBM PC BBC MODEL B and SPECTRUM 48K

"Analyser" computes the AC Frequency Response of linear (analogue) circuits. Gain and Phase, Input Impedance, Output Impedance and Group Delay (except Spectrum version) are calculated over the frequency range required. The effects on performance of Modifications to the circuit configuration and component values can be speedily evaluated.

Circuits containing Resistors, Capacitors, Inductors, Transformers, Bipolar and Field Effect Transistors and Operational Amplifiers can be simulated – up to 150 components (IBM version).

Ideal for the analysis of Active and Passive Filter Circuits, Audio Amplifiers, Loudspeaker Cross-Over Networks, Wide-Band Amplifiers, Tuned RF Amplifiers, Aerial Matching Networks, TV IF and Chroma Filter Circuits, Linear Integrated Circuits, etc. etc.

"Analyser" can greatly reduce or even eliminate the need to breadboard new designs.

Used by Industrial R&D Departments and Universities world-wide. Very Easy to Use. Prices from £20 ex VAT. Access or American Express Welcome.

For further details and example computation or for details on our New Draughting Program, please write, phone or telex:

NUMBER ONE SYSTEMS LIMITED
Dept MU, 9A Crown Street, St Ives, Huntingdon,
Cambs PE17 4EB, UK
Tel: (0480) 61778 Telex: 32339



TIGER SOFTWARE

Supplier of software and hardware to the home & business micro user.

**CHECK OUR LOW PRICES!
ALL PRICES INCLUDE VAT**

EPSON P40 PRINTER ONLY £50.75 + £4 carr.

PRINTERS

Epson LX-80	£228.00	Epson RX-100	£282.90
Epson FX-85	£389.95	Epson FX-105	£499.95
Epson DX-100 daisy wheel printer	£356.50		(Carriage on Printers £6)
Brother HR 10 daisy wheel printer	£148.25		
Star SG-10 80 column with 120cps	£238.75		
New Citizen 120D 80 column printer with 120cps draft and 25cps NLQ, including Tractor unit + 2 year warranty! only	£215.00		

Seikosa GP50A printer, ONLY £72.00

Smith-Corona Fasttext 80 printer, ONLY £143.75

4 COLOUR PLOTTER/PRINTER, ONLY £85.00

Cumana QFS Double-Density Disk Interface for BBC, only £44.95

Cumana top quality DS/DD (96 tpi) 5.25" box of 10 Disks

special price only £17.95 + £1 post & packing

Cumana Touch Pad + Screen Artist £38.95

NEW BBC MASTER 128 COMPUTER – Telephone!

Aries B32 Expansion Board (better than B+) only £91.00

The UNIQUE UNIBOX Disk Filing and Storage system:

- * 8 individually enclosed flip-back compartments
- * Accepts up to 80 5.25" disks
- * Guards against bending of disks
- * Ideal protection against dust, dirt and smoke
- * High quality plastic material with anti-static treatment
- * Complete with erno file-labelling system for instant access
- * Compact size: 257mm x 173mm
- * **PRICE only £12.75 + £1.75 post & packing**

Unibox complete with 25 top grade SS/DD Disks only £35.60

Unibox complete with 25 top grade DS/DD Disks only £40.60

Post and packing for Unibox with discs is £2.25

*** BBC SOFTWARE BARGAINS ***

3 arcade (cassette) games from Virgin games – 2 of which also have music recorded on side two! In sealed presentation box.

Price only £4.50 plus £1 post and packing.

(Titles are 'Bug Bomb' 'Checkout' 'Space Adventure')

ALSO – Twin packs of Virgin's superb 'Noc-A-Block' & 'Cruncher'

Price only £3.25 plus 75p post and packing

EDUCATION ORDERS ALSO SUPPLIED

ORDERS TO:

TIGER SOFTWARE
6 NORTH HILL WAY, BRIDPORT, DORSET DT6 4JX
Telephone: 0308 23655

BBC IN EDUCATION 441B INTERFACE UNIT

- 4 inputs 4 outputs ● Stand alone simulation
- No external power supply required
- True state of all lines monitored by LED display
- Comprehensive, understandable users guide
- Ideal unit for teaching control techniques on the BBC 'B' and Commodore computers, opening up new horizons in computer capabilities.

ALL ENQUIRIES TO:

CHARTER SYSTEMS
12 Hadleigh Road, Finham
Coventry CV3 6FF.

GEOLOGY SOFTWARE

Micro Prof

Hand Specimen Identification of minerals and rocks. Mapwork calculations. Triangular diagrams. Structural Geology and Artificial Intelligence in Geology.

Programs on cassette or disc. As used by schools, technical colleges and universities.

Details from: **Micro Prof**
68 Ferndown Road, Solihull B91 2BA

ELECTROLINK LTD

USER PORT INTERFACES

Range of boards, modules and systems covering simple 8-way input/output units up to 256 channel scanned systems with opto isolated inputs and relay isolated outputs from £50

COMPUTER SWITCHED MAINS SOCKETS

Relay or solid state switching types, singles or duals from £25

PASSIVE SWITCH UNIT

Simple switches for multiple computer or accessory connections via the user port, printer port, or RS423 port from £15

Data sheets free on request. Development and manufacturing services available for your project. Let us quote against your requirements.

ELECTROLINK LTD (Dept MU1)

Mail order only address: 14 Leopold Avenue, Farnborough
Hants, GU14 8NJ. Telephone: 0252 543095

ADVERTISERS INDEX

21st Software	122	Magus	160
Acorn	18, 19	Mancomp	163
Advanced Memory Systems	7, 3	Mannesman Tally	166
Advanced Technology Products	128	Micro Media	59
Akhter Computer	78	Microdis	164
Aries Computers	160	Microfix	138
Beebug	16, 17, 108	MicroLink	157
Beebugsoft	2	Microman Computers	30
C & F Associates	161	Micronet 800	15
Carson Developments	161	Micro Prof	178
Chalice	86	Microresources	56
Charter Systems	178	Microworld	82-85
Chase Data	52, 53	Mighty Micro	164
CJE Micros	35	Minerva	158
Clares	48, 69	Minic Business Systems	145
Comlex	163	Mirrorsoft	92, 93
Compumart	138	Morley Electronics	126
Computer Concepts	180	Mushroom Computers	152
Contex Computing	163	Nidd Valley Products	165
Cygnat Electronics	177	Number One Systems	177
Data Store	164	Opus	91, 103, 109
Database Software	96, 97	P&H Electronics	143
Datastar Systems	102	Pace	4, 64
Design Dynamics	163	Pear Tree Computers	158
Display Electronics	28	Pineapple Software	80
Doctor Soft	70	Printerland	164
Electrolink	178	Qualsoft	165
Electron and BBC Micro Users	77	Remedian Instruments	160
Electronequip	159	Rockfort	22
Flora Electronics	178	Selec Software	162
GCC Cambridge	62, 63	Silicon City	138
Gemini	114-117	Softlife	177
Grafsales	95	Software Services	162, 177
Griffin	58	Solidisk	8-14
Hi-Voltage	94	Spider	160
IDS Computer Supplies	68, 166	Superior Software	179
Island System	118	Technomatic	54
Keyzone	158	Terrell C F	177
Kosmos Software	161	Tiger Software	177
Leigh Computer Systems	166	Twillstar	20, 21
		Viglen	145-151
		Vine Micros	135, 145
		Volex Electronics	162
		Watford Electronics	36-47
		Weserve	138

DISKETTES (Price per box of 10 discs)

5.25"	SS/DD 48TPI	DS/DD 48TPI	SS/QD 96TPI	DS/QD 96TPI
Control Data	£13.50	£16.00	£18.00	£21.00
Nashua	£14.00	£16.50	£18.50	£21.50
Maxell	£16.00	£20.00	£20.00	£25.00
3.5" Diskettes				
Control Data	£26.00	£37.00	—	—
Nashua	£26.00	£37.00	—	—
Maxell	£38.00	£52.00	£39.00	£52.00

MAXELL CF2 3" COMPACT DISKS

(Individually Packed)

Single Disc	£4.00
Box of 10 Discs	£36.00
74LS00	25p
74LS10	25p
7438	40p
74LS123	60p
74LS163	60p
74LS244	75p
74LS393	75p
4020	60p
4013	50p
LM324	45p

All Prices include
VAT and P&P

EPROMS

BBC COMPATIBLE

2764-250ns	£2.50
27128-250ns	£3.00
27256-250ns	£5.50
27C256-250ns	£7.50
4164	£1.00
6264LP-15	£3.80
65C02 CMOS CPU	£9.00
8271	£39.50
27256-250ns	£5.50

CMOS + TTL ICS also available

FLORA ELECTRONICS

14 Lever Street
Piccadilly
Manchester M1 1LN
Tel: 061-228 3553

MORE THAN JUST A SEQUEL, A NEW EXPERIENCE

REPTON


2




COLLECT THE PUZZLE PIECES




THE PUZZLE PIECES IN POSITION

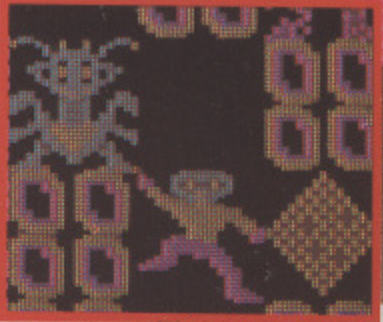

CLOSE-UP OF A MONSTER
REPTON 2

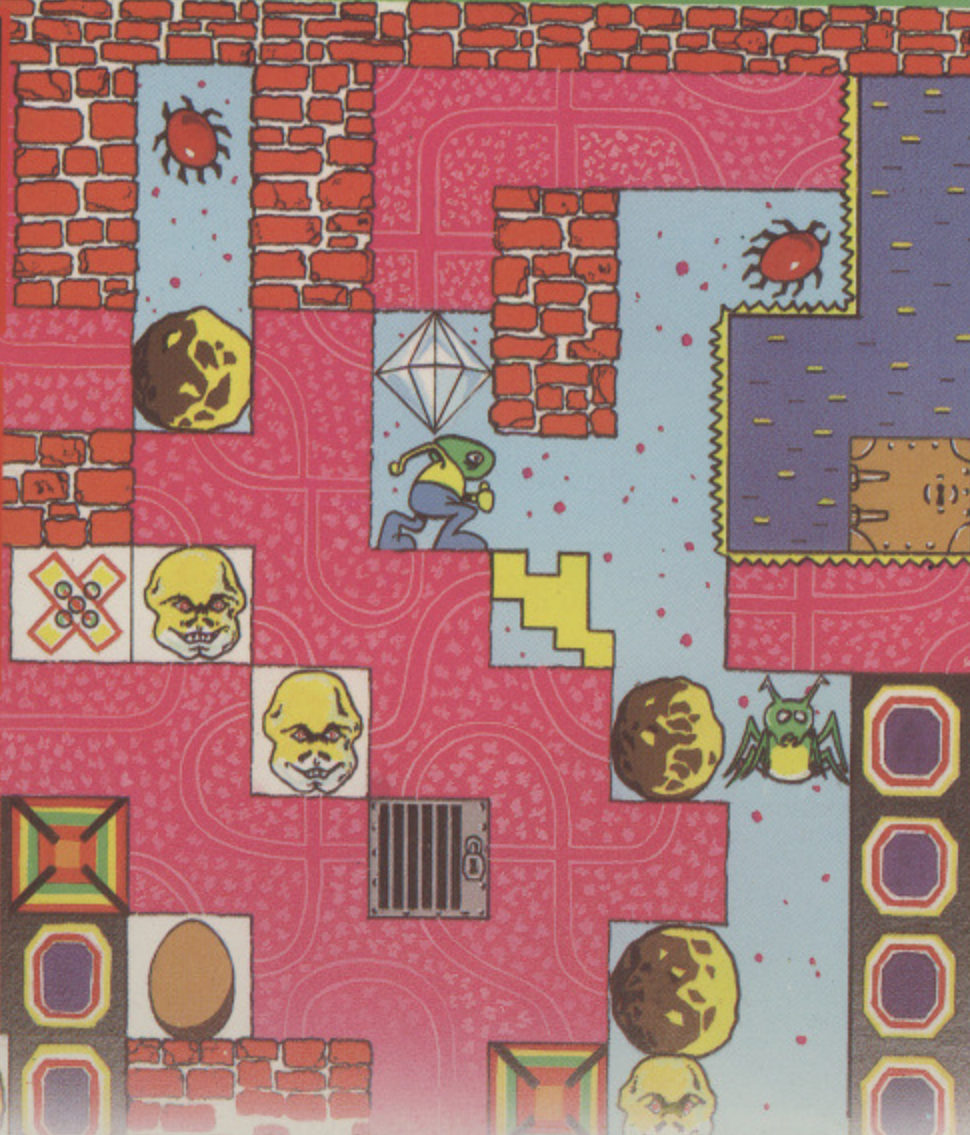

DODGE THE METEOR SHOWERS

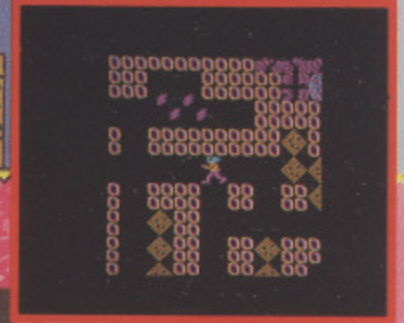

WATCH OUT FOR THE BLIND SPIRITS



ACORN ELECTRON VERSION

**ACORN
ELECTRON**
**BBC
MICRO**

REPTON met with unanimous acclaim from games players and reviewers alike. Now, totally redesigned and rewritten, we bring you a new experience... REPTON 2 — a challenge even for hardened REPTON addicts! Not only must you collect all the diamonds (more than a thousand in total), you must also find the 42 jigsaw puzzle pieces which have been strewn throughout the 16 levels. The levels of play, each 16 times the size of the TV screen, are connected by a series of transporters which propel you backwards and forwards between the different scenarios — but each transporter can only be used once. Each level has its own characteristics: brave the meteor storms at the planetary surface; entice the haunting spirits into their cages by strategically positioning the boulders; avoid the eerie skulls of past explorers; unlock the safes with hidden keys; and crush the fearsome monsters which hatch from giant eggs. Can **you** complete REPTON 2?

MORE PRIZES!

Complete REPTON 2 and enter our competition. The first 100 winning entrants will each receive a beautifully designed "I'VE COMPLETED REPTON 2" cotton T-shirt; all correct entries received before 31st March 1986 will be eligible for the cash prize of **£200**

CASSETTE VERSION — £9.95


BBC DISC VERSION — £11.95

WE PAY UP TO 20% ROYALTIES FOR HIGH QUALITY BBC & ELECTRON PROGRAMS




SUPERIOR SOFTWARE LTD.

Dept. MU12, Regent House,
Skinner Lane, Leeds 7.
Tel: 0532 459453.



OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

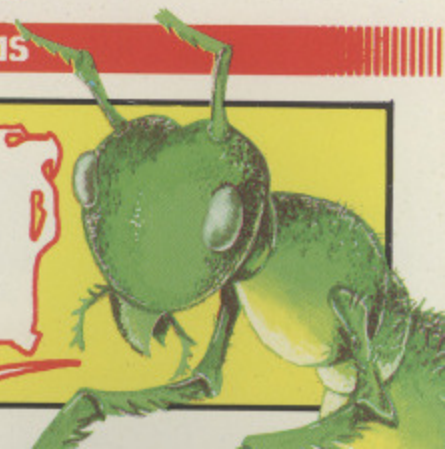

THE COMPLETE SUITE

for the BBC Microcomputer



INTER-SHEET
INTER-CHART
INTER-WORD*
INTER-BASE*

The most comprehensive range of integrated ROMs
for any microcomputer

*available soon!



Computer Concepts



Gaddesden Place, Hemel Hempstead, Herts HP2 6EX
Telephone: Hemel Hempstead (0442) 63933



COMPLETE SUITE
microcomputer



**-SHEET
-CHART
-WORD*
-BASE***

range of integrated ROMs
microcomputer
available soon!

Computer Concepts

Hempstead, Herts HP2 6EX
Hempstead (0442) 63933



THE MICRO USER

A Database Publication

THE MICRO USER

Volume 4
Number 1
March 1986
£1.25

Top-selling guide to the BBC Micro

How to beat
the best at
Silverstone

Pull-out guide inside

Two spelling checkers compared

Quicksorting made easy

Business graphics on your micro

Create your own character sets

Listings for two full-length games

Vol. 4 No. 1

