

# THE MICRO USER

Volume 5  
Number 2  
April 1987  
£1.25

Top-selling  
guide to the  
BBC Micro!

Turn your BBC Micro into a  
**B**iomorph **B**reeding **C**omputer



## ADVENTURES

Secrets of Twin  
Kingdom Valley

## CEEFAX

Telesoftware  
from the BBC

## EDUCATION

Programming for  
the disabled

## FUN

Easter game —  
Hunkie Egg

## BODY BUILD

Battery-power  
for your micro

## DISCS AND DRIVES


All you ever  
wanted to know  
on data storage

# The Superior Collection

## Volume 1

For the  
BBC Micro


NEW  
RELEASE

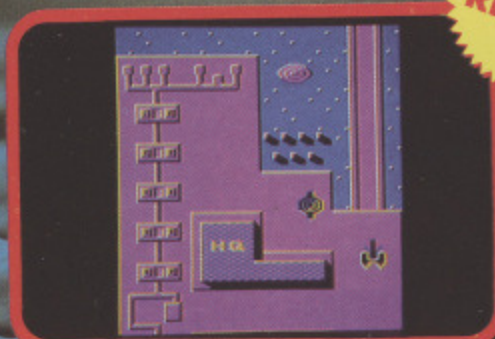

SYNCRON



REPTON

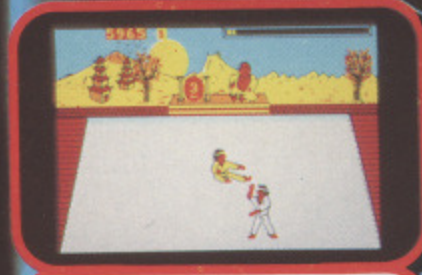

KARATE COMBAT



STAR STRIKER



AIRLIFT



BMX ON THE MOON



WALLABY



SMASH AND GRAB

## A New Concept in Compilations

The Superior Collection Volume 1 features one brand new game, Synchron, together with 7 of Superior Software's classic hits for the BBC Micro.

**Synchron** is a fast-action game set against a backdrop of an enormous graphically-detailed scrolling landscape. The landscape is, in total, 1024 times the size of the screen. You must endeavour to complete 16 hair-raising missions; in each mission you have to collect a number of power cylinders, land your spacecraft on a runway with each cylinder in turn, and finally locate and bomb the HQ Building. Whilst skilfully manoeuvring your spacecraft between the defence pylons and force-fields, you are attacked by alien spacecraft and missiles launched from the land bases. A superb game, worth at least £7.95 in its own right.

Here's what the computer press said about some of the other titles on this compilation package:—

**REPTON:** "This is an astounding game reaching new heights in BBC arcade adventures." ... MICRO USER

**KARATE COMBAT:** "Superior's Karate Combat is a superb karate simulation.

Graphics 9  
Sound 9  
Value 8  
Playability 10."  
... COMPUTER & VIDEO GAMES



**AIRLIFT:** "Airlift is an excellent arcade game ... It has a very polished presentation that cannot fail to impress and has the element of addictiveness which keeps you going back for one more try."  
... A & B COMPUTING

**SMASH AND GRAB:** "As usual with Superior products the graphics are excellent, with a good use of colour and no flicker. I expect this game will have you rolling with laughter. I certainly did.

Instructions 95%  
Playability 95%  
Graphics 100%  
Value For Money 100%  
... HOME COMPUTING WEEKLY

Awarded  
★★★★★  
(Top Rating)"

BBC Micro dual cassette ..... £9.95  
BBC Micro 5¼" disc ..... £11.95  
BBC Master Compact 3½" disc ..... £14.95

All games are compatible with the BBC B, B+ and Master series computers.

**SUPERIOR SOFTWARE**  
Limited

Please make  
all cheques  
payable to  
"Superior  
Software Ltd".



**OUR GUARANTEE**

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

# With the AMX range of Software, you can now forget about the Mac, the St., the Amiga, Windows and Gem.

It's no surprise that nearly all new 16 bit 'state of the art' micros now come with a Mouse and Wimp environment (Windows, Icons, Menus and Pointers) as standard.

With the BBC you already own one of the classic micros and by simply adding the AMX range of software you can achieve the same ease of use, freedom and versatility of much more sophisticated computers.

The AMX Mouse and compatible software – it's what you and your BBC micro have been missing.



## ART AND MOUSE OPERATING SYSTEM

**AMX MOUSE PACKAGE 16K Rom and Disc £79.95**

There's not much joy in a joystick and keyboards can be all fingers and thumbs. Acclaimed by the press as 'the best input device', already over 30,000 BBC users have adopted an AMX Mouse. Available for the BBC, B+, Master 128 and Master Compact. Please state version when ordering.


**AMX SUPERART AND MOS (only) £49.95.**



## GRAPHIC DFS FRONT END

**MAX 16K Rom £19.95**

MAX provides an easy to use graphic based front end to your computer's disc filing system including a comprehensive set of disc management operations such as cataloging, copying, deleting and re-naming, you can also run programs from within MAX. Available for the BBC, B+, Master 128 and Master Compact. Please state version when ordering.

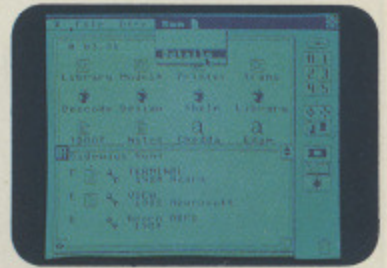

## DESKTOP PUBLISHING

**AMX PAGER 2 x 16K Rom, 2 x Disc £49.95**

Produce professional documents and newspapers with text and graphics, supplied with 16 variable typefaces it has many graphic functions including cut, copy, paste, etc. Available for BBC, B+, Master 128 and Master Compact.

**EXTRA! EXTRA! 2 x FLIPPY DISC £24.95**  
300k fantastic clip art, over 25 fonts, and utility software.



## COMPUTER AIDED DESIGN

**AMX DESIGN 32K Rom and Disc £69.95**

A highly sophisticated CAD package allowing drawings such as a PCB design up to the most intricate architectural drawing.

Advanced features include full zoom and macro facilities, 58 x 58 screen canvas, fully supported printer and plotter output. (Launch date Feb. 1987). Available for the BBC, B+, Master 128 and Master Compact.



There is also a growing list of additional AMX software requiring the original AMX Art Rom or Super Art Rom including:  
 AMX 3D Zicon £24.95, AMX Database £24.95, AMX XAM £24.95, AMX Mind Games £14.95, \*AMX Utilities £14.95, \*AMX paint Pot £14.95.  
 \* These programs are only suitable for use with the original AMX Art/Rom which can be purchased with a mouse for £69.95.  
 A Mouse (only) can be purchased for £34.95 direct from AMS, using the order form enclosed in each of the four major software packages (see screen shots).  
 These superb products are available from all good computer dealers or direct by cheque, access or visa. All prices include VAT and post and packaging.



FOR INSTANT ACCESS/VISA ORDERS TELEPHONE (0925) 413501/2/3



# AMX SOFTWARE

IMAGINATION AT YOUR FINGERTIPS.

+ JKM  
ALL THESE PROGRAMS WORK WITH JOYSTICK OR KEYBOARD OR MOUSE.

ADVANCED MEMORY SYSTEMS LTD. 166/170 WILDERSPOOL CAUSEWAY, WARRINGTON, WA4 6QA. TELEX 628672 AMSG. FAX 0925 58039.

TUBELINK ON PRESTEL PAGE 2582182 SUPPORTS THE AMX MOUSE AND ALL AMS SOFTWARE.

Macintosh is a licenced trade mark of Apple Inc. Atari St. is a trade mark of Atari Inc. Amiga is a trade mark of Commodore Business Machines Inc. Windows is a trade mark of Microsoft Inc. Gem is a trade mark of Digital Research Inc.



Vol. 5 No. 2 April 1987

Managing Editor  
**Derek Meakin**

Features Editor  
**Peter Davidson**

Production Editor  
**Peter Glover**

Art Editor  
**Heather Sheldrick**

Associate Editor  
**Alan McLachlan**

Reviews Editor  
**Christopher Payne**

News Editor  
**Mike Cowley**

Technical Editor  
**Mike Cook**

Advertisement Manager  
**John Riding**

Advertising Sales  
**Peter Babbage**  
**Gail Blicow**

Tel: 061-456 8835 (Editorial)  
061-456 8383 (Admin.)  
061-456 8500 (Advertising)  
061-480 0171 (Subscriptions)

Telecom Gold: 72:MAG001

Telex: 265871 MONREF G  
Quoting Ref. MAG001

Prestel Mailbox: 614568383

Published by:  
**Database Publications Ltd,**  
Europa House, 68 Chester Road,  
Hazel Grove, Stockport SK7 5NY.

Subscription rates for  
12 issues, post free:

£15 - UK & Eire (Sterling only)  
£25 - Europe  
£42 - Rest of world (airmail)

ABC 59,727  
Jan-June 1986

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1987 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution: Diamond Europress Sales & Distribution, Unit 1, Burgess Road, Ivy-house Lane, Hastings, East Sussex TN35 4NR. Tel: 0424 430422.

# CONTENTS

## Game of the month

### 64 **Hunkie Egg**

Collect the eggs in our fast action Easter game.

## Utilities

### 43 **40/80 Formatting**

How to make your discs work on any drive.

### 47 **Disc Protection**

Stop your discs being pirated with this useful routine.

## Reviews

### 31 **Software Scene**

Our experts take a look at the latest software.



### 37 **Viglen Console**

Give your Master a new look with this new style case.

### 63 **TOSS Rom**

A major breakthrough from Acorn - or is it?

### 115 **Spell-Master Rom**

We take a close look at this electronic dictionary.

## Education

### 67 **News**

Up to date reports about the BBC Micro in education.

### 69 **Disabled Programming**

A look at the software needs of the handicapped.

### 72 **DIY Keyboard**

A teaching aid for arithmetic - with a novel way to enter numbers.

### 77 **Education Reviews**

Our experts cast a critical eye over some of the latest releases.

### 81 **Letters**

Another selection from our mailbag on educational topics.

## Features

### 7 News

All the latest in the ever-changing world of your BBC Micro.

### 15 Show

Find out all about the next Electron & BBC Micro User Show.

### 22 Adventures

More tips, including an in-depth look at Twin Kingdom Valley.

### 39 Discs Uncovered

Everything you wanted to know in this revealing interview.

### 40 Disc Drives Explained

We take the top off disc drives and expose the inner workings.

### 51 Hac Man

Delve deeper into the mysteries of your favourite arcade games.



### 55 Machine Code

Learn how to address your computer indirectly, and why.

### 59 Problem Solved

More solutions to those mind-boggling hardware problems.

### 96 Body Building

Make your BBC Micro mobile with this car-battery conversion.

### 101 Begin Here

IF you want to know how to make decisions THEN just read this.

### 118 Communications

Make the most of Email as we continue our beginners guide.

### 122 Micro User Library

More high quality routines brought together for you to use.

### 125 Spreadsheets

A look at the functions and facilities on Ultracalc.

### 127 Pseudo code

More on how to ease your programming problems in style.

### 130 CEEFAX

An introduction to how the BBC telesoftware service works.

### 133 6502 Games

The professional look – how to make your sprites follow the leader.

### 145 Letters

The chance to get your news, views, moans and name into print.

# SPECIAL

## The Biomorphs




## are coming!

It all began with a book, which led to an Horizon Special on BBC TV, which was seen by Micro User technical editor Mike Cook – who was so inspired he wrote a program that turns your BBC Micro into a fertile breeding ground for infinite generations of fascinating creatures called Biomorphs.

You, too, can play with Evolution by turning to **Page 18**

Then, when you've got your breeding program under way, you can take part in our easy-to-enter contest and win a copy of the book that started it all!

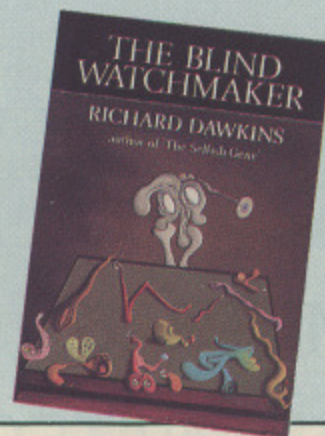

## NEXT MONTH

### CEEFAX:

We take a detailed look

### Utility:

Automatic disc catalogue database

### Reviews:

Unbelievable Ultimate, Starquake and more!

### Telesoftware:

Downloading problems explained

### Game of the month:

Duck's Dinner

# THE MICRO USER

May issue on sale April 8



# LAN



## COMPUTER SYSTEMS

### Bringing the World of Technology to your fingertips

ACORN

MITSUBISHI

TAXAN

STAR

3M

DYSAN

JUKI

BROTHER

VERBATIM

AMSTRAD

MICROVITEC

CUMANA

CITIZEN

OLIVETTI

EPSON

SONY

CANON


PACE

PHILIPS

MAXELL

ZENITH


CENTRONICS

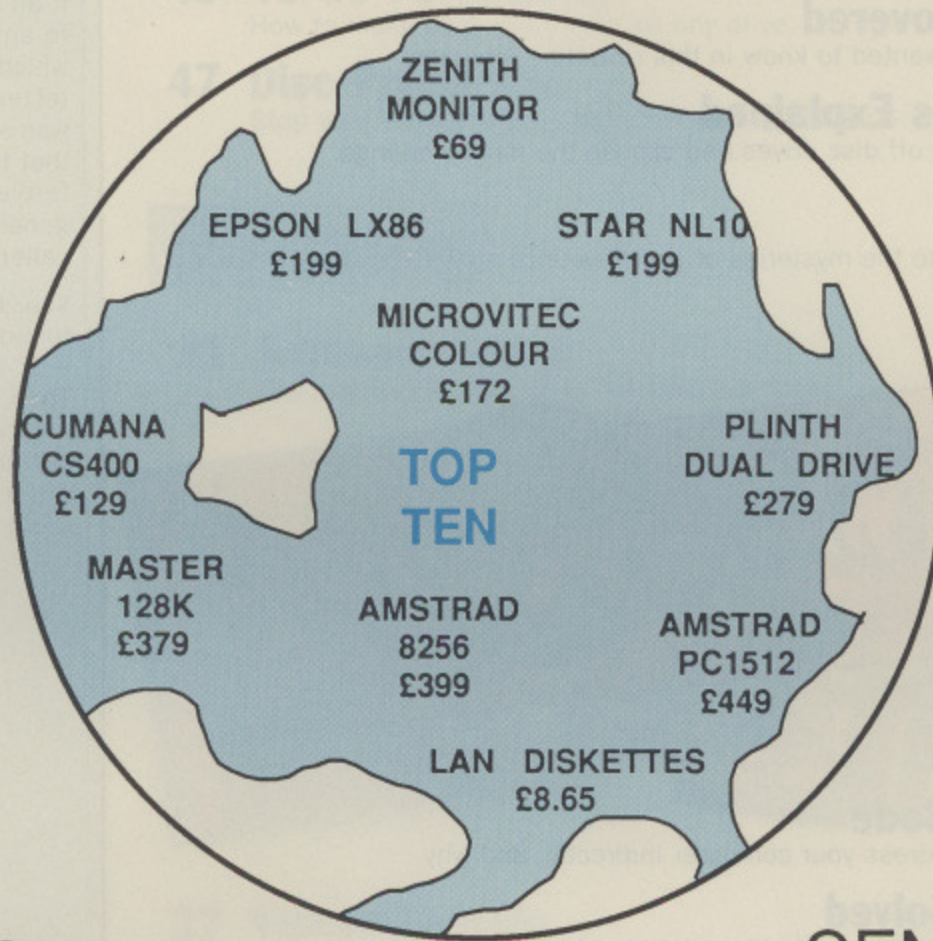

### Spring Education Catalogue Available Now



#### COME IN AND SEE US

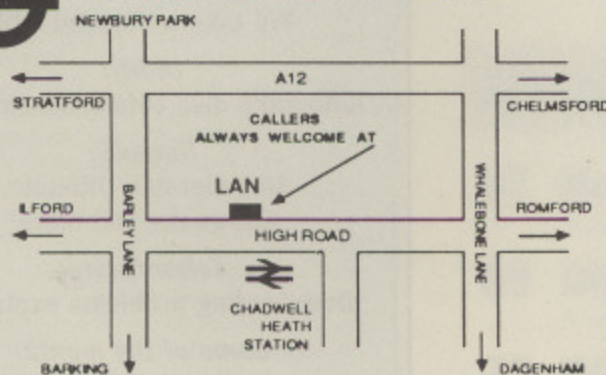

1063 HIGH ROAD  
CHADWELL HEATH  
ROMFORD, ESSEX  
TEL: 01-599 0961

We are open  
9-6.00pm  
Monday to  
Saturday



#### HOW TO ORDER

Enclose letter with cheque, postal order or credit card number for total amount including VAT and delivery charge.

Credit card holders may order by telephone.

Dispatch normally in 24 hrs. Contact Sales Desk

**Official Orders** from Educational Establishments,

Local Authorities and Government departments welcome. Contact Educ. Dept.

**Dealer and Export Enquiries:** Contact Trade Dept.

**Delivery Charges:**

- Below £10.00 add £1.50
- Below £50.00 add £2.50
- Below £100.00 add £3.50
- Above £100.00 add £8.00

*Prices exclusive of V.A.T. and Correct at time of going to press.*

Education callers ask for  
**Tony Judge or Mike Brown**





New Acorn director  
Paolo Tosi

## Changes at top

FOLLOWING the resignations of Alex Uboldi and Jim Edwards from the board at Acorn, the company has announced three new appointments and all are existing employees of parent company Olivetti.

Paolo Tosi, managing director of Olivetti UK, and Franco Agostinucci, vice president for product strategy, have been appointed directors.

The firm's new chairman is Bruno Soggiu, Olivetti's vice president for investment coordination.

According to Acorn managing director Brian Long this reflects an increasing desire on Olivetti's part to cooperate on product and marketing developments.

"It will also provide both continuity and strength for the Acorn board, enabling the company to capitalise on the opportunities now arising", Long said.

## Master beats target

ACORN has hit back at critics who accused the company of fudging sales figures for the Master.

An announcement that in its first year, the machine had notched up 100,000 units was treated with scorn in some quarters. It was claimed a substantial part of the figure was made up of Olivetti-badged items sold

abroad. But official Acorn spokesman Michael Page, keen to clear up the statistics, told *The Micro User*:

"We have said that we have sold 100,000 machines based on Master series technology worldwide in the past year.

"This well exceeds our targets".

He said that a "small per-

centage" of those sales represented Olivetti-badged machines sold in Italy.

This, he said, was the same technology.

"In all 75,000 Masters with Acorn badges have been sold in this country over the past year", he maintained.

"This is the figure we are currently using in our advertising".

## Reuters buy 2,000 Acorn OEM boards


*INTERNATIONAL news agency Reuters liked Acorn OEM boards so much . . . it bought 2,000 of them.*

*Acorn has been working in the original equipment manufacturer field for some time.*

*This order marked a significant change, and not only because of the size. It involved Acorn redesigning the BBC Micro as a Series 3 board.*

*The original order was for 500 a year. But because the boards worked so well as part of Econet local area networks more were ordered.*

*Desk space is at a premium at many Reuters' client's offices. So the agency developed a special Series 3 rack to handle standard Euro-card mountings. This arrange-*

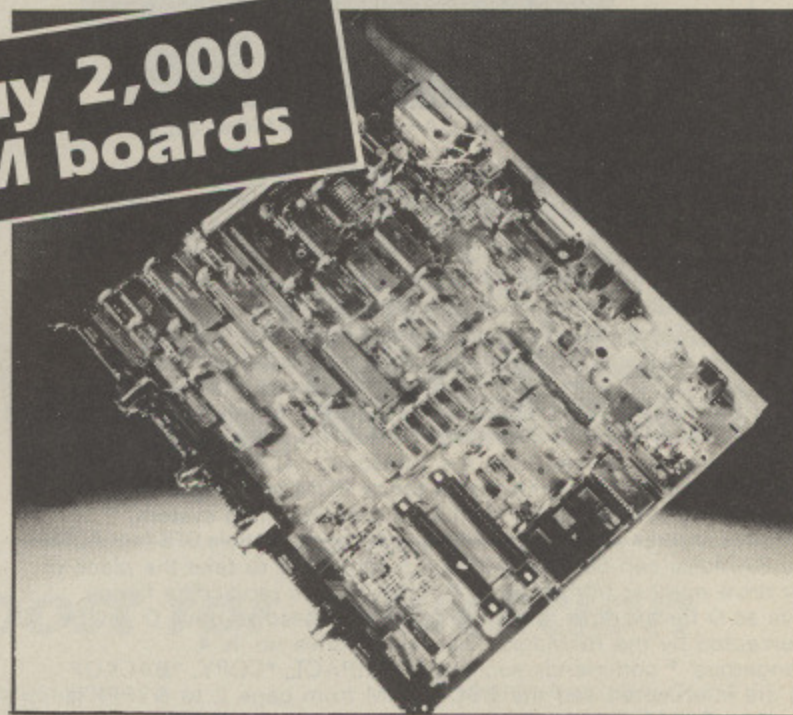

*ment allows devices to be mounted close together. And it gives access to many users while cutting desk space to a minimum.*

*A Reuters spokesman said: "The combination of well-proven Acorn hardware, the Econet local area network and our professional software environment allowed us to*

*introduce a distributed network architecture well ahead of the main PC marketplace".*

*An Acorn spokesman said that Master boards were now available singly in electronic components catalogues.*

*This meant more people could customise the boards specifically to their own requirements.*

## Joyful mouse

REALLY serious BBC Micro users who have a battery of peripherals plugged into their machines and then find a desperate need to use a mouse have help in sight. It comes

from Nidd Valley Micro Products of Wetherby in the shape of the Ana mouse, which has all the features of the company's Digimouse.

But because it is an analogue

device it can be plugged into the joystick port.

The Ana is compatible with some AMX software, but can be supplied with its own CAD program.

# MORLEY ELECTRONICS

## TELETEXT

### - NOW WITH ATS (Advanced Teletext System) SOFTWARE

The Morley Teletext adapter introduces you to the world of Teletext at a price that won't break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than eight years ago, will be fully compatible with any future advances in the Teletext system.


With the Morley adapter you will get a unit that automatically tunes itself in to the required station (no more messing around with screwdrivers in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

For technical details please ring Morley Electronics on Tyneside (091) 262 7507 after 4.00pm


#### FEATURES

● Advanced design uses the latest technology will handle ANY future enhancements to the Teletext system eg: full field: 8 bit data transfer: 2k pages etc.

- Simply plugs into the user port.
- Low power consumption, less than 200ma. Optional power supply available.
- User friendly menu driven software including extended OSCI and Oslow commands for access from BASIC programs.
- 16K Support Rom allowing extended commands including printer dumps etc. included in package
- FREE Telesoftware, no access charges. (at present updated weekly.)
- Save selected pages to disc/tape for later retrieval.
- Full access to all Teletext services and channels eg: CEEFAX, ORACLE, 4-TEL.
- Gives you a real-time clock at your disposal (\*TIME).
- Free software upgrades to allow for any enhancements to the teletext service. Eg: extra channels, full field data on cable & satellite systems etc.
- Easy to follow comprehensive user guide.
- No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- Works with Solidisc SWR.

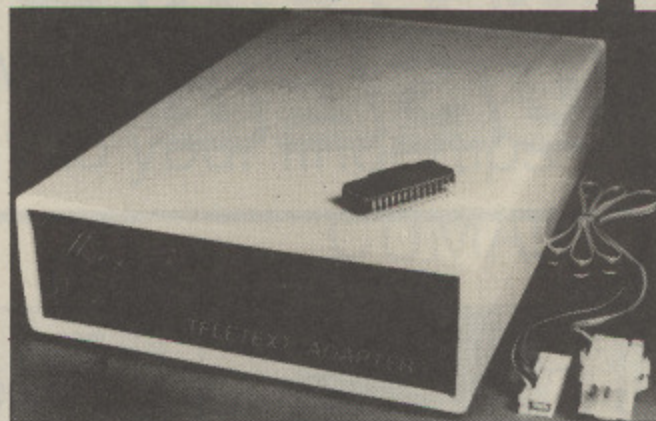

● Utis disc available including printer drivers allows pages to be selected and dumped direct to a printer (no more TV or Radio Times to buy).  
**ELECTRON TELETEXT ADAPTER**  
 Electron adapter now available, including emulated Mode 7 allowing you to run long Adventure type programs. Please ring for details.

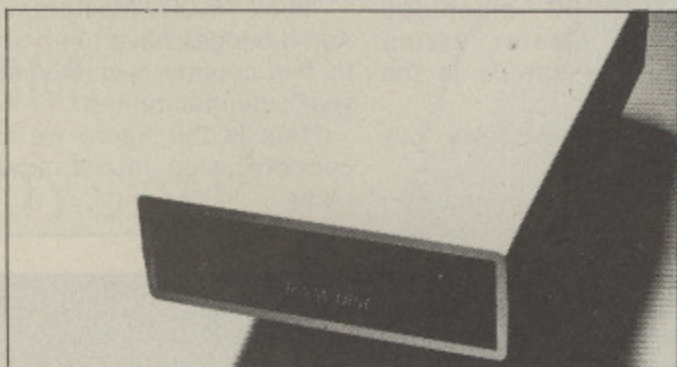

Now available the first true MEGA capacity RAMdisc for the BBC or MASTER computers.

This fully compatible unit, currently available in either 1 or 2 megabyte versions comes complete with operating software on ROM, power supply, battery backup and a comprehensive user guide, add to this our usual 12 months no quibble guarantee and we're sure you'll agree Morley have done it again.

#### FEATURES

1 Megabyte of RAM connected to the 1 MHz bus. Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase in speed, for example, a 20K mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc.

The RAMdisc ROM operates as a utility ROM working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acom compatible DFS (not ADFS). The RAMdisc can be selected by a \* command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive no. is 4. 'Dangerous' \* commands such as \*COMPACT, \*COPY, \*BACKUP etc are intercepted and the BBC's RAM from page 2 to &7FFF is saved to RAMdisc workspace, and may be recovered using a \* command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The save operation delays the \* command by just under 0.4 seconds. The BBC's RAM can also be saved by an interrupt-driven routine which can be enabled by a \* command.

The 'filing system wedge' ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter, verifier and 'sector' editor for use with the RAMdisc.

Catalogue structure allows up to 2,709 files.

**EPROM PROGRAMMER** now available programs 8, 16 and 32k EPROMS connects to the user port software available on rom or disc.

Version 1 economy uncased with standard DIL socket.

Version 2 deluxe cased with ZIF socket.

**DESIGN 7** - Now you can run your own TELETEXT service!

Incorporates the powerful editing facilities of DESIGN 7, again with Teletext adapter interfacing.

Stores up to 100 of your screen designs on a 40Tk disc or 200 on an 80Tk. Page selection by 3-digit number HOLD, REVEAL, page linking, individual page delays etc.

PLUS - a powerful CAROUSEL facility permits continuous slide-shows. Only one disc access for every 16 screens - reduces wear on drives. Smooth animation, variable speed text printing, built in printer dumps. Sample data disc and 22 page manual included. Beats all other systems for ease of use and versatility.

#### M/B software DESIGN 7

Easily the best value Mode 7 screen designer on the market today. Design any mode 7 screen, from simple MENU pages to full CEEFAX standard. This program is an invaluable aid. Designs can be saved to disc as automatically numbered files or the program will convert the screen into a Basic Proc.

INTERFACES DIRECTLY WITH ADAPTER allowing CEEFAX-ORACLE pages to be selected and dropped into editor screen for alteration, saving, or conversion to BASIC. Allows channel change from within program.

#### M/B software MASTER COPY

... the selective copier you need for the BBC MASTER computer ...

Dramatically reduces the time taken to copy unprotected discs,

**DFS to ADFS, ADFS to DFS, DFS to DFS, ADFS to ADFS**

using one or two, single-ro double-sided drives.

An 84K RAM buffer enables many files to be copied in one pass with the minimum of disc swapping, and directories are created automatically as required. Files of any length are handled.

Supplied on disc, MASTERcopy runs from sideways RAM and is invoked with a \* command. The program re-installs itself in sideways RAM when copying is done, ready for later use.

The ROM image supplied can be used to blow your own EPROM too, for use in the MASTER's cartridge slots.

Typical time to copy all 31 files DFS to ADFS is under 2 minutes!

**£12.95 on disc - £14.95 for ROM version (including postage etc.)**

**For further details on all products  
call 091 262 7507 after 4.00pm**

To order please fill in and send order form to: **MORLEY ELECTRONICS, Unit 3, Maurice Road Industrial Estate, Wallsend, Tyne and Wear NE28 6BY.**

<b>Adaptor Software</b>	Please send me				
ROM <input type="checkbox"/>	Qty. <input type="checkbox"/> Morley Teletext adaptors	@ £119.95 inc. VAT	Qty. <input type="checkbox"/> Optional PSU	@ £9.95 inc. VAT	
SWR DISC <input type="checkbox"/>	Qty. <input type="checkbox"/> Master Copy ROM	@ £13.95 inc. VAT	Qty. <input type="checkbox"/> 1 Mbyte RAM disc	@ £199.95 inc. VAT	
40 TRK <input type="checkbox"/>	Qty. <input type="checkbox"/> Master Copy Disc	@ £11.95 inc. VAT	Qty. <input type="checkbox"/> 2 Mbyte RAM disc	@ £349.95 inc. VAT	
80 TRK <input type="checkbox"/>	Qty. <input type="checkbox"/> M/B DESIGN7 screen designer	@ £7.95 inc. VAT	Qty. <input type="checkbox"/> Eprom Programmer V.1	@ £18.95 inc. VAT	
Please Tick <input type="checkbox"/>	Qty. <input type="checkbox"/> Teletext utilities on Disc	@ £5.95 inc. VAT	Qty. <input type="checkbox"/> Eprom Programmer V.2	@ £27.95 inc. VAT	
			Qty. <input type="checkbox"/> Desfax	@ £23.00 inc. VAT	

MU/4

Total £



NAME \_\_\_\_\_ PHONE No. \_\_\_\_\_ CHEQUE No. \_\_\_\_\_

ADDRESS \_\_\_\_\_

POSTCODE \_\_\_\_\_

Please add £3.00 P+P on Adaptors and RAM Discs, £2.00 P+P on PSU's and Programmers, £1.00 P+P on Software.

Please allow 28 days for delivery



# NEWS

A MYSTERY now surrounds the question of just who was the first person to develop an effective Chinese word processor on a BBC Micro.

The April edition of *The Micro User* described a British father and son team as currently leading the world in this field.

It reported that Robert Sloss, a Cambridge University lecturer, and his 20-year-old student son Andrew, have managed to get 14,000 Chinese characters on to two floppy discs.

And more importantly they have developed a rotating drum type keyboard which will satisfy both the cultural and commercial demands of that country.

But when a copy of the magazine arrived at the home of Dr. David Fung in Wellington, New Zealand, he wasn't at all pleased.

For the Chinese doctor insists that he demonstrated a prototype of a similar word processor in his native tongue back in 1984.

"While the BBC Micro is playing a key role in this area, I have to inform you that the Sloss system is not the first with a Beeb", he said.

"My apologies to Robert and Andrew, but I cannot let

月落鸟啼霜满天  
江枫渔火对愁眠  
姑苏城外寒山寺  
夜半钟声到客船

## Puzzle for Charlie Chan

non-Chinese claim that honour".

The original Fung word processor was based on a BBC Micro and an external 6502 second processor, but the latest version now uses the BBC Turbo, standard floppy disc drive and Hewlett Packard Thinkjet printer.

"It is entirely adequate for small scale publishing", says Dr. Fung. "For commercial applications however, the BBC Micro does not have sufficient graphic resolution.

"Unless Acorn can produce a high resolution screen of 1280 x 640 pixels or better, I am afraid the ultimate application will have to go to other machines".

## Sinclair's new micro uses BBC Basic

THE launch of Sir Clive Sinclair's much-publicised new Z88 lapheld computer revealed a closely-kept secret – it uses BBC Basic.

In a remarkable U-turn, Sir Clive, once the most ardent critic of the language, was forced to eat his words.

He has installed BBC Basic as the resident programming language and assembler in the new machine. "BBC Basic? It was just what we needed", he declared at the Which? Computer Show launch.

The official line is that the language is established and totally debugged; that it is fast and familiar to many.

It is believed that the choice of BBC Basic is not

unconnected with hopes that the Z88 could find a market in the educational field when it is pushed in that direction next year.

Industry observers have been amazed by this apparent turnaround by the computer industry's knight.

The fact that he had gone for BBC Basic certainly proved a source of amusement at the launch.

"This is akin to Winston Churchill singing the praises of Adolf Hitler", commented a source close to Acorn.

"We are only surprised at how long it has taken a man of Sir Clive's obvious intelligence to come round to appreciating how good a machine the BBC Micro is".



A SEQUEL to its very popular *Secret Diary of Adrian Mole* is now available from Virgin Games.

*The Growing Pains of Adrian Mole* is based on another bestselling book by Sue Townsend and players must try to make Adrian as popular as possible with everyone. Price £9.95.

## Manchester show boost for education

EDUCATION matters feature highly in the coming Electron and BBC Micro User Show – including nearly 100 new programs from one company.

LCL has produced the batch for the BBC Master Compact for the show, which will feature 70 other exhibitors.

Micro English and Micro French are complete courses of 24 programs taking beginners up to O level standard. Mega Maths is a 24 program step-by-step A level course.

Also available will be Animated Arithmetic, a two program course consisting of 105 topics which aims to teach infants using moving pictures not words.

The show has been chosen to take the wraps off music software which has been four years in the making.

The International School of London with Electro Music Research has produced Score Writer, which should be of interest to music students and composers both professional and amateur.

It has already brought interest from pop star Keith Winter of Shakatak.

The package allows a composition to be created and then written on a dot matrix printer. Other users will be well catered for, too, as companies show off the latest in games, hardware and

accessories.

Watford's new range of peripherals will be on show for the first time. Incorporating adjustable TV/monitor stands, 5.25in floppy discs, a disc file, an anglepoise copy holder, an anti-glare filter, an easy holder, a 5.25in disc drive head cleaner and a printer stand. All will cost £25 or under.

Watford will also have its new Co-Pro adapter on show. This £50 interface opens up the BBC Micro to advanced systems through a Master 512k board.

Flora Electronics will be unveiling their new non-volatile ram module for the

BBC Micro. Available in either 16k or 32k formats it will cost £22.50 and £32.50 respectively.

Minerva will be offering to bridge the gap between its own database System Delta and both the Acornsoft View range, and all Computer Concepts' Inter products. Their new Inter/View Link costs £19.95.

They will also present Reporter which they claim is more powerful than dBase III Plus Report Writer.

It comes in two parts. One allows simple lists to be generated by two commands. The other sets up a vast range

Turn to Page 11 ►

3 1/2" 'COMPACT' versions of CJE software available £2 extra.

# CJEmicros

ALL CJE MICRO'S SOFTWARE IS B, B PLUS, MASTER & MASTER COMPACT COMPATIBLE.

ENHANCED!

## Multi-Font NLQ

**Converts most printers to NEAR LETTER QUALITY** in user definable Fonts.

For EPSON & EPSON Compatibles, including MX/RX/FX/LX 80/100, STAR DP510/Gemini 10X/SG10/NL10 & Citizen 1200.

Simple to use, standard EPSON codes for Underline and Doublewidth used.

After initialising Multi-Font NLQ with a '\*MFNLQ', Multi-Font NLQ is normally transparent to the user. Multi-Font does claim some memory for workspace and storing font data. Multi-Font NLQ comprises of MFNLQ ROM for the BBC, and utility disc containing the FONT definer, ten fonts, BASIC demonstration program, VIEW demo text file and Driver.

Multi-Font NLQ is compatible with nearly all software, including most BASIC programs, VIEW, WORDWISE & InterWORD (SCRIBE & Printer Buffer software currently not supported).

Ten fonts are supplied or create your own using the font definer supplied.

Fonts included are:- Standard NLQ, Courier, Italic, Gothic, CompTS, Bold, Shadow, Outline, Broadway E, Theatre

Additional Font Disc MF 'B' contains:- Hand, Script, Stencil, Broadway, Caps, Italic-Plain, Meccano, Plain, STD large, Wire, Greek/Maths and Inverse.

For Canon & Taxan Kaga users we recommend FONTAID in preference to Multi-Font NLQ.

Multi-Font NLQ (ROM and 40/80 Disc)	<b>£30.00</b>
Additional font disc 'MF-B' (12 fonts)	<b>£15.00</b>
Additional font disc 'MF-C' (15 fonts)	<b>£15.00</b>
P & P on MFNLQ	<b>£ 1.00</b>

**MASTER Write Protect and ROM select switch.**  
Two switches set to RAM slots to be:-  
Internal ROM or RAM Read and Write or RAM Read only.  
£15.00 inc VAT P&P £1.00

This is Standard

This is COURIER

This is ITALIC

This is GOTHIC

This is COMPTS

This is BOLD

This is SHADOW

This is OUTLINE

This is BROADWAY

This is THEATRE

### EXAMPLE OF MFNLQ FONTS

Additional disc 'A' gives an extra 11 fonts including:- Greek/Maths, Plain, Hand & (Elite, Condensed, & Super Condensed).

Now included is a facility to issue '\*' commands within a VIEW document. To download new fonts within VIEW documents, the FONTAID ROM needs to be fitted in the BBC. (All other FONTAID facilities are available on both the FONTAID ROM & DISC). Fonts are always downloaded from Disc.

FonTAID is recommended to Canon & Taxan Kaga owners in preference to Multi-Font NLQ. As downloadable NLQ is a built-in facility of the Printer, full access to all the printers control codes is still allowed. The resolution of the FONTAID NLQ is also slightly higher than that of Multi-Font NLQ.

FONTAID requires 6264 RAM chip in printer.

FONTAID ROM & STD Font disc	(40 or 80 track)	<b>£30.00</b>
FONTAID ROM & STD Font disc with 6264 RAM	(40 or 80 track)	<b>£36.00</b>
FONTAID Additional Font DISC 'A' (11 fonts)	(40 or 80 track)	<b>£15.00</b>
FONTAID Additional Font DISC 'B' (13 fonts)	(40 or 80 track)	<b>£15.00</b>
FONTAID Additional Font DISC 'C' (15 fonts)	(40 or 80 track)	<b>£15.00</b>

FONT ROMS of individual fonts are available eg "Square".  
P & P on FONTAID **£ 1.00**

## FONTAID

NLQ Definer for Canon & Taxan Kaga NLQ Printers.

Design your own NLQ Fonts or 'download' one of our 40+ predefined fonts.

Fonts can be downloaded within Wordwise, Inter Word or VIEW Documents allowing different fonts to be used for different paragraphs, or even individual lines of text. During downloading your Program or Text will not be corrupted.

On the FONTAID standard font Disk are the following eight fonts:- Square, Outline, Italic, Gothic, Computer Type Style, Bold, Shadow, and Broadway Engraved.

## INFORM

### A UNIQUE NEW POWERFUL USE FOR SIDEWAYS RAM

INFORM has been developed specifically to take full advantage of the Sideways RAM facility that many BBC micro users now have. Inform is compatible with most SIDEWAYS RAM units including ATPL Sidewise with RAM, Solidisc SWR, BBC B PLUS 128K & BBC MASTER series (not SDL256)

INFORM is a very powerful facility, which allows the user to display text information, of any kind, from Sideways RAM. This information can be readily accessed by using '\*' commands from the keyboard or from application programs. In this way, much information can be displayed on the screen without stopping the current task, such as entering text in WORDWISE or VIEW.

The information in the RAM can be changed dynamically at any time.

Some of the possible applications for INFORM are:-

An on screen help manual can be created for your application, so that a reminder about more obscure points can be displayed at the users request. Information on your program or datafile contents, can remind you of their purpose.

Address and/or telephone numbers can be held and displayed quickly even while other applications are running. Very useful if you need to quickly display information about a client while he is hanging on the end of a phone!

Current prices for your products or stock position can be recalled instantly and readily modified using a wordprocessor. Similar files may be created from most databases such as VIEWSTORE.

In fact, any information to which you frequently refer can be displayed immediately without running another program. Your use of INFORM is only limited by your imagination, as they say!

There are three Inform Data Files (I.D.F.), of often used information, supplied on the disk to give an indication of the use of INFORM.

To use INFORM you must have Sideways RAM.

**INFORM on 40/80 track disc. P & P on INFORM £1.00 £20.00**

## PRINTERS

NOW FREE DELIVERY on PRINTERS (by courier)

Ring for sample printouts, full specification and latest prices.

Near Letter Quality Printers all with Centronics interface, Friction and Tractor feed.

<b>Panasonic KX-P1080</b>	<b>£180.00</b>
<b>Kaga KP810/Canon 1080</b>	<b>£260.00</b>
<b>Canon PW1156A (15")</b>	<b>£414.00</b>
<b>Star NL10</b>	<b>£260.00</b>
<b>Juki 5510</b>	<b>£320.00</b>
<b>Juki 5520 (7 colours)</b>	<b>£445.00</b>
<b>Letter Quality Printer</b>	
<b>Juki 6100 Daisywheel</b>	<b>£280.00</b>
<b>BBC Cable</b>	<b>£ 8.00</b>

Inclusive of  
VAT & Delivery  
Ring for  
latest prices.

CJE BBC Printer PACKS include:-  
CABLE to BBC 1.25M, M/C two tone screen dump, Screen text dump, Function key set up program, Function key label printing program, VIEW driver, Character defining program for downloadable character set (draft mode), 100 sheets of paper, Mains plug with 3AMP Fuse, Booklet giving instruction on pack software and general details of using the printer with a BBC.  
C.J.E. BBC Printer Packs are £15.00 cassette (£16.00 disc) (e.g. Kaga KP810 with Printer-pack £260 + £15 = £275 everything included)

TRADE & EXPORT ORDERS WELCOME please inquire for delivery cost.

PRICES INCLUDE VAT


Phone/Credit Card and Official Orders welcome.

Full range of Printer, BBC, AMSTRAD & ATARI accessories available. **Official ACORN approved Dealer.**

C.J.E. MICRO'S (Dept MU 4 ) 78 Brighton Road  
Worthing W. Sussex BN11 2EN (0903) 213361

CJEmicros

# NEWS

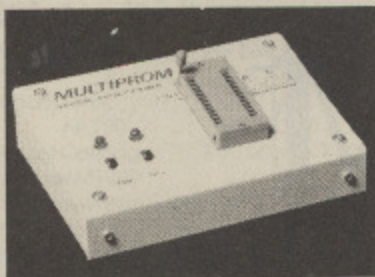

## Eproms for all

FOR expert users Ground Control, the Essex manufacturers have produced an eprom programmer compatible with all BBC Micros with a user port.

Multiprom plugs into the port via 0.6 metres of ribbon cable and a socket, taking power directly from the computer.

Developed from the company's UVIPROM range, the new product requires UVP 1.1 software.

Multiprom costs £44.95 and UVP 1.1 £5.

## Showcase

◀ From Page 9

of complicated formatted reports. Price £19.95.

First in a range of collections for the BBC Micro will be available from Superior Software. Each will contain seven hits plus one brand new title.

Volume One features Karate Combat, Repton, Starstriker, Airlift, Wallaby and Syncrom. Volume Two offers Kix, Repton 2, Deathstar, Space Pilot, Missile Strike, Overdrive and Crazy Painter. Both collections cost £9.95 on tape, £11.95 on disc.

Slogger will be unveiling their new 32k sideways ram for the BBC Micro. Plugging directly into a BBC rom socket it will cost approximately £25.

The Electron & BBC Micro User Show takes place at UMIST, Manchester, March 20 to 22. Doors are open from 10am to 6pm Friday and Saturday, and 10am to 4pm on Sunday.

A money-saving advance ticket order form appears on Page 15 of this issue.

## BBC Micros land in jail

SIX BBC Micros are behind bars at HM Prison, Channings Wood near Newton Abbot in Devon, playing a vital role in helping the inmates learn everything from spelling to business practice.

Education Officer at the prison, Bob Howard explained that they had been used with great success for about a year.

"They are used largely as classroom accessories at present, though we do have computer literacy classes,

both for the community and the inmates", said Mr Howard who is employed by the local authority.

He explained that the prisoners were able to use the BBC Micros in a variety of ways. Some simply learned to read and write with their help, others to spell and produce special letters.

There was also a business studies course, which made use of Database Software's Mini Office II.


"All the tutors have a

working knowledge of the machines but we need a full time computer tutor", he said.

"Indeed there are plans for courses on programming and word processing which will require such a person.

"We are very happy with the BBC Micros but we have to regard them as a means to an end rather than an end in themselves.

"The classes take them as they find them and are taught not to regard them as magic wands".

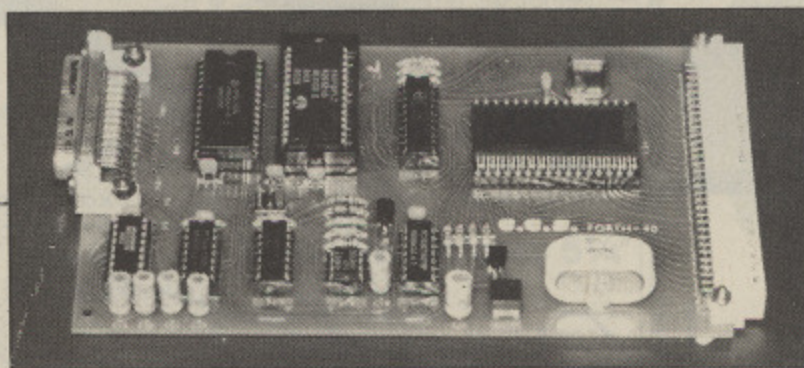

## The computer on a card

RECENTLY formed Warwickshire company, Central Control Systems is planning to release a new "cuckoo" computer soon.

The Forth-40 is a single board computer designed to work with the BBC Micro,

using rom-based software, and aimed at engineering, instrumental and laboratory work, particularly in connection with administering control and testing equipment.

It is supplied as a single height Eurocard and uses an

enhanced 6502 processor running at 2Mhz.

Further features include two programmable counter timers, auto run capability at switch on, an RS232 interface and battery-backed memory.

The board will cost £130.

TWO million French people now have access to pages from Ceefax thanks to a BBC Micro.

The BBC has just begun a six-months experiment with the French Kiosk teletext service to provide a selection of Ceefax pages.

The major problem to overcome was that the two systems operate differently. Ceefax pages are on a carousel - you wait for them to come round. The French system has a pile of pages, each section of which can be called directly.

The BBC Micro overcomes

## Merci BBC!

the problem by ensuring that a particular page number in Britain always takes a given place in France.

A spokesman for Ceefax explained that the Channel crossing had come about simply because the French had asked - and there was the possibility that Ceefax could make money on it.


"Their system is really quite different. It is going very well;

they have about two million subscribers", he said.



"They discovered about 40,000 resident English speakers in the Paris area alone and they also believe there is educational and tourist interest in the pages".

Another difference about Kiosk - just one of a number of services offered on teletext in France - is that newspapers take space on it. From now on, the BBC will provide news beside them.


Initially about 100 pages will be made available from Ceefax, updated as often as the BBC can manage.

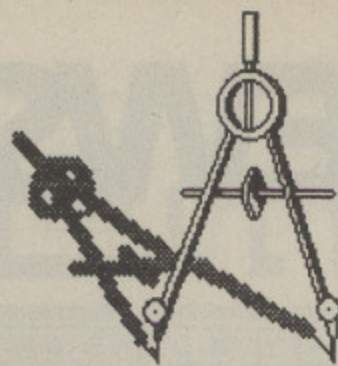

# ARTROOM

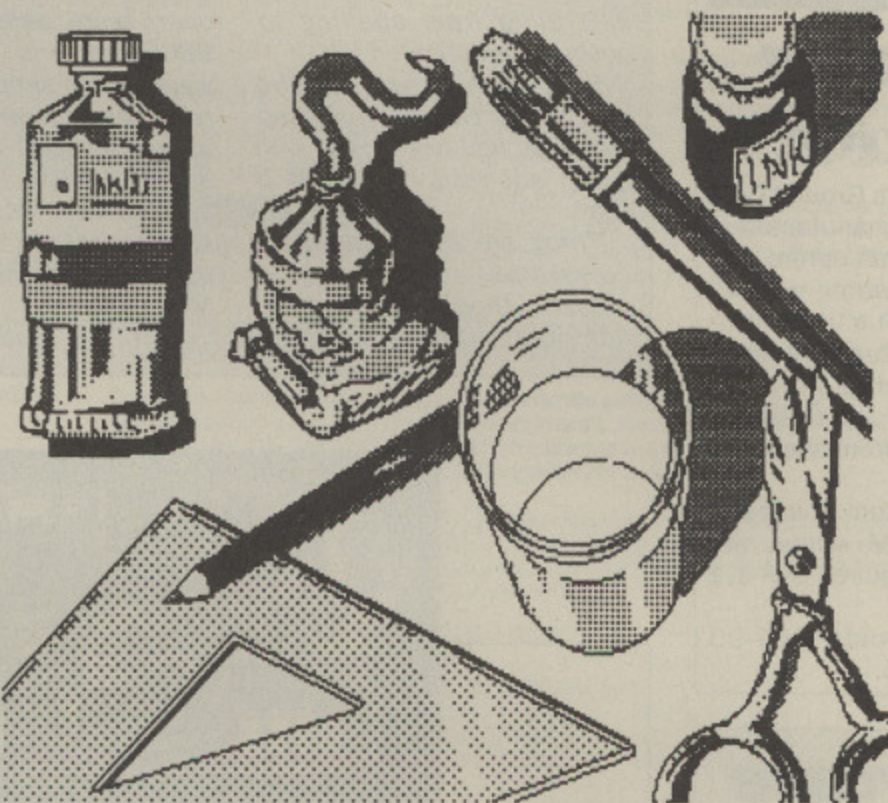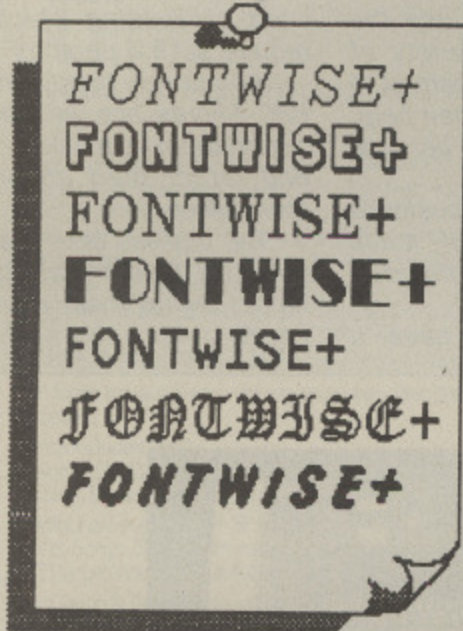

# clares

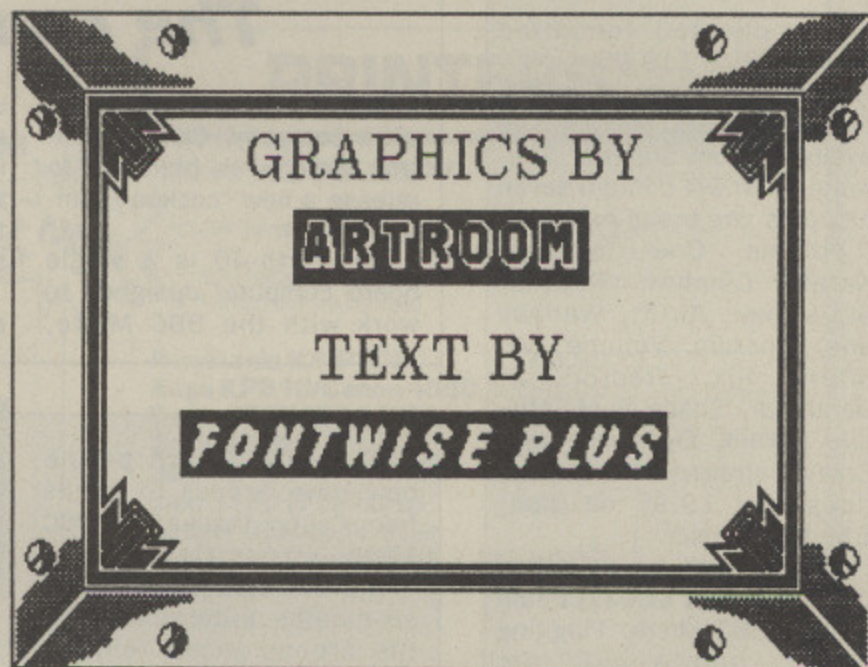

ARTROOM MASTER £25.00

ARTROOM COMPACT £27.00

ARTROOM + MOUSE £59.90

State whether for Master or Compact

FONTWISE+ PACK £30

The FONTWISE+ pack contains FONTWISE+, the FONT EDITOR and 22 Fonts. ADFS version now available for MASTER series.

Add £4 for 3.5 inch version for Compact.

Send for our catalogue today.

98 Middlewich Rd  
Northwich  
Cheshire  
CW9 7DA  
Tel: 0606 48511

# MICRO MEDIA Computer Supplies

0707 52698 or 0707 50913

Dept. MU Rydal Mount, Baker Street, Potters Bar, Herts EN6 2BP

## Printer Ribbons

Mixed types for quantity breaks

	2+	5+	12+
<b>Acom</b> AP 80	2.70	2.30	2.10
AP 100	2.70	2.30	2.10
Ink Jet Cartridge	7.50 per pack of four		
<b>Brother</b> M1009	3.50	3.00	2.80
Red Brown Blue Green	4.95	4.65	4.25
HR 15 MS	3.30	2.90	2.60
HR 15 Fabric	3.40	3.00	2.70
<b>Canon</b> PW1 156/1080	3.20	2.70	2.50
Red Brown Blue Green	4.70	4.20	3.90
<b>Centronics</b> GLP	3.50	3.00	2.80
Red Brown Blue Green	4.95	4.65	4.25
<b>Daisystep</b> 2000 M/S	2.90	2.40	2.20
Fabric	4.10	3.80	3.50
<b>Epson</b> FX/MX/RX 80	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
LX 80	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
<b>Juki</b> 5510	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
6100 MS	2.30	1.90	1.70
6100 SS	1.40	1.10	1.00
2200 Fabric	3.60	3.30	3.10
2200 SS	3.00	2.60	2.40
2200 Corr	3.90	3.50	3.30
<b>Kaga</b> KP 810/910	3.20	2.70	2.50
Red Brown Blue Green	4.70	4.20	3.90
<b>M/Tally</b> MT 80 M/S	3.80	3.00	2.80
<b>NEC</b> PC 8023	3.60	3.00	2.80
<b>Oki</b> 80/82	1.50	1.20	1.10
Red Brown Blue Green	2.40	2.00	1.80
<b>Panasonic</b> KXP 110	3.90	3.40	2.90
<b>Quendata</b> 2000 MS	2.90	2.40	2.20
Fabric	4.10	3.80	3.50
<b>Seikosha</b> GP80	2.70	2.30	2.10
GP100/250	2.70	2.30	2.10
GP500	3.70	3.10	2.90
Red Brown Blue Green	4.90	4.60	4.20
<b>Shinwa</b> CP80 M/S	3.80	3.00	2.80
<b>Smith Corona</b>			
D100/200	4.90	4.50	4.00
EL1000/2000 M/S	8.30	7.70	7.00
Fabric	3.70	3.40	3.30
Corr	4.80	4.50	4.30
<b>Star</b> Gemini 10x 15x	1.50	1.20	1.10
Red Brown Blue Green	2.40	2.00	1.80
NL 10	5.50	4.80	4.50
<b>Walters</b> WM80 M/S	3.80	3.00	2.80
2000	3.70	3.30	2.90

If the ribbon you require is not listed ring 0707 52698 and let us quote

## Swivel Bases for Monitors



Pan tilt revolves around 360°  
12.5° tiltable up and down  
adjustable by front mechanism.

12" Monitors **£12.00**  
14" Monitors **£15.00**

## Adjustable Copy Holders



A4 Adjustable desk clamping. Magnifying cursor line paper height adjustable clip, paper thickness adjustment.

**£20.90**

A4 Adjustable desk clamping. Plate positioned 360°.

**£13.90**

## Micro Media Brand Universal 5 1/4" Discs

Reversible with 2 notches and index holes. Lifetime guarantee, hub rings, envelopes, labels. Suitable for 40 or 80 track. Packed in plastic library case.

10+ 30+ 50+  
**9.40 8.90 8.50**

## Unbranded 5 1/4" Discs

Certified lifetime warranty hub rings, envelopes, labels

Prices per 10 Discs

	10+	30+	50+
SS/DD 40	6.50	6.00	5.50
DS/DD 40	7.50	7.00	6.50
DS/DD 80	8.50	8.00	7.50

## Unbranded 3 1/2" Discs

Lifetime Guarantee/label sets

SS/DD	17.00	16.00	15.00
DS/DD	19.00	18.00	17.00

## 3M 5 1/4" Lifetime Guarantee

SS/DD 40	10.30	9.90	9.60
DS/DD 40	12.50	12.20	11.90
DS/DD 80	15.20	15.20	14.90

## 3M 3 1/2" Lifetime Guarantee

SS/DD	20.50	20.30	20.00
DS/DD	25.50	25.30	25.00

## Verbatim Datalife 5 1/4"

SS/DD 40	11.70	11.40	11.10
DS/DD 40	14.70	14.40	14.10
DS/DD 80	19.70	19.40	19.10

## Computer Labels

Continuous fanfold, sprocket fed

Price per 1000	1,000	2,000
70x36	4.20	3.80
89x36	4.30	3.90
89x49	5.90	5.30
102x36	4.50	4.20

Please state no. of labels across the sheet (1, 2 or 3).

## 9 1/2" Backing Sheet for Fixed Tractor

	1,000	2,000
70 x 36 3 across	4.20	3.80
89 x 36 2 across	6.60	6.30
102 x 36 2 across	6.70	6.40

## Computer paper

Plain fanfold, micro perf edges

Size	Weight	1000's	Price per box	per box	1 box	2 bxs+
11x9 1/2	60	2	14.40	13.60		
	80	2	17.80	16.30		
EXACTA4						
11 3/8 x 9 1/4	70	2	24.00	21.30		
	90	1	15.20	12.70		

A4 Fixed tractor paper available

## Printer Stands



5mm clear perspex  
405 x 325 x 100mm

80 column printers **£19.90**  
132 column printers **£24.90**

## Head Cleaners

Discs with 15ml cleaning solution

5 1/4" Head Cleaner	4.00
3 1/2" Head Cleaner	5.00

## Printer Leads

Centronics lead to connect BBC to Epson Kaga Canon etc.

1 MTR	6.30	2 MTR	8.50
-------	------	-------	------

## Printout Binders


Adjustable hardback ring binder for 11x9 1/2 to 12x9 1/2 cont paper 40mm paper capacity

BLUE RED or BLACK	£4.90 each
set of 5 indexes	£2.30


## Disc Mailers

Price each 50+ 100+

Rigid Cardboard holds 40p 28p up to 3 discs	
---	--

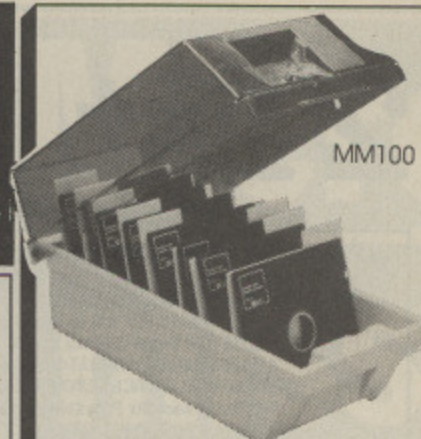


MM100

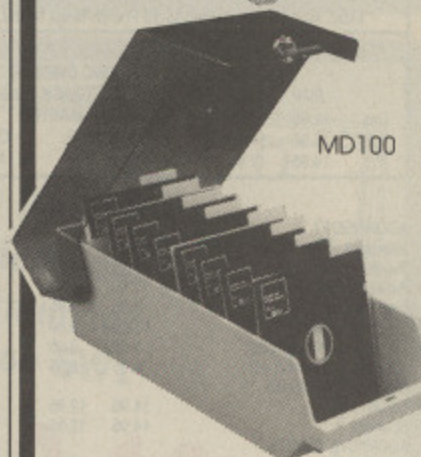

MD100



MM50

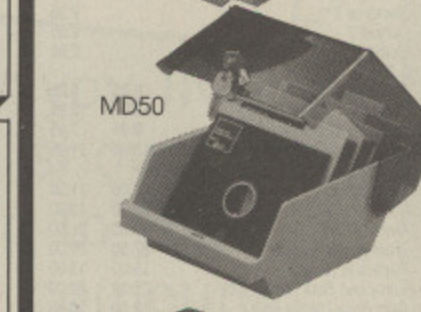

MD50



MM40

## Disc Boxes

	1	3+
MM 100 5 1/4 x 100	11.70	10.00
MD 100 5 1/4 x 100	11.70	10.00
MM 50 5 1/4 x 50	8.70	7.90
MD 50 5 1/4 x 50	8.70	7.90
MM 40 3 1/2 x 40	8.50	7.40
Rexel Mini Disc Box	5.00	
Plastic Library Case	3 for 4.00	

All MM/MD boxes anti-static with lock

● Educational and HMG orders accepted. ● Trade enquires. ● Personal callers welcome. ● Open Sat 10am - 4pm

Orders despatched 24 hrs. Please allow 5 days for delivery. For next day delivery please ring for details. Postage covers UK only.



ALL PRICES INCLUSIVE OF POSTAGE & PACKING

Please add VAT at 15%



24-Hour Credit Card Orders

**0707 52698**

MICROMEDIA-MICROMEDIA-MICROMEDIA-MICROMEDIA-

# 21st Software

ACCESS HOTLINE  
Ask for Jacqui  
0625 528885  
24Hr Answer Service

(ELECTRON VERSIONS AVAILABLE)

PRESENTS A SELECTION OF HARDWARE, UTILITIES & SOFTWARE FOR THE BBC MICRO

<b>NEW</b> <b>COMPACT DISCS</b> SUPERIOR/ACORN/SOFT COMPACT DISCS 3.5" REVS + REVS TRACKS RRP £18.95 Our Price £18.65 ELITE RRP £18.95 Our Price £17.95 CITADEL/KARATE COMBAT/SPEECH REPTON 2/GALAFORCE/STRYKERS RUN RRP £14.95 each Our Price £13.45 each L.C.L. Micro Maths/Micro English/Micro French/Mega Maths £21.50 each		<b>NEW</b> C.D.S. Brian Clough's FOOTBALL FORTUNES RRP Ours Cas 14.95 12.95 Disc 17.95 15.95 GREMLINS Footballer of the Year Cas only RRP £9.95 Ours £8.65		<b>NEW</b> ACORN/SOFT/SUPERIOR'S ACORN/SOFT'S HITS VOL I RRP Ours Cas 9.95 8.45 Disc 11.95 10.65 ACORN/SOFT'S HITS VOL II RRP Ours Cas 9.95 8.45 Disc 11.95 10.65 Compact versions £12.95 each		<b>SPECIAL OFFERS</b> MAJIC MUSHROOMS Disc £10.95 MAZE Cas £5.95 YIE AR KUNG FU Cas £8.95 POLE POSITION Cas £5.95 TRIVIAL PURSUITS Disc £15.95 OFFICE MATE Cas only £10.00 Ends 15th April 1987					
<b>MINI OFFICE II</b> RRP Ours Cas 14.95 12.95 5.25" 16.95 14.95 3" 19.95 17.95		<b>NEW</b> ELECTRIC DREAMS FIRETRACK BBC B + MASTER RRP Ours Cas Only 9.99 8.49		<b>NEW</b> FIREBIRDS CHOLO RRP Ours Cas 12.95 11.45 Disc 17.95 15.95		<b>NEW</b> DOMARK'S TRIVIAL PURSUITS Young Players Edn. RRP Ours Cas 14.95 13.45 Disc 19.95 16.95		VINE MICRO'S ROM SOFTWARE ADDCOM RRP £28.00 Our Price £26.00 REPLAY RRP £35.00 Our Price £31.50 Please state Op. system		LOGOTRON LTD XOR RRP Ours Cas 9.95 8.45 Disc 12.95 11.65	

ACORN/SOFT	RRP	Ours	EPIC SOFTWARE (Disc versions add £2)	RRP	Ours	LLAMASOFT	RRP	Ours	Trafalgar	RRP	Ours
Viewspell Rom	39.95	35.55	The Wheel of Fortune (cas)	9.95	8.45	Colourspace (cas)	7.95	6.95	ACORN/SOFT AND SUPERIOR SOFTWARE (*Disc version add £2)		
Aviator (cas)	14.95	13.25	Castle Frankenstein (cas)	7.95	6.55	MASCEN SOFT			Tempest*	9.95	8.95
Aviator (disc)	17.65	15.25	The Quest of the Holy Grail (cas)	7.95	6.55	Treasure Hunt	9.95	8.95	Repton*	9.95	8.95
Firebug (cas)	9.95	8.95	Kingdom of Klein (cas)	7.95	6.55	Block Busters	7.95	6.95	Death Star*	9.95	8.95
Snooker (disc)	11.50	10.50	FIREBIRD			Bulls Eye	8.95	7.95	Repton 2	9.95	8.95
Gateway to Karos (cas)	9.95	8.95	Sentinel (cas)	9.95	8.45	Gold Run	8.95	7.95	Citadel*	9.95	8.95
Kingdom of Hamil (cas)	9.95	8.95	Sentinel (disc)	14.95	12.95	MELBOURNE HOUSE			Speech*	9.95	8.95
ACORN/LINKWORD			GILSOFT			Classic Adventure	6.95	5.95	Karate Combat (cas)	8.95	7.95
Italian	14.95	12.95	The Quill (cas)	16.95	15.45	Hamstead	7.95	6.85	Karate Combat (disc)	11.95	10.95
Spanish	14.95	12.95	The Quill (disc)	22.95	20.45	Terrormolinos	7.95	6.95	Thrust (cas)	7.95	6.95
ADDICTIVE GAMES			GOLEM (for disc version add £2)	8.00	7.00	Hobbit (cas)	14.95	13.45	Thrust (disc)	11.95	10.65
Football Manager	8.95	7.95	Education I	8.00	7.00	Exploding Fist (cas)	9.95	8.95	Strykers Run (cas)	9.95	8.75
Boffin	9.95	8.95	Education II	8.00	7.00	Exploding Fist (disc)	14.95	13.45	Strykers Run (disc)	11.95	10.65
ADVENTURE INT.			Fun with words	8.00	7.00	Dodgy Geezers	8.95	7.95	Gala Force (cas)	9.95	8.75
Robin of Sherwood	7.95	6.95	Fun with numbers	8.00	7.00	MICROPOWER (Disc version add £2)			Gala Force (disc)	11.95	10.65
ALLIGATA			Jigsaw	8.00	7.00	Dr. Who/Terror Mines	18.95	17.25	Repton 3 (cas)	9.95	8.45
Decathlon (disc)	9.95	8.95	HEWSON			Castle Quest	12.95	11.65	Repton 3 (disc)	11.95	10.65
Who Dares Wins II (disc)	9.95	8.95	Heathrow A.T.C.	7.95	6.95	Ghouls	7.95	6.95	Ravenskull (cas)	9.95	8.45
Quiz Quest (disc)	9.95	8.95	Fantasia Diamond	7.95	6.95	Chess	7.95	6.95	Ravenskull (disc)	11.95	10.65
Son of Blagga	7.95	6.95	Southern Belle	7.95	6.95	Killer Gorilla	7.95	6.95	Elite (cas)	12.95	11.65
ATARISOFT			ASLICON SOFTWARE			Felix in Factory	7.95	6.95	Elite (disc)	14.95	13.65
Pole Position	9.95	8.95	Psychastria	7.95	6.75	Stock Car	6.95	5.95	Revs + 4 Tracks (cas)	12.95	11.65
Robotron	9.95	8.95	Caveman Capers	7.95	6.95	MIRRORSOFT (Disc version add £3)			Revs + 4 Tracks (disc)	14.95	13.65
BUG BYTE			Contraption	8.95	6.95	Count with Oliver	7.95	6.95	TYNESOFT (*Disc versions add £3)		
Twin Kingdom Valley (cas)		2.95	Bug Eyes II (cas)	7.95	6.95	First Steps	8.95	7.95	Goal (cas)	7.95	6.50
Tennis (cas)		2.95	Frankenstein 2000	6.95	5.95	Here/There with Mr. Men	7.95	6.95	Goal (disc)	11.95	10.65
Jack Atac (cas)		2.95	Int. Megaspots/Genes	8.45	7.45	Oudk Thinking Plus	6.95	5.95	Futreshock (cas)	7.95	6.50
Savage Pond (cas)		2.95	Last of the Free	7.95	6.75	Harrier Strike Force	9.95	8.95	Futreshock (disc)	11.95	10.65
Robots		2.95	Thunderstruck	7.95	6.75	MC LOTHLORIEN			Jet Set Willy II (cas)	7.95	6.50
Cricket		2.95	Thunderstruck II (cas)	7.95	6.75	Redcats	6.95	5.95	Jet Set Willy II (disc)	11.95	10.65
Starforce 7		2.95	Thunderstruck II (disc)	11.95	10.65	Paras	6.95	5.95	The Big K.O. (cas)	7.95	6.50
Dunjun 2		2.95	INCENTIVE			Johnny Reb	6.95	5.95	The Big K.O. (disc)	11.95	10.65
Skyhawk		2.95	Moon Cresta (cas)	7.95	6.95	Special Operations	6.95	5.95	Commonwealth Games (cas)	7.95	6.50
C.D.S.			Moon Cresta (disc)	9.95	8.95	Battlezone	6.95	5.95	Commonwealth Games (disc)	11.95	10.65
Colossus Chess IV (cas)	9.95	8.25	Graphic Adv. Creator (cas)	22.95	20.45	Waterloo	9.95	8.95	US Drag Racing*	6.95	5.95
Colossus Chess IV (disc)	14.95	12.95	Graphic Adv. Creator (disc)	27.95	25.00	MICROBYTE			Vindaloo*	7.95	6.50
Steve Davis Snooker (cas)	8.95	7.95	IMAGINE			Er Bert	4.95	3.95	Ian Botham's Test*	7.95	6.95
Steve Davis Snooker (disc)	12.95	11.95	Mikie	9.95	8.95	Reversi	4.95	3.95	Mousepat*	6.95	5.95
CLARES			Wizardore	7.95	6.95	Pinball	4.95	3.95	Winter Olympics*	7.95	6.95
Profile (disc)	12.00	11.00	Yie Ar Kung Fu	9.95	8.95	MOSAIC			Jet Set Willy*	8.95	7.95
Fontwise Plus (disc)	20.00	18.00	Kung Fu (disc)	12.95	11.65	Erik the Viking (cas only)	7.95	6.95	U.S. GOLD		
Brom (ROM)	34.50	31.50	Hypersports (disc only)	12.95	11.65	OCEAN			Spyhunter	9.95	8.45
Brom (disc)	27.50	25.00	Yie Ar Kung Fu II (cas)	8.95	7.65	Daley Thompson Superlast (cas)	8.95	7.65	Beach Head	9.95	8.95
Replica III (disc)	15.00	13.50	Yie Ar Kung Fu II (disc)	12.95	11.65	Daley Thompson Superlast (disc)	12.95	11.65	Rebel Planet	7.95	6.95
Enhanced Beta Base (disc)	25.00	22.00	KOSMOS SOFTWARE (Disc version add £1)			Match Day	9.95	8.95	Impossible Mission (cas)	8.95	7.65
Beta Base Utilities (disc)	12.00	10.85	French Mistress A or B*	8.95	7.95	REDSHIFT			Impossible Mission (disc)	14.95	13.65
Macrom Rom	40.00	36.00	German Master A or B*	8.95	7.95	English Civil War (cas)	9.95	5.95	Crystal Castles (cas)	9.95	8.45
Macrom disc	35.00	32.00	Spanish Tutor A or B*	8.95	7.95	ROBICO SOFTWARE (Disc version add £2)			Crystal Castles (disc)	14.95	13.45
COMSOFT			Answer Back Jun. or Sen.*	9.95	8.95	Banjax	9.95	8.95	Raid over Moscow	9.95	8.45
Playbox	4.95	3.85	Answer Back Sport	9.95	8.95	Enthar 7 (disc)	17.95	16.45	ULTIMATE		
DR. SOFT (*Disc 40T add £2)			Identify Europe*	7.95	6.95	Island of Xaan	9.95	8.95	Alic Atac	7.95	6.95
747 Flight Sim*	7.95	6.95	LCL (Disc version same price)			Rick Hanson	9.95	8.95	Alien 8	9.95	8.95
Phantom Combat*	9.95	8.95	Micro Maths (24 progs. 'O' Level)	24.50	21.50	Project Theius	9.95	8.65	Knightsore	9.95	8.95
Double Phantom (disc)	19.95	17.95	Micro English (24 progs. 'O' Level)	24.50	21.50	Myorem	9.95	8.65	Jetpac	7.95	6.95
DATABASE (Discs add £3)*			Mega Maths ('A' Level)	24.50	21.50	SHARDS (*Disc version add £3)			Sabre Wolf	9.95	8.95
Red Arrows*	8.95	7.95	Micro French ('O' Level)	24.90	21.50	Operation Salas	7.95	6.95	Nightshade	9.95	8.95
Instant Mini Office (Roms on board)	59.95	54.95	LONGMAN'S SOFTWARE			Whoopsy	6.95	5.95			
DESIGN PEOPLE			First Moves (Chess 8-)	9.95	8.95	Woodbury End*	9.95	8.95			
Tanks (disc)	12.99	11.65	LEISURE GENIUS (Disc add £2)			SHIELD					
Sink/Bismark (disc)	10.99	9.65	Scrabble	12.95	11.65	O Level Maths Ex.	9.95	8.95			
DOMARK			Monopoly	12.95	11.65	O Level Chemistry Ex.	9.95	8.95			
Trivial Pursuits (cas)	14.95	12.45	LEVEL 9			O Level Physics Ex.	9.95	8.95			
Trivial Pursuits (disc)	19.95	15.95	Price of Magyck	9.95	8.95	SOFTWARE INVASION (*Disc version add £3)					
DURELL MARTECH (*Disc add £3)			Adventure Quest	9.95	8.95	3D Bomb Alley	7.95	6.95			
Sam Fox's strip poker (disc) Acorn			Dungeon Adventure	9.95	8.95	Gunsplode	7.95	6.95			
DFS only	12.95	11.65	Emerald Isle	6.95	5.95	Blitzkrieg*	7.95	6.95			
Tarzan*	9.95	8.45	Lords of Time	9.95	8.95	Jet Boat	7.95	6.95			
War (cas)	8.95	7.65	Return to Eden	9.95	8.95	3D Grand Prix*	9.95	8.95			
War (disc)	14.95	12.95	Snowball	9.95	8.95	Stairway to Hell*	12.95	9.95			
Combat Lynx	8.95	7.95	The Worm of Paradise	9.95	8.95	SQUIRRELSOFT					
ELITE			Red Moon	6.95	5.95	Supergolf	7.50	6.50			
Airwolf (cas)	9.95	8.95									
Airwolf (disc)	14.95	13.65									
Commando (cas)	9.95	8.95									
Commando (disc)	14.95	13.65									

### Stock Sale Ring for Availability

Word Games disc	8.95	Robin	
Star Drifter cas	2.95	Sherwood cas	5.99
Pinball cas	2.95	Jet Power Jack cas	2.99
Erbert cas	2.95	Killer Gorilla cas	2.99
Contraption cas	4.95	Jet Boat cas	4.99
Gremlins cas	5.99	Overdrive cas	4.99

### SPECIAL OFFERS CASSETTE ONLY

Chuckie Egg	3.95
Mr. Wimpy	4.95
Fortress	3.95
B.C. Bill	3.95
J.C.B. Digger	4.95
Crossword Puzzler	3.95

21st Software Limited, 15 Bridgefield Avenue, Wilmslow, Cheshire, SK9 2JS. Tel: (0625 528885)  
 ALL PRICES ARE INCLUSIVE OF VAT AND CARRIAGE  
 OVERSEAS ORDERS PLEASE ADD £1.00 PER ITEM  
 We guarantee all titles are originals. We offer a quick and reliable service.

Please send me: Cas  Disc  40T  80T   
 Compact Disc

1. \_\_\_\_\_ £ \_\_\_\_\_  
 2. \_\_\_\_\_ £ \_\_\_\_\_  
 3. \_\_\_\_\_ £ \_\_\_\_\_  
 4. \_\_\_\_\_ £ \_\_\_\_\_  
 TOTAL £ \_\_\_\_\_

Please make cheques payable to:  
 21st Software Ltd

Send Orders to:  
 21st SOFTWARE LTD. Dept MU  
 15 Bridgefield Avenue,  
 Wilmslow SK9 2JS  
 Tel: Wilmslow (0625) 528885

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 Post Code \_\_\_\_\_  
 Tel. No \_\_\_\_\_

# Two shows BBC Micro users shouldn't miss

Renold Building  
UMIST  
Sackville Street  
Manchester

**20-22**  
MARCH

10am-6pm, Friday March 20  
10am-6pm, Saturday March 21  
10am-4pm, Sunday March 22



New Royal  
Horticultural Hall  
Westminster  
London SW1

**8-10**  
MAY

10am-6pm, Friday May 8  
10am-6pm, Saturday May 9  
10am-4pm, Sunday May 10

TWO showcases to keep you right up to date with all the new products now available – plus lots of bargains at rock-bottom prices!

Buy your tickets **NOW** and save **£1 per head!**

Wherever you live there's a show dedicated to your favourite computer that's within easy travelling distance of your home.

**Discount ticket for the Manchester Show**

**Advance ticket order for the London Show**

Bring this coupon to the show to get 50p per person off the normal admission price of £3 (adults), £2 (children). Valid for up to four people.

**50p OFF**



10am-6pm, Friday, 20 March  
10am-6pm, Saturday, 21 March  
10am-4pm, Sunday, 22 March  
Renold Building  
UMIST, Manchester



Adult tickets at £2 (save £1) ..... £

Under 16s tickets at £1 ..... £

Total .....

Cheque enclosed made payable to Database Publications Ltd.

Please debit my credit card account

Access/Visa

Admission at door:  
£3 (adults), £2 under 16s)

New Horticultural Hall,  
London, May 8-10

Post to: Show Tickets,  
Europa House, 68 Chester Road,  
Hazel Grove, Stockport SK7 5NY.

Name .....

Address .....

Signed .....

PHONE ORDERS: Ring Show Hotline: 061-480 0171  
Please quote credit card number and full address. Ref. MU4

# TWILLSTAR COMPUTERS LTD

FREE CATALOGUE and full price list. Call now for your issue.

PRESENTS

## Computers

### MASTER 128

Complete With Internal Software **£420.00**  
 Master Turbo Upgrade **£113.95**  
 Master Econet Module **£46.00**  
 Master ET **£373.75**  
 Master 512 **£217.35**

The Master 512 upgrade board incorporates the Intel 80186 processor, plus 512K bytes of RAM. Digital Research DOS+, which is compatible with both MS/DOS version 2, and CP/M 86, allows you to run a large proportion of the most useful programs available. A dual 80 track disc drive is required to run programs on the 512. Provided free with 512 upgrade board are three GEM packages, GEM Desk Top, GEM Write, GEM Paint.

Eprom Cartridge **£14.95**  
 Reference Manual Part 1 **£14.95**  
 Reference Manual Part 2 **£14.95**  
 Z80 Second Processor **£379.00**  
 Acorn Prestel Adaptor **£125.00**  
 Acorn Teletext Receiver **£135.00**  
 Winchester Disk Drive 10 MBYTES **£1250.00**  
 Winchester Disk Drive 30 MBYTES **£1850.00**

### ECONET ACCESSORIES

100m Cable **£89.00**  
 Station Lead Set **£29.00**  
 Econet Starter Kit **£99.00**  
 Econet Bridge **£199.00**  
 Level 1 Fileserver 40 Track **£99.00**  
 Level 2 Fileserver 80 Track **£235.00**  
 Print Server Eprom **£49.00**

## BBC Upgrades

64K Upgrade Kit **£39.95**  
 17/70 Upgrade Kit **£49.94**  
 ADFS ROM **£29.95**  
 Disc Upgrade Kit **£65.00**  
 Econet Upgrade Kit **£49.00**  
 Speech Upgrade Kit **£49.00**  
 DNFS ROM **£20.00**

## WORD PROCESSING SPECIAL PACKAGE

### PACKAGE 1

Based on Master 128. The Twillstar All in One Word Processing Package contains a Master 128, View 3.0, Viewsheet, High Res Green Monitor, 800K Dual Drives with PSU, Quendata Daisy Wheel Printer together with a box of Discs, Paper, and all the Cables. **£899.00**

### PACKAGE 2

Based on Master Compact 128. The Twillstar package includes Compact 128, latest version of the View Word processor, single 640K disk drive, monochrome monitor, correspondence quality printer. All connecting cables for above and also 5 disks and some paper. **£635.00**



## BBC MASTER COMPACT

Twillstar COMPACT to offer the MASTER COMPACT for your Home Education and Business needs! Complete with bundled software and an integral 3.5" Disk Drive in the following Systems:-

### SYSTEM 1 (inc. VAT) £414.00

\*128K \* Single 640K Drive \* UHF Modulator \* Bundled Software

### SYSTEM 2 (inc. VAT) £488.75

As System 1. With \*12" High Res. Monochrome Monitor\*

### SYSTEM 3 (inc. VAT) £626.75

As System 1. With \*14" Medium Res. RGB Monitor\*

### SPECIFICATIONS: \* Compatible with Master Series micro subset \*

128K RAM inc 64K sideways RAM \* 64K ROM inc 32K MOS, 16K BASIC

\* Up to 4 internal ROM sockets \* 3.5" 640K formatted disk drive \*

OUTPUTS: Video/RGB/Printer/ Mouse or Joystick \* Disk drive \*

(optional) Econet \* Serial \* 5V power from disk drive module \*

Usual 8 BBC display modes inc. Mode 7 \*BUNDLED SOFTWARE:

Pull down menu \* Desk top inc. note pad, calculator \* VIEW 3.0 \*

CARD INDEX \* Full LOGO \* BBC BASIC 4.0 \* ADFS + Utils \* Welcome suite \* Tutorials \* (1770 DFS under licence)

2nd DRIVE KIT **£113.00**

## Monitors

### MONOCHROME MONITORS

Phillips BM 7502 **£79.00**

Green Screen **£95.00**

Phillips BM 7522 **£120.00**


Amber Screen **£120.00**

Kaga KX 1202G **£120.00**

Hi Res Green **£120.00**

Kaga KX 1203G **£120.00**

Ultra Hi Res Amber **£120.00**



Hantarex Hx 12 Dark Gloss Screen high resolution monochrome monitor 12" Composite Video & Audio input **£75.00**

### COLOUR MONITORS

Microvitec 1431 Std Res **£201.25**

Microvitec 1451 Med Res **£270.25**

Microvitec 1441 Hi Res **£391.00**


Microvitec 2030 Cs 20 Std Res **£425.50**

Microvitec 1431 AP Std Res **£224.25**

Microvitec 1451 Ap Med Res **£293.25**

Phillips CM 8533 Med Res monitor with dark glass etched screen composite video input RGB and Audio Input. **£289.00**


### Taxan Super Vision 620



High Resolution colour monitor with several unique features, at an affordable price.

### SUPERVISION 620

12" RGB High resolution colour monitor. Fully compatible with IBM, Apple, BBC and most other Personal Computers. 635 x 312 line resolution. Positive or negative sync input. Text colour switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional tilt-swivel base (with clock/calendar available). Special introductory offer. **£299.00**



### PHILIPS MONITOR TO TV CONVERTER £69.00

HOW TO TURN A DEDICATED MONITOR INTO A FIRST CLASS TV SET?

SIMPLY SLIDE THE SWITCH ON THE TV TUNER.

The Philips AV 7300 TV tuner turns any colour monitor (with CVBS and audio inputs) into a first class TV set, giving you extra versatility and value from your monitor. A convenient TV/computer switch allows the tuner to stay permanently connected to the computer and at the same time to a TV antenna.

### OUTSTANDING PERFORMANCE OUTSTANDING VALUE

Just released by Hantarex 14" Colour Monitor Standard Resolution RGB PAL Audio Input (Inc. VAT) **£175.00**

### SPECIAL OFFER

Mitsubishi 1404 Medium Resolution Monitor with 640 X 200 Pixels RGB available with IBM or BBC Leads. **£229.00**



### SWIVEL BASE

Tilt and swivel base for 12" or 14" monitor or TV. "Looks very elegant" **£17.25**

## Disc Drives

### mitsubishi DISC DRIVES

User Friendly Disk Drives 100% BBC compatible slimline disc drives. All drives are supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 Track switchable at the front and have two years warranty.

### 5 1/4" Drives without P.S.U.

MD 400A Single 400K Double Sided **£118.00**

MD 802C Dual 400K Double Sided **£219.00**


### 5 1/4" Drives with P.S.U.

MD 400B Single 400K Double Sided **£135.00**


MD 802E Dual 400K Double Sided **£249.00**

### SPECIAL

MD 802D Dual 400K Drives horizontally mounted in a monitor stand to fit both the BBC B and the Master series. **£269.00**



## Printer Buffer



Now available Taxan Multipurpose Type Printer Buffer KIF-4308 compatible with any Centronics interface printer **£149.00**

## GENERAL COMPUTER ACCESSORIES

MODEMS EPROMS  
 Components and spare parts  
 Joysticks  
 Disk storage boxes  
 Dust covers  
 and lots more

The latest range of Software  
 Business Education  
 Games  
 All in stock, Call for details

## FAST REPAIR SERVICE

In house service department Repairs for computer printers and disk drives. Call 01-574 5271 and ask for our engineering department.

visit our NEW SHOWROOM  
 Open 9am-6pm Mon-Sat  
 OPEN SUNDAYS 10-2


YOUR ONE STOP  
 MEGA-COMPSTORE  
 FOR HOME, EDUCATION  
 & BUSINESS NEEDS!



# Printers

## KX-P 1080 DOT MATRIX PRINTER

- \* NEAR-LETTER QUALITY PRINTING IN ALL PITCHES
- \* OPERATOR ACCESSIBLE PRINT MODE SELECTOR (Std./Pgm., NLQ, Comp.)
- \* FRICTION FEED AND ADJUSTABLE TRACTOR ARE STANDARD
- \* WORD PROCESSING FUNCTIONS (Justification, Centering, L&R alignment)
- \* PROPORTIONAL SPACE PRINTING
- \* HIGH RESOLUTION, DOT-ADDRESSABLE GRAPHICS
- \* UP TO 40 DOWNLOADABLE CHARACTERS
- \* COMMAND CODE COMPATIBLE WITH POPULAR PRINTER SOFTWARE
- \* PRINT SPEED, DRAFT: 100 NLQ: 20 COMPRESSED: 86
- \* 9 PIN PRINT HEAD



The Panasonic KX-P 1080 impact dot matrix printer is ideal for applications that require economical high quality printing. It offers a variety of print modes, all producing crisp clearly formed characters. Wide choice of print sizes includes semi-compressed and compressed (even in near-letter quality printing). Operator accessible print mode selector adds convenience. For a reliable printer at an affordable price, the KX-P 1080 is always a smart choice.

**£159.00**

## Juki 5510 - Gives you 180 CPS & NLQ Standards £269.00

...and that's not all! The Juki 5510 also has full graphics mode, two position 'dip-switch' (providing instant compatibility with both the Epson and the IBM Graphic Printer). Standard 2K memory (expandable to 14K) built-in Parallel Centronics interface and 8-switch international character sets. If you need colour too, the optional Juki 5510 Colour Kit gives you seven colours.

**£112.00**

## EPSON PRINTERS

Epson FX 800 and FX 1000 range offers superior printing and technical features. 200 cps in draft and 40 cps in NLQ. Complete with tractor and friction feed as standard. Offering IBM compatibility, full graphics. Also includes two NLQ fonts, 10,12,17 and 20 cpi, double height and double width with 8K buffer built in.

FX 800	<b>£369.00</b>
FX 1000	<b>£499.00</b>
FX 800 Sheetfeeder	<b>£141.00</b>
FX 1000 Sheetfeeder	<b>£163.00</b>

Epson EX 800/1000 High speed printers. 300 cps in 12 cpi mode. Also offers four colour printing.

EX 800	<b>£465.00</b>
EX 1000	<b>£545.00</b>
Colour option for both	<b>£62.00</b>



## CANON 55A


Wide version. Fully IBM compatible. **£399.00**

## CANON PW1080A

80 column printer with 160 cps draft and 40 cps NLQ with built in friction and tractor feed. Fully compatible with Epson FX80. Standard parallel interface. **£249.00**

## STAR NB15

Outstanding print quality at 300 cps in draft mode and immaculate 24 pin Letter Quality at 100 cps. Fully featured front control panel. Centronics parallel or RS232 serial interface **£856.75**




## STAR NL-10

Fine Near-Letter-Quality, 100% compatibility and total reliability all in one easy to use printer. For quality, ease of operation and dependability, nothing beats the Star NL-10. You get outstanding print quality at 120 cps in draft mode and 30 cps in near letter quality. Plus, the sleek NL-10 offers full compatibility with most popular computers through plug in interface cartridges. Just insert the appropriate plug in interface cartridge for your IBM-PC, Commodore, Apple IIc or other parallel computer and your Star NL-10 is ready to print. Touch a button on the control panel to set the print pitch (3 choices), to select the typeface and to print in either draft or NLQ mode. You can even set left and right margins, make top of form settings and control forward and reverse feed in the smallest pitch. **£229.00**

## MP200

200 cps in draft. 40 cps in NLQ mode. 7K buffer as standard (128 downloadable characters in NLQ) optional 8K memory. IC font cards. Auto insert - Loads paper automatically to top of form. User friendly control panel - easy print pitch selection. I/F board - quick change of interface to match applications. Cut sheet feeder (optional double bin auto sheet feeder). IBM compatible. **£274.85**




## MP201

Same as MP200 with 136 columns **£318.55**

## MICRO P MP165

80 Columns. 165 cps in draft mode. 35 cps in NLQ mode. Ultra high resolution graphics. Friction and traction feed. Compatible with all major micros. Quiet and easy to use. 2 Year warranty. Epson or IBM compatible control codes. **£199.00**




## CITIZEN MSPIOE

The new MSPIOE with 160 CPS Draft and 40 CPS NLQ. With TWO years Warranty **£269.00**

## CITIZEN MSP-15E

17" Wide carriage. 136 column, operating at 160 cps and at the push of a switch will print near letter quality at 40 cps. Fully Epson and IBM compatible. 8k of standard buffer built in. Standard Centronics are optional RS232 **£379.00**



## CITIZEN 120D

Dot Matrix Printer. The 120D precision printer brings to the small business, educational and home user good quality and attention to detail. Its compact size, host of standard features and built in quality and reliability that supports Citizen's unique full TWO-YEAR warranty make it a must for all computer users. Fast draft output: 120 cps. Built-in NLQ: 25 cps. IBM and Epson compatible. Plug-in interface cartridge. Tractor and friction feed as standard. Optional cut sheet feeder. **£179.00**

## SOURCE The Complete Solution INTRODUCES THE NEW TECO VP1814



Dot matrix printer. VP1814 is fast highly reliable and easy to operate.

- ★ Standard 80 column
  - ★ The high-speed, low energy consumption 9 wire dot head gives printing speed of 189 cps and NLQ speed 36 cps
  - ★ Bi-directional, Logic seeking in text mode
  - ★ The use of fan-fold, roll or cut-sheet paper is possible with adjustable sprocket pin feed and friction feed
  - ★ Offers emphasized, double print, super script, sub script
  - ★ Justified print mode are also available including left, centre, right and full justification
  - ★ 9 graphic modes are available
  - ★ Both download and inprint buffer can exist simultaneously
  - ★ 7K input buffer standard can be expanded to 15K
  - ★ Printing modes selectable at front panel (NLQ/draft, Pica/Elite, enlarge, emphasize, condense, italic)
  - ★ 11 Language international character font is internalized
  - ★ Both IBM and Epson compatible
- MAIN UK DISTRIBUTOR  
SPECIAL INTRODUCTORY PRICE (inc. VAT) **£229.00**

## DAISYWHEEL



## PANASONIC KX-P3131

A Fully Formed Serial Impact Daisywheel printer with print speed of 17cps. Diablo compatible print wheels. Print pitches available are: 10, 12, 15 and proportional spacing. Standard friction feed and optional tractor. Paper width 13.5 inches. Standard Centronics optional RS-232C. Built with 8K text buffer expandable to 32K buffer. **£249.00**

## STAR POWER TYPE

**£229.00**


## BROTHER HR 20

The new Brother Daisywheel HR 20 8K standard buffer upgradable to 16k. Comes standard with serial and parallel port **£369.00**

## DAISYWHEEL PRINTERS

QUENDATA DWP 1120 with optional tractor/sheet feeder and 13" paper width facility. This Daisywheel printer with 20 CPS has 96 character printwheel compatible with the QUME. Standard centronics interface. (optional RS232 C)

Juki 6100	<b>£285.00</b>
Juki 2200	<b>£275.00</b>
Juki 6300	<b>£799.00</b>



## PRINTER STAND

Fits nearly any width of printer. Allows paper storage and gives ideal viewing position. Can also be used for computers and monitors. Steel construction prevents bending or buckling **£18.00**

## How to Order

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below £10.00	add £1.50
Items below £50.00	add £2.50
Items below £100.00	add £3.50
Items over £100.00	add £8.00

(UK Mainland only)

All prices include VAT at 15%  
Prices correct at time of going to press but subject to change without notice

Please make cheques payable to:  
**TWILLSTAR COMPUTERS LTD.**  
Access/Visa Card Holders:  
Welcome. Call now on:-  
**01-571 5938 or 574 5271**  
TELEX: 25247 Telex G attn TIL  
FAX: 01-574 4326

ASK FOR YOUR FREE CATALOGUE AND PRICE LIST Visit our

**NEW SHOWROOM**  
Open 9am-6pm Mon-Sat  
**OPEN SUNDAYS 10-2**

## CREDIT FACILITIES

Full credit facilities now available nationwide

- \* LOW DEPOSITS
- \* FAST FRIENDLY SERVICE
- \* UP TO 3 YEARS TO PAY

We have negotiated with a leading Finance Company to provide this additional service for our clients. Call for further details Typical APR 36.3%

## TWILLSTAR COMPUTERS LTD



**APEX HOUSE,**  
**BLANDFORD ROAD,**  
**NORWOOD GREEN,**  
**SOUTHALL,**  
**MIDDX UB2 4HD**  
Tel: 01-574 5271  
01-571 5938 Telex: 25247  
Telex G. attn TIL

Mike Cook plays

about with

evolution

# Breeding (*micro style*) can be fun

ANYONE watching the recent edition of Horizon about Darwinian evolution could not fail to be impressed by the simulated evolution of the little figures known as Biomorphs.

I was so taken by it that I laid down my soldering iron and started to program my own version for the BBC Micro.

The principles of the simulation are explained in chapter 3 of Richard Dawkins' book *The Blind Watchmaker*, where he demonstrates that dramatic large scale development may be achieved by the accumulation of numerous small changes.

The appearance of any creature is determined by its genes which are passed on to its offspring to produce near identical creatures.

However, every so often one of the genes mutates or changes slightly resulting in a significantly different creature.

If this creature has a slightly increased chance of survival then it will prosper and an increasing number of the population will carry the same gene pattern. Eventually the whole of the population may contain the same gene types.

In our simulation (to save time) each offspring acquires one mutated gene from its parents. We can then choose the child to breed from for the next generation.

This is more like selective breeding than natural selection, but if you equate the ability to please the selector (you) with chances of survival then it amounts to the same thing.

The small creatures in the simulation, christened Biomorphs by Dawkins, had nine genes. But the display and memory constraints on the BBC Micro necess-

itate a little simplification, so our Biomorphs have only six.

The basic shape is a simple bifurcating tree drawn by a recursive procedure: This is illustrated in Figure I.

Each gene controls some aspect of the drawing, as shown in Table I. It is not important, however, to understand what the genes do. In fact it could be considered to be an undue influence upon your selection.

The full listing of the Biomorph is given as Listing I. When it runs you are invited to choose the starting position for your evolution.

The choices are a microbe, where all the gene values are set close to the minimum, a random point chosen close to the minimum values, or some preset point.

Using this last option you can continue breeding from where you left off if you have made a note of the gene values.

At the centre of the screen is the parent biomorph and the mutated offspring are shown in the 12 surrounding boxes. Each mutation contains only one gene different from its parent.

There are 12 offspring because each of the six genes can change by a positive or negative increment. Note that they all look very similar – there will only be slight differences between them.

In fact, at the smaller sizes these differences might make no discernable difference. The gene values are extremely interdependent and all their effects grow with increasing complexity.

You will be invited to choose an offspring from which to breed the next generation and this can be selected by pressing any key, A to L. If any other key is pressed, the value of the parent's genes will be printed and the parent will be drawn.

There is nothing in the program to stop the Biomorphs growing out of their boxes but this can be prevented by the appropriate selection of offspring to breed from.

Many creatures or shapes can be evolved – a simple one is shown in the screen dump in Figure II. It is fun to give your creations names – I call these Bumble Drones.

Once during development I got a pass-

able likeness of an owl being mobbed by a sparrow but it was gone before I could print out the gene values.

This is a program that can be extensively tinkered with, as the gene maximum, minimum and increments are all contained in data statements and can be easily altered.

You could also include a feature to record the progress of your creatures and the gene values of each generation parent on disc file or printer.

If you want to incorporate a screen dump add the line:

```
1085 IF A$="" THEN CALL dump
```

Make sure your dump routine is loaded up before you run the program and when you have the screen you want press the spacebar to dump.

In a sense, as Dawkins points out, you are not creating the creatures but discovering them. However, as the number of possible creatures is so large the two processes become very similar.

The program as printed is capable of generating 152,128,595 shapes. If you could view them at the rate of one per second, it would take you just over 48 years to see them all.

● Create a biomorph and win a prize – see Page 21.

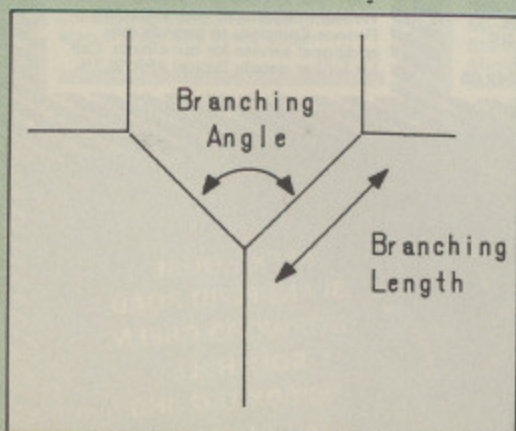


Figure I: Bifurcating trees

```
100 REM * Biomorphs *
110 REM by Mike Cook
120 REM (c) Micro User
130 MODE1
140 DIM morph(5,12),parent(5)
150 DIM gi(5,2),px(12),py(12)
160 REM READ IN INCREMENTS AND LIMITS
(MIN & MAX) OF EACH GENE
170 RESTORE 200
180 FOR AX=0 TO 2:FOR BX=0 TO 5
190 READ gi(BX,AX):NEXT NEXT
200 DATA 1,4,0.16,0.2,0.16,2:REM Gene
increment value
210 DATA 1,-36,-3.14,0.1,-3.14,-18:REM
Gene minimum value
220 DATA 9,36,3.14,10,3.14,18:REM Gene
maximum value
230 PROC_INTPOS:REM Initialise display
position
240 PROC_INTP:REM Initialise parent
250 gen=0
260 MODE 0
270 REPEAT
280 gen=gen+1
290 PROC_MUTATE
300 PROC_DISPLAY
310 PROC_CHOSE
320 UNTIL FALSE
330 DEF PROC_INTP
340 IF A$="C" THEN ENDPROC
350 parent(0)=1
360 parent(1)=4
370 parent(2)=.785
380 parent(3)=1
390 parent(4)=0
400 parent(5)=0
410 IF A$="A" THEN ENDPROC
420 FOR AX=0 TO 5
430 parent(AX)=(RND(5)+1)*gi(AX,0)
440 NEXT
```

Listing I

# FEATURE

B

B+

M

Compact

Gene 0 Depth of recursion used.  
 Gene 1 Basic size of line.  
 Gene 2 Branching angle.  
 Gene 3 Aspect ratio.  
 Gene 4 Branching angle incremented at each new level of recursion.  
 Gene 5 Line size incremented at each new level of recursion.

Table 1: the Biomorph genes

A	B	C	D
GENERATION NUMBER 1			
E			F
PARENT BIOMORPH ? or Breed from child (A-L) ?			
G			H
I	J	K	L

Figure 11: Biomorph of the following gene structure:  
 Gene 0 = 4    Gene 1 = 12    Gene 2 = 0.48  
 Gene 3 = 0.8    Gene 4 = 0.96    Gene 5 = -4



```

450 parent(0)=RND(3)+1
460 ENDPROC
470 DEF PROC_MUTATE
480 FOR BX=1 TO 12
490 FOR AX=0 TO 5
500 morph(AX,BX)=parent(AX)
510 IF (BXMOD2) DX=-1 ELSE DX=1
520 CX=(BX-1)DIV2
530 IF CX<>AX THEN 560
540 IF morph(AX,BX)+DX*(gi(AX,0))<gi(A
%,1) OR morph(AX,BX)+DX*(gi(AX,0))>gi(A
%,2) THEN 560
550 morph(AX,BX)=morph(AX,BX)+DX*(gi(A
%,0))
560 NEXT:NEXT:ENDPROC
570 DEF PROC_DISPLAY
580 PROC_LINES
590 PROC_TREE(parent(0),parent(1),pare
nt(2),parent(3),parent(4),parent(5),640,
500)
600 FOR AX=1 TO 12
610 PROC_TREE(morph(0,AX),morph(1,AX),
morph(2,AX),morph(3,AX),morph(4,AX),morp
h(5,AX),px(AX),py(AX))
620 NEXT:ENDPROC
630 DEF PROC_INTPOS
640 RESTORE 840
650 FOR A=1 TO 12
660 READ px(A),py(A):NEXT
670 PRINT"SPC(14);"Biomorph"
680 PRINT"An exercise in Darwinian Evo
lution"
690 PRINT"By Mike Cook"
700 PRINT"Based on an idea by Richard
Dawkins"
710 PRINT"Author of THE BLIND WATCHMAK
ER"
720 PRINT""Options to start evolving
from:"
730 PRINT"A - A microbe."
    
```

```

740 PRINT"B - Some random point."
750 PRINT"C - A defined point."
760 PRINT"Press the key of your choic
e.";
770 AS=GETS:IF NOT(AS="A" OR AS="B" OR
AS="C") THEN 770
780 PRINT:IF AS<>"C" ENDPROC
790 FOR AX=0 TO 5
800 PRINT"Gene number ";AX="";
810 INPUT parent(AX)
820 IF parent(AX)>gi(AX,2) OR parent(A
%)<gi(AX,1) PRINT"Values between ";gi(A
%,1);" and ";gi(AX,2):GOTO 800
830 NEXT:ENDPROC
840 DATA 160,860,480,860,800,860,1120,
860,160,604,1120,604,160,348,1120,348
850 DATA 160,92,480,92,800,92,1120,92
860 DEF PROC_LINES
870 VDU 12,23,1,0;0;0;5
880 PRINT
890 FOR XX=320 TO 960 STEP 320
900 FOR YY=256 TO 800 STEP 256
910 MOVE XX,0:DRAW XX,1023
920 MOVE 0,YY:DRAW 1259,YY
930 NEXT:NEXT
940 MOVE 640,260:PLOT 7,640,764
950 MOVE 324,512:PLOT 7,958,512
960 FOR AX=1 TO 12
970 MOVE px(AX)-150,py(AX)-60
980 VDU840+AX:NEXT
990 MOVE 360,322
1000 PRINT"PARENT BIOMORPH"
1010 MOVE 360,755
1020 PRINT"GENERATION NUMBER ";gen
1030 VDU4:ENDPROC
1040 DEF PROC_CHOSE
1050 VDU5:MOVE 360,290
1060 PRINT"? or Breed from child (A-L)
?";:FX15
1070 AS=GETS
    
```

```

1080 PRINTAS;:CX=ASCAS-840
1090 IF CX<0 OR CX>12 PROC_REVIEW:ENDPR
OC
1100 FOR AX=0 TO 5
1110 parent(AX)=morph(AX,CX)
1120 NEXT:VDU4:ENDPROC
1130 DEF PROC_REVIEW
1140 VDU22,1
1150 PRINT"Current Biomorph has:-"
1160 FOR AX=0 TO 5
1170 PRINT"GENE ";AX" VALUE ";parent(AX
)
1180 NEXT
1190 PROC_TREE(parent(0),parent(1),pare
nt(2),parent(3),parent(4),parent(5),640,
300)
1200 PRINTTAB(0,30);"Press any key to c
ontinue";
1210 AS=GETS:gen=gen-1:VDU22,0
1220 ENDPROC
1230 DEF PROC_TREE(D,L,dA,AR,DT,DS,X,Y)
1240 MOVE X,Y:DRAW X,Y-L
1250 PROC_GROW(P1/2,L,X,Y,D)
1260 ENDPROC
1270 DEF PROC_GROW(TH,L,X,Y,D)
1280 IF D MOVE X,Y ELSE ENDPROC
1290 dx=L*COS(TH+dA)*(1/AR)
1300 dy=L*SIN(TH+dA)*AR
1310 PLOT 1,dX,dY
1320 PROC_GROW(TH+dA+DT,L-DS,X+dX,Y+dY,
D-1)
1330 MOVE X,Y
1340 dx=L*COS(TH-dA)*(1/AR)
1350 dy=L*SIN(TH-dA)*AR
1360 PLOT 1,dX,dY:MOVE X,Y
1370 PROC_GROW(TH-dA-DT,L-DS,X+dX,Y+dY,
D-1)
1380 ENDPROC
    
```

Turn to Page 21 ▶

**p  
h**

# p&h electronics Ltd

5 THE PARADE · YATELEY  
HANTS  
TEL: 0252 877222

  
24 HR SALES LINE  
0252 878107

22/24 GUILDFORD ROAD  
BAGSHOT · SURREY  
TEL: BAGSHOT 0276 74533

## Acorn Systems

Master 128K	£490.00
Master Turbo Upgrade	£120.00
Master 512 Upgrade	£220.00
Master Eprom Cartridge	£14.00
Compact without Monitor	£440.00
Compact with TV Modulator	£455.00
Compact with Mono Monitor	£535.00
Compact with Colour Monitor	£685.00
<b>Disk Drives</b>	
Compact 2nd 3.5" drive	£110.00
Dual 400k 5.25" drive (built in Master Plinth)	£310.00

**FREE SONY  
WM33 Walkman  
with every  
Master or  
Compact system**

## Roms/Utilities

Intersheet	Rom	£50.00
Interword		£49.00
Interchart	Rom	£34.00
Disc Doctor	Rom	£26.00
Printmaster	Rom	£26.00
Graphics	Rom	£26.00
Logo (LCSI)	Rom	£59.00
Replica III 40/80	Disc	£14.00
Beta Base 40/80	Disc	£23.00
Vine Replay (State Disc I/F)	Rom	£33.00
Vine Tape to Disc	Rom	£18.00
Island Logic Music	Cassette1	£13.50
Island Logic Music	Cassette2	£13.50
Island Logic Music	Disc	£27.00
Fleet Street Editor	Disc	£38.00
Spelling Checker (Comp Con)	Rom	P.O.A.

## Disc Drives

<b>CUMANA</b>		
CSX100 100K 40T		£105.00
CSX400S 400K 40/80T Switchable		£145.00
CDX800S Dual 400K Switchable		£265.00
CS100 100K 40T With Power supply		£135.00
CS400S 400K 40/80 With Power supply		£170.00
CD800S Dual 400K With Power supply		£315.00
3.5" CS 354 400K		£130.00
3.5" CD 358 Dual 400K		£225.00
<b>PACE</b>		
PSD1 100K 40T		£102.00
PSD3 400K 40/80T Switchable		£130.00
PDD3 Dual 400K Switchable		£255.00
PSD1P 100K 40T With Power supply		£125.00
PSD3P 400K 40/80T With Power supply		£155.00
PDD3P Dual 400K With Power supply		£285.00

## Printers

<b>DOT MATRIX</b>		
Epson LX86	£269.00	
Epson LX86 Tractor Unit	£22.00	
Epson LX86 Sheet Feeder	£55.00	
Epson FX86	£365.00	
Cannon PW1080A	£279.00	
Micro P MP 165	£230.00	
Citizen 120D with Par/Int	£219.00	
<b>DAISYWHEEL</b>		
Juki 6100	£345.00	
Juki 6000	£199.00	
Printer - Master/BBC/Compact lead to suit	£12.00	

**FREE  
Printer Lead  
with every  
Printer**

## Compact Software on 3.5" Disc

Micropower Magic 10	£8.50
Acornsoft Hits Vol 1	£13.50
Acornsoft Hits Vol 2	£13.50
Best for Language	£18.00
Best for Maths	£18.00
Beta Base	£24.50
Birdie Barrage Golf	£11.50
Care Disc	£22.50
Citadel	£13.50
Commonwealth Games	£10.50
Compilation One	£18.00
Compilation Two	£18.00
Elite	£18.00
Galatforce	£13.50
Games Disc	£11.50
Games Disc 1	£11.50
Games Disc 2	£11.50
Karate Combat	£13.50
Mousetrap	£10.50
Repton 2	£13.50
Repton 3	£13.50
Revs 4 Tracks	£18.00
Speech	£13.50
Steve Davis Snooker	£11.50
Strykers Run	£13.50
US Drag Racing	£10.50
Viewsheet	£52.00
Vindaloo	£10.50
Winter Olympics	£10.50

**FREE CARRIAGE  
When you order  
3 Compact Discs  
(U.K. only)**

## Computer Books

15 Hour Word Proc Use BBC View	£5.95
30 Hour BASIC Standard Ed.	£7.95
40 Best Mach Code Routine BBC	£7.95
6502 Develop Pack (6502 2nd Pro)	£7.50
Advanced BASIC ROM For the BBC	£9.95
Advanced Disk User Guide	£16.95
Advanced Graphics with the BBC	£9.95
Advanced User Guide (BBC)	£15.95
Advanced User Guide - Binder	£3.91
Applied Assembly Language BBC	£9.95
Art of Micro Graphics BBC/Electron	£14.95
Assembly Language Prog for the BBC	£8.95
BASIC ROM User Guide (BBC/Electron)	£11.95
BBC B Compendium	£5.95
BBC BASIC for beginners	£7.95
BBC Hardware Projects	£8.95
BBC Master 128/ High Flyers	£10.95
BBC Micro & The Small Business	£5.75
BBC Micro Advanced Programming	£9.95
BBC Micro Disk Companion	£8.95
BBC Software Projects	£6.95
BCPL The Language & Compiler	£7.50
Basic Rom User Guide Cassette	£5.18
Beginners Guide Word Proc BBC	£7.95
Beyond Basic	£7.25
Building Blocks for BBC Games	£6.95
Comp Graph & Cad Fundam BBC Micro	£9.95
Complete Disc Manual - BB	£7.95
Creative Assembler BBC/Electron	£5.95
Disk Programming Tech for BBC	£10.95
File Handling on BBC Micro	£6.95
Guide to the BBC ROMS	£9.95
Interfacing & Robotics on BBC	£15.95
Interfacing your BBC Micro	£8.95
Introducing CP/M-2nd Processor	£9.95
Making Most Your BBC Disc system	£5.95
Mastering Assembly Code BBC	£8.95
Mastering Music BBC	£6.95
Mastering the Disc Drive	£7.95
Mathematical Prog in BBC Basic	£7.95
Step by Step Prog BBC Book 1	£5.95
Step by Step Prog BBC Book 2	£5.95
Structured Basic	£7.25
The BBC Micro Rom Book	£10.95
Tool Box 2 BBC/Electron	£10.95
Within The BBC Microcomputer	£13.95
Wordwise Plus	£9.95
Practical Disc File Techniques	£5.95
6502 Applications	£13.95
6502 Assembly Lang Subroutines	£19.95
6502 Reference Guide	£9.95
Programming the 6502	£16.95
6502 Ass Lang Prog 2nd Ed.	£19.95

## Acornsoft Books

Creative Graphics	£7.50
Graphs and Charts	£7.50
List Manual	£7.50
Forth Manual	£7.50
Comal Manual	£10.00
BCPL Manual	£15.00
ISO Pascal Manual	£10.00
View Guide	£10.00
Viewsheet Guide	£10.00
Viewstore Manual	£10.00
Master Reference Manual Part 1	£14.95
Master Reference Manual Part 2	£14.95
Logo Manual	£7.50
Microtext Manual	£10.00
BBC User Guide	£12.95
Into View 2.1	£5.00
Micro Prolog	£10.00
Turtle Graphics	£7.50
Creative Sound	£9.95

## Acornsoft View

View - Wordprocessor ROM	£45.00
View 3 inc. Printer Drivers	£70.00
Viewsheet - Spreadsheet ROM	£45.00
View Index Disc	£15.00
ViewStore - Database ROM	£45.00
Viewspell	£32.00
Viewplot	£23.00
Printer Driver Generator - Cassette	£9.00
Printer Driver Generator - Disc	£10.00

**SALE**

## Top Games

Elite	Cass £11.50	Disc £13.50
Revs	Cass £11.50	Disc £13.50
Thrust	Cass £9.50	Disc £11.50
Repton 3	Cass £8.50	Disc £10.50
Commando	Cass £9.50	Disc £12.50
Phantom Combat	Cass £9.50	Disc £14.50
Trivial Pursuit	Cass £13.50	Disc £18.00
Micro Power 10 Hits	Cass £8.50	Disc £10.50
Airwolf	Cass £9.50	Disc £14.00
Scrabble	Cass £12.50	Disc £17.00
Whiteknight 12 Chess	Cass £9.50	Disc £18.50
Monopoly	Cass £12.50	Disc £14.50
Lord of the Rings	Cass £14.50	
Strike Force Harrier	Cass £9.50	Disc £14.50
Ravenskull	£8.50	Disc £10.50
Aviator	Cass £13.50	Disc £16.50
Yie Ar Kung Fu	Cass £8.50	Disc £10.50

**FREE CARRIAGE  
When you order  
3 Top Games  
(U.K. only)**

## Accessories

Data Recorder	£29.00
Data Recorder - BBC Lead	£4.00
Full Proportional Joy Stick	£12.50
Full Proportional Joy Stick Pair	£20.00
Voitmac 14b Joystick	£14.50
AMX Mouse - with Super Art	£75.00
AMX Utilities Software	£13.50
AMX Desk	£22.00
AMX Paintbox	£13.50
AMX 3D Zicon	£22.00
AMX Pagemaker	£47.00
AMX Xam	£22.00
AMX Data Base	£22.00
AMX Super Art	£47.00
Modern Nightingale with Commstar	£149.00
Modern Auto Answer Board + Software	£75.00
Sideways ROM Board (APTL)	£43.00
5.25in Discs 10 in Library Case DS/DD	£18.00
TV Aerial/Computer Switch	£2.50
BBC Key Function Key Mask	£3.00
Computer Covers Soft	£5.50
Computer Covers Hard BBC B	£10.00
Printer Covers - State type	£6.50
Disc Drive Covers - State type	£5.00
Analogue Mouse (by NIDD)	£33.00
Digital Mouse (by NIDD)	£33.00

## BBC Micro Upgrades

<b>Hurry Limited supplies</b>	
Z80 Second Processor + Business software	£200.00
1770 Disc Upgrade Kit	£46.00
DNFS Rom	£20.00
ADFS Rom	£28.00
64K Upgrade Kit for B plus 64K	£38.00

## Monitors

Philips BM7502 Green High Res	£79.00
Philips BM7522 Amber High Res	£85.00
Philips BM 7542 White High Res	£85.00
Philips swivel stand for above	£9.00
Philips CM8533 RGB + Mono + Sound	£285.00
Microvitec 1431 Colour std res	£225.00
Microvitec1451 Colour med res	£270.00
<b>CTV/MONITORS</b>	
Sanyo 3143v 14in CTV + RGB	£185.00
Sony 1440 14in Black screen + RGB	£225.00
Sony 1442 As above Remote Control	£285.00
Monitor to Master/BBC/Compact lead to suit	£4.50
Philips TV tuner (for your monitor)	£65.00

## MAIL ORDER COUPON

### P&H ELECTRONICS LIMITED

22/24 GUILDFORD ROAD · BAGSHOT · SURREY GU19 5JN

Please send me: (or order by letter)

1 \_\_\_\_\_ at £ \_\_\_\_\_ P&P \_\_\_\_\_  
 2 \_\_\_\_\_ at £ \_\_\_\_\_ P&P \_\_\_\_\_  
 3 \_\_\_\_\_ at £ \_\_\_\_\_ P&P \_\_\_\_\_

I enclose cheque/PO for £ \_\_\_\_\_

Or please debit my Access/Barclaycard/Visa\* (delete as applicable)

Card Number \_\_\_\_\_ Expiry Date \_\_\_\_\_

FAST VAT FREE EXPORT SERVICE ON ORDERS OVER £15 NETT  
PLEASE ALLOW FOR CARRIAGE COSTS OR REQUEST CARRIAGE QUOTATION



CARRIAGE COSTS - Micros - Monitors - Printers: £7.00

Disc Drives - 2nd Processors - Data Recorders: £5.00

Accessories - Software - Books etc: £1.00 per item

ACCESS/BARCLAYCARD/VISA ORDERS WELCOME

CREDIT FACILITIES Instant credit up to £1,000, deposit 10%

PLEASE STATE: DISK FORMAT 40 OR 80 TRACK

Name \_\_\_\_\_  
 Address \_\_\_\_\_

Telephone \_\_\_\_\_

# Darwin and the micro

Richard Dawkins is a lecturer in Zoology at Oxford University. He has written three books: *The Selfish Gene*, *The Extended Phenotype* and *The Blind Watchmaker* which, as Mike Cook reports on Page 18, was the subject of a fascinating Horizon documentary on BBC2 earlier this year.

And he has made great efforts to explain Darwinian theory in terms that everyone can understand – even to using computers to illustrate his points.

I started by asking Richard how he developed an interest in zoology.

*"I was never much of a naturalist – I was more interested from the philosophical angle: How things came to be as they are. And the best way to get some answers is via science and biology."*

What inspired you to write the book?

*"It's so exciting to actually understand why we exist. I feel that people are missing something if they don't understand how they came to be here. The book isn't*

## Christopher Payne talks to Richard Dawkins, the biomorphs' creator

*a biology textbook by any means – it's specifically written so that the non-technical person can appreciate it. It does have a slightly science fiction feel – that of a sense of wonder."*

I noticed that the front cover of your book was painted by Desmond Morris. Is this the same person who wrote *The Naked Ape* and *Manwatching*?

*"Yes, Desmond is a prolific painter of this type of surrealist painting as well as a biologist in the same field as myself."*

*"We've been professional colleagues for a number of years. He certainly views his artistic creativity as equally as important as his writing."*

*"Oxford University Press used one of his earlier paintings for the cover of my first book, *The Selfish Gene*, but this specific painting was inspired by the title, *The Blind Watchmaker*."*

How did the documentary come about?

*"Well, I did a Horizon film about a year ago called *Nice Guys Finish First* which worked very well."*

*"I gave a proof copy of *The Blind Watchmaker* to the same producer, Jeremy Taylor, and we actually started filming before the book came out. It took*

*a few months to put together, during vacation time.*

*"We used a Commodore Amiga, programmed by Jeremy Ruston, to demonstrate the biomorphs and to produce the 3D landscape."*

What kind of response have you had to the programme?

*"I've received an awful lot of letters from young people who identify with computer-based ideas as they've been brought up with them."*

*"But I've also heard from retired people who like the book but who couldn't get to grips with the computer part of the documentary."*

*"With the latest generation of computers, which are so easy to use, the situation may change. But for the moment there are a lot of people who just switch off at the mention of computers – they don't even try."*

*"I've had lots of mail from creationists, too, those minds are deeply closed to evolution – many believe that God made the world 4,000 years ago."*


*"However, there are plenty of people who are religious without being creationists – religion can provide many comforts without a devout belief in Genesis."*

Many people accept evolution but don't see how life itself actually started from a primeval soup.

*"There had to be a chemical event to give rise to the first self-replicating molecule."*

*"This was a random chemical event and a very improbable one – but there was a long time to wait and there are lots of planets where it could just as easily have happened."*

*"Other planets may have developed life-forms completely different from our own, but however different they may be they will all have developed by Darwinian principles."*

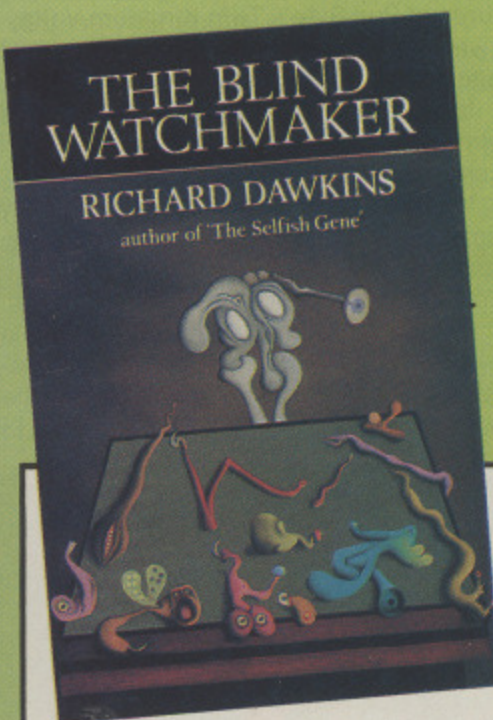

**EIGHT copies of The Blind Watchmaker to be won**

**ALL you have to do is type in the biomorph listings on the previous page, or buy the monthly tape or disc, and create an interesting biomorph of your own.**

**Bring it to the centre of the screen, press ? to copy down the values of the six genes.**

**Give it a name, such as Frog, Spitfire or Scarecrow, and fill in the rest of the entry form.**

**Send the form, or a photocopy, to the address below before April 30. A printout would help, but it's not essential.**

**Authors of the best eight designs will be sent a copy of this marvellous book worth £12.95.**

### ENTRY FORM

My name for the biomorph is:

The six gene values are:

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_ Age \_\_\_\_\_

Send to: Biomorph Competition, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.



# Enhanced Elite a real challenge

I'VE good news and bad news this month. First, the good news: The revamped Elite is superb: It's the only arcade game I have ever really bothered to play and I am pleased I bought the new issue.

At the time of writing I have just finished the first mission, so I am Dangerous again. This will be the third time I have journeyed along the road to Elite status.

I think I must have blasted that rogue ship in the first mission at least 100 times before it was destroyed and there

were constant interruptions from pirate ships trying to finish me off. I strongly approve of the fact that the rogue is now energy bomb proof.

A word of warning though – this new version is not easy. Tactics have to be carefully planned in a way that was not needed in earlier versions.

I can no longer go bounty hunting and be reading a book at the same time, nor can I treat Thargoids quite as casually as I used to.

If you have the hardware to run the enhanced Elite, then I can certainly

recommend it.

Now for the bad news: It looks as if Level 9 is dropping out of the BBC Micro scene.

There are two major reasons as I see it: Coding is no longer done on a BBC Micro and sales of the last two games were insufficient to make the exercise worthwhile. I suspect piracy has played a part here.

If like me you think this is a tragedy, I suggest you do two things.

Let your views be made known in the Micromail pages of this magazine and write to John Austin assuring him that you are willing to buy Level 9 adventures in the future. His address is: P.O. Box 39, Weston-super-Mare, Avon BS24 9UR.

On a more cheerful note, I want to draw your attention to some of the features of Bug Byte's Twin Kingdom Valley. I was delighted to see it reissued a while ago at the bargain price of £3.

It was the first game giving a choice of playing formats – with pictures – that I came across for the BBC Micro.

You can have a picture drawn every time you visit a location, or only when you visit a new one. You can also choose between short or long text descriptions.

My own preferred format gave me a picture every time I visited a new location and the long text description, the best combination for preparing a map in



the way I do.

If there was no picture, I could soon find the location reference number on my map. If a picture was drawn, the location obviously needed a new number.

Twin Kingdom Valley has two sorts of maze: The sort I like coping with – and the sort I don't.

I coped with wandering through the mountains happily enough – charting the exit directions kept track of where I was. However, the other sort of maze forces me to say you must not do as I did: Do as I say instead.

The first time I played the game I bashed around at random in the twisty maze until I found the witch and established a trading position.

Then I blundered around the sloping maze until I got the message and a holdall. Now I've been back to map them properly.

It's amazing the way you can concatenate combinations of the words turny, twisty, little, maze and passages, while still providing a sensible description.

That of course is the key to the first maze. If you are desperate, I'll let you have the moves needed to confront the witch and get away; but you must write and ask, enclosing a stamped addressed envelope.

The Sloping Maze must be conquered in order to gaze upon the secret of life. Again, if you are desperate, write for help.

One key to solving Twin Kingdom Valley lies in just that. You have to find and use different keys which gradually increase your ability to open doors.

There are other tasks as well, but you won't solve the game without the master key – and obtaining that is not easy.

You start off with a brass key, can get a bronze one and must find a silver, a

gold and finally the master key.

Only then can you move round freely – so long as you can see secret doors.

The other key to a successful conclusion lies in performing certain tasks in the right order. Basically it is necessary to choose a patron, either the Forest King or the Desert King. And it is essential to choose the correct one.

Once you are at his service, you can look after your own interests as well. You need to win friends, influence people, pick up treasures, slay inimical creatures and so on.

Twin Kingdom Valley was something of a landmark in adventure development. I am delighted that it is still around and I would be pleased to see any full (1024 points) solutions that readers can offer.

It's not always easy to find adventure games widely advertised, so let me state my preferred software houses, though please remember that this is a personal selection.

Top of my list is Level 9, P.O. Box 39, Weston-super-Mare, Avon BS24 9UR and close behind is Robico, 3 Fairland Close, Llantrisant, Mid Glamorgan, CF7 8QH

Next come Magus, 4 Toronto Close, Durrington, Worthing, West Sussex BN13 2TD) and Larsoft 4 Chantry Road, Clifton, Bristol BS8 2QD.

While others exist who have produced excellent adventure games, I have seen everything that these four have turned out and there's not been a dud among them. If you don't know their games, drop them a line.

### Problem Corner

A. Strong is stuck in **Dr Who and the Mines of Terror**: I hope he saw N.J. Sharrat's exposition in the January 1987 Micromail, it may take him on a little.

Mark Hilton has penetrated **Philosophers Quest** in a most professional manner but still has a few problems with other adventures.

In **Pirate Adventure**, how can he get the doubloons without being killed by the snake?

Why does he die every time he tries pressing buttons in MicroPower's **Wizard's Challenge**?

Mark also can't keep hold of the talisman in **Kingdom of Hamil**, even

though typing INVENTORY tells him he's still got it. Is this a bug?

Lastly, in **Ghost Town** he has the horseshoe and nails but where is the missing item (hammer?) to enable him to shoe the horse?

Mark does offer help with the **Kingdom of Hamil's** snark tunnel: Christopher Columbus went West; Peary went North; Scott travelled South and Marco Polo went East.

Combine the characters shown with the directions and you know where to go: Thus, if the mural shows Peary and Columbus, then the direction to go from the entrance to the snark tunnel is NW.

### Helpline

A.D. Marter's problem in the November 1986 issue was getting started with **Labyrinths of La Coshe**.

This has drawn replies from Simon Young who hacked his way into the program and Roger White, from my old University department, who played it straight and sent in a detailed analysis.

Simon wondered what the egg is for: Roger says you should leave it with the thief for a bit.

East of the forest clearing in **Labyrinths** is a necklace which forms the basis of a teleportation system. N and W of the clearing is a tree to be climbed.

And W of the clearing is a grating that can only be unlocked from underground.

Finally, several moves S from the

clearing is a valley with a waterfall: The essential move here is THROUGH WATERFALL.

Roger is only 7% sane in **Price of Magik**, the best score I've seen so far, and I shall include extracts of his work on Labyrinths in a future column.

Andrew Armstrong has found a way to kill the Green Knight in **Lord of the Rings**, though he's not sure if it's the method intended.

Get the candle stub from the Mathom House in Michel Delving and take it to the monastery. Wear the ring, go W and enter KILL KNIGHT WITH STUB, repeating this until he's dead.

This may be a bug, or just a dreadful pun on candles and (k)night. Andrew had to wear the ring to enter

the Mathom House; actually a visit to the mayor's office first means you can get in legitimately.

Matthew Hall has passed on tips for playing **Erik the Viking**.

To get the crew, blow the horn. To set sail, push the ship, get in and go W. To escape from the mist, wave the tube. To escape from the maelstrom, throw the plug overboard.

To survive the sea dragon, climb the mast, enter the dragon's nose, go E and N, take the feather then go back. The dragon will let you go.

To enter the church, kneel and pray, when inside read the book. To enter the cairn, knock with the hammer. To enter the enchanter's maze, pull the tapestry.

To pass the eagle at gravel beach,

Turn to Page 24 ▶

**Helpline**

◀ **From Page 23**

give mutton. To pass the icicles on iceberg ledge, light a fire. To stop the ship sinking, take the trestle tables, break them, take hammer and nails and enter MEND SHIP.

Two more readers are stuck in parts of **Bored of the Rings**.

James Parker and Scott Walkinshaw both have problems with Old Man Willow. CRY HELP is the answer here.

What's the ring for? You need to place it somewhere to finish the game. HIDE is the proper route to the farm (where there is some ale) and the route further into the adventure. You have to enter the inn to get Arrogant.

I can't wait to see what the authors' joining forces with Level 9 produces in due course.

Harry Miller can't leave the first location in **Philosophers Quest**: Forget the cup of tea, take the aqualung, the keys and the rod, THROW ROD and go S.

**Hall of Fame**

Gary Smith has sent a map and full solution to **Castle of Riddles**, for which I am very grateful.

Stuart Swinton, a true Tolkein fan, has solved **Lord of the Rings Part 1** with neat, logical maps.

Now for Stuart Booth's conclusion to **Snowball**.

Jacob's Ladder (1): Leave the shovel for the moment and go to the base of Jacob's Ladder.

Open the toolbox, climb up the ladder and go north from the platform to the ledge covered in uni-slime.

Drop the cat (50), go back down Jacob's Ladder and take the shovel and get into the shuttle.

The snow-desic and the warehouse: Take the shuttle to the snow-desic and get the linked cylinders from the south corner. Take the shuttle to the warehouse. Take and wear the ceramic body armour. Now catch the shuttle to the snow dozer.

The snow dozer: Dig beside the snow dozer with the shovel and take the keys. Weld the track with the

lance and linked cylinders. Enter the snow dozer, go down and take the fire extinguisher. Go up, turn the key and leave the snow dozer (100).

The shovel, keys, lance and linked cylinders have no further use and can be dropped. Enter the shuttle and take it all the way back to Jacob's Ladder.

Jacob's Ladder (2), the control room: Go back up Jacob's Ladder and up the Ramp to the T junction which looks risky. Wave the tray (50) and go to the old Control Room.

Take the electro flute and fire extinguisher from the tray. Blow the electro flute then press the extinguisher (50).

Attach the flask for extra air, if you have not already done so (50), then go to the New Control Room beside the panel and pull the lever (50).

As Stuart says, That's it... except... he has drawn some very good maps of the different areas, so again (as space permits) I will include them in the column.

● See you next month. Until then, happy adventuring.

DISCOUNT  
COMPUTER  
SUPPLIES

**G.P.D. SYSTEMS**

DISCOUNT  
COMPUTER  
SUPPLIES

31 ABBEY ROAD, BILLERICAY, ESSEX CM12 9NF. TEL: (02774) 51443

**COMPUTERS**

ACORN	exc. VAT inc. VAT
<b>NOW IN STOCK</b>	
Master 'Compact' New BBC system with integral 3.5" disc and separate keyboard. 128k RAM. Comes complete with a wide range of software. View, Logotron and much more	
Base unit	£385 £442.74
Base unit + UHF modulator	£395 £454.25
Base unit + monochrome monitor	£465 £534.75
Base unit + colour monitor	£595 £684.25
BBC MASTER 128k with VIEW and other free software	£390 £448.50
BBC B 32k (price subject to availability) from	£200 £230.00
ADFS Upgrade with manual	£26 £29.90
1770 DFS Upgrade with manual	£45 £51.75
Eprom Cartridge	£13 £14.95

**MONITORS**

	exc. VAT inc. VAT
Prices include cable-BBC	
Phillips 8501 standard resolution colour	£150 £172.50
Phillips 8533 medium resolution colour	£249 £286.35
Phillips Monochrome green, anti-glare, high res	£76 £87.40
Taxan 14" standard resolution colour	£192 £220.80
Taxan Supervision III high resolution colour	£320 £368.00
Taxan Supervision IVM ultra-res colour	£345 £396.75
Taxan Monochrome green or amber	£105 £120.75
Microvitec 1451 med res colour	£233 £267.95
Monitor stand for Master	£13 £14.95

**DISKS**

Box of 10 5.25" 96tpi double sided disks with free library case.	£11 £12.65
Box of 10 3.5" disks S/S with free library case	£20 £23.00
Box of 10 3.5" disks D/S with free library case	£25 £28.75
Disk storage boxes	from £2 £2.30

**DISC DRIVES**

	exc. VAT inc. VAT
Mitsubishi 5.25" 2 year manufacturer's guarantee 40/80 switchable (switch at front of unit). Complete with Manual and Utility Disk	
<i>Without PSU</i>	
Single 400k DS	£102 £117.30
Dual 800k DS	£190 £218.50
<i>With PSU</i>	
Single 400k DS	£117 £134.55
Dual 800k DS	£215 £247.25
Dual 800k horizontally mounted in a monitor stand. Fits both the BBC and Master series.	£250 £287.50
Low cost 5.25" Hoshin drives 1 year guarantee	
Single 400k DS Without PSU	£90 £103.50
Dual 800k DS Without PSU	£170 £195.50
Single 400k DS With PSU	£105 £120.75
Dual 800k DS with PSU	£190 £218.50
3.5" Disc Drives	POA
5.25" and 3.5" combinations	POA
Hard disks	from £611
Please telephone for information	

**PRINTERS**

	exc. VAT inc. VAT
Star NL10 30cps NLQ 120cps Draft	£205 £235.75
Star SD10 40cps NLQ 160cps Draft	£319 £366.85
Taxan KP815 160cps Draft	£280 £322.00
MP165 34cps NLQ 165cps Draft	£195 £224.25
EP 80+ 100 cps Draft	£130 £149.50
Epson LX86 28cps NLQ 120cps Draft	£215 £247.25
Star Powertype Datsywheel - Dual Interface	£169 £194.35
Juki 6100 Datsywheel	£249 £286.35
2000 sheets 11" micro-perf. fanfold paper	£11 £12.65
Printer Ribbons	P.O.A.

**BOOKS**

	exc. VAT inc. VAT
Master Reference Manual Part 1	£15 £15
Master Reference Manual Part 2	£15 £15
View User Guide	£10 £10

**BBC FIRMWARE**

	exc. VAT inc. VAT
AMX Mouse with Super Art Rom	£68 £78.20
Acorn View 3.0	£60 £69.00
View Store	£45 £51.75
View Sheet	£45 £51.75
Wordwise Plus	£40 £46.00
Printmaster (Epson or Star)	£23 £26.45
Help ROM	£21 £24.15
Spellcheck III	£28 £32.20
Interword	£45 £51.75
Intersheet	£45 £51.75
Interchart	£28 £32.20
Interbase	POA


Discounts available for quantity purchases  
Large selection of educational and business software.

Educational and official orders welcome.

Carriage (incl. VAT) £2.00 orders under £80

£8.00 orders over £80 + £2 for additional items

\*\*Late night order line now open\*\*  
\*\*02774 55076\*\*





# A Disc Drive For

# UNDER

# £70



# Another OPUS. Price Breakthrough

Don't waste your time and money trying to find a better disc drive bargain – at a stunning £69.95 this sensational sale offer from Opus is the best buy in Britain.

Our incredible sale price even includes VAT and our no-quibble 2-year warranty. What's more we'll deliver this quality disc drive to your doorstep anywhere in mainland Britain absolutely free of charge. But you'd better be quick off the mark, we're expecting quite a stampede!

## OPUS 250K DISC DRIVE

From Opus you'd expect nothing less than the very latest in Japanese disc drive technology and our 5¼" single-sided 40 track drive is no exception. It features a super-reliable direct drive mechanism and offers both fast track-to-track access times and ultra-low power consumption.

## OPUS DDOS

Should you need an interface for your new drive, we can even supply you with our easy-to-fit Opus double-density disc operating system for the amazing price of just £40.00. Its super compatibility makes it the perfect partner for all BBC micro models and Master Series computers. The Opus DDOS handles tape to disc transfers and is equipped with the same 1770 disc controller chip as the BBC B+.

## SALE HOTLINE—0737-65080

To guarantee your sale bargain post the coupon today or ring the Opus Sale Hotline on 0737-65080. Generous education and dealer discounts available on request.

To Opus Supplies Limited, 53 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.  
Please rush me the following (PRICES INCLUDE VAT AND CARRIAGE).

\_\_\_\_\_ Single Drive(s) at £69.95 each

\_\_\_\_\_ Opus DDOS at £40.00 each. (Only when purchased with drive)

I enclose cheque for £ \_\_\_\_\_ or please debit

my credit card account with the amount of £ \_\_\_\_\_

My Access  Visa  no. is

Name \_\_\_\_\_ MU

Address \_\_\_\_\_

Telephone \_\_\_\_\_

**Opus.**


ne  
re  
nd  
d  
n  
d  
s  
l  
d  
n  
o

VAT  
£15  
£15  
£10

VAT  
£8.20  
£9.00  
£1.75  
£1.75  
£6.00  
£6.45  
£4.15  
£2.20  
£1.75  
£1.75  
£2.20


## Double density disc interface

Solidisk very popular Double Density Disc Filing System (DDFS) is based on the WD-1770 floppy disc controller, the same chip used on the Beeb-Plus and the Master series, totally hardware compatible with Acorn 1770 DFS and ADFS ROMs. The DDFS is suitable for virtually any type of floppy disc drives, 3 1/2" and 5 1/4", 40 track and 80 track, single and double-sided with or without power supply unit. New low price without DFS ROM ..... £35.00 (order as XR/DDFS)

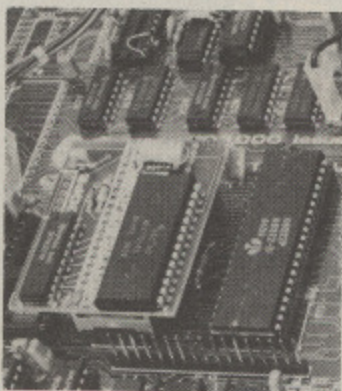


## 1770+8271, dual floppy disc controller interface

Solidisk DFDC (1770+8271) is the best seller in disc upgrades for Model B's already fitted with an INTEL 8271 chip (Acorn, Watford, Pace, Viglen, Cumana etc). It plugs into the 8271 socket with the latter relocated on the DFDC itself. This is the most convenient way of adding the modern and powerful 1770 without sacrificing the 8271 chip. The DFDC is fully hardware compatible with both Acorn DNFS 1.2 and ADFS ROMs, as well as Solidisk DFS 2.2 and ADFS 2.1 ROMs. The Acorn DNFS 1.2 is recommended for use jointly with the Solidisk ADFS 2.1 as both systems 'self-frugalise' to keep PAGE at the lowest value. We recommend the DFS 2.2 ROM alone if ADFS is not required. New low price without DFS ROM ..... £40.00 (order as XR/DFDC)

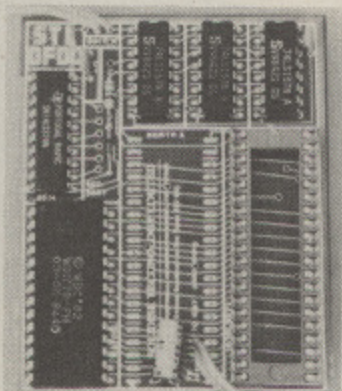

## Low cost 3 1/2 inch disc drives

The new generation of THIRD HEIGHT 3 and a half inch Floppy Disc Drives offers unprecedented value for money. They feature Double-sided, 80 track per side mechanism offering up to 640K per disc in double density and ADFS. Low power, large capacity, extremely quiet mechanism, robust media and LOWER PRICE than 5 and 1/4 drives make them irresistible. They are also the newly adopted Acorn disc standard. Cased, all leads. One year guarantee. Order as 3.5 INCH-DRIVE (80 track/Double-sided) ..... £90.00 FREE demonstration diskette (double sided) in DFS format while stock lasts (containing a Database, a Word-processor and a selection of games and disc utilities). Separate power supply for BBC Model B, issue 2 or Electron is available at £25.00. Order as 3.5/PSU.

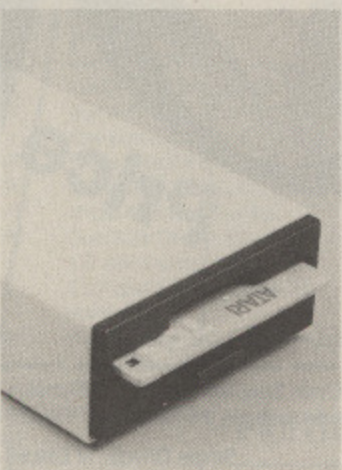


## Special leads

A Special set of leads to connect TWO drives in ANY combination of 5 1/4 and 3 1/2 drives is available separately at only £15.00 or only £8.00 surcharge if supplied in lieu of standard leads. Order as SPECIAL LEADS.

## Advanced disc filing system ROM-set (two 16k EPROMs) version 2.1

The finest product yet for any BBC computer fitted with the 1770 Floppy Disc Controller (Model B, Plus and Master 128K and Electron) encompassing many Master 128K specifications. The list of features is so extensive that it would require a lot more space to describe it. In brief, it has ALL the features of the 2.2 DFS ROM except device drivers for the INTEL-8271 chip, full ADFS implementation comparable to the MASTER 128K. Plus ADFS-FORMAT (FORM40, FORM80 and FORM160) and VERIFY. Plus MVDFS and MVADFS to transfer files between DFS and ADFS formats with automatic PAUSE for disc change rendering possible to operate with a single drive. Low PAGE value. Compatible with 6502, Z80, 32016, 80186 (Master version) Second Processor. Two manuals. Normally £30.00 but if order with DDFS or DFDC only ..... £20.00 Please mention computer model when ordering. Order as ROMS2.1S. Also available on a single 32K EPROM as ROM2.1/32.

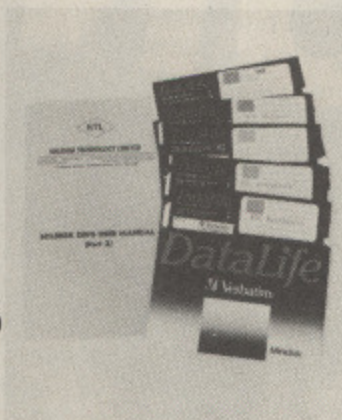


## Single and double density disc filing system ROM version 2.2

The most powerful and versatile DFS ROM available for the BBC model B, the BBC Plus and the Master 128K. Suitable for both 8271 and 1770 Floppy Disc Controller. Double density allows up to 60% increase over conventional format or 640K storage per (80 track double-sided) disc. Extensive features include 40 and 80 track software switch, unlimited filenames in catalogue (as opposed to Acorn 31), automatic Read after Write. It works with Z80, 6502 second processors and Econet and also is very fast on comparative review benchmarks. Built-in commands include FORMAT (F40 and F80), VERIFY, DZAP, MZAP, RECOVER, RESTORE, WORD, RTRACK, WTRACK etc. . . Also, ENABLE M allows IBM PC discs to be read or written to. Extensive User Manual covers many technical details. Supplied on 16K EPROM. Normally £15.00 but if order with DDFS or DFDC only ..... £10.00 Please mention computer model when ordering. Order as ROM2.2.



## Unbeatable quality 5 and 1/4 inch disc drives


Also available are NEC or MITSUBISHI 5 and 1/4 inch, 80 track, double-sided drives at a very attractive price. Cased in matching cream colour, all leads. Only ..... £109.00

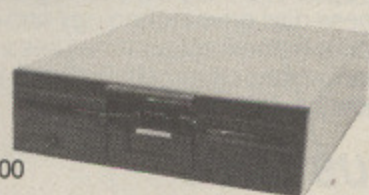

## Free bridge unit for twin drive systems


If you pay for two drives on a single order, we will offer you, absolutely FREE this practical BRIDGE unit. Solid steel construction, suitable for all Models of BBC and Master 128K.

# INEXPENSIVE PC CONNECTION FOR THE BEEB:

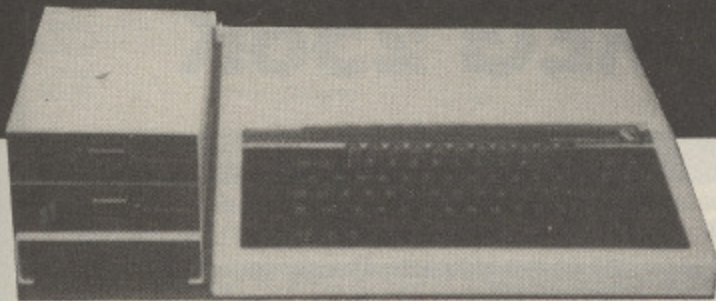

**80186 CO-PROCESSOR  
MOUSE 4 DISCS  
ONLY £239 INC. VAT!**

**512K-PC BOARD BY  
ACORN (ADC08) ADAPTED  
AND CASED BY SOLIDISK  
PLUG STRAIGHT INTO THE TUBE  
STACKABLE ON TOP  
OR UNDER DISC DRIVES**

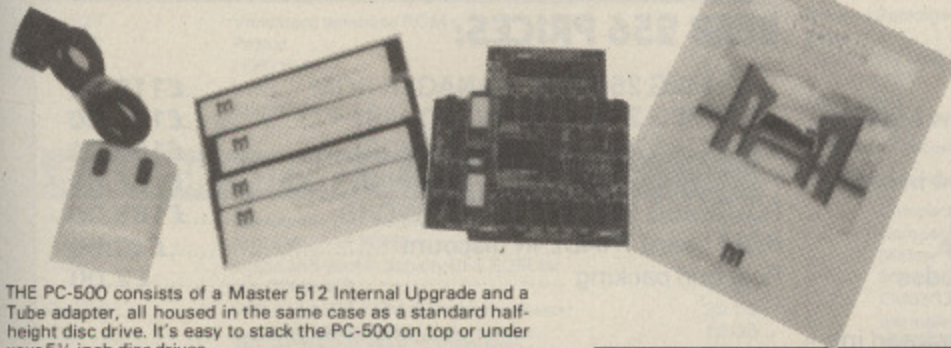

THE PC-500 consists of a Master 512 Internal Upgrade and a Tube adapter, all housed in the same case as a standard half-height disc drive. It's easy to stack the PC-500 on top or under your 5 1/4 inch disc drives. Connecting the PC-500 to the Beeb is by means of 24 inches of flat ribbon to the Tube connector, like the Z80 or 6502 second processors. An ON/OFF switch and indicator are also included.

## What you get for £239:

- 80186 CPU running at a clock speed of 10MHz.
- 512K RAM, 16K ROM.
- Mouse.
- 4 discs (80 track double sided, double density) containing DOS+, the GEM collection, Winchester initialiser, RAM disc, CP/M emulator, file transfer and format conversion programs etc... Literally dozens of utility programs, too many to list.
- Manual

## What you need to run the PC-500:


- BBC issue 3 to 7, MOS 1.2.
- Solidisk DDFS or DFDC with 2.1 ADFS ROM or Acorn 1770 with ADFS. Opus 1770 Double Density users will have to pay £20 extra for Solidisk ADFS version 2.1 OP ROM set.
- TWIN 80 track, double sided, double density 5 1/4 inch disc drives (Mitsubishi, NEC, TEAC, Matsushita or Sanyo). You may use the Solidisk 3.5" drives but will have to pay extra for disc copying service (£10 for 4 discs). 40 track double sided drives will require a special solidisk ADFS ROM set (Version 2.1PC, £25) and disc copying service.
- Solidisk Real time Clock (£30). DOS+ will take date and time directly from the RTC instead of prompting you each time.

## Software that runs and software that don't:

The majority of PC and CP/M software (40,000+ titles) for both the 8088 (and family) and the Z80 will run. All generic software (MSDOS 2.1, DOS+ and CP/M 2.2) eg Wordstar, DBASE 2, Supercalc etc will run, special machine dependent packages won't (eg Locoscript on the Amstrad PCW's). File transfer is even better, you can copy, edit or process files from virtually any kind of discs, from IBM to Amstrad, provided that you have suitable disc drives. Extra software may be needed in some cases. Ring Solidisk Technical for advice.

## DOS+ and the GEM collection:

DOS PLUS is becoming the dominating Disc Operating software for 16 bit computers. It is media compatible with PC DOS and MS DOS (2.1). Furthermore, Acorn's implementation has automatic

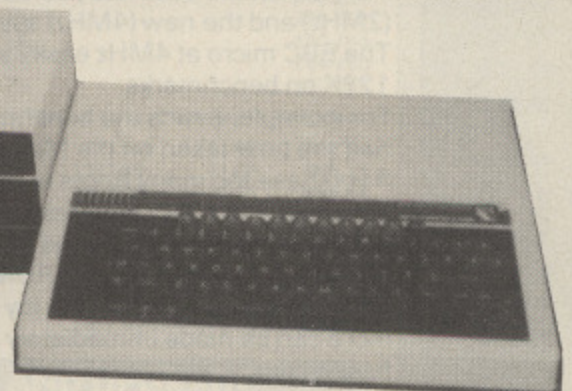

media sensing and a CP/M emulator. Discs from IBM PC, Amstrad, Apricot, BBC Z80 etc. can be read on your computer, and copied into your format. The GEM collection consists of GEM WRITE (a wordprocessor), GEM PAINT (a graphic drawing and painting program) and GEM DESKTOP (a mouse driven disc menu).

## Compatible Disc Drives:

Two problems: disc size (5 1/4, 3.5 and 3 inch) and disc format (single and double density, 40 and 80 tracks, single and double sided). You can READ and WRITE 40-track discs with an 80-track drive. But if a 40-track disc is written to by an 80-track drive, the resulting disc cannot be READ reliably on a true 40-track drive. The 40/80 track switch that you may have on your 80-track drive will not help, because true 40 track read/write heads have a gap nearly twice as large by comparison. If you have to write to IBM PC discs, you will have to buy a compatible drive such as the Solidisk FD400 series (£109).

## Public Domain Software:

Solidisk's PC unit is setting up a Public Domain Software User Group to provide PC-500 users with an inexpensive source of Public Domain Software and Shareware. First year membership is free to all PC-500 owners. PDS discs and manuals are available at the same prices as with Solidisk Sideways RAM software.



FD400  
PC compatible disc

## SOLIDISK SALE

### Electron Disc Interface:

This unit (EFS) plugs into the PLUS-1 Expansion and allows connection of a twin disc drive system and a Winchester. The Disc Interface is based on the same WD1770 chip as used on the Beeb. The Electron Disc Filing System software in ROM (32K) is a version of the Solidisk ADFS 2.1 thus offers a large degree of compatibility with Beeb software. The system is capable of both Beeb DFS format (single and double density) and ADFS format as used on the Acorn PLUS-3. The unit also has a 16K of Sideways RAM which can be used to load ROM images. The unit is guaranteed for one full year but we warn the users that the built-in Sideways RAM is UNRELIABLE hence the reduced price of only: **£50.00**  
Use a disc system with built-in power supply unit.

### Old Style SWR32 and 128K:

This exceedingly popular system (30,000 plus units sold) enables the Beeb user to load one or two ROM images into the Beeb, make a 16K printer buffer, use DFS with PAGE at &E00, play games, run bigger BASIC, store music and innumerable other uses as supported by a library of 15 software diskettes. The SWR32 system consists of a BASE UNIT which

plugs into the rightmost ROM socket on the BBC board and a (exchangeable) RAM CARD. The RAM CARD also has extension socket for a piggy-back memory board capable of bringing the extra memory to 128K bytes of RAM.

This system is now superseded by the new FOURMEG series and therefore offered at a knock-down price of **ONLY £20.00** for a complete unit, excluding software. The 96K add-on piggy-back memory board is also greatly reduced.


Order as SWR32 ..... **£20.00**  
Order as SWR128 (SWR32 with 96K extension) ..... **£50.00**  
NB: Manual supplied but software (not strictly required) not included.

The supportive software is a series of 15 diskettes, available on either 40 or 80 track DFS diskettes. You can buy any number of VOLUMES although we recommend you buy by PACK of FIVE volumes. PACK 1 (volumes 1 to 5) contains general applications such as MENU, PRINTER, DFS0E00, SILEXICON etc. PACK 2 contains programming applications (SOLIMON, SOLITRACE, TELETXT EDITOR, SPRITES, DFS and ADFS etc). PACK 3 contains exclusively computer games. Each diskette is priced at only £2.00, software PACK is £10.00 for 5 diskettes.

Order as VOL. XX ..... **£2.00**  
Order as SOFT/PACK 1 or 2 or 3 ..... **£10.00**

### Secondhand Refurbished Beebs:

As a result of the Solidisk MASTERPLAN, we have to dispose regularly of SECONDHAND, refurbished, complete with Double Density DISC INTERFACE, thoroughly checked and fully guaranteed (Labour only) BBC Model B's. Price vary with issues and ages, commencing from £150.00. Please ring.

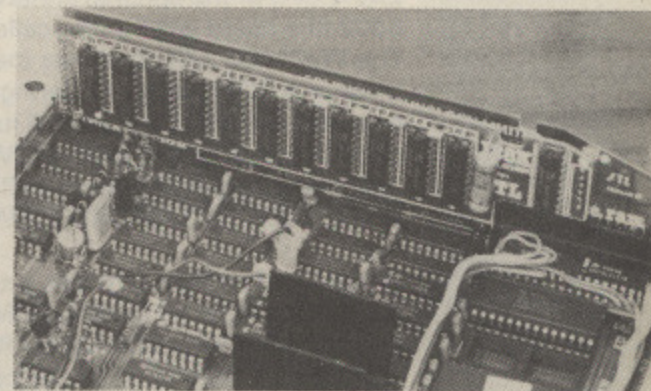

# SOLIDISK FOURMEG 256K

The memory limit on the BBC micro can now be definitely a thing of the past. The new Solidisk Fourmeg board offers all you could wish for. It has 256K of extra RAM, a superfast 4MHz CMOS processor, sophisticated memory management sockets for high capacity ROMs and 32K of software in ROM. It is compatible with most hardware add-ons — except Sideways ROM expansion — which it replaces.

Fitting is easy. You remove the existing processor from its socket and plug the new board in its place, push on three colour-coded wires, clip on two mini hooks and its ready. Switch on the computer and you will immediately see the difference.

The message "Solidisk 256K expansion (4MHz)" announces the new memory size and speed.

A switch at the back lets you select between the old (2MHz) and the new (4MHz) speed.

The BBC micro at 4MHz easily surpasses the new Master 128K on benchmarks.

For example, it runs the benchmark using Basic 4 in only half the time taken on the Master 128K.

If you have too many Roms to plug in at once, the Fourmeg 256 offers two ways out. Firstly, it includes additional high capacity (and fast) ROM sockets. Moreover, two four normal ROM images can be stored in one high capacity ROM chip (by "vertical paging") — so more can be made immediately available to your fingertips.

Secondly, ROM images can be stored on disks and loaded into any one of the eight Sideways Ram banks available. If you need more room in "languages" such as VIEW or BASIC, you may use any of the eight SHADOW RAM banks. No user memory is then lost to the screen, whatever the screen mode.

You can turn the extra memory into a RAMDISC or a

printer buffer by simple star commands. A Silicon disk of 200K, compatible with both the Solidisk DFS and ADFS formats replaces then one of the 4 physical disc drives. The Ramdisk is at least 10 times faster than physical disk drives and has no moving parts. The printer buffer saves you time, it lets you use the computer while feeding your printer in the background.

It is the most logical next step for owners of any Sideways ROM board or Solidisk Sideways Ram, who can trade in their present boards for the excellent Fourmeg 256.

To complement such a powerful product, Solidisk recommend Computer Concepts Wordwise Plus and Interword.

## BEEB 256 PRICES:

TWO MEG 256, 16K MANAGER ROM .....	£115.00
TWO MEG 256, WITH WORDWISE + .....	£145.00
TWO MEG 256, WITH INTERWORD .....	£165.00
FOURMEG 256, WITH WORDWISE+ .....	£165.00
FOURMEG 256, WITH INTERWORD .....	£185.00
ROM board TRADE IN discount .....	£30.00
Post and packing .....	£2.00



## Shadow Sideways ROM and Sideways RAM All in One for £50:

This board, the TWOMEG 32K, is specifically designed with the school BEEB in mind so that one can have everything required on a single, compact and extremely easy to install unit. All the necessary software is in a MANAGER ROM (supplied).

The top row of five ROM sockets will take software ROMs, up to 32K each, such as used on the BBC Plus and the MASTER 128K.

The middle row contains 32K of additional CMOS, low power RAM, acting as Shadow Ram or as two banks of Sideways Ram.


The empty 40 pin socket will receive either the normal 2MHz CPU or the optional enhanced, faster 4MHz CMOS 6502 (the board will then be called the FOURMEG 32K). The TWOMEG 32K combines the usual functions of a Sideways ROM board — offering storage for up to 160K on board and 64K on the BEEB itself (a total of 224K out of 256K possible) and a SHADOW RAM compatible with major language ROMs such as BASIC, VIEW, WORDWISE, INTERWORD, VIEWSHEET, VIEWSTORE etc.

When Shadow Ram is in use, a small 8K of Sideways RAM is available for loading ROM images or a small printer buffer. When SHADOW RAM is not in use, the entire 32K additional RAM can be used as two banks of SIDEWAYS RAM or as a RAMDISC (available only with

Solidisk DFS or ADFS). The Manager ROM also contains a Toolkit to assist programming in BASIC.

The attraction of the TWOMEG-32K board comes from its versatility, its convenient software in ROM and its low pricetag. Furthermore, the board can be fitted with a CMOS 65C02 capable for example of running the new BASIC 4 (some 30 per cent faster than BASIC 2 and also more accurate) or upgraded to FOURMEG speed, comparable to the TURBO board on the Master.

Twomeg 32K .....	£50.00
65C02 (2MHz) for the above .....	£10.00
Or upgrade to fourmeg .....	£25.00
Fourmeg 32K .....	£70.00
Post and packing .....	£2.00

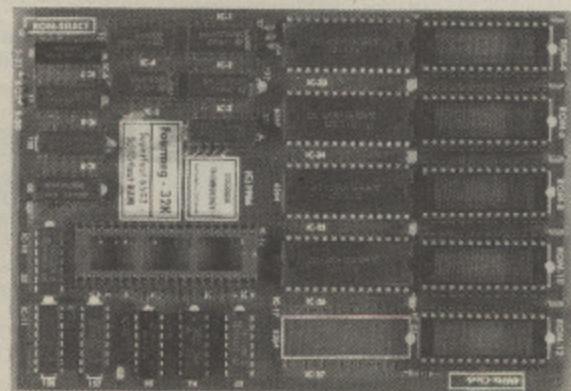

## MASTER SERIES:

AMB15	Master 128	499.00
ADB12	Master ET	399.00
ADC06	Turbo Upgrade	125
ADC08	80126/512K	228.00
ADF13	Eprom cartridge	14.95

## MANUALS AND DOCUMENTATION:

ADJ22	Ref manual Pt 1	14.95
ADJ23	Ref manual Pt 2	14.95

## MASTER COMPACT SERIES:

ADB20	Master Compact Single drive	441.25
ADB20+ADF30	Master Compact S/D with TV mod.	457.35
ADB20+ADF31	Master Compact S/D with Mono monitor	537.85
ADB20+ADF32	Master Compact S/D with Colour monitor	687.35
ADF15	RS232 kit	29.90
ADF16	Second 3.5" floppy drive	113.85
ADF17	PAL TV Adaptor	29.90

## ACORN SOFTWARE:

SUB27	Viewstore database ROM	59.80
SUB18	Pascal	69.00
	FORTH	19.90
	LISP	19.90
	MICRO-PROLOG	79.95

## SOLIDISK SOFTWARE ROMS:

PCFS	Compatible with PC and MS DOS discs	15.00
PCMAN	MANUAL FOR PCFS	5.00
CDFS	single and double density DFS ROM for the COMPACT	10.00
MADFS	DFS and ADFS ROM (32k) for the Master	20.00
LMS	communication ROM for the Master	10.00
SOLIMON	Machine code monitor for Master/Compact	10.00
INSIGHT	Intelligent disassembler, XREF	20.00
UVP	Eprom programmer software (8k)	5.00

## ECONET PRODUCTS:

ADF10	Econet plug-in	49.99
AEH17	100m Cable	99.00
AEH18	10station lead set	29.00
AEH19	Econet starter kit	99.00
AEH20	Econet bridge	199.00
AEH21	Econet socket kit	29.95
AES21	Level 2 Fileserver	249.00
AES22	Printer server ROM	49.00

## DISC DRIVES:

FD35	3.5" 80-track double-sided single drive	£100.00
TWIN35	Twin DF35	£200.00
FD525	5.25" 80-track double-sided single drive	£115.00
TWIN525	Twin FD525	£230.00
20MB	Winchester new model, low cost SEAGATE	£700.00

## PRINTERS:

LX86	EPSON LX86 + 2M printer lead	249.00
LXTF	LX80 Tractor Feed	31.30
LXCSF	LX80 Cut Sheet Feeder	53.53
FX85	EPSON FX85 NLQ + 2M printer lead	350.00
FXTF	FX85 Tractor Feed	30.59
FXCSF	FX85 Cut Sheet Feeder	123.50
NL10	STAR 80 col-120 cps par. 2M lead	289.00
NLCSF	Cut Sheet Feeder for NL-10	59.99
NLRIB	Black Ribbon for NL 10	5.64
MP165	Tractor and pich feed, 165 cps, NLQ, 2M printer lead, exceptional value	260.00
EPSRIB	Black ribbon for Epson and MP165	4.00
J6100	JUKI 6100 Daisy Wheel + 2M printer lead	340.00
JURIB	JUKI 6100 black vinyl printer ribbon	2.00
PAPER	2000 sheets cont. paper, A4 size 11" x 9.5"	14.00

## MONITORS:

BM7502	12" Philips hi-res green screen, lead	85.00
BM7522	12" Philips hi-res amber screen, lead	86.00
CM8533	14" hi-res Colour Monitor, lead	299.00
TAXAN3	12" TAXAN Supervision 3, hi-res RGB Colour, lead	375.00
TAXAN2	12" TAXAN Supervision 2, Merdium-res RGB Colour monitor, lead	315.00
XC1404	14" Mitsubishi RGB colour monitor, lead	260.00

## SOFTWARE PACKS:

SWPK1	5 software discs, 80 track. Database, spelling checker, machine code monitor, Macro Basic etc. 5.25" format	£10.00
	3.5" format	£15.00
SWPK2	5 software discs, 80 track. Games.	£10.00
	5.25" format	£10.00
	3.5" format	£15.00

## DISKETTES:

MD525	5 1/4" low cost VEREX for all drives	12.00
MD557	5 1/4" hi-rel MD557, Verbatim DSDD 96tpi	25.00
C102	3.5" low cost Verbatim for all drives	20.00
C103	3.5" hi-rel 90097M Verbatim DSDD 135 tpi	28.00
C104	3" CF2/MSOFT for all Amstrad drives	39.00

## CARTRIDGES:

ADF13	Acorn Eprom cartridge for two 27128	14.95
EPR32	Solidisk Eprom cartridge for one 27256	8.00
RAM32	Solidisk 32K RAM cartridge with battery backup and write protect switch	25.00
MEGA256	Solidisk 256K Mega-RAM card with RAM disc and printer buffer in ROM	100.00
MEGA256	Solidisk 1 Megabyte Mega-RAM card with RAM disc and printer buffer in ROM	POA
	Expected price in April/May	225.00

## EXTRA DISCOUNT

If you buy a disc drive or a printer or a monitor at the same time you buy a Master or a Compact, you are qualified for SYSTEM DISCOUNT and a free Software Pack 1 (worth £10.00 or more).

Normal Package Price	System Discount	Reduction
£600-£699	3%	£18-£21
£700-£799	4%	£28-£32
£800-£899	5%	£40-£45
£900-£999	6%	£54-£60
£1000 and above	7%	£70-£88

Example of system	normal price	Discount	Net price
1 Compact Mono + MP165 printer	797.85	31.95	765.94
2 Compact Colour + Juki 6100	1027.35	71.89	955.11
3 Master 128 + twin F/Drives	729.00	29.16	699.84
4 Master 128, twin F/Drives, CM8533 Colour monitor	1028.00	71.96	956.04
5 example 4 + MP165 printer	1288.00	90.15	1197.84
6 Master 512 + twin F/Drives	957.00	57.42	899.58
7 Master 512 + twin F/Drives, plus 20 MB Winchester	1657.00	115.99	1541.01

## SECONDHAND BEEB AND UPGRADE TO MASTER:

We buy and sell good condition second hand Beebs, even by post. Proof of original purchase is required if you are only selling your computer. Reduced commission is available if you are UPGRADING your BBC to a Master, ask for a MASTERPLAN quotation.

BBC Model	we buy at	we sell at
B-issue 2	131	175
B-issue 3	191	225
B-issue 4	187	250
B-issue 7	225	300

The prices above are given as average for very clean and good condition machines. Please ring for stock allocation before you call.

## ORDERING BY POST:

All items can be ordered by post, sending the coupon below and enclosing cheques, POs, drafts or credit card numbers or by phone. P and P is charged as follows:  
 Less than 1 KG (eg software, cartridges and books): £2.00  
 Up to 3 KGs (eg single disc drives): £3.00  
 Up to 10 KGs (eg computer, monitors, printers, twin disc drives): you can specify either parcel post £6.00 or courier/Datapost: £12.00.  
 Above 10 KGs (eg complete system), please either allow generously or give us a ring for quotation.

## ORDER FORM

Please fill and send to:  
**Solidisk Technology Ltd**  
 17 Swayne Avenue  
 Southend-on-Sea, Essex SS2 6JQ

Name: .....

Address: .....

Items: .....

Price: ..... P & P: £2/£3/£6/£12


Total: .....

Access/Barclay:

--	--	--	--	--	--	--	--	--	--

Solidisk Technology Limited, 17 Swayne Ave, Southend-on-Sea, Essex SS2 6JQ.  
 Tel: Southend (0702) 354674 (16 lines).

OFFICIAL DEALERS IN ESSEX



# MICROMAN Computers



## ACORN SPECIALIST COMPUTER CENTRE



All our prices include VAT.



APPOINTED WATFORD DEALER

Microman has been appointed a Watford Dealer. We are stocking a large range of Watford products, including the popular BEEB DIGITIZER, MAGAZINE MAKER, 32K SHADOW RAM CARD, RAM/ROM CARDS, DFS UPGRADES and many more available from our shop.

### BBC MASTER SERIES

Master 128	475.00
Master Turbo Module	125.00
Master 512 Upgrade	228.85

### BBC MASTER COMPACT SERIES

Master Compact + TV Modulator	458.85
Master Compact + Green Monitor	539.35
Master Compact + Colour Monitor	688.85
Compact ViewSheet	59.80
Compact ViewStore	59.80
A selection of games	call for prices

### ACORN PERIPHERALS

800K Dual Disc Drive + Stand	316.00
Prestel Receiver	139.00
IEEE Interface	325.00

### BBC B DISC INTERFACES

Acorn 1770 Disc Interface	49.95
Acorn ADFS ROM	29.99
Watford Single Density DFS	69.00

### RAM/ROM SHADOW EXPANSION

Watford Solderless ROM Board	36.80
Aries B12 Sideways ROM Board	46.00
Watford Shadow Board	67.85
Aries B32 RAM Extension Board	92.00
ATPL Sideways ROM Board	43.70

### EPROM PROGRAMMERS/ERASERS

Control Telemetry EProm Prog.	109.25
Uviprogram EPROM Prog.	20.95
Uviprogram EPROM Prog. + ZIP	25.95
Multiprogram Programmer	44.95
Please note - Uviprogram Programmer software extra.	
Uviprogram ROM Software	5.00
Uviprogram SWR Disc Software	2.00
Uviprogram EPROM Eraser	20.95
Uviprogram EPROM Eraser + Timer	25.95

### EPROMS/ROM

Eprom 2764 8K	2.95
Eproms 27128 16K	3.45
27128 per 5 Eproms	16.50
RAM 6264 LP-15 8K	3.95
27256 (12.5v)	5.95
27512 (12.5v)	9.95

### MONITORS (line BBC CABLE)

Microvitec 1421 Std/Metal	229.00
Microvitec 1451 Med/Metal	279.00
Philips CMB8533 Med/RGB/CV	299.00
Philips Green 7502	85.00
Philips Amber 7522	89.00
Philips White 7542	89.00

### MODEMS/COMMUNICATIONS

Pace Nightingale + Commstar II	99.00
--------------------------------	-------

### PRINTERS (line FREE BBC CABLE)

Canon PW1080A	289.00
Parasprite KX-P1080	179.00
Star NL10 + BBC/Cent Interface	278.00
Star NL10 Sheet Feeder	63.25
Juki 6100 Daisywheel	299.00

### PLOTTERS

Roland DXY-880A A3 Plotter	835.00
Roland DXY-980A A3 Plotter	1207.50
Epson H180 Plotter (4 pen)	458.85
Hitachi 672	595.00
Microman Plotter ROM	29.95

### LOW COST A4 PLOTTER PACKAGE

PL 80 A4 4pen Plotter (DXY type commands) 0.2mm resolution, plus FREE MICROMAN PLOTTER ROM (produces plots from Viewplot, Interchart, etc.), plus BBC Cable - All for only £189.00

### DIGITISERS

Graphpad II	75.50
Cherry Digitiser	632.50

### BBC CAD SYSTEMS

Bitstik 1	375.00
Bitstik Multi-plotter Driver	79.00
Bitstik 2 (Master compatible)	799.00
Bitstik 2 Upgrade	460.00
Pineapple Diagram (40T Disc)	28.75
Pineapple Diagram (80T Disc)	28.75
Pineapple PCB Designer	97.75
Novacad Trackerball Compatible	113.85
Novacad Plotter Utilities	32.78

### OPUS DISC DRIVES

OPUS 5802 400K 40/80T/DS	£109.95
OPUS 5802D 800K 40/80T/DS	£209.95
OPUS 5802D 800K 40/80T/DS including PSU	£239.95

### MOUSE/TRACKERBALL PRODUCTS

AMX Mouse +Free Watford Art	79.95
AMX Mouse: Master Version	79.95
AMX Pagemaker	49.95
AMX Pagemaker: Master Version	49.95
AMX Max	19.95
AMX Super Art ROM	49.95
AMX Super Art ROM: (Master Version)	49.95
AMX Cad	69.95
AMX Extra Extra	24.95
Fleet Street Editor	39.95
Fleet Street Editor Utilities	14.95
Trackerball RB2 +ICON Soft	69.95
Trackerball + Pointer (Master)	69.95
Pointer ROM	14.37
Trackerball/Mouse Interface	9.20

### VIDEO DIGITISERS

Watford BEEB Video Digitiser	126.50
Watford Magazine Maker	148.35

### WORD-PROCESSORS + UTILITIES

View 2.1 ROM	52.00
View 3.0 ROM	79.00
Viewspell ROM	39.95
Interword ROM	49.00
Wordwise Plus ROM	49.00
Watford Word-Aid	27.60

### FONT/NLQ UTILITIES

Watford NLQ ROM for Epson	28.75
Clares Fontwise (Disc)	12.00
Clares Fontwise Plus (Disc)	20.00
Clares Fonteditor (Disc)	20.00
Fontaid ROM	30.00

### Fontaid Utilities Disc A

Fontaid Utilities Disc A	15.00
Fontaid Utilities Disc B	15.00
Multi-Font NLQ	30.00

### DATABASES + UTILITIES

Viewstore ROM	52.00
Acorn Database (Disc)	15.35
Masterfile II (Disc)	22.00
Betabase	25.00

### SPREADSHEETS/CHARTS

Viewsheet ROM	52.00
Viewplot ROM	29.95
Intersheet ROM	49.95
Interchart ROM	33.95

### PANASONIC KX-P1080 PRINTER

This well-built printer offers many advanced features. It provides both friction and tractor feed NLQ as well as draft modes and full Epson code compatibility. This special offer includes a BBC Cable.

£179.00

### LANGUAGES

BCPL ROM	59.80
BCPL Calculations	34.50
BCPL Stand Alone Generator	49.90
ISO Pascal ROM	59.95
ISO Pascal Stand Alone Gen.	34.50
Comal ROM	49.85
Acorn LOGO ROM	69.00
Logotron LOGO ROM	69.00
Micro-Prolog ROM	79.95

### UTILITIES

Acorn Basic Editor ROM	29.90
Acorn Terminal ROM	34.50
Acorn Graphics Ext. ROM	29.90
Computer Concepts	Full range
Beebug	Full range
Caretaker Basic Utility ROM	33.35
	52.90
	56.35
Slave Plus ROM	39.95
Floppywise Plus ROM	29.95
Proc-Kit (Disc)	10.95
Loc-Kit (Disc)	25.00
Vine Replay ROM's	35.00
Vine TD ROM	18.00
Clares Profile Disc	12.00
Clares BROM Plus	30.00
Clares Ramrod ROM	40.00
Watford The Investigator	23.00
Watford Dumpout 3 ROM	28.75
CJE Inform	20.00
Moviemaker ROM	29.90
Supergraph	28.75
Pineapple Compiler	28.75

### VIGLEN PRODUCTS

Viglen Console, Cartridge System and Printer Stand	P.O.A.
--	--------

### PC SHOWROOM

With the launch of the Amstrad PC1512 and Opus PC II, we are opening a new showroom for the sales of PC compatible computers, add-on card, hard discs, printers and software. The showroom is adjacent to our existing shop and we welcome our existing and new customers to visit us and have an opportunity to see and use this new range of machines and software.

We will be stocking the range of Amstrad PC1512, Opus PC II and Tandon computers along with software titles such as VP Planner, VP Info, Executive Writer, Supercalc 3, Wordstar 1512, Word Junior and many more applications.

Opening times for the showroom will be 9-5 Mon.-Fri. and 9-12 Sat. Our shop times remain unchanged.

### MAIL ORDER SALES

PHONE 074488 5295

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

Carriage/Postage Charges: Computers/Printers/Disc Drives: Next day delivery, £8.00; Royal Mail Trackback, £4.00; ROM/Exp. Boards/Software: First class post, £1.00.

Our Mail Order Dept. will despatch your order within 24 hours (subject to availability).

ALL PRICES INCLUDE VAT Government and Educational Orders accepted.


### SHOP

SHOP OPENING 9-6 MONDAY TO SATURDAY

Unit 1A Rainford Industrial Estate Mill Lane, Rainford, St Helens, Merseyside, WA11 8LS

Phone 074488 5242/3667

Prices subject to change without notice

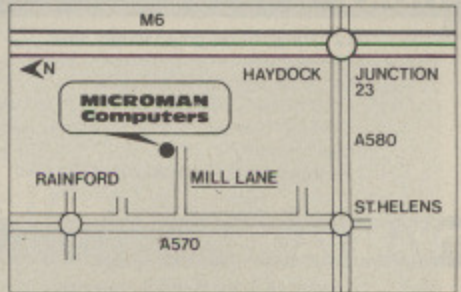

- ★★★★★ Excellent
- ★★★★ Worth buying
- ★★★ Only average
- ★★ Could do better
- ★ Give it a miss

## SOFTWARE

### Mind games

THIS is a suite of five games for you to play – provided you have the AMX rom and a suitable mouse.

When you boot up the disc you are presented with a complex screen in the usual AMX style.

While the display is in monochrome, the base colour can be chosen from the usual eight colours by clicking the mouse over the rectangular window in the bottom right corner.

Just above this is a square labelled volume, containing a number between 0 and 15. Clicking this will reduce the volume of sound from 15 to 0 in single unit steps.

Other windows control the start of each game and the level of difficulty chosen, while others display a counter of the number of moves taken and a scratchpad area that is used for one of the games: The centre of the screen contains the current game window.

Each game has a different shape window that only partly overlays the others, so that each of the five has a small area visible at all times. A game is selected by clicking over its name on the menu bar at the top of the screen.

The first game is a sliding block puzzle. In a 4x4 grid are 15 blocks numbered one to 15.


When you click the start window the computer shuffles the blocks as though sliding one at a time into the empty space provided by moving the previous block. Depending on the level chosen, it will make more or less moves.

The aim is to restore the original pattern in as few moves as possible. But although the computer shows you its moves, it carries them out so quickly that you cannot follow the sequence.

With this game, as with all the others, you are rewarded with a fanfare on successful completion.

Next comes a light puzzle in which a 3x3 grid of lights is displayed. Clicking on any light will switch it, and several others, on or off in a predetermined pattern.

Price: £14.95 (disc). Supplier: Advanced Memory Systems, 166/170 Wilderspool Causeway, Warrington, WA4 6QA. Tel: 0925 413501

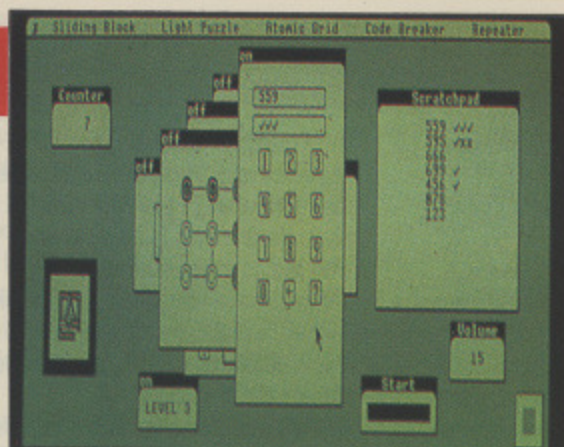

At the start of the game the computer selects a random pattern of lights and your task is to create the final pattern: All lights out except the centre one.

Although it sounds a simple game it's quite a challenge to solve the puzzle in relatively few moves.

The third game is called atomic grid.

The aim is to use the move button on the mouse to collect a symbol from its home and place it on the correct square on a 4x5 grid, under which the computer has hidden another symbol.

To help you there is a way of inquiring which row or column the hidden prize is located in. At the lowest level this game is very easy, but when three symbols are hidden it is quite challenging.

The code-breaker game is based on the Mastermind game seen in the shops a few years ago – nothing to do with the television programme.

Here the display is a little like a calculator: At the top are two lines of blanks, below which is a numeric keypad (zero to nine) with query and backspace buttons.

The computer selects a hidden code number, which the contestant tries to match in as few attempts as possible.

By clicking over the numeric keypad, numbers are displayed in the top row of blanks in sequence.

When all the blanks are filled the computer checks the proposed code number against its own selection, displaying the results of the comparison on the scratchpad.

A tick represents a digit correctly matched for value and position while a cross tells the contestant that a number has matched in value, but not in position.

If you give up, you can click on the query to reveal the hidden code number.

Although it's relatively easy with three digit code numbers, this game becomes infuriatingly difficult with nine digit codes.

The final game is very simple in concept, based on the electronic game Simon and its many clones.

The computer lights one of four buttons and sounds a correspondingly pitched note. You are expected to copy by clicking the correct button, thus sounding the correct note.

Each time you get it right the computer adds another button to the sequence, so you quickly find yourself trying to repeat sequences of 10 or 15 notes.

The components of Mind Games are simple in concept but varied in difficulty.

At their higher levels the games should challenge even the best among us, while at the simpler level they should still provide a challenge to younger children.

The use of the mouse environment is well executed and I found the whole package a joy to use.

It's a pity that you cannot skip from one game to another and retain the last score so that you can return where you left off. However, I can fully recommend Mind Games to all ages.

Ian Whitmore

### W.A.R

WORMING its way through space is a long chain of gigantic cylinders, an artificial world inhabited by alien beings.

As usual the aliens are bent on destroying the Earth and all its inhabitants. In a moment of bravado you foolishly volunteer to attack and destroy the alien planet.

W.A.R uses the screen in an unusual way: The title screen is retained once the game has loaded and a small window opens up within it.

This vertical rectangle is the playing area, and although it appears to be impossibly small you soon forget its dimensions as you get on with the job at hand – mindless destruction.

Your task is to strafe each cylinder to render most of its ground installations inoperative. Once a cylinder has been

immobilised in this way you move on to the next and start again.

After about five cylinders the sequence repeats itself – with no increase in difficulty.

The graphics are high resolution black and white, the ships and backgrounds are highly detailed and smoothly animated.

All ground installations are shown as shaded squares and must be destroyed: Anything taller than a shaded square is to be avoided. The background features are given depth by clever use of shadow.

The cylinders are defended by four types of droid, each having a different movement pattern or speed of attack. Your ship can manoeuvre in all four directions as you fly over the scrolling background.

By moving to the very bottom of the screen you can gain that extra fraction of a second needed to dodge or destroy an aggressor.

I would like to take this opportunity to thank the programmer for providing such a rapid rate of fire when the appropriate key is held down.



The first set of screens can be mastered with about 30 minutes practice. The reverse of the cassette contains a new set, which are made more difficult than the first by the inclusion of a large number of obstacles.

Rather unsportingly Martech gives you no way of distinguishing between flat and raised objects so you spend a great deal of time exploding for no apparent reason – this soon becomes intensely annoying.

W.A.R is a good game which has difficulty levels of two extremes. Had Martech pitched the difficulty level somewhere in between it would have been a stunner.

Jon Revis

Price: £8.95 (cassette) £12.95 (disc). Supplier: Martech, Martech House, Bay Terrace, Pevensey Bay, East Sussex BN24 6EE. Tel: 0323 768456

- ★★★★★ Excellent
- ★★★★ Worth buying
- ★★★ Only average
- ★★ Could do better
- ★ Give it a miss

## Dunjunz

★★★★

MACKSCRANE, the Great Demon, has stolen the chalice of binding and hidden it deep within the Dunjunz.

Four fearless adventurers must risk their lives to save the chalice... and the world.

Dunjunz is the arcade/adventure game to top them all.

It is based around a dungeons and dragons type scenario in which up to four players compete simultaneously.

This is achieved by dividing the screen into four separate action windows, all of them looking into the same dungeon, but each showing the progress of one particular adventurer.

This system enables groups of players to explore the dungeon as a fighting unit, protecting each other against attack by the guards, increasing their fire power when de-

stroying objects or even killing each other.

The adventurers are provided in four different guises: The Ranger uses a magic bow, the Wizard is hot stuff with a fireball, the Barbarian is an axe-wielding maniac and the Warrior is a mean swordswoman.

The weapons all have different attack values – the higher the value the greater the damage inflicted with each blow.

This value is increased if the adventurer locates the magic sword or a pile of weapons.

Similarly each character's armour has different values: The Warrior's chain mail and shield offer great protection from most blows, but not so the Ranger's robe which is of little defence against the guards attack.

A game such as this would not be complete without a smattering of magic, so both the Wizard and the Ranger are endowed with mystical powers. These manifest themselves in smart-bomb fashion, destroying every guard on the screen

Price: £2.99 (cassette). Supplier: Bug-Byte, Victory House, Leicester Place, London WC2H 7NB. Tel: 01-439 0666



## Goal!

★★★

FOOTBALL relies on several individuals working together as a team, which is one of the reasons why programmers find the game very difficult to reproduce on the computer screen.

Every football simulation I have ever played involves the player controlling one footballer and trying to score against a computerised opponent that knows exactly where you are going.

This program does nothing to break this tradition – it is no worse than the opposition but it isn't any better either.

Goal! is a five-a-side game which is played over 90 minutes. Fortunately this isn't in real time – I doubt whether there is anyone out there who could play this game for an hour and a half without suffering permanent brain damage.

The game is played on three separate screens. Kick-off occurs in the centre circle and as the ball moves to either

side of the screen the display changes to show one of the two goal areas.

This three screen system is one of the game's weak points.

You may make a break with the ball and pass all four opposition players while still in the central screen. But as the screen is redrawn to show the goalmouth you will find that the blighters are waiting for you in their own goal area.

You control the player who is closest to the ball. Occasionally he will be tackled and the ball will bounce towards one of your other men.

However, this new player will not respond to the controls until you press the kick key.

You can tackle a player by getting yourself on the same horizontal plane as the man with the ball and then running at him.

If you're lucky you will emerge from this clash with the ball at your feet: Pounding away at the kick key has very little bearing on the outcome.

The computer controlled players all move together,

Price: £7.95 (cassette). Supplier: Tynesoft, Unit 3, Addison Industrial Estate, Blaydon, Tyne & Wear NE21 4TE. Tel: 091-414 4611



supporting the man with the ball, while your players stand there like dummies as you race forwards. At least they reappear when you enter your opponent's goalmouth, not that they're much help.

The cassette inlay says that the computer team will adjust its level of play during the game to match your own. It never got down to my level.

If you are desperate to play football on your computer then this game is as good as any.

Steve Brook

## Yie Ar Kung Fu II

★★★★

THE popularity of martial arts games continues unabated. Yet another has appeared on the scene, this time the follow-up to the immensely successful Yie Ar Kung Fu.

For anyone who has not seen the original, you take the part of a Kung Fu fighter against a variety of opponents.

Each adversary has his – or her – own weapons and fighting style, so defeating different villains requires different tactics.

The general idea is nevertheless simple: Hit your opponent more times than he, or she, hits you.

As might be expected, Yie Ar Kung Fu II follows the same basic idea as its forerunner. This time there are three preliminary screens in which you must dodge, kick or punch lots of flying midgets, any of which will sap your strength if

you don't.

Only on the fourth screen do you actually get to meet your foe. After a while, however, I found three screens of dodging' to one screen of fighting a little repetitive.

A couple of out-of-the-ordinary features are temporary invulnerability and a way of replenishing your energy. Needless to say, you earn these the hard way.

You control your man, Lee Young, using the keyboard only. Buddha be thanked, the controls are the same as for the earlier game – it would be infuriating to have to learn different sets of eight or more keys.

I'm glad to see that what I consider to be essential facilities – pause/continue, sound on/off and restart game – are all provided.

Graphically YAKF II is impressive, especially in the care taken over background detail.

Every other round brings a different backdrop, well-designed and giving its own oriental atmosphere.

There are also a number of nifty small touches: The high-



score table has a tasteful oriental border and when you defeat an opponent Lee Young will jump up and down with a happy smile on his face.


Movement is smooth – even when a sweet-looking young lady is throwing half a dozen knives at you.

On technical merits I would still rate Way of the Exploding Fist as the best karate game for the BBC. YAKF II, however, has much more variety in the actual game-play and initially is easier to play. It's certainly worthy of its honourable ancestor.

Hac-Man

Price: £8.95 (cassette), £12.95 (disc – available soon). Supplier: Imagine, 6 Central St, Manchester M2 5NS. Tel: 061-832 6633



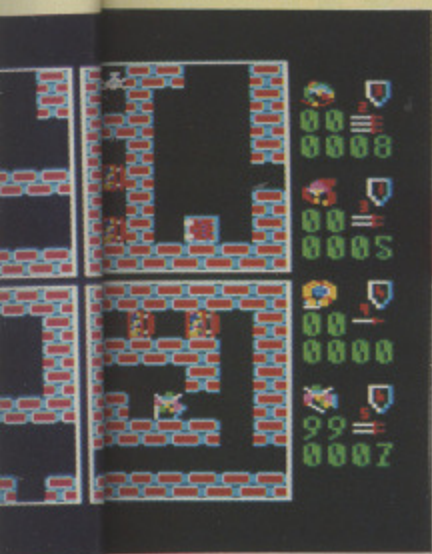

energy rating by 10 points, up to a maximum of 99.

The magic helmet and the cross of resurrection increase the strength of your armour and the Boots of Speed will double a character's rate of travel.

Not all objects you discover are beneficial. For example, the dungeon is riddled with trap doors from which new guards appear to replace their dead comrades.

Most dangerous of all are the energy drainers, innocent looking squares which relieve you of 20 energy points when touched and are sometimes used to bar your way to a new section of dungeon.

Drainers can be destroyed by multiple blows from a weapon but great care has to be taken as they have a defence mechanism which reflects a weapon back on the attacker. A shoot-and-sidestep technique is essential if you are to survive.

When I first played the game I was under the impression that I had to collect all the treasure on a level before I could jump through the trap door to level two. This is not so: If you want to you and your three comrades can exit level one in under 30 seconds.

However, in doing so you pass up the opportunity of improving weapon and armour ratings.

Dunjuz comes complete with 25 different levels, each

loaded individually from tape as required. This may sound tedious but each level takes only five seconds to load.

Loading occurs automatically when all surviving characters have jumped through the exit trap door. It is only necessary for one adventurer to survive to progress to the next level.

Once loaded, all dead characters are reincarnated with a full bill of health but with only the default values for weapons and armour. A surviving character is restored to full strength.

A save game option would have been appreciated as you are unlikely to fight your way through all 25 levels in a single session.

Ignoring the problem of cramming four people into an area of three square feet there is no denying that Dunjuz is a stunning piece of programming.

The action is smooth and fast and the levels tortuously difficult. This game will sell and sell.

James Riddell

## The Big KO

★ ★ ★ ★

THE noble art of boxing comes to the BBC Micro courtesy of Tynesoft. Trade blows with eight mean opponents on your way to The Big KO.

On loading you are presented with a very comprehensive menu. You can have a one or two player game using either joystick or keyboard and options are also there for sound on or off, user defined keys, load or save the high score table and load a new boxer.

You have to press three keys to throw a punch – a combination of left/right, head/body and punch. Using this system, and a little skill, you can launch a flurry of different blows to penetrate your opponent's guard.

Price: £7.95 (cassette). Supplier: Tynesoft, Addison Industrial Estate, Blaydon upon Tyne, Tyne & Wear NE21 4TE. Tel: 091-414 4611

A punch which lands on target is registered with a thud and a visible response from the other fighter – either a flinch or, in the case of Sippo the clown, a nose which lights up.


Before the bout begins your four punches are listed in order of power, so too are those of your opponent. This information can be used to formulate a plan of attack – which can be surprisingly effective.

In the first bout you face Heap Big Nose, a redskin with a tendency to stick his chin out too far. Lefts and rights to the head will soon leave him with reservations.

While fighting you will see two horizontal bars above the fighters. The green one represents strength so don't let this fall to zero or you'll be powerless to defend yourself.

The blue bar is the KO meter and once this has reached 100 per cent your opponent will go down.

After much sweating, shouting and keyboard bashing, I had fought my way through to the fourth bruiser.

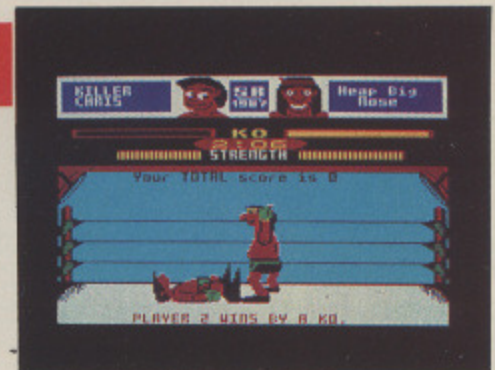

Handsome Devil, as he is known to his fans, is a rather robust chap with the complexion of a lobster and some suspiciously pointed ears.

My best result so far against this beast is taking him to the third round before losing.

The Big KO is one of the best boxing games I have played on any computer. It requires, skill, concentration, cunning and – most of all – a cast iron chin.

Jon Revis

## Daley Thompson's Supertest

★ ★ ★

A YEAR or two ago sports games were all the rage: Track and Field and Hyper Sports were in the arcades and on home computers programs such as Daley Thompson's Decathlon were sweeping all before them.

The follow-up to DTD, Daley Thompson's Supertest, has now been released for the BBC.

In common with other computer sports it features a series of events – in this case eight. You must pass a qualifying standard in the first to move to the next and so on. Each time you fail to qualify you lose one of your three lives.

Because of memory limitations, offering a variety of sports means loading the program in two stages. And if in either stage you can't qualify in at least one of the first three events you never see the fourth.

As its competitors – Olympic Decathlon, Hyper Sports, Micro Olympics and Commonwealth Games – have been on

Price: £8.95 (cassette) £12.95 (disc). Supplier: Ocean, 6 Central St, Manchester M2 5NS. Tel: 061 832 6633

sale for a while, Supertest clearly needs to be something special. Unfortunately this proves not to be the case.


After pressing Shift+Break you are presented with a nicely drawn title page and an invitation to select day one or two. The appropriate section then loads and after you enter your initials the game begins.

My first impressions of the game were bad – poor graphics, jerky movement and minimal sound are compounded by a desperate lack of playability.

Second impressions – "my wrists hurt" – remained with me every time I played. The absence of a pause facility means that you have to play continuously, making the wrists ache still more.

You control the central figure by continuously battering two keys or waggling a joystick. Having seen this method used in the other games I find it an unnecessary waste of a good keyboard or joystick.

The grand-daddy of sports games, Summer Games on the Commodore 64, requires not brute force but precise timing. It seems a pity that more sports games have not followed this

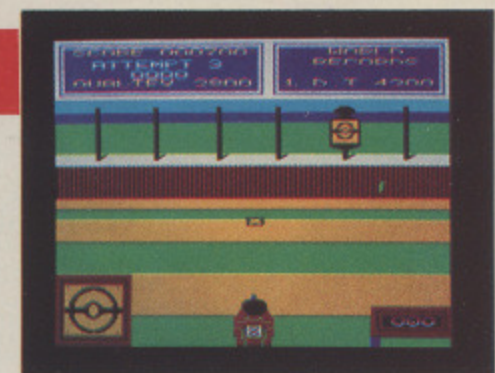

idea.

Two small points niggled: Firstly, as a diving teacher I found that the springboard diving "simulation" could hardly have been less accurate.

Secondly, surely it's common sense to put a write-protect tab on £13 worth of software?

Finely-detailed graphics, as seen in some of the competing games, combined with a more civilised method of control, would have resulted in a very enjoyable game.

Sadly, however, there will be no world records for Supertest.

Hac-Man

# BEEBUG

# SHOWROOM & MAIL ORDER

The products in this price list are available in our showroom in St. Albans and by mail order. Telephone your order on 0727 40303 or send the order form to the address below. Alternatively come along and see us. We are open Mon-Sat 9-5.30 and Thursday 9-8.00 pm and there is ample parking at the rear of our premises.

**Late Opening on Thursday**

**5% DISCOUNT TO BEEBUG MEMBERS ON ALL HARDWARE/SOFTWARE**  
Only if you quote your membership number

If you are not yet a member, join now on the form overleaf and claim your 5% discount on the hardware/software that you need.

**BEEBUG MAIL ORDER, Dept. MUA**  
Dolphin Place, Holywell Hill, St. Albans, Herts AL1 1EX  
Tel: 0727 40303 — Multi-lines

## COMPUTERS

Code	Description	Price	Mem Price
0196G	Compact+Col. Monitor	694.00	659.30
0197G	Compact+Mono Monitor	544.00	516.80
0198G	Compact TV System	464.00	440.80
0119G	Compact Entry System	444.00	421.80
0201B	Compact RS232 Interface	29.90	28.41
0211C	PAL TV Adaptor	29.90	28.41
0250C	Compact 5.25 Disc Lead	12.32	11.70
0298B	Compact Printer Lead	9.77	9.29
0200G	Master 128	474.00	450.30
0202G	Master ET	381.32	362.25
0240C	M128 Manual 1 ADJ22	14.95	14.20
0241C	M128 Manual 2 ADJ23	14.95	14.20
0242C	M128 Adv Ref Manual	19.00	18.05
0234B	M128 Econet Module	48.88	46.43
0235B	M128 Eprom Cartridge	15.18	14.42
0230C	65C102 6502 "Turbo"	119.00	113.05
0231D	80186 Co-Proc	228.85	217.41
0206F	Acorn Teletext Adaptor	115.00	109.25
0237F	Acorn IEEE Interface	322.00	305.90
0207A	Basic II Rom	21.85	20.76
0208A	1.2 Operating System	6.90	6.56
0209A	1.2 DNFS Rom	19.78	18.79
0212B	Acorn Speech Upgrade	46.00	43.70
0217B	1770 Disc Interface	50.24	47.73
0218B	ADFS Upgrade 1770	29.33	27.86
0225B	Econet Upgrade BBC	48.00	45.60
0226B	64K Upgrade Kit B+	39.00	37.05

## PRINTERS

Code	Description	Price	Mem Price
0299G	Panasonic KX-P1080	180.00	171.00
0301G	Brother HR15XL Ser.	350.75	333.21
0303G	Canon PJ1080A Col.	520.00	494.00
0305G	Epson RX 100	392.00	372.40
0307G	Epson FX 100	490.00	465.50
0308G	Epson JX 80 Colour	520.00	494.00
0310G	Juki 6100 Daisywheel	362.25	344.14
0311G	Taxan Kaga KP 815	299.00	284.05
0316G	Taxan Kaga KP915 15"	410.37	389.85
0318G	Epson H180 Plotter	368.00	349.60
0328G	Epson FX800	405.00	384.75
0322G	LX86 Printer	275.00	261.25
0327G	Star NL-10	285.00	270.75

## MONITORS

Code	Description	Price	Mem Price
0501G	Kaga KX1202 Green	116.00	110.20
0502G	Kaga KX1203 Amber	116.00	110.20

0556B	BNC Monitor Lead	3.90	3.70
0503G	Zenith 123 12" Green	83.00	78.85
0504G	Zenith 122 12" Amber	87.00	82.65
0530G	Microvitec 1431 Mon.	239.00	227.05
0531G	Microvitec 1451 Mon.	289.00	274.55
0550B	1.0m Mon. Lead RGB	5.75	5.46
0573C	14" Swivel Monitor Stand	14.50	13.78
0535G	Supervision III RGB	379.50	360.52
0536B	Supervision II RGB	318.55	302.62
0555B	Supervision Mon. Lead	7.00	6.65
0570D	Kaga Stand with Digital Clock	29.00	27.55
0572C	Kaga Mon. Stand KT3	19.00	18.05
0551E	Single Master Plinth	16.10	15.30
0559F	Double Master Plinth	28.75	27.31
0552E	Single BBC B Plinth	12.65	12.02
0553F	Double BBC B Plinth	23.00	21.85
0554B	Memorex VDU Cleaner	4.65	4.41

## DISC DRIVES

Code	Description	Price	Mem Price
0224G	Master Disc Drive Unit	316.00	300.20
0600F	Cumana CSX100 40T	106.95	101.60
0601G	Cumana CDX200 40T	215.00	204.25
0602F	Cumana CSX400 40/80T	142.60	135.47
0610F	Cumana CS100 40T	126.50	120.18
0603F	Cumana CS400 40/80T	162.15	154.04
0604G	Cumana CD800S 40/80T	286.35	272.03
0614F	Cumana CS100E	118.45	112.53
0615F	Cumana CS400E	155.00	147.25
0611A	Cumana Disk Guide	1.90	1.81
0650B	10 x Memorex DiscsSSDD 40	15.50	14.73
0651B	10 x Memorex Discs DSDD 80	25.50	24.22
0669B	10 x Memorex 3.5 Disc	25.00	23.75
0652A	Memorex Disc Cleaner	9.65	9.17
0653B	Disc Case 10 discs	2.25	2.14
0654C	Disc Box - up to 50	10.00	9.50
0655C	Lockable Disc Box 30	13.80	13.11
0656D	Lockable Disc Box 70	17.25	16.39
0223B	1770 + 10 discs when buying a Disc Drive	56.32	53.50

## WATFORD HARDWARE

Code	Description	Price	Mem Price
0213B	Watford DFS Rom+Man	27.49	26.11
0214B	Watford DDFS Kit	56.35	53.53
0216B	Watford DFS Manual	6.95	6.60
0219B	Watford 1.43 DFS Kit	62.10	59.00
0702B	Watford 32K RAM Card	67.28	63.91
0709D	Watford Eprom Eraser	33.35	31.68
0717B	Watford Sideways ZIF	17.83	16.93

# MAGIC MODEM



APPROVED for use with  
Telecommunications systems run  
by British Telecommunications in  
accordance with the conditions  
in the instructions for use  
SUT88 SIG 100488

**INCLUDES  
FREE PRESTEL  
SUBSCRIPTION  
worth £16.50**

We are now offering our excellent Magic Modem complete with our new COMMAND ROM for a special price of £98.80 for members

## THE MODEM

The BEEBUG Magic Modem is a highly professional piece of equipment. It is Model B, B+ and MASTER compatible and supports baud rates of 1200/75, 1200/1200, 75/1200 and 300/300. This means that it may be used to contact any of the wide range of bulletin boards as well as MICRONET 800, Prestel, Telecom Gold, Microlink etc. It also has auto-dial and answer facilities which make it a joy to use. It is supplied ready to use with lead, free registration to MICROLINK and 3 months free MICRONET/PRESTEL subscription.

## COMMAND ROM

COMMAND is a very special communications ROM. Unlike much communications software it is 'command' driven, and has a very powerful extended command set. In addition, for ease of use, all major features are available at the touch of a function key. Because the ROM may be command driven (using ★CALL, ★ANSWER, ★DOWNLOAD etc.) it is exceptionally easy to link commands together in BASIC to meet your own individual needs. Other features include: A full feature Viewdata Terminal and Text Terminal, Telephone Directory, Viewdata Editor, and over 45 more commands. Please telephone or write for further details.

**MODEM + SOFTWARE Order Code 0763E**

0736B	Watford 12 Rom Board	36.80	34.96
0737B	Watford Battery	4.37	4.15
0750B	Watford S/State 16K	32.20	30.59
0751B	Watford 16K Module	32.20	30.59
0752B	Watford Diagnostic Disc	23.00	21.85
0753B	Rom/Ram Board 64K	67.85	64.46
0754B	Rom/Ram Board 128K	102.35	97.23
0775B	Write Protect Mk12	2.76	2.62
1120B	Watford TD Rom (SD)	28.75	27.31
1121B	Watford TD Rom (DD)	28.75	27.31
0429B	Watford NLQ Epson	28.75	27.31

0764F	Red Box Starter System	129.00	122.55
0765D	Red Leader	59.95	56.95
0766D	Red One	34.95	33.20
0767D	Red Two	34.95	33.20
0770B	13 amp Spike Plug	11.99	11.39
0771B	3 way Spike Adaptor	15.00	14.25
0772B	4 way Spike Adaptor	14.50	13.78

1014B	View Driver Disc	9.77	9.29
1002B	Hi-View	44.28	42.06
1021B	Viewindex Disc	13.80	13.11
1043B	Viewspell Rom	34.02	32.32
1001B	View Sheet	44.28	42.06
1279B	Viewsheet User Guide	10.00	9.50
1030B	ViewPlot	25.30	24.04
1019B	Viewstore Rom	44.28	42.06
1008B	Basic Editor	28.00	26.60
1017B	GXR B	28.00	26.60
1018B	GXR B+	28.00	26.60
1031B	Termulator Rom	31.05	29.50
1035B	6502 Development	45.00	42.75
1037B	Database Cassette	11.50	10.93
1038B	Database Disc	14.50	13.78
1039B	Creative Sound Disc	19.00	18.05
1040C	Micros Business Disc	47.27	44.90

## OTHER HARDWARE

Code	Description	Price	Mem Price
0701B	Aries B32 RAM Card	93.15	88.49
0740B	Aries B12 ROM Board	46.00	43.70
0749B	Aries B12C Adaptor	5.87	5.57
0704B	ATPL ROM Board BBC	39.67	37.69
0735B	ATPL Battery Backup	17.37	16.50
0746B	ATPL ROM Board BBC Plus	33.35	31.68
0705A	2764 8K EPROM	2.64	2.51
0706A	27128 16K EPROM	3.34	3.17
0707A	6264 8K RAM	3.68	3.50
0747B	Eprom Eraser	10.35	9.83
0724B	Antex Soldering Iron	7.13	6.77
0708A	Eprom Extractor Tool	3.45	3.28
0710B	Softlife Rom Blower	75.90	72.10
0713A	Phone 2 in 1 Adaptor	6.30	5.99
0714A	BBkey Strip	2.09	1.99
0715A	Dust Cover BBC B/B+	3.45	3.28
0734A	Dust Cover Master	4.60	4.37
0718B	Delta 3B Single Joystick	9.99	9.49
0719B	Delta 3B Twin Joysticks	17.00	16.15
0720B	Delta 14B Joystick	12.50	11.88
0721B	Delta 14B/1 Interface	13.00	12.35
0773B	Delta 3S Compact Joystick	9.99	9.49
0774B	Delta 3S Optical Feedback	18.00	17.10
0741A	Delta ASC/B Interface	8.50	8.07

## ACORN COMPACT SOFTWARE

Code	Description	Price	Mem Price
1050B	Compact Viewsheets	59.80	56.81
1051B	Compact Viewspell	39.85	37.86
1052B	Compact Viewstore	59.80	56.81
1053B	Compact Viewindex	14.95	14.20
1054B	Compact Viewplot	29.95	28.45
1055B	Compact Printer Driver	11.50	10.93
1056B	Compact PASCAL	69.00	65.55

## 3.5" GAMES FOR MASTER COMPACT

Code	Description	Price	Mem Price
1136B	Elite	19.95	18.95
1139B	Revs incl 4 Tracks	19.95	18.95
1140B	Citadel	14.95	14.20
1141B	Strykers Run	14.95	14.20
1142B	Repton 3	14.95	14.20
1144B	Acornsoft Hits Vol 1	14.95	14.20
1146B	Acornsoft Hits Vol 2	14.95	14.20

## ACORNSOFT APPLICATIONS

Code	Description	Price	Mem Price
1000B	View 2.1	44.28	42.06
1022C	View 3.0	66.70	63.36
1286B	View 3.0 User Guide	10.00	9.50
1013B	View Driver Cassette	8.62	8.19

## BEEBUG BLANK DISCS

Code	Description	Price	Mem Price
0657B	10x 40T SS DD Discs	9.90	9.41
0658B	10x 40T DS DD Discs	10.42	9.90
0659B	10x 80T SS DD Discs	10.42	9.90
0660B	10x 80T DS DD Discs	10.90	10.36
0661E	25x 40T SS DD Discs	23.00	21.85
0662E	25x 40T DS DD Discs	26.47	25.15
0663E	25x 80T SS DD Discs	26.47	25.15
0664E	25x 80T DS DD Discs	29.00	27.55
0665E	50x 40T SS DD Discs	48.00	45.60
0666E	50x 40T DS DD Discs	50.00	47.50
0667E	50x 80T SS DD Discs	50.00	47.50
0668E	50x 80T DS DD Discs	53.00	50.35

## BEEBUG HARDWARE


Code	Description	Price	Mem Price
0762E	Beebug Magic Modem	90.00	85.50
0763E	Beebug Modem + Command	104.00	98.80

**ALL PRICES INCLUDE V.A.T.**

**BEEBUG MAIL ORDER  
DOLPHIN PLACE  
HOLYWELL HILL  
ST. ALBANS, HERTS.  
AL1 1EX  
(0727) 40303 — (24 HRS)**

### CARRIAGE

Carriage is denoted by the letter contained in the stock code, A-50p, B-£1, C-£2, D-£3, E-£3.75, F-£5.50, G-£7. When ordering several items, use the highest price code plus half of each subsequent code. For courier delivery use code G.



# One Full Year for just £12.90



We are specialists on the BBC Micro, Master and Compact computers, established in April 1982 following the launch of the original BBC Micro.

**For £12.90 we will provide you with:**

Free access to our technical support team (by phone or letter), to give impartial advice and help on any computer, hardware or software problems that you may have.

64 page magazine mailed directly to you ten times a year. This will keep you up to date with news, reviews, hints and programs for your computer.

Quality, free programs for you to type in (also available on tape/disc) covering everything from printer buffers to windows & icons.

A swift mail order service for all your hardware & software needs at competitive prices, with a further 5% discount to you as a member.

A showroom to try out the latest peripherals and software with absolutely no obligation, and with knowledgeable staff on hand.

Free personal adverts in the magazine to sell your unwanted kit.

## Join 20,000 satisfied members!

**For A Limited Period All New UK Members Will Receive A Special Welcome Pack Including:**

- Disc containing 14 really useful programs
- 56 page booklet packed full of information
- Quick reference card to your computer
- Handy function key strip & screen planning sheets
- Plus a booklist, software catalogue, local user group list, magazine indexes etc.
- And of course your personal membership card & the latest magazine

**NATIONAL USER GROUP FOR THE BBC MICRO, MASTER & COMPACT**

**INFORMATION**

**NEWS**

**REVIEWS**

**FREE PROGRAMS**

**INTERESTING ARTICLES**

**ADVICE**

**TECHNICAL HELP**

**10 MAGAZINE/YEAR**

I would like to enrol as a member of BEEBUG for 1 year and receive the next 10 issues of BEEBUG magazine.

Your Machine	Disc		
	40T	80T	3.5"
Model B			
Master 128			
Master Compact			

Please tick

I enclose £ (enter correct amount\*) OR Please debit by Access/Visa Account £

Card Number

\_\_\_\_\_

Card Expiry Date

SURNAME \_\_\_\_\_ INITIALS \_\_\_\_\_ TITLE \_\_\_\_\_

ADDRESS \_\_\_\_\_

POSTCODE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

**EITHER** Post today to:  
BEEBUG, Dept MU4,  
Dolphin Place, Holywell Hill,  
St. Albans, Herts AL1 1EX  
OR Phone St. Albans  
(0727) 40303

**\*SUBSCRIPTION RATES**

UK, BFPO, CI	£12.50
Rest of Europe	£19.00
Middle East	£23.50
America & Africa	£26.00
Elsewhere	£28.00

All payments MUST be in pounds sterling. Cheques MUST be drawn on a UK bank.

**FOR A FREE BEEBUG INFORMATION PACK  
PHONE 0727 40303**

**Start your year here!**



Ian Whitmore gives  
his Master an exciting  
new look

REVIEW

M

# A touch of the PCs

THE Viglen Master System is a unified console system for the Acorn BBC Master, allowing for a separate keyboard, and combining disc drives encased with the main board to form a monitor stand.

It arrived in a large case in which I found a very sensibly packed collection of odd-shaped bits of cream plastic, a few screws, rubber feet and connectors gathered into a poly bag, a keyboard extension cable and a pack of labels.

Tucked into one corner was an eight page illustrated instruction leaflet with details of assembly, which in general were easy to follow. The pictures were very helpful.

I carefully read the instructions and then set about the reassembly job armed with a flat file and my trusty crosshead screwdriver (you can get away with using only one, but it is easier to use both a larger and a smaller one).

About one and a quarter hours later I had my Master Console System up and running with my 5.25in drives installed. I did not need to resort to a soldering iron but some people might to deal with the 40/80 switches supplied.

The first thing is to dismantle your Master by removing the four "Fix" screws, saving them for later, and removing the top, which is not used in the final reassembly.

The keyboard is then disconnected from the main board and its retaining screws removed. Using the same screws the keyboard is mounted in the new case and the keyboard extension cable attached with the multipin links.

The next operation is the trickiest. An 18in long label for the top of the keyboard box is supplied, still attached to its backing paper. Peel off the backing paper and carefully place the label on the box. This is extremely difficult for the ham-fisted.

The label is flimsy, easily stretched, and sticks to everything in sight. I feel that Viglen might have fitted it for the customer, as it is important for the appearance of the finished machine.

On with the assembly. The keyboard box is now screwed together, trapping the cable in the notch in the lid at the same time. The keyboard is tested after attaching its cable to the main board.

If you are fitting your disc drives to the case, slide them in and attach them with

their original mounting screws.

The power cable is attached to the original computer power supply and the data cable to the disc connector on the main board.

In order to achieve this the main board must be loosened, part of the slot for the disc connector filed away, and the connector attached before replacing the main board. This operation may nullify any Acorn guarantee, so beware!

It is at this point that 40/80 switches are fitted either to the back or front of the unit.

Finally you place the top onto the base and use the original four "Fix" screws to complete the assembly. The finishing touch is to place the other labels on the front, top and back of the machine.

I found the console to be a useful modification. The main unit has the same footprint as the original Master, but it now has a mobile keyboard.

The main unit can function as a monitor stand and accepts my metal cased Microvitec monitor 14in with no trouble. Access to the cartridge slots is now through the top, alongside the monitor area.

There are no sprung doors to catch on things, but the cartridge area is less accessible.

Viglen sent a Viglen Master Rom System with the review case which works well, allowing the use of two of their

normal rom cartridges with each cartridge slot in the Master. This is not included in the usual console package.

Access to connectors in general is unchanged, although lifting the console system to gain access to those underneath demands a little more muscle with disc drives installed.

Viglen sell a number of accessories, such as disc data and power cables, internally mounting additional power supplies, a cooling fan kit and adaptors to enable 3.5in drives to be fitted.

Winchester hard discs can be fitted and Viglen will sell the console in any state of fitting, from the basic kit to a full blown Master system with discs, monitor and so on.

The final appearance is very professional. The only disappointment for me was the poor function keystrip holder which will not accept my Interword strip as it is too wide.

The keystrip holder is not as neat as that on the original Master, having gone back to the old B system with the strip lying flat. This requires the removal of the transparent cover to insert strips.

If you want a separate keyboard in PC style then at £59 this must be a reasonable bet, especially as you also get a monitor stand and disc drive box.

Assembling the console is only difficult in two areas, the large keyboard label and having to file some of the case away for the disc data connector.

If Viglen changes the function keystrip holder the Master Console System will be almost perfect.

Product: The Viglen Master Console System  
Price: £59  
Supplier: Viglen Computer Supplies,  
Unit 7, Trumpers Way, Hanwell,  
London W7 2AQ.  
Tel: 01-843 9903



A BBC Master  
escorted in  
the Viglen  
console system

Use your  
BBC Micro to  
talk to the world!

# MicroLink

in association with **TELECOM GOLD**

Join MicroLink - and use your micro to send and receive electronic mail, telexes, telemessages, go teleshopping, book theatre and rail tickets, read the latest micro news, form your own exclusive closed user group ... even go via satellite to the USA to chat in real time to other users with similar interests as yourself. And it's all as easy as making a phone call! All you need to access MicroLink with your micro is a modem, appropriate software and a telephone.

*How much does it cost?*

● Standing charge of £3 a month. ● Connect charges of 3.5p a minute (between 7pm and 8am weekdays and all Saturday and Sunday), or 11p a minute during office hours. ● Cost of local phone call (London area) or cheap-rate PSS (extra 2.5p a minute).

*These are basic charges. Most MicroLink facilities are free, including sending messages to other people on the system. Extras are:*

*Telex: 5.5p per 100 characters (UK), 11p per 100 (Europe), 18p per 100 (N. America), £1.25 per 400 (rest of the world), £2.75p per 400 (ships at sea). Plus a once-only telex registration fee of £10.*

*Telemessages: £1.45 for up to 350 words. An illustrated greetings card (for weddings, birthdays, etc) costs an extra 75p. Delivered anywhere in Britain first post the following day.*

*Overseas mail: 20p (Germany, Denmark), 30p (USA, Canada, Australia, Singapore, Hong Kong, Israel) for first 2,048 characters. For additional 1,024 characters, 10p and 15p.*

To join MicroLink simply fill in and return the form below. Within days you will receive your personal mailbox number and password, an easy-to-understand Quick Guide to MicroLink, and the phone number of the Helpline where you can get additional assistance should you require it.

**Your personal passport to the wide world of communications**

## Application Form

Name

Position

Company

Address

Postcode  Daytime tel:

### Commencement of Service

Please indicate month of commencement   19

Allow 7 days for validation of mailbox

Date of first payment to be on 15th of month following commencement. Please complete billing authorisation form A, B or C.

\* Telecom Gold is a trademark of British Telecommunications plc.

I/We hereby apply to join MicroLink

I enclose my cheque for £5 payable to Database Publications as registration fee to MicroLink.

I also wish to use Telex. I authorise you to charge an additional £10 to my initial bill for validation.

I confirm that I am over 18 years of age.

I confirm that I accept the terms and conditions for the time being in force, copies of which are available on request

I intend to use the following computer model

Signature

Date

### A. Direct Debiting Instruction (Enter full postal address of UK Bank Branch) to:

I/We authorise you until further notice in writing to charge to my/our account with you on or immediately after 15th day of each month unspecified amounts which may be debited thereto at the instance of Database Publications Ltd - MicroLink by Direct Debit. Bills are issued 10 days before debit is processed.

Name of Account to be debited

Account Number  Sort Code

### B. Please debit my/our Access/Mastercard/Visa/ \*American Express

No.

I/We authorise you until further notice in writing to charge to my/our account with you on or immediately after 15th day of each month unspecified amounts which may be debited thereto at the instance of Database Publications Ltd - MicroLink. Bills are issued 10 days before charge is applied to your account.

Signature  Date

### C. Please invoice the company/authority.

If you select this option, which is ONLY AVAILABLE to government establishments and Public Limited Companies, we will require an OFFICIAL ORDER to accept unspecified amounts.


Send to: **MicroLink,  
Database Publications,  
Europa House,  
68 Chester Road,  
Hazel Grove,  
Stockport SK7 5NY.**

#### FOR OFFICE USE ONLY:

Mailbox assigned

Start date

Password

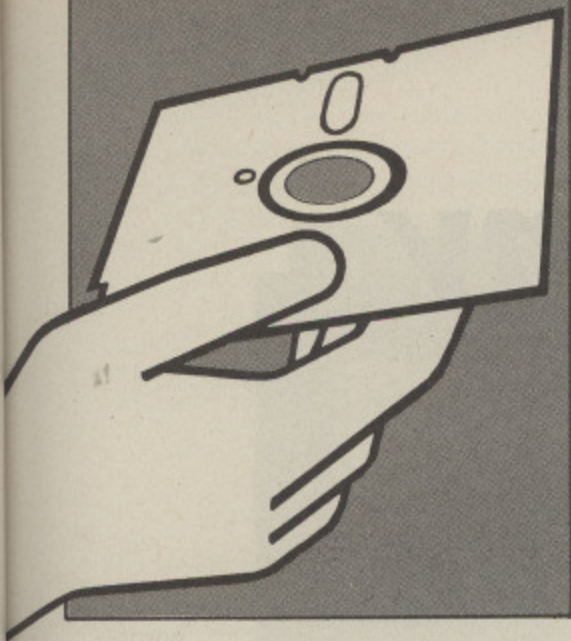

# Discs from Q to A

**Q** What is the difference between a single and double sided disc, and can I use a single sided one as double sided?

**A** All manufacturers aim to produce double sided, double density discs and the discs are then tested to see which category they should be sold as.

Obviously, double sided discs can be used as single sided, but often a single sided disc will work in a double sided drive.

Business users who need reliability should use high quality double sided discs, but home users will probably have no problems using single sided discs in a double sided drive.

**Q** What is the difference between single and double density and which should I get for general use?

**A** Again if all discs were of the highest quality possible the density would be 96tpi – sometimes known as quad density.

During certification they are given the appropriate labels and as with the single/double sided question, using the cheaper discs (in this case 48tpi) usually works on most drives.

**Q** What does the term tpi that you keep using mean?

**A** Tpi stands for tracks per inch and is the number of tracks that were put on and read from the disc as they were made.

The most common sort of disc is a double sided 48 tpi disc, usually known as a double sided double density disc.

**Q** Is a hub ring necessary or is it just a gimmick that advertisers use to make us buy their discs?

**A** They are necessary on some makes of drive but not those usually used on BBC Micros. However, if you regularly use discs with hub rings in your drive you may find that ones without will slip.

**Q** Is it OK to cut a notch and new timing hole on the other side of the disc and flip it over in a single sided drive?

**A** Discs designed to be flipped over are now available and there is no

**Peter Davidson**

**interviews Steve Evans,**

**business development**

**manager of Micro-stat**

harm in using these or normal discs with extra notches cut in the correct places.

There are stories that it is bad for the disc to rotate backwards in its sleeve, but this is only true of discs with cheap sleeves.

**Q** Is there any advantage in having a disc that is welded all the way round rather than just sealed in spots?

**A** Floppy discs are often bent slightly as they are put into the drive so it could be said that the spot welded ones are better because they allow more flexibility. It all depends what point the advertiser wants to put over.

**Q** Some discs are thicker than others. Do thick discs have any advantage over thin ones?

**A** There is an IBM standard that determines everything about the disc, including thickness. Some companies attempt to save money by using thinner PVC for the sleeve and mass production methods lead to discrepancies.

**Q** What advice would you give to someone purchasing a disc?

**A** Business users need high reliability and should therefore buy discs that are certified for the use that they intend to put them to.

Home users are more concerned about the price, and providing backups are kept, reliability is not so important.

A reasonably priced single density disc will probably work even as an 80 track double sided disc and even if the user has to reject some himself, they will work out a lot cheaper than double sided, double density ones.

The best way is to buy one of a particular make and see how well it performs for your applications.

**Q** Are all discs made of the same material?

**A** Most discs are made by sticking ferric oxide to the cookie using a mylar base. High density discs for the IBM PC/AT and clones use cobalt and a slightly different mylar base giving them a "cobbled coating".

**Q** What's a cookie?

**A** It's the term we use for the actual discs. We also call them doughnuts.

**Q** What does the term Clipping Level mean?

**A** I liken this to dropping a ball – it will only rise part of the way back to where it was dropped.

When a disc is made a signal is put on to it and the level of this signal is 100%. The level that can be read back is called the clipping level.

On bulk discs (used by software houses for disc duplication) this level is usually around 40%, while for a good quality disc the figure is 50%.

Disc drives respond to levels of 20% and lower, so there is quite a large margin.

**Q** Occasionally I have had discs that stick in their sleeves. What causes this and how do I avoid it?


**A** High pressure round the edge of a disc can crimp the cookie into the sleeve. Do not put too many discs into a box or subject them to pressure in any other form.

**Q** What do you see as the future of data storage on micros?

**A** The trend is away from 5.25in discs and towards 3.5in ones and to pack as much data as possible onto the smaller surface. One reputable Japanese manufacturer has developed a 3.5in disc that can hold 2Mb of formatted data.

Further into the future, the trend will be away from magnetic media and towards optical ones with discs similar to the present compact record discs being used and allowing an even higher density of data to be written and read from small surfaces.

# Anatomy of a disc drive

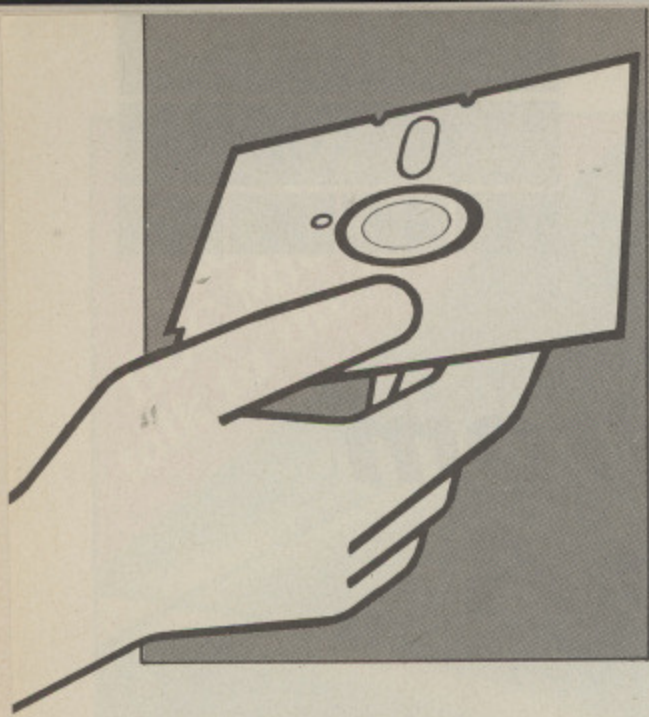

I AM frequently asked which is the best disc drive and I always answer that they are all the same so buy the best you can. And while that advice may be a little vague, it's probably the best you'll get.

There are many disc drive manufacturers and even more companies produce "own label" units. To make matters worse the latter are often from different manufacturers at different times.

All drives perform the same task and if one works at all, it works as well as any other — such is the nature of digital electronics.

However, the many individual components can be designed in a number of different ways, so let's have a look inside a disc drive.

The function of a drive is simply to record and retrieve data. To do this the disc has to be made to spin, so the first consideration is how the drive grips the disc.

This is usually done with a wedge shaped wheel that grips the central hole

**Mike Cook takes us on**

**a guided tour of a disc**

**drive's inner regions**

when the drive door is closed.

If this grabs the disc slightly out of alignment the tracks will appear eccentric to the read head and no data will be read.

Some drives attempt to minimise this by spinning the disc automatically as the door is closed. If you suffer from this problem you can shut the door after you have typed in the disc command and so achieve the same effect.

The spinning motor can move the disc by belt or direct drive, the former being used on the earlier disc drives.

But today it is possible to make small powerful motors to drive the pulleys directly. This has the advantage of

taking up less space and, normally, less current than the older method.

Somewhere on the pulley or motor there is usually a paper disc with two rings of black lines. These are strobe discs used for setting the speed of the motors.


When the motor is running correctly and you view the rings under a flashing light the lines appear to stand still. One ring "stands still" when the light flashes at 50 Hz and the other at 60Hz.

These are the two frequencies used for mains transmission throughout the world and so the source of flashing light can be simply an ordinary fluorescent lamp. There is usually a potentiometer on the logic board for adjusting the speed of the motor.

Once the disc is spinning, the read/write head must be positioned on the correct track.

This is normally done with a stepping motor, but the mechanism for transferring rotary motion to head movement

Figure 1: Disc drive viewed from above

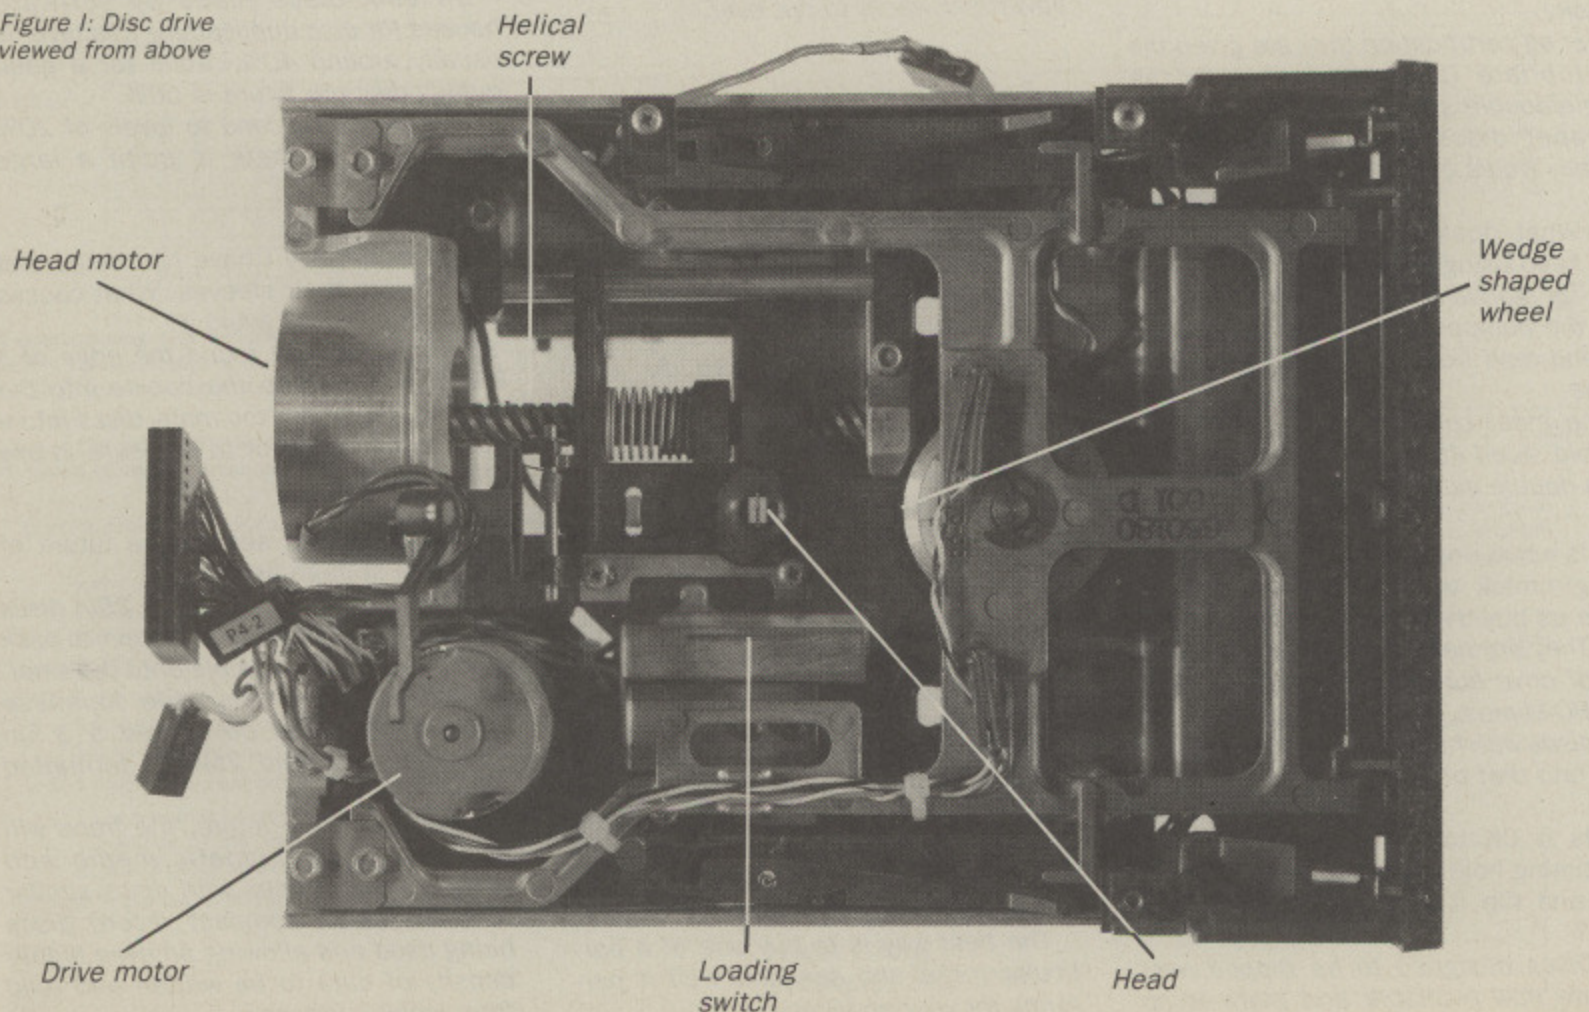



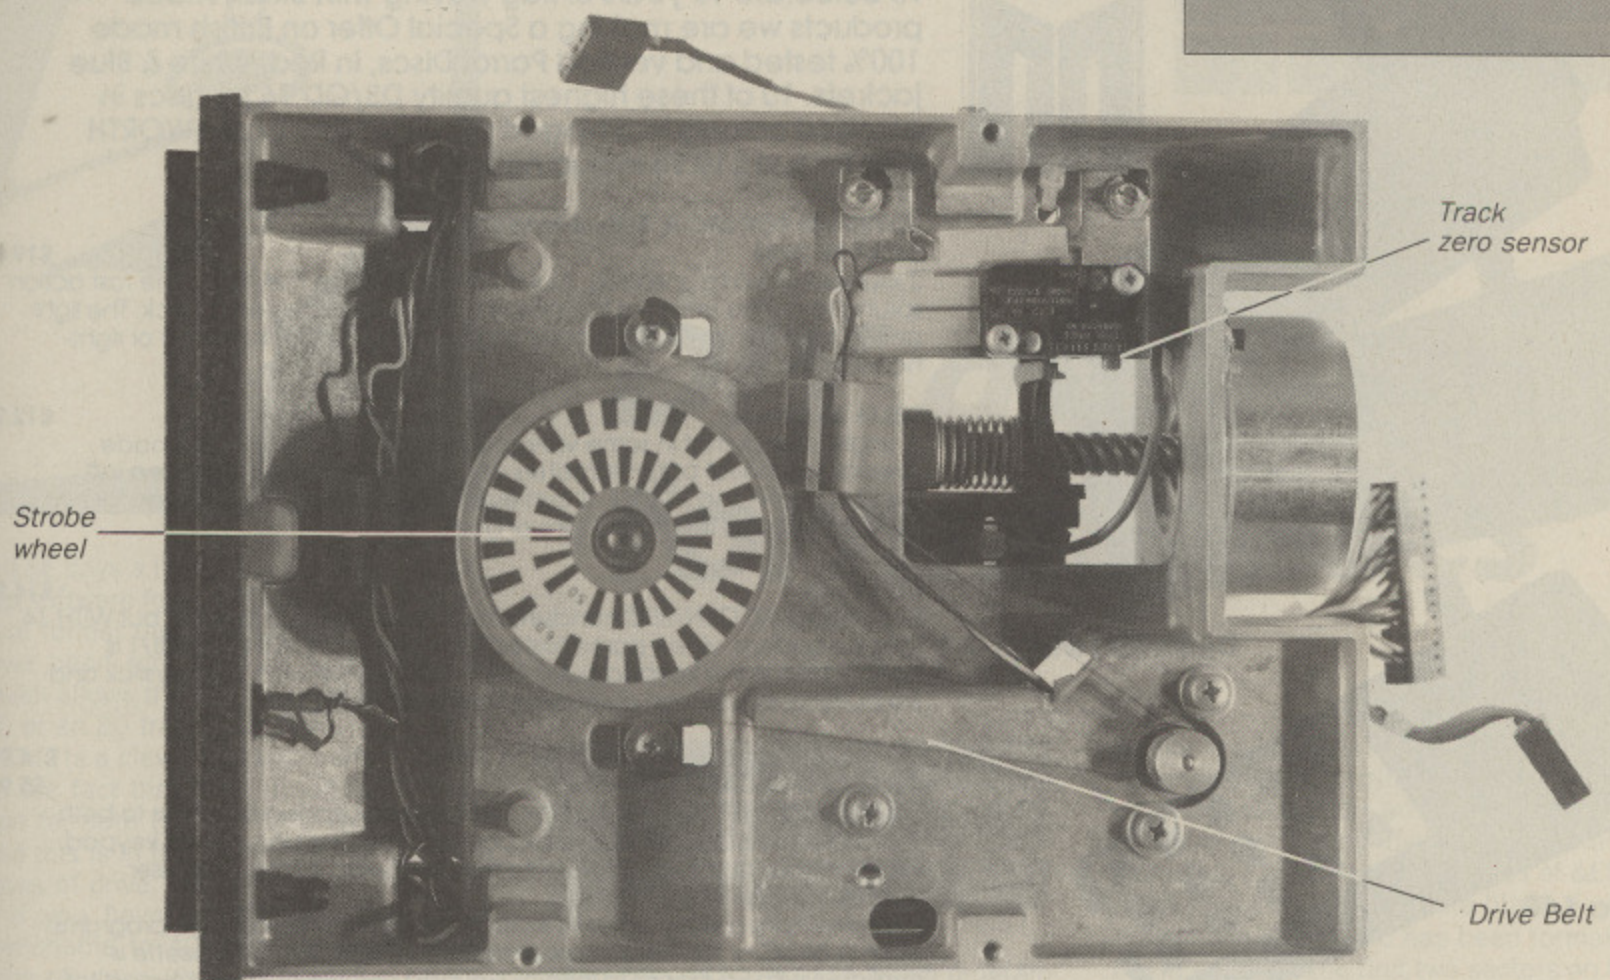


Figure II: Drive viewed from below

can differ. Traditionally this is done by having the head attached to a helical screw and as the screw turns the head moves across the disc.

Alternatively the head may be attached to a spring strip which the motor then winds and unwinds to make the head move, or it can be moved using a rack and pinion mechanism.

Whichever method is employed, the details of the design determine the rate at which the head can be moved reliably and this is known as the stepping rate. The head movement motor receives a pulse to move the head from one track to another but when it is first switched on there is no way of telling which track it is resting at.

Therefore there is some sort of detector that signals when the head is at track zero. This is normally a micro-switch tripped by a small lever attached to the head. Alternatively this action may be performed by the lever breaking a light beam.

Misalignment of this switch can cause the dreaded "Can't find track zero" message.

On an early computer of mine the heads could sometimes be stepped back past the point where the track zero switch was tripped. Consequently the drive would not correctly obey the operating system.

The remedy was to dismantle the case and physically move the head or to poke into the disc controller chip a command to move the head forward several tracks. Fortunately I have not heard of this happening on the BBC Micro.

When the head is moved to the correct

position it is loaded — that is it is brought into contact with the disc. This is done by an electro-magnet pulling the head towards the drive.

And there is usually a mechanical override that unloads the head whenever the drive door is opened, although some drives have the head permanently loaded to save time.

The operation of head loading can vary from drive to drive and it is known, surprisingly enough, as the head load time.

The start of each revolution of the disc is marked by a pulse given by a small hole near its centre. It is detected by a light beam and indicates the start of a track.

The pulses may also be used by diagnostic software to determine the speed of the drive instead of using the stroboscopic method.

A write protect notch on the disc indicates a disc should not be altered. This can be sensed by the drive either using a micro switch or light beam.

People with microswitch sensors often use transparent sticky tape to cover this notch but unfortunately this tends to be missed by the light beam sensors. The moral is clear — or rather the write protect covering should not be.

The protection offered by a write protect notch is normally only a software convention. However, the 8271 controller used in the first BBC Micros would not write anything if the notch was covered.

The electronics board contains all the components to make the drive function. Drives are always connected to a com-

puter along a bus which means that all connections go to all drives.

In order to send information to only a single drive, three wires indicating the selected drive are included in the bus. And somewhere on the electronics board is a set of links or switches to select just one of these lines.

The other links can control features such as when to perform the head loading or whether to turn off the data signal when the drive is not selected.

The only real difference between makes of disc drive is the various delays that have to be introduced by the operating system during the stages of disc access.

The BBC Micro does offer a few choices of delay using the links at the bottom right hand corner of the keyboard. These are set in the factory for the maximum delay, but if you do have a fast drive they can be adjusted.

But remember that you might have to change them back when you take your computer elsewhere.

While the increased speed this gives you can look dramatic when expressed as a percentage, we are only talking about extra delays in the order of one or two seconds, so I don't consider it worth worrying about.

Operating a drive at a speed close to its limit can reduce the reliability of operation so it is best to leave the links alone, they can be more trouble than they are worth.

So there you have it — the disc drive dissected. Have a peek inside yours and see if you can identify its major components. ■



To celebrate 10 years of flag waving with British made products we are making a Special Offer on British made 100% tested and verified Parrot Discs, in Red, White & Blue jackets. 10 of these highest quality DS/QD 96 tpi discs in assorted colours in a hinged plastic library case (WORTH £20) for just £19.95 including VAT & P&P.



Delta 3B Twin

**JOYSTICKS FOR BBC A, B, B+ & MASTER**

**DELTA 3B TWIN**

£19.95

2 joysticks wired to one plug. As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

**DELTA 3B SINGLE**

£12.95

A single joystick that in some ways can act as two. The custom made special "low noise" potentiometers are wired so that it will work as a left hand or right hand joystick. It can even run some programs written for two joysticks and has the fire buttons of both.

**DELTA 14B**

£14.95

Our original ACORN/BBC handset. The same super light joystick, but WITH 14 long life buttons, video game tested for many years. A DELTA 14B/1 is needed to run the keypad but a 14B on it's own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

**DELTA 14B/1 for use with 1 or 2 DELTA 14B's**

£14.95

**DELTA DRIVER CASSETTE**

£5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

**FOR THE MASTER COMPACT OR ELECTRON FITTED WITH A SWITCHED JOYSTICK INTERFACE**

**DELTA 3S**

£12.95

For an ELECTRON with a switched joystick interface (Not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, Etc. and will run on First Byte Interface or similar.

**NEW !!! DELTA 3S0 - OPTICAL FEED BACK**

£19.95

FIVE light emitting diodes show you how your joystick is performing. Now you can see exactly when each switch has operated so you can move about faster and more certainly guaranteeing diagonals.

**FIRST BYTE INTERFACE**

£19.95

Probably the most used ELECTRON interface - comes complete with software to run the majority of games on the ELECTRON using a DELTA 3S or DELTA 3S0 joystick.

**SPECIAL OFFER** buy a DELTA 3s and a FIRST BYTE INTERFACE together and SAVE £2.85 ONLY £29.95

**NEW !!! DATAPRINT 2P LOW COST - LOW PROFILE - PRINTER SHARER**

£39.95

A neat small unit which allows two parallel printers to be connected to one computer and simply switched between the two. e.g. one printer for paper and one for labels.

**DATAPRINT 2C LOW COST - LOW PROFILE COMPUTER SHARER**


£39.95

The opposite of the DATAPRINT 2P this little box just 125 x 90 x 20mm allows two computers to share one printer.

**DATAPAD 16B**



£39.95

A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.

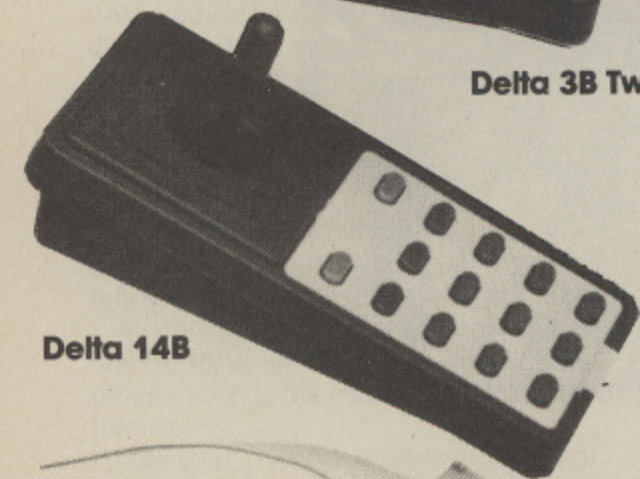

Delta 14B

Delta 14B/1

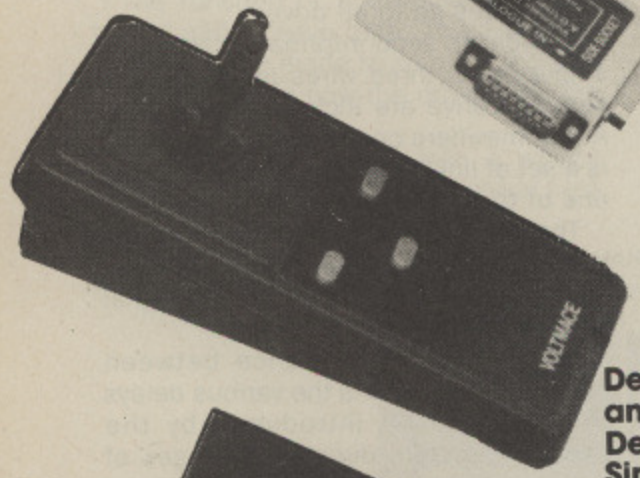

Delta 3S and Delta 3B Single



Datapad 16B



Available from your dealer or direct from us



**Voltmace Limited**

Park Drive  
Baldock  
Herts  
SG7 6EW  
Telephone (0462) 89441

# DIY dual format discs

**Chris Nixon shows  
how it's done without  
a special program**

THESE days a lot of disc-based commercial software for the BBC Micro is sold on dual format discs. These are discs that have been formatted in a special way which allows them to be used in either a 40 or an 80 track disc drive.

This is a clever technique which relies on the fact that the catalogue information for both types of disc is in track 0 and this is in the same position for both types of drive.

If you have an 80 track disc drive switchable to 40 track, or one of each type of drive (there is always a catch), you can create your own dual format discs. You will also need any 40 track formatter.

From now on you will be able to distribute your programs or data files knowing that they will function correctly no matter which type of drive they will eventually be used with.

Firstly a word about formatting in general. As you probably know, any disc is unusable until it has undergone a process known as formatting.

A formatter is usually a machine code program which places magnetic markers on the disc showing where each track and sector start.

A track is a thin circular band of mag-

netic data on the disc on which program data is stored. According to which type of disc drive you have, there will be either 40 or 80 of them packed very closely together, making a band about 1.5 inches wide on the disc.

Each track is divided into 10 sectors of 256 bytes each. And every sector on the disc has an ID field.

This consists of a few extra bytes that contain information about which track the sector is part of, and what position (out of 10) in that track the sector occupies.

In this way, the disc drive head can position itself quickly and accurately over the correct part of the disc ready to store or retrieve data. Without these

tracks, the disc drive head would not be able to find any position on the disc at all and would report an error.

During formatting the newly created sectors are filled with 256 values of &E5 (hex) to signify that they are blank.

After the whole disc has been formatted in this way, the first two sectors on it which are used to store the disc catalogue are filled with zeros, apart from a few bytes on sector 1 which tell the computer how many sectors are present on the disc.

This will be either 400 for a 40 track disc (10 sectors x 40 tracks) or 800 for an 80 track disc (10 sectors x 80 tracks).

Knowing all this, you are ready to prepare your disc in the 40/80 format. The steps to follow, using a 40 track formatter in all cases, are:

- Format the disc in a 40 track or 80 track double-stepping drive – as shown in Figure I.
- Format the disc in an 80 track drive – see Figure II.
- Still using an 80 track drive, save a dummy file to fill the part of track 0 not used for the catalogue and tracks 1 to 19 using:

\*SAVE DUMMY 1900 +C600

- Finally press Control+Break to clear the machine and you are ready to put some programs on your new dual format discs – see Figure III.

Now comes the tedious part. Any file you wish to place on the disc must be recorded in both 80 and 40 track modes. The exception is the !BOOT file if it is less than 2k in length. This is not diffi-

Turn to Page 44 ►

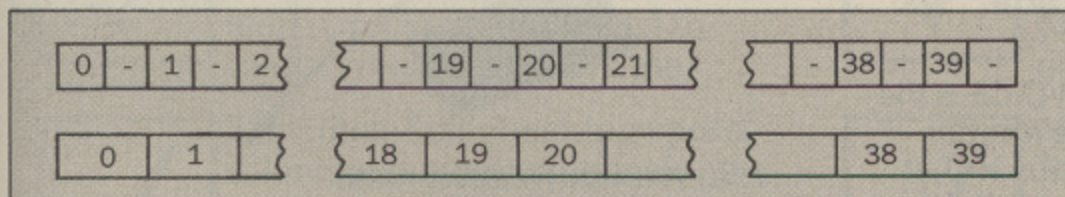


Figure I: Layout of tracks on a 40 track disc

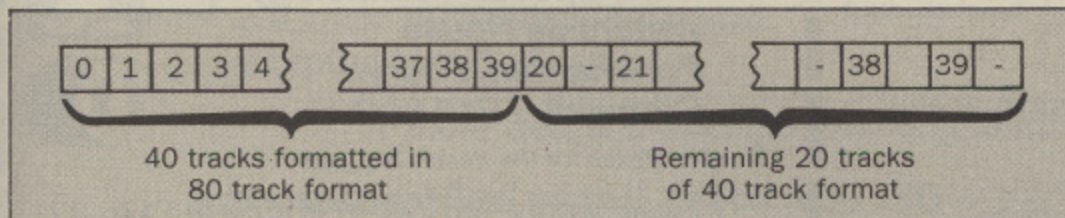


Figure II: Layout of tracks on a 40/80 track disc

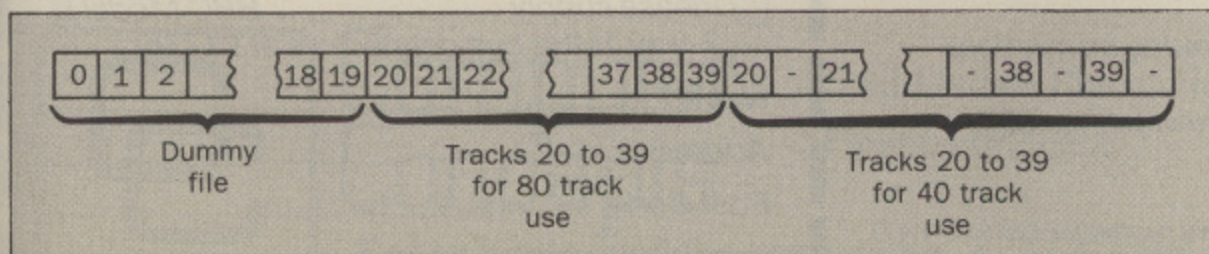


Figure III: Usage of a 40/80 track disc

## UTILITY

### ◀ From Page 43

cult to do, but it can be easy at this point to make disastrous mistakes which will require you to reformat and start all over again.

The method I use to avoid confusion is to first switch the drive to 40 track and copy over all files, before switching to 80 track and copying them all again.

I will explain the reason for this shortly, but if you are one to shy from technical details, you need go no further. Your disc is ready for use and you should now test it in both 40 and 80 track modes.

### How it works

If some or all programs don't load, you have made a mistake in the copying process and I'm afraid you will have to reformat the disc.

The reason for recording each file in both 40 and 80 tracks is the new layout of the disc. The only way to dual format a disc is basically to format half of it as an 80 track disc and half as a 40 track disc.

In our case, the first 40 tracks are formatted correctly as for an 80 track disc and the remaining 40 tracks are formatted to look like tracks 20 to 40 of a 40 track disc, with spaces between them. A dummy file which takes up the first 20 tracks is then saved in the catalogue.

The way this strange arrangement works is that when a file is saved on the disc the catalogue is accessed and found in either format. The presence of the 20 track long dummy file then forces the operating system to save the file at the start of the 21st track.

Now remember, with our special format tracks 20 to 39 do not overlap at all and exist in both the 80 and 40 track sections. The result is that the file now exists in two separate areas of the disc, while the operating system thinks that it has erased over the first copy.

Unfortunately, as you have probably worked out, we end up with only 20 tracks of the disc which are usable for our data. This is because the catalogue together with the dummy file – which must be present – takes 50k. However,

this still leaves 50k of program storage, quite adequate for marketing most programs and packages.

Be careful not to use discs formatted using this method for distributing data storage programs such as databases, mailing lists and drawing packages.

It is impossible to control the users drive from software to switch from 40 to 80 tracks for the necessary double-saving of data, and anyway 50k of disc space is not really sufficient for such uses.

### Making more room

Finally, instead of wasting all track 0, as a last operation any program that is under 2k in length can be saved as DUMMY and then renamed to the filename of your choice.

Doing this lets the disc system think that tracks 1 to 19 are free to use, so you must not try to save any more programs on the disc.

And that's all there is to creating a dual format disc without any special programs to achieve it. ■

# Have a word with your micro for just £149\* + VAT

## Microcomputer Voice Control at a Sensible Price

R&D Speech Technology's MICRO-VOICE is the definitive speech input/output device for your BBC microcomputer. For just £149 plus VAT, it delivers full vocal control of your system, freeing processor time, and saving you the bother of typing in commands.

### The Micro-Voice

- Understands up to ten words or phrases at any one time.
- Listens in any language.
- Is simple to install and simple to operate.
- Can be quickly and easily incorporated into any program.
- Comes with detailed operating instructions and training.
- Is totally reliable and achieves up to 95% accuracy.

\*Includes microphone and stand.  
System in photograph includes optional headset for £25.00 (+VAT)



TEL.: FALMOUTH (0326) 75290

To: R & D Speech Technology  
Waterside House  
Ponsharden, Penryn  
Cornwall, TR10 8AR



Tick the Boxes for the Items Required

- Please supply MICRO-VOICE(S) at £176.35 (inc. VAT and P&P)
- Please supply ..... BBC Model B 3-way 1MHz bus connectors at £17.99

Name .....

Address .....

Post Code .....


# The ultimate spelling checker for WORDWISE, INTER-WORD and VIEW

Spell Master is designed for use with all the major word processing packages - Wordwise/Plus, Inter-Word and View.


Spell Master occupies just one ROM socket, easily fitted to a model-B, B+, B+128, Master or Master Compact.

# SPELL


Master ✓




Over 50,000 words are stored permanently in the basic dictionary ROM, easily extended by the user into sideways RAM and even ROM.




If you are unsure of the spelling of a word, a special 'fuzzy match' facility will list words which approximate to your guess at the spelling.




The speed at which words are checked is around **10,000 per minute...** much faster than any other spelling checker available.




At any time at all, whether in a word processor or not, a 'browse' facility will enable any area of the dictionary to be examined.




Because Spell Master is a ROM, it is always instantly available from within your word processor - no need to load it from disc each time.



Extra star commands provide many unusual facilities associated with words - anagrams, crossword solutions, and so on...



The ultra-fast checking speed allows a convenient check-as-you-type mode to be used. In this mode, every word is instantly checked without loss of typing speed.



**MONEY-BACK GUARANTEE:** If you are not completely satisfied with Spell Master, we will refund the cost of any purchase made direct from Computer Concepts.

*A more detailed specification is available upon request*

**Recommended retail price £51.30 + VAT (£59.00 inclusive)**  
Available direct from Computer Concepts and all good BBC dealers



**Computer Concepts**

Gaddesden Place, Hemel Hempstead  
Herts. HP2 6EX. Tel. (0442) 63933.

Telephone orders welcome • ACCESS & VISA accepted.

# CARE ELECTRONICS

800 ST ALBANS ROAD,  
GARSTON WATFORD,  
HERTS. WD2 6NL. Tel: 0923 672102

## CARE MASTER ROM EXTENDER

Designed to enable users of CARE/Viglen BBC Model B Cartridges. To now use them on the MASTER micros. The extender is able to take one 8K, 16K or 32K Eprom Cartridge. Including Inter-word.

## CARE MASTER ROM CARTRIDGES

Designed by CARE Electronics to Acorn Specifications. Capable of taking up to 2 x 16K Eproms. Including Inter-word & Split-Master. CARE Cartridges offer 3 options for maximum user flexibility. Opt 1 Standard Cartridge: Opt 2 Single Zif: Opt 3 Dual Zif.

Reference Manual 1	No VAT @ £15.00c
Reference Manual 11	No VAT @ £15.00c
CARE Master ROM Extender	@ £9.20c
CARE BBC Model B Cartridges	@ £1.99c
CARE BBC Model B ZIF Cartridge	@ £8.05c
CARE LOW Profile System (The Original)	@ £12.65d
CARE Master ROM Cartridge (Standard)	@ £8.05c
CARE Master ROM Cartridge (Single Zif)	@ £13.80c
CARE Master ROM Cartridge (Dual Zif)	@ £18.86c
CARE Master Smart Cartridge	@ EPOA
CARE Master 32K (96K) RAM Cartridge	@ EPOA
PHILIPS Monitor BM75022 Green Hi-Res 20MHz	@ £89.70a
PHILIPS Monitor BM7522 Amber Hi-Res 20MHz	@ £92.00a
HANTAREX Monitor HX-12 Green Hi-Res 18MHz	@ £79.50a


OPEN  
9am-5pm  
Mon-Sat

SEE US  
AT THE  
UMIST  
SHOW  
20 - 22  
MARCH

## READY MADE LEADS

Centronics to Centronics 1.5mt	@ £11.50c
Disc Drive Data (Single) 1.2mt	@ £5.75c
Disc Drive Data (Dual) 1.5mt	@ £8.05c
Disc Drive Power (Dual) 1.5mt	@ £4.60c
Printer Cable (BBC to Centronic) 1mt	@ £6.90c
Printer Cable (BBC to Centronic) 1.5mt	@ £8.05c
RGB 6-6 pin DIN 1.2mt	@ £3.45c
RGB 6-7 pin DIN (Hitachi) 1.2mt	@ £5.75c
RGB 6-7 pin DIN (Ferguson) 1.2mt	@ £5.75c
RGB 6 pin to SCART (Euro) 1.2mt	@ £9.20c
User Port Extension skt to Plug 0.5mt	@ £9.66c
1MZ Bus Extension skt to Plug 0.25mt	@ £10.81c

Many other types available.



## EDUCATION ORDERS WELCOME

HOW TO ORDER: All prices inclusive of VAT. By Post. Enclose your cheque/P.O. made payable to CARE Electronics. Or use your ACCESS/VISA. Please allow 7 days for delivery. Please add carriage. a = £10.35 b = £5.75 c = £1.15 d = £2.30

## EPROM PROGRAMMER

EPROM Programmer inc Software on ROM	@ £31.05d
EPROM programmer inc Software on Cart	@ £39.10d

## POWER SUPPLIES

For Use With Disc Drives. Please note, not old full height type Dual BBC	@ £34.50b
--	-----------

For use with most peripherals Quad BBC Outlets	@ £36.80b
--	-----------

## SWITCHING UNITS

1 MICRO INTO 2 PRINTERS      1 PRINTER INTO 2 MICROS



BBC Printer 2 to 1 (Inc Lead)	@ £34.50d
BBC Printer 6 to 1	@ £80.50d
Centronics 4 to 1	@ £80.50d
Printer 2 to 2 'CPX2 Fully Buffered'	@ £57.50b
User Port 2 way & Off Posn (Inc Lead)	@ £37.95d
User Port 6 way & Off Posn (Inc Lead)	@ £80.50d
RGB Switcher 2 to 1	@ £23.00d
RS423 2 to 1	@ £23.00d
RS232C 2 to 1 'T' (All lines)	@ £57.50d
RS232C 4 to 1 (All lines)	@ £80.50d
RS232C 2 to 2 'X' (8 lines)	@ £69.00d

## MORELY ELECTRONIC PRODUCTS

Teletext Adaptor inc Software on ROM	@ £121.90d
Teletext Adaptor inc Software on Disc	@ £121.90d

## NOW INCLUDING ATS (ADVANCED TELETEX SYSTEM) ROM

## M B SOFTWARE

MASTERCOPY (DFS-ADFS, ADFS-DFS, DFS-DFS, ADFS-ADFS)	
(please specify 40 or 80 track)	
ROM Version	@ £14.95c
Disc Version	@ £12.88c
DESIGN 7 - Mode 7 Designer (best we've seen)	@ £8.97c
DESFAFX Teletext Emulator (The FAX System!!)	@ £24.15c

# MCS MIKES COMPUTER STORE

Code	Product Name	RRP Inc. VAT	MCS Inc VAT
520STM1	Atari 520STM Computer	£259.95	£249.95
520STM2	520STM + 1 meg Drive	-	£389.95
520STFM1	Atari 520STFM Computer	£399.95	£369.95
520STFM2	520 STFM+ SM125 B/W Mon.	£499.95	£462.95
520STFM3	520STFM+ Philips 8533 Col. Mon.	£714.90	£652.95
1040STF1	Atari 1040STF Computer	£599.95	£554.95
1040STF2	1040STF+SM125 Hi-Res. B/W Monitor	£699.95	£646.95
1040STF3	1040STF+ Philips 8533 Colour Monitor	£914.90	£838.41
SF354	Atari 500K Disk Drive	£149.50	£134.55
SF314	Atari 1Meg Disk Drive	£200.10	£180.09
SH204	Atari 20 Meg hard Disk	£699.95	£647.95
SM125	Atari High Res. Monitor B/W	£149.50	£134.55
CUM1MEG	Cumana 1 Meg Disk Drive	£159.00	£143.10
CUM1TWIN	Cumana Twin 1 Meg Disk Drive	£269.00	£242.10
P8533MON	Philips 8533 Med. Res. Mon.	£314.95	£283.46
P8501MON	Philips 8501 Low Res. Mon.	£243.95	£219.55
LX86PRIN	Epson LX-86 120 cps Printer	£316.25	£284.63
EPSSHEET	Epson LX-86 Sheet Feeder	£63.25	£56.93
LQ800	Epson LQ-800 24 pin Printer	£684.25	£599.95
BRO1109	Brother 1109 NLQ Printer	£253.00	£227.70
WS4000	Miracle WS4000 Modem	£172.44	£154.95

SAVE £20 -  
Buy  
FAST ST BASIC  
with any Atari ST  
pack for  
**ONLY £69**  
Securicor 'Next Day'  
delivery + Insurance £10  
SHOP OPEN  
Monday-Saturday  
9.30am-5.30pm  
(Closed Wednesday)

All prices are correct at time of going to press. We reserve the right to change prices and specifications without notice.

Educational Discount Available




## SHOP

292 London Road Westcliff-on-Sea,  
Essex SS0 7JJ. Tel: 0702 332554

## MAIL ORDER

P.O. Box 31, Westcliff-on-Sea, Essex SS0 3LQ  
Tel: 0702 335379

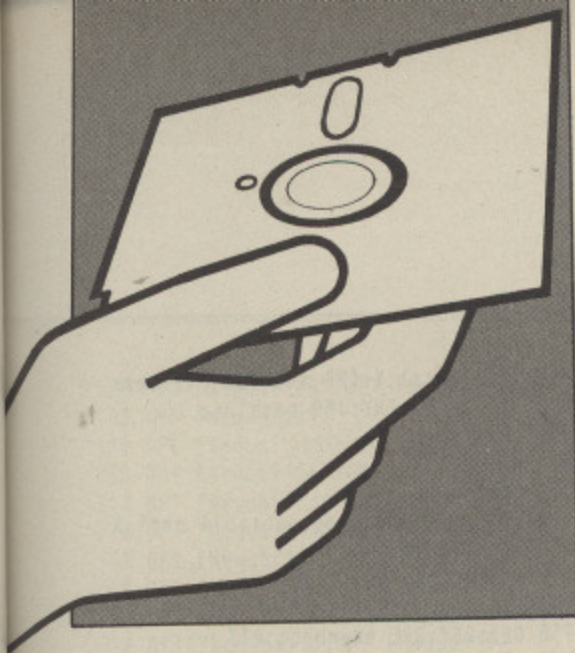

# The lock that baffles pirates

HAVE you ever wondered how the best software houses protect their discs from the prying eyes of software pirates?

With the Disclok protection system you can now enjoy the same security as the big names, with the freedom to distribute your software on disc in complete safety.

The secret of good protection is to do the unexpected.

For instance, you may have come across the technique of using a disc editor program to poke naughty bytes into the disc catalogue, to fool users into believing there are less files on the disc than there actually are.

This works fine until someone else with a disc editor examines your disc and sees what you have done. To ensure total security, or at least a huge headache for the hacker, a more obscure approach is necessary.

In this article I am not going to explain how the Disclok system works, in case there are any would-be pirates reading it, but it does work well.

To use the system type in Listing I and save it as LOK.SRC. Now run it and the assembled machine code will be saved on the disc as DISCLOK. This is the part of the system that actually protects the disc.

Now type in Listing II and save it as KEY.SRC. Run it and the assembled machine code will be saved as L. This is the key that enables programs protected with Disclok to be run.

Any Basic or machine code programs may be protected as the key automatically detects which is which.

Now you are ready to protect some discs. For this I suggest that you format some new ones, as you can lose vital programs if you make any serious errors.

Disclok only allows seven files out of the full 31 to be protected and these must be in the P directory. So copy all the programs that make up your package on to a freshly formatted disc and put each one into the P directory using the \*RENAME command.

This is to ensure that Disclok only protects those files that you want it to.

The next step may take some time, but it is necessary. Every program in your package that calls a protected program must have the CHAIN and \*RUN commands replaced in the following

## Chris Nixon shows how to beat off those software pirates

way.

To run a protected file the filename is put into page &900, terminating with a Return code (&OD). Then just execute \*RUN L.

For example, if you wanted the !boot file to run a protected file called GAME, you would construct the !boot file like this:

```
*BUILD !boot
0001 *BASIC
0002 $&900="GAME"
0003 *RUN L
```

Or from the end of a Basic program:

```
32000 $&900="GAME"
32010 *RUN L
```

Note that you do not include the P directory prefix with the filename as Disclok automatically removes all protected files from the P directory.

One area of difficulty is if you are trying to CHAIN one Basic program from the middle of another.

The Disclok system uses a homemade version of CHAIN which does not reset Basic properly. The solution is simple although long-winded. Replace the

method above with:

```
32000 !&70=PX:PX=&A00:[LDA #138:LDX #0:L
DY &50:JMP &FFF4]:PX=!&70:CCS="*B."+CHR$
13+"PA.=&####:$&900=""zzzz":*RUN L"+CHR
$13:FOR LLX=1 TO LENCCS:?&50=ASC MID$(CCS
,LLX):CALL&A00:NEXT:END
```

where #### is the value of page required to run the program and zzzz is the name of the program to be run.

Finally copy the program L on to the disc. We now have a fully prepared disc, ready for protecting. Make a copy of it as a prepared master disc — because you won't be able to copy the protected disc.

All that remains is the actual protection. Insert the disc containing Disclok in drive 0 and type \*DISCLOK. You will then be instructed to remove the disc and insert the disc to be protected.

Disclok will quickly scan the directory protecting any program on the P directory, and protect the disc so that it cannot be backed up. If no file is found then the error message No P directory files found is generated.

If all has gone well, the computer will beep and announce "Disc now locked". If you don't believe it, try it.

You will find that the protected files are no longer on the P directory, and look pretty normal. That is, until you try to LOAD, \*LOAD, CHAIN, \*RUN, \*DUMP, \*TYPE, \*COPY, \*BACKUP or \*INFO them.

● Please don't send any protected discs to The Micro User, because we don't know how to crack them either.

### Listing I

```
10 REM *****
20 REM * DISC-LOK Version 1 *
30 REM * by Chris Nixon *
40 REM * January 1987 *
50 REM * (c) The Micro User *
60 REM *****
70 REM
80 MODE7:DIM CODEX 2000
90 mess=&70:cat=&900:cat1=&B00
100 FORPASS=4T06 STEP2
110 PX=&1300:OX=CODEX
120 COPT PASS
130 JSR setup:JSR loadcat
140 JSR copycat:LDA progcount
150 BEQ noprogs:JSR password
160 JSR savecopy:LDA #mess1 MOD 256
```

```
170 STA mess:LDA #mess1 DIV 256
180 STA mess+1:JMP message
190 .noprogs
200 LDA #mess2 MOD 256:STA mess
210 LDA #mess2 DIV 256:STA mess+1
220 JSR message:JMP &FFE7
230 .setup
240 LDA #21:LDX #0:LDY #0:JSR &FFF4
250 LDA #title MOD 256:STA mess
260 LDA #title DIV 256:STA mess+1
270 JSR message:LDA #0:STA drive
280 JSR &FFE0:BCS escape:RTS
290 .escape
300 LDA #126:JMP &FFF4
310 .loadcat
320 LDA #cat MOD 256:STA block+1
330 LDA #cat DIV 256:STA block+2
```

Turn to Page 48 ►

◀ From Page 47

```

340 LDA #853:STA block+6:LDA #0
350 STA param:STA param+1:LDA #822
360 STA param+2:JMP osword7F
370 .copycat
380 LDA cat+8105:LSR A:LSR A:LSR A
390 STA maxprog:DEC maxprog:LDA #8
400 STA catptr:LDA #0:STA catptr1
410 STA progcount
420 .progloop
430 LDX catptr:LDA cat+7,X:AND #87F
440 CMP #ASC"P":BNE nextprog
450 JSR copyinfo
460 .nextprog
470 LDA progcount
480 CMP maxprog1:BEQ exitcopycat
490 CLC:LDA catptr:ADC #8:STA catptr
500 DEC maxprog:BPL progloop
510 .exitcopycat
520 RTS
530 .copyinfo
540 LDX catptr:LDY catptr1:LDA #7
550 STA counter
560 .copyentry
570 LDA cat,X:STA cat1,Y
580 LDA cat+8100,X:STA cat1+8,Y
590 LDA #8FF:STA cat+100,X:INX:INY
600 DEC counter:BPL copyentry
610 LDX catptr:LDA #ASC"$":STA cat+7,X
620 TXA:LDX catptr1:STA cat1+7,X
    
```

```

630 INC progcount:CLC:TXA:ADC #16
640 STA catptr1:RTS
650 .savecopy
660 LDA #cat MOD 256:STA block+1
670 LDA #cat DIV 256:STA block+2
680 LDA #84B:STA block+6:LDA #0
690 STA param:STA param+1:LDA #822
700 STA param+2:JSR osword7F
710 LDA #87F:LDX #format MOD 256
720 LDY #format DIV 256:JSR &FFF1
730 LDA #cat1 MOD 256:STA block+1
    
```

```

860 LDA (mess),Y:CMP #42:BEQ exitmess
870 JSR &FFE3:INY:JMP messloop
880 .exitmess
890 RTS
900 .password
910 LDX #879:LDA progcount:STA cat1,X
920 DEX:LDY #8
930 .saveprog
940 LDA prog,Y:STA cat1,X
950 DEX:DEY:BPL saveprog:RTS
960 .catptr:BRK
970 .catptr1:BRK
980 .progcount:BRK
990 .maxprog:BRK
1000 .maxprog1:OPT FNequ(7)
1010 .counter:BRK
1020 .drive:BRK
1030 .format
1040 BRK:OPT FNequ(idfields)
1050 OPT FNequ(5):OPT FNequ(863)
1060 OPT FNequ(39):OPT FNequ(11)
1070 OPT FNequ(18):BRK:OPT FNequ(16)
1080 .block:BRK:BRK:BRK:BRK
1090 OPT FNequ(3)
1100 .param:OPT FNequ(0):OPT FNequ(0)
1110 .prog:LDA #200:LDX #2:LDY #0
1120 JMP &FFF4
1130 .title
1140 OPT FNequ(22):OPT FNequ(7)
1150 OPT FNequ(31):OPT FNequ(7)
1160 OPT FNequ(0):OPT FNequ(141)
    
```

This is one of hundreds of programs now available FREE for downloading on **MicroLink**

```

740 LDA #cat1 DIV 256:STA block+2
750 LDA #84F:STA block+6:LDA #827
760 STA param:LDA #869:STA param+1
770 LDA #1:STA param+2
780 .osword7F
790 LDA drive:STA block
800 LDX #block MOD 256
810 LDY #block DIV 256
820 LDA #87F:JMP &FFF1
830 .message
840 LDY #0
850 .messloop
    
```

# Cut-Price Disks – Lowest Yet!

from only £14.99 for 25 disks delivered to your door

ALL PRICES INCLUDE VAT & DELIVERY TO YOUR DOOR! – NO HIDDEN EXTRAS

## Offer 1 – 5.25" 'Universal' Hlgrade disks

to suit all drives SSSD, SSDD, SSDD, DSDD & DSQD 48 or 96tpi (40/80)  
Disks are packed in 25's, complete with envelopes, label sets and write protect tabs. Nothing wasted on fancy brand names, just plain good value you can rely on!

£ 14.99 – 25 disks	★ Full spec Hlgrade disks, made to 60% clipping level
£ 26.99 – 50 disks	★ Life-time no quibble warranty
£ 49.99 – 100 disks	★ Hub-rings on 5.25" disks
£ 96.99 – 200 disks	★ Label sets & envelopes included
£119.99 – 250 disks	★ No extras – VAT & delivery included.
£219.99 – 500 disks	

## 3.5" Hlgrade disks Offer 2

(single or double sided 135tpi)  
Life-time Warranty & fully certified

Single sided	Double sided	Qty
£ 39.99	£ 49.99	25 disks
£ 75.99	£ 85.99	50 disks
£139.99	£159.99	100 disks
£259.99	£299.99	200 disks
£319.99	£365.99	250 disks

Same day despatch – at no extra cost

## 3M – The BRAND leaders

at CASH 'N CARRY prices  
Offer 6 – If it's quality, reliability and security then it's 3M. Direct Disk Supplies always give the best price. In fact it's so special that the minimum quantity is 20 disks. Remember VAT & Delivery are included – No extras from DDS

SSDD-48tpi 744	20 disks	£24.99
DSDD-48tpi 745	20 disks	£28.99
DSDD-96tpi 747	20 disks	£35.99

Official orders very welcome.

## Coloured 'Universal' disks at lowest prices! Hlgrade Rainbow Coloured disks Offer 5

Use coloured disks to code your files. Buy our rainbow pack of 5 different coloured 'Universal' disks. Without doubt the best value in quality and price.

£ 18.99 – 25 disks
£ 35.99 – 50 disks
£ 69.99 – 100 disks
£129.99 – 200 disks
£149.99 – 250 disks
£279.99 – 500 disks



Cash 'n Carry prices on disks from Direct Disk Supplies


## Offer 4 Save money by using both sides Reversible Media Life

floppy disks complete with 2 notches and two index holes. Again, packed in complete sets of 25 disks.

£ 18.99 – 25 disks
£ 35.99 – 50 disks
£ 69.99 – 100 disks
£129.99 – 200 disks
£149.99 – 250 disks
£279.99 – 500 disks

### How to Order

1. DIAL-A-DISK on 01-979 7811, and give your ACCESS or VISA number and expiry date.
2. Send your cheque etc. to Direct Disk Supplies Ltd. at the new address below.
3. Official Orders. Bona-fide orders from Universities, Colleges, Schools, Charities, etc. are very welcome.



# Direct Disk Supplies Ltd.

Dept M U FREEPOST, 129 High Street, Hampton Hill, Middlesex TW12 1BR

DIAL-A-DISK

☎ 01-979 7811



```

1170 OPT FNequb(129):OPT FNequb(157)
1180 OPT FNequb(131)
1190 OPT FNequs("DISC-LOK Version 1 ")
1200 OPT FNequb(156):OPT FNequb(31)
1210 OPT FNequb(7):OPT FNequb(1)
1220 OPT FNequb(141):OPT FNequb(129)
1230 OPT FNequb(157):OPT FNequb(131)
1240 OPT FNequs("DISC-LOK Version 1 ")
1250 OPT FNequb(156)
1260 OPT FNequb(31):OPT FNequb(10)
1270 OPT FNequb(3):OPT FNequb(134)
1280 OPT FNequs("(c) The Micro User")
1290 OPT FNequb(13):OPT FNequb(129)
1300 OPT FNequs("STRING$(38,"-")")
1310 OPT FNequb(28):OPT FNequb(0)
1320 OPT FNequb(24):OPT FNequb(39)
1330 OPT FNequb(5):OPT FNequb(12)
1340 OPT FNequb(13)
1350 OPT FNequs(" 1) Remove this disc f
rom the drive")
1360 OPT FNequw(&0D0D)
1370 OPT FNequs(" 2) Insert disc to pro
tect in drive 0")
1380 OPT FNequw(&0D0D)
1390 OPT FNequs(" 3) Press a key...*")

```

```

1400 .mess1
1410 OPT FNequb(12):OPT FNequb(7)
1420 OPT FNequb(13)
1430 OPT FNequs(" Disc now locked.")
1440 OPT FNequw(&0D0D):OPT FNequb(42)
1450 .mess2
1460 OPT FNequb(12):OPT FNequb(7)
1470 OPT FNequb(13)
1480 OPT FNequs(" No "P" directory fi
les on disc.")
1490 OPT FNequw(&0D0D):OPT FNequb(42)
1500 .idfields
1510 OPT FNequd(&0FFBC27)
1520 OPT FNequd(&0FFBC27)
1530 OPT FNequd(&0FFBC27)
1540 OPT FNequd(&0FFBC27)
1550 OPT FNequd(&0FFBC27)
1560 OPT FNequd(&0FFBC27)
1570 OPT FNequd(&0FFBC27)
1580 OPT FNequd(&0FFBC27)
1590 OPT FNequd(&0FFBC27)
1600 OPT FNequd(&0FFBC27)
1610 OPT FNequd(&0FFBC27)
1620 OPT FNequd(&0FFBC27)
1630 OPT FNequd(&0FFBC27)

```

```

1640 OPT FNequd(&0FFBC27)
1650 OPT FNequd(&0FFBC27)
1660 OPT FNequd(&0FFBC27)
1670 OPT FNequd(&0FFBC27)
1680 OPT FNequd(&069BC27)
1690 J:NEXT
1700 $&900="SAVE DISCLOK "+STR$ "CODEX+"
"+STR$ "0X+" 1300 1300"
1710 XX=0:YX=9:CALL&FFF7:END
1720 DEF FNequb(NX)
1730 ?0X=NX:0X=0X+1:PX=PX+1
1740 =PASS
1750 DEF FNequw(NX)
1760 ?0X=NX MOD 256
1770 ?(0X+1)=NX DIV 256
1780 0X=0X+2:PX=PX+2
1790 =PASS
1800 DEF FNequd(NX)
1810 !0X=NX:0X=0X+4:PX=PX+4
1820 =PASS
1830 DEF FNequs(NS)
1840 FORLX=1 TO LENNS
1850 0X?(LX-1)=ASC(MID$(NS,LX,1))
1860 NEXT:0X=0X+LENNS:PX=PX+LENNS
1870 =PASS

```

Listing II

```

10 REM *****
20 REM * DISC-KEY Version 1 *
30 REM * by Chris Nixon *
40 REM * January 1987 *
50 REM * (c) The Micro User *
60 REM *****
70 REM
80 MODE7:DIM CODEX 2000
90 mess=&70:maxprog=&C79
100 FORPASS=0T02 STEP2
110 PX=&A00
120 [OPT PASS
130 JSR checkdisc
140 JSR checkname:JSR getinfo
150 JMP loadprog
160 .checkdisc
170 LDA #&7F:LDX #block1 MOD 256
180 LDY #block1 DIV 256:JSR &FFF1
190 LDX #&78:LDY #8
200 .checkloop
210 LDA prog,Y:CMP &C00,X
220 BNE wrongdisc:DEX:DEY
230 BPL checkloop:JMP &C70
240 .wrongdisc
250 JMP (&FFF4)
260 .prog
270 LDA #200:LDX #2:LDY #0:JMP &FFF4
280 .checkname
290 LDA #900:CMP #&0D:BEQ notfound
300 LDA #0:STA progcount:STA catptr
310 .nameloop
320 LDX #0:LDY catptr
330 .charloop
340 LDA #900,X:CMP #&0D:BEQ found
350 CMP &C00,Y:BNE nextname
360 INX:INY:CPX #7:BNE charloop
370 .found
380 LDA catptr:RTS
390 .nextname
400 CLC:LDA catptr:ADC #16:STA catptr
410 INC progcount:LDA progcount
420 CMP maxprog:BCC nameloop
430 .notfound
440 BRK:BRK:EQU$ "Not found":BRK
450 .readsector
460 LDA &CD:STA block:STX param

```

```

470 STY param+1:LDA #&21:STA param+2
480 LDA #3:STA block+5
490 LDA #&53:STA block+6
500 LDX #block MOD 256
510 LDY #block DIV 256
520 LDA #&7F:JMP &FFF1
530 .getinfo
540 PHA:TAX:LDA &C0E,X:AND #3
550 STA DVID+1:LDA &C0F,X:STA DVID
560 JSR gettrack:PLA:TAX:LDA &C0D,X
570 STA proglength:LDA &C0A,X:STA exec
580 LDA &C0B,X:STA exec+1:BMI basic
590 LDA &C08,X:STA load:LDA &C09,X
600 STA load+1:LDA #0:STA basicflag
610 RTS:.basic
620 LDA #0:STA load:LDA #18:STA load+1
630 LDA #1:STA basicflag:RTS
640 .loadprog
650 LDA load:STA block+1
660 LDA load+1:STA block+2
670 .loadloop
680 LDX track:LDY sector
690 JSR readsector:INC sector
700 LDA sector:CMP #10:BEQ nexttrack
710 .reenter
720 INC block+2:DEC proglength
730 BPL loadloop:LDA basicflag
740 BNE doRUN:JMP (exec)
750 .doRUN
760 LDY #ASC"O":JSR insert
770 LDY #ASC".":JSR insert
780 LDY #13:JSR insert
790 LDY #ASC"R":JSR insert
800 LDY #ASC"U":JSR insert
810 LDY #ASC"N":JSR insert
820 LDY #13
830 .insert
840 LDA #138:LDX #0:JMP &FFF4
850 .nexttrack
860 INC track:LDA #0:STA sector
870 JMP reenter
880 .gettrack
890 LDA #10:STA DVIS:LDA #0:STA DVIS+1
900 JSR divide:STA sector:LDA DVID
910 STA track:RTS
920 .divide
930 LDA #0:STA QUOT:LDX #16
940 .LOOP
950 ASL DVID:ROL DVID+1:ROL A:TAY

```

```

960 ROL QUOT:CMP DVIS:LDA QUOT
970 SBC DVIS+1:BCC LESS:TAY:SBC DVIS
980 TAY:LDA QUOT:SBC DVIS+1:STA QUOT
990 INC DVID
1000 .LESS
1010 TYA:DEX:BNE LOOP:RTS
1020 .DVIS:BRK:BRK
1030 .DVID:BRK:BRK
1040 .QUOT:BRK:BRK
1050 .xpos:BRK
1060 .track:BRK
1070 .sector:BRK
1080 .temp:BRK
1090 .catptr:BRK
1100 .proglength:BRK
1110 .load:BRK:BRK
1120 .exec:BRK:BRK
1130 .basicflag:BRK
1140 .code:OPT FNequb(30)
1150 .progcount:BRK
1160 .key:OPT FNequb(&69)
1170 .block1
1180 BRK:OPT FNequd(&C00)
1190 OPT FNequb(3):OPT FNequb(&57)
1200 OPT FNequw(&6927):OPT FNequb(&21)
1210 .block:BRK:BRK:BRK:OPT FNequd(0)
1220 .param
1230 OPT FNequd(0):OPT FNequd(0)
1240 J:NEXT
1250 $&900="SAVE L A00 "+STR$ "PX
1260 XX=0:YX=9:CALL&FFF7:END
1270 DEF FNequb(NX)
1280 ?PX=NX:PX=PX+1
1290 =PASS
1300 DEF FNequw(NX)
1310 ?PX=NX MOD 256
1320 ?(PX+1)=NX DIV 256
1330 PX=PX+2
1340 =PASS
1350 DEF FNequd(NX)
1360 !PX=NX:PX=PX+4
1370 =PASS

```

This listing is included in this month's cassette tape offer. See order form on Page 159.

AS PROMISED, this month I am going to concentrate on what is, judging by the number of letters I have received, by far the most popular game around at the moment: Repton 3.


The Repton games are without doubt some of the most remarkable ever seen on the BBC Micro, and Repton 3 takes the game strategy to new heights.

It combines the best features of both the original and Repton 2 while adding many other novel features, such as capsules to reset the countdown timer, and a nasty creeping fungus. Ugh.

The idea of Repton 3 is similar to its predecessors in that you collect all the diamonds from each level, while avoiding falling boulders, monsters which hatch from broken eggs and many other nasties.

If you perform this task successfully you are given a password for the next level, a feature retained from the first Repton. You are also given an edit code, which will be explained shortly.

Repton 3 is by far the largest of the three games. It has no less than 24

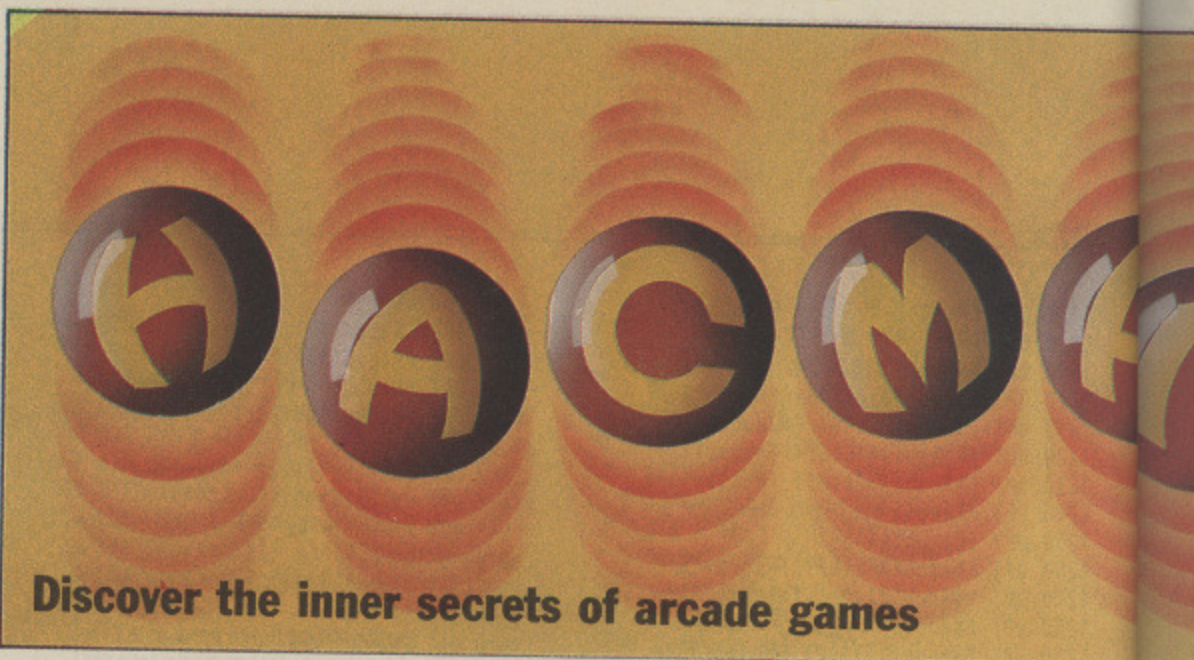

huge screens, loaded in turn in blocks of eight, called respectively Prelude, Toccata and Finale.

Included with the game is a screen designer that allows you to redesign all the screens and characters, or even design your own from scratch. A sort of do-it-yourself masochism.

One feature is that you can edit one of the predefined screens only after entering the appropriate edit code. Therefore, in order to be able to modify a screen you first have to be able to do it. This is, of course, only fair.

The designer also allows you to define

your own passwords so that anyone attempting your screens must tackle them stage by stage, as in the original.

What it does not do is allow you to add codes to your own masterpieces to prevent them from being edited.

Messrs P. Lander and C. Norton have sent in a routine which adds random codes to screens (Listing 1) which is compatible with both tape and disc versions — many thanks to both of you.

Many of you have already finished the game and sent in the complete list of passwords and edit codes.

Thanks to John Gill, Michael Horsfield,



For the Acorn MASTER

## MASTER REPLAY

- \*\*TAPE TO DISC TRANSFER\*\*
- \*\*BBC 'B' TAPES CAN BE USED ON THE MASTER\*\*  
(with kit fitted)
- \*\*SAVES FROM 32K RIGHT UP TO 128K\*\*

All the features of the BBC REPLAY have been enhanced and additional routines included to make this the best transfer utility possible. Available in two versions — as an add-on to the ROMBOARD '3', or self-contained. Both versions require the 1Mbit ROM to be socketed.

- MASTER REPLAY (self-contained) — £41.95
- MASTER REPLAY (for use with ROMBOARD '3') — £36.95
- MASTER to B conversion kit — £9.95 incl. O.S.1.20 ROM  
(Only works with REPLAY present)

### ROMBOARD '3'

An internal board taking three ROMs which can 'overlay' any of the Operating System's built-in ROM software. The computer MUST have a socketed 1Mbit ROM (IC24).

Price — £19.95

### WRITE-PROTECT SWITCH

A small module which plugs into the computer and offers write-protection to one or both of the sideways RAM banks.

Price — £8.95

BBC 'B+'

### 'B+' to B' CONVERSION KIT

This addition will allow BBC 'B' tapes to be used on the B+ computer. (Requires O.S.1.20 ROM)

- Price with ROM — £21.95
- Without ROM — £15.95

## QUALITY FIRMWARE FOR ACORN COMPUTERS

For BBC 'B' and 'B+'

## REPLAY

- \*\*TAPE TO DISC TRANSFER\*\*
- \*\*MID-PLAY STOP AND SAVE\*\*
- \*\*MOST DISC TO DISC TRANSFER\*\*
- \*\*MID-GAME PAUSE\*\*
- \*\*DISPLAYS A STOPPED SCREEN READY FOR PRINTING\*\*

Easy to fit, with no soldering, uses one side-ways ROM socket with three simple connections onto the computer.

REPLAY must be matched to the Disc Interface in use.

Ten versions now available

Price — £35.00

BBC 'B', 'B+' and Electron

### THE MATRIX ROM

Using BASIC commands this ROM is an indispensable tool for performing matrix operations and the solving of linear simultaneous equations. The MATRIX ROM was written with the co-operation of the Civil Engineering Dept., University of Southampton.

Price — £41.40

For BBC 'B', 'B+' and Electron

### ADDCOMM ROM

A Toolkit/Graphics utility adding 40 extra BASIC commands. Brilliant programming and value for money. 16 page brochure sent on request.

Price — £28.00

**ALL PRICES INCLUDE VAT AND POST**

Available from:

VINE MICROS, MARSHBOROUGH, SANDWICH,  
KENT CT13 0PG. Tel: 0304 812276

Or your local Dealer.





## SERIES

B

B+

M



about something completely different?

What about a spaceman, robot or werewolf in place of Repton? Who can design the most fiendishly difficult screens? And what about a jungle, spaceship or plan view of city streets instead of the present underground scenes?

One point I must emphasise: No matter how pretty your characters and how complex your screens, if they are impossible to complete we cannot use them.

Before you send them to us make sure that you can actually finish all eight of them, and include the best route for solving each screen.

Lastly, if you add passwords or edit codes, don't forget to send a list of the codes together with the screens. Who knows — your masterpieces may soon be wreaking mayhem all over the country.

To change the subject at last, one game suddenly surging in popularity is Elite's Commando.

Thank you, Matthew Bain, for your many tips; but Ian Webb's long list of pokes for the cassette version — covering virtually every possible aspect of the game — really steals the show.

Type \*LOAD TGAME (Return) and wait until that file has loaded. Then make any of the modifications below:

Type CALL &2300 (Return) to start the game. Thank you, Ian.

As I write, neither of Commando's much-heralded competitors, Who Dares Wins II and Green Beret, have yet been released; if you are after a "one-man-against-the-odds" game, Commando's worth a look. And it's Master compatible.

Jason Hartley and the persistent C. Parsons to name but a few, not forgetting Mark Wickett and Matthew Corbett for their excellent 16 page detailed guide to the game.

The passwords and edit codes, which are also compatible with the Electron version of the game, are as follows:

	Prelude	Toccatà	Finale
A	Prelude 56882	Toccatà 48042	Finale 27246
B	Citadel 44544	Upstart 6527	Enliven 24937
C	Morning 13330	Octagon 27492	Contest 32000
D	Awkward 33023	Chaotic 20312	Illegal 19786
E	Fritter 24656	Majesty 1356	Appease 3346
F	Lawless 8515	Revenue 16713	Student 20055
G	Ration 3447	Foresee 50190	Average 16660
H	Tobacco 2303	Reserve 65280	Phoenix 51762

Unfortunately the screens of the BBC Micro and Electron versions are not compatible: One cannot be loaded into the other's editor.

Repton 3 offers a competition. When the eighth and last screen of each of the



three blocks has been completed an entry code is given — to enter the competition you must supply all three.

What makes the game more difficult is that an entry code will be displayed only if all the screens have been completed without passwords. All eight in one go, three times over.

The Repton 3 screen editor allows almost infinite expansion of the game and *The Micro User* would like to release a compilation of screens produced with the Repton 3 editor, but for this we need your help.

If you have designed a complete set of

```

100 REM R3 Screen Edit Code Generator
110 REM by P.Lander & C.Norton
120 REM (c) The Micro User
130 DIM file% 2620
140 INPUT "Load name",name$
150 PROCoscli("LOAD "+name$+" "+FNhex(
file%))
160 FOR IX=850 TO 85F
170 IX?file%=RND(255):NEXT
180 INPUT "Save name",name$
190 PROCoscli("SAVE "+name$+" "+FNhex(
file%)+"+2620 0000")
200 END
210 DEF PROCoscli($8700)
220 LOCAL XX,YX:YX=7
230 CALL &FFF7:ENDPROC
240 DEF FNhex(D%)=FNh(D%DIV&100)+FNh(D
%AND&FF)
250 DEF FNh(H%)=STR$(H%DIV&10)+STR$(
H%AND&F)

```

Listing 1: Repton 3 Screen Random Edit Code Generator

eight screens, preferably with redefined characters, that you're itching to unleash on others then send them in to me, care of *The Micro User*.

Who can design the most original characters? Repton himself is bound to rear his ugly head quite often, but how

```


?&2355 Speed of game (0 is full speed).
?&23BB=0 Infinite lives.
?&240C Number of bonus lives gained every 10000 points.
?&2539 Start level number, 0 to 3.
?&2540 Initial number of lives.
?&2553 Number of grenades.
?&2055=0 Walk over trenches.
?&2085 Number of grenades in a box.
?&2E85=1 Repeating fire.
?&31F0=8D0 Soldiers die instantly.
?&3211=8FE Soldiers disappear when killed.
?&34E6=8A9: ?&34E7=1 Soldiers do not shoot.
?&369E=0 Impervious to cars, trucks or motorbikes.
?&3B29 Number of hits required to destroy a car or motorbike
(with 0 it explodes instantly).
?&3B67 Number of hits required to destroy a truck, 5 or less
causes it to explode instantly.
?&3C13=0 Infinite grenades.
?&3C0C=0: ?&3CDF=8F0 Impervious to grenades.
?&4011=0: ?&4014=8F0 Impervious to bullets.

```

Pokes for the cassette version of Commando


● Next month, among other goodies, how to run the enhanced Master version of Stryker's Run on a Model B equipped with sideways ram. Until then, happy blasting.

# All this in just

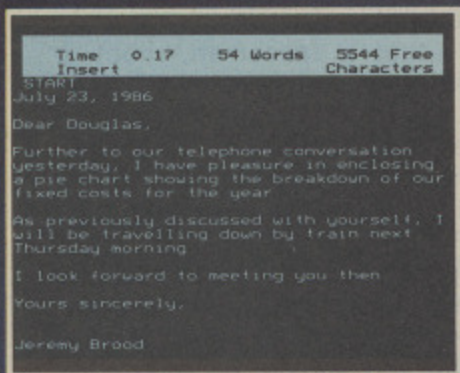


## WORD PROCESSOR

Compose a letter, set the print-out options using embedded commands or menus, use the mail merge facility to produce personalised circulars – and more!

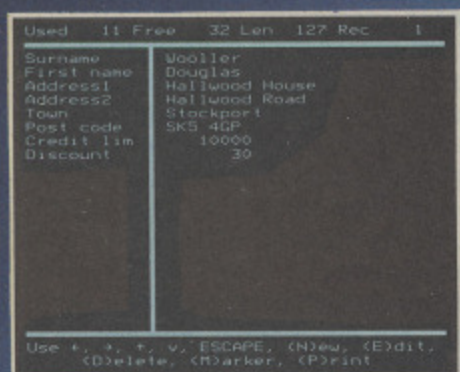


## DATABASE

Build up a versatile card index, use the flexible print out routine, do powerful multi-field sorting, perform all arithmetic functions, link with the word processor – and more!

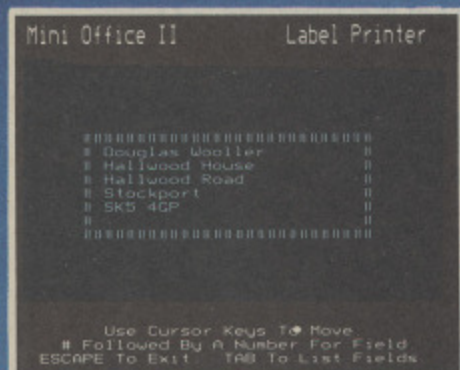

## LABEL PRINTER

Design the layout of a label with the easy-to-use editor, select label size and sheet format, read in database files, print out in any quantity – and more!

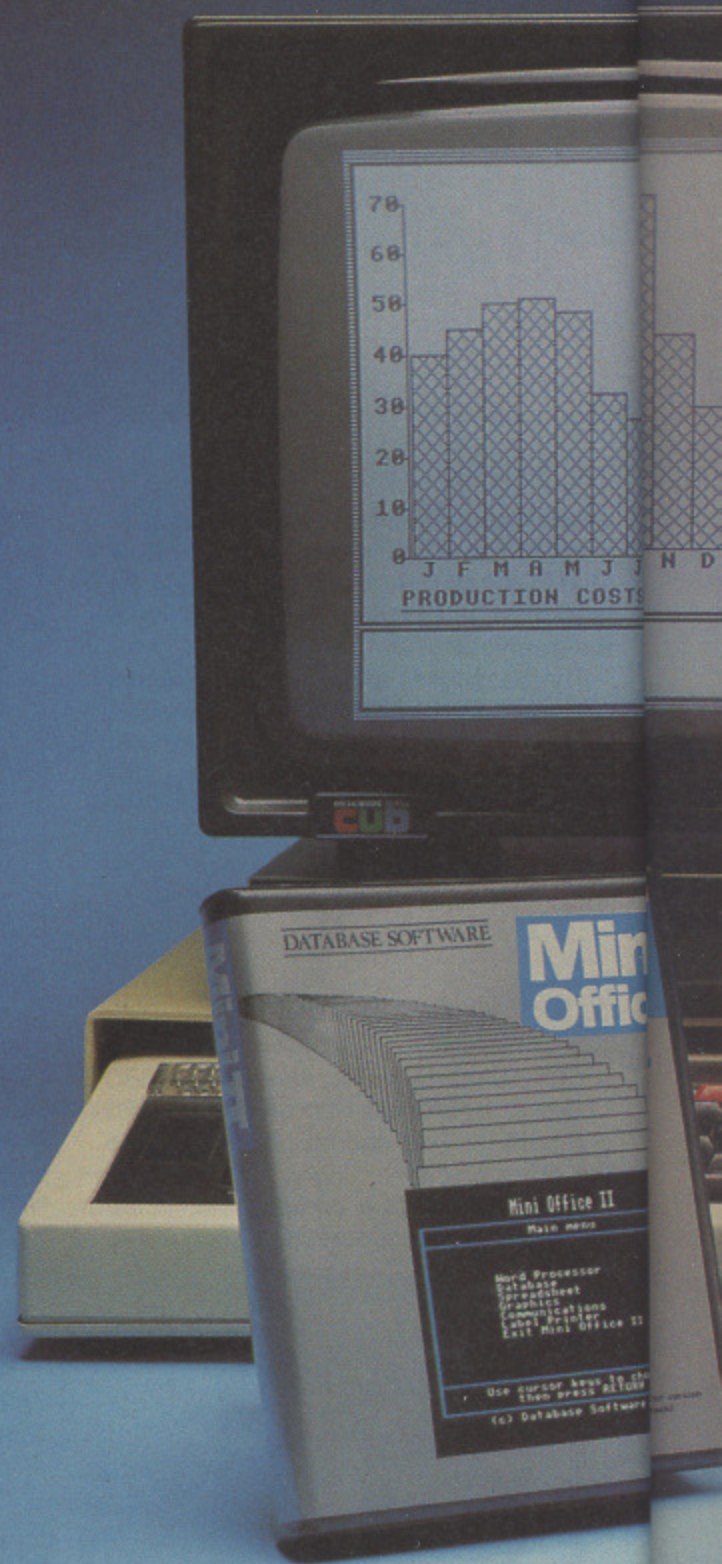

# ...and at a price t

Mini Office II offers the most comprehensive, integrated suite of programs ever written for the BBC Micro – making it the most useful productivity tool yet devised.

A team of leading software authors were brought together to devote a total of 26 man years of programming to the development of Mini Office II. What they have produced is a package that sets new standards in home and business software.

The sample screenshots above illustrate just a few of the very wide range of features, many of which are usually restricted to software costing hundreds of pounds. Most are accessed by using cursor keys to move up and down a list of options and pressing Enter to select.

Is it that easy to use? Several leading reviewers have

already sung its praises on this very point.

Yet possibly the best advertisement for Mini Office II is that it comes from the same stable that produced the original Mini Office package back in 1984.

That was so successful it was shortlisted in two major categories of the British Microcomputing Awards – the Oscars of the industry – and sold in excess of 100,000 units!

It was up to Mini Office II to take over where the first Mini Office left off, with 32 extra features, two additional modules, a program to convert existing Mini Office files to Mini Office II format, and a 60 page, very easy to follow manual.

*This is the package thousands of BBC Micro owners have been waiting for – and at a price everyone can afford!*

He  
Men  
com  
mar  
real  
pac  
you  
Wh  
sm  
ther

# It ONE package!




**SPREADSHEET**  
Prepare budgets or tables, total columns or rows with ease, copy formulae absolutely or relatively, view in either 40 or 80 column modes, recalculate automatically – and more!


```

Freospace= 3750      Auto
Cell=A1             Text
Contents=           Fixed
    
```

	A	B	C	D
1 >	Fixed Costs for 1986			
2		Jan	Feb	Mar
3				
4	Rent	400	400	400
5	Electric	100	50	45
6	Telephone	130	125	115
7	Salaries	2450	2400	2400
8	Cleaning	80	80	80
9	Stationary	55	50	50
10	Postage	375	360	355
11	Carrier	420	380	330
12				
13	TOTALS	3970	3845	3775
14				
15				
16				
17				
18				

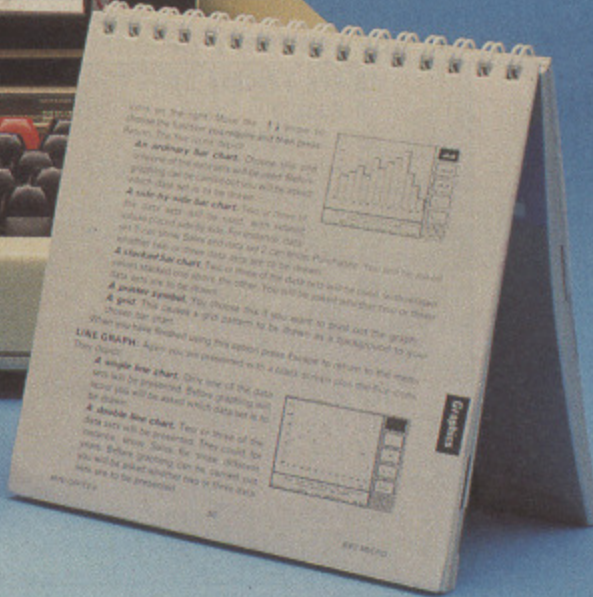

**GRAPHICS**  
Enter data directly or load data from the spreadsheet, produce pie charts, display bar charts side by side or stacked, overlay line graphs – and more!

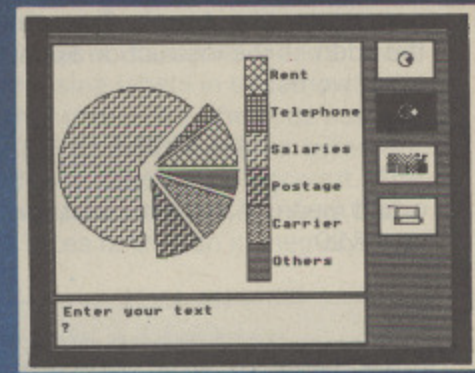

**COMMS MODULE**  
Using a modem you can access services such as MicroLink and book rail or theatre tickets, send electronic mail, telex and telemessages in a flash – and more!

```

>br
*****
British Rail Service
Tickets / Fares / Timetable
*****
(c) Database Publications

1 * Ticket Bookings
2 * Pullman/Steam Bookings
3 * Seat Reservations
4 * Sleeper Reservations
5 * Pullman Rail
6 * Steam Excursions
7 * Electric Express - Newsletter
8 * Timetable and Fares from May 12th

* Hn for HELP
1-B R(edisplay) Q(uit)
Select 1
>
    
```

## Price that can't be matched!

Here's what some independent reviewers say about Mini Office II: Menus throughout the program were abundant and well structured, allowing complex choices to be made with hardly a glance at the pocket-sized spiral-bound manual, and offering a wealth of user-defined functions... For the money it really is unbeatable. Dedicated word processors, spreadsheets and comms packages may offer some extra facilities, but some are so full of whistles and bells you may find yourself forever in the manual or even not using half of their power. What you get with Mini Office II is a vallant attempt to provide an all-embracing small business package at a down to earth price; it fulfills all its promises, and there's nothing cut-rate about the facilities it provides. – Viewfax 258 (Prestel)

### BBC Model B and B+

- Cassette ..... £14.95
- 5 1/4" disc ..... £16.95

Voted Business Program of the Year – 1985 AND 1986  
"Popular Computing Weekly"

This package is incredible value. It includes a word processor, database, spreadsheet, graphics display, label printer and communications module. You could well spend over £200 to get the same range of functions if you bought separate programs from other firms!

"Daily Mail Home Computing Guide"

**DATABASE SOFTWARE**

Order form  
on Page 159

Office II is  
duced the  
two major  
ards – the  
0,000 units!  
re the first  
additional  
ice files to  
y to follow  
ro owners  
an afford!

Mike Bibby concludes

his series on machine

code with a look at

indirect indexing

# Roundabout way to your address

LAST month we saw how we could use the X and Y registers to index our load and store instructions.

Called absolute indexed addressing, the technique adds the content of the specified register (the offset) to the absolute address accompanying the mnemonic (the base). This calculates the address the instruction applies to. In other words:

```
LDA &7C00,X
```

would mean, if the X register contained, say, &20:

```
LDA &7C20
```

We tend to wrap these indexed instructions in loops, increasing or decreasing the register each time through. Program I illustrates the idea.

You'll probably remember it from last month: It puts five asterisks on the screen — the address &7E80 was chosen to ensure that the asterisks started at the beginning of a line below the listing the assembler puts on the screen.

You should have no difficulty in seeing what's going on. Using Y as our index, we initially load it with five. However, the first thing that happens within *loop* is a DEY to take Y to four. We then store Y at &7E80+4 — which does not affect the Zero flag of course — and branch back to *loop*. This continues until Y has reached zero when the final store is in &7E80+0=&7E80. Our five asterisks will now have appeared on the screen, from right to left.

## Upper limit

We tend to use this counting down technique with indexing to avoid an unnecessary compare operation to check when the upper limit of a loop has been reached.

Program II uses this idea to put 256 asterisks on the screen, from &7C00 to &7CFF. Why 256? Well, the Y register is restricted in range from 0 to 255. If you work through the program carefully you'll see that the first store is at &7C00, then at &7CFF, &7CFE and so on down to &7C01.

Notice that the DEY is now after the store. Is there a way of achieving the same effect with it before the store?

Incidentally, if you've typed in Program II, you might like to save it, as we'll be using it again later. We'll also be referring to its assembler output:

```
0900
0900      OPT pass%
0900      .start
0900 A9 2A  LDA # ASC('*')
0902 A0 00  LDY # 0
0904      .loop
0904 99 00 7C STA base,Y
0907 88      DEY
0908 D0 FA  BNE loop
090A 60      RTS
```

Suppose, though, that you want to get round this 256 limit. For instance, you might want to fill all 1000 characters of the screen with asterisks.

Well, we can't avoid the restriction on the size of the register, so we'll have to concern ourselves with altering the base address.

Program III shows one way of filling the whole screen. Since using:

```
STA &7C00,Y
```

fills from &7C00 to &7CFF, we simply include the instruction:

```
STA &7D00,Y
```

in the same loop to get the next set of 256. Also throwing in:

```
STA &7E00,Y
STA &7F00,Y
```

fills up the rest of our screen. In fact, it more than does this since  $4 \times 256$  gives us 1024 characters. This means that we go past the last memory address corresponding to a character on the unscrolled Mode 7 screen — &7FE7 — right onto &7FFF. That's alright, though, since the BBC Micro only uses this extra memory for scrolling.

Program IV shows another way of filling the entire screen — but don't tell anyone you got the idea from me, it's a

```
10 REM PROGRAM I
20 MODE 7
30 FOR pass%=0 TO 3 STEP 3
40 P%=8900
50 [
60 OPT pass%
70 .start
80 LDA # ASC('*')
90 LDY # 5
100 .loop
110 DEY
120 STA &7E80,Y
130 BNE loop
140 RTS
150 ]
160 NEXT pass%
170 CALL start
```

Program I

```
10 REM PROGRAM II
20 MODE 7
30 base=&7C00
40 FOR pass%=0 TO 3 STEP 3
50 P%=8900
60 [
70 OPT pass%
80 .start
90 LDA # ASC('*')
100 LDY # 0
110 .loop
120 STA base,Y
130 DEY
140 BNE loop
150 RTS
160 ]
170 NEXT pass%
180 CALL start
```

Program II

```
10 REM PROGRAM III
20 MODE 7
30 FOR pass%=0 TO 3 STEP 3
40 P%=8900
50 [
60 OPT pass%
70 .start
80 LDA # ASC('*')
90 LDY # 0
100 .loop
110 STA &7C00,Y
120 STA &7D00,Y
130 STA &7E00,Y
140 STA &7F00,Y
150 DEY
160 BNE loop
170 RTS
180 ]
190 NEXT pass%
200 CALL start
```

Program III

bit naughty.

As we've seen, getting past the 256 restriction involves altering the code to take into account different base addresses. Program IV does just this — only to get the different base addresses we use the program to alter itself.

To see how this works, let's go back to Program II. If you look at the assembler output from it you'll see the line:

```
0904 99 00 7C STA base,Y
```

99 is the opcode for STA absolute indexed with Y; 00 7C is the address of *base* in our normal lo-byte, hi-byte fashion.

Suppose, however, that before running our code we alter location &0906 so that it contains &7D instead of &7C. We'll still have the opcode for STA absolute indexed but the base address will be &7D00 — the start address of our second set of asterisks when we're filling the screen. So when we run this altered code we get the second 'quarter' of the screen full of asterisks.

To see this in practice, add the following lines to Program II:

```
190 ?&904=&7D
200 CALL start
```

Now when we run the program we get half the screen filled with asterisks. The first time we call *start* (line 180) our code hasn't been modified so the first quarter of our screen fills. Line 190 then alters the code so that when called with line 200 *start* fills the second quarter of the screen with asterisks.

Program IV uses the idea of modifying code but this time from within the program itself. The assembler output is as follows:

```
0900
0900
0900 OPT pass%
0900 .start
0900 A9 2A LDA # ASC('*')
0902 A2 04 LDX # 4
0904 A0 00 LDY # 0
0906 .loop
0906 99 00 7C STA base,Y
0909 88 DEY
090A D0 FA BNE loop
090C EE 08 09 INC loop+2
090F CA DEX
0910 D0 F4 BNE loop
0912 60 RTS
```

The effect of *loop* remains unchanged from Program II giving us 256 asterisks on the screen. This time though it's wrapped up in an outer loop — controlled by *X* so that it's performed four times.

```
10 REM PROGRAM IV
20 MODE 7
30 base=&7C00
40 FOR pass%=0 TO 3 STEP 3
50 P%=&900
60 [
70 OPT pass%
80 .start
90 LDA # ASC('*')
100 LDX # 4
110 LDY # 0
120 .loop
130 STA base,Y
140 DEY
150 BNE loop
160 INC loop+2
170 DEX
180 BNE loop
190 RTS
200 ]
210 NEXT pass%
220 CALL start
```

Program IV

Each time the inner loop is performed, though, the asterisks appear further down the screen since before branching back the program changes its own code.

It's the:

```
INC loop+2
```

that does the trick. If you look at the assembler output you'll see that *loop+2* is the address of the high byte of our absolute indexed instruction. The first time through *loop* this is &7C so the Ascii code for an asterisk is placed in memory locations &7C00 to &7CFF. On dropping out of *loop* the increment ensures that the high byte is now &7D. We then decrease our outer loop counter, *X*, and, since it won't yet be zero, we branch back to perform *loop* once more. This time the code for an asterisk is placed in &7D00 to &7DFF.

After dropping out of *loop* again, the increment changes the high byte of the indexed store to &7E, *loop* now places asterisks from &7E00 and so on.

It works and it's fun so you won't be surprised to know that it's frowned upon. Self-modifying code is the machine code equivalent of GOTO. Avoid it!

One reason for this advice is that since it alters itself, the code must be resident in ram. You can't put your self-modifying routines into rom, which you sometimes want to do.

The second reason for shunning such code is to make debugging simpler. Since the code itself is constantly altering, working out exactly what's going on and the state of the program when it crashed can be a nightmare. It's easier to know where you're going if you know exactly where you are in the first place.

Thirdly, the potential for crashes is far

higher. If you specify the address you want to modify incorrectly then you're likely to be wreaking havoc on your program.

The final reason is program clarity. You might know at the time why there's that:

```
INC loop+2
```

but will you remember what's going on in two month's time? (Incidentally, the last two points are why I used:

```
INC loop+2
```

rather than:

```
INC &908
```

Not only does it make the code far more readable, using labels in this way, it also means that changes in the code such as altering *P%* or inserting extra bytes are automatically taken into account. The address *loop+2*, of course, refers to the byte two bytes further on in memory than *loop*.)

### Alterable addresses

However, the idea behind self-modifying code isn't bad: By altering the base address of an indexed operation we can 'extend' our indexing over more than 256 bytes. We don't want to alter the program itself, though. Somehow we need to separate the address we're going to be changing from the code.

What we require is a special area of ram that we can put 'alterable addresses' in. Instead of spelling out such an address directly in the program code itself, our program would then refer the 6502 processor to where it's stored in this special ram — a roundabout, or indirect way of getting to the address. Instead of giving it an address, we give it the address of an address!

### Zero page

Well, we've got our special area of ram: zero page. And we've got a way of letting the 6502 know that we're referring to an address that's stored there, known as *indirect indexed addressing*.

What we do is to 'hide' our base address down in zero page. This, of course takes two bytes, the address being stored in usual lo-byte, hi-byte fashion. Our instruction then points to the base address indirectly by specifying the zero page address where it's hidden. If you're being super-precise, it's the zero page address at which the lo-byte is

## EPROMS, 8271

	Ex VAT	Inc VAT
1-9 27128 250nS	2.57	2.95
10+ 27128 250nS	2.30	2.65
1-9 2764 250nS	2.26	2.60
10+ 2764 250nS	2.00	2.30
1-9 27256 250nS	4.57	5.25
10+ 27256 250nS	4.13	4.75
1-9 TTL/Cmos set	4.77	5.49
1-9 8271 controller	30.43	35.00
10+ 8271 controller	29.00	33.45
1-9 6264 LP 150nS	2.56	2.95
10+ 6264LP 150nS	2.30	2.65

## ROMS/UPGRADES

	Ex VAT	Inc VAT
Inter-Word	37.39	43.00
Inter-Sheet	36.52	42.00
Inter-Chart	24.35	28.00
Wordwise Plus	37.39	43.00
Spell Master	40.87	47.00
View 2.1	36.52	42.00
View 3.0	55.65	64.00
ViewStore	36.52	42.00
ViewSpell	30.39	34.95
AMX Max	16.09	18.50
Acorn 1770 DFS	42.61	49.00
Acorn 8271 DFS	41.74	48.00
B Plus 64K to 128K	26.00	29.90

## DISC DRIVES

	ExVAT	IncVAT
Cumana CSX100	91.30	105.00
Cumana CSX400	124.35	143.00
Cumana CSX351 3.5" 40T	42.61	49.00
Cumana CD800S	252.17	290.00
MD400A 400k No PSU	101.74	117.00
MD400B 400k & PSU	116.52	134.00
MD802C 800k No PSU	190.43	219.00
MD802E 800k & PSU	216.52	249.00
MD802D 800k PSU & stand	247.83	285.00
Acorn Dual 800K & Stand	247.83	285.00

## SPECIAL OFFER

**Altair ROM/RAM board with battery backup half price only**  
**£39.00 inc VAT**

## DISKETTES (lifetime warranty)

	Ex VAT	Inc VAT
10 96tpi D/S D/D in library case	13.90	15.99
10 Low cost 96tpi D/S D/D in library case	7.39	8.50
10 Low cost 96tpi D/S D/D bulk packed	6.52	7.50

## MONITORS


	Ex VAT	Inc VAT
Philips CM8533	239.13	275.00
Philips CM8501	146.96	169.00
Philips BM7502	68.70	79.00
Philips BM7522	73.91	85.00
Acorn ADF 32	212.17	244.00
Taxan KX1201 P31	84.35	97.00
Taxan KX1202 P39	91.30	105.00
Taxan KX1203 Amber	93.04	107.00
Taxan Sup. Vision 2	260.00	299.00
Microvitec 1451MS	223.48	257.00

(Prices inc. BBC Cable)

## MASTER/COMPACT

	Ex VAT	Inc VAT
Master 128K Micro	373.04	429.00
Master ET 128K Micro	338.00	388.70
512 Co-processor	185.00	212.75
Turbo Upgrade	98.78	113.50
Acorn Cartridges	10.87	12.50
Reference Manuals	14.50	14.50
View 3 User Guide	9.00	9.00
View Sheet User Guide	9.00	9.00
Master & B Dust Covers	3.00	3.45
Colour Compact	543.48	625.00
Printer Buffer software	4.30	4.95
Compact 5.25" upgrade	13.00	14.95

Second user BBC B's available



## Panasonic KXP1080

with BBC cable & paper  
**£169.00 (£146.96 +VAT)**

	Ex VAT	Inc VAT
KXP1080 Fabric ink ribbon	3.00	3.45
KXP1080 View Printer Driver	8.65	9.95
KXP1080 Control/Dump Rom	13.00	14.95

## Canon PW1080A

with BBC cable & paper  
**£239.00 (£207.83+VAT)**

## Kaga/Taxan KP810

With BBC cable and paper  
**£239.00 (£207.83 +VAT)**

## JUKI 6100

with BBC cable & paper  
**£259.00 (£225.22+VAT)**

## CITIZEN 120D

with cable & paper  
**£175.00 (£152.17+VAT)**

## EPSON LX86

with BBC cable & paper  
**£232.00 (£201.74+VAT)**

## STAR NL10

with BBC cable & paper  
**£229.00 (£199.13+VAT)**

## PRINTER ADD ONS

	Ex VAT	Inc VAT
LX Tractor Unit	19.96	22.95
LX Sheet Feeder	47.83	55.00
LX Print Ribbon	3.00	3.45
NL-10 Sheet Feeder	47.83	55.00
NL-10 Print Ribbon	4.80	5.52
KP/PW Print Ribbon	3.39	3.90
Juki 6100 Dust Cover	5.60	6.44
Printer Dust Covers from	4.00	4.60

## PRINTERS/CABLES

	Ex VAT	Inc VAT
Kaga/Taxan KP815	239.13	275.00
Kaga/Taxan KP910	338.26	389.00
Epson FX800	320.87	369.00
Epson FX1000	425.22	489.00
Juki 2200 D/W	225.22	259.00
MP 165	173.04	199.00
1.2m (4 foot) BBC cable	6.00	6.90
2.0m (6 foot) BBC cable	7.78	8.95
Compact cable (printer)	8.65	9.95

Phone for our best price before placing your order  
EDUCATIONAL & GOVERNMENT ORDERS WELCOME

All products have a 12 month no quibble guarantee  
Prices subject to variation without prior notification

We are closed to callers all day Wednesday & some Saturday afternoons  
Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

# WeServe

Larger items delivered by Securicor



Micro Dept.  
128 West Street,  
Portchester,  
Hants.  
PO16 9XE  
Tel: 0705 325354

# POOLSWINNER

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years. The database updates automatically as results come in.
- **PREDICTS** Not just SCOREDRAWS, but ALWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.



Boxed, with detailed instruction booklet

**PRICE £15.00 (all inclusive)**

# FOOTBALL FOLLOWER

RESULTS DATABASE SYSTEM



Boxed, with detailed instruction booklet

- **THE PERFECT PROGRAM** for everyone interested in Football - Soccer Fans, Pools Punters, amateur league secretaries and team managers.
  - **POWERFUL DATABASE** designed to store league results and all important statistics for all clubs.
  - **SET UP** to handle English and Scottish league matches, but can be easily converted to non-league, amateur and Australian football.
  - **FULL PRINTER SUPPORT:** Fixture lists, results, league tables, statistical records etc. can be printed out if you have a printer, or copied from the screen.
  - **UPDATED:** The package is supplied with this season's football results already entered into the program.
  - **INTEGRATED** with Poolswinner and FIXGEN: information can be exchanged between programs. (Can be used to update Poolswinner.)
- PRICE £15.00 (all inclusive)**

## FIXGEN 86/7

AT LAST! No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish fixtures for 1986/7. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner and Football Follower. Yearly updates available. (Published under licence from the Football League and Scottish Football League.)

**POOLSWINNER with FIXGEN £16.50 (for both)**  
**FOOTBALL FOLLOWER with FIXGEN £16.50 (for both)**



**SPECIAL COMBO PACK**

FOR SOCCER FANS, the best combination is Football Follower with Fixgen.

FOR POOLS PUNTERS who want a ready made system, Poolswinner with Fixgen is the best combination.

FOR POOLS PUNTERS who want to do more detailed analysis and develop their own system, the complete suit of all three programs is available at a special price:

**POOLSWINNER+FOOTBALL FOLLOWER+FIXGEN**  
**£26.50 (all inclusive) (ask for "COMBO PACK")**



Boxed, with detailed instruction booklet

## COURSEWINNER V3

NOT JUST A TIPSTER PROGRAM, Coursewinner V3 can be used by experts and occasional punters alike.

THE PUNTERS COMPUTER PROGRAM

You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date.

**PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.**

### AVAILABILITY

All programs available for:

AMSTRAD CPC's, PCW's  
All BBC's  
All SPECTRUMS  
COMMODORE 64/128

All programs except FOOTBALL FOLLOWER Atari (48K), Sinclair QL  
Supplied on tape (simple conversion to disc) except: AMSTRAD PCW (3" disc add £3.00), AMSTRAD PC (5 1/4" disc add £3.00), Sinclair QL (microdrive).

Send Cheques/POs for return of post service to ...



phone 24 hrs

# selec

SOFTWARE



phone 24 hrs

37 COUNCILLOR LANE, CHEADLE, CHESHIRE. ☎ 061-428 7425  
(Send for full list of our software)



◀ From Page 55

stored.

To show that it's only a pointer or in-direction to where the real base address is stored, we put the zero page address in brackets. Finally, the whole thing is indexed by the Y register.

Suppose the 6502 saw the instruction:

```
STA (&70),Y
```

It would interpret the brackets as telling it to look in zero page locations &70 and &71 for the base address to be combined with the offset of Y. So, if &70 and &71 contain &00 and &7C respectively, the instruction boils down to:

```
STA &7C00,Y
```

Notice how vital those brackets are:

```
STA &70,Y
```

and:

```
STA (&70),Y
```

are very different instructions.

The first stores the accumulator in memory location &70+Y – the absolute indexed addressing we're used to. The second looks at zero page locations &70 and &71 and uses the address that's stored there as a base to offset with Y.

Program V uses indirect indexed addressing to fill the top quarter of the screen with asterisks. Previously we've used absolute indexed instructions of the type:

```
STA base,Y
```

to achieve this. In this case base would be &7C00. Now we're going to use indirect indexed addressing:

```
STA (indirect),Y
```

where indirect is the location in zero page where we've stored base – &7C00 in the form 00 7C.

Initially we have to make sure that our zero page locations do indeed contain, point to or vector this address. Choosing &70 for indirect:

```
LDA # base MOD 256
STA indirect
```

puts the correct lo-byte into zero page at &70 while:

```
LDA # base DIV 256
STA indirect+1
```

```
10 REM PROGRAM V
20 MODE 7
30 base=&7C00
40 indirect=&70
50 FOR pass%=0 TO 3 STEP 3
60 P%=&900
70 [
80 OPT pass%
90 .start
100 LDA # base MOD 256
110 STA indirect
120 LDA # base DIV 256
130 STA indirect+1
140 LDA # ASC("*")
150 LDY # 0
160 .loop
170 STA (indirect),Y
180 DEY
190 BNE loop
200 RTS
210 ]
220 NEXT pass%
230 CALL start
```

Program V

puts the hi-byte into &71.

loop is our by now 'standard' code, this time using:

```
STA (indirect),Y
```

to replace our old:

```
STA base,Y
```

Since we've just filled the 'zero page indirection' with the address of base, the two instructions are equivalent.

```
10 REM PROGRAM VI
20 MODE 7
30 base=&7C00
40 indirect=&70
50 FOR pass%=0 TO 3 STEP 3
60 P%=&900
70 [
80 OPT pass%
90 .start
100 LDA # base MOD 256
110 STA indirect
120 LDA # base DIV 256
130 STA indirect+1
140 LDA # ASC("*")
150 LDX # 4
160 LDY # 0
170 .loop
180 STA (indirect),Y
190 DEY
200 BNE loop
210 INC indirect+1
220 DEX
230 BNE loop
240 RTS
250 ]
260 NEXT pass%
270 CALL start
```

Program VI

Of course we're only quarter filling our screen. Program VI takes care of this in a similar way to Program IV: We repeat loop four times using X as a counter.

This time, after dropping out of loop, we move onto the next 256 asterisks with:

```
INC indirect+1
```

This increases the hi-byte of the address stored at indirect – in other words the address now stored in zero page now points to one page, or 256 bytes further along in memory, ready for giving us our next quarter screenful of asterisks when we branch back to loop . . .

### Indirect power

Using indirect indexed addressing this way means that our actual program does not modify itself as it runs – just the contents of indirect. Bear in mind two points:

- The address in brackets has to be zero page.
- You can only use the Y register this way, not the X.

These indirect or vectored techniques can be very powerful. Just by altering the initial contents of the zero page locations used so that they point to a completely new address we can get our code to affect different areas of memory. All right, we're unlikely to want 1024 consecutive &2As anywhere else in memory but for real applications – such as transferring the contents of a block of memory to new locations – the flexibility of this approach is ideal: Change two zero page bytes and the whole area of operation of the program is changed.

### Switch on to 6502

And that's it – the end of the series. We haven't covered all there is to machine code, but we've touched on most of the major points. I hope I've given you a feel for the fun involved in assembly language programming. If you've followed me so far you'll have no problems in learning the rest on your own.

But if you do find a particular aspect of machine code difficult, why not write in and tell us? If it's of interest to enough people we'll do a special feature on it.

One final piece of advice: You don't learn machine code by just reading about it. So switch on your BBC Micro and get cracking.


## Battery Backed 16K & 32K RAM MODULES

### CHECK THESE FEATURES:

- \* Very compact design (fully cased.)
- \* Same footprint as a ROM.
- \* Built in rechargeable battery to maintain data when computer is switched off.
- \* No soldering required whatsoever.
- \* Guaranteed to run all rom based software
- \* Comes complete with READ & WRITE protect switches.
- \* Menu driven software included to save/load to/from ROM/RAM on a 5.25", 40 or 80 track disc.
- \* Easy to follow instructions included.
- \* If not fully satisfied, simply return the intact module within 14 days for a full refund.
- \* 10% discount for educational establishments (any quantity)

Now available with money back guarantee

READ & WRITE PROTECT SWITCHES

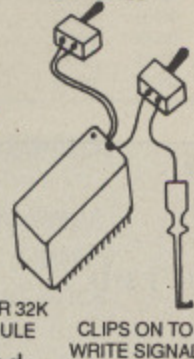

16K OR 32K MODULE CLIPS ON TO WRITE SIGNAL

**Excellent value at £25 for 16k**

32K version is of same physical size as the 16K version but is logically addressed into two 16K banks. (ie into two sockets)

**£35 for 32K**

Prices include VAT and P&P

\* Must not be used to infringe copyright\*

16K & 32K non battery backed version also available, fully cased with write protect switch. Telephone for further details.

**FLORA ELECTRONICS**  
14 LEVER ST,  
PICCADILLY,  
MANCHESTER M1 1LN  
Tel: 061 228 3553  
061 228 3030

## LOOKING FOR ACORN SPARES?

We Stock:

**ALL Acorn Spares**

Peripherals from ATPL, Peartree, Acorn Etc  
Upgrades, cables, discs etc

8271	£43.70	B Econet Kit	£25.00
8271 TTL Kit	£6.00	B+ Econet Kit	£24.00
DNFS ROM	£21.28	B/B+ User Guide	£14.00
WD1770	£14.00	Serv Man B/B+	£24.33
Video ULA	£18.00	Serv Man 6502	£13.42
Serial ULA	£15.00	Serv Man Z80	£21.83
Electron ULA	£23.00	Serv Man Mast	£21.94
2764-25	£3.00	ATPL Wordwise	£42.55
27128-25	£3.00	MR 6000 Peart	£10.00
27512-25	£12.00	MR 7200 Peart	£27.00
27513-25	£15.00	BBC Print. Cabl	£9.00
27C256-20	£5.00	BNC/Phono	£1.75
6116LP15	£2.50	Quickshot II	£7.50
6264LP15	£3.20	BBC J/Stick	£6.21
62256LP12	£14.00		

All prices INCLUDE VAT & Postage

This is a very small selection from our range of spares, please phone for price. Dealer enquiries welcome.

# DRAM

ELECTRONICS LTD.

Unit 12, Kingston Mill, Chestergate,  
Stockport SK3 0AL.  
Tel: 061-429 0626. Tlx: 312242

## HSV COMPUTER SERVICES LIMITED

### DISKETTES UNBRANDED LIFETIME GUARANTEE

NEW LOWER PRICES		Quantity	10	20	30	40	50	100
3 1/2"	SS/DD	135 TPI	15.50	30.00	44.00	57.00	70.00	135.00
	DS/DD	135 TPI	17.50	34.00	50.00	65.00	80.00	155.00
5 1/4"	SS/DD	48 TPI	5.95	11.00	16.00	21.00	25.00	45.00
	DS/DD	48 TPI	6.95	13.00	19.00	25.00	30.00	55.00
	DS/QD	96 TPI	7.95	15.00	22.00	29.00	35.00	65.00
	Universal	96TPI	8.95	17.00	25.00	33.00	40.00	75.00

Universal discs are suitable for 40/80 track drives and have two notches and two holes.

All disks supplied in cardboard boxes with write protect tabs, labels and envelopes and come with our no quibble money back or replacement guarantee



CREDIT CARD HOT LINE  
(0256) 463507



ALL OUR PRICES INCLUDE CARRIAGE & VAT. NO EXTRAS TO PAY!

Also best prices for: Disk Boxes, Ribbons, Paper, Labels

**HSV COMPUTER SERVICES LIMITED**

40-42 New Market Square, Basingstoke, Hants RG21 1HS

# HSV

N  
Stock:  
pares  
rn Etc  
cs etc  
£25.00  
£24.00  
£14.00  
£24.33  
£13.42  
£21.83  
£21.94  
£42.55  
£10.00  
£27.00  
£9.00  
£1.75  
£7.50  
£6.21

phone  
S LTD.

100  
5.00  
5.00  
5.00  
5.00  
5.00

### Delayed action

I HAVE an issue 2 BBC Micro and I am encountering the following problems although on power-up everything seems OK.

- After about half a minute of use all keyboard entries begin to repeat at about 10 times normal speed making it impossible to enter a single character except by making a very short stab at the key – Break is the only way to clear the problem.
- Soon after this all keyboard entries cease to be displayed and again Break is necessary to clear this.
- After about half an hour progressively longer periods of normal keyboard entry are possible but the problem never disappears completely, with occasional High-speed or Non-entry occurring, always at the most inconvenient moment.
- Occasionally when a key is held down nothing will print. Then when the key is released a row of that character will print at high-speed.
- In programs with sound the sound also sometimes runs at high speed.
- In the Mini Office II word processor the seconds counter runs at 10 times normal speed when this effect is present on keyboard entry.

Not being able to play with my micro is seriously threatening my sanity so could you please help? – **R.S. Hutchins, Shoreham-By-Sea, W.Sussex.**

● The fault with your computer is the interrupt system. What is happening is that the computer is being interrupted more often than it should due to a fault in some chip. This has the effect of speeding up the computer's perception of time.

Now the only problem remains is: which chip? The prime candidate is the system VIA (IC3), a 6522. Try removing this and replacing it with the VIA in IC69, as this chip only looks after the user port and the printer interface the computer will work without it.

If that cures your problems you can get a replacement from Watford Electronics.

Other suspect chips are the A/D converter (IC73) and the ACIA, a 6850 (IC4). Happy hunting.

### Radio messages

I HAVE just bought a BBC Master and I would like to know how to make it receive and understand coded messages from a radio transmitter. I am really looking for a set with a maximum range of one mile. – **Malcolm Johnson, Westhumble, Dorking, Surrey.**

● You do not say what you mean by coded messages, so I am not sure exactly what you want to do. However, the only way you can operate a trans-

Your technical questions answered by MIKE COOK

# PROBLEM SOLVED

mitter is with a Home Office licence.

There are two types: The CB licence only allows you to transmit speech but the Amateur licence allows you to send speech, Morse code, teleprinter code and Ascii data.

However, it is a requirement of the licence that all transmissions must be in plain language so it is not permissible in this country to transmit coded radio messages.

### Exit the colour

I HAVE a 1.2 OS Model B that has given faultless service for the last three years but has now developed a fault.

Colour is present for 30 seconds or so in it's correct form and then it disappears completely leaving a perfectly acceptable black and white picture.

The rest of the micro's performance is faultless and colour does not come on again if it is switched off and back on unless some hours have elapsed. – **Bernard Sheppard, Puddletown, Dorset.**

● You do not say if you are using the RGB output or a TV set. From the sound of the fault it is a TV set.

The fault lies in the colour encoder circuit. As it is OK at first I would think your trouble lies in the colour sub-carrier oscillator circuit. Maybe the frequency is drifting or the colour burst is disappearing altogether.

For frequency drift you should try replacing the colour crystal 17.7354 MHz located close to the modulator. However, without looking at the set with test equipment it is impossible to say if this is the fault.

### Pole positioner

HAVE you been into an amusements area and seen pole position controlled by a steering wheel, gear stick and a brake pedal? Can this be done on a BBC Micro? – **Alun Jones, Southmoor, Oxon.**

● Yes it is perfectly possible to build yourself units like this.

Get a pedal from an old sewing machine and wire it up like a paddle to the analogue input port. The steering wheel should be fitted to a rotary potentiometer and again wired to the analogue input port.

Finally the gear lever should be a switch wired up like a fire button. If you are not sure of the wiring see the May 1983 bodybuilding or page 432 of the

Advanced Users Guide.

Now you only have one problem: getting the software to accept these signals. It will be impossible to patch most commercial software but you might just be able to wire this lot up in the same manner as the software expects.

Failing that you will have to write your own.

### Making music

I WAS thinking of buying the Acorn Music 500 system but I noticed that you had to connect it up to a hi-fi or midi system. I was wondering if you can connect it up to a normal cassette recorder. – **Ewen Setti, Annan, Dumfries and Galloway, Scotland.**

● The Music 500 needs to be connected to a hi-fi or amplifier and speaker system, preferably a stereo one, so you can hear it.

Normal cassette recorders can't act as amplifiers but you should be able to record and playback using one. However, if your recorder can act as an amplifier then the Music 500 could be connected up to that instead of a hi-fi.

### Printer control

I AM appealing to you for help as I appear to be hitting brick walls on every path I take.

At present I have a BBC Model B and a Tandy DMP120 printer. The problem is that the BBC will not send the control codes to the printer to set the page depths, lines per page, form feed or print styles and so on.

An example of a command to set a particular style is:

**PRINT CHR\$(27) CHR\$(66)**

This appears not to work on a BBC. Obviously I have already sent the commands \*FX5,1 and VDU2.

Can you please give me any guidance or suggestions as Tandy are unable to. – **Roger P.S. Price, Warley, West Midlands.**

● You cannot send escape sequences to a printer like this because you are also sending them to the VDU driver. You have to send them to the printer alone.

Do this with a VDU command so for example to what you wanted use: VDU 2,1,27,1,66,3.

### Illumination needed

I HAVE used the Light Pen and programs from the October and November issues of *The Micro User* on my BBC using Mode 7. When I upgraded to a Master I found that the programs would run, but not in Mode 7.

The problem appears to be that random numbers are being poked into the light pen registers in Mode 7.

I have tried the same program on

Turn to Page 60 ►

# PROBLEM SOLVED

## ◀ From Page 59

other Masters and they do not work in Mode 7, but the same program, run on a dealer's machine and when checked out by Acorn appeared to function correctly.

Acorn refuses to admit that there is a batch of machines that won't support the light pen in Mode 7.

Have you experienced any problems in this area or can you suggest a likely cause? — **G. Bickerton, Sandbach, Cheshire.**

● Nothing can poke values into the light pen register as this is a read only register in the video controller chip. Therefore I can understand Acorn's attitude.

There must be something that you are not telling me. I can only think of three possible explanations.

● The CRT controller chip is faulty.

● The light pen line into the CRT controller is being shorted out by some signal that only changes in mode 7.

● Something else is going on in the software to corrupt the values being returned from the light pen machine code program.

Do you get the same results using my test program?

## Controlling motors

COULD you please explain how to use the user port on my BBC Micro to control 4 or more motors backwards and forwards?

Is this possible and if not what is the maximum number I can use, and how do I connect them?

Finally, would it be possible to power lights and buzzers the same way? — **David Neward, Lower Pensylvania, Exeter.**

● You'll find all you need to know about controlling motors from the user port in the *Bodybuilding* articles in the May 1984 (*stepping motors*) and November 1985 (*DC motors*) issues of *The Micro User*.

If you need extra user ports see the *Bodybuilding* article in the August 1984 issue (4 extra user ports). Basic use of the User Port is described in the *Bodybuilding* articles from July 1983 to September 1983.

## Blowing eproms

HAVING missed out on some of the earlier issues of *The Micro User*, I am now a regular and eager reader.

I now have some spare 8k eproms and would like to blow several Basic Extensions and Utilities on to one Eprom. How can I do this?

Many thanks for a great magazine. — **Bill Tottle, Portchester, Hants.**

● This is easier said than done. First get an eprom programmer and then decide if your programs are going to run in eprom

or are going to be moved out into ram for execution. Either way you have to modify your program to suit.

Then you need to put the correct header into the eprom and details of this can be found in the *Advanced User Guide* but note that it only applies to machine code programs.

You can have Basic programs in eprom and fish them out using the \*ROM command to change to the rom filing system.

This behaves rather like a read-only disc. The header for this is more complex but if you get the Watford eprom programmer the software does this for you.

Also, very soon, The Micro User intends to publish a utility to do all this automatically.

## Disc copier

PLEASE could you inform me if there is a tape to disc copier for the Acorn ADFS, compatible with the Master Turbo?

Also could you tell me what Rory McCloy means when in the August 1986 issue, page 20 second paragraph, he says "...27512(64k) and 27256(128k) but not 27512"7?

Also please can you tell me what !BOOT means? — **G.H. Lyons, Northwood, Middx.**

● I know of no automatic tape to disc copier for the ADFS. Most of the ones for the BBC DFS are very limited in what they will cope with anyway.

There was a misprint in the article and the last part of the sentence should read, "...as well as 27128 (16k) and 27256 (32k) but not 27512 (64k)."

The numbers on roms are measured in bits, not bytes, and most have a prefix of 27. There are eight bits in a byte, so a 16k (byte) rom holds  $16 \times 8 = 128k$  bits and its number is 27128.

!BOOT (pronounced pling-boot) is the name of the file the BBC tries to access when automatic loading from disc is required, usually this is done by pressing Shift+Break.

You'll find details in any book on the DFS.

## Danger signals

I WONDER if you can help me with an incipient problem which has appeared on my issue 7 BBC Micro.

When the machine is cold I have

trouble powering up: I switch on and nothing appears to happen. If I give the switch, or the plug switch a flick it then powers up in the normal way. That is to say, I hear two bleeps, one low, one high.

It obviously isn't any trouble to repower, but I am terror-stricken at the possibility of the problem may getting worse and I would like to nail it now.

I have noticed that if the machine is hot and is repowered it sometimes makes slightly different noises, but it has always done this and has given no trouble until recently. — **George Speller, Keighley, Yorks.**

● This could be one of two things, either the reset circuitry or the power supply.

If it is the power supply then there is not a lot you can do about it as delving inside there is not recommended.

However, it could be the reset circuitry. To see if it is, the next time you switch on and nothing happens try a control break a few times. If this works then your power supply is probably OK and the reset circuitry needs looking at.

There is not much to go wrong. It could be the 555 chip (top left hand corner) or one of the timing components around it — check for bad joints.

## No go drives

I HAVE a BBC Model B fitted with a Watford DDFS and I purchased a twin disc drive manufactured by LVL (now no longer trading).

From the start the drive would not operate with my micro. Fearing I had purchased a faulty drive, I asked a friend at college if he could test both the micro and the drive in the college computer studies class. He did this with the following results:

● The micro would operate college drives, no problem.

● My drive would run on the college BBC Micros.

● My micro and drive will not operate together.

Could my problem be anything to do with the DDFS. I am afraid I do not know what DFS system was used in the college machines — **F. Theobald, Sidmouth, Devon.**

● You seem to have tried everything.

Given the results of your tests there is no reason why your drives should not work on your computer. I can only suppose the tests differed in some small respect that you are overlooking.

For example the power supply or the connecting leads — were these the same in the two tests? Try to ensure every possible variable is controlled.

Your problem will be quite simple once you have found it but without proper test equipment it might be difficult to find. As a last resort a dealer should be able to fix it for you.

## MULTIPROM EPROM PROGRAMMER



MULTIPROM allows the experienced user to program 2764, 27128, 27256, 27512, 27513 and 27011 EPROMs, including "A" version. Programming of 27256 up types is carried out in 16K blocks to ensure MULTIPROM compatibility with all models of BBC from B to Master. The UVP 1.1 software requires DFS and a disc drive for operation.

The fully cased MULTIPROM plugs into the user port on the BBC microcomputer, taking power directly from the computer, with an onboard converter providing the programming voltage. Two switches with LEDs are provided, one powering down the MULTIPROM to insert or remove an EPROM from the Textool ZIF socket, and one for Vpp on/off. DIP switches enable swift configuration of the MULTIPROM for each type of EPROM. The necessary UVP 1.1 software, which includes fast programming algorithm, is available on Sideways ROM and contains the following commands: - \*TEST (blank check), \*READ (afsp) (read Eprom to disc), \*BLOW (afsp) (blow EPROM with names file), \*VIEW (look at contents of memory from &2000), \*COMP (afsp) (compare contents of EPROM to disc). When using \*VIEW & \*COMP, data is displayed in hex and ASCII format.

Prices: **MULTIPROM** £44.95 **UVP 1.1 ROM** £5.00

### EPROMS

Type	1-2	3-9	10+
27C64-25	£2.50	£2.30	£2.20
27C128-25	£3.50	£2.90	£2.60
27128-25	£3.90	£3.70	£3.50
27256-25	£5.00	£4.80	£4.60


NOTE: EPROM prices are changing. Please confirm prices before ordering.

## UVIPAC EPROM ERASER

The UVIPAC was designed especially for the home microcomputer enthusiast, but is equally useful in the development lab when quick erasure of just a couple of EPROMs is required.

A special type of discharge tube is used to help achieve the very compact dimensions of the unit, which is housed in a 90 x 80 x 40 mm plastic case. The 230 or 110 volt (+ or -5%) mains powered unit enables up to 3 EPROMs of any size, or 1 CPU with on-board EPROM to be erased in around 15 minutes usually.

The EPROMs are simply loaded into the conductive foam pad supplied and inserted into the unit. After the door has been closed the unit is switched on, an optical fibre indicator showing positively that the unit is in operation. When the required period has elapsed the unit is switched off and the EPROMs removed. The UVIPAC can also be supplied with a built in fixed 15 minute timer, the UVIPAC (T), or with timer and audible time out sounder, the UVIPAC (TS). Spare tubes and conductive foam pads are available if required.

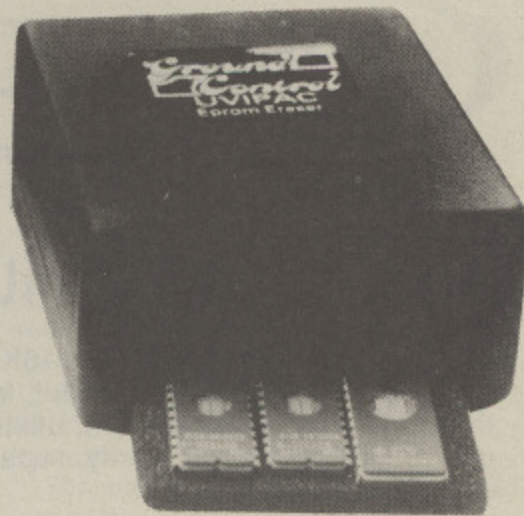

Prices: **UVIPAC** £21.45 **UVIPAC (T)** £26.45 **UVIPAC (TS)** £28.45

UVIPROM 1 and UVIPROM 2 (with ZIF socket) plug into the user port and can program 2764 or 27128 EPROMs only, using the 1.1 ROM for control purposes, giving 5 \*COMMANDS. UVIPROM 32 and UVIPROM 32+ (with ZIF socket) program 27256 EPROMs only, using the 2.1 ROM, with 7 \*COMMANDS. NOTE that the PCBs are not cased and that a disc drive is essential to use the software.

Prices: **UVIPROM 1 & 32** £20.95 **UVIPROM 2 & 32+** £25.95 **1.1 ROM** £5.00 **2.1 ROM** £8.00



Send orders to:

Dept. MU  
Ground Control  
Alfreda Avenue  
Hullbridge  
Essex SS5 6LT  
Tel: 0702 230324

ALL PRICES INCLUDE VAT AND P&P.

MAIL/TELEPHONE ORDERS ONLY PLEASE.

DETAILED DATA ON REQUEST



## ZONEFOUR LTD

All disks now sent 1st class or courier

VISA

### MIMIC IN FREE LIBRARY CASES

DS 96 TPI	10s	£9.50
FLIPSIDED	10s	£8.95
DS 48 TPI	10s	£8.50
UNIVERSAL	10s	£9.95

### MIMIC 3.5"

SS	10s	£16.95
DS	10s	£16.95

### 5.25" BULK UNBRANDED DISKS (LIFETIME GUARANTEE)

	SS48 TPI	SS96 TPI	DS 48TPI	DS 96TPI
Try 10 and see	£5.95	£6.95	£6.95	£7.95
25	£12.00	£13.00	£13.00	£14.00
50	£23.00	£24.00	£24.00	£26.00
100	£42.00	£44.00	£44.00	£46.00
250	£95.00	£97.00	£97.00	£100.00
500	£180.00	£185.00	£185.00	£190.00

MAXELL AMSOFT 3"	10s	£27.50
3" MIMIC OF 2DD	10s	£35.00

### ACCESSORIES INC VAT

IBM/Amstrad PC1512 Printer Cable GPR 101 25 x cent.	£15.00
Disk Notcher/doublers	£5.50
Disk cleaners 3.5"	£4.95
5.25" cleaner	£4.50
Mini-Vac for printers and keyboards	£9.95

### 5.25" BULK COLOUR UNBRANDED

	SS48 TPI	SS96 TPI	DS 48TPI	DS 96TPI
10*	£8.95	£9.95	£9.95	£10.95
25	£22.00	£24.00	£24.00	£26.00
50	£40.00	£45.00	£45.00	£48.00
100	£75.00	£80.00	£80.00	£90.00
250	£175.00	£190.00	£190.00	£200.00
500	£340.00	£360.00	£360.00	£375.00

### RED, GREEN, BLUE, GREY, BEIGE

10 in single colour OR 2 of each please state in large quantities your choice. (if stocks are available) \*in library cases

### 3.5" BULK UNBRANDED DISKS 135 TPI LIFE TIME GUARANTEE

	SS	DS
10	£14.95	£16.95
25	£35.00	£40.00
50	£65.00	£80.00
100	£120.00	£150.00
250	£275.00	£350.00
500	£500.00	£650.00

### MIMIC HIGH DENSITY (COBALT COATED) 1.6 MEG SUITABLE FOR A.T.s

10	50	100
£23	£100	£180

### DISC BOXES INCLUDING VAT

5.25"	50 capacity	£8.70	100 capacity	£11.70
3.5"	40 capacity	£8.50	80 capacity	£11.95
3"/3.5"	60/90 capacity	£11.95		
10x3.5" or 5.25"		£1.50		

ALL 5.25" DISKS HAVE REINFORCED HUB RINGS, SLEEVES, LABELS AND WRITE PROTECTS. ALL DISKS CARRY A LIFETIME GUARANTEE. ALL DISK PRICES INCLUDE VAT AND P/P. TO ORDER PLEASE CALL DIRECT DISK LINE: 10AM-6PM

ZONEFOUR, 65 CENTURY ROAD, LONDON E17 6JA. TEL: 01-523 2059

PLEASE CALL FOR BULK AND INSTITUTIONAL PRICES



## MEGA-ROM

67 Powerful commands on this 16K Rom. A comprehensive BASIC toolkit, friendly and thorough Rom management, utilities for the disk user including format, verify, repair, editor & search routines.

"Overall a good selection of numerous utilities and a recommended buy at around £35" MICRO USER - JUNE 1986.

**NOW ONLY £29.95**

## ROM MASTER

New improved version of our powerful Rom management system.

Now with even more commands to control your errant Roms. This Rom will keep others turned off even through CTRL BREAK. Over 20 commands including the ability to encrypt & de-encrypt files to keep them secure from prying eyes.

**PRICE £14.95**

## VECTOR 1

TAPE TO DISK UTILITY  
FEATURES

- + Once only purchase
- + Can save to any disk
- + Very user friendly, help pages on disk
- + 40/80 Format
- + No awkward ROMs, can be used on any machine
- + Can load to all available RAM & 400-&7FFF
- Simply the best tape to disk utility available

Vector 1 versions compatible with Acorn, Opus, UDM, Cumana, BBC+, WATFORD (Not 1-42, 1-43 DFS's.) and Solidisk.

## VECTOR 2

DISK UTILITY  
Features

- + 40/80 Format
- + User friendly, menu driven
- + Contains powerful features such as a disk sector editor, Disk Compare, format, verify and track repair
- The most powerful disk utility available compatible with Acorn, Opus 335/345 and Solidisk DFS's.



### NEW IMPROVED VERSION (1.40)

Send £2.00 with old disk for upgrade.  
Prices: £12.00 each for Vector 1 or Vector 2 £23 for both.

**SCYTHE TOOLKIT £21.95**  
(Send for full details)

All prices shown include VAT and p&p. Please add £3.00 per disk if you require 3" disks and specify when ordering.

Orders to:  
**CHALICE SOFTWARE, Dept MU**  
3 Merlin Way, Covingham,  
Swindon SN3 5AN.  
Telephone 0793 615026

# PINEAPPLE SOFTWARE

Programs for the BBC models 'B' with disc drive with FREE updating service on all software

### DIAGRAM

Still the only drawing program available for the BBC micro which gives you the ability to draw really large diagrams and scroll them smoothly around the screen stopping to edit them at any time if required.

Pineapple's unique method of storing the diagram information on disc means that the size of diagrams is limited only by the free space on disc, and not the amount of computer memory you have available. (A blank 80 track disc will allow up to 39 mode 0 screens of diagram).

The superb print routines supplied with the program enable large areas of the diagram to be printed in a single print run in a number of different sizes and rotated through 90 deg. if required. Full use can also be made of printers which have a wider than normal carriage available.

The program is fully compatible with the Marconi Tracker ball described below.

PLEASE STATE 40 or 80 TRACK DISC & WHETHER STANDARD BBC or MASTER VERSION IS REQUIRED

**PRICE £25.00 + VAT**

### DIAGRAM UTILITIES

A suite of six utility programs which add additional features to the 'Diagram' drawing program. The utilities include the saving and loading of areas of diagram to and from disc. The ability to display the whole of your large diagram on the screen at one time (in either 4\*4 or 8\*8 screen format). The addition of borders and screen indents to diagrams, and the ability to shift a whole diagram in any direction.

**PRICE £10.00 + VAT**

### MARCONI TRACKER BALL

This high quality device comes with its own Icon Artmaster drawing program and utilities to enable it to be used in place of keyboard keys, joysticks, or with your own programs.

**PRICE £60.00 + VAT p&p £1.75**

**PRICE INCLUDING 'DIAGRAM' SOFTWARE £79.00 + VAT p&p £1.75**

### TRACKER BALL for MASTER series

The Pointer ROM is supplied instead of the Icon Artmaster disc and enables the Tracker ball to work directly with the MASTER series computers. (e.g. to use with TIMPAINT etc.). Prices are the same as for the standard tracker ball.

### POINTER

The Pointer Rom is available separately for people already owning tracker balls, and comes with instructions for use with the MASTER computer.

**PRICE £12.50 + VAT**

### PCB

This new release from Pineapple is a printed circuit board draughting aid which is aimed at producing complex double sided PCB's very rapidly using a standard BBC micro and any FX compatible dot-matrix printer.

The program is supplied on EPROM and will run with any 32k BBC micro (including Master series). Also supplied is a disc containing a sample PCB layout to demonstrate the programs features.

By using an EPROM for the program code the maximum amount of RAM is available for storing component location and ASCII identification files etc. (Up to 500 components and 500 ASCII component descriptions may be stored for a given layout). There is no limit to the number of tracks for a given PCB, although the maximum size of board is restricted to 8" \* 5.6".

Using a mode 1 screen, tracks on the top side of the board are shown in red, while those on the underside are blue. Each side of the board may be shown individually or superimposed. A component placement screen allows component outlines to be drawn for silk screen purposes and component numbers entered on this screen may be displayed during track routing to aid identification of roundels.

The print routines allow separate printouts of each side of the PCB in a very accurate expanded definition 1:1 or 2:1 scale, enabling direct contact printing to be used on resist covered copper clad board.

This program has too many superb features to describe adequately here, so please write or phone for more information and sample printouts.

**PRICE £85.00 + VAT**

### CONVERTER LEADS

Converter leads to enable the Trackerball to run mouse software and the mouse to run trackerball software (inc. DIAGRAM). Please state which way round when ordering.

**PRICE £8.00 + VAT**

### MICROSPICE

A new addition to our range of engineering software. Microspice is a very powerful DC and AC analogue circuit simulator package for any model BBC computer.

As well as all the usual facilities available with this type of program, non-linear effects, small signal, noise measurements and sweeps may be performed. Component values may be swept, allowing component tolerances to be investigated as well as thermal performance etc. Comprehensive transistor modelling is incorporated using a 20 parameter Ebers Moll description. The program is supplied on disc with a very comprehensive 49 page manual.

Please write or phone for more information

**PRICE £99.00 + VAT P&P FREE**

**ALL ORDERS SENT BY RETURN OF POST**

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL. ☎ Tel: 01-599 1476

VISA



# TOSS in a wild card

TOSS is an acronym for Temporal Operating System Supervisor and is a new technique that holds the promise of greatly increasing the computing power of any micro.

At the moment it is undergoing field trials and is available only as a pre-production prototype chip, TOSS 0.1, for the Acorn Master.

The chip is massive, 1Mb, the same size as all the Master's bundled software.

As the name implies, it is a supervisor program for the operating system, that is it sits on top of the operating system and makes it run at maximum efficiency.

This ensures maximum compatibility with existing software. However, for programs that will not run on the new system due to software protection and the like, there is a new command to disable it.

To explain how it works, consider a computer chess program. The computer analyses the current position and then makes the best move.

Then it is your turn to move and the computer waits for your response. The time spent waiting is in effect wasted.

Now suppose that the program is written so that the computer carries on analysing the position while you are thinking out your response.

It then only has to take a quick look at the keyboard every half second or so to

see if you want to make your move, and the result is that the chess program plays a much better game because it has longer to analyse the situation.

It has done this by utilising otherwise wasted time. This is exactly the principle used by TOSS.

Suppose you are writing a program. You may list it, read the listing to check for errors and then type RUN.

The time spent reading the listing is effectively wasted. What TOSS will do is to issue the RUN command after the listing in anticipation of you typing RUN.

Of course you might not want to run your program, which is why Toss caches any output in a ram buffer until you issue the RUN command.

If you type anything else but RUN, for example if you edit a line, the RUN is aborted and your command is obeyed.

In fact TOSS is continually inserting a RUN command after each operating system command in anticipation of the real thing.

Where TOSS really achieves maximum performance is inside your program, when you use the INPUT command.

TOSS ensures the program keeps on running and checks the keyboard periodically for your input.

The results with graphics programs and dim-witted users can be quite startling.

While they are searching for the

spacebar TOSS ensures the program keeps on running, caching the output ready for you.

In the event of your input resulting in the program following two possible paths TOSS implements a multi-tasking system and follows both.

The concepts incorporated in TOSS are being used for research into the next computer breakthrough, which is currently named Super Toss.

This uses a new hardware chip, Future Operations Organising Logic, which correlates all possible actions and reports back the most likely event.

With this chip the TOSS system will no longer spend computing time hoping for an event because it will know it is coming.

When the program branches, TOSS will know which branch will be taken — the potential for increased computing throughput is enormous.

It is even possible to spot syntax errors before you type them in and call up a Help file to display the correct syntax!

However the problem with this extension at the moment is the chip's capacity, as it can only handle events likely to happen 0.8 seconds into the future.

But it is hoped to extend this to up to 5 seconds for the production units.

Any extra extension of event prediction time will have to wait until the ESP chip is developed using the new organic electronic techniques.

Early experiments indicate that a prediction time of up to one hour may be possible.

This would have enormous potential because, for example, it could produce a final, debugged program in seconds which would normally have taken an hour to produce.

You should note that this will work only if you could have produced the program in the first place, as it only predicts what you could do.

This could well face the user with a dilemma, for if you use the computer with the chip enabled you will not gain the experience that you would if you had without it.

Therefore you will always be stuck at the same level of expertise and never learn anything new.

Super TOSS is potentially such an advance that Acorn could drive all other computer manufacturers out of the market.

It could revolutionise the gambling industry and increase personal productivity by untold amounts.

At the current development rate, Super Toss and the FOOL chip will be available early April 1988.

```

Clawsoft TOSS 4M
Acorn OS 64K
Acorn 1770 DFS
BASIC
** TOSS Message: Zapper loaded.
>LOAD"Zapper"
** TOSS Reminder: Already loaded.
** TOSS Message: RUNing program.
>LIST
10 REM ** Za
** TOSS Interrupt: RUN error detected.
Mistake at line 20
** TOSS Directive: Correct error line.
20 MOLE 4:PROCinit
>20 MODE 4:P
** TOSS Interrupt: Error corrected.
** TOSS Message: RUNing program.
>CHAIN"Defen
** TOSS Interrupt: User command cancel
** TOSS Message: Zapper is a good game
>_

```

# Hunkie-Egg

By Gordon J. Key

HAVE you ever wondered what Quasimodo does when he isn't trying to rescue Esmeralda?

Well, it seems that he is employed in the castle kitchens as the official Easter Egg collector.

Throughout the year the cooks make hundreds of Easter Eggs and hang them all over the place.

Just before Easter Quasimodo has to find his way about the castle touching each of the eggs with a special ring that Merlin gave him.

Each egg he touches is instantly transported to one of the children that live in the castle grounds – but doing this does involve a certain amount of danger from the beasties that inhabit the kitchens.

For instance, there are the jellyfish – the kitchens are a little damp in places. They sting quite badly if you step on them.

Then there are the robot teasmaids that don't care who they run down, not to mention the Pink Wok and Elsie the spider.

Points are awarded for each egg touched and you can enter your name into the high score table if you score enough.

When typing in the program there are a few things that you should be careful about.

Ensure that you save everything to either tape or disc before attempting to run the program, as the program destroys over 60 per cent of its length after initialisation.

The assembly language and DATA readers have checksums that should detect minor typing errors and give a helpful message.

But nothing is infallible so make sure you save everything first as an assembler error could result in total loss of the program.

If you are using cassette on a model B or B+ or running on a Master or Compact the program will relocate itself up to &1900 when it is run.

Line 1700 is vital to PROCshorten and it should be entered exactly as it is in the listing.





# GAME

B

B+

M



## PROCEDURES

<b>game</b>	Controls main game loop.
<b>on</b>	Places the sprites on the screen.
<b>b</b>	Moves the baddies.
<b>s</b>	Calculates the moves for the spider and wok.
<b>t</b>	Calculates the moves for the jellyfish.
<b>i</b>	Calculates Quasimodo's position on the screen.
<b>h</b>	Gets keyboard entry; Secondary part of PROCi.
<b>j</b>	Makes Quasi jump.
<b>k</b>	Makes Quasi fall.
<b>ns</b>	Prints the next screen when all the eggs have been collected.
<b>scrol</b>	Clears the screen by scrolling to the left.
<b>cl</b>	Makes Quasi climb a ladder.
<b>l</b>	Makes Quasi walk.
<b>u</b>	Decides if there is a ladder for Quasi to climb.
<b>mode(M%)</b>	Selects Mode <i>M%</i> with VDU22 then removes the cursor.
<b>init</b>	Sets up the initial variables.
<b>hisc</b>	Displays the high score table.
<b>bel(N%)</b>	Makes a bell-like sound.
<b>head</b>	Prints the heading for the high score table.
<b>mup</b>	Calculates the new high score table.
<b>gname</b>	Gets a new name for the high score table.
<b>lines</b>	Draws a pair of horizontal lines.
<b>scn</b>	Displays the current screen.
<b>start</b>	Sets the start-of-game variables.
<b>pl</b>	Prints the current screen number.
<b>draw(M%)</b>	Prints individual characters for PROCscn.
<b>code</b>	Assembles machine code.
<b>stop(C%,0%)</b>	Prints an error message if a checksum does not tally.
<b>s(S%)</b>	Used by PROCcode to skip <i>S%</i> bytes.
<b>read(a%,B%,C%,0%)</b>	Reads a word of DATA.
<b>shorten</b>	Shortens the program so that Mode 2 can be selected.
<b>relocate</b>	Relocates the program to Page &19.

## VARIABLES

<b>A%</b>	Checksum value.
<b>B%</b>	Start address for screen map.
<b>C%</b>	Checksum target.
<b>D%</b>	Constant value of -105.
<b>E%</b>	Jump length.
<b>H%</b>	Position of Quasi on a ladder.
<b>I%</b>	Current baddie sprite number.
<b>J%</b>	Jump flag.
<b>L%</b>	Constant value of -98.
<b>M%</b>	Sprite number to be used for Quasi.
<b>N%</b>	Bell pitch
<b>O%</b>	Error number.
<b>P%</b>	Call address for the sprite routine.
<b>Q%</b>	Call address to reset all sprites.
<b>R%</b>	Constant value of -67.
<b>S%</b>	Screen map offset.
<b>T%</b>	Counter.
<b>U%</b>	Constant value of -73.
<b>V%</b>	Number of baddies.
<b>W%</b>	Current screen position of robot teasmaid.
<b>X%</b>	X coordinate of Quasi.
<b>Y%</b>	Y coordinate of Quasi.
<b>Z%</b>	Current screen position of Quasi.
<b>U</b>	Screen map Y pointer.
<b>S</b>	Screen map X pointer.
<b>Q</b>	Dummy variable.
<b>g%</b>	Target number of eggs.
<b>h%</b>	Number of eggs touched.
<b>i%</b>	Counter.
<b>j%</b>	Jump counter.
<b>l%</b>	Number of lives
<b>p%</b>	Constant value of &75.
<b>r%</b>	Current room.
<b>s%</b>	Current score.
<b>u%</b>	Position flag.
<b>x%</b>	Jump X value.
<b>a%()</b>	Baddie X coordinate.
<b>b%()</b>	Baddie Y coordinate.
<b>c%()</b>	Baddie X step value.
<b>d%()</b>	Baddie Y step value.
<b>e%()</b>	Baddie screen map position.
<b>f%()</b>	Baddie ladder counter.
<b>hs%()</b>	High score table values.
<b>hs\$()</b>	High score table names.

Full listing starts on Page 138 ►

# INSTANT

Now on a power-packed ROM board – the BBC Micro's top-selling 6-in-1 package. Included in it are all the highly-acclaimed features of Mini Office II . . . plus many exciting extras.



**INSTANT**

## WORD PROCESSOR

Memory can hold up to 3,600 extra words. Text can be entered in 20 (enlarged), 40 or 80 column modes. New embedded commands for Epson compatible printers.

**INSTANT**

## DATABASE

Room for an additional 150 average-sized records in RAM. Total capacity only limited by disc space.

**INSTANT**

## SPREADSHEET

Provides 3000 extra cells, plus many more maths functions. Can run 40 or 80 column format.

**INSTANT**

## COMMUNICATIONS

Bigger buffer capacity means much longer text files can occupy the BBC Micro's memory for uploading or downloading text.

**INSTANT**


## GRAPHICS

Speedier switching to and from spreadsheet to create or amend bar charts, line graphs and pie charts with ease.

**INSTANT**

## LABEL PRINTER

Labels prepared in the database can be quickly output in any format onto sticky labels

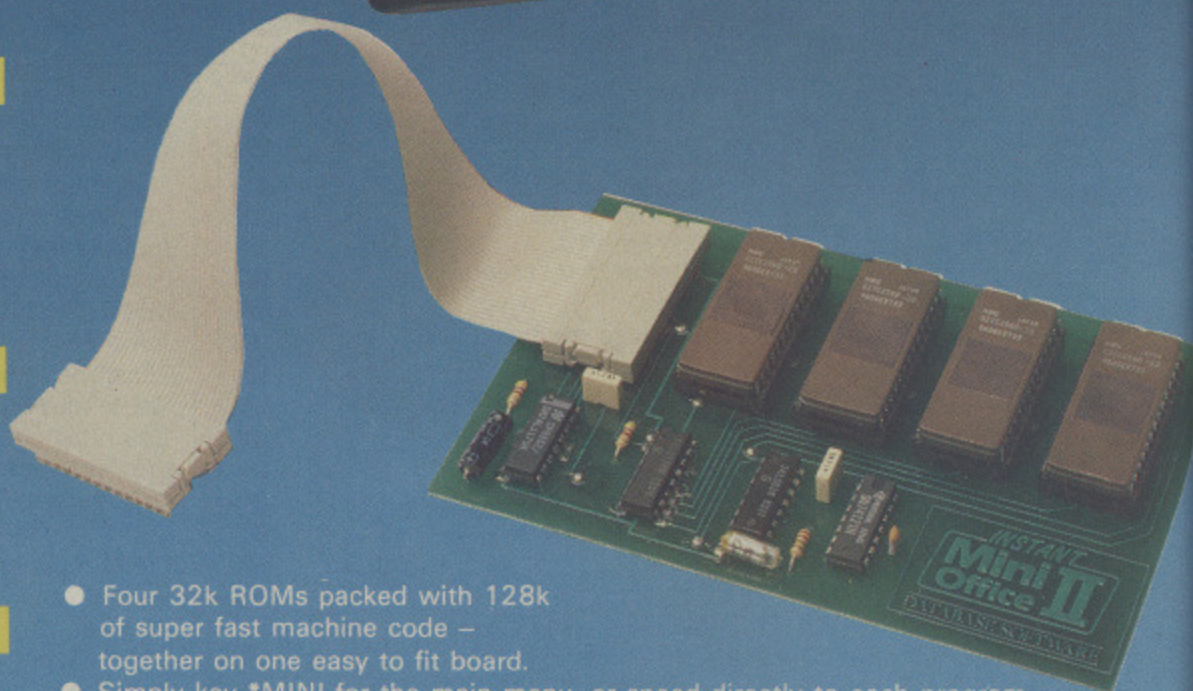

- Four 32k ROMs packed with 128k of super fast machine code – together on one easy to fit board.
- Simply key \*MINI for the main menu, or speed directly to each program by keying \*WP, \*SP, \*DB and so on.
- Switch from one application to another in a split second.
- Frees valuable RAM space for much more data.
- No need to swap discs if you've only one drive.
- Easy to install – slots into any sideways ROM.
- Works with Aries or Watford shadow RAM board.
- Compatible with BBC B, B+, Master and Compact.
- Compatible with all filing systems: tape, DFS, ADFS, and ECONET – and many third party DFSs.

**ONLY £59.95**

### Order Form

	£	p
<input type="checkbox"/> Instant Mini Office	£59.95	2372
<input type="checkbox"/> Upgrade Mini Office II to Instant Mini Office	£51.95	2375
<i>I enclose full tape/disc pack</i>		
<input type="checkbox"/> Mini Office II cassette	14.95	2368
<input type="checkbox"/> 5.25" disc 40T	16.95	2369
<input type="checkbox"/> 5.25" disc 80T	16.95	2370

Post to: Database Software, FREEPOST, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY

PHONE ORDERS: 061-429 7931 (24 hours)  
ENQUIRIES: 061-480 0171 (9am-5pm)  
PRESTEL ORDERS: Key \*89 then 814568383  
MICROLINK ORDERS: Mailbox 72:MAG001

Name \_\_\_\_\_

Address \_\_\_\_\_

Add £3 for Europe; £8 for Overseas

Cheque enclosed made payable to Database Publications Ltd.

Please debit my Access/Visa credit card account.

Post Code \_\_\_\_\_ Tel: \_\_\_\_\_

Signed \_\_\_\_\_

Please allow 28 days for delivery.

Please quote credit card number and full address + Ref:IMUA

The original Mini Office II is still available on tape and disc. Existing owners of tape or disc versions can exchange them for Instant Mini Office and save £8. See the coupon alongside.

## Domesday on show

ONE of the leading suppliers to the BBC Micro education market has stepped in to answer a plea for help from a school for the handicapped.

Pupils at Hangers Wood School in South Oxhey, Watford, wanted to see the Domesday Project, but the school couldn't afford to buy it. So kind-hearted staff at Watford Electronics offered to demonstrate the Domesday Project to the school.

The Advanced Interactive Video project, the equivalent of more than 300 weighty volumes on just two 12in video discs, is an electronic portrait of contemporary Britain.

But at more than £4,000 plus for the Acorn laser disc based project, along with the equipment to run it, it's out of reach for many schools, including Hangers Wood.

However with Watford's help, six teenage pupils and three members of staff were able to see for themselves the system that took a million people two years to complete.

Shiraz Jessa, technical director at Watford, said: "We were only too happy to help the children. It is a fascinating project".

Hangers Wood is a council-run school with 44 physically handicapped pupils.

## Free teletext software

BBC Enterprises has begun providing free teletext system software for Acorn Econet users. For the first time Ceefax and Oracle will be available on Econet through a single Acorn teletext adapter, where previously each machine on the network needed its own adapter.

And it is no longer necessary to go off Econet to access and download Ceefax and Oracle pages.

Any station on the Econet network can now have access to the full range of teletext facilities and any teletext page from any channel can be displayed.

Interactive software can be used on the network to take information directly from any teletext page and use it as data. A time-out feature avoids time-wasting searches by telling the user



Shiraz Jessa, Watford Electronics' technical director, watches the demonstration with staff and pupils from Hangers Wood School.

when a requested page is not available.

Programs and documents can be date and time stamped from Ceefax for saving to disc, and the system will even operate across a "bridge" connecting two or more networks together.

A spokesman for BBC Telesoftware told *The Micro User*: "The software will be available from BBC2 Ceefax and will be repeated at very frequent intervals throughout the spring".

● The Acorn teletext adapter is available as a special mail order offer to readers of *The Micro User*, Page 98.

## Legal aid for school

A GROUP of children from a school in Kent made legal history when they used their BBC Micros to contact a London firm of solicitors.

The firm, Pennefather and Co, had just broken fresh ground by offering to answer legal queries via computers – over the MicroLink electronic mail service.

Sharp-eyed pupils from Swadelands School in Kent were the first to see the electronic mail announcement and the introductory offer of one free consultation.

Keen to be at the forefront of new technology, the pupils decided to put the offer to the test.

A variety of questions were sent to Pennefather and Co via the MicroLink service.

"If I wrote a book, would I get the

money for it?"

"Can I legally collect money for charity by carol singing?"

"If my grandmother left me all her money, could my parents object?"

"If my parents divorced, could I choose the parent to live with?"

Says John Pennefather: "We expected a good deal of interest from individuals and businesses, but did not think our announcement would cause a stir among schoolchildren.

"We were greatly encouraged when Swadelands pupils decided to put our service to the test.

"After all, it is the schoolchildren of today who will take this form of communication for granted in the future".

The special offer of a free consultation is open to all MicroLink subscribers as an introduction to this online service.

"It's also to give people a taste of the way solicitors will handle their work in the future", says Mr Pennefather.

## Japanese course

A COURSE aimed at teaching Japanese with the aid of BBC Micros has been set up by Duncan Baker of the Lydbury English Centre, Shropshire.

Aimed at UK business people who trade with Japan the residential course lasts five days.

Duncan is looking for four businessmen to fill the remaining places on the course which runs from May 10 to 15.

## Laboratory line-up

DESIGN Consultancy of Norwich has produced a system which they hope will clear the decks in science and engineering departments.

The idea behind the Oasis Virtual Instrument System (VIS) is that students can use it with just the laboratory computer instead of having to cope with a conglomeration of multi-meters, oscilloscopes, chart recorders, plotters and

interfaces.

The VIS serves as a multi-channel precision voltmeter, oscilloscope, up to and including audio frequencies, a data logger, chart recorder and x/y plotter all in one.

The Oasis VIS costs £399 which includes a data converter, connectors, instrument emulation software and documentation.



# FRENCH

on the  
RUN!



## The adventure game with a big difference.

£9.95 cassette  
£11.95 5 1/4" disc

**You're on  
your own in  
Occupied  
France —  
facing the  
toughest test  
that a British  
pilot has  
ever had to  
experience!**

DATABASE SOFTWARE

The year is 1943. As an RAF officer stranded in Occupied France you have one aim — to get back to Britain.

The only way to do this is to try to pass as a Frenchman, but if your French isn't good enough you risk capture and interrogation by the police or even the Gestapo.

Even the simplest tasks — from buying food to taking buses — place you at risk. And to add to your problems you've got limited funds: "Should I hitch a lift or take the train?", "Do I sell my belongings or get a job?"

Whatever you decide to do, time is short. And there are always people willing to denounce you . . .

French on the Run is that rare combination: A truly educational program that's also a thoroughly enjoyable game. This text adventure not only tests your grammar and vocabulary, but your knowledge of France and the French way of life.

And as your French improves the language problems get harder and the situations become progressively more dangerous. There are four routes to complete in sequence — you need the password from the last before attempting the next. The standard of French required is about O level, though on the last route it rises to just below A level.

**And there's a chance for you to try out the French you'll learn in practice: We are offering a FREE WEEKEND IN PARIS as a prize to the first person to get back to England alive, having broken a code near the end of the final route.**

*For teachers: French on the Run uses multi-choice questions with randomised distractors, all carefully chosen to illustrate linguistic points or points concerning things French. The program is meant for individual assessment, but can be used just as effectively for classroom work. A sealed envelope contains details of how the secret passwords are created.*

**TO ORDER TURN TO THE FORM ON PAGE 159**

# EDUCATION THEME

UNTIL a few years ago the computer was an expensive luxury usually hidden away in the back rooms of universities or in the accountancy departments of giant corporate businesses.

All that changed with the advent of the microprocessor: Machines like the ZX81, and later the BBC Micro, soon became an essential part of all of our lives.

They do our accounts, help to teach our children and entertain us with a bewildering array of games.

They can also be used as a valuable teaching aid, not only for the three Rs, but for developmental work where coordination skills and concentration need to be improved.

In the North East of England, one social services Department is forging ahead with a scheme which is tailor-made to suit the needs of mentally handicapped people and those with severe physical disabilities which restrict efficient use of the computer keyboard.

The scheme at Cleveland County Social Services was developed three years ago and has expanded considerably.

Like many other authorities, Cleveland has had excellent results at its centres, heartened by the progress of clients who have been encouraged to learn through using a computer.

The great thing about the micro is that it never gets bored or tired, it never loses its temper and it is always ready to teach.

Perversely, herein lies a problem. A computer is nothing without software and, commercially speaking, it is simply not worthwhile writing tailor-made software for disabled people. There is just no money in it since virtually every program has to be constructed to fit individual needs.

The computer personnel at Cleveland County Social Services department, who are sponsored through a community programme, are now using BBC Micros as teaching aids.

They operate in adult training centres for mentally handicapped people, in centres for physically handicapped people and in children's homes.

A project collectively called Communications and Modern Technology in Mental Health was started in Cleveland in June 1984 to produce tailor-made software for handicapped people.

It was the brainchild of Helen Lockwood and Peter O'Sullivan and is funded by the Cleveland County Community Programme Agency through the Manpower Services Commission.



Trainees use the arithmetic program

## Programming for disabilities

By Mark Smiddy

Initially, the scheme covered the seven adult training centres in the area, but has been so successful that it has expanded very rapidly to include three physically handicapped centres and two children's homes in the county.

All software for the scheme is developed by a small team of programmers working in liaison with the instructors at the centres and the trainees themselves.

When working with the trainees at the centres, in addition to their regular instructor there is also an instructor's assistant (also funded through the community programme) who has been trained in the use of the computers and external hardware.

All the software is written for the BBC Micro and Master, using a variety of peripherals such as light pens, speech synthesisers and the concept keyboard.

"BBC machines were the obvious choice", said Nick Boyne-Cross, project

co-ordinator at the time of its inception. "The BBC Micro was already widely used in schools and the existing peripherals such as the concept keyboard from Star Microterminals made it most suitable for our special needs. In fact I do not think that there is another machine available at the price that can match the BBC's versatility".

The emphasis placed on the software produced by the project is quality rather than quantity. The team's view is that if a job is worth doing it's worth doing best!


This is not a mere matter of pride, development officer Patricia Tighe said: "We believe that the trainees deserve only the very best and we aim to give them just that".

The actual software produced varies widely, from basic mathematics tutors using very large characters to a word processor using the Braid speech synthesiser and Moon system - a simplified version of Braille - with the concept keyboard.


Due to the foresight of the people behind the project even the most sev-

Turn to Page 70 ►

# EDUCATION THEME

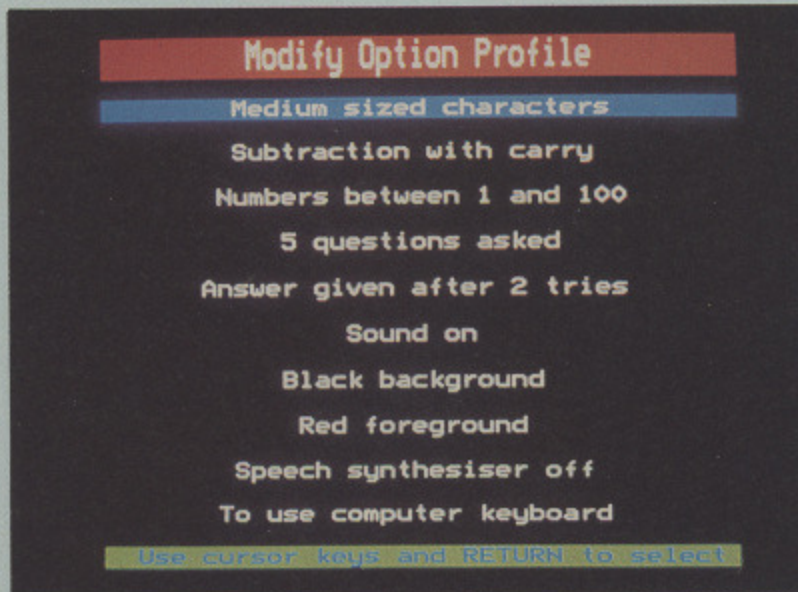

A wide range of options are available

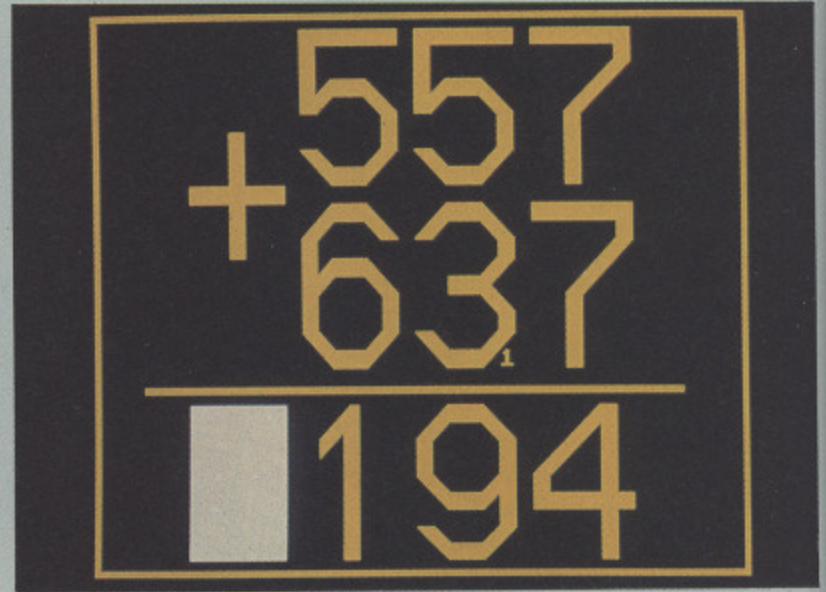

Large characters are clear and easy to read

## ◀ From Page 69

erely disabled trainees are getting used to communicating with the outside world – some of them for the first time in their lives.

The task of writing software for the disabled is not as straightforward as it might initially seem, as each individual has very special needs.

It is not just, for example, a case of adapting existing educational software to use concept keyboards for external control and expecting trainees with a low degree of muscular control to be able to use it – they won't.

Conversely, it's quite pointless expecting a trainee with a short attention span – or worse, poor sight – to sit in front of screen after screen full of text.

In fact programming for the disabled opens up a totally new can of worms. So where do you go from here? Quite simply – back to basics.

First of all it is essential to understand the problems faced by the trainees you intend to help.

The best way to do this is to visit the educational establishments where they are taught, meet the instructors and speak to the trainees themselves. Anyone not prepared to do this should never attempt to write for the disabled.

By way of illustration I shall take an example from the case file.

John, aged 25, is mentally and physically handicapped but his instructor wanted him to learn basic arithmetic.

This sort of mathematics is essential if John is to be able to lead a more normal life – for example, buying something in a shop and checking that he has received the correct change.

While the actual mechanics of adding and subtracting numbers are relatively straightforward when worked out bit by bit on paper, John could not read normal sized characters, or even the enlarged text available in BBC mode two.

The eventual solution to the problem was a mathematics tutor that explained the sum bit by bit, using numbers that filled a full one third of the screen. This has enabled John to add up two numbers with a result up to 9999.

The basic program has now been amended to include subtraction and addition with or without carry/borrow.

The tutor has proved to be so useful for John that it has now been extended by an options utility that enables the whole configuration to be changed and saved to disc for later use.

This allows it to be used with other trainees at the centre, who may not be so poorly sighted, without the instructor having to wade through pages of a startup menu every time the program is run.

Having to do this would bore the trainees and it is essential to keep their attention, as any teacher will tell you.

The options program allows things such as screen colours to be set. While this may seem to some to be trivial, it is in fact an essential.

Originally the screen colours were yellow letters on a black background. These were chosen by the instructor after reading a study that suggested that poorly sighted people found this combination easiest to see.

Generally speaking this is because these colours display a very high contrast on most monitors.

Try it by turning the colour down on your television. Red and green, for example, give a very low contrast.

However, colour blindness depends very much on the individual. Black and yellow, therefore, may prove to be completely useless.

The clarity of a display depends on the user, not on what makes it look pretty – something worth bearing in mind if you ever get an opportunity to write for the disabled.

Support for the individual does not

stop there though and a constant contact is kept with the centres to see how each program may be improved.

Recently John's sight worsened to the point where he could not distinguish even the large characters presented. In direct response to this the programmer has added a speech facility to confirm that the correct input has been made, give scores and so on.

Due to a further deterioration in John's sight he was no longer able to write using pen and paper but it was felt that since the computer has been so successful in helping him to learn maths, it could be used with a new word processor developed specially for him.

This is called Moonwriter and provides John with a simple writing aid. The input comes from a concept keyboard with an overlay containing letters in Moon, an alphabet for the blind and partially sighted similar to Braille. Sentences are displayed on the screen in large characters.

Speech has again been added as a backup to the screen and when he is satisfied with what he has entered, John can use the printer to give himself a hard copy.

Speaking as a programmer to programmers, writing for the disabled is probably the most challenging task most of us can attempt on a micro – but it can also be the most rewarding.

It may not earn you the sort of money that your latest version of a classic arcade game will, but it will earn you a much greater reward than that – the knowledge that you have helped someone, possibly less fortunate than yourself, have a better life.

For further information write to:  
The Project Supervisor, Communications  
and Modern Technology Mental Health,  
P.O. Box 91, Marton House, Middles-  
brough, Cleveland TS4 2EH.

# INTER-WORD

The integrated word processor for the BBC micro



INTER-WORD is fast, efficient and simple to use. Being menu operated the newcomer does not need to remember strange key combinations or command names. The menus are not a burden to the experienced user since there are shortcuts to access many of the features.

Some of its special features are:

**● On screen style changes**

Underline, bold and a special dotted style are shown on screen exactly as they would appear on the final printout. Also left, centred and right justified text is shown on screen as you edit. What you see on screen is really what you get on the printout.

**● Multiple documents in memory**

Most people do not work on one document at a time. INTER-WORD allows up to 16 documents to be stored in memory at once, and text to be transferred from one to another.

**● Multi column**

Built in facilities for printing text in up to 5 columns.

**● Pull down menu operation**

Simple and fast selection of all INTER-WORD options and page layout.

**● Multi-file operation**


Very large documents can be handled with ease. INTER-WORD's unique multi-file mode puts virtually no limits on document size and allows simple and fast movement to any point in the document.

**● Specific page printing**

Any page or range of pages may be printed, even in multi-file mode, with any number of copies.

*Review*

"INTER-WORD is the most powerful and comprehensive word processor available for the BBC today. It is more powerful and flexible than View and still retains much of the friendliness and ease of use of Wordwise. Inter-Word looks set to become the standard word processor for the BBC Micro."  
*Beebug, Aug/Sept '86*

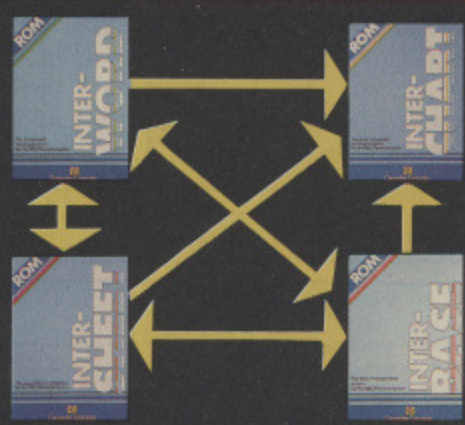

Inter-Word is part of the 'ROM Link' series which is the only truly integrated suite of ROMs for the BBC micro.

£49.00+vat (£56.35)



**Computer Concepts**

Gaddesden Place, Hemel Hempstead, Herts HP2 6EX, England. Telephone (0442) 63933

**● Block operations**

These are common to most word processors, but with INTER-WORD any part of the text can be marked and then instantly moved, copied, deleted, printed, saved, underlined etc. There is no limit to the amount that can be marked.

**● Automatic re-formatting**

This enables the user to just type—no keys to press to re-format the paragraph after changes to the text or margins have been made; the margins on the rulers can simply be dragged, all text being instantly re-formatted to the new settings.

**● 40, 53, 80 and 106 column screen modes**

- Mail merge
- Integrates with all other parts of INTER family
- Automatic page numbering, with headers and footers
- Very fast and smooth scrolling
- Powerful search and replace facilities including wildcards, upper/lower case sensitivity, stored search and replace strings for instant re-use
- Automatic word count
- Fast simple cursor movement to any point
- Easily tailored to any printer
- Line numbering
- Selectable screen colours
- Compatible with the B, B+ and Master; Solidisk, Aries and Watford shadow RAM boards.

**MONEY-BACK GUARANTEE**

Buy INTER-WORD—if you don't like it—send it back for a full refund!

(Available when purchased directly from Computer Concepts)



Access/Barclaycard accepted. All orders despatched within 24 hours.



Compatible with all BBC Micros

**20% discount**

Available to all WORDWISE PLUS owners. Simply quote your serial number, name and address when ordering direct. Discount price; £39.20 + VAT (£45.08 incl.)





Figure IV: The BBC Micro connector

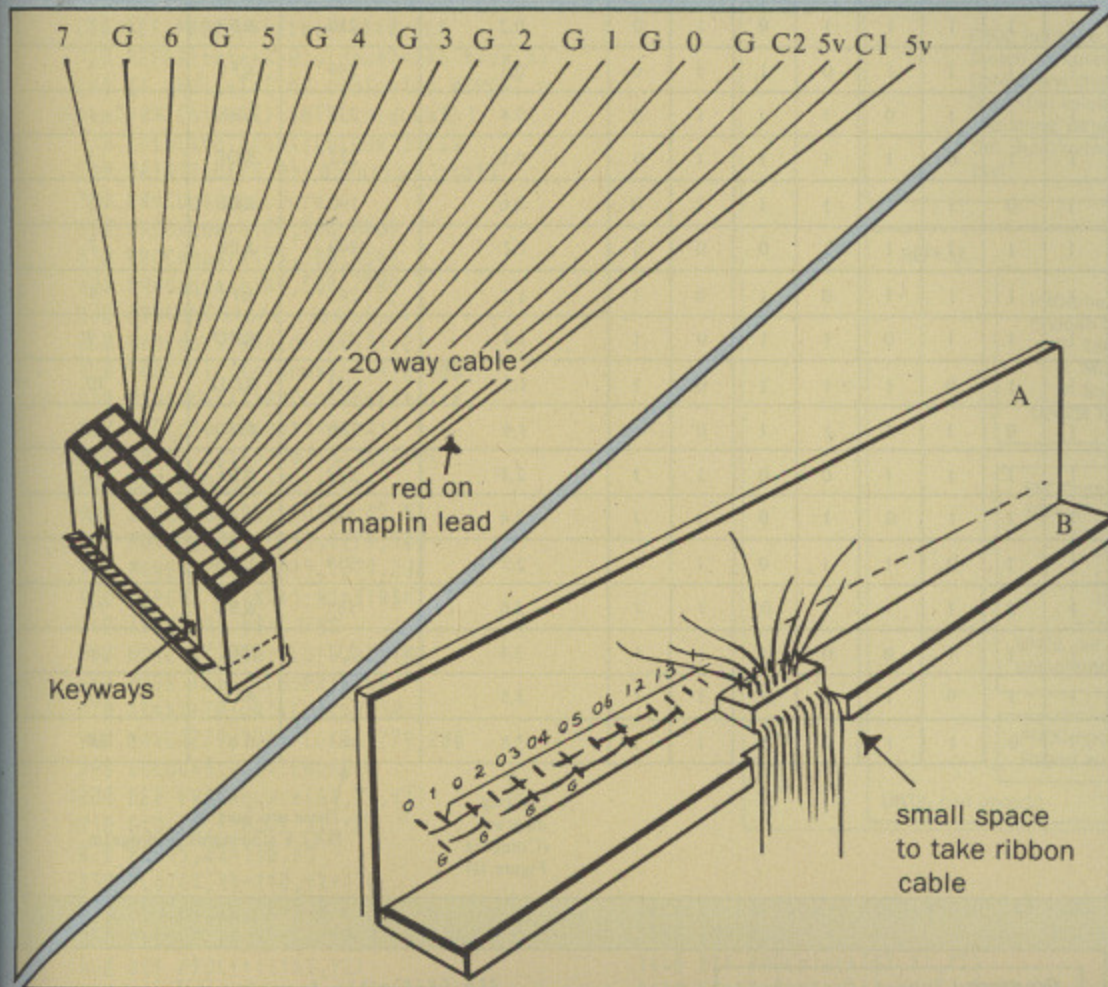


Figure V: The counting block connector

you should consult Figure IV. It shows the ribbon cable terminations relative to a user port socket. Watch the key-way positions!

- Pin and glue one of the B pieces along the edge of A nearest the studs. Cut out a small space for the ribbon cable and then use impact adhesive to fix the plug on to the B side – Figure V.
- Join the pins of the ribbon cable to any similarly colour-coded stud using the wires you attached in Step 4 of the instructions above.
- Drill a suitable hole in the remaining B side and fit the push-to-make switch. Pin and glue the B side to the other edge of the studded A side.

Wire the switch to pin 7 on the ribbon cable and any G stud. This push switch has to be pressed to “enter” an answer.

An alternative system can be fitted using two micro switches. Fit a switch at each end of the board and join them with a wooden “spacebar”.

Connect the normally open terminals of the micro switch(es) as described for

Turn to Page 74 ▶

shown and a new question presented. Finally the child’s overall performance is reported before a restart is allowed.

For the benefit of disc users the program includes an automatic downloader and it is therefore imperative that you SAVE the program, complete or not, before you run it.

Here’s how you go about making the number board:

- Make a marking-out pattern for the studs you are going to use. Figure I shows a suitable design if you are using the Welpac studs. The three studs must not touch each other, but a fourth stud should be able to touch all three.

- Mark lines across one of the A pieces 3.5cm apart. This will give 20 spaces and we will use the middle 18. Mark out the stud positions. Make pilot holes and push the studs through from the top side. Number the studs on the underside, as shown in Figure II.

- All the studs labelled G should be linked by soldering wire connections. Then all studs with the same numbers should be joined in the same way. Colour-coded wiring helps.

We now have to make links to the ribbon cable which will lead to the micro. The Maplin lead has a socket to fit the user port at one end and a plug at the other.

The pins on the plug are shown in

Figure III. You can safely remove the pins which have been marked in green – it will make soldering easier and we won’t be using them.

Solder 10cm to 15cm lengths of colour-coded wire to the pins numbered 0 to 6 on the diagram and a longer piece to pin 7.

The top row of 3 pins labelled G can be joined with a single wire. Plastic plugs can melt, so be careful.

If you are not using the Maplin lead

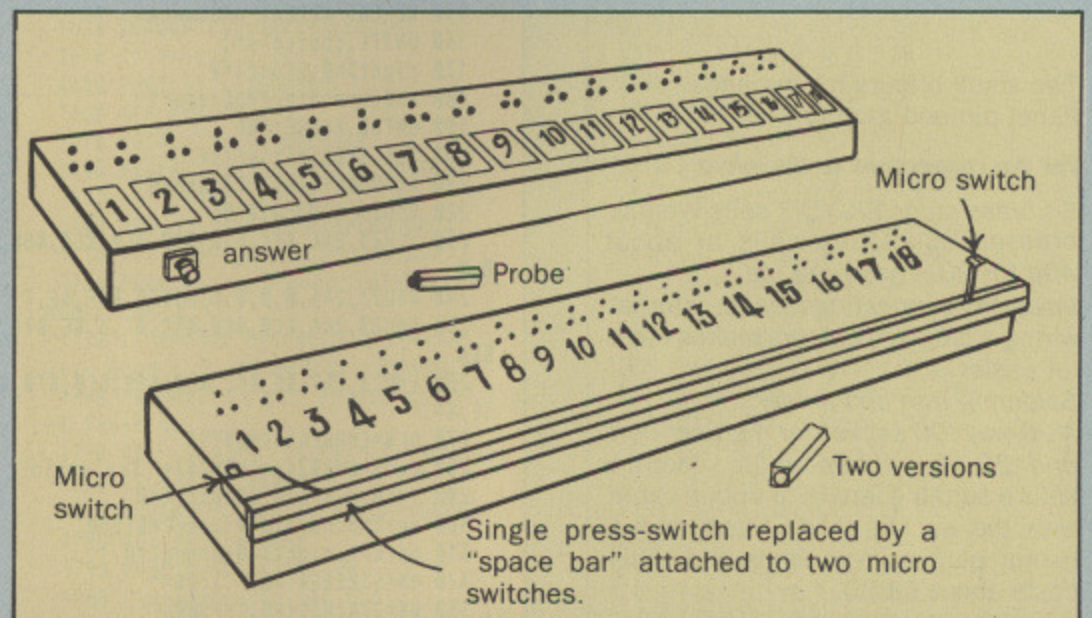


Figure VI: Two versions of the board

◀ From Page 73

the push-to-make switch. Now answers can be entered by pushing down anywhere along the wooden bar – Figure VI.

Check-out time. With the computer switched off, connect the ribbon cable to the user port. Switch on and enter Program I, then RUN it.

It should show 255 at first. If you hold a coin to connect any group of three studs together you should see one of the numbers from the Decimal column in Table I. Check that all 18 values correspond.

If you press the push switch the program should stop and display a second number, 128 less than before. The only likely faults are poorly-soldered connections, or an upside-down connection to the user-port.

When all is well complete the assembly by fitting the base and the two ends. The numbers on the board can be written on the wood in felt marker pen, or on to brightly-coloured self-adhesive labels which can then be fixed to the board.

You can make a probe by driving a spare upholstery stud into a small piece of dowelling.

State of each user-port line								grounded lines	number at &FE60		number on board
7	6	5	4	3	2	1	0		decimal	HEX	
1	1	1	1	1	1	0	0	0.1	252	&FC	1
1	1	1	1	1	0	1	0	0.2	250	&FA	2
1	1	1	1	0	1	1	0	0.3	246	&F6	3
1	1	1	0	1	1	1	0	0.4	238	&EE	4
1	1	0	1	1	1	1	0	0.5	222	&DE	5
1	0	1	1	1	1	1	0	0.6	190	&BE	6
1	1	1	1	1	0	0	1	1.2	249	&F9	7
1	1	1	1	0	1	0	1	1.3	245	&F5	8
1	1	1	0	1	1	0	1	1.4	237	&ED	9
1	1	0	1	1	1	0	1	1.5	221	&DD	10
1	0	1	1	1	1	0	1	1.6	189	&BD	11
1	1	1	1	0	0	1	1	2.3	243	&F3	12
1	1	1	0	1	0	1	1	2.4	235	&EB	13
1	1	0	1	1	0	1	1	2.5	219	&DB	14
1	0	1	1	1	0	1	1	2.6	187	&BB	15
1	1	1	0	0	1	1	1	3.4	231	&E7	16
1	1	0	1	0	1	1	1	3.5	215	&D7	17
1	0	1	1	0	1	1	1	3.6	183	&B7	18


↑  
"Wiring diagram" (Compare Figure II)

↑  
These are used as DATA statements in program

**MATERIALS NEEDED AND COSTS**

**For the box**

You need 2 pieces of plywood or hardwood (A) for the top and bottom and two pieces or more solid wood (B) for the sides.

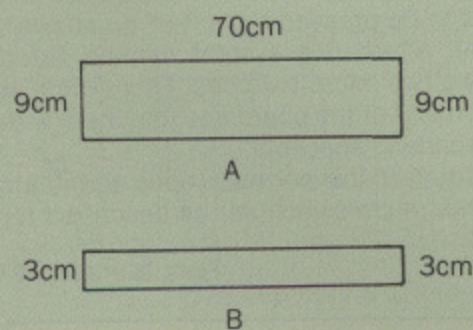

Two small offcuts for the ends. Panel pin and glue to join A to B.

**For the connections to the micro**

54 brass studs B&Q DIY sells Welpac brassed upholstery nails at about 40p for 30. These are ideal.

Insulated connecting wire for internal wiring – different colours makes life a lot easier.

Soldering iron and solder.

A 20-way IDC socket for the user-port and 20-way ribbon cable. Maplin sells a suitable length of ribbon cable with the socket ready fitted and a useful plug as the other end. This costs about £3.30.

A push-to-make switch ... about 50p.

**Program I**

```
10 CLS
20 ?&FE62=08 input lines
30 REPEAT
40 PRINTTAB(4,4)?&FE60;:REM Print out
any input
50 UNTIL (?&FE60 OR 127)=127:REM Unti
l answer button is pressed
60 PRINT ?&FE60
```

**Program II**


```
100 REM * Counting Board *
110 REM * by J.G.Lancaster *
120 REM * (c) The Micro User *
130 PROCreloc
140 MODE1:PROCinitialise
150 REPEAT REPEAT PROCmenu
160 UNTIL choice%<>5
170 right%=0:wrong%=0
180 PROCoperate:PROCreport
190 UNTIL FALSE:END
200 DEF PROCinitialise
210 AX=RND(-TIME):?&FE62=0
220 VDU23,8202;0;0;0;
230 VDU23,244,&1C,&38,&70,&E0,&C0,&80,
0,0
240 VDU23,245,0,0,0,&10,&39,&1F,&F,7
250 VDU23,246,&C0,&F0,&3C,&F,3,&E,&7C,
&E0
260 VDU23,247,&E,&1C,&30,&F0,&C0,&70,&
3E,&7
270 OK$=CHR$245+CHR$244
280 bad$=CHR$246+CHR$247+' Try again'
290 TX=0:over%=0:CH=0:ch%=0
300 err%=0:hival%=9:port%=&FE60
310 qst%=1:right%=0:wrong%=0
320 QS=STRING$(40,' '):QS=""
330 WS=STRING$(40,' '):WS=""
340 DIM QS(5)
```

```
350 QS(1)="1" Counting on'
360 QS(2)="2" Taking away'
370 QS(3)="3" Mixed questions'
380 QS(4)="4" Stop'
390 QS(5)="5" Teacher Information'
400 DIM W1$(2),W2$(2)
410 W1$(1)="Count on":W2$(1)="more"
420 W1$(2)="Take away":W2$(2)=""
430 ENDPROC
440 DEF PROCmenu
450 REPEAT CLS:COLOUR1:QS="M E N U"
460 PROCdb(QS,8,2):COLOUR 2
470 PROCdb(QS(1),4,6)
480 PROCdb(QS(2),4,9)
490 PROCdb(QS(3),4,12)
500 PROCdb(QS(4),4,15)
510 PROCdb(QS(5),4,18)
520 PRINTTAB(2,22)"Counting-on Board n
ust be used"
530 PROCin:choice%=ch%
540 UNTIL choice%<6:CLS:COLOUR3
550 IF choice%=5 PROCinfo:ENDPROC
560 IF choice%=4 THEN END
570 PROCdb(QS(choice%),4,9)
580 PROCmenu2:ENDPROC
590 DEF PROCmenu2:COLOUR2:qst%=1
600 PROCdb("How many questions?",4,15)
610 REPEAT PROCin
620 UNTIL ch%<11:limit%=ch%
630 PROCdb(STR$limit%,4,24)
640 IF limit%=0 limit%=10
650 PROCdelay:ENDPROC
660 DEF PROCdb(SS,UX,VX)
670 LOCAL AX,CX,XX,YX
680 AX=10:YX=&A:m=&A00
690 FOR CX=1 TO LENSS
700 ?m=ASC MID$(SS,CX):CALL &FFF1
710 VDU23,240,m?1,m?1,m?2,m?2,m?3,m?3,
m?4,m?4,31,UX+CX,VX,240
720 VDU23,240,m?5,m?5,m?6,m?6,m?7,m?7,
```

```

m?8,m?8,10,8,240,13,10
730 NEXT:ENDPROC
740 DEF PROCoperate:err%=0:CLS
750 REPEATtries%=0:oldnum%=RND(hival%)
760 IF choice%=2 OR choice%=3 REPEAT o
ldnum%=RND(hival%):UNTIL oldnum%>1
770 total%=oldnum%:COLOUR 3:CLS
780 PRINTTAB(28,2);"Question ";qst%
790 PROCboardpicture
800 PROCsquare(85,588,886)
810 PROCsquare(85,588,556)
820 PROCsquare(85,588,790)
830 PROCdb("Start from",4,2)
840 PROCdb(STR$oldnum%,19,2)
850 PROCfill((oldnum%-1)*70,100)
860 PROCcheck1:PROCnumberchoice
870 PROCcheck2:qst%=qst%+1
880 UNTIL qst%>limit%:ENDPROC
890 DEF PROCboardpicture
900 GCOLOR,3:VDU5:LOCAL A%,N%
910 MOVE0,100:PLOT5,1279,100
920 MOVE0,200:PLOT5,1279,200
930 REPEAT N%=N%+1:NS=STR$N%
940 IF N%<10 NS=" "+NS
950 MOVE A%,200:PLOT5,A%,100
960 MOVE A%+8,170:PRINTNS
970 A%=A%+70:UNTIL A%>1250
980 MOVE1279,100:PLOT5,1279,200
990 COLOUR3:VDU4:ENDPROC
1000 DEF PROCsquare(G%,X%,Y%)
1010 GCOLOR,2:MOVE X%,Y%
1020 PLOT5,X%+110,Y%
1030 PLOTG%,X%+110,Y%+110
1040 PLOTG%,X%,Y%+110
1050 PLOTG%,X%,Y%:GCOLOR,3:ENDPROC
1060 DEF PROCfill(X%,Y%)
1070 X%=X%+8:Y%=Y%+8:GCOLOR,1
1080 old=Y%:REPEAT MOVE X%,Y%
1090 PLOT 5,X%+54,Y%:Y%=Y%+4
1100 UNTIL Y%>old+84:ENDPROC
1110 DEF PROCcheck1
1120 REPEAT PROCchecker:UNTILtotal%=N%
1130 PROCsound:PROCdb(OK$,21,12)
1140 PROCsquare(5,588,556):PROCdelay2
1150 PROCsquare(85,588,556):COLOUR 0
1160 PROCdb(OK$,21,12):COLOUR3:ENDPROC
1170 DEF PROCcheck2
1180 IF over%=1 PRINTTAB(3,20)"The righ
t number is ";total%:PROCdelay:PROCfill(
(total%-1)*70,100):PROCdelay2
1190 IF over%=1 IF qst%=limit% COLOUR 0
1200 IF over%=1 PRINTTAB(3,22)"We can t
ry another question...":PROCbar:ENDPROC
1210 REPEAT PROCchecker
1220 IF TIME>TX+100 PROCsound:TX=TIME
1230 PROCblock(21,(N%-1)*70,100)
1240 ch%=?port%:UNTIL(ch% OR 127)=127
1250 IF total%=N% PROCcorrect ELSE PROC
wrong
1260 ENDPROC
1270 DEF PROCsound
1280 SOUND1,-15,60+4*N%,2
1290 ENDPROC
1300 DEF PROCnumberchoice
1310 IF choice%=3 CH=1
1320 IF CH=1 choice%=RND(2)
1330 num%=RND(hival%)
1340 IF choice%=2 REPEAT num%=RND(hival
%):UNTIL num%<oldnum%
1350 IF num%>(2*hival%) num%=2*hival%
1360 PROCsquare(5,588,790)
1370 PROCdb(W1$(choice%),8,5)
1380 PROCdb(STR$num%,19,5)
1390 PROCdb(W2$(choice%),23,5)
1400 PROCsquare(5,588,790)
1410 total%=oldnum%+num%

```

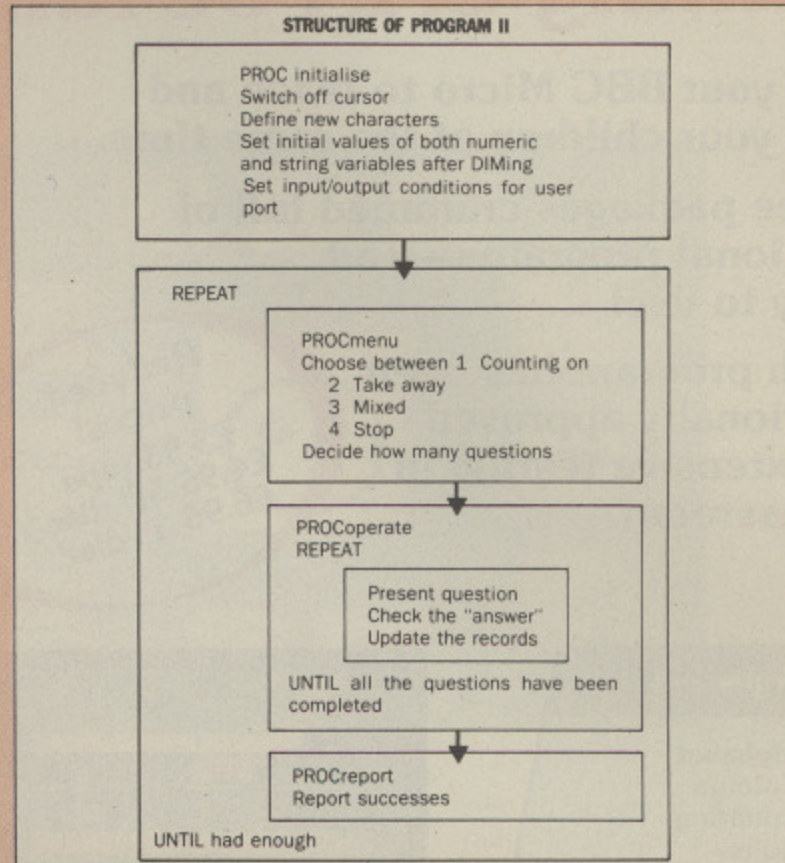

```

1420 IF choice%>1 total%=oldnum%-num%
1430 ENDPROC
1440 DEF PROCblock(G%,X%,Y%)
1450 X%=X%+8:Y%=Y%+8:MOVE X%,Y%
1460 PLOT 5,X%+54,Y%
1470 PLOT G%,X%+54,Y%+84
1480 PLOT G%,X%,Y%+84
1490 PLOT G%,X%,Y%:GCOLOR,3:ENDPROC
1500 DEF PROCcorrect
1510 IF wrong%=0 right%=right%+1
1520 COLOUR 2:PROCdb(OK$,21,12)
1530 IF wrong%=1 COLOUR0
1540 PROCdb("Well done!",5,21)
1550 V%=0:REPEAT
1560 PROCfill((N%-1)*70,100):V%=V%+1
1570 UNTIL V%>8:PROCsound:PROCdelay
1580 wrong%=0:PROCbar:CLS:ENDPROC
1590 DEF PROCwrong
1600 over%=0:wrong%=1:err%=err%+1
1610 COLOUR 1:PROCdb(bad$,21,12)
1620 COLOUR 0:PROCdb(bad$,21,12)
1630 COLOUR 1:tries%=tries%+1
1640 IF tries%>2 over%=1
1650 PROCcheck2:ENDPROC
1660 DEF PROCdelay
1670 LOCAL TX:TX=TIME+120
1680 REPEAT UNTIL TIME>TX:ENDPROC
1690 DEF PROCdelay2
1700 PROCdelay:PROCdelay:ENDPROC
1710 DEF PROCreport:CLS:COLOUR3
1720 PROCdb("There were "+STR$limit%+
questions",2,5)
1730 IF err%=0 PROCdb("All correct.
Very good!",2,25):PROCbar:ENDPROC
1740 PROCdb("You got "+STR$right%+" rig
ht first go",2,12)
1750 Q$="You made "+STR$err%+" mistake"
1760 IF err%>1 Q$=Q$+"s"
1770 PROCdb(Q$,2,25):PROCbar:ENDPROC
1780 DEF PROCchecker
1790 PROCin:N%=ch%:P%=19
1800 PROCsquare(85,588,556)
1810 IF N%>9 PROCdb(" ",18,12):P%=18

```

```

1820 NS=STR$N%:IF N%=10 NS="10"
1830 PROCdb(NS,P%,12)
1840 oldnum%=N%:ENDPROC
1850 DEF PROCbar:COLOUR3
1860 PRINTTAB(3)"Press the answer bar"
1870 REPEAT UNTIL ?port%=127
1880 over%=0:wrong%=0:ENDPROC
1890 DEF PROCinfo:CLS
1900 PRINTTAB(2,4)"MENU choices can onl
y be entered using the numberboard"
1910 PRINTTAB(2)"Use the probe or a co
in to join any"
1920 PRINTTAB(2)"set of studs together"
1930 PRINTTAB(2)"Once questions are be
ing set you use"" the probe or a coin
to select"" your number"
1940 REPEAT
1950 PRINTTAB(2,16)"To TEST your answer
you must press the answer bar when your
number is flashing"
1960 PRINTTAB(2,20)"To return to the ME
NU, press"" the answer bar now"
1970 PRINTTAB(2,16)SPC80
1980 UNTIL ?port%=127
1990 ENDPROC
2000 DEF PROCin:*FX21
2010 REPEAT REPEAT N%=0
2020 M%=?port%:RESTORE
2030 REPEAT N%=N%+1:READ num%
2040 UNTIL num%=M% OR num%=-1
2050 UNTIL N%>0 AND N%<11
2060 UNTIL num%=M%:ch%=N%:ENDPROC
2070 DATA 252,250,246,238,222
2080 DATA 190,249,245,237,221
2090 DATA 189,243,235,219,187
2100 DATA 231,215,183,-1
2110 DEF PROCreloc:*TAPE
2120 IF PAGE<=&E00 ENDPROC
2130 P%=PAGE:Q%=&E00:*FX18
2140 LX=TOP-PAGE:FORM%=0TOLXSTEP4
2150 Q%!M%=P%!M%:NEXT:*FX138,0,138
2160 PAGE=Q%:*K.10OLDIMRUNIM

```


# Learning CAN be fun

- Use your BBC Micro to teach and amuse your children at the same time.
- Three packages crammed full of educational programs – and so easy to use!
- Each program has been educationally approved after extensive testing in the classroom.

Reduced prices!  
£3.95 tape  
£4.95 5¼" disc  
£6.95 3" disc



- Ages 2-5**
- Alphabet
  - Colours
  - Counting
  - House
  - Magic Garden
  - Matchmaker
  - Numbers
  - Pelican
  - Seaside
  - Snap

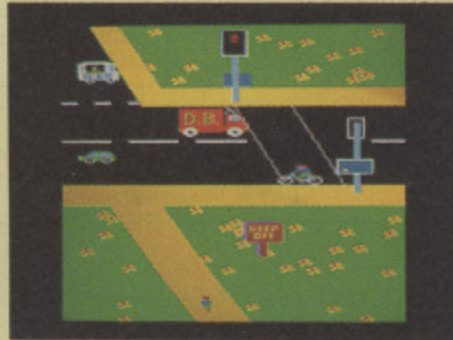


**PELICAN**  
Teach your children to cross the road safely at a Pelican crossing




**HOUSE**  
Select the colours to draw a house – hours of creative entertainment

- Ages 5-8**
- Balance
  - Castle
  - Derrick
  - Fred's Words
  - Hilo
  - Maths Test
  - Mouser
  - Number Signs
  - Seawall
  - Super Spell

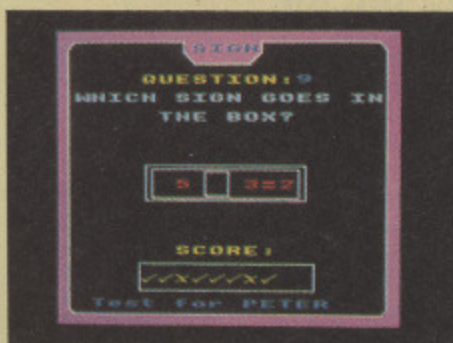

**NUMBER SIGNS**  
Provide the correct arithmetic sign and aim to score ten out of ten

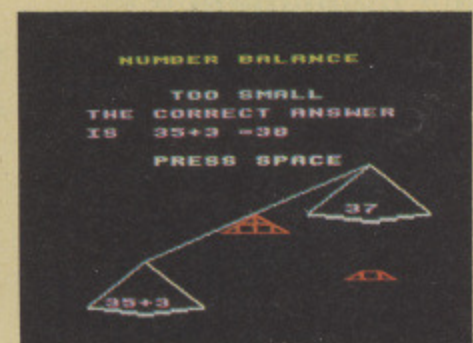


**BALANCE**  
Learn maths the fun way. Type in the answer to balance the scales

- Ages 8-12**
- Anagram
  - Codebreaker
  - Dog Duck Corn
  - Guessing
  - Hangman
  - Maths Hike
  - Nim
  - Odd Man Out
  - Pelmanism
  - Towers of Hanoi



**HANGMAN**  
Improve your child's spelling with this fun version of the popular game

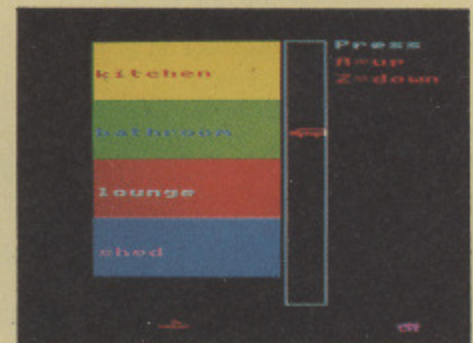

**ODD MAN OUT**  
Find the word that does not fit – before your time runs out

**TO ORDER TURN TO THE FORM ON PAGE 159**

## Modules to enliven maths lessons

*Products: Early Maths Series – Faces (£11), Nasty Games (£11), Grid Games (£15). Available on 5.25in and 3.5in disc. Supplier: System Software, 12 Collegiate Crescent, Sheffield S10 2BA. Tel: 0742 682321*

THE Early Maths Series is a set of programs presented in three modules, designed to enliven maths lessons. It uses basic ideas taken from the Maths Activity books available from Eigen Publications.

Module One is called Faces and is aimed at five to nine year-olds. For the 8 to 13 age group comes module two, Nasty Games and finally module three, Grid Games, caters for 9 to 16 year-olds.

All three modules aim to encourage logical thinking, whether using symbols as in Faces or numbers in Nasty Games and Grid Games.


As the title suggests Faces involves developing ideas of logic, sets and matching using a face and its components.

The module consists of three programs: Making Faces, Sets and Grid Game (not to be confused with the module Grid Games that we'll come to later). You use the cursor keys to choose the option you require from a menu.

At this stage, as there are no on-screen instructions, you have to constantly refer to the rather flimsy, vaguely-worded eight-page manual.

Making Faces requires you to build a face and introduces the idea of having a smile or frown. The Sets program has you sorting out a series of faces into sets.

If you are successful and make no errors a reward is given: A caterpillar

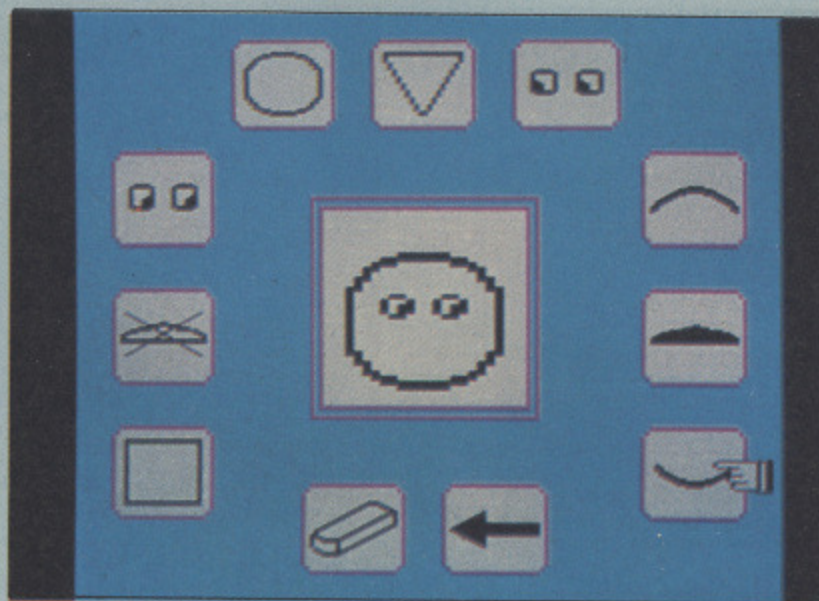

crawls across the screen and eats a carrot.

In Grid Game the concept of sets is developed further by encouraging children to relate the face characteristics to the row and column headings for the grid.

Eight-year-old children initially found the programs attractive but they soon became bored because of a lack of any real challenge.

Younger children, particularly those with little basic numeracy, liked the graphics but needed constant guidance to complete the task. Such supervision is rarely possible in the teaching situation.

Nasty Games is aimed to develop children's understanding of place value and it certainly achieves this through a series of light-hearted games which encourage children to outwit each other.

The program begins with Hundreds, an absorbing game for up to six players, with the option for an individual to play against the computer.

Before playing you choose your options: Largest, smallest, odd or even.

With the first option, you play up to eight rounds to beat your opponents to the largest number, using random numbers generated by the computer. A score sheet is displayed at the end of each round.

This game proved to be very popular with eight-year-old children and was probably most successful when used with a group of four.

The second game is called Plus, and as its name suggests deals with addition sums. Each player aims for the sum of his two numbers to be the largest or smallest depending on the game.

Strangely, the program will not allow

zero to appear in the tens box, which rather limits your strategy.

When you have filled all the boxes you then complete the given calculation to determine the winner. Again you can choose the number of rounds you play.

The final game is Minus which is identical to Plus except that it deals with subtraction.

It will not allow you to get a negative answer as a result of subtraction, so the top number of the sum must be completed before the bottom boxes can be accessed.

Both Plus and Minus are good educational games: They are enjoyable, demand strategy and are fun to use, but they quickly become repetitive and have limited application.

But Hundreds, the simplest of the games, is a winner. It provokes argument and discussion and, at times, utter frustration. While this is happening the children are learning and reinforcing their understanding of place value.

The third module in this series, Grid Games, is designed to develop children's general facility with numbers and in particular to develop an understanding of multiplication, division and the links between them.

It involves the concepts of breaking a number down into its divisors (factors) and of building a number from multiples.

The Grid Games module is split into two distinct programs, each reinforcing the alternative approach. These are called Divisors and Multiples.

Within each program are four activities: One, Place, Choose and Two. One is the basic activity for a single player.

There is a simple picture scoring

**Turn to Page 78** ▶

# EDUCATION SOFTWARE

## ◀ From Page 77

guide to encourage the child and there is an optional dustbin to increase the level of game strategy.

The dustbin option allows you to dump a number into it and retrieve it at a later stage. As the dustbin empties a new number appears in the box and the old number is removed.


Place first requires you to place the given row and column headings before playing the grid game. Choose offers a selection of heading numbers and you select and place these to maximise your game playing chances.

Two offers a competition between two players using the same grid. A score card is kept to enable players and teachers to observe how individuals are progressing, thus enabling the activities to be used in turn by a number of children.

By using these options the program offers you eight different but very similar games.

Both games require you to have a quick recall of multiplication facts. Without it you simply score low or not at all.

The program offers no teaching facility within it and therefore can only be used to reinforce already acquired knowledge.

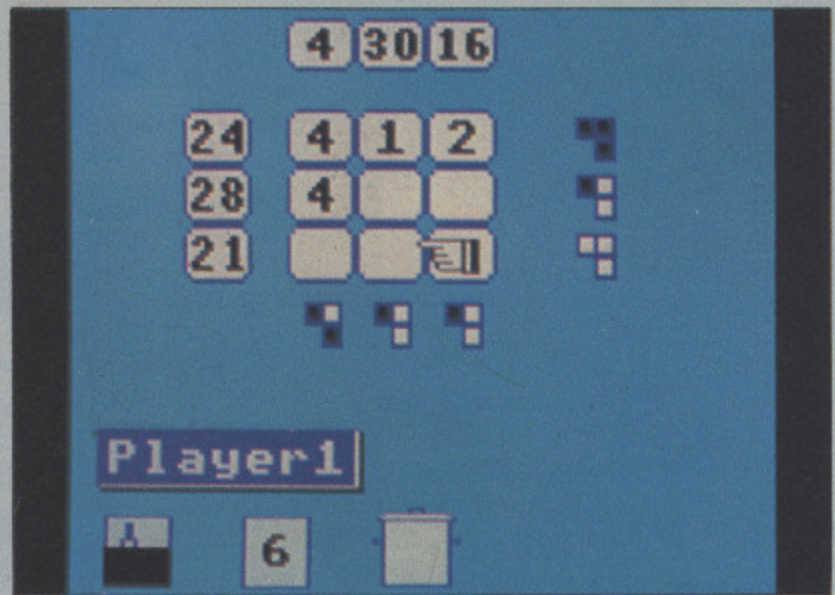

This type of activity is readily available in other ways as board or card games – when random numbers are needed a dice would be used.

It's a pity the program doesn't give the child the chance to build his own squares from scratch, as this would present a considerably more difficult task and test understanding of the concepts involved.

Within the primary school maths cur-

riculum this set of programs can undoubtedly find a place.

None of the ideas contained in them are original, nor are they presented in any startling manner, but they do give teachers a source of software which will complement their teaching.

They offer more than just rote learning and they do offer the opportunity to do computer-related activities.

Andrew Heaton

## No way to treat children


Product: First Filer  
 Price: £19.95 (5.25in disc) £22.95 (3.5in disc)  
 Supplier: Chalksoft, PO Box 49, Spalding, Lincs PE11 1NZ.  
 Tel: 0775 69518

FIRST Filer is a new database that the authors claim is "specially designed for young children, and avoids awkward syntax and funny words".

It comes with a program disc and a data disc, a slim paperback manual and some worksheets. So far so good.

You start by placing your program disc in the drive and booting up with Shift+Break. Be careful which roms you have in your machine – it will conflict with some.

After the title screen I was told to leave the program disc in the disc drive

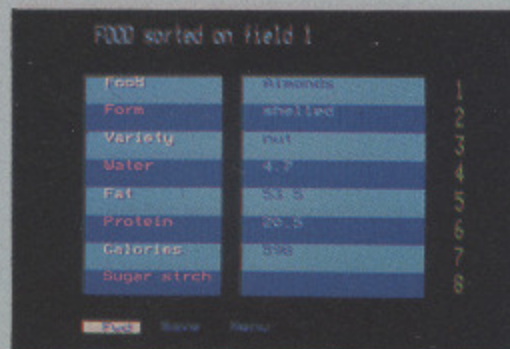

– actually I had absolutely no intention of removing it. This was my introduction to the rather condescending manner of the programmer.

The next step was to select whether I wanted to use an old file or create a new one. I selected the old file so that I could examine one of the databases supplied.

That went well, but then I received the message "Program disc still in drive?" Well of course it was, and even I know that the program could easily find that out all by itself.

Slightly miffed I replaced the program disc with the data disc and indicated I had done so. Why I couldn't have put the data disc in drive one to save swapping I don't know.

The next step showed a very sloppy programming attitude – the program

used \*CAT to get the catalogue on the screen then wiped out the top status and bottom file information, leaving a list of the main files. It works, but it is not good programming.

My anger at the programmer got the better of me: I used a file name that didn't exist – Mam – and got the really condescending "Are the Mam files on the disc?". So I typed in No – but the programmer was being rhetorical.

Eventually I loaded a database file and decided to do a search. Find and What seemed to be what I wanted, so I selected What – and was presented with the message "What". And so it went on . . .

I cannot recommend this product for young children, and even the manual says: "Do not expect to be able to use it on the first few occasions without this booklet".

It is condescending, uses meaningless phrases, has inconsistent text entry and during the search routine has a childish attempt at user-friendliness (messages such as "still looking!") just to mask a slow routine.

It is a real shame – Chalksoft can produce such good software, but this is a very poor implementation of an excellent idea.

Steve Turnbull

# FINGERTIP COMMUNICATION

**D**IALUP is a communications package which puts the world of information literally at your fingertips. It's vast range of 'up-to-the-minute' features must surely make it the most comprehensive 'value for money' communications package available to date. It has been specifically developed with the home user very much in mind. It is simple to use. So simple, in fact, that two single finger keystrokes are all that is required to connect you directly to a service. **WHAT COULD BE SIMPLER?**



**D**IALUP can be used on a number of machines such as the new Amstrad PC and the Amstrad PCW, BBC Models B, B Plus and Master, the RM Nimbus, the Apricot PC/Xi and IBM PC/XT. It works with any manual dial modem plus a wide range of autodial modems such as the Award Winning and Highly Recommended WS4000 from Miracle Technology, the WS3000 plus the TANDATA TM512, the Da Com DSL2123, the CommuTel modems or any Hayes standard modem. **WHAT COULD BE MORE VERSATILE?**



## DIALUP PERSONAL COMMUNICATIONS SOFTWARE

It is also very economical. Using a Multistream account (available from BT), you can connect to the majority of services in the UK and only local dialling rates will apply. A definite saving on your telephone bill! You can not only access Prestel type services (Viewdata) but also electronic mail services such as Easylink or Telecom Gold to send a letter, telex or other documents to a friend, colleague or company. A whole variety of transactions and purchases will be possible from your armchair. **WHAT COULD BE EASIER?.**

**D**IALUP is menu driven to make it easy to use. It has a number of useful facilities. You can

- print interesting pages/frames or save frames to disc and review them later
- save logon sequences for auto logon, password protection and logon to pre-selected pages
- see at a glance how long you have been connected from a 'status-line'
- use special keys to perform a variety of useful tasks at the press of a button eg. temporarily halt the flow of information to the screen (so you can read it at your own pace).
- use 'file commands' without having to break connection with a service (list, file, rename, copy)
- save details of up to 20 services.

For the technically minded communicator here are some of the technical specifications -

- full duplex
- XON/XOFF flow control
- RTS/CTS handshaking
- 300, 1200, 1200/75, 75/1200, 2400, 4800, and 9600 baud rate
- XMODEM, KERMIT or DIALUP file transfer error checking protocols
- telesoftware download (CET standards)
- direct exchange of files between two DIALUP users (back to back connection)
- multistream EPAD protocol for additional error correction
- colour and graphics (in Viewdata mode).

**D**IALUP Personal is NOW available complete with DIALUP disc, a 160 page user Manual, a function overlay keypad and cable at ONLY £89.95 + p&p. A total communications package, DIALUP plus the Miracle Technology WS4000 modem (Hayes compatible and fully intelligent), is offered at a special price of JUST £259.95 + p&p.



**HOW TO ORDER:** Either fill in and post the coupon below or telephone PMS Communications Ltd on 021-643-7688 quoting Access details.

Please send me the following.  
 ...DIALUP Personal communications software packages (includes cable) @ £89.95 + £2.95 p&p. (TOTAL £92.90)

...DIALUP Personal communications software packages (includes cable) with the Miracle Technology WS4000 modem @ £259.95 + £5.50 p&p. (TOTAL £265.45)

I enclose a cheque for £ \_\_\_\_\_ made payable to PMS Communications Ltd.

Give details of machine on which it will be used.  
 Micro, Model, (If BBC, do you require a ( ) 40 track disc or ( ) 80 track disc).

If using a different modem please supply details.  
 Manufacturer, Model.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

PHONE DAY \_\_\_\_\_

EVENING \_\_\_\_\_

Please send to: PMS COMMUNICATIONS LTD, Norfolk House, Smallbrook Queensway, BIRMINGHAM B5 4LJ. Phone: 021-643-7688.



## AMCOM FOR THE COMPLETE MASS STORAGE SOLUTION

### Winchester Hard Disc Systems

With more experience than any other company in the provision of hard disc storage for BBC users, Amcom can supply a range of ADFS compatible winchester drives, second to none.

With storage capacities of up to 600 megabytes, Amcom winchesters are designed for use in demanding environments like schools, colleges, and universities as well as for industrial applications.

### Amcom Tapestreamers

Amcom Tapestreamers provide a fast, reliable and economic means of backing-up the large amounts of data stored on Winchester hard disc systems. The speed and ease with which data is streamed onto magnetic tape makes backing-up faster, easier and more convenient with total Data Integrity. Multiple copies are easy to make, and data is quickly transferred back to the hard disc when required.

### E-Net

The definitive networking system for BBC microcomputers, fast, versatile and easy to use, E-Net is already in use by over 400 schools and colleges.

### Digital IC Tester

A sophisticated I.C. tester designed to test I.C.'s in common use today. It connects directly to the BBC's 1 MHz bus and comes complete with user friendly software on disc.



For further information on: Winchester hard discs, Educational networking systems or Tapestreamers, contact:

Amcom Software Ltd. 35 Carters Lane, Kiln Farm, Milton Keynes MK11 3HL. Telephone (0908) 569212

GRANNY'S GARDEN  
FLOWERS OF CRYSTAL  
DINOSAUR DISCOVERY  
DRAGON WORLD  
BOX OF TREASURES  
ZOOPAK

4MATION EDUCATIONAL RESOURCES  
Linden Lea, Rock Park, Barnstaple, Devon EX32 9AQ  
Telephone: (0271) 45566 Telex No: 42513 Sharet G. 4MAT  
SEND A5 S.A.E. FOR CATALOGUE

FOR BBC B with DISK

NEW **TANKS!**

**TANKS!** is the latest in our unique series of battlegames.

**£12.95 + £1.00 p&p**

The game simulates a Second World War tank battle. You choose from three scenarios: Western Europe 1944, North Africa 1942 or Russia Winter 1943. Then you may choose your forces. **TANKS!** is one player, and you play against the computer.

Action takes place on a scrolling map, with the enemy forces hidden. You must consider the quickest route to your objective, avoid or defuse the mines placed by the opposing forces, hide from marauding enemy bombers, negotiate enemy fortified positions, or destroy them with artillery or mortars. You must keep your tanks refuelled, but protect your valuable petrol trucks. Oh, and of course, you will also have to fight the enemy tanks.

**Available from: Design People Software, 77 Grimwade Street, Ipswich, Suffolk IP4 1LN, or from good distributors.**



# EDUCATION LETTERS

## Quality of display

IT IS interesting to reflect that only a short time ago, the person who painfully pecked at a typewriter keyboard with just two fingers would never have considered calling himself a typist.

It was easy to recognise the amateur because errors and omissions were numerous, and somehow the way the whole piece of work was set out on the page instantly revealed the lack of knowledge, expertise and formal training which is normally the hallmark of a competent typist.

However, with the advent of the micro, more and more people are eager to use the keyboard and it has become commonplace to see them carefully picking their way over the keyboard using the hunt and peck technique of the two fingered typist.

Additionally, as software becomes more generally available, there is a growing awareness of the advantages of being able to type and to use the functions of a word processor.

More recently, word processing has been suggested to be a great educational aid to all kinds of users across the whole curriculum,

Keep your letters coming in – the education pages are here to reflect your interests. We want to hear your tips, ideas, experiences and suggestions. Send your contributions to:

Peter Davidson, Education Editor, The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport, SK7 5NY.

via Special Needs, English, Humanities and Computer Studies Departments.

And it has been greeted with a great wave of enthusiasm by pupils and teachers, as well as the public at large.

The result has been reflected in the number of classrooms which now have walls adorned with examples of pupils' work which has been created using word processors.

These may initially appear to be very accurate – spellings may well have been pointed out and corrected, paragraphs drafted and redrafted to the eventual satisfaction of both pupil and teacher.

But on closer scrutiny it could be suggested that much of the work lacks any quality of display – and looks very much like the work produced by what were previously considered to be the very poor typists.

Yet pupils and teachers alike seem to be convinced that because they have mastered all the machine's functions they have become experts – or at the very least experienced word processing

operators and teachers.

May I ask how this can possibly be acceptable?

Especially considering the very high standards set for even elementary word processing in the Business Studies areas by such examining bodies as The Royal Society of Arts.

For example, students must demonstrate an ability to key in, follow instructions, recall, edit and add text, follow correction signs and proof read their work to an acceptable standard of 99 per cent accuracy.

Also, all work must be displayed and presented to what is an RSA Stage I Typewriting examination standard, again to 99 per cent accuracy.

Additionally, there is a criterion for assessment in the completion of four tasks within a set timescale. And a requirement for assessment in a wide range of word processing functions. To be awarded a Certificate, the student must pass in all four areas unaided.

In view of these considerations it could be suggested that the next step in word

processing is to ensure that text produced isn't simply displayed so that it looks more aesthetically pleasing and professional.

Some standardisation should be adopted by teachers all over the country so that all work produced conforms to a basic layout requirement which is recognisable and acceptable in a working environment.

This would no doubt require some cooperation, organisation and effort on the part of all teachers, plus a willingness to recognise that something must be done soon.

This could perhaps be achieved if Inset trainers with any involvement at all were actually qualified Typists/Word Processing Teachers themselves, instead of self-taught enthusiasts. Has anybody else got any views on this please? – **Doreen Goldstone, Danbury, Essex.**

## Exit from slimmer

AS A teacher writing programs for primary school pupils, I have found Robin Nixon's character slimmer program in the May 1986 issue of The Micro User most useful, as Mode 2 text is generally inappropriate for programs for this age group.

For the convenience of other teachers, and the children, I usually arrange for programs to be CHAINED from a central menu program.

As not all of my programs are written in Mode 2, I should like to know of a routine to disable the character slimmer utility and return the micro to normal text. This would prevent the text from being corrupted in other modes as is currently the case.

Thank you for a most interesting and informative magazine – many of your articles have prompted ideas for further programs! – **Pauline Harris, Chelmsford, Essex.**

● You can return your micro to normal text as you change mode by following the mode change with \*FX20.

## Diagnosis at a distance

I AM a headmaster of a very small school with 50 pupils and I am looking for an easy-to-handle database program to use as an electronic card system.

I have a Master 128 and purchased Viewstore, but I find it much too difficult to handle. I want to be able to create my own cards, change them, print them out and so on. A sorting and searching procedure is also necessary.

I hope you can recommend a database that is not too complicated and yet flexible enough for me to handle.

Also, I have another problem concerning the computer. As you know on the Master it's possible to have the time and

date constantly available but sometimes I get a lot of garbage when I ask for the time using \*TIME.

The clock then is completely lost and I have to put it right again using \*PANEL. I asked my dealer but the only answer he could give was to show him the computer, which I'm afraid is very difficult for me as I live about a hundred miles away from him.


There are very few dealers because Acorn computers are not used very much over here and he is the nearest one I can get to.

I find your magazine very helpful as it's the only source of information I've got. – **J.M.M. Kok, Nederland.**

● For your requirement, Mini Office II seems to be the ideal package. Not only will the database cater for the points you raise, but the package would also give you many other features that could be of use in your school, such as mail-merging, label printing and graphics.

With regards to your other problem, as your dealer says it is very difficult to diagnose faults without first seeing the computer.

However, the way to find faults is a process of elimination and you could try first removing Viewstore, which from your letter appears to be the only non-standard part in your Master.

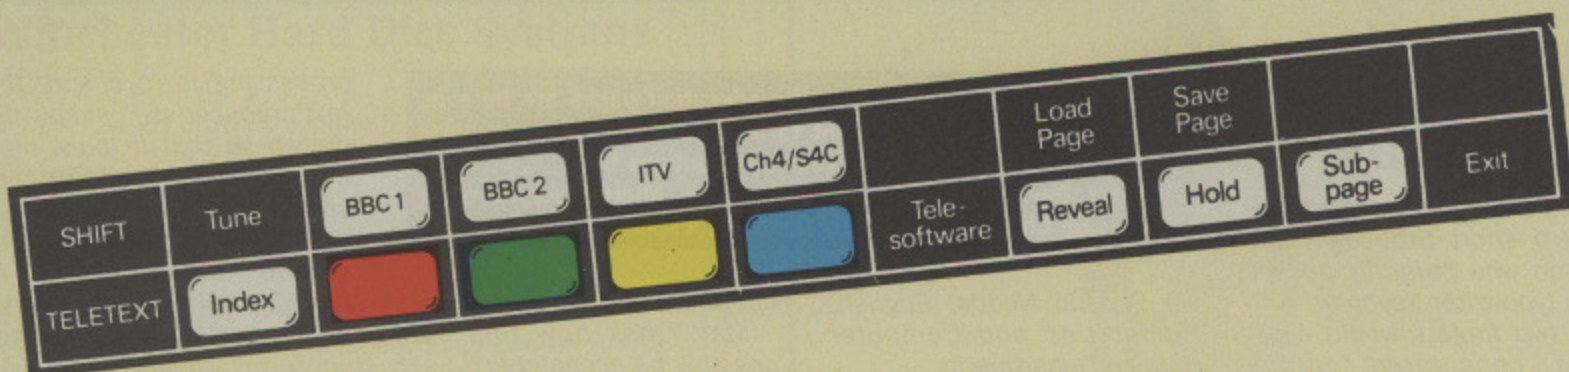

# Turn your BBC Micro into a teletext receiver!



Throughout Britain, 3 1/2 million households regularly watch teletext – the many thousands of pages put out by Ceefax and Oracle covering everything from share prices to football results.

But if you have a BBC Micro you can do much more than just flash from page to page. With the BBC Teletext Adapter and rom – and using a normal TV set or monitor – you can store the pages in memory, transfer them to tape or disc, and display them again and again in any order you like.

**BBC Micro Teletext System\***  
Includes Adapter, Rom, manual and guide to teletext

**£69.95**

**BBC Micro Advanced Teletext System\***  
Includes Adapter, Advanced Teletext Rom, manual and guide to teletext

**£74.95**

\* Not compatible with the BBC Compact

**BBC Advanced Teletext Rom**  
For existing users who wish to upgrade to the new Rom software

**£7.95**

All prices include VAT & P&P

For an extra £5 we will send you the BBC Advanced Teletext software – the only package providing ALL the features offered by the BBC/ITV services. Its many enhancements include automatic loading of associated pages each time you select a page from the menu – considerably speeding up access time.

There may be some pages you wish to look at regularly, such as news, sports results or weather. The latest teletext rom can be programmed to "keep" such pages for you, updating them as necessary. They can be displayed at the touch of a key, without waiting for them to come round.

● If you already have the BBC Teletext System we will send you the new rom for £7.95.

**IMPORTANT:** The BBC point out that the Teletext Adapter, like a TV set, will not work satisfactorily without a good outside aerial. Nor will it function correctly if you experience interference such as ghosting. They emphasise that these problems only affect a few areas of the country. However, if you have any doubts as to the quality of signal available in your area you should contact the BBC Technical Support Service on 01-927 5040.

# OPUS WILL MAKE YOU A BETTER ORGANISER FOR ONLY £60

If your micro system is starting to get out of hand a smart organiser could be the solution to your problems.

At just £59.95 the Organiser desk from Opus Supplies will help to organise your system beautifully. It's purpose built to provide plenty of storage space and because it's produced alongside our range of executive computer desking it offers a level of quality you'll appreciate.

Shelving accommodates your monitor, printer, computer, disc drive or cassette recorder and software, and the teak-finished unit is fitted with castors to make it fully mobile. The Organiser's assembled dimensions are: H. 31", W. 40¼" and D. 26".

And our price includes VAT and FREE DELIVERY.

The Organiser desk is suitable for use with all leading home micros including the BBC, Amstrad, Commodore and Sinclair computers.

Getting organised couldn't be easier. Phone us on 0737 65080 or simply post the coupon below.



To: Opus Supplies Ltd,  
55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please rush me the following:  
(PRICES INCLUDE VAT AND CARRIAGE\*)

\_\_\_\_\_ Organiser Desk(s) at £59.95 each (inc. VAT)

I enclose a cheque for £\_\_\_\_\_ or please debit my

credit card account with the amount of £\_\_\_\_\_

My Access  Barclaycard  (please tick) no. is: \_\_\_\_\_

\* UK Mainland only

Name \_\_\_\_\_

Address \_\_\_\_\_

Telephone \_\_\_\_\_

BBC

**Opus.**  
Opus Supplies Ltd



# Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England  
 Tel: Watford (0923) 37774-40588 Tlx: 8956095 Fax: 01 950 8989



All prices exclusive of VAT; subject to change without notice & available on request.  
 Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)



**BBC MASTER 128K Micro** £395  
**BBC MASTER TURBO 4MHz** £493  
 512K Processor Add on Board  
 "inc. Mouse and GEM package" £195

## BBC MASTER COMPACT

All Master Compact Microcomputers are supplied complete with an integral 3 1/2" Disc Drive and various educational and professional bundled softwares.

System 1	Standard Package	£385
System 1A	System 1 + TV Modulator	£399
System 2	System 1 + Green Hires Monitor	£469
System 3	System 1 + Medium Res Colour Monitor	£599

## SPECIAL OFFER

**FREE . . . £80 worth of Software**  
*Gemini's OFFICE MATE & OFFICE MASTER packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics. Accounts packs: Cashbook, Final Accounts, Mailist, Easyledger, Invoice & Statements, Stock Control and Computer Concepts' popular interword wordprocessor ROM; WHEN YOU BUY YOUR BBC MASTER COMPUTER FROM US.*

Turbo 65C102 Add-on Module	£99
BBC MASTER ET (Econet Terminal)	£315
Econet Module for the Master	£43
ROM Cartridges for Master	£13
Reference Manual I (No VAT)	£14
Reference Manual II (No VAT)	£14
Advance Ref. Manual (No VAT)	£19
64K Upgrade Kit for B+	£32
Acorn 1770 DFS Kit complete	£42
ECONET Upgrade Kit for BBC	£42
ALL ECONET UPGRADES Available	
6502 Acorn 2nd Processor package	£175
Z80 Acorn 2nd Processor package	£325
32016 Co-Processor	£999
Cambridge Workstation	£3450
ARIES IEEE Interface	£265
Acorn IEEE Interface Complete	£280
Acorn Teletext Adaptor	£95
Acorn Bitstick I	£299
Robocom Bitstick II	£759
Upgrade for Bitstick I to II	£450
Bitstick Multiplotter Driver	£65

(Securicor carriage £7)

## CO-PRO ADAPTOR

Now for the first time you can add the Master Co-processor boards, to your standard BBC model B, or B+. With this brand new launch from Watford Electronics. You can attach any BBC Master Co-processor to the original BBC Micro. Once again Watford forges ahead with a new concept in BBC micro addons. This unique external CO-PRO ADAPTOR, is protected by patent applications.

Use the super fast Turbo Board with your BBC B, it is much faster than the 6502 2nd processor it supercedes.

With the 512K addon your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs.

To use this addon you require a BBC model B, fitted with DNFS 1.20 or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly as if they were second processors. Master owners may use this interface to add a second Co-processor.

Watford, brings power to your BBC at only: **£50.00 (carr £5)**

**By popular demand our retail shop is now open until 8.00pm. every Thursday.**

## VARIOUS PRINTERS

- EPSON FX800 Printer £315
- EPSON FX105 Printer £430
- EPSON JX-80 Colour Printer £299
- EPSON Hi-80 Printer Plotter £229
- Hi-80 Refills, set of 4 Pens £6
- EPSON Paper Roll Holder £17
- EPSON LX86 Printer £199
- EPSON LX80/86 Tractor Feed £20
- EPSON LX80/86 Sheet Feeder £49
- EPSON FX800 Printer £315
- EPSON FX1000 Printer £425
- EPSON EX800 Printer £405
- EPSON LQ800 Printer £449
- Brother HR20 Daisy Wheel £329
- Centronics Printer Cable to interface all the above Printers to BBC £6 (Securicor carriage charge on printers £7)

## RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232 IEEE 488	£27	RS232 + 2K Buffer	£55
	£65	RS232 & 8K Buffer	£75

## CENTRONICS GLP & Brother M1009 (NLQ) Printers

**A major price break-through in NLQ Printers from Watford.**

At last, a low cost full feature printer, supplied complete with Watford's own NLQ ROM (separately at no extra cost). Due to Watford's bulk purchasing power and low margins we can now offer this incredible printer deal direct from the manufacturers to our customers.

Features include, Epson RX Compatible commands, Near Letter Quality print, 50 CPS Draft mode, Centronics parallel interface, Single, Double & Quadruple density graphics modes, Subscript & Superscript, handle up to 9 1/2" wide standard paper, Friction Feed standard, Low cost Tractor feed optional extra, Bi-directional logic seeking.

**Special Offer £95 (carr £5)**  
**Tractor Feed Attachment £12**

## PRINTER SHARERS

(Ideal for School environment)

Connect 3 BBC Micros to 1 Printer	£60
Connect 6 BBC Micros to 1 Printer	£99
<b>PRINTER CHANGER</b>	
Connects 3 Printers to 1 Micro (Cables extra)	£65

## Acorn-Olivetti JP101 Spark Jet Printer

One of the main problems with most printers is that they are hopelessly noisy. How often have you wanted to print something late at night but not done so for fear of waking the children? Also ideal for those working in quiet environments such as libraries, etc. Silence the complaints with the serious solution from Watford at the amazing cost of only **£59**

**Accepts standard 9 1/2" Paper.**  
**Pack of 4 refills £10**

**JP101 accepts 9 1/2" standard fan fold paper or single A4 sheets. Tractor & Friction feed supplied as standard - print speed 50 cps.**

RS232 Kit for the COMPACT £26

## SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.  
**2764-250nS £2.50**  
**27128-250nS £2.75**

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards  
**6264LP (8K) £2.90**  
**2 x 6264LP (16K) £5.80**

## KAGA/TAXAN PRINTERS (IBM/Epson compatible)

**KAGA KP815 Printer**  
 Only £239 (carr £7)

**KAGA KP915 Printer**  
 Only £369 (carr £7)

## PRINTER LEADS

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8
Compact's Special Centronics Lead	£9
RS232 Cable	P.O.A.
IBM Parallel 1 metre Cable	£12

## PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
BBC Micro	-	£3.50
BBC Master	-	£4.00
Brother HR15	£3.00	-
FX100	£7.00	£5.25
FX80-MX80-FX85	£4.50	£4.95
RX80	£4.50	£4.50
LX80	£4.00	£4.50
GP80	£4.50	£4.00
GP100-GP250	£5.95	£3.95
Centronics GLP	£4.00	£3.75
KAGA KP810	£5.25	£4.75
CANON PW1080	£5.25	£4.75
Panasonic KX1080	£7.75	£4.75
Microvitec Metal Monitors	-	£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

## Listing Paper (Perforated)

1,000 Sheets 9 1/2" x 11" Fanfold Paper	£7
2,000 Sheets 9 1/2" x 11" Fanfold Paper	£12
1,000 Sheets 15" x 11" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50


## PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90 x 36mm (Single Row)	£5.00
1,000 90 x 36mm (Twin Row)	£4.90
1,000 90 x 49mm (Twin Row)	£7.50
1,000 102 x 36mm (Twin Row)	£6.25

Carriage on 1,000 Labels £1.00

## Panasonic KX-P1080

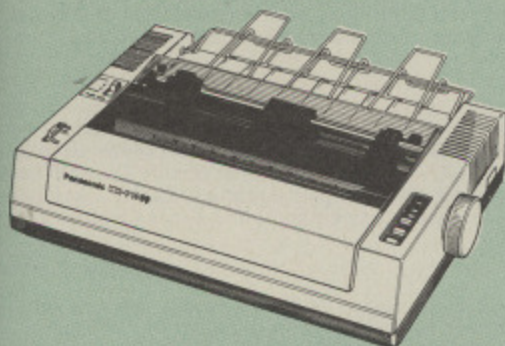

from the prodigious Japanese Stable of  
Panasonic comes this fabulous new NLQ  
Dot Matrix Printer

Available NOW at a superbly realistic price, the KX-P1080 perfectly balances features, quality of construction and Value for Money to produce the printer of tomorrow, here today, ready to sweep the current generation of machines away.

Ingenious innovation in terms of software control codes permits great flexibility when it comes to defining the print style. A nippy 100 cps of clear Draft text backs up the crisp 20 cps Near Letter Quality text mode, with upto 40 superbly useful downloadable characters. A delightful range of assorted character widths is efficiently supported, with sizes ranging from a broad 5 cpi to petite 17 cpi, EVEN in NLQ mode. Some of the extensive support for serious use includes specialised functions to perform justification, centering and even left and right ranging. Proportional spacing permit even greater freedom when it comes to advanced use. Not only is the full Epson RX compatible control code set implemented, but extra codes have also been added to cater for the NLQ options, etc.

A full 96 ASCII character set is supported, with an extended set of 32 international characters. A 1K Print Buffer alleviates much of the wait time normally associated with printing, whilst the bi-directional logic seeking print head takes the quickest route to print as required.

The draft text is implemented with a 9 x 9 matrix, with Near Letter Quality effected by means of an 18 x 18 matrix.  
*(Price includes, FREE A 4ft Printer Lead, and a Dump Out 3, Screen Dump ROM worth £35 with every printer purchased from us).*

Special Price: **£149** (carr. £7)  
Panasonic RS232 Interface: **£39**

## Panasonic KX-P1092 Dot Matrix Printer

Similar to KX-P1080 but has 180cps speed, Draft and NLQ down loadable characters option and is IBM/Epson compatible.

Price **£345**

## Panasonic KX-P3131 Daisy-Wheel Printer

A few months ago, we introduced the KX-P1080 to our large and discerning customer base. As a result of the enthusiastic and overwhelming reaction to this versatile dot matrix printer (see above for details), we are now extremely pleased to be able to bring you details of the fabulous KX-P3131 Daisywheel Printer, also from Panasonic. The KX-P3131 printer is the ideal printer for the home user wishing to produce clear, immaculate letters or reports.

Ideally suited to the pocket of the home user, costing not much more than a pair of disc drives, this daisywheel printer delivers flawless text at 10, 12 or 15 characters per inch. It also supports proportional print mode.

Printing at a respectable 17 characters per second, the KX-P3131 features a capacious 6 kilobytes printer buffer to swallow most printing requirements with ease. For the more demanding user, there is a 32 kilobytes printer buffer option available. Taking paper up to 13.5" wide, the KX-P3131 prints with bidirectional logic seeking, ensuring the minimum time to print your text.

Only **£218** (carr. £7)

Single Sheet Feeder **£195**  
Tractor Feed **£90**



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

### MICROVITEC 14"

- 1431 - Medium resolution as used on the BBC television computer programme **£175**
- 1451 - High resolution, suitable for word processing in mode 0 **£225**
- 1441 - High res, exceeds the capabilities of the BBC micro **£359**
- 1431AP RGB + PAL and AUDIO **£199**
- 1451AP RGB + PAL and AUDIO **£255**
- Dust Cover for Microvitecs **£5.50**

### KAGA-TAXAN 12"

- KAGA KX1201G Hi-res Green Monitor **£85**
- KAGA KX1202G Long persistence Hi-Res Green Monitor **£93**
- KAGA KX1203A Ultra-Hi-Res Amber Monitor **£93**
- KAGA Vision 2 Hi-res RGB Colour monitor. Ideal for Wordprocessing **£260**
- Kaga Super Vision 3, Ultra Hi-res, RGB Colour) Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue **£309**
- 12" Anti-Glare Screens **£9.50**

### PHILLIPS 14"

- Hi res Colour Monitor **£219**

### ZENITH

"Test Bureau Recommended for use in Education"

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith PC Systems.)

Green (New Design) Hi-res **£69**  
Amber (New Design) Hi-res **£74**

### LEADS

BNC Lead for Zenith or Philips **£3**  
Skart Monitor Lead **£5**  
RGB lead for KAGA **£3**

N.B. carriage on Monitors **£7** (securicor)

## SWIVEL BASES

for Video Monitors

By placing your monitor on one of our superb swivel bases, you gain the freedom to adjust the monitor viewing angle to suit your needs. By doing this, you alleviate eye strain and reduce back stress.

for 12" Monitors **£10** (carr. £2.50)  
for 14" Monitors **£14** (carr. £2.50)

## INCREDIBLE WORD PROCESSING DEAL !!!


Watford Electronics, already renowned for quality products at discount prices, are offering, the truly spectacular BARGAIN OF THE YEAR!

A Watford's 32K Shadow RAM Card - Printer Buffer and the much sought after, Computer Concepts' Inter-WORD, (a very powerful package) All this at an astounding price of:

Only **£89** (carr £2)

## 32K

## SHADOW RAM- Printer Buffer Expansion Board

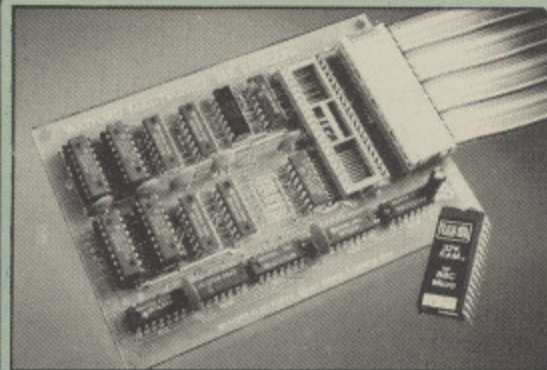

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

● IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

● "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.

● In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

● Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

● Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (\*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

● Ensure COMPATIBILITY with a vast range of hardware (including our ROM board, the ATPL ROM boards, double density boards, second processors), and software (including BASIC, TOOLKIT, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, Music 500's AMPLE). This is because our board, unlike those of our competitors, is connected to the computer by a ribbon cable and has the power consumption of a couple of ROMs!

● Achieve EASY OPERATION with ROM based software. A large range of commands is available for machine code and BASIC users, including some useful \*HELP messages, and a comprehensive manual is supplied free.

● Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

Only **£59** (carr £2)

(Price includes a comprehensive manual and the ROM)

Continued

## Mark II Light Pen

You no longer have to fiddle with the brilliance control or work in the shade as this NEW Mark II Light Pen is totally insensitive to local lighting conditions. It only operates on high frequency light from the TV or Monitor. The red LED Indicator on the Mk II pen, lights up when valid video data is available. Your program can have access to this signal allowing computer verification of target for high res drawing. The conveniently located switch on the pen body allows the computer to ignore any stray signals. Supplied complete with the sophisticated PEN-PAL Software on Cassette or Disc. Please specify.

Special Offer Price: £15

## THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED (BOOK)

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, Canon PW1080A or any Epson FX80 compatible Printer with the BBC Micro, both from Basic and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

Superb Value at £5.95 (No VAT)

## NOW WITH EXTRA FEATURES AT NO EXTRA COST Watford's latest DFS 1.44

- Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
- Option to DOUBLE the speed of BPUT and BGET.

If you already have the Watford Electronics DFS and wish to incorporate these new facilities then simply return your existing DFS ROM to us together with £5 remittance for an upgrade. Please pack the ROM securely and address the package to our Upgrades Dept.

## WATFORD'S & ACORN'S SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for four years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Our highly sophisticated DFS is fully compatible with Acorn DFS).

### PRICES

- Complete Disc Interface Kit including DFS ROM and fitting instructions £62
- Acorn's 0.90 DFS Kit complete £57
- DFS Manual (Comprehensive) (no VAT) £6.95  
(P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs).
- Watford's sophisticated DFS ROM only £16
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only £12
- DNFS ROM only £17 ● ADFS ROM only £25
- Watford's DFS is exclusively available from Watford Electronics and their appointed dealers only. Every ROM carries a special label with LOGO and serial number.

## WATFORD'S DOUBLE DENSITY DFS INTERFACE

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantages of a system that gives 80% more storage per disc in double density mode. P.S. - Please note that not all DDFSs are capable of providing either the full 80% storage increase, or of allowing a file the full size of the disc - Ours allows both of these! Operates both in Single & Double Density modes.

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD & 7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

### PRICES

- Complete DDFS Kit incl. fitting instructions £46
- DDFS Manual (no VAT) £6.95
- We will exchange your existing Single Density DFS Kit for our DDFS Unit at £29

## BBC MICRO BUSINESS/WORD/PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). Please telephone or call in at our retail shop to discuss your particular requirement and a demonstration.

### EXAMPLE PACKAGE

BBC Master 128K Micro, View wordprocessor, Viewsheet, Basic Editor, Terminal Emulator, Twin 800K 40-80 track double sided Disc Drives, Zenith Hi-Res green monitor, Panasonic KX-P3131 professional quality Daisy Wheel printer, Gemini Database, Spreadsheet, Beebplot Graphics, Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements, and Stock Control packages on disc with manuals.

Only £899

A Low Cost wordprocessing package: Same as above except, a single disc drive instead of a twin and Olivetti Spark Jet Printer instead of Panasonic.

Only £625

## MYSTERIES OF DISC DRIVES & DFS REVEALED (BOOK)

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

£5.95 (Book No VAT)

## DISC ALBUMS

Attractively finished in antique brown leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.

£4

## EXTENDED WARRANTY

Now Available  
For BBC, Masters, Disc Drives & Monitors.  
Write or phone for further details

## FLOPPY HEAD CLEANER KIT



The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use.

£8

## ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection -  
Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 - holds upto 50 discs £8
- M85 - holds upto 95 discs £10



## PLASTIC LIBRARY CASES

FOR 5 1/4" DISC STORAGE  
holds 10 Discs. £2.00

## DUST COVERS (For our Disc Drives)

Single CLS (without PSU) £3.20 Twin CLD (without PSU) £3.85  
Single CS (with PSU) £3.95 Twin CD (with PSU) £3.90

## Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our drives are of Japanese manufacture. All our 80 track drives are already fitted with a 40-80 select switch.

All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.


Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below for single drives is for a single drive in a standard single case. Single drive in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!!)

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 10th page of our advert for the Plinths). P.S. All our 5 1/4" Disc Drives are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

**Cable to connect 5 1/4" Disc Drives to BBC Compact**  
Single £9 Twin £12  
**Special Cable to connect 3 1/2" and 5 1/4" Disc Drive**  
to BBC Compact £13

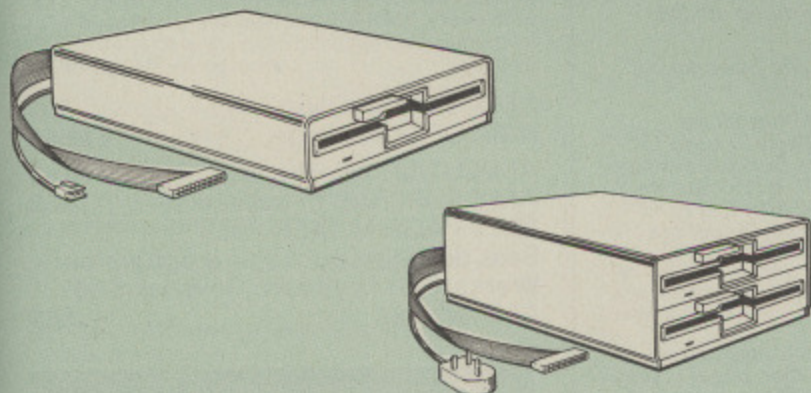

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
200K (360K)	CLS 200 £95		CS 200 £108	
400K (720K)	CLS400S £96	CLD 400 £180	CS 400S £109	CD400 £200
800K (1.44M)		CLD 800S £183		CD 800S £204

● TWIN Disc Drive Case, complete with Power Supply & Cables £43  
Securicor carriage on Disc Drives £5 to £6

Prefix C = Cased Drive  
L = Less PSU  
S = Single  
D = Double

Suffix S = 40-80 Switchable

e.g. CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40-80 track).

## 3M - DISKETTES

Top quality 3M - SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect tabs.

● 10 x 5 1/4" S/S D/D 40 Track Diskettes	£10
● 10 x 5 1/4" D/S D/D 40 Track Diskettes	£12
● 10 x 5 1/4" S/S D/D 80 Track Diskettes	£15
● 10 x 5 1/4" D/S D/D 80 Track Diskettes	£15
● Hi-Density 10 x 5 1/4" 1.6M D/S D/D for IBM	£32
● 10 x 3 1/2" S/S D/D 40/80 track Discs	£20
● 10 x 3 1/2" D/D D/D 40/80 track Discs	£24

## TOP QUALITY 3 1/2" & 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

### DON'T SETTLE FOR LESS, BUY THE BEST

● 10 x M3 3 1/2" D/S D/D 80 Track Discs	£20
● 10 x M4 5 1/4" S/S D/D 40 Track Discs	£9
● 10 x M5 5 1/4" D/S D/D 40 Track Discs	£11
● 10 x M7 5 1/4" D/S D/D 80 Track Discs	£14
● 3" Double Sided Discs	£3 each

## Special BULK OFFER on 5 1/4" DISCS

(Supplied packed in plastic storage Units)  
(Lifetime warranty on Discs)

### BULK PACK DISCS in lots of 100

Type	S-S 40T	D-S 40T	D-S 80T
● Without Sleeves	£46	£49	£72
● With Sleeves	£49	£52	£75

## ACORN WINCHESTER DRIVES

Suitable for direct connection, via the 1MHz bus, to any BBC running ADFS. These Acorn Winchester disc drives are fast and extremely reliable. Each Winchester comes complete with the Level III Econet File Server software. 10 Megabytes £1050; 30 Megabytes £1549

## WATFORD'S WINCHESTER DRIVES


- 20 Megabytes with ADFS £635
- 40 Megabytes with ADFS £999

## WINCHESTER WORKSTATION

20 Megabyte Winchester, plus a Tape Streamer and a 400K Floppy Drive all housed in a plinth with cooling fan £1499

CDP 800S

CDPM 800S

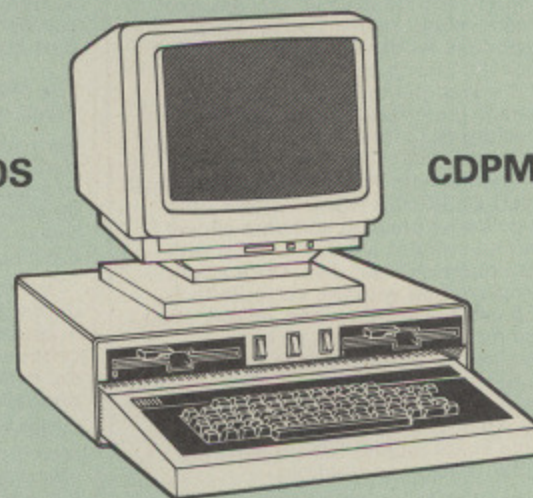

Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £210

CDPM 800S for Master £225  
(Securicor Carr. £7)

## ACORN'S Special Twin 800K Disc Drives

Specially mounted side by side in a Master Plinth. Supplied complete with Manual and Cables. Plugs directly to the Master Computer.

RRP £250 Our Price: Only £199 (carr £7)

## EPSON NLQ ROM for the BBC Micro



Harness the full potentials of your Epson RX & FX Printers. Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type \*NLQ80-100 and a single VDU code to use NLQ print.
- NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
- Single codes select PROPORTIONAL type (yes even on the RX80) ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
- Full UK character set) Standard 'pica size') Proportional spacing; Enlarged; Underlined; Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

**Only: £25**

## VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM. A must for all VIEW and NLQ ROM users.

**£7.00**

(Hi-View compatible)

## THE NLQ DESIGNER

(The First & still the Best)

KAGA KP810-910 and Canon PW1080 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of its particularly strong points is the NLQ option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLQ font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! For the BBC Micro. This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on. Downloadable Fonts require 6264 RAM chip fitted. Now BBC Master compatible.


A 40 or 80 track (please specify) FONT Disc containing 9 Fonts, (Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print and Gothic is now supplied FREE with every package.

(P.S. This ROM is not suitable for Epson printers.)

- NLQ Designer ROM & FONT Disc **£25**
- Kaga Individual FONT ROMs **£15**

(Write in for further details).

## DUMPOUT 3

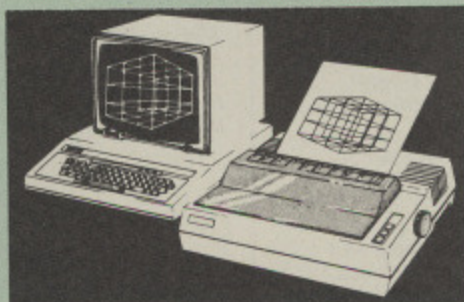

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines (\*GIMAGE - This provides a full graphics dump of any graphics mode, plus modes 7 and '8'. There are many optional parameters but you need only specify the parameters you wish to change.

Features available include:

- Vertical and horizontal scaling through all the graphic modes and mode 7
- Rotation of the image produced through 90, 180 and 270 degrees
- Left hand indentation setting
- Screen dump window definition
- Colour grey scaling
- Two tone fast dump
- Special colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered dumps
- User port switched dumps

What does the independent press say!

Practical Electronics, May 1985  
"The Dump Out 3 ROM from Watford Electronics represents one of the most sophisticated types of printer dump utilities available for the BBC Micro . . .".

"an extremely sophisticated and powerful dump utility".

"VERDICT - Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985.  
"Well, here is that winner"!

"provides) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of BGIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".

"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £25 it must represent excellent value for money and surely cannot be beaten".

Designed for use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Panasonic KX1080, Mannesman Tally etc.

Price including comprehensive manual

**£25**

## MEGABUFFER 256


This new Megabuffer 356 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

- Low Cost, High performance.
- Improves efficiency by making more efficient use of computer and printer.
- Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
- Total compatibility with all software.
- Cheaper phone bills when using your Modems.
- Ideal for those doing large graphics screen dumps that are slow to print.
- Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.
- Data Dump facility is included.
- Built in test unit for both the buffer & your printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

**Only £99 (carr £2)**

## THE AMX MOUSE



Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

**ONLY: £63** (carr £1.50)

We are giving away, absolutely FREE, our popular Colour Art software package worth £15 with every AMX Mouse package purchased from us.

AMX MOUSE ONLY	<b>£35</b>
AMX DESK Package	<b>£19.00</b>
AMX UTILITY Package	<b>£11.00</b>
AMX SUPERART Package	<b>£39</b>
AMX PAGE-MAKER Pack	
Best desk-top publishing software.	
Works with keyboard, joystick and AMX Mouse	<b>£32</b>

We are giving away, absolutely FREE, PAGE-FONTS, a disc containing over 20 fonts, with every purchase of AMX PAGE-MAKER from us.

PAGE-FONTS Over 20 fonts for use with AMX PAGE-MAKER	<b>£9.50</b>
AMX 3D ZICON Disc	<b>£19</b>
AMX Database Disc	<b>£19</b>
AMX XAM Educational	<b>£19</b>
AMX MAX( A gem of desktop (ROM)	<b>£17</b>

## RB2 MARCONI TRACKER BALL

This popular unit is supplied complete with software.


**Price: £50**

## FLEET STREET EDITOR

Software pack **£35**



## DIAGNOSTICS DISC

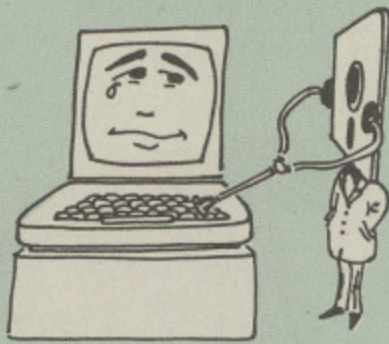

The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is wrong.

At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb: RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

## BBC Publication's Popular Educational Software

- Maths with a Story 1 (Cassette). 4 primary level maths programs **£10.95**
- Maths with a Story 2 (Cassette) 4 further maths programs **£10.95**
- Picture Craft (Disc) 6 - 14 age group. Pack consists of flexible geometrical design & colouring programs **£19.95**
- WAVES: Science Topics (Disc) CSC O Level Physics program. **£14.95**
- RELATIONSHIP: Science (Disc) O Level Biology program. **£14.95**
- BONDING: Science (Disc) O Level Chemistry program. **£14.95**
- ELECTROMAGNETIC SPECTRUM (8 Discs) O Level program. **£14.95**
- ELECTRONICS IN ACTION (Disc) O Level program **£14.95**
- NEWTON & THE SPACE SHUTTLE (Disc) O Level program. **£20**
- ECOLOGY (Disc) O Level program. **£20**
- POLYMERS (Disc) O Level program. **£20**
- Classification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. **£20**
- FOOD & POPULATION (Disc) O Level program. **£20**
- MICROTECHNOLOGY (Cassette) O Level program. **£6.95**
- A VOUS LA FRANCE (2 Cassettes) A French language home study aid. **£17**
- DEUTSCH DIREKT! (Disc & Audio Cassette) **£20**

## TED

### The Teletext Editor Package for serious users

TED is the brand new package from Watford Electronics for the editing and creation of teletext (Mode 7) screens and displays. TED is ideal for anyone wanting to create their own Mode 7 pictures (such as game title pages), designing animated displays for shop windows, exhibitions, classrooms, etc. TED is also probably the most powerful Prestel screen editor you will ever come across.

Supplied on a special 32k package, full facilities are provided for manipulating the screen, including easy to use pixel manipulation; line, column and block buffering and copying; left and right margins; large text in a variety of different fonts (contained within the ROM device); various borders and effects templates (contained within the ROM device); line and column insertion and deletion; easy to use graphics line drawing. Those are some of the features of editor itself. In addition to this, TED contains routines for taking a number of Teletext screens and creating them into an animated sequence, with user selectable display times, repeats on a group of shows, various entry methods (how the picture is put onto the screen), routing selection (both predefined and keyboard specific), chaining of other shows, etc. Scrolls treat the Teletext sequence as a very long page with a window onto it. Supplied complete with a comprehensive manual. There are many more facilities not mentioned here, so write in for a comprehensive leaflet; you'll wonder how you managed without TED.

Price: £35

## ROM-SPELL

"way ahead of any competition"



ROM-SPELL is probably THE most advanced and fastest spelling checker available for the BBC Micro. Printed below are some extracts from a recent independent review (A&B Computing Nov. '85), which we feel sure will convince you that this is THE only spelling checker worth considering.

"The editing system is very neat and simple, instead of replying to queries and beeps all of the time . . ."

"The other feature which places ROM-SPELL way in front of any competition is the ability to examine the user dictionary, so any spelling mistakes that have found themselves on the disc can be examined and taken out if necessary".

" . . . that it is compatible with many of the popular word processors on the market is a good indication that ROM-SPELL is going to be a very popular product indeed".

" . . . ROM-SPELL is by far the best spelling checker for the unexpanded BBC B (with or without word processor). It boasts features which are hard to find on conventional spellcheckers on CP-M and MSDOS, namely Spellstar and has a speed-performance ratio of roughly the same as its CP/M cousin. The difference is that the CP/M version would cost the best part of £500".

" . . . and with such vital house keeping features as an ambiguous word checker, the ability to edit the user dictionary, a comprehensive manual that is both easy to read and actually ENJOYABLE to learn from, . . . I feel confident that ROM-SPELL will woo the word processing public with no problems at all".


Compatible with: View, Wordwise & Wordwise +.

Don't settle for less, Buy the best.

£25

(Not compatible with 1770 DFS)  
(Please state 40 or 80 track disc)

## ROM MANAGER

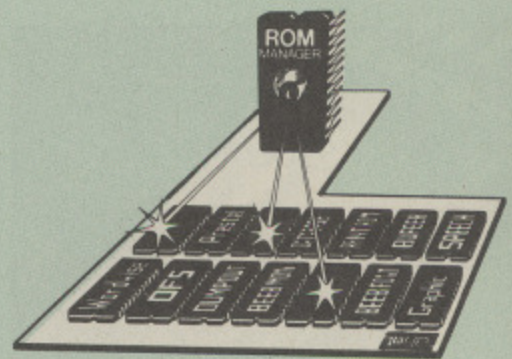

Probably the most powerful way of expanding the BBC micro is from the use of Sideways ROMs. One problem faced by the avid ROM collector is that of ROM command clashes. The solution is very simple in the form of the ROM that "Provides comprehensive management of all your installed ROMs". (Quote from BEEBUG November '84.)

Basically, ROM Manager offers you the ability to turn off any installed ROM, or to send any \* command to any specific installed ROM. It is said that imitation is the sincerest form of flattery - Acorn's BBC Plus features many of the abilities of this powerful ROM.


Many more facilities available.

SPECIAL OFFER £20



CREDIT CARD 24 HOUR  
Ansaphone Hot Lines  
(0923) 50234-33383

## COPY HOLDERS

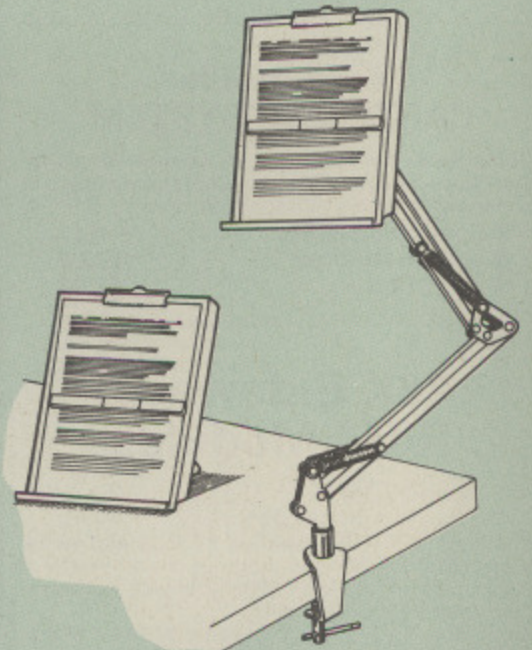

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.


Available in 2 versions, desk resting and shelf clamping versions, these two units hold your paper firmly by means of a magnetic ruler and a clip grip.

Amazing value at only  
Desk Top **£10** (carr. £2)  
Angle poise **£14** (carr. £3)

All prices in this advert are exclusive of VAT.

Continued

## SIDEWAYS ZIF SOCKET

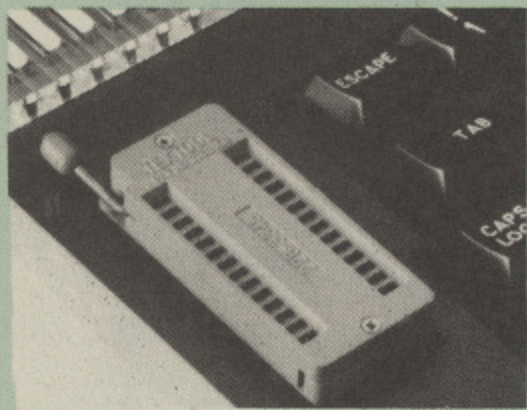

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

- Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.

- The low profile of the socket allows unrestricted access to the Keyboard.

- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

- This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

- BBC, B+ and Master compatible.

**ONLY £15 (carr £2)**

## Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack.

- Complete System **£11**
- Spare Cartridges **£2.50**
- Spare Rack **£1.50**

## 16K Sideways RAM Modules

Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector. Key points to note about this new addition to the Watford range of products are:

- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.

Only: **£29 (carr £2)**

### Optional extras

- READ and WRITE protect Switches **£2 each**
- Battery for Battery Backup **£3**

## 16K DISC RAM

Unlike other RAM boards, this revolutionary, battery backed up, write protectable 16K sideways RAM board allows you to run from disc every sideways ROM available.


Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM in conjunction with our Buffer & Backup ROM.

**New Low Price: £32 (carr £2)**

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

## SOLID STATE 16K SIDEWAYS RAM

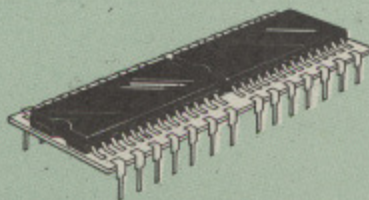

This new unit from Watford, which utilises the latest in Static RAM technology, offers 16k of easy-fit sideways RAM in a very compact unit with a footprint no larger than a standard 28pin EPROM. With only a single flying lead terminating in a mini hook-on probe, to fit, (no soldering required) this compact unit works with any BBC Micro with or without a ROM board. **Compatible with BBC B Plus.** Like our other 16K RAM Modules, this unit is very simple to fit.

Only **£28 (carr 2)**

Supplied complete with comprehensive software on Disc, Operating and fitting instructions.

Do you find the 16K Sideways RAM Units confusing? If so, we have compiled this quick questionnaire to help YOU decide which is the best one for you. If the answer to any of the questions is yes, then use the index number to select from the boards below. Options in brackets indicate possible secondary choices.

Do you require:

- Sideways RAM for a BBC B+ Choose 1, 2 or 3.
- Sideways RAM for the B+? Choose 3.
- A small, basic module? Choose 3.
- A sideways RAM module for a ROM board? Choose 1 or 3.
- An easy to use utilities disc? Choose 1, 2 or 3.
- More than one module installed at once? Choose 1 or 3.
- To use sideways RAM as a printer buffer? Choose 1 or 3.
- Battery Backup? Choose (1) or 2.
- Write protect for RAM (makes ROM look like RAM)? Choose (1) or 2.
- Read protect (allows recovery from crashes)? Choose 1.


Key:

- 1) 16k Sideways RAM Module
- 2) 16k Disc RAM
- 3) Solid State 16k Sideways RAM

## GRAPH PAD 2

Supplied complete with Software **£60 (Carr. £3)**

## SOLDERLESS SIDEWAYS ROM SOCKET BOARD

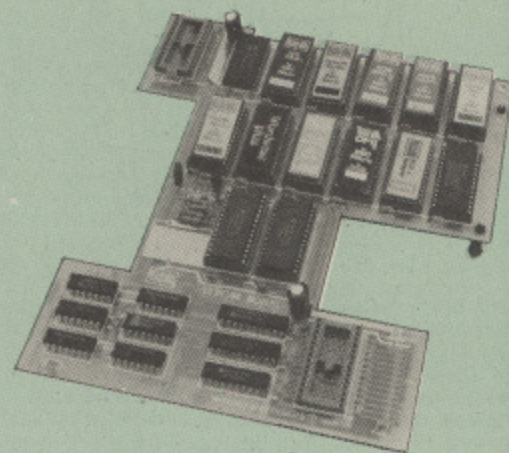

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others - not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)

- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:

- Increase your BBCs capacity for ROMs from 4 to 16.
- **No soldering required.**
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish" allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

**Price: Only £32**  
Battery backup fitted **£36**  
(carriage £2)

**NEW**

## The BBC B+ Micro ROM EXPANSION BOARD

Specially designed for all BBC Plus users, this board sits in an external box, and will accept either 10 off 16k EPROMs, OR 10 off 32k EPROMs.


With the 32k EPROMs, only 5 can be 'online' at once (that's all the B+ can address, as each chip 'holds' two normal sockets worth), but you can swap between the two banks if necessary. With the 16k EPROMs, you can obviously address them all at once. An extra card can be added to permit 2 banks of 10 EPROMs to be used (again with only one bank available at once).

The ROM box, which has its own mains power supply, and connects to the BBC Plus via a specially designed card (which is a buffered card for your peace of mind) permits easy access to the EPROMs via the hinged lid. NO soldering is required for this board.

**£79 (carr £2)**

## Watford ROM/RAM CARD

A must for all serious users

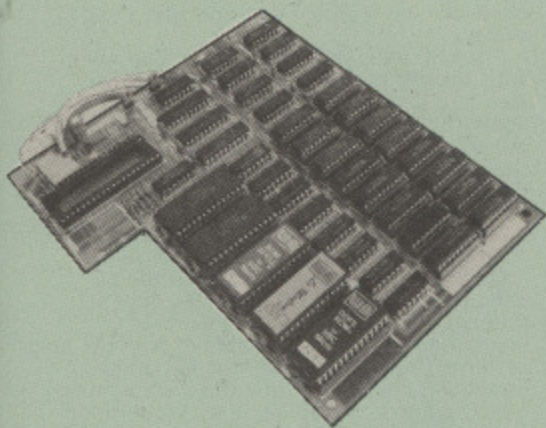

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD &7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

### INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM .....£39
- ROM/RAM card with 64k dynamic RAM .....£52
- ROM/RAM card with a massive 128k dynamic RAM .....£80

(carriage on ROM-RAM Card £3)

### OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit.....£6
  - 16k Dynamic RAM for Upgrade.....£7.50
  - Battery backup.....£3
  - Read and Write protect switches.....£2 each
- Complete ROM-RAM board  
(all options installed).....£89

## Le Modem



### The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.


The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
  - Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
  - Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
  - Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
  - Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELE-SOFTWARE to be downloaded.
  - A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
  - FULLY controlled by simple \*COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
  - Connects to the 1MHz bus. A \*AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
  - Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A \*TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
  - Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
  - FREE Registration to MicroLink.
  - BT Approval applied for.
- (When ordering, please specify the version required, (BBC or Master))

### SPECIAL OFFER

Price: **£74**  
(carr £3)


(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)  
(Write in for further details)



## Nightingale Modem

SPECIAL PRICE to our Customers


**£85**



(Price includes: Nightingale Modem, Commstar ROM pack, Cables & Comprehensive manual)

- Nightingale Modem without software Only £87
- COMMSTAR ROM package only £29  
(P&P on modem £2.00)
- Auto Dial Utilities Disc £9.50

## APOLLO



### The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard) we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BAPT approved.
- FREE Registration to MicroLink.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution - Buy a Watford APOLLO!

Special Launch Price: **£75**  
(Carr £3)  
(Write in for full specification)

### BT TELEPHONE CONNECTORS

LJU 1/4A Mini Line Master	£4.50
LJU 1/6A Mini Line Slave	£3.00
LJU 2/4A Line Master	£4.00
LJU 2/6A Line Slave	£2.50
LJU 3/4A Flush Master	£3.95
LJU 3/6A Flush Slave	£2.75
LJU 10/3A Dual Splitter	£5.50
4 Way BT Plug	£0.75

### Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32 (carr £2)

Continued

## COMPUTER CONCEPT'S ROMS

ACCELERATOR	£48
CARETAKER Basic Utility	£25
DISC DOCTOR	£28
Graphics ROM	£23
TERMI	£25
COMMUNICATOR	£49
SPEECH ROM	£24
Printmaster	£24

## Wordwise

£24

## Wordwise plus

### WORDWISE PLUS £40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

## Word-Aid

### The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text-segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

### HI-WORDWISE-PLUS

Supplied on disc. This version requires a WORDWISE-PLUS ROM to be present in the machine. It gives up to 44k of text space on the 6502 2nd processor.

£5

## Inter SHEET ONLY £37

## INTER-CHART ONLY: £26

## Inter-WORD

Only: £42

Special Discount price for the existing Wordwise Plus owners. Simply quote your reg. number and pay.

Only: **£39**

All Prices Exclusive of VAT

## VIEW

VIEW WORDPROCESSOR 2.1 £37

### VIEW 3.0 ROM

Price: Only £54

HI-VIEW £36  
(for use with 6502 2nd Processor)

VIEW Printer Driver Generator £9  
Please specify Disc or Cassette)

VIEW SHEET (Acornsoft) £37

VIEWSTORE £37

VIEWSPELL with 80 track disc £29

VIEWPLOT Disc £22

VIEW-INDEX £12

### Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

Only £10

### VIEW DRIVERS FOR JUKI & BROTHER HR15 PRINTERS

Only £10

### VIEW-VIEW SHEET PRINTER DRIVER for SILVER REED

(Officially approved by Silver Reed)

Only: £10

MINI OFFICE II (disc) £14.50

## REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£13 (40 or 80 track)

النور

## ARABIC ROM for the BBC Micro

The ALNOOR ARABIC ROM converts your BBC into a bilingual computer. New keytops provide both English and Arabic symbols. Two sets of Arabic symbols are provided for use in either context sensitive or insensitive operation.

20, 40 and 80 column operation. Compatible with ASMO (449). English-Arabic printer interface software. Numeric entry from either left or right of number. Communications software to send or receive 7 or 8 bit data.

Different shapes of Vowels (e.g. Shadda, Fatha, etc). Different shapes of Hamza. Full English and Arabic character sets with all special characters.

£85

(Price includes Alnoor ROM, Operating Manuals & a full set of Arabic/English Keytops)

## VIEW PRINTER DRIVER ROM

(Professional facilities for demanding users)

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.

The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, LX, JX80 range, HI80, KP810/910, PW1080, JP101, HR15, M1009, GLP, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features).


NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. LPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute \* command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33



CREDIT CARD 24 HOUR  
Ansaphone Hot Lines  
(0923) 50234-33383



## THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only £20

## ROMAS

### THE CROSS ASSEMBLER AND MACRO EDITOR FOR SERIOUS PROGRAMMERS!

ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8 P.S. This includes the Acorn 6502 & Z80.

A give away at . . . Only £29

Please specify 40 or 80 track disc when ordering.



18 mon  
develop  
success  
the rev  
generat  
RAM an

Like t  
shadow  
Unlike t  
comma  
the RAM  
sideway

With  
of RAM  
Lisp an  
The bus  
ViewSh  
applicat  
scientific  
data sto

Sidew  
ROM im  
large lib  
copyrig  
The B32  
extend  
the prin  
a disc s

The B  
socket  
connect  
board R  
control  
existing

This bo  
install,  
compat  
B-32. F  
the com  
with the  
where i  
The ser  
hobbyis  
externa  
for exp  
force (Z  
enhanc

The E  
ROM so  
are rep  
fully ac  
system  
sideway  
6264 st

The  
detacha  
extensi  
board'  
the exis  
board o  
previou  
cable b

If you  
adaptor  
a nomie  
to prov  
elsewh

Ari

Aries B  
into CP  
Aries B  
into all  
connect  
Aries B  
are not  
Aries B  
into 1M



## ARIES CORNER

### Aries B-32 Shadow RAM Card

18 months of intensive research and development have produced a worthy successor to the widely acclaimed Aries-B20: the revolutionary Aries-B32. This 'second generation' expansion board features 32k of RAM and a 16k ROM socket.

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved \*FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the processor socket on your BBC micro - no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

Price: B-32 **£80** (carr. £2)

### Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries B-20 and the Aries B-32. For the business user or educationalist, the compact and secure internal fitting is ideal, with the ROM board tucked neatly inside the lid where it will not cause overheating problems. The serious software developer and the hobbyist may prefer to mount the board externally, giving instant access to the sockets for experimental purposes. A zero-insertion force (ZIF) socket may be fitted to the board to enhance this mode of operation.

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable 'mother board' which carries the extension ROM sockets and a small 'base board' on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have an B32 or B20, a small adaptor module (the Aries B-12C) is available at a nominal cost. The 6264 static RAM chips used to provide the sideways RAM are advertised elsewhere in our advert.

Price:  
Aries B-12 **£40**. Aries B-12C **£5**

### THE ARIES RANGE HARDWARE REQUIREMENTS

Aries B-32 & BBC B, MOS 1.20, hardware plugs into CPU socket.

Aries B-12 & BBC B, MOS 1.20, hardware plugs into all four sideways ROM sockets and connects to the B32 or the B20. The adaptor Aries B-12C module is necessary where these are not fitted.


Aries B-488 BBC B, MOS 1.20, Hardware plugs into 1MHz Bus.

### ARIES B-488 IEEE-488 INTERFACE UNIT

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.

Aries B-488 Unit: **£238** (Carr £3)

### OFFICE MASTER



**CASHBOOK** - A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

**FINAL ACCOUNTS** - Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet.

**MAILIST** - A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.


**EASILEDGER** - A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

**INVOICES & STATEMENTS** - Greatly reduces the time and cost of preparing Invoices and Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

**STOCK CONTROL** - Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

All this for only **£21**

(Cassette or Disc)



### OFFICE MATE

- DATABASE
- BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS
- WORD PROCESSOR

**DATABASE** - Set up a computerised "card index" system and add records/data to the file your way. Features include search, sort, mathematical calculations, printer routines, data summaries, etc.

**SPREADSHEET** - Offers a wide range of invaluable calculation and editing features. Beebplot will take files created by Beebcalc to provide data portrayal in graph, histogram or pie chart format.


**BEEBLOT** - Provides an easily assimilated visual representation of numerical data.

**WORDPROCESSOR** - Provides many routines found in large and expensive packages.

**OFFICE MATE Only £10**

(Cassette or Disc)

### PLINTHS FOR BBC MICRO, MASTER & PRINTERS

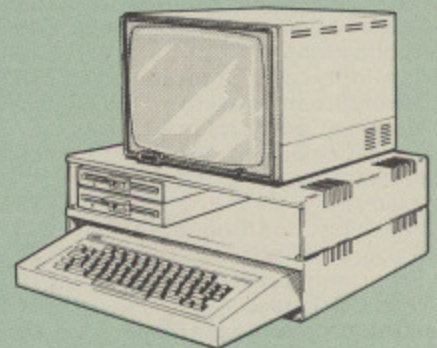

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	<b>£11</b> (carr. £1.50)
DOUBLE BBC PLINTH	<b>£20</b> (carr. £2.00)
PRINTER PLINTH	<b>£10</b> (carr. £1.50)
SINGLE MASTER PLINTH	<b>£14</b> (carr. £1.50)
DOUBLE MASTER PLINTH	<b>£25</b> (carr. £2.00)

### THE EUREKA CARD

(The Unique RAM Expansion System)

The Eureka Card is Watford's latest and most sophisticated RAM expansion system. Using advanced PAL based technology this card is a breakthrough in RAM systems for the BBC micro. The Eureka Card provides the user with around 58K of free memory in Basic, VIEW and WORDWISE PLUS. You also get Shadow RAM from within the active language. No other RAM expansion system can match that!

Load up to 58K long Basic programs. Texts in VIEW and WORDWISE PLUS up to 58K as well. This with absolutely NO loss of speed in accessing your text or program. Eureka consists of a card containing 64K of program memory, two parallel banks of sideways RAM and some extremely complex switching circuitry. This is all controlled by Eureka's highly sophisticated software supplied in ROM. Designed to a very high specification, this board is fully buffered to give reliable operation under virtually any circumstances.

The Eureka board plugs into the 6502 socket and has NO messy flying leads. It is compatible with many other products from Watford, such as our Solderless ROM Board and our ROM/RAM Board. All in all, the Eureka Card is an amazing board. Jump into the age of serious data processing with a Eureka Card! Please write in for further details 'on advantages the Eureka can offer you'.

Introductory price: Only **£89** (carr £3)

(P.S. Eureka is only suitable for a standard model B; it normally replaces any Shadow RAM cards present. Some speed degradation does occur with filing system access. Eureka cannot be used at the same time as a second processor).

### BEEBMON

The most powerful machine code monitor for the BBC Micro **£24**.


Continued



**BOOKS (No VAT on Books)**

15 Hrs Word Processor Using BBC	£3.95
30 Hour BASIC (BBC Micro)	£7.95
40 Best machine Code Routines	£7.95
6502 Assembly Language Program	£19.95
6502 Application	£11.95
6502 Assembly Lang. Subroutines	£19.95
6502 Development System	£7.50
6502 Machine Code for Humans	£7.95
6502 Reference Guide	£9.95
68000, Assembly Lang. Programming	£19.95
68000 Machine Code Programming	£13.00
68000 Programming the	£22.95
6809, Programming the	£16.95
Art of Music Graphics	£14.95
A User Guide to Wordwise Plus	£9.95
A Young persons Guide to BBC Basic	£5.95
Advanced Disc User Guide	£16.95
Advanced BASIC ROM User Guide	£9.95
<b>Advanced User Guide for BBC</b>	£15.95
Advanced Graphics with BBC	£9.95
Assembly Language Programming on BBC Micro	£11.50
Adventure into BBC BASIC	£6.95
Applied Assembly Lang. for BBC	£9.95
Assembler Routines for the 6502	£7.95
Assembly Language Programming FOR the BBC Micro	£8.95
Assembly Language Programming on the BBC & Electron	£8.95
Basic ROM User Guide	£11.95
Basic User Guide for BBC Micro	£10.00
BBC B Compendium	£5.95
BBC B+ User Guide	£14.95
BBC BASIC for Beginners	£7.95
BBC Forth	£7.50
BBC Hardware Projects	£8.95
BBC Micro & the small Business	£5.75
BBC Micro ROM Book	£10.95
BBC Master 128 High Flyer	£10.95
BBC Micro Advanced Ref. Guide	£10.95
BBC Micro Disc Companion	£8.95
BBC Micro File Handling on	£6.95
BBC User Guide	£10.00
BBC Software Projects	£6.95
BBC Wordprocessor Beginners Guide	£7.95
BBC Within the Micro	£13.95
BCPL User Guide	£14
Complete FORTH	£6.95
CP-M - 86 User's Guide	£19.95
CP-M Bible	£16.50
CP-M Handbook with MPM	£9.95
CP-M Plus Handbook	£13.95
CP-M Soul of	£16.50
CP-M The software BUS	£8.95
Creative graphics on BBC Micro	£7.50
Disc Drive Projects for Micros	£5.45
<b>DISC FILING SYSTEM (DFS)</b>	
<b>Operating Manual for BBC</b>	£6.95
Disc Programming Techniques	£9.95
Disc System for the BBC Micro	£6.95
Exploring FORTH	£6.95
FORTH on the BBC Micro	£7.50
Functional Forth for the BBC Micro	£5.95
Guide to BBC ROMs	£9.95
Graphs & Charts on BBC Micro	£7.50
Hackers Handbook - New	£6.95
Interfacing & Robotics on BBC	£15.95
Into View	£4.50
Introduction to COMAL	£9.50
Introduction to LOGO	£6.95
Introducing 'C'	£9.95
Introducing LOGO	£5.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£17.95
ISO - PASCAL Reference Manual	£9.95
LISP 2nd Edition	£14.95
LISP, A Beginners Guide to	£10.95
LISP the Language of Artificial Intelligence	£9.95
Logo Programming	£9.95
<b>Mysteries of DISC DRIVES and DFS REVEALED</b>	£5.95
Mastering Assembly Code	£8.95
Mastering CP-M	£17.95
Mastering Music	£6.95
Mastering the Disc Drive	£7.95
Master Advance Reference Manual	£19.95
Master Reference Manual Part 1	£14.00
Master Reference Manual Part 2	£14.00
Micronet Handbook	£6.95
Points of View	£6.95

Programming the 6502	£16.95
Programming the Z80	£19.95
Structured Basic	£7.95
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
<b>The Epson FX-KAGA PRINTER Commands REVEALED</b>	£5.95
Turtle Graphics on BBC Micro	£7.50
Using Floppy Discs with BBC Micro	£5.95
View 3.0 User Guide	£10
View Guide	£4.50
Viewsheet User Guide	£10
Viewstore User Guide	£10
Using BBC Basic	£4.95
Wordprocessing BBC Beginners Guide	£7.95
Wordstar & CP/M made easy	£7.45
Wordwise + A User Guide	£9.95
Z80 Applications	£15.95
Z80 Assembly Language Programming	£19.95
Z80 Reference Guide	£9.95

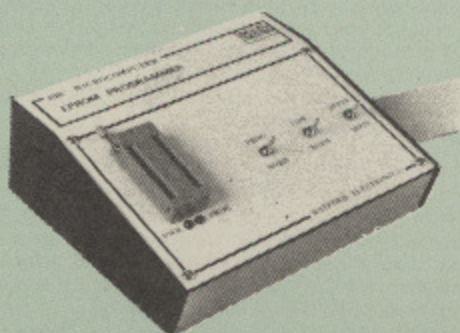**EPROM PROGRAMMER**

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

**SOFTWARE PACKAGE**

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette-disc loading). It is a fully purpose designed and integrated package to simplify ROM development. The system is menu driven with many prompts to avoid any accidents.

**Software facilities include:**


Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming.

Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the \*ROM filing system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

**SPECIAL OFFER £69 (£3 carr.)****TEX EPROM ERASERS**

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- **ERASER EB** - Standard version erases up to 16 chips. **£28 (carr £2)**
- **ERASER GT** - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30 (carr £2)**
- Spare UV tubes. **£9**

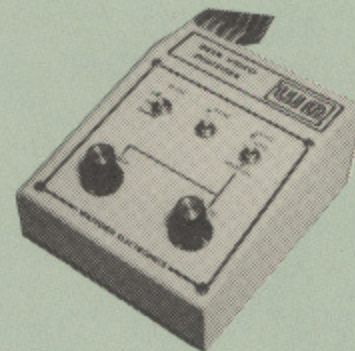**BEEB VIDEO DIGITISER**

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional \* commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

**£109 (Carr. £3)**

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual)  
(BBC B+ and Master compatible, except Master with Econet)

**Magazine Maker**

(As seen on TV)

A combination of the AMX Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within AMX Pagemaker to illustrate magazines or newsletters - in fact anything that needs to be created on A4 size paper.

With Pagemaker's many features, a variety of pictures can be composed - the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.

**Complete Package £129.00 (carr. £3)**

### VOLTMACE JOYSTICKS

Delta 3B Single Joystick	£10
Delta 3B Twin Joysticks	£16
Delta 14B Single Joystick	£12
Delta 14B/1 Adaptor Module	£12
Transfer Software Disc-Tape	£7

### ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.  
Price: **£2**

## ACORN MUSIC 500

BBC B, B+ & Master compatible.

You too can acquire this music package that has already thrilled thousands, for:

**ONLY £49 (carr £3)**  
(included FREE with every unit, 'MU-500' software disc worth £6)

### ATTACHE CARRYING CASE for BBC Micro

This attache carrying case is attractively finished in mottled antique brown leatherette. An ideal and safe way of carrying your BBC Micro around. Supplied with two Keys.  
Price: **£13 (£2 carr.)**

28pin ZIF SOCKET (Textool)	£6.95
<b>28pin DIL HEADER PLUG</b>	
SOLDER type	£1.50
IDC CRIMP type	£1.95

### SPARES for BBC Micro

Keyboard	£46	Keystrip	£2
UHF Modulator	£4	Case	£25
Speaker Grill	£1	Speaker	£2
Power Supply	£59	Keyswitch	£1.50

### Replacement FLEXIBLE 17 way Keyboard Connector £3

### 8 WAY DIP SWITCHES

With these DIP switches soldered to their keyboard, any BBC B or B+ owner can take full advantage of the fast disc drives that we supply by configuring his BBC for fast disc drive operation.

Excellent value for money at **£1.00**

### CONNECTING LEADS

(All ready made and tested)	
CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

**DISC DRIVE POWER LEADS**  
Supply from BBC power supply to standard Disc Drive connector.  
Single **£3.00** Dual **£3.75**

**DISC DRIVE INTERFACE LEADS**  
BBC to Disc Drives Ribbon Cable  
Single **£4** Twin **£6**

### MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	80p	200p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-
6 way Power Connector	-	95p

## Watford Dealer's List

### UNITED KINGDOM

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Cirkit Distribution Ltd, Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

Dennis Spitz Computers Inc, 86 Golders Green Road, London NW11.

Farnell Electronics, Canal Road, LEEDS LS12 2TU. Tel: 0532 636311.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel: 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Rainford Industrial Estate, Mill Lane, Rainford, St. Helens

Pearl Computers Ltd, St. Georges Street, Huntingdon Cambs.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

### OVERSEAS DEALERS

\*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong, Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, B09300 Aalst, Belgium.

E.B.N., Eisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.S., Zilversmidstraat 2, B-2000 Antwerpen, Belgium, Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 Kobenhavn K, Denmark

\*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland, Tel: (010) 413 8197/414 5171.

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark, Tel: 08 642522

\*Acorn/Watford Referral Centres.

## Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro & Master with the Viglen console unit.


BBC **£42**; Master **£51** (carr. £4)

### SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£6.99**

### 4 WAY MAINS DISTRIBUTION SOCKET

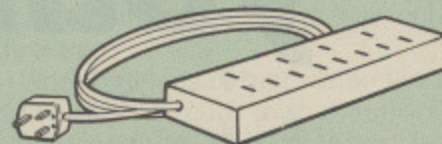

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug.

**£8.95** (carr £1.50)

Now also available with a built-in surge Arrester, providing Protection for your complete system.

**Spikes Cleaner Unit: £12.50** (carr £1.50)

### CHIP SHOP

8271	£36		
DS3691	£3.50		
DS88LS120	£5.25	Acorn OS 1.2	£14
LM324	£0.45	Acorn OS B+	£25
SN76489	£5.50	Acorn BCPL	£42
SAAS050	£8.75	BCPL CalcPack	£15
UPD7002	£4.40	BCPL Stand Alone	
2764-250nS	£2.50	Generator	£36
27128-250nS	£2.75	Basic Editor	£22
27256	£3.95	ULTRACALC	£52
27512	£13	BROM Plus	£32
4013	60p	Buffer & Backup	£20
4020	£0.90	Beebmon	£22
4464	£8	Beebfont	£25
4816RAM	£1.75	Acorn COMAL	£36
6264LP-8K		Acorn FORTH	£32
RAM	£3.00	Acorn Graphics	£25
6502ACPU	£4.75	Graphics Extension Rom	
65C023M	£9.75	GXR-B	£21
65C12	£9	GXR-B+	£22
6512A	£10.00	Acorn LISP	£35
6522	£3.40	Acorn LOGO	£42
6522A	£5.00	ISO Pascal	£42
6845SP	£6.00	ISO-Pascal Stand	
68B50	£2.95	Alone Generator	£30
7438	40p	ICON Master	£28
74LS00	25p	Logotron LOGO	£45
74LS04	25p	Micro Prolog	£62
74LS10	25p	Microtext Disc	£48
74LS123	80p	Mini Office ROM	£47
74LS163	70p	ROMIT	£29
74LS244	80p	SerialULA	£13
74LS245	£1.00	VideoULA	£15
74ALS245	£2.75	TERMULATOR	£25
74LS373	£1.00	MUROM	£21
74LS393	£1.00	SLEUTHROM	£23
75453	70p	STUDIO8 Disc	£18
		Toolkit Plus	£31
		Communicator	£49
		Disassembler	£16
		HelpII	£27
<b>ASSORTED ROMS</b>			
ACORN BASIC 2	£19		
ACORNADFS	£25		
ACORNDFNS	£17		

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome. Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £2 on Larger items.

On bulkier items, £7 Securicor charge applies. Overseas orders, carriage is charged at cost.

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

## Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND  
Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989



# Plug into your Jag

FOR some time now people have been asking me to provide a method of powering the BBC Micro from a car battery. Most people who ask assume that it is a simple matter – after all there are integrated circuit voltage regulators available so why not simply use one of those?

Well to be honest it is not as simple as that and I knew it, hence the reluctance. Also I was a little wary about the liability which might be involved in producing such a kit.

After all, unlike any of my previous projects, the potential to damage your computer is there.

However, I was galvanised into action by yachtsman Peter Pederson, who phoned me one Thursday to request just such a device. I asked him when he was sailing and when he said "Tuesday", I swung promptly into action.

To begin with the BBC Micro has a power supply capable of delivering three different voltages, 5V, -5V and 12V.

In fact the computer only needs the first two to operate and you can even do without the -5 volt supply if you don't want the sound, tape storage and serial ports.

So let's look first of all at how to supply the +5V and we can worry about the other voltages later.

A car battery is nominally 12V but it

can range between 13.5 and 9V depending on its state of charge. This must be reduced to a stable 5V as computer circuitry can only work between 4.75 and 5.25V.

The simplest way to reduce the voltage is shown in Figure I. This is just a resistor in series with the computer: if we choose the value correctly it will drop the excess voltage and leave 5V for the running of the computer.

Those of you not already convulsed with laughter will not be surprised to know that when someone once asked me to calculate the resistor value for them I declined.

This simple method will not work for many reasons, the main one being that the computer does not draw a constant amount of current.

The current demand of the computer changes during every part of the clock cycle so for this system to work we need to make the resistor variable and to make it change it in sympathy with the computer's changing demands.

Of course this is impossible simply with a resistor but we can do something similar with a transistor.

Figure II shows the basis of a simple transistor series regulator. The transistor is working in the common emitter mode and this is sometimes called an

emitter follower.

The name tells you how it works: Whatever voltage you place on the base, the voltage on the emitter follows it.

In fact the emitter voltage is always 0.7V lower than the base voltage due to the forward voltage drop on a silicon junction.

But if the voltage is constant and the emitter's load (our computer) varies then the transistor must pass a variable amount of current in order to keep the emitter voltage constant.

The transistor will have a current gain so the current we need to supply to the base is small compared to that the emitter will supply.

Figure II shows a zener diode supplying a constant base voltage. For those who have not met them, zener diodes have a predictable, and almost constant, forward breakdown voltage and they are often used for small current power supplies.

Most voltage regulator ICs are based on the series transistor principle and you can quite easily get devices that will pass the 3 amps required to power the BBC Micro.

However, a closer look at these devices reveals that although they will pass the current they will not handle the power dissipation.

If we have 13.5V being reduced to 5V then the difference (8.5V) is dropped across the series regulator. This, coupled with the 3 amp current, results in a 25 (8.5x3) watt power dissipation.

That is as much power as most soldering irons and it is not easy to get a device to dissipate that much heat, so the series regulator solution is not very practical.

Incidentally, using a series regulator it would be impossible to generate the negative voltage needed.

The modern solution to low voltage, high current power supplies is the switching regulator – there is one inside your computer already.

This uses a high voltage, low current mains transformer and converts it into a low voltage, high current source for your computer. To see the principle look at Figure III.

If the switch is closed the voltage on

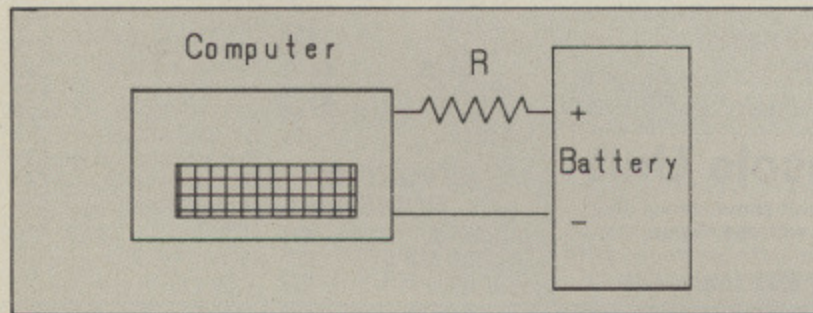


Figure I: Simple minded approach

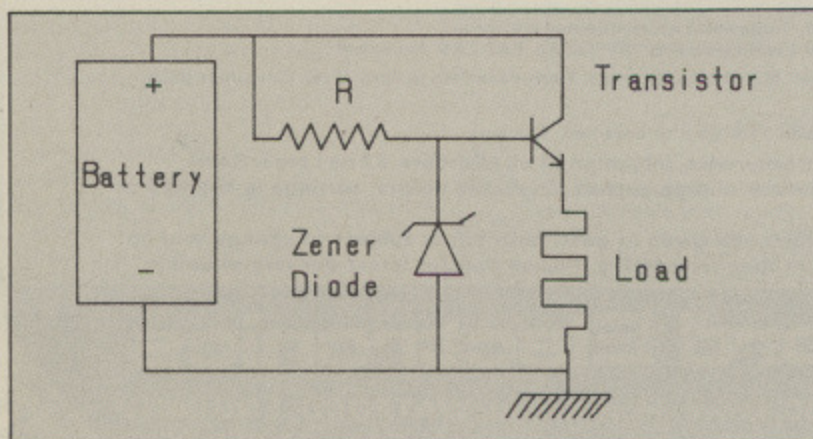


Figure II: Simple series regulator

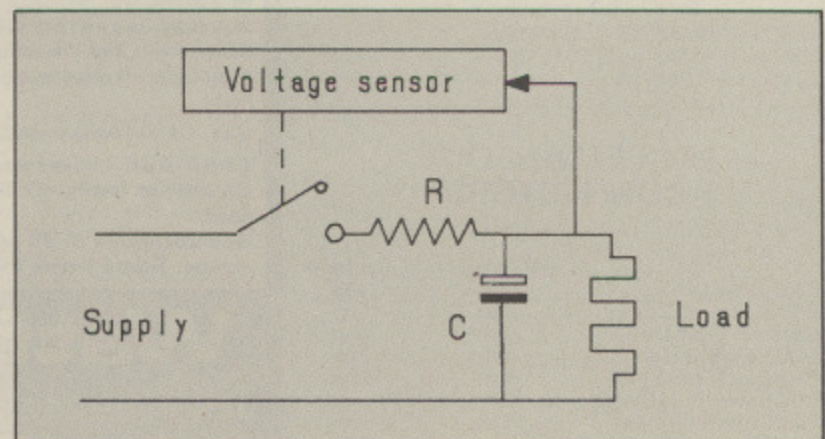


Figure III: The principle of a switching regulator



the capacitor will start to rise. Eventually it would reach the same value as the input voltage but what we do is to measure the voltage rising and when it reaches the value we want we turn the switch off.

What happens then is that current drains out of the capacitor into the load and the capacitor voltage drops. We sense this and give the switch a quick dab on to raise the voltage again. If we do this fast enough we can maintain a steady voltage.

In practice the use of a resistor would absorb too much power and so we use an inductor. This has the property of resisting rapid changes in current while it maintains a low resistance.

Hence we get a voltage rise on the capacitor slow enough to measure and feed back the signal to control the switch. Figure IV shows the basis of a practical switching regulator.

The transistor T1 is turned on and off at a fixed frequency but the ratio between the on and off times is constantly being changed by a pulse width modulator.

**'The switching transistor will dissipate comparatively little power'**

This is fed an error signal derived from the difference between a reference voltage and what is actually being produced at the output.

You will notice that we have also added a diode in the circuit. This is because when you suddenly switch off the current from an inductor, the magnetic field it created collapses and generates a reverse voltage. The diode catches this and allows recirculation current to flow.

The eagle-eyed among you might be saying, "It's all very well but we still have a transistor passing all the current". This is true but now the transistor is either on or off.

When it is off there is lots of voltage across it but no current through it: When it is on there is lots of current flowing but very little voltage dropped across it.

As the power dissipation is given by the product of the voltage and current you can see that the switching transistor will dissipate comparatively little power.

Compare this with the series regulator where the transistor was half on and half off, acting effectively like a variable resistor.

There are a number of integrated circuits available to aid the construction

# THE BEEB BODY BUILDING COURSE

of a switching regulator.

When I was searching for a device to use, the L296 from SGS caught my eye because it contained nearly all the components required to make a high current regulator — in one package. While it's not cheap, it is reasonably priced for what it does.

The circuit of a battery powered BBC Micro supply regulator is shown in Figure V. A quick glance will reveal that it will supply the -5V as well as the +5V.

This is achieved by winding an extra coil on the inductor and in effect making a transformer. The voltage is then rectified with a simple diode and capacitor.

The regulation (stability of voltage with increasing current) is not as good as the +5 volt side but then in the BBC Micro it does not have to be.

The oscillator is set to run at 100KHz by R1 and C1 and the stability of the feedback loop is controlled by C2, C3 and R2.

There is a soft start mechanism that slowly applies the power to your computer and the time taken to achieve full power is controlled by C4.

On the output side, D1 is not just any old diode but a very fast Schottky power diode. If you used a slow diode then the charge storage could build up a high voltage and cause reduced efficiency and excess power dissipation.

T1 is a safety device — a Silicon Controlled Rectifier (SCR) which can protect

against over-voltage. An SCR is normally like an off switch but when a small voltage is applied to the base it turns on.

The point is that it remains on even when the gate signal is removed. The only way to turn an SCR off is to reduce the current through it to zero or below.

Incidentally, a current below zero is just a current flowing in the opposite direction.

What happens is that inside the L296 there is a circuit that monitors the output voltage. If it is larger than it should be, it generates a voltage on pin 10.

This fires the SCR and it shorts out the output thus preventing the excess voltage being applied to your computer and damaging it.

You will only get an over-voltage output when the switching transistor of the L296 is permanently closed. The SCR is chosen so that it will withstand this short circuit current and the only device to blow will be the L296.

This is infinitely preferable to blowing all the chips in your computer and anyway it will probably only be triggered when the L296 is faulty.

To protect itself from excess current the L296 has a current limiting mechanism. Current flowing through it is passed through a resistor and the voltage across that resistor is monitored.

When it exceeds a certain value, the switching transistor is turned off. This will cause the current to rise again but, due to the soft start mechanism, this happens slowly.

So that under short circuit conditions the maximum current flows and triggers the over-current sensor, the current then drops to zero and the soft start mechanism slowly ramps up the current until the limit is reached.

This means that the average current flow during short circuit conditions is considerably less than the maximum.

To turn the power on and off you can switch the battery lead. However, this

Turn to Page 98 ►

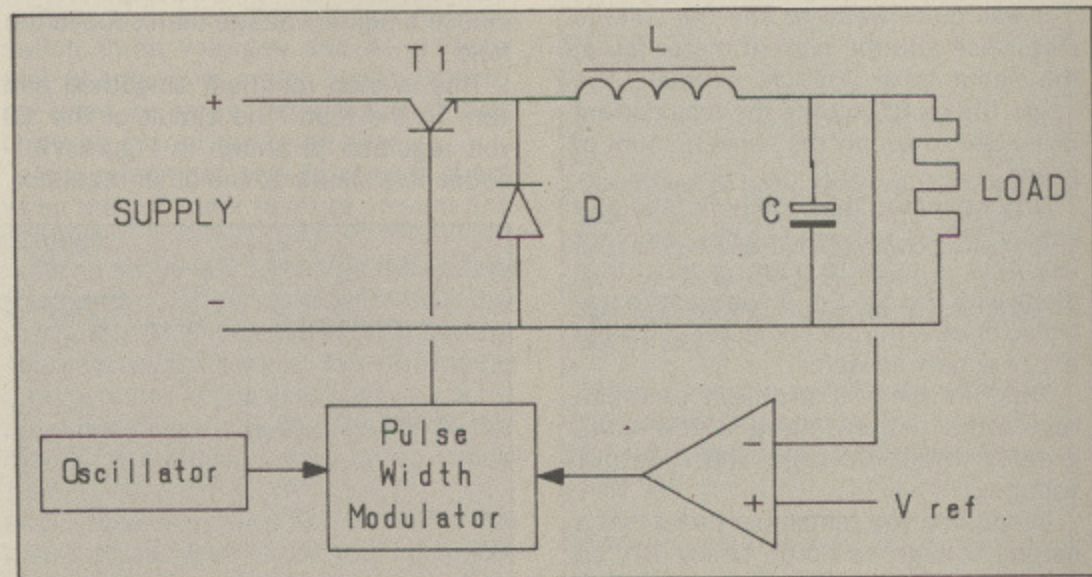


Figure IV: A practical switching regulator

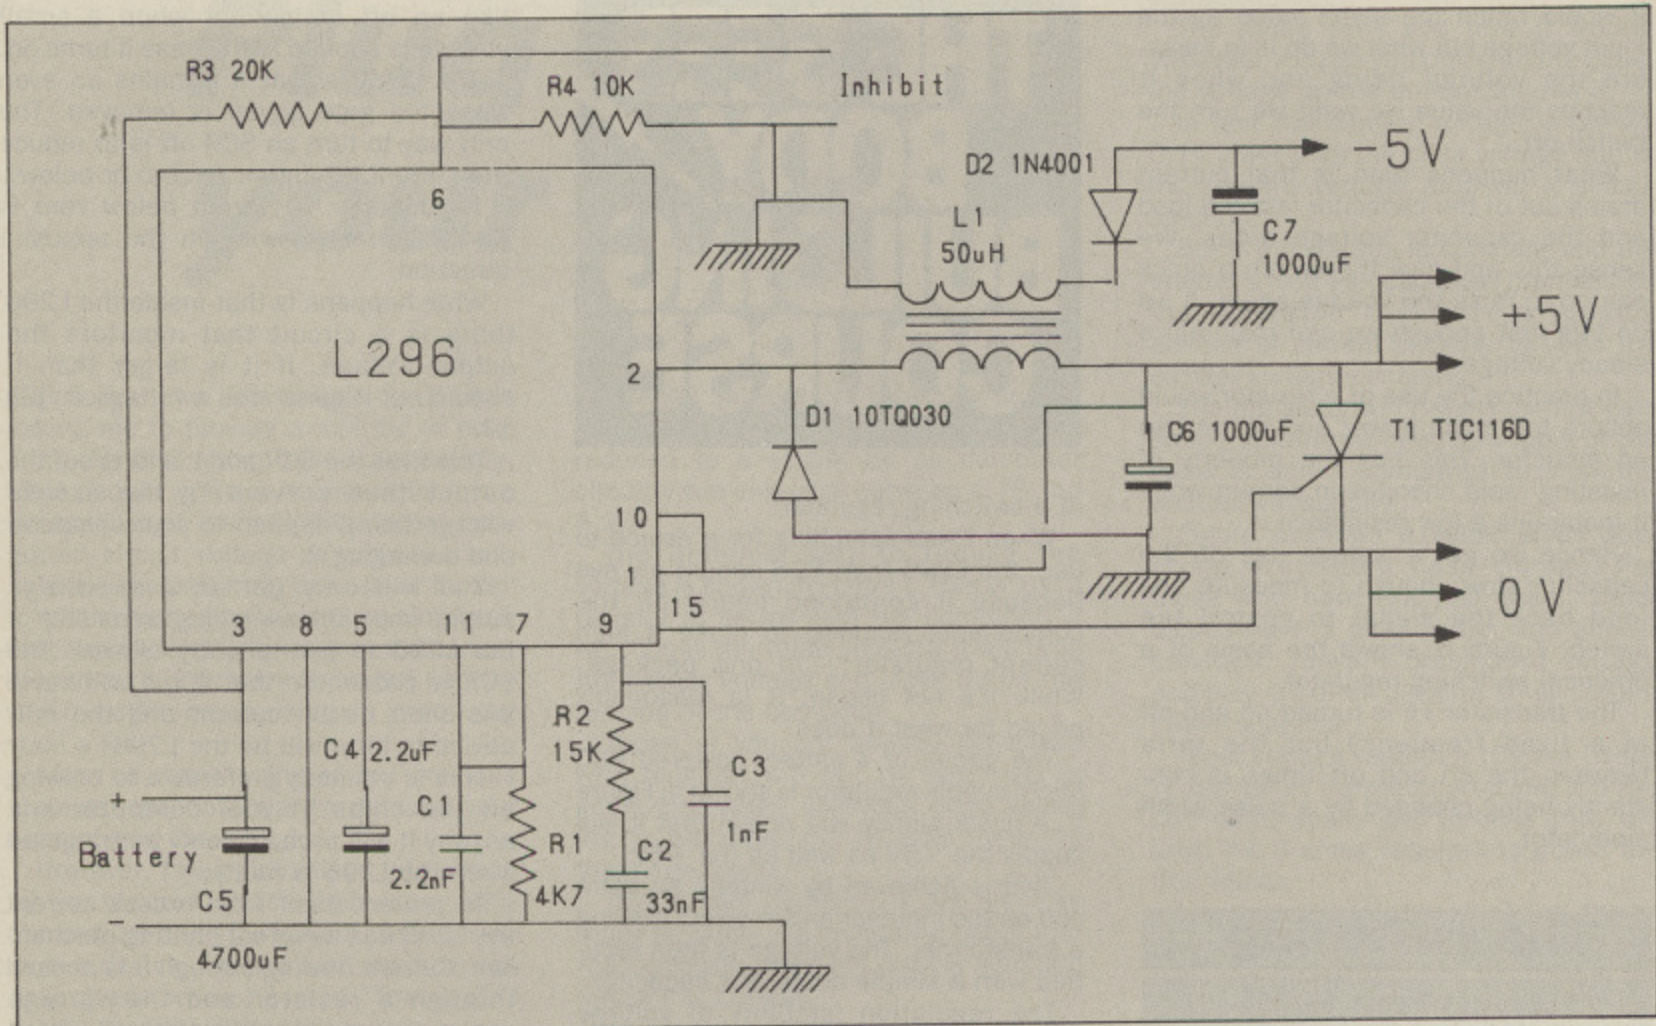


Figure V: 5 Volt regulator

◀ From Page 97

involves switching heavy currents. An alternative is to use the inhibit feature of the L296.

This stops the regulator from switching until the inhibit leads are shorted out. And as this only takes a few milliamps any miniature switch can be used.

The power supply is capable of supplying slightly more current than the computer's own supply. In theory there should be 4 amps available but I have not taken it that far.

When testing this I used my bench power supply so that I could try the effects of different input voltages.

It was quite weird to see the voltage meter rise and the current meter fall at the same time. This is because the larger the input voltage the less current is needed to supply the same amount of power.

Now we turn to the problem of the 12V supply. This is not used by the computer itself but is used to power a disc drive along with the 5V. So, if you want to use a disc drive with your computer you need a 12V supply as well.

This presents a problem because regulators usually need a few volts greater input voltage than output voltage.

In addition you remember I said that a battery voltage can drop below 12V so what we need is a circuit that will supply a constant 12V even when the battery

drops below this value.

Well it turns out that a variation of the switching supply can be made that steps up the input voltage. The principle is shown in Figure VI.

In addition to the switching regulator switch S1 there is a switch S2 that connects the inductor to ground: They are both switched together.

When they are on the inductor builds up a magnetic field around it but no power is supplied to the output. However, when the switches turn off the field collapses very rapidly.

It is the speed of change of a magnetic field that determines the voltage it induces, so a rapidly collapsing field will induce a higher voltage than caused the field.

This is then rectified, smoothed and sent to the load. The circuit of the 12 volt regulator is shown in Figure VII - notice it is similar to the other regulator.

The step up function, implemented by the second switch, is done with a power FET. As we want a 12V output we must feed a fraction of the output voltage back into the L296 and this is done by R5 and R6.

No crowbar over-voltage is implemented as, when running from a battery, any over-voltage will not be sufficient to damage a disc drive.

As you only want to run the disc motor when you are loading and saving programs there is a switch to turn off the regulator. The lines marked inhibit should be shorted to ground to turn the modulator on.

To save battery power only switch this on when you are about to use the drive or it can be connected to the same switch as the other regulator.

If you are going to use two switching regulators, it is important that the switching be synchronized to prevent all

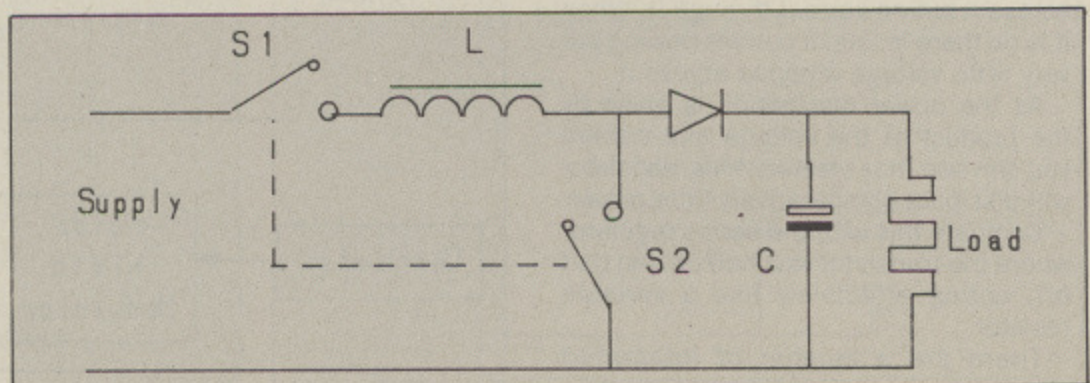


Figure VI: Voltage step up principle

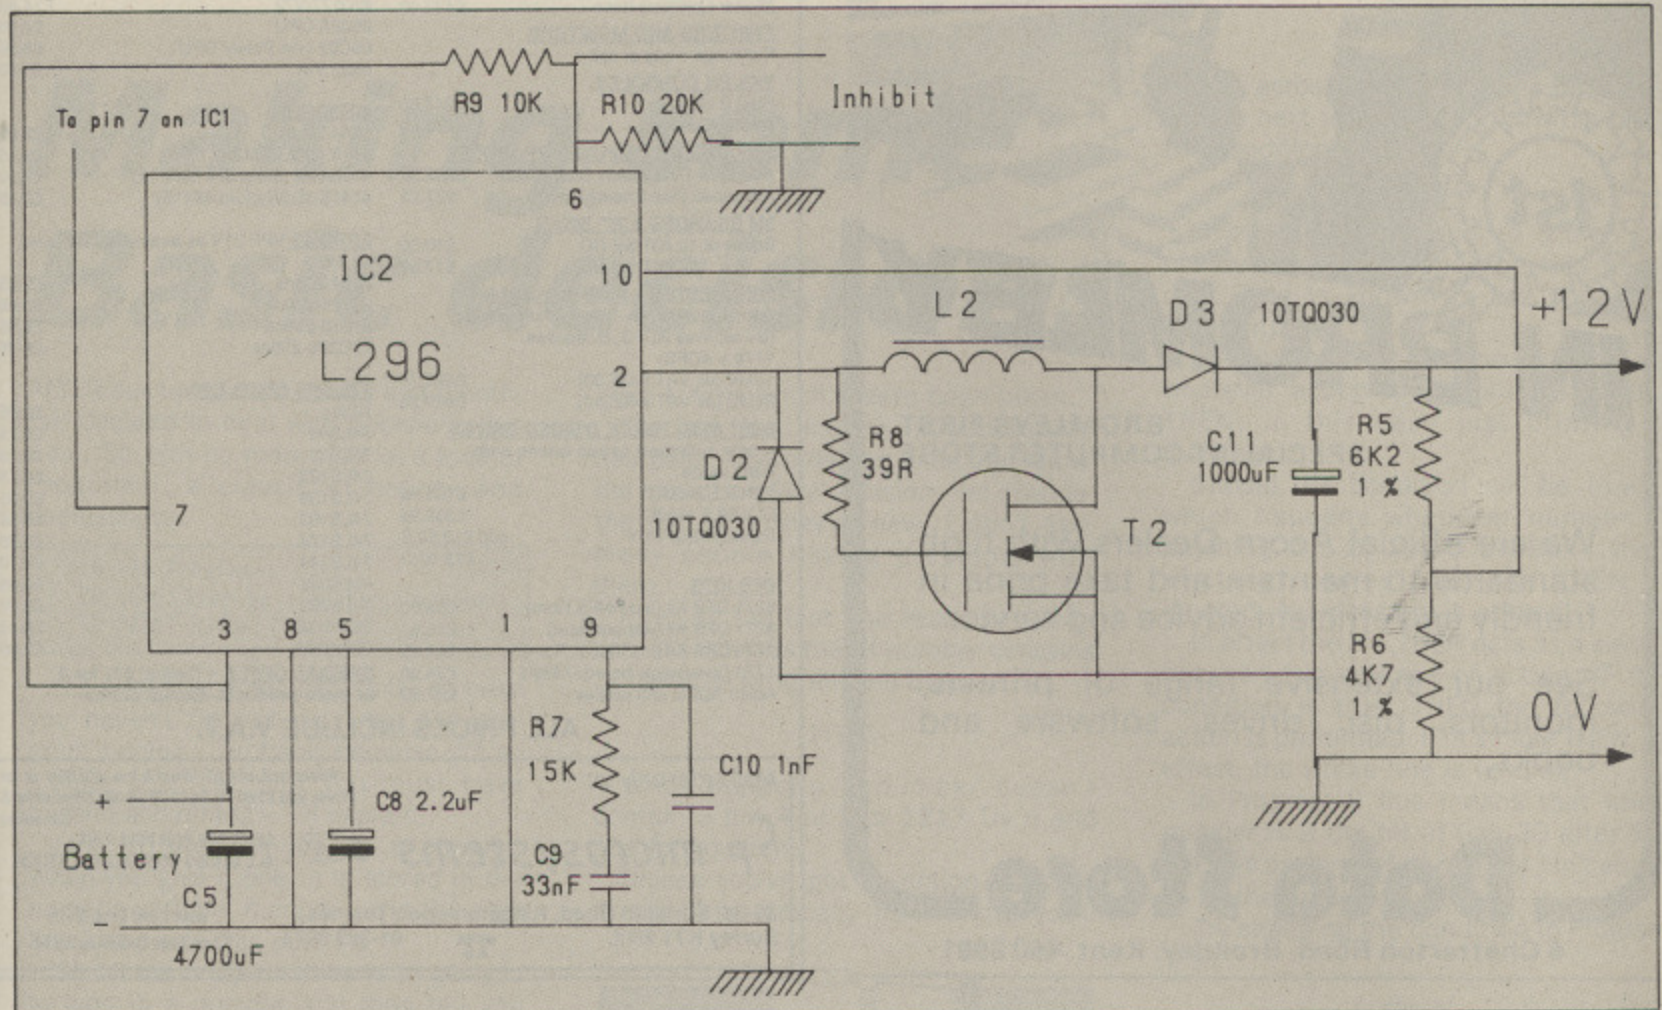


Figure VII: 12 Volt regulator

sorts of nasty intermodulation.

Fortunately, the L296 has a provision for synchronizing with an external oscillator, in this case the 5V regulator.

The coils should be wound on a toroidal core with a soft saturation characteristic, the number of turns depending on the type of core material you use. As these inductors are rather difficult to wind I have had them specially made for this project.

**'Switching from mains to battery can be tricky'**

Layout is quite important as well because all the heavy current earth lines need to be separated from the signal earth lines and joined only at one point.

Also, as these regulators are switching at high speed it is important to keep all the lines as short as possible to prevent the introduction of distributed inductances.

To this end I have laid out a printed circuit that includes both regulators. This along with all the other components is available as Body Build pack Number 41. The order form is on this page.

Note that you can obtain the pack in two versions: One that contains just the components to produce the two 5V

supplies and the other that includes the 12V supply as well.

Also included in the latter pack is an auxiliary power socket just like the one on the BBC Micro to plug your disc drives into.

Having made the regulators you now have to install them. The simplest way is to replace the spade connectors with wires from the switching regulators. The two inhibit switches should be mounted at a convenient place.

Alternatively you might want to switch from mains to battery operation. This can be tricky because of the contact resistance of the switches causing a voltage drop.

Remember also that you will have to switch three voltages and so a three pole change-over switch would have to be used or three separate switches changed over at the same time.

Also remember only to change them when the computer is off to prevent any damage.

On no account float charge the battery (charge the battery while operating the computer). This is because most battery chargers are not isolated from the mains and therefore, if you use them your computer becomes connected directly to the mains, a condition that could prove fatal.

● So there you have it. Free from the mains at last. Free to use your computer in the garden, caravan or even sailing around the world. See you next month.

**BEEB BODY BUILDING PACK ORDER FORM**

Body Build Pack 41 to build a Switched regulator.

- 41(a) Triple supply Kit..... £49
- Assembled..... £56
- 41(b) Dual supply Kit ..... £29
- Assembled..... £34

Name.....

Address.....

Post code.....

All prices include VAT and P&P

Conditions of sale. Musbury Consultants guarantee the components and sub-assemblies supplied. However, they will not be liable for any consequential damage however caused arising from the use of this.

Make cheques payable to Musbury Consultants and send to:  
8 Fairhill, Helmshore, Rossendale, Lancs. BB4 4JX

Foreign orders add £3 if airmail delivery is required.



# 1st IN BROMLEY

**BROMLEYS FIRST SPECIALIST COMPUTER STORE**

We are official Acorn Dealers with high standards to maintain and take pride in friendly and efficient advice and service.

See our extensive range of printers, monitors, disc drives, software and books.

## Data Store

6 Chatterton Road, Bromley, Kent. 460 8991

## MICROS - MONITORS - DRIVES PRINTERS - 8271/1770 & COMPONENTS

<b>BBC MICROS - free courier delivery</b>		<b>CONTROLLERS, CPU'S, ETC</b>	
Master 128 inc Software	£445.00	8271	£34.80
Master Compact-base	£432.00	WD1770/72	£14.80
<b>PRINTERS AND MONITORS</b>		6502A CPU	£4.90
Full range - see or call		65C02 Low Power CPU	£8.20
<b>VIGLEN CONSOLES</b>		6522 VIA	£3.60
BBC B Console	£47.50	<b>MEMORIES</b>	
Master Console	£55.50	6264 LP-15	£2.85
<b>ADVANCED COMPUTER PRODUCTS</b>		4416-15NL (TMS or NEC)	£2.45
Adv 1770 DFS or Adv Disc Toolkit	£32.50	41464-12 (Solidisk 41254-12)	£4.90
Advanced Disc Investigator	£27.25	41416-15 (Watford 48415)	£2.45
<b>3M BRANDED 5.25" DISKS</b>		<b>EPROMS VPP 21V as available, otherwise</b>	
Boxes of 10 40T SS DD	£10.50	12.5V	
80T SS DD	£17.50	2764-250ns	£2.65
<b>WINCHESTER - Fully compatible</b>		27128-250ns	£3.05
Own power supply & fan - Plug in & go!		27256-250ns	£4.95
(B+ requires ADFS, B requires		27C256-250ns	£6.35
1770 + ADFS)		<b>TTL-DFS CHIPS ETC</b>	
10MB (ex VAT £425.00)	£488.75	7438	£0.35
20MB (ex VAT £495.00)	£569.25	74LS04	£0.25
<b>5.25" 40/80 TRACK D/SIDED DRIVES</b>		74LS10	£0.25
- new switched cased drives with		74LS123	£0.55
BBC leads		74LS136	£0.35
SINGLE (400k)*	£105.95	74LS163	£0.55
DOUBLE (800k)	£209.95	74LS174	£0.55
POWER SUPPLY	add £18.50 S	74LS244	£0.70
	£23.50 D	74LS245	£0.85
<b>DFS KITS</b>		74LS393	£0.70
8271 DFS Kit (inc DNFS Rom)	£53.50	CD4013B	£0.45
8271 DFS Kit (without Rom)	£40.90	CD4020B	£0.55
1770 DFS Kit (inc. Acorn Rom)	£44.95	<b>SPECIAL OFFER - Deduct 5% for 2</b>	
1770 Compatible board+7438's	£34.90	<b>or more products. Except drives</b>	
Acorn ADFS with utilities	£27.50		

**ALL PRICES INCLUDE V.A.T.**

Mail order only to:

Prices incl. of VAT - Post & Ins. add 65p or for Drives add £3.60 (1) £4.60 (2) £8.00 (Winchester & Consoles)

**Cp microsystems**

SEND SAE FOR FULL LIST. ALL GOODS NORMALLY IN STOCK

32-34, Surbiton Road, Kingston upon Thames, Surrey KT1 2HX.

01-393 3975

\*State if 2nd Drive (DR1) Local Auth. Orders accepted

## amig SYSTEMS

### EDUCATION SOFTWARE TIMETABLE SOFTWARE

**TIME CHART** Powerful software to produce, change, and print a school or college timetable. A major feature is the display of the timetable as a spreadsheet - the screen is a movable window on the complete timetable. Fully documented (74 page manual).

#### FLEXIBLE STRUCTURE

- Change the number of years and days in the cycle.
- Up to 9 periods per day, 250 teachers, 250 rooms, 250 subjects, 250 students per year, and 120 subjects per year.

#### POWERFUL ROUTINES

- Extensive spreadsheet commands (swap MON p.3 with THU p.5).
- Automatic allocation of elective subjects into blocks.
- Split up large subjects, or combine small subjects.
- Fast machine code clash calculations.

#### EXTENSIVE PRINTOUTS - with flexible options

Student printouts: subject lists, daily or weekly timetables. Timetables: whole school or selected parts (faculty selection), teacher timetables (daily and weekly), plus many more.

#### TIME CHART is used in schools in all States of Australia.

Starter Pack (manual and demonstration disk). £10.00  
Standard Version £80.00 (upgrade from starter pack £70.00).

#### PHYSICS SOFTWARE using powerful numerical methods techniques:

**MOTION 1** Motion of an animated train, under the action of almost any force, as two selected graphs are plotted. £24.00  
**PLANE MOTION** Animated car moving on an inclined plane as two graphs are plotted. Vector display of forces £28.00  
**DC CIRCUIT MASTER** Students build & test a wide range of circuits using batteries, resistors, wires, diodes and lamps. £28.00

#### ACCOUNTING TUTOR Students explore journals and ledgers. £30.00

All classroom software is suitable for use on Econet network. BBC 80 track DFS disk format (Time Chart on double sided disk).

Add £5.00 for airmail postage.

Send payment, school order, or write for details to AMIG SYSTEMS 16 Waratah Street, Ascot Vale, Victoria, AUSTRALIA 3032

## contex

## computing

#### BANK MANAGER (for disc systems only)

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" Micro User April 86  
Enter cheques and receipts. Standing Orders any frequency. Automatic date sequencing. Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards. Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank' (bank, credit, cards, savings, cash) accounts online simultaneously, inter-account transfers, 9999 standing orders, 99 analysis categories, 12 actual and 12 budgets per category, over 4,000 postings on an 80tk disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec. file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

#### BANK MANAGER MASTER (for disc systems only)

Version 2 now available. Includes all of the facilities of the standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports, improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50

Upgrade from standard, return original disc and £6.00

#### BANK MANAGER BUSINESS UTILITIES (for disc systems only)

For the 'professional' who also uses the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Use with either standard or master/compact version.

Bank Manager Business Utility Pack 1 £12.00

#### TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. You may revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Recommended.

for BBC B, B+, Master and Compact; Cassette £9.50, Disc £12.50

ALL PRICES FULLY INCLUSIVE, FREE POSTAGE WITHIN U.K. Enquiries and Access credit card orders telephone 023 03 347

CONTEX COMPUTING, 15 Woodlands Close, Cople, Bedford MK44 3UE



Please rush me..... for BBC:  B  B+  Master  Compact

Cass  5.25"  3.5"  40tk  80tk

Enclosed £..... or debit my Access card no.....

Name.....

Address.....

FAST DELIVERY

**Nigel Peters goes into  
the decisions game with  
the IF... THEN structure**

**SERIES**

**B**

**B+**

**M**

**Compact**

# Making some Basic decisions

AFTER our forays into arrays last month, I've decided to deal with decisions this time. So with no more ado let's look at Program I, a classic of brevity and uselessness.

```
10 REM Program I
20 INPUT "Give me a number ",number
30 PRINT number
```

It's almost spectacularly silly. In case you haven't figured out what the program's doing – probably because it's so simple you feel that you must have missed something – I'll explain.

Line 20 prompts you for a number. When you give it one, it is stored in the numeric variable *number* – and the next line just prints this out.

So all the program does is to get you to type in a number and then tell you what you've typed in.

Notice that you give the program a number and it *has* to print it out, whatever the number is. It has no choice.

This is something that all the programs so far have in common. The micro runs them line by line, one after the other, sometimes going round loops but always obeying every statement. It has no choice as to whether it does a line – it just does it.

The trouble is that real life isn't like that. In our everyday life we have to make decisions – if I've only got 60 pence left I can't buy another pint.

We also choose between alternatives – if it's my round I'll have a half of bitter, if it's yours make it a double malt whisky.

To be any use our programs have to make decisions as well. Program II shows one way of doing this in Basic.

```
10 REM Program II
20 INPUT "Give me a number",number
30 IF number=3 THEN PRINT "It's ";num
ber
```

Alright, so it's another rather trivial program, almost identical to Program I. Don't let appearances deceive you though, because it contains the seeds of some very powerful programs.

It allows you to make decisions, or rather, tell the micro when to make decisions and how to make them.

The first two lines should cause you no problems by now – if you've got this far you've almost certainly understood Pro-

gram I, from which they're been taken.

The last line, line 30, introduces two new Basic keywords, the ones that allow the micro to take a decision. Yet despite the fact that they're new, I don't see many people having problems with them.

After all the last line reads like English. It's obvious that if *number* contains 3, then the program will display:

It's 3

What happens if *number* doesn't contain 3 but 4 or 2 or 121? Try it and see for yourself.

Unless you've got a version of Basic that differs radically from mine, you'll



see that the number in *number* is only printed out if *number* contains 3.

Otherwise that final PRINT is ignored and effectively line 30 does nothing. So the program does different things depending on the value in *number*.

In effect the program has made a choice, performing different actions depending on the input given to it.

Alright, so we've forced it to take a decision and we told it what to do, but the actual choice depended on what was happening when the program ran.

We don't know what *number* will be, so we don't know what will happen until it happens. The micro alters its course of action depending on the prevailing circumstances.

All this is done using Basic's IF...THEN structure which takes the form:

If a condition is true THEN do something

What happens is that when the micro

comes across an IF it realises that what comes next is a condition. In this case the condition is:

number=3

When *number* is equal to 3 then it's obvious that the condition has been met. This is known as the condition being true.

The program now goes on to do whatever action is specified after the THEN, in this case just printing a message.

Should the condition not be true – which happens whenever *number* is anything but 3, say 5 or '99 – then whatever comes after the THEN is ignored. No message is printed.

In effect the IF...THEN acts as a switch between two courses of action. IF the condition is true, THEN the following action is performed. IF it's false THEN, in effect, the whole line is ignored.

In Program II this means that when *number* is 3 the bit of line 30 after the THEN is performed. If *number* isn't equal to 3, then nothing happens.

Try changing the condition in Program II to:

number=7

or:

number=-3

and see what this does to the program's behaviour.

While in this example the IF...THEN is performing a fairly trivial task it would hardly be an exaggeration to say that the IF...THEN construct is one of the most powerful features in Basic.

All non-trivial programs have them. Program III gives a flavour of how they are used.

```
10 REM Program III
20 PRINT "Option one - 1"
30 PRINT "Option two - 2"
40 PRINT
50 INPUT "Choose an option 'choice"
60 IF choice=1 THEN PRINT "You picked
option one"
70 IF choice=2 THEN PRINT "You picked
option two"
```

Here lines 20 to 50 have you choosing between two options and storing the result in *choice*. This is then used in lines 60 and 70 to decide which message is printed.

It doesn't take much imagination to see that instead of giving a message the code after the THEN could do all sorts of things.

One choice could send the program off to calculate a single person's tax code, the other to calculate a married man's allowance. Or one choice could give you another game while the other

Turn to Page 102 ►

◀ **From Page 101**

brings it to an end or shows the high score table.

Anywhere that either you or the program has a choice, there's an IF...THEN lurking. And as we'll see in the next couple of months, IF...THEN is an extremely powerful structure.

As an intellectual exercise, can you spot the differences in the meaning of:

```
number=3
```

in:

```
30 number=3
```

and:

```
30 IF number=3 THEN ...
```

In the first case the value 3 is assigned to the variable *number*.

In the second the IF has the micro checking to see if *number* contains the value 3. It might be clearer if you remember that:

```
number=3
```

is short for:

```
LET number=3
```

In the case of the IF, the equals sign is

=	equal
<>	not equal
<	less than
>	greater than
<=	less than or equal
>=	greater than or equal

Table 1

being used as what is known as a comparative operator. It asks for a comparison to be made between two things, the comparison being true if they're both the same.

We're not just stuck to the equals sign, we can make other comparisons using the operators shown in Table 1.

I won't go into them in detail; I'll leave it to you to experiment with them and see what they do.

Program IV shows the "not equal" operator in action. Here the message is only printed if *number* is not equal to 3, the exact opposite of Program II.

```
10 REM Program IV
20 INPUT "Give me a number " number
30 IF number<>3 THEN PRINT "You didn't pick 3"
```

Once you've figured out how that works and tried using some of the other operators, take a look at Program V, the last program this month.

```
10 REM Program V
20 INPUT "Give me a number " number
30 IF number<>3 THEN PRINT "You didn't pick 3"
40 IF number=3 THEN PRINT "You picked 3"
```

This contains our old friend *number* and two IF statements. The first checks if *number* is anything but 3 and tells you. If *number* is 3 it tells you that as well.

Whatever happens one of the two IFs is true, so one of the messages appears.

This is rather different from Programs II and IV when the program simply halted if the condition was true. Now all the alternatives are catered for.

Try using the other comparative operators in Program V and see what happens when they are combined.

● *That will give you enough to keep you busy until next month, when we'll be taking some more decisions. What else?*

# VISION SOFTWARE

## OR LEARN YOUR LESSON THE HARD WAY

In our competitive world it has never been more important to study for success - whether in exams or continuous assessment. Now **VISION SOFTWARE** can help. Both in the classroom and revising at home, **VISION SOFTWARE** provides that vital reinforcement essential to those taking CSE, GCE, 16-plus or GCSE courses.

Each subject is covered in depth and presented as a course of separate units, so your syllabus can be met precisely. Extra information is always provided by the software to give the encouragement that is so essential, while each disk and cassette pack comes complete with a User Guide containing all the necessary study diagrams.


Developed by teachers - proven in the classroom - isn't it about time **VISION SOFTWARE** was helping you.

**AVAILABLE ON MAIL ORDER FOR:**

- Amstrad 464, 664 and 6128
- BBC B, B+ and Master
- Electron
- Spectrum 48K, 128K and Spectrum-plus.

Prices from  
**£10.90**  
inc VAT.  
p&p

**FOR A FREE CATALOGUE:** simply complete the coupon and send it to Disney Limited, FREEPOST, Sutton Coldfield, West Midlands B72 1BR (No stamp required).

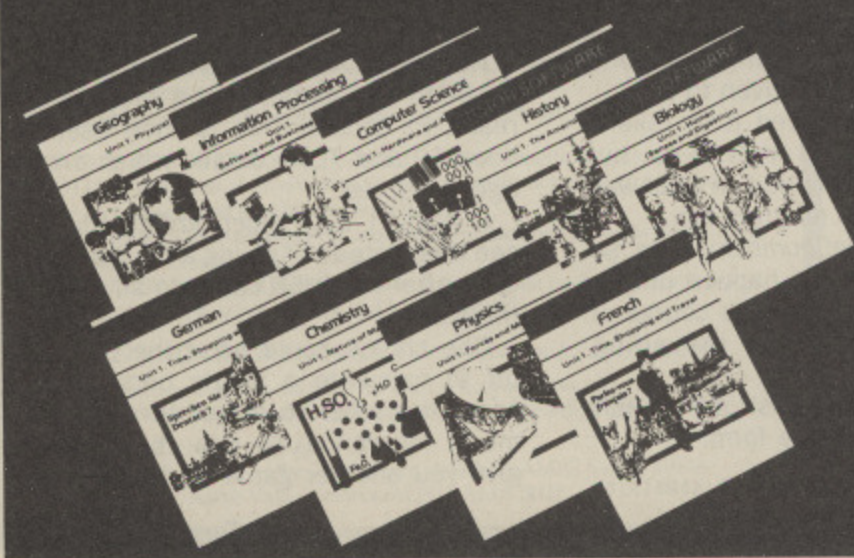

Please send my **FREE** catalogue of Vision Software.

Subjects of interest and microcomputers are:

Name \_\_\_\_\_

Chemistry  Physics

Address \_\_\_\_\_

Biology  Computer Science

History  Geography

French  German

Information Processing  Other \_\_\_\_\_

Post code \_\_\_\_\_

Amstrad  BBC

Electron  Spectrum

Other \_\_\_\_\_

MU/4/87

# MEGABYTE MIRACLES



**ONLY  
£209.95**  
2 MEGABYTE DUAL DRIVE  
5 1/4" double-sided 80/40 track  
switchable disc drive. Formatted  
capacity with DDOS 1.4 Mb

**ONLY  
£109.95**  
1 MEGABYTE SINGLE DRIVE  
5 1/4" double-sided 80/40 track  
switchable disc drive. Formatted  
capacity with DDOS 720K

**Don't miss this amazing special offer from Opus — a choice of powerful 1 or 2 Megabyte disc drives at simply magic prices.**

Choose our 1 Megabyte drive for just £109.95 or 2 Megabyte dual drive offering for only £209.95. Our prices even include VAT and FREE delivery! And, if you need an interface, add just £40 to the cost of either of our special offer drives and we'll supply you with one of the best double-density systems on the market — the Opus DDOS.

### OPUS DRIVES

Our 5 1/4" drives are double-sided, 80/40 track hardware switchable models representing the very latest in disc drive technology and offering superb performance. They feature reliable direct drive mechanisms, low power consumption and fast track access times and they're backed by our no-quibble 2 year guarantee.

### THE OPUS DDOS

Our highly acclaimed DDOS is probably the most advanced double-density disc interface available and if you choose one of our Megabyte bargains we'll slash £20 off the normal retail price — it's yours for just £40.

Our disc interface uses the same disc controller chip as the BBC B+ allowing you to run all leading software titles — just phone for our comprehensive listing.

The Opus DDOS handles tape to disc transfers, Format and Verify utilities are included on ROM and its powerful machine code operating system gives you up to 248 files — the perfect partner for your new Opus disc drive.

Simply post the coupon or call Opus now on **0737 65080** — we'll guarantee delivery within 72 hours. Our Megabyte Miracles offer is available for a limited period only, so call today to avoid disappointment.

Generous education and dealer discounts available.

To: Opus Supplies Limited, 55 Ormside Way, Halmethorpe Industrial Estate, Redhill, Surrey.  
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE — UK Mainland only)

- \_\_\_\_\_ 1 Megabyte (unformatted) System(s) at **£109.95** each
- \_\_\_\_\_ 2 Megabyte (unformatted) System(s) at **£209.95** each
- \_\_\_\_\_ Opus Double Density Disc Interface at **£40.00** each  
(Only when purchased with drive)

I enclose cheque for £ \_\_\_\_\_ or please debit my credit card account with the amount of £ \_\_\_\_\_

My Access  Visa  no. is: \_\_\_\_\_

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

TELEPHONE \_\_\_\_\_

**Opus.**

**☎ 0737 65080**

# TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE  
17 Burnley Road, London NW10 1ED Tel: 01-208 1177  
305 Edgware Road, London W2 Tel: 01-723 0233

## BBC MASTER SERIES

<b>AMB15 MASTER</b> (see page 5 for details of bundled software included in the price)	<b>£385 (a)</b>
<b>AMB12 MASTER ET</b>	<b>£315 (a)</b>
<b>AMCO6 Turbo 65C02 Module</b>	<b>£99 (b)</b>
<b>ADC08 512 Processor</b>	<b>£195 (b)</b>
ADF14 ROM Cartridge	<b>£13 (d)</b>
ADF10 Econet Module	<b>£41 (c)</b>
ADJ22 Ref Manual	<b>£14 (c)</b>
Part I	<b>£14 (c)</b>
BBC MASTER	<b>£14 (c)</b>
Dust Cover	<b>£4.75 (d)</b>
ADJ23 Ref Manual	<b>£14 (c)</b>
Part II	<b>£14 (c)</b>
ADJ24 Adv	<b>£19.50 (c)</b>
Ref Manual	<b>£10 (d)</b>
View User Guide	<b>£10 (d)</b>
Viewsheets User Guide	<b>£10 (d)</b>

<b>MASTER ROM/RAM CARTRIDGES</b>	
TRC1 Two rom cartridge	<b>£7.95 (d)</b>
TRC4 Four rom cartridge	<b>£9.95 (d)</b>
TRC 32K Cartridge ind RAM.	<b>£26.95 (d)</b>

## BBC MASTER COMPACT

A free packet of ten 3.5" DS Disks with each COMPACT" See page 5 for details

<b>SYSTEM 1</b> 128K, Single 640K Drive & bundled software.	<b>£385 (a)</b>
<b>SYSTEM 2</b> System 1 with a 12" Hi Res Monochrome Monitor.	<b>£469 (a)</b>
<b>SYSTEM 3</b> System 1 with a 14" Med Res RGB Monitor.	<b>£599 (a)</b>
Second Drive Kit.	<b>£99 (c)</b>
Serial Kit.	<b>£29 (d)</b>
T.V. Modulator	<b>£29 (d)</b>
Extension cable for external 5.25" 80T Drive (Serial Kit).	<b>£12.50 (d)</b>

## UPGRADE KITS

L2 OS ROM	<b>£15 (d)</b>	ADFS ROM	<b>£26 (d)</b>
DNFS ROM	<b>£17.50 (d)</b>	1770 DFS Kit	<b>£43.50 (d)</b>
BASIC II ROM	<b>£22.50 (d)</b>	Econet Kit	<b>£55 (d)</b>

## ECONET ACCESSORIES

Econet Starter Kit	<b>£85 (b)</b>	Econet Bridge	<b>£174 (b)</b>
Econet Socket Set	<b>£29 (c)</b>	Printer Server Rom	<b>£41 (d)</b>
File Server Level II	<b>£75 (b)</b>	10 Station Lead Set	<b>£26 (d)</b>
Master FS Utility Disc	<b>£17.25 (d)</b>		

## ACW/CO-PROCESSOR

For full specification see page 5	
<b>32016 Co-processor</b>	<b>£999 (a)</b>
<b>Cambridge Workstation</b>	<b>£3450 (a)</b>
<b>X25 Gateway</b>	<b>£2175 (b)</b>

<b>PANOS/PANDORA Upgrade incl 32000 BASIC FP.</b>	<b>£29 (d)</b>
Co-Processor upgrade to 10 MHz operation for faster processing.	<b>£POA (d)</b>
Time Warp Real Time Clock with utilities for reading time and date in PANOS (for model B and B+ users).	<b>£39 (c)</b>
32016 Instruction Set Manual.	<b>£25 (c)</b>

## WINCHESTER DRIVES

<b>Acorn 30 Mbyte Winchester with File Server Level III and ADFS hierarchical filing System.</b>	<b>£1,529 (a)</b>
<b>P20HD TECHNOMATIC 20 Mbyte Winchester Drive fully compatible with Acorn ADFS and FS III. Includes ADFS Rom. Special reduced price.</b>	<b>£499 (a)</b>

**P204HP TECHNOMATIC 20 Mbyte Winchester** and a 80T DS floppy Drive built in a monitor stand. Includes ADFS Rom. **£849 (a)**

**P2041HT** As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. Includes ADFS Rom. **£1,499 (a)**

**TS10 10 Mbyte Tape Streamer Backup unit** with utilities. **£695 (a)**

**TFC10 10 Mbyte Pre-formatted Cartridge** for use with P2041HT and TS10. **£19 (d)**

**WINCHESTER Drive Multiplexer**  
TWM2 for two computers. **£99 (b)**  
TWM4 for four Computers. **£159 (b)**

Details on Technomatic Winchesters on page 6

## SECOND PROCESSORS

<b>Universal 2nd Processor</b>	<b>£75 (b)</b>
<b>TORCH ZEP100</b>	<b>£229 (a)</b>
<b>MULTIFORM Z80</b> TECHNOMATICs multi format Z80 system includes a FREE Pocket Wordstar + MS/DOS Read/Write Utility	<b>£289 (b)</b>

## ACORN IEEE INTERFACE

Allows BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard. The interface can link upto 14 compatible devices. Typical applications are in experimental work in academic and industrial labs. **£265 (a)**

## TELETEXT ADAPTOR

Converts your computer into a teletext receiver. **£95 (b)**  
BBC Publications rom for enhanced Teletext Utilities. **£7.95 (d)**

## PRINTERS

**EPSON LX86**  
120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. **£199 (a)**

**EPSON LX80/86 Tractor Feed** **£20 (c)**

**EPSON LX80/86 Sheet Feeder** **£49 (c)**

**EPSON FX800**  
An enhanced version of FX85. Call for details. **£329 (a)**

**EPSON FX1000**  
An enhanced version of FX105. Call for details. **£449 (a)**

**EPSON EX800**  
See details on page 5. **£409 (a)**

Colour option for EX800/EX1000. **£55 (b)**

**EPSON LQ800**  
See details on page 5. **£439 (a)**

**EPSON LQ1000**  
As LQ800 but wider carriage for 136 columns. **£589 (a)**

**TAXAN KP815**  
Enhanced KP810 with 160cps and full IBM compatibility. **£269 (a)**

**TAXAN KP915**  
Enhanced KP910 with 180cps and full IBM compatibility. **£369 (a)**

**NATIONAL PANASONIC KX P1080** **£159**

**STAR NL 10 (Parallel Interface)** **£209**

**STAR NL 10 (Serial Interface)** **£279**

**INTEGREX Multicolour Inkjet printer.** **£549**

Ideally suited for high res colour VDU screen dumps. Quietness & consistent output are major characteristics. BBC Screen dump for Integrex. **£525**

**BROTHER HR20** **£15**

A new attractively styled printer from Brother with unusually quiet operation, host of new features, including option to copy current documents. 8K buffer standard expandable to 16K. Parallel & Serial ports as standard. **£329**

**STAR POWER Type** **£229**

A new low cost daisy wheel printer incorporating STAR technology for innovation and enhancements. Phone for details. See page 5 for details.

**JUKI 6100 Daisy wheel printer** **£259**

15 cps, 2K buffer, switchable 10/12/15 cpi proportional spacing, underlining. Parallel interface.

## PLOTTERS

**TAXAN** **£675**

A3 six colour flat bed plotter

**HITACHI 672** **£459**

**GRAPHICS WORKSTATION** **£599**

**LINEAR GRAPHICS**

**A4S PLOTMATE** **£370**

**A4SM PLOTMATE** **£450**

**A3M PLOTMATE** **£569**

(Enquire re educational prices for the Linear Graphics plotters)

**Parallel Printer Lead (1.2m).** **£66**

**Serial Printer Lead (1.2m).** **£77**

## PRINTER SHARERS & BUFFERS

**BUFFALO PB Buffer** **£99**

Parallel buffer for internal fitting to most Epson printers. Simple to instal. **PB128 (128K)**

**PERIPHERAL & COMPUTER SHARERS**

High quality switches to allow the user to share between computers, printers, modems etc. shielded metal cases. all lines fully switched.

	<b>Parallel</b>	
3 Computers to 1 Printer 36x36-3	<b>£69 (c)</b>	25x25-3
4 Computers to 1 Printer 36x36-4	<b>£85 (c)</b>	25x25-4
2 computers 2 Printers X-over 36x36-x	<b>£69 (c)</b>	25x25-x
BBC Cable set 3 to 1 (1m ea)	<b>£32 (d)</b>	
BBC Cable set 4 to 1 (1m ea)	<b>£39 (d)</b>	

**BBC Computer Sharer: TCS26** **£22**

1 computer to 2 printers fitted with BBC cable

**Paper & Labels**

Plain fanfold paper with microperforation:

2000 sheets 9 1/2 x 11" **£12 (£3)**

2000 sheets 14 1/2 x 11" **£18.50 (£4)**

1000 sheets A4 **£12.50 (£3)**

**Labels/1000**

Single Row 3 1/2 x 1 7/16" **£5**

Triple Row 2 7/16" x 1 7/16" **£5**



TECHNOLOGY  
24 hr viewdata system)  
Tel:01-450 9764

MAIL ORDER  
7 Burnley Road  
London NW10 1ED  
Tel:01-922800

RETAIL SHOPS  
15 Burnley Road, London NW10 1ED  
Tel:01-208 1177 Telex:922800  
(close to Dollis Hill ☺)  
West End Branch  
305 Edgware Road, London W2  
Tel:01-723 0233  
(near Edgware Road ☺)

For fast delivery telephone  
your order on 01-208 1177  
using VISA/Access Card




Orders welcome from  
government depts &  
educational establishments

All prices ex VAT.  
Prices are subject to  
change without notice  
Please add carriage  
(a) £8.00 (Datapost)  
(b) £2.50  
(c) £1.50  
(d) £1.00

### DISC DRIVES

Full details on page 6.  
All drives fitted with MITSUBISHI mechanisms.

£159 (a)	25" Single Drives 40/80 switchable:	
£209 (a)	S400 400K/640K	£114 (b)
£279 (a)	S400 400K/640K with integral mains power supply	£129 (b)
£525 (a)	25" Dual Drives 40/80 switchable:	
£15 (d)	D800 800K/1280K	£199 (a)
	D800 800K/1280K with integral mains power supply	£229 (a)
	D800P 800K/1280K with integral mains power supply and monitor stand	£249 (a)
£329 (a)	5" 80T DS Drives:	
	S351 single 400K/640K 	£75 (b)
	S351 single 400K/640K with integral mains power supply	£119 (b)
£229 (a)	D352 Dual 800K/1280K	£135 (b)
	D352 Dual 800K/1280K with integral mains power supply	£187 (b)
£259 (a)	D853 Combo Dual 5.25"/3.5" drive with psu.	£229 (a)

### DISC DRIVE MULTIPLEXER

Full specification on page 6.

£679 (a)	DM2 Dual Unit: 2 computers/one drive unit	£75 (b)
£459 (a)	DM4 Dual Unit: 4 computers/one drive unit	£135 (b)

### 3M FLOPPY DISCS

25" Discs in packs of 10

£370 (a)	40T SS DD	£10.00 (d)
£450 (a)	40T DS DD	£12.00 (d)
£569 (a)	80T SS DD	£14.50 (d)
£7 (d)	80T DS DD	£15.50 (d)

(Add £1 for library case packing)

See page 10 for details of Special Offer

### 5.25" DISCS IN PACKS OF 10

£20 (d)	40T SS DD
£25 (d)	40T DS DD

### BULK DISCS

£99 (a)

ER SHARER quality unlabelled discs supplied in packs of 50 in a storage box. The discs have the reinforcing hub removed. These discs are guaranteed for 10 years.

£65 (a)	25" 40 T single sided discs in storage box.	£35 (b)
£75 (a)	25" 80T double sided discs in storage box.	£45 (b)
£65 (a)	25" 40 T single sided discs in storage box.	£35 (b)
£34 (a)	25" 80T double sided discs in storage box.	£45 (b)
£41 (a)	25" 80T double sided discs in storage box.	£95 (b)

### OPPICLENE DRIVE HEAD CLEANING KIT

£22 (a)	Kit with 20 disposable discs	£12.50 (d)
	Kit with 20 disposable discs	£14.00 (d)

### SC STORAGE BOXES

£12 (£3.50)	340 Lockable 40 x 3.5"	£8.50 (c)
18.50 (£4.50)	550 Lockable 50 x 5.25"	£9.00 (c)
12.50 (£3.50)	570 Lockable 70 x 5.25"	£11.00 (c)
£5	5100 Lockable 100 x 5.25"	£13.00 (c)

### MONITORS

BBC lead incl with all monitors  
MICROVITEC 14" RGB Monitors  
Please specify plastic or metal case.

Microvitec 1431 Standard Resolution 453 pixels	£179 (a)
Microvitec 1431AP As 1431 + composite video and sound input	£199 (a)
Microvitec 1451 Medium Resolution 653 pixels	£225 (a)
Microvitec 1451AP As 1451 + composite video and sound input	£259 (a)
Microvitec 1441 High Resolution 895 pixels	£365 (a)
Microvitec 20" RGB/PAL/Audio Monitors	
Microvitec 2030CS Standard Resolution RGB/Comp Video	£380 (a)
Microvitec 2040CS High Resolution RGB/Comp Video	£685 (a)

TOUCHTEC-501  
Brings genuine touch screen operation on metal cased Microvitec monitors, incl utilities disc with starter and development programs

£239 (b)

PHILIPS 8501  
See page 10 for details.

£139 (a)

TAXAN SUPER VISION 620  
12" Hi Res/Hi Contrast  
Option to switch to green/amber  
BBC/IBM Compatible

£279 (a)

TAXAN SUPER VISION III  
12" Super Hi Res and contrast RGB Monitor with option to switch to mono  
BBC/IBM compatible.

£319 (a)

MITSUBISHI XC1404  
14" Med Res RGB Monitor  
Etched dark screen brilliance and contrast control, BBC/IBM compatible

£219 (a)

### 12" MONOCHROME MONITORS

TAXAN KX1201G Hi Res green etched screen	£85 (a)
TAXAN KX1202G Hi Res Long Persistence (P39)	£95 (a)
TAXAN KX1203A Hi Res amber etched screen	£95 (a)
PHILIPS BM 7502 Hi Res green screen	£75 (a)
PHILIPS BM7522 Hi Res amber screen	£75 (a)

### MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)	£20 (c)
Philips Swivel Base	£14 (c)
Monitor Stand Models B & B+	£10 (c)
Monitor Stand Master	£13 (c)
Double Tier stand Models B, B+ or Master	£24 (b)
Taxan RGB Lead	£5 (d)
Microvitec Lead	£3.50 (d)
Monochrome BNC/Phono Lead	£3.50 (d)

### EPROMS/RAMS

2764-25	£2.50 (d)
27128-25	£2.75 (d)
6264LP-15	£2.80 (d)

### RAM/ROM EXPANSION

ATPL Board for Model B. Simple to instal, no soldering. Allows expansion to 15 Roms + 2 8K Rams	£37 (c)
ATPL Battery backup kit	£16 (d)
ATPL Board for BBC+ (now in stock).	£31 (c)
TIME WARP Real Time Clock. Plugs into the user port, battery back up as standard, includes manual, demo software including a diary/planner application program	£31 (d)
Time Warp with PANOS Utilities.	£39 (d)

### MODEMS

(All modems are BABT approved)  
See page 7 for modem specifications

MIRACLE WS2000V21/23 & BELL stds	£95 (c)
WS2000 Auto Dial Card	£27 (d)
WS2000 Auto Answer Card	£27 (d)
WS2000 SK1 Kit	£5 (d)
WS2000 DS1 disc	£10 (d)
WS2000 Data Cable for BBC	£6 (d)
MIRACLE WS4000 V21/23	£149 (b)
MIRACLE WS3000 V21/23	£295 (b)
MIRACLE WS3000 V22	£495 (b)
MIRACLE WS3000 V22 bis	£650 (b)
WS3022 1200/1200 fd	£395 (b)
WS3024 2400/2400 fd	£570 (b)
BBC Data Cable for WS3000/4000	£7 (d)

### PROGRAMMINGS ACCESSORIES/SOFTWARE

See page 8 for detailed specification

Compatible with B, B+ and Master

EPROMER II while stocks last.	£89 (b)
Eprom Ryter (Epromer III) See page 8 for details.	Approx £119 (b)
MPROMER	£49 (c)
META ASSEMBLER	£145 (b)
PORTAL EPROM EMULATOR 128K	£185 (b)
PORTAL EPROM EMULATOR 512K	£285 (b)
TEAM Disassembler	£145 (b)
EPROM ERASERS	
UVIB 6 eproms, safety cutout	£47 (b)
UVIT 6 eproms, timer, safety cutout	£59 (b)

# TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE  
17 Burnley Road, London NW10 1ED Tel: 01-208 1177  
305 Edgware Road, London W2 Tel: 01-723 0233

## CAD/DRAWING PACKAGES

<b>NovaCad</b> Cad Package for B, B+ MASTER & Compact. (See page 9 for specification)	
<b>Tracker Ball/Mouse Version (TM)</b>	£79 (d)
<b>TM Version plus Tracker Ball</b>	£119 (c)
<b>TM Version plus Mouse</b>	£105 (c)
<b>Plotter Driver Generator</b>	£25 (d)
<b>MOUSE</b>	
<b>AMX MOUSE with SUPER ART</b> (pse specify B, B+ or Master)	£63 (d)
<b>Super Art</b>	£43 (d)
<b>PAGEMAKER</b>	£39 (d)
<b>MAX</b>	£17.35 (d)
<b>RB2 TRACKER BALL</b>	
<b>RB2 Tracker Ball with Icon Master</b> (for B, B+ & Master)	£59 (c)
<b>RB2 Tracker Ball with Cursor Control Rom</b> (for Master only)	£59 (c)
<b>RB2 Tracker Ball 'Stand Alone'</b> for use with NOVACAD & other software)	£47 (c)
<b>Cursor Control Rom for Master</b>	£12.50 (d)
<b>MIRRORSOFT FLEET STREET EDITOR</b> incl VAT	£39.50 (d)

## CP/M SOFTWARE

<i>for Acorn, Torch &amp; Multiform Z80 Processors</i>	
<b>MICROPRO's Wordstar Professional</b>	£310 (a)
<b>ASHTON TATE'S DBASE II</b>	£310 (a)
<b>SUPERCALC II</b>	£195 (a)
<i>Send for details on our full range of CP/M &amp; PC DOS packages for Business, Communications &amp; High Level Languages.</i>	

## BBC SOFT/FIRMWARE

### DATABASE MANAGEMENT SYSTEMS

<b>VIEWSTORE</b> Acorn's database with display in any mode in spreadsheet or user defined card format and powerful sort facilities. Max file size 4Mb	£37 (d)
<b>STARdataBASE</b> A fast machine code, true random access database. Upto 4000 records/file, 69 fields. Fully menu driven, user defined record layout, very fast searches thru keysearch facility. Mailmerging from VIEW and WW.	£49 (d)
<b>MASTERFILE II</b> Highly popular economically priced database. 17 fields per record, file size limited by drive capacity only. (40T or 80T) Please state DES or ADES.	£17 (d)

### WORD PROCESSORS

<b>VIEW 2.1</b>	£37 (d)
<b>VIEW 3.0</b>	£56 (c)
<b>VIEW INDEX</b>	£12 (d)

### VIEW PRINTER DRIVER GENERATOR

**DOT PRINT PLUS**  
Full details on page 5 NLQ rom for Epson FX/RX, MX and GLP. £9 (d)

**WORDWISE** £28 (d)

**WORDWISE PLUS** £24 (d)

**WYSIWYG PLUS** £38 (d)

See page 7 for details. £21 (d)

**INTERWORD** £46 (d)

(If you own a WW+ then quote your reg number and pay £39). £49 (d)

**SPELLMASTER** £24 (d)

**WORDEASE** £24 (d)

A 16K rom based utility for WW +

**SPELLCHECK III** £31 (d)

A 16K rom based spellcheck program for View and WW. Contains 2000 words on the rom and 6000 (expandable to 17000) words on a disc.

**EDWORD II** £43 (c)

(Please specify model B, B+, Compact or Master).

**EDWORD II** £27 (c)

Applications package

### SPREADSHEETS

**VIEWSHEET** £37 (d)

Acorn's spreadsheet provides 255 cols and 255 rows and will operate in any mode. Fully compatible with VIEW and 6502 2nd processor.

**WINDOMATIC** £15 (d)

Enhances the power of Viewsheet. See page 9 for details.

**VIEWPLOT** £22 (d)

A disc based plotting program. (To be released soon).

**INTERSHEET** £39 (d)

The new spreadsheet from Computer Concepts with many advanced features like 105 col mode, holding several spreadsheets in memory at a time etc.

**INTERCHART** £27 (d)

Graphics package for Intersheet

**ULTRACALC** £52 (d)

BBC Publications very popular and well proven spreadsheet rom includes graphics utility disc.

**MINI OFFICE II (for BBC B)** £14.75(d)

A suite of inexpensive but extensive word processor, database and spreadsheet packages. (40T or 80T)

**MINI OFFICE II (Rom)** £48 (d)

### LANGUAGES

<b>META ASSEMBLER</b> Multi processor Assembler full details on page 8	£145 (b)
<b>TEAM DISASSEMBLER</b>	
<b>MACROM</b> A very fast full featured macro assembler rom from 6502 and 65C02 codes, allows use of macros from library disc. Assembly can be disc to memory, memory to memory, memory to disc and disc to disc thus allowing very long source code upto the length of disc in use. About 3 times as fast as ADE and 30% more economical in memory.	£33 (d)
<b>ACORN MICRO PROLOG</b> Logic programming language used extensively in the artificial intelligence field. A simple 'front end' is supplied to make syntax more friendly.	£62 (d)
<b>ISO-PASCAL</b> Acorn's full implementation of International Std Pascal on 2x16K roms.	£48 (c)
<b>ISO PASCAL STAND ALONE GENERATOR</b>	£30 (d)

### OXFORD PASCAL

A fast P-code compiler and stand alone utility (40 or 80 T) Specify B or B+. £36

**OXFORD PASCAL** £52

for Master £46

**BCPL** £17.50

**BCPL CALCULATIONS**

Supports floating point, fixed point and fast integer calculations on BCPL.

**BCPL STAND ALONE GENERATOR** £39

**ACORN LOGO** £46

**LOGOTRON LOGO** £58

**BBC PUBLICATIONS OPEN LOGO** £58

**ACORN LISP ROM** £39

**ACORN FORTH ROM** £41

**ACORN COMAL ROM** £41

**MICROTEXT**

A frame based authoring system from NPL for interactive computer tutoring. Disc based

**MICROTEXT PLUS** £22

Extended Features incl extra memory, control of external devices etc. Rom based.

### COMMUNICATIONS

**TERMULATOR**

Advanced terminal emulator which includes VT52/100, Tektronics 4010, teletype emulations. £25

**COMMSTAR** £22

A highly popular communication rom suitable for all general purpose applications (specify B or Master)

**COMMUNICATOR** £4

A full 80 col VT100 emulation program with easy to follow screen menus.

**DATABEEB** £2

A variety of facilities for use with WS2000 Modem

**COMMAND** £34

(specify the modem type)

### COMPACT

(all on 3 1/2" disc)

**ARTROOM** £2

**FONTWISE+** £2

**FONT EDITOR** £2

**RAMROD** £3

**BROM PLUS** £3

**MACROM** £3

**BETABASE** £2

### UTILITIES

**ACCELERATOR** £4

**ACORN BASIC EDITOR** £2

**MONITOR (BBC Pub)** £3

**BROM PLUS** £26.50

**SLEUTH** £2

**TOOLKIT PLUS** £3

**TOOLBOX 2 (BBC Pub) Manual** £9.50

**Cassette** £2

**EXMON II** £2

**HELP II** £2

**ACORN GXR GRAPHICS ROM** £2

specify B or B+

**PRINTMASTER** £2

**PRINTWISE** £2

**DUMPMASER** supports about 40 printers

**FONTWISE PLUS** £1

**HERSHEY FONT CHARACTER GENERATOR** £1

**ICON MASTER** £2

**MOVIE MAKER** £2

Two Roms + Cassette

**ADV TELETEXT UTILITIES ROM** £7.9

4 hr viewdata system)  
Tel:01-450 9764

MAIL ORDER  
Burnley Road  
London NW10 1ED  
Tel:922800

RETAIL SHOPS  
15 Burnley Road, London NW0 1ED  
Tel:01-208 1177 Telex:922800  
(close to Dollis Hill ⊕)  
West End Branch  
305 Edgware Road, London W2  
Tel:01-723 0233  
(near Edgware Road ⊕)

For fast delivery telephone  
your order on 01-208 1177  
using VISA/Accs Card

Orders welcome from  
government depts &  
educational establishments

All prices ex VAT.  
Prices are subject to  
change without notice  
Please add carriage  
(a) £8.00 (Datapost)  
(b) £2.50  
(c) £1.50  
(d) £1.00



**BBC PUBLICATIONS  
EDUCATIONAL SOFTWARE**

Series of programs developed in many cases along-  
side Radio & TV programmes by BBC's Education  
Department which supplement the classroom studies  
moving and colourful displays helping in clear  
understanding of a variety of subjects. Some packages  
include audio cassettes.

**PRIMARY EDUCATION**

**ASTRONOMY:**  
5-7 years. Phases of moon, eclipses,  
planets etc. Includes a game. Disc £11 (d)

**COMPUTERS AT WORK:**  
Work Game illustrates two of the  
most important computer applications:  
graphics & IT. Incl. a database prog,  
word processing tutorial and a robotic  
control prog. Aud/EC/disc £16 (c)

**ATURE CRAFT**  
An inexhaustible, versatile and flexible  
series of programs to design shapes &  
patterns, paint them and convert them  
into pictures, puzzles and games. Disc £17 (d)

**PRODUCING GEOGRAPHY**  
5-7 years. Four exciting graphical  
adventures include river navigation,  
mountain climbing and desert  
trekking. Disc £16 (d)

**SHAPES WITH A STORY 1**  
Primary level programs incl  
geometry, co-ordinates and prob-  
ability for children of wide ranging  
abilities. Cass £8 (d)

**SHAPES WITH A STORY 2**  
Similar programs as 1 but covered  
from a different angle. Cass £8 (d)

**NUMBER GAMES:**  
Programs designed to stimulate the  
interest of an active child of 8 years and  
over. Cass/EC £7.50(d)

**TEACHING YOUR COMPUTER**  
5-7 years. Introduction to computers  
using synchronised audio techniques.  
Cass £24 (c)

**WORD PLAY**  
Elegant but simple introduction to  
word processing using animal shapes  
and editing functions. Fun manual for  
children. Cass £10 (d)

**WORD MOVER**  
Simple text editor. Cass £8 (d)

**SECONDARY LEARNING**

**ADVANCED LEVEL**  
**STATISTICS**  
Topics covering central concepts and  
examples. Topics include Discrete  
& Binomial Distribution. Eont.  
& Normal Data Distribution.  
Hypothesis Testing & Confidence  
Intervals, Central Limit theorem &  
Regression, Simulations, Correlations  
& Regressions. Disc £23 (d)

**ADVANCED STUDIES:**  
**GEOGRAPHY**  
Topics covering social geography:  
Rural & Town planning, drainage &  
land use management and planning for  
the future. Cass £10 (d)

**TECHNICAL INFORMATION**  
Designed to introduce IT to  
young adults. Suitable for use  
in schools, IT/Cs & Adult  
Centres. Prog Cass £10 (d)  
Audio Cass £5 (d)  
Book £8 (d)

**SCIENCE TOPICS (ST)**  
**WAVES**  
Physics program allows display of  
wave forms and shows changes caused  
by different parameters. Disc £14 (d)

**S.T.: RELATIONSHIPS**  
A Biology program giving a  
sophisticated simulation exercise based  
on data from W.H.O. Disc £14 (d)

**S.T.: BONDING**  
A Chemistry program to reinforce &  
strengthen the concept of bonding of  
elements. Transfer and sharing of  
electrons are both shown graphically. Disc £14 (d)

**S.T.: ELECTROMAGNETIC  
SPECTRUM**  
A graphical adventure prog to test your  
knowledge of the electromagnetic  
spectrum. Disc £14 (d)

**S.T.: ELECTRONICS IN ACTION**  
Program about using computers for  
control. Control is achieved by using  
6502 assy lang. Prog editor is supplied. Disc £14 (d)

**S.T.: NEWTON & THE SHUTTLE**  
An interactive prog in 3 parts covering  
launch to recapture of a satellite to test  
the knowledge of Newtonian mech. Disc £19 (d)

**S.T.: ECOLOGY**  
Simulation program managing a nature  
reserve to meet a host of individual  
needs. Disc/EC £19 (d)

**S.T.: POLYMERS**  
Students run a manufacturing co. and  
have to choose best materials for their  
products and compete with a rival co.  
run by the computer. Disc/EC £19 (d)

**S.T.: CLASSIFICATION &  
PERIODIC TABLE**  
A database program for producing  
different classifications of chemical  
information and presented in any  
format. Disc £20 (d)

**S.T.: FOOD & POPULATION**  
Simulation in space of biological  
aspects of nutrition and food pro-  
duction logistics. Disc £20 (d)

**SEC. SCIENCE:  
MICROTECHNOLOGY**  
Fundamental concepts of electronics  
Logic & Resistor Tutors, Servo Cct  
simulation & a cct design program. Cass £7 (d)

**SEC. SCIENCE: THE MOLE  
CONCEPT**  
A computer sync. audio program  
explains definitions of atomic &  
molecular masses and depicts molar  
equations. Disc/Aud/EC £16 (c)

**SEC. SC.: UNIFORMLY  
ACCELERATED MOTION:**  
Illustrates basic eqns., uniform accln,  
under gravity and an idea of terminal  
velocity. Disc/AUD/EC £16 (d)

**VU-TYPE**  
The popular 'Sight & Sound' touch  
typing tutor with alterable settings. Disc/EC £15 (d)

**GENERAL**

**VU TYPE PROFESSIONAL**  
An enhanced and expanded version of  
Vu Type with 63 Pitman approved  
exercise. Disc £19 (d)

**WHITE KNIGHT MK II**  
(Specify it for Master). Disc £16 (d)

**BATTLEFIELDS**  
Cass £8.50 (d)

**A VOUS LA FRANCE**  
A home study aid for anyone  
learning French. Cass/EC £17 (d)  
Book £5.25 (d)

**DEUTSCH DIREKT**  
Disc based vocabulary  
learning prog with audio  
cassette to help with Disc/aud/EC £16 (c)  
pronunciation. Book £5.95 (d)

**MODEM MASTER**  
£POA  
Cassette based programs listed above can be supplied  
on disc at an extra charge of £1.50 per disc and please  
specify the format required 40 or 80T.

**PRINTER ACCESSORIES**

**EPSON ACCESSORIES:**

**Interfaces:**

8143 RS232.....	£28 (d)
8148 + RS232 + 2K.....	£57 (d)
8148 + RS232 + 8K.....	£65 (d)
8165 IEEE + Cable.....	£65 (d)
8132 Apple II.....	£60 (d)
8177P NLQ for FX80+/FX100+.....	£99 (d)

Parallel & Serial Buffers of various size also available.

FX80/80 + /85 Tractor Attachment.....	£27 (c)
LX80/86 Tractor Feed.....	£20 (d)
LQ800 Tractor Feed.....	£44 (b)
LQ1000 Tractor Feed.....	£49 (b)
EX800/1000 Colour option.....	£55 (b)
H180 HP GL Emulation Rom + Ram.....	£59 (c)
H180 Printer Emulation Rom.....	£35 (c)

**SHEET FEEDERS:**

8338 LX80.....	£49 (b)
8333 FX100 + /105.....	£169 (a)
8331 FX80 + /85.....	£129 (b)
LQ800.....	£129 (b)
LQ1000.....	£159 (b)
EX800.....	£129 (b)
EX 1000.....	£289 (b)
FX 800.....	£129 (b)
FX 1000.....	£169 (b)

**Ribbons:**

RX/FX100/100 + . FX105.....	£7 (d)
RX/FX80/80 + , FX85.....	£4 (d)
LX80.....	£4.50 (d)
LQ800.....	£8.50 (d)
LQ1000.....	£10 (d)
LQ1000.....	£10 (d)
EX800/1000.....	£7.50 (d)
H180 Pen Set (Aqueous/Ball point).....	£7.50 (d)

**Dust Covers:**

FX80.....	£5.50 (d)
TAXAN/Canon KP810.....	£6 (d)
FX100.....	£7.50 (d)
KP910.....	£7 (d)

**HITACHI 672 Plotter**

Aqueous Pen Set six pens.....	£18.50 (d)
Oil Based Pen Set six pens.....	£25.00 (d)

**TAXAN CANON Accessories:**

RS232 + 2K interface.....	£63 (d)
Ribbon. KP 810/815/910/915.....	£6 (d)

**Star Printer**

NL10 Sheet Feeder.....	£52 (b)
NL10 RS232 Interface.....	£69 (c)
NL10 IBM Type Interface.....	£39 (c)
NL10 Ribbon.....	£4.50 (d)

**National Panasonic KX P1080**

Spare Ribbon.....	£4.50 (d)
Serial Interface.....	£39 (c)

**JUKI 6100**

RS232 Interfaces.....	£65 (d)
Tractor Feed.....	£149 (a)
Ribbon (Carbon).....	£2.00 (d)
Spare Daisy Wheel.....	£14 (d)
Sheet Feeder.....	£182 (a)

**BROTHER HR20**

Daisy Wheel.....	£18 (d)
Tractor Feed.....	£116 (a)
Spare Ribbon Nylon.....	£3.00 (d)
Spare Ribbon Carbon.....	£4.50 (d)

**INTEGREX INK JET COLOUR PRINTER**

Spare Ink Cartridge Black.....	£9 (d)
Spare Ink Cartridge Colour.....	£15 (d)
Paper Roll.....	£7 (d)

**Printer Leads:**

BBC Parallel Lead (1.2m).....	£6 (d)
BBC Serial (Epson) Lead (1.2m).....	£7 (d)

**Other lengths can be supplied on order:**

IBM Parallel Lead (2m).....	£12 (d)
-----------------------------	---------

**PAPER & LABELS**

**Plain Fanfold paper with micro perforations:**

2000 sheets 9 1/2" x 11" 60gms/sq m.....	£12 (£3)
2000 sheets 14 1/2" x 11" 60gms/sq m.....	£18.50 (4.50)
1000 sheets A4 90gms/sq m.....	£12 (b)

**Labels/1000:**

Single Row 3 1/4 x 1 7/16".....	£5.25 (d)
Triple Row 2 7/16" x 1 7/16".....	£5 (d)

# TECHNOMATIC

BBC COMPUTERS & ECUNET CENTRE

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

305 Edgware Road, London W2 Tel: 01-723 0233

## ACW443 CAMBRIDGE WORKSTATION

- A complete self-contained workstation with:
- \* NS32016 8MHz Main Processor & 32081 FP processor.
  - \* 20 Mbyte Winchester and one 80T Ds floppy drive.
  - \* A detachable keyboard Hi Res RGB Monitor.
  - \* 4Mbyte of on board Ram as standard.
  - \* Languages supplied include: Fortran 77, Pascal, C, Cambridge LISP, 32016 Assembler & 32bit BASIC.
  - \* Utilities on the operating system to cross link programs between different languages, utilities for porting programs to mainframes.
  - \* **Phone for detailed leaflet.**

## 32016 CO-PROCESSOR

- A second processor that brings genuine 'Mainframe' power to the BBC Computer.*
- \* Interfaces with the BBC through the tube connector.
  - \* NS32016 6MHz CPU & 32081 FP processor.
  - \* 1Mbyte Ram as standard.
  - \* Packaged software includes all the languages and utilities supplied with the ACW Work Station.
  - \* **Phone for detailed leaflet.**

CPU/FP Upgrade Kit (Acorn recommended) for the Co processor for 10 Mhz operation to enable faster processing. It can be fitted at no extra charge if ordered with the Co Processor.

TIME WARP Real Time Clock with PANOS utility allows screen display of time, day and date within PANOS at anytime and allows these data to be printed on documents. Model B users will find this particularly useful.

## 512 CO-PROCESSOR

*Brings professional software to the BBC Master.*

- \* 10 Mhz 80186 \*DOS PLUS.
- \* GEM Write & GEM Draw.
- \* 'WIMP' Environment with high quality Mouse.
- \* Runs many 'IBM' programs — even 'Flight Simulator'!
- \* Convert to/from IBM/BBC data.

## DOTPRINT PLUS

*A uniquely versatile NLQ ROM for the BBC Micro.*

- \* Built-in character font generator.
- \* Built-in view printer driver.
- \* Supports microspacing for professional justification in View & with disc in Wordwise/Plus.
- \* True bold print as well as double width.
- \* 12 character pitch as standard.
- \* Fully variable pitch and line spacing.
- \* Suitable for fully 'EPSON' compatible printers with quad-density graphics.
- \* **DOTPRINT PLUS** for EPSON FX/RX and compatibles.
- \* **DOTPRINT DUAL** for EPSON MX range.

## MICROJUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money; perhaps even more important, they supplied people to fight for their

## NORMALLY JUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money; perhaps even more important, they supplied people to fight for their  
**Notice how MICROJUSTIFICATION eliminates 'stretched' spaces between words.**

## FREE BUNDLED SOFTWARE WITH THE BBC MASTER



Authorised dealer for  
"Advanced Interactive  
Video System"

Please send for details on the equipment and subsidies available to schools

## EPSON PRINTERS

Epson have launched a new series of printers to update the FX range. The new **FX800** and **FX1000** range combines printing versatility and superior technical features with the highest standards of reliability. The features include two NLQ fonts, 10, 12, 17, and 20 cpi, dble ht and dble width, 200 cps in draft and 40 cps in NLQ, tractor and friction as standard, IBM compatible, full graphics, 8K buffer, Parallel interface.

### EPSON EX8000/1000


This range offers high speed printing to offer versatility in volume printing with speeds of 300 cps in 12 cpi mode. Four colour printing option is available for these printers.

### EPSON LQ800/1000

This range with its 24 pin print head offers the highest standards in letter quality printing at high speeds while maintaining the versatility of dot matrix printers. The hex density graphics capability produces about the best printout any dot matrix printer can produce.

## GRAPHICS WORKSTATION

**A A3 pen plotter with 0.1mm resolution allows graphs, charts, architectural drawings to be plotted using the 9 predefined plotting instructions or by using a CAD package. The pen mount allows a variety of pen types including drawing pens to be used or the following range of accessories to be fitted.**

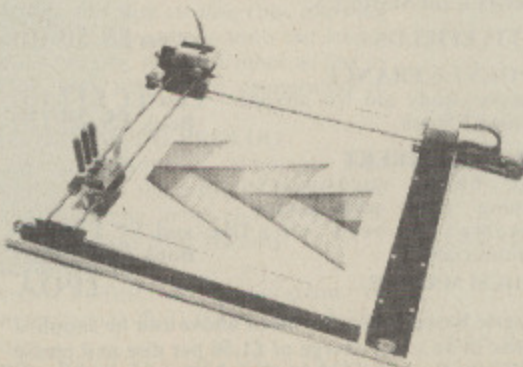

We now supply the Master 12 Computer with educational software which enables immediate use of the computer.

The software package includes:

### VU-TYPE DISC

The popular 'sight and sound' touch typing tutor using colour graphics.

### WORDMOVER

A program to help develop the vocabulary of primary school children

### WORD PLAY

An elegant and simple program to introduce primary school children to the concept of word processing.

### DRAWSTICK

A simple drawing program

### LOCO MOTION

An animated game giving the player control of a train travelling around a network of some 50 screens.

### PANTRY ANTICS

A fast, amusing and exciting arcade game.

## STAR NL10

A 80 col 120 cps printer with fine NLQ at 30 cpi offers novel and innovative features. There are dip switches to set, full control from the front console. Plug in interface cartridge simplifies adaptation to different computers. Friction Tractor feed as standard. Epson Compatible Graphics.

## NATIONAL PANASONIC KXP1080

A high performance low cost printer with character pitch feature 10, 12, 15 & 17 cpi and proportional spacing in both draft and NLQ mode. Column, 100 cps draft and 20 cps in NLQ. Parallel interface and Friction and Tractor feeds standard. Epson Compatible Graphics.

## HITACHI 672

- \* A3 four colour precision plotter.
- \* Serial and parallel ports as standard.
- \* Produces 'OHP' transparencies as well as plain paper.
- \* 'HP' graphics language or single character commands.

## OPTICAL SENSOR

This converts the plotter into an input device and offers a new range of applications: Scan or digitise a picture or a drawing to display or store. Travel mazes and investigate methods of artificial intelligence. Reliably read bar codes.

## DRILL/ROUTER

This will drill holes, machine moulds and complex 3-D shapes in a range of suitable materials to a depth of 16mm. Driver software supplied on disc and an optional application program is available to interface the drill/router to our NOVACAD package.

## SCRIBER

The sharp pointed scriber may be used to etch fine drawings on surfaces such as scraperboard wax coated copper etc. Full details on request. page 1 for price.

*All accessories available separately if required*

TECHNOLINE  
4 hr viewdata system)  
Tel:01-450 9764  
MAIL ORDER  
7 Burnley Road  
London NW10 1ED  
Tel:922800

RETAIL SHOPS  
15 Burnley Road, London NW10 1ED  
Tel:01-208 1177 Telex:922800  
(close to Dollis Hill ⊕)  
West End Branch  
305 Edgware Road, London W2  
Tel:01-723 0233  
(near Edgware Road ⊕)

For fast delivery telephone  
your order on 01-208 1177  
using VISA/Access Card



Orders welcome from  
government depts &  
educational establishments

All prices ex VAT.  
Prices are subject to  
change without notice  
Please add carriage  
(a) £8.00 (Datapost)  
(b) £2.50  
(c) £1.50  
(d) £1.00



TS 400



PD 800



PD 800 P




P2041 HT

**ALL TECHNOMATIC FLOPPY DRIVES  
NOW CARRY A TWO YEAR WARRANTY**

### FLOPPICLENE Disc Drive Cleaning Kit

Floppiclene introduces a positive concept in ensuring continuous high performance of the disc drives by providing an easy and efficient method of keeping the drive heads clean. Use of disposable cleaning discs eliminates the risk always present in reusable discs of recontamination and abrasion of the sensitive drive heads. Available for both 5.25" and 3.5" drives. Please see page 2 for prices.

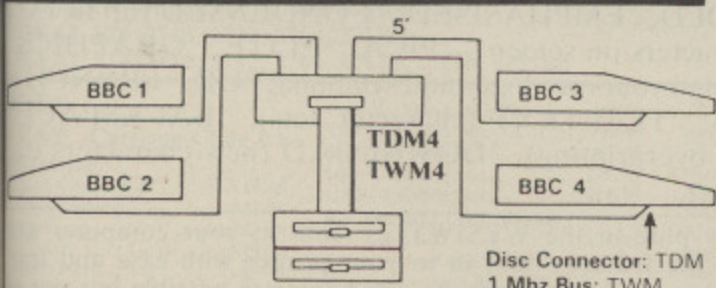

**TDM4/TWM4 Quad Unit (up to 4 computers)**  
**TDM2/TWM2 Dual Unit (2 computers)**

## DISC DRIVES

TECHNOMATIC offers a wide combination of high quality, high performance drives to meet all needs of BBC micro users. Please see our detailed and competitive price list on page 2.

\* All Technomatic drives are fitted with quality slim line ultra low power mechanisms capable of single and double density operation and offering very fast track access and head settling times.

\*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

\*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

\*The plinth version drives provide for a neat and compact system installation giving it a more professional look.

\*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with suitably fused 13A moulded plug.

\*PD853 Combo drive includes a combination of 5 1/4" (40/80T switchable) and a 3 1/2" 80 Track Double Sided mechanisms. Complete with mains p.s.u. Ideal for software conversion for 5 1/4" to 3 1/2" or vice versa.

**Such is our faith in Mitsubishi mechanisms that we offer a two year warranty on our floppy drives**

## WINCHESTER DRIVES

Mass storage 20 Mbyte drives are available in the following versions:

- \* P20HD Stand alone.
- \* P204HP With a single floppy housed in a plinth version case.
- \* P214TS Top of the range with a 10 Mbyte back up streamer and a single floppy housed in a plinth type casing and supplied with backup utilities.
- \* TS10 A stand alone 10Mbyte streamer for those who are already equipped with a Winchester and a floppy drive. Utilities for backup can only be loaded from a floppy.

All models are fully compatible with Acorn's ADFS system and include a mains psu and the necessary cable connections.

### DISC DRIVE MULTIPLEXER

The cost-effective alternative to networking! A self-contained unit that enables up to four computers to be connected to one single or dual disc drive. No hardware modifications - simply plugs into the computers drive port connectors. No ROMs or other software needed. All DFS commands work as normal. The switching of drives between computers is totally automatic and completely invisible to the user. This unit is ideal for installing in classrooms and other situations, where networking is not planned or necessary, or where costs must be kept low. In many cases software needs to be shared, although full networking complexity and cost is not needed. Several of these units can be connected in series to allow more computers to access the same drives, i.e. two quads connected together will allow 7 computers to share 1 drive. Units are supplied with 5' of cable per outlet as standard. Mains powered.

### WINCHESTER DRIVE MULTIPLEXER

A unique addition to our hardware range that allows the sharing of a Winchester between a number of computers. The principle of operation is the same as our highly popular disc drive multiplexers and there is no need for any additional software or hardware modifications. The Multiplexers are available in two versions, a dual unit for two computers and a quad unit for four computers to share a Winchester. Multiplexers are particularly useful for accessing common software and transferring data. Care needs to be exercised for certain types of random access files.

# TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE  
17 Burnley Road, London NW10 1ED Tel: 01-208 1177  
305 Edgware Road, London W2 Tel: 01-723 0233

## MODEMS

### MIRACLE WS4000


- \* A cost effective intelligent modem that offers the best value for money bringing the world of data communication within easy reach.
- \* Plain English commands make it simple to use, even for the first time user.
- \* Latest Hayes-type protocol commands, auto dial, auto answer, auto speed seeking.
- \* Equalisation model in V23 for line-noise filtering.
- \* Many other options including upgrading to V22 and V22 bis.

### MIRACLE WS2000

- \* A comprehensive manually switched 'World Standard' modem.
- \* Competitively price with a capability to be upgraded for various options.
- \* BT approved for V21/V23, 300/300, 1200/75 and 1200/1200 half duplex.
- \* Includes BEL103/113/108 standards for use outside UK.

Optional extras include (Not BT approved).

- \* SK1 chip set for computer control.
- \* User port cable.
- \* Auto dial Board.
- \* Auto Answer Board.
- \* DSI disc for auto dial facilities on Commstar.

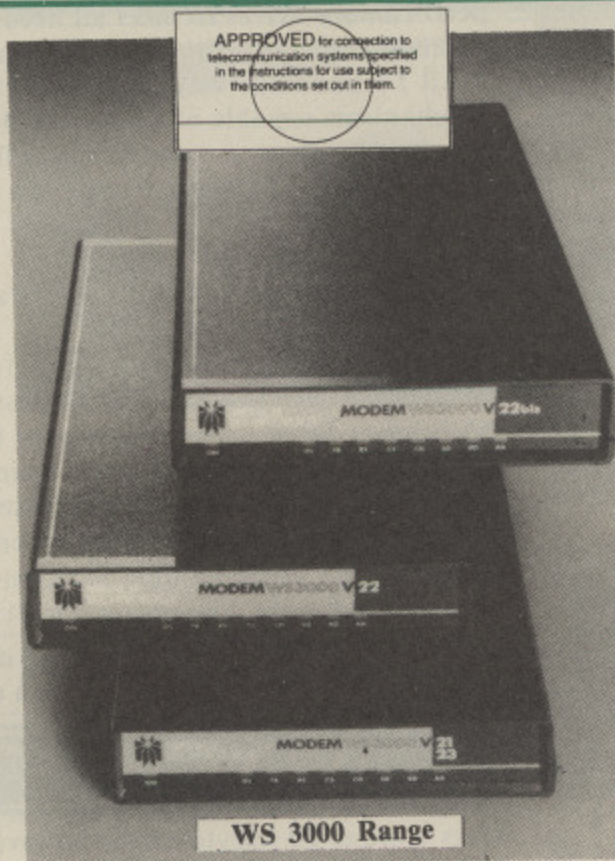

Miracle have introduced two new models in the WS3000 series for users who require a modem for a specific use. Model WS3022 provides 1200/1200 baud full duplex operation whilst only WS3024 provides 2400/2400 baud fd only.

Please see page 2 for prices

### MIRACLE WS3000 RANGE

- \* A professional range of intelligent modems with full BABT approval.
- \* Auto Answer and Auto Dial facilities installed as standard.
- \* HAYES protocols implemented.
- \* Pulse or DTMF 'tone' dialing.
- \* Plain English command structure simplifies the use of the modem.
- \* Integral parallel printer port fitted a standard configurable for both input and output for process control applications.
- \* A line sharing facility to differentiate between data and voice calls.
- \* Intelligent speed buffering converts 1200/1200 terminals to 1200/75
- \* Equalisation mode for line noise filtering
- \* Internal battery back up for storing names, numbers and default settings.
- \* Upgrade path for 1200/1200 and 2400/2400 and security encryption.
- \* Applications in the field of graphics and text access, high speed telex, user to user and user to main frame.

### SPECIFICATIONS

- WS4000 V2123: \*CCITT V21/V23, \*300/300, 600 and 1200 half duplex, 1200/75.
- WS3000 V2123: \*CCITT V21/V23/Bell 103, 300/300, 600 and 1200/75
- WS3000 V22: \*As V2123 and also 1200/1200 full duplex.
- WS3000 V22 bis: \*As V22 and also 2400/2400

## MULTIFORM Z80

A unique Z80 2nd Processor with a 'MULTIFORMAT' capability.



- \* Multiform Z80 will run most CP/M 2.2 formats on the BBC.
- \* 28 different formats including Acorn Z80, RML 380Z & 480Z, EPSON QX, Amstrad, Osborne etc, supplied on the library disc with the utility to create additional formats.
- \* Emulates the two of the most commonly used CP/M terminals, HAZELTINE 1500 and ADM-3a in addition to the Acorn VDU making installation of most of the software packages easy.
- \* Utility to inter convert ASCII text wordprocessed on a standard BBC and under OS/M or CP/M.
- \* 8271 allows single density CP/M formats whilst 1770 DFS allows both single and double density CP/M formats. Single or dual drive, 40 or 80 track format and SS or DS drives can be used providing the CP/M format matches.
- \* Dual drive will allow two separate formats to operate simultaneously for data transfer making it ideal for use in environment where machines with different formats are in use.
- \* Utility to read and write on IBM PC DOS discs available as an optional extra. Utility will also format a PC DOS disc.
- \* Multiform Z80 is supplied with a OS/M operating system rom, System disc and a Library disc. Please specify the DFS type and the drive format when ordering.

## WYSIWYG PLUS

This new screen/printer utility not only allows you to see on the screen exactly how the text is going to appear on the paper when printed but also simplifies the printer control codes that you need to use to get the different effects.

WYSIWYG + can be used in BASIC or from within most popular word processors like View, Interword & Wordwise Plus.

The printer commands have been simplified to meaningful words so that the user does not have to either remember or keep referring to the printer manual and try to decode the commands to VDU format. For example: \*ENLARGED will display enlarged text on the screen and send the appropriate command to the printer to print in enlarged mode.

Some of the features you could see in WW + or from BASIC include:

- \*SUBSCRIPT, \*SUPERScript, \*ENLARGED, \*BOLD, \*EMPHASISED, \*CONDENSED (up to 132 characters on screen), \*PICA, \*ELITE, \*GRAPHICS (design your own logos and symbols), \*UK, \*FRENCH, \*US, \*TELETEXT (character sets), \*BACKSPACE (for overprinting), \*DOWNLOAD (new characters or fonts).

Simply plug in the WYSIWYG+ rom in your computer and utilise the features built in to your printer with ease and without bother to produce the results you know are possible but not simple to achieve. No other single package offers this multiflexibility and simplicity to get the best from your printer.

WYSIWYG+ rom is supplied with a comprehensive manual.

TECHNOMATIC  
24 hr v  
Tel:01-4  
MAIL C  
17 Burn  
London  
Telex:92

An enha  
sophistic  
The new  
programm  
efficient

The soft  
clarifying  
simple an

"All the  
present  
with any  
... has  
approach

- Asser
- 6800
- mncr
- AO,
- Fully
- block
- Com
- Disas
- Send
- to dis
- Asser
- Over
- condi
- direct
- 32 b
- arithr
- Modu
- Serial
- code
- Over
- differ
- Two
- func

Emul  
Acces  
Load  
28 pir  
monit  
Fully  
100 tir  
Fully  
Four  
post c  
Comp

ORTAL  
ORTAL

DOKS  
o VAT  
NGUAG  
22 Assy La  
22 Program  
6 Book...  
orn BCPL  
orn FORT  
orn LISP.  
orn ISO P  
to to COM  
ro to LOG  
ero Prolog  
roduction

TECHNOLOGY  
24 hr viewdata system)  
Tel:01-450 9764

**MAIL ORDER**

15 Burnley Road  
London NW10 1ED  
Tel:01-450 9764

**RETAIL SHOPS**  
15 Burnley Road, London NW10 1ED  
Tel:01-208 1177 Telex:922800  
(close to Dollis Hill) ☺  
West End Branch  
305 Edgware Road, London W2  
Tel:01-723 0233  
(near Edgware Road) ☺

For fast delivery telephone  
your order on 01-208 1177  
using VISA/Access Card



Orders welcome from  
government depts &  
educational establishments

All prices ex VAT.  
Prices are subject to  
change without notice  
Please add carriage  
(a) £8.00 (Datapost)  
(b) £2.50  
(c) £1.50  
(d) £1.00

# EpromRyter

(Epromer III)  
Eprom Programmer

An enhanced version of the highly successful EPROMER II providing added sophistication to the eprom programming applications on the BBC computer range. The new software also utilises the extra facilities of the BBC Master computer. The programming methods are 'state of the art' of programming technology for fast, efficient and cost effective operation.

The single rail eproms handled by the EpromRyter are:

- 2716 2732 2764 27128 27256 27512 27513 27011  
2516 2532 2564 (NMOS & CMOS)
- One time eproms P27XXX, 87CXXX etc.
- Also A suffix eproms such as 27XXXX

The software is menu driven, many operations being single key. On screen help clarifying the operation being carried out. Will make the programming process very simple and easy for both specialists and novices alike.

**The main features of the programming software are:**

- \* Device, function and voltage selection from the computer keyboard.
- \* Continuous display of the options selected.
- \* All eproms upto 27512 (64K) programmed in single pass.
- \* Automatic Intelligent identifier support for eproms able to respond.
- \* Selectable programming voltage 25/21/12.5V
- \* 3 programming methods: Normal, Intelligent & Pulse (20 sec for a 27128).
- \* Serial port protocols supported.
- \* Intel HEX, Motorola S, HEX and ASCII protocols supported.
- \* DFS, NFS, ADFS and Rom Filing System Supported.
- \* BASIC/Machine Code programming using RFS.
- \* Powerful editor with input in HEX or ASCII. \* Full editable 64K file.
- \* Block move of data within the address range.
- \* User can select any section of the eprom from single byte to the full address range to blank check/burn/verify. Facility to program single bytes makes program development/amendment simpler.
- \* Multiple loading for ROM Filing System

*Some of the above features apply to Master Computers only*

EpromRyter interfaces with the BBC through the 1 MHz bus, has a mains power supply and is fitted with a 3M TEXTTOOL ZIF socket to provide consistent and reliable service for a long period.

# META Version III

*"All the good features you would expect to find in a good source code editor are present . . . Meta assembler lives in a different world. It is structured to work with any new processor . . . as new instruction sets can be added . . . as needed . . . has a well featured editor with colour highlighting, a sound modular approach."*

Acorn User October 1986

- Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc — and 68000 — using native mnemonics for each processor, eg. LD A, (HL) for Z80 and MOV AO, \$1000 for 68000 etc.
- Fully integrated Editor: four field, all search, search/replace, block copy, delete, move, marked save, load etc.
- Compatible with Portal Eprom Emulators and Team Disassemblers.
- Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc — all **during Assembly**.
- Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition directives.
- 32 bit labels; 31 character names. Arithmetic and Boolean arithmetic to 32 bits.
- Modular source code with numeric and string parameter passing.
- Serial communicator area with eight options lines: echo, control code trap, LF supression/addition etc.
- Over 500 in use throughout the world in universities and many different industries.
- Two 16K Roms, two 80 track discs, A4 ring-band manual, function-key strip.

## PORTAL EPROM EMULATORS

- Emulates 2716, 2732, 2764, 27128, 27256, 27512 eproms at 150ns Access time.
- Load at 4Kbytes/second — No "erase" time.
- 28 pin header plugs into Eprom socket on target system — status monitored on 13 Leds.
- Fully software controlled from Meta Assembler.
- 100 times faster than standard EPROM program/erase cycle.
- Fully CMOS compatible; draws no power from target system.
- Four portals may be independently programmed off same user-post cable.
- Complete with all cables, manual and disc.

PORTAL 128 (2716, 2732, 2764, 27128):

PORTAL 512 (2716, 2732, 2764, 27128, 27256, 27512).

**BOOKS**

to VAT Carriage Code (c)	
LANGUAGES	
2 Assy Lang Prog.....	£19.95
2 Programming.....	£13.95
Book.....	£23.95
arn BCPI User Guide.....	£15.00
arn FORTH.....	£7.50
arn LISP.....	£7.50
arn ISO Pascal Ref Manual.....	£10.00
to COMAL.....	£10.00
to LOGO.....	£7.50
Prolog Ref Manual.....	£10.00
roduction to Turbo Pascal.....	£14.95
Prog the Micro with Pascal.....	£8.50
The Supervisor's BBC Micro.....	£10.95
The UNIX Book.....	£7.50
Unix User Guide.....	£19.95
Understanding Unix.....	£18.45
<b>BBC MICRO GUIDE BOOKS</b>	
BBC User Guide Acorn.....	£15.00
BBC Plus User Guide.....	£15.00
Drawing your Own BBC Programs.....	£6.95
Inside Information.....	£8.95
Math Prog in BBC Basic.....	£7.95
The Friendly Computer Book.....	£4.50
Toolbox 2.....	£10.95
VIA 6522 Book.....	£4.50

**PROGRAMMING UTILITY**

Advanced Sideways Ram User Guide.....	£9.95
Advanced User Guide (BBC).....	£15.95
Advanced User Guide.....	£12.50
Applied Assembly Language on the BBC.....	£9.95
BBC Micro Advanced Programming.....	£9.95
BBC Micro Ref Guide (B Smith).....	£10.95
BBC Micro Sideways ROM's RAM.....	£9.95
Guide to the BBC ROM.....	£9.95
Beginners Guide to W.P.....	£7.95

Mastering Assembly Code.....	£8.95
Mastering Interpreters & Compilers.....	£14.95
View 3.0 User Guide.....	£10.00
View store.....	£10.00
View sheet.....	£10.00
Wordwise Plus.....	£9.95
<b>SOUND &amp; GRAPHICS:</b>	
Computer Graphics & CAD Fundamentals.....	£9.95
Mastering Music.....	£6.95
<b>DISC DRIVE SYSTEMS:</b>	
Advanced Disc User Guide.....	£16.95

Disc Book.....	£3.50
Disc Programming Techniques.....	£7.95
Disc Systems.....	£6.95
File Handling on the BBC.....	£6.95
Discovering Disc Drives.....	£POA
Practical Disc File Techniques.....	£5.95
Mastering the Disc Drive.....	£7.95
<b>APPLICATIONS:</b>	
Interfacing Proj for BBC.....	£6.95
BBC and Small Business.....	£5.75
The Software Business.....	£5.50

## MICROPROMER

An add on unit for Epromer II enabling the user to program 8741, 8748 and 8749 single chip microcontrollers. Now with the aid of cross assemblers such as META, the user can write code for the above devices and then with the aid of Micropromer program the device.

- \* Simple menu structure with on screen help. i.e. select a function and on the screen will appear details of the function being performed.
- \* Comprehensive error reporting and checking.
- \* Read, verify, blank check, program from 1 to the maximum byte count for the device being used at any address location.
- \* Support for DFS, ADFS and cassette filing systems.
- \* Edit data in Hex or ASCII.
- \* Total control via software, no switches to worry about.
- \* Supplied with user manual and software on diskette.
- \* MPROMER simply plugs into the EPROMER II ZIF socket.

## TEAM DISSASSEMBLER

The third part of the Universal Development System: a Meta labelling disassembler.

Supports 1802, 8080, 8085, HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc): updates soon for most of Meta processors.

- Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.
- Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.
- Reconstituted source code ready for immediate re-assembly by META.
- Omniversal search/replace for re-naming arbitrary label names with meaningful ones.

# TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE  
17 Burnley Road, London NW10 1ED Tel: 01-208 1177  
305 Edgware Road, London W2 Tel: 01-723 0233

## NOVACAD Computer Aided Draughting for the BBC Micro


“Novacad can drive a plotter to provide drawings of a high quality... Novacad is excellent. It is flexible, genuinely easy to operate without much practice, and a pleasure to use.” *Beebug December 1986*

“Novacad is a professional package, well worth the £90 for the ROM and disc and is expandable to suit your own particular requirements. I would have no reservations if I heard Novacad called, ‘the best on the market’.” *A&B Computing August 1986*

A sophisticated CAD package with unique facilities which are generally confined to the professional CAD packages costing thousands of pounds.

NOVACAD is being used in widely differing fields ranging from leading British industries for producing engineering drawings to Accountants' offices for producing flow charts. Architects,

engineers, plumbers, kitchen planners and many other professions requiring easy to use facilities for producing professional quality output are making extensive use of NOVACAD's unique features. NOVACAD is proving to be an invaluable teaching aid in technical schools and colleges simply because of the ease with which it can be used.

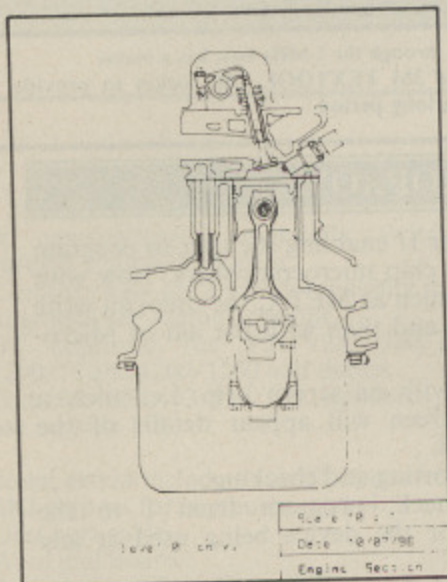

### MINIMUM HARDWARE REQUIREMENTS

- Any BBC range computer with Acorn DFS.
- 40 Track single sided single drive.
- Epson compatible dot matrix printer.

With basic BBC B, NOVACAD operates in mode 4 allowing use of any 2 colours. With shadow memory of the BBC+ or the Master, it can also operate in mode 0 for higher resolution or mode 1 for allowing use of any 4 colours, and it will provide additional user memory for more complex drawings.

6502 second processor or the Turbo on the Master will also increase the drawing speed considerably.


### The major features of NOVACAD are:

- \* Simple and easy to use with logical command sequence.
- \* A large drawing area (approx 15 screens).
- \* The ability to create complex icons (upto 500 lines instead of the usual 15 to 20 pixels), store them in a library and recall them at different scales and orientations.
- \* A zoom facility allowing magnification of up to 20 times to insert finer details.
- \* Block copy of shapes on the screen for repetitive use.
- \* Text entry at any 90° orientation at any position on the screen.
- \* Create multi layer drawing with 8 levels available.
- \* Full compatibility with the BBC range with minimal hardware requirements yet having the capability of exploiting the potential of the extra shadow memory or the second processor's memory and speed.
- \* Printer routine for Epson 80 and 136 column printers.
- \* A unique optional facility to output to any BBC compatible plotter.

### NOVACAD

is available in two versions

- \*BASIC version for cursor control from the keyboard.
- \*T/M version for cursor control from the keyboard. Tracker Ball or a Mouse.

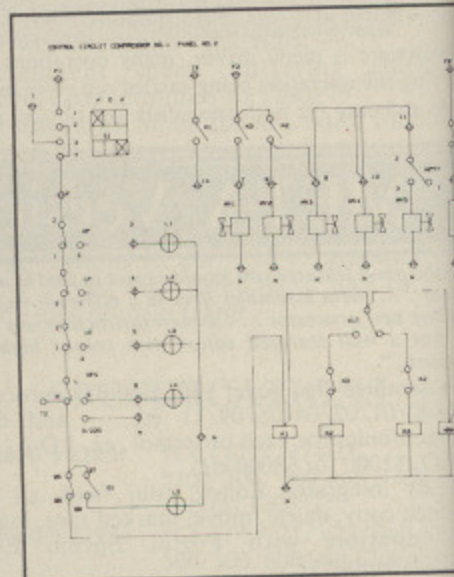

### OPTIONAL EXTRAS

Plotter driver generator is available as an optional extra to configure a plotter for any BBC compatible plotter. Configured programs for the popular plotters like Epson HI 80, Hitachi 672, Plotter Penman and HP GL. This program allows the drawing to be scaled to the maximum plotter size thus enabling drawing of A2, A3 sizes to be produced with equal ease. The zoom facility will enable inaccurate drawing on the screen to be eliminated.

ROUTCAD, an optional software package for our Graphics Workstation allows production of shapes drawn in NOVACAD in 3D on suitable material. It is ideal for a range of applications including template making and model building.

**NOVACAD package includes a 16K ROM, Utility disc and a comprehensive manual.**

## WINDOMATIC

All users of Acorn's VIEWSHEET spreadsheet program will be aware of its powerful windowing facility which allows the screen and/or printer to be configured in upto 10 separate windows taken from anywhere in the sheet. They will also be painfully aware of how difficult and time consuming it is to set up a required display. Although VIEWSHEET allows configurations to be saved to the media, it does not have provision for deciphering them.

WINDOMATIC has been produced with the intention of rectifying these shortcomings and to bring out the very best from VIEWSHEET.

WINDOMATIC provides a quick and easy way to configure screen and printer allowing complicated documents and reports to be set up much more easily. It displays complete text information on all 20 windows and accurate graphic representation of the screen and printer output. The package includes a screen dump routine for Epson printers and allows use of other printer dump packages. The program is compatible with BBC Master, B+ and 6502 and Turbo second processors. It can be entered from VIEWSHEET by use of function keys or it may be run by loading a previously saved window configuration from disc. The program is supplied on a disc with a comprehensive manual.



TECHNOLINE  
(4 hr viewdata system)  
Tel: 01-450 9764

MAIL ORDER  
Burnley Road  
London NW10 1ED  
Tel: 922800

RETAIL SHOPS  
15 Burnley Road, London NW10 1ED  
Tel: 01-208 1177 Telex: 922800  
(close to Dollis Hill ⊕)  
West End Branch  
305 Edgware Road, London W2  
Tel: 01-723 0233  
(near Edgware Road ⊕)

For fast delivery telephone  
your order on 01-208 1177  
using VISA/Access Card




Orders welcome from  
government depts &  
educational establishments

All prices ex VAT.  
Prices are subject to  
change without notice  
Please add carriage  
(a) £8.00 (Datapost)  
(b) £2.50  
(c) £1.50  
(d) £1.00

# A PRICE BREAKTHROUGH

## TECHNOMATIC WINCHESTERS

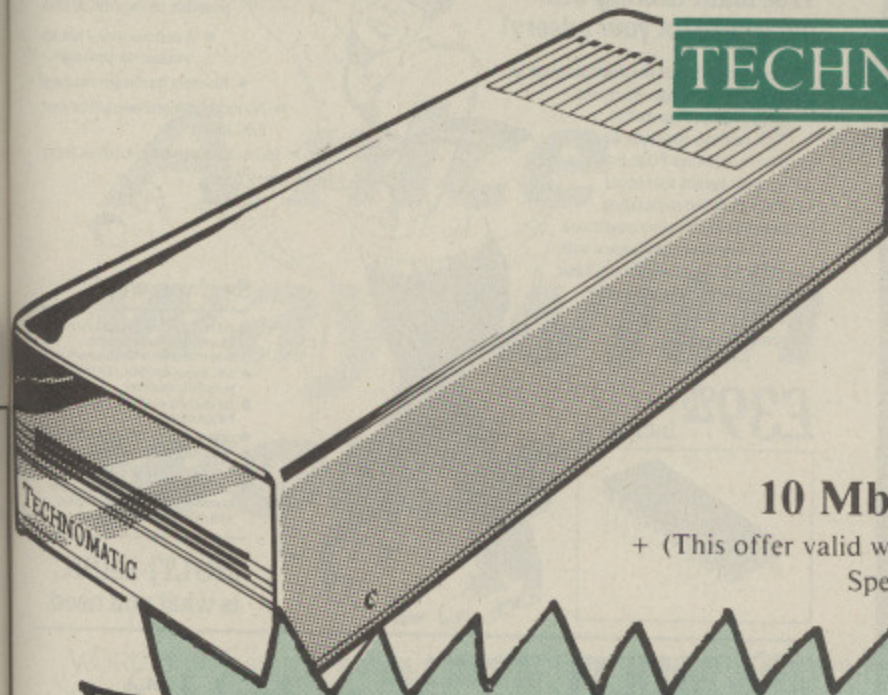

- \* Cased with power supply and cooling fan
- \* 1 Mhz bus extension cable
- \* Fully compatible with Acorn ADFS and FS III
- \* Fully compatible with S.J. Research file server
- \* 12 months warranty

10 Mbyte **£399 (a)**; + 20 Mbyte **£499 (a)**

+ (This offer valid whilst current stocks last and on orders received before 27th March)

Special Adaptor for S.J Research File Server £28


# SPECIAL OFFERS PAGE

### 3M FLOPPY DISCS


#### Individually Tested and Guaranteed for Life

Ever mindful of the catastrophes caused by data loss, 3M make floppy disks that are at least 32% less abrasive than the industry average. Which is why after stringent analogue and digital tests each 3M floppy disk is guaranteed error free for life.

**FREE CLOCK CALCULATOR  
WITH EVERY 5 BOXES  
OF 3M DISCS PURCHASED.**

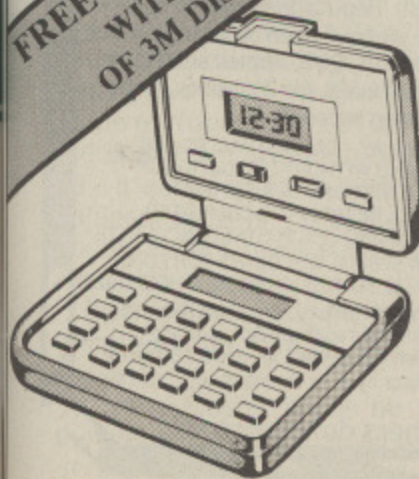

### 3 1/2 DISC DRIVES

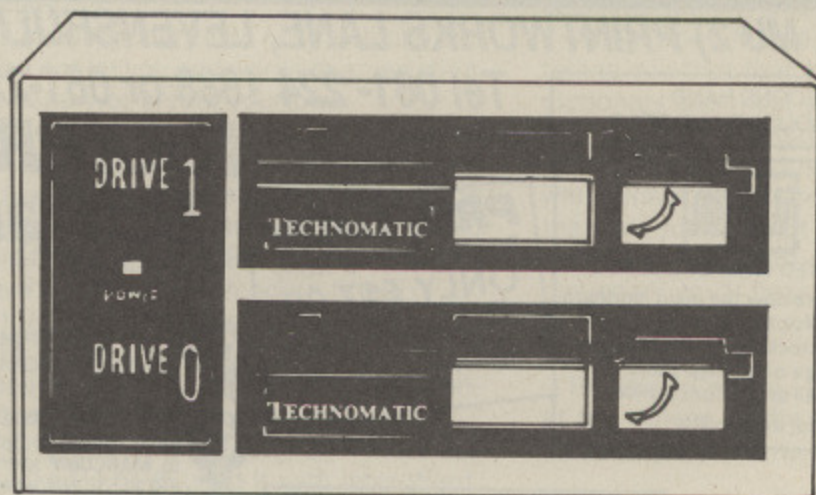

\* 400K/640K capacity perdrive in DFS/ADFS modes.

\* Mitsubishi 80 track double sided ultra low power, fast access mechanisms.

\* The drives are supplied fully cased and with cables ready for connection to a computer.

\* Drives powered from the computer

\* 2 years warranty.

Single Drive **£75 (b)**

Dual Drive **£134 (b)**

### EXTRAS

available as an  
plotter routine  
plotter. Pre  
popular plotter  
672, Plotmate  
program allow  
to the maximum  
drawing of A2 and  
equal ease. The  
inaccuracies are  
eliminated.  
software packag  
ation allows for  
drawn using  
le material and  
ations including  
building.

### manual.

to configure  
ments and  
complete text  
te graphic

for Epson  
ckages.  
+ and 6502  
tered from  
be run by  
from disc.  
prehensive

# CASPER UPGRADES BBC TO 68000 FOR £299 + £2.50 P+P + VAT



'C' Compiler £99  
+ £2.50 P+P + VAT

As reviewed by Mike Cook, Micro User March '87.

- 68000 2nd processor card with 128K RAM.
- 68000 two pass assembler with system monitor and BBC link software in EPROM.
- Two system diskettes (40 or 80 track).
- Cable and fixings.
- Comprehensive Users Manual covering installation, assembler instructions and teaching guide.

CA Special Products Ltd.

FREEPOST Moss Way Donibristle Industrial Park Dunfermline FIFE

Remittances by post or Tel: 0383 823928



Government + Educational Establishments' Official Orders Accepted.

# Does your BBC have a one track mind?

MASTER  
COMPATIBLE

True multi-tasking will  
put you out of your misery!


Your BBC now has the true multi-tasking potential of much bigger machines.

CMS Soft have cracked it!

This module, packaged as a ready-to-fit sideways ROM, brings you a robust system that holds its own in the most demanding industrial and laboratory conditions.

And there is no interference with normal BASIC functions; Multi-Basic enhances the power, speed and readability of the best BASIC Interpreter there is.

£39<sup>95</sup> incl. p+p



Real time Programs now possible on the BBC Micro.

- A serious tool - not an 'evaluation package'
- No extra hardware required
- No modifications needed to your BBC Micro
- Faster than procedure driven tasks

So if you want:

- full MULTI-TASKING with up to 8 background tasks running concurrent with the main program
- BBC Basic CONTROL FEATURES powerfully enhanced
- the ability to run REAL TIME PROGRAMS
- control of PHYSICAL INPUT/OUTPUT
- 5 real-time COUNTER/TIMERS
- 8 real-time TASK INTERVAL TIMERS
- a COMPREHENSIVE MANUAL that describes each command in detail, with many practical examples

MULTI-BASIC  
is what you need



MULTI  
BASIC

CMS Soft Limited.  
Unit 18, Industrial Estate  
Chelmsford Road, Great Dunmow  
Essex CM6 1XG  
Telephone (0223) 324141

CMS soft

# MANCOMP LTD

(Dept. MU 2) PRINTWORKS LANE, LEVENSHULME, MANCHESTER M19 3JP.  
Tel 061- 224 1888 or 061-224 9888

SECOND HAND  
BBC'S BOUGHT AND SOLD

APPOINTED WATFORD DEALER

Mancomp are now the main Northern Distributors for Watford Electronics and will be stocking all of Watford's popular range of hardware and software - all at Watford's prices. Phone first for availability.

PRINT-AID  
Printer Control Rom  
ONLY £17.00

The Utility Rom to take the trouble out of getting the most out of your printer. (Specify Printer Type when ordering.)

EXPRESS SPECTRUM,  
BBC and COMMODORE  
REPAIRS!

SPECTRUM REPAIRS BETWEEN £9 and £20

BBC REPAIRS FROM £15 TUES-SAT

COMMODORE REPAIRS BETWEEN £14 and £35

DISCS

Double-sided 96TPI  
£7.50 for 10  
Incl. FREE library case!  
25 for £14.95

MODEMS

B.T. Approved  
Modem complete with software  
£86.25  
300, 1200 & Prestel Auto Dial  
Modem alone - £89.95  
Software - £39.95

in all U.K. with While-u-Wait repairs! with INTERNATIONAL repair service!

FOR PROFESSIONALISM - "Of all the repair companies 'Sinclair User' spoke to, MANCOMP seemed the MOST PROFESSIONAL when it came to advice and a helpful attitude" AUG 85.

FOR HONESTY - We let you watch your computer being repaired and if there is nothing wrong with it, we will tell you!!

FOR REPUTATION & HELPFULNESS - "I have come across a firm that will be more than willing to advise you as to how to remedy your problems. They are called MANCOMP and as well as repairing faulty computers, are also quite willing to discuss your problems with you and offer reasonably cheap and more importantly CORRECT CURES" Phil Rogers POPULAR COMPUTING WEEKLY JAN 85.

WHY PAY HIGH 'FIXED' PRICES

(We do not charge you for our fancy premises by charging high 'fixed' prices!) Reputations take time to build, we have been repairing ZX 81's, Spectrums, QL's, Apples and BBC's professionally, for 2½ years - who is coming second?

WHY DELAY - OUR ESTIMATES ARE FREE AND WITHOUT OBLIGATION. IF YOU DO NOT LIKE OUR ESTIMATE WE WILL RETURN THE COMPUTER AND REFUND THE POSTAGE INCURRED! EXTRA-SPECIAL DISCOUNTS FOR EDUC INST. H.M. FORCES, CHARITIES, HOSPITALS! Every parcel sent by Royal Mail Receipted Post and insured for return journey! (For next day delivery include £1.50 extra). (Securicor by prior arrangement).

All our prices include VAT Please add carriage  
£5.50 for Printers & Drives £1.50 for other items

Terms and conditions available on request. What we do today ... others do tomorrow!

114 MICRO USER April 1987

John Allen tries out  
an aid to bleep  
out the mistakes

REVIEW

B

B+

M

Impact  
Comput

# A nice way with words



WORD processing is now a major application for micros, but merely manipulating words is no longer enough. The computer is capable of more and software is finally emerging to allow this greater sophistication on the BBC Micro.

Last year saw the release of Acornsoft's spelling checker Viewspell which has a 75,000-word dictionary on an 80 track disc.

It works by checking the words in a document against its dictionary after the whole document has been typed. Typically this takes around two minutes for a two page document.

After Viewspell has identified incorrect words the word processor is entered to make the corrections.

Computer Concepts has approached its spelling checker from a different direction. Spell-Master has the dictionary on rom so it sits inside the computer allowing much faster access.

This means that as well as operating as a language system like Viewspell it can also operate from within a word processor, checking words as they are typed.

Spell-Master is supplied on two roms mounted on a board that fits into just one socket – making a massive 128k on board. As well as the 57,000-word dictionary this holds the Spell-Master code.

The rom board can be fitted into any of the spare rom sockets on the BBC B or B+. It is designed to overhang roms in adjacent sockets – with the exception of double height ones such as Inter-Word which are too tall.

On the Master Compact it needs to be installed into one of the two higher sockets.

On the Master it can be installed in the highest socket (unless you have one of the early Master 128s where the

operating system is on a dual chip) or it can be inserted into a Care Electronics rom cartridge.

The checker has linkages to Inter-Word, View, Wordwise and Wordwise-Plus for immediately checking words as they are typed in.

Inter-Word already has menu 8 built in for Spell-Master. View, Wordwise and Wordwise-Plus users need to press Control+J when in edit mode to get the Spell-Master menu window.

In all of the systems, once activated, Spell-Master issues a beep every time you type a word that is not in the dictionary.

A spelling checker is not much use if it does not let you add words to an existing dictionary or create your own.

Spell-Master does this by building up user dictionaries in sideways ram. While sideways ram is a standard feature on the Master and Master Compact, if you own a model B or B+ you do need to have a sideways ram board fitted.

It is the immediate checking of words that is the most impressive feature of Spell-Master and the one which will contribute most to its success.

All words of three letters or more are checked. I have used it with Inter-Word,

Wordwise-Plus and View 3.0 and found that it did not perceptibly slow down the action of the word processor.

It does look neater with Inter-Word (due to the built-in menu) but it functioned equally well in all three.

In View it is sometimes necessary to reformat the text after corrections from Spell-Master, but this is the same when performing corrections normally.

The Spell-Master menu allows the whole text, a marked section or the text after the cursor to be checked.

The dictionary can be browsed through and you can switch the immediate checking facility on or off.

When Spell-Master issues its beep telling you that that a word is not in the dictionary the most probable reason is that it is simply mistyped.

If the word is corrected Spell-Master will remain silent, but if after altering the word you attempt to move the cursor away and the word is still not in the dictionary you'll hear another beep. But at no time are you forced to take any action.

Pressing Control+C checks the word at the cursor. If the word is not in the dictionary a window appears giving the

Turn to Page 116 ▶

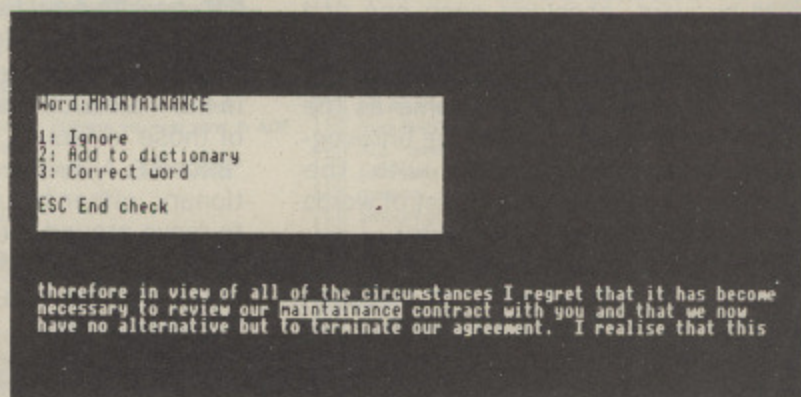


Figure 1: The Spell-Master menu in View

## ◀ From Page 115

options of ignoring it, adding the word to the user dictionary or browsing through the main dictionary.

If the third option is chosen the whole dictionary can be examined, using the cursor keys until the correct spelling is found. At this point pressing Return will replace the original word in the text with the corrected one.

Pressing Control+V at any time will check the text from the current cursor position to the end.

As with Control+C any words not found in the dictionary will cause a window to appear giving the options of ignoring the word, adding it to the user dictionary or browsing through the dictionary to find the correct spelling.

If you are unsure of how a word is spelt you can enter the dictionary browse option, find the word and press Return to insert it into your text.

A number of useful commands are provided as star commands allowing you to look at parts of the dictionary – these are a great help for solving crossword clues.

The authors of Spell-Master have also included a text editor which performs a number of functions. Cursor movements are compatible with Wordwise and Inter-Word, blocks of text can be marked, moved, copied or deleted and there is a search and replace facility so it could be used as a simple word processor.

This means that files from sources other than the word processors already mentioned can be loaded into the editor and checked.

The checking is carried out in much the same way as checking the entire text in one of the other packages. In the editor the checking menu appears after pressing f1.

The editor also provides the means to create user dictionaries and edit the contents of existing ones. This is important, otherwise words that are wrong can be accidentally added – and never removed.

One of the options in the editor allows you to do is to spell-check files. This might be useful if a file is too large to fit in memory.

It works by reading in the original file word by word, checking each one and writing it out to an output file. If the word is not recognised it is preceded with .

If the output file is the same as the input file, the first letter of the unrecognised word is replaced with the backslash \. In both cases a list of words not found is placed in the editor.

Although the Spell-Master dictionary is smaller than Viewspell's, in practice I did not find much difference in the number of words that I use which are not included.

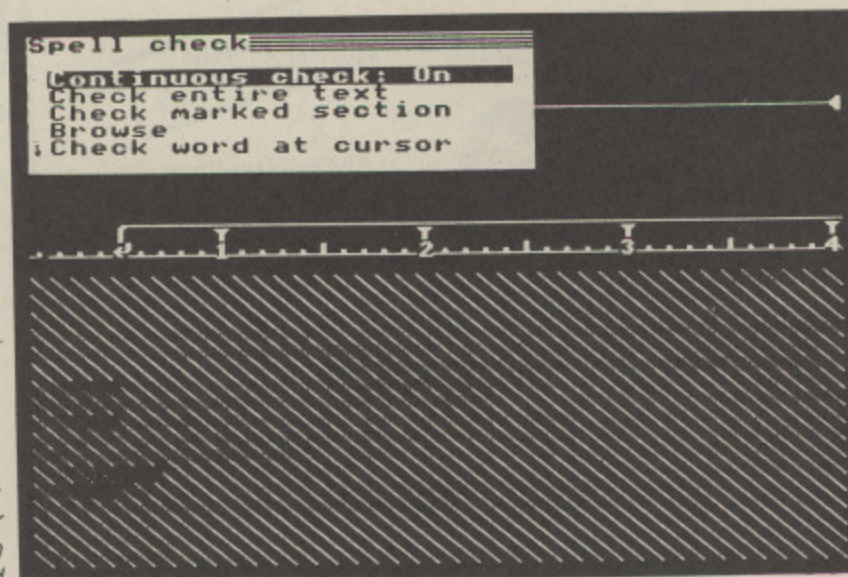


Figure 11:  
The Spell-Master  
menu in  
Inter-Word

Viewspell's dictionary is probably more consistent, being supplied by Longmans, whereas Spell-Master's is more pragmatic. Neither have much in the way of proper names, but Spell-Master seems slightly better for computer terms.

Even if the only function of Spell-Master were to check text as it is typed this would be a remarkable product, but in fact it is far more versatile than that.

If you regularly do word processing you will quickly appreciate that the whole range of commands add together to improve your style and confidence, whichever word processing system you use.

Spell-Master is very fast, the dictionary is adequately sized and it is easy to use.

However, it is not really usable without having sideways ram for the user dictionary, which will be a problem for many B and B+ owners, though I understand Computer Concepts is thinking about bringing out a low priced extension board.

Additionally it is not possible to search the dictionary with variable length wildcards.

Spell-Master is more expensive than Viewspell but for the serious user it is a much better buy. Used with Inter-Word it provides the standard of word processing facilities you expect, but do not always get, on much more costly machines.

### Star commands

**\*ANAGRAM:** Entering a string of letters causes Spell-Master to list all the words in the main dictionary that are anagrams of those letters.

**\*BROWSE:** Allows you to examine the dictionary, either by using the cursor keys to move around, or by typing in the first few letters of a word. It includes the main dictionary and any user dictionaries present.

**\*CHECK:** Checks for a particular word in the main dictionary. It allows wildcards

to be used: # for any character and \* for any number of characters.

There are a couple of restrictions, however: You have to give the first two letters of the word and \* can only be used at the end of a word. This means it is not as powerful a command as Viewspell's SEARCH.

**\*CROSSWORD:** This really shows the speed of Spell-Master. It is similar to CHECK in that you give the letters you have with # for the unknown ones.

But unlike CHECK this will allow wildcards in place of the first two letters.

Looking for "worthwhile", (which is near the end of the dictionary) giving "###thwhile" took 8.57 seconds on my model B. The same test with SEARCH in Viewspell took over 4 minutes.

**\*DLOAD/DSAVE:** These commands load and save the user dictionary into and out of sideways ram.

**\*FUZZY:** Lists words in the dictionary which sound like the one you give. This is to allow approximate spellings to be entered.

Generally I found this worked well – sometimes it gave only a couple of options, sometimes quite a lot. But it does require the first letter to be right.

For example "philosopher" was not found after typing "filosopher", but it did find it for "philosofer".

**\*SPELL:** Enters the Spell-Master editor.  
**\*WORKON/WORKOFF:** Enables and disables the Spell-Master rom from claiming the 256 bytes that it needs to do the instant spell-checking in View or Wordwise.

Unless instructed by the \*WORKOFF command it will always claim this space if View or Wordwise are present. It does not require this space when working with Inter-Word.

Product: Spell-Master  
Price: £59 (rom)  
Supplier: Computer Concepts, Gaddesden  
Place, Hemel Hempstead, Herts. HP2  
6EX.  
Tel: 0442 63933

# ELECTRONIC ENGINEERS


this is serious stuff at lighthearted prices

Those Engineers really useful people

Probe around *Miteyspice's* computer model of your circuit. More informative, more fun and faster than a breadboard. Plot the AC & DC characteristics, quantify bandwidth with the digitising cursor, sweep components, investigate temperature and noise (20 param Ebers Moll model) and when perfect, lay it out & etch it accurately with *PCB* using an ordinary DM printer. These programs have too many superb features to cover here, please send for details.

**\*\*Just released\*\***  
**MITEYSPICE**  
incorporating the unbeatable *Microspice* circuit simulator (£119 + VAT)

**P.C.B.**  
Pineapple's acclaimed "a utility I thoroughly recommend" Julian Rogers *Micro User* March '87 circuit board drafting program (£85 + VAT)

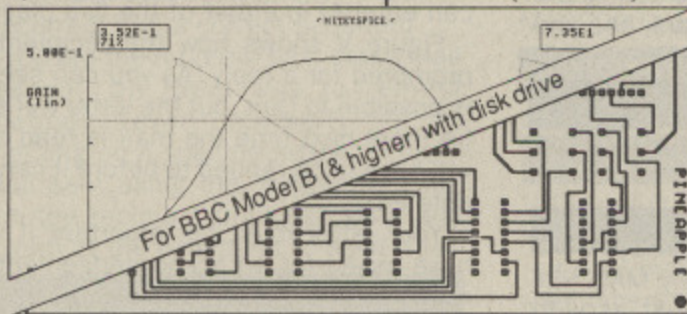

Sales: 106a Fortune Green Road,  
West Hampstead, London NW6 1DS  
Tel: 01-435 2771  
Telex: 8950511 mark for mailbox 23332001

**THOSE ENGINEERS Ltd**  
(also at Fairoaks Airport, Chobham)



DATE	TIME	DATE	TIME	DATE	TIME
01	00:00	01	00:00	01	00:00
02	00:00	02	00:00	02	00:00
03	00:00	03	00:00	03	00:00
04	00:00	04	00:00	04	00:00
05	00:00	05	00:00	05	00:00
06	00:00	06	00:00	06	00:00
07	00:00	07	00:00	07	00:00
08	00:00	08	00:00	08	00:00
09	00:00	09	00:00	09	00:00
10	00:00	10	00:00	10	00:00
11	00:00	11	00:00	11	00:00
12	00:00	12	00:00	12	00:00

## Can your Database do this?

Ours couldn't either - so we wrote **INTERVIEW LINK** to link with: ViewPlot, ViewSheet, Interchart, Intersheet.

No longer do you have to buy a dedicated, rigid database. Ours is flexible and even programmable. We are continually developing add-on applications to give you the ultimate data handling system:

**MAILSHOT** - Mail merge with Wordwise+, View and Interword. Up to 4 across labels.

**REPORTER** - Simple or complex reports including totals, averages, debit/credit column format, etc.

**SCHOOL ADMINISTRATOR** - Definable pupil records, external examination entries, DES Form 7, etc.


**ACCOUNTS** - Five management modules. Totally flexible with graphs, histograms, pareto curves.

Other vertical applications also available. Send now for further details.

**SYSTEM DELTA**  
The Ultimate Data handling system



**MINERVA SYSTEMS,**  
69 SIDWELL STREET,  
EXETER, EX4 6PH.  
Tel: 0392 37756

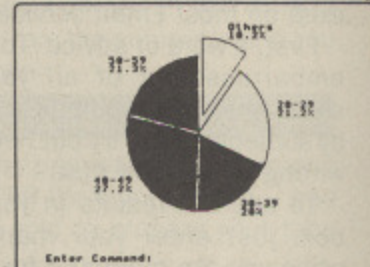

## At last a machine code development system that really does outperform ADE

**NEW TECHNICAL REFERENCE GUIDE NOW AVAILABLE!**  
£12  
Please contact us for further details.

### SYSTEM Software

12 Collegiate Crescent  
Sheffield S10 2BA

Tel. (0742) 682321

Access and Barclaycard welcome  
Further information available



#### Features

- Runs on BBC B, B+, Master, Compact, ADFS, DFS, ANFS, NFS
- Full use of all available RAM
- Intelligent memory management unit (MMU)
- User switches on all main features
- Automatic search for macros on disc
- Assemble absolute or relocatable code
- Source program tokenised or full text
- REPEAT..UNTIL, WHILE..WEND etc. high level language constructs
- Macros nestable to any depth
- Excellent error diagnostics
- Linker
- Editor and symbolic disassembler provided



#### Versions and prices

**Recommended for Master Compact..**  
ADE+ MMU and 65C00 series assembler on disc (3.5" ADFS). 32K sideways RAM required.  
**£42.00 + vat**

**Recommended for BBC B, B+ ..**  
ADE+ MMU and 65C00 series assembler on 2 16K EPROMS with DFS 5.25" utility disc.  
**£46.00 + vat**

**Recommended for Master 128, turbo..**  
ADE+ MMU and 65C00 series assembler on EPROM cartridge with 5.25" DFS utility disc.  
**£49.00 + vat**

**Upgrade**  
ADE to ADE+ (upgrade to either disc, EPROM or cartridge, you must send in ADE ROM chip)  
**£27.00 + vat**

**Upgrade**  
ASM to ADE+ (upgrade to either disc, EPROM or cartridge, you must send in ASM ROM chip)  
**£35.00 + vat**

Please add £1.25 P&P per unit.



#### The Ultimate Assembly Language Development Tool

ADE+ is a 65C00 series assembler system supporting all the mnemonics of the 65C12 used in the latest BBC microcomputers plus the additional 'Rockwell' instructions. ADE+ is fast, faster in fact than the in-built BASIC assembler and all rival products that we have tested. The assembler produces absolute code that can be "RUN or linker modules that can be merged with the output from other programs using the ADE+ linker. ADE+ supports a powerful linker which drastically cuts assembly time; a feature normally only found on minis and mainframes. The linker will even link the output from compilers with your assembly language programs. Full library support for both the linker and the assembler is provided - fast searching for unknown instructions in a random access macro library. ADE+ is a modular system with many modules to add later; i.e. a mouse based editor & a Z80 cross assembler! A print spooling system uses sideways RAM as a print buffer to eliminate waiting time; your listing runs off as a background job! Use the print spooler from BASIC or your own programs. ADE+ uses ALL available memory. With a second processor attached the IO processor spare memory is used as a buffer to reduce the amount of disc access. All available memory is handled by ADE+'s intelligent memory management module. Use your own favourite editor or the one provided. Assemble from disc or memory. Full utilities including librarians, converter for BBC BASIC etc. ADE+ must be the bargain of 1986/7!

#### A comparison of three 65C12 assemblers

Feature	ADE +	BBC Basic	MACROM
Number of pseudo-ops	54	4	36
Use of all available RAM	Yes	No	No
Macros	Yes	No	Yes
String functions	Yes	Yes	No
True macro libraries	Yes	No	No
Relocatable output	Yes	No	No
Linker with libraries	Yes	No	No
High level constructs	Yes	Yes	No
Use any editor?	Yes	No	No
Number of error reports	39+ warnings	3+BASIC errs	20
65C00 extended opcodes	All	65C12 only	65C12 only
Switch off 65C12 opcodes	Yes	No	No
ROM size	32K	16K	16K
Disassembler	Symbolic	No	Simple
Label restrictions	No	Yes	Yes

# Golden opportunities

LAST month I looked at how you send a letter using electronic mail (Email). As with ordinary letters, which can be sent recorded, registered and so on, there are a lot of options available to senders of Email.

This month I intend to look at some of the options available to people using the Telecom Gold system — similar facilities exist on most Email services.

First, a word of advice. To save you the embarrassment of all your mistakes showing when your letters are received by someone else, try out new features by writing to yourself first.

To see the results in your own mailbox, just enter your mailbox number when you are prompted for the name or number of the person you are sending the letter to.

You'll notice that most of the illustrations in this article are from MAG001 to MAG001 — that's from me to me.

It's rather impersonal to have to enter a number at the "To" prompt each time you send a letter. You can set up your own directory so that you can send mail by name rather than number.

To illustrate this we'll set up a directory with four entries in it. You start by creating a MAIL.REF file: To do this at the prompt enter:

```
ED
```

The computer will respond with:

```
INPUT
```

Now type in your names and numbers separated by a space with each one on a new line.

If you want to send mail to a group of people you can attach more than one number to a name by including them in the list separated by spaces.

```
>ED
INPUT
PETE MAG001
PETER MAG001
PD MAG001
LOT MAG001 MAG999

EDIT
SAVE MAIL.REF

>
```

Figure I: Creating a simple MAIL.REF file

When you have finished entering the names press Return on a blank line and the computer will respond with:

```
EDIT
```

You are now in edit mode and can easily save the file. Type:

```
SAVE MAIL.REF
```

The result of setting up my MAIL.REF file is shown in Figure 1. Just as with letters, the file can be created on a word processor and transmitted when you are ready. There's no need to type it in while you are online.

You'll notice that the last entry in Figure 1 contains two mailbox numbers. This means that by sending a letter to LOT both MAG001 and MAG999 will receive copies.

Unfortunately you can't put your own number there twice so this is one you can't try within the confines of your own box.

Before leaving the subject of MAIL.REF files, there are a couple more points you should know.

Firstly, if a file already exists you can't save a new one. To erase an existing file, at the prompt type:

```
DESTROY MAIL.REF
```

It is possible to edit a file on the Gold computer, but that would be the subject of an article on its own. For now let's just say that if you want to change a file, delete the old one and start again.

If you keep your word-processed file it can be edited and retransmitted to Gold at any time.

Sometimes you may want to know that a recipient has received your Email. All you have to do is put AR (Acknowledgement Requested) into your message.

```
>MAIL SEND PETE AR

Subject: Figure II
Text:
This is a test of AR.
.s

MAG001 -- Sent

>
```

Figure II: Asking for an acknowledgement with the command in the address line

As with all the options I'll be discussing there are two places where this command can be put — either as part of the "To" line or at the end of the message, where it has to be preceded by a full stop.

Figures II and III show the two ways of issuing the command and Figure IV shows what the sender will see.

If your message is so important that you want more than just an acknowledgement you can insist that the recipient replies. The command to do this is RR (Reply Requested) — again, it can be entered in either of the two places.

Figure V shows how the recipient is prompted for a reply. As you can see, it is possible to Quit, but the letter will still be there next time the mail is read and will have to be replied to before it can be deleted.

Your letter must be important if you have asked for an acknowledgement or reply, so to ensure it arrives quickly you can also send it express. This puts your letter at the front of the recipient's mail queue.

If he is online, it puts the following message on his screen to say that a letter has arrived:

```
Express letter call from MAG001
```

The command to send express letters is EX and it goes in one of the usual places. It can be combined with one or more other commands such as:

```
To: MAG001 AR RR EX
```

Why would you want to request a reply and an acknowledgement on the same letter? You will receive an acknowledgement as soon as the recipient looks at

```
>mail send Peter

Subject: Figure III
Text:
Another test of AR.
.ar
.s

MAG001 -- Sent

>
```

Figure III: Acknowledgement requested as an afterthought

```
>mail read

To: MAG001
From: MAG001
Posted: Mon 16:Feb-87 21:43 GMT Sys 72 (1)
Subject: Figure II
Acknowledgment Sent

--More--
```

Figure IV: Recipient's message when he reads acknowledgement requested mail

his mail but, although he can't delete the letter without replying, he can leave responses until later.

Confidentiality can be a problem if more than one person has access to a mailbox. If you want to restrict certain mail to one box user to read you can give that person a password and use it on any mail you send him by using PA followed by the password.

Figure VI shows how to send a message with a password attached, and Figure VII shows how the message is received and the result of entering both an incorrect and a correct password.

If you are the forgetful type dated mail gives you an ideal way to remind somebody (even yourself) to do something on a specified date.

Mail sent using this method will not reach the recipient until that date and the form of the command to send it is:

```
DA d/m/y
```

So if I want a letter to arrive on February 14, 1988, the command takes the form:

```
DA 14/2/88
```

The way to send a letter like this is shown in Figure VIII, but when it arrives

```
>mail read
```

```
To: MAG001
From: MAG001          Posted: Mon 16-Feb-87 21:47 GMT Sys 72 (1)
Subject: REPLY TO THIS
```

```
--More--
```

You can't delete this without replying.

Reply Requested.

```
Text:
.q
```

```
>mail read
```

```
To: MAG001
From: MAG001          Posted: Mon 16-Feb-87 21:47 GMT Sys 72 (1)
Subject: REPLY TO THIS
```

```
--More--delete
```

Reply Requested.

```
Text:
OK, you win. I'll delete it now.
.s
```

```
MAG001 -- Sent
```

Action Required: del

End of Mail.

```
>
```

Figure V: You have to reply to mail if the sender requests it

at the recipient it will appear no different to one posted on that date.

One of the big advantages of electronic mail is that multiple copies of a memo or letter can be sent very easily. You can send these copies in several ways, the difference being in the manner the recipients see who the letter has also been sent to.

If the mail is to all recipients just list their names when you are asked who the letter is to — or put several names in your MAIL.REF file as I did with LOT.

So, to send mail to MAG001 and MAG999 I can enter:

```
MAIL SEND MAG001 MAG999
```

or

```
MAIL SEND LOT
```

The resulting message to the recipient is shown in Figure IX.

If your mail is to one person, but you want others to see it and the recipient to know they have seen it, then use a Carbon Copy (CC).

For instance, if you send someone a

```
>mail send mag001 pa pete
```

```
Subject: Test of password
Text:
This is secret.
.ex
.s
```

Figure VI: Use a password to ensure the confidentiality of mail.

```
>mail read
```

```
To: MAG001
From: MAG001          Posted: Mon 16-Feb-87 22:11 GMT Sys 72 (1)
Subject: Test of password
Password: fred
```

```
Bad password
```

```
End of Mail.
```

```
>mail read
```

```
To: MAG001
From: MAG001          Posted: Mon 16-Feb-87 22:11 GMT Sys 72 (1)
Subject: Test of password
Password: pete
```

```
--More--
```

```
This is secret.
```

Action Required: del

End of Mail.

```
>
```

Figure VII: You must know the password to read password protected mail

request to do something and want his boss to know you have asked him to do it, use CC and the boss will receive a copy.

The actual recipient will also know that the boss has been sent the copy as shown in Figure X. Although I've only sent one copy, CC can be followed by a whole list of names or numbers.

In the above example, if you didn't want the person to know that the boss had been sent a copy, use BC (Blind Copy) instead of CC. The boss will still be sent a copy but no indication will be given to the recipient of the original.

It is possible to store a letter that you frequently send, or one that you want to send to several people in a slightly different form, on the Gold computer. To do this all you have to do is type:

```
XMIT
```

You will be asked whether you want to transmit to or from the computer and you obviously answer:

```
TO
```

You will then be prompted for a filename — I'll use LETTER for this example — and you'll then be told to prepare your tape or disc.

At this point you can send a word-processed letter as I described last month, or ignore the prompt and press Return then type in your letter. When you

**Turn to Page 120** ▶

```
>mail send mag001 da 17/3/87
```

```
Subject: delayed
Text:
This will arrive tomorrow.
.s
```

```
MAG001 -- Sent
```

```
>
```

Figure VIII: Delayed mail is an ideal way of sending reminders.

```
To: MAG001
To: MAG999
From: MAG001          Posted: Tue 17-Feb-87 21:22 GMT Sys 72 (1)
Subject: Figure IX
```

```
--More--
```

Figure IX: Email can easily be sent to several people at the same time

```
To: MAG001
Cc: MAG999
From: MAG001          Posted: Tue 17-Feb-87 21:24 GMT Sys 72 (1)
Subject: Figure X
```

```
--More--
```

Figure X: Use carbon copies to show the recipient that someone else has a copy

◀ From Page 119

have finished type:

.END

The letter will be saved as a text file and Figure XI shows the complete operation. The saved file can be loaded as part or all of any letter by entering:

.LOAD LETTER

Figure XII shows me sending the same letter (which I had previously saved) to two different people, though with varying first lines. When you have finished with it, LETTER can be deleted using the DELETE command.

Well, there you have it. Just some of the possibilities when you send Email.

The best way to familiarise yourself with these is to work through the figures, substituting your own mailbox number for MAG001, then experiment with various combinations of commands.

You'll notice that I have mixed upper and lower case letters in the figures — you can use either.

And remember, to save you looking silly when the unexpected happens and your mail doesn't go exactly as planned, practice by sending letters to yourself.

```
>xmit
TRANSMIT TO OR FROM THE COMPUTER?  to
WHAT WILL BE THE NAME OF THIS FILE?  le
tter
PREPARE YOUR CASSETTE/DISKETTE TO TRANSMIT DATA,
PRESS RETURN, THEN BEGIN SENDING
(hit BREAK or enter ".END" when done)
This is a demonstration letter.
I am just typing it in, but I could
have word-processed it if it was
longer.
.end
>
```

Figure XI: Saving a file on Gold computer for later use

Gold even provides you with an easy way to do this. Try:

MAIL SEND ME

● Next month, we'll take a break from Email and look at some of the sources of telesoftware available and how you can quickly obtain a copy of a program down the telephone wires from a friend who is miles away.

```
>MAIL SEND mag001
Subject: Greeting
Text:
Dear Peter
.load letter
19 line(s) loaded.
.s
MAG001 -- Sent

>mail send mag999
Subject: Greeting
Text:
Dear Helpline
.l letter
19 line(s) loaded.
P.S. Don't forget to answer the question
I asked you.
.s
MAG001 -- Sent
>
```

Figure XII: Send a quick letter by using a saved file as part of it

QUAL-SOFT

THOUGHTWARE

Sports simulations

Way back in 1983 we introduced LEAGUE DIVISION 1 for the BBC Micro. In September 1984 the original version of SOCCER SUPREMO, and the LD1 upgrade DIV1 '85 were introduced, the 1st graphics oriented, the 2nd an out and out strategy game. In both games you become the manager of a newly promoted 1st division team, which you have to build up into a challenger, and hopefully winner, of the 1st Division Championship. The game uses professional simulation techniques which produce a true, natural management simulation rather than the simple minded mental arithmetic exercises of other "simulations". This caused this response:

**"Hugely enjoyable but dangerously addictive"** says Dr. Trevor Harley, Department of Psychology, University of Warwick  
**YOU AIN'T SEEN NOTHING YET!!**

WELL DR HARLEY

THE NEW

**SOCCER SUPREMO**

AND

**LEAGUE DIVISION ONE**

A SOCCER MANAGEMENT SIMULATION

TAPE 2  
European Cup  
U.E.F.A. Cup  
Cup Winners Cup

TAPE 1  
6 Seasons  
Division 1 Football  
The F.A. Cup

TAPE 2  
European Cup  
U.E.F.A. Cup  
Cup Winners Cup

TAPE 1  
6 Seasons  
Division 1 Football  
The F.A. Cup

To the versions we've added; the F.A. Cup, the European Cup, the U.E.F.A.Cup and the European Cup Winners Cup. We've introduced multiple DATA files for the different seasons and to allow a massive transfer market of over seventy players, from World Cup stars to top scoring non-league players. Soccer Supremo retains the 3D, 22 man, 90 minute football match graphics, improving the graphics' layout, We've added sound, in-match injuries, named goal scorers, penalty shoot-outs (European matches), and replaced the complicated match statistics with a post match individual player assessment. We've ..... well, lots of other small improvements. The games are now almost three times the size of the originals, using two tapes plus the multiple datafiles. But .....

**WE'VE ADDED NOTHING TO THE COST!**

The new games are supplied DIRECT from QUAL-SOFT. TAPE 1 + TAPE 2 + Manual, P&P and VAT still costs £9.95. RELEASE DATES: SOCCER SUPREMO is immediately available, LEAGUE DIVISION ONE will be released on the 21st February. Current owners of SOCCER SUPREMO, DIV1 85 and the COMBO tape can obtain a £5 rebate. Just return your tape and include payment of £4.95.

QUAL-SOFT  
Dept. MU,  
18 Hazlemere Road  
Stevenage SG2 8RX

Tel: 0438  
721936



Please supply:  
SOCCER SUPREMO   
LD1

Name: \_\_\_\_\_  
Address: \_\_\_\_\_  
Access No. (if applicable) \_\_\_\_\_





# Four rip-roaring games for your computer for less than £1 per game!

Three of this high-powered collection are top-rate machine-code versions of arcade classics and the fourth is a thrilling real-time adventure game. There's hours of enjoyment and something to suit everyone in this unique value for money collection.



**SNAPMAN** - Guide your man through the maze as he munches energy pellets and avoids hostile aliens.

THOUSANDS OF COPIES SOLD!

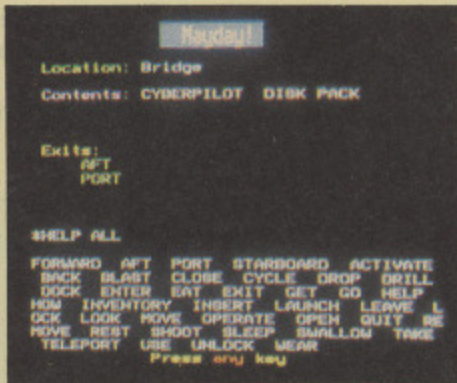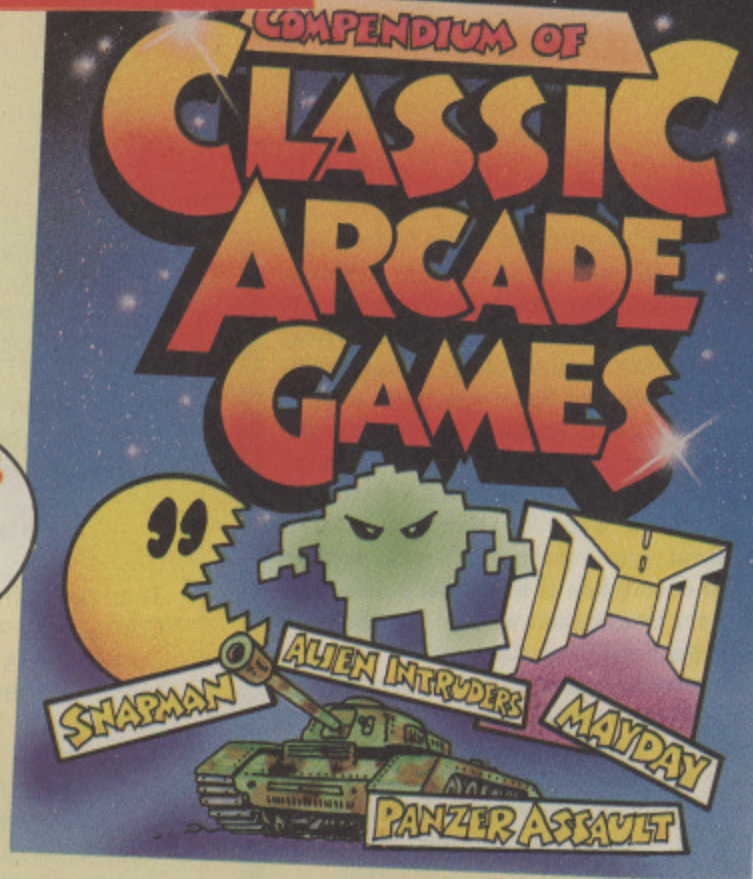

**MAYDAY** - A futuristic adventure! As captain of an interstellar cruiser you must guide the sole survivor of a stricken space freighter through the wreckage of his craft. If you fail to recover those vital medical supplies a whole planet is doomed!



**PANZER ASSAULT** - You are a tank commander engaged in vicious combat against encircling enemy forces.



**ALIEN INTRUDERS** - With only your laser for protection you must destroy the waves of aliens who threaten to engulf you.

**ONLY £3.95** tape  
5 1/4" disc £4.95

TO ORDER TURN TO THE FORM ON PAGE 159

Compiled by Steve Turnbull

**WELCOME** to part two of the Library, and thanks for sending in all your routines. Remember, they can be in any language.

This month we have an advancement on the FNin routine, an all-singing shift-down routine for Basic programs, a 6502 machine code routine for turning the cursor on and off, and a couple of routines to tidy up the Master clock.

A quick word on how you should present your routine: It should have a brief description of its salient points, perhaps a justification of why it's better to use than anything else, and an example program to demonstrate how it works.

In Basic avoid all GOTOs and GOSUBs, because any routine should be relocatable into any program. And in machine code make sure all memory locations are named – such as *charbuff* instead of *&C00*, and *oswrch* instead of *&FFEE*.

Happy programming.

**Title:** STRING INPUT  
**Language:** Basic  
**Author:** Teri Paul

String input using the Basic INPUT command (or *osword 0* from any language) is very dangerous. Try typing:

```
MODE 7:INPUT A$
```

Then press the following keys in order Control+V, Control+E, Control+Y, Control+E, A, A, A, A. This changes to Mode 5 then draws a line on the screen – all from an INPUT command.

But good commercial programs don't allow this, what they use is an idiot-proof input routine.

Here is a general string input routine which behaves identically to the INPUT statement which takes as parameters, permissible keys, an initial string, the maximum line length and whether a zero length string is acceptable. It uses the FNin routine as a building block.

Line 140 contains essential

initialisation, *d/\$* is Delete, *ln\$* is the line delete – Control+U – and *cr\$* is Return.

While this has been kept to the normal values for input, you could change these to any keys – for instance Control+K to Kill a line.

Line 270 ensures that the cursor is positioned correctly in the line. Lines 280 to 300 select the acceptable keys, and particularly whether *cr\$* is allowed when the input string has length zero.

Line 310 gets the input character and line 320 selects the appropriate procedure to either delete a character, delete a line or add a character.

The main part of the routine repeats until a *cr\$* has been accepted.

A new line is generated on screen and the final string is returned.

```

100 REM ** String Input **
110 hi$="ABCDEFGHIJKLMNOPQRSTUVWXYZ"
120 lo$="abcdefghijklmnopqrstuvwxyz"
130 nm$="0123456789":sp$=" "
140 d/$=CHR$127:ln$=CHR$21:cr$=CHR$13
150 PROCcursoff:s$="":CLS
160 REPEAT
170 PRINT"Type in a line:"
180 s$=FNstr(hi$+lo$+nm$+sp$,s$,100,TR
UE)
190 UNTIL s$=""
200 PROCcurson:END
210 ---
220 DEF FNstr(k$,s$,LX,TX)
230 LOCAL XX,YX,PX,a$,i$
240 XX=POS:YX=VPOS
250 PX=LENs$:PRINT s$;
260 REPEAT
270 VDU31(XX+PX)MOD40YX+(XX+PX)DIV40
280 a$=k$:IF TX a$=a$+cr$
290 IF PX>0 a$=a$+cr$+d/$+ln$
300 IF PX=LX a$=cr$+d/$+ln$
310 i$=MID$(a$,FNin(a$),1)
320 IF i$=d/$ PROCdL ELSEIF i$=ln$ PRO
Cln ELSEIF i$<>cr$ PROCad
330 UNTIL i$=cr$:PRINT:=s$
340 ---
350 DEF PROCdL:s$=LEFT$(s$,PX-1)
360 VDU127:PX=PX-1:ENDPROC
370 ---
380 DEF PROCln:LOCAL ZX
390 FOR ZX=1 TO PX:PROCdL
400 NEXT:ENDPROC
410 ---
420 DEF PROCad:s$=s$+i$
430 PRINTi$;:PX=PX+1:ENDPROC
440 ---
450 DEF FNin(k$):LOCAL I$
460 PROCcurson
470 REPEAT I$=INSTR(k$,GET$)
480 VDU -7+(I$<>0):UNTIL I$>0
490 PROCcursoff:=I$
500 ---
510 DEF PROCcurson
520 VDU23;29194;0;0;0;:ENDPROC
530 ---
540 DEF PROCcursoff
550 VDU23;8202;0;0;0;:ENDPROC
560 ---

```

Send your routines – with full details of the language it is written in and the hardware/software requirements – on disc or tape to:

Steve Turnbull, Library, The Micro User, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Remember to enclose a stamped addressed envelope for the return of your media. Five blank discs will be sent to the authors of any routines published.

**Title:** RELOCATOR  
**Language:** Basic  
**Author:** Tim Arrowsmith

When using long graphics programs from disc it is often necessary to shift the program down to the lowest allowable page.

Most shift down routines involve messy function key definitions which are hard to type in correctly.

But it is not necessary to leave the program for the shift down; a much more elegant routine is shown here.

Line 0 is added at the start of your program and the procedure definition itself must be right at the end.

When the program is first RUN, PROCrelc is entered if the page is already equal to or less than the required page then the routine exits.

If the shift-down is required then the "Relocating..." message is displayed and the program is moved down four bytes at a time.

So that you know the program is working there is also the sound statement which starts at the lowest pitch and moves up to the highest pitch.

Finally, PAGE is set to the new value, the keyboard buffer is cleared, then OLD and RUN are inserted along with Ascii value 6 which switches the screen drivers on.

Finally the screen drivers are switched off and the program ends.

While the screen is off the OLD is performed at the new page position resetting TOP, the screen drivers are switched on and the program runs.

PROCrelc is entered a second time. But this time the page setting is acceptable, the routine just exits and the rest of your program is run as normal.

```
0 PROCrelc(&E00)
1 REM *** Relocator ***
1000 END
32600 DEF PROCrelc(Q%):CLS:*Tape
32610 P%=PAGE:IF P%<=Q% THEN ENDPROC
32620 LX=TOP-P%:PRINTCHR$129CHR$136"R
elocating...";
32630 FOR M%=0 TO LX-1 STEP 4
32640 Q%!M%=P%!M%:SOUND17,-4,255*M%/
LX,1
32650 NEXT:PAGE=Q%:AX=138:XX=0:*FX15
32660 $&100="OLD"+CHR$13+"RUN"+CHR$6+C
HR $13
32670 FOR LX=&100 TO &107:YX=?LX
32680 ZX=USR&FFF4:NEXT:VDU21:END
```

**Title:** CURSOR ON/OFF  
**Language:** 6502  
**Author:** Jeremy North

Drawing screen displays with the cursor still active looks messy. The following routine allows you to perform the cursor switching in machine code and complements last months Basic routines.

The only point of interest is that the

carry flag is in bit position zero.

This means it can be set, the flags pushed on to the stack, pulled off into the accumulator and then isolated with the AND #1, so creating a value of zero or one in the accumulator.

```
100 REM ** Cursor On/Off **
110 MODE 7:PROCasem
120 REPEAT VDU30:CALL cursoff
130 PRINT"Cursor on? (y/n)";
140 IF FNin("YyNn")<3 CALL curson
150 CLS:FOR ZX=1 TO 20
160 PRINTTAB(RND(40)-1,RND(25)-1)"X";
170 PROCwait(.8):NEXT:UNTIL FALSE
180 ---
190 DEF FNin(k$)
200 LOCAL IX:CALL curson
210 REPEAT IX=INSTR(k$,GET$)
220 VDU -7*(IX<>0):UNTIL IX>0
230 CALL cursoff:=IX
240 ---
250 DEF PROCwait(t)
260 LOCAL TX:TX=TIME+t*100
270 REPEAT UNTIL TIME>TX
280 ENDPROC
290 ---
300 DEF PROCasem
310 DIM code 256
320 oswrch=&FFEE
330 FOR LX=0 TO 2 STEP 2
340 P%=code:[OPT LX
350 .curson SEC:BCS curses
360 .cursoff CLC
370 .curses PHP
380 LDA #23:JSR oswrch
390 LDA #1:JSR oswrch
400 PLA
410 AND #1:JSR oswrch
420 LDX #7:LDA #0
430 .loop
440 JSR oswrch:DEX
450 BNE loop:RTS
460 J:NEXT:ENDPROC
```

**Title:** MASTER CLOCK/CALENDAR  
**Language:** Basic IV Master Only  
**Author:** Richard Tate

The TIME\$ function on the Master is very useful but I found that needed a more compact way of displaying the information.

The routine given here accesses the TIME\$ function and then splits it according to the parameter P%. When P% is 1 the time in 12 hour clock format is returned, when it's 2

the date is returned in dd:mm:yy format, and if 3 then both are returned.

If any other number is used an error is generated.

The two functions FNn and FNz turn their parameters into two digit strings padding to the left with spaces and zeroes respectively.


```
10 REM ** Master Clock/Calendar
20 CLS:PRINT TIME$
30 FOR P%=1 TO 3
40 PRINT"Parameter = ";P% gives "FNc
kcl(P%)
50 NEXT:PRINT":END
1000 ---
1010 DEF FNckcl(P%)
1020 LOCAL TS:TS=TIME$
1030 IF P%=1 =FNck(TS)
1040 IF P%=2 =FNcl(TS)
1050 IF P%=3 =FNck(TS)+" "+FNcl(TS)
1060 ?&700=0:?&701=50
1070 $&702="Bad parameter"
1080 ?&70F=0:CALL &700:=0
1090 ---
1100 DEF FNck(TS)
1110 LOCAL H%,M%,X$:H%=VALMID$(TS,17)
1120 IF H%>12 H%=H%-12:X$="pm" ELSE X$=
"an"
1130 M%=VALMID$(TS,20)
1140 =FNs(H%)+". "+FNz(M%)+ " "+X$
1150 ---
1160 DEF FNcl(TS)
1170 LOCAL D%,M%,Y%,M$,m$
1180 D%=VALMID$(TS,5)
1190 M%=MID$(TS,8,3)
1200 Y%=VALMID$(TS,14)
1210 RESTORE 1290:REPEAT
1220 READ m$,M%:UNTIL m$=M$
1230 =FNs(D%)+":"+FNs(M%)+":"+FNz(Y%)
1240 ---
1250 DEF FNn(N%)=RIGHTS(" "+STR$N%,2)
1260 ---
1270 DEF FNz(N%)=RIGHTS("0"+STR$N%,2)
1280 ---
1290 DATA Jan,1,Feb,2,Mar,3,Apr,4
1300 DATA May,5,Jun,6,Jul,7,Aug,8
1310 DATA Sep,9,Oct,10,Nov,11,Dec
```

**We've broken the price barrier!**

***A complete communications package for the BBC Micro for under £100!***



APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use.

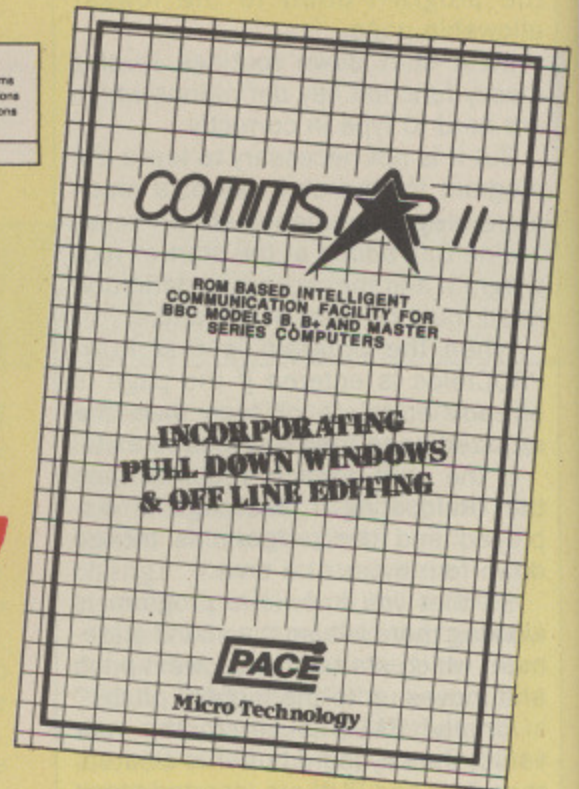

The long-awaited price breakthrough in communicating with the BBC Micro is here now – thanks to a special deal *The Micro User* has negotiated with one of Britain's leading modem manufacturers, Pace Micro Technology.

We can offer a dramatic reduction in the price of one of the most reliable modems ever made, together with its associated software. The modem is the BBC-compatible Pace Nightingale, which operates at the two most popular speeds – 1200/75 (for Prestel and other viewdata systems) – 300/300 (for MicroLink, Telecom Gold, remote mainframes, commercial databases, etc).

The software we are offering is the renowned Commstar II, one of the most sophisticated packages ever produced for the BBC Micro. This latest version of the top-selling package features fast access to all functions via pull-down menus and windows – and is extremely simple to use.

● Readers taking advantage of this offer will also be entitled to free membership of MicroLink, Britain's fastest-growing electronic mail service. With it you can use your BBC Micro to send (and receive) telex, telemessages, download free telesoftware, and communicate directly with other users all over the USA and other parts of the world.



Free registration to MicroLink (worth £5) with every order.

**Modem**

+

**Software**

**£99.85**

(RRP £147.85)

**SAVE £48**

**Comstar II**

**£29** (RRP £34)

**SAVE £5**

Prices do not include postage

**TO ORDER TURN TO THE FORM ON PAGE 159**

**Nigel Peters ends his series on spreadsheets with another look at Ultracalc**

**SERIES**

**B**

**B+**

**M**



# Functions and facilities

WELCOME to the second article on BBC Soft's Ultracalc and the final article in this spreadsheet series. This month we'll be taking a look at some of the functions and facilities that Ultracalc has which our old friend Mini Office II doesn't.

The first point to make is that the manual defines the difference between a function and a facility as the fact that a function applies to one cell only while a facility applies to an area.

And in case you're wondering what a function is, it's a piece of mathematical working like sine, cosine, logarithm and so on.

These functions can work on either a number, the coordinates of a cell containing a value (not a label) or a formula. So:

LOG(10)  
LOG(A1)  
LOG(A1+A2)

are all acceptable.

They can be used in formulae just as you'd normally use values or cell coordinates. This allows you to put formulae such as:

2+LOG(A1)

into the active cell.

Because it resides in rom, Ultracalc has more functions than spreadsheets that live in memory such as the disc-based Mini Office II.

The three standard trigonometric functions SIN, COS and TAN are there along with DEG and RAD to deal with degrees and radian measure respectively.

The presence of these allows Ultracalc to perform sophisticated mathematical calculations — as well as helping with the kid's homework.

And, if you understand them, there's ASN, ACS and ATN to deal with arc-sine, arc-cosine and arc-tangent.

Still on maths, if you feel the need to raise the constant e (2.718...) to a power, then the EXP function is ready and willing to do it for you.

You can also have a square root at the drop of a SQR and get the absolute value of a number — the value ignoring any minus sign there may be — with ABS.

Finally PI which gives the value of pi and FIX which gives you the integer part of a real — FIX(12.34) is 12 — finish

of the mathematical functions.

One interesting function is SGN. It takes the form:

SGN(parameter)

where *parameter* is a value, cell number or formula. When it's used it examines the value of *parameter* and returns 1 if it's positive, -1 if it's negative and, logically enough, 0 if it's a zero value. So the following:

SGN(-23)  
SGN(99)  
SGN(0)

return values of -1, 1 and 0 respectively.

This may seem a little pointless but it does help the spreadsheet choose between alternatives, a subject we'll deal with later.

And who isn't interested if his business has made a profit, loss or just broken even?

While you may not use or understand all of these, I think that you'll agree that they allow some sophisticated modelling using the spreadsheet.

They're not just confined to financial analysis but can be used in educational and scientific work.

What functions you actually get depends on the spreadsheet you're using. As a rule of thumb, the more you pay the more you get.

The question to ask yourself when buying a spreadsheet is which you'll actually use. There are some wonderful spreadsheets around with all sorts of functions but for most people the vast majority of them will never be used.

Closely related to the functions are Ultracalc's facilities, in effect functions that deal with areas of the spreadsheet rather than just one cell.

Despite the fact that they deal with areas, they still return their result to one cell only.

The SUM facility allows you to sum up the values in an area, any labels that might be there being ignored. This means that:

SUM(A1B2)

puts the total of the four cells A1, B1, A2, B2 into the active cell or into the formula that SUM is part of. Similarly:

SUM(A1A5)

totals the values in the first five cells of column A while:

SUM(A2E2)

does the same job for the second column.

This is very similar to the command we had in Mini Office II, only applied to areas as well.

As you might expect, there are commands for finding the maximum and minimum values in an area. Restrain your amazement when I inform you that these are called MAX and MIN.

There's also a CNT facility which returns the number of cells in a given area that actually hold values. To see what use this is, suppose that you have a spreadsheet with details of four projects.

You could set aside an area of memory, say D5E6 and use these to hold any losses. If there are no losses, there's no entry in that area.

If all four projects make losses then these are recorded in D5, D6, E5 and E6. You can find out the number of projects that are making losses at any time by using:

CNT(D5E6)

Observant readers will have noticed the "if" in the above explanation. It seems that the spreadsheet has to make a choice, doing one thing if the project is in profit and another if it's in the red.

We couldn't do this with Mini Office II but we can with Ultracalc. And it's all quite logical.

The Ultracalc spreadsheet can take decisions using the IF facility. This takes the form:

IF(logical expression,value 1,value 2)

What happens when it is used is that the logical expression is evaluated. If it happens to be true, then *value 1* is returned otherwise it's *value 2*.

So, one of two things happen depending on the result of the logical expression. It's easier to see how it works in practice than in theory. Suppose you had:

IF(A1=100,105,95)

When it comes across this, the spreadsheet will check to see if A1 contains 100. If it does then it returns the value 105, if it doesn't it returns 95. The values can be cell coordinates so you can have expressions such as:

IF(A1<>100,A2,A3)

Now if A1 isn't 100, the value in A2 is returned, otherwise — when A1 does hold

Turn to Page 126 ►

◀ **From Page 125**

100 – you get the value in A3 returned.

A nice feature of IF is that the values returned can be the coordinates of cells holding labels.

Suppose you had the costs of a project in cell A1 and the sales revenue from it in cell A2. You could have the label PROFIT in cell D1 and LOSS in D2. Then:

IF (A2>A1,D1,D2)

returns PROFIT or LOSS as appropriate.

As you'll probably guess from the above, the IF facility is very powerful and can be much more complex than my examples. Ultracalc allows all the usual comparative operators to be used along with AND and OR.

Another powerful tool is the LKP, or look up, facility. This allows you to search a list for a given target.

Once the target is found, it returns a corresponding value from a separate but parallel list. It takes the form:

LKP(target,area1,area2)

The parameter *area1* tells the spreadsheet where it is to look for a match to *target*.

Once this is found, the LKP facility returns the corresponding value in the list defined by *area2*. The target can be a number or a label.

To get an idea of how it works, suppose you have a list of cars and their prices in your spreadsheet such as Figure 1 – would that the prices were real.

	A	B
1	Fiesta	1000
2	Escort	2000
3	Sierra	3000
4		
5	target	cost

Figure 1: A list of cars and prices

As you can see, cells A1 to A3 contain the names of three cars. Cells B1 to B3 contain their prices.

Now we can use LKP to search through the list of names in column A and give us the corresponding price from column B. In this case we'd enter:

LKP(A5,A1A3,B1B3)

into cell B5, where I've put *cost* in Figure 1. Then all we have to do is enter the

make of car in cell A5, where I've got *target*.

Once this is done LKP searches the list, finds a match and returns the price.

So if you put ESCORT in cell A5, the spreadsheet looks down the list of cars in column A. Finding ESCORT in cell A2 it then looks up the price in cell B2 and puts this value into cell B5.

There's much more to the LKP function than merely matching labels and numbers. You can also search for values or even labels when you only have parts of the name you're searching for.

I think you'll see that combined with the IF function, this ability to look up values in tables makes Ultracalc a sophisticated and powerful tool. And we've only touched the surface of what we can do with them.

Yet, sadly, that's where we have to end. Not just for this month but for ever.

I hope that in the past few months I've given you some idea of how spreadsheets work and how they are used and what to look for in them.

Even so, there's a lot more to them, as some of the facilities we've covered briefly this time show. Have fun exploring them yourselves.

# SUMMER SALE

Prices applicable until September

COMPUTERS	RSP	OUR PRICE	PRINTERS	RSP	OUR PRICE
Master 128	499.00	442.75	Cannon PW1080A		
Compact	441.25	414.00	(80/160cps)	401.85	245.00
Compact TV System	457.35	425.50	MP165 (80/165 cps)	297.85	245.00
Compact Mono	537.85	500.00	MP201 (132/200cps)	458.85	410.00
Compact Colour	687.35	645.00	Epson EX800 (80/250 cps)		580.75
			Epson LA2500 (136/2cps)		1144.25
					1000.20
FLOPPY DISCS			DISCS		
Cumana CSX 400S	153.95	140.00	5.25" SS/DD	5.25" DS/QD	
Akhter md 400A	139.95	130.00	25	£13	25
Akhter md 800 2dm	324.95	295.00	50	£24	50
			100	£46	100
HARD DISCS			250	£100	250
Akhter Hd 1000			500	£190	500
(10mb Winchester)	599.95	550.00			£210
Akhter Hd 2000			3.25 SS/BASF	3.5 DS (in plastic library case)	
(20mb Winchester)	749.95	700.00	10	£15	10
Akhter Hd 4000			25	£36	25
(40 mb Winchester)	1199.95	1100.00	50	£70	50
			100	£130	100

Ask for Quote for products not listed and we also supply Amstrad including the new PC1512

All prices include VAT and Postage

Mail Order Division  
Willow Software, MU1  
The Willows  
Wrighton Lane  
Congresbury  
Bristol BS19 5QB  
Tel: 0924 834056

## SOLID STATE DESK TOP DATA SWITCHES FULL TWELVE MONTHS GUARANTEE

- PRINTERSHARER™ Several Micros to one Printer
- PRINTERCHANGER™ One Micro to several Printers
- PRINTERCROSSOVER™ Two Micros to two Printers

Keyzone Solid State Switching Devices can use cables from 1m to at least 30m on input & output without any data loss/error.



### PRINTERSHARER & PRINTERCHANGER PARALLEL 26 PIN FOR BBC

- 3 way without cables.....£60.00 (C)
- 3 way with interlink cables - 6ft.....£75.00 (A)
- 6 way without cables.....£110.00 (B)
- 6 way with interlinks cables - 6ft.....£140.00 (A)

### PARALLEL 25D 25 PIN FOR IBM

- 2 way without cables.....£70.00 (C)
- 3 way without cables.....£80.00 (C)

### CENTRONICS 36 PIN

- 2 way without cables.....£75.00 (C)
- 3 way without cables.....£85.00 (B)
- 4 way without cables.....£95.00 (B)

### SERIAL BIDIRECTIONAL (RS232 PCB all lines connected)

- 2 way without cables.....£55.00 (C)
- 3 way without cables.....£65.00 (C)
- 4 way without cables.....£75.00 (C)
- 3 way RS423 for BBC.....£40.00 (C)

### "PRINTERCROSSOVER"

- Parallel 26 pin for BBC & Apple II.....£70.00 (C)
- Parallel 25 pin for IBM PC.....£85.00 (C)
- Centronics 36 pin.....£95.00 (C)
- Serial RS 232.....£70.00 (C)
- Serial RS423 for BBC.....£45.00 (C)

### CABLES (STANDARD 6FT)

- Parallel Interlinks for BBC switches.....£8.00 (E)
- Parallel Interlinks for Compact.....£9.00 (E)
- BBC Printer Cable.....£9.50 (E)
- Compact Printer Cable.....£10.00 (E)
- Serial RS232 (12 lines).....£12.00 (E)
- Serial RS232 (25 lines).....£14.00 (E)
- Serial IBM Printer Cable (12 lines).....£12.00 (E)
- Parallel Interlink for IBM Switches.....£14.00 (E)
- Parallel IBM Printer Cable (Standard).....£15.00 (E)
- Parallel IBM Printer Cable (Moulded).....£18.00 (E)
- Centronics 36 pin Flat Ribbon Cable.....£12.00 (E)
- Centronics 36 pin Flex (Round) Cable.....£16.00 (E)

### ACCESSORIES

- Serial RS232 to Parallel Converter.....£65.00 (D)
- Parallel to Serial RS232 Converter.....£70.00 (D)
- Serial RS232 in line Surge Protector.....£20.00 (E)
- Serial 25D Gender Changer - Shielded.....£10.00 (E)
- Centronics 36 pin Gender Changer - Ribbon.....£10.00 (E)
- Switch selectable serial smart cable.....£24.00 (E)

☆☆☆☆


Automatic & Buffered Printerشارer and Printerchanger, intelligent universal and parallel buffers and multiport buffers available - please contact.

SAME DAY CABLE MAKING SERVICE AVAILABLE

Add postage: (A) £4.00, (B) £3.50, (C) £3.00, (D) £2.00, (E) £0.75 + VAT @ 15%



KEYZONE LIMITED  
U14, Acton Business Centre  
School Road, London NW10 6TD  
Telephone: 01 965 1684/1804 Telex: 8813271 GECOM G



# Underlining the obvious

ALL RIGHT. Hands up all those who spotted last month's deliberate mistake.

There I was, enthusing about how the indentation and underlining helped make my Pseudocode more intelligible — and there was Figure V without an indentation in sight and only an apology for underlining.

Sorry about that. There's many a slip between cup and lip and in this case many a slip between word processor and typesetter as well. My beautiful Pseudocode became garbage.

Still it's an ill wind and all that and the mistake can be put to use. After all by comparing Figure I (last month's Figure V) with Figure II (which is what was intended to be last month's Figure V) you should see how indentation and underlining helps.

The structure of the program shows more clearly.

## Underlined

For a start it's easy to find the mini-algorithms as each one has been given an underlined title. Also you know exactly which code belongs to that mini-algorithm as it appears underneath it, slightly indented.

Now suppose we want to break down some of the tasks even further. We saw last month how *pay for drinks* could be broken down into:

```
open wallet
pass over money
receive change
```

and if this needs further explanation then *receive change* can become:

```
hold out hand
collect money
check amount
put change in pocket
```

Figure III shows these mini-algorithms put into our main piece of pseudocode. Have a good look at it as there's more to it than appears at first sight.

It might just look like a set of instructions and at one level this is what it is. However, it's a lot more than that.

It not only shows the instructions needed to achieve a goal (in this case get the editor to buy a drink) but it also shows how they go together. The major tasks are described broadly at the top left of the code.

These are given in fairly general terms. Any further explanation of these actions is shown in a mini-algorithm, whose title is underlined and indented

```
go to bar
buy drink
consume drink

go to bar
stand up
leave table
head towards counter
stop at bar

buy drink
catch eye of barman
order round
pay for drinks
stop crying
```

Figure I: Last month's Figure V

```
go to bar
buy drink
consume drink

go to bar
stand up
leave table
head towards counter
stop at bar

buy drink
catch eye of barman
order round
pay for drinks
stop crying
```

Figure II: Same algorithm, different style

```
go to bar
buy drink
consume drink

go to bar
stand up
leave table
head towards counter
stop at bar

buy drink
catch eye of barman
order round
pay for drinks
stop crying

pay for drinks
open wallet
pass over money
receive change

receive change
hold out hand
collect money
check amount
put change in pocket
```

Figure III: Same algorithm, taken further

for accuracy.

Notice that the further right a mini-algorithm starts, the more concerned with details it is, yet the less it actually does.

Difficult tasks are broken down into simpler tasks which are broken down into even simpler ones.

## Flexible

The result is that the overall structure and relative importance of the various bits and pieces of the algorithm is shown pictorially in an easy-to-grasp form. You get to see the wood and then select the trees you're interested in.

I must point out that the way I indent and underline my Pseudocode is my way — there's no proper, defined way of doing it.

It's not a language like Basic or Pascal where the rules are strict and unforfeiting. Pseudocode is meant to be a flexible, easy-to-use way of thinking about and designing programs.

If you spend more time thinking about a nicely indented layout than you do about the actual algorithm then you're missing the point. None of my Pseudocode ever looks as neat or is as complete as the examples shown here.

Having said that, do try to be consistent in whatever way you treat your Pseudocode.

You may not want to underline the titles of mini-algorithms or feel that an indentation of one space is enough. Fine and good, it's your Pseudocode. But whatever you do, apply your rules consistently and you'll help yourself enormously.

## Easy to grasp

The only real rule with Pseudocode is clarity. There's nothing wrong with the algorithm in Figure IV, it does exactly the same job as the one in Figure III.

But is it as easy to grasp? A good layout makes the algorithm easier to understand and hence to use.

That's enough on indentation and layout for the moment. After all, Pseudocode is about writing programs so let's see how it can help us.

Figure V shows a piece of Pseudocode that allows us to find the average of two numbers.

The main algorithm is our universal

Turn to Page 128 ►

◀ From Page 127

calculation algorithm from last month. The rest of the Pseudocode describes how to deal with this particular compu-

```

go to bar

  go to bar
  stand up
  leave table
  head towards counter
  stop at bar

buy drink

  buy drink
  catch eye of barman
  order round
  pay for drinks
  stop crying

  pay for drinks
  open wallet
  pass over money
  receive change

  receive change
  hold out hand
  collect money
  check amount
  put change in pocket

consume drink
    
```

Figure IV: Same algorithm, different layout

tational problem.

As is plain from the code the screen is cleared and two numbers are requested. Then the calculation is done and finally the results displayed.

In this case there's only been one level below the main algorithm. Most programmers would be able to go straight from this to coding with no trouble.

However, it depends what language

```

initialise
calculate
output

  initialise
  clear screen
  request first number
  request second number

  calculate
  add numbers
  divide by 2

  output
  clear screen
  print message
  display average
    
```

Figure V: An average piece of Pseudocode

you're using as *request first number* is easy to do in Basic:

```

INPUT 'Give me the first number', number1
but would be rather more difficult in assembler.
    
```

In that case it might be best to break the code down further, making *request first number* a mini-algorithm which shows exactly how you mean to do it.

All of which shows one of the fundamental questions of using Pseudocode — how far do you go? How much detail should you go into before you translate the code into whatever language you're using?

In many ways it's a matter of taste and I'll deal with the question later. For the moment it's enough to say that you'll know when to stop writing Pseudocode and start entering your program at the keyboard.

Now let's cast our mind back to the problem we mentioned last month, getting our editor to buy more than one round.

So far all our code has been strictly sequential. There's been one instruction followed by another followed by another and so on. There's been no repetition.

Most programs, however, contain a lot of repetition and Pseudocode has several structures for dealing with this. Figure VI shows one of these, the FOR construction, in action.

All this does is describe how to print the line:

```

**/**/**/**/**/**/**
    
```

which may not be very exciting but does show how FOR works. It takes the form:

```

FOR so many times DO
  whatever
  whatever
ENDFOR
    
```

and has the effect of repeating whatever statements come between the DO and ENDFOR for *so many times*.

```

display line

  display line
  for 10 times do
  write *
  write /
  endfor
    
```

Figure VI: The Pseudocode FOR loop

It's not all that different from Basic's FOR . . . NEXT loop so the concept should be easy to grasp.

Notice that in Figure VI I've indented the body of the loop, the bits between the DO and ENDFOR.

This isn't strictly necessary but I think it helps the reader to grasp what's happening, linking together all the statements that will be repeated.

Also you'll see that I haven't put FOR, DO and ENDFOR in capitals. Some people do, claiming that they can see the control structures more easily. I

```

display ten lines

  display ten lines
  for 10 times do
  display line
  move to new line
  endfor

  display line
  for 10 times do
  write *
  write /
  endfor
    
```

Figure VII: Two FORs in action

think that the indentation does the job just as well and don't bother. It's up to you.

Until now we've been busy breaking our algorithms into ever smaller units. Let's go the other way and use *display line* in another piece of Pseudocode, this time one to produce 10 of the above lines. Figure VII shows the result.

I told you that Pseudocode was flexible, didn't I? Notice now that we've got a pair of nested FOR loops.

If you can't see that, Figure VIII shows exactly the same algorithm with the code for *display line* substituted directly. You could, if you wanted, have your

```

display ten lines

  display ten lines
  for 10 times do
  for 10 times do
  write *
  write /
  endfor
  move to new line
  endfor
    
```

Figure VIII: Another way of looking at things

Pseudocode like this.

I prefer Figure VII to Figure VIII. It's easier to grasp what it's doing and that's the whole point of Pseudocode.

And that's where we end for this time. As a challenge, try translating the average program and the line producing program into Basic and another language, maybe Pascal or Assembler.

Notice how very different looking listings can be produced from the same piece of Pseudocode.

● That should keep you busy until next month when we'll look at some more Pseudocode structures. Hopefully we'll be able to get the editor to keep buying drinks while the pub is open, repeatedly getting rounds in until closing time.



# YOU NEED A GOOD SENSE OF HUMOUR TO BUY FROM COMPUMART...

WITH OUR LOW PRICES YOU'LL BE LAUGHING  
ALL THE WAY TO THE BANK!

**BoxClever**  
DON'T MISS THESE  
SPECIAL INTRODUCTORY  
PRICES... Order Today!  
DD 50L - £7.95  
DD 100L - £10.95  
MD 100L - £9.95  
AMS 20L - £9.95  
**POST FREE!**

ALL PRICES INC. VAT AT 15%  
PRICES AND DELIVERY SUBJECT TO AVAILABILITY

## 'BoxClever'

When it comes to 'boxing' you'll find  
ours' a KNOCKOUT!  
Excellent quality Perspex, lockable,  
& with dividers

**AMS 20L**  
Holds 20-3"  
Disks & Cases

**DD 50/100L**  
5 1/4" Disks  
DD 50L - Holds 50  
DD 100L - Holds 100

**MD 100L**  
Holds 100-  
3-5" Disks

## Amsoft 3" CF2 MICRODISKS

From the U.K.'s LARGEST Supplier

Individually packed in  
Plastic Cases - Boxed in  
5s or 10s

ONLY 5-~~£14.95~~ / 10-~~£26.95~~  
PACK +£1 P&P / PACK +£1 P&P  
SAVE £3

Phone for Quantity Discounts

## 3-5" Blank Disks

Announcing NEW  
LOW PRICES...

10	SS~	£12.95	+£1 P&P
	DS~	£16.95	+£1 P&P
50	SS~	£59.95	+£2 P&P
	DS~	£79.95	+£2 P&P
100	SS~	£109.95	+£2 P&P
	DS~	£149.95	+£2 P&P

Boxed in Tens, User Labels  
Top Quality - Fully Guaranteed

## 5 1/4" BLANK DISKS

10	SS~	£5.95	+£1 P&P	FREE Plastic Case per 10
	DS~	£7.95	+£1 P&P	
50	SS~	£29.95	+£2 P&P	FREE Lockable Storage Box per 50
	DS~	£39.95	+£2 P&P	
100	SS~	£49.95	+£2 P&P	Strong card boxes in Tens
	DS~	£59.95	+£2 P&P	

Top Quality - Fully Guaranteed  
Individually Certified - Envelopes - Labels - Write Protect Labels etc.

SAVE UP TO 25%

ALL Disks  
at  
**LOWER PRICES!**

### How to Order...

Simply post your order stating Name and Full Address, with either a Cheque or Postal Order (Made payable to Compumart) to the address opposite.  
Phone any of our 3 Order Lines (24 Hours) and place your order using your Credit Card.  
All Disks are usually despatched SAME DAY by First Class Post.  
For a SPEEDY NEXT DAY Securion Delivery, just add £2 to Postage (e.g. £3 p&p, add £2 - Send £5).  
Overseas Orders: Please deduct 15% (VAT), then add 10% (for Air Mail and Insurance).  
We accept Official Purchase Orders from Government and Educational Establishments.

ALL Products are covered  
by the Compumart Guarantee!

**Compumart**  
A GREAT DEAL MORE - FOR A GOOD DEAL LESS!  
3 ORDER LINES  
(OPEN FOR 24 HOURS)  
☎☎☎☎ 262259  
(0509) 233893  
266322  
Please Send Cheques/P.O.'s to...  
**COMPUMART-Dept MU -Unit 8 -Falcon Street  
Loughborough - Leics - LE11 1EH**



Jeremy Brayshaw, BBC Telesoftware Organiser with the BBC Micro system teletext adapter

# Ceefax: More than just a toy

**Jeremy Brayshaw looks**

**back as an old friend**

**comes of age**

Free software. That was the claim that originally aroused my interest in the BBC's Telesoftware service many years ago.

With around 15 files transmitted each week there is a vast range of software available for anyone – and it is all free. But there is much more to teletext than just free software . . .

I purchased my teletext adapter as soon as it was launched – in the days when it was quite expensive.

I was not familiar with the Ceefax system and it was an exciting and interesting venture to explore the ever-changing pages of teletext.

As with so many things, I prepared myself for the time when the novelty would wear off and my adapter would be left to gather dust in the corner of the room.

But with such a wide range of useful information so easily available, I soon realised that Ceefax was more than an electronic toy.

Several years later, and my adapter is still in constant use by the whole family. It has become an indispensable infor-

mation source for many practical purposes and I would find it difficult now to be without it.

The ability to incorporate information taken from Ceefax within a computer program gives a new dimension to computer software.

At last my humble BBC Micro could perform serious and useful tasks and perhaps even win the pools for me.

Looking at the sports pages on Ceefax, I found all the information I needed about the football matches and teams. All I had to do was to write a program that took this information and used it in a pools prediction calculation.

With careful reference to my Teletext user guide I discovered the techniques needed to extract the required information from the pages and constructed an interactive program.

The prediction program worked and proved the reliability of Ceefax for information of a volatile nature.

Using the teletext adapter gives the computer a facility that cannot be achieved in any other practical way. It reliably finds all the league and match data for every game being played and processes it using an appropriate calculation.

Unfortunately my algorithm for deciding the outcome of each match is not as good as I had hoped and I haven't actually won anything yet, although

many other people claim a worthwhile profit from the program.

As Ceefax covers such a wide subject area, interactive programs can be used for almost any application. For example, the major share prices are updated regularly throughout the day as part of the Ceefax financial service, and this seemed an appropriate area for investigation.

The resultant program offers the chance to create a personal portfolio of shares, real or fictitious, keeping a detailed account of progress by finding the correct share prices current at the time of running the program.

As the share prices are updated about every 90 minutes on Ceefax it is quite possible to make a healthy profit during the course of a day.

If you would like to try your hand on the stock market then this program is for you. Keep an eye on BBC2 Ceefax pages 710 and 712 for details of when it is available again.

The weather details provided the source for another software package, logging daily details and producing a monthly graph of weather trends.

TV programme listings, teletext indexes, financial information, recipes and news pages have all been the subject of interactive programs.

My interest in Ceefax and telesoftware led me to apply for the BBC Telesoftware Organiser's job. This came as a bit of a surprise to the BBC and particularly the existing Telesoftware Organiser who was not at that time ready to relinquish his post.

In due course, however, the position became available and I was invited to attend an interview. Having spent the previous 13 years as a teacher, working my way up from nothing to a state of extreme poverty, and still reeling from the effects of the English education system, I found it an exciting challenge to be a part of the vast BBC empire.

My appointment has given me the opportunity to study the Ceefax system in close detail. One of the many exciting forthcoming features from Telesoftware is a series of programming modules accompanied by detailed descriptions giving the techniques of interactive program writing.

In this I hope to impart some of the details about the Ceefax system, and how to get your computer to make efficient use of it.

The BBC has been involved with telesoftware for some time. Many years of research and experimentation were carried out before regular public transmissions started.

Let's take a look at how the telesoftware service began:

Experimental transmissions for a

Ceefax service started in 1972. Following this two-year trial, a full public information service began in 1974 but at this time did not include teletext broadcasts.

As the BBC's computer literacy project got under way the Ceefax system seemed an ideal medium for the distribution of related information and software and so the subject was investigated.

An integrated computer package was required and the BBC microcomputer system, which included a teletext adapter, was designed and produced.

It was soon realised that extra features would have to be incorporated into the existing teletext transmissions in order to provide teletext broadcasts. There were two main problems to be overcome:

First, teletext uses only 127 different character codes. Computers, however, use 255 different codes. Some method had to be found of transmitting all the additional ones.

Secondly, it is important that any errors in the reception of computer software can be detected by the receiver. A checking system applying to all the information on the page had to be devised.

The problems were considered by the BBC research engineers and they designed a protocol for teletext transmission that would solve these and a few other difficulties.


Experimentation in teletext transmission lasted several years. Mullard had designed and built a prototype receiver for use in the initial research.

This consisted of a 22 inch colour television set permanently linked to a Mullard microcomputer system. The computer was a single box housing a Z80 processor with 32k ram and a 24k Basic rom.

Receiving files from the broadcast needed a separate downloading program to be run. This restricted downloading to Basic programs only (in Ascii format), although the protocol allowed for any type of file to be trans-



The original Mullard Teletext receiver - permanently connected

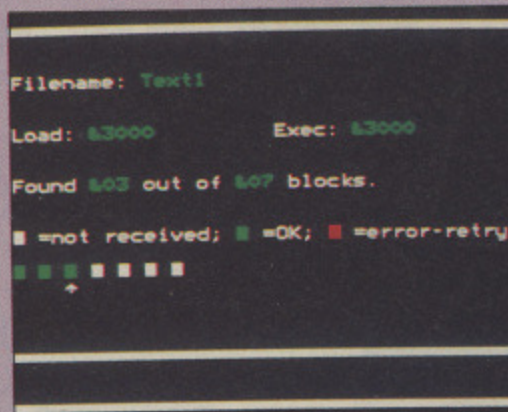

Teletext program downloader

mitted. Using this equipment, the Brighton Polytechnic embarked upon a major project using both BBC and ITV teletext transmissions to determine the feasibility of the system.

Education, in particular the secondary sector, was chosen as the target for the new experimental service. Nine schools from seven education authorities were selected to take part, and care was taken to ensure they represented an accurate cross-section of the 6,000 or so state secondary schools in the country.

Between September 1981 and June 1982 the schools in the scheme received a variety of educational software from both Ceefax and Oracle for assessment.

These early broadcasts included some interactive software which took the current food prices from Ceefax pages and used them in software designed for domestic science lessons.

Several minor problems with both software and hardware were discovered. Even so, the trials were very successful.

The design of the BBC microcomputer system's Acorn adapter was by now well under way. The protocol was refined in the light of experiences gained and these changes made a firm foundation for the next series of tests.

The final version of the protocol specification was agreed by the appropriate international standards committee (CCIR). It provides a range of facilities extra to the normal teletext broadcast and enables efficient transmission of long files.

This protocol, known as the Redefinable Teletext Format (RTF) has been used without alteration by the BBC ever since.

Following the success of the Teletext in Secondary Education project, the Brighton Polytechnic team turned their attentions to the primary school sector. This project, which began in 1982, involved 40 of the 25,000 or so state primary schools.

The original Mullard receivers were by

now obsolete, so the participating schools were issued with prototype Acorn adapters for use with their existing BBC Micros.

The equipment proved extremely reliable and versatile and offered far greater mobility than had been possible previously.

The results from these two projects were very encouraging and led to the introduction of a full public Ceefax teletext service from September 1983. It now offers unrivalled facilities both for schools and for non-educational situations.

The BBC Teletext service is free and offers a regularly changing range of programs, notes, reviews and computing news items. And to receive it all you need is a teletext adapter connected to a home micro.

Adapters are available for a range of computers, but remember the BBC transmissions conform to the internationally agreed RTF protocol. Not all adapters implement this standard fully, so it is worth checking this point before purchase.

The adapter needs a good quality aerial connection to receive the teletext signals. The computer can then be used as an enhanced teletext receiver, displaying teletext pages from any channel.

A separate teletext television set is not needed. It is not possible to connect a computer directly to an existing teletext TV set.

If you are thinking of buying an Acorn adapter (or if you already own one) then I strongly recommend you purchase the Advanced Teletext System rom (ATS) to control it. Both the adapter and ATS are available on special offer on Page 44.


The ATS provides very easy to use facilities. Even my non-technical family find using the ATS software far easier than using our standard teletext television.

Teletext has come a long way since those early experimental days. Take a look now at what's going on - BBC2 Ceefax, page 700 onwards.

Don't miss an important announcement in next month's

**THE MICRO USER**

# Devise your own Repton screens ... and baffle your friends!

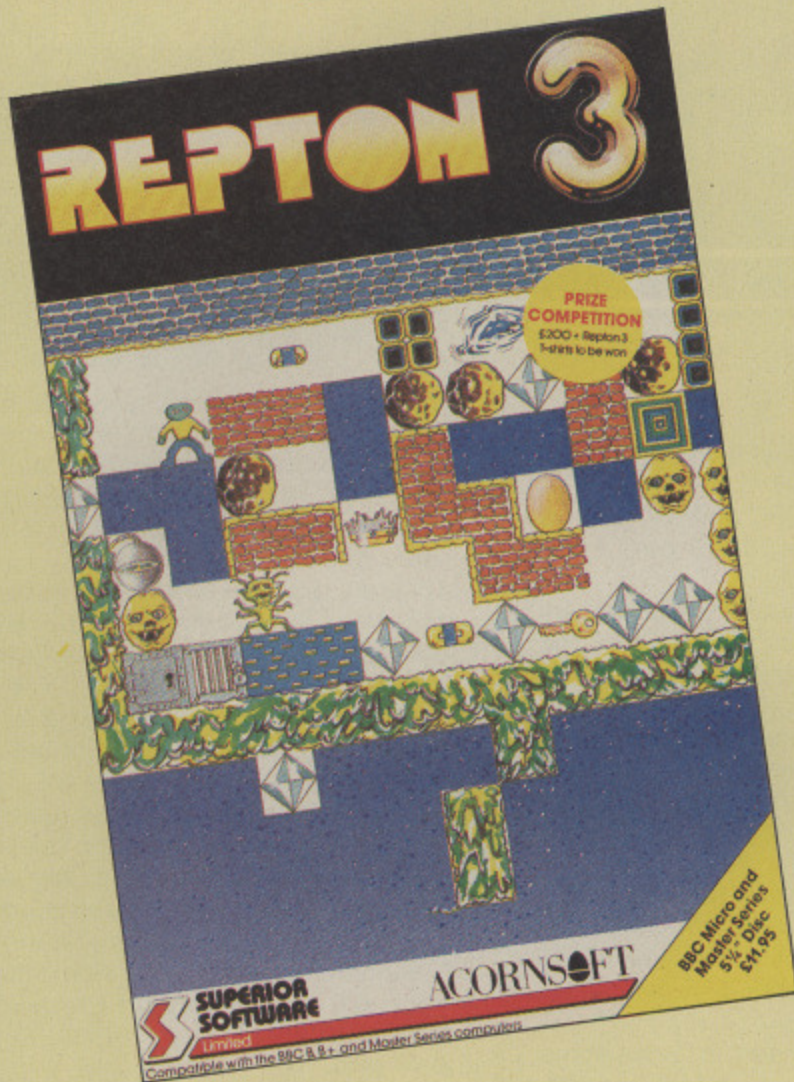

First there was Repton, voted Game of the Year in 1985. Then came the universally acclaimed Repton 2 with a whole set of new challenges. Now comes Repton 3 – all the fun of the first two games but with even more appeal!


Not only are there 24 screens with a host of brand new challenges, there is also a feature-packed screen designer.

Now you can devise your own fiendish screens for your family and friends to solve. Position timebombs, sprinkle the growing fungus, and set devious puzzles of rocks and diamonds. Then you can save your masterpiece to cassette or disc.

It's certainly a game which will keep you entertained for months!

You can buy Repton 3 from us and **SAVE £2** on the normal selling price.

Or you can take out a subscription and **SAVE a massive £5**.

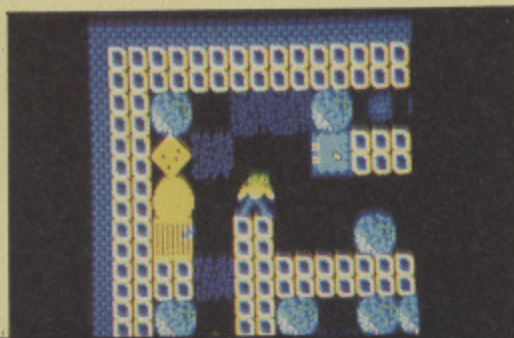

Design a screen then playtest it



You can even change the characters

SAVE UP TO **£5**

	RRP	Special reader offer	YOU SAVE	Offer including subscription	YOU SAVE
Cassette	£9.95	£7.95	£2	£19.95	£5
5 1/4" Disc	£11.95	£9.95	£2	£21.95	£5

TO ORDER TURN TO THE FORM ON PAGE 159

Roland Waddilove

continues his series

on machine code

arcade games

SERIES

B

B+

M

Centaur

# On the track of sprites

IN the last two articles we looked at three different methods of detecting collisions between sprites. Now it is time to move on and this month we'll be seeing how to implement tracking sprites.

Once set in motion these characters will automatically follow a preset pattern round the screen.

You may be wondering why we should need such sprites when writing arcade games. Well, they are more common than you may think.

The ghosts in Pac Man follow a pattern around the maze, so do the aliens in Arcadians as they swoop down. Perhaps the best example of this class of sprites are the aliens in Galaforce - the game Kevin Edwards wrote for Superior Software last year.

In this game aliens stream in from off the edge of the screen, perform an amazing pattern and zoom off again, exploding as they reach the edge. And what is more, each new level brings a new wave of aliens with an even more intricate pattern.

The prospect of programming this may seem daunting, but as we'll see it is in fact fairly straightforward if you go about it in the right way.

Faced with a task like this it is vital that you plan your program and data very carefully. It's so easy to become entangled with spaghetti-like code with pages and pages of data.

Before you put finger to keyboard the structure of the pattern data must be worked out. I'm not talking about the data itself here, but the way it is to be stored in memory.

This must be done before any code has been entered into the micro - you can't write the program unless you know

how the data is structured.

Of course, there's more than one way to skin a cat and I can't possibly go through all the possible data structures. Here is just one solution, using a single byte to specify each point in the pattern

Imagine a sprite currently at the coordinates x1,y1, following a pattern on the screen.

There are two ways to specify its next position, x2,y2. We can either provide the absolute coordinates to move to or give it the new coordinates relative to its current position.

Sprites normally move in small steps, often a byte at a time. So, the new coordinate relative to the current position will always be a small number.

If we restrict the relative movement to the range 0 to 3, 3 being  $\frac{3}{4}$  of a normal mode 2 character's width, only two bits are required to store the offset. Remember that the movement can be positive or negative so an extra bit is necessary to hold the sign.

This means that the new coordinates can be stored in six bits, three for the x displacement and three for the y. Since there are eight bits in a byte this leaves two bits free.

One of the spare bits can determine whether a bomb is to drop or some other action is to occur and the remaining bit can be a GOTO bit - causing a jump to another part of the pattern.

Take a look at Figure 1, which shows the structure of the pattern data. Bits 0 to 2 and 3 to 5 are the signed x and y coordinates relative to the current position.

If bit 6 is set a bomb is dropped at this point in the pattern and bit 7 means GOTO - the numbers stored in bits 0 to 6 are subtracted from the current position

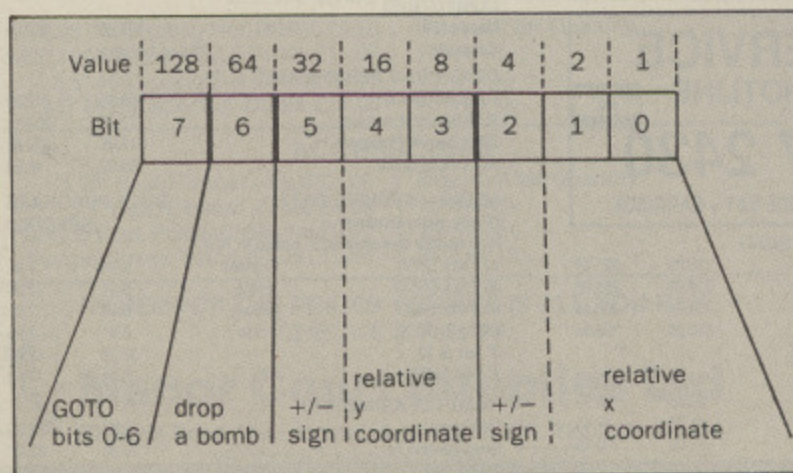


Figure 1: The structure of the pattern byte

# MACHINE

# CODE

# GAMES

## Part 4

in the pattern.

For instance, a pattern byte of &85 would mean go back five bytes in the pattern. This enables a sprite to repeat a section, fly in circles or go back to the start.

There are certain values of the pattern byte that will never occur - 4, 32 and 36. In binary 4 is %00000100 indicating an x offset of -0, which is meaningless. Similarly -0 for y and -0 for both x and y should not arise.

These numbers can be treated as special cases. All indicate the end of the pattern in one way or another, 4 means the sprite is to explode at this point, 32 means remove it from the screen and 36 means turn it into a kamikazi sprite so it will make a beeline straight for you.

The two bytes at the beginning of a pattern hold the absolute x and y coordinates of the start position. The pattern itself starts at byte two and ends with one of the special cases outlined above or a GOTO.

As you can see it is possible to cram a mass of information into just one byte. This is vital on the BBC range of micros as there is only about 10k of ram to play around with in modes 0, 1 and 2.

Now we can move on to the data structure for the sprites themselves.

Each sprite requires a six byte block of memory - two for the absolute coordi-

Turn to Page 134 ▶

### Byte Function

- 0 = flags
- 1 = pattern pointer
- 2 = x coordinate
- 3 = y coordinate
- 4/5 = screen address

### Flags

- Flags
- bit 0 = on screen
- bit 1 = exploding
- bit 2 = dead
- bit 3 = start exploding

Figure 2: The sprite information block

◀ **From Page 133**

nates, two for the screen address, one for a pointer to the current position in the pattern and one for various flags. Figure 11 shows the sprite information block that I use.

Bit 0 of the flags indicates whether the sprite is on the screen. Bit 1 means it is exploding and bit 3 means start it exploding. Bit 2 means it is dead.

It is convenient to store all the blocks in one page of memory and index into them using the X and Y registers. This means that there can be up to 256/6 or 42 tracking sprites on the screen.

It's now time to put the theory into practice so enter and save this month's listing.

When you run it you'll first be asked for the spacing between the sprites. Try 7 to start off. At the next prompt enter the number of sprites, remembering that you can only have 42 at most.

The screen will clear and you'll see a stream of aliens flying in from the top left corner of the screen. They'll loop round the bottom and zoom off, disappearing at the top right of the screen.

Press Escape and run it again, experimenting with the spacing and number of sprites.

The structure of the data makes the

programming less difficult than you might first have thought, having just seen the demonstration.

There are several points to watch out for when writing this sort of routine. Firstly all the sprites are off the screen when the program is first run and must be printed at the start position one at a time.

Only those sprites on the screen are moved and these are recognised by having bit zero of their flags byte set.

When putting sprites on the screen it's important not to confuse those that have finished the pattern and have been taken off the screen. These are recognised by having bit 2 of their flags byte set.

Only one sprite at a time can be printed at the start position and before the next one is printed the last one must have moved out of the way.

This is the spacing between the sprites. Try the demonstration with a spacing of one and you'll see the problems that can occur.

The solution is to have a timer. This counts down the next sprite to be put on the screen.

Finally, try designing your own patterns and replace the data statements at the end of the listing with your own. Take

note of how the data is structured and it's up to you to make sure that the sprites stay within the confines of the screen limits.

● *That's all for now. There is plenty here to get your teeth into and it should keep you busy until next month when we'll move on to bouncing sprites.*

```

10 REM Tracking Sprites
20 REM By R.A.Waddilove
30 REM (c) Micro User
40 MODE 7:*TV0,1
50 IF PAGE<>&1900 PRINT"PAGE must be
&1900":STOP
60 RESTORE 1730:FOR I%=0 TO 47:READ J
%:I%?&C00=J%:NEXT
70 pattern=&900:balls=&A00
80 RESTORE 1760:I%=0:REPEAT:READ J%:I
%?pattern=J%:I%=I%+1:UNTIL J%<0
90 INPUT"Space between balls(1-20):"
space
100 INPUT"Number of balls(1-40):"numb
er-of-balls
110 PROCAssemble:CLEAR
120 MODE 2:CALL &1100
130 END
140
150 DEF PROCAssemble
160 old=&70:new=&72:rows=&74:columns=&
75:temp=&76:temp1=&78
170 delay=&78
    
```

**Turn to Page 137 ▶**

# Microdis

FREE CABLE AND PAPER DISCOUNT!

**SPECIAL OFFERS**

Daisystep 80 col Daisywheel Printer	139.08	159.95
Juki 6100 Daisywheel Printer	252.13	289.95
National Parasonic KXP1080U	156.48	179.95
Epson LX86 (new model) 120cps/25NLO	203.65	239.95
MP165 160cps/40NLO	182.57	209.95
MP201 200cps/50NLO	324.95	373.69

DOT MATRIX PRINTERS	Ex VAT	inc VAT & Carriage
Canon PW1080A	217.35	249.95
Canon PW1156	334.74	384.95
Epson LX86 (new model) 120cps/25NLO	208.65	239.95
Epson LX Tractor Attachment	18.91	21.75
Epson LX Sheet Feeder	48.65	55.95
Epson FX80 (160cps)	347.78	399.95
Epson P40 (Thermal, 80 col)	52.13	59.95
Juki 5510 186 cps/NLO (colour option)	304.30	349.95
Juki 5510 Colour Upgrade	97.20	111.78
Juki 5520 Colour Printer	408.65	469.95

DAISYWHEEL PRINTERS	Ex VAT	inc VAT & Carriage
Juki 6100	252.13	289.95
Juki 2200	217.35	249.95

LASER/INK JET PRINTERS	Ex VAT	inc VAT & Carriage
Epson SQ2000 Inkjet	1529.82	1759.30
QMS Kiss Laser	1695.65	1950.00
Canon LP88A1	1720.00	1978.00

**FREE! FREE! FREE!**  
WITH EVERY PRINTER -  
LISTING PAPER + BBC LEAD  
(phone for other leads)

LISTING PAPER	Ex VAT	inc VAT & Carriage
60 GSM (Listing) 9.5"x11" 2000 sheets	15.00	17.25
80 GSM (letter grade) 9.25"x12" 2000 sheets	17.90	20.58
Labels - Box of 8000 (2 abreast on 9.5" backing with central perf.)	39.00	44.86

MONITORS -	Ex VAT	inc VAT & Carriage
Philips 7502 (Green)	74.74	85.95
Philips 7522 (Amber)	82.57	94.95
Philips 7542 (White)	82.57	94.95
Colour 14" Screen		
Philips 8833	273.87	314.95
Philips 8873	299.00	343.65

# DISCOUNT

Dept. MU487, 46 Middle Street, Blackhall, Hartlepool, Cleveland TS27 4EA. Tel: 091 587 2430

**INCREDIBLE DISC DRIVE PRICES**

HIGH QUALITY DISC DRIVES		
Cased with leads, etc READY TO GO		
	Ex VAT	inc VAT & Carriage
5.25" Acorn DFS Disc Interface	43.33	49.95
Opus DDOS Disc Interface	40.83	46.95
BBC SX (Uses BBC's Power Supply)		
SX400S 80 track double side (400K)	91.76	104.95
Dual (uses BBC's power supply)		
DX800S Dual 80 track double side	178.22	204.95
Single With Power Supply		
S400S 80 track double side	113.00	129.95
Dual Drives (with Power Supply)		
D800S 2x80 track double side	204.30	234.95

NOTE - All 80 track drives have a 40/80 switch!

SX100 40 track single side 100K	69.52	79.95
<b>!SPECIAL!</b>		
SX100 + DDOS	86.91	99.95

**FAST SERVICE**  
24 HOUR HOTLINE

**091 587 2430**

NOTE: ALL PRICES INCLUDE VAT + CARRIAGE

MICROVITEC RGB MONITORS (BBC)		
1431 (472X585 dots)	193.00	221.95
1431 AMP54 (with audio & PAL)	219.09	251.95
1451 (653x582 dots)	234.74	269.95
1451 AMP54	313.00	359.95

BBC ROM UTILITY SOFTWARE		
Wordwise	31.26	35.95
Wordwise Plus	40.65	46.75
View 2.1	41.26	47.45
View 3	61.00	70.15

Sorry, office only - No callers without appointment

Prices and specifications subject to variation. Please phone for best prices

**UPGRADE TO IBM STANDARD**  
TRADE-IN YOUR BBC FOR THE PC1512  
IBM CLONE  
Telephone for Details

AMSTRAD PC1512		
S Drive Mono Monitor	499	573.85
Dual Drive	559	642.85
20Mb	899	1033.85
Single Drive Colour	619	711.85
Dual Drive	729	838.35
20Mb	1069	1229.35

**FREE DICTAPHONE CALL-OUT SERVICE CONTRACT**  
included with PC1512 if no trade-in.

COMPUTERS		
Master 128	395.65	459.95
Compacts	Phone for latest	

OTHER BBC PERIPHERALS		
Teletext Receiver	188.95	217.29
6502 Second Processor	177.50	204.13
280A Second Processor	312.95	359.89
ATPL ROM Board	39.09	44.95


MEDIA - ARCHIVE DATA (Fully guaranteed)		BULK PURCHASE SPECIAL!	
High quality diskettes 5.25" boxed in 10's			
40 Track SSSD	includes	6.91	7.95
40 Track DSDD	FREE	6.91	7.95
80 Track SSSD	library	6.91	7.95
80 Track DSDD	case	6.91	7.95
3" Box of 10		37.35	42.95
3" Disc (each)		3.91	4.50

HEAD CLEANING KITS		
3M Standard	13.87	15.95
Rexel Drive/VDU	19.96	22.95

# COMPUTER REPAIRS (UK)

2 Austins Place, Hemel Hempstead,  
Herts. HP2 5HN Tel: (0442) 217624

Too many function strips, wondering where to put them?  
Then maybe you will be interested in our purpose built function strip holder.

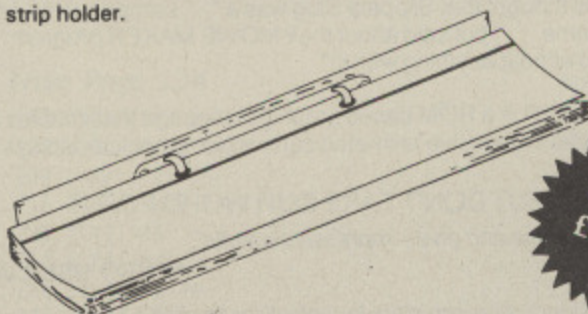

only  
£5.50

Each holder comes with 10 clear plastic sleeves. Easily fitted to the BBC or BBC - Master series.

To compliment this little add-on, we have commissioned a function strip design programme, compatible with Epson dot matrix printers (works in condensed mode), and can also supply blank function strip cards.

- Flip over function strip holder ..... £5.50
- Extra sleeves for above ..... £0.40
- Blank function strip cards ..... £0.25
- 10 for £1.25
- Function strip design software ..... £4.50

14 day money back guarantee if not satisfied

Available only from Computer Repairs (UK) Please make cheques or postal orders payable to: Computer Repairs (UK), to the above address.

\*State whether disc or cassette

P.S. We repair all makes of Micro, got something faulty, why not give us a ring.

Trade enquiries welcome

## COMPUTER

# EXPRESS

Our trained staff are always ready to serve you!



## PRINTER MADNESS

### DOT MATRIX PRINTERS

Epson LX86 - The Best Seller in the World	£195.00
Star NL10 - The Number Two Seller - Best Spec	£210.00
Star NX15 - The New Wide-body NL10!	£291.00
Panasonic 1080 300cps & 80 col - A Hot Seller	£145.00
Epson FX100+ - The Old Favourite	£389.00
Epson FX85+ - IBM Made This One Famous	£289.00
Epson LQ800 Letter Quality - 24 Pin Printhead	£428.00
Epson LQ1000 Letter Quality - 24 Pins	£371.00
Epson LQ2500 - This one is really good!	£725.00
Epson SQ2500 - Ink your jet with this one!	£999.00
Epson F880 - Brand New!	£324.00
Epson FX100 - Brand New!	£415.00
Epson EX810 300cps & 80 column - Super Fast	£385.00
Epson EX1000 300cps & 136 column - Super Fast	£517.00
Star NS15 - The top up-market Star 24 pin	£669.00
Juki 5510 - A Best Seller	£270.00
Star SR15 200cps wide carriage - Good Buy	£375.00
Seiko-sha MP300A - 300cps! (EX800 clone)	£302.00
MP 165 - Cheap Fast and Good Quality	£170.00
MP 200 - 132 Column 200cps!	£292.00
MP 201 - 132 column 200cps	£295.00
NEC P5 - Heavy-Duty Office Favourite!	£780.00
NEC P6 - Good Buy	£411.00
NEC P7 - Worth a Look	£489.00
Oki Microline 182 - The Number 2 Brand	£205.00
Oki Microline 192 - Personal Favourite	£299.00
Oki Microline 193 - Worth A Look	£369.00
Oki Microline 293 - Worth A Look	£528.00
Citizen MSP-15 160cps & 80 column	£359.00
Citizen MSP-25 200cps & 132 column - Try it!	£289.00

### COLOUR PRINTERS

Okimate 20 Thermal Printer	£159.00
Juki 5520 - The Market Leader - Fast!	£340.00
Epson JX90	£350.00
Epson EX-Series Colour Upgrade Option	£55.00

### DISKETTES

5 25in DS/DD 48p (IBM-Compatible) Diskettes	£1.00 each
5 25in DS/DD 96p (AT-Compatible) Diskettes	£1.80 each
Computer Express Branded 5 25in DS/DD Diskettes	£1.00 each
TDK 3.5in DS/DD Diskettes	£2.99 each
Computer Express Branded 3.5in DS/DD Diskettes	£2.25 each
Oliveri 5 25 DS/DD 48p Demo Diskettes	£1.70 each

### COMMUNICATIONS

Microline WS4000 V21/V23 Modem	£135.00
Da-Com DSL 2123 AD/H Hayes	£225.00
Sage Chitchat Comms Pack (Modem/Software/Cable)	£299.00
CrossTalk IV Comms Software	£99.00
Sage Chitchat Comms Software	£85.00
One-To-One Electronic Mail Subscription	£20.00
RS232 Serial Modem Cable	£15.00

### HARD DISKS, ADD-ON BOARDS, CHIPS

64k DRAM chips (nine to make 64k)	£1.15 each
256k DRAM chips (nine to make 256k) 160 Ns	£3.00 each
8087 5mz Maths Co-Processor	£170.00
8087 8mz Maths Co-Processor	£175.00
80287 Maths Co-Processor	£229.00
AST Six Pack Plus 64k memory Multifunction Card	£197.00
Outbe Six Shooter Multifunction Card 64k memory	£150.00
Intel Aopvboard with 0k installed	£325.00
Plus Hardcard 10mb	£350.00
Plus Hardcard 20mb	£595.00
Outbe 20mb Hard Pack	£450.00
Mountain 20mb Mountain Card	£659.00
Seagate 20mb Hard Disk with WD Controller & Cables	£395.00
Hercules Colour Card	£700.00
Ram Cards 0k, 256k, 384k, 512k	Call
Hercules Mono Graphics Card	£179.00
Hercules Mono Plus Graphics Card	£189.00
Clone Hercules Card	£35.00
Mouse Systems Mouse with Pop-Up Menu & PC Paint	£125.00
Microsoft Bus Mouse	£135.00
Summa Mouse with Gem Collection	£189.00

### DAISY WHEEL PRINTERS

Quindata DWP1120 - The Best Seller - 20cps	£145.00
Juki 6100 - 20cps	£227.00
Juki 6200 - 30cps	£407.00
Juki 6300 - 40cps	£660.00
Juki 6500 - 60cps	£899.00
Brother HRP5	£739.00

### PLOTTERS, DIGITIZERS & LASERS

New Oki Laser	£1700.00
HP Laserjet Plus	£2299.00
Cherry A3 Digitizer	£475.00
Roland B80A Plotter - Best Value A3 Plotter	£649.00
Epson H1 - 80 Plotter - Best A4 Plotter	£309.00
OMS K8 Laser	£1695.00

### PRINTER ACCESSORIES

IBM - Compatible Centronics Parallel Cable (Round)	£11.50
BBC Centronics Parallel Cable (Round)	£7.50
Serial cables Made to Order	£20.00
Two-Way Printer T-Switch	£35.00
Fan-Fold White Paper 11in long, 1000 sheets	£6.99
80 Col Printer Stands	£21.75
132 Column Printer Stands	£29.00
Adjustable Floor-Standing Printer Stands	£80.00

### MONITORS

Dynalor 12in 128Mhz Mono Monitor with Tilt/Swivel Stand	£100.00
Taxon K16S/860 16in Ultra High-EGA Colour Monitor	£699.00
Taxon K12S/3 Suspension III Colour Monitor	£369.00
Eizo ER8030M 14in High-Resolution Colour Monitor	£379.00
Eizo ER8042S 14in Ultra-High-Res EGA Colour Monitor	£465.00
ADI 14in Mono Monitor with Tilt/Swivel Stand	£200.00

FOR FULL PRICE LIST PLEASE CALL

0727-72790

TELEPHONE ORDERS WELCOME

SINGLE AND MULTI-USER MICRO-COMPUTER AND SOFTWARE SALES AND SUPPORT  
99 PARK STREET LANE • BRICKET WOOD • HERTFORDSHIRE • AL2 2JA • ST ALBANS (0727) 72790  
Telex: 895061 ONE ONE G (Quere Ref: 1541200)

## PLEASE READ THIS

# WHOLESALE PRICES TO YOU THE USER

WABASH 5.25" quantities of	25	50	100	200
SS/SD 48TPI	£11.00	£20.00	£38.00	£69.00
SS/DD 48TPI	£11.50	£22.00	£41.00	£74.00
DS/DD 48TPI	£12.00	£24.00	£45.00	£85.00
BASF & FUJI etc				
DS/DD 96TPI	£13.00	£26.00	£49.00	£96.00

All above plain label except SS/SD, which are branded.  
All include envelopes & labels.

### 3.5" DS/DD PLAIN LABEL DISK

We only sell Made in Japan items as they are the best

10 = £18.00	Prices inc. VAT & delivery 100% Error free certified Lifetime warranty Includes labels
20 = £30.00	
50 = £75.00	
100 = £135.00	

### LOCKABLE DISK BOXES

5.25" 50 Capacity Ref. DD50L	£9.50	Discount for Quantity 10% for 3+ 20% for 6+ 25% for 12+
5.25" 100 Capacity Ref. DD100L	£11.00	
3.5" 40 Capacity Ref. DS40L	£9.00	
3.5" 80 Capacity Ref. DD80L	£11.00	

### ACCESSORIES

5.25" Head Cleaner + Fluid	£4.00	Discount for Quantity 10% for 3+ 20% for 6+ 25% for 12+
3.5" Head Cleaner + Fluid	£6.00	
BBC to Cent. Printer Cable, 1m	£5.00	
Perspex Printer Stand, 80Col	£15.00	

REMEMBER THE PRICES YOU SEE IS ALL YOU PAY.  
CHEQUE & P.O. TO:



## Manor Court Supplies Ltd

80 North Road, Yate, Bristol, Avon BS17 5PR. Tel: 0454 322744  
VAT invoice if required. Co. Reg. No. 1730374

# DOUBLE PHANTOM?

YES! This IS the program demonstrated on BBC TV's "Micro Live". The Worlds first micro multi-user combat flight simulation is now available direct from DOCTOR SOFT via our 'HOT LINE' FIRST CLASS MAIL ORDER service.

DOUBLE PHANTOM is basically a TWO computer version of the highly acclaimed PHANTOM COMBAT simulation. At least one BBC must have a disc system. A hardware link (included) then links the machines which become separate aircraft sharing the same airspace, each VISIBLE and VULNERABLE to the other!

DOUBLE PHANTOM has all the usual PHANTOM features including the fastest and smoothest 3D colour graphics around (15fps). RAF Phantom pilot Paul Courtney's verdict: "Marvellous... quite the best micro flight simulation I've ever seen... Totally captivating!"

Phone: Mail Order Hot line 0903 776000 with VISA/ACCESS. Mail: PO BOX 66, East Preston, West Sussex BN16 2TX. Most orders despatched SAME DAY, FIRST CLASS, POST FREE.

DOUBLE PHANTOM (inc link)	BBC ★	disc 19.95
LINK separately	BBC	cable 9.95
PHANTOM COMBAT	BBC ★	disc 12.95
PHANTOM COMBAT	Electron & BBC	cass 9.95
747	BBC B only	disc 9.95
747	BBC B only	cass 8.95
747	Electron	cass 7.95
747	Commodore 64	cass 12.95
747	Commodore 64	disc 14.95
747	Commodore 64(USA format)	disc 14.95

(Overseas orders, equiv currency, add air mail at cost)

JOYSTICKS optional with all programs

BBC means all machines from 32k up

★ SPECIFY DFS when ordering discs

£2 discount on multiple order

DOCTOR SOFT - THE FLIGHT SIMULATION SPECIALIST



**HIGH  
PERFORMANCE**

**Precision™**

from  
**45<sup>p</sup>**



Suitable for:  
Apple  
Commodore  
IBM  
And Most Other  
Single and  
Double-sided  
Soft Sector,  
Double Density Systems

**Precision™ 5 1/4" Flexible Disks**

- Every disk certified 100% error-free
- Guaranteed to meet or exceed ANSI standard


Price per disk (excluding delivery & VAT)

	10+	50+	100+	300+	1000+
SS/DD	0.69	0.59	0.54	0.49	0.45
DS/DD	0.79	0.69	0.63	0.59	0.55
DS/QD	1.09	0.99	0.92	0.86	0.79

Supplied in boxes of 10

Delivery free (UK Mainland) for CWO/Credit Card Orders.  
For Credit Orders and urgent orders phone for delivery prices.  
Telephone Orders can be accepted from Government bodies, schools, etc., or from private individuals or companies with VISA or ACCESS cards.  
Send cheques made payable to IDS Computer Supplies with the order to the address below. Don't forget the VAT! (UK Orders only)

**IDS Computer Supplies**  
Dept A12



**0908 563166**

Unit 15 Darin Court ■ Crownhill ■ Milton Keynes ■ MK8 0AD

# MOVIE MAKER

As seen on BBC TV's Micro Live.

What did they say?

Fred Harris thought that Slippery Slug was a "... company with an unusual name ..." but said about their MOVIE MAKER program: "... you can do almost anything with it!"

MOVIE MAKER is a ROM based graphics language that enables ANY user to create impressive animated cartoons or graphics displays.

**BUT DON'T TAKE OUR WORD FOR IT**

"Great fun to use and gives impressive results".

MICRO USER June '86

"The most innovative program launched for the BBC Micro ..."

VIEWFAX TUBELINK July '86

"Movie Maker opens up some exciting prospects".

A&B COMPUTING June '86

"Movie Maker, it's what your empty ROM sockets are for".

Slippery Slug June '86

Phone your friendly Slippery Slug on Bath (0225) 69236 for a recorded message. After the message, leave your name and address and the Slippery Slug will send you a free information pack giving full details of the package and also full copies of the reviews.

MOVIE MAKER is supplied on two 16K ROMS and has two demo movies supplied on a demonstration cassette. Inclusive price only £29.90. Postage and packing is free. Compatible with BBC B, B+, MASTER 128, and MASTER COMPACT.

Or send just £1.95 for the introductory cassette and brochure. (Price refundable against purchase of the main pack.)


Slippery Slug  
PO Box 83, Bath BA1 1ZA



plus

**SUPERB  
STORAGE  
BOX**

**50  
DISKS**

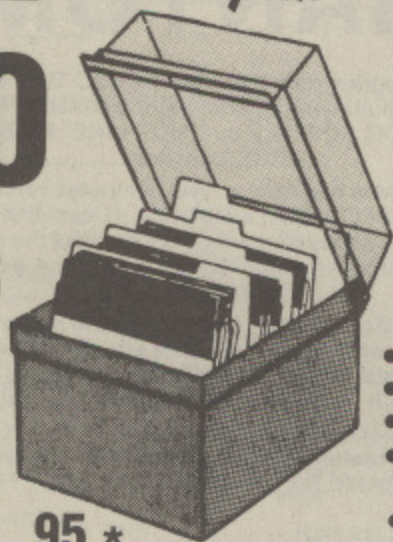

SS/DD  
for only

**£29.<sup>95</sup>\*** DS/DD £39.95  
DS/QD £49.95

Please send the following amount

(including £2.00 delivery and VAT)

SS/DD £36.74  
DS/DD £48.24  
DS/QD £59.74

WITH DIVIDERS  
AND SMOKED  
FLIP-TOP LID

- Full Specification
- Lifetime Guarantee
- Bulk packed disks
- Complete with sleeves, labels and w/p tabs
- Individually certified to 30% above ANSI specification

Telephone Orders can be accepted from Government bodies, schools, etc., or from private individuals or companies with VISA or ACCESS cards.  
Send cheques made payable to IDS Computer Supplies with the order to the address below. Don't forget the VAT! (UK Orders only)

**IDS Computer Supplies**  
Dept A12



\*excl. delivery & VAT

**0908 563166**

Unit 15 Darin Court ■ Crownhill ■ Milton Keynes ■ MK8 0AD

## Everyone needs help! Here it is. HELPSCREEN EPROMS

Our range of Eproms will give your BBC that INSTANTANEOUS HELP facility. Each EPROM contains 15 screens of Help each called by a single keypress. No need to remember lists of commands. No memory tied up. No interference with other programs.

**FOUR UNIQUE SERVICES:**

### 1) STOCK EPROMS

Ready to fit chips containing a mass of Help, all instantly to hand. Do away with dog-eared reference manuals! Speed up your programming!

#### No.1 BEGINNERS BASIC

All Basic commands and their syntax, specially grouped to aid learning.

#### No.2 PROGRAMMERS BASIC

Packed with the reference information you constantly need when programming.

#### No. PROGRAMMERS MACHINE CODE

Operating System calls & vectors and a host of other invaluable information.

**All one Price £19.95 including P&P**

### 2) CUSTOM EPROMS

We have a very comprehensive range of Helpscreens in our catalogue. You select from these the ones you want, and we will arrange them in your order and supply the Custom Eprom. Send for free catalogue and ordering information.

**Price £24.95 including P&P**

### 3) SUPER CUSTOM EPROMS

You supply your own Screens (or programs to create them) on disc or tape. Supply all 15 or maybe mix in some of our catalogue Screens, and we will arrange them all in Eprom with the necessary code for instant, single key access to each. Send for free catalogue and ordering information.

**Price £27.95 including P&P**

### 4) DISC ALTERNATIVE

Any of the above options on disc, with (almost) instant access and using the same single key access. (Uses 1K RAM).

**Price £10.95 including P&P**

All goods come with full instructions on fitting and use

**MICRO HELP**

Dept. 3

P.O. Box 17, Newtown, Powys SY16 1ZZ



◀ From Page 134

```

180 ball-at-start=&7C
190 ball-number=&7D
200 osbyte=&FFF4
210 FOR pass=0 TO 2 STEP 2
220 PX=&1100
230 [ OPT pass
240 .initialise
250 LDA #space:STA delay
260 LDA #0:TAX
270 .loop
280 STA balls,X \initialise balls
290 DEX:BNE loop
300 .main-loop
310 JSR move-balls
320 DEC delay:BPL not-time
330 LDA #space:STA delay
340 .not-time
350 LDA #&81:LDX #256-113:LDY #&FF:JSR
osbyte \Escape?
360 TYA:BEQ main-loop
370 RTS
380
390 .move-balls
400 LDA #0:STA ball-at-start \one new
ball at a time
410 LDX #number-of-balls*6
420 LDA #&240:fx19 CLI:SEI:CMP #&240:BE
Q fx19
430 .mbloop
440 STX ball-number
450 LDA balls,X:AND #1:BNE on-screen
460 JSR new-ball:JMP next-ball
470 .on-screen
480 LDA balls,X:AND #10:BEQ move-it
490 JSR explode:JMP next-ball
500 .move-it
510 LDA data:STA olddata+1:STA newdata
+1:LDA data+1:STA olddata+2:STA newdata+
2
520 LDA balls+4,X:STA old:LDA balls+5,
X:STA old+1 \old address
530 JSR get-new-xy
540 LDY balls+3,X:LDA balls+2,X:TAX:JS
R convert \new address
550 LDX ball-number
560 LDA new:STA balls+4,X:LDA new+1:ST
A balls+5,X \store it
570 JSR print
580 .next-ball
590 LDA ball-number:SEC:SBC #6:TAX
600 BNE mbloop
610 CLI
620 RTS
630
640 .get-new-xy
650 LDY balls+1,X:INC balls+1,X \patt
ern index
660 LDA pattern,Y
670 CMP #32:BNE ex1:JMP remove
680 .ex1
690 CMP #4:BNE ex2:LDA #9:STA balls,X:
RTS \explode next time
700 .ex2
710 CMP #36:BNE moving:JMP kamikasi
720 .moving
730 LDA pattern,Y:AND #4:BEQ xplus \l
eft or right?
740 LDA pattern,Y:AND #3:STA temp:SEC:
LDA balls+2,X:SBC temp:JMP got-x
750 .xplus
760 LDA pattern,Y:AND #3:CLC:ADC balls
+2,X
770 .got-x
780 STA balls+2,X

```

```

790 LDA pattern,Y:AND #32:BEQ yplus \
up or down?
800 LDA pattern,Y:LSR A:LSR A:AND #6:S
TA temp:SEC:LDA balls+3,X:SBC temp:JMP g
ot-y
810 .yplus
820 LDA pattern,Y:LSR A:LSR A:AND #6:C
LC:ADC balls+3,X
830 .got-y
840 STA balls+3,X
850 RTS
860
870 .remove
880 LDA #4:STA balls,X \dead
890 LDA #80:STA new:STA new+1:JSR prin
t \off screen
900 PLA:PLA:JMP next-ball
910
920 .explode
930 \Write it yourself!
940 RTS
950
960 .kamikasi
970 \Write it yourself!
980 RTS
990
1000 .new-ball
1010 LDA delay:BNE no-ball
1020 LDA ball-at-start:BNE no-ball
1030 LDA balls,X:AND #4:BNE no-ball \d
ead?
1040 INC ball-at-start \no more
1050 LDA #1:STA balls,X \on screen
1060 LDA #2:STA balls+1,X \pattern sta
rt
1070 LDA pattern+1:STA balls+3,X:TAY:LD
A pattern:STA balls+2,X:TAX \start x,y
1080 JSR convert
1090 LDX ball-number
1100 LDA new:STA balls+4,X:LDA new+1:ST
A balls+5,X \store address
1110 LDA data:STA newdata+1:LDA data+1:
STA newdata+2
1120 JMP put
1130 .no-ball
1140 RTS
1150
1160 .put
1170 LDA #&80:STA old:STA old+1
1180 .print
1190 LDA #4:STA columns
1200 LDX #0:LDY #0
1210 LDA new:STA temp1:LDA new+1:STA te
mp1+1
1220 LDA old:STA temp:LDA old+1:STA tem
p+1
1230 .loop1
1240 LDA #12:STA rows
1250 .loop2
1260 .newdata LDA #3000,X:EOR (new),Y:S
TA (new),Y
1270 .olddata LDA #3000,X:EOR (old),Y:S
TA (old),Y
1280 INX
1290 LDA old:AND #7:CMP #7:BEQ bottom1
1300 INC old:BNE next1:INC old+1:JMP ne
xt1
1310 .bottom1
1320 CLC:LDA old:ADC #&79:STA old:LDA o
ld+1:ADC #2:STA old+1
1330 .next1
1340 LDA new:AND #7:CMP #7:BEQ bottom2
1350 INC new:BNE next2:INC new+1:JMP ne
xt2
1360 .bottom2
1370 CLC:LDA new:ADC #&79:STA new:LDA n
ew+1:ADC #2:STA new+1
1380 .next2
1390 DEC rows:BNE loop2
1400 CLC:LDA temp1:ADC #8:STA new:STA t
emp1:LDA temp1+1:ADC #0:STA new+1:STA te
mp1+1
1410 LDA temp:ADC #8:STA old:STA temp:L
DA temp+1:ADC #0:STA old+1:STA temp+1
1420 DEC columns:BNE loop1
1430 RTS
1440
1450 .data OPT FNequ(&C00)
1460
1470 .convert \X,Y -> address
1480 LDA #0:STA new+1:TXA:ASL A:ASL A:R
OL new+1:ASL A:ROL new+1:STA new \X*8
1490 TYA:AND #7:ADC new:STA new:LDA new
+1:ADC #0:STA new+1 \+(Y MOD 8)
1500 TYA:LSR A:LSR A:LSR A:ASL A:TAY \
2*(Y DIV 8)
1510 LDA table,Y:ADC new:STA new:LDA ta
ble+1,Y:ADC new+1:STA new+1
1520 RTS
1530
1540 .table OPT FNtable
1550 ]
1560 NEXT
1570 ENDPROC
1580
1590 DEF FNequ(word)
1600 ?PX=word MOD256
1610 PX?1=word DIV256
1620 PX=PX+2
1630 =pass
1640
1650 DEF FNtable
1660 FOR IX=0 TO 31
1670 ?PX=(&3000+IX*&280)MOD256
1680 PX?1=(&3000+IX*&280)DIV256
1690 PX=PX+2
1700 NEXT
1710 =pass
1720
1730 REM Ball data...X=4/Y=12
1740 DATA 0,1,1,3,15,7,7,15,3,1,1,0,3,3
,3,3,15,15,15,15,3,3,3,7,3,3,3,15,7,7,
15,3,3,3,7,0,2,2,3,15,15,15,15,3,2,2,0
1750 REM ***** Pattern Data *****
1760 DATA 0,8
1770 DATA 27,27,27,27,27,27,27,27,27
1780 DATA 27,27,27,27,27,26,26,26,26
1790 DATA 17,17,17,17,17,17,17,17,17
1800 DATA 16,16,16,16,8,8,8,8,8,8,8
1810 DATA 5,5,5,6,6,6,7,7,7,7,7,7
1820 DATA 6,6,6,5,5,5,40,40,40,40,40
1830 DATA 40,40,48,48,48,48,49,49,49
1840 DATA 49,49,49,49,49,49,58,58,58
1850 DATA 58,59,59,59,59,59,59,59,59
1860 DATA 59,59,59,59
1870 DATA 32,-1

```

This is one of hundreds of programs now available FREE for downloading on **MicroLink**

This listing is included in this month's cassette tape offer. See order form on Page 159.

◀ From Page 65

```

10 REM *****
20 REM *   Hunkie-Egg   *
30 REM *   by G.J.Key 1987 *
40 REM * (c) The Micro User *
50 REM *****
60 *FX3
70 IFTOP>8300MODE7:PROCshorten:ELSEM
ODE2
80 PROCinit
90 ONERRORCALLQX:CLS
100 PROCgame
110 END
120 DEFPROCgame:s%=0:PROChisc
130 REPEAT:s%=0:h%=0:r%=1:l%=5
140 VX=3:PROCscn:PROCon
150 REPEAT:PROCl:REPEAT
160 PROCb:CALLPX,a%(TX),b%(TX),TX
170 PROCi:CALLPX,X%,Y%,M%
180 UNTIL?p%>7
190 FORI%=1TO10
200 SOUND1,3,130,3-(I%=10)*7
210 M%=M%+1:IFM%=10M%=7
220 CALLPX,X%,Y%,M%
230 REPEATUNTILADVAL-6=15
240 NEXT:I%=I%-1:CALLQX
250 PROCstart:IFLXPROCon
260 UNTILL%=0
270 FORTX=0TO1:GCOL3,129:CLG:NEXT
280 GCOL0,128:COLOUR5:PRINTTAB(5,15);
290 FORTX=1TO10:PRINTMID$("GAME OVER",
TX,1);:SOUND1,4,150,5:REPEATUNTILADVAL-
6=15:NEXT:TIME=0:REPEATUNTILTIME>200:PRO
Cscrol
300 PROChisc
310 UNTILO
320 ENDPROC
330 DEFPROCon:FORI%=0TOVX-1
340 CALLPX,a%(IX),b%(IX),IX:SOUND1,4,1
80,8:REPEATUNTILADVAL-6=15:NEXT:CALLPX,X
%,Y%,M%:p%=0
350 ENDPROC
360 DEFPROCb
370 TX=TX+1:IFTX=VXTX=FALSE
380 IFTX<3PROCl:ENDPROC
390 IFTX>4PROCs:ENDPROC
400 IFf%(TX)a%(TX)=a%(TX)+c%(TX):b%(TX)
)=b%(TX)+d%(TX):f%(TX)=f%(TX)-1:ENDPROC
410 WX=B%?e%(TX)
420 IFWX=3e%(TX)=e%(TX)+18:c%(TX)=FALS
E:d%(TX)=2:f%(TX)=5:ENDPROC
430 IFWX=40RW%=7IFb%(TX)-3<Y%e%(TX)=e%
(TX)+18:c%(TX)=FALSE:d%(TX)=1:f%(TX)=10:
ENDPROC
440 IFWX>4IFb%(TX)-3>Y%e%(TX)=e%(TX)-1
8:c%(TX)=FALSE:d%(TX)=TRUE:f%(TX)=10:END
PROC
450 IFc%(TX)=0c%(TX)=SGN(X%-a%(TX))
460 d%(TX)=FALSE:IFa%(TX)=0:c%(TX)=1
470 IFa%(TX)=64:c%(TX)=TRUE
480 e%(TX)=e%(TX)+c%(TX):f%(TX)=4
490 ENDPROC
500 DEFPROCs
510 IFY%=b%(TX)-3c%(TX)=2*SGN(X%-a%(TX)
))
520 a%(TX)=a%(TX)+c%(TX)
530 IFa%(TX)=60c%(TX)=FALSE
540 IFa%(TX)=FALSE c%(TX)=FALSE
550 ENDPROC
560 DEFPROCl
570 a%(TX)=a%(TX)+c%(TX):IFa%(TX)<2c%(
TX)=-c%(TX):ENDPROC
580 IFa%(TX)>66c%(TX)=-c%(TX)
590 ENDPROC
600 DEFPROCi

```



```

610 IFJXPROCj:ENDPROC
620 U=Y%*Y:u%=U:INTU:IFuXPROCl
630 S=X%*X:S%=S+INTU*18:Z%=B%?S%
640 IFS<>INTS PROCh:ENDPROC
650 IFZ%=3J%=TRUE:ENDPROC
660 IFuXIFZ%>3PROCu:ENDPROC
670 IFH%<10PROCl:ENDPROC
680 DEFPROCh
690 IFNOTINKEYUXENDPROC
700 IFZ%=3ENDPROC
710 J%=1:E%=5:j%=TRUE:x%=FALSE
720 IFINKEYLX%=TRUE
730 IFINKEYRX%=1
740 ENDPROC
750 DEFPROCl
760 IFJ%=TRUE:PROCl:ENDPROC
770 IFX%=0ORX%=68x%=FALSE
780 IF(X%AND3)=0IF?p%=7PROCb(150):GC
OL3,6:MOVE64+X%*16,991-INTU*160:VDU5,129
,4:s%=s%+10*r%:PRINTTAB(6,31);s%:;h%=h%+
1:IFh%=g%PROCl:ENDPROC
790 Y%=Y%+j%:X%=X%+x%:J%=J%+1:IFJ%=5AN
DINKEYUXj%=0:E%=9:ELSEIFJ%=E%j%=1ELSEIFJ
%=E%+4J%=TRUE
800 ENDPROC
810 DEFPROCl
820 IFB%(INT(Y%*Y)*18+X%*X)=3Y%=Y%+2:
SOUND&12,1,250-Y%*4,1:ENDPROC:ELSEJ%=FAL
SE:ENDPROC
830 DEFPROCl
840 h%=0:r%=r%+1:CALLQX:PROCscrol
850 IFV%=3V%=5ELSEV%=V%+1:IFV%=8V%=7
860 PROCscn:PROCon
870 ENDPROC
880 DEFPROCscrol:I%=0:FORTX=0TO76STEP2
:VDU23,13,TX;0;0;28,I%,31,TXDIV4,0,12:
PROCb(1TX*3):I%=TXDIV4:NEXT:VDU26,12:EN
DPROC
890 DEFPROCl
900 IFINKEYUXY%=Y%-1:M%=9:H%=H%+1AND15
:SOUND&10,2,5,1:ENDPROC
910 IFINKEYDY%=Y%+1:M%=9:H%=H%-1:SOUN
D&10,2,5,1:IFH%=0H%=10
920 ENDPROC
930 DEFPROCl
940 IFINKEYLXIFX%>0X%=X%-1:M%=8:SOUND&
10,2,4,1
950 IFINKEYRXIFX%<68X%=X%+1:M%=7:SOUND
&10,2,4,1

```

```

960 ENDPROC
970 DEFPROCu
980 IFZ%=4ORZ%=7IFINKEYDY%=Y%+1:M%=9:
H%=9:SOUND&10,2,5,1:ENDPROC
990 IFZ%>4IFINKEYUXY%=Y%-1:M%=9:H%=1:S
OUND&10,2,4,1:ENDPROC
1000 PROCh
1010 ENDPROC
1020 DEFPROCmode(M%)
1030 VDU22,M%,23;8202;0;0;0;
1040 FORTX=0TO7:VDU19,TX+8,TX;0;:NEXT
1050 VDU19,12,8;0;19,14,15;0;19,8,4;0;
1060 ENDPROC
1070 DEFPROCinit
1080 p%=875:p%?1=1:L%=-98:R%=-67:U%=-73
:d%=-105
1090 Q=RND(-TIME):DIMa%(6),b%(6),c%(6),
d%(6),e%(4),f%(6),hs$(10),hs$(10):B%=&16
00
1100 FORTX=1TO10:hs$(TX)=(11-TX)*500:hs
$(TX)="HUNKIE-EGG":NEXT
1110 ENDPROC
1120 DEFPROChisc:PROCh
1130 PROCmup:PROCb(120)
1140 PRINTTAB(0,3)FNLines:FORTX=0TO11
1150 PRINTTAB(32,5+TX)CHR$156TAB(7,5+TX)
)CHR$129CHR$157CHR$135;:IFTXMOD11PRINThs
$(TX)STRING$(20-LENhs$(TX))-LENSTRhs$(TX)
),".");hs$(TX);"
1160 NEXT:PRINT"FNLines
1170 IFI%<>TRUE PROCgname
1180 PROCbel(120):PRINTTAB(6,22)CHR$136
"PRESS THE SPACE BAR TO PLAY":REPEATUNI
LINKEY-99
1190 PROCbel(100):PROCmode(2)
1200 ENDPROC
1210 DEFPROCbel(N%):SOUND&11,4,N%,10:EN
DPROC
1220 DEFPROCh:PROCmode(7)
1230 FORTX=0TO1:PRINTTAB(11,TX)CHR$141C
HR$132CHR$157CHR$135"HUNKIE-EGG "CHR$15
6:NEXT
1240 ENDPROC
1250 DEFPROCmup
1260 Ifs%<=hs$(10):I%=TRUE:ENDPROC
1270 I%=10:REPEAT:IFhs$(I%-1)<s%:hs$(I
)=hs$(I%-1):hs$(I)=hs$(I%-1):I%=I%-1
1280 UNTILI%=10Rhs$(I+(I%<>FALSE))>=s%
1290 hs$(I)=s%:hs$(I)=STRING$(10, ".")

```

```

1300 ENDPROC
1310 DEFPROCgname
1320 PROCbel(160):PRINTTAB(8,22)CHR$136
"PLEASE ENTER YOUR NAME"
1330 TX=0:$8380=hs$(IX)
1340 PRINTTAB(9,5+IX)CHR$131;:*FX21
1350 REPEAT:i%=GET:IFI%=13hs$(IX)=$8380
:UNTILTRUE:PRINTTAB(9,5+IX)CHR$135:ENDPR
OC:ELSEIFI%<320ri%>127UNTILFALSE
1360 IFTX<10ANDi%>127VDUi%:TX?&8380=i%:
TX=TX+1
1370 IFTX>0ANDi%=127VDU8,46,8:TX=TX-1:I
FTX<>10TX?&8380=46
1380 UNTILFALSE
1390 ENDPROC
1400 DEFFNlines:=CHR$146+STRING$(38,CHR
$243)
1410 DEFPROCscn
1420 CLS:COLOUR1:COLOUR131:RESTORE
1430 FORTX=0T029:IFTX<20PRINTTAB(TX,0)C
HR$131TAB(TX,30)CHR$131;
1440 PRINTTAB(0,TX)CHR$131TAB(19,TX)CHR
$131;:NEXT
1450 COLOUR6:COLOUR128:PRINTTAB(1,1);:F
ORTX=0T017:VDU129:NEXT:g%=18
1460 BX=&1600+((r%-1)MOD5)*108
1470 FORTX=0T05:PRINTTAB(1,5+TX*5);
1480 FORIX=0T017
1490 PROCdraw?(BX+18*TX+IX))
1500 NEXT:NEXT:VDU24,0;0;1279;39;16,26
1510 COLOUR7:COLOUR128:PRINTTAB(0,31)"S
CORE:";s%;SPC(7-LENSTR$s%)LIVES:";:PROC
pl
1520 DEFPROCstart
1530 FORTX=0T02:a%(TX)=0+TX*33:b%(TX)=1
3+TX*10:c%(TX)=2+(TX=1)*3:NEXT
1540 FORTX=3T04:a%(TX)=28-(TX=3)*16:b%(
TX)=3:c%(TX)=1+(TX=4)*2:d%(TX)=0:e%(TX)=
a%(TX)DIV4:f%(TX)=0:NEXT
1550 FORTX=5T06:a%(TX)=0:b%(TX)=3-40*(T
X=5):c%(TX)=0:d%(TX)=0:NEXT
1560 XX=68:Y%=50:MX=8:X=.25:Y=.1
1570 HX=15:J%=FALSE:TX=FALSE:JX=FALSE
1580 ENDPROC
1590 DEFPROCpl:GCOLOR,7:MOVE1279,31:VDU5
,87F,48+LX,4:ENDPROC
1600 DEFPROCdraw(MX)
1610 IFM%=255BX=&1600:M%=?BX
1620 IFR%>5IFTX<5IFM%=2MX=1
1630 LOCALiX
1640 ONMXGOTO1650,1660,1670,1680,1650,1
660,1680
1650 VDU10,17,128,17,6,129,11,8:g%=g%+1
1660 VDU17,1,17,131,128:ENDPROC
1670 COLOUR128:VDU32:ENDPROC
1680 COLOUR8:COLOUR128:FORi%=1T05:VDU13
2,10,8:NEXT:PRINTTAB(1X+2,5+TX*5);
1690 ENDPROC
1700 THEEND
1710 DEFPROCcode:FORTX=0T02STEP2
1720 x=&70:y=&71:sno=&72:gone=&73:nm=&7
4:c=&75;q=&76:b=&77:w=&80:h=&92:total=&9
3:f lag=&94:ystr=&95:rwn=&96:P%=&E00:e=&C0
00
1730 [OPTTX:LDX#7:LDY#11:.L
1740 LDA&600,Y:STAW,X:DEX:DEY
1750 LDA&600,Y:STAW,X:DEY:DEY:DEX
1760 BPLl:LDY#0:STYgone:LDA(w),Y
1770 BMIoffsc:CLC:ADC#4:STAX:CMPI#73
1780 BCConsc:.offsc:LDA#255:STAgone
1790 .onsc:LDA(w+2),Y:ASLA:ASLA:CLC
1800 ADC#16:STAW:LDA(w+4),Y:STASno
1810 .rem:STYy:LDX#3:.lp1:ASLx:ROly
1820 DEX:BNElp1:LDAw:AND#7:CLC:ADCx
1830 STAX:BCCnh:INCY:.nh:LDAw:LSRA
1840 LSRA:AND#254:TAX:CLC:LDAr,X

```

```

1850 ADCx:STAX:INX:LDAr,X:ADCy:STAY
1860 LDA#0:CMPI#7:BCCot:SBC#7:JMPm
1870 .ot:SEC:ROLA:TAX:STXsno:LDY#1
1880 .lp2:LDA#0,X:STAW,Y:LDA#0,X
1890 STAs+1,Y:LDash,X:STAW+2,Y:DEX
1900 DEY:BPLlp2:JSRpit:LDXsno:LDY#1
1910 .cl:LDAx,Y:STAW,Y:STAsol,X:DEX
1920 DEY:BPLcl:LDAgone:BNEby:.pit
1930 LDXw+3:LDAw:AND#248:STARwn:LDAw
1940 AND#7:STAystr:LDAw+1:STARwn+1
1950 .l1:LDAw+2:STAh:LDArwn:STAW+4
1960 LDYyst:LDArwn+1:STAW+5:.l2
1970 LDA(w+4),Y:.s2:BNEbu:.s:EORe,X
1980 STA(w+4),Y:DEX:BEQbyby:.on:DECH
1990 BEQon2:INY:CPY#8:BNEl2:CLC
2000 LDAw+4:ADC#880:STAW+4:LDAw+5
2010 ADC#2:STAW+5:LDY#0:BEQL2:.on2
2020 CLC:LDArwn:ADC#8:STARwn:BCCL1
2030 INCrwn+1:.pnh:JMPl1:.byby:RTS
2040 .by:LDA#&C0:INX:INX:STAsol,X
2050 RTS:.bu:BITb:BEQs:PHA:ORAc:STAc
2060 PLA:BNEs:.m:TAX:BEQnou:CMPI#1
2070 BNEtwo:LDA#3:BNEou:.two:LDA#6
2080 .nou:STAW:LDAx:CMPIloc:BNEmvd
2090 LDAy:CMPIloc+1:BEQstill:.mvd
2100 INCq:.still:LDAq:AND#3:STAQ:TAX
2110 LDAw,X:CLC:ADCw:LDXnm:SEC:ROLA
2120 STANm:LDY#0:STYc:INY:.nlp1
2130 LDAmoloc,Y:STAW,Y:LDAmp,X

```

This is one of hundreds of programs now available FREE for downloading on **MicroLink**

```

2140 STAs+1,Y:LDA#ht,Y:STAW+2,Y:DEX
2150 DEY:BPLnlp1:LDA#19:JSR&FFF4
2160 LDAy:CMPI#3A:BCSntop:LDX#5:.dl
2170 NOP:INY:BNEdl:DEX:BNEdl:.ntop
2180 JSRpit:.cln2:LDXnm:LDY#1:.mlp2
2190 LDAmoloc,Y:LDA#b,Y:STAs2,Y:DEX
2200 STAmoloc,Y:LDA#b,Y:STAs2,Y:DEX
2210 DEY:BPLnlp2:LDAgone:BEQpeek
2220 LDA#&C0:STAmoloc+1:RTS:.peek
2230 JSRpit:LDA#&EA:STAs2:STAs2+1
2240 LDAy:CMPI#3A:BCSntop:LDX#4:.dl2
2250 NOP:INY:BNEdl2:DEX:BNEdl2:.nbot
2260 LDA#0:STAW:LDX#4:.sl ASLc:ROLA
2270 ASLc:ROLw:DEX:BNEsl:ORAw:STAc
2280 RTS:.q%:LDA#10:PHA:.ofl:PLA
2290 TAX:DEX:BMIalf:TXA:PHA:STAsno
2300 LDY#255:STYgone:INY:JSRrem
2310 JMPofl:.alf:RTS:.gb:BRK:BRK
2320 .wd:OPT FNs(4):.r:OPT FNs(64)
2330 .sdp:OPT FNs(14):.sh
2340 OPT FNs(14):.sol:OPT FNs(14)
2350 .mht:BRK:BRK:.moloc:BRK:BRK
2360 .mdp:BRK:BRK:]NEXT
2370 P%r:FORTX=0T031:P%=&3000+TX*640:
P%=P%+2:NEXT
2380 AX=0:FORTX=&E00T0wd-1:AX=AX+?TX:NE
XT:PROCstop(&DFB8,1)
2390 ?q=0:?nm=1:?b=63:?gb=?s2:?s2=&EA:g
b?1=s2?1:s2?1=&EA:ldw=&2010001
2400 P%=&E00:Z%=FNread(sdp,2,&12309E14,
2):Z%=FNread(&1101,4,&9CFD030D,3):TX=&16
00:AX=0:REPEAT:READ?TX:AX=AX+?TX:TX=TX+1
:UNTILTX?TRUE=255:PROCstop(&5D3,4)
2410 ENDPROC
2420 DEFPROCstop(CX,OX)
2430 IFCX=AXENDPROC ELSE:*FX3
2440 CLS:PRINTTAB(0,10)"THERE IS AN ERR
OR ";VDU7,7,7

```

```

2450 ONOXGOTO2460,2470,2480,2490,
2460 PRINT"IN THE ASSEMBLER":END
2470 PRINT"IN LINE 2820":END
2480 PRINT"BETWEEN LINES""2830 AND 293
0":END
2490 PRINT"AFTER LINE 2930":END
2500 DEFFNs(SX):P%=P%+SX:=TX
2510 DEFFNread(a%,B%,C%,OX):AX=0:REPEAT
2520 READAS:!a%=EVAL("&"+AS):AX=AX+!a%:
a%=a%+B%
2530 UNTILAS="12345678":PROCstop(CX,OX)
:=a%-BX
2540 DEFPROCshorten:*TAPE
2550 VDU23,128,223,223;251,251;223,223,
23,129,24,60,60,126,126,126,126,60,23,13
0,255,255,255,255,255,255,255,23,131
,153,51,204,102,153,51,204,102,23,132,25
5,129,129,129,255,129,129,129,23,133,255
,255,255,255,255,255,255
2560 ENVELOPE1,4,-1,-1,-1,255,0,2,70,-2
,-2,-2,100,0:ENVELOPE2,1,0,0,1,0,0,80,
-80,0,-126,80,0:ENVELOPE3,4,6,-1,-2,10,2
0,20,-1,-1,-1,-5,106,0:ENVELOPE4,1,0,0,0
,1,1,1,80,-1,-1,-1,126,10
2570 PROChead:PROCbel(200)
2580 PRINTTAB(14,3)CHR$131"By G.J.Key"
2590 IFPAGE<>&1900 PROCrelocate
2600 PRINT"FNlines"TAB(8,7)CHR$134"Use
the following keys,"
2610 PRINTTAB(12,10)CHR$131"Z.....LE
FT"
2620 PRINTTAB(12,12)CHR$131"X.....RI
GHT"
2630 PRINTTAB(12,14)CHR$131"*.....UP
/JUMP"
2640 PRINTTAB(12,16)CHR$131"?.....DO
WN"
2650 PRINTTAB(12,18)CHR$131"ESCAPE...RE
START"
2660 PRINT"FNlines;TAB(7,23)CHR$134"PL
EASE WAIT A SHORT WHILE"
2670 PROCcode:TX=PAGE+1:AS=STRING$(255,
"*"):REPEAT:TX=TX+LENSTX+1
2680 IF?TX=255CLS:PRINTTAB(0,10)"LINE 1
700 IS MISSING OR INCORRECT"CHR$7:END
2690 AS=$(TX+3):REPEAT:IFLEFT$(AS,1)="
"AS=RIGHT$(AS,LEN(AS)-1)
2700 UNTILLEFT$(AS,1)<>"
2710 UNTILLEFT$(AS,6)="THEEND"
2720 PROCbel(200):REPEAT
2730 PRINTTAB(4,23)CHR$(RND(7)+128)"PRE
SS SPACE WHEN YOU ARE READY"
2740 UNTILINKEY-99:PROCbel(120)
2750 ?TX=&FF:*FX3,2
2760 *KEY0OLDIMRUNIM
2770 *FX138,0,128
2780 DEFPROCrelocate:*FX138,0,128
2790 PRINTTAB(0,11)FNlines" PLEASE WAI
T WHILST I RELOCATE TO &1900"FNlines:*F
X3,2
2800 IFPAGE<&1900:*KEY0FORTX=TOP-PAGE T
O-4STEP-4:TX!&1900=TX!PAGE:N.:PAGE=&1900
IMOLDIMRUNIM
2810 IFPAGE>&1900:*KEY0FORTX=0TOTOP-PAG
E STEP4:TX!&1900=TX!PAGE:N.IMPAGE=&1900:
MOLDIMRUNIM
2820 DATA1178,1178,1178,119C,119C,1108,
1100,240C,240C,240C,3C0C,3C0C,600C,780C,
C000,C000,C000,C000,C000,C000,C000,6018,
C000,1238,1298,12F8,1358,1388,1418,1478,
1408,1478,12345678
2830 DATA05050,0000FC54,00,15540000,08
547E,F000,DA500000,7E88CCCC,A8540050,CFC
F8A00,45EECCCC,5454CF,DBC4F500,8888E6E6,

```

◀ From Page 139

54DECFC0,E7CF8A00,4444D9D9,A0E5CFCE,CFCF  
4500,8ADDCCCC,0A00CF,EDA80000,B544CCCC,5  
0A000A8,2AA00000,50A0B5,FC00,54A8A8,5400  
F0A0,54

2840 DATAA0000000,88,0,CCCCCF8,CFCC,0,  
55CCCCF8,44,0,F3AAFEF0,CCE6,CC4455,F3AAF  
AFC,8888F3F3,8A4444,F3000000,CCCC,CF8CF  
00,F355FDF0,4444F3F3,458888,F355F5FC,CCD  
9,CC88AA,0,A2F3F3A2,0,A200000A,F3F3F3F3,  
A2,F3E745CF,F951F300

2850 DATA8ACFF3,A251A200,F2A2F3F3,CFE7E  
7F3,51A25100,F151F3F3,CFDBDF3,F3DB8ACF,  
F6A2F300,45CF3,51000045,F3F3F3F3,51,0,5  
1F3F351,0

2860 DATA260C1D2A,22222222,80C0727,808,  
F0A000A,2020A05,11110415,33333311,C0C0C0  
3,3F0C0C24,270F0A0F,3030727,3322082A,331  
12233,18182403,40C0C,3031300,10103,40C2E  
15,5000000,4040405,0,0,0

2870 DATA0,22000000,8080222,808,F0A000A  
2020A05,22260C3F,A1B3322,18181808,3F0C0  
C0C,270F0A0F,3030727,11110415,22333311,1  
8181802,40C0C,3031300,10103,0,11000000,4  
040401,0,0,0

2880 DATA260C1D2A,22002222,8080D25,0,F0  
A000A,2020A05,11110415,33332211,C241803,  
3F0C0C0C,270F0A0F,3030727,3322082A,33333  
333,180C0C03,4040C,3031300,10103,C2E0415  
5000011,5,0,0,0

2890 DATA80C1D2A,A000000,808080A,0,0,0,  
33110415,33221133,24241803,80C0C,3032300  
20203,2222082A,33333322,C0C0C03,3F0C0C1  
8,180F050F,3030B1B,190C2E15,11111111,40C  
0B1B,404,F050005,101050A

2900 DATA0,22000000,8080802,0,0,0,22220  
82A,11333322,24242401,80C0C,3032300,2020  
3,11190C3F,5273311,24242404,3F0C0C0C,1B0  
F050F,3030B1B,0,11000000,4040111,404,F05  
0005,101050A

2910 DATA1D082A,A000022,0A,0,0,0,33110  
415,33333333,240C0C03,8080C,3032300,2020  
3,2222082A,33331122,C182403,3F0C0C0C,1B0  
F050F,3030B1B,190C2E15,11001111,4040E1A,  
0,F050005,101050A

2920 DATA2200082A,22222222,8022222,8080  
8,60C0C08,706,11000415,111111,C033333,C0  
C0C0C,3030C0C,3030303,3F000000,2233000C,  
C033333,C040C0C,3010C0C,1010303,0,0,0,C0  
C080A,4,0

2930 DATA0,0,0,C0C0405,8,0,3F000000,113  
3000C,C033333,C080C0C,3020C0C,2020303,22  
00082A,222222,C033333,C0C0C0C,3030C0C,30  
30303,11000415,11111111,4011111,40404,90  
C0C04,809,12345678

2940 DATA2,1,3,2,4,2,1,1,2,3,2,4,2,1,2,  
2,3,2,1,2,3,2,5,2,3,2,4,2,2,7,2,2,1,3,1,  
2,3,2,1,2,4,2,3,1,6,4,2,5,2,4,2,2,4,2,3,  
2,4,2,7,2,1,1,2,6,2,3,2,7,2,2,5,2,3,1,6,  
1,6,2,4,2,1,3,2,1,2,5,2,4,2,2,2,2,2,2,2,  
2,6,2,2,2,2,2,2,2,2,2,6,2,2

2950 DATA4,2,1,1,1,1,1,3,3,1,1,1,1,1,  
1,2,4,7,2,2,2,3,1,1,1,1,1,1,1,3,2,2,2,  
7,7,2,3,1,3,1,1,1,1,1,1,1,1,3,1,3,2,7,7,  
2,3,1,3,1,1,1,1,1,1,1,1,3,1,3,2,7,6,2,2,  
2,4,2,4,2,2,2,2,4,2,4,2,2,2,6,2,2,2,2,6,  
2,6,2,2,2,2,6,2,6,2,2,2,2

2960 DATA1,4,1,1,4,1,1,1,1,1,1,4,1,1,  
4,1,1,2,3,1,3,1,7,1,3,1,1,3,1,7,1,3,1,3,  
1,4,1,3,2,3,5,3,1,1,1,1,3,5,3,2,3,1,4,6,  
1,1,1,1,1,1,4,1,1,4,1,1,1,1,1,1,6,2,2,2,  
2,2,4,2,6,2,2,6,2,4,2,2,2,2,2,2,2,2,2,2,  
6,2,2,2,2,2,6,2,2,2,2,2,2

2970 DATA1,1,4,1,1,1,1,1,1,1,1,1,1,4,  
1,1,1,4,1,3,5,1,3,4,3,1,1,3,4,3,1,5,3,1,  
4,5,1,3,3,1,3,5,4,3,3,4,5,3,1,3,3,1,5,4,  
1,3,1,1,1,5,3,3,5,1,1,1,3,1,4,5,1,1,  
1,1,4,1,1,1,1,1,1,1,1,1,1,1,5,2,2,2,2,2,  
6,2,2,2,2,2,2,2,2,2,2,2,2,2,2

2980 DATA1,1,1,1,1,1,1,4,1,1,1,1,1,1,  
1,1,1,1,4,1,3,1,3,1,3,5,1,3,1,3,1,3,1,4,  
1,1,5,1,3,1,4,1,3,1,1,3,1,4,1,3,1,5,1,1,  
3,1,3,1,7,1,1,1,4,1,1,7,1,3,1,3,1,1,1,1,  
1,1,5,1,1,1,7,1,1,5,1,1,1,1,1,2,2,2,2,2,  
2,2,2,2,6,2,2,2,2,2,2

This listing is included in this month's cassette tape offer. See order form on Page 159.

\* EPROMS \* RAMS \*

QUALITY BBC chips from Hitachi, Fujitsu, Intel etc  
Low prices - Large stocks - fast delivery  
Prices INCLUDE VAT and UK post, normally by return

**NB** 21 volt Vpp EPROMS are generally no longer manufactured  
Please telephone for availability and current price  
NOW is the time to order our VersEprom (see below)

250 nanoSecond - 12.5 volt Vpp (programming voltage)

27128A-25	1-2 pcs £3.20,	3-9 pcs £2.90,	10+ pcs £2.60
27256-25	1-2 pcs £5.25,	3-9 pcs £4.90,	10+ pcs £4.70
27C256-25	1-2 pcs £6.50,	3-9 pcs £6.25,	10+ pcs £6.00
27512-25	1-2 pcs £11.95,	3-9 pcs £11.75,	10+ pcs £11.50
27513-25	1-2 pcs £17.50,	3-9 pcs £17.25,	10+ pcs £17.00

200nS - 12.5 (or 21 volts) available

2764-20	1-2 pcs £3.75,	3-9 pcs £3.50,	10+ pcs £3.30
27128-20	1-2 pcs £3.95,	3-9 pcs £3.75,	10+ pcs £3.50
27256-20	1-2 pcs £6.50,	3-9 pcs £5.95,	10+ pcs £5.75

**RAMS**

Hit. 6264LP15 (ATPL, Watford) 1 pc £2.95, 2+ pcs £2.65  
Upgrading Solidisk - please state type already fitted -  
NEC 41254-12 or 15, 41464-12 or 15. Equivalent £5.25 each  
including socket.

**VersEprom**

Low cost EPROM PROGRAMMER for BBC B, Plus and Master with DD and DFS. BBC coloured, sloping front case with ZIF. Plugs into/powerd from user port. Rom software, includes fast programming algorithm. Programs 2764, 27128, 27256, 27512, 27513 and 27011, 12.5 or 21volt EPROMS. Commands: TEST, READ, BLOW, VIEW and COMP. Price £49.95

EPROM ERASERS handling up to 3 EPROMS at a time  
D1 £21.45, D2 (with built-in 15 min timer) £26.45

Prices INCLUDE VAT and UK post, normally BY RETURN

Send UK cheques/PO  
LA or Gov't Orders to:

**SILICON CITY**

Mithian, St. Agnes, Cornwall TR5 0QE  
Access/Visa orders, telephone 087 255 2112

**EPROM PROGRAMMER**  
for the BBC micro

An exceptionally versatile unit, programs EEPROMS and EPROMS from 2K to 32K.

Powerful, easy to use software in a sideways ROM.

Features full screen data editor, files, and softkeys.

Professionally designed hardware ensures reliable and safe programming, also detects badly socketed EPROMS.

Soundly constructed in a convenient flip-top box which protects unit when not in use

Supplied with a comprehensive manual.

Adaptors for single chip EPROM MPU'S available.




Now with new software

- ★ Handles the latest EPROMS
- ★ Faster operation
- ★ Checksums

£95 (excl VAT, free P&P)

10% Educational discount available

2 year guarantee. Detailed information on request



Control Telemetry of London  
11 Canfield Place  
London NW6 3BT Tel: 01-328 1155

# MICRO USER CLASSIFIEDS

Has upgrading your BBC Micro given you hardware you no longer need? Or have changing interests left you with unwanted software? Then **THIS** is the place to advertise your surplus items. Our 179,000 readers are always on the lookout for a bargain and this is the first place they'll look!

**An added bonus!**  
Your advert will be automatically displayed on MicroLink, the electronic mail service operated in association with Telecom Gold. This means it will be seen by thousands of computer enthusiasts who can send an instant response.

**Ads will be accepted under the following conditions:**

- This service is EXCLUSIVELY for the use of private readers. No trade ads will be allowed.
- To avoid encouraging software piracy, all ads will be carefully vetted before they are accepted.
- Ads can only be accepted on this form (or a photocopy of it).
- There is no maximum to the number of words you include in your ad. If there is insufficient room on the form, continue on a separate sheet of paper.
- The cost is 20p per word, with a minimum of 10 words.
- We **GUARANTEE** your ad will appear in the May issue (on sale April 8) providing it is received by March 13.

● BBC B OS 1.20. 32K SWR. Acorn DFS 0.90 Wordwise. Boxed complete with all manuals. £295. Tel: 01 874 5457 after 6pm. London SW18.

● Acorn Z80 Processor Plus all software £275. W.E. Eprom Programmer + ROM £50. OEL Telemod 2 Modem Solidisk 1770/ 8271. Switchable DFS Board Plus 2.1 ADFS, 2.1 FDFS ROMS £50. Beebug Exmon £15. Phone 01 390 0407.

● Acorn Z80 2nd Processor For Sale £250. Also Viewsheet £30. Tel: 0384 891073.

● BBC B with colour Monitor Printer Modem Tapedeck Joystick £200. Software Magazines. Ring 021 353 6404 After 6pm £350.

● Teletext Adaptor, Volex TTX 2000B, ROM and manual £65 ono. Printer, Canon PW IO 80A, Manual, Spare Ribbon £85 ono. 021 550 1959.

● Watford Complete DDFS Kit With Manual £35. Tel 061 764 7904.

● Micro User Full Set Up To November 1986 £20 ono. Tel: Clive 0703 431973.

● BBC B Basic 2, OS 1.2, Watford DFS, Wordwise Plus, Expansion Board, Viewsheet, Double Sided Dual 40/80 Switchable Disc Drives, Microvitec 1451 High Res. Monitor, Canon NLQ Printer, Ideal Small Business System £900. Tel: 0761 414905. After 6pm.

● BBC B Issue 7 With Acorn DFS, View and Max ROMS, Plinth, Technomatics Single 40/80T D/S Disc Drive lots of software - including Elite, Strikeforce Harrier £400. Tel 04862 66998.

● BBC B 1.2 OS. Acorn Recorder. Joystick. Many Games including Elite, Ravenskull, Etc. Recent Service. Offers Around £225.

Sheffield (0742) 489987.

● Computer Concepts Graphic ROM and manual. £15 Phone. Tel: 0703 440003

● 6502 2nd Processor, DNFS, Hi-Basic £85. Watford Eprom Programmer MKII. £35. Tel: 0223 322244.

● Wanted. Dual Disc Drive for BBC B and Software discs. Tel: 01 363 7114.

● BBC DNFS Twin 80T Viglen case Solidisk 64K SWR Software 8 ROMS 30 Disks Joysticks Books Magazines £350. Tel: 01 699 3858 Evenings. 01 486 5811 x 6535 Days.

● Turbo upgrade for Master 128. Six months old. £80. Ultracalc 2 £35. Viewstore £30. Disc Doctor £15. 061 434 6251.

● BBC B 1.2 O.S. with carrying case and data recorder. Over 650 tapes. Many bound volumes of computer maga-

zines. Must sell complete - cannot split. For collection only. Worth £1,700 - accept £1,000 o.n.o. for quick sale. Tel: 01 200 6316 (Evenings)

● BBC Including disc drive, Centronics GLP, Voyager 7, Commsoft Music 500, AMX mouse, Joystick, ROM Board, ROMS Including Wordwise+, Transferom, Over £4700 of Software books and Mags. Total Cost £2400. Accepting £1200 o.n.o.. Ring Winslow (029671) 3238.

● BBC Model B. 32K 1.2 O.S. Watford DFS Mitsubishi DDDS 400K Drive, MCP40 Printer/Plotter Light Pen, Joysticks Data Recorder Manuals & Over 30 Tapes & Discs, Numerous Mags. & Books Collected Over 3 years. All Worth Over £1200. Will accept £500 o.n.o. Tel: 01 427 8452 Evenings.

**PLEASE PRINT THIS AD IN THE NEXT MICRO USER**


Cheque enclosed for £ \_\_\_\_\_ (minimum £2 for 10 words)

Name \_\_\_\_\_

Address \_\_\_\_\_

**POST TO: Micro User Classifieds, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.**

## S.A. Software House Limited

BBC Master Compact from	£458.00	Disk Drives from	£75.00
BBC Master 128K INC DFS/ECO	£499.99	Printers from	£130.00
BBC model B	£230.00	Printer Cables	£12.00
BBC model B INC DFS	£290.00	Acorn DFS	£60.00
BBC Master ET	£340.00	Watford DFS	£60.00

Second hand computers Bought & sold, phone for prices

We carry out computer repairs and maintenance contracts, phone for details

Wide selection of Software, Hardware, Leads, Plugs, Spare parts etc.  
S.A.E. for full details.. All available Mail Order

Unit 15  
Brook House  
250 Barr Street  
Hockley  
Birmingham B19 3AG  
Tel: 021-523 2770 or 021-554 0451. Telex: 333340

Educational & Institutional orders welcome  
Carriage extra

(Above Prices include VAT)

## DISC-BASED STATISTICS PACKAGE

THIRD EDITION NOW AVAILABLE.

Developed for the BBC B and B+ but FULLY COMPATIBLE WITH THE MASTER SERIES.

Includes descriptive statistics (Mean, Median, Mode, Variance, Standard deviation, probability and confidence limits), Standard errors, t-tests, Anova with Scheffe's Procedure, Correlations (rank, linear and curvilinear), Chi-square, Exact Probability, McNemar's Test, Mann-Whitney, Kruskal-Wallis, Friedman, Cochran's Q. Also Validation and Reliability Tests. Provides print-outs if required. Includes a comprehensive "Help" program.

£25 FOR DISC AND USER GUIDE.

Please state if 40 or 80 track required. Owners of previous editions may wish to update - send SAE for further information.

BIRKDALE SOFTWARE  
89 Birkdale Drive, Leeds LS17 7RU

## S.P. ELECTRONICS

ALL IN STOCK

BBC SPECIALISTS

BBC MASTER COMPACT	From £458.00
BBC MASTER 128	£499.00
Cumana CD800S (800k) 2 x 80 track DS drive with PSU	£340.00
Disc Operating System	£75.00
Disc Drives	from £75.00
G3WHO Ritty Program (Tape)	£7.50
G3WHO Ritty Program (Eprom Version)	£20.00
Circuit Board for Ritty decoder (inc. instructions) Ritty PCB	£10.00
Canon Dot Matrix 160 cps NLO Printer	£299.00
Printer Cable (Centronics)	£12.90
Citizen 120D 120cps	£199.00
Z80 2nd Processor	£150.00
Data Recorder	from £25.00
WORDWISE Word Processor	£33.00
Slow Scan TV Circuit Board & Program (inc. instructions)	£17.50
ADFS	£29.90
1770 DFS Kit	£49.90

We are Acorn approved dealers & repair specialists

Wide selection of software, books, leads, plugs, etc. All prices only while stocks last.  
All available Mail Order

48 Linby Road, Hucknall,  
Notts. NG15 7TS  
Tel: 0602 640377



Educational & institutional orders welcome  
Carriage extra

(all prices include VAT)

## BRANDED DISKS

Incredible prices

All disks supplied in original packing and fully guaranteed

Prices per box of ten

3.5" Verbatim Datalife	SSDD 135tpi MF350	£21.75
3.5" Sony	SSDD 135tpi OMD3440	£19.45
3.5" Memorex	DSDD 135tpi MX 3460	£24.30
5.25" Verbatim Datalife	SSDD 48tpi MD525	£12.75
5.25" Verbatim Datalife	DSDD 48tpi MD550	£15.35
5.25" Verbatim Verex	SSDD 48tpi MD200	£11.00
5.25" Verbatim Verex	DSDD 48tpi MD250	£12.45
5.25" Maxell	DSDD 48tpi MD2-D	£15.00

All inclusive prices. No extra to pay.  
Government and educational orders welcome.

Please make cheques or postal orders payable to:

ORIOLE LIMITED  
DEPT. XYZ, P.O. Box 297, London N3 2TS

## SPIDER 2 REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!

- Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.
- 8 independent countdown timers.
- Easy to install with no soldering.
- Comprehensive manual supplied.


New SPIDER 2 features

- Special keywords for controlling the Serial Port.
- Professional implementation of Foreground/Background processing.
- Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT

SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so BASIC programs are unaffected. The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER using the 1MHz bus.

Ask now for details.  
**Paul Fray Ltd**  
Willowcroft, Histon Road, Cambridge CB4 3JD  
Telephone: (0223) 66529



SPIDER - stamps out I/O bugs

NOW AVAILABLE FOR THE MASTER

## BALANCE YOUR BOOKS

with  
MICROLEDGER

(For BBC micros - model B or better)


A general ledger program designed by a Chartered Accountant for maximum versatility and ease of use. Ideal for small businesses, schools, clubs, etc., or just for household accounts. Features include:

- "Double-entry" bookkeeping.
- Up to 99 general ledger accounts - all account names user-specified.
- Up to 500 entries per accounting period.
- Excellent budgeting capability.
- Comprehensive output reports, including Income and Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting; actual/budget comparisons. Full audit trail.
- Menu-driven, plus on-screen prompt messages.
- 29 page, comprehensive manual.

MicroLedger is supplied on 40 track 5.25" disk or on tape cassette for conversion to other disk media. It is unrivalled value at £16.50 (incl. p&p) for disk or tape - specify which is required. Send P.O. or cheque to Ixchel Software, 16 Meredith Road, London SW13 0DY; or ring 01-876 9732 for a free fact sheet.

Sorry! - Limited to one only per customer

FREE



large  
(100 disk capacity)  
lockable disk storage  
box worth £13.95

- When you buy 25 disks for only £19.95 including postage and VAT!


All disks supplied are superior quadruple density 5.25" Double Sided, which are best for both 40 & 80 Track Drives.

Nebulae, Dept MI, FREEPOST, Kilroot Park  
Industrial Estates, Carrickfergus, Co Antrim,  
BT38 7BR TEL (09603) 65020

7 Day Delivery  
One year guarantee,  
& 14 day money back period.

We accept orders from all government bodies, schools, universities, PLC's etc. We despatch on receipt of an official purchase order.

# IT MAY LOOK LIKE A SINGLE DISC DRIVE TO YOU...

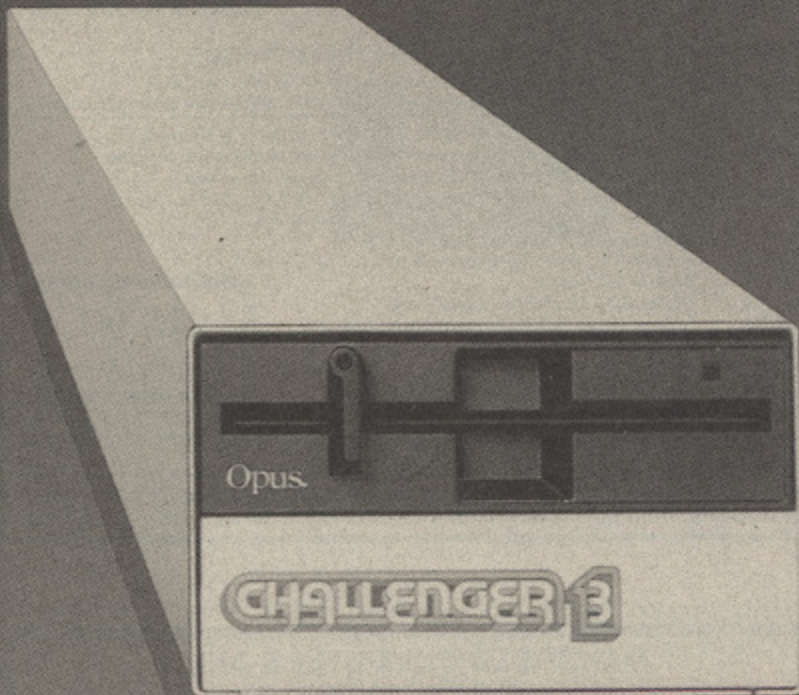

## BUT YOUR COMPUTER KNOWS BETTER

**£199.95**  
(512K RAM) Save £50  
**£179.95**  
(256K RAM) Save £20  
**LIMITED PERIOD OFFER**



It's the clever bits only your BBC computer can see which help the Opus Challenger outperform every other disc drive on the market, including dual drive systems.

Only Challenger has both a conventional double-sided floppy disc drive and a high technology RAM disc, effectively a second, lightning fast solid state disc drive which turns your unit into a unique dual system with up to a massive 1.2 Megabytes of useable capacity.

Only Challenger has its own built-in double density disc interface, making all that soldering and track cutting associated with other interface connections, a thing of the past. Just plug-in and away you go.

You'll find more performance than from any dual disc drive system and from only £179.95, Challenger is up to £70 cheaper than even the most inexpensive twin-drive and interface package. Unbeatable value and a unique 3-in-1 combination:

**5 1/4" DOUBLE-SIDED 40/80 TRACK DISC DRIVE**

**BUILT-IN DOUBLE DENSITY DISC INTERFACE**

**INTEGRAL SOLID STATE RAM DISC** Up to 20 times faster than a disc drive and now available in 256K and 512K versions

With all that power and performance you can race through work conventional disc drives labour over and, when you need to save to floppy, the RAM disc backs-up your information in a fraction of the time without any need for tiresome disc swapping. A & B Computing, which voted Challenger "Best buy of the year", said: "Using the RAM disc is a real dream... we checked a document just over 21K long, which took 5 minutes 56 seconds on floppy and only 1 minute 7 seconds using the RAM disc".

You don't even need to worry about compatibility. We've fitted the same disc controller chip used on the BBC B+ to make Challenger compatible with all leading software titles and it's suitable for use with the new 128 Master Series.

Challenger's price even includes VAT, FREE 72-hour delivery, the unbeatable Opus two-year warranty and a full operating manual.

So call us now on 0737 65080 for details of our nationwide dealer network or simply post the coupon. Generous education and dealer discounts available.

**CHALLENGER – SIMPLY  
LIGHT YEARS AHEAD OF THE OPPOSITION**

To: Opus Supplies Limited, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.  
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

Challenger Unit(s) £179.95 each including 256K RAM disc

Challenger Unit(s) £199.95 each including 512K RAM disc

I enclose a cheque for £ \_\_\_\_\_ or please debit my credit card  
account with the amount of £ \_\_\_\_\_

My Access  Visa  no. is:

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

TELEPHONE \_\_\_\_\_

**Opus.**

## DISC BASED HOME BANK ACCOUNT PROGRAM for ONLY £7.95!

Keep changes to a minimum by using this program, which will maintain up to 9 separate Bank, Building Society or Credit Accounts on disc and includes the following features.

- Credits, Debits and Standing Orders
- Transfer between accounts, even as standing orders
- Account print outs including part print outs
- An inbuilt calculator.

Information entry using simple forms with clear, easy to use displays

Suitable for BBC B, B+ and Master with DFS or ADFS.  
Send £7.95 now for 5.25" disc and manual.

New Machine Code Program to convert INTERWORD files to ASCII files, suitable for use with assemblers or basic. Allows this superb Word Processor to be used to edit your basic or assembler programs.

Send £5 for 5.25" disc and instructions

**MALVERN SOFTWARE**

4, Bastonford Villas, Bastonford, Powick, Worcester WR2 4SL.  
Tel 0905 830937

## BeebDOS

from MicroBoss

### Software for BBC and IBM file interchange

Runs on IBM-PC-XT-AT or compatibles and supports DOS 2.0 or later  
Supplied on 360k IBM diskette with manual and plastic wallet the software includes:

- BCOPY** Copy files BBC-IBM, IBM-BBC, BBC-BBC (wild cards allowed)
- BCONV** Flexible IBM file translate facility enabling text to be passed between VIEW, WORDSTAR and Displaywrite 3 amongst other uses.
- BGRAPH** Convert BBC mode 0,1,4,5 screen format (AMX Art included) files to IBM standard colour (CGA) for use in presentations
- BCAT** Catalogue BBC disks
- BFORM** Format BBC disks (boot option & title can be specified)
- BBACK** Backup BBC disks
- BWIPE** Delete BBC files (wild cards allowed)
- BACC** Lock or unlock BBC files (wild cards allowed)
- BCOMP** Compact BBC disks
- BREN** Rename BBC files
- BTOPT** Alter the title or boot option of a BBC disk

**£15.00  
Inclusive**

**BBC diskette formats supported are Watford DDFS and Solidisk DDFS and any double density filing system which uses the standard Acorn DFS catalogue structure**

CHEQUE OR POSTAL ORDER TRADE/EDUCATIONAL ENQUIRIES WELCOME  
MICROBOSS LTD 3 HADLEIGH RD FRINTON ESSEX CO13 9QQ TEL (02556) 71095

## ADVANCED STATISTICAL SYSTEM For BBC Models B, B+ and Master 128

### FIRST

#### Standard, Professional and Academic Features

Fast, robust, accurate, interactive, modular. Full data management. Transforms, dummy variables, data subsets. Scatter & Normal prob. plots. Detailed Univariate Stats., 1 tests.

#### Unrivalled regression facilities

(Weighted through the origin, standardised). Correlation matrix, ANOVA for regression, Data summary. Residuals, fitted values & confidence intervals. Contour plots. Advanced regression DIAGNOSTICS, VIF's, influential points etc.

#### Unique ROBUST regression. True NONLINEAR regression

Powerful two-way ANOVA. Cluster analysis. Time Series & smoothing. Nonparametric methods. Distributions generator, Histograms. Chisquared tests. Specialised Linear Calibration. "Outlier" detection. Numerous other powerful options. Full utilities (data saving, dumps, printing, formatting, etc.)

#### Comprehensive Manual

Special versions available for 32016 Co-processor & ACW.

Price £90-£150 depending on features.

Full details from:

**Serious Statistical Software**

Lynwood, Benty Heath Lane, Hooton, S. Wirral L66 6AG. Tel 051-327 4268

## MANSFIELD COMPUTERS AND ELECTRONICS

BBC Master - best price in UK	£429.00
BBC Master compact	from £441.00
Amstrad PCW 8256	£435.85
Amstrad PCW 8512	£550.85
Amstrad PC 1512	from £516.35
All hard disk PC 1512 include 640k of memory FREE OF CHARGE.	
Floppy versions - memory only £20.00 extra.	
Spectrum 128 + 2 with joystick + 12 games	£159.95
Citizen 120D dot matrix printer with NLO	£189.00
Epson LX86	£269.00
Full range of monitors	from £89.00
Opus single 40/90 switchable disk drive	£115.95
Opus dual 800k inc PSU	£269.00
Acorn dual 800k disk drive with plinth	£316.00
MCE UNIVERSAL DISKS d/s d/d 96 tpi box of 10	£9.95

Extensive range of printer ribbons and paper at special prices  
Joysticks - Interfaces - Business software - Games software

#### EDUCATIONAL ORDERS WELCOME

All prices include VAT. Guaranteed service on all goods, including out of warranty service by our own service department. We are Acorn, Amstrad, Spectrum and Commodore Specialists.

33 Albert Street Mansfield Notts NG18 1EA.  
Tel: 0623 31202



# BULK DISKS AT CRAZY PRICES

5.25"	25	50	100	200	250
S/S D/D	£13.99	£25.99	£48.99	£95.99	£115.99
D/D 96TPI	£14.99	£26.99	£49.99	£96.99	£119.99
Coloured	£18.99	£35.99	£69.99	£129.99	£149.99

All disks are supplied with write/protect tabs, labels and envelopes. Coloured disks run on any disk drive either 40 or 80 track, single or double.

3.5"	25	50	100	200	250
D/S 135 TPI	£39.99	£75.99	£139.99	£259.99	£299.99
S/S 135 TPI	£37.99	£72.99	£132.99	£246.99	£259.99

All disks come with a full lifetime guarantee and are made to TOP international standards.

Remember all prices include VAT & Delivery

#### SPECIAL OFFER BOX

Buy 100 5.25" disks and receive lockable storage box all at special price of **£54.99**


#### LOCKABLE STORAGE BOXES

5.25"	Holds	3.5"
£11.95	100	£11.95
£9.95	50	£9.95
£1.95	10*	£1.95

\*(not lockable)



**CENTEC**



**0689-61947**

18 Crescent Way, Green St. Green,  
Orpington Kent BR6 9LS

Please call for bulk and educational prices

## C & F ASSOCIATES

BBC Cassette Software			BBC Disc Software		
Title	RRP	Our Price	Title	RRP	Our Price
Sentinel	9.95	7.75	Sentinel	14.95	12.95
Colossus Chess	9.95	7.75	Revs	14.95	12.95
Ravenskull	9.95	7.75	Elite	14.95	12.95
Revs	12.95	10.95	Repton 3	11.95	10.95
Elite	12.95	10.95	Sink The Bismark	10.95	9.95
Repton 3	9.95	7.75	Acornsoft Hits 1	11.95	10.95
Strykers Run	9.95	7.75	Acornsoft Hits 2	11.95	10.95
Spy Hunter	9.95	7.75	Enthar 7	16.95	14.95
Raid Over Moscow	9.95	7.75	Colossus Chess	14.95	12.95
Yie Ar Kung Fu	9.95	7.50	Ravenskull	11.95	10.95
Yie are Kung Fu 2	8.95	7.20	Citadel	11.95	10.95
Exploding Fist	9.95	7.50	Scrabble1	14.95	12.95
Galaforce	9.95	7.50	Brian Clough Football	17.95	15.95
Thrust	7.95	6.50	War	14.95	12.95
Impossible Mission	8.99	7.20	Phantom Combat	12.95	10.95
Rick Hanson	9.95	7.95	Crystal Castle	14.95	12.95
Project Thesis	9.95	7.95	Graphic Adv. Creator	27.95	22.95
Myorem	9.95	7.95			
Phantom Combat	9.95	7.50			
Acornsoft Hits 1	9.95	7.75			
Acornsoft Hits 2	9.95	7.75			
Computer Hits 3	9.95	7.75			
5 Star Games	9.95	7.75			
Thunderstruck	7.95	6.75			
Psycastria	7.95	6.75			
Southern Belle	7.95	6.50			
Brian Clough Football	14.95	12.95			
Strike Force Harrier	9.95	7.50			
Speech	9.95	7.50			
Citadel	9.95	7.50			
Crystal Castle	9.95	7.75			
Power Pack	9.95	7.75			

#### Master Compact Discs

Doctor Who	14.95	12.95
Revs	19.95	17.50
Elite	19.95	17.50
Repton 3	14.95	12.95
Strykers Run	14.95	12.95
Citadel	14.95	12.95
Repton 2	14.95	12.95
Galaforce	14.95	12.95
Speech	14.95	12.95
Karate Combat	14.95	12.95
Acornsoft Hits 1	14.95	12.95
Acornsoft Hits 2	14.95	12.95

ALL PRICES INCLUDE VAT AND POSTAGE & PACKING  
(Overseas Orders add £1.00 per item)

Cheques/PO payable to:

**C & F ASSOCIATES**

and send to

**C & F ASSOCIATES (MU) PO BOX 2, BIDEFORD EX39 3RE**

Tel: (023 73) 619

Orders normally despatched within 24 hours of receipt but allow maximum of 7 days



# LETTERS

**£10 Prize letter**

## Compressing screen dumps to disc

I THINK that some readers may be interested in a very powerful facility which will (usually) produce compressed screen dumps to disc. This facility is already installed on every BBC Micro, it is the \*SPOOL command.

What is not pointed out in the User Guide is that when a spool file is opened all the bytes that are sent to the VDU drivers are also sent out to the spool file.

This means that VDU instructions (regardless of language in use at the time) can be saved to disc or tape using far less space than would otherwise be the case.

all the PRINT, PLOT, MOVE, DRAW, VDU commands and so on.

There are several advantages using this technique. It saves valuable programming space and there will be a reduction of disc space needed to save the screen in comparison to using the \*SAVE command.

Machine code programmers can use this method to compile a list of the raw VDU codes to be sent to oswrch. All the necessary padding zeros are there - let the computer do the work for you. - **Jim Sharp, Featherstone, West Yorks.**

chased for my micro.

The range of information and software available and the ease of downloading is enough to occupy anyone for hours every day.

The fact that many of the programs are reproduced from past issues of The Micro User is an added bonus. - **Tony Lawrence, Wigston, Leics.**

### Back to basics

THANKS for going back to basics in computer logic, I found your article on Kar-nough mapping in the September 1986 issue of The Micro User mentally stimulating as well as very interesting.

Suddenly my children's algebra of sets, which I'd regarded as a pretty pointless exercise in the obvious, takes on meaning.

However, you did make a couple of quantum leaps which left me questioning your reasoning.

By choosing a non-sequential order for the ABCD values your map is rather random. If I use the logical order  $\bar{B}\bar{A} \bar{B}A \bar{B}\bar{A} \bar{B}A$  across the

**Win a tenner**

● Want to write to Micromail? The address is: Letters The Micro User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY. Writers of the most interesting letters receive a £10 prize.

```

10 *SPOOL LINES
20 MODE 0
30 FOR LX=1 to 100
40 DRAW RND(1300),RND(1100)
50 NEXT
60 *SPOOL

```

When you run this program a file called LINES is created and if you type in the command \*EXEC LINES, the screen display produced by running the last program will be replayed to the screen.

Line 60 is needed to close the file before the Basic prompt > is printed, or that will be sent to the file as well. This simple method works for

### Teletext alternatives

I NOTICE in February's issue of The Micro User that you have once again put on offer the BBC Micro Teletext System and since this is similar to that of last year I cannot praise the value of the offer enough.

I have no experience of the alternatives on the market but can honestly say that this has been the most useful and entertaining add-on pur-

top and  $\bar{D}\bar{C} \bar{D}C \bar{D}\bar{C} DC$  down the side then the cell values ready sequentially from 0 to F.

Is there any reason why this should not be done and if not why you chose your order?

The resultant cell groupings using such varying networks also differ leading to different Boolean expressions. Are they all valid?

The second leap of imagination was that after you explained the structure of the various gates (all having two inputs except the inverter with just one), you then showed NAND gates with 3 and 5 inputs. Surely this isn't possible?

A minor point also on NAND gates on a matter of economy. Why add a second inverter to AND to make NAND when one could just make a NAND gate? - **Peter Noble, Old Glossop, Derbyshire.**

● Mike Cook replies: Thanks for the encouragement.

First let me take you to task: The definition of "quantum leap" is: "the smallest quantity ... a system can possess". I wish people would stop misusing the word.

Secondly the reason for the

## Not word-perfect

I WAS very interested to read Jim Notman's review of Inter-Word in January's edition of The Micro User.

As he rightly pointed out it does "stand head and shoulders" above anything else currently available for the BBC Micro.

However, I was surprised that he was unable to find any fault with the program. In my three months with Inter-Word I have encountered a problem which renders the program almost unusable in some

circumstances.

I refer of course to its inability to include both double and single spaced type in the same document.

In many situations this will not be considered important, but in the production of scholarly papers (such as projects and reports for colleges and universities, as well as some journals) it is absolutely vital.

Generally you are required to submit documents in double-spaced format, with single-spaced block quo-

tations and footnotes.

Although the desired effect can be obtained by inserting printer codes at the appropriate points within the document, this is not visible on the screen and cannot be used in paged mode without affecting the page length.

I would be grateful if any readers could suggest a way round this problem as I would be sorry to part with such an otherwise outstanding program. - **John C. SurrIDGE, Bracknell, Berks.**

Turn to Page 146 ►

# LETTERS

## ◀ From Page 145

ordering was explained in the article. It was so that adjacent squares changed by only one variable.

With your method two variables change when going from the second to third column. If you do this, grouping will not work and the results are meaningless. In fact you should not be able to make any groups at all.

It is possible to have any gate with any number of inputs. For example on a three input NAND gate there will only be a logic one output when all three inputs are zero or for a three input AND gate the output is true when A AND B AND C are true.

Finally I am not sure that I follow what you are saying. In a NAND gate the concept is of an AND gate followed by a NOT gate.

When this is implemented on to silicon it can usually be achieved with a single transistor. The economy comes from having a flexible gate – the NAND gate – with which you can make all the functions NOR, OR, AND, NOT and

EXCLUSIVE OR so you do not need to have lots of different types of gate.

## File transfer

IN my 80 to 40 file transfer program published in the March issue of The Micro User, the program has to be saved as 8040, otherwise line 130 won't work.

– Dr. Goatly, Wimbledon.

## After-sales service

I AM writing to you about after-sales service. If people are expected to pay £400+ for a micro they are entitled to a competent network of repair facilities and user support.

A year ago my micro developed a DFS fault and refused to access the disc so I took it to a recommended repairer.

After spending over £60 the problem was not solved. Frustrated, I wrote to Acorn. They told me not to worry and gave me another address of a "recommended repairer". I

sent my micro.

Months passed by, I rang the company and my computer was returned many weeks later. A rom was not returned with it and it was weeks before it came back. The rom board was disconnected so that it would not be damaged in transit. When I reconnected it, it wouldn't work. I sent it back two further times and after each return it failed to work.

In desperation I sent it to Acorn – and it never arrived.

I do not blame Acorn for the faulty repairs directly. But Acorn ought to provide the essential "return to manufacturer" repair facility.

Just look at Acorn's alternative. It was their choice for implementing this policy. The general attitude of Acorn has not been satisfactory. – I.S. Gibson, Maidstone, Kent.

● The rules for dealing with companies of any sort are these: Always keep copies of letters you send, and never throw away letters sent to you.

Always keep telephone notes, but never use a tape

recorder unless you tell the person you are recording and they agree to it.

If you send any piece of hardware, send it either by registered mail, Datapost or use the new Post Office Trak-back service.

## Printing listings

APART from the fact that I am 65 years of age and find the printing rather small, I am well disposed towards the new style of printing programs in the March Issue of The Micro User.

The 40 line layout is very helpful, but just one point: It is not very easy to recognise a quotation mark mixed along with any apostrophe markings.

Another valuable point is the ability to distinguish between I and 1 infinitely more easily. If a ban could be placed on the use of I there would be much hope for copy typists.

There is, however, a printing error contained in the latter part of Line 2890 on Page 148 where a number 1 has not been properly indicated.

Also, in connection with the game Dino, I have not had the slightest success in being able to make the program work.

As an avid copier of so many games in your publication, I have a large stock of successfully listed items and I have learnt how fallible the typist can be in missing sight of the obvious error.

Having due regard to all that, I cannot get beyond a warning (after the initial screen) "Bad Hex at 2590". No way can I discover the error if it is on my part.

Perhaps you would be good enough to process the enclosed order for the disc containing this game – I want to try and find out if I have made an error or if there are some errors in the listing. – S. Morcroft, Dunkinfield, Cheshire.

● Thank you for your comments about the new style of listings.

After much experiment we

## £10 Prize letter

# Enhancing ADFS menus

I FOUND the ADFS Menu by John McCrae in the January issue of The Micro User particularly useful as I have recently upgraded to 1770 FDC and ADFS.

However, because PAGE now defaults to &1F00 there is insufficient memory to run the program in MODE 1.

Deleting all the REM statements helps, but I felt that as the program could be enhanced by adding the facility of going back up a level (that is, up the directory tree), a less greedy mode was needed.

I chose the 2-colour Mode 4 and modified the program so that instead of using a different colour to indicate a directory, the letter D is used to prefix the directory name.

Change the program as follows: Delete all REM statements and lines 590, 1330, 1350, 1360, 1410, 1420, 1500 and 1590. Modify:

```

60 IF FNos<2 MODE4 ELSE
MODE129
610 IF ?(point%+3)>128 PR
INT" D'SPC1$name%:GOTO630
620 PRINTSPC3$name%
1320 VDU19,0,4;0::REM Blue
background
1340 VDU19,1,7;0::REM Whit
e text
1380 PRINTTAB(5,9)"A to Z
to select Prog/Path."
1390 PRINTTAB(5,11)"TAB fo
r next directory'SPC3
1400 PRINTTAB(5,12)"* to e
xit'SPC5'0/1 to Mount."
682 IF D%<>13 THEN 700

```

Add new lines for the "go up a level" facility:

```

685 pl%=LENpath$:count%=0
686 REPEAT
687 ch$=MID$(path$,pl%-co
unt%,1)
688 count%=count%+1
689 UNTIL ch$="." OR coun
t%=pl%+1
690 dir$=RIGHT$(path$,cou
nt%-1)
691 path$=LEFT$(path$,pl%
-count%)
692 IF pl%=1 path$=""
693 IF pl%=0 path$=":dir
$=:PRINT"SPC5'Already i
n root directory":FORQ=1TO3
000:NEXT
694 GOTO280
1375 PRINTTAB(5,8)"Press a
key:"
1385 PRINTTAB(5,10)"RETURN
to go up a level."SPC3

```

– H.L. Smith, Little Bealings, Woodbridge.

# LETTERS

ALL programs printed in this magazine are exact reproduction of listings taken from running programs which have been thoroughly tested.

However, on the rare occasions when mistakes occur corrections are published as a matter of urgency. Should you encounter error messages when you type in a pro-

gram, they will almost certainly be the result of your own typing mistakes.

Unfortunately we can no longer answer personal programming queries concerning these mistakes. Of course letters about suggested errors will be investigated without delay, but any replies found necessary will only appear in the mail pages.

finally decided that 40 column lines were essential and reached the compromise that the typeface had to be slightly smaller but even so we find the new style much clearer.

The problem with quotation marks and apostrophes will soon also be cured.

Although the listings are now printed using a professional laser typesetter, they came directly from a BBC Micro and, as with all our programs, Dino has been thoroughly tested.

The printing fault you mention was caused by dirt getting on to the negative at the printers, but you were correct assuming a 1 had been deformed.

Your Bad Hex at 2590 is probably caused by a typing error causing A\$ to be set up wrong somewhere else in the

program, but we've passed your order to the appropriate department and when the disc arrives I'm sure you won't be disappointed with Dino.

## Date stamp correction

FOUR months ago I purchased a BBC Master and have successfully typed in numerous programs from The Micro User. However I am having trouble with two in the February issue, Rhondo and Date Stamp. In Rhondo I get "No room at L.2400", and in the Date Stamp program I keep getting the "Bad Checksum" message. Could you please advise me. — A.M. Harris, Whetstone, London.

● In regard to Rhondo the listing is definitely correct, but

## Previewing files

FURTHER to your reply to R. Chadwick about previewing long files in Wordwise in the February issue of The Micro User, there is a simple but fiddly trick which allows disc-based Wordwise Plus users to preview files of any length in 80 column format, even with minimum memory.

The secret is to make a little file containing nothing but an embedded command to print the long file, then load and preview the little one.

Since the file actually being previewed is very short, preview takes place in 80 columns, however long the big file.

Admittedly disc accesses do slow down the preview, but the text still scrolls up too fast



for comfortable reading. As usual in Wordwise, scrolling can be stopped and restarted by pressing the spacebar.

For example, if the file BOOK is too long to preview in 80 columns, make a file called (say) PV (for preview) which contains only:

```
f1 PF "file" f2
```

and load and preview PV.

This works only with the PF embedded command in Wordwise Plus — it does not work with the GF command in ordinary Wordwise. — Brian L. Kershaw, King's Heath, Birmingham.

we are sorry to say that line 580 in the Date Stamp should read:

```
580 IF sum%<>&40A2 PRINT "Bad Checksum - it should be &40A2":END
```

We apologise to any readers frustrated by this error.

## Body building

WITH regard to Mike Cook's article on using conducting foam, fairly good contacts can be made to this material using a standard office

Turn to Page 148 ►

I READ Paul Carpenter's letter on hardware scrolling in the February issue of The Micro User, and I thought you'd be interested in a few more tricks the 6845 CRTIC can do.

If you've ever used VDU24 or VDU28 to define the area of screen you may not know you can use the spare graphics memory as program space.

The registers you need to know are:

- R2 (=98) : left border (in bytes)
- R1 (=80) : bytes per line
- In MODE 0, 1 character = 1 column of 8 bytes
- In MODE 1, 1 character = 2 columns of 8 bytes
- In MODE 2, 1 character = 4 columns of 8 bytes
- R7 (=34) : top border (in characters)

The numbers refer to MODE 0, 1 and 2 values. The area of screen switched off is black and the spare memory is

between the screen memory and rom memory.

To switch the screen memory next to the rom, so the program area is all together, you alter R12 and R13 so that if "A" is start of screen memory DIV 8

(=&1000-R1\*R6), then R12 = A DIV256, and R13 = AMOD256. HIMEM = A\*8, but as the rom operates as if

nothing has happened, a Basic program is virtually impossible.

CLS and CLG will clear the spare memory (unless they can be adjusted using VDU24 and VDU28), hardware scrolling (done automatically by the operating system) is to be avoided, and if R1 is altered a lot of graphic functions are confused.

If you've ever wondered how some programs, like Citadel, seem too long for their graphics mode, they most probably use this.

The following program produces a small MODE 2

screen, but the program area extends to the MODE 4 and 5 HIMEM value (&5800).

```
100 DIM code 99
110 FOR LX=0 TO 2 STEP 2
120 PX=code:[OPT LX
130 LDY #11
140 .Loop LDA ary,y
150 STA &FE00:DEY
160 LDA ary,Y:STA &FE01
170 DEY:BPL Loop:RTS
180 ]:ary=PX:NEXT
190 FOR PX=ary TO ary+11
200 READ ?PX:NEXT
210 DATA 0,13,11,12,20,6
220 DATA 28,7,64,1,90,2
230 MODE 2:CALL code
```

— Robert Chambers, Bury, Huntingdon, Cambs.

## More tricks for the 6845

# LETTERS

## ◀ From Page 147

stapler. The staples should be cleaned with Acetone before use and can have wires soldered directly to them.

The foam can also be attached to a card or similar material with staples. An alternative is to simply sew the foam with fine constantan wire.

Conducting paints based on copper, silver and graphite are available. Silver based epoxy resins are available, but are rather expensive.

A fairly flexible and perfectly serviceable conducting adhesive can be made up using very dilute cellulose acetate, for example Durofix+ amyl acetate and graphite powder.

You need very little solution for quite a lot of graphite. Adding too much acetate will make the cement non-conducting.

A very permanent coating can be made by adding a drop of dilute waterglass to graphite powder. The coating may be baked on after it has dried.

It also sticks to glass and ceramics very well.

I hope that this information may be of interest to you for simple experimental projects.

— C.J.Chapman, Nuneaton, Warwicks.

## Disc utilities

I AM trying to write a disc utility program which uses the DFS star commands, but I don't know how to use them from Basic. Can you help? —

Brychan W., Llanfilo, Brecon.

● Because other roms cannot recognise Basic variables, such as file names in string variables, you need a way of transferring the contents of the string to the rom.

Here's a simple procedure you can include in your programs and an example of how to use it.

```
100 REPEAT
110 INPUT "File name",f$
120 PROCcli("INFO "+f$)
130 UNTIL FALSE
140 DEF PROCcli($$)
150 LOCAL XX,YX:YX=7
160 CALL &FFF7:ENDPROC
```

## Confessions of a faint-hearted Micro User

# Trouble with Boolean bugs

Dear Trev,

Why do things keep getting worse? Why does life pick on me?

All right, I admit that I'm used to being a walking disaster area. For me ring-pull cans don't and the toast always lands butterside-down. Banana skins lie in wait.

I accept this. After a lifetime of wet drip-dry shirts and stuck-up non-stick pans I'd die of shock if I opened a tin of ointment that didn't have a fly in it.

But it's a bit much when The Micro User puts the knife in as well.

It all started when I decided that I was going to write a proper program, one that worked. And to impress Doreen I planned to write something that would be useful for her teaching — despite her repeated claims that "I don't teach, I survive".

She said that the most useful thing I could do was to write a program that calculated the number of days left until the school holidays.

It would also be nice if it could come up with a selection of original excuses for taking days off, with a facility to prevent duplication. (She's buried five grandmothers already.)

I wanted something more educational and one of Ludwig's lectures had given me an idea. The subject was Boolean Algebra which, despite Clive's assurances to the contrary, is not about French balls.

It was the ideal subject! I'd write a program to take one of those horrible complicated AND, NOT and OR conditions and produce in its place a nice, simple condition.

The Beeb is full of logical operators so I thought I wouldn't have many prob-

lems. Why do I bother thinking?

After several nights nail biting, swearing and drinking black coffee my masterpiece was ready.

Only it wasn't. It had a bug in it and I couldn't find where. Bored and angry I went downstairs to watch Micro Dead in an effort to prove to myself that some people know even less about micros than I do.

"What's the matter with you?" asked Andrea, busy knitting a clapper cosy to keep the bells warm.

"I've got a bug", I muttered.

"Well take a aspirin", came the reply.

"Not me, my program."

"Well don't take it out on me. I thought with all the time you spend at night-school and doing your homework with that Doreen you'd be able to get a program working."

"It does work, only sometimes it doesn't", I whined.

"Well cut out the bits that don't work and use the rest."

I was tempted to do the same with Andrea but instead stormed out of the house yelling "I'm off to Doreen's for a bit".

Doreen's house was surprisingly peaceful — apparently the kids have got themselves a part-time job at a car-wrecker's yard.

"They're better than all the machinery", enthused Doreen as she lead me upstairs to her study.

"Right, let's see what you've got", she ordered, reaching out and grabbing my masterpiece.

"I'm afraid it doesn't work all the time," I murmured.

"So what's new?" was the answer.

"No", I persevered, "It's got an

intermittent bug in it."

"Oh that should be no problem, show us your Pseudocode and we'll soon sort it out."

And that was how The Micro User nobbled me. Apparently some fool has been mouthing on about Pseudocode and structure and Doreen has taken it to heart.

Of course I hadn't bothered to write any and I told her so. In fact we had words about it. Gone are my days of unconditional jumps.

Now I'm stuck with iteration and functional decomposition which sound more like the results of a bug than a way of avoiding them.

From the way Doreen went on you would have thought my programs needed vaccinating.

The last straw came when she put my code through the Debugger, an error-finding program written by a Dutchman.

It didn't tell me what my mistakes were but flashed up a very nice animated scoreboard that read "Structure 0, Bugs 5" accompanied by the Match of the Day theme.

With that I took myself off to the Ram and Buffer where I told Clive I was never writing a program again. He said he wasn't aware that I ever had done.

Why do I bother? Yours,

Bob

PS: Ludwig has debugged my program. He says that what Doreen said about either my ANDs and ORs or my XORs and NOTs was not true though my NOT TRUEs were FALSE and that was why my ANDs and ORs were not always working. Logical really. ■

**Acorn**  
The choice of experience.

**PEARTREE  
COMPUTERS**  
LTD

**Approved  
Acorn dealer**

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595



# Join our VIP Club and save ££££££££

Dear Customer

As part of our **First Birthday** celebration, we are offering a new **PEARTREE PRIVILEGE CARD**. It's our way of saying 'thank you' for your support and patronage over the last year. You represent our **future** and we hope that we can play an increasingly useful part in **yours!**

Your **Privilege Card** will cost you just £5—less than 10p a week—and for this you will receive **service** and **prices** which will be second to none:

All the benefits of this **Privilege Card** can be yours for just £5.00 per year; and as an added bonus, we will give you a **Gift Voucher** worth £6.00 when you introduce us to two of your friends who join the membership.

So please hurry and fill in the form on our last page, and mail it FREEPOST to our address.

Yours sincerely

V.G.M. Marketing Director

P.S.: The gift vouchers are only valid for purchase from Peartree. This Privilege Card offer is for private or company computer users, not for Educational and Governmental departments.

- First, you will receive a **5% discount** on all our advertised goods, and up to **25% discount** on all repairs.
- You will be sent **immediate details** of all new products.
- Your order will be given **priority**.
- You will have access to our **Technical Hotline**, to help with any problems you may have.
- At the end of each year we will send you a **Gift Voucher** to the value of 1% of the goods you have purchased during the year.



## The Acorn

*Music 500*  
SYNTHESISER

Now available from **Peartree** the Acorn Music 500 for the BBC, BBCB+, Master 128 and a new revolution on the

**MASTER COMPACT**

For the Master Compact comes with the 1MHZ BUS cartridge at:

**£69.00** excluding VAT.

For the other Acorn products at:

**£49.00** excluding VAT.

only from PEARTREE

▶ ACH034

**FOR THE  
MASTER  
COMPACT**  
**£69** ex. VAT

**FOR OTHER  
ACORN  
PRODUCTS**  
**£49** ex. VAT

**PLEASE USE OUR CODES WHEN ORDERING**



# PEARTREE COMPUTERS LTD

Approved service centre for all Acorn products.


Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

## HARDWARE

ACH001	<b>BBC MASTER 128</b> 128K complete with View, Viewsheet, basic editor. ADFS 1770 DFS Battery backed up ram	<b>£385.00</b>
ACH002	<b>BBC MASTER COMPACT</b> 128K computer 640K disc drive built in RGB comp video, joystick and printer port	<b>£375.00</b>
ACH003	<b>BBC MASTER COMPACT TV</b> As above with PAL TV modulator	<b>£395.00</b>
ACH004	<b>BBC MASTER COMPACT MONO</b> As above with high resolution green monitor	<b>£445.00</b>
ACH005	<b>BBC MASTER COMPACT COLOUR</b> As above with RGB medium res colour monitor with video composite	<b>£545.00</b>
ACH011	<b>TURBO UPGRADE for MASTER 128</b> 65C102 co-processor 4MHz 64K ram extra high Basic, high editor	<b>£99.00</b>
ACH012	<b>512K MSDOS for MASTER</b> IBM compatible DOS plus 8186 processor	<b>£189.00</b>
ACH013	<b>BBC B 32K inc. ACORN DFS</b> Industry's favourite machine! Stocks available from time to time, please call	<b>£329.00</b>
ACH014	<b>BBC B+ 128K</b> Stocks available from time to time please call	<b>£365.00</b>
ACH015	<b>1770 DFS KIT for BBC B</b> Allows BBC to access disc drives Allows you to use ADFS as well	<b>£41.00</b>
ACH016	<b>ADFS ROM for 1770 or BBC B+</b> Gives 720K per disc	<b>£24.00</b>
ACH017	<b>64K UPGRADE KIT for the BBC B+</b> Upgrade your BBC B+ to 128K	<b>£27.00</b>
ACH018	<b>6502 2nd PROCESSOR</b> Compatible with BBC B, B+ and the Master with 64K ram and high basic	<b>£189.00</b>
ACH019	<b>Z80 2nd PROCESSOR</b> Complete with 64K CPM Complete with vast range of business software	<b>£319.00</b>
ACH020	<b>32016 CO-PROCESSOR</b> 32 bit processor Complete with Fortran, Pascal, Cambridge Lisp, C Basic and 32016 assembler	<b>£999.00</b>
ACH021	<b>ACORN CAMBRIDGE WORK STATION</b> 4MB work station with 32016 co-processor	<b>£3400.00</b>
ACH023	<b>TELETEXT RECEIVER</b>	<b>£94.00</b>
ACH024	<b>IEEE INTERFACE</b>	<b>£269.00</b>
ACH033	<b>2MHZ BUS INTERFACE</b> For Master Compact computers Allows you to connect Music Synthesisers and hard disc systems Simple plug-in cartridge	<b>£29.95</b>
ACH034	<b>ACORN MUSIC 500 SYNTHESIZER</b> The old synthesiser going strong Ideal for presents!!	<b>£49.00</b>
ACH035	<b>MUSIC 5000 SYNTHESIZER</b> Compatible with BBC B, B+ and Master Very user friendly with pull down menus	<b>£140.00</b>
ACH038	<b>MUSIC 5000 DEMO CASSETTE</b>	<b>£2.95</b>

All prices are exclusive of VAT.

## ECONET

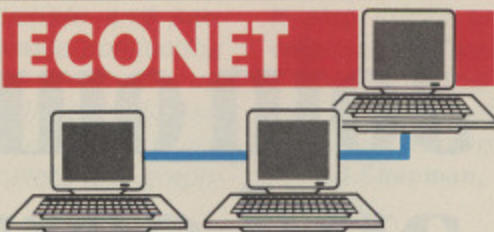

ACH006	<b>ECONET BBC MASTER ET 128</b> No DFS Econet station with 128K memory	<b>£300.00</b>
ACH007	<b>ECONET KIT</b> Upgrades for BBC B or BBC B+	<b>£55.00</b>
ACH008	<b>ECONET STARTER KIT</b>	<b>£79.00</b>
ACH009	<b>ECONET SOCKET KIT</b>	<b>£29.00</b>
ACH010	<b>ECONET MODULE</b> Upgrade cartridge for Master 128	<b>£43.00</b>
ACH022	<b>ECONET 10 STATION LEAD SET</b>	<b>£25.00</b>
ACP006	<b>PRINTER SERVER EPROM</b> Allows BBC machine to be a printer server station	<b>£39.00</b>

## DISC DRIVES



All Peartree Disc Drives have a two year warranty by Akhter Computers

ACH026	<b>SINGLE 40/80 DRIVE, NO PSU 400K MITSUBISHI</b>	<b>£119.00</b>
ACH027	<b>SINGLE 40/80 DRIVE inc. PSU 400K MITSUBISHI</b>	<b>£135.00</b>
ACH028	<b>DUAL 40/80 DRIVE, NO PSU 800K MITSUBISHI</b>	<b>£229.00</b>
ACH029	<b>DUAL 40/80 DRIVE, inc. PSU 800K MITSUBISHI</b>	<b>£269.00</b>
ACH030	<b>DUAL 40/80 DRIVE IN MASTER BRIDGE MITSUBISHI</b>	<b>£289.00</b>
ACH031	<b>WINCHESTER 30MB (ACORN) with LEVEL 3 FILE SERVER</b>	<b>£1449.00</b>
ACH032	<b>WINCHESTER 20MB &amp; 400K DRIVE</b> In monitor bridge for Master Built in fan and power supply Other sizes for hard discs are available, please call	<b>£766.00</b>

## ACORN PERIPHERALS

ACH037	<b>ARIES B32 BOARD</b> 32K Shadow ram for BBC B	<b>£79.00</b>
ACP003	<b>MEGAMOUSE</b> High quality UK manufactured Fully AMX compatible	<b>£49.00</b>
ACP004	<b>WATFORD VIDEO DIGITISER</b> Use this superb digitiser by turning your favourite photographs into BBC's graphic mode, colour or monochrome	<b>£99.00</b>
ACP005	<b>MAGAZINE MAKER</b> Watford video digitiser and AMX page maker. Please state when ordering for Master or BBC B	<b>£139.00</b>

## COMPONENTS

ACP007	<b>EPROM 27256 32K</b> 32K eprom	<b>£4.95</b>
ACP008	<b>EPROM 27128 16K</b> 16K eprom	<b>£2.95</b>
ACP009	<b>EPROM 2764 8K</b> 8K eprom	<b>£2.75</b>
ACP010	<b>8K RAM CHIP</b> Low power ram chips used in sideways rams	<b>£2.50</b>
ACP012	<b>EPROM ERASER WITH TIMER</b>	<b>£29.95</b>
ACP013	<b>EPROM BLOWER</b> Will program 2764, 27128, 27256 and 27513	<b>£69.00</b>
ACP023	<b>ACORN BBC B KEYBOARD</b>	<b>£49.00</b>
ACP025	<b>ACORN UHF MODULATOR</b>	<b>£5.95</b>
ACP026	<b>ACORN 8271 DISC CONTROLLER</b>	<b>£39.00</b>
ACP027	<b>ACORN 8271 AND TTL</b> Complete DFS kit	<b>£49.00</b>
ACP028	<b>BBC B+ AND BBC B IBM LOOKALIKE CASE</b>	<b>£99.00</b>
ACP032	<b>ZEP 100 TORCH CPM FOR BBC 64K CPM TORCH</b>	<b>£199.00</b>
ACP033	<b>BBC MASTER DUST COVER</b>	<b>£4.50</b>
ACP034	<b>BBC B DUST COVER</b>	<b>£4.50</b>
ACP035	<b>BBC MASTER COMPACT DUST COVER</b>	<b>£7.50</b>

## MODEMS




ACP014	<b>PACE NIGHTINGALE</b> 1200/75 75/1200 300/300 baud rates BT approved complete with cables	<b>£109.00</b>
ACP015	<b>PACE NIGHTINGALE COMBO</b> As above with Comstar software	<b>£129.00</b>
ACP016	<b>PACE ACCESSORY BOARD</b> Autodialler, autoanswer rate selection	<b>£42.00</b>
ACP017	<b>PACE AUTODIAL DISK</b> Sets up Comstar for autodial	<b>£9.00</b>
ACP020	<b>WS3000V21/V23 MODEM</b> Hayes compatible	<b>£285.00</b>
ACP021	<b>WS4000 SCHOOLS MODEM</b> Autodial, autoanswer Schools approved	<b>£159.00</b>
ACP029	<b>VOYAGER MODEM</b>	<b>£59.00</b>
ACP031	<b>BBC MICRO VIEWDATA</b>	<b>£49.00</b>

## SOFTWARE



Computer Concepts

ACS002	<b>WORDWISE PLUS</b> Mode 7 editing, preview in mode 0 Multi document editing	<b>£45.00</b>
ACS003	<b>INTER SHEET</b> 40, 80 and 105 column mode multiple spreadsheet	<b>£42.00</b>
ACS004	<b>INTER CHART</b> Built in Epson screen dump Supports pie, line and bar charts	<b>£30.00</b>



# PEARTREE COMPUTERS LTD



Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

## SOFTWARE



### Computer Concepts

- ACS005 **INTER WORD** £42.00  
80 or 105 column word processor  
Continuous documents
- ACS006 **INTER BASE** £55.00  
Compatible with all filing systems  
Card index mode, contains powerful Basic like  
programming language
- ACS007 **ACCELERATOR** £49.00  
Basic compiler can produce rom and ram format  
codes



### ACORNSOFT

- ACS012 **VIEW 3.0** £53.00  
Industry's standard word processor  
For the BBC B, B+, 6502 compatible  
Including printer driver generator
- ACS013 **VIEWSHEET** £36.00  
Acornsoft standard spreadsheet
- ACS014 **VIEWSTORE** £37.00  
Complete with report generator  
Data can be imported from other view products
- ACS015 **VIEWSPELL** £32.00  
Spelling checker for View with 70,000 words
- ACS016 **VIEWPLOT** £24.00  
Enables you to draw lines, pie graphs  
Compatible with Viewsheet
- ACS017 **VIEWINDEX** £13.00  
Automatically creates indexes, notes, page  
numbers
- ACS018 **VIEW PRINTER DRIVER  
GENERATOR** £9.00  
To be used to personalise View documents with  
special features



### ACORNSOFT LANGUAGES

- ACS020 **ISO PASCAL** £52.00  
Full implementation of the ISO standard
- ACS053 **ISO PASCAL S.A.G. DISC** £29.00  
Generate stand alone code
- ACS021 **LOGO** £52.00  
Good introduction for children with total graphics  
support
- ACS022 **TERMULATOR** £29.00  
Terminal emulator enables the host computer to  
be sent directly to the BBC's output driver
- ACS023 **COMAL** £39.00  
Programming language standard in many  
European countries
- ACS024 **BASIC EDITOR** £25.00  
Powerful screen basic editor
- ACS025 **MICRO PROLOG** £60.00
- ACS026 **BCPL ROM** £49.00
- ACS027 **BCPL CALCULATION** £29.00
- ACS028 **BCPL STAND ALONE  
GENERATOR** £39.00
- ACS054 **FORTH ROM** £39.00
- ACS055 **FORTH DISC** £14.95
- ACS056 **MASTER LISP C-ROM** £49.00
- ACS057 **LISP ROM** £39.00

- ACS058 **MASTER LOGO C-ROM** £52.00
- ACS059 **6502 DEVELOPMENT  
PACK DISC** £39.00
- ACS060 **GXR for MODEL B** £23.00
- ACS061 **GXR for MODEL B+** £23.00



### ACORNSOFT EDUCATION SOFTWARE

- ACS029 **CREATIVE SOUND DISC** £14.95
- ACS062 **TREE OF KNOWLEDGE** £9.00
- ACS063 **CREATIVE SOUND CASSETTE** £13.00
- ACS064 **PEEKO COMPUTER DISC** £9.00
- ACS065 **SPOOKY MANOR CASSETTE** £7.50
- ACS066 **SPOOKY MANOR DISC** £9.00
- ACS067 **TALK BACK CASSETTE** £7.50
- ACS068 **TALK BACK DISC** £9.00
- ACS069 **WORKSHOP CASSETTE** £7.50
- ACS070 **WORKSHOP DISC** £9.00
- ACS071 **ABC CASSETTE** £7.50
- ACS072 **ABC DISC** £9.00
- ACS073 **MICROTEXT DISC** £49.00
- ACS074 **MICROTEXT PLUS ROM** £199.00

### OTHER SOFTWARE

- ACS030 **PRINTER BUFFER** £6.95  
For the Master and the BBC B+
- ACS031 **DOS COPY BBC/MS-DOS** £14.95  
BBC MSDOS copies to or from many IBM  
MSDOS disc formats  
Compatible with all BBC products
- ACS032 **CPMBEEB BBC/CPM** £14.95
- ACS038 **AMX MOUSE AND SUPERART** £65.00
- ACS039 **AMX DESK** £19.00
- ACS040 **AMX UTILITIES** £11.50
- ACS041 **AMX SUPERART** £43.00
- ACS042 **AMX PAGEMAKER** £43.00
- ACS043 **AMX 3D ZICON** £21.00
- ACS044 **AMX DATABASE** £21.00
- ACS045 **AMX XAM** £21.00
- ACS046 **AMX MAX** £17.00
- ACS047 **THE ARTIST SOFTWARE** £39.00
- ACS048 **ARTIST AND MEGAMOUSE** £79.00
- ACS050 **ADVANCED DISC  
INVESTIGATOR** £22.50  
Powerful disc utility  
Back up most protected discs  
Check and repair faulty tracks  
Compatible with the BBC B, B+ and the Master
- ACS051 **ADVANCED DISC TOOLKIT** £27.50  
Compatible with all Acorn products  
35 extra commands ADFS formatter and back up  
plus many more powerful utilities
- ACS052 **MUSIC 500 SOFTWARE** £9.95  
Ample software with full manual

## PRINTERS

- PRT001 **EPSON LX86 PRINTER** £199.00  
120CPS  
NLQ mode  
Centronics Interface
- PRT002 **EPSON FX800** £399.00  
19 pin dot matrix  
180 CPS draft mode  
35 CPS NLQ mode  
8K buffer  
Parallel interface standard  
80 column
- PRT003 **EPSON FX1000** £499.00  
19 pin dot matrix  
200 CPS draft mode  
35 CPS NLQ mode  
8K buffer  
Parallel interface standard  
136 column
- PRT004 **EPSON LQ800 PRINTER** £499.00  
24 pin dot matrix  
180 CPS draft mode  
60 CPS NLQ mode  
7K buffer  
Parallel interface standard  
80 column
- PRT005 **EPSON LQ1000 PRINTER** £599.00  
24 pin dot matrix  
180 CPS draft mode  
60 CPS NLQ mode  
7K buffer  
Parallel interface standard  
136 column
- PRT008 **MP 165 PRINTER** £199.00  
165 CPS draft mode  
40 CPS in NLQ mode  
2K buffer  
Centronics interface  
Built in tractor feed  
Epson compatible
- PRT011 **JUKI 6100 PRINTER** £279.00  
18 CPS daisy wheel printer  
Standard ribbons  
Centronics interface
- PRT013 **JUKI 6300 PRINTER** £799.00  
40 CPS daisy wheel printer  
Diablo compatible  
Serial or parallel interface please specify when  
ordering
- PRT012 **EPSON FX80+** £199.00  
160 CPS draft mode  
Extremely robust complete with pin feed  
(Limited stocks)
- PRT014 **EPSON LX86/80 TRACTOR  
FEED** £22.00
- PRT016 **EPSON LX86/80 SHEET FEED** £59.95
- PRT018 **JUKI 6100, 6200, 6300  
SHEET FEED** £199.00  
Please specify for which model when ordering.

\*\*Please Note  
We have many other makes of printers in stock such as



Always call for availability.

PLEASE USE OUR CODES  
WHEN ORDERING

All prices are exclusive of VAT.



# PEARTREE COMPUTERS LTD

Approved service centre for all Acorn products.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

## MONITORS

### COLOUR

MON001	<b>HANTAREX COLOUR MONITOR MEDIUM</b>	£199.00
	Medium to high resolution RGB interface Composite video and sound input	
MON002	<b>MICROVITEC 1451 COLOUR MON MED</b>	£249.00
	Medium res monitor Metal or plastic case, please state when ordering RGB interface	
MON003	<b>MICROVITEC 1451 A/P COL MON MED</b>	£279.00
	As above with audio and composite video input	
MON004	<b>MICROVITEC 1441 MON COL HIGH</b>	£449.00
	Very high resolution monitor 895 pixels RGB interface	
MON005	<b>TAXAN SUPER VISION 3 COL HIGH</b>	£349.00
	Compact 12" high resolution RGB colour monitor Super high contrast tube 640 X 252 line resolution	
MON006	<b>MITSUBISHI 1404 MON COL MED</b>	£249.00
	Super value medium resolution monitor	

### MONOCHROME

MON008	<b>HANTAREX GREEN MONITOR</b>	£65.00
	The high resolution green monitor supplied to many education departments and hospitals	
MON009	<b>KAGA KX 1201 GREEN MONITOR</b>	£99.00
	P31	
MON010	<b>KAGA KX 1202 GREEN MONITOR</b>	£109.00
	P39	
MON011	<b>KAGA KX 1203 AMBER MONITOR</b>	£109.00
	(PUL)	
MON012	<b>PHILIPS GREEN MONITOR</b>	£69.00
MON013	<b>ZENITH GREEN MONITOR</b>	£69.00
MON014	<b>ZENITH AMBER MONITOR</b>	£79.00

Many other monitors are in stock. We can supply, please call for prices and deliveries.

## BOOKS

MIS011	<b>EPSON PRINTER COMMANDS REVEALED</b>	£5.95
	A comprehensive book which will guide you through the commands of Epson printers	
MIS012	<b>BBC MASTER REFERENCE GUIDE PT1</b>	£14.95
MIS013	<b>BBC MASTER REFERENCE GUIDE PT2</b>	£14.95
MIS014	<b>VIEW MANUAL (BBC)</b>	£10.00
MIS015	<b>VIEWSHEET MANUAL</b>	£10.00
MIS016	<b>DFS OPERATING SYSTEM MANUAL</b>	£6.95
MIS017	<b>BBC USER GUIDE</b>	£14.95
MIS024	<b>BBC ADVANCE USER GUIDE</b>	£16.95

MIS018	<b>ADVANCED SIDWAYS RAM USER GUIDE</b>	£9.95
MIS019	<b>VIEWSTORE MANUAL</b>	£10.00

### MISCELLANEOUS

MIS020	<b>40 TRACK BARE DISC DRIVES</b>	£89.00
	Double sided 200K	
MIS021	<b>40/80 BARE DISC DRIVES</b>	£99.00
	Double sided 400K	
MIS022	<b>20 MBG HARD DISC DRIVES</b>	£499.00
	Comes with host adaptor card and disc control card	
MIS010	<b>SPECTRUM LOW PROFILE KEYBOARD</b>	£24.95

## LEADS

LDS001	<b>BBC TO TV LEAD</b>	£1.25
LDS002	<b>BBC TO GREEN MONITOR LEAD</b>	£2.95
LDS003	<b>BBC TO SONY/KAGA COLOUR MONITOR</b>	£5.95
LDS004	<b>BBC TO MICROVITEC LEAD</b>	£2.20
LDS005	<b>PHONO TO PHONO LEAD</b>	£1.25
LDS006	<b>BNC TO BNC</b>	£2.95
LDS007	<b>BBC TO CASSETTE</b>	£2.25
LDS008	<b>BBC TO ACORN CASSETTE LEAD</b>	£2.25
LDS009	<b>BBC TO CENTRONICS</b>	£9.95
LDS010	<b>BBC TO SERIAL PRINTER</b>	£9.95
LDS011	<b>4 WAY MAINS TRAILING SOCKET</b>	£9.50
LDS012	<b>CABLE FOR MODEM</b>	£4.95
LDS014	<b>MASTER COMPACT PRINTER LEAD</b>	£15.95

## SUPPLIES

MIS001	<b>PAPER 11x9.5 60GSM 2000 SHEETS</b>	£16.95
MIS002	<b>PAPER 11x9.5 70GSM 2000 SHEETS</b>	£19.95
MIS003	<b>PAPER 11.6x9.5 70GSM 2000 SHEETS</b>	£19.95
MIS004	<b>PAPER 11.6x9.5 80GSM 2000 SHEETS</b>	£21.95

## PRINTER RIBBONS

MIS005	<b>RIBBON FOR MX FX80 &amp; JUKI 5510</b>	£4.50
MIS006	<b>RIBBON FOR LX80 LX86</b>	£4.50
MIS007	<b>RIBBON FOR MP165</b>	£5.00
MIS008	<b>RIBBON KAGA KP810/ CANON PW1</b>	£5.95
MIS009	<b>RIBBON FOR EPSON FX RX/100</b>	£7.95
MIS010	<b>SPECTRUM LOW PROFILE KEYBOARD</b>	£24.95
MIS023	<b>RIBBON FOR CPA80</b>	£3.50



Artist is a new 16k language ROM compatible with the BBC Micro, BBC+ and the new Master Series, allowing full manipulation of a mode-2 screen.

Copying specific screen areas to exclude certain colours. Drawing and painting underneath any colour combination. Making your brush cycle through a defined colour sequence. Colour pattern editing. Sprites of any size. Animation. Just a hint of how Artist is the most highly advanced software package yet designed, with features never before seen on the BBC Micro.

With the ultimate in art packages comes the ultimate mouse—Megamouse. Built to professional standards and comfortably shaped, it provides sensitive, accurate movement, that is unbeatable.

This exclusive Peartree offer includes the Artist ROM, the systems disc, a user's manual and an excellent grey shade Epson printer dump.

You have the option of buying the megamouse separately, or saving £10 by buying the complete package.

## THE ARTIST

A masterpiece in colour graphics for only

**£85**

The Artist is compatible with the AMX Mouse and the Megamouse is compatible with the AMX Software.

ACS047	<b>ARTIST SOFTWARE</b>	£45.00
ACS048	<b>ARTIST AND MEGAMOUSE</b>	£85.00








# PEARTREE COMPUTERS LTD

**Acorn**  
The choice of experience.

Pear tree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

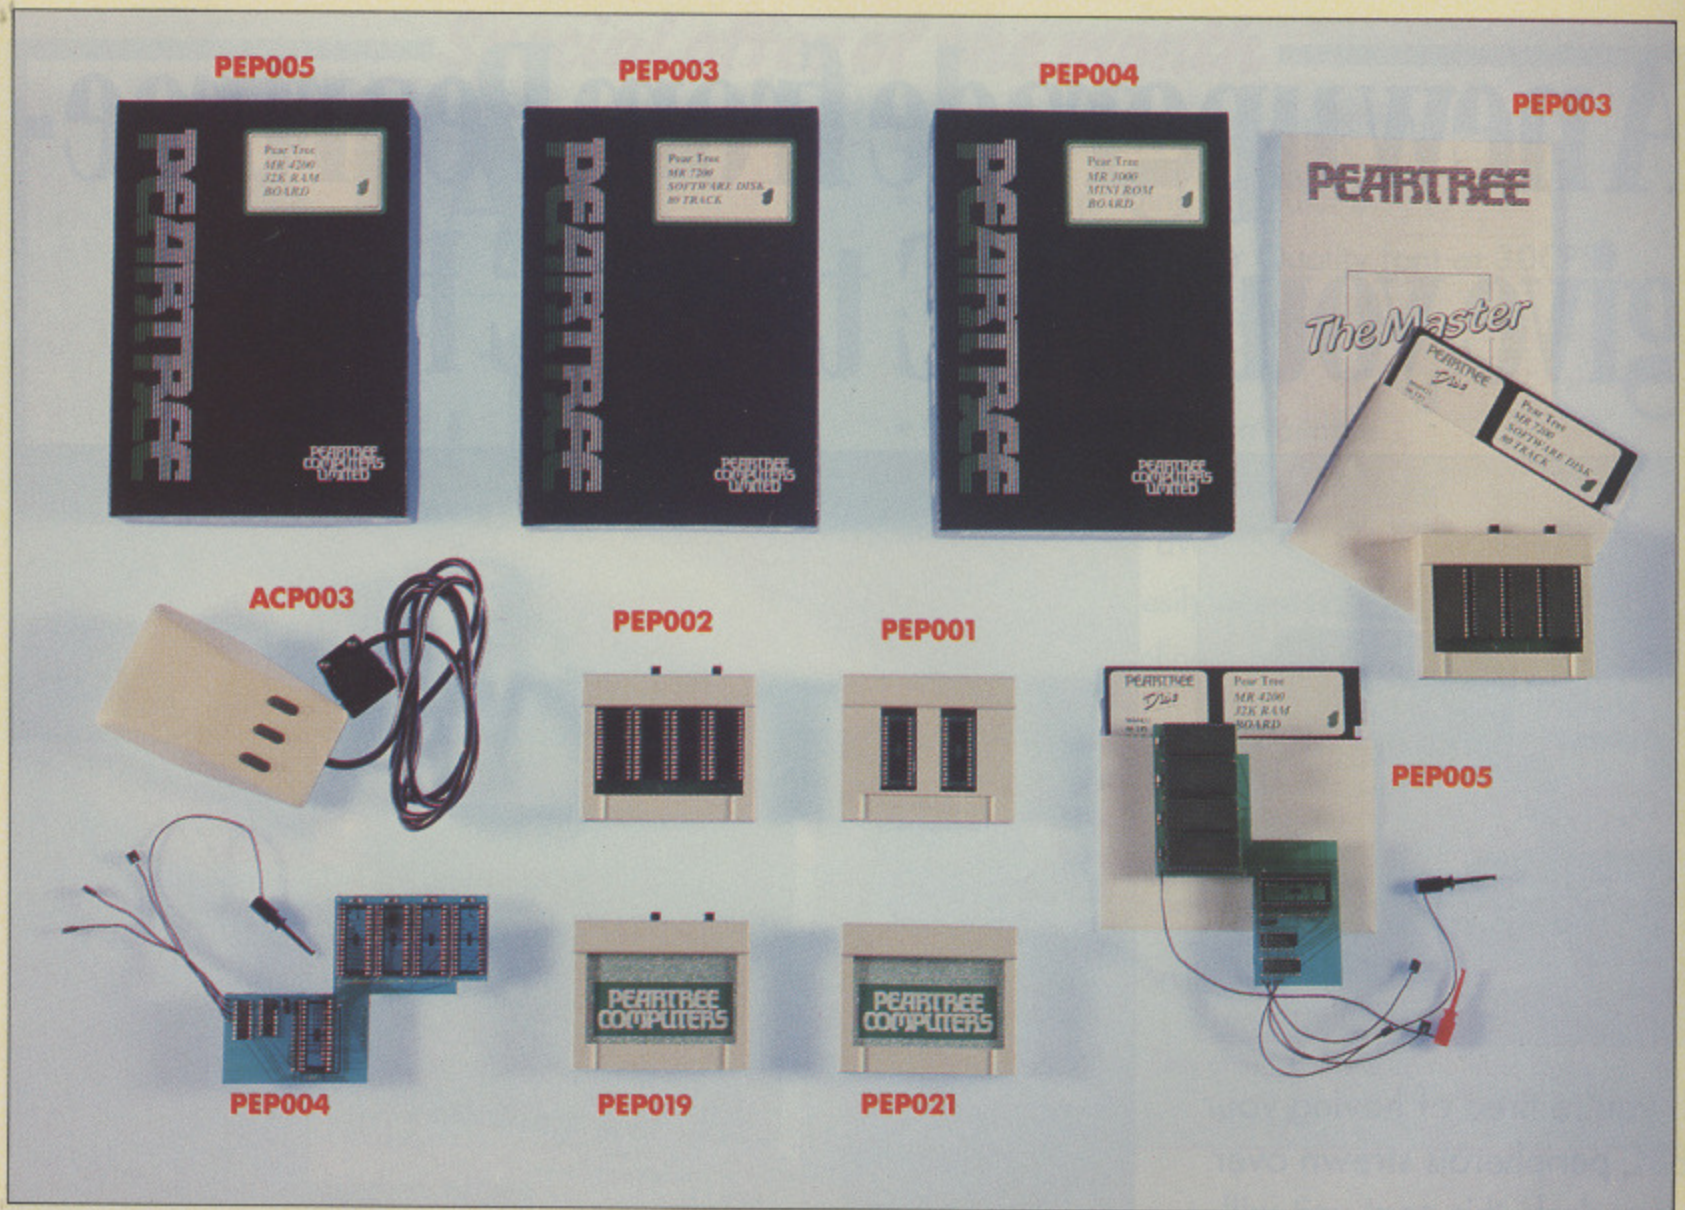

## PEARTREE PRODUCTS

PEP001	<b>PEAR 1 ROM CARTRIDGE</b> Add 32K rom to your Master	<b>£7.95</b>
PEP002	<b>MR6000 MASTER CARTRIDGE</b> Add 64K rom to your Master	<b>£9.95</b>
PEP003	<b>MR7200 MASTER RAM CARTRIDGE</b> Add 32K ram to your Master	<b>£26.95</b>
PEP019	<b>MR8000 MASTER RAM CARTRIDGE</b> Add 64K ram to your Master Battery backed up Battery life five years	<b>£33.95</b>
PEP020	<b>2MHz BUS CARTRIDGE FOR COMPACT</b> Plug it into your Compact and add a hard disc or a Music 500	<b>£29.95</b>
PEP021	<b>MR6600 MASTER COMPACT CARTRIDGE</b> Add 64K rom to your Master Compact	<b>£19.95</b>
PEP004	<b>MR3000 ROM BOARD</b> Still going strong. This has proved to be a very popular mini rom board for the BBC Model B Add 4 extra rom sockets	<b>£14.00</b>

PEP005	<b>MR4200 RAM BOARD</b> Still going strong. Add 32K of sideways ram to your BBC Model B	<b>£26.95</b>
PEP006	<b>PEAR1 MASTER 128+FX80+</b> Acorn Master 128 Epson FX80+	<b>£570.00</b>
PEP007	<b>PEAR2 MASTER 128 +DRIVE+FX80+</b> Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the Master	<b>£835.00</b>
PEP008	<b>PEAR3 MASTER 128 GREEN MONITOR FX80+ PRINTER DISC DRIVE</b> Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the Master High res green monitor	<b>£895.00</b>
PEP009	<b>PEAR4 MASTER 128 COLOUR MONITOR FX80+ PRINTER DISC DRIVE</b> Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the Master Medium to high resolution RGB monitor with video output	<b>£1025.00</b>
PEP010	<b>DISCS DS/DD 5.25 96 TPI</b> Life time guarantee Reinforced hub	<b>£13.50</b>

PEP011	<b>DISCS DS/DD 3.5</b> Double sided Suitable for the Master Compact	<b>£26.00</b>
PEP013	<b>KBL 128 PC CASE</b> Give your BBC the PC look with numeric keypad	<b>£99.00</b>
PEP015	<b>SPANISH OPERATING SYSTEM</b> Comes with Eprom and new keycaps and full manual	<b>£49.00</b>
PEP016	<b>FRENCH OPERATING SYSTEM</b> Comes with Eprom and new keycaps and full manual	<b>£49.00</b>
PEP017	<b>ARABIC OPERATING SYSTEM</b> Comes with Eprom and new keycaps and full manual	<b>£89.00</b>
PEP018	<b>GREEK OPERATING SYSTEM</b> Comes with Eprom and new keycaps and full manual	<b>£49.00</b>

Call for other combinations for prices and deliveries

**PLEASE USE OUR CODES WHEN ORDERING**

**All prices are exclusive of VAT.**


**Approved  
Acorn dealer**

**PEARTREE  
COMPUTERS**  
LTD

**Acorn**  
The choice of experience.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

# A new upgrade from Peartree— give your BBC the PC look.

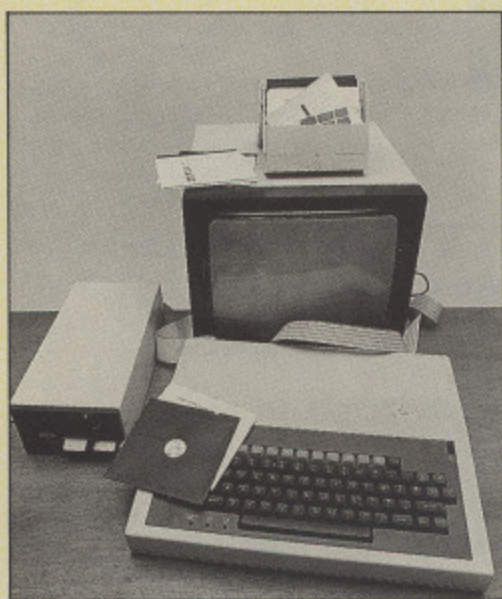

If you're tired of having your BBC peripherals strewn over your desk, this neat unit will tidy them into a professional package—it even includes an IBM® look-a-like keyboard and a built-in 80mm fan. It's easy to fit (with full instructions supplied) and the necessary connections are on the back of the case.

The complete package costs

**only**  
**£99.00**  
+ carriage  
and VAT



**PLEASE USE OUR CODES WHEN ORDERING**

*All prices are exclusive of VAT.*


total price **£124.20** ▶ PEP013



As reviewed in March '87  
issue of Micro User.



HALCIEN

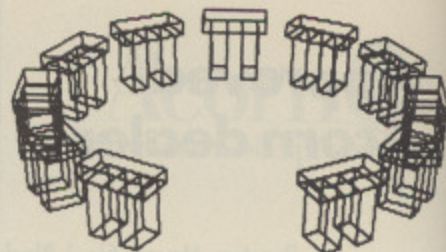

```
(( \ draw a ball using circles
DO
  FROM 5 BY 10 TO 175
LOOP
  \ pitch back by loop index
  \ and apply 40 degree yaw
  ROTN 0,#X,40
  \ then draw a full circle
  ARC 360,400
END_DO
))
```

( shown above and opposite are examples of 3D GRAPHICS using built-in HALCIEN keywords )

HIGH-LEVEL  
ALGORITHMIC  
WELL-STRUCTURED  
MODULAR Programming

All programs are stored in an EXTREMELY COMPACT ENCODED FORMAT within RAM

AT LAST! A single package that helps to both REDUCE the COST of computer software development and yet INCREASE the POWER available from your micro . . .



HALCIEN



HALCIEN is a powerful new programming language ideally suited to a vast range of practical applications in every field of computer use.

Within BUSINESS, the easy writing and maintenance of HALCIEN programs allows highly cost-effective data processing support. In SCIENCE and ENGINEERING, the great flexibility of HALCIEN is invaluable for both basic research and product development. Within EDUCATION, the modern structure of HALCIEN encourages student use of the good programming methodology and practices that will hallmark the quality software engineers of tomorrow.

HALCIEN has a complete range of general-purpose programming language features (see opposite) plus a powerful suite of built-in keywords that support AUTOMATED TEXT FILE EDITING along with both TWO and THREE DIMENSIONAL GRAPHICS PROCESSING.

Amazingly, HALCIEN resides within a single, easily installed 16K ROM — available NOW for the BBC B, B+ and Master series. The HALCIEN package includes a comprehensive User Guide and disc of easily customised utility and demonstration programs.

Bring the power of HALCIEN directly to your micro at the all-inclusive price of £49.95 per pack, or contact us for further technical details. Educational discounts are available — all official enquiries welcomed.

There can be only one conclusion — the HALCIEN days are here!



HALCIEN..  
The GLOBAL  
Computing Language!

```
PROC 'PI BOXES' \ 3 boxes set
ICON 3D \ up as a 'PI' symbol
POSN -75,0,50 BOX 50,100,200
POSN 25,0,50 BOX 50,100,200
POSN -100,0, 0 BOX 200,100,50
END_IC
END_P
```

```
(( \ draw a ring of PI_BOXES
DO
  FROM 30 BY 30 TO 330
LOOP
  3D POSN 0,0,1500
  \ roll by loop index &
  \ pitch by 60 degrees
  ROTN #X,60
  2D GAP 0,-600
  PI_BOXES
END_DO
))
```

AUTOMATED  
EDITING of  
TEXT FILES held  
within main memory

Full support for both TWO  
and THREE-DIMENSIONAL  
STRUCTURED GRAPHICS  
Processing

ADVANCED TECHNICAL FEATURES:-

- A high-level, algorithmic, fully structured program format.
- Modular program construction. Separate program elements can be drawn from several different sources — allowing easy access to utility procedures for rapid program development.
- Programs are stored for execution in an extremely compact, encoded form that packs the maximum program power into the available memory—particularly important on BBC micros.
- Program encoding is both transparent to the user and very fast (even for modular programs drawn from several files) — allowing efficient, source-only program file management.
- A full range of data types (BOOLEAN, 32 bit INTEGER, 48 bit REAL, character STRINGS, ARRAYS, compound STRUCTURES and a REFERENCE type for linked list and tree processing). Fully automatic conversion between data types when required.
- A high degree of 'orthogonality' — parametric values can be presented as literals, variables, procedures or expressions.
- A powerful set of tools for processing a RAM text file both manually (via a screen editing mode) and automatically (using a comprehensive suite of language keywords that can be used within HALCIEN programs of any complexity). These include flexible, bidirectional text cursor movement; string searching; text string insertion, overwrite, exchange or deletion; text block processing; efficient program access to both string AND numeric data values held in textual form.
- A graphics keyword set that allows complex image components ('icons') to be defined with ease, positioned, scaled and rotated through any angle (not just 90 degree steps) — all performed rapidly under full program control. Icon position, size and rotation values can be nested for fully 'structured' image generation. HALCIEN supports both TWO and THREE dimensional wire-frame drawing within a graphics space of 64K units cubed (where the screen is 1K units high). The Earth image above is just one view of an 850+ point 3D icon of the entire planet — supplied on the utility disc as an animated demonstration (in full colour on the Master). HALCIEN is truly a language with GLOBAL application!

Orders and enquiries to:-

High-level Algorithms Limited,  
Dept. MU/87/04  
12, Den Brook Close,  
Lydwell Park,  
Wellswood, Torquay,  
Devon TQ1 3TP  
TEL:(0803) 22092

HALCIEN language pack(s) @ £49.95 each (inc. VAT)  
• 40/80T 5¼/3½" utils disc  
• DFS/ADFS disc format  
• model B/B+/Master series  
• Further technical details of the HALCIEN language (delete as appropriate)

Name: .....

Address: .....

.....


.....

..... POST CODE .....

(European Export Orders £46.00 inc. P&P - Exc. VAT)



*This could be your last chance to build up a library of fun and knowledge from our back issues!*

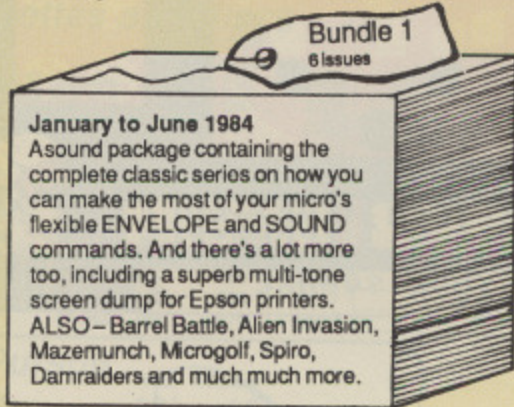


**January to June 1984**  
A sound package containing the complete classic series on how you can make the most of your micro's flexible ENVELOPE and SOUND commands. And there's a lot more too, including a superb multi-tone screen dump for Epson printers. ALSO - Barrel Battle, Alien Invasion, Mazemunch, Microgolf, Spiro, Damraiders and much much more.

**Only £5.95\* per bundle**


Or send £18.95 or £24.95\* and we'll also include the appropriate monthly tapes!

Need a binder for your magazines?  
We'll send one for £4.25


\*Inc. UK only postage & packing

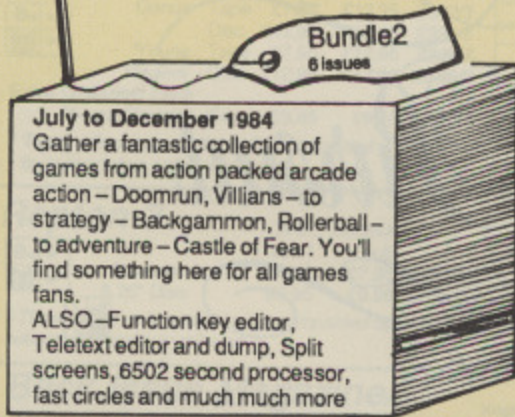

**July to December 1984**  
Gather a fantastic collection of games from action packed arcade action - Doomrun, Villians - to strategy - Backgammon, Rollerball - to adventure - Castle of Fear. You'll find something here for all games fans. ALSO - Function key editor, Teletext editor and dump, Split screens, 6502 second processor, fast circles and much much more

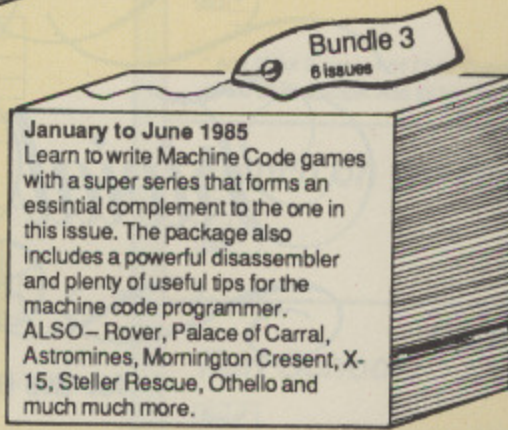

**January to June 1985**  
Learn to write Machine Code games with a super series that forms an essential complement to the one in this issue. The package also includes a powerful disassembler and plenty of useful tips for the machine code programmer. ALSO - Rover, Palace of Carral, Astromines, Mornington Crescent, X-15, Steller Rescue, Othello and much much more.

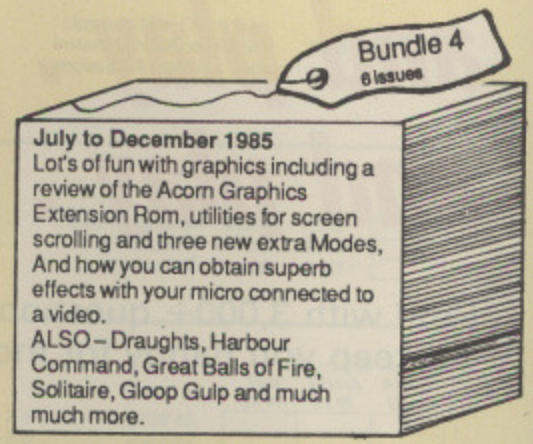

**July to December 1985**  
Lot's of fun with graphics including a review of the Acorn Graphics Extension Rom, utilities for screen scrolling and three new extra Modes. And how you can obtain superb effects with your micro connected to a video. ALSO - Draughts, Harbour Command, Great Balls of Fire, Solitaire, Gloop Gulp and much much more.

**Latest  
monthly  
tapes &  
discs**

**JANUARY 1987:** Ayo, the game of Africa, needing strategy and foresight. Flying Fingers, put your typing to the test in this fast arcade style test. Function Keys, access 16 function keys while retaining full cursor editing. Disassembler, handles all 6502 and CMOS 6502 instructions. ADFS menu, step your way quickly through the hierarchical menu system. Tweetie, illustration of some of your micro's superb graphic capabilities. Body Building, the program for your BBC drumkit. PLUS Two more files for Any Questions.  
**FEBRUARY 1987:** Rhondo, all the fun at the fair in this fast-action shooting gallery spectacular. 6502 Games, a demonstration of

collision detection routines for machine code game programmers. Choice, develop your child's decision making skills. Map test, grid reference game Date Stamp, save time when filing. List Hold, stop that scrolling screen. Wordwise Plus Index, indexing plus file description. Compressor, variable name compactor. Body Building, super fast A to D converter and multi channel oscilloscope. Plus Save a life, the life-saving tutorial.  
**MARCH 1987:** Dino, ride the gobblosaurus in this entertaining prehistoric rom. Birthday Mystery, use logic and elimination to discover the implement of a serious crime. Half-Life, a radio-active random decay simulation. Compressor II, save memory by cre-

ating multi-statement lines. Teletext Carousel, a utility for the Morley Teletext Adapter. Hac Man, the Jet Set Willy II Upgrade. Command Clashes, rom problem solved. Body Building, software for temperature measurement. 6502 Games, collision detection demonstration. Library, three useful routines.  
**APRIL 1987:** Hunkie Egg, collect the eggs in our fast action Easter game. Biomorphs, create creatures with this fascinating simulation. Disc Protection, a utility to stop your discs being pirated. Counting, the program for the DIY keyboard. 6502 Games, how to make your sprites follow the leader. Plus four more routines from the Library.

**ONLY  
£3.75 tape  
£5.75 5¼" disc**



**Keep your copies neat and complete**

These handsome binders are bound in PVC with the Micro User Logo in gold blocking on the spine

**Only  
£4.95**



**Your BBC Micro needs protecting!**

Our luxury dust cover is made of soft pliable water-resistant transparent vinyl, bound with strong cotton and decorated with the Micro User logo in black.

**Only £3.95**



**TO ORDER TURN TO THE FORM ON PAGE 159**



Overseas orders:  
ALL GOODS NOW SENT AIRMAIL

Valid to April 30, 1987  
Please tick items in box below

**Annual subscription**

UK & Eire (Sterling only)	£15	2001	<input type="checkbox"/>
Europe: Surface	£25	2365	<input type="checkbox"/>
Overseas Air	£42	2004	<input type="checkbox"/>

Commence with \_\_\_\_\_ issue

**Renewals**

UK & Eire (Sterling only)	£15	2002	<input type="checkbox"/>
Europe: Surface	£25	2114	<input type="checkbox"/>
Overseas: Air	£42	2113	<input type="checkbox"/>

**Annual subscription for cassettes and discs**

<input type="checkbox"/>	UK	£45	2005	<input type="checkbox"/>
<input type="checkbox"/>	Europe/Overseas	£60	2006	<input type="checkbox"/>
<input type="checkbox"/>	BBC 'B' cassette	£35	2007	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 40T	£50	2007	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 80T	£50	2007	<input type="checkbox"/>
<input type="checkbox"/>	3" disc	£65	2008	<input type="checkbox"/>

Commence with \_\_\_\_\_ (state month)

**Renewals**

UK	£45	2009	<input type="checkbox"/>
Europe/Overseas	£60	2010	<input type="checkbox"/>
BBC 'B' cassette	£35	2011	<input type="checkbox"/>
5.25" disc 40T	£50	2011	<input type="checkbox"/>
5.25" disc 80T	£50	2011	<input type="checkbox"/>
3" disc	£65	2012	<input type="checkbox"/>

**Trivial Pursuit**

<input type="checkbox"/>	Complete Packs	Genus	Tape	With sub*	Without sub	2382/3	<input type="checkbox"/>
				£7.95	£12.95		
<input type="checkbox"/>	*Young Players'	Disc	Tape	£12.95	£17.95	2384/5	<input type="checkbox"/>
<input type="checkbox"/>				£7.95	£12.95	2386/7	<input type="checkbox"/>
<input type="checkbox"/>	Extra Question Pack	Young Players'	Tape	£12.95	£17.95	2388/9	<input type="checkbox"/>
<input type="checkbox"/>				£3.95	£6.95	2390/1	<input type="checkbox"/>

\* These offers only available if accompanied by subscription order or renewal

**Repton 3**

<input type="checkbox"/>	Cassette	With sub*	£4.95	Without sub	£7.95	2392/3	<input type="checkbox"/>
<input type="checkbox"/>	5.25" Disc	£6.95	£9.95	2394/5	<input type="checkbox"/>		

\* These offers only available if accompanied by subscription order or renewal

**Back Issue Magazine/ Tape Bundles**

Bundle 1	Jan-Jun 1984	2115/18			
Bundle 2	July-Dec 1984	2119/22			
Bundle 3	Jan-Jun 1985	2123/26			
Bundle 4	Jul-Dec 1985	2127/30			
Magazine only	£5.95 UK	£7.95 Europe	£21.95 Overseas		
Magazine and tape	£18.95 UK	£24.95 Europe	£35.95 Overseas		
Magazine and disc	£24.95 UK	£30.95 Europe	£41.95 Overseas		

**Micro User back issues**

UK	£1.75	June 1986	2403	<input type="checkbox"/>
Europe	£2.25	July 1986	2404	<input type="checkbox"/>
Overseas	£3.75	Aug 1986	2405	<input type="checkbox"/>
		Sept 1986	2406	<input type="checkbox"/>
		Oct 1986	2407	<input type="checkbox"/>
		Nov 1986	2408	<input type="checkbox"/>
		Dec 1986	2409	<input type="checkbox"/>
Jan 1986	2043	Jan 1987	2410	<input type="checkbox"/>
Feb 1986	2044	Feb 1987	2411	<input type="checkbox"/>
March 1986	2045	March 1987	2412	<input type="checkbox"/>
April 1986	2401			<input type="checkbox"/>
May	2402			<input type="checkbox"/>

**Single copies of monthly cassette/discs**

□ Any 5 tapes for £15				
	1986	Tape	5.25" disc	
		£3.95	£4.95	£4.95
Megaroids	Jan 2181/83	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tipaka	Feb 2185/87	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Morris Miner	Mar 2412/15	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ghouls of Azzod	April 2416/18	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cavern Quest*	May 2420/23	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pendragon*	June 2424/26	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Royal Wedding	July 2428/30	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Fruit Worm	Aug 2432/34	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pear Picker + Rockfall	Sept 2436/38	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Witch Hunt+	Oct 2440/42	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Quasimodo's Quest		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maltese Cross	Nov 2444/46	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Santa's Sleigh	Dec 2448/50	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ayo	Jan 2452/54	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Rhondo	Feb 2456/58	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Dino	Mar 2459/69	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hunkie Egg	April 2470/72	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Teletext Adapter**

<input type="checkbox"/>	Teletext Adapter	£69.95	2011	<input type="checkbox"/>
<input type="checkbox"/>	Teletext Adapter + BBC advanced teletext software	£74.95	2012	<input type="checkbox"/>
<input type="checkbox"/>	BBC advanced teletext software	£7.95	2013	<input type="checkbox"/>

Add £6 for Europe. Add £17 for Overseas

**Nightingale Modem + Commstar II**

UK	£102.95	2376	<input type="checkbox"/>
Europe	£108.95	2377	<input type="checkbox"/>
Overseas	£116.95	2378	<input type="checkbox"/>

**Commstar II**

UK	£29.95	2379	<input type="checkbox"/>
Europe	£32.00	2380	<input type="checkbox"/>
Overseas	£36.00	2381	<input type="checkbox"/>

**Mini Office II**

<input type="checkbox"/>	BBC 'B' cassette	£14.95*	2368	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 40T	£16.95*	2369	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 80T	£16.95*	2370	<input type="checkbox"/>
<input type="checkbox"/>	3" disc	£19.95*	2371	<input type="checkbox"/>

**Instant Mini Office II**

<input type="checkbox"/>	Instant Mini Office	£59.95†	2372	<input type="checkbox"/>
<input type="checkbox"/>	Upgrade Mini Office II to Instant Mini Office	£51.95†	2375	<input type="checkbox"/>

\* Add £2 for Europe. Add £5 for Overseas  
† Add £3 for Europe. Add £8 for Overseas

**French on the Run**

<input type="checkbox"/>	BBC 'B' cassette	£9.95	2359	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 40T	£11.95	2360	<input type="checkbox"/>
<input type="checkbox"/>	5.25" disc 80T	£11.95	2361	<input type="checkbox"/>

**Fun School**

<input type="checkbox"/>	Age 2-5	2338/40	<input type="checkbox"/>
<input type="checkbox"/>	Age 5-8	2342/44	<input type="checkbox"/>
<input type="checkbox"/>	Age 8-12	2346/48	<input type="checkbox"/>

**Magic Sword**

<input type="checkbox"/>	BBC 'B' Cassette	£8.95	2228	<input type="checkbox"/>
<input type="checkbox"/>	5.25" Disc 40T/80T*	£9.95	2229	<input type="checkbox"/>

\*Add £2 for Europe. Add £5 for Overseas

**Classic Card and Board Games**

<input type="checkbox"/>	No.1	2460/2	<input type="checkbox"/>
<input type="checkbox"/>	No.2	2464/6	<input type="checkbox"/>

**Classic Arcade Games**

<input type="checkbox"/>	BBC 'B'	2246/49	<input type="checkbox"/>
--------------------------	---------	---------	--------------------------

**Micro User Binders**


UK	£4.95	2221	<input type="checkbox"/>
Europe	£8.25		
Overseas	£10.25		

**Dust Covers**

BBC B & B+	£3.95	2220	<input type="checkbox"/>
BBC Master	£3.95	2222	<input type="checkbox"/>
BBC Master Compact	£3.95	2224	<input type="checkbox"/>

**European & Overseas Postage Prices**

Please add £2 postage per item unless otherwise stated.  
All overseas items now sent Air mail.



Don't forget to fill in your name and address overleaf.

TOTAL \_\_\_\_\_

Payment: please indicate method (✓)

Access/Mastercharge/Eurocard/Barclaycard/Visa

\_\_\_\_\_

Cheque made payable to Database Publications Ltd.

Expiry Date

\_\_\_\_/\_\_\_\_

BLOCK CAPITALS PLEASE

Name \_\_\_\_\_

Address \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Post Code \_\_\_\_\_

Tel: \_\_\_\_\_

Signed \_\_\_\_\_

Please allow 28 days for delivery

### You can also order by phone, Prestel or MicroLink/Telecom Gold

- Any of the goods listed here can be ordered by telephone.
- Micronet subscribers and other users of Prestel can also use the Prestel mailbox.
- MicroLink subscribers and other users of Telecom Gold can also use the MicroLink mailbox.

Orders: **061-429 7931**

24 hours

Enquiries: **061-480 0171**

9am-5pm.

#### Prestel

Key Page 89, then send your order to:

**614568383**

24 hours

#### MicroLink/Telecom Gold


**72:MAG001**

24 hours

Don't forget to quote your credit card number AND your full address.

**The Micro User,  
FREEPOST,  
Europa House,  
68 Chester Road,  
Hazel Grove,  
Stockport SK7 5NY.**

NO  
POSTAGE  
NEEDED  
(IF POSTED IN UK)

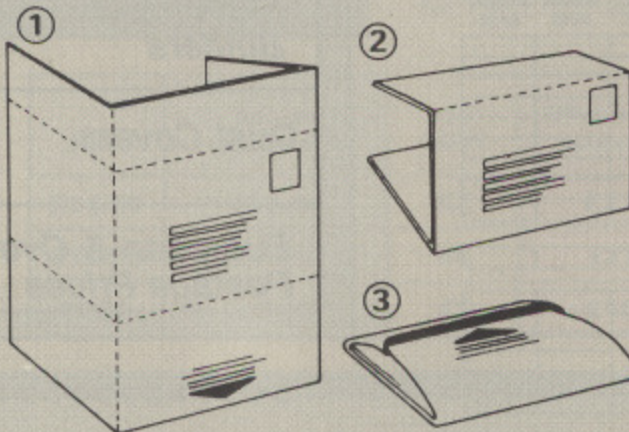

**TUCK INTO FLAP**

Don't forget to provide: Your address, your cheque/credit card No. If you've ordered discs have you indicated which format?





For the Best Deals on Computers/Printers



# ROCKFORT

A Trading Division of Vignesh Ltd.


Manufacturer and distributor of Rockfort disk storage systems

## DISK STORAGE



**M.F. 50 Floppy Disk Box**  
Holds 50 - 5.25" Disks  
£9.50

**MF10 Box £2.75**



**MD 10/12 Micro Disk Box**  
Holds 20 3.5" Disks or 10 3" Disks  
£7.85

## The second Great Little Printer from Centronics

### GLP Mark II



**Price**  
**£169.95 inc VAT**  
Tractor feed - £13.50  
GLP Ribbon - £4 each

**CENTRONICS GLP II**  
(- IMPROVED VERSION OF GLPI)  
EVERYTHING IN THE OLD GLP+  
- 100 cps in draft print mode  
- 25 cps near letter quality  
- 2k input buffer  
- Quad density graphics  
- 50 million characters print-head life

#### PRINTER CABLES

IBM	£14.95	BBC	£9.95
Apricot	£14.95	QL	£9.95
Spectrum	£12.95	RS232	£14.95

All prices inclusive of VAT.  
Please add £9.20 for carriage by Securicor

TRADE ENQUIRIES INVITED For Sinclair and BBC spares please call

## COMPUTERS

**BBC MASTER 128K**  
with word processor + spread sheet software  
£449 inc VAT

**MASTER COMPACT**  
with 3.5" disc drive + word processor  
£449 inc VAT

**BBC 5.25" Disc Drives**

Single 400K DS with PSU	£157
Dual (2 yrs. Guarantee)	£249

**3.5" Drives with power supply**

Single 400K DS-DD	£157
Dual 800K DS-DD	£249

**Rockfort Labelled 5.25" Floppy Disks**  
Prices include VAT and carriage

10-SS/DD 48tpi	£10.95
10-DS/DD 48tpi in MF10 box	£12.95
10-DS/DD 96tpi	£16.95
25-SS/DD 48tpi	£22.95
25-DS/DD 48tpi in MF50 box	£26.95
25-DS/DD 96tpi	£39.95
50-SS/DD 48tpi	£36.95
50-DS/DD 48tpi in MF20 box	£40.95
50-DS/DD 96tpi	£59.95

Disks supplied in sleeves with write protect notch, hub rings, labels and carry lifetime guarantee.

Call for a catalogue or visit our showroom:

**ROCKFORT PRODUCTS**  
81 CHURCH ROAD  
HENDON NW4 4DP  
01-203 0191



## B AND S COMPUTING (NOTTM) LTD.

THE LENTON BUSINESS CENTRE  
LENTON BOULEVARD  
NOTTINGHAM NG7 2BY

Tel 0602 787923



BUSINESS SYSTEMS • HARDWARE • SOFTWARE  
VIDEO SYSTEMS • MEDIA SUPPLIES  
APPROVED DOMESDAY DEALERS

ACORN APPROVED DEALER

### ACORN PRODUCTS

BBC Master Compact from £389  
Phone for special package offers. Choice of either Free Software, Disks, Plinths etc.

BBC Master 128	£399(a)
BBC Master ET (Econet filing system only)	£329(a)
Master Turbo Upgrade	£99(c)
Master 512 Upgrade	£195(a)
Master 128 Eprom Cartridge	£11(e)
Master Compact RS232 interface	£26(e)
64K Upgrade kit for BBC B+ 64K	£30(d)
Z80 Second Processor	£324(a)
6502 Second Processor	£182(a)
1770 Disc Interface (for BBC B)	£41(d)
ADFS ROM (BBC+ or BBC B with 1770 Interface)	£25(e)

### DOT MATRIX PRINTERS

Kaga KP810 80 col/150 cps +27 cps NLO Mannesmann	£239(a)
Tally MT 85 80 col/180 cps +45cps NLO	£314(a)
Epson LX 86 80 col/120 cps +16cps NLO	£229(a)
Juki 5510 80col/180 cps + 30cps NLO	£249(a)
Juki 5510 Colour Upgrade Kit	£94(c)
Canon PW1080 80col/150cps +27cps NLO	£239(a)
Citizen 120D 80col/120 cps +25cps NLO	£169(a)
Citizen MSP20 80 col/200 cps +50cps NLO (8K buffer)	£289(a)

### DAISY WHEEL PRINTERS

Juki 6100 20 cps	£244(a)
MP Daisy Junior 14 cps	£144(a)

### MONITORS

Philips BM7502 High Res Mono Green +Sound	£69(a)
Philips BM7522 High Res Mono Amber + Sound	£74(a)
Philips CM8533 Med Res Colour RGB +Composite Video +Sound (Green screen switchable)	£242(a)
Taxan Super Vision III	£329(a)
Hantarex Med Res Colour RGB/CV +Sound	£159(a)
Microvitec 1431MS Std Res Colour RGB	£179(a)
Microvitec 1451MS Med Res Colour RGB	£224(a)
Microvitec 1441MS High Res Colour RGB	£375(a)
Master Monitor Plinth	£12(c)
Master Monitor Plinth with shelf	£22(b)

\*All Monitors are supplied with a FREE BBC lead\*

### DISC DRIVES

Direct VPD0241 40/80T DS 400K	£99(a)
Direct VPD0243 dual 40/80T DS 800K (horizontal)	£194(a)
Direct VPD0246 40/80T DS 400K +PSU	£114(a)
Direct VPD0248 dual 40/80T DS 800K +PSU (horizontal)	£214(a)
Direct VPD0249 dual 40/80T DS 800K +PSU on Master Plinth	£229(a)
UFD MD802C dual 40/80T DS 800K (vertical)	£214(a)
UFD MD802E dual 40/80T DS 800K +PSU (Vertical)	£244(a)

### DISKS AND ACCESSORIES

3M 744 SS/DD 48tpi 5.25" (box of 10)	£11(d)
3M 745 DS/DD 48tpi 5.25" (box of 10)	£13(d)
3M 747 DS/DD 96tpi 5.25" (box of 10)	£17(d)
3M 35SS SS/DD 3.5" (box of 10)	£23(d)
3M 35DS DS/DD 3.5" (box of 10)	£33(d)
B and S DS/DD 96tpi 5.25" (Case of 10)	£13(d)
Lockable Library Cases: 50 disc £8(c) 100 disc £10(c)	

### MODEMS

Miracle WS2000 Auto Dial Boards and Auto Answer Boards	£28(d)
Miracle WS3000 Series (Hayes Compatible Modems)	from £269(a)
Miracle WS4001 V2123 +BBC Lead	£144(a)
Miracle Databeeb Communications Rom	£24(e)
Pace Nightingale +Commstar +BBC Lead	£114(c)
Pace Commstar II Comms Rom	£28(e)
Nightingale Auto Dial/ Auto Answer Board and Software	£52(d)
Pace OBBS Bulletin Board Software	£19(e)

\*\*\* Please note: BAPT approval on Modems only \*\*\*

### FANFOLD PAPER AND LABELS

2000 x 1Part 60gm 11" x 9.5" Std Perf	£11(c)
1000 x 1Part 85gm 11" x 9.5" Micro Perf	£9(c)
1000 x 1Part 90gm PERFECT A4 Micro Perf	£13(c)
1000 Labels 89 mm x 36 mm	£4(d)
1000 Labels 89 mm x 49 mm	£6(d)
1000 Labels 102 mm x36 mm	£5(d)

Please state Single or Twin Row when ordering Labels

### AMX MOUSE AND SOFTWARE

AMX Mouse and Super Art	£65(d)
AMX Pagemaker	£37(d)

Please state Computer (B/B+/MASTER)

### PRINTER RIBBONS & ACCESSORIES

Epson 8143 Serial XON/XOFF +0K Buffer	£26(d)
Epson 8148 Serial XON/XOFF +2K Buffer	£59(d)
Epson LX 80/86 Ribbon (Compatible)	£2.89(e)
Epson 8302 LX 80/86 Tractor Unit	£19(c)
Epson 8338 LX 80/86 Single Sheet Feeder	£49(b)
Epson MX 80/FX80/ FX85/Juki 5510 Ribbon (Compatible)	£2.24(e)
Juki 5520 Colour Ribbon	£7.50(e)
Citizen 120D Ribbon	£4(e)
Mannesmann Tally MT 85 Fabric Ribbon	£4.50(e)
Mannesmann Tally MT 85 Carbon Film Ribbon	£5.50(e)
Mannesmann Tally MT 85/MT86 Font Cartridge	£17(e)
Centronics Parallel Printer Lead (1.5m)	£6(e)

Full range of Ribbons & Accessories supplied - Call for details

### LANGUAGES

Micro Prolog	£49(d)	Forth	£32(e)
ISO-Pascal	£42(d)	Comal	£32(d)
Logo	£44(d)	Lisp	£32(e)
BCPL	£37(c)		

### BUSINESS SOFTWARE

View 2.1	£37(d)	View Sheet	£37(d)
View 3.0	£57(d)	View Store	£37(d)
View Spell	£29(d)	View Plot (Disc)	£21(e)
Hi View	£37(d)	View Index (Disc)	£10(e)
View Printer Driver Generator		Tape £7(e) Disc £8(e)	
Inter Sheet	£39(d)	Inter Chart	£26(d)
Inter-Word	£39(d)	Inter-Base	POA
Wordwise	£30(d)	Wordwise Plus	£37(d)

### UTILITIES

Fleet St. Editor (Mirrorsoft)	£31(d)
Fleet St. Editor Fonts and Graphics (Mirrorsoft)	£11.75(e)
Fontwise Plus (Clares Micro Supplies)	£16(e)
Replica III (Clares Micro Supplies)	£11(e)

Please state 40 or 80 track when ordering.

### BOOKS (No VAT on Books)

Master Reference Manuals: Part 1 £14(d). Part 2 £14(d)	
Advanced Master Reference Manual	POA
ISO Pascal	£6.50(e)
View Guide	£4.50(e)
View 3	£9(e)
View Store	£9(e)
BCPL	£14(d)
Forth	£6.50(e)
Into View	£4.50(e)
View Sheet	£9(e)
Lisp	£6.50(e)

\*Large Range supplied - Phone for details\*

### ROM BOARDS

ATPL 'Sidewise' (State B or B+)	£36(d)
---------------------------------	--------

UK customers: please add 15% VAT to all prices (including carriage) Government and Educational establishments official orders welcomed. When ordering please enclose a cheque or postal order for the appropriate amount.

UK Carriage rates: (a)£8.50- courier insured delivery, (b)£3.50, (c) £2.50, (d) £1.50, (e) £1.00 All prices are correct at time of going to press. All offers are subject to availability. All prices are subject to change without prior notification and are available on request. Current price list is available on request.

## CAREY ELECTRONICS

computing and communications

For The BBC Microcomputer System - Computers - Pheripherals - Software

Master "128"	479.00	Pace "Nightingale"	113.85
Master "Turbo"	619.00	Acorn 1770 DFS	49.95
Master "512"	720.00	Acorn ADFS ROM	29.99
Master "Compact"	from 458.00	A.T.P.L. "Sidewise" ROM board	43.70
6502 Second Processor	199.00	A.M.X. Mouse	from 69.95
Z80 Second Processor	399.00	Digimouse with Grafix	39.90
32016 Second Processor	1300.00	Digimouse with Artroom	59.90
Acorn "Prestel" Adapter	129.00	Grafpad 2	75.50
Acorn "Teletext" Adapter	P.O.A.	Datapen Lightpen	25.00
Acorn "IEEE 488" Interface	325.00	Microvitec monitors	from 249.00
Pace Autodial-Auto Answer Board		Philips BM7502 (12" green)	92.95
with Free Auto-Dialing software	56.35	Pace "Commstar"	29.95

We accept MAIL ORDERS. Please send cheque payable to:

**CAREY ELECTRONICS**  
7 Church Road, Walton-on-Naze, Essex CO14 8DF  
Tel: Frinton-on-Sea (02556) 6993 (9am to 9pm)

## Disc Transfers on a BBC

BBC <-> MS-DOS      BBC <-> CP/M  
CP/M <-> MS-DOS      Torch <-> MS-DOS

These four programs run on a BBC micro with a 1770 (B+, Master, Compact, B with 1770 upgrade); depending on the size of your BBC disc drives you can read and write many formats, including:

MS-DOS: Amstrad PC1512, Apricot, Atari, Nimbus, IBM  
CP/M: Acorn Z80, Amstrad, Epson, Kaypro, Osborne, 380Z, 480Z.

Torch CPN, BBC DFS and ADFS

Prices: £19.50 each      £34.50 for any two  
£49.50 for any three      £59.50 for all four

**BAKsoft 20 Leys Avenue Cambridge CB4 2AW**

## LARGEST COMPUTER CENTRE IN MANCHESTER

Home and Business Computers

Main Dealers for:

Acorn, Atari, Ferranti, Epson, Commodore (Amiga), Kaypro, Sanyo, Olivetti, Sperry.

Also joysticks, books, disk drives, calculators, cables, monitors.

Large Showroom. FREE delivery mainland UK for items £100 or over  
Personal expert specialists.

ALL EXPORT ORDERS TESTED BEFORE DESPATCH

Prestel Mailbox No 614 860 329 Telex Nos. 295141 - TXLINK - G

Quote MBX 614 860 329

Mighty Micro Bulletin Board Service on line from 7pm-8am Mon-Sat  
and all day Sunday either 300 or 1275

## MIGHTY MICRO

NO ORDERS TOO SMALL

268 Wilmslow Road, Fallowfield, Manchester M14 6WL  
Telephone: 061-224 8117

# ADVERTISERS' INDEX

21st Software .....	15	Malvern Software .....	144
4mation Educational Resources.....	80	Mancomp .....	114
Advanced Memory Systems .....	3	Manor Court Supplies ...	135
Amcom Software .....	80	Mansfield Computers ...	144
Amig Systems .....	100	Microboss .....	144
B&S Computing .....	161	Microdis .....	134
Baksoft .....	162	Micro Help .....	136
Beebug .....	34,35,36	Microman Computers .....	30
Birkdale Software .....	142	Micro Media .....	13
C&F Associates .....	144	Mighty Micro .....	162
C.A.Special Products ...	114	Mikes Computer Store ...	46
Care Electronics .....	46	Minerva Systems .....	117
Carey Electronics.....	162	Morley Electronics .....	8
Centec .....	144	Nebulae .....	142
Central Telemetry .....	140	Opus Supplies .	25,83,103,143
Chalice Software .....	62	Oriole.....	142
CJE Micros .....	10	P&H Electronics .....	20
Clares .....	12	Paul Fray.....	142
CMS Soft .....	114	Peartree Computers .	149-155
Compumart .....	129	Pineapple Software .....	62
Computer Care South ...	142	PMS Communications ...	79
Computer Concepts ..	45,71	Qual-Soft .....	120
Computer Express.....	135	R&D Speech Technology .	44
Computer Repairs.....	135	Rockfort Products .....	161
Contex Computing .....	100	S.A.Software House .....	142
C.P. Microsystems .....	100	Selec Software.....	56
Database Exhibitions .....	15	Serious Statistical Software .....	144
Database Publications	38,82,121,124,132	Silicon City .....	140
Database Software	52,53,66,68,76	Slippery Slug .....	136
Data Store .....	100	Solidisk Technology ..	26-29
Design People Software ..	80	S.P.Electronics .....	142
Direct Disk Supplies.....	48	Superior Software .....	2,163,164
Doctor Soft.....	135	System Software .....	117
Dram Electronics .....	58	Technomatic .....	104-113
Flora Electronics ...	58,162	Those Engineers.....	117
G.P.D. Systems .....	24	Twillstar Computers ..	16,17
Ground Control.....	61	Vine Micros .....	50
High-Level Algorithms ..	156	Vision Software .....	102
HSV Computer Services ..	58	Voltmace .....	42
IDS Computer Supplies .	136	Watford Electronics...	84-95
Ixchel Software .....	142	Weserve .....	56
LAN Computer Systems.....	7	Zone Four .....	61

## DISKS

PRICES PER BOX OF 10 DISCS  
ALL DISCS FULLY GUARANTEED

	40 TRACK		80 TRACK	
	SS/DD	DS/DD	SS/DD	DS/DD
5.25" Diskettes				
STORAGE MASTER	£11.00	£13.00	£15.00	£17.50
NASHUA (Lib Cased)	£12.00	£15.00	£16.00	£18.50
MAXELL	£14.00	£16.00	£16.00	£21.00
UNBRANDED	£ 6.00	£ 8.00	£ 9.00	£ 9.00
BULK PACK (25 Discs)	£14.00	£17.00		£18.00
50 DISCS (in lockable storage box)		£45.00		£50.00

5.25" head cleaning disc with cleaning solution FREE  
with every 50 discs purchased

3.5" Diskettes, Storage Master, Nashua, Sony (Box of 10)

SS/DD	£23.50	DS/DD	£32.50
-------	--------	-------	--------

## BATTERY BACKED RAM MODULES

16K	£25.00
32K	£35.00

## MEMORIES (BBC COMPATIBLE)

2764-250ns	£2.50	41256-15	£2.50
27128-250ns	£2.80	41254-15	£5.00
27256-250ns	£5.00	41464-15	£5.00
27C256-250ns	£6.50	41416-15	£2.50
6264LP-15	£2.75	65C02CMOS	
8271 FDC	£37.50	CPU 2Mhz	£9.00
4164-15	£1.00	CPU 4Mhz	£18.00
8271 + TTL & CMOS Chips (Ex DFS ROM)			£42.50

## LISTING PAPER

11" x 9.5" Microperforated 60gsm 2000 sheet

£11.50 (+ £3 P&P)



CALLERS WELCOME  
Educational & Institutional orders welcome  
All prices include VAT & P&P

## FLORA ELECTRONICS

14 LEVER STREET, PICCADILLY,  
MANCHESTER M1 1LN  
Tel: 061-228 3553

# STRYKERS RUN


The first release to include a special enhanced version for the BBC Master making use of its 128K RAM. An extra 40K of detailed graphics are provided together with additional game features and atmospheric music.



Commander Stryker under fire in the city



Battling in the air



An action close-up



Enemy equipment (Enhanced BBC Master version)



A camouflaged Battle fortress (Enhanced BBC Master version)

## STRYKER'S RUN for the BBC Micro B, B+, Master and Master Compact.

Stryker's Run features probably the best graphics ever seen on the BBC Micro; the action is intense and the animation is superlative.

The battlefield graphics include cities, edifices, wrecked buildings, trees gravestones, bridges, despatch-posts, military bases, helicopters and jet ships, with hills and mountains in the background. The Master-enhanced version also includes statues, watch-towers, a neglected cafe, a deserted cinema, aircraft hangars, aeroplanes, trucks and tanks.

For many years, a war has ensued between the Allied Nations and the Volgans. The battle was reaching a stalemate position, but recently the Allies through good intelligence work and some luck have managed to obtain the plans of the Volgan's next offensive. If the Allied Forces can capitalise on these plans they can end the impasse and the war. You play the role of Commander John Stryker commissioned to take this top-secret information to the Allies' HQ.

Your character in the game can jump, run, duck, fire his laser pistol and throw grenades. He can also board aircraft and fly them, making use of their more powerful weaponry.

Your opponents, the Volgans, have a variety of weapons at their disposal comprising rifles, pistols, grenades, machine-guns, mortars, mines, helicopter gunships, rocket launchers and SAM missiles.

Game Author: Chris Roberts.

**PRICE: £9.95 (cassette), £11.95 (BBC Micro 5 1/4" disc), £14.95 (Master Compact 3 1/2" disc).**

**PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES**

If you complete the game, you can enter our competition. The prizes include a radio controlled 4-wheel-drive off-road racer (worth £200) complete with control system, trophies and £20 in consolation prizes.

Closing date: 31st March, 1987.

**Compatible with the BBC B, B+, Master and Master Compact computers.**



ACORNSOFT

Dept. RS3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS


**OUR GUARANTEE**  
 • All mail orders are despatched within 24 hours by first-class post.  
 • Postage and packing is free.  
 • Faulty cassettes and discs will be replaced immediately.

# The Superior Collection

## Volume 2

For the BBC Micro

NEW RELEASE

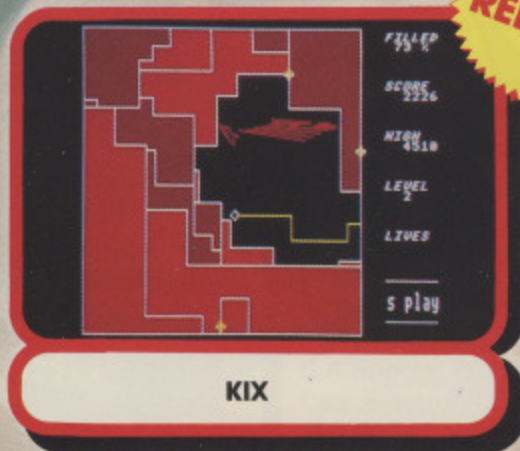

KIX

Voted COMPUTER GAMER'S BBC MICRO GAME OF THE YEAR 1985



REPTON 2



DEATHSTAR




SPACE PILOT



MISSILE STRIKE



BATTLE TANK



CRAZY PAINTER



OVERDRIVE

## A New Concept in Compilations

The Superior Collection Volume 2 features one brand new game, Kix, together with 7 of Superior Software's smash hits for the BBC Micro.

**Kix** is a fascinating strategic game in which you play the role of the intrepid Kix, whose objective is to take control of each of 20 quadrants; you must cover at least 75% of a quadrant's area in order to seize power over the entire quadrant. You can choose to move quickly or, to earn extra points, take a slower pace — but be ready to speed up immediately if you get cornered. The quadrants are guarded by Tracers who are aided and abetted by the fast-moving Fuse. Two excellent soundtracks add to the atmosphere of this fantastic game, which is worth at least £7.95 in its own right.

Here's what the computer press said about some of the other titles on this compilation package:—

**REPTON 2:** "Repton 2 is better than anything I've played on the BBC Micro or Electron. Brilliant!" ... ACORN USER

**DEATHSTAR:** "Deathstar is a super fast, all action arcade classic. It's the sort of game that you can't put down ... The graphics are excellent and the scrolling is very smooth in all four directions. The pace is fast and furious even on the starting screen. This action packed game is recommended for all arcade gamers." ... ELECTRON USER

**SPACE PILOT:** "The professional presentation — well up to the usual Superior standard — coupled with the incredible addictiveness makes Space Pilot a must for all shoot'em-up fans.

Instructions	65%	Awarded ★★★★ (Top Rating)"
Playability	95%	
Graphics	90%	
Value for Money	65%	

... HOME COMPUTING WEEKLY

**CRAZY PAINTER:** "Great sound and graphics, smooth and accurate animation, responsive and simple controls.

Instructions	70%	Awarded ★★★★ (Top Rating)"
Playability	100%	
Graphics	100%	
Value For Money	100%	

... HOME COMPUTING WEEKLY

BBC Micro dual cassette.....	£9.95
BBC Micro 5¼" disc .....	£11.95
BBC Master Compact 3½" disc.....	£14.95

All games are compatible with the BBC B, B+ and Master series computers.



Dept. SCA3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.

Please make all cheques payable to "Superior Software Ltd".



**OUR GUARANTEE**

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

# Superior Collection

## Volume 2

For the BBC Micro

THE MICRO USER

NEW RELEASE



KIX



DEATHSTAR



BATTLE TANK



CRAZY PAINTER



OVERDRIVE

### Concept in Compilations

and new game, for the BBC Micro.

play the role of the ch of 20 ant's area in order oose to move - but be ready to adrants are the fast-moving here of this n right.

Here's what the computer press said about some of the other titles on this compilation package:—

**REPTON 2:** "Repton 2 is better than anything I've played on the BBC Micro or Electron. Brilliant!" ... ACORN USER

**DEATHSTAR:** "Deathstar is a super fast, all action arcade classic. It's the sort of game that you can't put down ... The graphics are excellent and the scrolling is very smooth in all four directions. The pace is fast and furious even on the starting screen. This action packed game is recommended for all arcade gamers." ... ELECTRON USER

**SPACE PILOT:** "The professional presentation — well up to the usual Superior standard — coupled with the incredible addictiveness makes Space Pilot a must for all shoot'em-up fans.

Instructions	65%	Awarded ***** (Top Rating)"
Playability	95%	
Graphics	90%	
Value for Money	65%	

... HOME COMPUTING WEEKLY

**CRAZY PAINTER:** "Great sound and graphics, smooth and accurate animation, responsive and simple controls.

Instructions	70%	Awarded ***** (Top Rating)"
Playability	100%	
Graphics	100%	
Value For Money	100%	

... HOME COMPUTING WEEKLY

..... \$9.95  
..... £11.95  
..... £14.95

with the BBC B, B+ and Master series computers.

Please make all cheques payable to "Superior Software Ltd".



**OUR GUARANTEE**  
 • All mail orders are despatched within 24 hours by first-class post.  
 • Postage and packing is free.  
 • Faulty cassettes and discs will be replaced immediately.

24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

phone: 0532 459453.

A Database Publication

# THE MICRO USER

**ADVENTURES**  
 Secrets of Twin Kingdom Valley

**CEEFAX**  
 Telesoftware from the BBC

**EDUCATION**  
 Programming for the disabled

**FUN**  
 Easter game — Hunkie Egg

**BODY BUILD**  
 Battery-power for your micro

**DISCS AND DRIVES**

All you ever wanted to know on data storage

April 1987

Vol. 5 No. 2